

Date: 2007-10-02 Page 1 of 15

No. : HM159754

MGA Entertainment (H.K.) Ltd. **Applicant (MGE001):**

9th Floor, Tower 6, The Gateway, Harbour City, 9 Canton

Road, Tsimshatsui, Kowloon, Hong Kong.

Manufacturer: N/A

Product: Bratz Plugged In Rock Star Headset -**Description of Samples:**

Transmitter (88MH – 108MHz)

Brand Name: N/A Model Number: 365488S8

FCC ID: LU9365488A

Date Samples Received: 2007-08-03, 2007-09-12

Date Tested: 2007-08-06 to 2007-09-25

Investigation Requested: Perform ElectroMagnetic Interference measurement in

> accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

> Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks:

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department

For and on behalf of The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-02 Page 2 of 15

No. : HM159754

CONTENT:

	Cover Content	Page 1 of 15 Page 2-3 of 15	
<u>1.0</u>	General Details		
1.1	Test Laboratory	Page 4 of 15	
1.2	Applicant Details Applicant Manufacturer	Page 4 of 15	
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 15	
1.4	Date of Order	Page 5 of 15	
1.5	Submitted Samples	Page 5 of 15	
1.6	Test Duration	Page 5 of 15	
1.7	Country of Origin	Page 5 of 15	
<u>2.0</u>	Technical Details		
2.1	Investigations Requested	Page 6 of 15	
2.2	Test Standards and Results Summary	Page 6 of 15	
<u>3.0</u>	<u>Test Results</u>		
3.1	Emission	Page 7-9 of 15	
3.2	Bandwidth Measurement	Page 10-11 of 1.	5
3.3	Operation Description	Page 12 of 15	



Date: 2007-10-02 Page 3 of 15

: HM159754 No.

Appendix A

List of Measurement Equipment

Page 13 of 15

Appendix B

Page 14-15 of 15 Photographs



Date: 2007-10-02 Page 4 of 15

No. : HM159754

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details Applicant

MGA Entertainment (H.K.) Ltd. 9th Floor, Tower 6, The Gateway, Harbour City, 9 Canton Road, Tsimshatsui, Kowloon, Hong Kong.

Manufacturer

N/A

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong



Date: 2007-10-02 Page 5 of 15

No. : HM159754

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Bratz Plugged In Rock Star Headset – Transmitter (88MH – 108MHz)

Manufacturer: N/A
Brand Name: N/A
Model Number: 365488S8

Input Voltage: 3Vd.c. ("AAA" size battery x 2)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a MGA Entertainment (H.K.) Ltd., Bratz Plugged In Rock Star Headset - Transmitter (88MH - 108MHz). The transmitter is a 3 switches transmitter. The EUT continues to transmit while switch is being pressed. Modulation by IC; and type is amplitude modulation.

1.4 Date of Order

2007-08-03, 2007-09-12

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2007-08-06 to 2007-09-25

1.7 Country of Origin

N/A

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-02 Page 6 of 15

No. : HM159754

<u>2.0</u> **Technical Details**

2.1 **Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4: 2003 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

EMISSION Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Т	est Result				
			Severity	Pass	Failed	N/A			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.239	ANSI C63.4:2003	N/A						
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	\boxtimes					

Note: N/A - Not Applicable



Date: 2007-10-02 Page 7 of 15

No.: HM159754

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.239
Test Method: ANSI C63.4:2003
Test Date: 2007-09-25
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

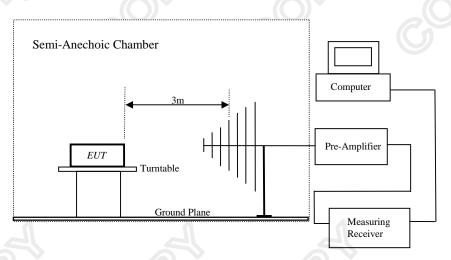



Date: 2007-10-02 Page 8 of 15

No. : HM159754

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.239]:

Frequency Range of	Peak Limits	Average Limits
Fundamental		
[MHz]	[µV/m]	[μV/m]
88-108	2,500	250

Results of Tx mode: PASS

Field Strength of Fundamental Emissions									
Peak Value									
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV	dB/m	dBμV/m	μV/m	$\mu V/m$				
98.50	34.30	10.1	44.4	166.0	2,500	Horizontal			

Field Strength of Fundamental Emissions									
	Average Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m Factor Strength Strength Polarity								
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m				
98.50	31.60	10.1	41.7	121.6	250	Horizontal			

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.



Date: 2007-10-02 Page 9 of 15

No. : HM159754

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Limits [V/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx mode: PASS

Radiated Emissions									
Quasi-Peak									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	μV/m	μV/m				
197.00	< 1.0	11.0	< 12.0	< 4.0	150	Vertical			
295.50	< 1.0	14.0	< 15.0	< 5.6	200	Vertical			
394.00	< 1.0	17.5	< 18.5	< 8.4	200	Vertical			
492.50	< 1.0	10.2	< 11.2	< 3.6	200	Vertical			
591.00	< 1.0	11.9	< 12.9	< 4.4	200	Vertical			
689.50	< 1.0	12.4	< 13.4	< 4.7	200	Vertical			
788.00	< 1.0	13.2	< 14.2	< 5.1	200	Vertical			
886.50	< 1.0	15.0	< 16.0	< 6.3	200	Vertical			
985.00	< 1.0	16.1	< 17.1	< 7.2	500	Vertical			

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB



Date: 2007-10-02 Page 10 of 15

No.: HM159754

3.2 20B Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-9-25 Mode of Operation: Tx mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-10-02 Page 11 of 15

No. : HM159754


Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[kHz]
99.09	175.54	200

Result:

The following figure is the measured bandwidth of Fundamental Emission.

20dB Bandwidth of Fundamental Emission

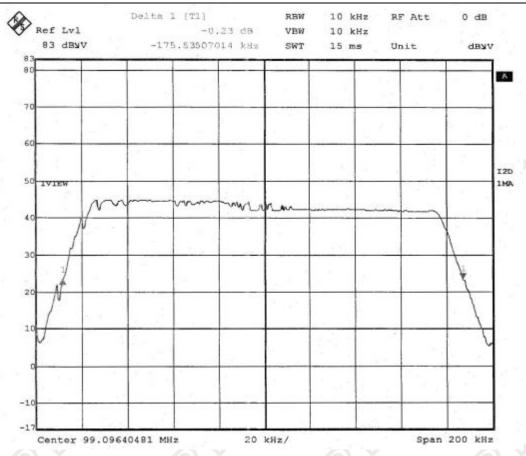



Date: 2007-10-02 Page 12 of 15

No. : HM159754

3.3 **Operation Description**

The transmitter is a FM transmitter operating at 99.09MHz band. The transmitter is powered by 3Vd.c. and the transmitting frequency is crystal controlled. The operation is achieved by different combinations of from frequency modulation signal on the 88.1-107.9MHz carrier frequency.



Date: 2007-10-02 Page 13 of 15

No. : HM159754

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL		
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676	N/A	N/A		
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842	N/A	N/A		
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144	N/A	N/A		
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2006/05/02	2009/05/02		
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071	2006/02/01	2008/02/01		
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2007/03/17	2008/03/17		

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52	2007/07/15	2008/07/15
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2007/03/17	2008/03/17
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2006/01/12	2008/01/12

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

To Be Determined **TBD**



Date: 2007-10-02 Page 14 of 15


No. : HM159754

Appendix B

Photographs of EUT

Front View of the product







Front View of the product



Rear View of the product





Date: 2007-10-02 Page 15 of 15

No. : HM159754

Photographs of EUT



***** End of Test Report *****