

Date: 2007-07-20 Page 1 of 16

No. : HM159546

Applicant (MGE001): MGA Entertainment (H.K.) Ltd.

9th Floor, Tower 6, The Gateway, Harbour City, 9 Canton

Road, Tsimshatsui, Kowloon, Hong Kong.

Manufacturer: N/A

Description of Samples: Product: Bratz The Movie RC 1962 Corvette –

27MHz

Brand Name: N/A Model Number: 366362 FCC ID: LU9366362

Date Samples Received: 2007-07-16

Date Tested: 2007-07-18

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

LEE Kam Chuen,
ElectroMagnetic Compatibility Department
For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-07-20 Page 2 of 16

No. : HM159546

CONTENT:

	Cover Content	Page 1 of 16 Page 2-3 of 16
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 16
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 16
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 16
1.4	Date of Order	Page 5 of 16
1.5	Submitted Samples	Page 5 of 16
1.6	Test Duration	Page 5 of 16
1.7	Country of Origin	Page 5 of 16
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 16
2.2	Test Standards and Results Summary	Page 6 of 16
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 7-9 of 16
3.2	Bandwidth Measurement	Page 10-11 of 16



Date: 2007-07-20 Page 3 of 16

No. : HM159546

Appendix A

Page 12 of 16 List of Measurement Equipment

Appendix B

Page 13-14 of 16 Duty Cycle Correction During 100 msec

Appendix C

Page 15-16 of 16 Photographs



Date: 2007-07-20 Page 4 of 16

No. : HM159546

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone: 852 2666 1888 Fax: 852 2664 4353

1.2 Applicant Details

Applicant

MGA Entertainment (H.K.) Ltd. 9th Floor, Tower 6, The Gateway, Harbour City, 9 Canton Road, Tsimshatsui, Kowloon, Hong Kong.

Manufacturer

N/A

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong



Date: 2007-07-20 Page 5 of 16

No.: HM159546

1.3 Equipment Under Test [EUT] Description of Sample

Product: Bratz The Movie RC 1962 Corvette – 27MHz

Manufacturer: N/A
Brand Name: N/A
Model Number: 366362

Rating: 9Vd.c ("6F22" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a MGA Entertainment (H.K.) Ltd.., Bratz The Movie RC 1962 Corvette – 27MHz. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed, It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2007-07-16

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2007-07-18

1.7 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-07-20 Page 6 of 16

No. : HM159546

<u>2.0</u> **Technical Details**

2.1 **Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

2.2 **Test Standards and Results Summary Tables**

EMISSION Results Summary									
Test Condition	Test Requirement	Test Method	Class /	Т	est Result				
			Severity	Pass	Failed	N/A			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.227	ANSI C63.4:2003	N/A						
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2003	N/A						

Note: N/A - Not Applicable



Date: 2007-07-20 Page 7 of 16

No.: HM159546

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.227
Test Method: ANSI C63.4:2003
Test Date: 2007-07-18
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. In the frequency range of 9kHz to 30MHz, The center of the loop antenna shall be 1 meter above the ground and rotated loop axis for maximum reading. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

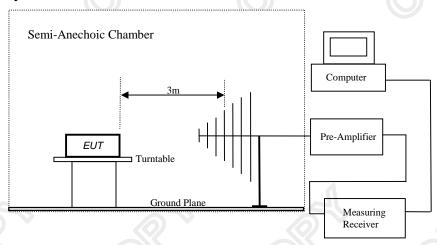



Date: 2007-07-20 Page 8 of 16

No.: HM159546

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of		Field Strength of	Field Strength of		
Fundamental		Fundamental Emission	Fundamental Emission		
		[Peak]	[Average]		
[MHz]		$[\mu V/m]$	$[\mu V/m]$		
	26.96-27.28	100,000	10,000		

Results of Tx Mode: PASS

Field Strength of Fundamental Emissions									
Peak Value									
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m	-			
27.15	61.70	10.4	72.1	4,027.2	100,000	Vertical			

Field Strength of Fundamental Emissions Average										
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity			
MHz	dΒμV	dB	dB/m	dBµV/m	μV/m	μV/m				
27.15	57.5	-4.2	10.4	67.9	2,483.1	10,000	Vertical			

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz ±5.2dB



Date: 2007-07-20 Page 9 of 16

No.: HM159546

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results of Tx Mode: PASS

Radiated Emissions Ouasi-Peak										
Frequency Measured Correction Field Field Limit @3m E-Field										
	Level @3m Factor Strength		Strength		Polarity					
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m	•				
54.29	6.6	9.1	15.7	6.1	100	Vertical				
81.44	< 1.0	8.1	< 9.1	< 2.9	100	Vertical				
108.58	< 1.0	10.7	< 11.7	< 3.8	150	Vertical				
135.73	< 1.0	10.2	< 11.2	< 3.6	150	Vertical				
162.87	< 1.0	11.9	< 12.9	< 4.4	150	Vertical				
190.02	< 1.0	12.4	< 13.4	< 4.7	150	Vertical				
217.16	< 1.0	12.8	< 13.8	< 4.9	200	Vertical				
244.31	< 1.0	15.0	< 16.0	< 6.3	200	Vertical				
271.45	< 1.0	16.1	< 17.1	< 7.2	200	Vertical				

Remarks:

No further spurious emissions found between lowest internal frequency and 30 MHz Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz ±5.2dB





Date: 2007-07-20 Page 10 of 16

No. : HM159546

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-07-18 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

The Hong Kong Standards and Testing Centre Ltd.




Date: 2007-07-20 Page 11 of 16

No. : HM159546

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
27.145	85.6	within 26.96-27.28

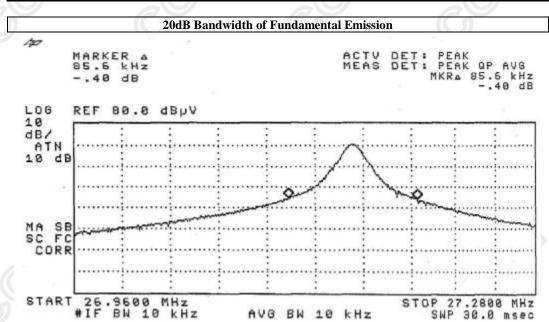



Date: 2007-07-20 Page 12 of 16

No. : HM159546

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	2006/12/29	2007/12/29
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	2006/12/29	2007/12/29
EM009	QUASIPEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	2006/12/29	2007/12/29
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	2006/12/29	2007/12/29
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	2006/12/29	2007/12/29
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	2006/12/29	2007/12/29
EM020	HORN ANTENNA	ETS-LINGGREN	3115	4032	2006/07/11	2008/07/11
EM022	LOOP ANTENNA	ETS-LINGGREN	6502	1189-2424	2006/07/26	2008/07/26
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	100072	22007/06/08	2008/06/08
EM215	MULTIDEVICE CONTROLER	ETS-LINGGREN	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	ETS-LINGGREN	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	ETS-LINGGREN	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINGGREN	FACT-3		2007/05/02	2008/05/02
EM219	BICONILOG ANTENNA	ETS-LINGGREN	3142C	00029071	2006/02/01	2008/02/01
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 40	100248	2007/07/11	2008/07/11

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52	2006/07/15	2007/07/15
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	100072	22007/06/08	2008/06/08
EM197	LISN	ETS-LINGGREN	4825/3	1193	2006/09/25	2007/09/25
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	2006/01/12	2008/01/12

Remarks:-

CMCorrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2007-07-20 Page 13 of 16

No.: HM159546

Appendix B


Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (16.125msec) never exceeds a series of 4 long (1.35msec) and 10 short (450µsec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 4x1.35msec+10x450µsec per 16.125msec=61.3% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.613) = -4.2dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

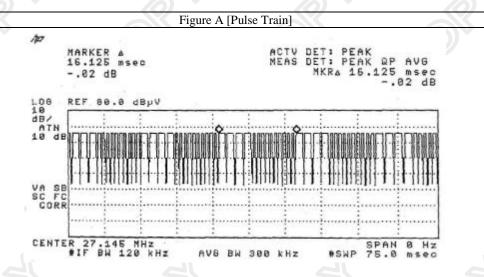


The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-07-20 Page 14 of 16

No. : HM159546

Figure B [Long Pulse] .16 dB L06 10 dB/ ATN 10 d REF 80.0 dBpV dB 27.145 MHz F BH 128 kHz

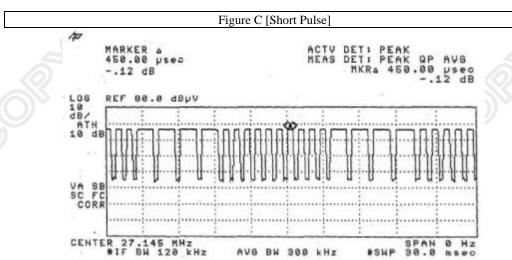



Date: 2007-07-20 Page 15 of 16


No. : HM159546

Appendix C

Photographs of EUT

Front View of the product







Inner Circuit Top View



Inner Circuit Bottom View





Date: 2007-07-20 Page 16 of 16

No. : HM159546

Photographs of EUT

Measurement of Radiated Emission Test Set Up

***** End of Test Report *****