

Date: 2009-05-15 Page 1 of 18

No. : HM163373

**Applicant (MGE001):** MGA Entertainment (HK) Ltd.

9<sup>th</sup> Floor, Tower 6, The Gateway, Harbour City, 9 Canton

Road, Tsimshatsui, Kowloon, Hong Kong.

**Manufacturer:** N/A

**Description of Samples:** Product: Moxie Girlz Art-titude RC Vehicle – 49MHz

Brand Name: N/A Model Number: 393252 FCC ID: LU9393252

**Date Samples Received:** 2009-04-08

**Date Tested:** 2009-04-14

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2008 and ANSI C63.4:2003 for FCC Certification.

**Conclusions:** The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

**Remarks:** Assortment No. is 393238 provided by applicant.

Dr. LEE Kam Chuen,
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
The Hong Kong Standards and Testing Centre Ltd.



Date: 2009-05-15 Page 2 of 18

No. : HM163373

# **CONTENT:**

|            | Cover<br>Content  | Page 1 of 18<br>Page 2-3 of 18 |
|------------|---|--------------------------------|
| 1.0        | General Details   |                                |
| 1.1        | Test Laboratory   | Page 4 of 18                   |
| 1.2        | Applicant Details Applicant Manufacturer                | Page 4 of 18                   |
| 1.3        | Equipment Under Test [EUT] Description of EUT operation | Page 5 of 18                   |
| 1.4        | Date of Order   | Page 5 of 18                   |
| 1.5        | Submitted Samples                                       | Page 5 of 18                   |
| 1.6        | Test Duration   | Page 5 of 18                   |
| 1.7        | Country of Origin                                       | Page 5 of 18                   |
| <u>2.0</u> | Technical Details                                       |                                |
| 2.1        | Investigations Requested                                | Page 6 of 18                   |
| 2.2        | Test Standards and Results Summary                      | Page 6 of 18                   |
| <u>3.0</u> | <u>Test Results</u>                                     |                                |
| 3.1        | Emission  | Page 7-10 of 18                |
| 3.2        | Bandwidth Measurement                                   | Page 11-12 of 18               |



Date: 2009-05-15 Page 3 of 18

: HM163373 No.

Appendix A

Page 13 of 18 List of Measurement Equipment

Appendix B

Page 14-16 of 18 Duty Cycle Correction During 100 msec

Appendix C

Page 17-18 of 18 Photographs



Date: 2009-05-15 Page 4 of 18

No. : HM163373

# 1.0 General Details

#### 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

# 1.2 Applicant Details Applicant

MGA Entertainment (HK) Ltd. 9<sup>th</sup> Floor, Tower 6, The Gateway, Harbour City, 9 Canton Road, Tsimshatsui, Kowloon, Hong Kong.

#### Manufacturer

N/A

#### The Hong Kong Standards and Testing Centre Ltd.



Date: 2009-05-15 Page 5 of 18

No. : HM163373

# 1.3 Equipment Under Test [EUT] Description of Sample

Product: Moxie Girlz Art-titude RC Vehicle – 49MHz

Manufacturer: N/A
Brand Name: N/A
Model Number: 393252

Input Voltage: 3Vd.c. ("AAA" size battery x 2)

#### 1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a MGA Entertainment (HK) Ltd., Moxie Girlz Art-titude RC Vehicle – 49MHz. The transmitter is a button transmitter. The EUT continues to transmit while button is being pressed. Modulation by IC and type is pulse modulation.

#### 1.4 Date of Order

2009-04-08

#### 1.5 Submitted Sample(s):

1 Sample

#### 1.6 Test Duration

2009-04-14

# 1.7 Country of Origin

China



Date: 2009-05-15 Page 6 of 18

No. : HM163373

#### 2.0 Technical Details

#### 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15:2008 and ANSI C63.4:2003 for FCC Certification.

# 2.2 Test Standards and Results Summary Tables

| EMISSION<br>Results Summary  |   |                 |          |             |        |  |  |  |
|--|---|-----------------|----------|-------------|--------|--|--|--|
| Test Condition   | Test Condition Test Requirement Test Method Class / Test Result |                 |          |             |        |  |  |  |
|  |   |                 | Severity | Pass        | Failed |  |  |  |
| Field Strength of<br>Fundamental Emissions &<br>Spurious Emissions | FCC 47CFR 15.235  | ANSI C63.4:2003 | N/A      | $\boxtimes$ |        |  |  |  |
| Radiated Emissions,<br>30MHz to 1GHz                               | FCC 47CFR 15.209  | ANSI C63.4:2003 | N/A      | $\boxtimes$ | 3      |  |  |  |

Note: N/A - Not Applicable



Date: 2009-05-15 Page 7 of 18

No. : HM163373

# 3.0 Test Results

#### 3.1 Emission

# 3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2003
Test Date: 2009-04-14
Mode of Operation: Tx on mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-Anechoic Chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

# **Test Setup:**

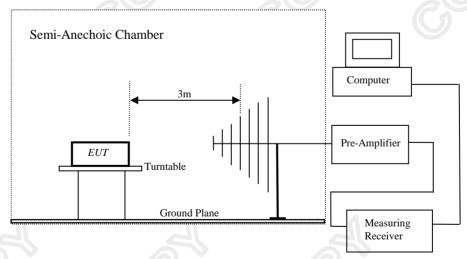



Date: 2009-05-15 Page 8 of 18

No. : HM163373

#### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

|             | Frequency Range of | Field Strength of    | Field Strength of    |
|-------------|--------------------|----------------------|----------------------|
| Fundamental |                    | Fundamental Emission | Fundamental Emission |
|             |                    | [Peak]               | [Average]            |
|             | [MHz]              | $[\mu V/m]$          | $[\mu V/m]$          |
|             | 49.82-49.90        | 100,000              | 10,000               |

#### Results of Tx on mode:

| Field Strength of Fundamental Emissions                     |            |        |          |          |         |          |  |  |  |
|---|------------|--------|----------|----------|---------|----------|--|--|--|
|   | Peak Value |        |          |          |         |          |  |  |  |
| Frequency Measured Correction Field Field Limit @3m E-Field |            |        |          |          |         |          |  |  |  |
|   | Level @3m  | Factor | Strength | Strength |         | Polarity |  |  |  |
| MHz   | $dB\mu V$  | dB/m   | dBμV/m   | μV/m     | μV/m    |          |  |  |  |
| 49.860  | 59.90      | 9.2    | 69.1     | 2,851.0  | 100,000 | Vertical |  |  |  |

| Field Strength of Fundamental Emissions |           |             |            |          |          |           |          |  |  |  |
|---|-----------|-------------|------------|----------|----------|-----------|----------|--|--|--|
|   | Average   |             |            |          |          |           |          |  |  |  |
| Frequency                               | Measured  | Adjusted by | Correction | Field    | Field    | Limit @3m | E-Field  |  |  |  |
| Π                                       | Level @3m | Duty Cycle  | Factor     | Strength | Strength |           | Polarity |  |  |  |
| MHz                                     | dΒμV      | dB          | dB/m       | dBμV/m   | μV/m     | μV/m      |          |  |  |  |
| 49.860                                  | 54.2      | -5.7        | 9.2        | 63.4     | 1,479.1  | 10,000    | Vertical |  |  |  |

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

#### Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB



Date: 2009-05-15 Page 9 of 18

No. : HM163373

#### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

| Frequency Range [MHz] | Quasi-Peak Limits<br>[μV/m] |  |  |
|-----------------------|-----------------------------|--|--|
| 30-88                 | 100                         |  |  |
| 88-216                | 150                         |  |  |
| 216-960               | 200                         |  |  |
| Above960              | 500                         |  |  |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Tx on mode:

| Radiated Emissions<br>Quasi-Peak |           |            |          |          |           |          |  |  |
|----------------------------------|-----------|------------|----------|----------|-----------|----------|--|--|
| Frequency                        | Measured  | Correction | Field    | Field    | Limit @3m | E-Field  |  |  |
|                                  | Level @3m | Factor     | Strength | Strength |           | Polarity |  |  |
| MHz                              | $dB\mu V$ | dB/m       | dBμV/m   | μV/m     | μV/m      | -        |  |  |
| 99.72                            | 19.9      | 8.8        | 28.7     | 27.2     | 150       | Vertical |  |  |
| 149.58                           | < 1.0     | 9.3        | < 10.3   | < 3.3    | 150       | Vertical |  |  |
| 199.44                           | < 1.0     | 11.9       | < 12.9   | < 4.4    | 150       | Vertical |  |  |
| 249.30                           | < 1.0     | 15.9       | < 16.9   | < 7.0    | 200       | Vertical |  |  |
| 299.16                           | < 1.0     | 17.4       | < 18.4   | < 8.3    | 200       | Vertical |  |  |
| 349.02                           | < 1.0     | 17.2       | < 18.2   | < 8.1    | 200       | Vertical |  |  |
| 398.88                           | < 1.0     | 17.3       | < 18.3   | < 8.2    | 200       | Vertical |  |  |
| 448.74                           | < 1.0     | 19.1       | 20.1     | 10.1     | 200       | Vertical |  |  |
| 498.60                           | < 1.0     | 20.6       | < 21.6   | < 12.0   | 200       | Vertical |  |  |

## Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: 30MHz to 1GHz 5.2dB



Date: 2009-05-15 Page 10 of 18

No. : HM163373

#### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2009-04-14 Mode of Operation: On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date: 2009-05-15 Page 11 of 18

No. : HM163373

#### Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range | 20dB Bandwidth | FCC Limits         |
|-----------------|----------------|--------------------|
| [MHz]           | [KHz]          | [MHz]              |
| 49.86           | 44.3           | within 49.82-49.90 |

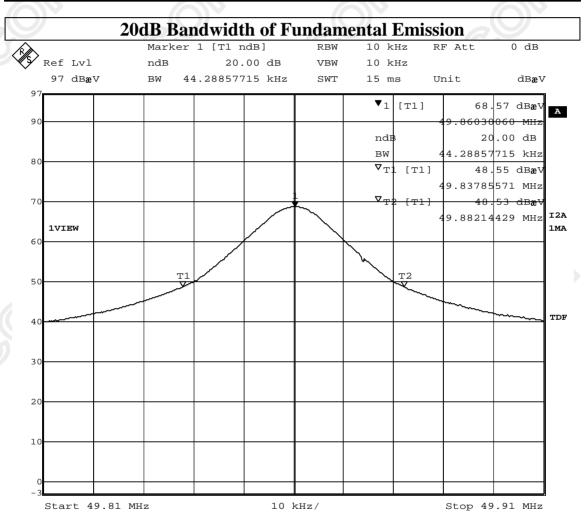

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2009-05-15 Page 12 of 18

No. : HM163373





Date: 2009-05-15 Page 13 of 18

No. : HM163373

#### Appendix A

# List of Measurement Equipment

#### **Radiated Emission**

| EQP NO. | DESCRIPTION                   | MANUFACTURER    | MODEL NO. | SERIAL NO. | LAST CAL   | DUE CAL    |
|---------|-------------------------------|-----------------|-----------|------------|------------|------------|
| EM020   | HORN ANTENNA                  | EMCO            | 3115      | 4032       | 2006/07/11 | 2009/07/11 |
| EM215   | MULTIDEVICE CONTROLER         | EMCO            | 2090      | 00024676   | N/A        | N/A        |
| EM216   | MINI MAST SYSTEM              | EMCO            | 2075      | 00026842   | N/A        | N/A        |
| EM217   | ELECTRIC POWERED<br>TURNTABLE | EMCO            | 2088      | 00029144   | N/A        | N/A        |
| EM218   | ANECHOIC CHAMBER              | ETS-Linggren    | FACT-3    |            | 2008/12/01 | 2011/12/01 |
| EM174   | BICONILOG ANTENNA             | EMCO            | 3142B     | 1671       | 2008/01/24 | 2010/01/24 |
| EM181   | EMI TEST RECEIVER             | ROHDE & SCHWARZ | ESIB7     | 100072     | 2008/06/16 | 2009/06/16 |
| EM022   | LOOP ANTENNA                  | EMCO            | 6502      | 1189-2424  | 2006/07/26 | 2009/07/26 |

#### Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

**TBD** To Be Determined



Date: 2009-05-15 Page 14 of 18

No. : HM163373

# Appendix B


### **Duty Cycle Correction During 100msec**

Each function key sends a different series of characters, but each packet period 100msec) never exceeds a series of 8 long (1.365msec) and 93 short (0.437msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (8x1.365msec)+(93x0.437msec) per 100msec=51.6% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

#### Remarks:

Duty Cycle Correction = 20Log(0.516) = -5.7dB


The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

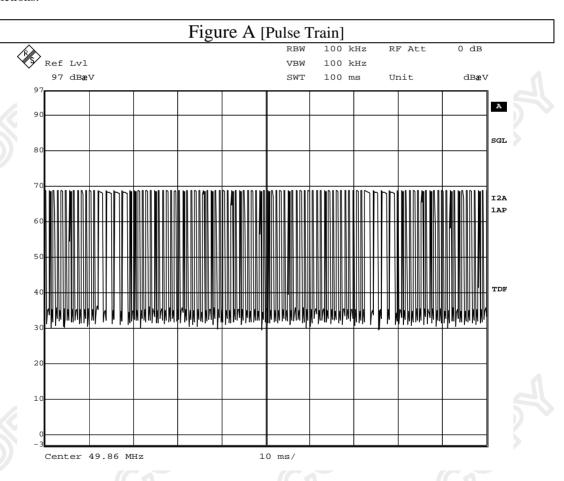



Date: 2009-05-15 Page 15 of 18


No. : HM163373

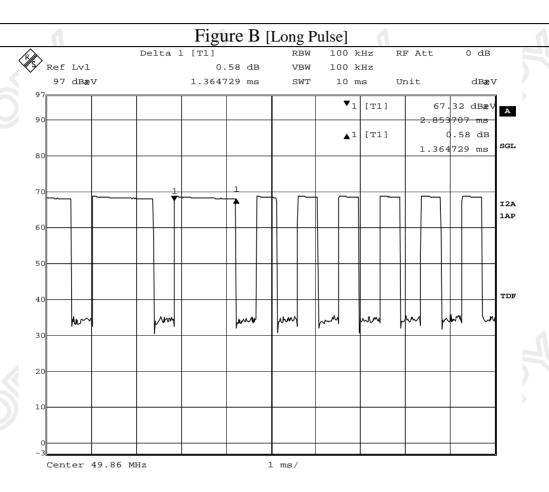



Date: 2009-05-15 Page 16 of 18

No. : HM163373

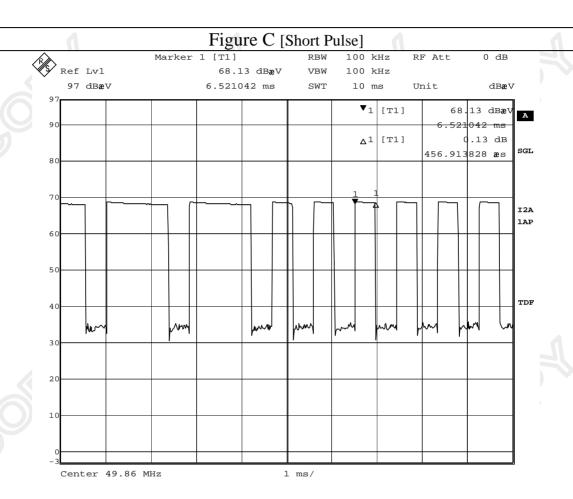



Date: 2009-05-15 Page 17 of 18

No. : HM163373

# Appendix C


### Photographs of EUT

Front View of the product



**Inner Circuit Top View** 



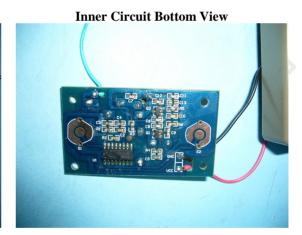




Date: 2009-05-15 Page 18 of 18

No. : HM163373

# Photographs of EUT

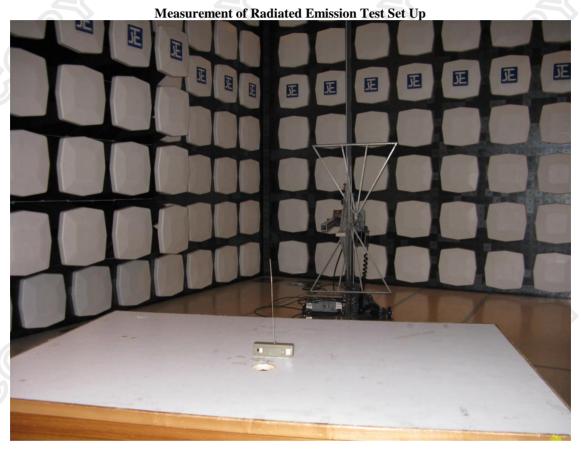

\*\*\*\*\* End of Test Report \*\*\*\*\*

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org