

Intentional Radiator Test Report

**Test Standards:
FCC Part 15 (Subpart C – Intentional Radiators)
Industry Canada RSS-210**

Prepared For:

**Socket Communications, Inc.
37400 Central Court
Newark, CA 94560**

**Equipment Under Test:
Bluetooth Headset**

**Model:
RING SCANNER**

Prepared by:



**44366 S. Grimmer Blvd.
Fremont, CA 94538
USA**

TABLE OF CONTENTS


1. CUSTOMER INFORMATION	3
2. EUT AND ACCESSORY INFORMATION	4
3. SUMMARY OF TEST RESULTS	5
4. STANDARDS AND MEASUREMENT METHODS	6
5. TEST SETUPS	7
6. TEST RESULTS	9
7. TEST EQUIPMENT	47

1.0 CUSTOMER INFORMATION

Test Laboratory:	EMCE Engineering 44366 S. Grimmer Blvd. Fremont, CA 94538 USA Tel: 510-490-4307 Fax: 510-490-3441 bob@universalcompliance.com
FCC registration number	0007-1981-20
Applicant:	Socket Communications, Inc. 37400 Central Court Newark, CA Tel: 510-744-2700 Fax: 510-744-2701
Contact Person:	Bob Miller
Receipt of EUT:	8/14/06
Test plan reference:	FCC Part 2, 15 (15.247) / IC RSS-210
Date of testing:	8/14/06 – 8/18/06
FCC ID#	LUBCRS020
Industry Canada #	2529A-CRS020
Date of Report:	9/5/06

The tests listed in this report have been completed to demonstrate compliance to the CFR 47 Section 15.247, as well as Industry Canada Radio Standard RSS-210, Issue 5.

Contents approved:


Name: Bob Cole Title: President

2.0 EUT AND ACCESSORY INFORMATION

EUT description

The EUT is a Socket Communications, Inc. M/N: **RING SCANNER**.

EUT and accessories

The table below lists all EUTs and accessories used in the tests. Later in this report, only numbers in the last column are used to refer to the devices in each test.

Software

The computers were equipped with test software provided by the customer. The software was used to control the EUT in the tests.

	Name	Type	S/N	Number
EUT	RING SCANNER	RING SCANNER	N/A	E0001
Accessories	Laptop Computer	Compaq Presario M/N: 1694	3882A744	S0001
Software	CSR Bluesuite 1.20	Bluetest03, BlueChat	N/A	N/A

EUT Information

Product Specification	Description
Model Name	RING SCANNER
Type of Modulation	Frequency Hopping Spread Spectrum (FHSS)
Number of Hopping Channels	79
Operating Frequency Range	2402 – 2480 MHz
Type of Equipment	Combined, Battery Powered
Extreme Operating Temperature Range	-20 C – 55 C
Extreme Operating Voltage Range	Fully Charged Battery
Type of Antenna	Integral
Antenna Gain (dBi)	-3.0
Transmitter Method of Frequency Generation	Synthesized
Transmitter Aggregate Data Rate	>250kbps
Transmitter Duty Type	Intermittant
Transmitter Duty Cycle	Tx ON: .326 ms, Tx OFF: .924 ms: Duty Cycle = .261
Continuous Operation for Testing Purposes?	Yes
Transmit Emissions Designator	1M00 Q1D

3.0 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in RSS-210	Description	Results
15.245 (b)(1)	6.2.2(o) (a2)	Peak output power (Radiated Emissions)	<i>PASSED</i>
15.247 (a)(1)	6.2.2(o) (a3)	CF Separation	<i>PASSED</i>
15.247 (a)(1)(ii)	6.2.2(o) (a3)	Number of Hopping Frequencies	<i>PASSED</i>
15.247 (a)(1)(ii)	6.2.2(o) (a3)	Dwell Time	<i>PASSED</i>
15.247 (a)(1)(ii)	6.2.2(o) (a3)	20 dB Bandwidth	<i>PASSED</i>
15.247, c	6.2.2(o) (e1)	Band-edge compliance of RF Radiated emission	<i>PASSED</i>
15.247, c	6.2.2(o) (e1)	Restricted Band (Radiated Emissions)	<i>PASSED</i>
15.247(d)	6.2.2(o) (e1)	Spurious radiated emissions	<i>PASSED</i>
15.247(d)	6.2.2(o) (e1)	Spurious Antenna Conducted emissions	<i>PASSED</i>

PASS The EUT passed that particular test.
 FAIL The EUT failed that particular test.

4.0 STANDARDS AND MEASUREMENT METHODS

The tests were performed in guidance of CFR 47 section 15.247, FCC Public Notice DA 00-705 (March 30, 2000), FCC Report & Order 97-114 (April 10, 1997), and ANSI C63.4 (2003). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under “Test method”. For the test equipment, see device list in the end of this test.

4.1 Selection of operation mode for tests

Before tests, several operation modes, and modulation patterns were tried. The worst case was selected for each test and those results reported.

5.0 TEST SETUPS

To fulfill all requirements for the testing, total of two different test setups were used. One EUT was used, unmodified for radiated tests.

SMA connector added in place of internal antenna for Antenna Conducted measurements.


Setup A (Antenna Conducted measurements)

Operational description

ANTENNA CONDUCTED EMISSIONS MEASUREMENTS

The EUT was connected to the Laptop Computer through the serial port (COM1), the antenna bypassed and the SMA Cable connected to the Spectrum Analyzer. This setup was used for the **PEAK POWER OUTPUT, CF SEPARATION, NUMBER OF HOPPING FREQUENCIES, 20 dB BW, BAND-EDGE COMPLIANCE, and RESTRICTED BAND** measurements.

Block Diagram

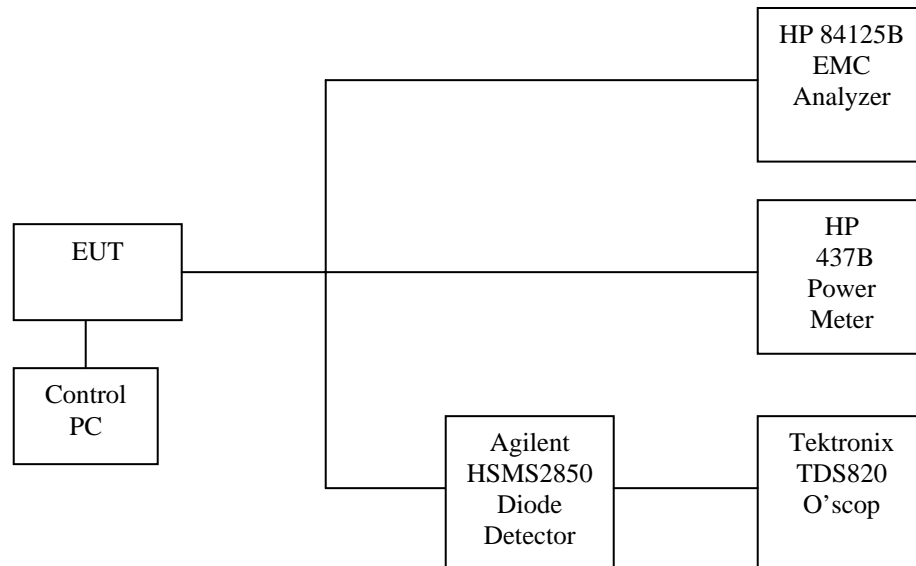

The solid lines are coaxial cables and the dashed lines are either EUT insertion to the test board or control cables between test setup devices. The measurement results were adjusted with the attenuation of the coaxial cable.

Setup B (Radiated measurements)

Operational description

RADIATED EMISSIONS MEASUREMENTS


This setup was used in radiated emissions measurements with hopping enabled.

The EUT was tested in 3 orthogonal orientations.

Worst case data is presented.

THIS SETUP USED FOR *RADIATED SPURIOUS EMISSIONS*

Block diagram



Note: The high –pass filter is used for the Radiated Spurious emissions above 2.4835 GHz. A pass-thru connector is used for Radiated Spurious emissions measurements from 30 MHz – 2.4 GHz.

The solid lines are coaxial cables and the dashed lines are either EUT insertion to the test board or control cables between test setup devices.

6.0 TEST RESULTS

The measurement results were adjusted for the attenuation of the cable between the EUT connector and receiver.

PEAK OUTPUT POWER

Peak Output Power [CFR 47, 15.247(b)(1) and RSS-210 6.2.2(o)]

EUT	RING SCANNER
Test setup	A (conducted – hopping DISABLED)
Temp, Humidity, Air Pressure	78° F, 30.88
Date of Measurement	8/16/06
Measured by	Bob Cole
Result	PASSED


Limits and results

PEAK OUTPUT POWER


EUT Channel	Limit (dBm)	Test results (dBm)
2	30.0	-19.91
40	30.0	-21.60
80	30.0	-22.27

Screen shots


Plot 1: Peak output power 2402 MHz

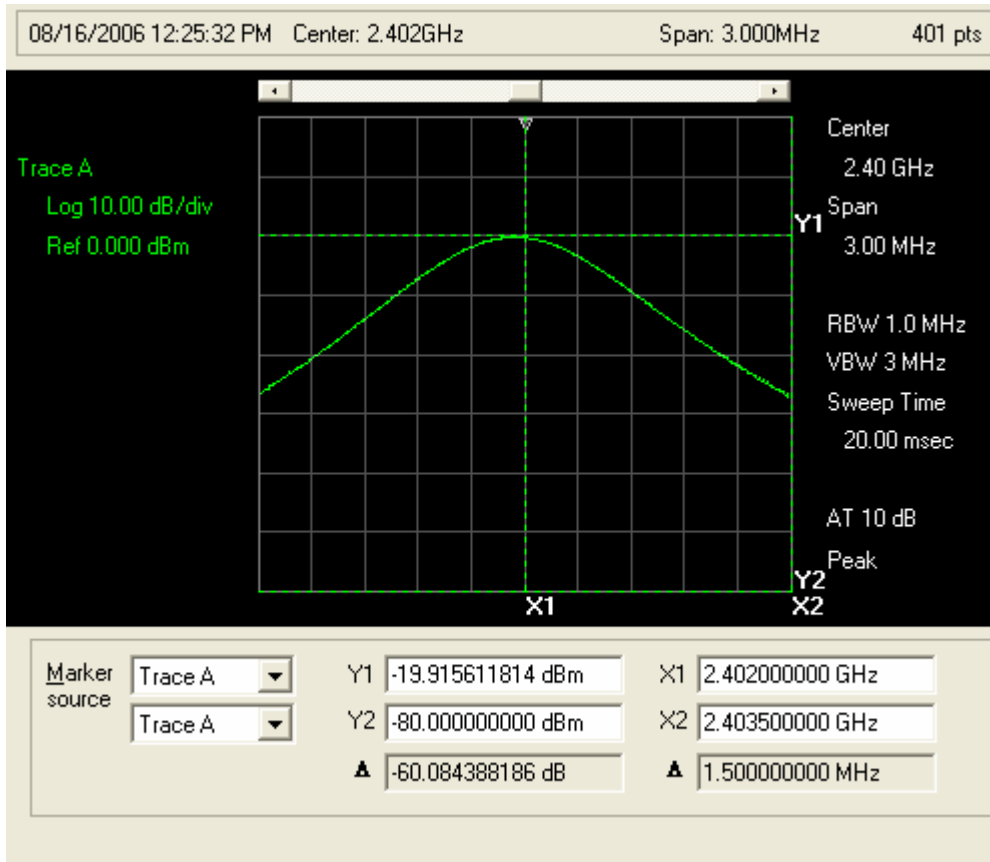

Plot 2: Peak output power 2441 MHz

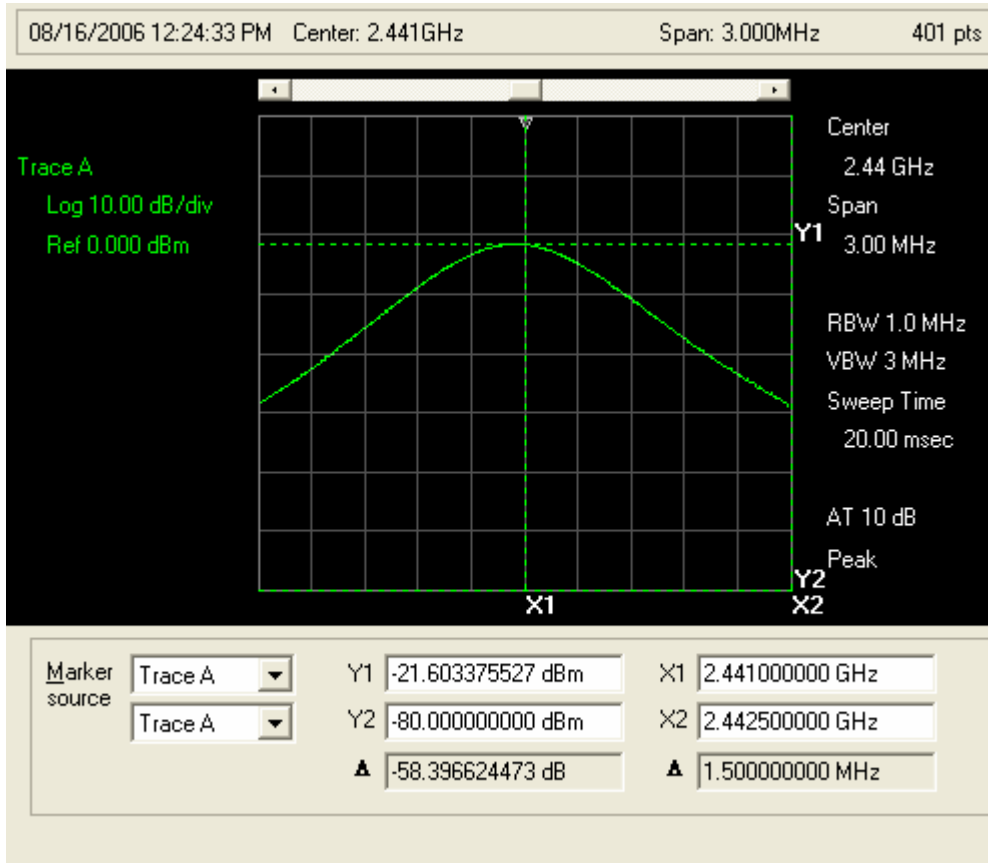

Plot 3: Peak output power 2480 MHz

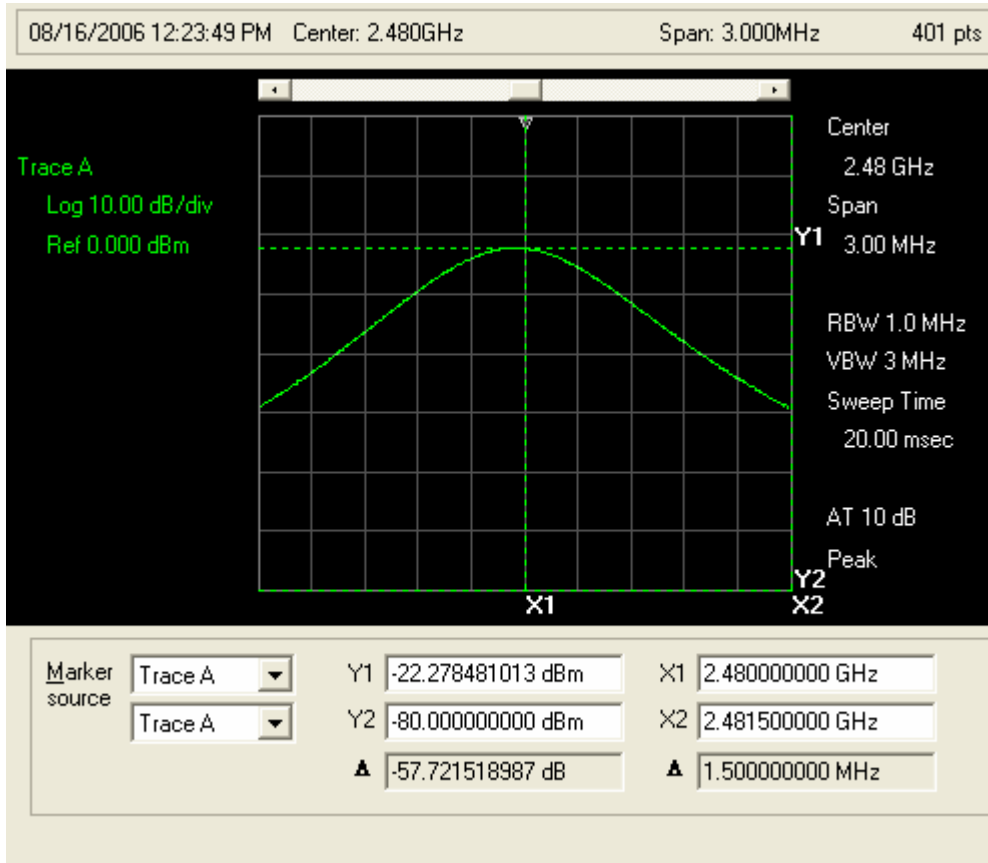

CENTER FREQUENCY SEPARATION

CF Separation [CFR 47, 15.247 (a)(1) and RSS-210 6.2.2(o)]

EUT	RING SCANNER
Test setup	A (conducted – hopping enabled)
Temp, Humidity, Air Pressure	77° F, 30.96
Date of Measurement	8/16/06
Measured by	Bob Cole
Result	PASSED


Limits and results

CENTER FREQUENCY SEPARATION

EUT Channel	Limit (MHz)	Test results (MHz)
41-42	≤ 1.0	1.000

Screen Shot:

Plot 4: CF separation

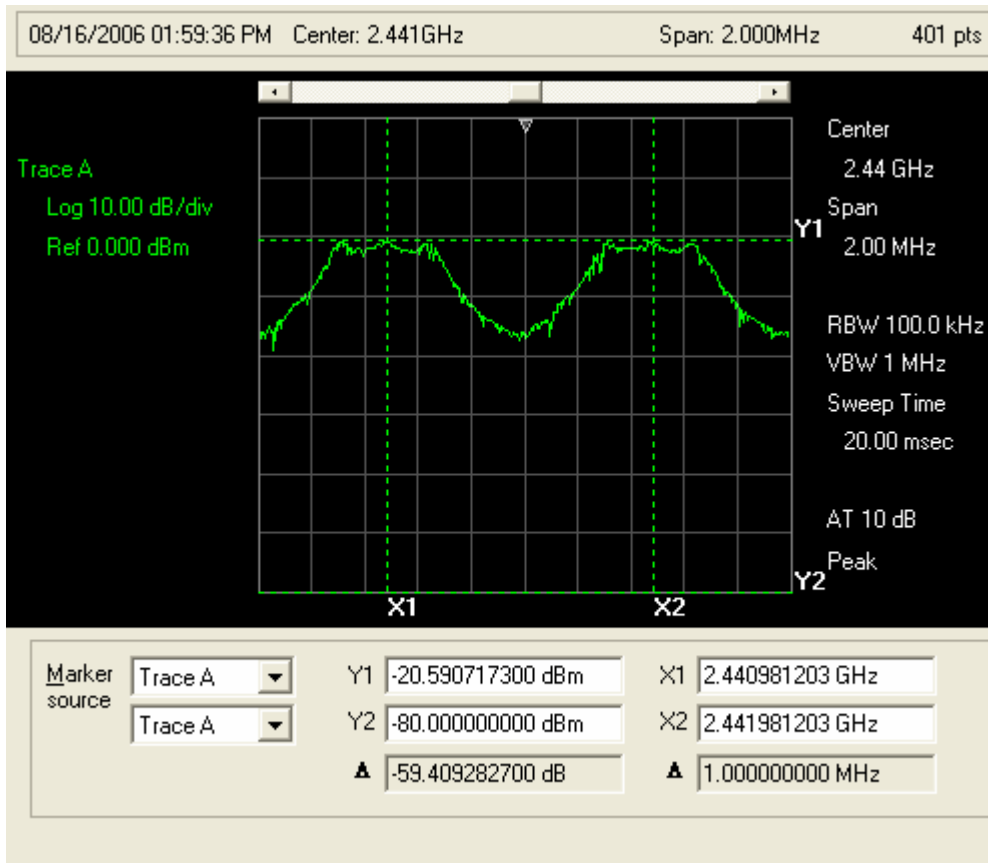

NUMBER OF HOPPING FREQUENCIES

Number of Hopping Frequencies [CFR 47, 15.247 (a)(1)(ii) and RSS-210 6.2.2(o)]

EUT	RING SCANNER
Test setup	A (conducted – hopping enabled)
Temp, Humidity, Air Pressure	80° F, 30.92
Date of Measurement	8/16/06
Measured by	Bob Cole
Result	PASSED


Limits and results

NUMBER OF HOPPING FREQUENCIES


EUT Channel	Limit (MHz)	Test results (MHz)
2-80	≤ 75	79

Screen Shot:

Plot 5: Number of Hopping Frequencies

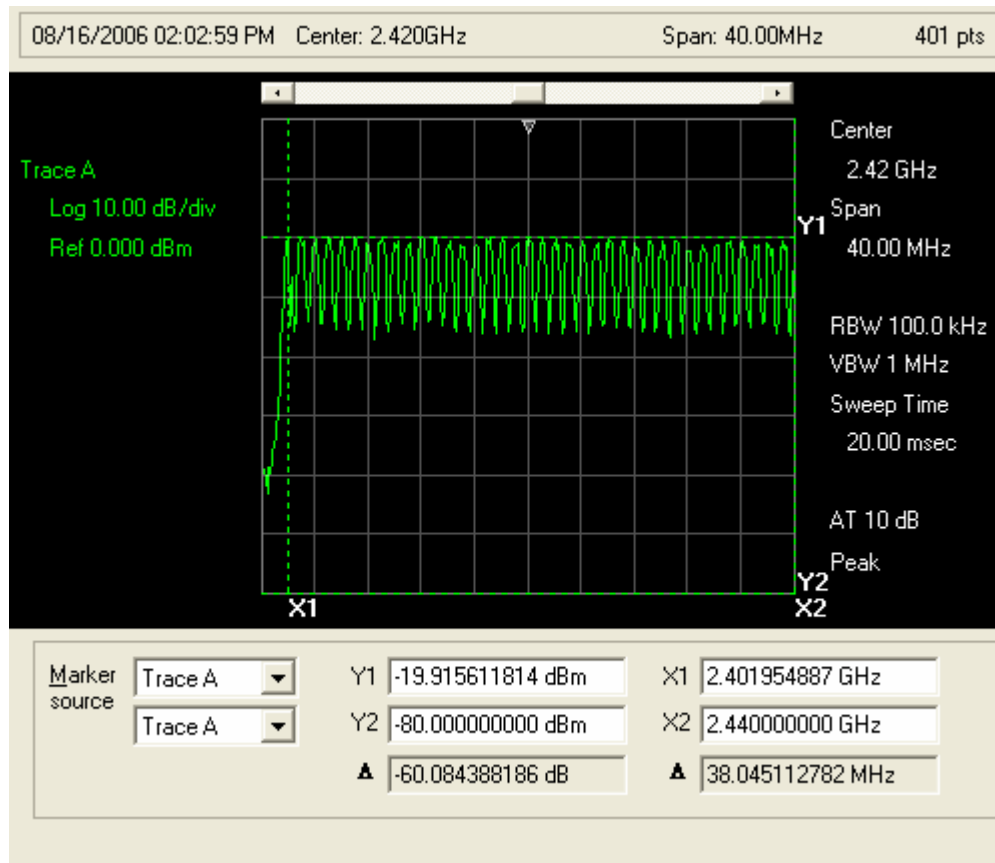

Plot 5b: Number of Hopping Frequencies

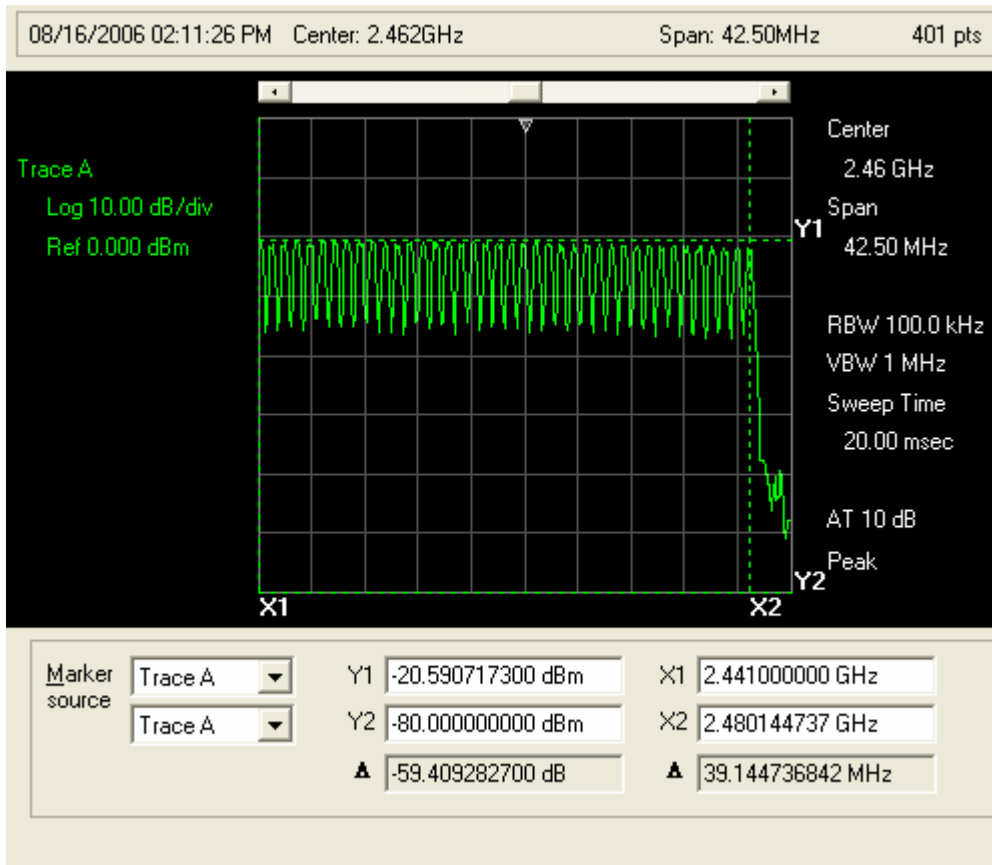

DWELL TIME

Dwell Time

EUT	RING SCANNER
Test setup	N/A
Temp, Humidity, Air Pressure	N/A
Date of Measurement	N/A
Measured by	Bob Cole
Result	PASSED – see Bluetooth Specification below

Limits and results

DWELL TIME

EUT Channel	Limit	Test results
2	400 ms per 30 second of operation	PASSED <i>See description that follows</i>

There are five hopping sequences (section 11, Bluetooth Spec. 1.1):

- 1) A **page hopping sequence** with 32 unique wake-up frequencies distributed equally over the 79 MHz, with a period length of 32; The basic slot time can be 312.5 uS or 625 uS. Min. hop repeat rate = $32 \cdot 312.5\text{mS} = 10\text{mS}$.
- 2) A **page response sequence (page scan)** covering 32 unique response frequencies that all are in a one-to-one correspondence to the current page hopping sequence. The master and slave use different rules to obtain the same sequence. The basic slot time can be 312.5 uS or 625 uS and the period is 1.28s.
- 3) An **inquiry sequence** with 32 unique wake-up frequencies distributed equally over the 79 MHz, with a period length of 32; The basic slot time can be 312.5 uS or 625 uS. Min. hop repeat rate = $32 \cdot 312.5\text{mS} = 10\text{mS}$.
- 4) An **inquiry response sequence (inquiry scan)** covering 32 unique response frequencies that all are in a one-to-one correspondence to the current inquiry hopping sequence. The basic slot time can be 312.5 uS or 625 uS and the period is 1.28s.
- 5) A **channel hopping sequence** which has a very long period length, which does not show repetitive patterns over a short time interval, but which distributes the hop frequencies equally over the 79 MHz during a short time interval; The basic slot time is 625 uS.

Worst case dwell times (largest dwell value) would be found with #5, the Channel Hopping (or data) sequence. The other hopping sequences may short shorter time sequences; however they are not repeated as often and hence have a lower overall dwell or duty cycle.

In normal transactions one may see occasional short periods between a chosen frequency due to inquiry and page scans possibly be interleaved during data transactions. It's my understanding that this would not create a dwell cycle result worse than the Channel hopping or data sequence.

Channel Hopping Sequence (Data sequence) Dwell Calculation

Cycle time for complete hopping sequence of a 79 hop cycle (data transmission mode) =

$$(1.1) \text{ Time slot period} * 79 \text{ slots} = 625\mu\text{S} * 79 = 49.375 \text{ mS}$$

See page below from Bluetooth spec. Rev 1.1, section 2, for a depiction of the hopping sequence versus packet size. Figure 2.1 shows a DH1 cycle. Figure 2.2 shows a DH1, DH3 and DH5 sequence (resp.).

Every time slot has a frequency assignment, and the frequency used for a packet remains the same as the slot it started in, if the packet is longer than one time slot.

For a DH1 packet this does not have an impact. The channel selector steps thru the entire list of 79 pseudo-random channels and then start over from the beginning.

For a DH5 (5 Slot packet), the starting frequency will be used for all 5 time slots ($f(k)$ in this example), and 4 following frequencies will not be used during that hopping cycle. Therefore instead of stepping sequential thru the 79 frequency channel list, only every 5th channel is used. Each time the 79 frequency channel list is started, is it a new randomized list of 79 channels. The probability that it will use the same frequency channel in the next list is 1/5.

Therefore even though the DH5 is at one frequency for 5 times longer than a DH1 packet, it repeats itself 1/5 as often, with the effective dwell time (averaged over a long period over a long period of time – for instance the 30 sec FCC dwell test) being the same.

For the “duty cycle correction factor”, my “read” of the FCC doc says that one should take the “worst” 100mS period found, in contrast to the average 30 sec dwell time just mentioned. As a result the DH1 and DH5 numbers for the 100 mS dwell case will be different. For a worst case DH5 packet sequence, the same frequency channel could appear in two successive 79 channel sequences.

DH1 calculation: DH1 uses 1 time slot of 0.625 mS per hopping cycle.

Dwell time per 100mS – since one 79 hop sequence is approx 50mS, there will be approx. two hop sequences in 100 mS (more accurately 100/49.375).

$$(1.2) \text{ DH1 dwell time} = 0.625 \text{ mS} * (100\text{ms}/49.375\text{mS}) = 1.26 \text{ mS (per 100 mS)}$$

DH5 calculation: DH5 uses 5 time slots of 0.625 mS per hopping cycle.

Dwell time per 100mS – since one 79 hop sequence is approx 50mS and there could be two appearances of a frequency channel in 100 mS (more accurately 100mms/49.375ms).

$$(1.3) \text{ DH5 dwell time} = 5 * 0.625 \text{ mS} * (100\text{ms}/49.375\text{mS}) = 6.3 \text{ mS (per 100 mS)}$$

Using the FCC duty cycle correction factor:

$$(1.4) \text{ DH1 Dwell correction} = 20 \log (\text{DH1 dwell time}/100\text{mS}) = 20 \log (0.0126) = -38 \text{ dB}$$

$$(1.5) \text{ DH5 Dwell correction} = 20 \log (\text{DH5 dwell time}/100\text{mS}) = 20 \log (0.0633) = -24 \text{ dB}$$

Therefore the worst case duty cycle adjustment condition will be for the DH5 packet.

The calculation shows us that we can subtract 24 dB from our 2nd harmonic measurement to compensate for this duty cycle adjustment.

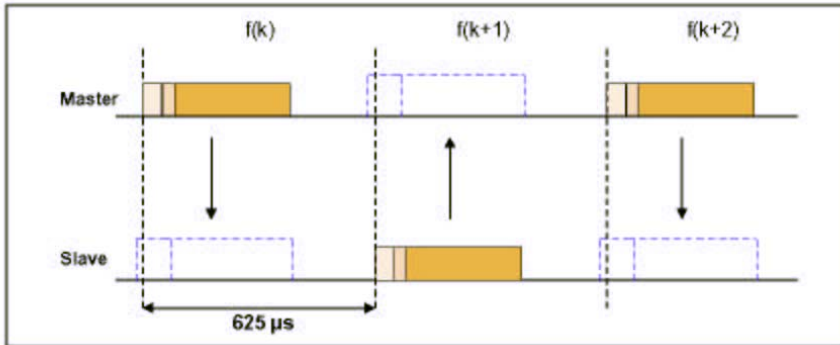


Figure 2.1: TDD and timing

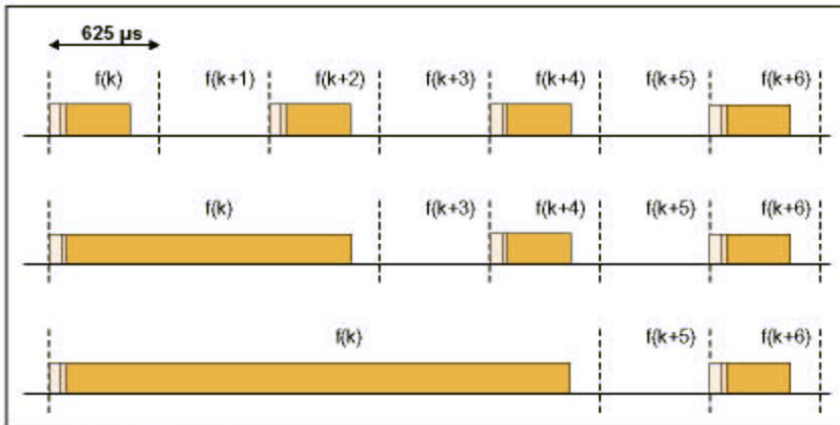


Figure 2.2: Multi-slot packets

20 dB Bandwidth

20 dB Bandwidth [CFR 47 15.247 (a)(1)(ii) and RSS-210 6.2.2(o)]

EUT	RING SCANNER
Test setup	A (conducted – hopping ENABLED)
Temp, Humidity, Air Pressure	78° F, 30.87
Date of Measurement	8/16/06
Measured by	Bob Cole
Result	PASSED


Limits and Results

20 dB BANDWIDTH


EUT Channel	Limit (MHz)	Test results (MHz)
2	≤ 1.0	0.820
40	≤ 1.0	0.887
80	≤ 1.0	0.917

Screen Shots


Plot 6: 20 dB BW 2402 MHz

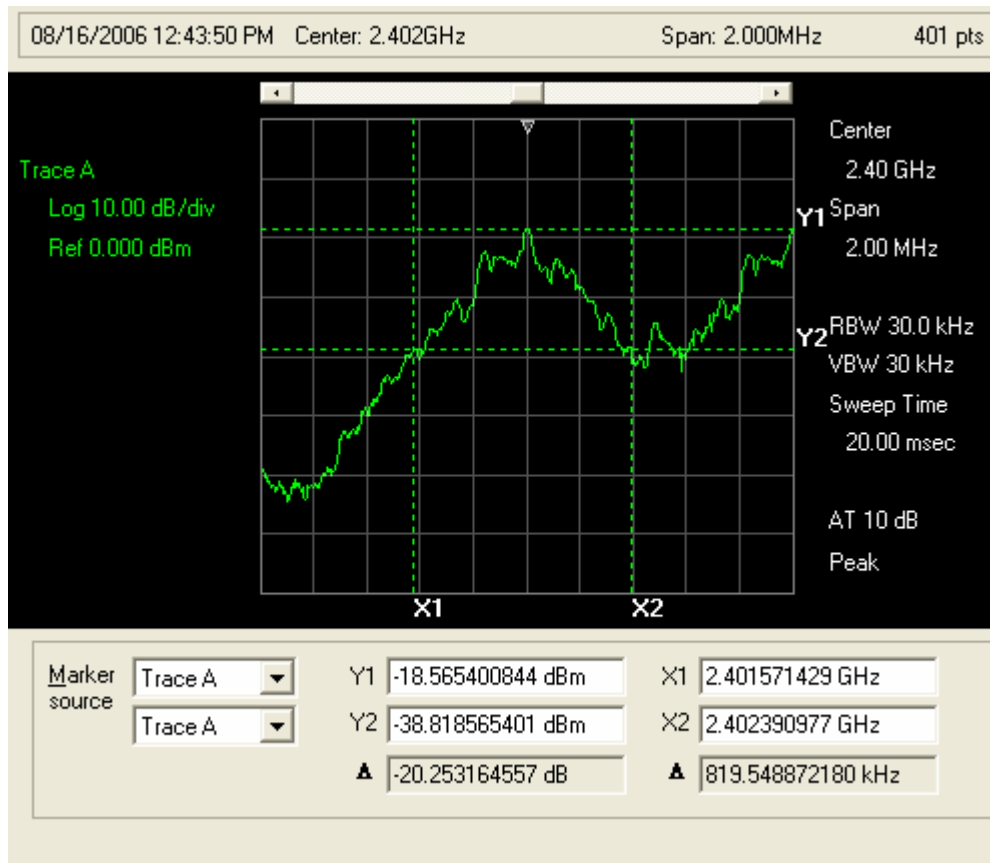

Plot 7: 20 dB BW 2441 MHz

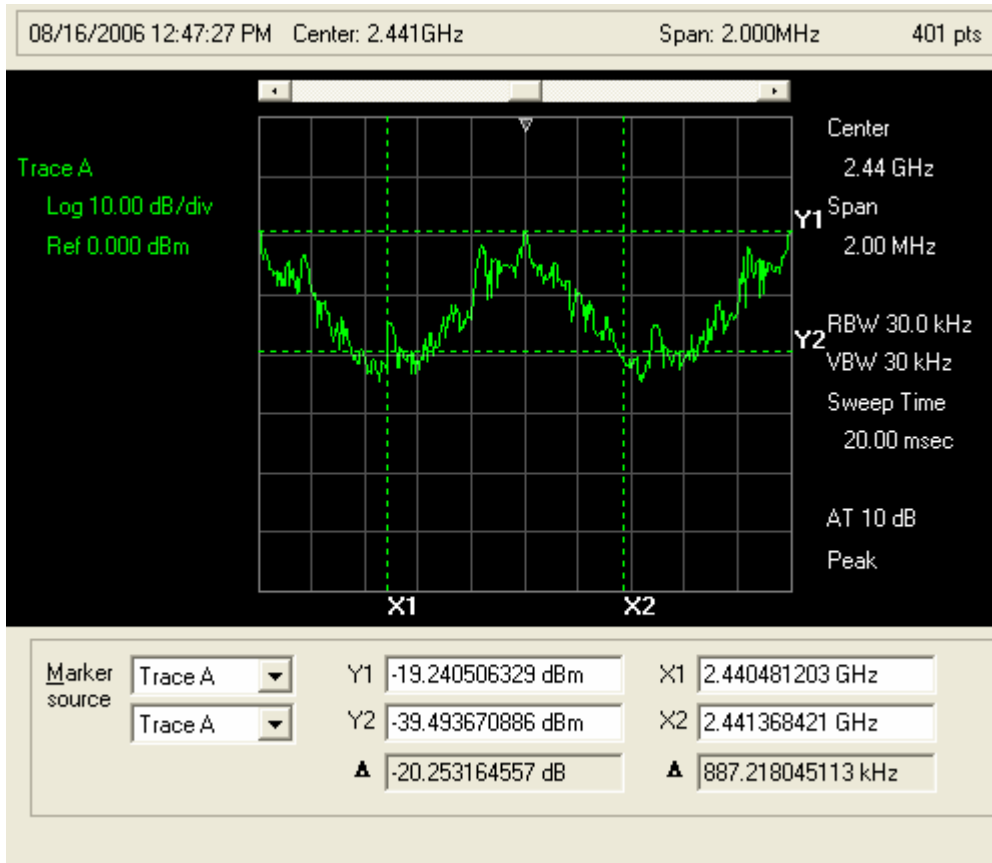

Plot 8: 20 dB BW 2480 MHz

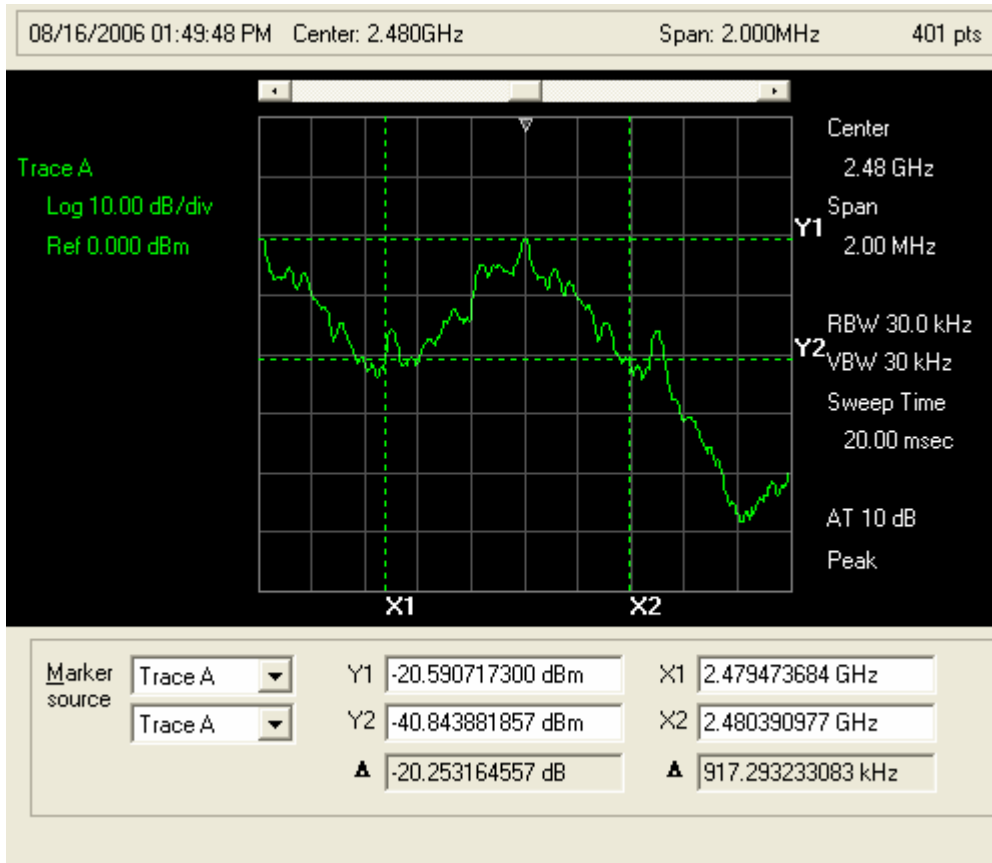

BAND-EDGE COMPLIANCE

Band-edge compliance of RF Radiated emissions [CFR 47, 15.247c(1) and RSS-210 6.2.2(o)]

EUT	RING SCANNER
Test setup	A (conducted – hopping enabled & disabled)
Temp, Humidity, Air Pressure	79° F, 30.72
Date of Measurement	10/24/05
Measured by	Bob Cole
Result	PASSED

EUT operation mode

EUT operation mode	Hopping Enabled / Disabled
EUT channel	2, 80
EUT TX power level	Maximum


Limits and results

BAND-EDGE COMPLIANCE


Channel	Limit (dBm)	Results (dBm)
2	-53.00	-59.74
80	-53.00	-70.54

Screen shots:


Plot 9: Band-edge Compliance, Lower Band-edge (Hopping Disabled)

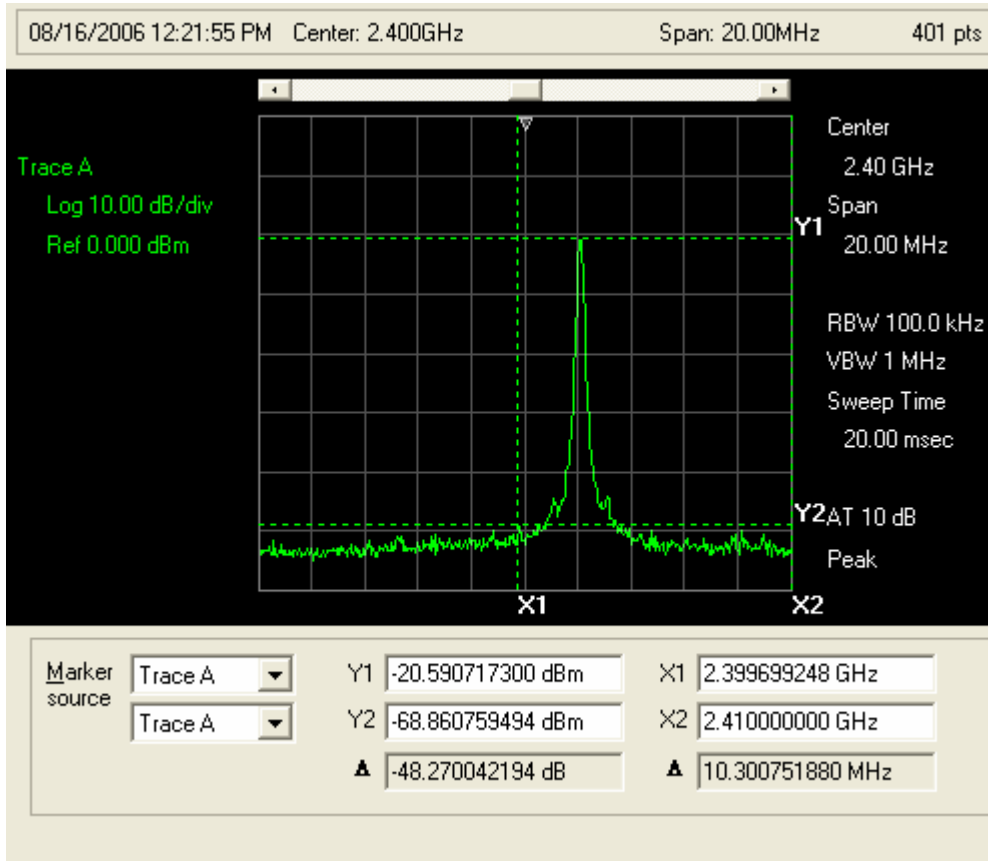


Plot 10: Band-edge Compliance, Lower Band-edge (Hopping Enabled)

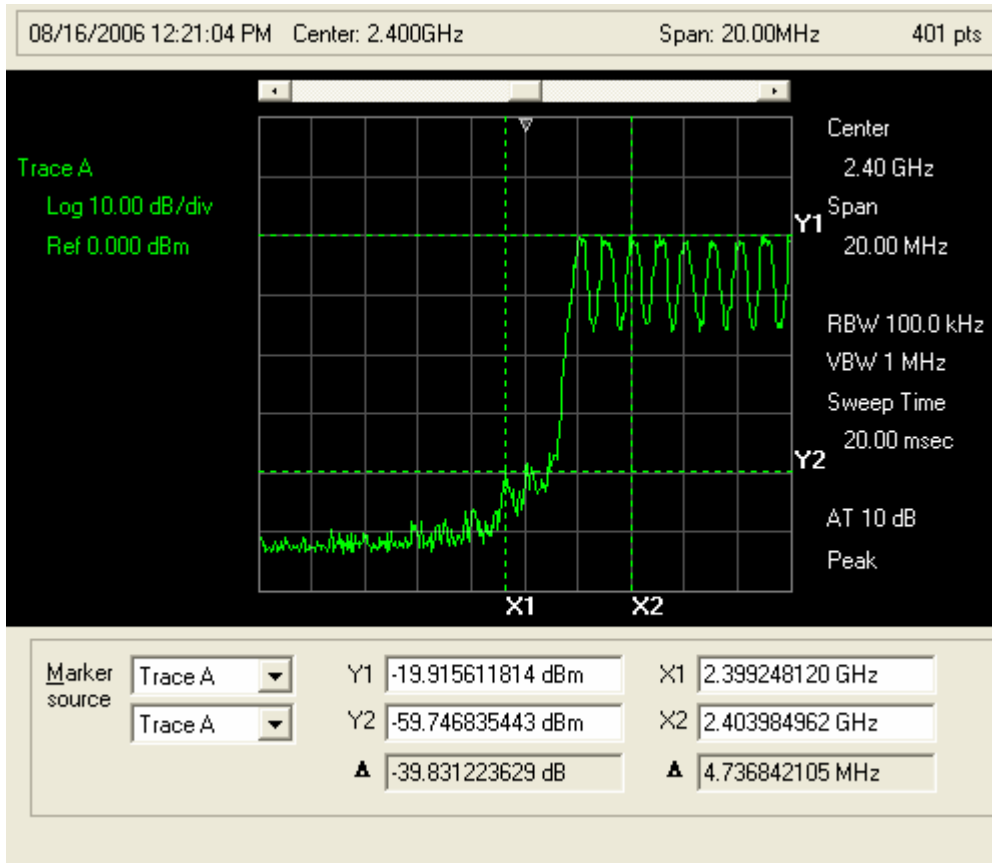

Plot 11: Band-edge compliance, Upper Band-edge (Hopping Disabled)

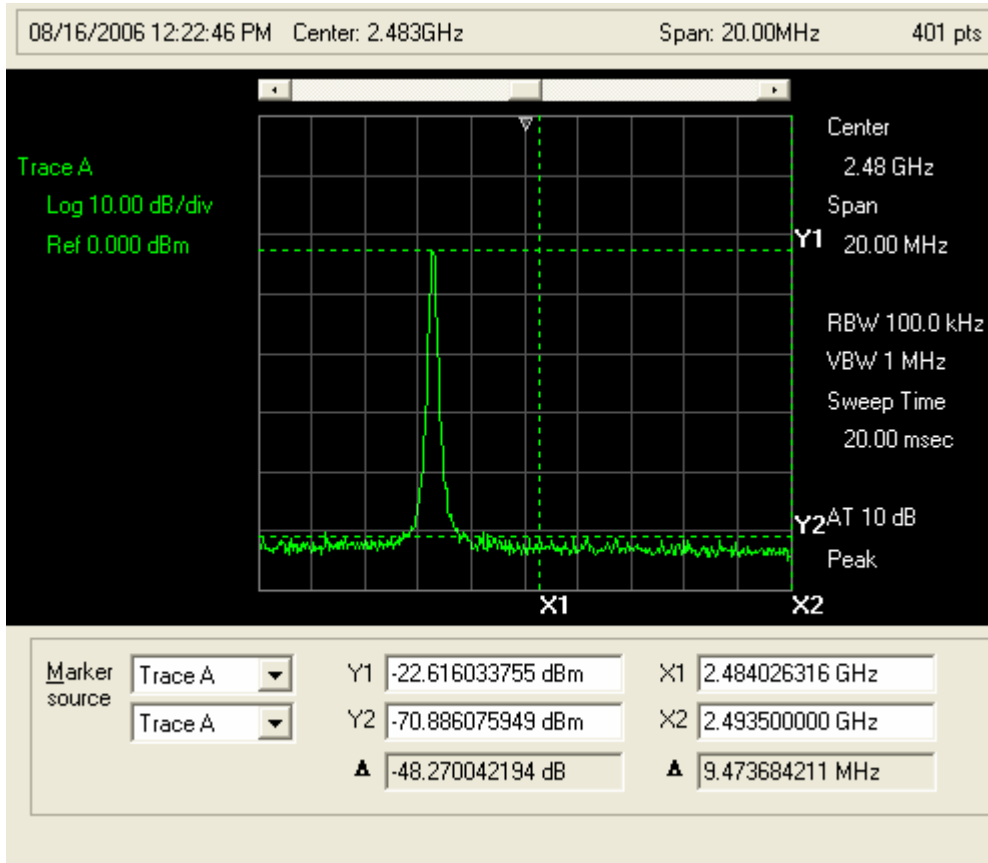

Plot 12: Band-edge Compliance, Upper Band-edge (Hopping Enabled)

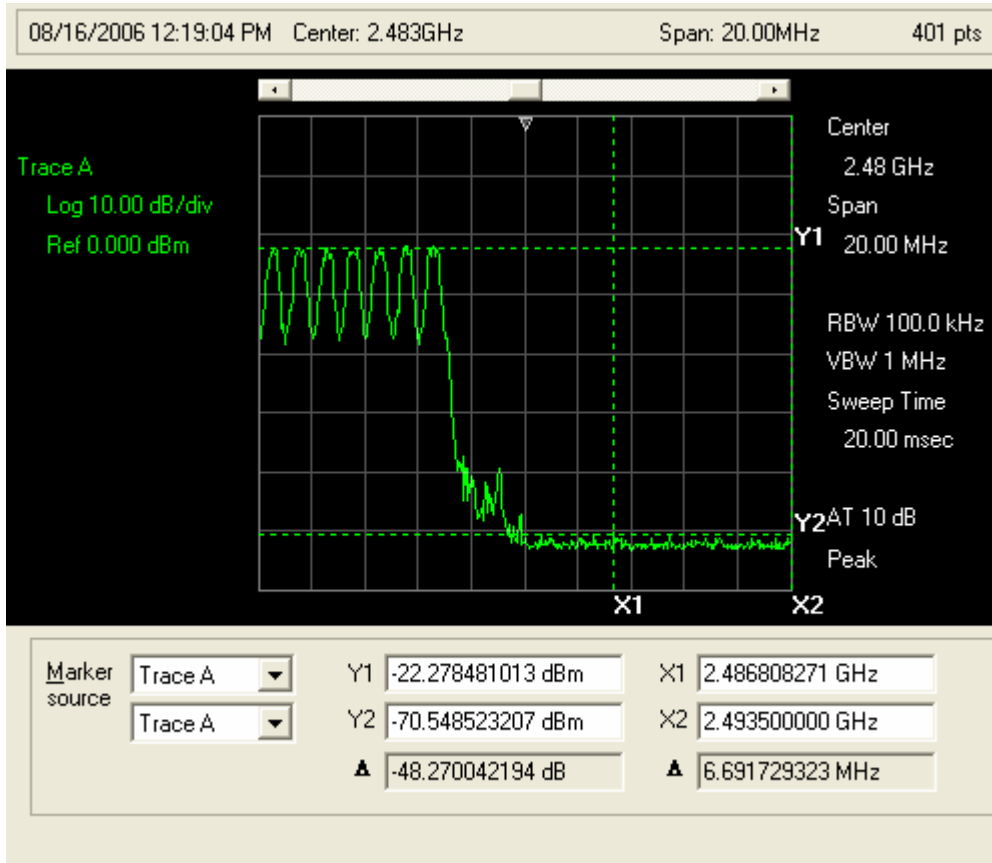

SPURIOUS RF RADIATED EMISSIONS

Spurious RF Radiated Emissions [CFR 47, 15.247c1) and RSS-210 6.2.2(o)]

EUT	RING SCANNER
Test setup	B (Radiated – hopping disabled)
Temp, Humidity, Air Pressure	77° F, 30.38
Date of Measurement	8/16/06
Measured by	Bob Cole
Result	PASSED

RESTRICTED BAND MEASUREMENTS

1.000- 2.4835 GHz Test Data

Test Location: EMCE Engineering •44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer:	Socket		
Specification:	FCC-65 Restricted Band 30-2400		
Work Order #:	2561	Date:	8/16/2006
Test Type:	Radiated Scan	Time:	11:10:59 AM
Equipment:	Ring Scanner	Sequence#:	1
Manufacturer:	Socket Communications	Tested By:	Bob Cole
Model:	Ring Scanner		
S/N:	BC02-2 Module		

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
----------	-----	------------------	--------------	---------

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Ring Scanner*	Socket Communications	Ring Scanner	BC02-2 Module

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Tested while transmitting at 2402, 2441, and 2480 MHz. Worst Case data at 2480 MHz is presented.
 RBW = 1 MHz
 VBW = 1 MHz

Transducer Legend:


--

Measurement Data: Reading listed by margin. Test Distance: 1 Meter

#	Freq MHz	Rdng dBµV	dB	dB	dB	dB	Dist Table	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar Ant
1	1059.450M	52.0					-10.0	42.0	54.0	-12.0	Vert
2	1201.281M	50.1					-10.0	40.1	54.0	-13.9	Vert

3	1000.000M	47.7	-10.0	37.7	54.0	-16.3	Vert
4	1593.134M	45.5	-10.0	35.5	54.0	-18.5	Vert
5	1671.525M	45.4	-10.0	35.4	54.0	-18.6	Vert
6	1662.480M	45.3	-10.0	35.3	54.0	-18.7	Vert
7	2334.405M	44.9	-10.0	34.9	54.0	-19.1	Vert
8	1467.507M	44.1	-10.0	34.1	54.0	-19.9	Vert
9	1165.611M	43.8	-10.0	33.8	54.0	-20.2	Vert
10	1500.673M	43.6	-10.0	33.6	54.0	-20.4	Vert

EMCE Engineering Date: 8/16/2006 Time: 11:10:59 AM Socket WO#: 2561
FCC-65 Restricted Band 30-2400 Test Distance: 1 Meter Sequence#: 1

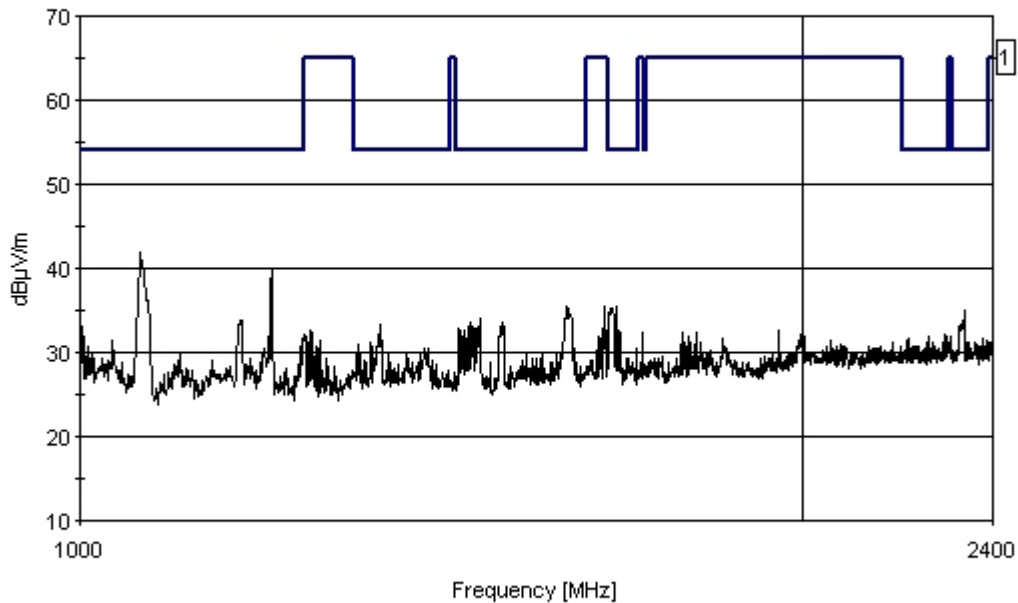

— Sweep Data — 1 - FCC-65 Restricted Band 30-2400

2.4835 – 25 GHz Test Data

Test Location: EMCE Engineering •44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Socket**
 Specification: **FCC-65 Restricted Band 2483.5 - 18000**
 Work Order #: **2561** Date: 8/16/2006
 Test Type: **Radiated Scan** Time: 11:48:53 AM
 Equipment: **Ring Scanner** Sequence#: 3
 Manufacturer: Socket Communications Tested By: Bob Cole
 Model: Ring Scanner
 S/N: BC02-2 Module

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
----------	-----	------------------	--------------	---------

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Ring Scanner*	Socket Communications	Ring Scanner	BC02-2 Module

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Tested while transmitting at 2402, 2441, and 2480 MHz. Worst Case data at 2480 MHz is presented.
 RBW = 1 MHz
 VBW = 1 MHz


Transducer Legend:

--

Measurement Data: Reading listed by margin. Test Distance: 1 Meter

#	Freq MHz	Rdng dB μ V	dB	dB	dB	dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	17996.510M	56.9					-10.0	46.9	54.0	-7.1	Vert
2	17715.470M	55.5					-10.0	45.5	54.0	-8.5	Vert
3	7439.217M	51.4					-10.0	41.4	54.0	-12.6	Vert
4	11100.480M	51.2					-10.0	41.2	54.0	-12.8	Vert
5	11643.180M	51.1					-10.0	41.1	54.0	-12.9	Vert
6	11723.580M	50.9					-10.0	40.9	54.0	-13.1	Vert
7	12562.770M	50.8					-10.0	40.8	54.0	-13.2	Vert
8	12185.890M	50.5					-10.0	40.5	54.0	-13.5	Vert
9	10700.480M	50.4					-10.0	40.4	54.0	-13.6	Vert
10	8256.292M	49.2					-10.0	39.2	54.0	-14.8	Vert

EMCE Engineering Date: 8/16/2006 Time: 11:48:53 AM Socket WO#: 2561
FCC-65 Restricted Band 2483.5 - 18000 Test Distance: 1 Meter Sequence#: 3

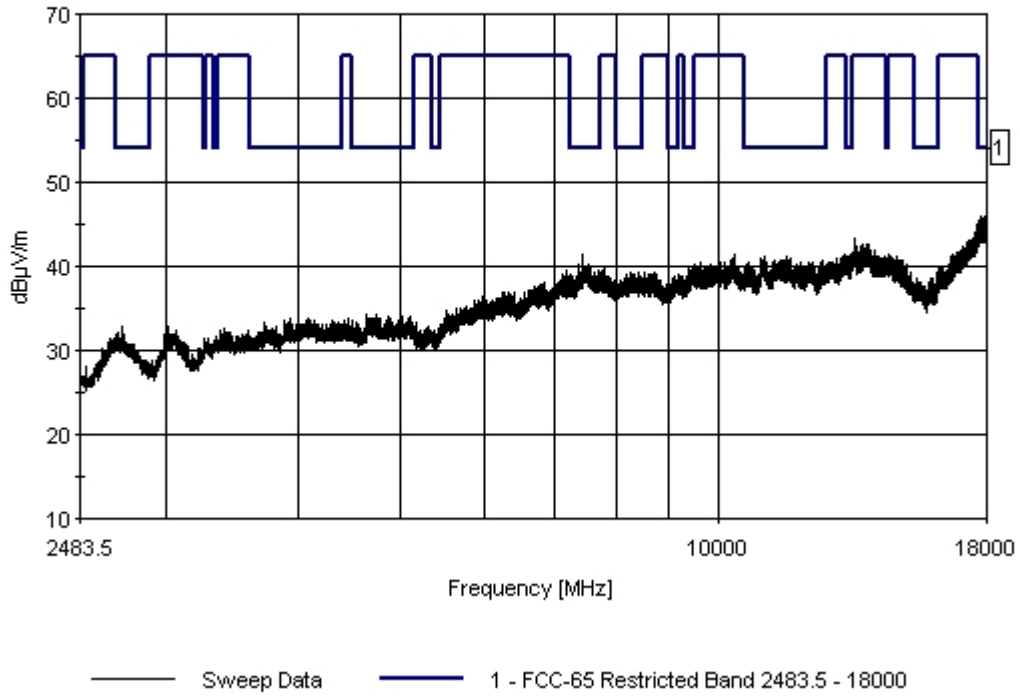

TRANSMITTER SPURIOUS CONDUCTED EMISSIONS

Spurious Conducted Emissions 1 GHz - 26 GHz – Worst Case Emission

Spurious Antenna Conducted Emissions 1.0 – 2.4 GHz

Test Location: EMCE Engineering •44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer:	Socket	Date:	8/16/2006
Specification:	FCC Cond Spurious 85	Time:	2:22:23 PM
Work Order #:	2561	Sequence#:	1
Test Type:	Conducted Emissions	Tested By:	Bob Cole
Equipment:	Ring Scanner		120V 60Hz
Manufacturer:	Socket Communications		
Model:	Ring Scanner		
S/N:	BC02-2 Module		

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
----------	-----	------------------	--------------	---------

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Ring Scanner*	Socket Communications	Ring Scanner	BC02-2 Module

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Hopping Enabled RBW = 100 kHz VBW = 100 kHz

Transducer Legend:


T1=dBuV - dBm 50 ohm conversion

Measurement Data: Reading listed by margin. Test Lead: Antenna Terminal

#	Freq MHz	Rdng dBuV	T1 dB	Margin			Dist Table	Corr dBm	Spec dBm	Margin dB	Polar Anten
				dB	dB	dB					
1	2399.725M	42.8	-107.0				+0.0	-64.2	-42.0	-22.2	Anten
2	2397.890M	38.1	-107.0				+0.0	-68.9	-42.0	-26.9	Anten
3	2396.056M	34.8	-107.0				+0.0	-72.2	-42.0	-30.2	Anten
4	2382.113M	34.0	-107.0				+0.0	-73.0	-42.0	-31.0	Anten
5	2279.180M	33.5	-107.0				+0.0	-73.5	-42.0	-31.5	Anten
6	1920.992M	33.1	-107.0				+0.0	-73.9	-42.0	-31.9	Anten
7	2254.155M	33.0	-107.0				+0.0	-74.0	-42.0	-32.0	Anten

8	1422.407M	32.9	-107.0	+0.0	-74.1	-42.0	-32.1	Anten
9	694.012M	32.8	-107.0	+0.0	-74.2	-42.0	-32.2	Anten
10	1514.566M	32.7	-107.0	+0.0	-74.3	-42.0	-32.3	Anten

EMCE Engineering Date: 8/16/2006 Time: 2:22:23 PM Socket W/O#: 2561
FCC Cond Spurious 85 Test Lead: Antenna Terminal 120V 60Hz Sequence#: 1

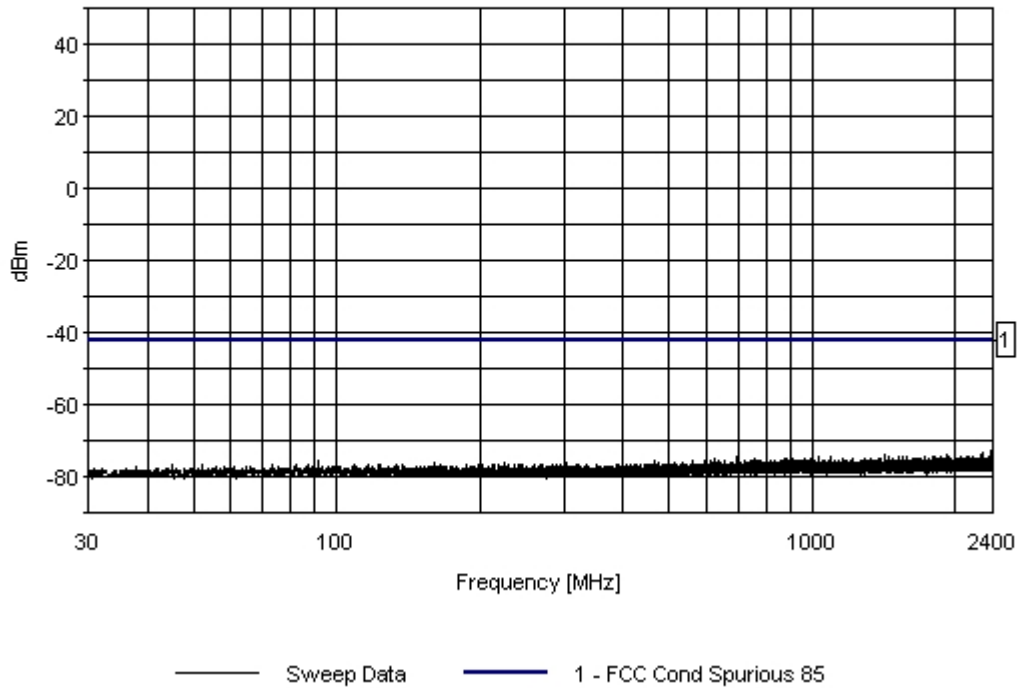

Spurious Antenna Conducted Emissions 2.4835-18 GHz

Test Location: EMCE Engineering •44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Socket**
 Specification: **FCC Cond Spurious High -42 dBm**
 Work Order #: **2561** Date: 8/16/2006
 Test Type: **Conducted Emissions** Time: 2:51:14 PM
 Equipment: **Ring Scanner** Sequence#: 2
 Manufacturer: Socket Communications Tested By: Bob Cole
 Model: Ring Scanner 120V 60Hz
 S/N: BC02-2 Module

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
----------	-----	------------------	--------------	---------

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Ring Scanner*	Socket Communications	Ring Scanner	BC02-2 Module

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

Hopping Enabled RBW = 100 kHz VBW = 100 kHz


Transducer Legend:

T1=dBuV - dBm 50 ohm conversion

Measurement Data: Reading listed by margin. Test Lead: Antenna Terminal

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBm	Spec dBm	Margin dB	Polar Ant
1	17760.210M	45.5	-107.0				+0.0	-61.5	-42.0	-19.5	Anten
2	17872.270M	45.5	-107.0				+0.0	-61.5	-42.0	-19.5	Anten
3	16216.230M	45.3	-107.0				+0.0	-61.7	-42.0	-19.7	Anten
4	17750.060M	45.3	-107.0				+0.0	-61.7	-42.0	-19.7	Anten
5	17888.750M	45.1	-107.0				+0.0	-61.9	-42.0	-19.9	Anten
6	17715.590M	45.0	-107.0				+0.0	-62.0	-42.0	-20.0	Anten
7	17854.690M	45.0	-107.0				+0.0	-62.0	-42.0	-20.0	Anten
8	17866.540M	45.0	-107.0				+0.0	-62.0	-42.0	-20.0	Anten
9	17943.030M	45.0	-107.0				+0.0	-62.0	-42.0	-20.0	Anten
10	17803.830M	44.9	-107.0				+0.0	-62.1	-42.0	-20.1	Anten

EMCE Engineering Date: 8/16/2006 Time: 2:51:14 PM Socket WO#: 2561
FCC Cond Spurious High -42 dBm Test Lead: Antenna Terminal 120V 60Hz Sequence#: 2

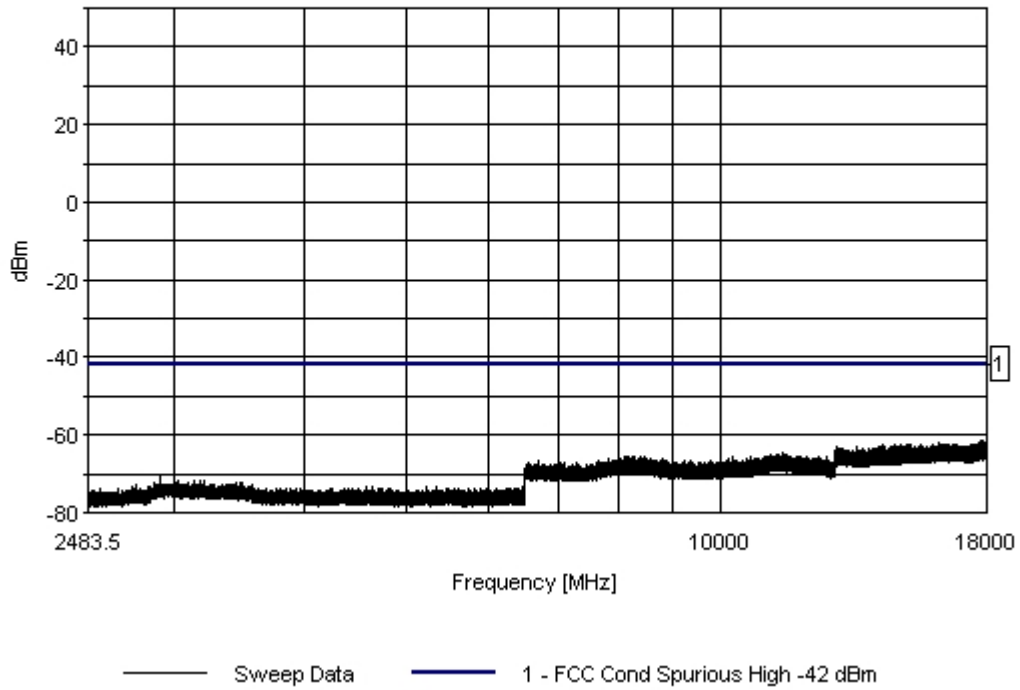

AC LINE CONDUCTED EMISSIONS MEASUREMENT

AC Line Conducted Emissions Measurement 150 kHz – 30 MHz

EUT	RING SCANNER – US Version AC Adaptor
Test setup	C (conducted – hopping enabled)
Temp, Humidity, Air Pressure	74° F, 30.69
Date of Measurement	N/A
Measured by	Bob Cole
Result	PASSED

CLASS B LIMIT

Frequency Band (MHz)	EN 55022 B Limit (dB μ V/m)	Detector
0.15 – 0.5	66 to 56	QP
0.5 – 5.0	56	QP
5.0 – 30.0	60	QP

EUT operation mode

EUT operation mode	Hopping Enabled
EUT channel	Hopping
EUT TX power level	Maximum
EUT operation voltage	230 VAC

Not Applicable – Battery Powered Equipment

7.0 TEST EQUIPMENT

Antenna Conducted Measurements:

Equipment	Type	Manufacturer	Calibration Due Date
Spectrum Analyzer	8593EM	Hewlett-Packard	2/1/07
Oscilloscope	TDS820	Tektronix	2/1/07
Coaxial cable	SMA Male – Reverse SMA Male (Length = 20 cm)	Own	10/1/06

Spurious RF radiated emissions:

Equipment	Type	Manufacturer	Calibration Due Date
EMI Analyzer System	84125B	Hewlett-Packard	2/1/07
Spectrum Analyzer	8593EM	Hewlett-Packard	2/1/07
Pre-Amp	83051A	Hewlett-Packard	2/1/07
Pre-Amp	83017A	Hewlett-Packard	2/1/07
High Pass Filter	9701	CMT	2/1/07
Horn Antenna	3115	EMCO	2/1/07
Cable		Hewlett Packard	2/1/07

Note: The HP 84125B EMC Analyzer System is calibrated as a system, including the analyzer, pre-amps, filters, and cable.

EN 55022 (AC powerline conducted emissions)

Equipment	Type	Manufacturer	Calibration Due Date
Spectrum analyzer	8568B	Hewlett-Packard	2/1/07
LISN	3810/2	EMCO	10/1/06
Coaxial cable	N Type – BNC (5 Meters)	Own	10/1/06