



CERTIFICATE OF COMPLIANCE

APPLICABLE SPECIFICATIONS:

47 CFR PART 2, SUBPART J, SECTION 2.907
47 CFR PART 15, SUBPART C, SECTION 15.225
INDUSTRY CANADA RADIO STANDARD RSS-210 ISSUE 5

Report Number: 2701-1, Dated 2/22/07

I hereby certify that the measurements shown on this report were made in accordance with the procedures of American National Standards Institute (ANSI) Specification C63.4-2003. The voltages conducted along its power leads and electric fields radiated by the equipment listed below meets the Commissions Limits for a Class B CF RFID - Scan Card.

Company: *Socket Mobile, Inc.*
Street Address: *39700 Eureka Drive*
City, State & ZIP *Newark, Ca 94560*
Equipment under Test: *CF RFID - Scan Card*
Model Number: *8510-00226, 8510-00248, 8510-00249*
Serial Number: *001*

EMCE Engineering, Inc. has been placed on the Federal Communications Commission's list of recognized facilities for Parts 15 and 18 DoC approvals. Per the request of EMCE Engineering, Inc., the facility has been added to the list of those who perform Measurement Services for the public on a fee basis. This list is published periodically and is also available on the FCC World Wide Web. Additionally, EMCE Engineering, Inc. has been approved by the National Institute for Standards and Technology under the NVLAP program (Lab Code 200092-0). The Line Conducted emissions (CFR 47, 15.207) and Spurious Radiated emissions (CFR 47, 15.109) results presented in this report fall under EMCE's Scope of Accreditation.

Certified By:

A handwritten signature in black ink, appearing to read "R. Cole".

President
EMCE Engineering

Disclaimer

EMCE Engineering, Inc., assumes no responsibility for the continuing validity of test data when the Equipment under Test is not under the continuous physical control of EMCE. The signature below attests to the fact that all measurements reported herein were performed by myself or were made under my supervision, and are correct to the best of my knowledge and belief as of the date specified. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Tests were conducted by qualified EMCE Engineering, Inc. personnel utilizing test equipment maintained in a “current” state of calibration with traceability to NIST.

- *This report or certificate does not represent endorsement by NVLAP or any agency of the US Government.*
- *This report or certificate shall not be reproduced except in full without the written approval of the issuer.*

ELECTROMAGNETIC INTERFERENCE TEST REPORT

Report Number: 2701-1

Report Date: 2/22/07

Applicable Specification:

47 CFR Part 15, Subpart C, Section 15.225

Certification of a Class B CF RFID - Scan Card

FCC ID: LUBRFID002

Equipment under Test: CF RFID - Scan Card
Model Number: 8510-00226, 8510-00248, 8510-00249
Serial Number: 001

Prepared for: Socket Mobile, Inc.
39700 Eureka Drive
Newark, Ca 94560

Tested by: Bob Cole

Prepared by: Bob Cole
EMCE Engineering, Inc.
44366 S. Grimmer Blvd.
Fremont, CA 94538
Phone: 510-490-4307
Fax: 510-490-3441

Note:

- *This report or certificate does not represent endorsement by NVLAP or any agency of the US Government.*
- *This report or certificate shall not be reproduced except in full without the written approval of the issuer.*

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1.0	SCOPE	5
1.1	Objective	5
1.2	Description of EUT	5
1.3	Results/Modifications	5
1.4	Test Limits	5
2.0	APPLICABLE DOCUMENTS	6
2.1	FCC Document	6
2.2	Other Documents	6
3.0	GENERAL SETUP AND TEST CONDITIONS	7
3.1	Test Facility	7
3.2	Description of Open - Field Test Site	7
3.3	Site Attenuation	7
3.4	Ground Plane (Ground Screen)	7
3.5	Input Power for EUT	9
3.6	Accessory Equipment Precautions	9
3.7	Ambient Interference	9
3.8	Personnel	9
3.9	Use of Interference Measuring Equipment	10
3.10	Calibration of Measuring Equipment	10
4.0	PREPARATION OF EUT FOR TEST	11
4.1	Identification of EUT	11
4.2	Setup of EUT	11
4.3	Interface and Cabling	13
4.4	Peripherals Connected	13
5.0	DETAILED MEASUREMENTS	14
5.1	Conducted Emissions, Power Leads, 450kHz to 30MHz	14
5.1.1	Test Results	14
5.1.2	Test Instrumentation	15
5.1.3	Recommendations	15
5.2	Radiated Emissions Test, 30MHz to 1000MHz	16
5.2.1	Vertical Polarization Measurements	16
5.2.2	Horizontal Polarization Measurements	17
5.2.3	Test Results	17
5.2.4	Test Instrumentation	17
5.2.5	Recommendations	17

LIST OF FIGURES

<u>Figure</u>	<u>Title</u>	<u>Page</u>
<i>1</i>	<i>EMCE Test Site Layout</i>	<i>8</i>

LIST OF APPENDICES

<u>Appendix</u>	<u>Title</u>	<u>Page</u>
<i>A</i>	<i>EMCE NVLAP Accreditation Certificates</i>	<i>15</i>
<i>B</i>	<i>Test Data Sheets</i>	<i>19</i>
<i>C</i>	<i>Intentional Radiator Results</i>	<i>23</i>
<i>D</i>	<i>Modification List and Photos</i>	<i>31</i>
<i>E</i>	<i>Certification Labeling and Compliance Information</i>	<i>32</i>
<i>F</i>	<i>Measurement Equipment Error Analysis</i>	<i>35</i>
<i>G</i>	<i>Test Equipment List</i>	<i>37</i>

1.0 SCOPE

This test report describes the equipment setup, test methods employed and results obtained during electromagnetic interference (EMI) testing of a Class B CF RFID - Scan Card as defined in Part 15, Subpart A, paragraph 15.3 (o). The tests described herein measured the RF radiated (RFI Field Strength) emissions of the equipment under test (EUT) as installed in a typical "Host" environment. The tests conformed to the measurement and test site requirements of ANSI C63.4-2003.

1.1 Objective

The tests described herein were performed to establish that the EUT is capable of compliance with the requirements of Part 15, Subpart B, Section 15.225 for Intentional Radiators (a Class B CF RFID - Scan Card).

1.2 Description of EUT

The EUT is a CF RFID - Scan Card Model Number: 8510-00226, 8510-00248, 8510-00249 Serial Number: 001, manufactured by Socket Mobile, Inc.. The EUT contained the following options: No Options.

Model Differences:

- *M/N 8510-00226 is the RFID Reader*
- *M/N 8510-00248 is the RFID Reader with Class 1 Laser Scan Engine*
- *M/N 8510-00249 is the RFID Reader with the Class 2 Laser Scan Engine*

All testing was performed on the model 8510-00249 unit, which is representative of all three model for EMC compliance purposes.

1.3 Results/Modifications

The EUT passed FCC Class B conducted and radiated emissions tests. No modification was necessary. The manufacturer may declare the EUT as complying with the FCC requirements.

1.4 Test Limits

FCC Class B Line Conducted and Unintentional Radiated emission limits are as follows:

<u>Conducted Emission Limits (Quasi-peak)</u>	<u>Radiated Emission Limits @ 10-meters</u>	
<i>N/A due to product type</i>	<i>30 – 230 MHz</i>	<i>30.0 dBuV/m</i>
	<i>230 – 1000 MHz</i>	<i>37.0 dBuV/m</i>

2.0 APPLICABLE DOCUMENTS

2.1 FCC Documents

<u>Document</u>	<u>Title</u>
<i>Title 47 CFR</i>	<i>TELECOMMUNICATION</i>
<i>Part 2</i>	<i>Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.</i>
<i>Part 15</i>	<i>Radio Frequency Devices.</i>

2.2 Other Documents

<i>ANSI C63.4-2003</i>	<i>American National Standards for Methods of Measurement of Radio-Noise Emissions From Low-Voltage Electrical and Electronic Equipment In the Range of 9kHz to 40GHz.</i>
<i>ANSI C63.5-2003</i>	<i>American National Standards for Calibration of Antennas Used for Radiated Emissions Measurement.</i>
<i>CISPR 22: 2003</i>	<i>Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement. By the International Electrotechnical Commission (IEC).</i>

3.0 GENERAL SETUP AND TEST CONDITIONS

3.1 Test Facility

The tests described herein were performed at:

*EMCE Engineering, Inc.
44366 S. Grimmer Blvd.
Fremont, CA 94538*

This laboratory has one semi-anechoic chamber, one electromagnetic shielded enclosure and a 3-meter and 10-meter Open Area Test Site (OATS). A computer controlled spectrum analyzer with quasi-peak adapter, and printer were used for gathering and recording test data. Figure 1 shows the test site layout for conducted and radiated measurements.

3.2 Description of Open Area Test Site (OATS)

The 3 and 10 meter site is located out-of-doors in an open field whose size is 212 feet long by 206 feet wide. The dimensions of the test area are 66 feet wide by 59 feet long (20m x 18m). The description of the 3 and 10-meter site is on file with the FCC according to the requirements of Part 2.948.

3.3 Site Attenuation

The site attenuation for radiated measurements has been determined for this test site using the method described in ANSI C63.4 Paragraph 5.4.6 and sub paragraphs. The site attenuation is measured annually. Site attenuation was last measured and reported to the FCC in December 2006.

3.4 Ground Plane (Ground Screen)

The site has a 3900 square foot (20m x 18m) floor area of poured reinforced concrete, 6 to 8 inches thick. A 20m x 18m (66ft x 59ft) solid 24 gauge galvanized sheet steel ground plane is centered on the test area with its long dimension along the major axis of the test site. The antenna mast and turntable are located 3 meters apart on the centerline of the major axis so that each is greater than 3 meters from the edges of the ground plane. The ground plane is connected to a nine-foot long earth ground rod at each corner of the ground plane.

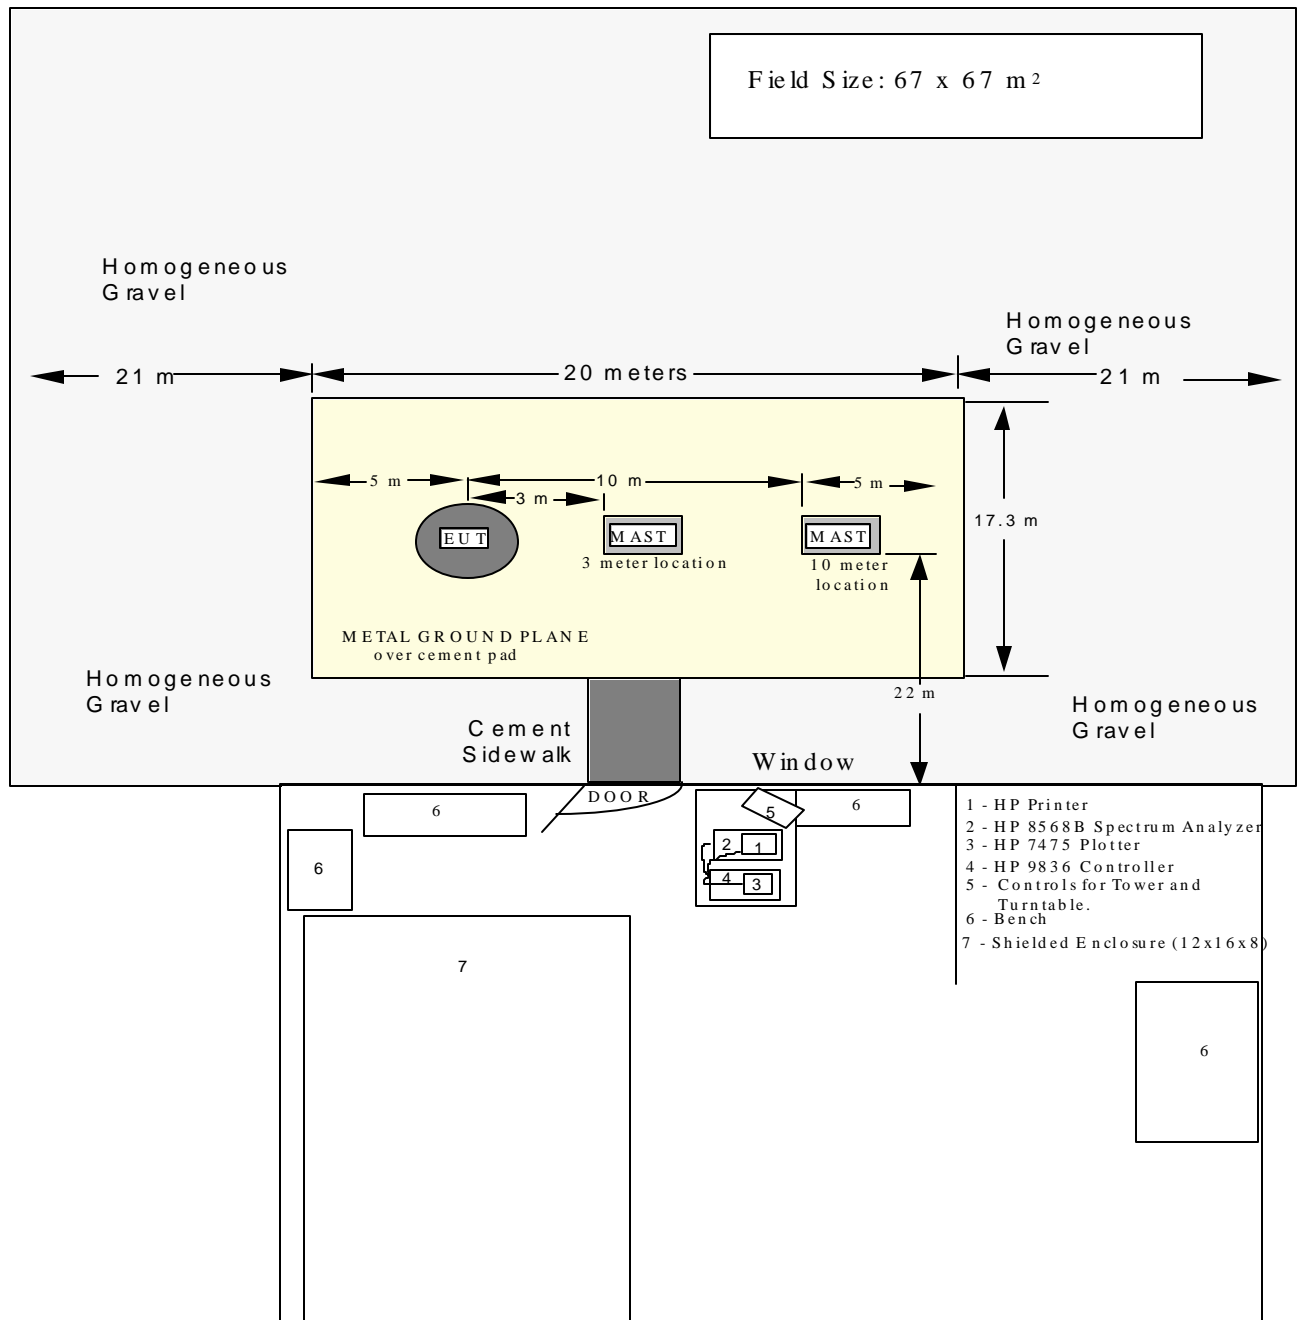


FIGURE 1. TEST SITE LAYOUT.

3.5 Input Power for EUT

Electricity for the EUT is provided through buried power lines in metallic conduit with an outlet box placed near the EUT. Power for the EUT is taken from the outlet box of either of two “shielded enclosure” quality power line filters located on the ground plane near the EUT. The filters are electrically bonded to the ground plane.

3.6 Accessory Equipment Precautions

Care was taken that accessory equipment or adjacent equipment did not produce unacceptable interference so as to contaminate the final test data. The EMI receiver and its associated hardware were located greater than 15 meters away from the EUT during testing and were powered from a separately filtered power source.

3.7 Ambient Interference

Ambient interference from radio and television stations, vehicles, mobile radio, etc. was present at the open test site during testing. Care was taken to assure that ambient interference did not overload the measurement receiver or mask emissions from the EUT. The method of measurement used to deal with ambient noise during radiated emission testing is described in Paragraph 5.2.1.

3.8 Personnel

All testing was performed by EMCE Engineering personnel who are properly trained for the instruments and procedures used. The test data sheets have been signed-off by the attending EMCE Test Engineer.

3.9 Use of Interference Measurement Equipment

All of the emission measurements and field strength measurements were performed with a Hewlett-Packard 8566B Spectrum Analyzer System. The Spectrum Analyzer System utilizes the following basic instruments:

- 1. Fujitsu Lifebook Computer*
- 2. EMITest, v4.11 measurement software*
- 2. HP-85650A Quasi Peak Adapter*

Test results are recorded on tabular data sheets and show final corrected values compared to the specification limit. Sample calculations show how the antenna factors, cable losses, amplifier gain, etc. are combined in the automatic analyzer program to produce the final corrected values shown on the graphs and data sheets.

3.10 Calibration of Measuring Equipment

The EMI Receiver (spectrum analyzer) is calibrated by an outside calibration laboratory on a 12-month basis. The laboratory provides certification with traceability to NIST. Antenna factors are measured at 1-year interval by EMCE Engineering using the reference antenna method of ANSI C63.5-2003. Cable losses as well as amplifier gains are swept at least every month to verify accurate values.

4.0 PREPARATION OF EUT FOR TEST

4.1 Identification of EUT

Equipment under Test: **CF RFID - Scan Card**
Model Number: **8510-00226, 8510-00248, 8510-00249**
Serial Number: **001**

4.2 Setup of EUT

Power to EUT: **From PDA**
Grounding of EUT: **DC Ground**
Special Software: **RFID Test Demo**

- Orientation of EUT: Per CFR 47, 15.31 and ANSI 63.4-2003, for all measurements the
- EUT was evaluated in the X, Y, and Z orthogonal axes.
- Loop Antenna was manipulated to find the worst case emission. Positions include, but not limited to parallel and perpendicular to the EUT, and parallel to the ground

4.3 Interfaces & Cabling

The following cables were connected during test:

<u>Interface</u>	<u>Source Port</u>	<u>Load Port</u>	<u>Length Cable</u>	<u>Conductors Number</u>	<u>Cable Type</u>	<u>Connector Material</u>
------------------	--------------------	------------------	---------------------	--------------------------	-------------------	---------------------------

N/A

4.4 Peripherals

The following peripherals were attached and operating during the tests:

<u>Nomenclature</u>	<u>Mfgr & Model</u>	<u>Serial No</u>
PDA	Dell	13401d45

5.0 TEST PROCEDURES

5.1 Conducted Emissions, Power Leads, 150 kHz to 30 MHz

Not Applicable Due to Product Type (Battery Powered)

Conducted emissions were measured from 150kHz to 30MHz on the power and return leads of the EUT according to the methods defined in ANSI C63.4, Section 7.0 and the limits found in CFR 47, 15.107. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane and removed from the vertical ground plane by 40-cm as shown in Appendix D, Photographs of Test Setup. The interface cables and equipment positioning were varied within limits of reasonable application per Figure 9A of ANSI C63.4 to determine the position producing maximum conducted emissions.

The LISN and high pass filter were connected through 20 feet of RG-214 coaxial cable to the spectrum analyzer input. The switch on the LISN was set to the Supply Line position and the power was applied. The EUT was operated as described in Paragraph 4.0 in a mode, which was intended to produce maximum emissions for normal operation.

The switch in the LISN was then set to the Return Line position and the interference scan was repeated and an additional set of data sheets and plot charts were prepared for the return lead.

5.1.1 Test Results

Not Applicable due to product type.

5.1.2 Test Instrumentation

N/A

5.1.3 Recommendations

Due to the fact that there were no test failures, there are no recommendations.

5.2 Radiated Emissions Test, 25 MHz to 1000 MHz

Radiated emissions were measured from 25 MHz to 1000 MHz. The measurement bandwidth was 120 kHz according to the methods defined in ANSI C63.4 Section 8.0. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meters above the ground plane, as shown in Appendix D, Photographs of Test Setup.

The EUT was operated as described in Paragraph 4.0, in a mode, constantly scanning for RFID Tags, which was intended to produce maximum emissions. Preliminary scans of the frequency range were used to determine the cable configurations and equipment positions which produce maximum emissions. These configurations were then kept intact while both angle of rotation of the EUT with respect to the antenna and antenna height were scanned for maximum readings. The angles and antenna polarization are shown on the data sheets in Appendix C.

5.2.1 Test Results

The EUT passed both vertical and horizontal radiated emissions tests.

5.2.2 Test Instrumentation

See Appendix I – 1-10


5.2.3 Recommendations

Because there were no test failures, there are no recommendations.

APPENDIX A

Certifications

EMCE NVLAP Accreditation



SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999

Universal Compliance Labs dba EMCE Engineering

44366 South Grimmer Boulevard

Fremont, CA 94538-6385

Mr. Bob Cole

Phone: 510-490-4307 Fax: 510-490-3441

E-Mail: bob@universalcompliance.com

URL: http://www.universalcompliance.com

**ELECTROMAGNETIC COMPATIBILITY
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 200092-0

NVLAP Code Designation / Description

Emissions Test Methods:

- 12/CIS22 IEC/CISPR 22 (1997) & EN 55022 (1998) + A1(2000): Limits and methods of measurement of radio disturbance characteristics of information technology equipment
- 12/CIS22a IEC/CISPR 22 (1993) and EN 55022 (1994): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1995) and Amendment 2 (1996)
- 12/CIS22b CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
- 12/FCC15b1 ANSIC63.4 (2003) with FCC Method 47 CFR Part 15, Subpart B: Unintentional Radiators
- 12/T51a AS/NZS CISPR 22 (2004): Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement


Immunity Test Methods:

- 12/I01 IEC 61000-4-2, Ed. 1.2 (2001) + A1, A2; EN 61000-4-2: Electrostatic Discharge Immunity Test
- 12/I03 IEC 61000-4-4(1995), A1(2000), A2(2001); EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical Fast Transient/Burst Immunity Test

2007-01-01 through 2007-12-31

Effective dates:

Judy S. Bussis
For the National Institute of Standards and Technology



**ELECTROMAGNETIC COMPATIBILITY
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 200092-0


<i>NVLAP Code</i>	<i>Designation / Description</i>
12/104	IEC 61000-4-5, Ed. 1.1 (2001-04); EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test
12/105	IEC 61000-4-6, Ed. 2.0 (2003-05); EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields
12/106	IEC 61000-4-8, Ed. 1.1 (2001); EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test
12/107	IEC 61000-4-11, Ed. 1.1 (2001-03); EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests

2007-01-01 through 2007-12-31

Effective dates

Dolly A. Briscoe
For the National Institute of Standards and Technology

United States Department of Commerce
National Institute of Standards and Technology

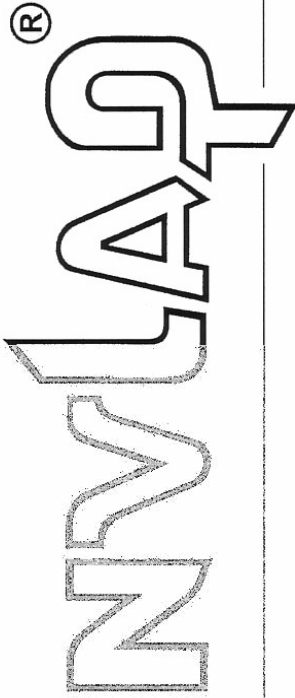

Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200092-0

Universal Compliance Labs dba EMCE Engineering
Fremont, CA

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS



2007-01-01 through 2007-12-31
Effective Dates

Dolly S. Bruce
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2005-05-19)

APPENDIX B

Test Data Sheets

Conducted Emissions
Radiated Emissions

LINE CONDUCTED EMISSIONS TEST

Not Applicable Due to Product Type

UNINTENTIONAL RADIATED EMISSIONS TEST

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Socket Communications**

Specification: **EN55022B RADIATED**

Work Order #: **2688**

Date: 2/21/2007

Test Type: **Radiated Scan**

Time: 13:04:00

Equipment: **RFID / Scan Card**

Sequence#: 1

Manufacturer: **Socket Communications**

Tested By: **Bob Cole**

Model: **Combo**

S/N:

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
----------	-----	------------------	--------------	---------

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
RFID / Scan Card*	Socket Communications	Combo	

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

--

Transducer Legend:

T1=AH SAS-200/543 S/N: 199	T2=EMCE Y1 Cable - Radiated Site
T3=8447 Pre -Amp	


Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq	Rdng	T1	T2	T3	dB	Dist	Corr	Spec	Margin	Polar
	MHz	dBµV	dB	dB	dB		Table	dBµV/m	dBµV/m	dB	Ant
1	122.031M	38.7	+11.3	+2.0	+26.6		+0.0	25.4	30.0	-4.6	Horiz
2	54.240M	40.8	+9.3	+1.4	+26.7		+0.0	24.8	30.0	-5.2	Vert
3	40.682M	37.0	+11.9	+1.2	+26.9		+0.0	23.2	30.0	-6.8	Vert
4	122.042M	35.1	+11.3	+2.0	+26.6		+0.0	21.8	30.0	-8.2	Vert
5	135.592M	33.5	+12.0	+2.2	+26.6		+0.0	21.1	30.0	-8.9	Horiz
6	81.362M	37.9	+7.1	+1.7	+26.8		+0.0	19.9	30.0	-10.1	Vert
7	149.162M	31.7	+12.3	+2.3	+26.6		+0.0	19.7	30.0	-10.3	Vert
8	27.123M	33.8	+12.4	+0.0	+27.1		+0.0	19.1	30.0	-10.9	Vert
9	284.776M	29.5	+19.5	+3.0	+26.7		+0.0	25.3	37.0	-11.7	Horiz
10	257.656M	28.0	+16.1	+2.9	+26.7		+0.0	20.3	37.0	-16.7	Horiz

EMCE Engineering Date: 2/21/2007 Time: 13:04:00 Socket Communications WO#: 2688
EN55022B RADIATED Test Distance: 10 Meters Sequence#: 1

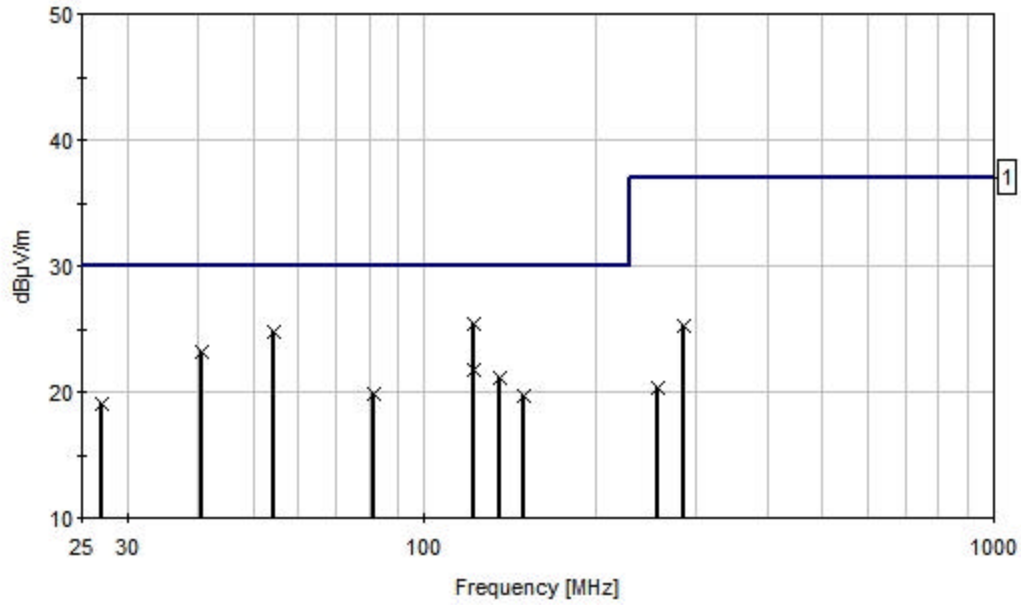

— Readings — 1 - EN55022B RADIATED × Peak Readings

APPENDIX C
Test Data Sheets
Intentional Radiator Results

INTENTIONAL RADIATOR

Maximum allowed field strength in the frequency range of 13.553-13.567 MHz is 15,848 microvolts per meter, or 84 dBuV/M at a test distance of 30 meters. Test distance for this measurement is 1 meter. The calculation for determining the field strength limit at 1 meter is as follows:

$$\text{Correction Factor} = 40 \log (\text{distance 1} / \text{distance 2})$$

$$\text{Correction Factor} = 40 \log (30/1)$$

$$\text{Correction Factor} = 59.1 \text{ dBuV/M}$$

Therefore, the limit used for this measurement is 143.1 dBuV/M

Test results show compliance to the limits called out in CFR 47, Section 15.225 (a), (b), (c), (d) and (e), as well as RSS-210 6.2.2(e) as follows:

TEST RESULTS
Peak Output Power

Per CFR 47, Section 15.225 and RSS-210 Issue 5, Section 6.2.2(e)

Test Location: EMCE Engineering •44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Socket Communications**
 Specification: **RFID Band 13.110-14.010 MHz**
 Work Order #: **2688**
 Test Type: **Radiated Scan**
 Equipment: **RFID / Scan Card**
 Manufacturer: **Socket Communications**
 Model: **Combo**
 S/N:

Date: 2/21/2007
 Time: 11:44:06 AM
 Sequence#: 2
 Tested By: Bob Cole

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
----------	-----	------------------	--------------	---------

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
RFID / Scan Card*	Socket Communications	Combo	

Support Devices:

Function	Manufacturer	Model #	S/N
----------	--------------	---------	-----

Test Conditions / Notes:

--

Transducer Legend:


T1=Chamber Receive Cable	T2=LP-105 Loop Antenna
T3=8447 Pre-Amp	

Measurement Data: Reading listed by amplitude. Test Distance: 1 Meter


#	Freq MHz	Rdng dBµV	T1 dB	T2 dB	T3 dB	Dist Table dB	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar Ant
1	13.558M	68.7	+0.7	+19.7	+27.2	+0.0	61.9	143.0	-81.1	Vert
2	13.569M	51.6	+0.7	+19.6	+27.2	+0.0	44.7	109.5	-64.8	Vert
3	13.455M	51.4	+0.7	+19.7	+27.2	+0.0	44.6	109.5	-64.9	Vert
4	13.577M	51.1	+0.7	+19.6	+27.2	+0.0	44.2	109.5	-65.3	Vert
5	13.541M	51.1	+0.7	+19.7	+27.2	+0.0	44.3	109.5	-65.2	Vert
6	13.482M	49.8	+0.7	+19.7	+27.2	+0.0	43.0	109.5	-66.5	Vert
7	13.523M	49.4	+0.7	+19.7	+27.2	+0.0	42.6	109.5	-66.9	Vert
8	13.597M	49.2	+0.7	+19.6	+27.2	+0.0	42.3	109.5	-67.2	Vert
9	13.346M	49.1	+0.7	+19.8	+27.2	+0.0	42.4	99.5	-57.1	Vert

10	13.512M	48.8	+0.7	+19.7	+27.2	+0.0	42.0	109.5	-67.5	Vert
----	---------	------	------	-------	-------	------	------	-------	-------	------

EMCE Engineering Date: 2/21/2007 Time: 11:44:06 AM Socket Communications WO#: 2688
RFID Band 13.110-14.010 MHz Test Distance: 1 Meter Sequence#: 2

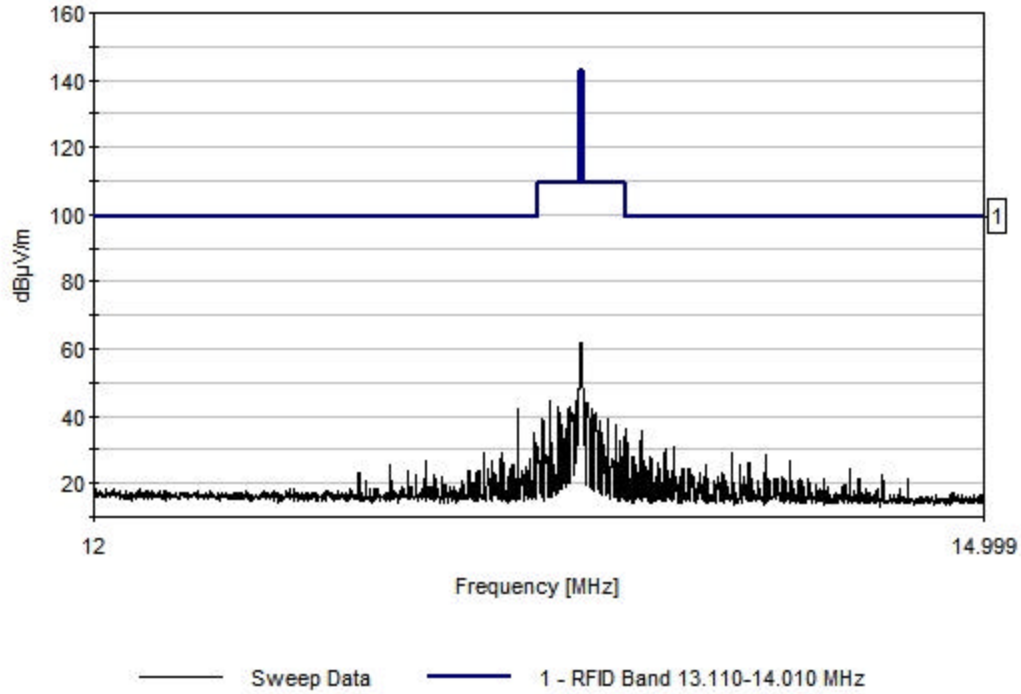

20 dB Bandwidth
Per RSS-210, Section 5.9.1
20 dB BW = 1.034 kHz

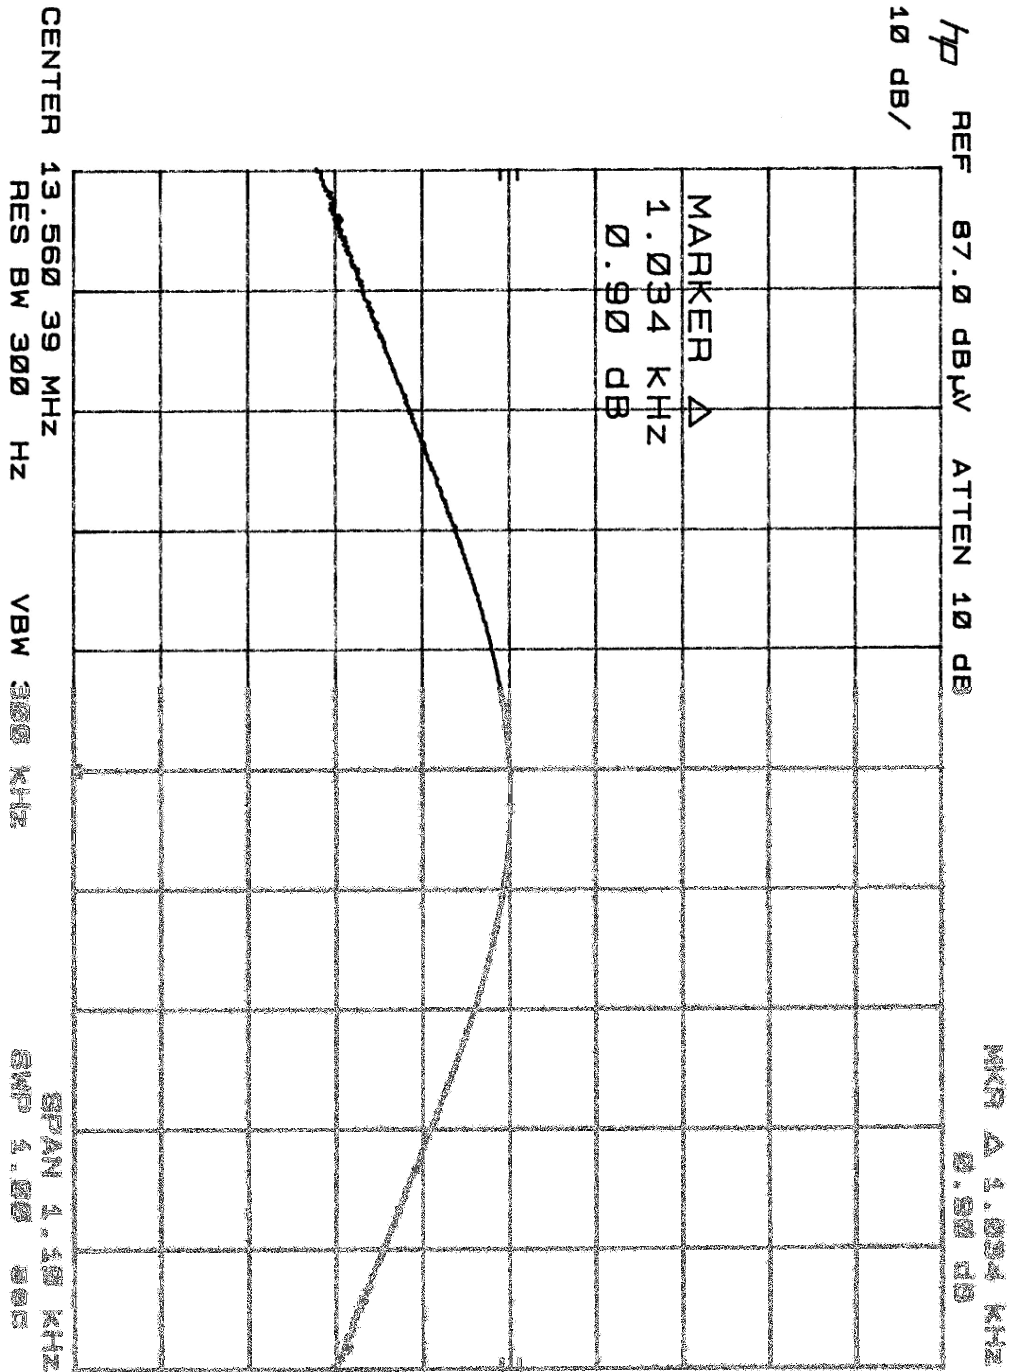

Frequency Stability

CFR 47, Section 15.225(e) and Sec 15.31(e), RSS-210 Sec 6.2.2(e) and 6.4

<u>Temperature (Celcius)</u>	<u>Voltage (DC)</u>	<u>Transmit Frequency (MHz)</u>	<u>Upper Limit (MHz)</u>	<u>Lower Limit (MHz)</u>	<u>Pass / Fail</u>
Ambient	Battery Full	13.558	13.56678	13.55322	PASS
+50	Battery Full	13.557	13.56678	13.55322	PASS
-20	Battery Full	13.561	13.56678	13.55322	PASS

Field Strength of Harmonics

CFR 47, Section 15.225(d), RSS-210 Sec 6.3

Limits from CFR 47, Section 15.209

Test Distance: 3 meters

Frequency (MHz)	Measurement Field strength (microvolts/meter)	distance (meters)
0.009-0.490.....	2400/F(kHz)	300
0.490-1.705.....	24000/F(kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

Test Location: EMCE Engineering • 44366 S. Grimmer Blvd • Fremont, CA 94538 • 510-490-4307

Customer: **Socket Communications**

Specification: **EN55022B RADIATED**

Work Order #: **2688**

Date: 2/21/2007

Test Type: **Radiated Scan**

Time: 13:04:00

Equipment: **RFID / Scan Card**

Sequence#: 1

Manufacturer: Socket Communications

Tested By: Bob Cole

Model: Combo

S/N:

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
<i>Equipment Under Test (* = EUT):</i>				
Function	Manufacturer	Model #	S/N	
RFID / Scan Card*	Socket Communications	Combo		

Support Devices:

Function	Manufacturer	Model #	S/N
<i>Test Conditions / Notes:</i>			

Transducer Legend:


T1=AH SAS-200/543 S/N: 199	T2=EMCE Y1 Cable - Radiated Site
T3=8447 Pre-Amp	

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBµV	T1 dB	T2 dB	T3 dB	Dist dB	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar Ant
1	122.031M	38.7	+11.3	+2.0	+26.6	+0.0	25.4	30.0	-4.6	Horiz

2	54.240M	40.8	+9.3	+1.4	+26.7	+0.0	24.8	30.0	-5.2	Vert
3	40.682M	37.0	+11.9	+1.2	+26.9	+0.0	23.2	30.0	-6.8	Vert
4	122.042M	35.1	+11.3	+2.0	+26.6	+0.0	21.8	30.0	-8.2	Vert
5	135.592M	33.5	+12.0	+2.2	+26.6	+0.0	21.1	30.0	-8.9	Horiz
6	81.362M	37.9	+7.1	+1.7	+26.8	+0.0	19.9	30.0	-10.1	Vert
7	149.162M	31.7	+12.3	+2.3	+26.6	+0.0	19.7	30.0	-10.3	Vert
8	27.123M	33.8	+12.4	+0.0	+27.1	+0.0	19.1	30.0	-10.9	Vert
NOTE: 2 nd Harmonic										
9	284.776M	29.5	+19.5	+3.0	+26.7	+0.0	25.3	37.0	-11.7	Horiz
10	257.656M	28.0	+16.1	+2.9	+26.7	+0.0	20.3	37.0	-16.7	Horiz

EMCE Engineering Date: 2/21/2007 Time: 13:04:00 Socket Communications WO#: 2688
 EN55022B RADIATED Test Distance: 10 Meters Sequence#: 1

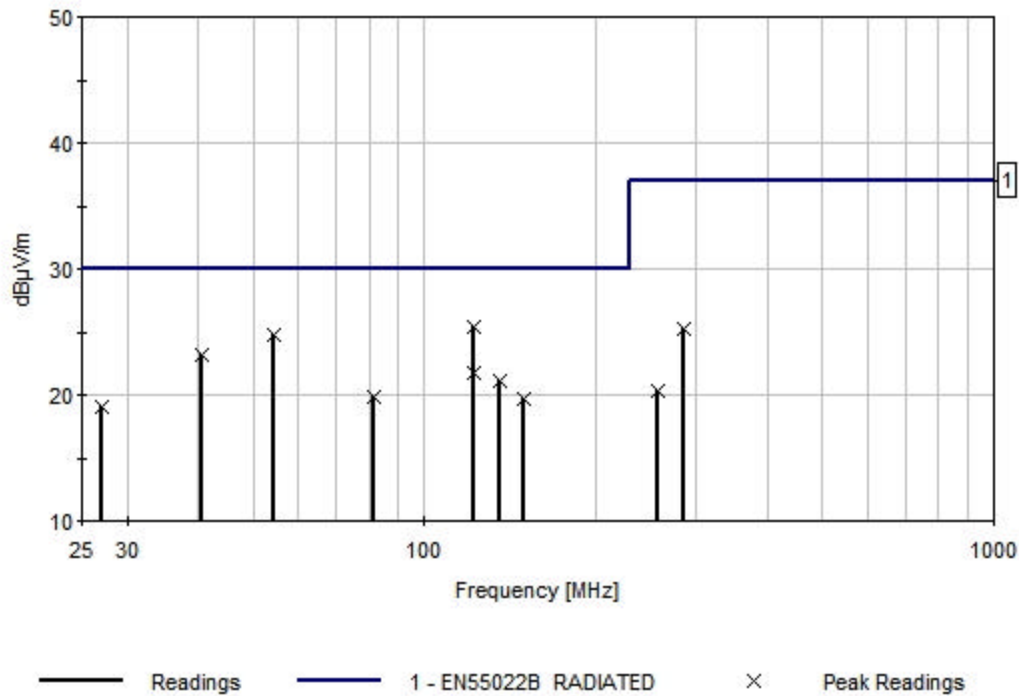

APPENDIX D

EUT MODIFACTION LIST AND PHOTOS

N/A - NO modifications necessary

APPENDIX E

CERTIFICATION LABELING AND COMPLIANCE INFORMATION

CERTIFICATION LABELING AND COMPLIANCE INFORMATION

If a product must be tested and require Certification, a Compliance Information Statement shall be supplied with the product at the time of marketing or importation. The compliance information statement shall contain the information as shown:

COMPLIANCE INFORMATION STATEMENT

Product Name: CF RFID - Scan Card
Product Model Number: 8510-00226, 8510-00248, 8510-00249

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Identification

Devices subject Certification shall be uniquely identified by the responsible party. This identification shall be of a format consisting of the FCC Identifier and IC number, e.g.:

FCC ID: LUBRFID002

IC: 2529A-RFID002

Labeling Requirements

Product authorizations subject to Certification shall have a label as follows:

The label shall be located in a conspicuous location on the device and shall contain as a minimum the unique identification of "Trade Name" and "Model Number" along with the FCC 2 part statement, as well as the FCC Identifier and IC number.

Retention of Records

For each product subject to Certification, the responsible party shall maintain the records listed below:

- A) A record of the original design drawings and specifications and all changes that have been made that may affect compliance with the FCC requirements.*
- B) A record of the procedures used for production inspection and testing (if tests were performed) to insure the continuous conformance required. (Statistical production line emission testing is not required).*
- C) A record of the measurements made on an appropriate test site that demonstrates compliance with the applicable regulations.*

APPENDIX F

Measuring Equipment Error Analysis

MEASURING EQUIPMENT ERROR ANALYSIS

Radiated Emissions Measurement

Table 1 shows the calculated measurement accuracy for radiated emissions test (9kHz-1000MHz). The radiated emissions amplitude accuracy is determined as follows: Antenna Factor Error + Cable Loss Error + Pre-amplifier Gain Error + Spectrum Analyzer Amplitude Error. The spectrum analyzer amplitude error is obtained from the manufacturer's specification sheet. Antenna factors are measured at 1 year intervals by EMCE Engineering, and cable losses as well as amplifier gains are swept at least every month by EMCE Engineering to verify accurate values. The measurement accuracy for these are determined by EMCE.

Table 1
Radiated Emissions Measurement Accuracy

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Accuracy</u>
Spectrum Analyzer	Hewlett-Packard	8568B	+/- 1.6dB
Antennas	EMCO/Roberts	3104/Empire	+/- 1.0dB
Pre-amplifier	Hewlett-Packard	8447D	+/- 0.5dB
Double Shielded Coax Cable	50 ohm, Type N	50 feet	+/- 0.5dB
			= +/- 3.6dB

Conducted Emissions Measurement

Table 2 shows the calculated measurement accuracy for conducted emissions test (150kHz-30MHz). The conducted emissions amplitude accuracy is determined as follows: LISN Attenuation Error + Cable Loss Error + Spectrum Analyzer Amplitude Error. The spectrum analyzer amplitude error and LISN attenuation error are obtained from the manufacturer's specification sheet. Cable loss below 30MHz is negligible therefore error presented by the cable is not considered.

Table 2
Conducted Emissions Measurement Accuracy

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Accuracy</u>
Spectrum Analyzer	Hewlett-Packard	8568B	+/- 1.6dB
LISN	EMCO	3816/2	+/- 0.5dB
			= +/- 2.1dB

APPENDIX F

TEST EQUIPMENT LIST

Test Equipment List

Name	Manufacturer	Model	Cal. Due Date	Designator
<i>Spectrum Analyzer</i>	<i>Hewlett-Packard</i>	<i>8568B</i>	<i>2/1/08</i>	<i>1</i>
<i>Quasi-Peak Adapter</i>	<i>Hewlett-Packard</i>	<i>85650A</i>	<i>2/1/08</i>	<i>2</i>
<i>LISN</i>	<i>EMCO</i>	<i>3816/2</i>	<i>6/15/08</i>	<i>3</i>
<i>Antenna Mast</i>	<i>EMCO</i>	<i>1050</i>	<i>N/A</i>	<i>4</i>
<i>Rotating Table</i>	<i>EMCO</i>	<i>1060</i>	<i>N/A</i>	<i>5</i>
<i>Antenna, Biconical</i>	<i>Electro-Metrics</i>	<i>BIA-30</i>	<i>11/15/07</i>	<i>6</i>
<i>Antenna, Log-periodic</i>	<i>Electro-Metrics</i>	<i>LPA-30</i>	<i>11/15/07</i>	<i>7</i>
<i>Antenna, Loop</i>	<i>Empire Devices</i>	<i>LP-105</i>	<i>6/20/07</i>	<i>8</i>
<i>Preamplifier</i>	<i>Hewlett-Packard</i>	<i>8447D</i>	<i>7/1/07</i>	<i>9</i>
<i>Computer Controller</i>	<i>Fujitsu / EMITest</i>	<i>Lifebook</i>	<i>N/A</i>	<i>10</i>