
CENERAL NOTES: UNLESS OTHERWISE SPECIFIED

- I. PARTS TO BE CLEAN AND FREE OF BURRS AND SHARP EDGES
- 2. PARTS MUST MEET THE FOLLOWING ADDITIONAL REQUIREMENTS AS APPLICABLE:
- o, THIS IS A COMPUTER GENERATED DRAWING, ALL REVISION CHANGES MUST BE COMPLETED THROUGH THE COMPUTER DATA BASE.
- b. DIMENSIONS APPLY AFTER PLATING.
- c. WELDING TO BE IN ACCORDANCE WITH APPROPRIATE AMERICAN WELDING SOCIETY STANDARDS.
- d. COMMERCIAL EQUIVALENT OF MIL-SPEC HARDWARE ACCEPTABLE PER CUBIC STANDARD 000-0061.
- 3. PARTS MUST BE IDENTIFIED WITH PART NUMBER AND LATEST REVISION LETTER BY BAG , TAG OR STAMP.
- 4. SEE TITLE BLOCK FOR DIMENSIONING FORMAT
- 5. DASH NUMBERS MAY BE USED BY MANUFACTURING FOR INTERNAL
- 6. AREAS INDICATED BY X DENOTE CHANGE OCCURRED IN THIS AREA AT "X" REVISION.

7 TEXT SHOWN FOR REFERENCE ONLY. USE 4400-30003 ARTWORK (ITEM 2) TO PRINT LABEL.



	REVISIONS								
ZONE	REV	DESCRIPTION	DATE	APPROVED					
	А	INITIAL RELEASE	06/23/10	N.KORT					
	В	ECN 4400-90052 PMM 8/25/10	08/25/10	N.KORT					
	С	ECN 4400-90056 PMM 9/1/10	09/01/10	N.KORT					

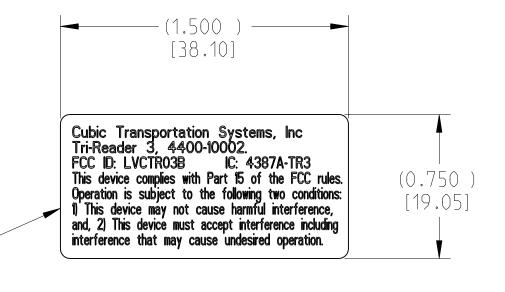

DO NOT MANUFACTURE TO THIS DRAWING UNLESS:

- I. IT IS SIGNED AND DATED IN RED INK BELOW,
- 2. THE REVISION MATCHES THE PURCHASE ORDER OR SHOP ORDER. TO VERIFY CONTACT CUBIC PURCHASING AT I-93I-455-8524

NOTICE OF PROPRIETARY RIGHTS IN DATA
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION ORIGINATED OR OWNED BY CUBIC, NEITHER THIS DOCUMENT NOR THE INFORMATION DISCLOSED HEREIN
SHALL BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR USED OR
DISCLOSED TO OTHERS FOR MANUFACTURING OR ANY OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY CUBIC.

2	4400-30003		ARTWK,FCC ID LVCTRO3B-TR3		REF	EA	-
1	THT-6-423-10		LABEL, WHT.1.50X.75,POLYESTER	BRADY	1	EA	-
	4400-02014	С	LABEL.FCC ID LVCTR03B-TR3				
ITEM NO.	PART_NUMBER	REV	DESCRIPTION	VENDOR	QTY	U/M	

DIMENSIONING FORMAT:								CAE FILE DATA	APPROVALS	A AUDIA			
INCHES (MILLIMETERS)	METRIC HOLE TOLERANCES		INCH HOLE TOLERANCES		LINEAR			DATA ENTRY: DATA ADMIN		- CUBIC			
	HOLE DIA	TOLERANCES	HOLE DIA	TOLERANCES	DECIMAL PLACES		MILLIMETERS	P.MILLER		A AADIA			
MATERIAL & FINISH	.34mm THRU 3.18mm +.10m	+.10mm03mm	0135 THRU 125	+ 004 - 001	DECIMAL PLACES	INCHES	+	DATE	DESIGNER				
TIATERIAL & TINISH	13111111 111110 311011111		10133 111110 1123	1001	Х.		0.5mm	06/23/10	P.MILLER 06/23/10	TITLE			
MATERIAL:	3.20mm THRU 6.35mm	+.13mm03mm	.126 THRU .250	+.005001	.x	<u>†</u> .1	0.2mm	FILE NAME:	ENGINEER	LABEL, FCC ID LVCTR03B-TR3			
	6.37mm THRU 12.70mm +.15mm -	. 15mm - 03mm	251 THDII 500	. 006 - 001				4400-02014	T.B-SORENSEN 06/23/10	DEADLE, OU ID LYOTHOOD THO			
	0.3711111 11110 12.7011111	+. IIIIII V	.231 TINO .300	+.000001	.xx	± .03	0.1mm	MTYPE:	DESIGN APPROVAL	SIZE FSCM NO. DWG NO. REV			
FINISH:	12.72mm THRU 19.05mm	+.20mm03mm	.501 THRU .750	+.008001	.xxx	± .010	0.05mm	MACH	T.B-SORENSEN 06/23/10	º B 57560 4400-02014 C I			
,	19.07mm THRU 25.40mm	1 +.25mm03mm	.751 THRU 1.000	+.010001	ANGI	LIIAR + 1°	1	NEXT ASSY(S):	INITIAL RELEASE	SCALE 2/1 SHEET 1 OF 1			



Label Location

