



element

Emerson Automation Solutions/Rosemount Inc.

Model 248DX

**FCC 15.247:2019
2.4 GHz DTS Radio**

Report # EMPM0071.1



NVLAP LAB CODE: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST

Last Date of Test: October 17, 2019
Emerson Automation Solutions/Rosemount Inc.
EUT: Model 248DX

Radio Equipment Testing

Standards

| Specification | Method |
|-----------------|------------------------------|
| FCC 15.247:2019 | ANSI C63.10:2013, KDB 558074 |

Results

| Method Clause | Test Description | Applied | Results | Comments |
|-----------------------------|-------------------------------------|---------|---------|---|
| 6.2 | Powerline Conducted Emissions | No | N/A | Not required for a battery powered EUT. |
| 6.5, 6.6, 11.12.1, 11.13.2, | Spurious Radiated Emissions | Yes | Pass | |
| 11.6 | Duty Cycle | Yes | N/A | |
| 11.8.2 | Occupied Bandwidth | Yes | Pass | |
| 11.9.1.1 | Output Power | Yes | Pass | |
| 11.9.1.1 | Equivalent Isotropic Radiated Power | Yes | Pass | |
| 11.10.2 | Power Spectral Density | Yes | Pass | |
| 11.11 | Band Edge Compliance | Yes | Pass | |
| 11.11 | Spurious Conducted Emissions | Yes | Pass | |

Deviations From Test Standards

None

Approved By:



Eric Brandon, Department Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



| Revision Number | Description | Date (yyyy-mm-dd) | Page Number |
|-----------------|-------------|----------------------|-------------|
| 00 | None | | |

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE


For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



| | | | | |
|---|---|---|--|---|
| California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918 | Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136 | Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066 | Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255 | Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600 |
| NVLAP | | | | |
| NVLAP Lab Code: 200676-0 | NVLAP Lab Code: 200881-0 | NVLAP Lab Code: 200630-0 | NVLAP Lab Code:201049-0 | NVLAP Lab Code: 200629-0 |
| Innovation, Science and Economic Development Canada | | | | |
| 2834B-1, 2834B-3 | 2834E-1, 2834E-3 | 2834D-1 | 2834G-1 | 2834F-1 |
| BSMI | | | | |
| SL2-IN-E-1154R | SL2-IN-E-1152R | SL2-IN-E-1017 | SL2-IN-E-1158R | SL2-IN-E-1153R |
| VCCI | | | | |
| A-0029 | A-0109 | A-0108 | A-0201 | A-0110 |
| Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA | | | | |
| US0158 | US0175 | US0017 | US0191 | US0157 |

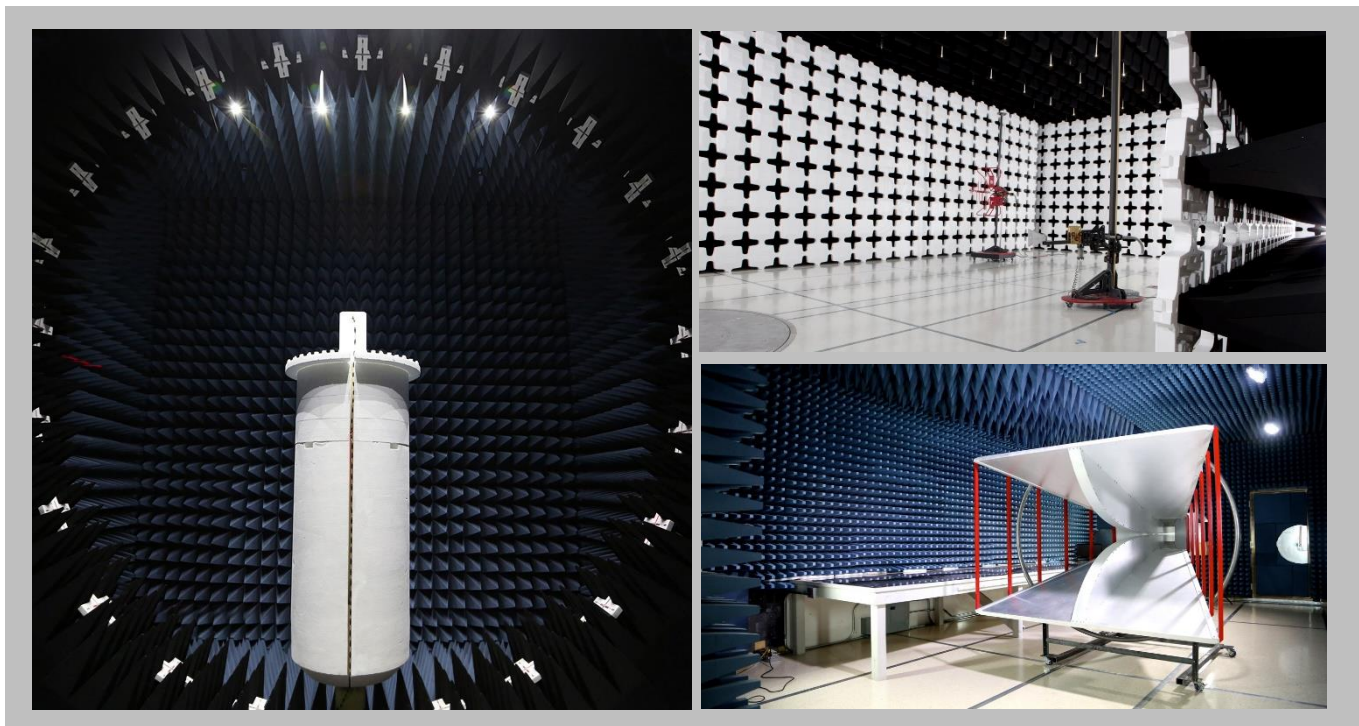

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


| Test | + MU | - MU |
|---------------------------------------|-------------|-------------|
| Frequency Accuracy | 0.0007% | -0.0007% |
| Amplitude Accuracy (dB) | 1.2 dB | -1.2 dB |
| Conducted Power (dB) | 1.2 dB | -1.2 dB |
| Radiated Power via Substitution (dB) | 0.7 dB | -0.7 dB |
| Temperature (degrees C) | 0.7°C | -0.7°C |
| Humidity (% RH) | 2.5% RH | -2.5% RH |
| Voltage (AC) | 1.0% | -1.0% |
| Voltage (DC) | 0.7% | -0.7% |
| Field Strength (dB) | 5.2 dB | -5.2 dB |
| AC Powerline Conducted Emissions (dB) | 2.4 dB | -2.4 dB |

Test Setup Block Diagrams

Antenna Port Conducted Measurements

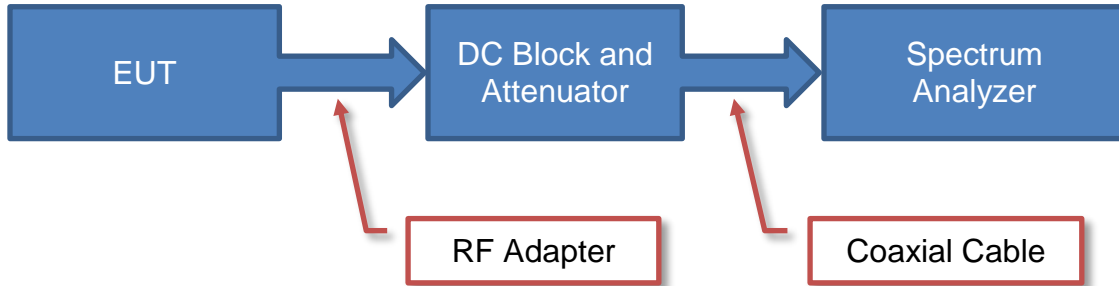

Near Field Test Fixture Measurements

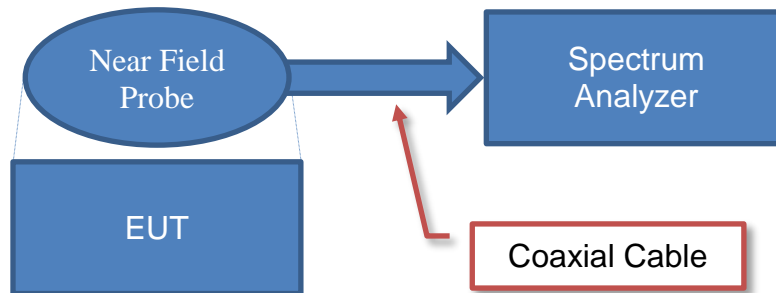

Spurious Radiated Emissions



PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

| | |
|---------------------------------|---|
| Company Name: | Emerson Automation Solutions/Rosemount Inc. |
| Address: | 6021 Innovation Boulevard |
| City, State, Zip: | Shakopee, MN 55379 |
| Test Requested By: | Elizabeth Reiersen |
| EUT: | Model 248DX |
| First Date of Test: | October 14, 2019 |
| Last Date of Test: | October 17, 2019 |
| Receipt Date of Samples: | October 14, 2019 |
| Equipment Design Stage: | Production |
| Equipment Condition: | No Damage |
| Purchase Authorization: | Verified |

Information Provided by the Party Requesting the Test

| |
|--|
| Functional Description of the EUT: |
| Wireless Temperature Transmitter |
| Testing Objective: |
| To demonstrate compliance of the 2.4 GHz DTS radio to FCC 15.247 requirements. |

CONFIGURATIONS



Configuration EMPM0071- 1

| EUT | | | |
|----------------------------------|----------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Wireless Temperature Transmitter | Rosemount Inc. | 248DX | 0007065 |

Configuration EMPM0071- 3

| EUT | | | |
|----------------------------------|----------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Wireless Temperature Transmitter | Rosemount Inc. | 248DX | 0009561 |

| Peripherals in test setup boundary | | | |
|------------------------------------|--------------------|-------------------|------------------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Laptop | Lenovo | ThinkPad T510 | 431436U |
| USB HART Interface | MACTek Corporation | Viator | 346802 |
| AC Adapter (Laptop) | Lenovo | 92P1160 | 11S92P1160Z1ZBGH87P524 |

| Cables | | | | | |
|----------------------------|--------|------------|---------|---------------------|----------------------------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| USB Cable (HART Interface) | No | 0.3m | No | Laptop | USB HART Interface |
| HART Interface Cable | No | 2.0m | No | USB HART Interface | Wireless Temperature Transmitter |
| AC Cable (Laptop) | No | 1.0m | No | AC Mains | AC Adapter (Laptop) |
| DC Cable (Laptop) | No | 1.8m | Yes | AC Adapter (Laptop) | Laptop |

MODIFICATIONS



Equipment Modifications

| Item | Date | Test | Modification | Note | Disposition of EUT |
|------|------------|-------------------------------------|--------------------------------------|---|---|
| 1 | 2019-10-14 | Spurious Radiated Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 2 | 2019-10-17 | Duty Cycle | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 3 | 2019-10-17 | Occupied Bandwidth | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 4 | 2019-10-17 | Output Power | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 5 | 2019-10-17 | Equivalent Isotropic Radiated Power | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 6 | 2019-10-17 | Power Spectral Density | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 7 | 2019-10-17 | Band Edge Compliance | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT remained at Element following the test. |
| 8 | 2019-10-17 | Spurious Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | Scheduled testing was completed. |

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting WirelessHART (802.15.4) - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

EMPM0071 - 1

FREQUENCY RANGE INVESTIGATED

| | | | |
|-----------------|--------|----------------|-----------|
| Start Frequency | 30 MHz | Stop Frequency | 26500 MHz |
|-----------------|--------|----------------|-----------|

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|------------------------------|-----------------|--------------------------------|-----|-------------|----------|
| Attenuator | Coaxicom | 3910-20 | AXY | 17-Sep-2019 | 12 mo |
| Filter - Low Pass | Micro-Tronics | LPM50004 | HGG | 17-Sep-2019 | 12 mo |
| Filter - High Pass | Micro-Tronics | HPM50111 | HFM | 18-Sep-2019 | 12 mo |
| Amplifier - Pre-Amplifier | Miteq | JSD4-18002600-26-8P | APU | 11-Sep-2019 | 12 mo |
| Cable | ESM Cable Corp. | TTBJ141 KMKM-72 | MNP | 11-Sep-2019 | 12 mo |
| Antenna - Standard Gain | ETS Lindgren | 3160-09 | AHG | NCR | 0 mo |
| Amplifier - Pre-Amplifier | L-3 Narda-MITEQ | AMF-6F-12001800-30-10P | PAP | 23-Feb-2019 | 12 mo |
| Cable | Element | Biconilog Cable | MNX | 23-Feb-2019 | 12 mo |
| Cable | Element | Standard Gain Cable | MNW | 23-Feb-2019 | 12 mo |
| Cable | Element | Double Ridge Guide Horn Cables | MNV | 23-Feb-2019 | 12 mo |
| Antenna - Biconilog | Ametek | CBL 6141B | AYS | 19-Mar-2019 | 24 mo |
| Amplifier - Pre-Amplifier | Miteq | AMF-3D-00100800-32-13P | AVX | 23-Feb-2019 | 12 mo |
| Amplifier - Pre-Amplifier | Miteq | AMF-6F-08001200-30-10P | AVC | 23-Feb-2019 | 12 mo |
| Amplifier - Pre-Amplifier | Miteq | AM-1064-9079 and SA18E-10 | AOO | 23-Feb-2019 | 12 mo |
| Antenna - Standard Gain | ETS-Lindgren | 3160-08 | AJP | NCR | 0 mo |
| Antenna - Standard Gain | ETS-Lindgren | 3160-07 | AJJ | NCR | 0 mo |
| Antenna - Double Ridge | ETS Lindgren | 3115 | AIB | 27-Aug-2018 | 24 mo |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AFD | 28-Jul-2019 | 12 mo |

MEASUREMENT BANDWIDTHS

| Frequency Range (MHz) | Peak Data (kHz) | Quasi-Peak Data (kHz) | Average Data (kHz) |
|-----------------------|-----------------|-----------------------|--------------------|
| 0.01 - 0.15 | 1.0 | 0.2 | 0.2 |
| 0.15 - 30.0 | 10.0 | 9.0 | 9.0 |
| 30.0 - 1000 | 100.0 | 120.0 | 120.0 |
| Above 1000 | 1000.0 | N/A | 1000.0 |

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

SPURIOUS RADIATED EMISSIONS




EmiR5 2019.08.15.1 PSA-ESCI2019.05.10

| | | | | |
|------------------------|--|--------------------------|-------------|--|
| Work Order: | EMPM0071 | Date: | 14-Oct-2019 | |
| Project: | None | Temperature: | 21.5 °C | |
| Job Site: | MN09 | Humidity: | 36% RH | |
| Serial Number: | 0007065 | Barometric Pres.: | 1019 mbar | |
| EUT: | Model 248DX | | | |
| Configuration: | 1 | | | |
| Customer: | Emerson Automation Solutions/Rosemount Inc. | | | |
| Attendees: | Merritt Pulkrabek | | | |
| EUT Power: | Battery | | | |
| Operating Mode: | Transmitting WirelessHART (802.15.4) - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated | | | |
| Deviations: | None | | | |
| Comments: | EUT operating at a measured 77.6% duty cycle. Duty cycle correction factor (DCCF) of 1.1 dB was added to the average points, based on the formula $DCCF = 10 * \log(1/DC)$. | | | |

| | |
|----------------------------|--------------------|
| Test Specifications | Test Method |
| FCC 15.247:2019 | ANSI C63.10:2013 |

| | | | | | | | |
|--------------|----|--------------------------|---|--------------------------|-----------|----------------|------|
| Run # | 21 | Test Distance (m) | 3 | Antenna Height(s) | 1 to 4(m) | Results | Pass |
|--------------|----|--------------------------|---|--------------------------|-----------|----------------|------|

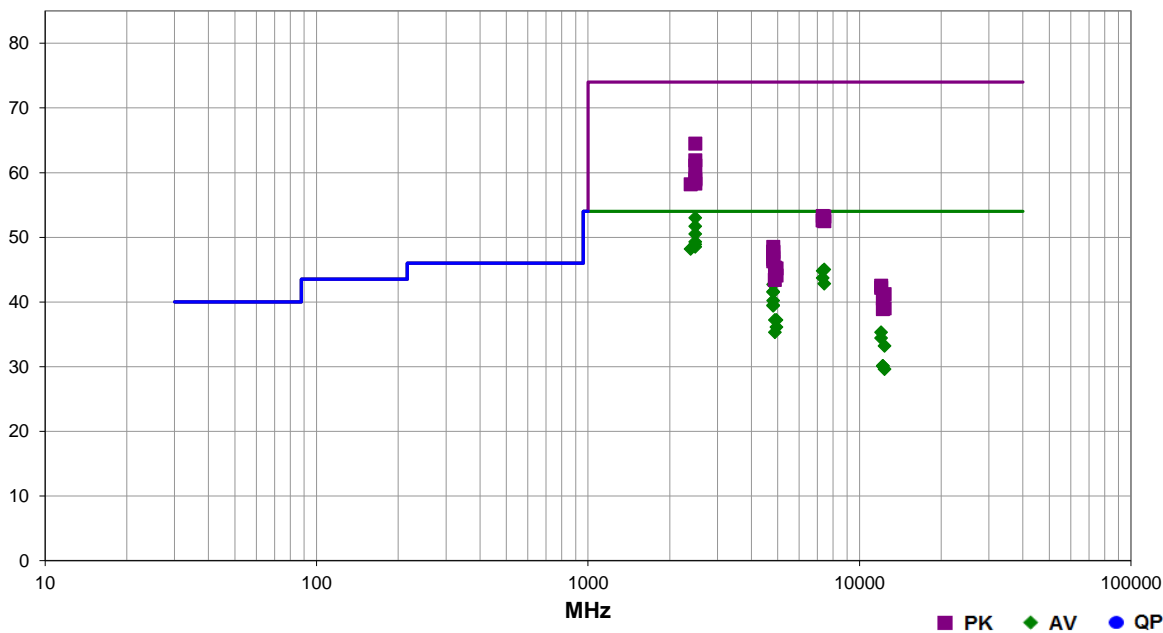

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction Factor (dB) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|-----------------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|-------------------------|
| 2483.542 | 36.0 | -4.1 | 1.0 | 296.0 | 1.1 | 20.0 | Vert | AV | 0.0 | 53.0 | 54.0 | -1.0 | High ch, EUT on side |
| 2483.508 | 34.7 | -4.1 | 1.0 | 188.0 | 1.1 | 20.0 | Horz | AV | 0.0 | 51.7 | 54.0 | -2.3 | High ch, EUT horizontal |
| 2483.500 | 33.5 | -4.1 | 1.5 | 29.0 | 1.1 | 20.0 | Horz | AV | 0.0 | 50.5 | 54.0 | -3.5 | High ch, EUT vertical |
| 2483.525 | 32.3 | -4.1 | 1.5 | 159.0 | 1.1 | 20.0 | Horz | AV | 0.0 | 49.3 | 54.0 | -4.7 | High ch, EUT on side |
| 2483.617 | 31.9 | -4.1 | 1.5 | 322.0 | 1.1 | 20.0 | Vert | AV | 0.0 | 48.9 | 54.0 | -5.1 | High ch, EUT vertical |
| 2483.525 | 31.5 | -4.1 | 1.5 | 300.0 | 1.1 | 20.0 | Vert | AV | 0.0 | 48.5 | 54.0 | -5.5 | High ch, EUT horizontal |
| 2387.567 | 31.3 | -4.2 | 1.5 | 278.0 | 1.1 | 20.0 | Vert | AV | 0.0 | 48.2 | 54.0 | -5.8 | Low ch, EUT on side |
| 7426.383 | 31.1 | 12.8 | 3.6 | 16.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 45.0 | 54.0 | -9.0 | High ch, EUT on side |
| 7321.517 | 31.0 | 12.7 | 3.9 | 219.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 44.8 | 54.0 | -9.2 | Mid ch, EUT vertical |
| 2483.900 | 48.6 | -4.1 | 1.0 | 296.0 | 0.0 | 20.0 | Vert | PK | 0.0 | 64.5 | 74.0 | -9.5 | High ch, EUT on side |
| 7321.350 | 29.9 | 12.7 | 1.5 | 32.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 43.7 | 54.0 | -10.3 | Mid ch, EUT on side |
| 7426.542 | 28.9 | 12.8 | 1.5 | 213.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 42.8 | 54.0 | -11.2 | High ch, EUT vertical |
| 4809.000 | 38.2 | 3.4 | 2.2 | 2.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 42.7 | 54.0 | -11.3 | Low ch, EUT vertical |
| 2483.675 | 46.0 | -4.1 | 1.5 | 29.0 | 0.0 | 20.0 | Horz | PK | 0.0 | 61.9 | 74.0 | -12.1 | High ch, EUT vertical |
| 4810.925 | 37.1 | 3.4 | 1.0 | 296.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 41.6 | 54.0 | -12.4 | Low ch, EUT on side |
| 4808.992 | 37.0 | 3.4 | 1.5 | 225.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 41.5 | 54.0 | -12.5 | Low ch, EUT horizontal |
| 2483.592 | 45.2 | -4.1 | 1.0 | 188.0 | 0.0 | 20.0 | Horz | PK | 0.0 | 61.1 | 74.0 | -12.9 | High ch, EUT horizontal |
| 4809.017 | 35.7 | 3.4 | 2.3 | 356.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 40.2 | 54.0 | -13.8 | Low ch, EUT vertical |

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction Factor (dB) | External Attenuation (dB) | Polarity/ Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|-----------------------------------|---------------------------|---------------------------|----------|--------------------------|-------------------|----------------------|------------------------|-------------------------|
| 4808.992 | 35.0 | 3.4 | 3.6 | 76.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 39.5 | 54.0 | -14.5 | Low ch, EUT on side |
| 4809.050 | 34.9 | 3.4 | 2.8 | 151.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 39.4 | 54.0 | -14.6 | Low ch, EUT horizontal |
| 2484.033 | 43.2 | -4.1 | 1.5 | 159.0 | 0.0 | 20.0 | Horz | PK | 0.0 | 59.1 | 74.0 | -14.9 | High ch, EUT on side |
| 2484.083 | 43.0 | -4.1 | 1.5 | 322.0 | 0.0 | 20.0 | Vert | PK | 0.0 | 58.9 | 74.0 | -15.1 | High ch, EUT vertical |
| 2485.175 | 42.4 | -4.1 | 1.5 | 300.0 | 0.0 | 20.0 | Vert | PK | 0.0 | 58.3 | 74.0 | -15.7 | High ch, EUT horizontal |
| 2387.983 | 42.4 | -4.2 | 1.5 | 278.0 | 0.0 | 20.0 | Vert | PK | 0.0 | 58.2 | 74.0 | -15.8 | Low ch, EUT on side |
| 4880.992 | 32.6 | 3.5 | 2.5 | 194.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 37.2 | 54.0 | -16.8 | Mid ch, EUT vertical |
| 4950.917 | 32.5 | 3.6 | 2.3 | 149.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 37.2 | 54.0 | -16.8 | High ch, EUT vertical |
| 4950.850 | 31.4 | 3.6 | 3.5 | 126.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 36.1 | 54.0 | -17.9 | High ch, EUT on side |
| 4880.917 | 30.7 | 3.5 | 1.3 | 90.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 35.3 | 54.0 | -18.7 | Mid ch, EUT on side |
| 12027.480 | 35.4 | -1.2 | 2.0 | 240.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 35.3 | 54.0 | -18.7 | Low ch, EUT vertical |
| 12027.330 | 34.5 | -1.2 | 1.0 | 47.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 34.4 | 54.0 | -19.6 | Low ch, EUT on side |
| 7321.850 | 40.6 | 12.7 | 3.9 | 219.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 53.3 | 74.0 | -20.7 | Mid ch, EUT vertical |
| 7426.458 | 40.4 | 12.8 | 3.6 | 16.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 53.2 | 74.0 | -20.8 | High ch, EUT on side |
| 12377.470 | 32.6 | -0.5 | 1.5 | 240.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 33.2 | 54.0 | -20.8 | High ch, EUT vertical |
| 7318.408 | 39.9 | 12.7 | 1.5 | 32.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 52.6 | 74.0 | -21.4 | Mid ch, EUT on side |
| 7423.192 | 39.7 | 12.8 | 1.5 | 213.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 52.5 | 74.0 | -21.5 | High ch, EUT vertical |
| 12202.340 | 29.4 | -0.4 | 1.5 | 47.0 | 1.1 | 0.0 | Horz | AV | 0.0 | 30.1 | 54.0 | -23.9 | Mid ch, EUT vertical |
| 12199.050 | 29.4 | -0.4 | 2.7 | 158.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 30.1 | 54.0 | -23.9 | Mid ch, EUT on side |
| 12377.440 | 29.0 | -0.5 | 1.5 | 295.0 | 1.1 | 0.0 | Vert | AV | 0.0 | 29.6 | 54.0 | -24.4 | High ch, EUT on side |
| 4808.767 | 45.1 | 3.4 | 2.2 | 2.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 48.5 | 74.0 | -25.5 | Low ch, EUT vertical |
| 4808.867 | 44.4 | 3.4 | 1.5 | 225.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 47.8 | 74.0 | -26.2 | Low ch, EUT horizontal |
| 4808.717 | 44.3 | 3.4 | 1.0 | 296.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 47.7 | 74.0 | -26.3 | Low ch, EUT on side |
| 4808.717 | 43.5 | 3.4 | 3.6 | 76.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 46.9 | 74.0 | -27.1 | Low ch, EUT on side |
| 4808.967 | 43.2 | 3.4 | 2.3 | 356.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 46.6 | 74.0 | -27.4 | Low ch, EUT vertical |
| 4808.783 | 42.9 | 3.4 | 2.8 | 151.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 46.3 | 74.0 | -27.7 | Low ch, EUT horizontal |
| 4881.192 | 41.8 | 3.5 | 2.5 | 194.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 45.3 | 74.0 | -28.7 | Mid ch, EUT vertical |
| 4950.867 | 41.6 | 3.6 | 2.3 | 149.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 45.2 | 74.0 | -28.8 | High ch, EUT vertical |
| 4950.800 | 40.5 | 3.6 | 3.5 | 126.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 44.1 | 74.0 | -29.9 | High ch, EUT on side |
| 4878.508 | 39.8 | 3.6 | 1.3 | 90.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 43.4 | 74.0 | -30.6 | Mid ch, EUT on side |
| 12022.870 | 43.7 | -1.2 | 2.0 | 240.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 42.5 | 74.0 | -31.5 | Low ch, EUT vertical |
| 12022.540 | 43.4 | -1.2 | 1.0 | 47.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 42.2 | 74.0 | -31.8 | Low ch, EUT on side |
| 12377.220 | 41.7 | -0.5 | 1.5 | 240.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 41.2 | 74.0 | -32.8 | High ch, EUT vertical |
| 12199.420 | 40.9 | -0.4 | 2.7 | 158.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 40.5 | 74.0 | -33.5 | Mid ch, EUT on side |
| 12374.670 | 39.5 | -0.5 | 1.5 | 295.0 | 0.0 | 0.0 | Vert | PK | 0.0 | 39.0 | 74.0 | -35.0 | High ch, EUT on side |
| 12198.200 | 39.4 | -0.5 | 1.5 | 47.0 | 0.0 | 0.0 | Horz | PK | 0.0 | 38.9 | 74.0 | -35.1 | Mid ch, EUT vertical |

DUTY CYCLE



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------|-----|-----------|-----------|
| Generator - Signal | Agilent | N5173B | TIW | 5-Jul-17 | 5-Jul-20 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | MNU | 11-Apr-19 | 11-Apr-20 |
| Attenuator | S.M. Electronics | SA26B-20 | RFW | 13-Feb-19 | 13-Feb-20 |
| Block - DC | Fairview Microwave | SD3379 | AMI | 6-Aug-19 | 6-Aug-20 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AAX | 5-Apr-19 | 5-Apr-20 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

DUTY CYCLE



TelTx 2019.08.30.0 XMt 2019.09.05


| | | | | | | | |
|---|---|--------------------------------|---------------|-------------------------|------------------|------------------|----------------|
| EUT: Model 248DX | | Work Order: EMPM0071 | | | | | |
| Serial Number: 0009561 | | Date: 17-Oct-19 | | | | | |
| Customer: Emerson Automation Solutions/Rosemount Inc. | | Temperature: 23.7 °C | | | | | |
| Attendees: Merritt Pulkrabek | | Humidity: 36.3% RH | | | | | |
| Project: None | | Barometric Pres.: 1018 mbar | | | | | |
| Tested by: Dustin Sparks | | Power: Battery | | | | | |
| Job Site: MN08 | | | | | | | |
| TEST SPECIFICATIONS | | | | | | | |
| FCC 15.247:2019 | | Test Method | | | | | |
| | | ANSI C63.10:2013 | | | | | |
| COMMENTS | | | | | | | |
| None | | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | | |
| None | | | | | | | |
| Configuration # | 3 | Signature <i>Dustin Sparks</i> | | | | | |
| | | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| WirelessHART (802.15.4) Low Channel, 2405 MHz | | 4.308 ms | 5.553 ms | 1 | 77.6 | N/A | N/A |
| WirelessHART (802.15.4) Low Channel, 2405 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | 4.308 ms | 5.554 ms | 1 | 77.6 | N/A | N/A |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |
| WirelessHART (802.15.4) High Channel, 2475 MHz | | 4.307 ms | 5.554 ms | 1 | 77.5 | N/A | N/A |
| WirelessHART (802.15.4) High Channel, 2475 MHz | | N/A | N/A | 5 | N/A | N/A | N/A |

DUTY CYCLE




TuTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | | |
|---|-------------|----------|------------------|-----------|-----------|---------|
| | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| | 4.308 ms | 5.553 ms | 1 | 77.6 | N/A | N/A |

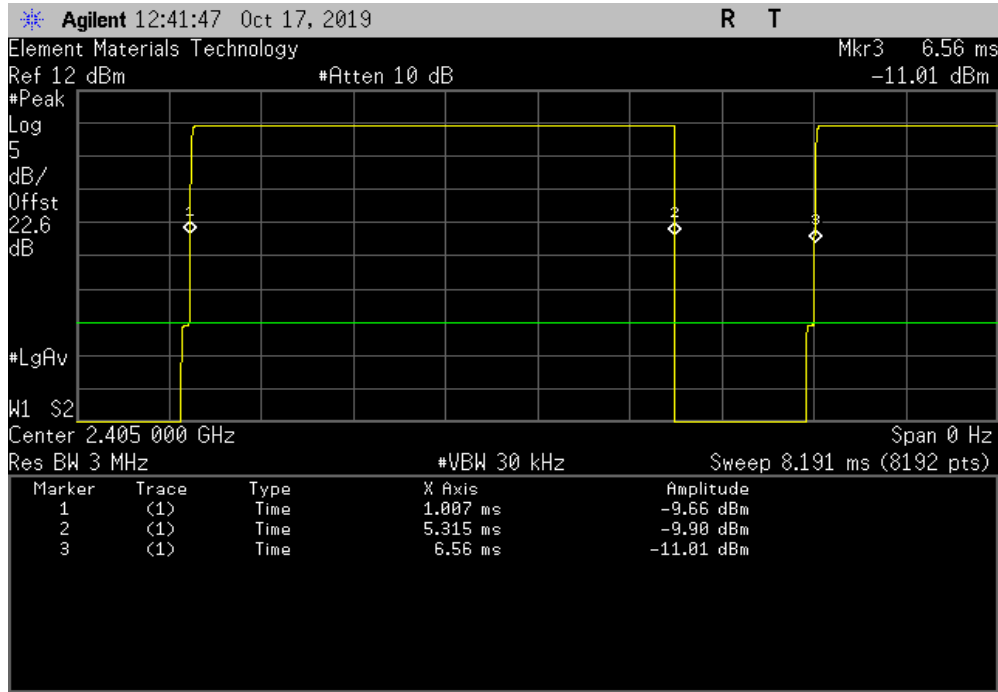

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | | |
|---|-------------|--------|------------------|-----------|-----------|---------|
| | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| | N/A | N/A | 5 | N/A | N/A | N/A |

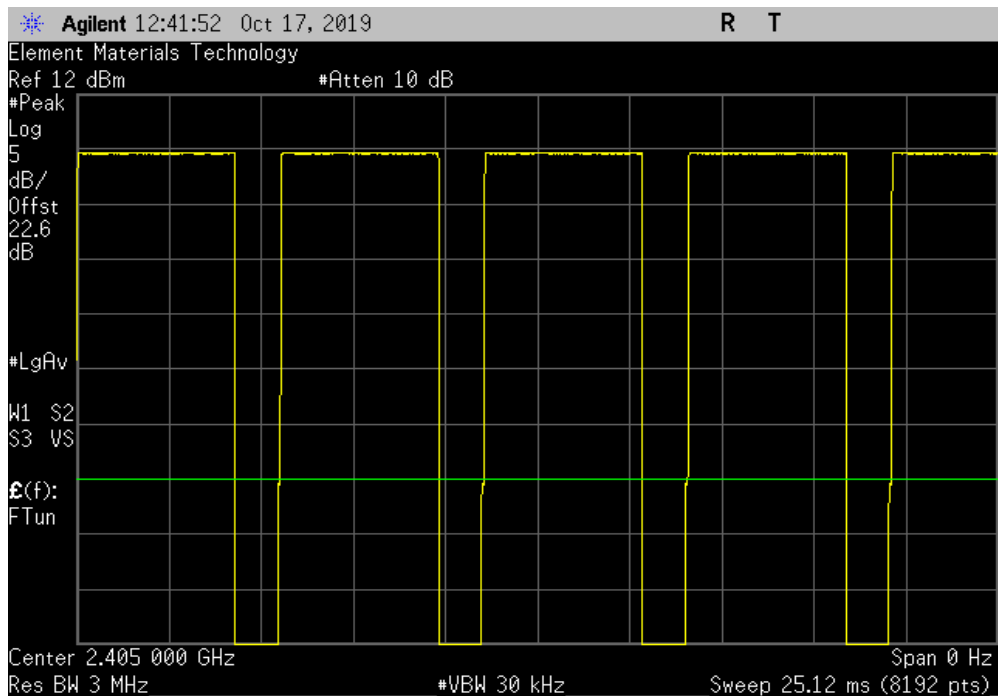


DUTY CYCLE




TuTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | | | |
|---|-------------|----------|------------------|-----------|-----------|---------|
| | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| | 4.308 ms | 5.554 ms | 1 | 77.6 | N/A | N/A |

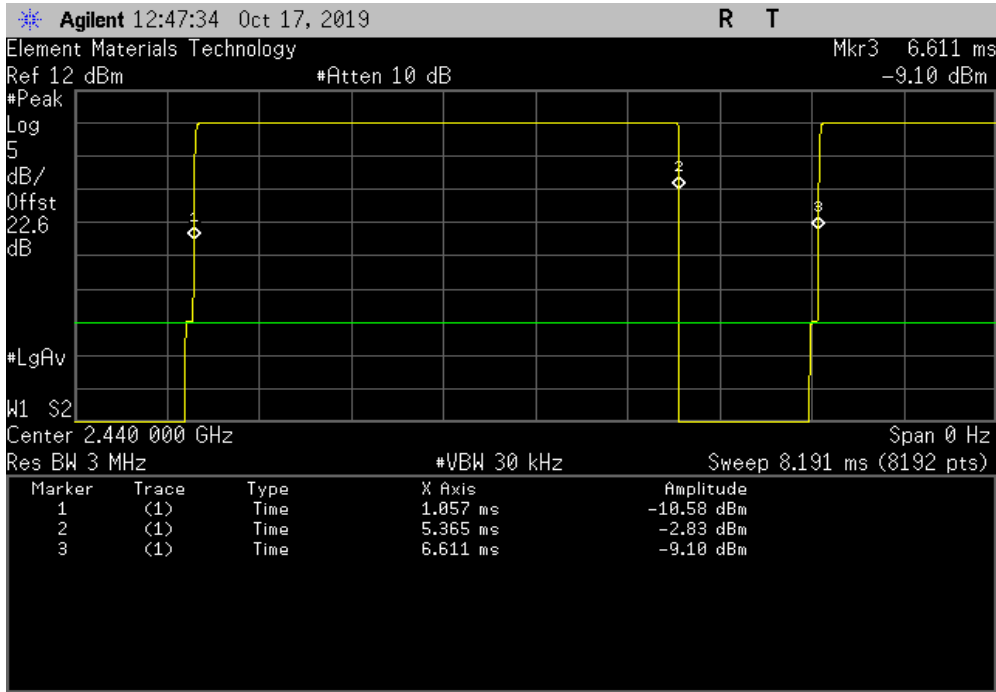

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | | | |
|---|-------------|--------|------------------|-----------|-----------|---------|
| | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| | N/A | N/A | 5 | N/A | N/A | N/A |

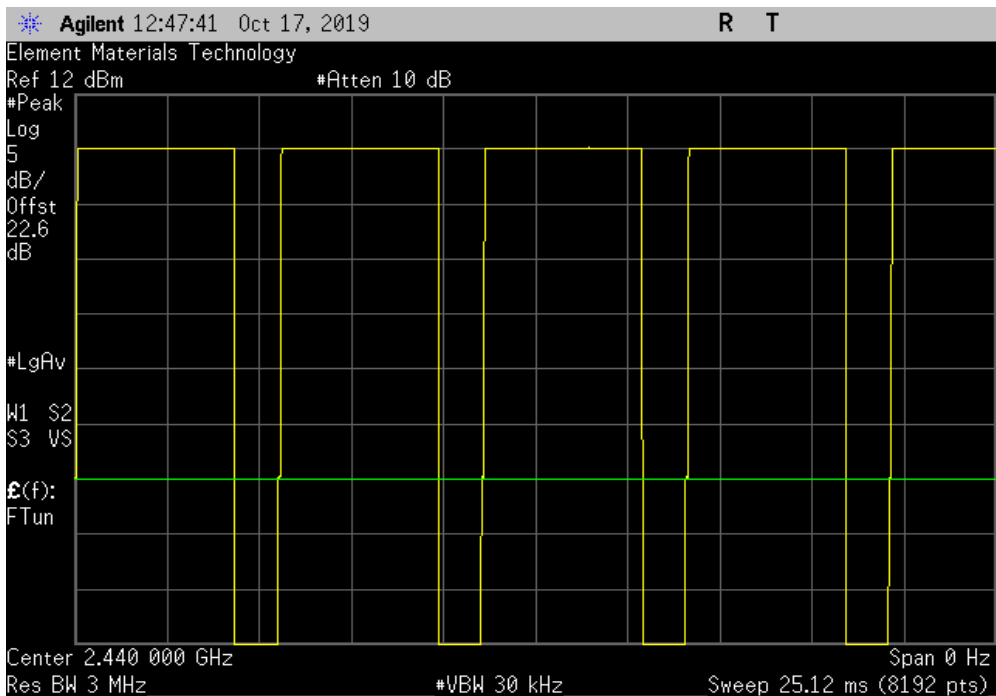


DUTY CYCLE




TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | | | | |
|--|-------------|----------|------------------|-----------|-----------|---------|
| | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| | 4.307 ms | 5.554 ms | 1 | 77.5 | N/A | N/A |

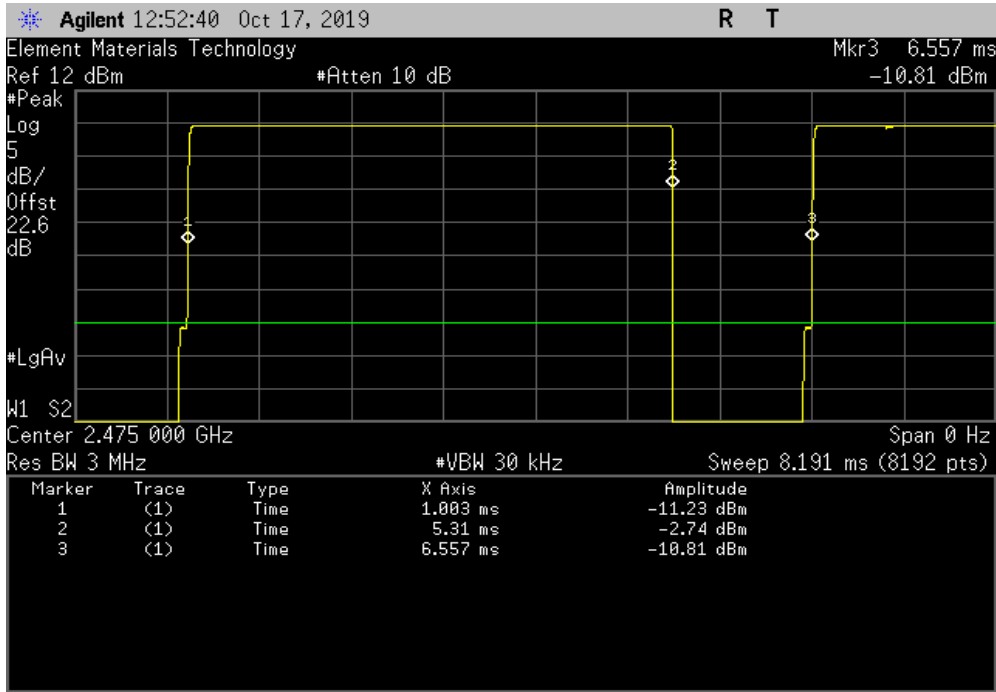

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | | | | |
|--|-------------|--------|------------------|-----------|-----------|---------|
| | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| | N/A | N/A | 5 | N/A | N/A | N/A |

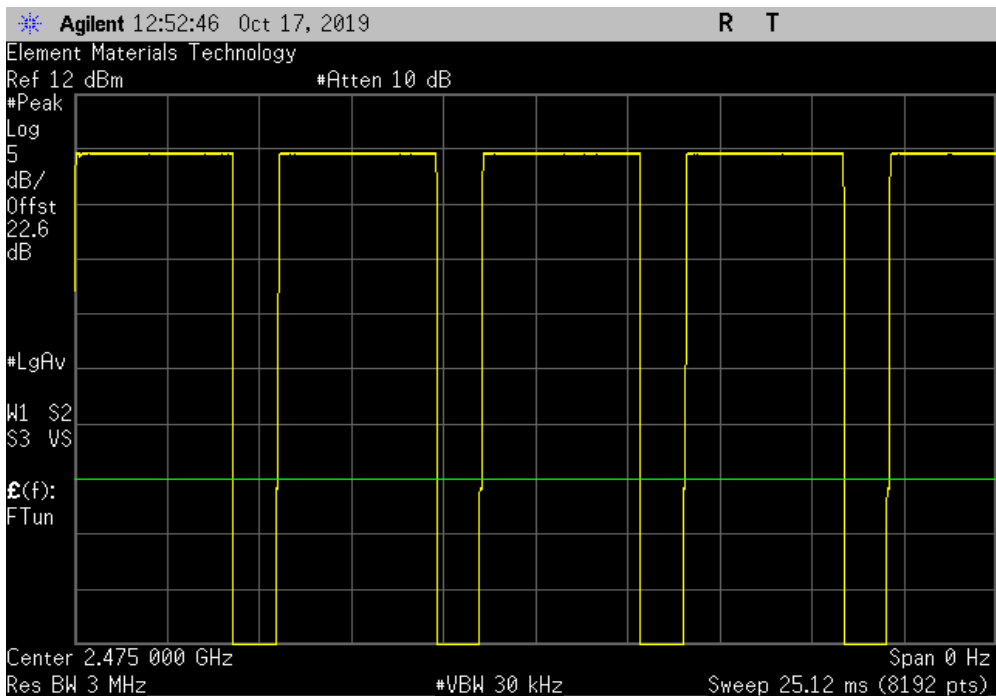

OCCUPIED BANDWIDTH



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------|-----|-----------|-----------|
| Generator - Signal | Agilent | N5173B | TIW | 5-Jul-17 | 5-Jul-20 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | MNU | 11-Apr-19 | 11-Apr-20 |
| Attenuator | S.M. Electronics | SA26B-20 | RFW | 13-Feb-19 | 13-Feb-20 |
| Block - DC | Fairview Microwave | SD3379 | AMI | 6-Aug-19 | 6-Aug-20 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AAX | 5-Apr-19 | 5-Apr-20 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH



TelTx 2019.08.30.0 XMI 2019.09.05


| | | | |
|---|---|--------------------------------|-----------|
| EUT: Model 248DX | | Work Order: EMPM0071 | |
| Serial Number: 0009561 | | Date: 17-Oct-19 | |
| Customer: Emerson Automation Solutions/Rosemount Inc. | | Temperature: 23.7 °C | |
| Attendees: Merritt Pulkrabek | | Humidity: 36.5% RH | |
| Project: None | | Barometric Pres.: 1018 mbar | |
| Tested by: Dustin Sparks | | Power: Battery | |
| | | Job Site: MN08 | |
| TEST SPECIFICATIONS | | | |
| FCC 15.247:2019 | | Test Method | |
| | | ANSI C63.10:2013 | |
| COMMENTS | | | |
| None | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| None | | | |
| Configuration # | 3 | Signature <i>Dustin Sparks</i> | |
| | | Value | Limit (>) |
| WirelessHART (802.15.4) Low Channel, 2405 MHz | | 1.553 MHz | 500 kHz |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | 1.549 MHz | 500 kHz |
| WirelessHART (802.15.4) High Channel, 2475 MHz | | 1.605 MHz | 500 kHz |
| | | | Result |
| | | | Pass |
| | | | Pass |
| | | | Pass |

OCCUPIED BANDWIDTH




TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | | |
|---|--|--|--|-----------|-----------|--------|
| | | | | Value | Limit (>) | Result |
| | | | | 1.553 MHz | 500 kHz | Pass |

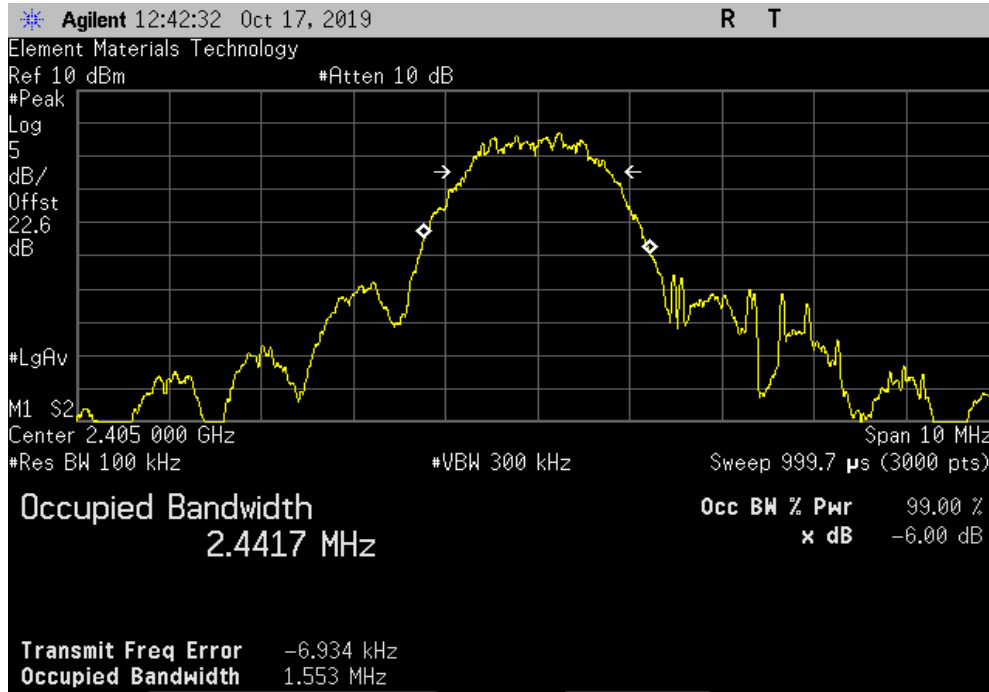

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | | | |
|---|--|--|--|-----------|-----------|--------|
| | | | | Value | Limit (>) | Result |
| | | | | 1.549 MHz | 500 kHz | Pass |

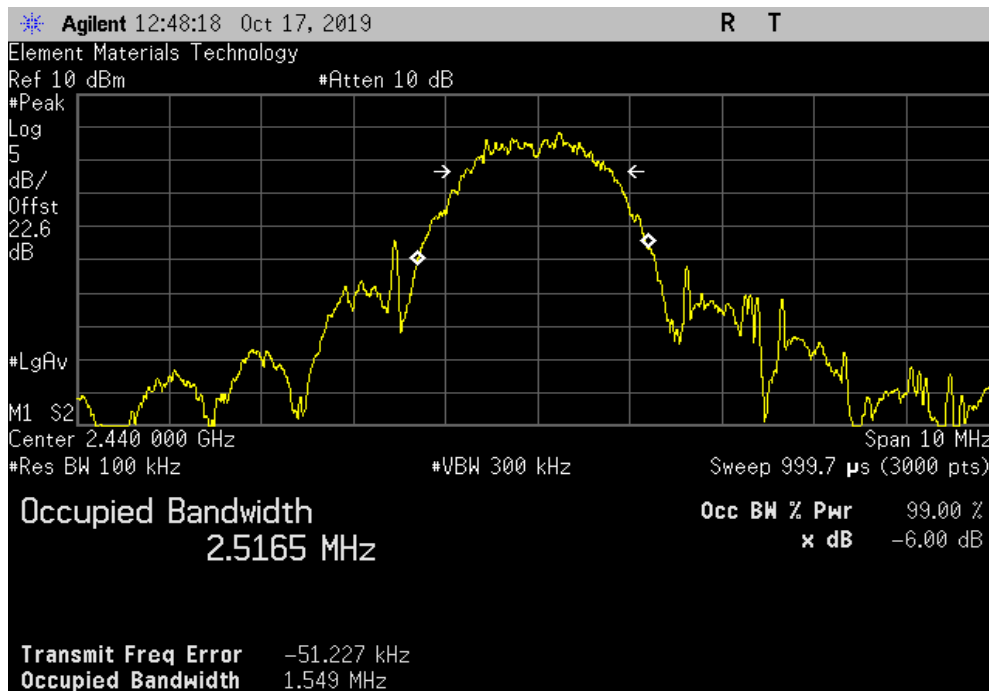


OCCUPIED BANDWIDTH



TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | |
|--|-----------|---------|--------|
| | Value | Limit | Result |
| | 1.605 MHz | 500 kHz | Pass |

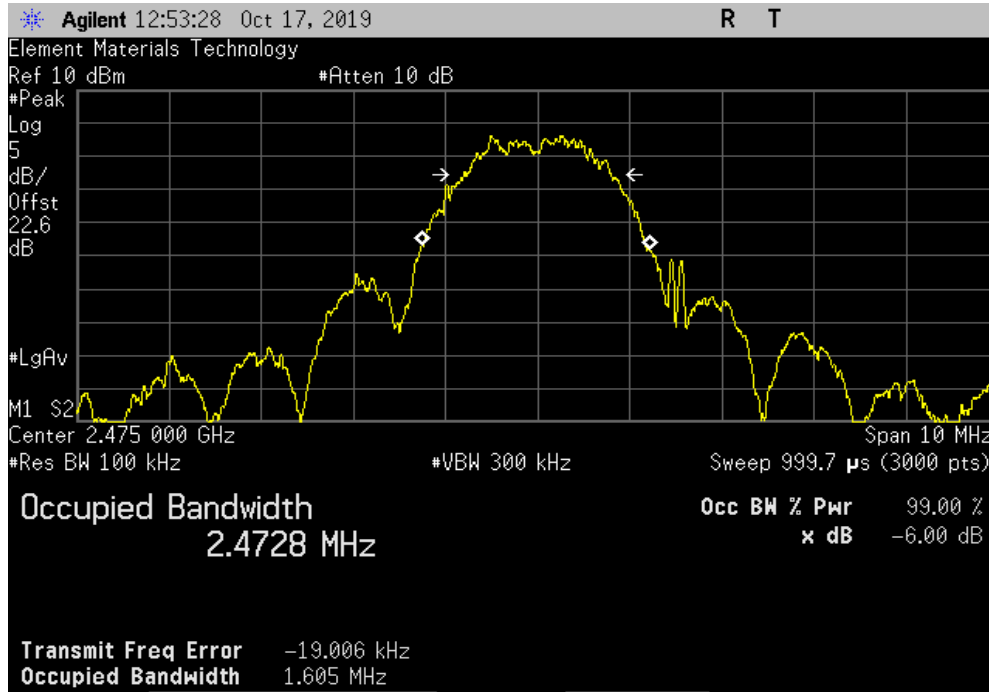

OUTPUT POWER



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------|-----|-----------|-----------|
| Generator - Signal | Agilent | N5173B | TIW | 5-Jul-17 | 5-Jul-20 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | MNU | 11-Apr-19 | 11-Apr-20 |
| Attenuator | S.M. Electronics | SA26B-20 | RFW | 13-Feb-19 | 13-Feb-20 |
| Block - DC | Fairview Microwave | SD3379 | AMI | 6-Aug-19 | 6-Aug-20 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AAX | 5-Apr-19 | 5-Apr-20 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

OUTPUT POWER



TelTx 2019.08.30.0 XMt 2019.09.05

| | | | |
|---|---|--------------------------------|--------------------|
| EUT: Model 248DX | | Work Order: EMPM0071 | |
| Serial Number: 0009561 | | Date: 17-Oct-19 | |
| Customer: Emerson Automation Solutions/Rosemount Inc. | | Temperature: 23.6 °C | |
| Attendees: Merritt Pulkrabek | | Humidity: 36.4% RH | |
| Project: None | | Barometric Pres.: 1018 mbar | |
| Tested by: Dustin Sparks | | Power: Battery | |
| | | Job Site: MN08 | |
| TEST SPECIFICATIONS | | | |
| FCC 15.247:2019 | | Test Method | |
| | | ANSI C63.10:2013 | |
| COMMENTS | | | |
| None | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| None | | | |
| Configuration # | 3 | Signature <i>Dustin Sparks</i> | |
| | | Out Pwr (dBm) | Limit (dBm) Result |
| | | 7.226 | 30 Pass |
| | | 7.871 | 30 Pass |
| | | 7.471 | 30 Pass |


WirelessHART (802.15.4) Low Channel, 2405 MHz
 WirelessHART (802.15.4) Mid Channel, 2440 MHz
 WirelessHART (802.15.4) High Channel, 2475 MHz

OUTPUT POWER




TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | | |
|---|--|--|--|---------------|-------------|--------|
| | | | | Out Pwr (dBm) | Limit (dBm) | Result |
| | | | | 7.226 | 30 | Pass |

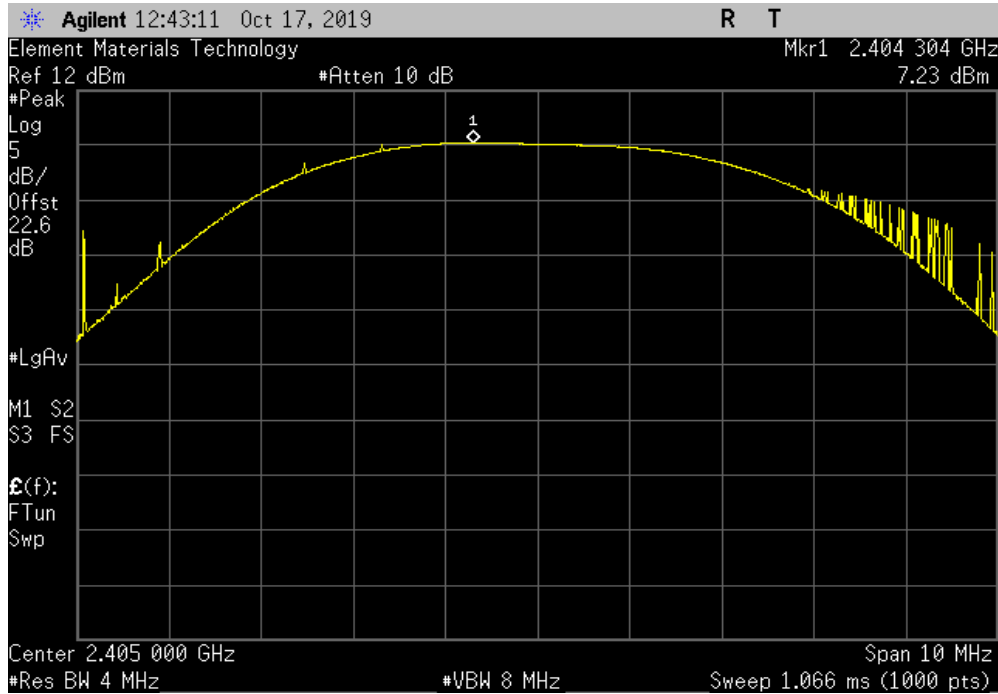

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | | | |
|---|--|--|--|---------------|-------------|--------|
| | | | | Out Pwr (dBm) | Limit (dBm) | Result |
| | | | | 7.871 | 30 | Pass |

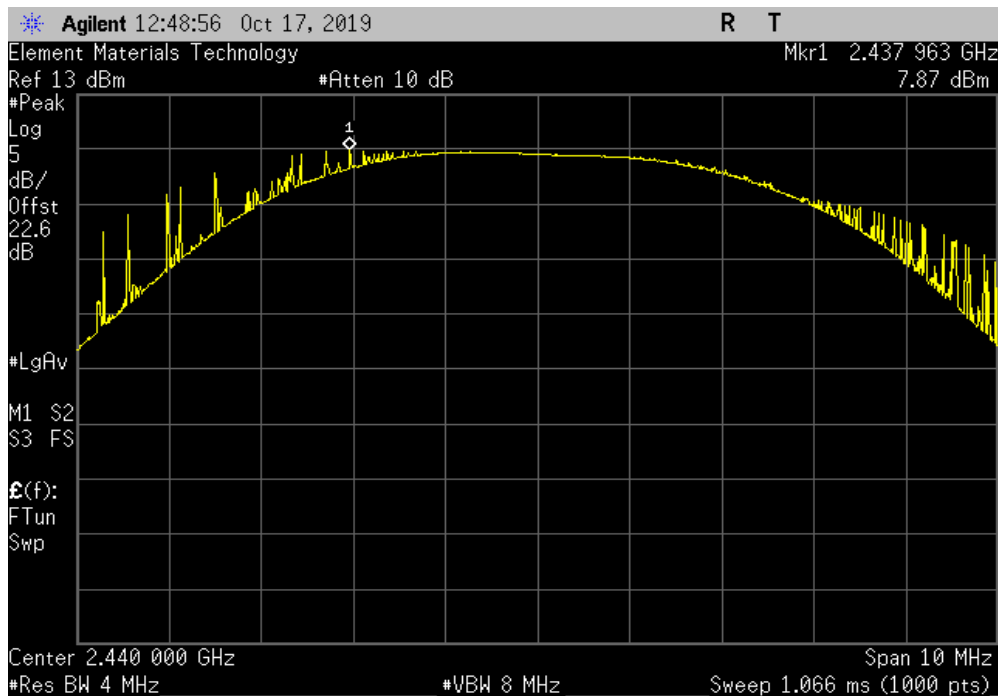


OUTPUT POWER



TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | | | | |
|--|--|--|--|------------------|----------------|--------|
| | | | | Out Pwr (dBm) | Limit (dBm) | Result |
| | | | | 7.471 | 30 | Pass |

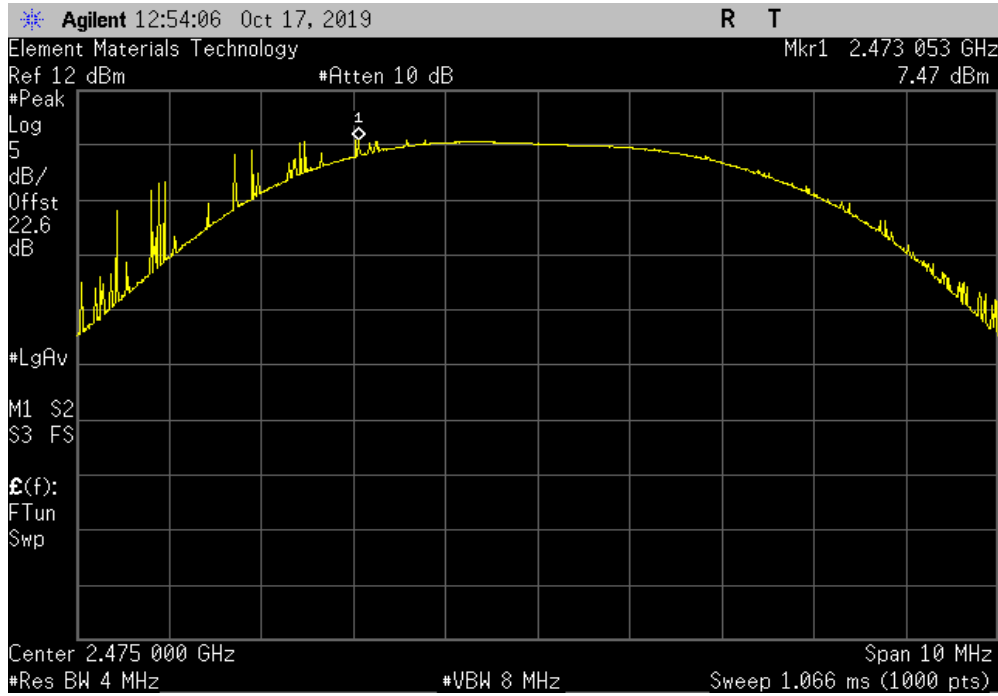

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------|-----|-----------|-----------|
| Generator - Signal | Agilent | N5173B | TIW | 5-Jul-17 | 5-Jul-20 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | MNU | 11-Apr-19 | 11-Apr-20 |
| Attenuator | S.M. Electronics | SA26B-20 | RFW | 13-Feb-19 | 13-Feb-20 |
| Block - DC | Fairview Microwave | SD3379 | AMI | 6-Aug-19 | 6-Aug-20 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AAX | 5-Apr-19 | 5-Apr-20 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio. The antenna gain in dBi was added to the conducted output power in order to obtain the EIRP.

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TelTx 2019.08.30.0 XMI 2019.09.05


| | | | | | | |
|---|---|--------------------------------|--------------------|------------|------------------|--------|
| EUT: Model 248DX | | Work Order: EMPM0071 | | | | |
| Serial Number: 0009561 | | Date: 17-Oct-19 | | | | |
| Customer: Emerson Automation Solutions/Rosemount Inc. | | Temperature: 23.6 °C | | | | |
| Attendees: Merritt Pulkrabek | | Humidity: 36.6% RH | | | | |
| Project: None | | Barometric Pres.: 1018 mbar | | | | |
| Tested by: Dustin Sparks | | Power: Battery | | | | |
| Job Site: MN08 | | | | | | |
| TEST SPECIFICATIONS | | | | | | |
| FCC 15.247:2019 | | Test Method | | | | |
| | | ANSI C63.10:2013 | | | | |
| COMMENTS | | | | | | |
| None | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 3 | Signature <i>Dustin Sparks</i> | | | | |
| | | Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result |
| WirelessHART (802.15.4) Low Channel, 2405 MHz | | 7.226 | 2 | 9.226 | 36 | Pass |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | 7.871 | 2 | 9.871 | 36 | Pass |
| WirelessHART (802.15.4) High Channel, 2475 MHz | | 7.471 | 2 | 9.471 | 36 | Pass |

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | | |
|---|---------------|--------------------|------------|------------------|--------|--|
| | Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| | 7.226 | 2 | 9.226 | 36 | Pass | |

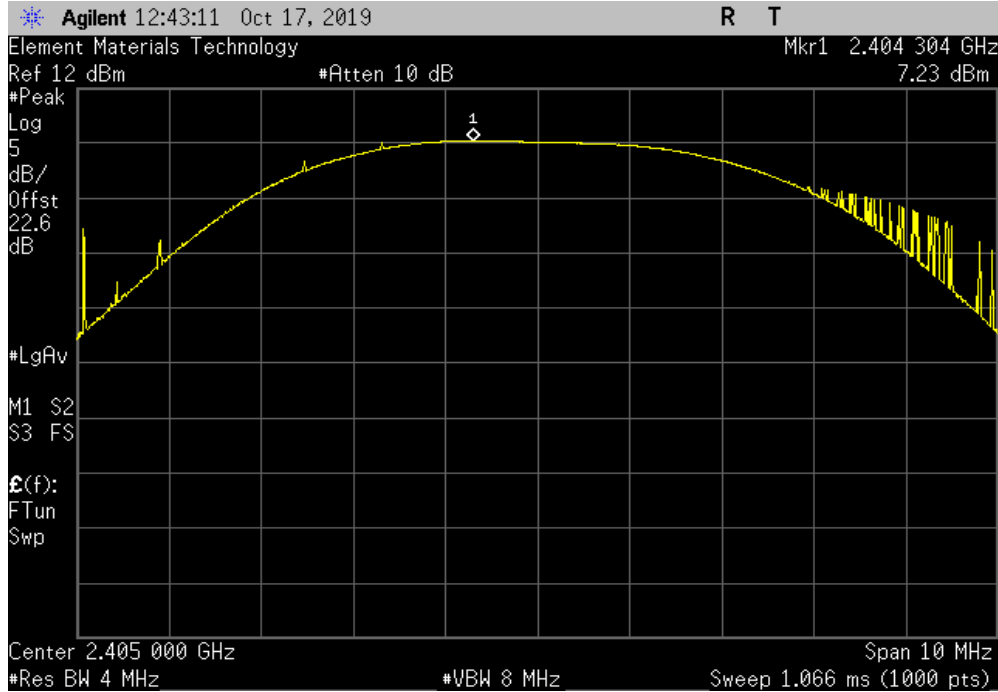

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | | | |
|---|---------------|--------------------|------------|------------------|--------|--|
| | Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| | 7.871 | 2 | 9.871 | 36 | Pass | |

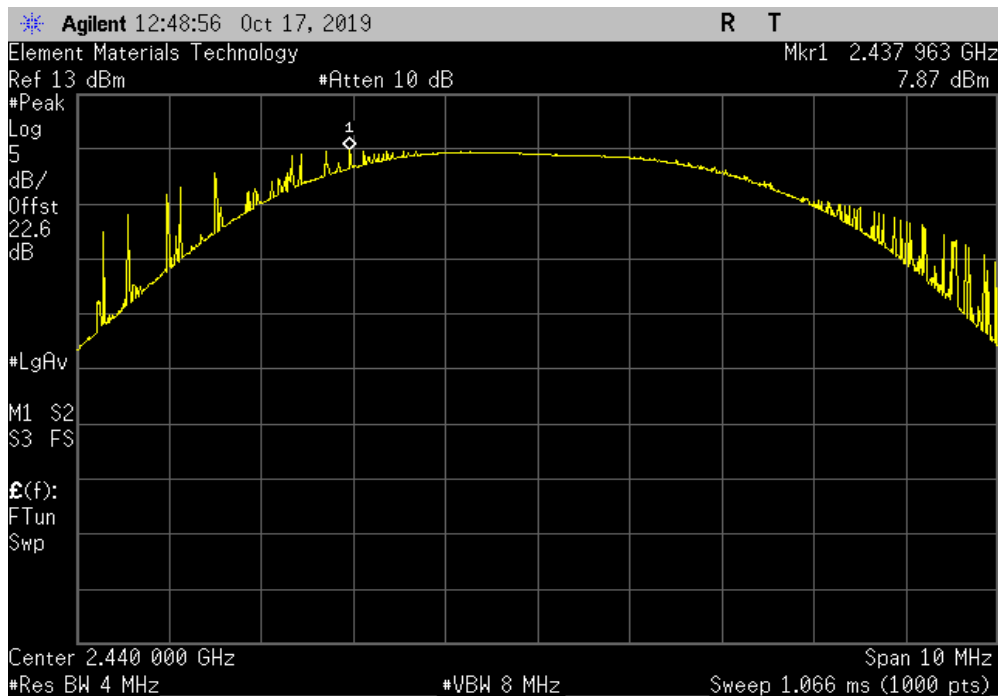


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | | | | |
|--|------------------|-----------------------|---------------|---------------------|--------|--|
| | Out Pwr (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result | |
| | 7.471 | 2 | 9.471 | 36 | Pass | |

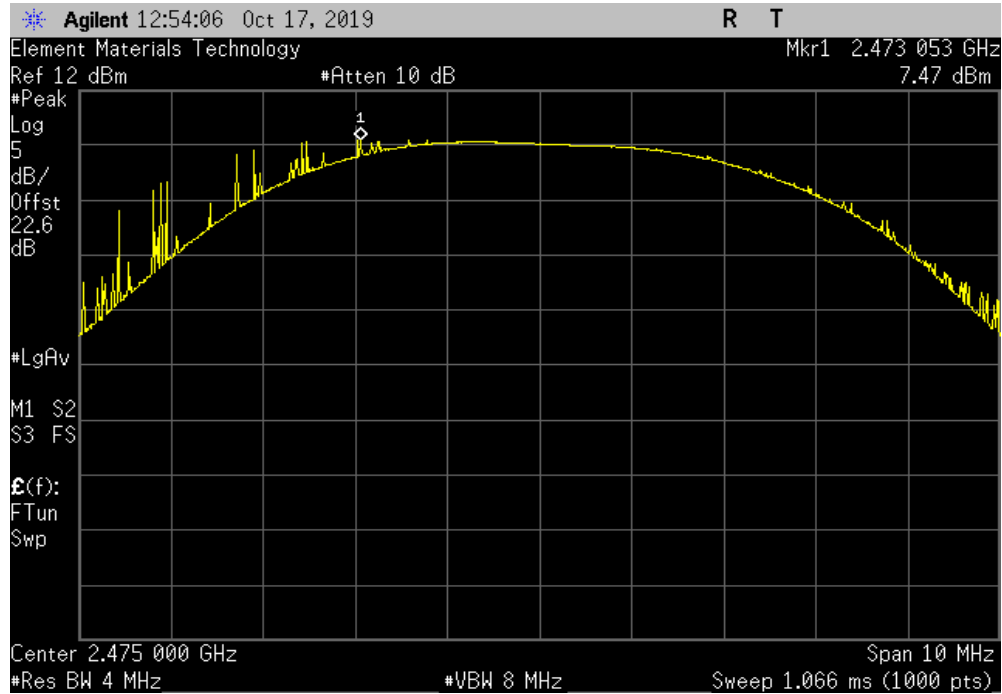

POWER SPECTRAL DENSITY



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------|-----|-----------|-----------|
| Generator - Signal | Agilent | N5173B | TIW | 5-Jul-17 | 5-Jul-20 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | MNU | 11-Apr-19 | 11-Apr-20 |
| Attenuator | S.M. Electronics | SA26B-20 | RFW | 13-Feb-19 | 13-Feb-20 |
| Block - DC | Fairview Microwave | SD3379 | AMI | 6-Aug-19 | 6-Aug-20 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AAX | 5-Apr-19 | 5-Apr-20 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TelTx 2019.08.30.0 XMt 2019.09.05


| | | | |
|---|---|--------------------------------|------------|
| EUT: Model 248DX | | Work Order: EMPM0071 | |
| Serial Number: 0009561 | | Date: 17-Oct-19 | |
| Customer: Emerson Automation Solutions/Rosemount Inc. | | Temperature: 23.6 °C | |
| Attendees: Merritt Pulkrabek | | Humidity: 36.4% RH | |
| Project: None | | Barometric Pres.: 1018 mbar | |
| Tested by: Dustin Sparks | | Power: Battery | |
| | | Job Site: MN08 | |
| TEST SPECIFICATIONS | | | |
| FCC 15.247:2019 | | Test Method | |
| | | ANSI C63.10:2013 | |
| COMMENTS | | | |
| None | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| None | | | |
| Configuration # | 3 | Signature <i>Dustin Sparks</i> | |
| | | Value | Limit |
| | | dBm/3kHz | < dBm/3kHz |
| WirelessHART (802.15.4) Low Channel, 2405 MHz | | -5.128 | 8 |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | -4.96 | 8 |
| WirelessHART (802.15.4) High Channel, 2475 MHz | | -5.157 | 8 |
| | | | Results |
| | | | Pass |
| | | | Pass |
| | | | Pass |

POWER SPECTRAL DENSITY




TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | |
|---|----------|------------|---------|
| | Value | Limit | Results |
| | dBm/3kHz | < dBm/3kHz | |
| | -5.128 | 8 | Pass |

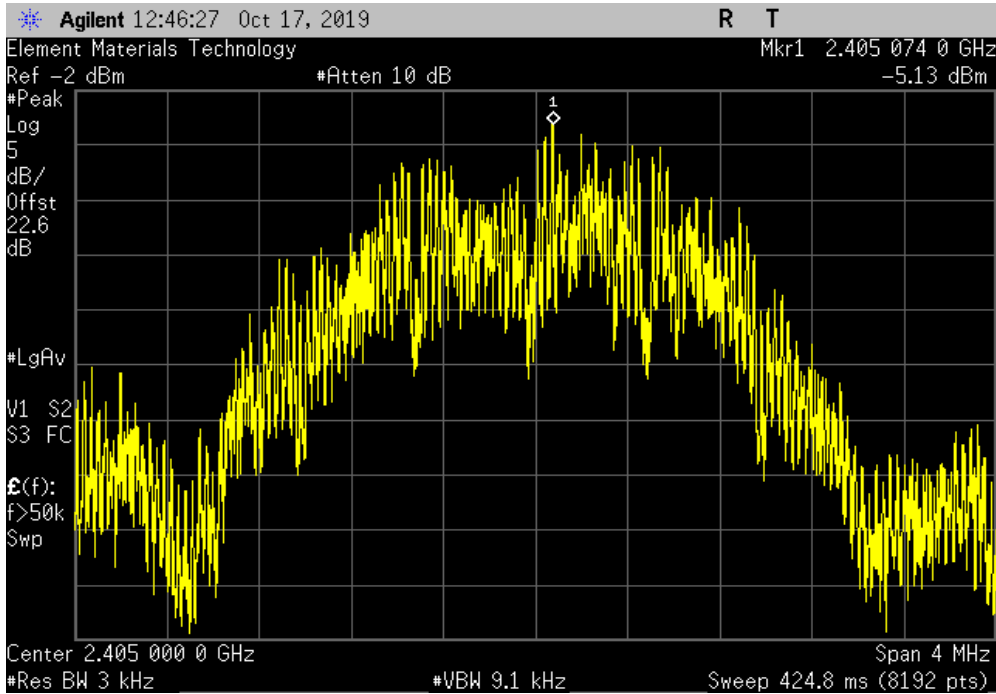

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | |
|---|----------|------------|---------|
| | Value | Limit | Results |
| | dBm/3kHz | < dBm/3kHz | |
| | -4.96 | 8 | Pass |

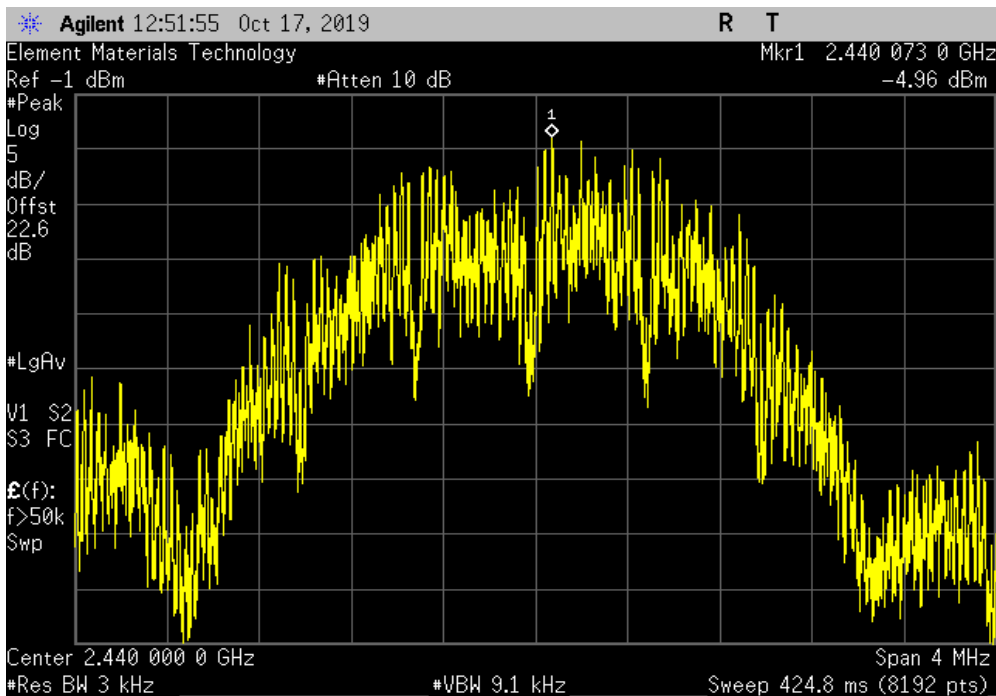


POWER SPECTRAL DENSITY



TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | |
|--|----------|------------|---------|
| | Value | Limit | Results |
| | dBm/3kHz | < dBm/3kHz | |
| | -5.157 | 8 | Pass |

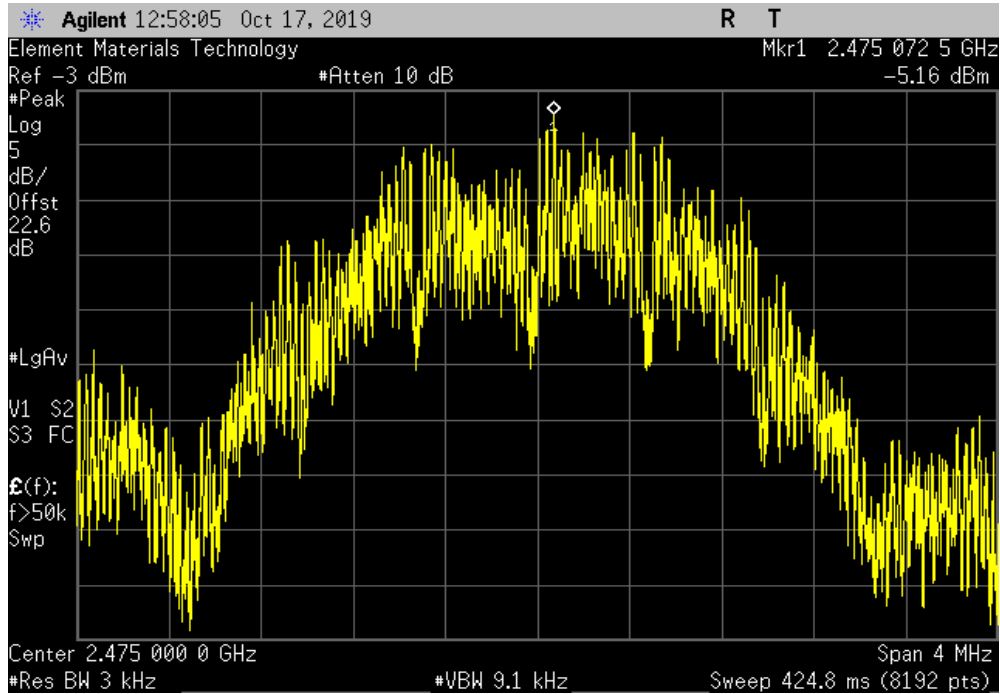

BAND EDGE COMPLIANCE



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------|-----|-----------|-----------|
| Generator - Signal | Agilent | N5173B | TIW | 5-Jul-17 | 5-Jul-20 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | MNU | 11-Apr-19 | 11-Apr-20 |
| Attenuator | S.M. Electronics | SA26B-20 | RFW | 13-Feb-19 | 13-Feb-20 |
| Block - DC | Fairview Microwave | SD3379 | AMI | 6-Aug-19 | 6-Aug-20 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AAX | 5-Apr-19 | 5-Apr-20 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TstTx 2019.08.30.0 XMI 2019.09.05

| | | | |
|---|---|--------------------------------|----------------------|
| EUT: Model 248DX | | Work Order: EMPM0071 | |
| Serial Number: 0009561 | | Date: 17-Oct-19 | |
| Customer: Emerson Automation Solutions/Rosemount Inc. | | Temperature: 23.6 °C | |
| Attendees: Merritt Pulkrabek | | Humidity: 36.3% RH | |
| Project: None | | Barometric Pres.: 1018 mbar | |
| Tested by: Dustin Sparks | | Power: Battery | |
| | | Job Site: MN08 | |
| TEST SPECIFICATIONS | | | |
| FCC 15.247:2019 | | Test Method | |
| | | ANSI C63.10:2013 | |
| COMMENTS | | | |
| None | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| None | | | |
| Configuration # | 3 | Signature <i>Dustin Sparks</i> | |
| | | Value (dBc) | Limit ≤ (dBc) Result |
| | | -41.72 | -20 Pass |
| | | -49.74 | -20 Pass |


WirelessHART (802.15.4) Low Channel, 2405 MHz
 WirelessHART (802.15.4) High Channel, 2475 MHz

BAND EDGE COMPLIANCE




TuTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | |
|---|-------------|---------------|--------|
| | Value (dBc) | Limit ≤ (dBc) | Result |
| | -41.72 | -20 | Pass |

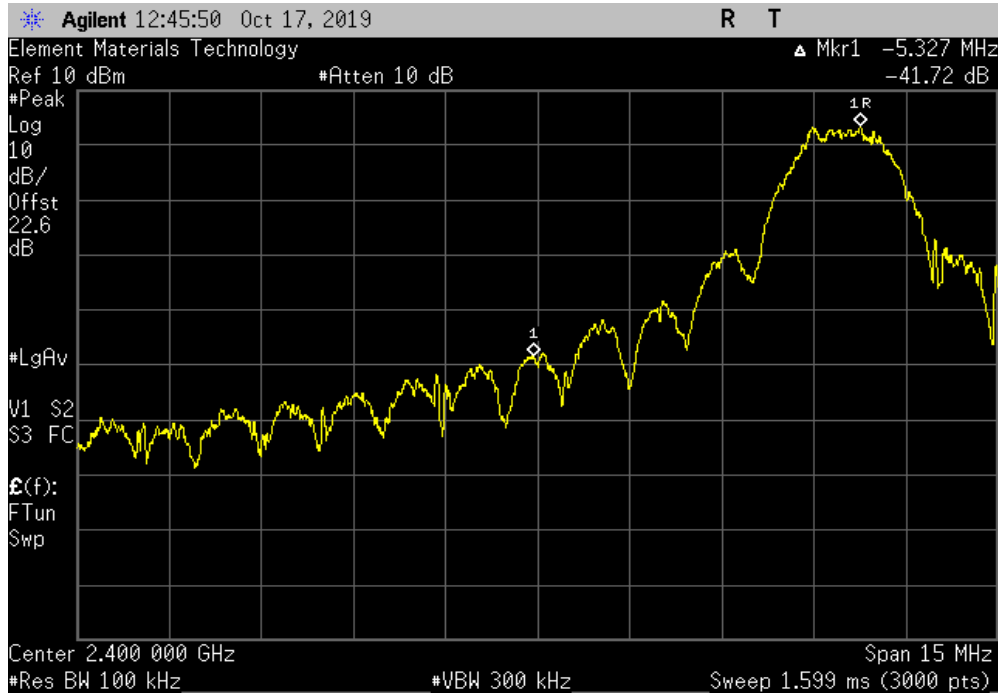

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | |
|--|-------------|---------------|--------|
| | Value (dBc) | Limit ≤ (dBc) | Result |
| | -49.74 | -20 | Pass |

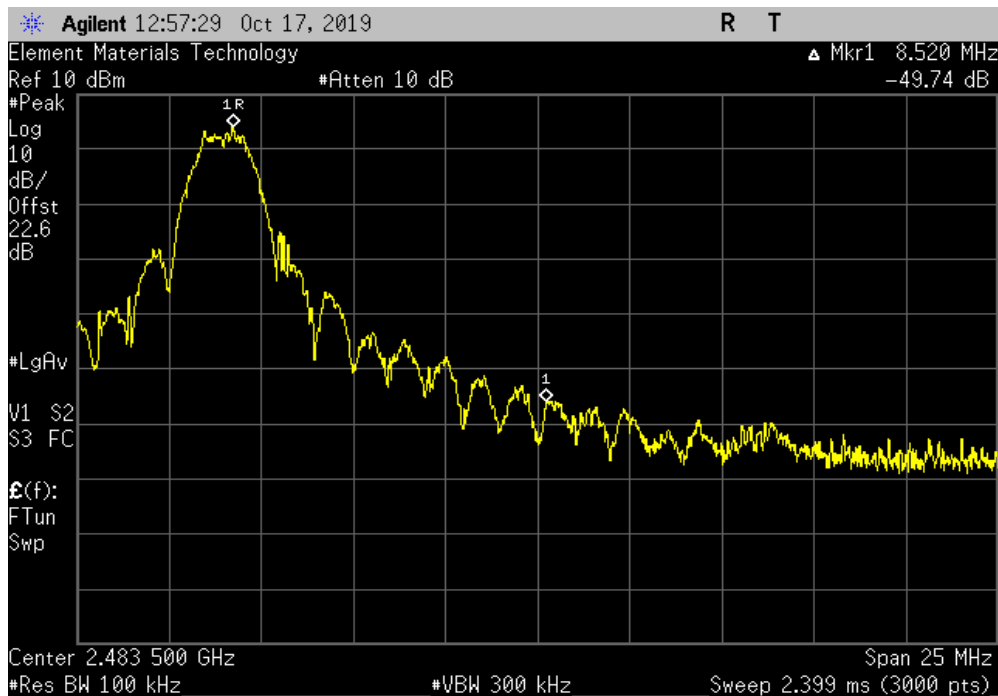

SPURIOUS CONDUCTED EMISSIONS



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Cal. Due |
|------------------------------|--------------------|-----------------|-----|-----------|-----------|
| Generator - Signal | Agilent | N5173B | TIW | 5-Jul-17 | 5-Jul-20 |
| Cable | ESM Cable Corp. | TTBJ141-KMKM-72 | MNU | 11-Apr-19 | 11-Apr-20 |
| Attenuator | S.M. Electronics | SA26B-20 | RFW | 13-Feb-19 | 13-Feb-20 |
| Block - DC | Fairview Microwave | SD3379 | AMI | 6-Aug-19 | 6-Aug-20 |
| Analyzer - Spectrum Analyzer | Agilent | E4440A | AAX | 5-Apr-19 | 5-Apr-20 |

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS



TelTx 2019.08.30.0 XMt 2019.09.05

| | | | |
|---|---|--------------------------------|--|
| EUT: Model 248DX | | Work Order: EMPM0071 | |
| Serial Number: 0009561 | | Date: 17-Oct-19 | |
| Customer: Emerson Automation Solutions/Rosemount Inc. | | Temperature: 23.7 °C | |
| Attendees: Merritt Pulkrabek | | Humidity: 36.3% RH | |
| Project: None | | Barometric Pres.: 1018 mbar | |
| Tested by: Dustin Sparks | | Power: Battery | |
| | | Job Site: MN08 | |
| TEST SPECIFICATIONS | | Test Method | |
| FCC 15.247:2019 | | ANSI C63.10:2013 | |
| COMMENTS | | | |
| None | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| None | | | |
| Configuration # | 3 | Signature <i>Dustin Sparks</i> | |


| | Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
|--|-------------------|---------------------|-----------------|---------------|--------|
| WirelessHART (802.15.4) Low Channel, 2405 MHz | Fundamental | 2405.23 | N/A | N/A | N/A |
| WirelessHART (802.15.4) Low Channel, 2405 MHz | 30 MHz - 12.5 GHz | 2394.3 | -53.65 | -20 | Pass |
| WirelessHART (802.15.4) Low Channel, 2405 MHz | 12.5 GHz - 25 GHz | 24911.5 | -52.73 | -20 | Pass |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | Fundamental | 2440.23 | N/A | N/A | N/A |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | 30 MHz - 12.5 GHz | 2878.4 | -55.27 | -20 | Pass |
| WirelessHART (802.15.4) Mid Channel, 2440 MHz | 12.5 GHz - 25 GHz | 22544.6 | -52.65 | -20 | Pass |
| WirelessHART (802.15.4) High Channel, 2475 MHz | Fundamental | 2475.22 | N/A | N/A | N/A |
| WirelessHART (802.15.4) High Channel, 2475 MHz | 30 MHz - 12.5 GHz | 820.1 | -55.06 | -20 | Pass |
| WirelessHART (802.15.4) High Channel, 2475 MHz | 12.5 GHz - 25 GHz | 24897.8 | -52.62 | -20 | Pass |

SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2405.23 | N/A | N/A | N/A | |

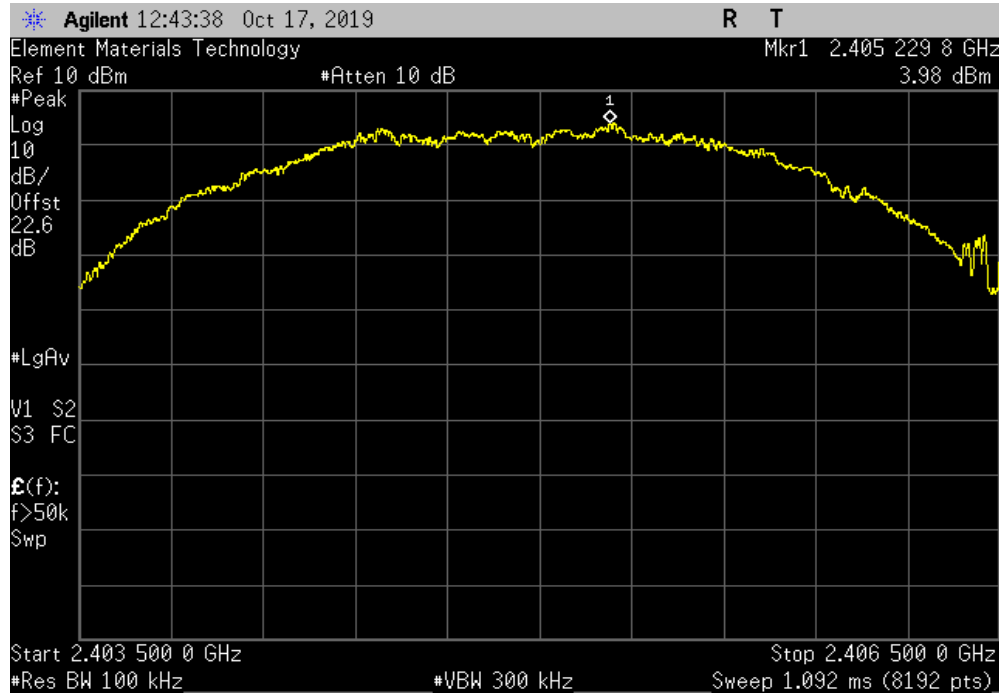

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | 2394.3 | -53.65 | -20 | Pass | |

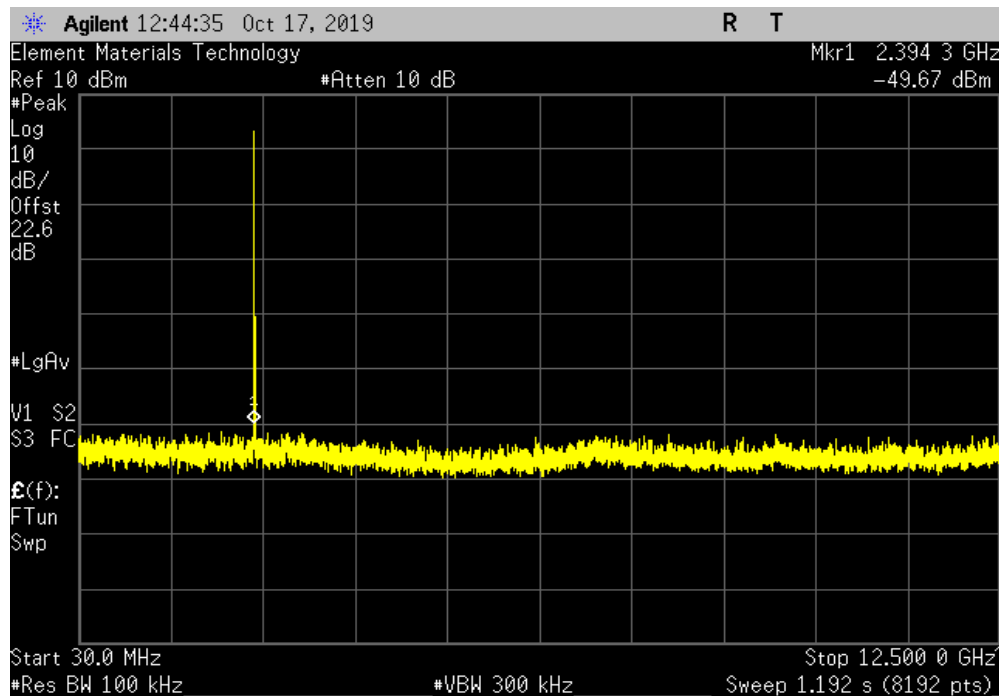


SPURIOUS CONDUCTED EMISSIONS




TuTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Low Channel, 2405 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 12.5 GHz - 25 GHz | 24911.5 | -52.73 | -20 | Pass | |

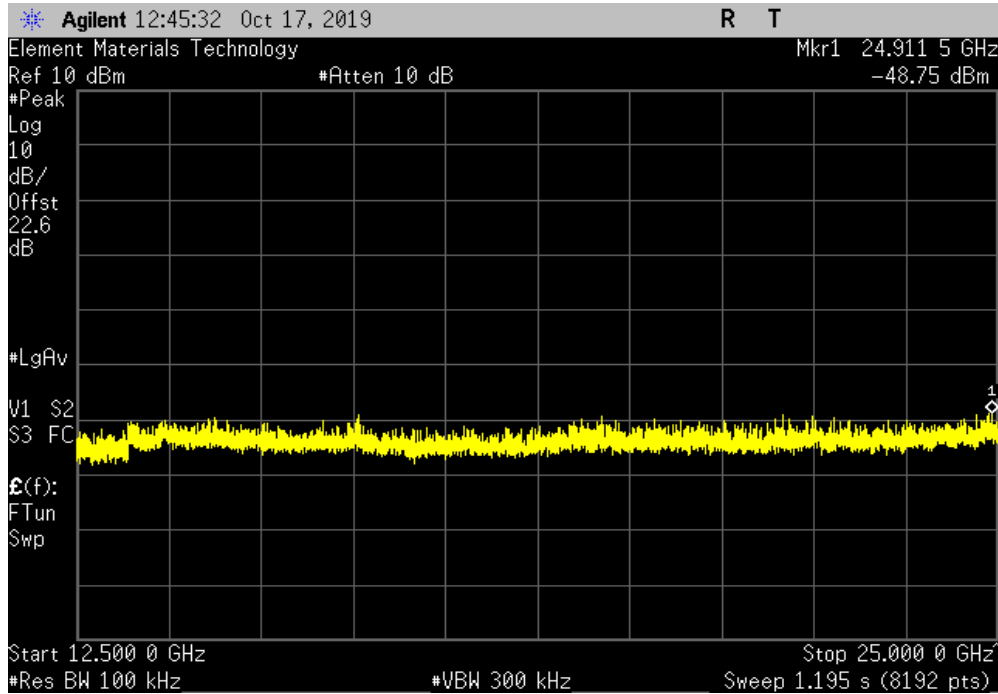

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | | |
|---|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2440.23 | N/A | N/A | N/A | |

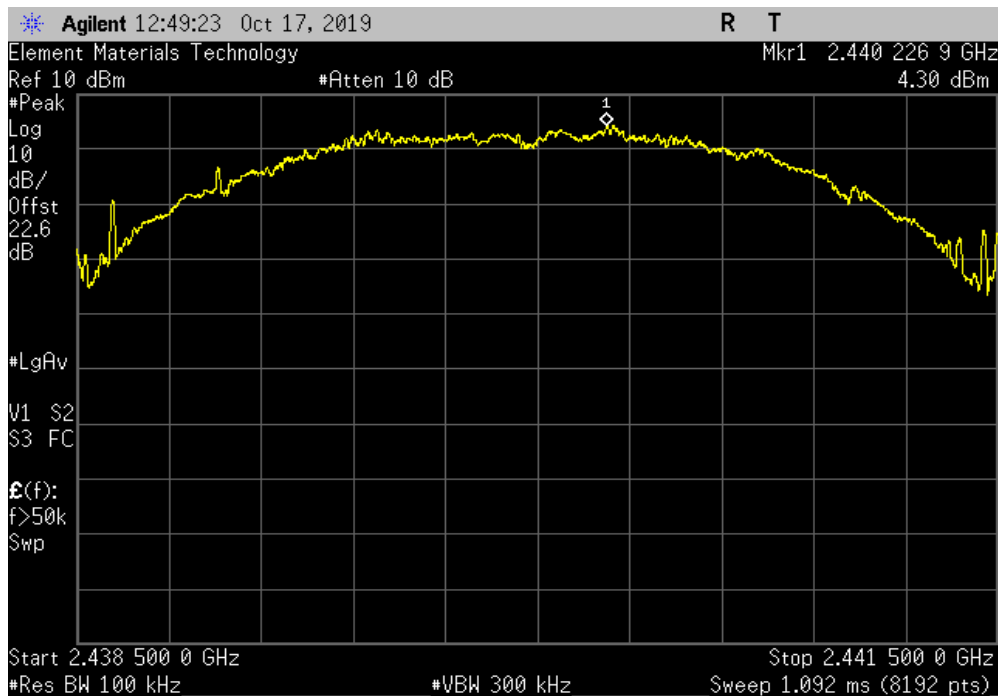


SPURIOUS CONDUCTED EMISSIONS




TuTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | |
|---|---------------------|-----------------|---------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
| 30 MHz - 12.5 GHz | 2878.4 | -55.27 | -20 | Pass |

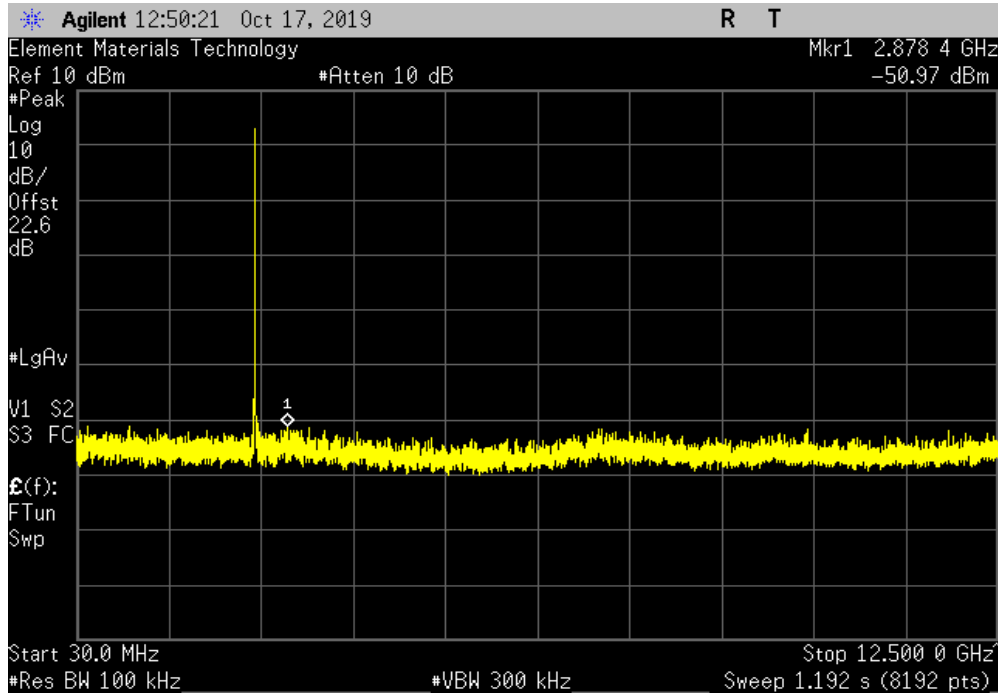

| WirelessHART (802.15.4) Mid Channel, 2440 MHz | | | | |
|---|---------------------|-----------------|---------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
| 12.5 GHz - 25 GHz | 22544.6 | -52.65 | -20 | Pass |

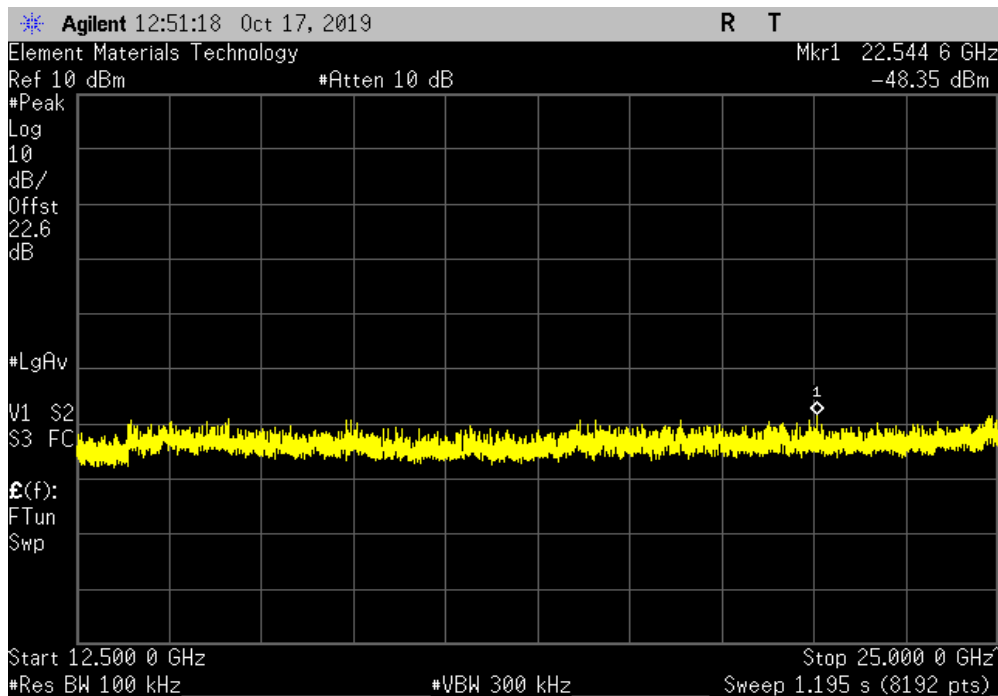


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | | | |
|--|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| Fundamental | 2475.22 | N/A | N/A | N/A | |

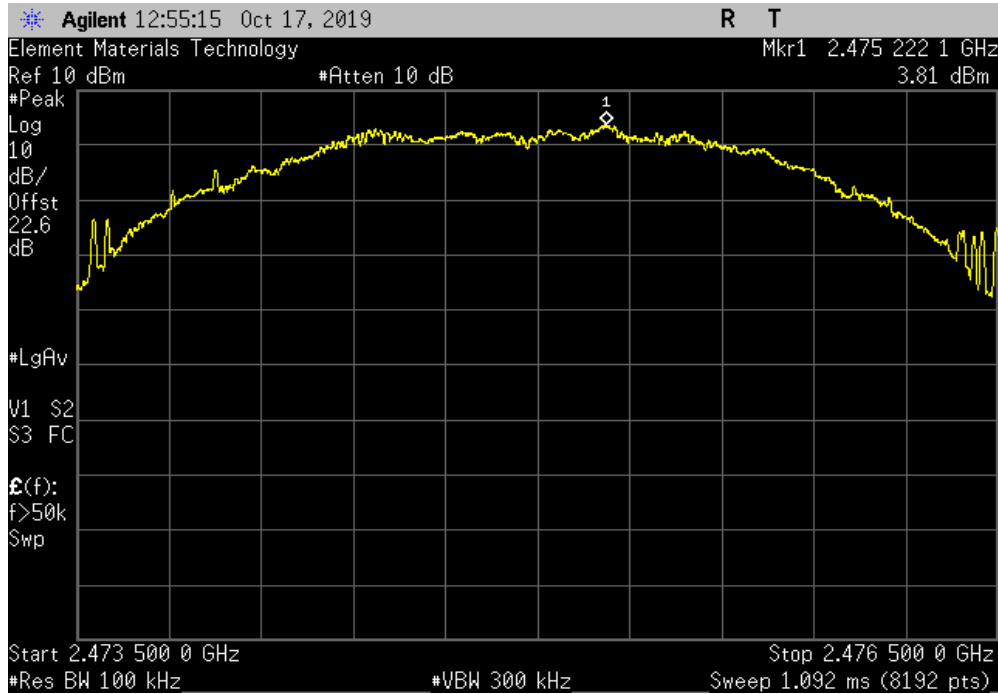

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | | | |
|--|---------------------|-----------------|---------------|--------|--|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | 820.1 | -55.06 | -20 | Pass | |

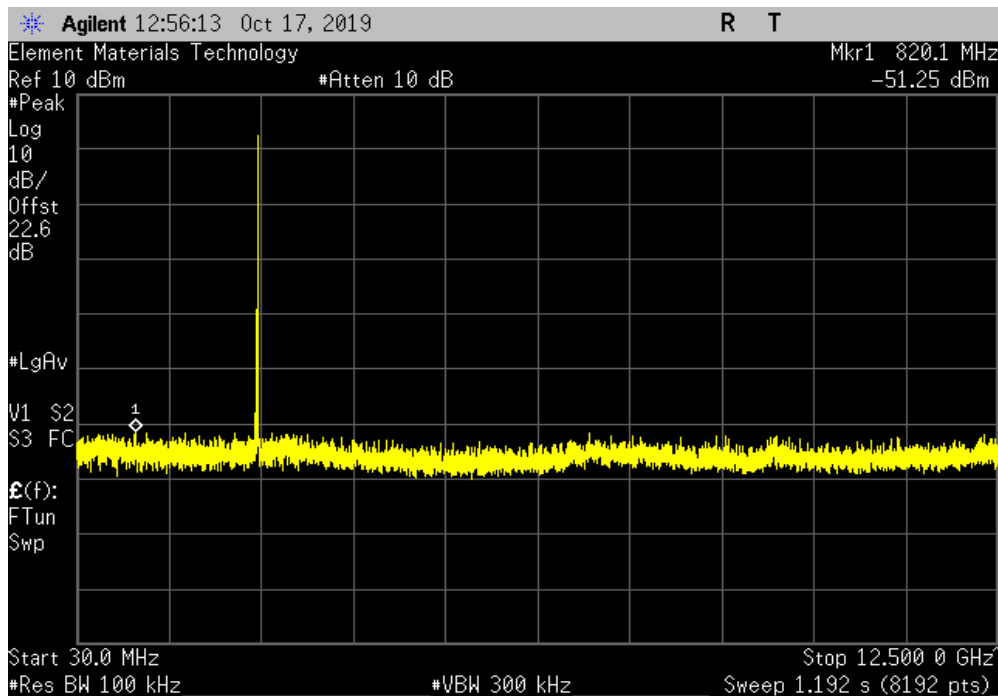

SPURIOUS CONDUCTED EMISSIONS



TbTx 2019.08.30.0 XMI 2019.09.05

| WirelessHART (802.15.4) High Channel, 2475 MHz | | | | |
|--|---------------------|-----------------|---------------|--------|
| Frequency Range | Measured Freq (MHz) | Max Value (dBc) | Limit ≤ (dBc) | Result |
| 12.5 GHz - 25 GHz | 24897.8 | -52.62 | -20 | Pass |

