



# element

## Emerson Location Awareness Personnel Tag

Model GEO10

FCC 15.247:2019

2.4 GHz DTS Radio

Report # EMPM0079 Rev. 1



NVLAP LAB CODE: 200881-0



*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.*

# CERTIFICATE OF TEST

Last Date of Test: November 15, 2019

Emerson

EUT: GEO10

## Radio Equipment Testing

### Standards

Specification	Method
FCC 15.247:2019	ANSI C63.10:2013, KDB 558074

### Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

### Deviations From Test Standards

None

### Approved By:



Eric Brandon, Department Manager

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.*

# REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		
01	Antenna Gain value updated	2020-08-11	29-31

# ACCREDITATIONS AND AUTHORIZATIONS



---

## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

---

## Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

---

## European Union

**European Commission** – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

---

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

**MSIT / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Israel

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

---

## Hong Kong

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

---

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---

## SCOPE


For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

# FACILITIES



<b>California</b> Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	<b>Minnesota</b> Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	<b>Oregon</b> Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	<b>Texas</b> Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	<b>Washington</b> Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425)984-6600
<b>NVLAP</b>				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
<b>Innovation, Science and Economic Development Canada</b>				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
<b>BSMI</b>				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
<b>VCCI</b>				
A-0029	A-0109	A-0108	A-0201	A-0110
<b>Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA</b>				
US0158	US0175	US0017	US0191	US0157

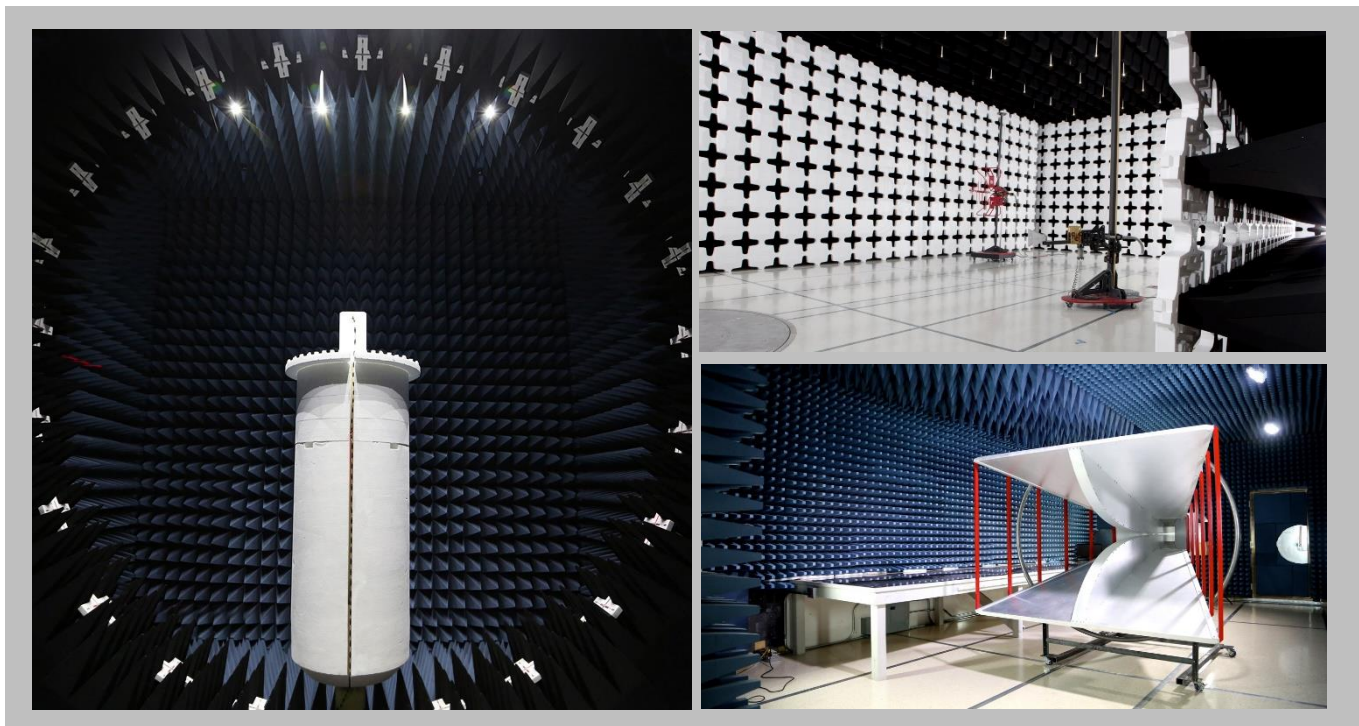

# MEASUREMENT UNCERTAINTY



## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<b>Test</b>	<b>+ MU</b>	<b>- MU</b>
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

# Test Setup Block Diagrams

## Antenna Port Conducted Measurements

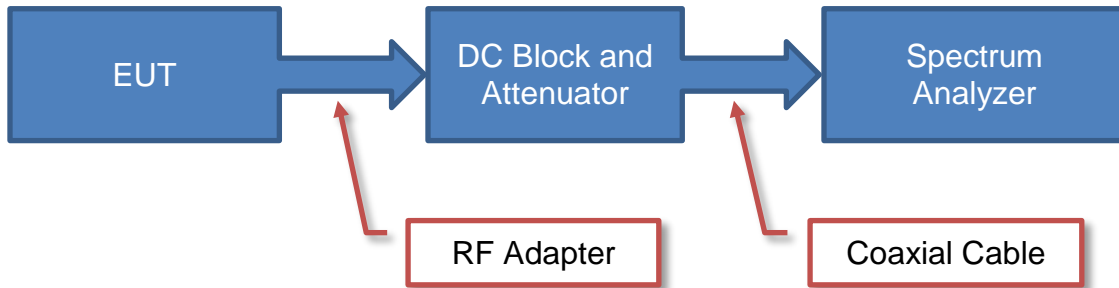

## Near Field Test Fixture Measurements



## Spurious Radiated Emissions



# PRODUCT DESCRIPTION

## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	Emerson
<b>Address:</b>	6021 Innovation Boulevard
<b>City, State, Zip:</b>	Shakopee, MN 55379
<b>Test Requested By:</b>	Merritt Pulkrabek
<b>EUT:</b>	GEO10
<b>First Date of Test:</b>	November 14, 2019
<b>Last Date of Test:</b>	November 15, 2019
<b>Receipt Date of Samples:</b>	November 11, 2019
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage
<b>Purchase Authorization:</b>	Verified

## Information Provided by the Party Requesting the Test

<b>Functional Description of the EUT:</b>
Mobile Wireless Location Device (TAG)
<b>Testing Objective:</b>
To demonstrate compliance of the 2.4 GHz DTS radio to FCC 15.247 requirements.



# CONFIGURATIONS



## Configuration EMPM0079- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Mobile Wireless Location Device (TAG)	Emerson	GEO10	3403F

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Interface Board	Emerson	N/A	N/A
Laptop 2	Acer	Aspire One	LUSAL0B137011502C81601
Power Supply (Laptop 2)	Delta Electronics, Inc.	ADP-40TH A	AP0400100201107459P101

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Data Cable	No	0.25 m	No	Wireless Personal Tag	Interface Board
USB Cable	Yes	1.8 m	No	Interface Board	Laptop
DC Cable (Laptop 2)	No	2.5 m	Yes	Power Supply (Laptop 2)	Laptop 2

## Configuration EMPM0079- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Mobile Wireless Location Device (TAG)	Emerson	GEO10	3403C

# MODIFICATIONS



## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2019-11-14	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2019-11-15	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2019-11-15	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2019-11-15	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2019-11-15	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2019-11-15	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2019-11-15	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2019-11-15	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting Geo - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated

## POWER SETTINGS INVESTIGATED

Battery

## CONFIGURATIONS INVESTIGATED

EMPM0079 - 3

## FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26500 MHz
-----------------	--------	----------------	-----------

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - High Pass	Micro-Tronics	HPM50111	LFN	12-Sep-2019	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	17-Sep-2019	12 mo
Attenuator	Fairview Microwave	SA18E-20	TWZ	17-Sep-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	11-Sep-2019	12 mo
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNP	11-Sep-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	8-Mar-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	8-Feb-2019	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	17-Sep-2019	12 mo
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	16-Jan-2019	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	18-Oct-2019	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	18-Oct-2019	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	25-Jan-2018	24 mo
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	13-Dec-2018	12 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of  $10 \cdot \text{LOG}(dc)$ .

# SPURIOUS RADIATED EMISSIONS




EmiR5 2019.08.15.1 PSA-ESCI 2019.05.10

*Dustin Sparks*

<b>Work Order:</b>	EMPM0079	<b>Date:</b>	14-Nov-2019
<b>Project:</b>	None	<b>Temperature:</b>	20.7 °C
<b>Job Site:</b>	MN05	<b>Humidity:</b>	22.7% RH
<b>Serial Number:</b>	3403C	<b>Barometric Pres.:</b>	1027 mbar
<b>EUT:</b>	GEO10		
<b>Configuration:</b>	3		
<b>Customer:</b>	Emerson		
<b>Attendees:</b>	None		
<b>EUT Power:</b>	Battery		
<b>Operating Mode:</b>	Transmitting Geo - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated		
<b>Deviations:</b>	None		
<b>Comments:</b>	Duty cycle correction factor (DCCF) of 3.7 dB added to all RMS average measurements. Based on a measured duty cycle of 42.6% and the following formula: DCCF = 10 * log(1/0.426)		

<b>Test Specifications</b>	<b>Test Method</b>
FCC 15.247:2019	ANSI C63.10:2013

<b>Run #</b>	35	<b>Test Distance (m)</b>	3	<b>Antenna Height(s)</b>	1 to 4(m)	<b>Results</b>	Pass
--------------	----	--------------------------	---	--------------------------	-----------	----------------	------

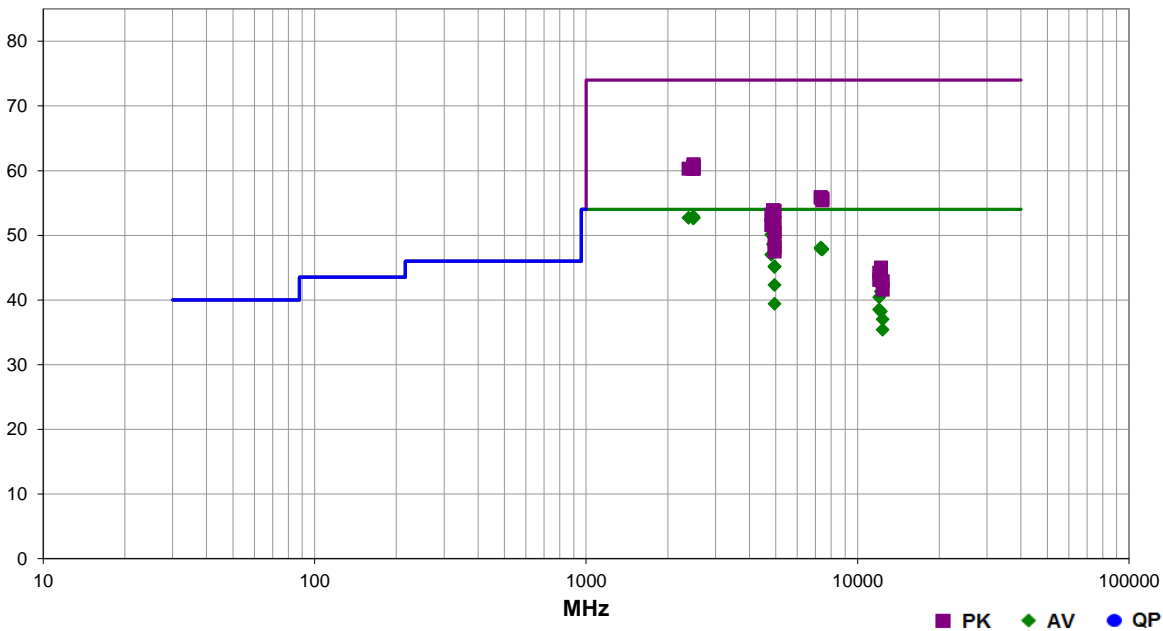

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2485.808	32.9	-3.7	1.5	345.0	3.7	20.0	Horz	AV	0.0	52.9	54.0	-1.1	High ch, EUT vertical
2487.358	32.7	-3.7	1.5	353.0	3.7	20.0	Vert	AV	0.0	52.7	54.0	-1.3	High ch, EUT vertical
2487.258	32.7	-3.7	4.0	30.0	3.7	20.0	Vert	AV	0.0	52.7	54.0	-1.3	High ch, EUT on side
2483.783	32.8	-3.8	1.5	79.0	3.7	20.0	Horz	AV	0.0	52.7	54.0	-1.3	High ch, EUT horizontal
2487.675	32.7	-3.7	1.5	114.0	3.7	20.0	Vert	AV	0.0	52.7	54.0	-1.3	High ch, EUT horizontal
2385.792	32.6	-3.6	1.0	56.9	3.7	20.0	Horz	AV	0.0	52.7	54.0	-1.3	Low ch, EUT vertical
2483.950	32.7	-3.8	1.5	358.9	3.7	20.0	Horz	AV	0.0	52.6	54.0	-1.4	High ch, EUT on side
4880.933	42.8	4.7	2.1	227.0	3.7	0.0	Horz	AV	0.0	51.2	54.0	-2.8	Mid ch, EUT vertical
4951.000	42.4	4.8	2.8	38.0	3.7	0.0	Horz	AV	0.0	50.9	54.0	-3.1	High ch, EUT vertical
4810.933	41.8	4.6	2.2	232.9	3.7	0.0	Horz	AV	0.0	50.1	54.0	-3.9	Low ch, EUT vertical
4880.875	40.2	4.7	3.2	185.9	3.7	0.0	Vert	AV	0.0	48.6	54.0	-5.4	Mid ch, EUT horizontal
4951.008	39.7	4.8	3.3	8.1	3.7	0.0	Vert	AV	0.0	48.2	54.0	-5.8	High ch, EUT horizontal
7321.217	30.9	13.5	1.5	167.9	3.7	0.0	Vert	AV	0.0	48.1	54.0	-5.9	Mid ch, EUT horizontal
7426.292	30.9	13.3	2.5	182.9	3.7	0.0	Vert	AV	0.0	47.9	54.0	-6.1	High ch, EUT horizontal
7322.283	30.7	13.5	1.5	95.9	3.7	0.0	Horz	AV	0.0	47.9	54.0	-6.1	Mid ch, EUT vertical
7427.442	30.8	13.3	1.5	15.0	3.7	0.0	Horz	AV	0.0	47.8	54.0	-6.2	High ch, EUT vertical
4810.908	38.7	4.6	3.2	181.0	3.7	0.0	Vert	AV	0.0	47.0	54.0	-7.0	Low ch, EUT horizontal
4950.833	36.7	4.8	2.2	314.0	3.7	0.0	Horz	AV	0.0	45.2	54.0	-8.8	High ch, EUT horizontal

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4950.917	36.6	4.8	1.5	37.9	3.7	0.0	Vert	AV	0.0	45.1	54.0	-8.9	High ch, EUT on side
4950.958	33.8	4.8	3.9	296.1	3.7	0.0	Vert	AV	0.0	42.3	54.0	-11.7	High ch, EUT vertical
12202.440	39.4	-1.8	1.0	188.0	3.7	0.0	Vert	AV	0.0	41.3	54.0	-12.7	Mid ch, EUT horizontal
2487.117	44.7	-3.7	1.5	114.0	0.0	20.0	Vert	PK	0.0	61.0	74.0	-13.0	High ch, EUT horizontal
2488.367	44.5	-3.7	1.5	353.0	0.0	20.0	Vert	PK	0.0	60.8	74.0	-13.2	High ch, EUT vertical
2483.550	44.4	-3.8	1.5	79.0	0.0	20.0	Horz	PK	0.0	60.6	74.0	-13.4	High ch, EUT horizontal
12027.440	38.8	-2.1	1.0	8.1	3.7	0.0	Vert	AV	0.0	40.4	54.0	-13.6	Low ch, EUT horizontal
2486.575	44.0	-3.7	1.5	345.0	0.0	20.0	Horz	PK	0.0	60.3	74.0	-13.7	High ch, EUT vertical
2485.525	44.0	-3.7	1.5	358.9	0.0	20.0	Horz	PK	0.0	60.3	74.0	-13.7	High ch, EUT on side
2485.550	44.0	-3.7	4.0	30.0	0.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	High ch, EUT on side
2385.808	43.9	-3.6	1.0	56.9	0.0	20.0	Horz	PK	0.0	60.3	74.0	-13.7	Low ch, EUT vertical
4950.967	30.9	4.8	1.5	347.1	3.7	0.0	Horz	AV	0.0	39.4	54.0	-14.6	High ch, EUT on side
12027.390	36.9	-2.1	2.3	120.0	3.7	0.0	Horz	AV	0.0	38.5	54.0	-15.5	Low ch, EUT vertical
12202.490	36.3	-1.8	2.3	113.9	3.7	0.0	Horz	AV	0.0	38.2	54.0	-15.8	Mid ch, EUT vertical
12377.490	34.0	-0.7	1.0	231.0	3.7	0.0	Vert	AV	0.0	37.0	54.0	-17.0	High ch, EUT horizontal
7318.200	42.4	13.5	1.5	167.9	0.0	0.0	Vert	PK	0.0	55.9	74.0	-18.1	Mid ch, EUT horizontal
7321.325	42.3	13.5	1.5	95.9	0.0	0.0	Horz	PK	0.0	55.8	74.0	-18.2	Mid ch, EUT vertical
7423.308	42.4	13.3	2.5	182.9	0.0	0.0	Vert	PK	0.0	55.7	74.0	-18.3	High ch, EUT horizontal
7425.267	42.1	13.3	1.5	15.0	0.0	0.0	Horz	PK	0.0	55.4	74.0	-18.6	High ch, EUT vertical
12377.490	32.4	-0.7	2.0	55.0	3.7	0.0	Horz	AV	0.0	35.4	54.0	-18.6	High ch, EUT vertical
4880.933	49.2	4.7	2.1	227.0	0.0	0.0	Horz	PK	0.0	53.9	74.0	-20.1	Mid ch, EUT vertical
4950.892	49.0	4.8	2.8	38.0	0.0	0.0	Horz	PK	0.0	53.8	74.0	-20.2	High ch, EUT vertical
4809.317	48.6	4.6	2.2	232.9	0.0	0.0	Horz	PK	0.0	53.2	74.0	-20.8	Low ch, EUT vertical
4951.092	47.1	4.8	3.3	8.1	0.0	0.0	Vert	PK	0.0	51.9	74.0	-22.1	High ch, EUT horizontal
4879.017	47.1	4.7	3.2	185.9	0.0	0.0	Vert	PK	0.0	51.8	74.0	-22.2	Mid ch, EUT horizontal
4809.258	47.0	4.6	3.2	181.0	0.0	0.0	Vert	PK	0.0	51.6	74.0	-22.4	Low ch, EUT horizontal
4950.767	45.7	4.8	2.2	314.0	0.0	0.0	Horz	PK	0.0	50.5	74.0	-23.5	High ch, EUT horizontal
4950.933	44.9	4.8	1.5	37.9	0.0	0.0	Vert	PK	0.0	49.7	74.0	-24.3	High ch, EUT on side
4948.733	43.3	4.8	3.9	296.1	0.0	0.0	Vert	PK	0.0	48.1	74.0	-25.9	High ch, EUT vertical
4947.808	42.7	4.8	1.5	347.1	0.0	0.0	Horz	PK	0.0	47.5	74.0	-26.5	High ch, EUT on side
12202.320	46.8	-1.8	1.0	188.0	0.0	0.0	Vert	PK	0.0	45.0	74.0	-29.0	Mid ch, EUT horizontal
12027.280	46.3	-2.1	1.0	8.1	0.0	0.0	Vert	PK	0.0	44.2	74.0	-29.8	Low ch, EUT horizontal
12202.340	45.2	-1.8	2.3	113.9	0.0	0.0	Horz	PK	0.0	43.4	74.0	-30.6	Mid ch, EUT vertical
12027.480	45.2	-2.1	2.3	120.0	0.0	0.0	Horz	PK	0.0	43.1	74.0	-30.9	Low ch, EUT vertical
12372.560	43.6	-0.7	1.0	231.0	0.0	0.0	Vert	PK	0.0	42.9	74.0	-31.1	High ch, EUT horizontal
12376.630	42.3	-0.7	2.0	55.0	0.0	0.0	Horz	PK	0.0	41.6	74.0	-32.4	High ch, EUT vertical

# DUTY CYCLE



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

# DUTY CYCLE



TelTx 2019.08.30.0 XMI 2019.09.05

EUT: GEO10		Work Order: EMPM0079					
Serial Number: 3403F		Date: 15-Nov-19					
Customer: Emerson		Temperature: 22.8 °C					
Attendees: None		Humidity: 24.4% RH					
Project: None		Barometric Pres.: 1030 mbar					
Tested by: Dustin Sparks		Power: Battery					
Job Site: MN08		Test Method					
TEST SPECIFICATIONS		ANSI C63.10:2013					
FCC 15.247:2019							
COMMENTS							
None							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1	Signature <i>Dustin Sparks</i>					
		Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
Geo, Low Channel (2405 MHz)		4.26 ms	10.011 ms	1	42.6	N/A	N/A
Geo, Low Channel (2405 MHz)		N/A	N/A	5	N/A	N/A	N/A
Geo, Mid Channel (2440 MHz)		4.26 ms	10.011 ms	1	42.6	N/A	N/A
Geo, Mid Channel (2440 MHz)		N/A	N/A	5	N/A	N/A	N/A
Geo, High Channel (2475 MHz)		4.26 ms	10.009 ms	1	42.6	N/A	N/A
Geo, High Channel (2475 MHz)		N/A	N/A	5	N/A	N/A	N/A




# DUTY CYCLE



TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
4.26 ms	10.011 ms	1	42.6	N/A	N/A	

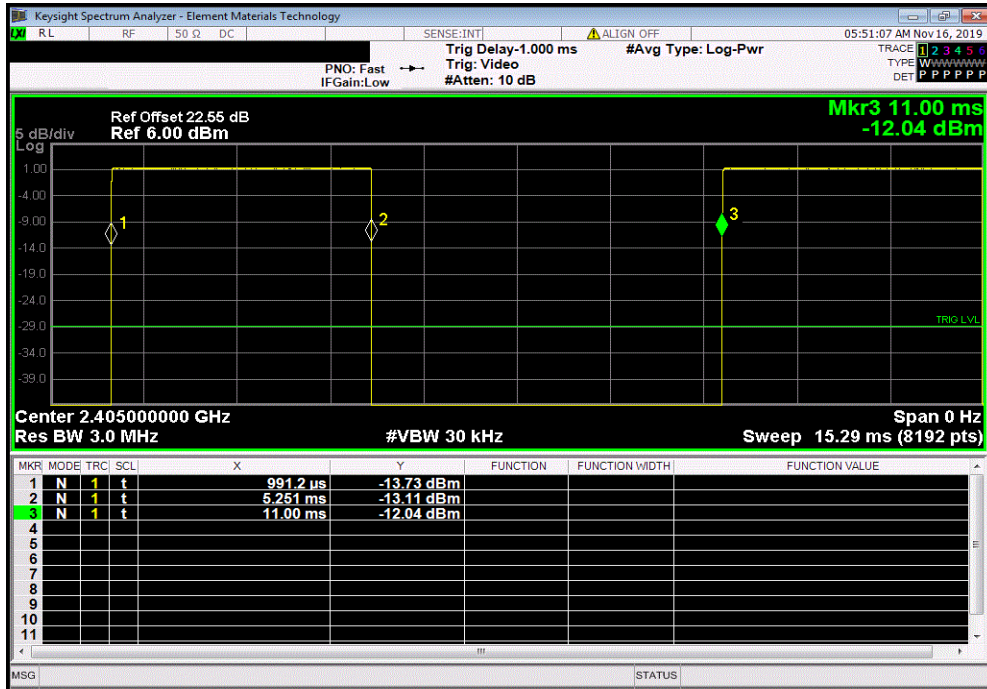

Geo, Low Channel (2405 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	




# DUTY CYCLE




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Mid Channel (2440 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
4.26 ms	10.011 ms	1	42.6	N/A	N/A	

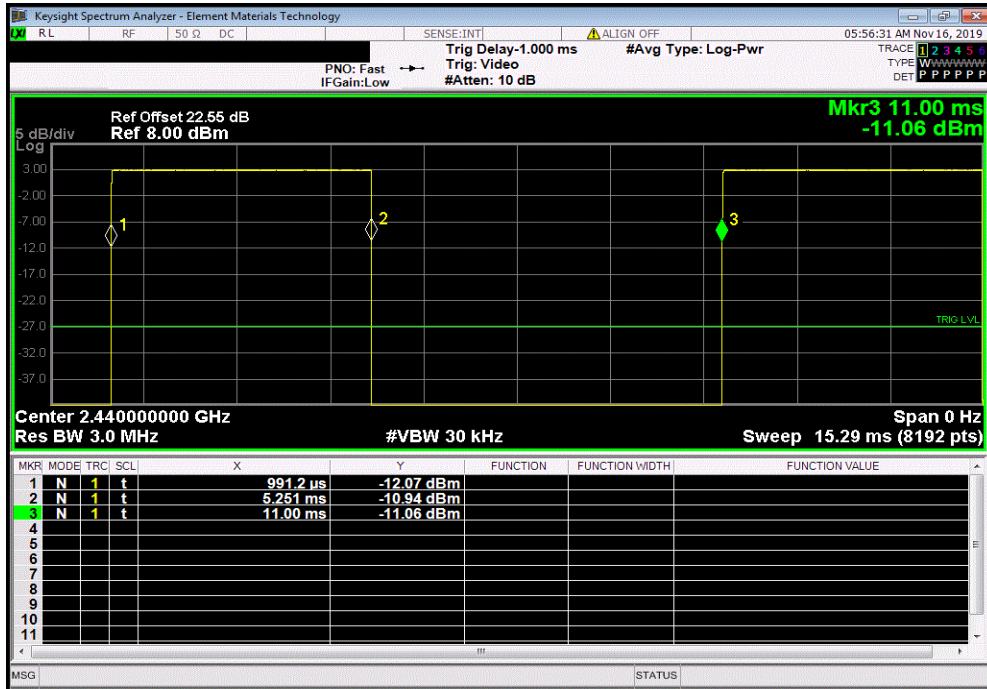

Geo, Mid Channel (2440 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

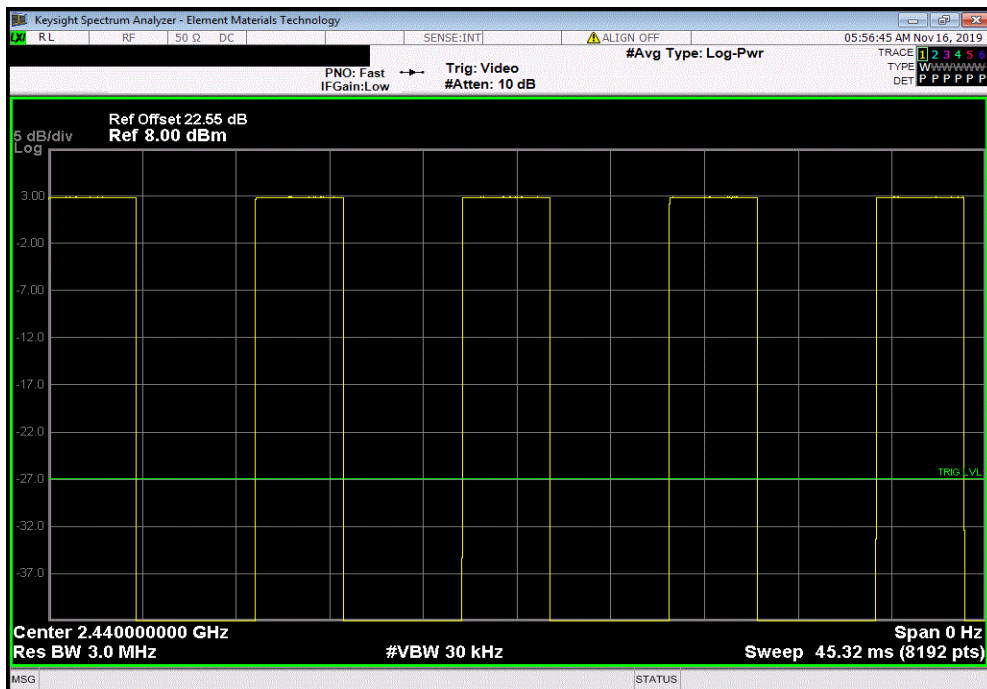


# DUTY CYCLE




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, High Channel (2475 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
4.26 ms	10.009 ms	1	42.6	N/A	N/A	

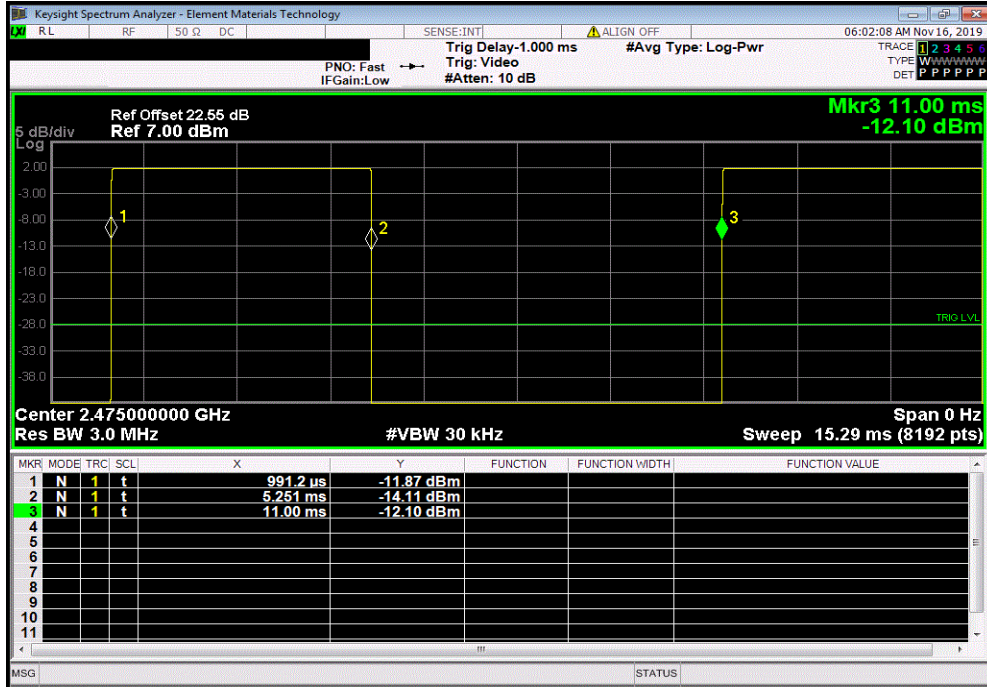

Geo, High Channel (2475 MHz)						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

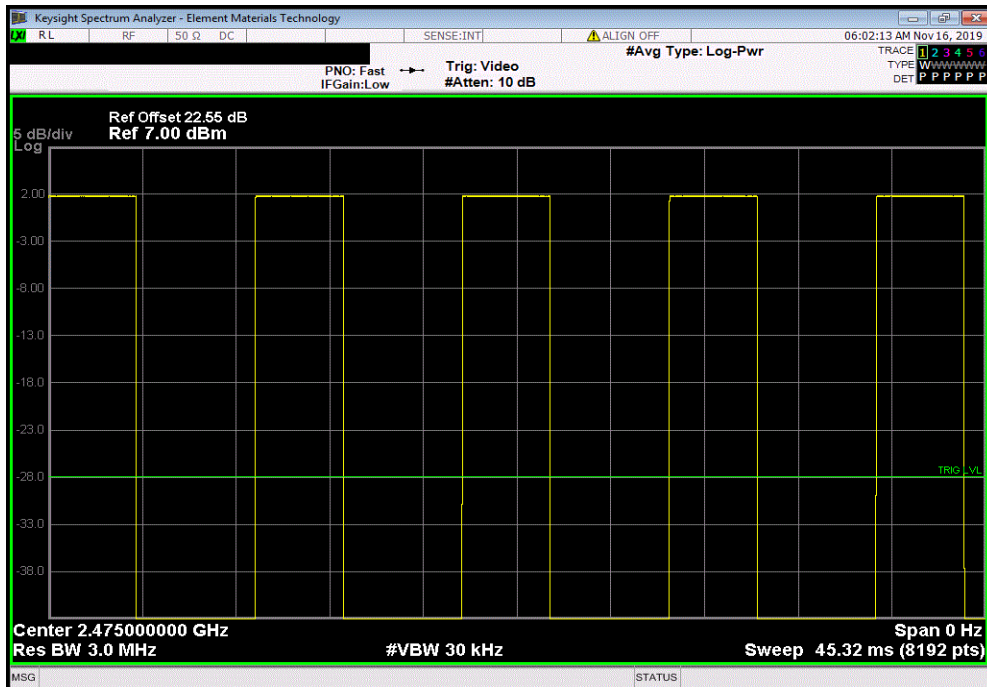

# OCCUPIED BANDWIDTH



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

# OCCUPIED BANDWIDTH



TelTx 2019.08.30.0 XMI 2019.09.05

EUT: GEO10		Work Order: EMPM0079	
Serial Number: 3403F		Date: 15-Nov-19	
Customer: Emerson		Temperature: 22.7 °C	
Attendees: None		Humidity: 24.5% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Dustin Sparks		Power: Battery	
Job Site: MN08			
TEST SPECIFICATIONS			
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Dustin Sparks</i>	


	Value	Limit (>)	Result
Geo, Low Channel (2405 MHz)	1.482 MHz	500 kHz	Pass
Geo, Mid Channel (2440 MHz)	1.459 MHz	500 kHz	Pass
Geo, High Channel (2475 MHz)	1.591 MHz	500 kHz	Pass

# OCCUPIED BANDWIDTH




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)						
				Value	Limit	Result
				1.482 MHz	500 kHz	Pass

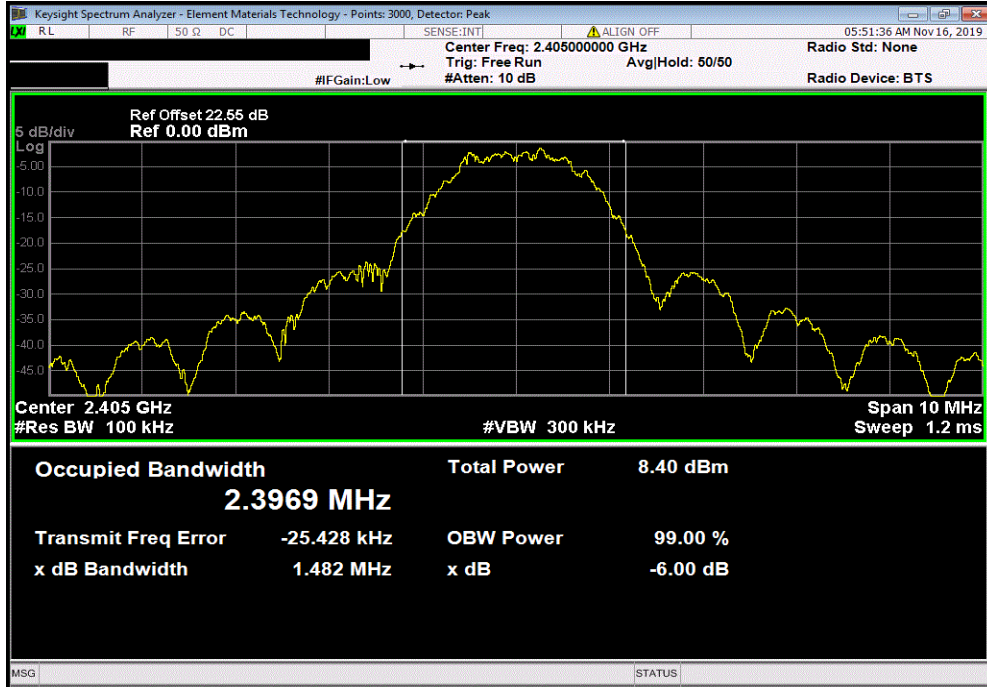

Geo, Mid Channel (2440 MHz)						
				Value	Limit	Result
				1.459 MHz	500 kHz	Pass

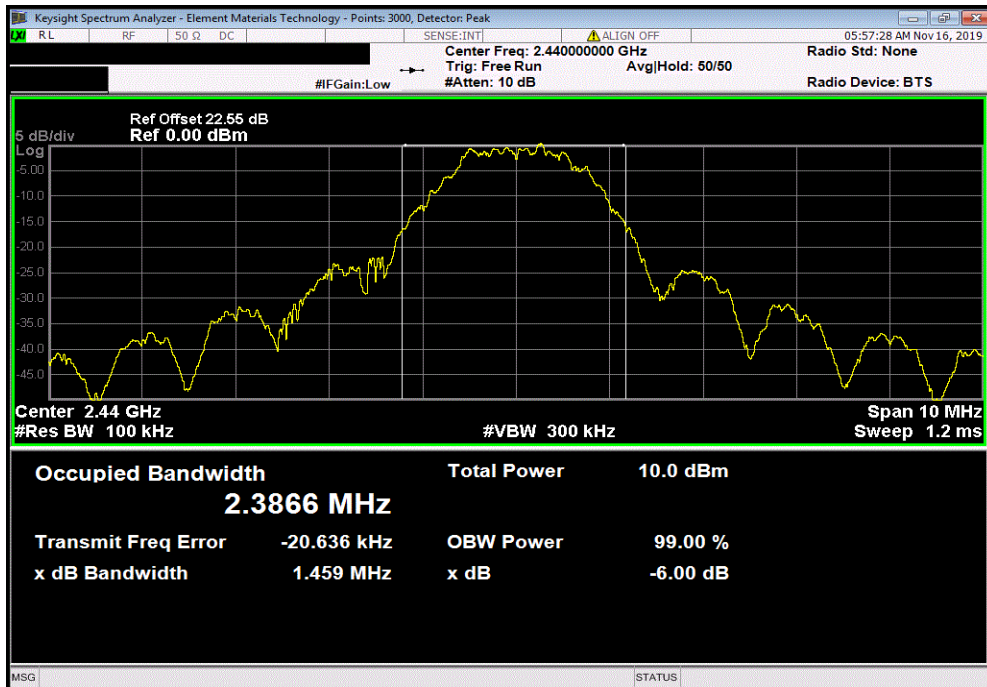


# OCCUPIED BANDWIDTH



TbTx 2019.08.30.0 XMI 2019.09.05

Geo, High Channel (2475 MHz)			Value	Limit	Result
			1.591 MHz	500 kHz	Pass

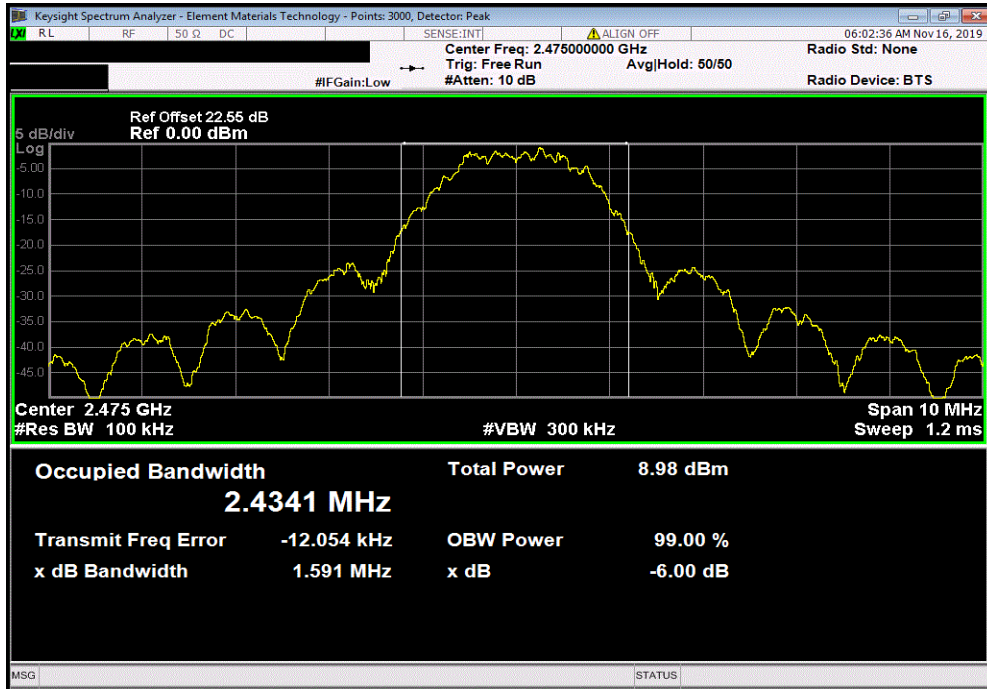

# OUTPUT POWER



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.



# OUTPUT POWER



TelTx 2019.08.30.0 XMI 2019.09.05

EUT: GEO10		Work Order: EMPM0079	
Serial Number: 3403F		Date: 15-Nov-19	
Customer: Emerson		Temperature: 22.7 °C	
Attendees: None		Humidity: 24.4% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Dustin Sparks		Power: Battery	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Dustin Sparks</i>	


	Out Pwr (dBm)	Limit (dBm)	Result
Geo, Low Channel (2405 MHz)	1.544	30	Pass
Geo, Mid Channel (2440 MHz)	3.206	30	Pass
Geo, High Channel (2475 MHz)	2.22	30	Pass

# OUTPUT POWER




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)						
				Out Pwr (dBm)	Limit (dBm)	Result
				1.544	30	Pass

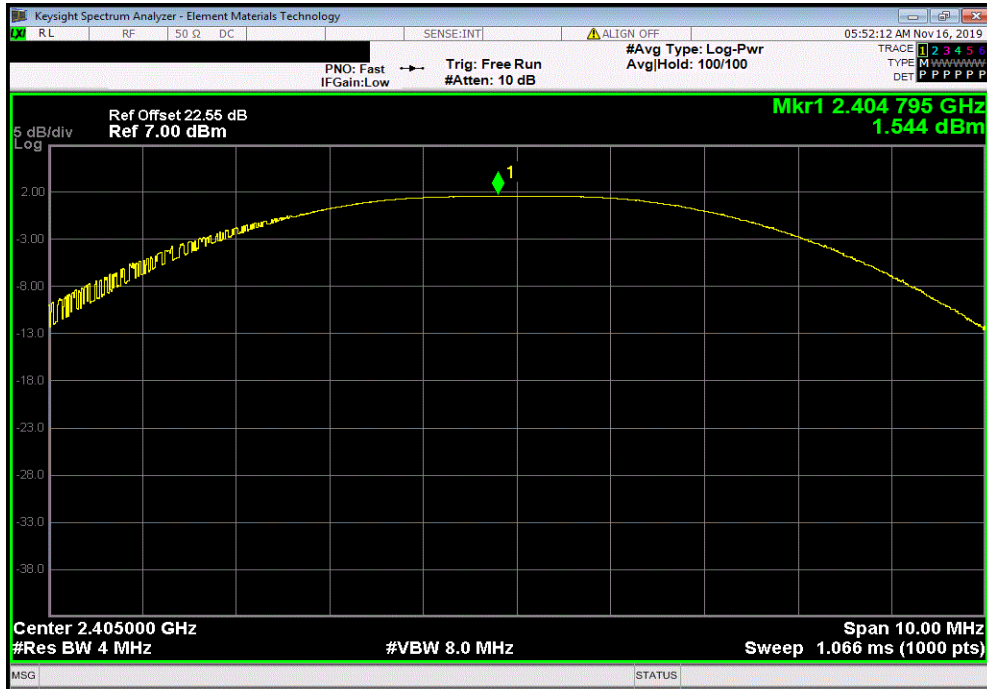

Geo, Mid Channel (2440 MHz)						
				Out Pwr (dBm)	Limit (dBm)	Result
				3.206	30	Pass

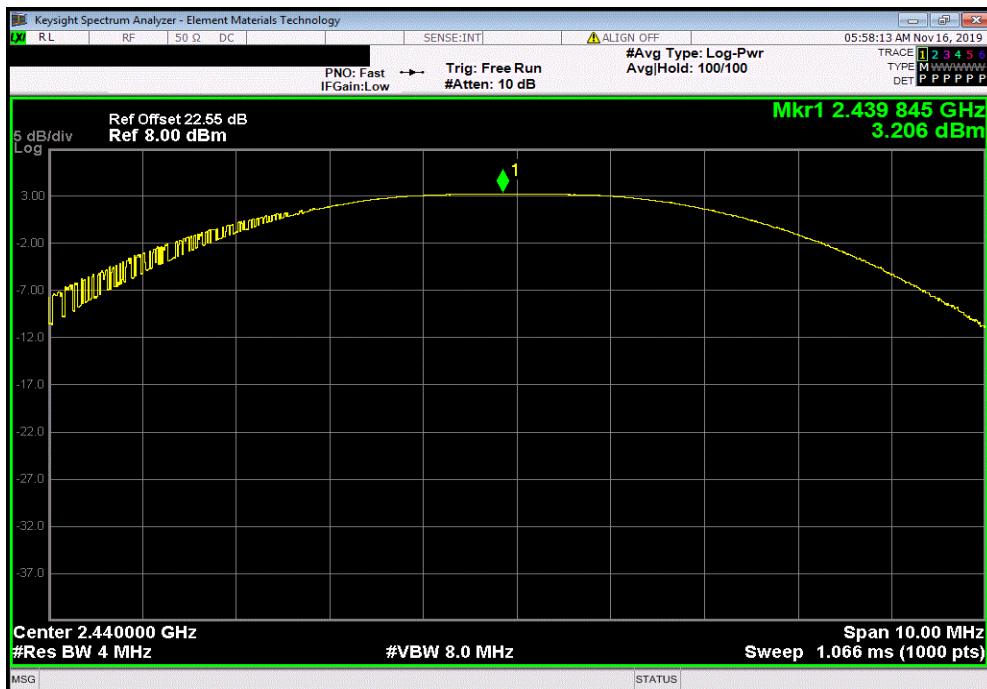


# OUTPUT POWER



TbTx 2019.08.30.0 XMI 2019.09.05

Geo, High Channel (2475 MHz)				Out Pwr (dBm)	Limit (dBm)	Result
				2.22	30	Pass

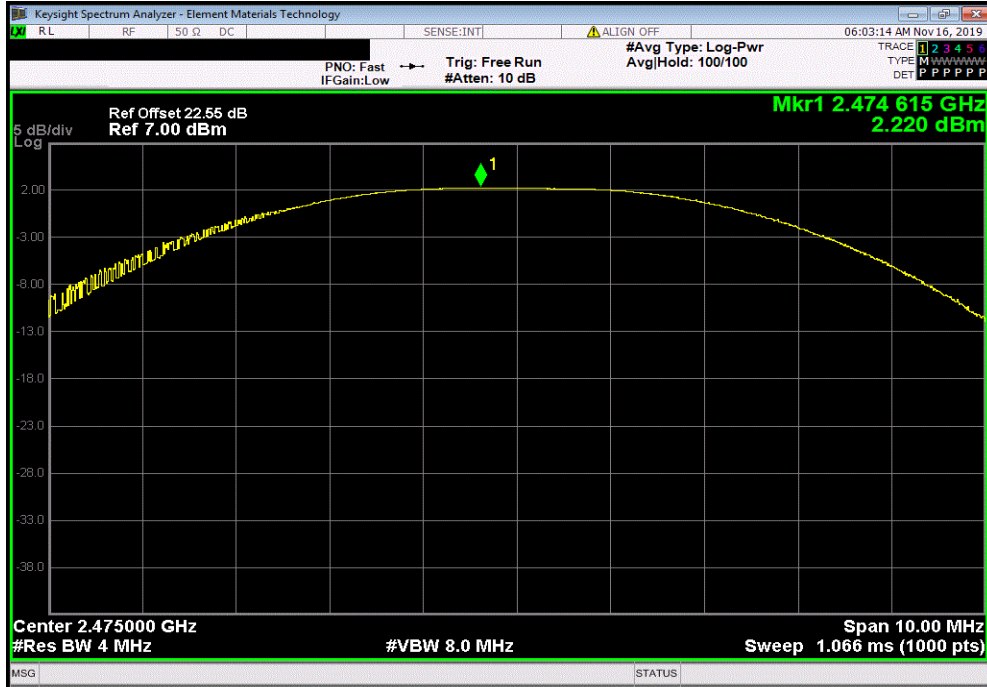

# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

The antenna gain of the EUT was added to the output power in order to get the EIRP.

# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TelTx 2019.08.30.0 XMI 2019.09.05


EUT: GEO10		Work Order: EMPM0079				
Serial Number: 3403F		Date: 15-Nov-19				
Customer: Emerson		Temperature: 22.7 °C				
Attendees: None		Humidity: 24.5% RH				
Project: None		Barometric Pres.: 1030 mbar				
Tested by: Dustin Sparks		Power: Battery				
Job Site: MN08						
<b>TEST SPECIFICATIONS</b>						
FCC 15.247:2019		Test Method				
		ANSI C63.10:2013				
<b>COMMENTS</b>						
None						
<b>DEVIATIONS FROM TEST STANDARD</b>						
None						
Configuration #	1	Signature <i>Dustin Sparks</i>				
		Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
Geo, Low Channel (2405 MHz)		1.544	-3.75	-2.206	36	Pass
Geo, Mid Channel (2440 MHz)		3.206	-3.75	-0.544	36	Pass
Geo, High Channel (2475 MHz)		2.22	-3.75	-1.53	36	Pass

# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
1.544	-3.75	-2.206	36	Pass		

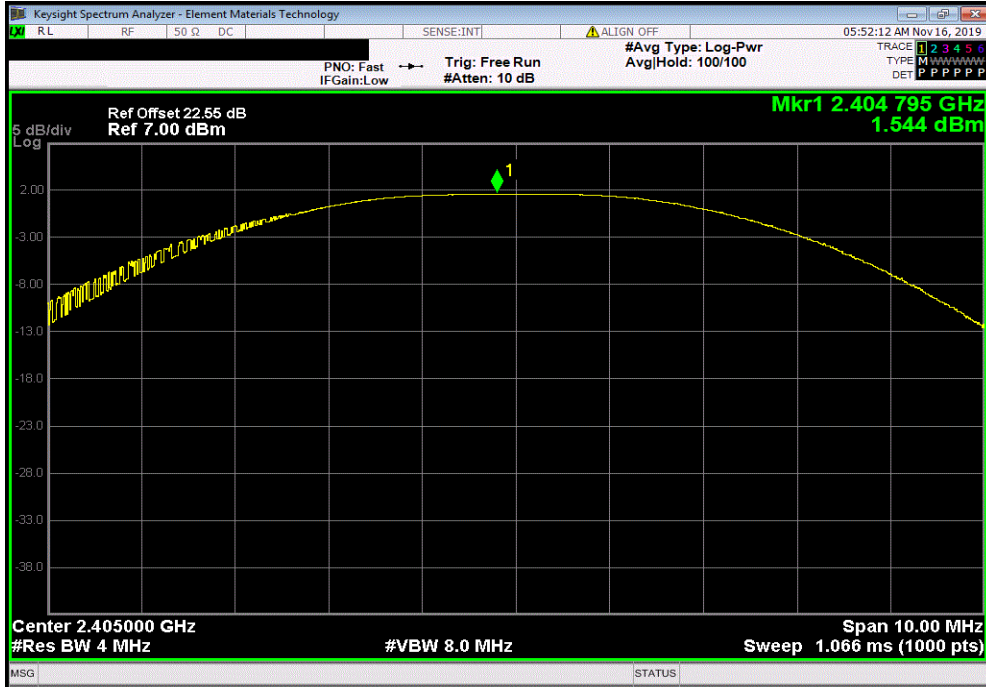

Geo, Mid Channel (2440 MHz)						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
3.206	-3.75	-0.544	36	Pass		

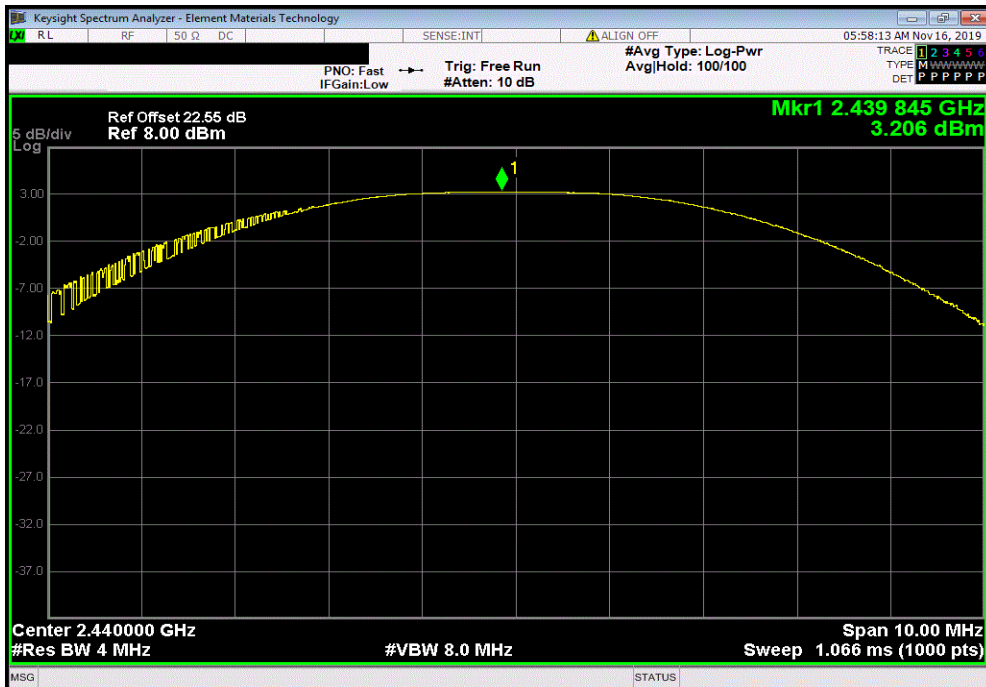



# POWER SPECTRAL DENSITY



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.



# POWER SPECTRAL DENSITY



TelTx 2019.08.30.0 XMI 2019.09.05

EUT: GEO10		Work Order: EMPM0079	
Serial Number: 3403F		Date: 15-Nov-19	
Customer: Emerson		Temperature: 22.7 °C	
Attendees: None		Humidity: 24.5% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Dustin Sparks		Power: Battery	
Job Site: MN08			
<b>TEST SPECIFICATIONS</b>			
FCC 15.247:2019		ANSI C63.10:2013	
<b>COMMENTS</b>			
None			
<b>DEVIATIONS FROM TEST STANDARD</b>			
None			
Configuration #	1	Signature <i>Dustin Sparks</i>	


	Value dBm/3kHz	Limit < dBm/3kHz	Results
Geo, Low Channel (2405 MHz)	-10.249	8	Pass
Geo, Mid Channel (2440 MHz)	-8.072	8	Pass
Geo, High Channel (2475 MHz)	-9.739	8	Pass

# POWER SPECTRAL DENSITY




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-10.249	8	Pass			

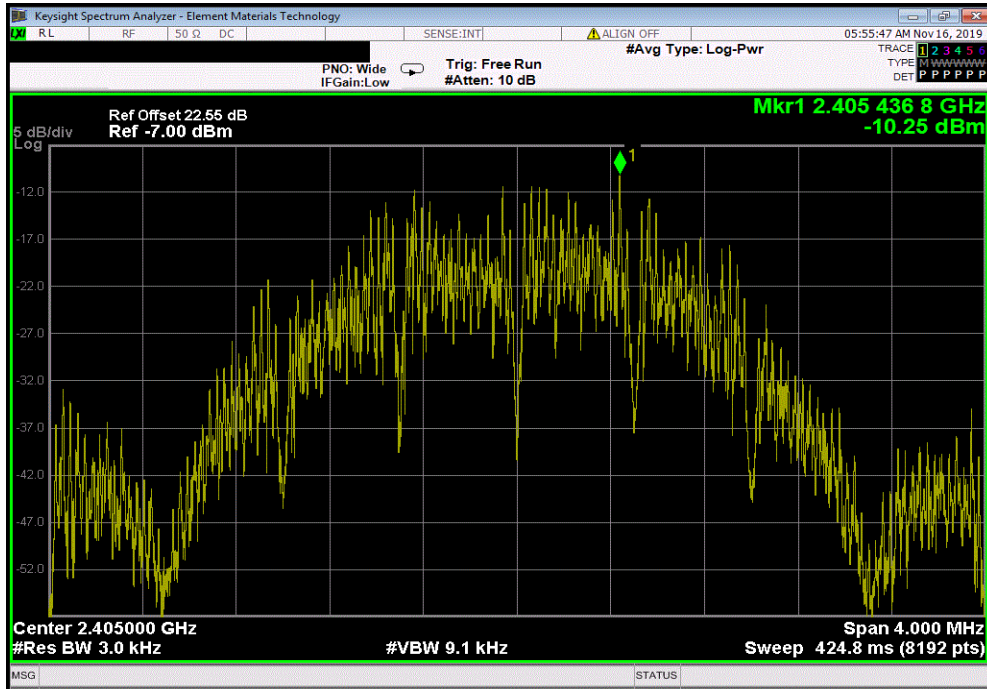

Geo, Mid Channel (2440 MHz)						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-8.072	8	Pass			

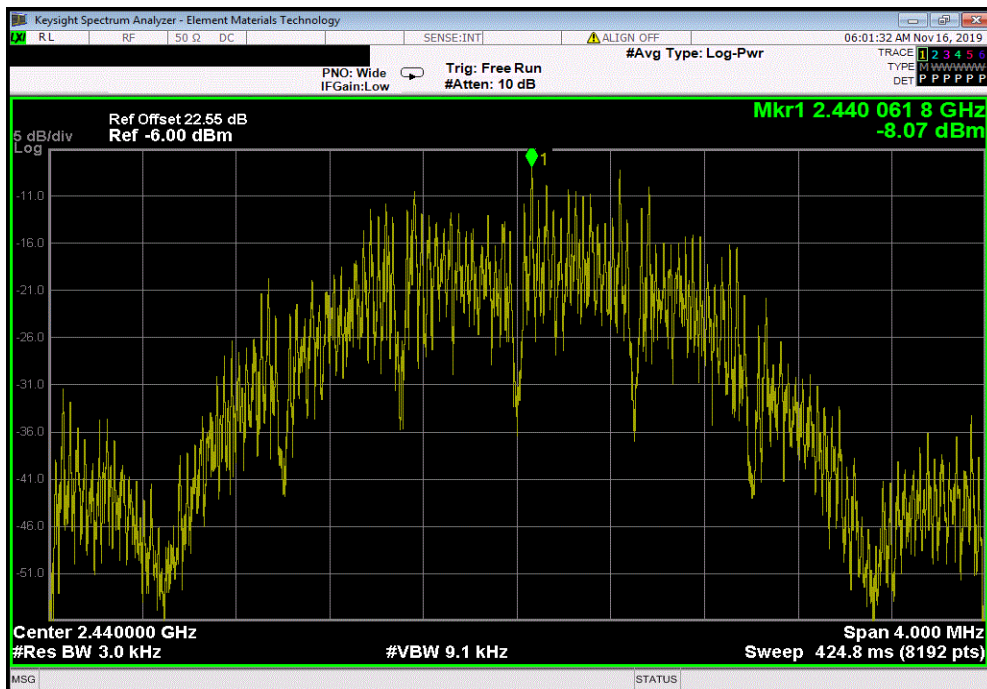


# POWER SPECTRAL DENSITY



TbTx 2019.08.30.0 XMI 2019.09.05

Geo, High Channel (2475 MHz)			
	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-9.739	8	Pass

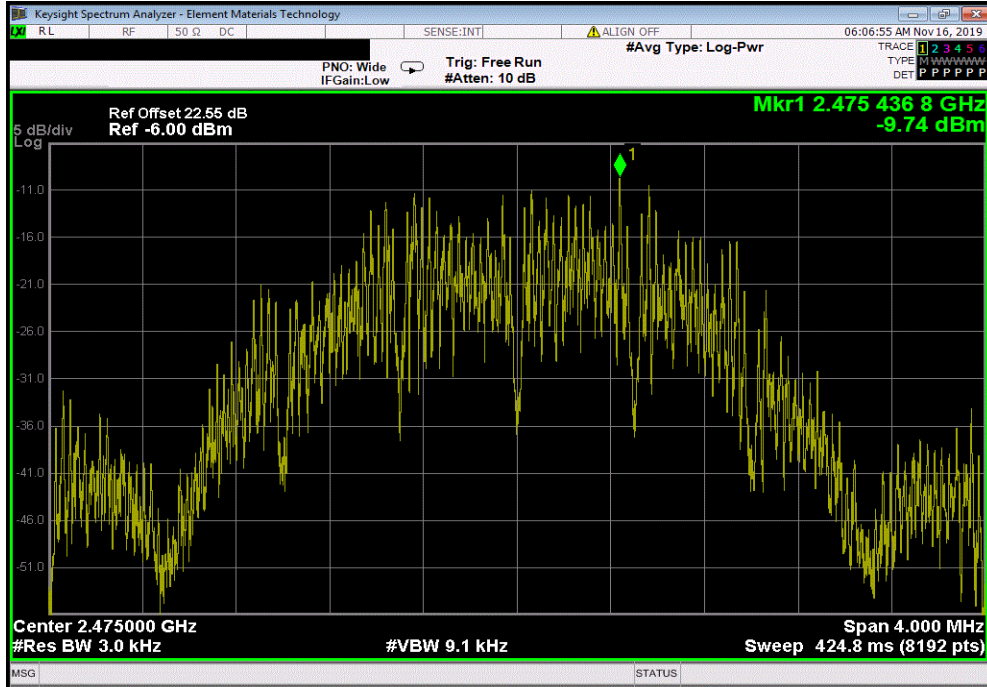

# BAND EDGE COMPLIANCE



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

# BAND EDGE COMPLIANCE



TelTx 2019.08.30.0 XMI 2019.09.05


EUT: GEO10		Work Order: EMPM0079	
Serial Number: 3403F		Date: 15-Nov-19	
Customer: Emerson		Temperature: 22.6 °C	
Attendees: None		Humidity: 24.5% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Dustin Sparks		Power: Battery	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 15.247:2019		ANSI C63.10:2013	
TEST METHOD			
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Dustin Sparks</i>	
		Value (dBc)	Limit ≤ (dBc) Result
Geo, Low Channel (2405 MHz)		-41.24	-20 Pass
Geo, High Channel (2475 MHz)		-49.46	-20 Pass

# BAND EDGE COMPLIANCE




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)						
				Value (dBc)	Limit ≤ (dBc)	Result
				-41.24	-20	Pass

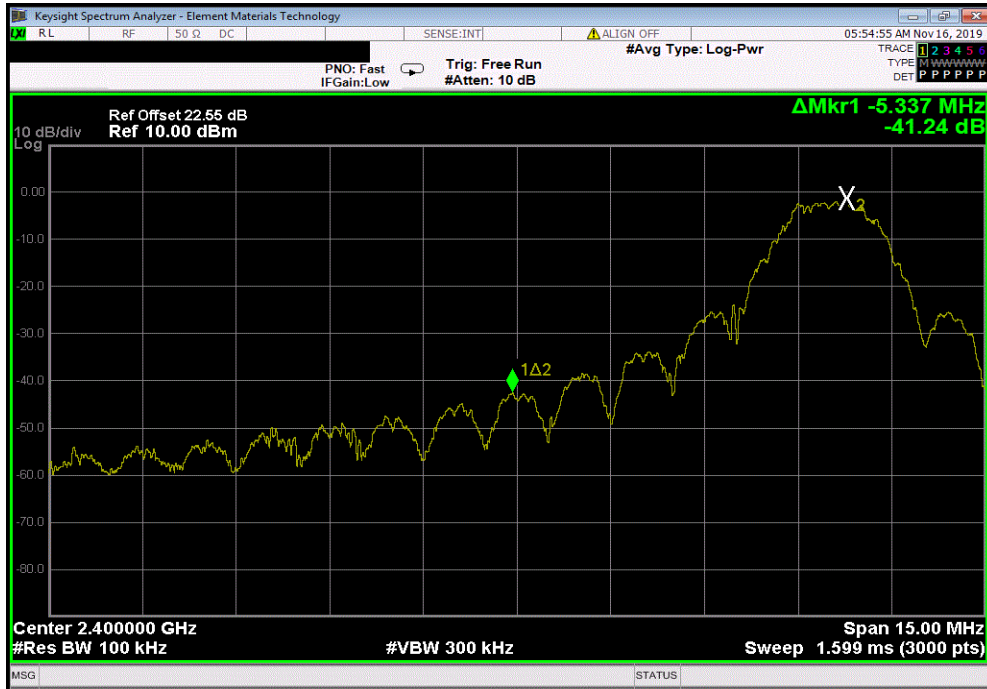

Geo, High Channel (2475 MHz)						
				Value (dBc)	Limit ≤ (dBc)	Result
				-49.46	-20	Pass

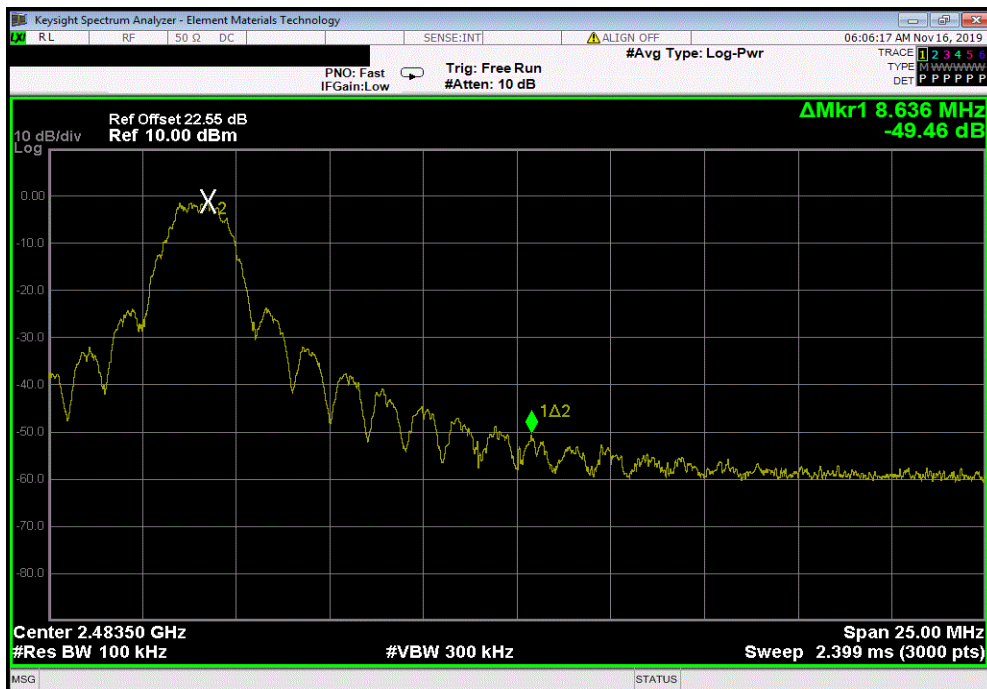

# SPURIOUS CONDUCTED EMISSIONS



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	15-Sep-19	15-Sep-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

# SPURIOUS CONDUCTED EMISSIONS



TelTx 2019.08.30.0 XMt 2019.09.05

EUT: GEO10		Work Order: EMPM0079	
Serial Number: 3403F		Date: 15-Nov-19	
Customer: Emerson		Temperature: 22.7 °C	
Attendees: None		Humidity: 24.4% RH	
Project: None		Barometric Pres.: 1030 mbar	
Tested by: Dustin Sparks		Power: Battery	
Job Site: MN08			
TEST SPECIFICATIONS			
FCC 15.247:2019		ANSI C63.10:2013	
TEST METHOD			
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Dustin Sparks</i>	

	Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
Geo, Low Channel (2405 MHz)	Fundamental	2405.26	N/A	N/A	N/A
Geo, Low Channel (2405 MHz)	30 MHz - 12.5 GHz	4642.88	-50.62	-20	Pass
Geo, Low Channel (2405 MHz)	12.5 GHz - 25 GHz	24116.41	-49.05	-20	Pass
Geo, Mid Channel (2440 MHz)	Fundamental	2440.25	N/A	N/A	N/A
Geo, Mid Channel (2440 MHz)	30 MHz - 12.5 GHz	8097.21	-52.85	-20	Pass
Geo, Mid Channel (2440 MHz)	12.5 GHz - 25 GHz	24093.52	-49.89	-20	Pass
Geo, High Channel (2475 MHz)	Fundamental	2475.25	N/A	N/A	N/A
Geo, High Channel (2475 MHz)	30 MHz - 12.5 GHz	3822.31	-50.99	-20	Pass
Geo, High Channel (2475 MHz)	12.5 GHz - 25 GHz	24001.95	-49.37	-20	Pass




# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2405.26	N/A	N/A	N/A	

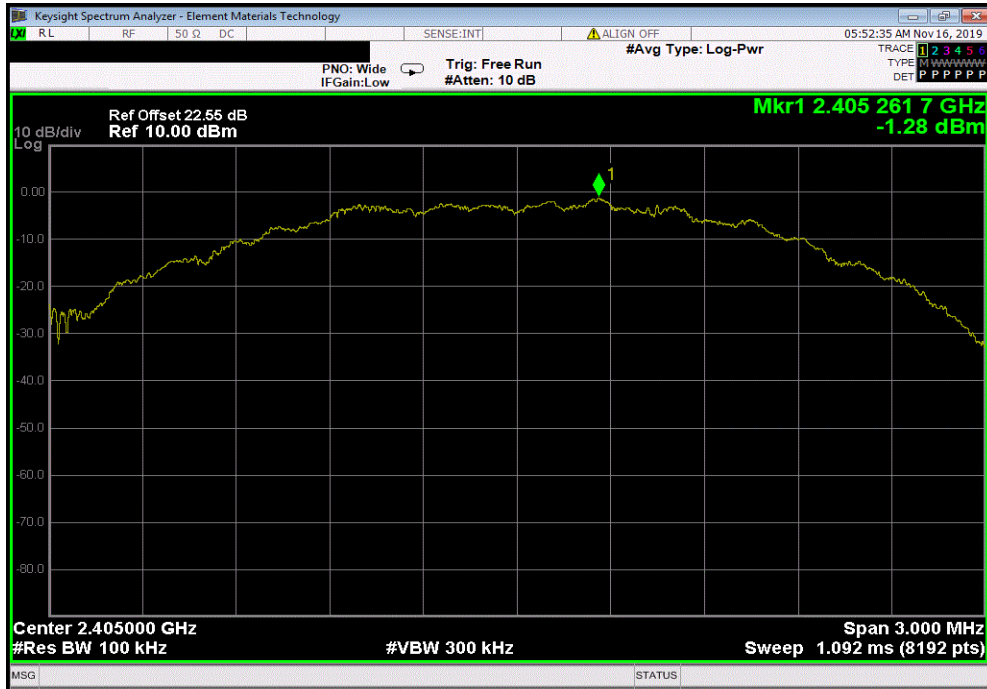

Geo, Low Channel (2405 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	4642.88	-50.62	-20	Pass	

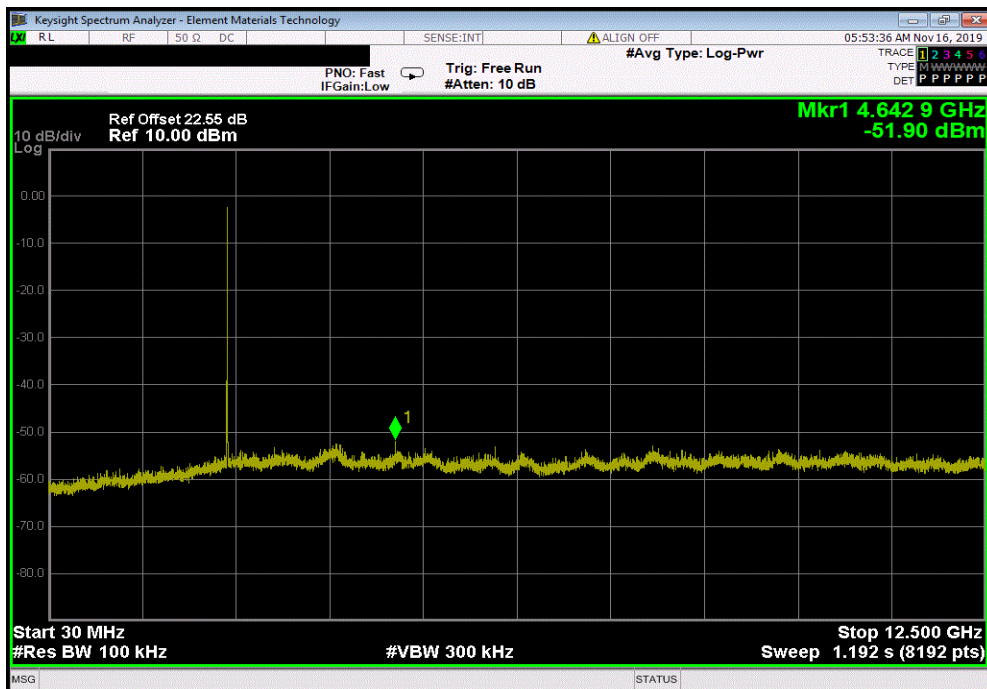


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Low Channel (2405 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24116.41	-49.05	-20	Pass	

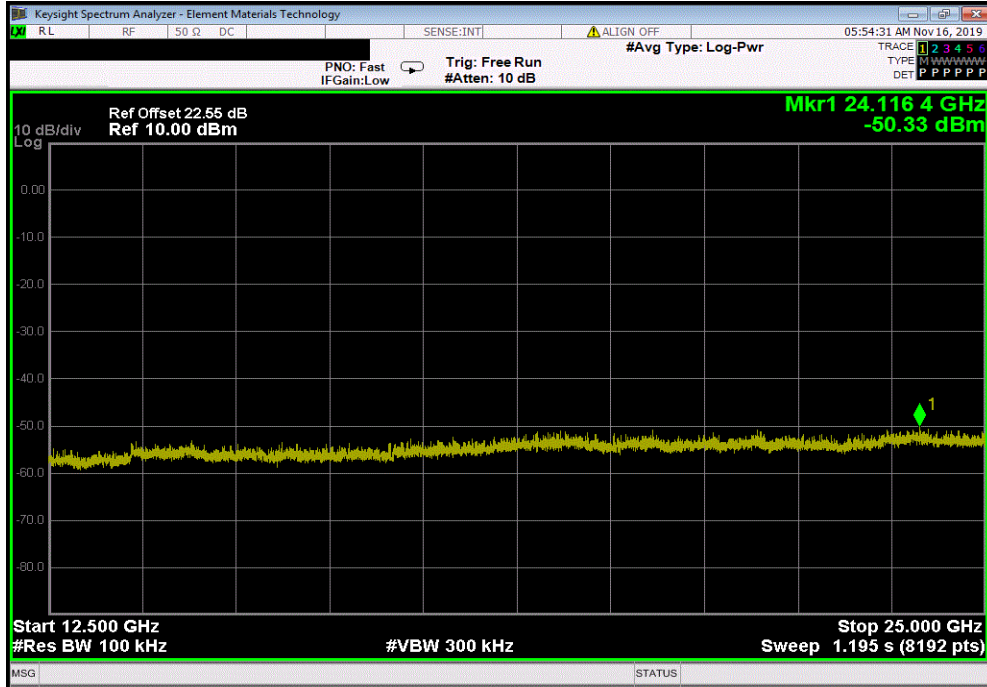

Geo, Mid Channel (2440 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2440.25	N/A	N/A	N/A	

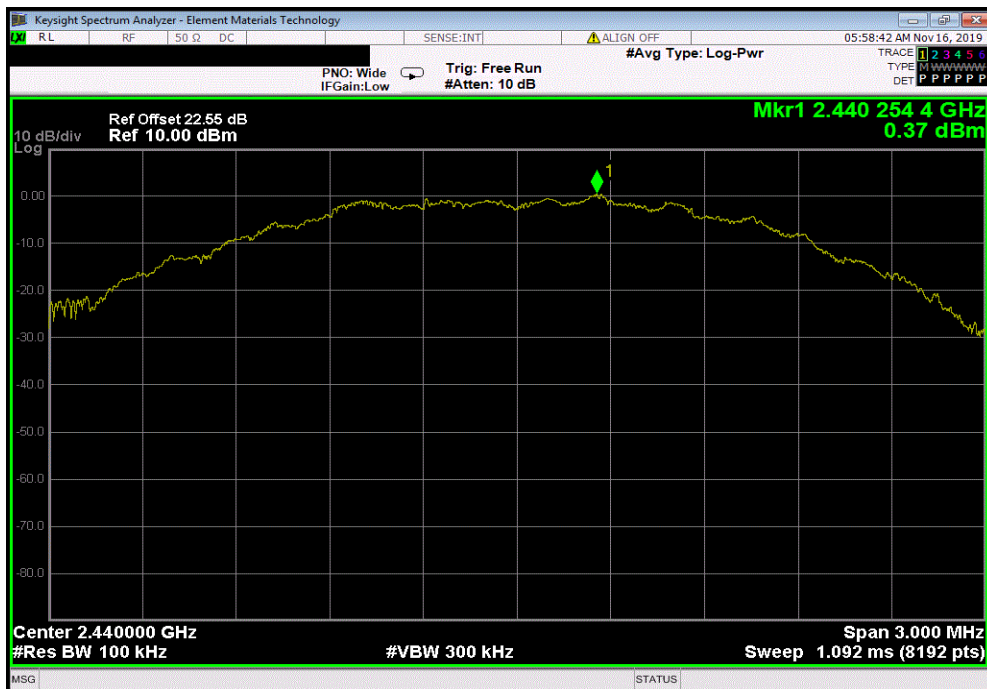


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, Mid Channel (2440 MHz)				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz	8097.21	-52.85	-20	Pass

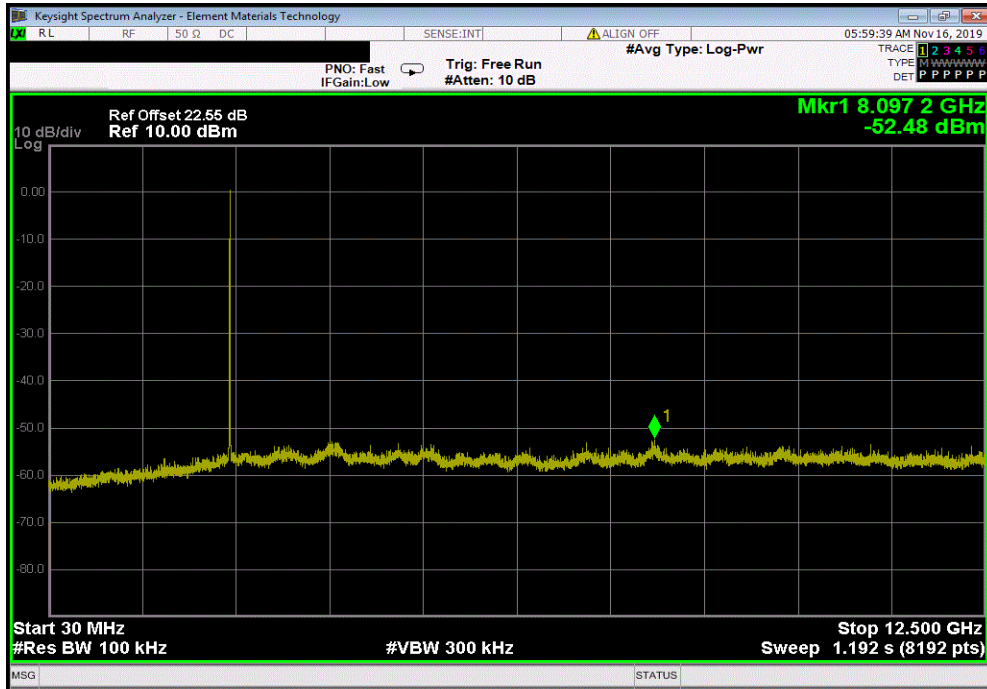

Geo, Mid Channel (2440 MHz)				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	24093.52	-49.89	-20	Pass

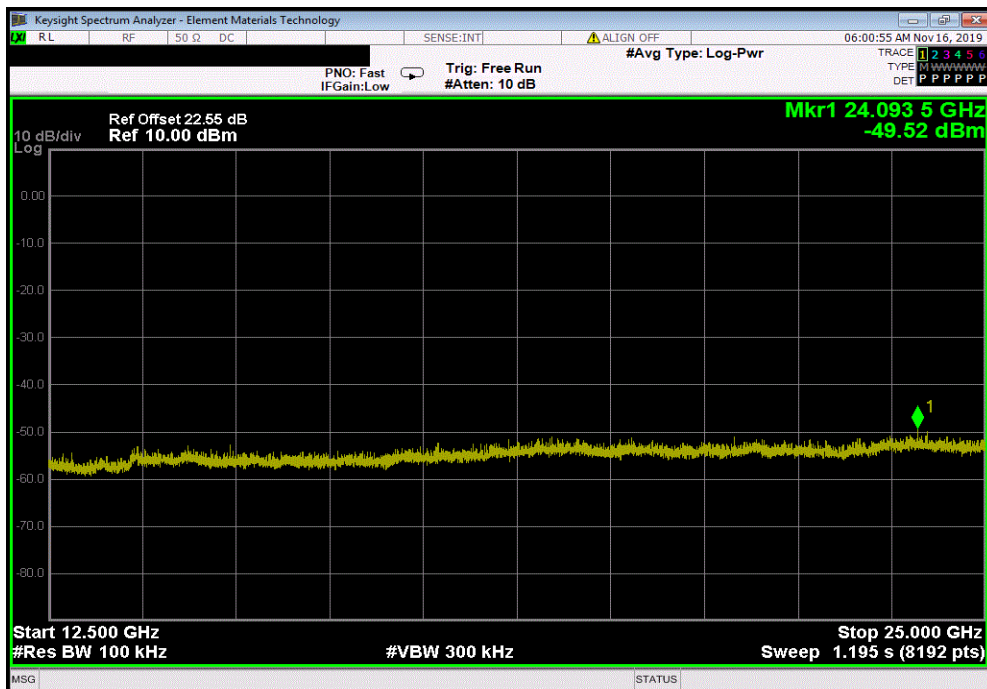


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

Geo, High Channel (2475 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2475.25	N/A	N/A	N/A	

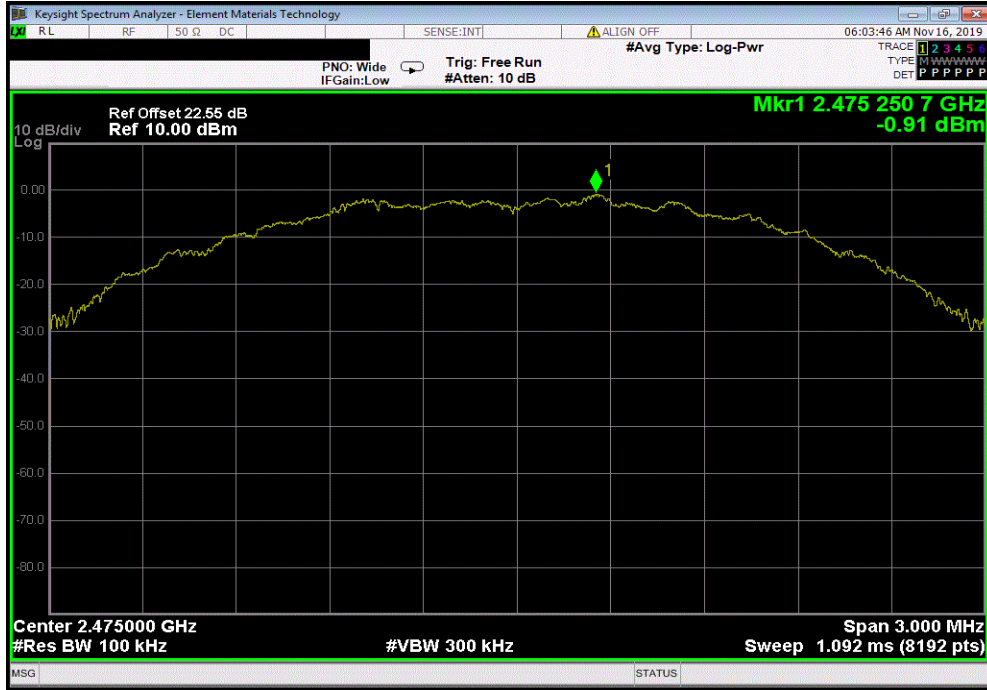

Geo, High Channel (2475 MHz)					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	3822.31	-50.99	-20	Pass	

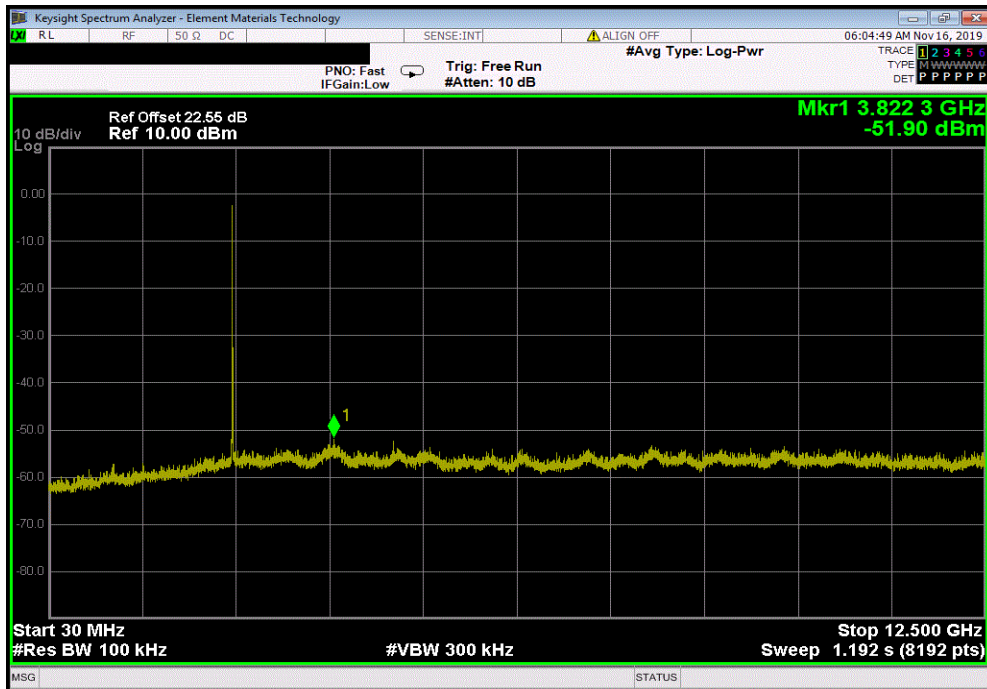

# SPURIOUS CONDUCTED EMISSIONS



TbTx 2019.08.30.0 XMI 2019.09.05

Geo, High Channel (2475 MHz)				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	24001.95	-49.37	-20	Pass

