


Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5270MHz	Humidity (%RH)	58.0

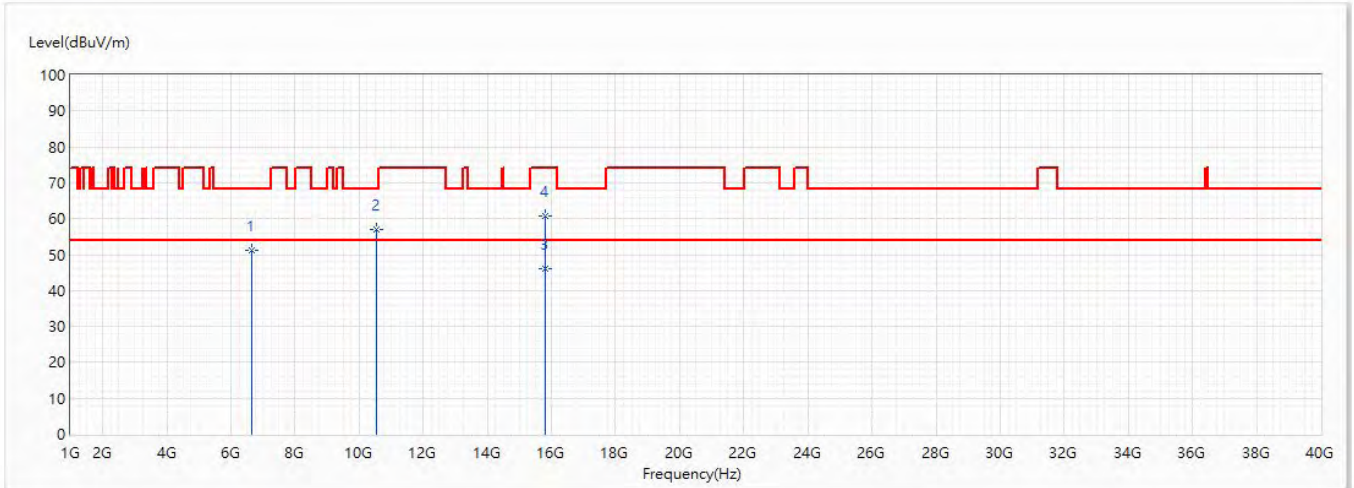


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6640.04	51.15	68.20	-17.05	56.52	-5.37	PK
2	10540	57.05	68.20	-11.15	53.64	3.41	PK
* 3	15810	46.12	54.00	-7.87	39.83	6.29	AV
4	15810	60.71	74.00	-13.29	54.42	6.29	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are less than 20dBm form the limt, so as not reported.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5270MHz	Humidity (%RH)	58.0

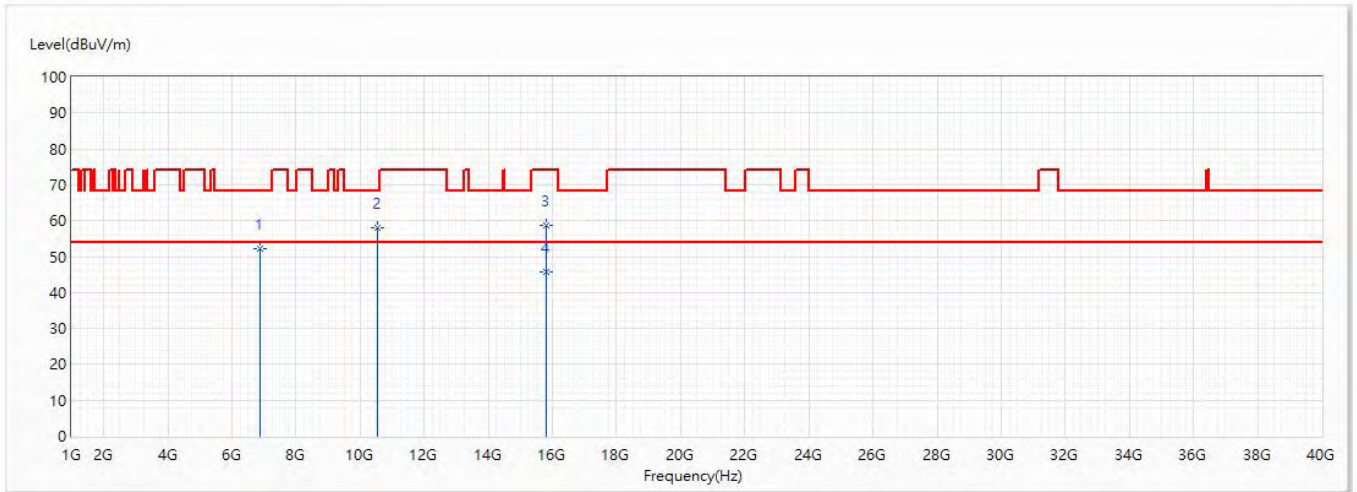


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6889.7	52.23	68.20	-15.97	56.69	-4.46	PK
2	10540	57.89	68.20	-10.31	54.48	3.41	PK
3	15810	58.75	74.00	-15.25	52.46	6.29	PK
* 4	15810	45.67	54.00	-8.33	39.38	6.29	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are less than 20dBm form the limt, so as not reported.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5310MHz	Humidity (%RH)	58.0

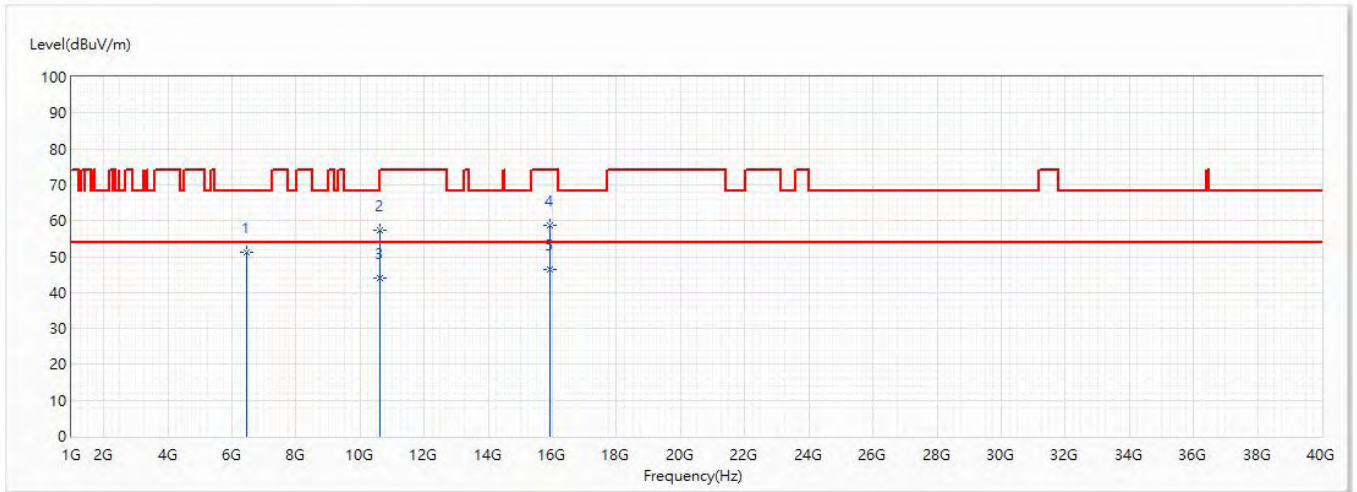


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6441.3	51.29	68.20	-16.91	57.52	-6.23	PK
2	10620	57.35	74.00	-16.65	53.87	3.48	PK
3	10620	44.07	54.00	-9.93	40.59	3.48	AV
4	15930	58.67	74.00	-15.33	52.20	6.47	PK
* 5	15930	46.25	54.00	-7.75	39.78	6.47	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are less than 20dBm form the limit, so as not reported.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5310MHz	Humidity (%RH)	58.0

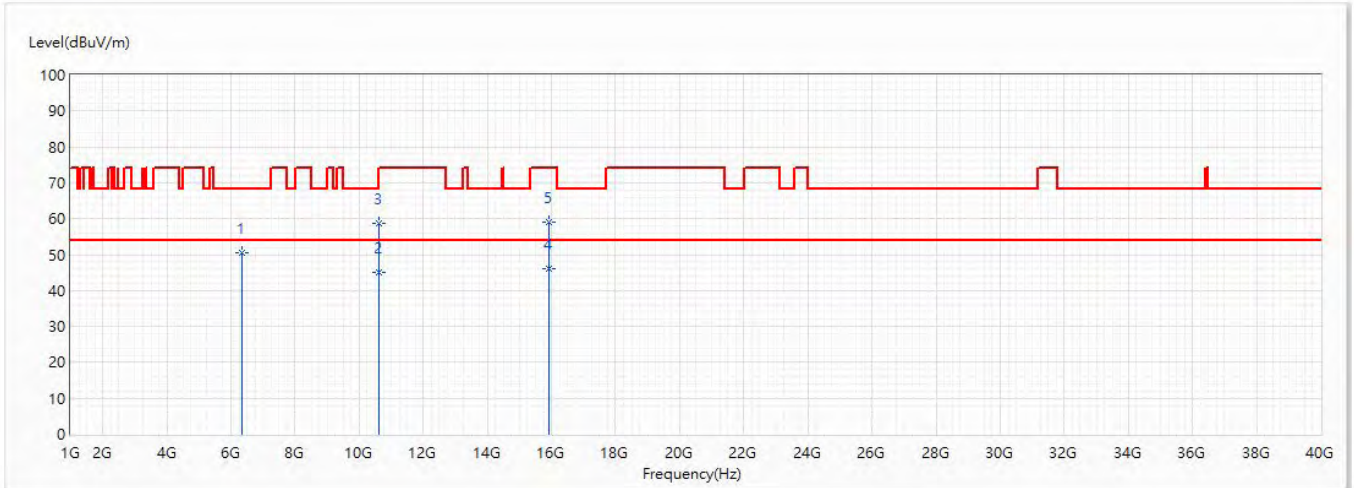


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6339	50.56	68.20	-17.64	57.33	-6.77	PK
2	10620	45.02	54.00	-8.98	41.54	3.48	AV
3	10620	58.71	74.00	-15.29	55.23	3.48	PK
* 4	15930	46.23	54.00	-7.77	39.76	6.47	AV
5	15930	59.01	74.00	-14.99	52.54	6.47	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are less than 20dBm form the limit, so as not reported.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5290MHz	Humidity (%RH)	58.0

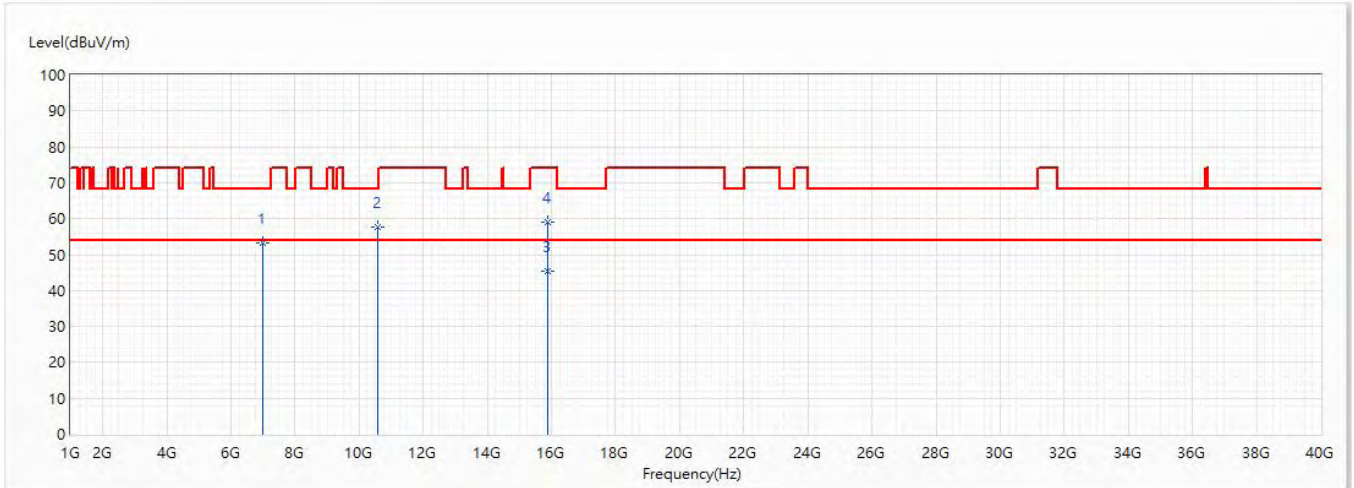


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6987.5	53.15	68.20	-15.05	57.23	-4.08	PK
2	10580	57.68	68.20	-10.52	54.26	3.42	PK
* 3	15870	45.39	54.00	-8.61	38.81	6.58	AV
4	15870	59.15	74.00	-14.85	52.57	6.58	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are less than 20dBm form the limit, so as not reported.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5290MHz	Humidity (%RH)	58.0

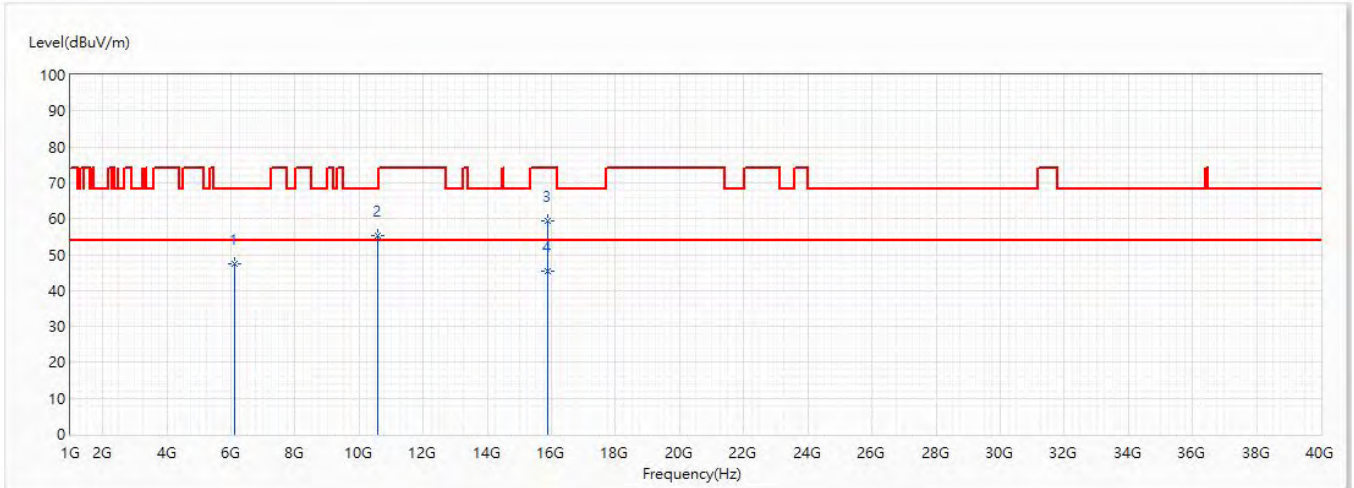


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6125	47.59	68.20	-20.61	55.73	-8.14	PK
2	10580	55.36	68.20	-12.84	51.94	3.42	PK
3	15870	59.39	74.00	-14.61	52.81	6.58	PK
* 4	15870	45.54	54.00	-8.46	38.96	6.58	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are less than 20dBm form the limt, so as not reported.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5500MHz	Humidity (%RH)	58.0

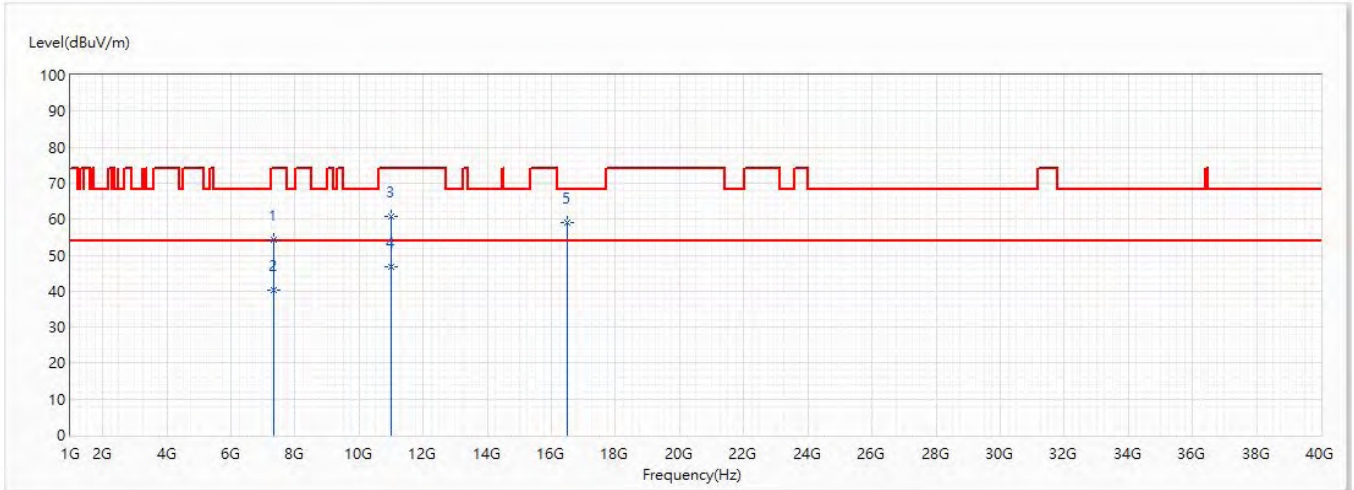


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7333.33	54.21	74.00	-19.79	56.98	-2.77	PK
2	7333.333	40.37	54.00	-13.63	43.14	-2.77	AV
3	11000	60.83	74.00	-13.17	55.99	4.84	PK
* 4	11000	46.84	54.00	-7.16	42.00	4.84	AV
5	16500	59.04	68.20	-9.16	52.69	6.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5500MHz	Humidity (%RH)	58.0

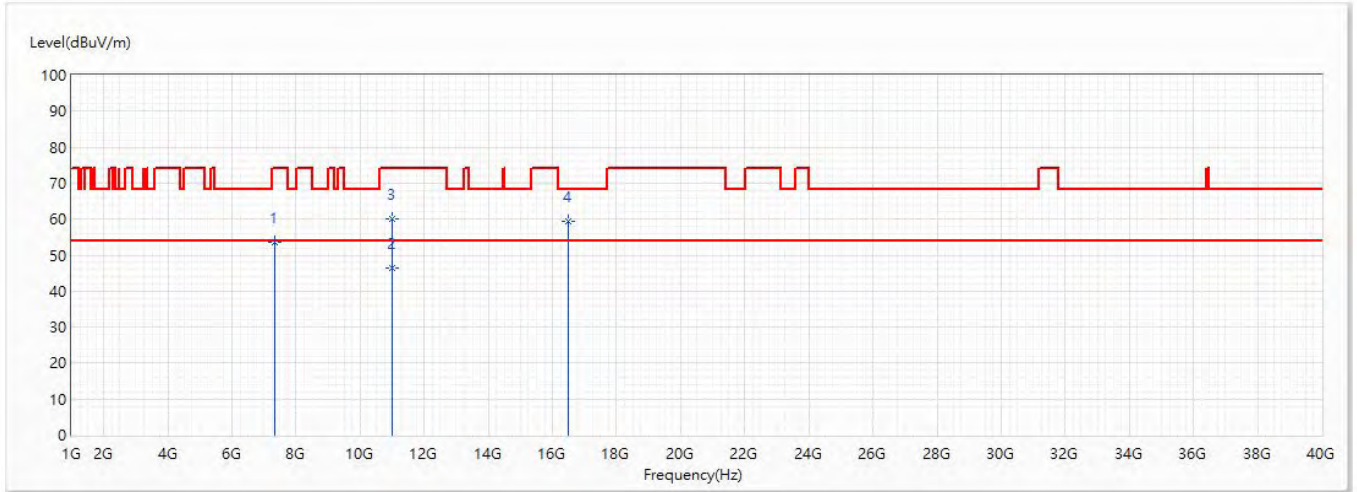


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7333.333	53.62	74.00	-20.38	56.39	-2.77	PK
* 2	11000	46.48	54.00	-7.52	41.64	4.84	AV
3	11000	59.99	74.00	-14.01	55.15	4.84	PK
4	16500	59.23	68.20	-8.97	52.88	6.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5580MHz	Humidity (%RH)	58.0

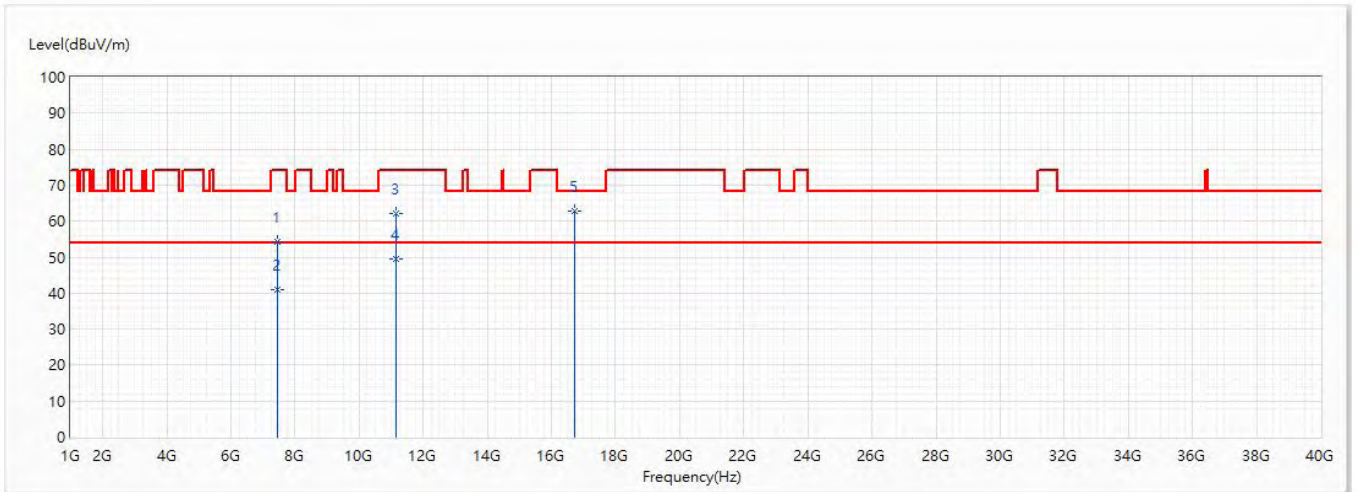


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7440	54.35	74.00	-19.65	56.67	-2.32	PK
2	7440	40.82	54.00	-13.18	43.14	-2.32	AV
3	11160	62.12	74.00	-11.88	57.32	4.80	PK
* 4	11160	49.34	54.00	-4.66	44.54	4.80	AV
5	16740	62.87	68.20	-5.33	55.79	7.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5580MHz	Humidity (%RH)	58.0

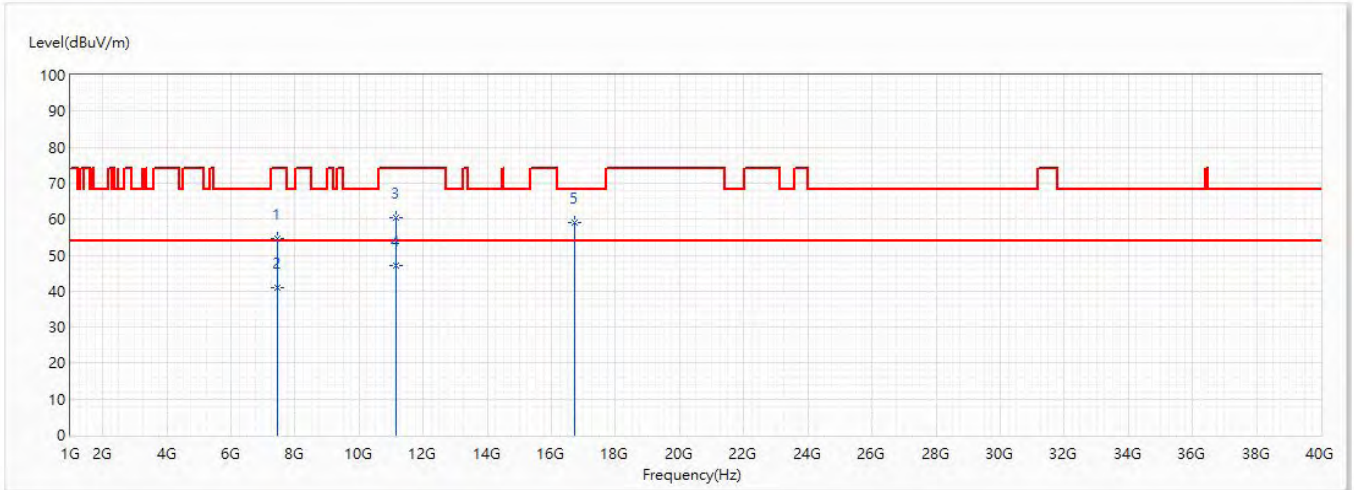


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7440	54.56	74.00	-19.44	56.88	-2.32	PK
2	7440	40.92	54.00	-13.08	43.24	-2.32	AV
3	11160	60.34	74.00	-13.66	55.54	4.80	PK
* 4	11160	47.04	54.00	-6.96	42.24	4.80	AV
5	16740	58.98	68.20	-9.22	51.90	7.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5700MHz	Humidity (%RH)	58.0

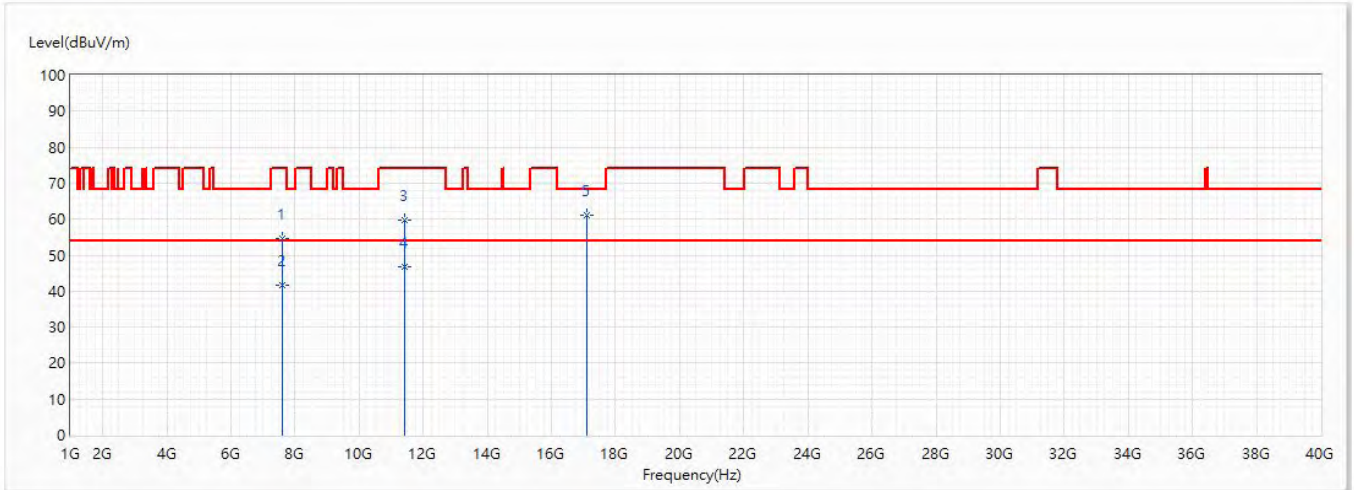


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7600	54.64	74.00	-19.36	56.75	-2.11	PK
2	7600	41.51	54.00	-12.49	43.62	-2.11	AV
3	11400	59.68	74.00	-14.32	54.77	4.91	PK
4	11400	46.68	54.00	-7.32	41.77	4.91	AV
* 5	17100	61.26	68.20	-6.94	52.93	8.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5700MHz	Humidity (%RH)	58.0

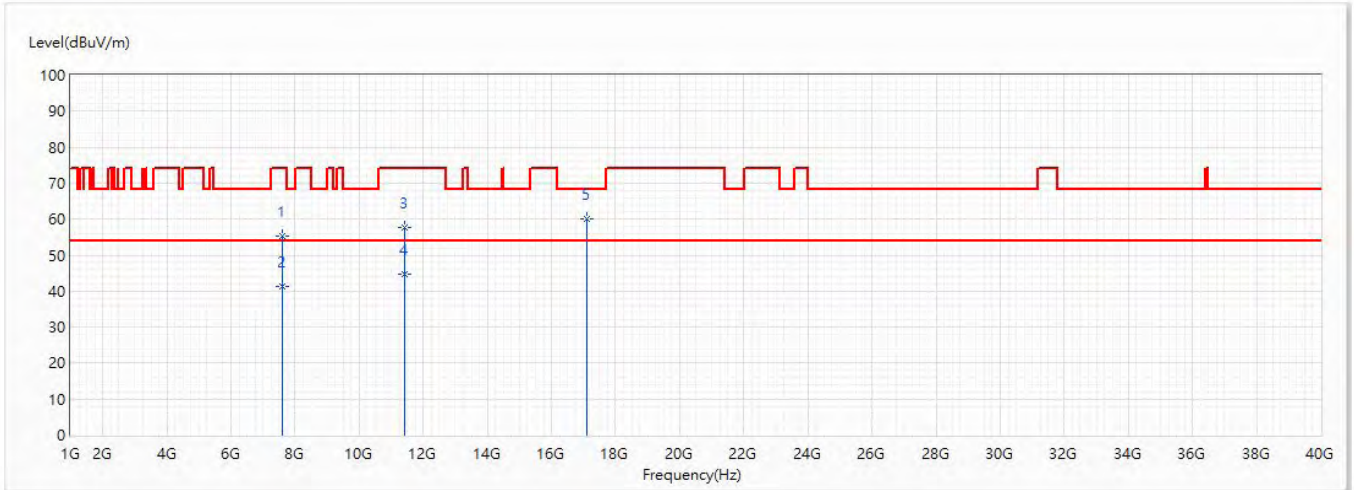


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7600	55.31	74.00	-18.69	57.42	-2.11	PK
2	7600	41.44	54.00	-12.56	43.55	-2.11	AV
3	11400	57.66	74.00	-16.34	52.75	4.91	PK
4	11400	44.83	54.00	-9.17	39.92	4.91	AV
* 5	17100	60.10	68.20	-8.10	51.77	8.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5500MHz	Humidity (%RH)	58.0

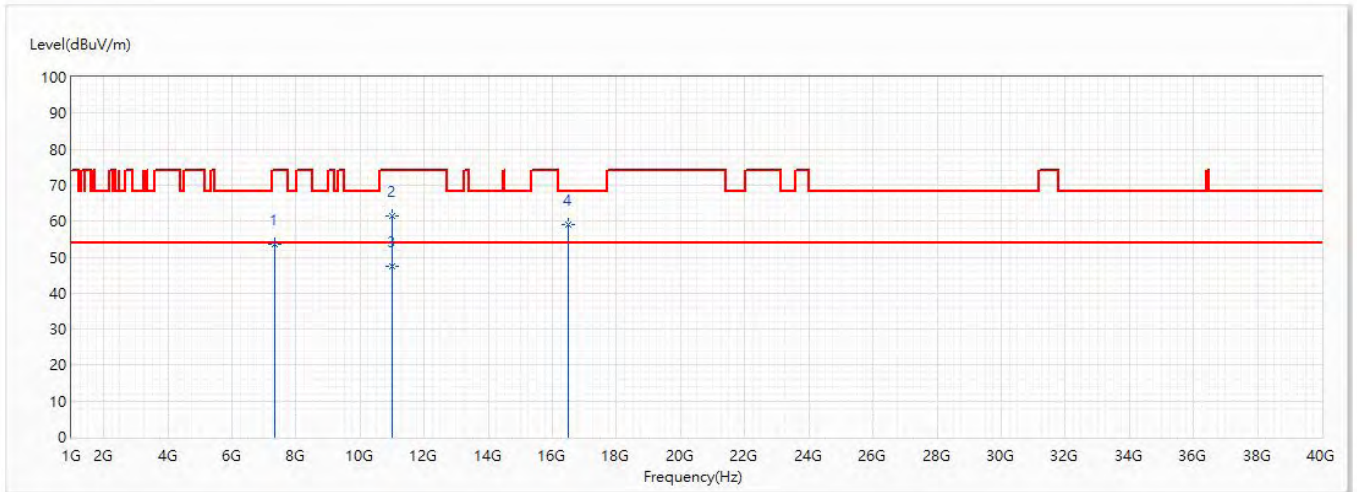


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7333.333	53.43	74.00	-20.57	56.20	-2.77	PK
2	11000	61.44	74.00	-12.56	56.60	4.84	PK
* 3	11000	47.30	54.00	-6.70	42.46	4.84	AV
4	16500	59.20	68.20	-9.00	52.85	6.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5500MHz	Humidity (%RH)	58.0

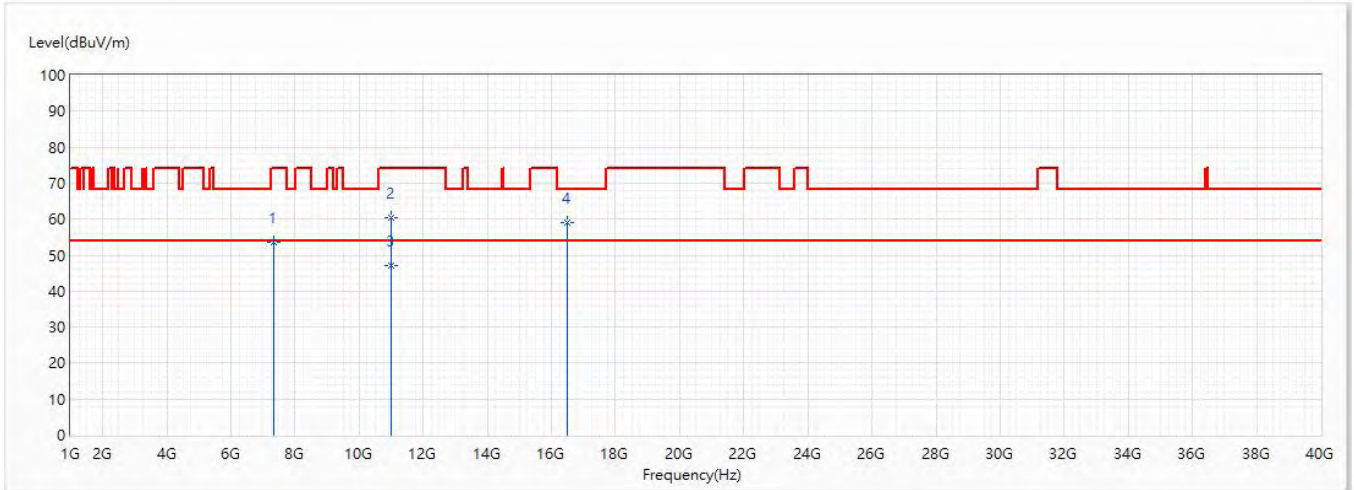


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7333.333	53.55	74.00	-20.45	56.32	-2.77	PK
2	11000	60.43	74.00	-13.57	55.59	4.84	PK
* 3	11000	46.95	54.00	-7.05	42.11	4.84	AV
4	16500	59.02	68.20	-9.18	52.67	6.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5580MHz	Humidity (%RH)	58.0

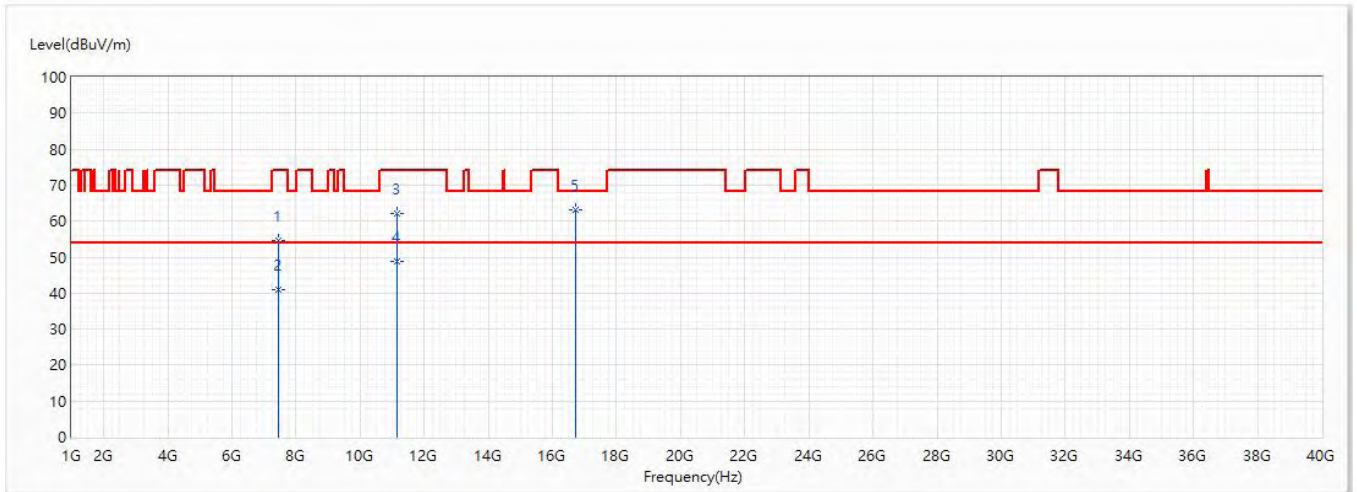


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7440	54.52	74.00	-19.48	56.84	-2.32	PK
2	7440	40.92	54.00	-13.08	43.24	-2.32	AV
3	11160	62.26	74.00	-11.74	57.46	4.80	PK
4	11160	48.86	54.00	-5.14	44.06	4.80	AV
* 5	16740	63.29	68.20	-4.91	56.21	7.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5580MHz	Humidity (%RH)	58.0

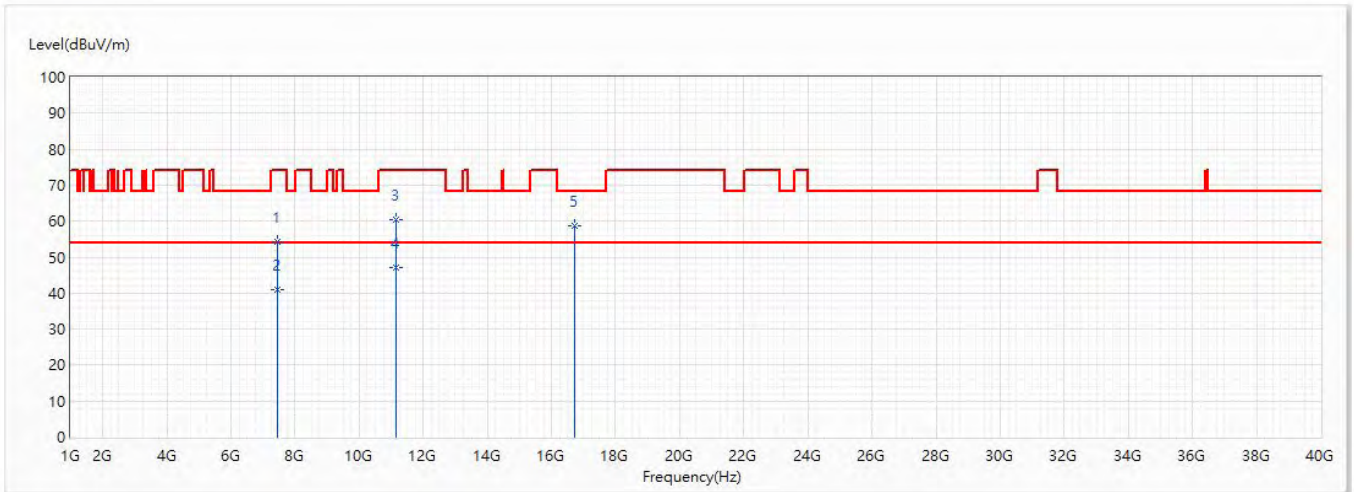


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7440	54.21	74.00	-19.79	56.53	-2.32	PK
2	7440	40.89	54.00	-13.11	43.21	-2.32	AV
3	11160	60.39	74.00	-13.61	55.59	4.80	PK
* 4	11160	46.95	54.00	-7.05	42.15	4.80	AV
5	16740	58.73	68.20	-9.47	51.65	7.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5700MHz	Humidity (%RH)	58.0

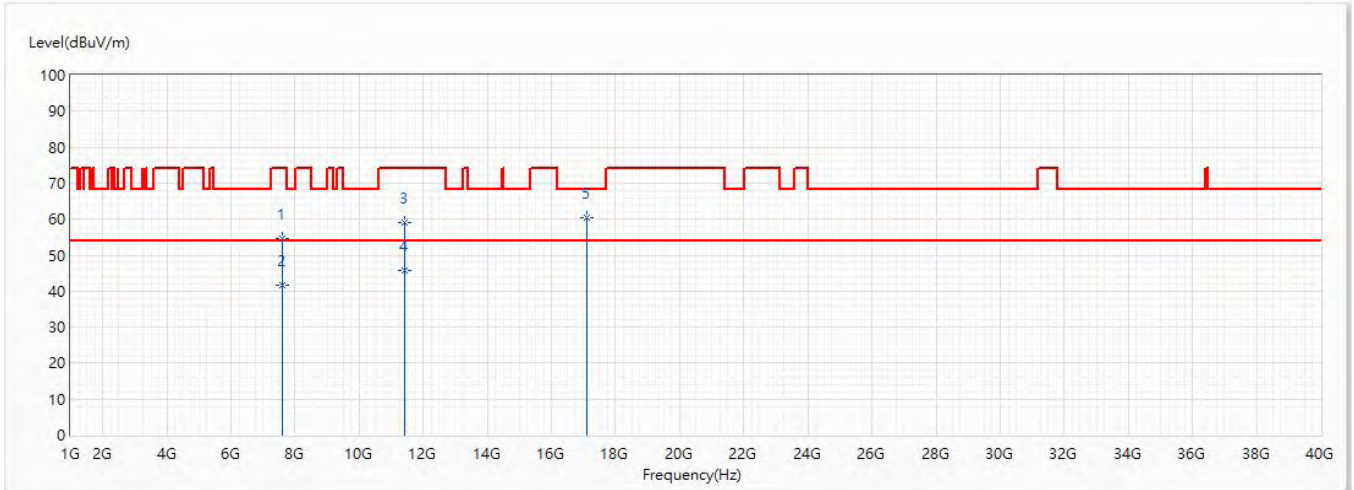


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7600	54.57	74.00	-19.43	56.68	-2.11	PK
2	7600	41.65	54.00	-12.35	43.76	-2.11	AV
3	11400	59.17	74.00	-14.83	54.26	4.91	PK
4	11400	45.68	54.00	-8.32	40.77	4.91	AV
* 5	17100	60.58	68.20	-7.62	52.25	8.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5700MHz	Humidity (%RH)	58.0

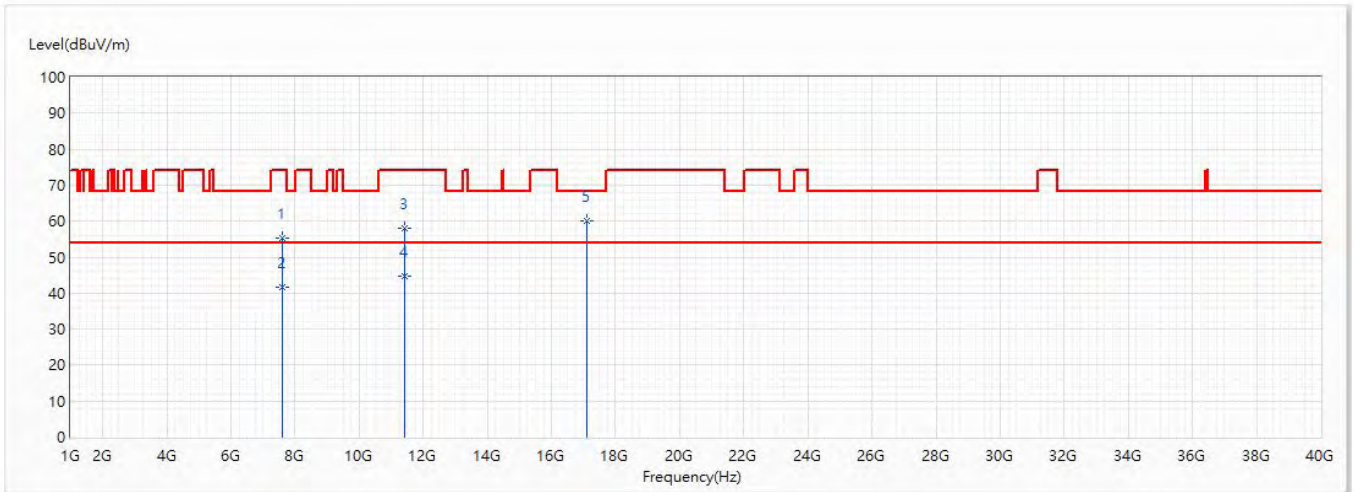


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7600	55.26	74.00	-18.74	57.37	-2.11	PK
2	7600	41.56	54.00	-12.44	43.67	-2.11	AV
3	11400	58.00	74.00	-16.00	53.09	4.91	PK
4	11400	44.64	54.00	-9.36	39.73	4.91	AV
* 5	17100	60.21	68.20	-7.99	51.88	8.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5510MHz	Humidity (%RH)	58.0

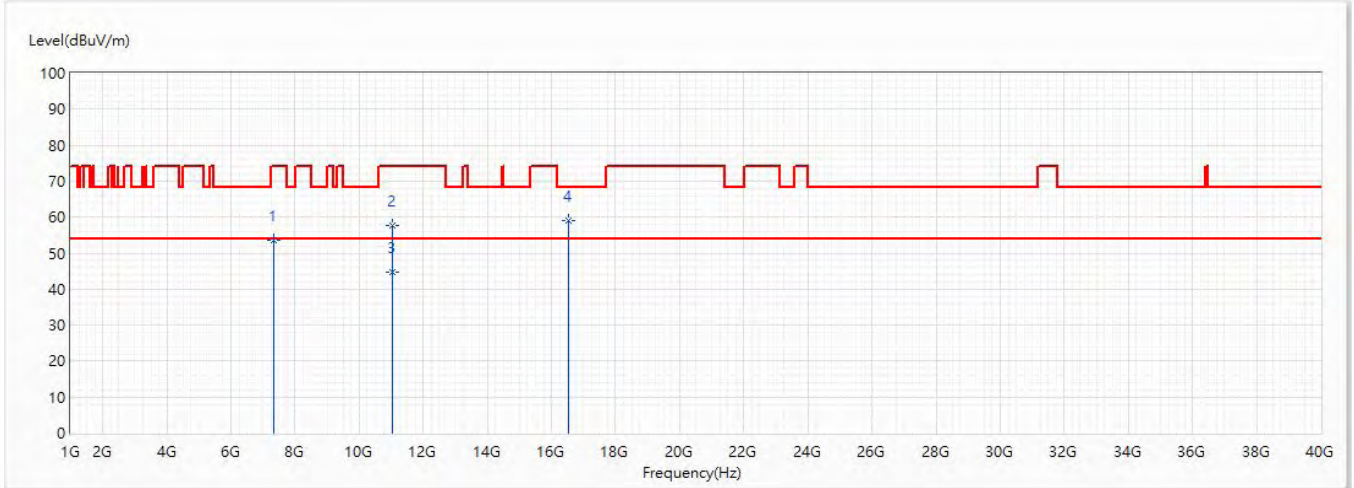


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7346.667	53.44	74.00	-20.56	56.14	-2.70	PK
2	11020	57.80	74.00	-16.20	53.02	4.78	PK
3	11020	44.80	54.00	-9.20	40.02	4.78	AV
* 4	16530	59.06	68.20	-9.14	52.42	6.64	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5510MHz	Humidity (%RH)	58.0

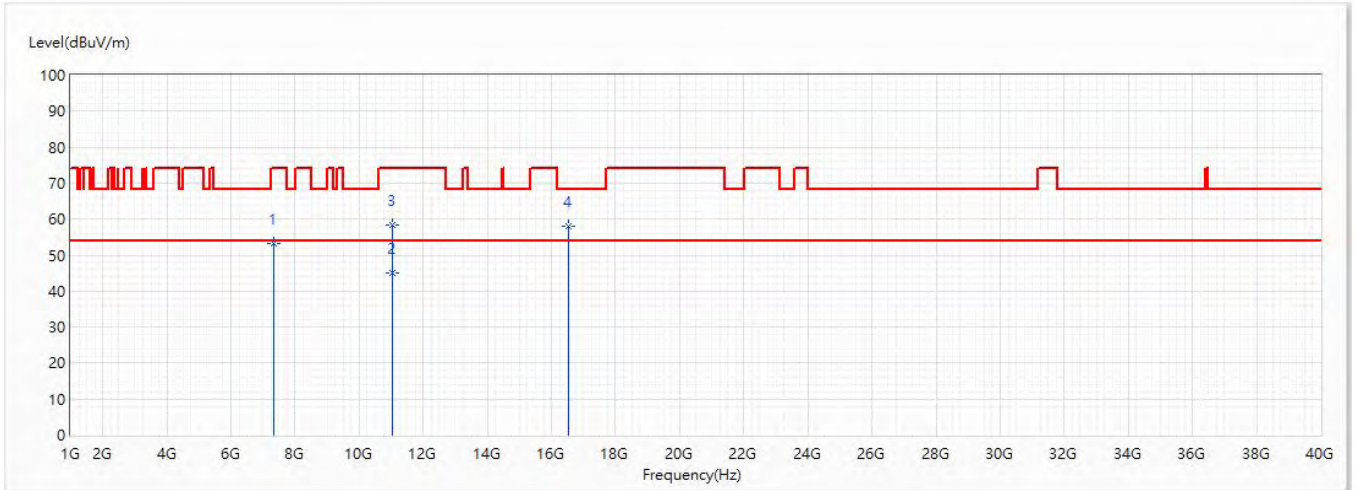


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7346.667	53.11	74.00	-20.89	55.81	-2.70	PK
2	11020	45.01	74.00	-28.99	40.23	4.78	PK
3	11020	58.43	74.00	-15.57	53.65	4.78	PK
* 4	16530	58.13	68.20	-10.07	51.49	6.64	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5550MHz	Humidity (%RH)	58.0

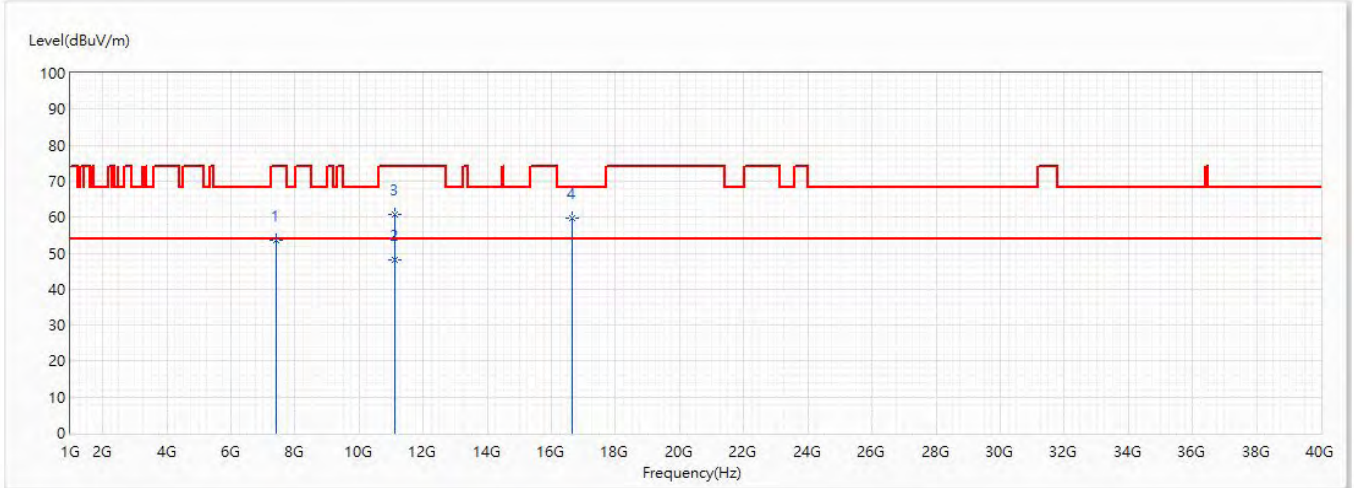


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7400	53.43	74.00	-20.57	55.85	-2.42	PK
* 2	11100	48.11	54.00	-5.89	43.60	4.51	AV
3	11100	60.64	74.00	-13.36	56.13	4.51	PK
4	16650	59.81	68.20	-8.39	52.71	7.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5550MHz	Humidity (%RH)	58.0

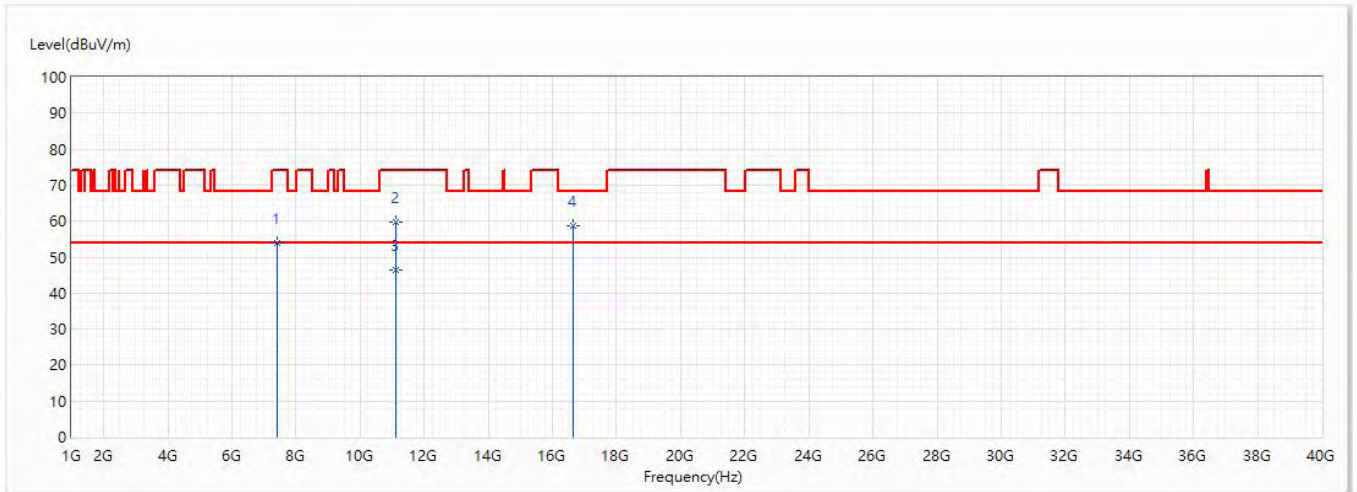


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7400	53.91	74.00	-20.09	56.33	-2.42	PK
2	11100	59.58	74.00	-14.42	55.07	4.51	PK
* 3	11100	46.57	54.00	-7.43	42.06	4.51	AV
4	16650	58.73	68.20	-9.47	51.63	7.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5670MHz	Humidity (%RH)	58.0

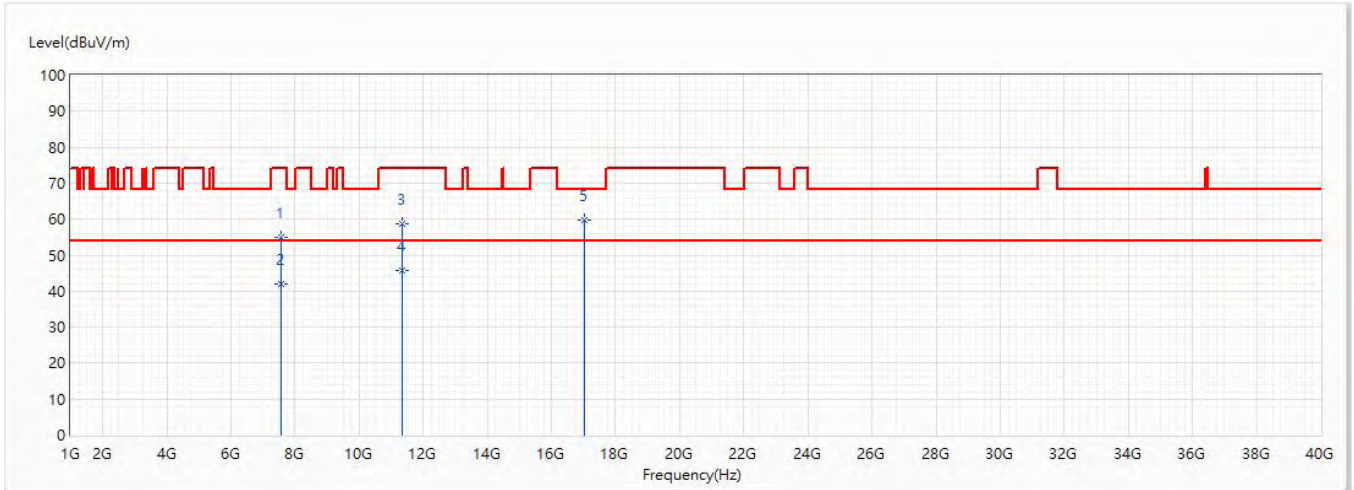


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7560	54.97	74.00	-19.03	57.10	-2.13	PK
2	7560	41.88	54.00	-12.12	44.01	-2.13	AV
3	11340	58.60	74.00	-15.40	53.67	4.93	PK
* 4	11340	45.76	54.00	-8.24	40.83	4.93	AV
5	17010	59.79	68.20	-8.41	52.05	7.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5670MHz	Humidity (%RH)	58.0

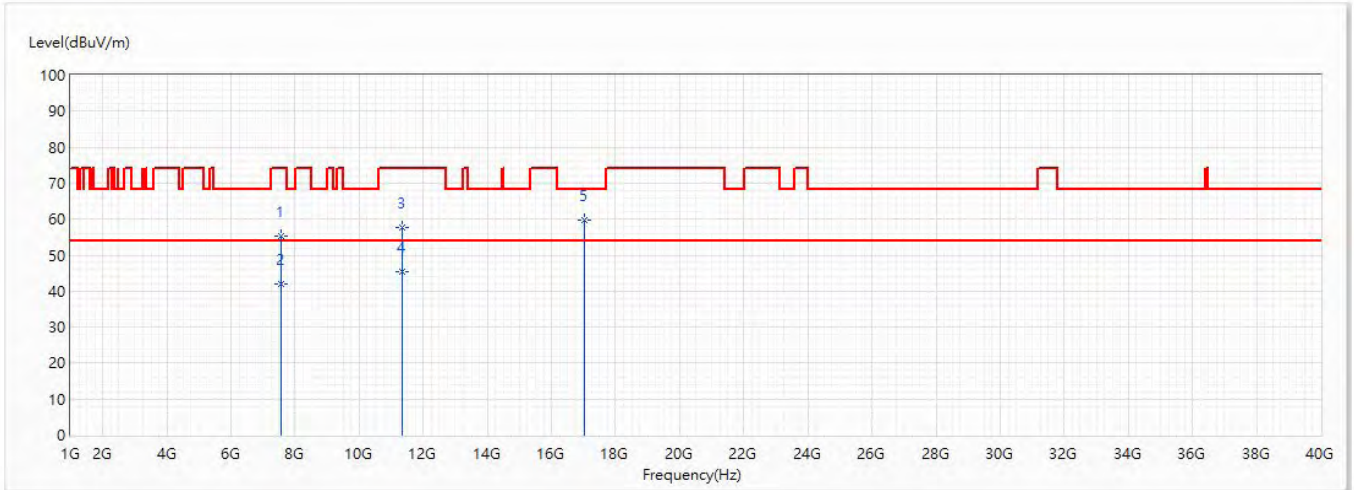


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7560	55.34	74.00	-18.66	57.47	-2.13	PK
2	7560	41.85	54.00	-12.15	43.98	-2.13	AV
3	11340	57.62	74.00	-16.38	52.69	4.93	PK
4	11340	45.33	54.00	-8.67	40.40	4.93	AV
* 5	17010	59.66	68.20	-8.54	51.92	7.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5530MHz	Humidity (%RH)	58.0

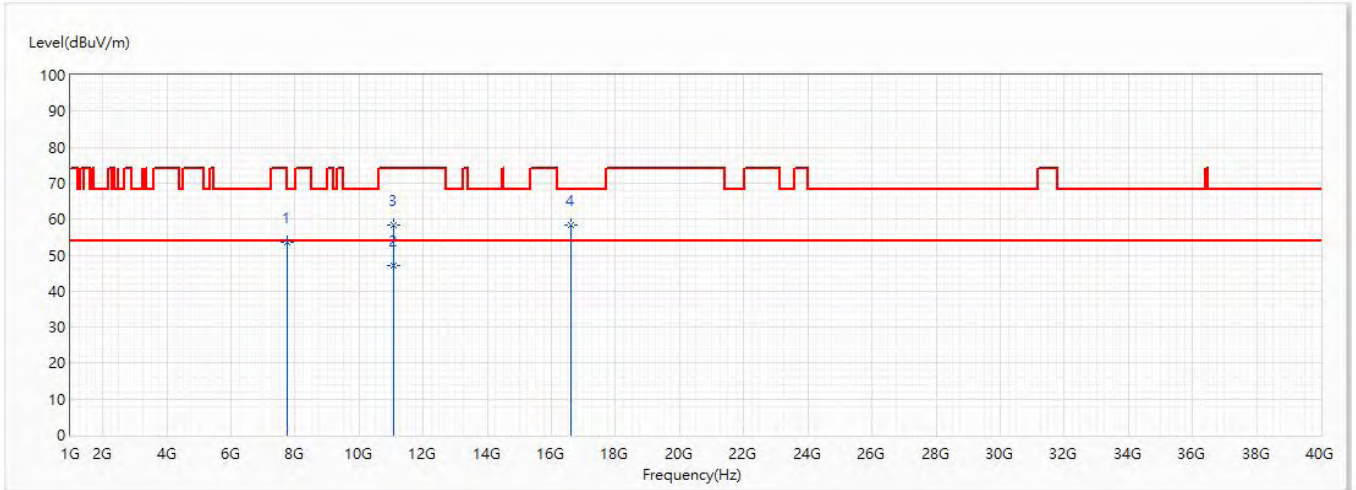


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7737.333	53.45	74.00	-20.55	55.60	-2.15	PK
* 2	11060	47.06	54.00	-6.94	42.41	4.65	AV
3	11060	58.21	74.00	-15.79	53.56	4.65	PK
4	16590	58.21	68.20	-9.99	51.00	7.21	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5530MHz	Humidity (%RH)	58.0

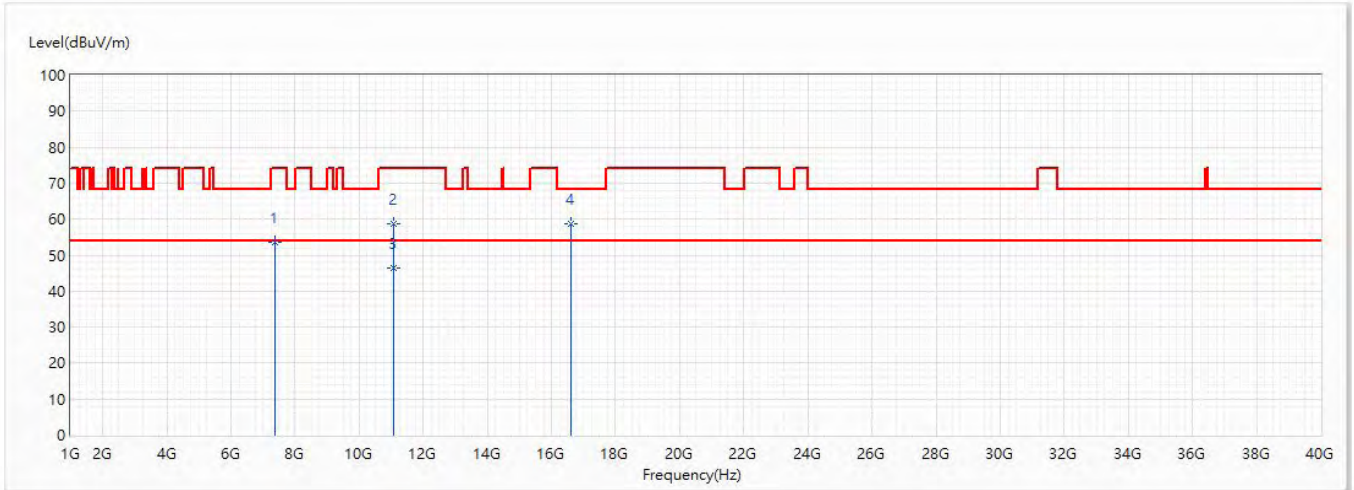


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7373.333	53.46	74.00	-20.54	56.03	-2.57	PK
2	11060	58.71	74.00	-15.29	54.06	4.65	PK
* 3	11060	46.45	54.00	-7.55	41.80	4.65	AV
4	16590	58.71	68.20	-9.49	51.50	7.21	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5610MHz	Humidity (%RH)	58.0

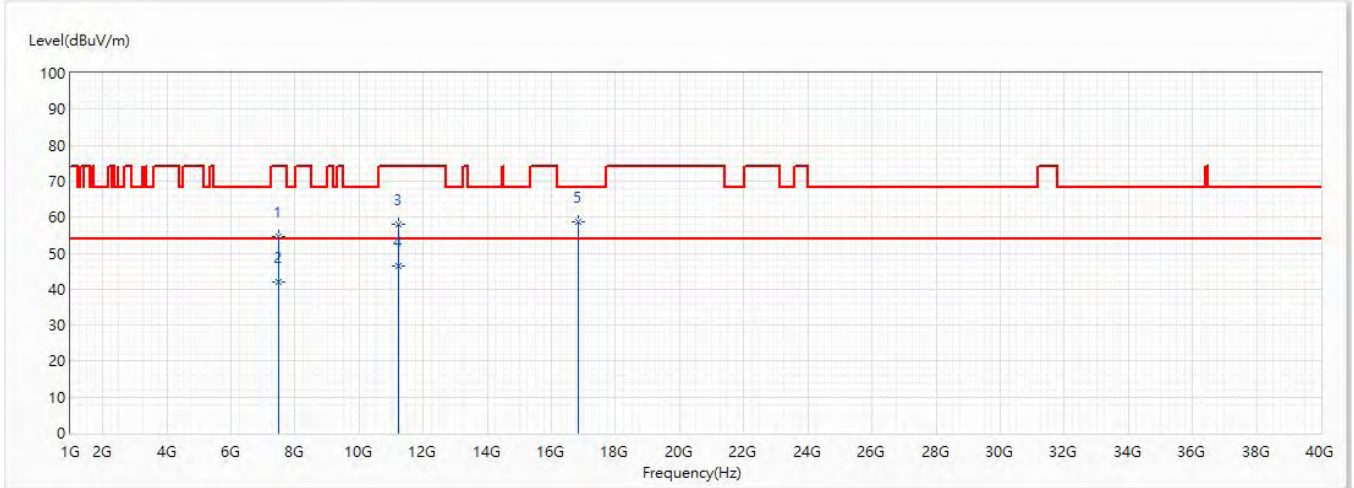


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7480	54.52	74.00	-19.48	56.73	-2.21	PK
2	7480	42.06	54.00	-11.94	44.27	-2.21	AV
3	11220	58.10	74.00	-15.90	53.12	4.98	PK
* 4	11220	46.39	54.00	-7.61	41.41	4.98	AV
5	16830	58.84	68.20	-9.36	51.46	7.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5610MHz	Humidity (%RH)	58.0

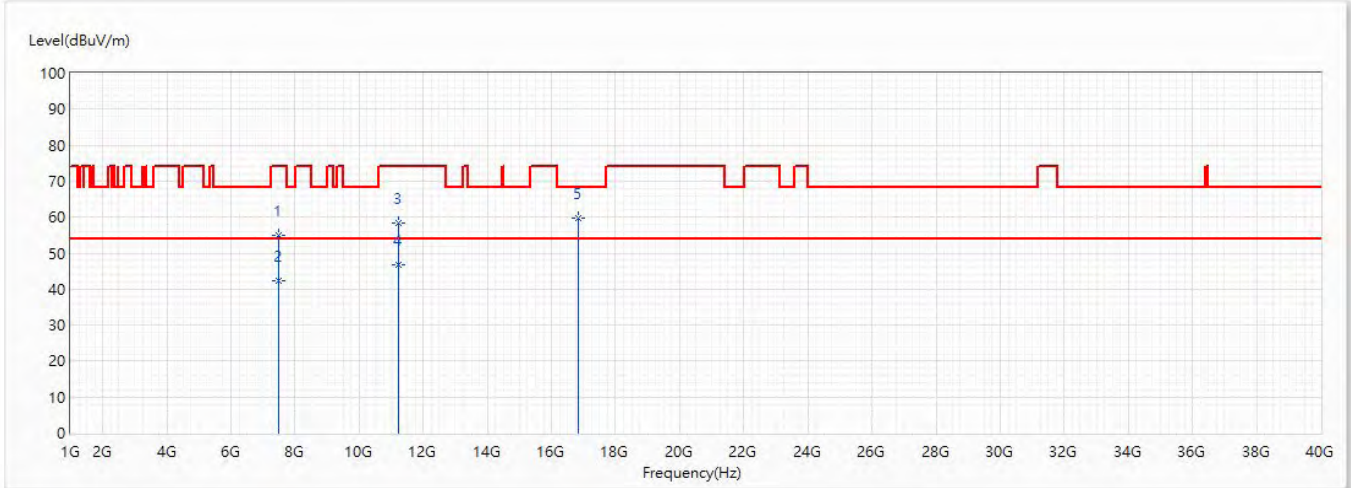


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7480	55.00	74.00	-19.00	57.21	-2.21	PK
2	7480	42.25	54.00	-11.75	44.46	-2.21	AV
3	11220	58.23	74.00	-15.77	53.25	4.98	PK
* 4	11220	46.70	54.00	-7.30	41.72	4.98	AV
5	16830	59.70	68.20	-8.50	52.32	7.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5745MHz	Humidity (%RH)	58.0

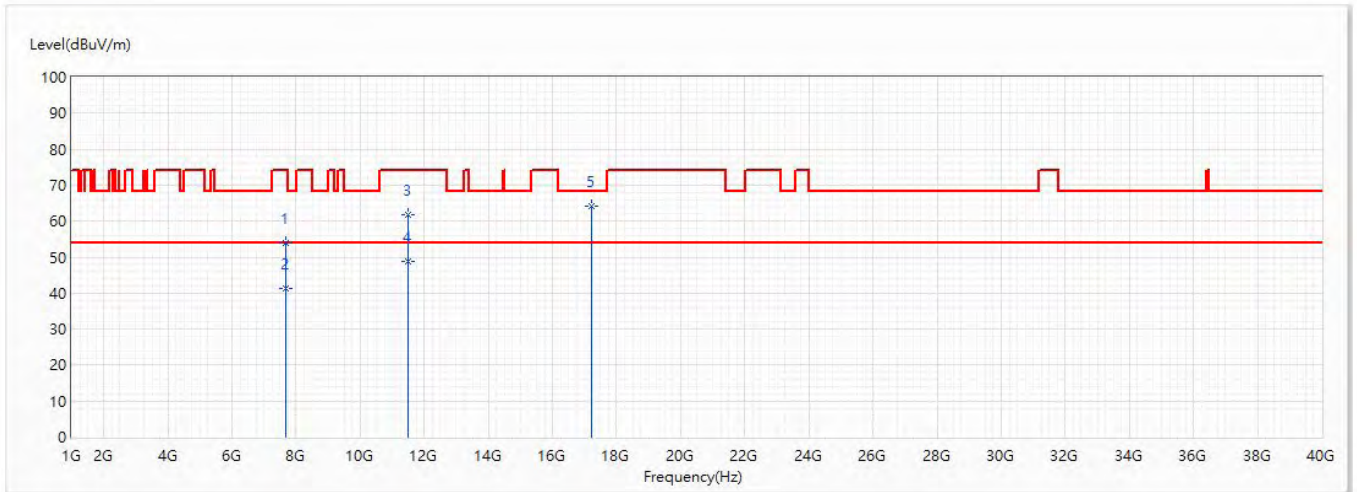


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7660	54.03	74.00	-19.97	56.19	-2.16	PK
2	7660	41.22	54.00	-12.78	43.38	-2.16	AV
3	11490	61.79	74.00	-12.21	56.74	5.05	PK
4	11490	48.66	54.00	-5.34	43.61	5.05	AV
* 5	17235	64.20	68.20	-4.00	55.48	8.72	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5745MHz	Humidity (%RH)	58.0

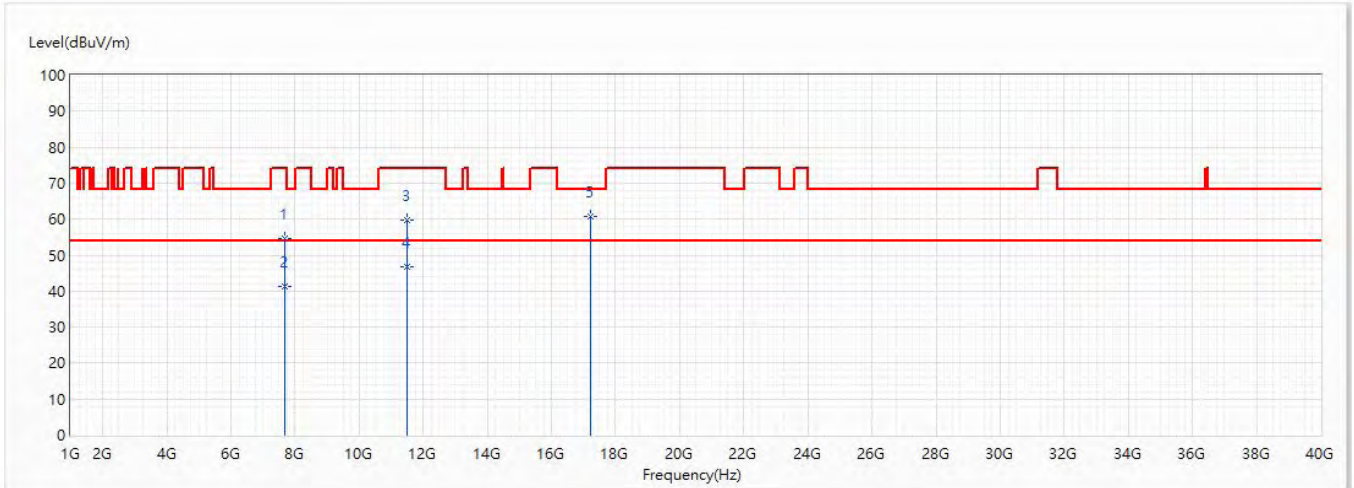


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7660	54.64	74.00	-19.36	56.80	-2.16	PK
2	7660	41.16	54.00	-12.84	43.32	-2.16	AV
3	11490	59.61	74.00	-14.39	54.56	5.05	PK
* 4	11490	46.68	54.00	-7.32	41.63	5.05	AV
5	17235	60.80	68.20	-7.40	52.08	8.72	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5785MHz	Humidity (%RH)	58.0

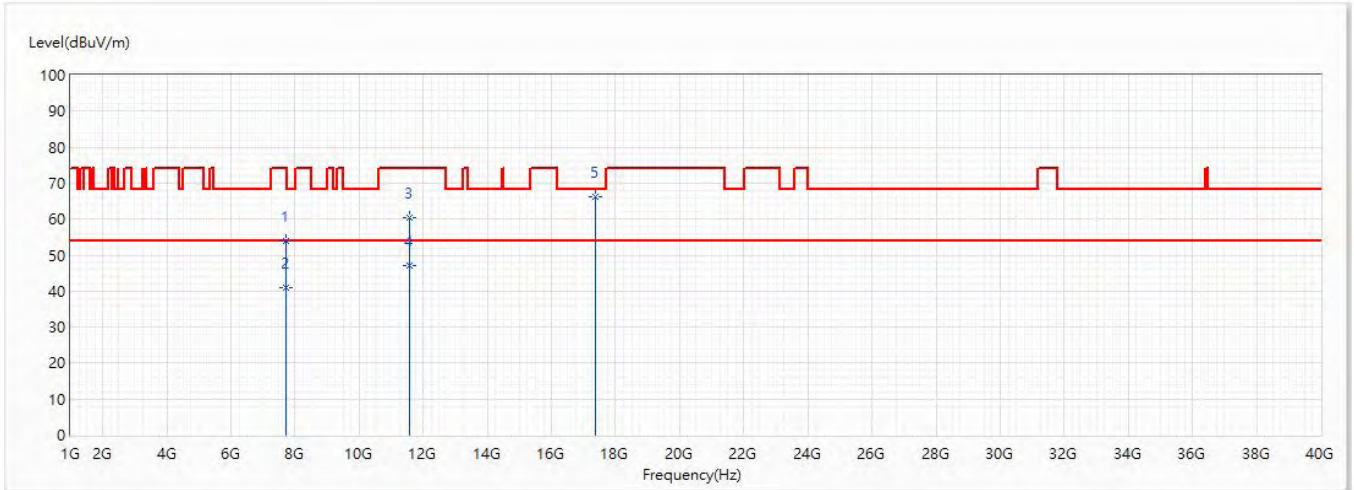


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7713.333	54.08	74.00	-19.92	56.26	-2.18	PK
2	7713.333	40.96	54.00	-13.04	43.14	-2.18	AV
3	11570	60.34	74.00	-13.66	55.26	5.08	PK
4	11570	47.17	54.00	-6.83	42.09	5.08	AV
* 5	17355	66.05	68.20	-2.15	56.81	9.24	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5785MHz	Humidity (%RH)	58.0

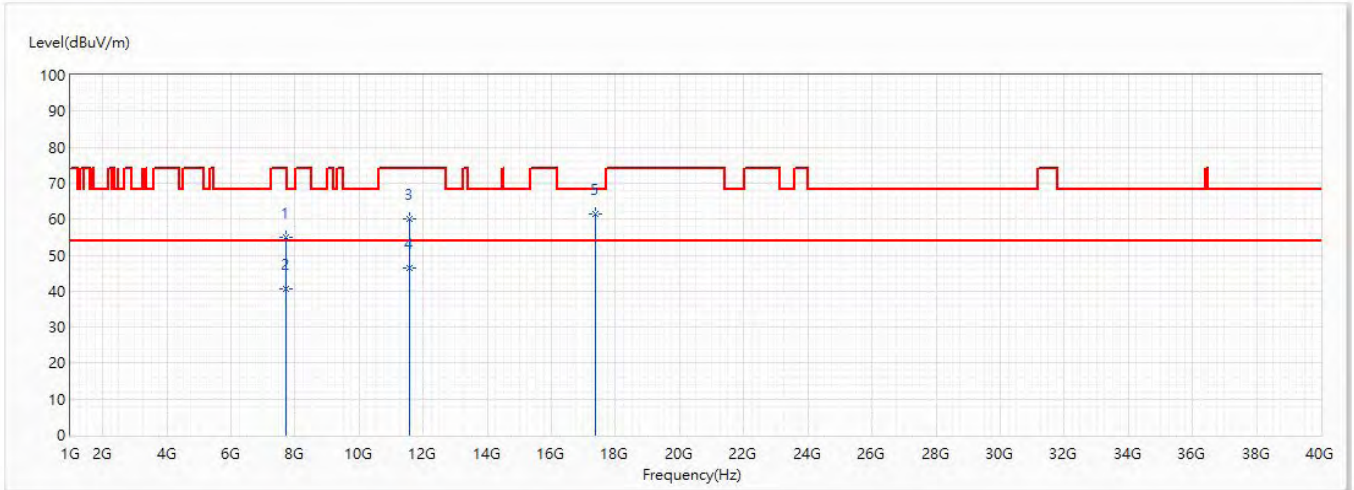


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7713.333	54.98	74.00	-19.02	57.16	-2.18	PK
2	7713.333	40.65	54.00	-13.35	42.83	-2.18	AV
3	11570	59.92	74.00	-14.08	54.84	5.08	PK
4	11570	46.52	54.00	-7.48	41.44	5.08	AV
* 5	17355	61.42	68.20	-6.78	52.18	9.24	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5825MHz	Humidity (%RH)	58.0

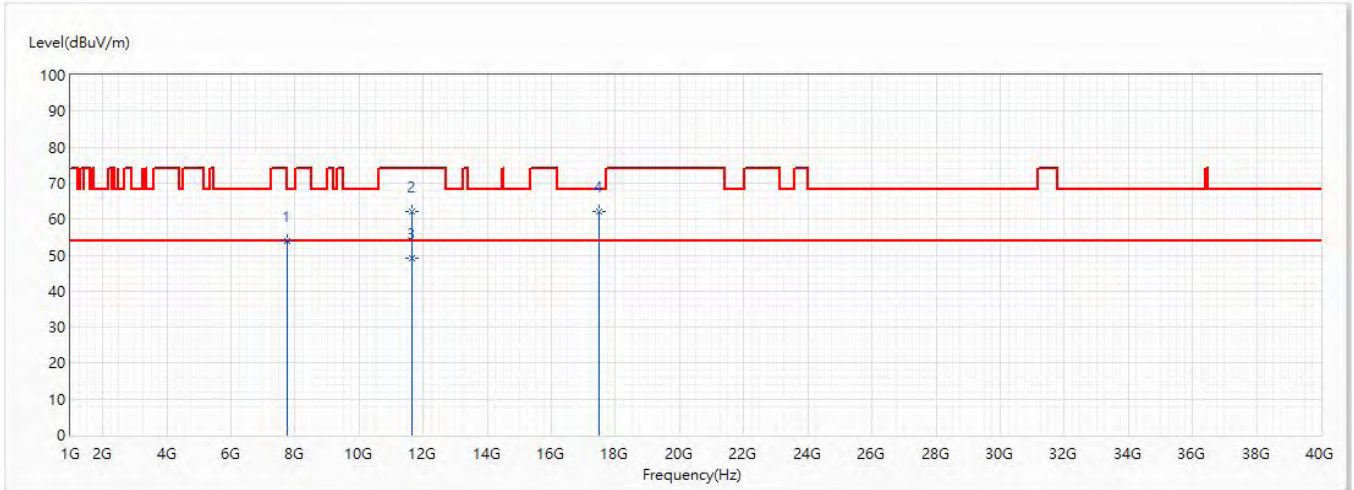


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7766.667	53.99	68.20	-14.21	56.11	-2.12	PK
2	11650	61.96	74.00	-12.04	56.85	5.11	PK
* 3	11650	49.26	54.00	-4.74	44.15	5.11	AV
4	17475	61.96	68.20	-6.24	52.27	9.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5825MHz	Humidity (%RH)	58.0

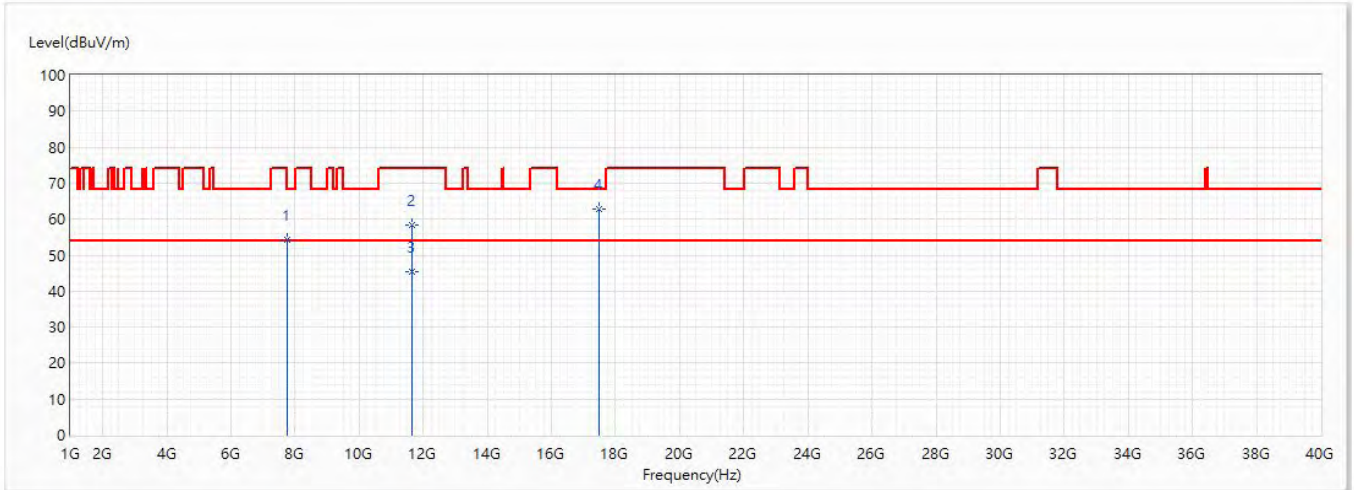


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7766.667	54.26	68.20	-13.94	56.38	-2.12	PK
2	11650	58.50	74.00	-15.50	53.39	5.11	PK
3	11650	45.37	54.00	-8.63	40.26	5.11	AV
* 4	17475	62.91	68.20	-5.29	53.22	9.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5745MHz	Humidity (%RH)	58.0

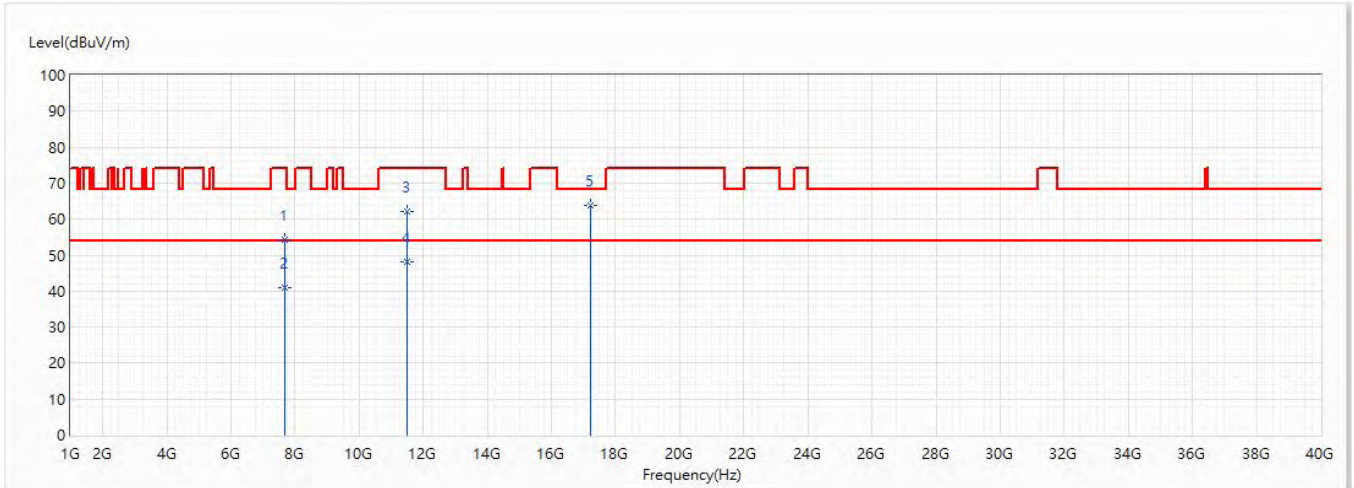


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7660	54.33	74.00	-19.67	56.49	-2.16	PK
2	7660	40.94	54.00	-13.06	43.10	-2.16	AV
3	11490	61.98	74.00	-12.02	56.93	5.05	PK
4	11490	48.21	54.00	-5.79	43.16	5.05	AV
* 5	17235	63.85	68.20	-4.35	55.13	8.72	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5745MHz	Humidity (%RH)	58.0

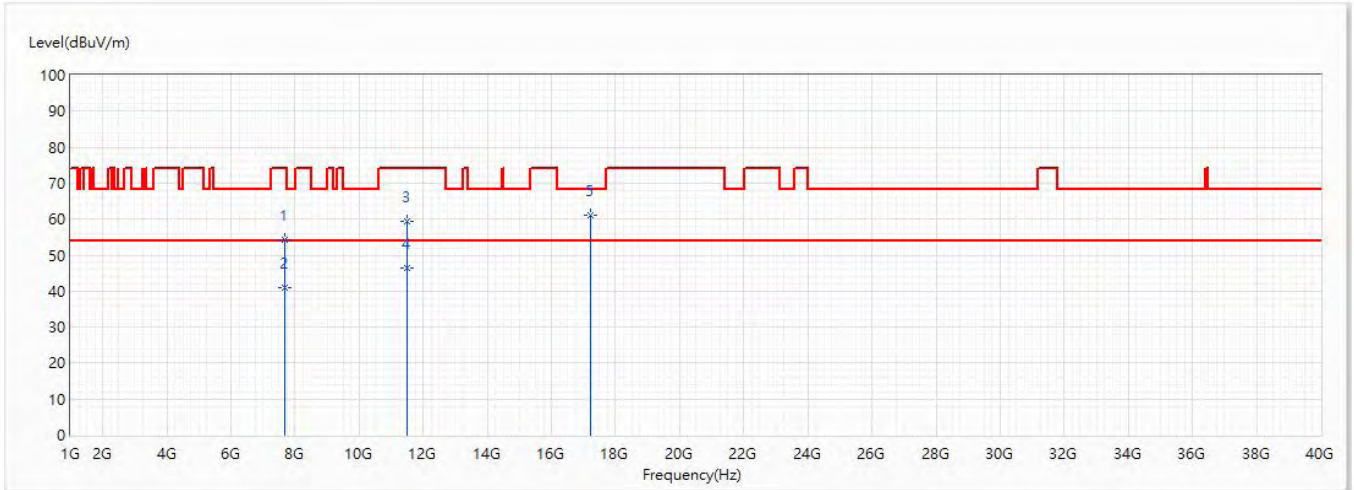


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7660	54.40	74.00	-19.60	56.56	-2.16	PK
2	7660	41.08	54.00	-12.92	43.24	-2.16	AV
3	11490	59.47	74.00	-14.53	54.42	5.05	PK
4	11490	46.33	54.00	-7.67	41.28	5.05	AV
* 5	17235	61.20	68.20	-7.00	52.48	8.72	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5785MHz	Humidity (%RH)	58.0

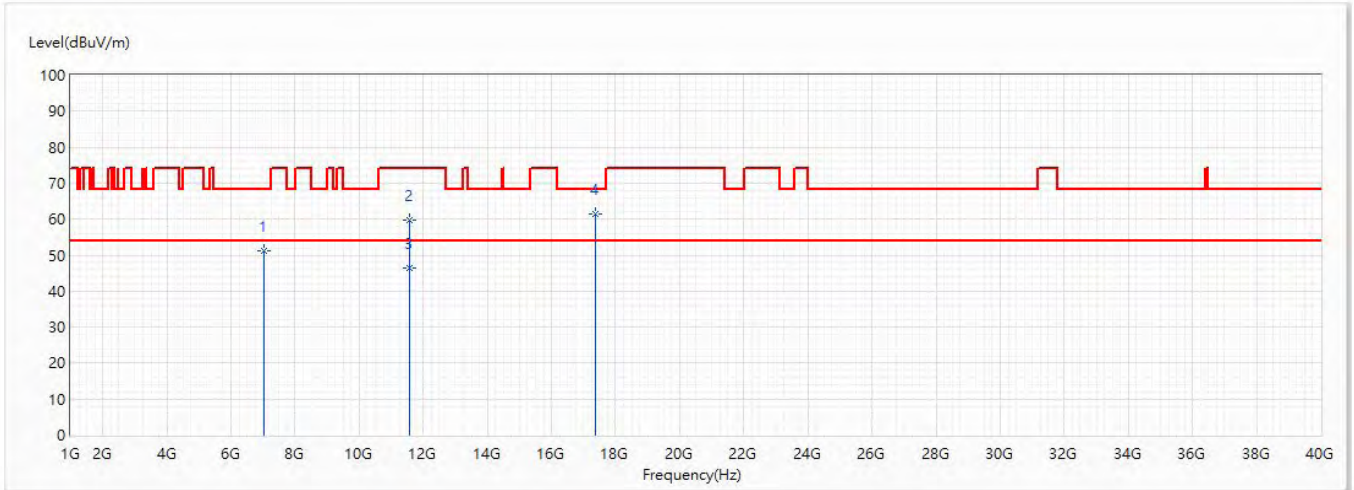


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7023	51.25	68.20	-16.95	55.19	-3.94	PK
2	11570	59.75	74.00	-14.25	54.67	5.08	PK
3	11570	46.50	54.00	-7.50	41.42	5.08	AV
* 4	17355	61.35	68.20	-6.85	52.11	9.24	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5785MHz	Humidity (%RH)	58.0

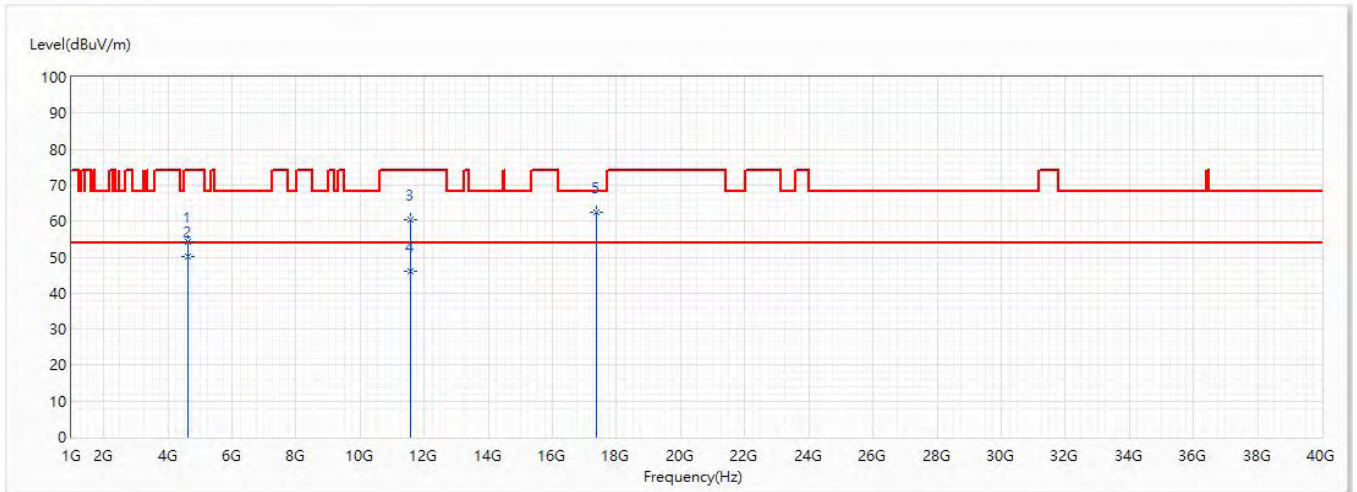


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4628	54.38	74.00	-19.62	66.45	-12.07	PK
2	4628	50.25	54.00	-3.75	62.32	-12.07	AV
3	11570	60.33	74.00	-13.67	55.25	5.08	PK
4	11570	46.13	54.00	-7.87	41.05	5.08	AV
!5	17355	62.62	54.00	8.62	53.38	9.24	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5825MHz	Humidity (%RH)	58.0

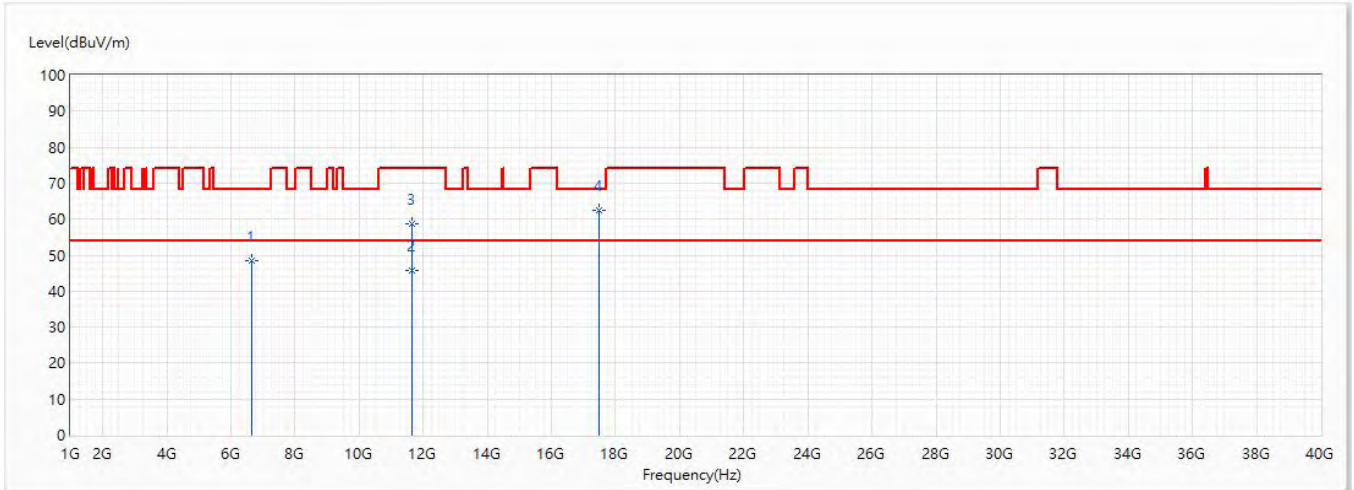


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6646	48.39	68.20	-19.81	53.74	-5.35	PK
2	11650	45.62	54.00	-8.38	40.51	5.11	AV
3	11650	58.59	74.00	-15.41	53.48	5.11	PK
* 4	17475	62.39	68.20	-5.81	52.70	9.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5825MHz	Humidity (%RH)	58.0

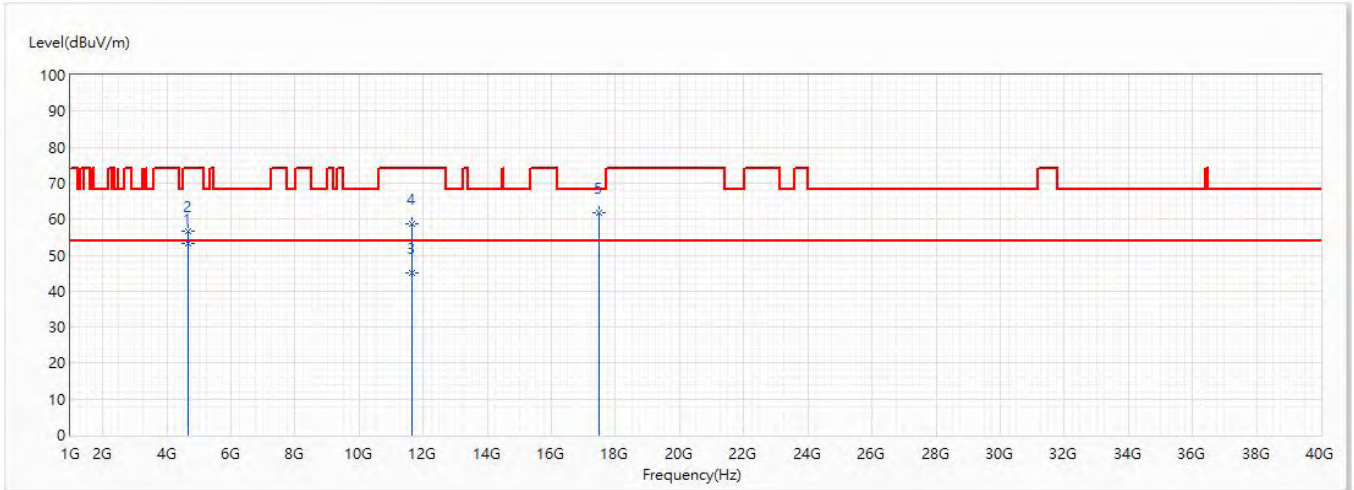


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	4660.2	53.16	54.00	-0.84	65.15	-11.99	AV
2	4660.2	56.71	74.00	-17.29	68.70	-11.99	PK
3	11650	44.95	54.00	-9.05	39.84	5.11	AV
4	11650	58.71	74.00	-15.29	53.60	5.11	PK
5	17475	61.81	68.20	-6.39	52.12	9.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5755MHz	Humidity (%RH)	58.0

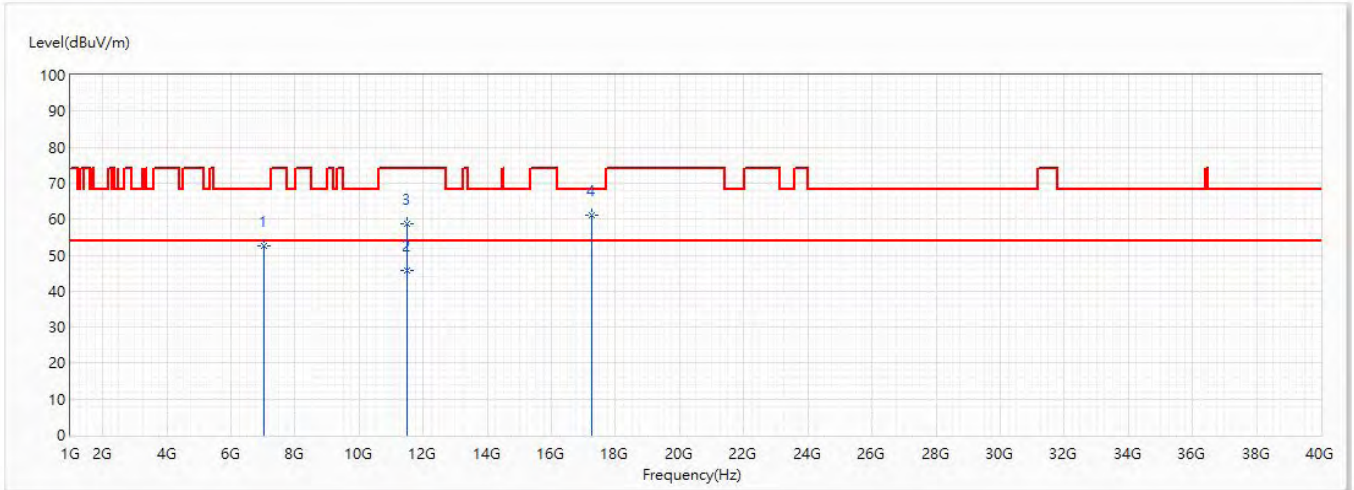


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	7023	52.41	68.20	-15.79	56.35	-3.94	PK
2	11510	45.61	54.00	-8.39	40.54	5.07	AV
3	11510	58.77	74.00	-15.23	53.70	5.07	PK
* 4	17265	61.25	68.20	-6.95	52.40	8.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5755MHz	Humidity (%RH)	58.0

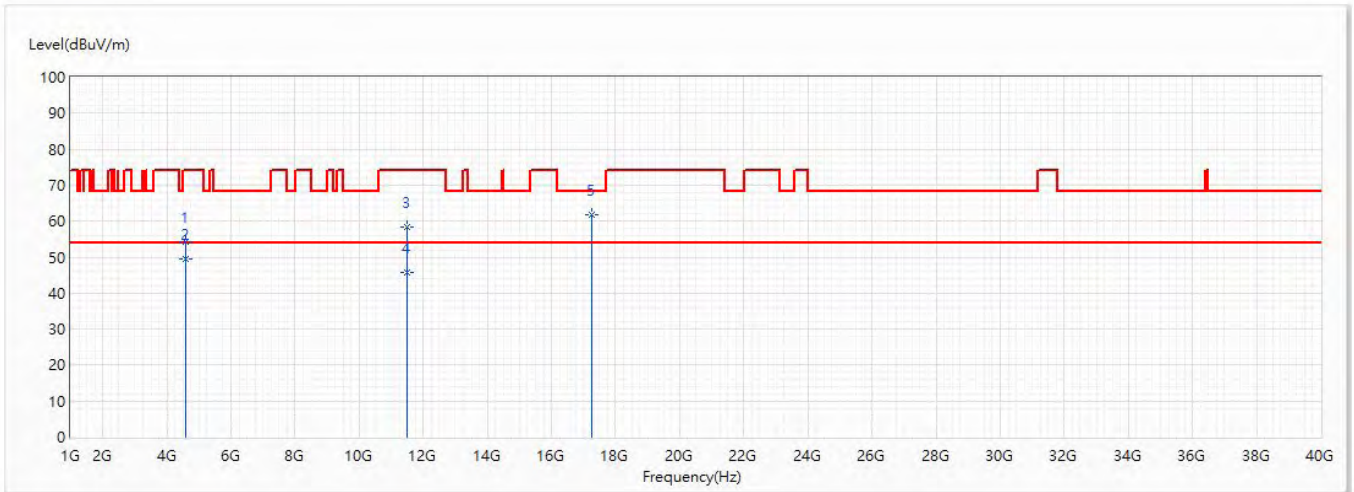


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4604	54.32	74.00	-19.68	66.45	-12.13	PK
* 2	4604	49.56	54.00	-4.44	61.69	-12.13	AV
3	11510	58.29	74.00	-15.71	53.22	5.07	PK
4	11510	45.71	54.00	-8.29	40.64	5.07	AV
5	17265	61.85	68.20	-6.35	53.00	8.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5795MHz	Humidity (%RH)	58.0

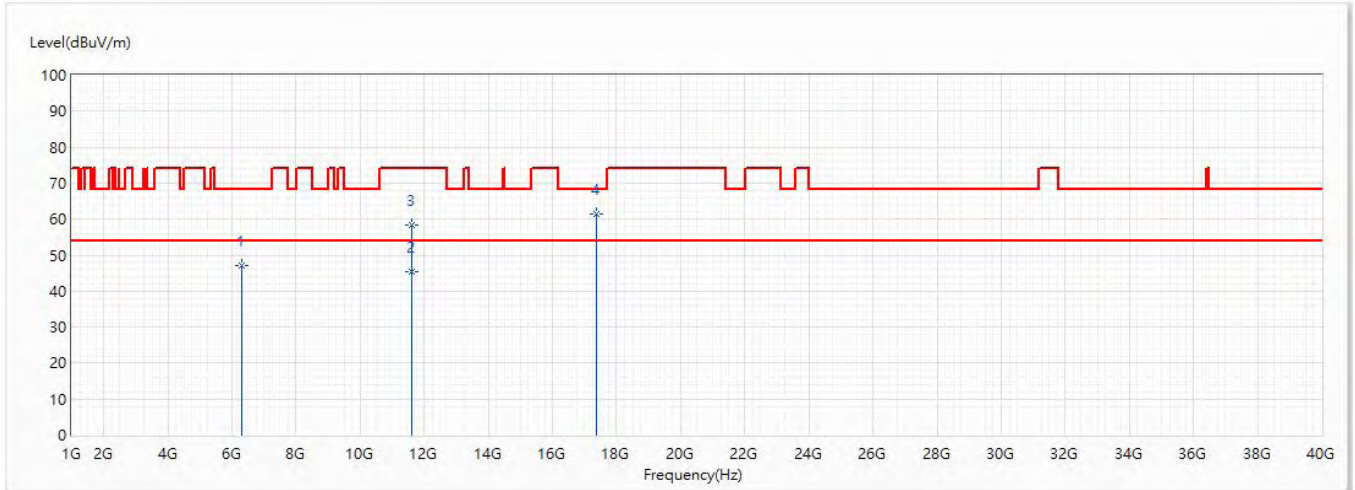


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	6311	47.15	68.20	-21.05	54.12	-6.97	PK
2	11590	45.36	54.00	-8.64	40.28	5.08	AV
3	11590	58.35	74.00	-15.65	53.27	5.08	PK
* 4	17385	61.33	68.20	-6.87	51.98	9.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5795MHz	Humidity (%RH)	58.0

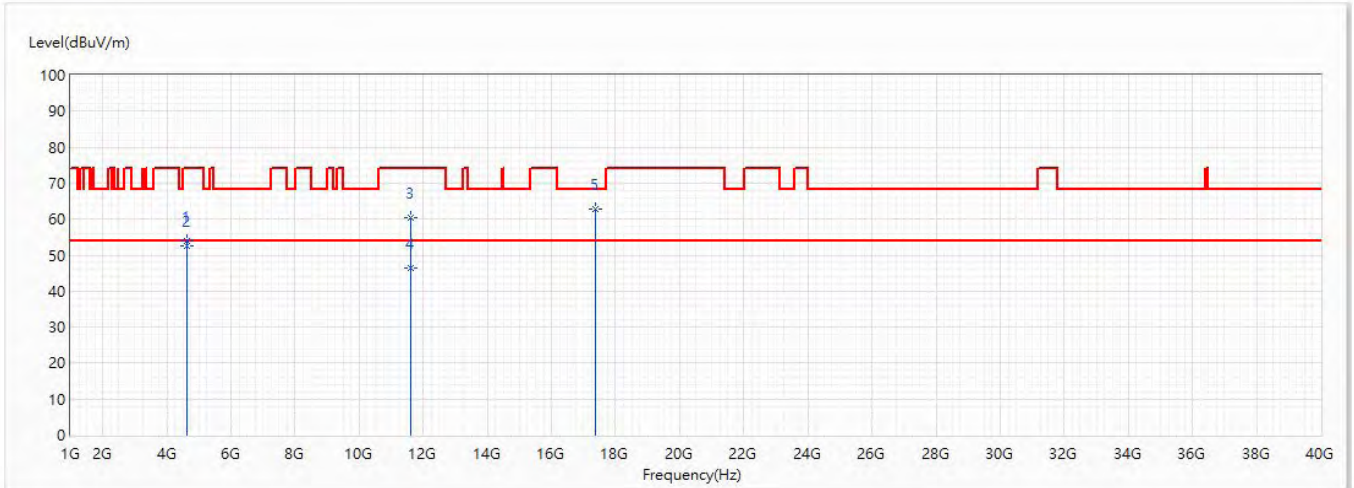


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4636.3	54.04	74.00	-19.96	66.08	-12.04	PK
* 2	4636.3	52.68	54.00	-1.32	64.72	-12.04	AV
3	11590	60.33	74.00	-13.67	55.25	5.08	PK
4	11590	46.35	54.00	-7.65	41.27	5.08	AV
5	17385	62.77	68.20	-5.43	53.42	9.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5775MHz	Humidity (%RH)	58.0

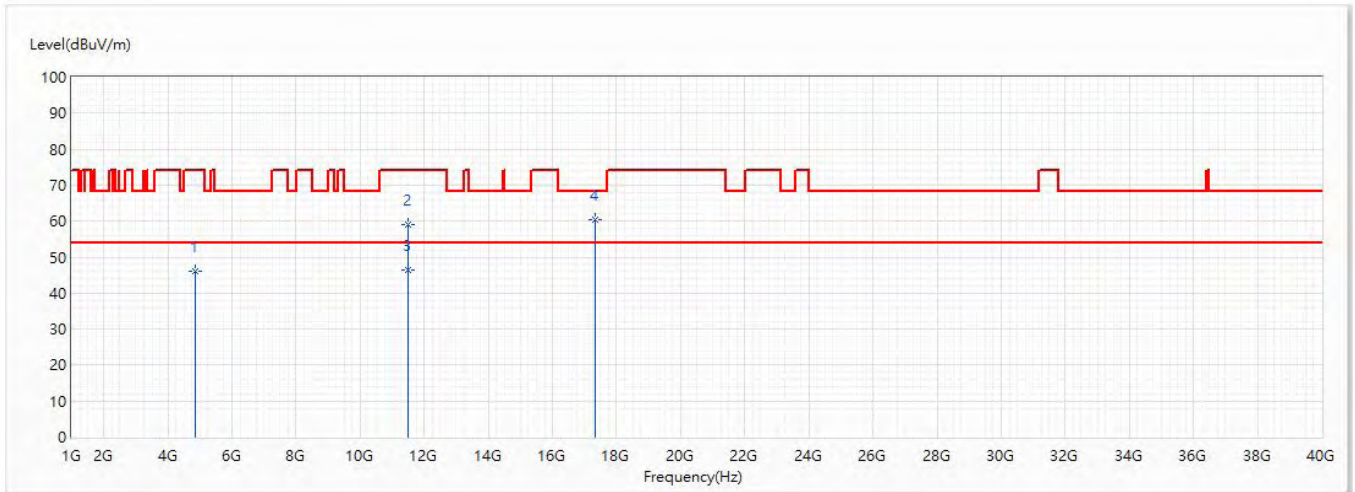


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4853	46.18	74.00	-27.82	57.57	-11.39	PK
2	11500	59.11	74.00	-14.89	54.04	5.07	PK
3	11500	46.25	54.00	-7.75	41.18	5.07	AV
* 4	17325	60.58	68.20	-7.62	51.45	9.13	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limt.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/8
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5775MHz	Humidity (%RH)	58.0

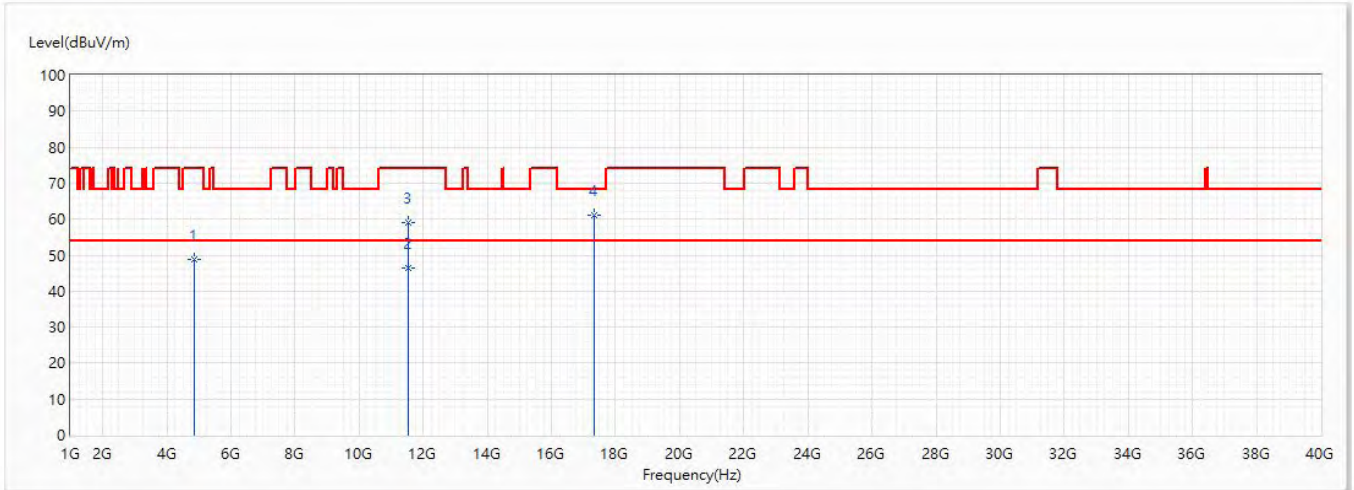

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4847	48.91	74.00	-25.09	60.30	-11.39	PK
2	11550	46.25	54.00	-7.75	41.18	5.07	AV
3	11550	58.91	74.00	-15.09	53.84	5.07	PK
* 4	17325	61.25	68.20	-6.95	52.12	9.13	PK


Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

7. Band Edge

7.1. Test Setup

RF Radiated Measurement:

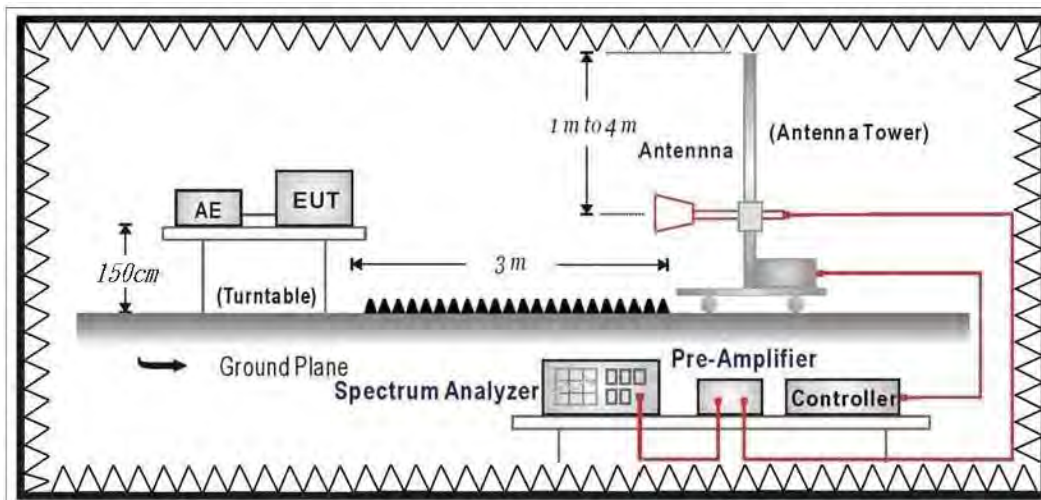

7.2. Limits

➤ General Radiated Emission Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54


Remark:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ Unwanted Emission out of the restricted bands Limits

FCC Part 15 Subpart E Paragraph 15.407(b) Limits		
Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (dBuV/m@3m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
5725 - 5850	-27 (Note1)	68.3
	-17 (Note2)	78.3

4. For transmitters operating in the 5.725-5.85 GHz band
- (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

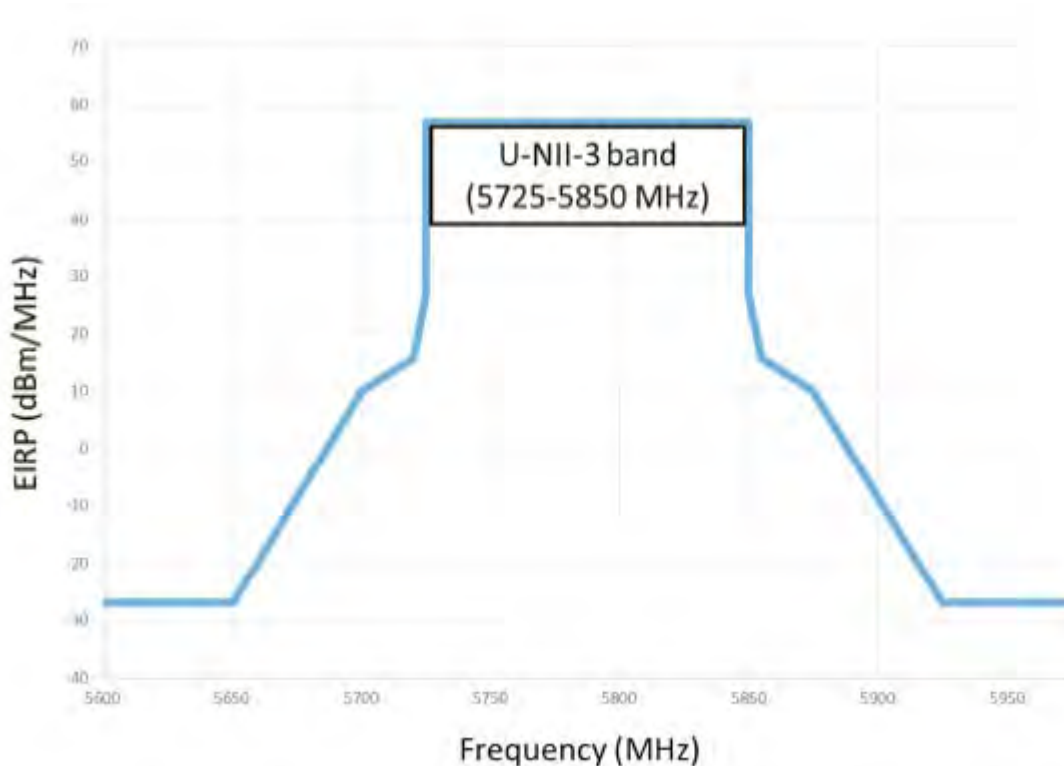

Remark:

1. For frequencies more than 10 MHz above or below the band edges.
2. For frequency range from the band edges to 10 MHz above or below the band edges.
3.
$$\mu\text{V/m} = \frac{1000000 \sqrt{30 \times EIRP}}{3}$$
, RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

7.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 KHz, above 1GHz are 1 MHz.

7.4. Test Result

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5180MHz	Humidity (%RH)	58.0

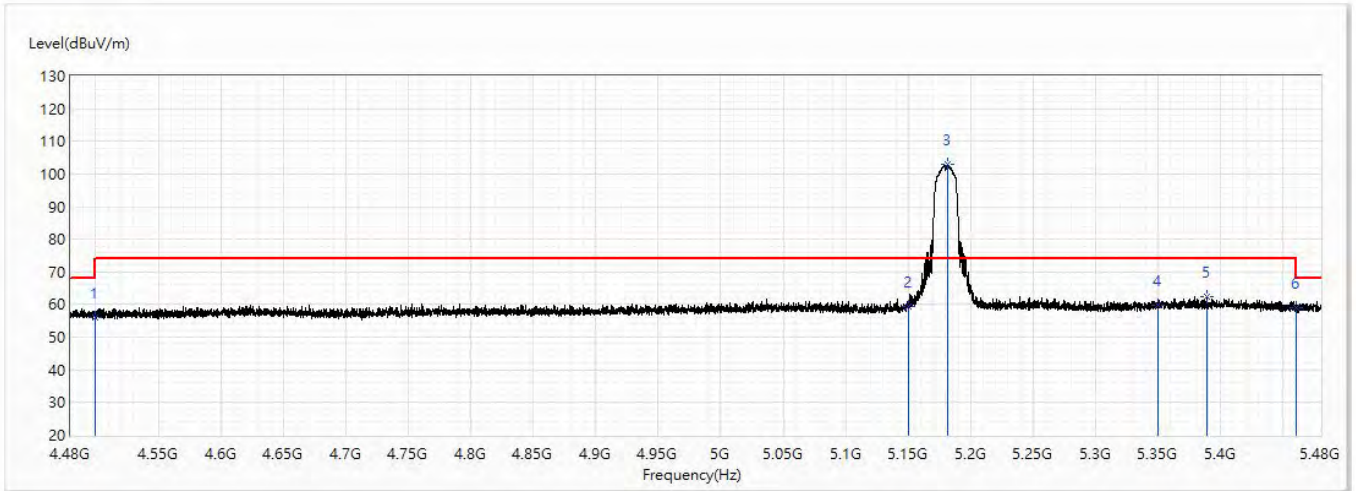


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.89	74.00	-18.11	31.87	24.02	PK
2	5150	59.57	74.00	-14.43	34.64	24.93	PK
! 3	5181.25	102.92	74.00	28.92	77.89	25.03	PK
4	5350	59.97	74.00	-14.03	34.46	25.51	PK
5	5388.625	62.42	74.00	-11.58	36.74	25.68	PK
6	5460	58.86	74.00	-15.14	33.07	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!" , means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5180MHz	Humidity (%RH)	58.0

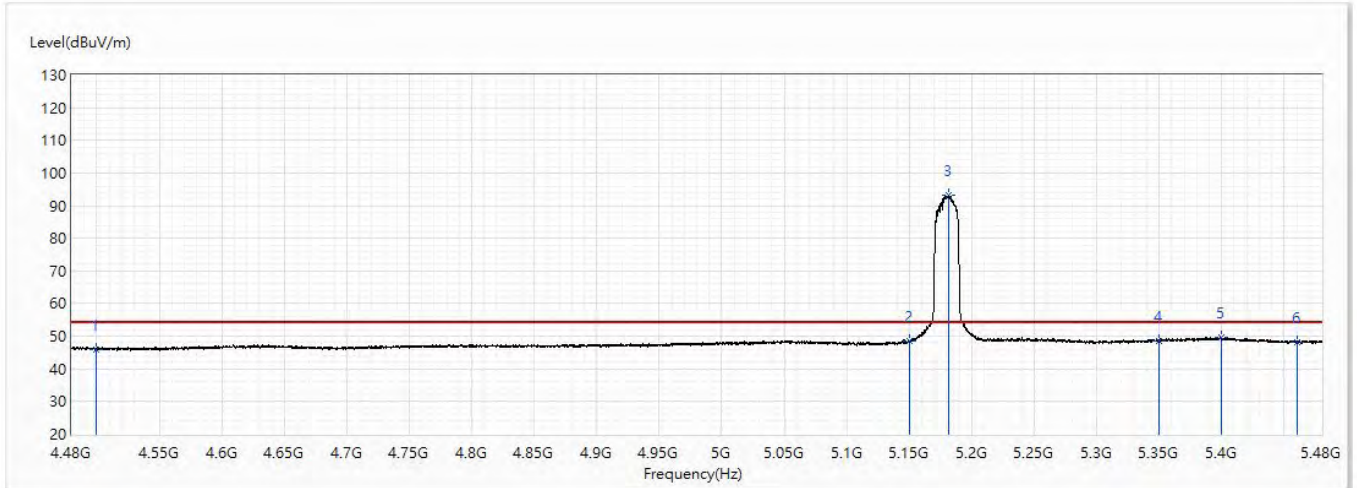


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.06	54.00	-7.94	22.04	24.02	AV
2	5150	48.57	54.00	-5.43	23.64	24.93	AV
! 3	5181.625	93.21	54.00	39.21	68.17	25.04	AV
4	5350	48.63	54.00	-5.37	23.12	25.51	AV
5	5399.375	49.62	54.00	-4.38	23.89	25.73	AV
6	5460	48.30	54.00	-5.70	22.51	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5180MHz	Humidity (%RH)	58.0

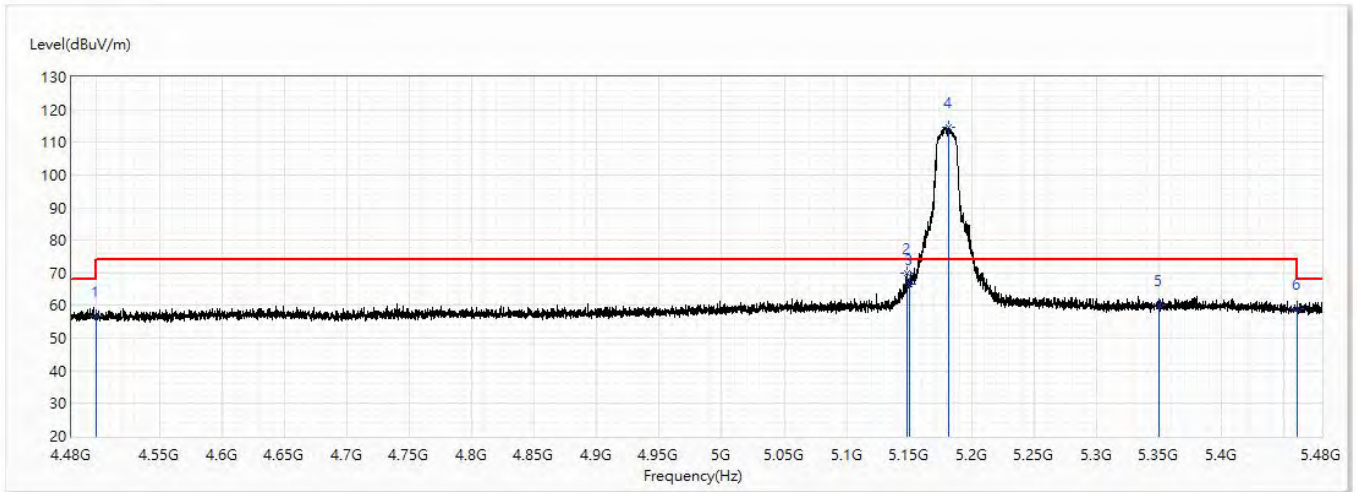


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.94	74.00	-17.06	32.92	24.02	PK
2	5147.875	69.79	74.00	-4.21	44.86	24.93	PK
3	5150	66.38	74.00	-7.62	41.45	24.93	PK
! 4	5181.5	114.60	74.00	40.60	89.57	25.03	PK
5	5350	60.27	74.00	-13.73	34.76	25.51	PK
6	5460	59.13	74.00	-14.87	33.34	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5180MHz	Humidity (%RH)	58.0

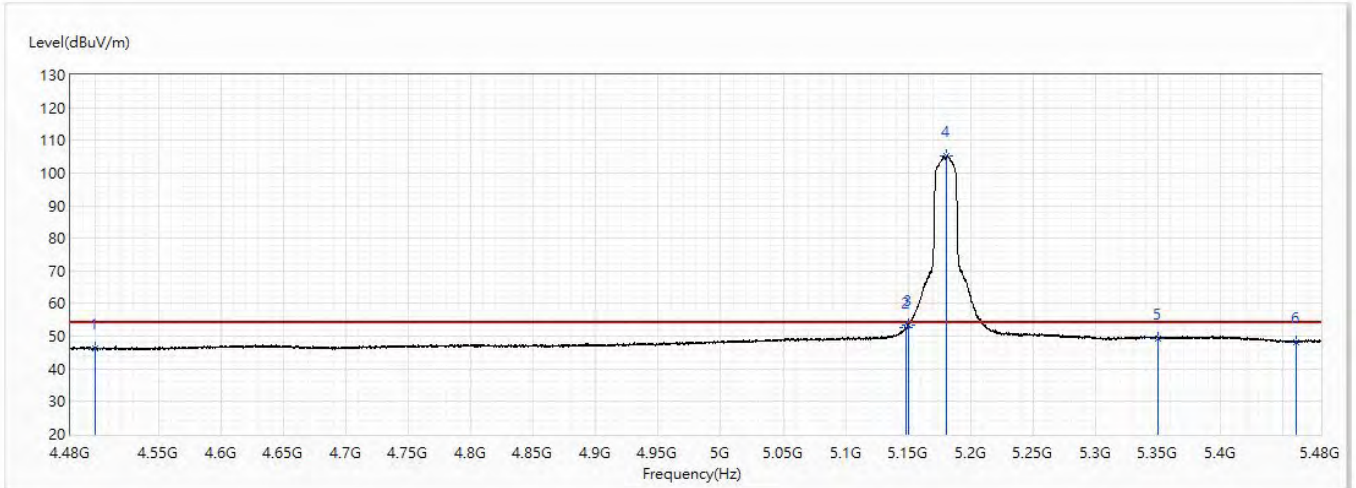


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.39	54.00	-7.61	22.37	24.02	AV
2	5148.5	52.63	54.00	-1.37	27.70	24.93	AV
3	5150	53.35	54.00	-0.65	28.42	24.93	AV
! 4	5181	105.34	54.00	51.34	80.31	25.03	AV
5	5350	49.45	54.00	-4.55	23.94	25.51	AV
6	5460	48.33	54.00	-5.67	22.54	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5220MHz	Humidity (%RH)	58.0

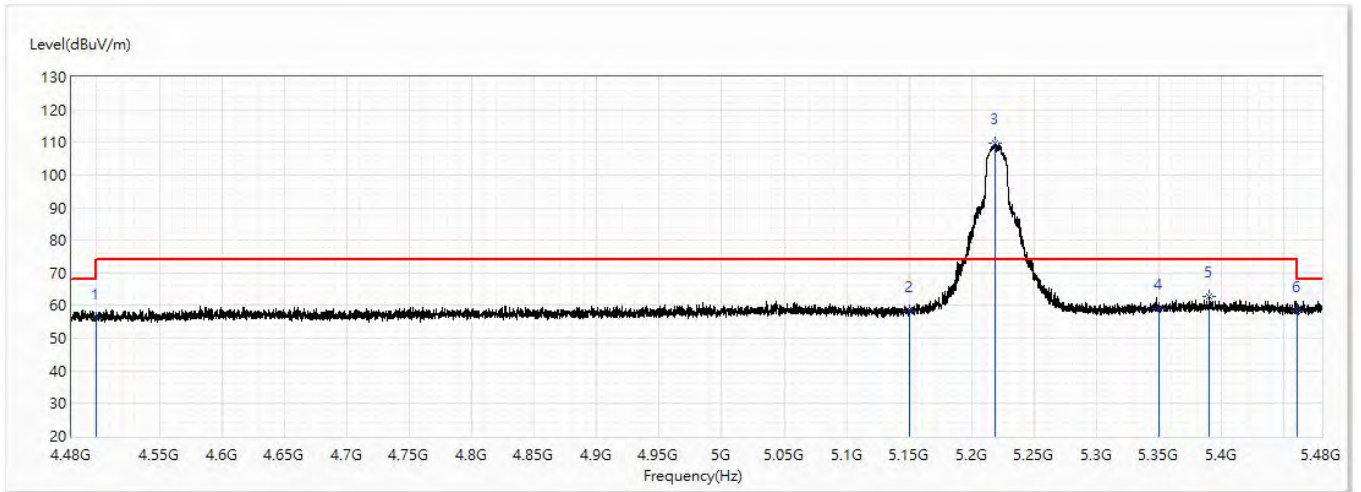


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.93	74.00	-18.07	31.91	24.02	PK
2	5150	58.44	74.00	-15.56	33.51	24.93	PK
! 3	5218.5	109.79	74.00	35.79	84.66	25.13	PK
4	5350	59.15	74.00	-14.85	33.64	25.51	PK
5	5389.75	62.77	74.00	-11.23	37.08	25.69	PK
6	5460	58.19	74.00	-15.81	32.40	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5220MHz	Humidity (%RH)	58.0

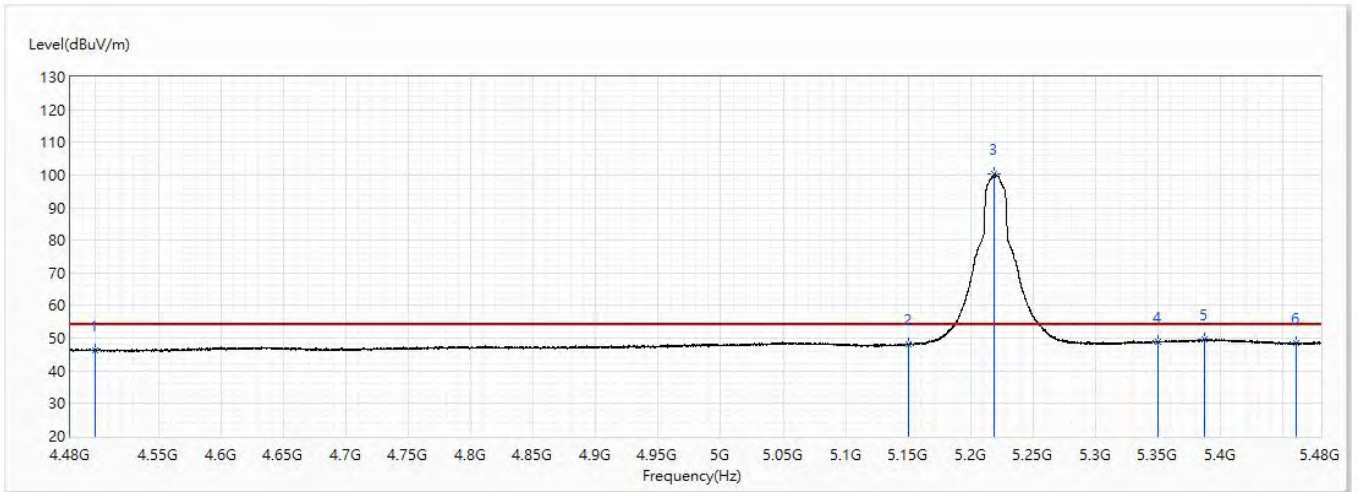


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.37	54.00	-7.63	22.35	24.02	AV
2	5150	48.14	54.00	-5.86	23.21	24.93	AV
! 3	5219	100.39	54.00	46.39	75.26	25.13	AV
4	5350	48.81	54.00	-5.19	23.30	25.51	AV
5	5386.875	49.77	54.00	-4.23	24.09	25.68	AV
6	5460	48.37	54.00	-5.63	22.58	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5220MHz	Humidity (%RH)	58.0

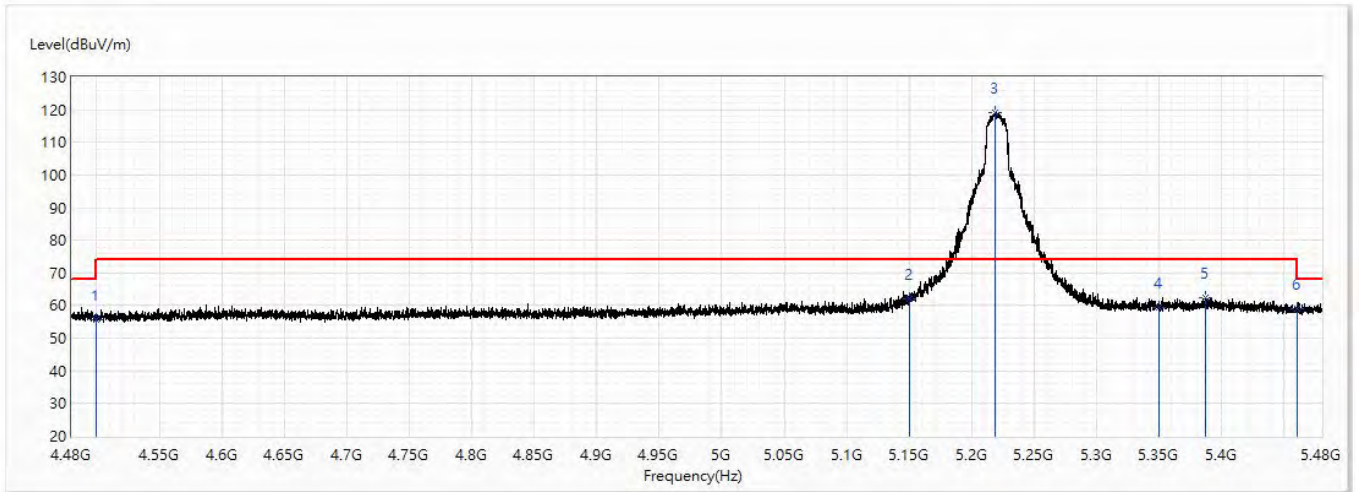


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.60	74.00	-18.40	31.58	24.02	PK
2	5150	61.95	74.00	-12.05	37.02	24.93	PK
! 3	5219	119.26	74.00	45.26	94.13	25.13	PK
4	5350	59.43	74.00	-14.57	33.92	25.51	PK
5	5386.625	62.51	74.00	-11.49	36.83	25.68	PK
6	5460	59.05	74.00	-14.95	33.26	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/2
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5220MHz	Humidity (%RH)	58.0

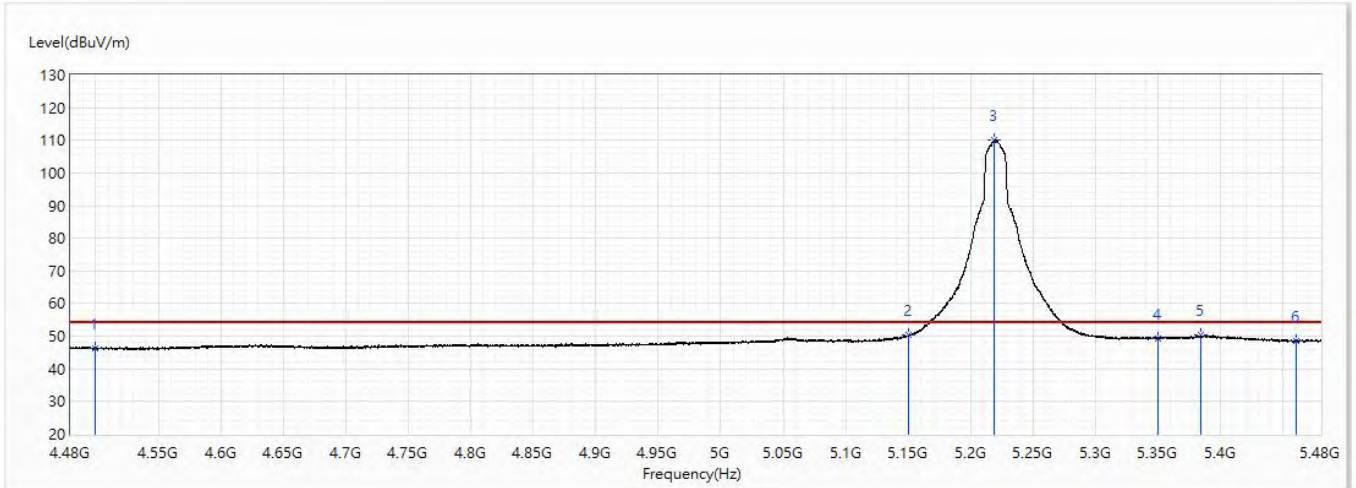


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.41	54.00	-7.59	22.39	24.02	AV
2	5150	50.23	54.00	-3.77	25.30	24.93	AV
! 3	5218.875	110.27	54.00	56.27	85.14	25.13	AV
4	5350	49.44	54.00	-4.56	23.93	25.51	AV
5	5384.25	50.35	54.00	-3.65	24.69	25.66	AV
6	5460	48.43	54.00	-5.57	22.64	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5240MHz	Humidity (%RH)	58.0

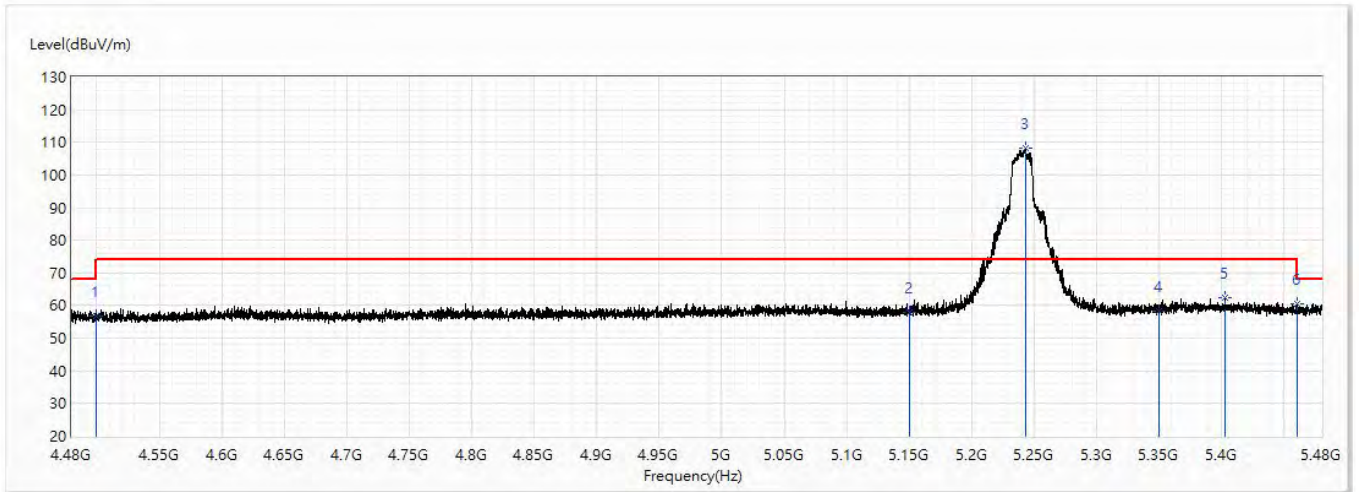


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.88	74.00	-17.12	32.86	24.02	PK
2	5150	58.09	74.00	-15.91	33.16	24.93	PK
! 3	5243	108.18	74.00	34.18	83.00	25.18	PK
4	5350	58.38	74.00	-15.62	32.87	25.51	PK
5	5402.375	62.47	74.00	-11.53	36.74	25.73	PK
6	5460	60.60	74.00	-13.40	34.81	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5240MHz	Humidity (%RH)	58.0

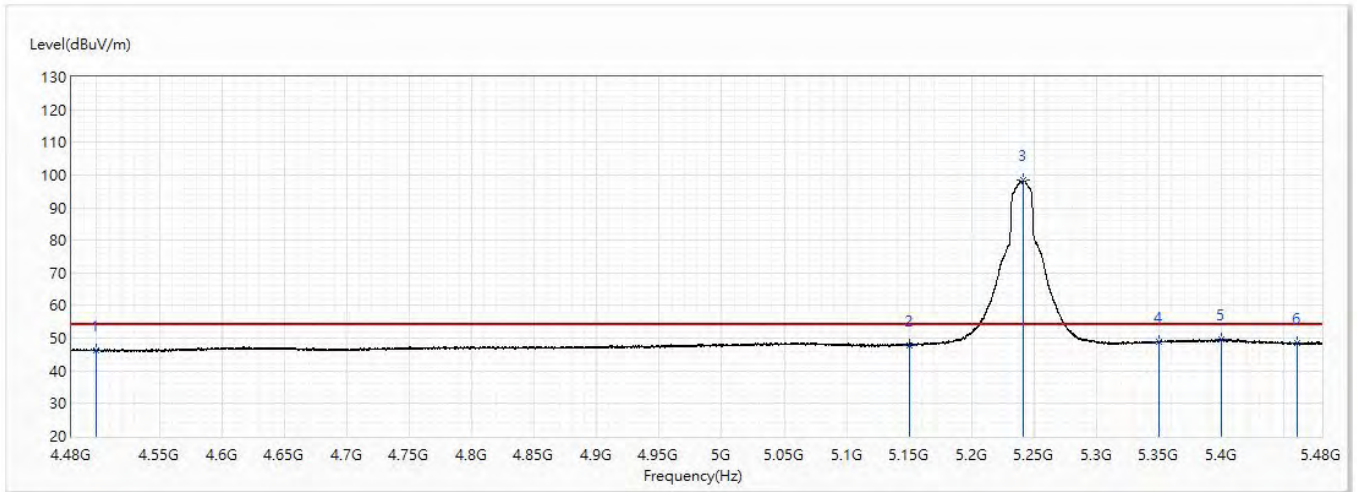


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.44	54.00	-7.56	22.42	24.02	AV
2	5150	47.91	54.00	-6.09	22.98	24.93	AV
! 3	5241.125	98.44	54.00	44.44	73.26	25.18	AV
4	5350	48.87	54.00	-5.13	23.36	25.51	AV
5	5400	49.66	54.00	-4.34	23.93	25.73	AV
6	5460	48.43	54.00	-5.57	22.64	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5240MHz	Humidity (%RH)	58.0

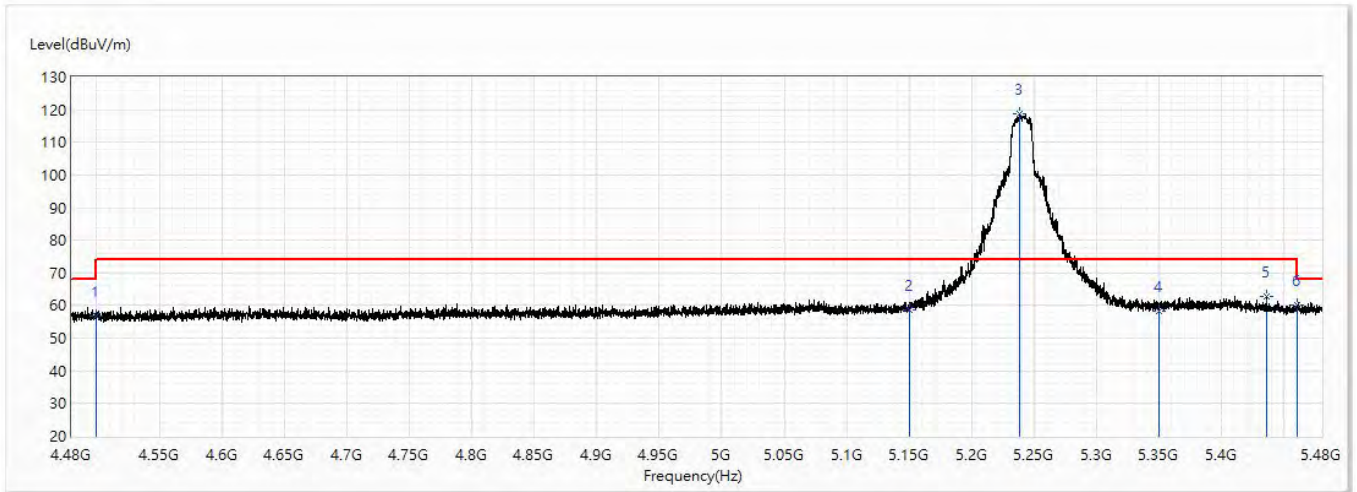


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.65	74.00	-17.35	32.63	24.02	PK
2	5150	58.76	74.00	-15.24	33.83	24.93	PK
! 3	5238.375	118.58	74.00	44.58	93.41	25.17	PK
4	5350	58.39	74.00	-15.61	32.88	25.51	PK
5	5436	62.76	74.00	-11.24	36.98	25.78	PK
6	5460	60.13	74.00	-13.87	34.34	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5240MHz	Humidity (%RH)	58.0

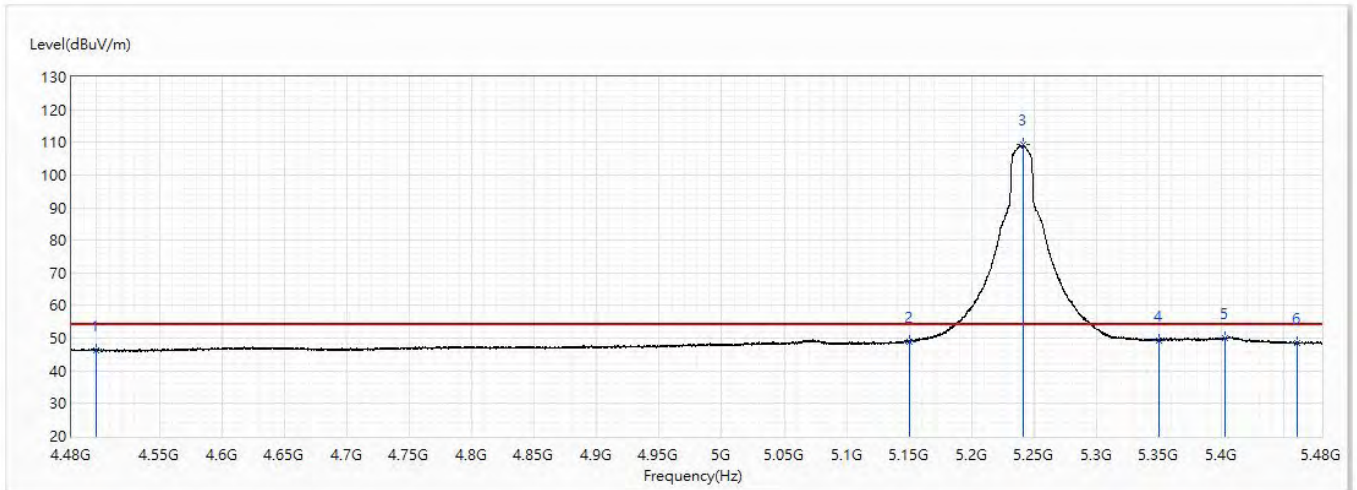


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.42	54.00	-7.58	22.40	24.02	AV
2	5150	49.05	54.00	-4.95	24.12	24.93	AV
! 3	5241.5	109.30	54.00	55.30	84.12	25.18	AV
4	5350	49.41	54.00	-4.59	23.90	25.51	AV
5	5402.875	50.03	54.00	-3.97	24.30	25.73	AV
6	5460	48.67	54.00	-5.33	22.88	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5180MHz	Humidity (%RH)	58.0

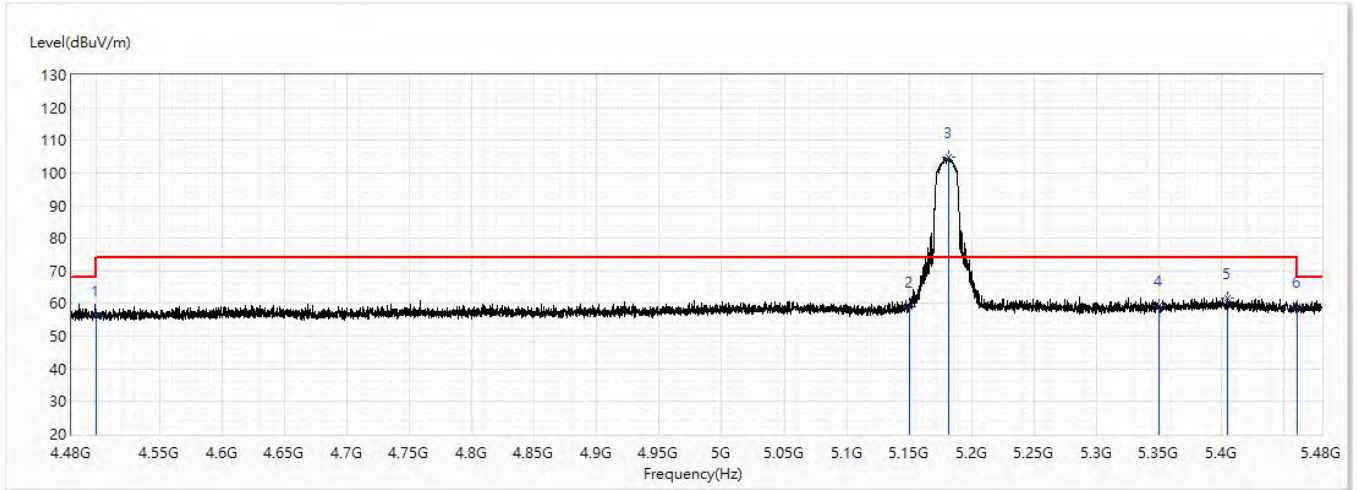


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.54	74.00	-17.46	32.52	24.02	PK
2	5150	59.09	74.00	-14.91	34.16	24.93	PK
! 3	5181.375	104.85	74.00	30.85	79.82	25.03	PK
4	5350	59.50	74.00	-14.50	33.99	25.51	PK
5	5404.625	61.56	74.00	-12.44	35.83	25.73	PK
6	5460	59.03	74.00	-14.97	33.24	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5180MHz	Humidity (%RH)	58.0

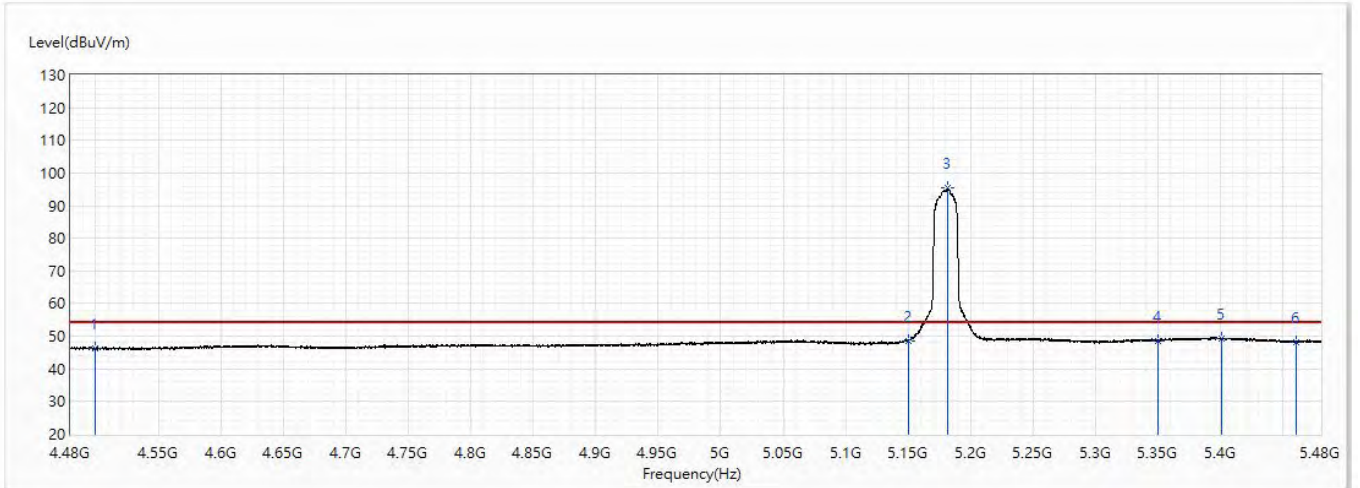


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.21	54.00	-7.79	22.19	24.02	AV
2	5150	48.65	54.00	-5.35	23.72	24.93	AV
! 3	5181.5	95.29	54.00	41.29	70.26	25.03	AV
4	5350	48.66	54.00	-5.34	23.15	25.51	AV
5	5400.5	49.37	54.00	-4.63	23.64	25.73	AV
6	5460	48.32	54.00	-5.68	22.53	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5180MHz	Humidity (%RH)	58.0

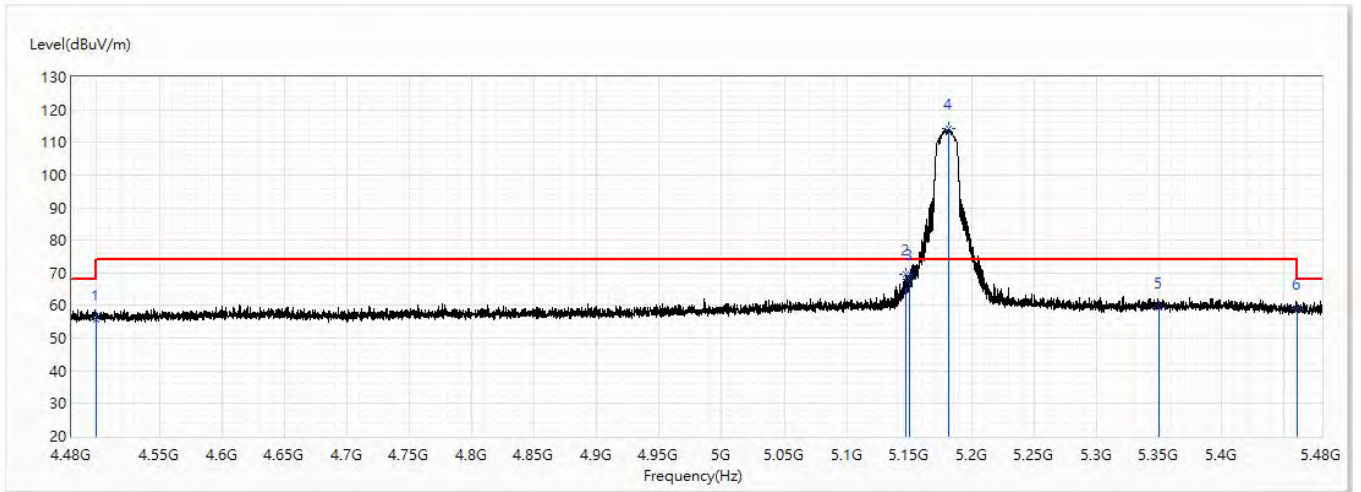


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.77	74.00	-18.23	31.75	24.02	PK
2	5146.875	69.37	74.00	-4.63	44.44	24.93	PK
3	5150	67.92	74.00	-6.08	42.99	24.93	PK
! 4	5181.375	114.31	74.00	40.31	89.28	25.03	PK
5	5350	59.39	74.00	-14.61	33.88	25.51	PK
6	5460	59.04	74.00	-14.96	33.25	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5180MHz	Humidity (%RH)	58.0

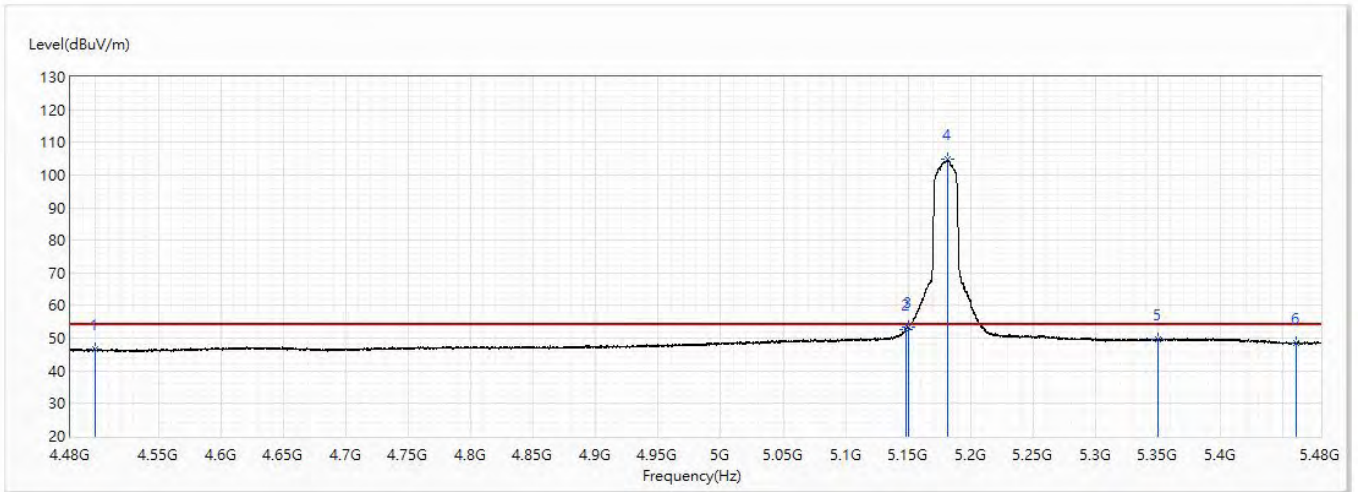


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.79	54.00	-7.21	22.77	24.02	AV
2	5147.875	52.60	54.00	-1.40	27.67	24.93	AV
3	5150	53.51	54.00	-0.49	28.58	24.93	AV
! 4	5181.75	104.71	54.00	50.71	79.67	25.04	AV
5	5350	49.58	54.00	-4.42	24.07	25.51	AV
6	5460	48.68	54.00	-5.32	22.89	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5220MHz	Humidity (%RH)	58.0

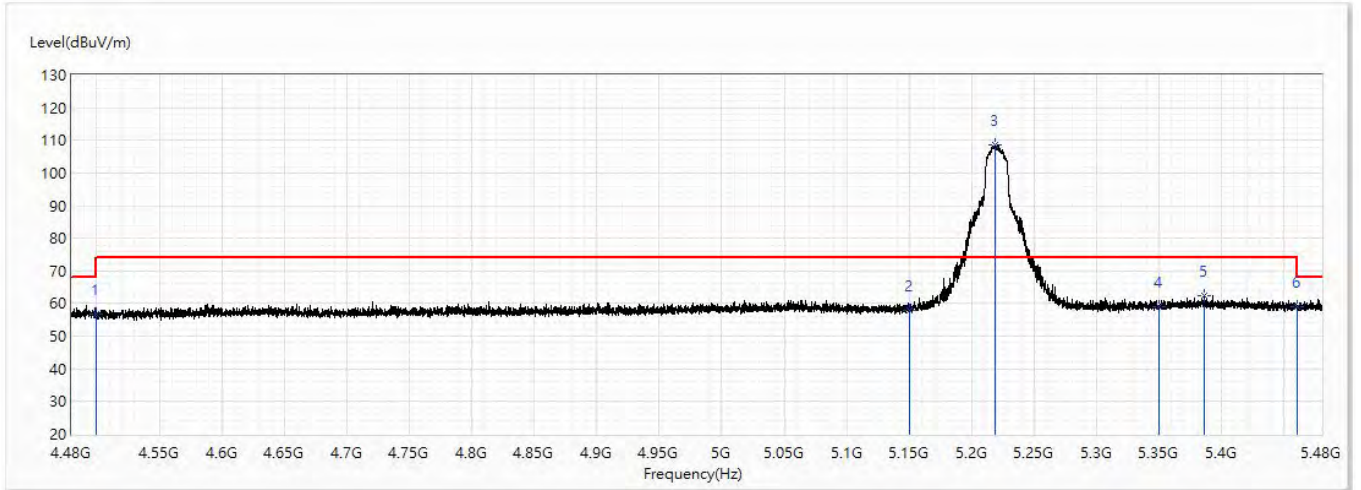


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.81	74.00	-17.19	32.79	24.02	PK
2	5150	57.94	74.00	-16.06	33.01	24.93	PK
! 3	5218.875	108.64	74.00	34.64	83.51	25.13	PK
4	5350	59.01	74.00	-14.99	33.50	25.51	PK
5	5386.5	62.41	74.00	-11.59	36.73	25.68	PK
6	5460	59.04	74.00	-14.96	33.25	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5220MHz	Humidity (%RH)	58.0

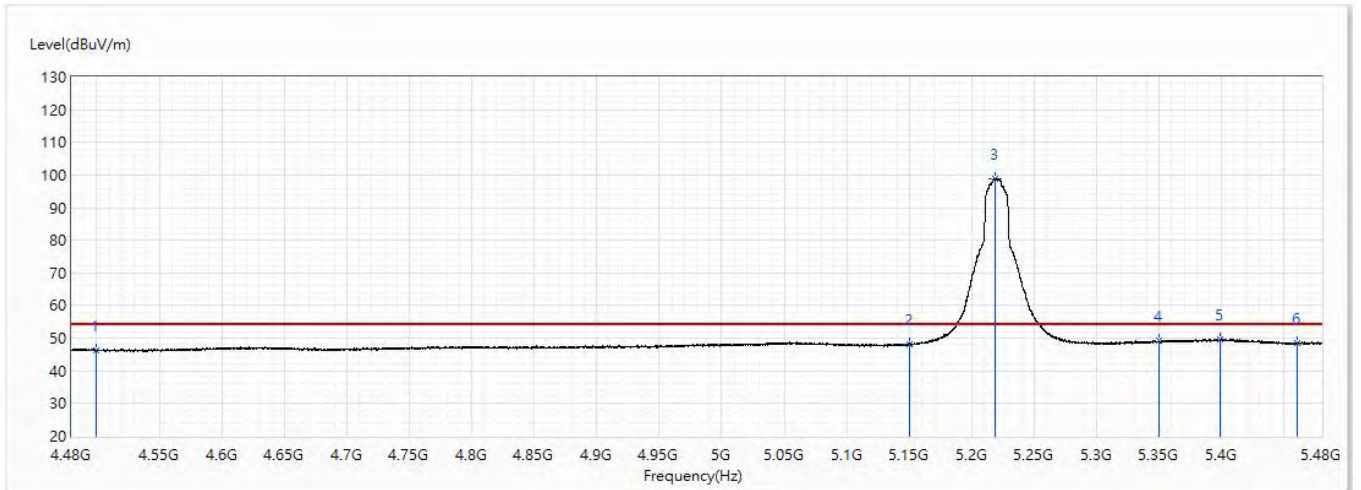


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.43	54.00	-7.57	22.41	24.02	AV
2	5150	48.18	54.00	-5.82	23.25	24.93	AV
! 3	5218.5	98.98	54.00	44.98	73.85	25.13	AV
4	5350	49.19	54.00	-4.81	23.68	25.51	AV
5	5399.125	49.63	54.00	-4.37	23.90	25.73	AV
6	5460	48.55	54.00	-5.45	22.76	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5220MHz	Humidity (%RH)	58.0

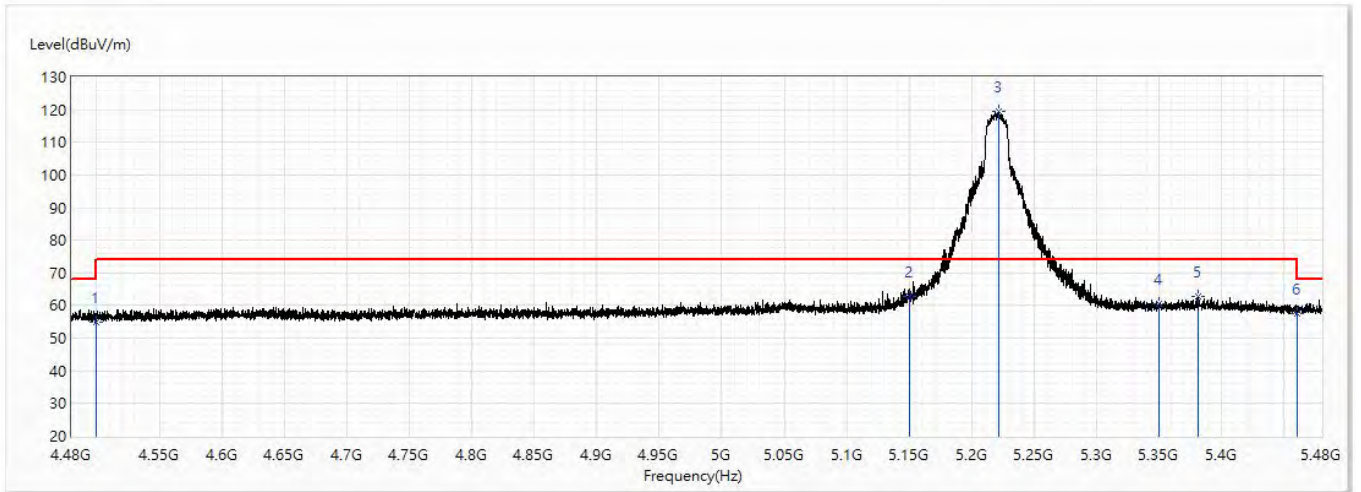


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	54.96	74.00	-19.04	30.94	24.02	PK
2	5150	62.64	74.00	-11.36	37.71	24.93	PK
! 3	5221.625	119.58	74.00	45.58	94.45	25.13	PK
4	5350	60.36	74.00	-13.64	34.85	25.51	PK
5	5380.75	62.74	74.00	-11.26	37.09	25.65	PK
6	5460	57.69	74.00	-16.31	31.90	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5220MHz	Humidity (%RH)	58.0

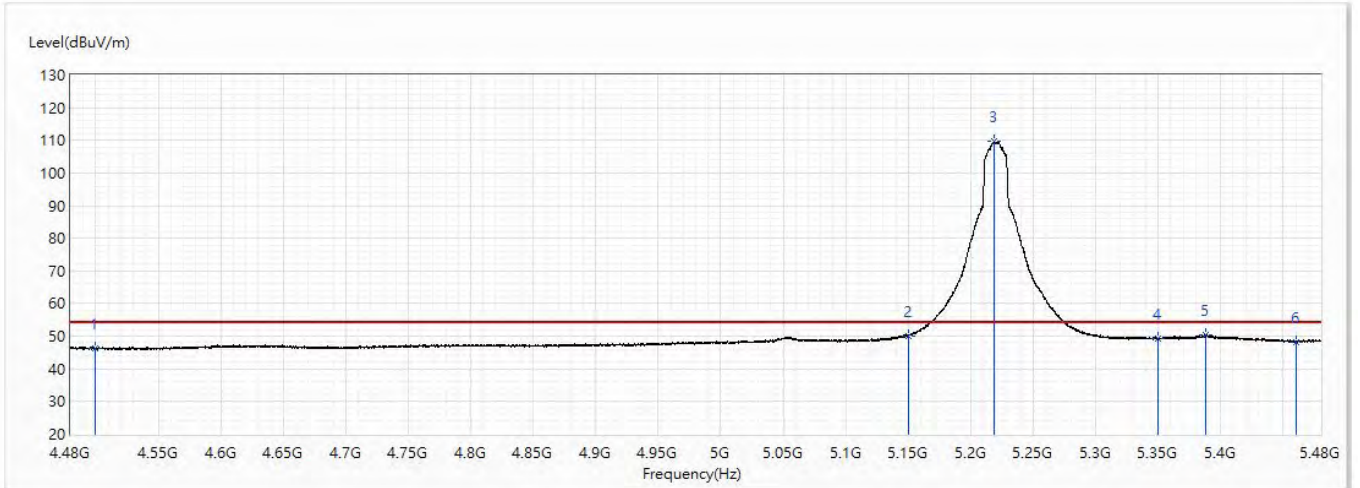


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.24	54.00	-7.76	22.22	24.02	AV
2	5150	50.21	54.00	-3.79	25.28	24.93	AV
! 3	5218.625	109.65	54.00	55.65	84.52	25.13	AV
4	5350	49.34	54.00	-4.66	23.83	25.51	AV
5	5387.75	50.39	54.00	-3.61	24.71	25.68	AV
6	5460	48.18	54.00	-5.82	22.39	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5240MHz	Humidity (%RH)	58.0

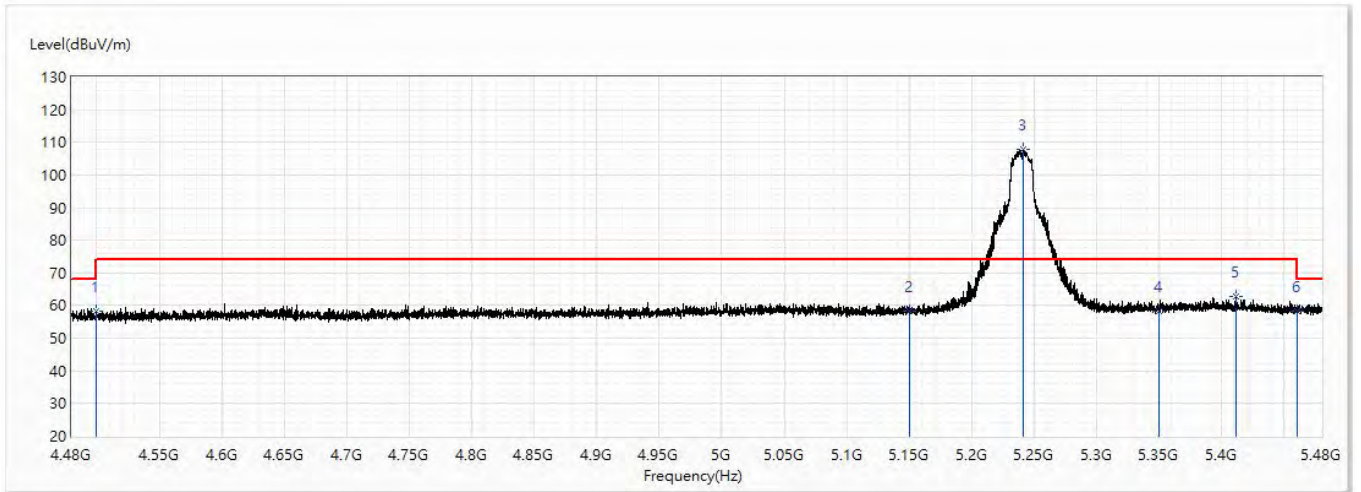


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	58.15	74.00	-15.85	34.13	24.02	PK
2	5150	58.27	74.00	-15.73	33.34	24.93	PK
! 3	5241.25	107.95	74.00	33.95	82.77	25.18	PK
4	5350	58.26	74.00	-15.74	32.75	25.51	PK
5	5411.875	62.76	74.00	-11.24	37.02	25.74	PK
6	5460	58.25	74.00	-15.75	32.46	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5240MHz	Humidity (%RH)	58.0

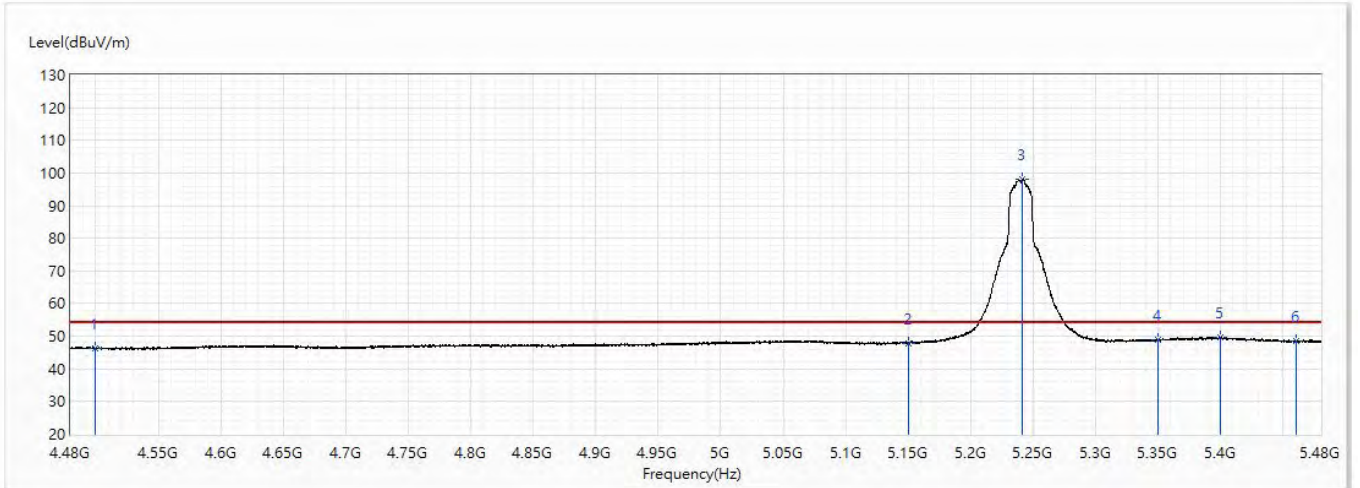


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.24	54.00	-7.76	22.22	24.02	AV
2	5150	47.87	54.00	-6.13	22.94	24.93	AV
! 3	5241.5	98.00	54.00	44.00	72.82	25.18	AV
4	5350	48.91	54.00	-5.09	23.40	25.51	AV
5	5399.625	49.76	54.00	-4.24	24.03	25.73	AV
6	5460	48.49	54.00	-5.51	22.70	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5240MHz	Humidity (%RH)	58.0

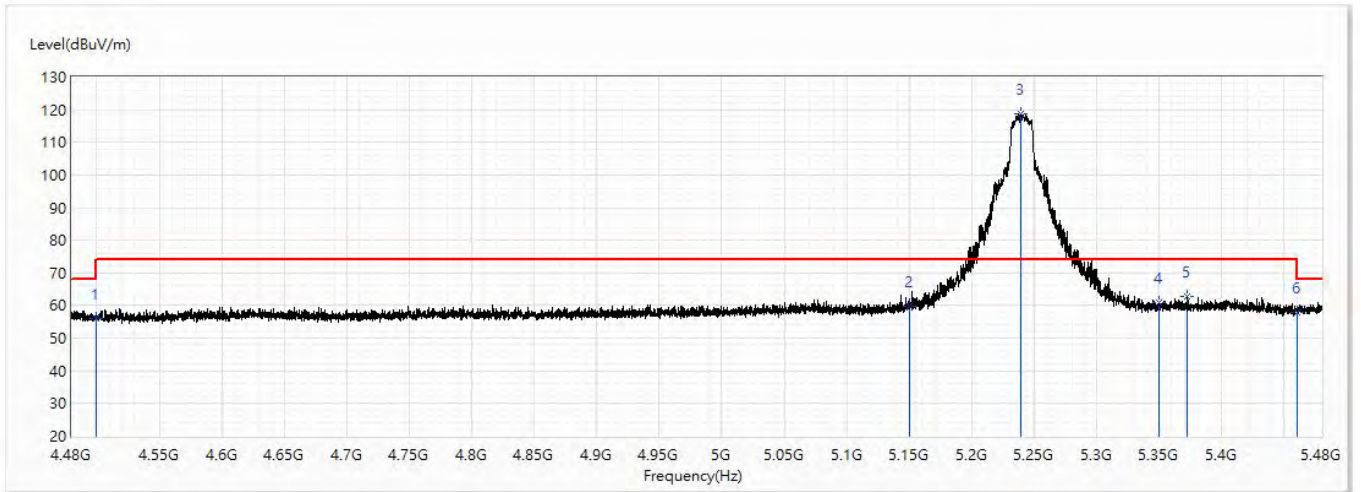


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.12	74.00	-17.88	32.10	24.02	PK
2	5150	59.62	74.00	-14.38	34.69	24.93	PK
! 3	5238.875	118.77	74.00	44.77	93.60	25.17	PK
4	5350	61.02	74.00	-12.98	35.51	25.51	PK
5	5372.5	62.86	74.00	-11.14	37.26	25.60	PK
6	5460	57.75	74.00	-16.25	31.96	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5240MHz	Humidity (%RH)	58.0

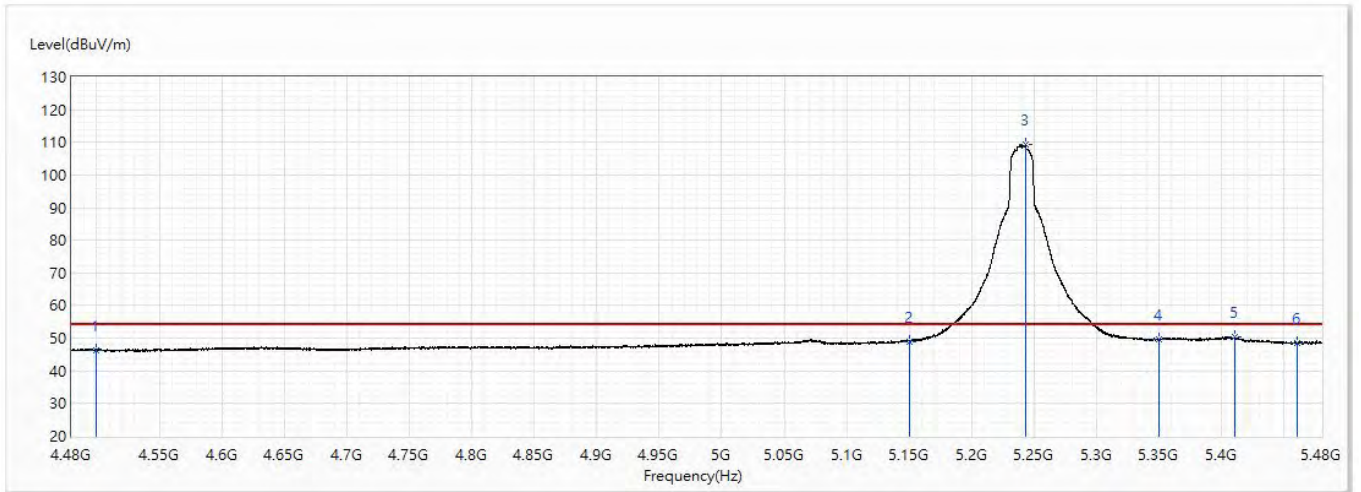


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.32	54.00	-7.68	22.30	24.02	AV
2	5150	49.05	54.00	-4.95	24.12	24.93	AV
! 3	5242.875	109.25	54.00	55.25	84.07	25.18	AV
4	5350	49.69	54.00	-4.31	24.18	25.51	AV
5	5410.5	50.44	54.00	-3.56	24.70	25.74	AV
6	5460	48.56	54.00	-5.44	22.77	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5190MHz	Humidity (%RH)	58.0

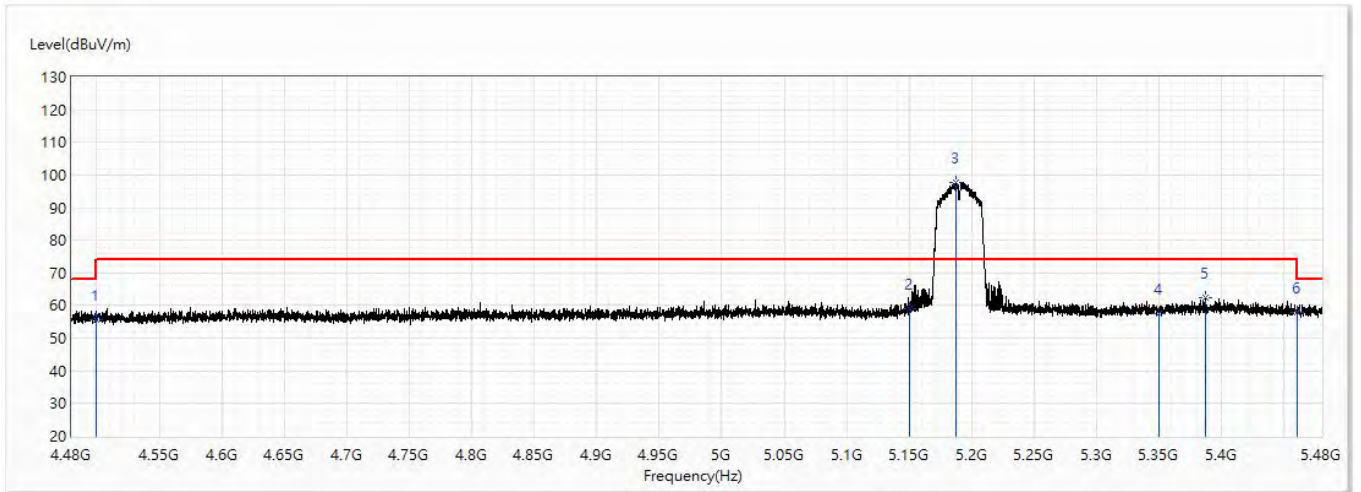


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.68	74.00	-18.32	31.66	24.02	PK
2	5150	58.89	74.00	-15.11	33.96	24.93	PK
! 3	5187.25	97.76	74.00	23.76	72.70	25.06	PK
4	5350	57.61	74.00	-16.39	32.10	25.51	PK
5	5387.5	62.25	74.00	-11.75	36.57	25.68	PK
6	5460	57.87	74.00	-16.13	32.08	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5190MHz	Humidity (%RH)	58.0

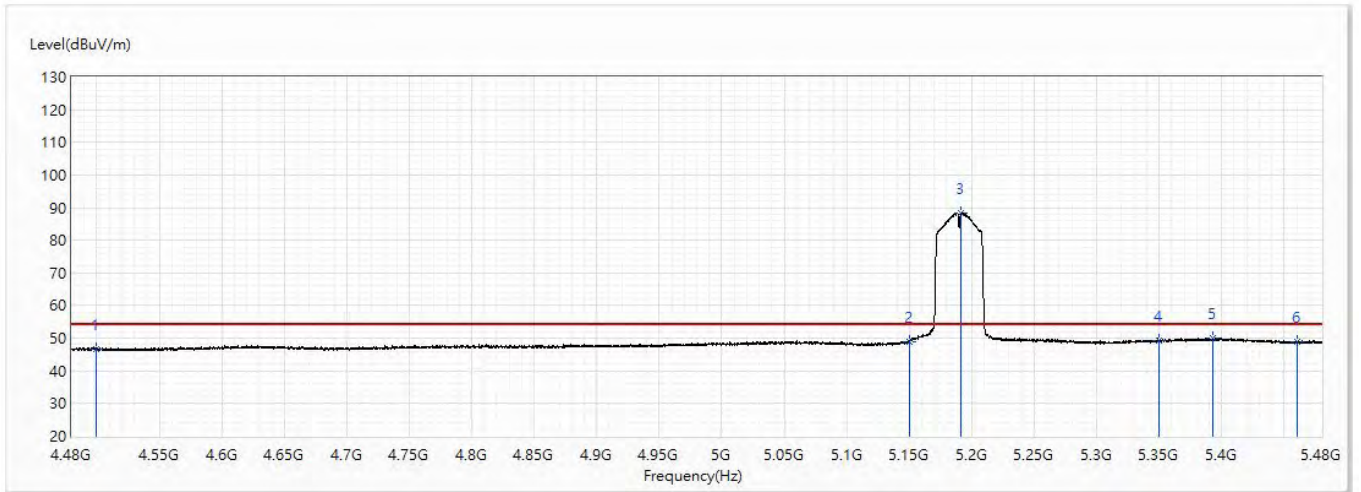


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.71	54.00	-7.29	22.69	24.02	AV
2	5150	48.82	54.00	-5.18	23.89	24.93	AV
! 3	5191.375	88.48	54.00	34.48	63.42	25.06	AV
4	5350	49.27	54.00	-4.73	23.76	25.51	AV
5	5392.5	50.16	54.00	-3.84	24.46	25.70	AV
6	5460	48.74	54.00	-5.26	22.95	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5190MHz	Humidity (%RH)	58.0

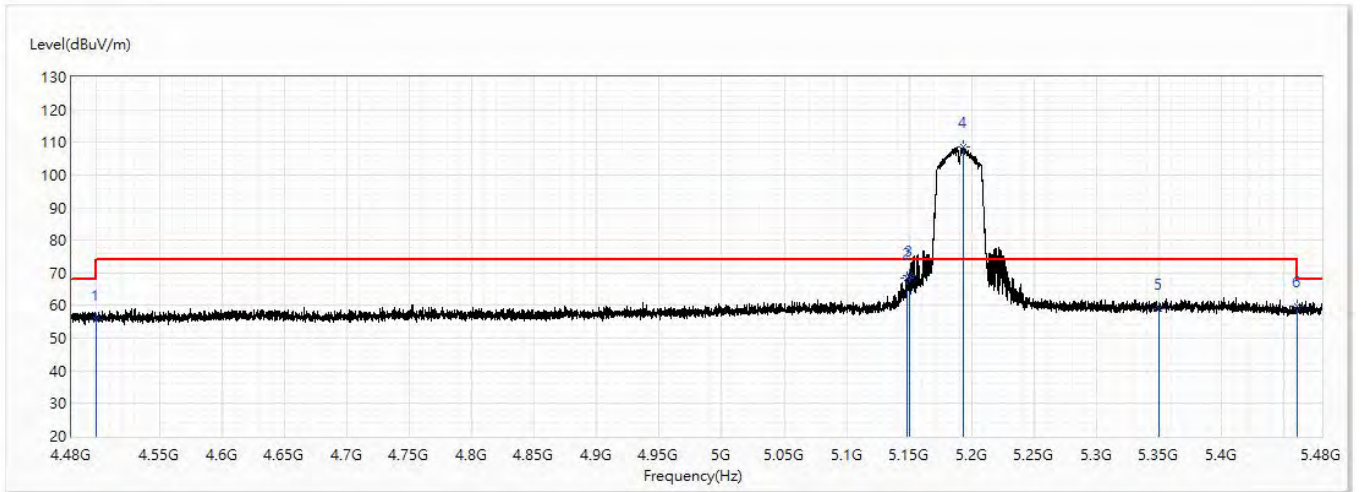


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.85	74.00	-18.15	31.83	24.02	PK
2	5148.125	68.43	74.00	-5.57	43.50	24.93	PK
3	5150	69.20	74.00	-4.80	44.27	24.93	PK
! 4	5192.875	108.61	74.00	34.61	83.54	25.07	PK
5	5350	59.10	74.00	-14.90	33.59	25.51	PK
6	5460	59.64	74.00	-14.36	33.85	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5190MHz	Humidity (%RH)	58.0

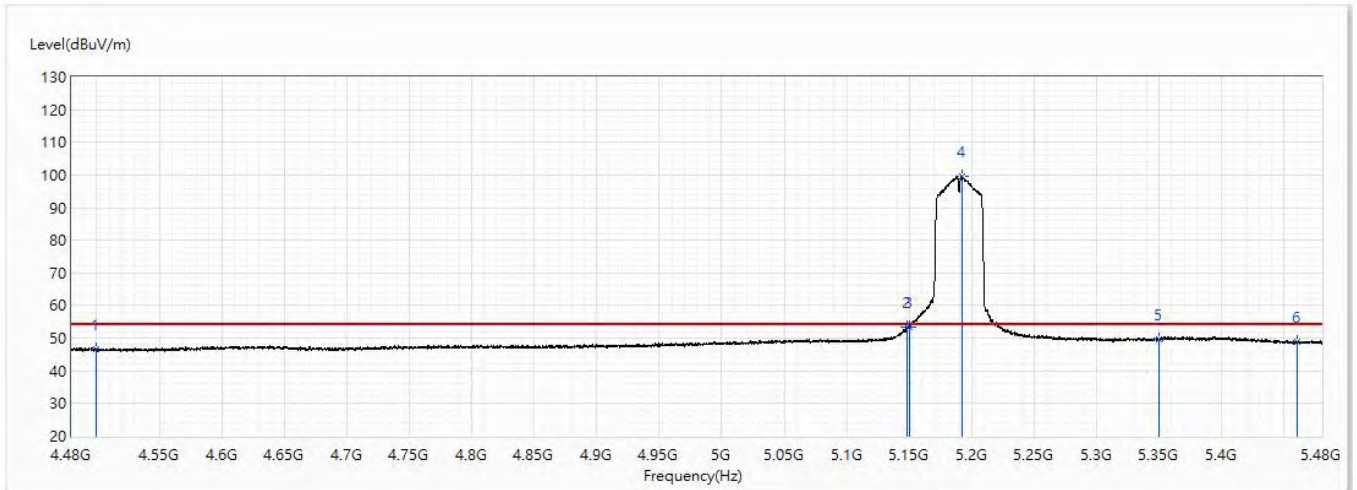


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.49	54.00	-7.51	22.47	24.02	AV
2	5148	53.49	54.00	-0.51	28.56	24.93	AV
3	5150	53.54	54.00	-0.46	28.61	24.93	AV
! 4	5191.875	99.52	54.00	45.52	74.46	25.06	AV
5	5350	49.62	54.00	-4.38	24.11	25.51	AV
6	5460	48.97	54.00	-5.03	23.18	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5230MHz	Humidity (%RH)	58.0

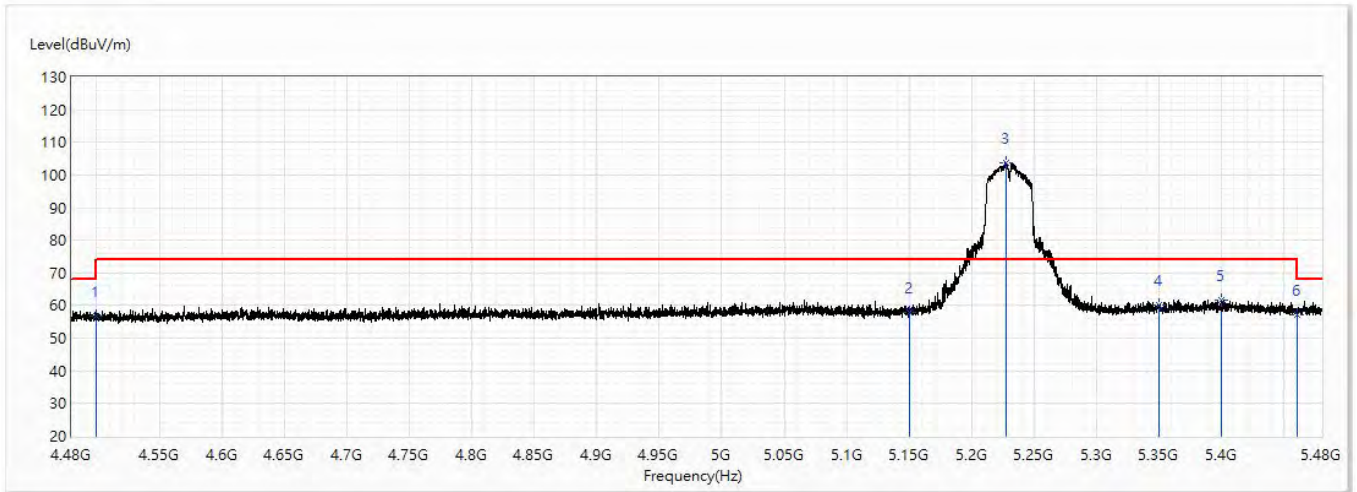


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.66	74.00	-17.34	32.64	24.02	PK
2	5150	57.98	74.00	-16.02	33.05	24.93	PK
! 3	5227.875	103.69	74.00	29.69	78.53	25.16	PK
4	5350	60.24	74.00	-13.76	34.73	25.51	PK
5	5399.875	61.85	74.00	-12.15	36.12	25.73	PK
6	5460	57.13	74.00	-16.87	31.34	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5230MHz	Humidity (%RH)	58.0

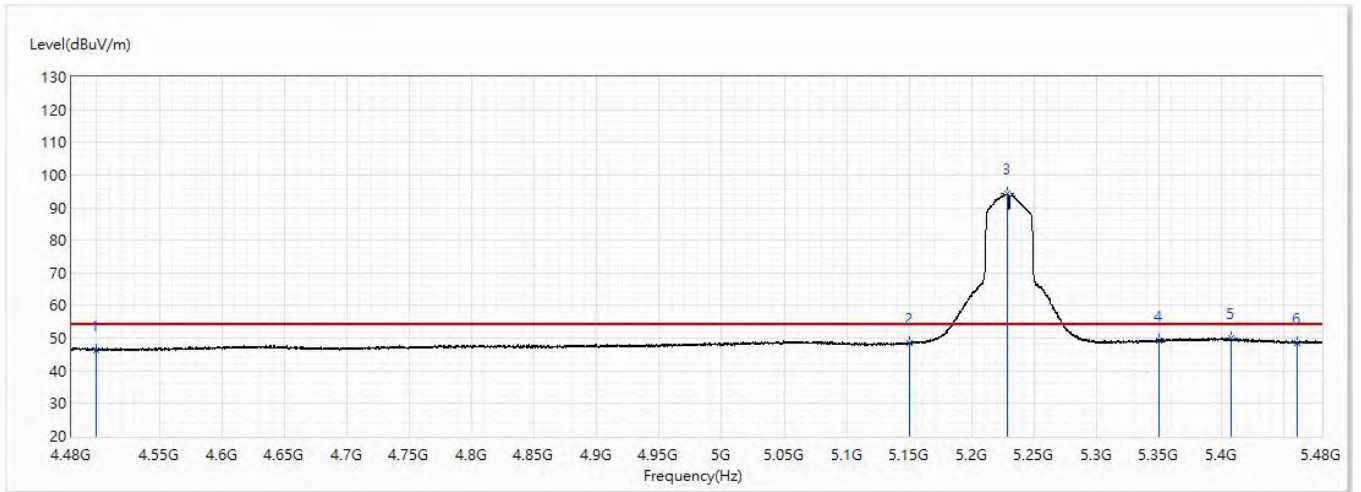


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.43	54.00	-7.57	22.41	24.02	AV
2	5150	48.61	54.00	-5.39	23.68	24.93	AV
! 3	5228.875	94.32	54.00	40.32	69.16	25.16	AV
4	5350	49.11	54.00	-4.89	23.60	25.51	AV
5	5407.75	50.16	54.00	-3.84	24.42	25.74	AV
6	5460	48.36	54.00	-5.64	22.57	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5230MHz	Humidity (%RH)	58.0

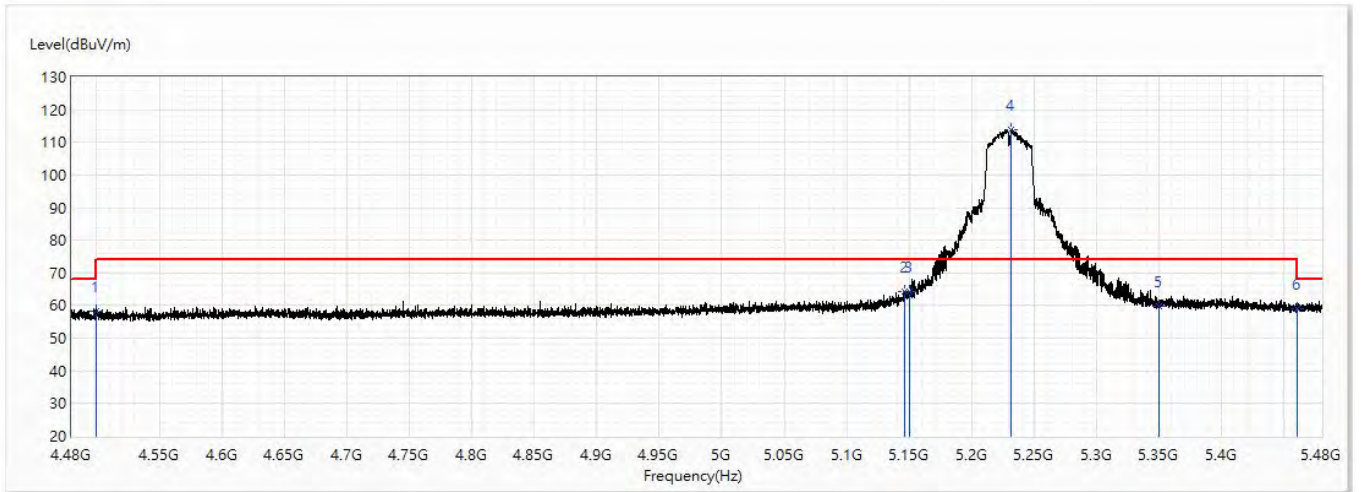


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	58.15	74.00	-15.85	34.13	24.02	PK
2	5146.375	64.39	74.00	-9.61	39.46	24.93	PK
3	5150	64.13	74.00	-9.87	39.20	24.93	PK
! 4	5231.75	114.02	74.00	40.02	88.86	25.16	PK
5	5350	59.81	74.00	-14.19	34.30	25.51	PK
6	5460	58.95	74.00	-15.05	33.16	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/3
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5230MHz	Humidity (%RH)	58.0

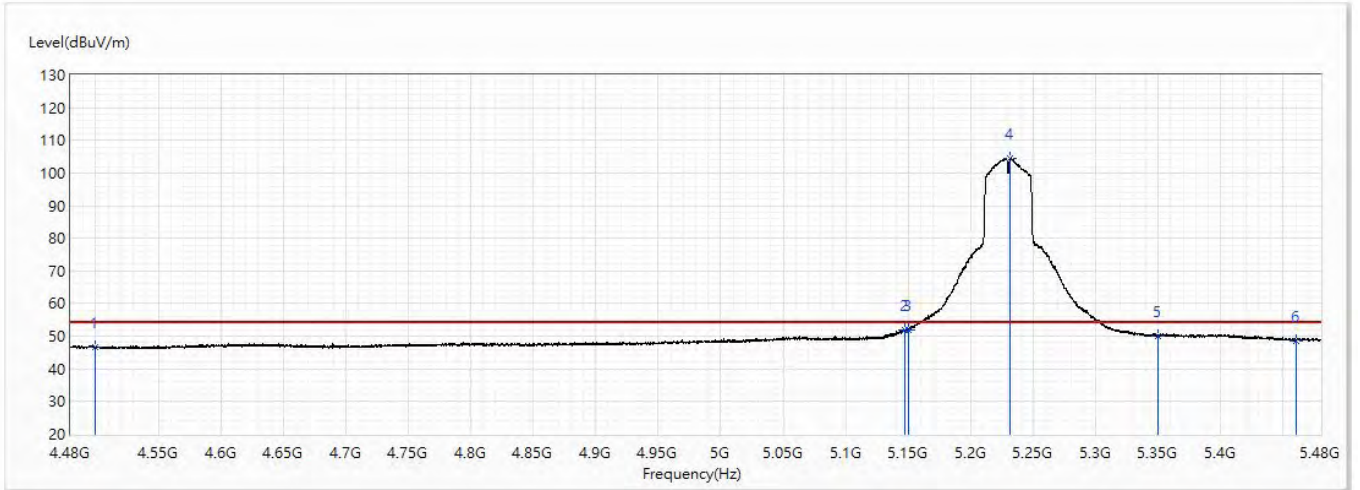


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.64	54.00	-7.36	22.62	24.02	AV
2	5147.5	51.79	54.00	-2.21	26.86	24.93	AV
3	5150	51.83	54.00	-2.17	26.90	24.93	AV
! 4	5231.5	104.62	54.00	50.62	79.46	25.16	AV
5	5350	50.08	54.00	-3.92	24.57	25.51	AV
6	5460	48.70	54.00	-5.30	22.91	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5210MHz	Humidity (%RH)	58.0

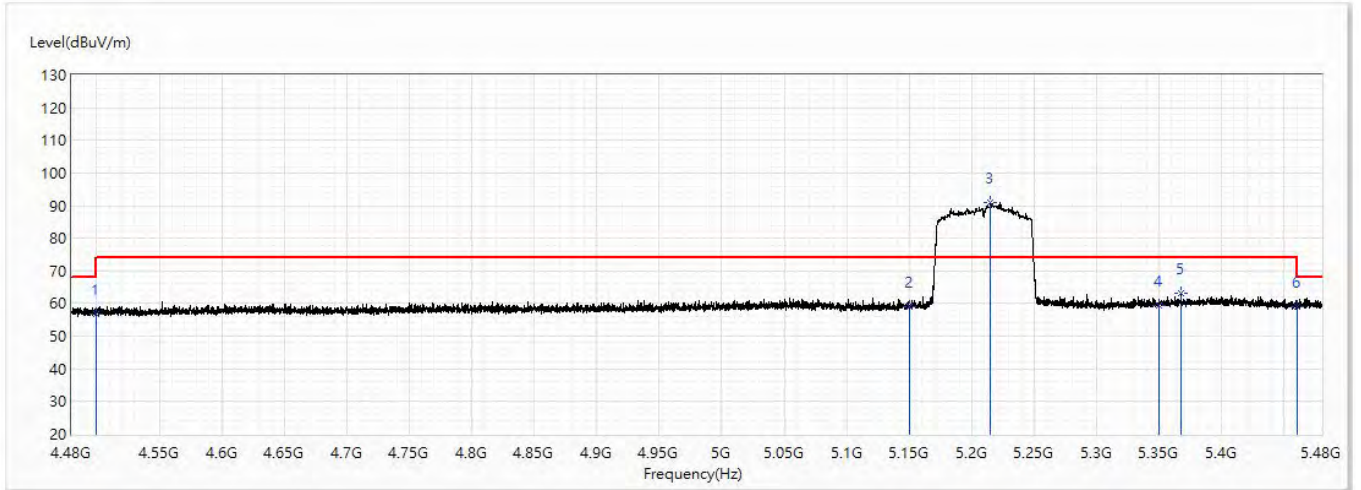


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.82	74.00	-17.18	32.80	24.02	PK
2	5150	59.01	74.00	-14.99	34.08	24.93	PK
! 3	5214.875	90.94	74.00	16.94	65.83	25.11	PK
4	5350	59.52	74.00	-14.48	34.01	25.51	PK
5	5367.25	63.26	74.00	-10.74	37.67	25.59	PK
6	5460	58.94	74.00	-15.06	33.15	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5210MHz	Humidity (%RH)	58.0

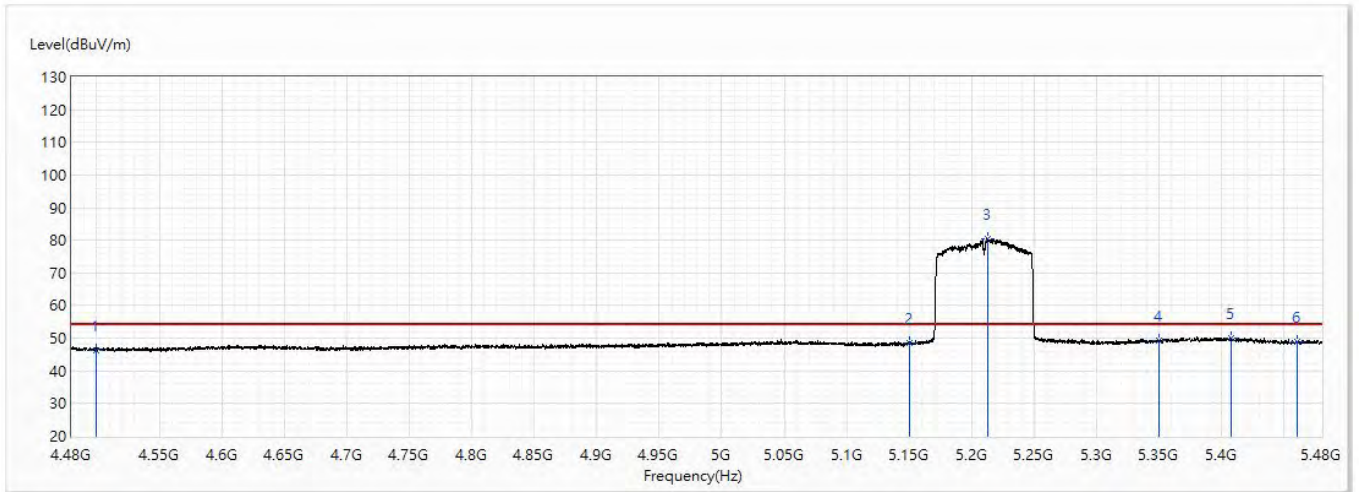


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.44	54.00	-7.56	22.42	24.02	AV
2	5150	48.70	54.00	-5.30	23.77	24.93	AV
! 3	5212.875	80.28	54.00	26.28	55.17	25.11	AV
4	5350	49.32	54.00	-4.68	23.81	25.51	AV
5	5407.25	50.14	54.00	-3.86	24.40	25.74	AV
6	5460	48.89	54.00	-5.11	23.10	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5210MHz	Humidity (%RH)	58.0

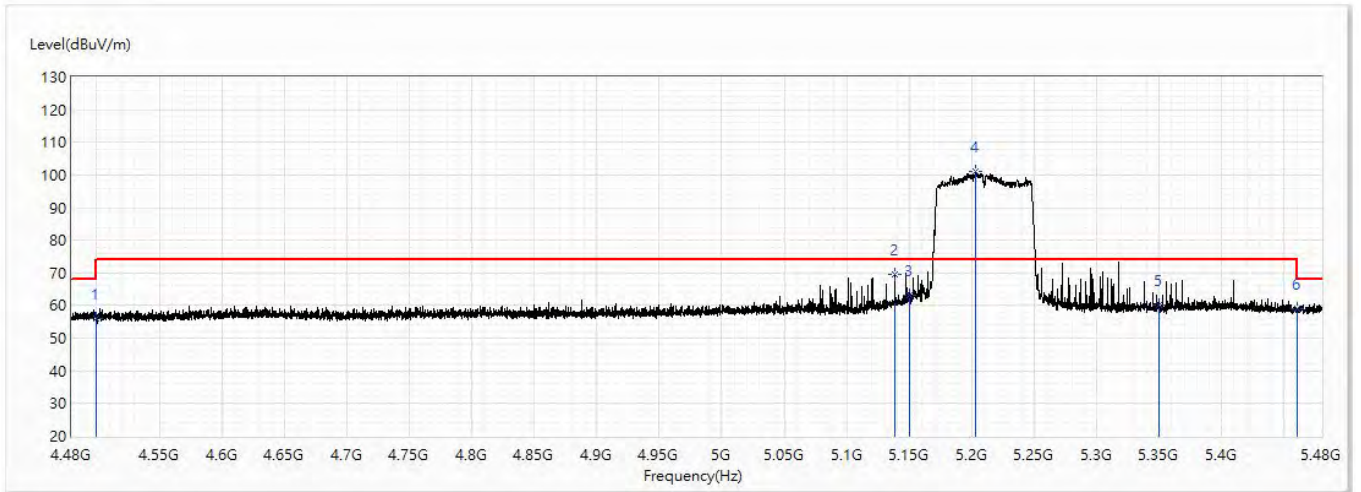


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.99	74.00	-18.01	31.97	24.02	PK
2	5138.625	69.73	74.00	-4.27	44.83	24.90	PK
3	5150	63.23	74.00	-10.77	38.30	24.93	PK
! 4	5203.375	101.01	74.00	27.01	75.92	25.09	PK
5	5350	60.20	74.00	-13.80	34.69	25.51	PK
6	5460	58.90	74.00	-15.10	33.11	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5210MHz	Humidity (%RH)	58.0

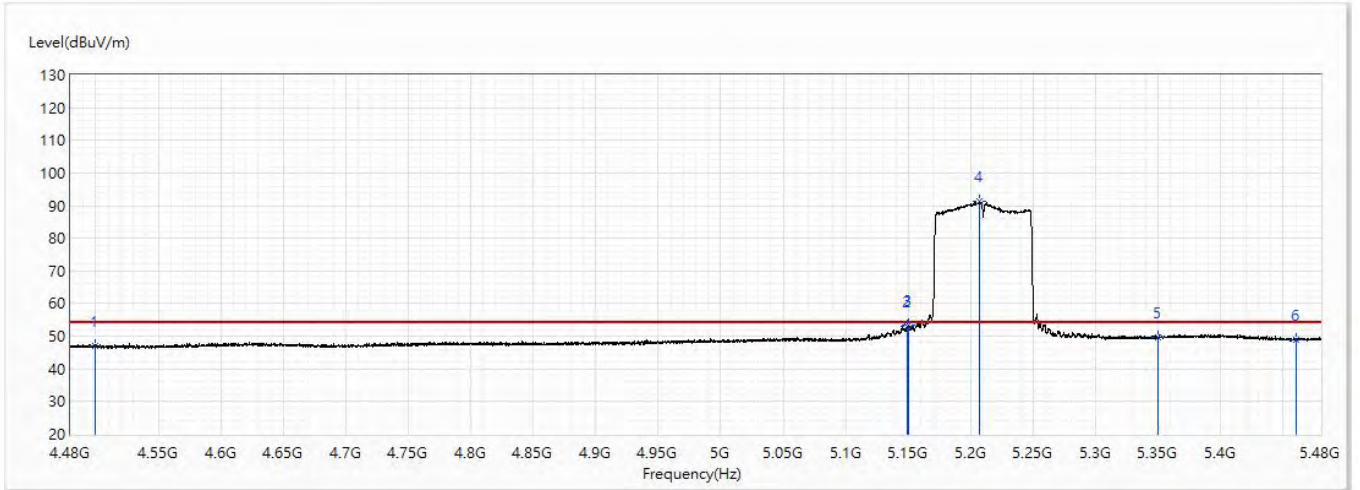


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	47.03	54.00	-6.97	23.01	24.02	AV
2	5149.125	52.97	54.00	-1.03	28.04	24.93	AV
3	5150	53.36	54.00	-0.64	28.43	24.93	AV
! 4	5207.125	91.16	54.00	37.16	66.05	25.11	AV
5	5350	49.62	54.00	-4.38	24.11	25.51	AV
6	5460	48.96	54.00	-5.04	23.17	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5260MHz	Humidity (%RH)	58.0

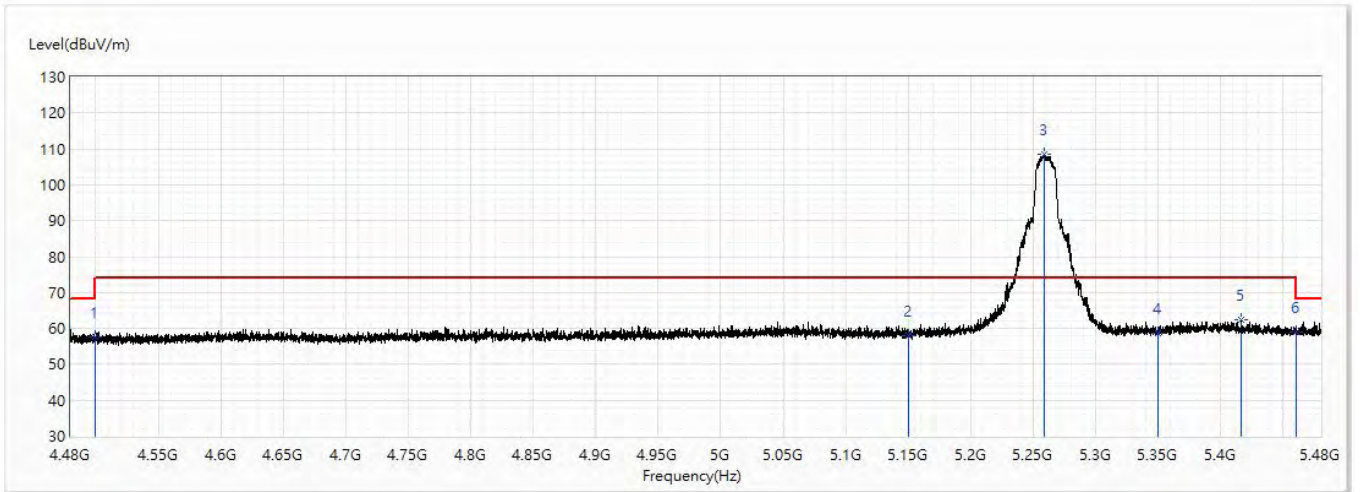


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	57.48	74.00	-16.52	33.46	24.02	PK
2	5150	58.04	74.00	-15.96	33.11	24.93	PK
! 3	5258.5	108.62	74.00	34.62	83.41	25.21	PK
4	5350	58.63	74.00	-15.37	33.12	25.51	PK
5	5416.875	62.54	74.00	-11.46	36.79	25.75	PK
6	5460	58.92	74.00	-15.08	33.13	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5260MHz	Humidity (%RH)	58.0

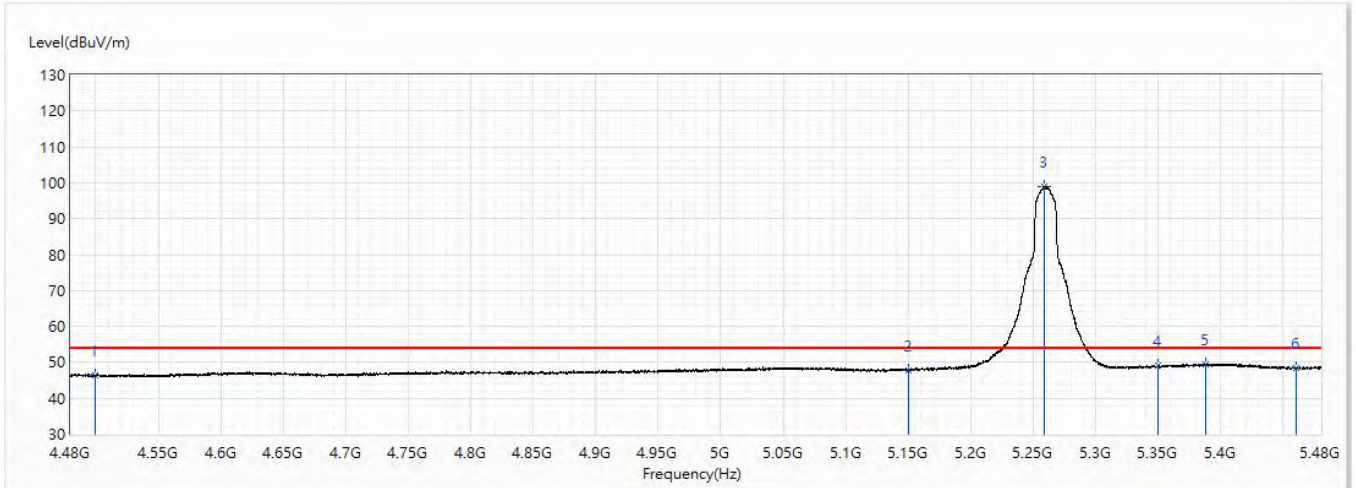


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.28	54.00	-7.72	22.26	24.02	AV
2	5150	47.81	54.00	-6.19	22.88	24.93	AV
! 3	5259.125	98.93	54.00	44.93	73.72	25.21	AV
4	5350	49.02	54.00	-4.98	23.51	25.51	AV
5	5387.875	49.35	54.00	-4.65	23.67	25.68	AV
6	5460	48.37	54.00	-5.63	22.58	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5260MHz	Humidity (%RH)	58.0

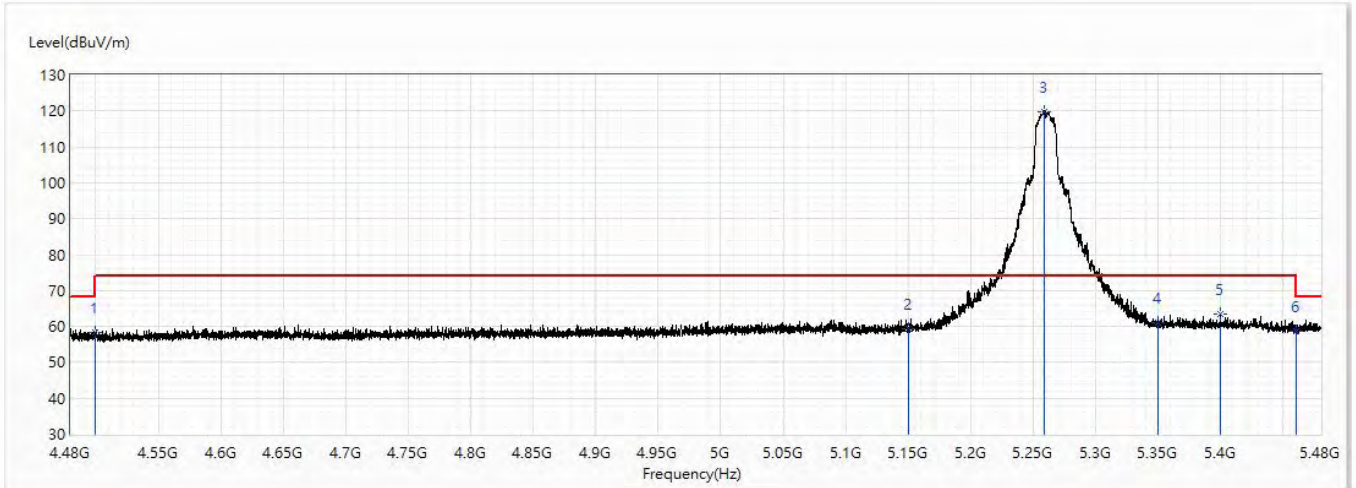


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	58.16	74.00	-15.84	34.14	24.02	PK
2	5150	59.21	74.00	-14.79	34.28	24.93	PK
! 3	5258.625	119.86	74.00	45.86	94.65	25.21	PK
4	5350	61.00	74.00	-13.00	35.49	25.51	PK
5	5400.125	63.35	74.00	-10.65	37.62	25.73	PK
6	5460	58.80	74.00	-15.20	33.01	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5260MHz	Humidity (%RH)	58.0

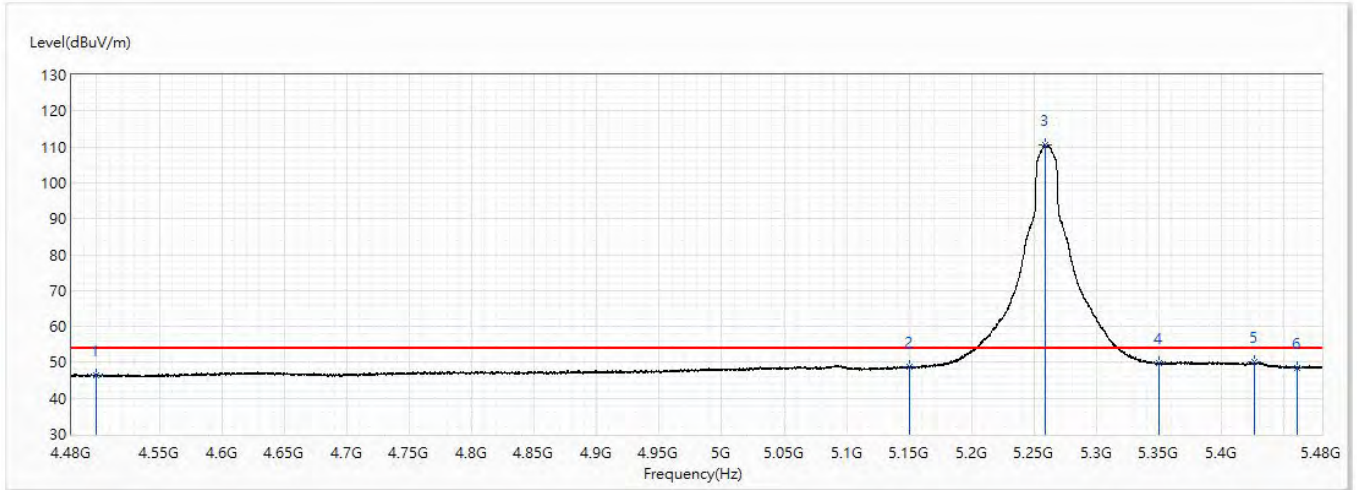


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.28	54.00	-7.72	22.26	24.02	AV
2	5150	48.62	54.00	-5.38	23.69	24.93	AV
! 3	5258.75	110.67	54.00	56.67	85.46	25.21	AV
4	5350	49.77	54.00	-4.23	24.26	25.51	AV
5	5425.875	50.11	54.00	-3.89	24.34	25.77	AV
6	5460	48.55	54.00	-5.45	22.76	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5300MHz	Humidity (%RH)	58.0

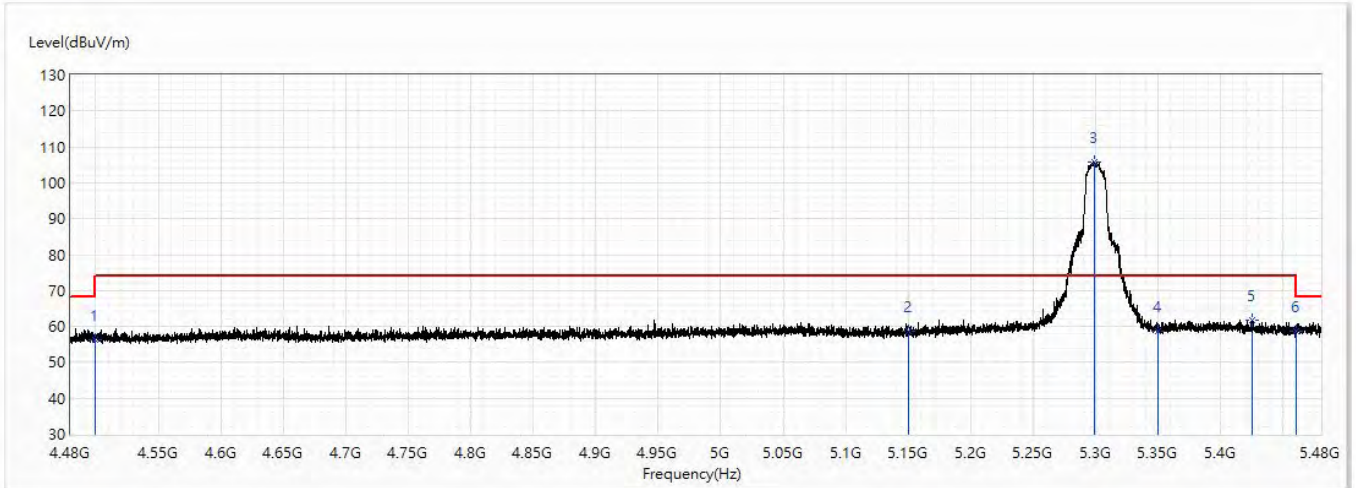


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.45	74.00	-17.55	32.43	24.02	PK
2	5150	58.53	74.00	-15.47	33.60	24.93	PK
! 3	5299.125	105.87	74.00	31.87	80.57	25.30	PK
4	5350	58.80	74.00	-15.20	33.29	25.51	PK
5	5425	61.87	74.00	-12.13	36.11	25.76	PK
6	5460	58.75	74.00	-15.25	32.96	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5300MHz	Humidity (%RH)	58.0

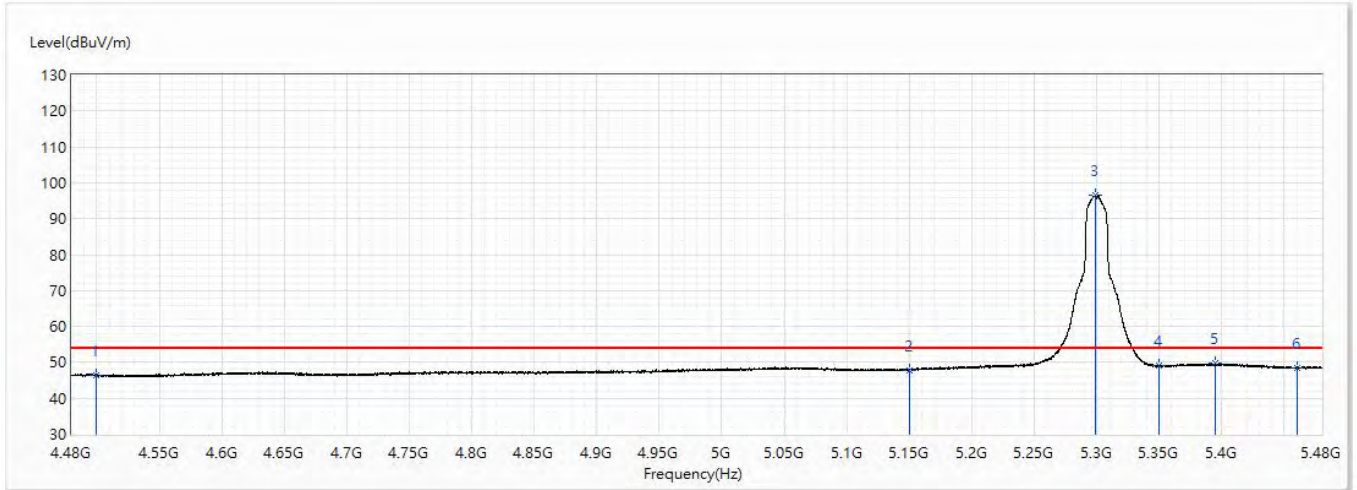


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.27	54.00	-7.73	22.25	24.02	AV
2	5150	47.84	54.00	-6.16	22.91	24.93	AV
! 3	5298.875	96.69	54.00	42.69	71.39	25.30	AV
4	5350	49.12	54.00	-4.88	23.61	25.51	AV
5	5394.625	49.78	54.00	-4.22	24.08	25.70	AV
6	5460	48.26	54.00	-5.74	22.47	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5300MHz	Humidity (%RH)	58.0

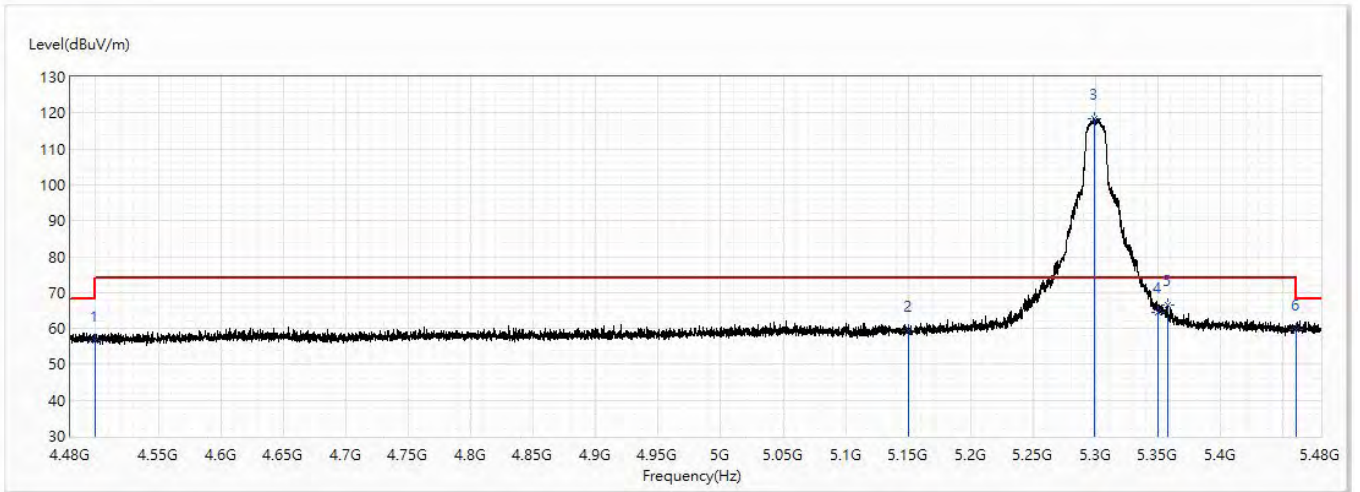


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.66	74.00	-17.34	32.64	24.02	PK
2	5150	59.21	74.00	-14.79	34.28	24.93	PK
! 3	5298.625	118.51	74.00	44.51	93.21	25.30	PK
4	5350	64.59	74.00	-9.41	39.08	25.51	PK
5	5357.25	66.39	74.00	-7.61	40.84	25.55	PK
6	5460	59.84	74.00	-14.16	34.05	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5300MHz	Humidity (%RH)	58.0

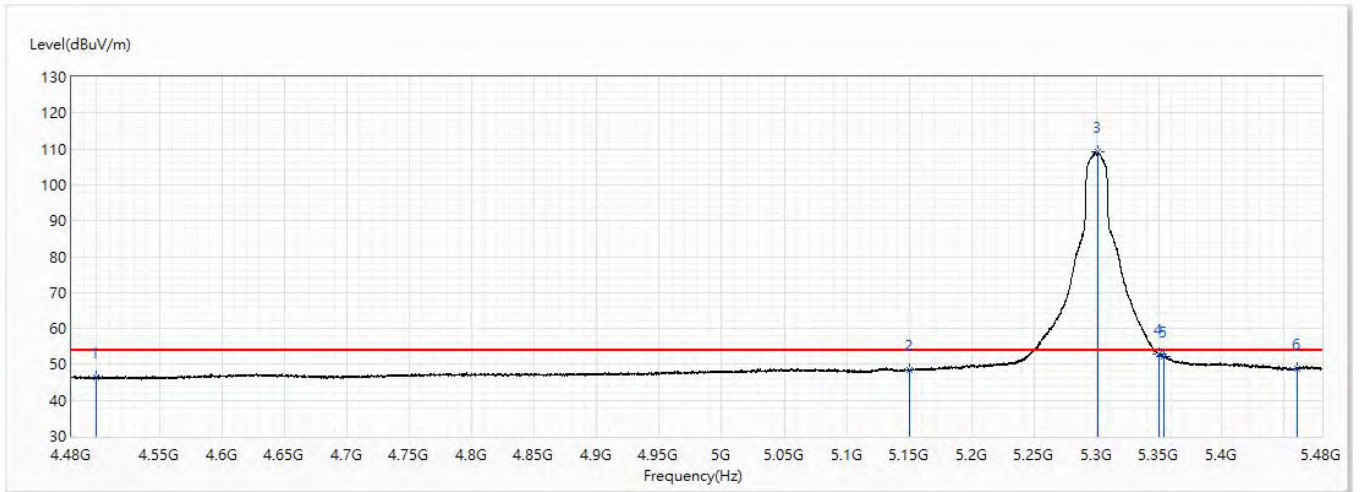


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.30	54.00	-7.70	22.28	24.02	AV
2	5150	48.29	54.00	-5.71	23.36	24.93	AV
! 3	5300.875	109.15	54.00	55.15	83.85	25.30	AV
4	5350	52.72	54.00	-1.28	27.21	25.51	AV
5	5353.375	52.09	54.00	-1.91	26.56	25.53	AV
6	5460	48.70	54.00	-5.30	22.91	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5320MHz	Humidity (%RH)	58.0

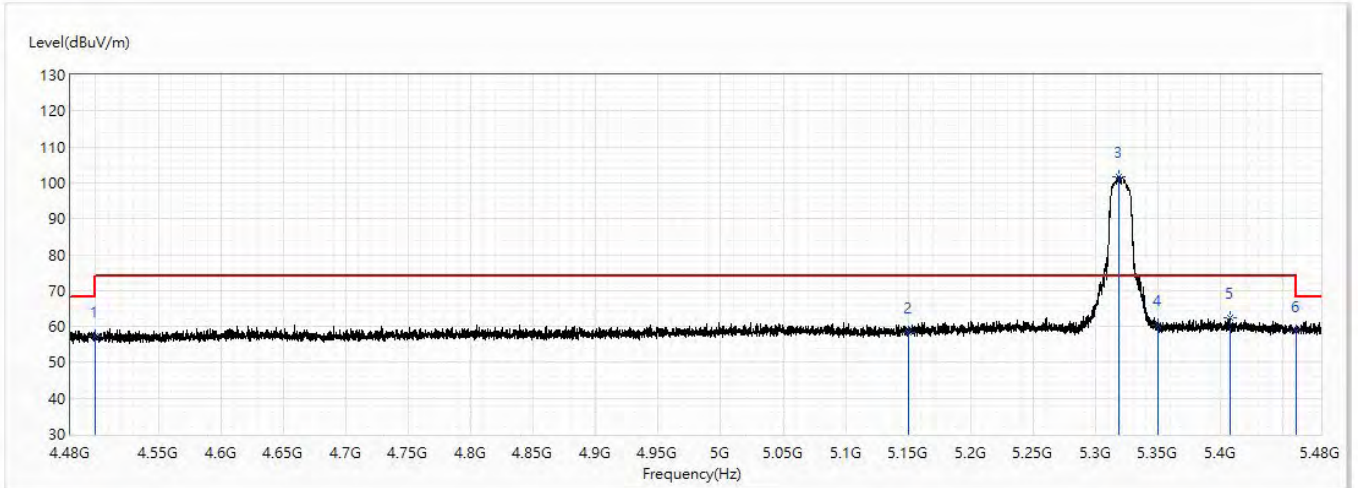


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	57.31	74.00	-16.69	33.29	24.02	PK
2	5150	58.40	74.00	-15.60	33.47	24.93	PK
! 3	5319	101.80	74.00	27.80	76.42	25.38	PK
4	5350	60.35	74.00	-13.65	34.84	25.51	PK
5	5407.625	62.43	74.00	-11.57	36.69	25.74	PK
6	5460	58.67	74.00	-15.33	32.88	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5320MHz	Humidity (%RH)	58.0

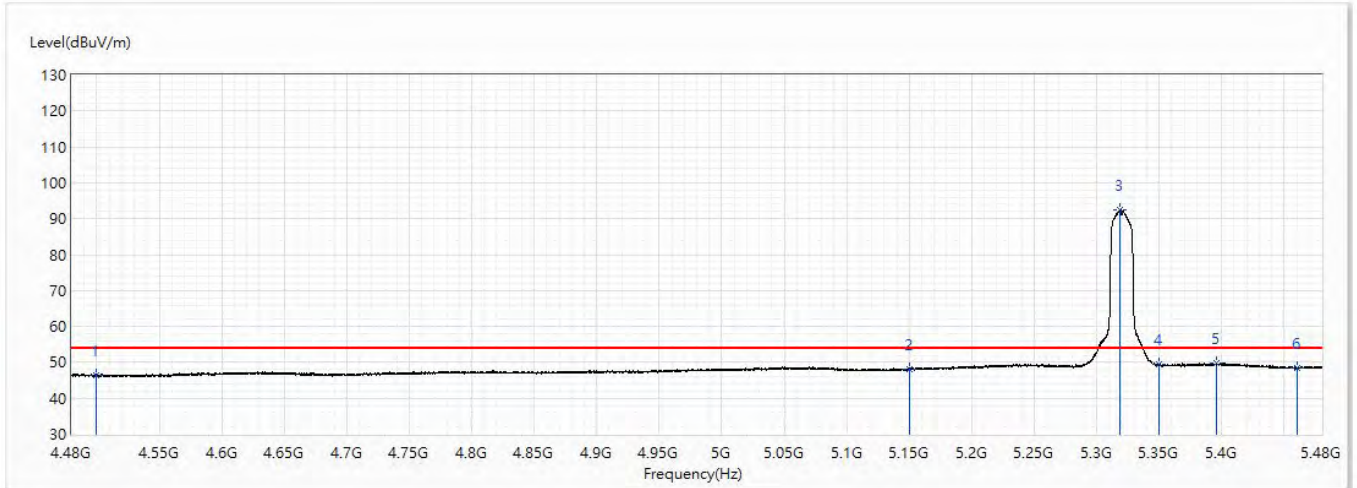


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.30	54.00	-7.70	22.28	24.02	AV
2	5150	48.18	54.00	-5.82	23.25	24.93	AV
! 3	5318.875	92.50	54.00	38.50	67.12	25.38	AV
4	5350	49.35	54.00	-4.65	23.84	25.51	AV
5	5396.25	49.76	54.00	-4.24	24.04	25.72	AV
6	5460	48.40	54.00	-5.60	22.61	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5320MHz	Humidity (%RH)	58.0

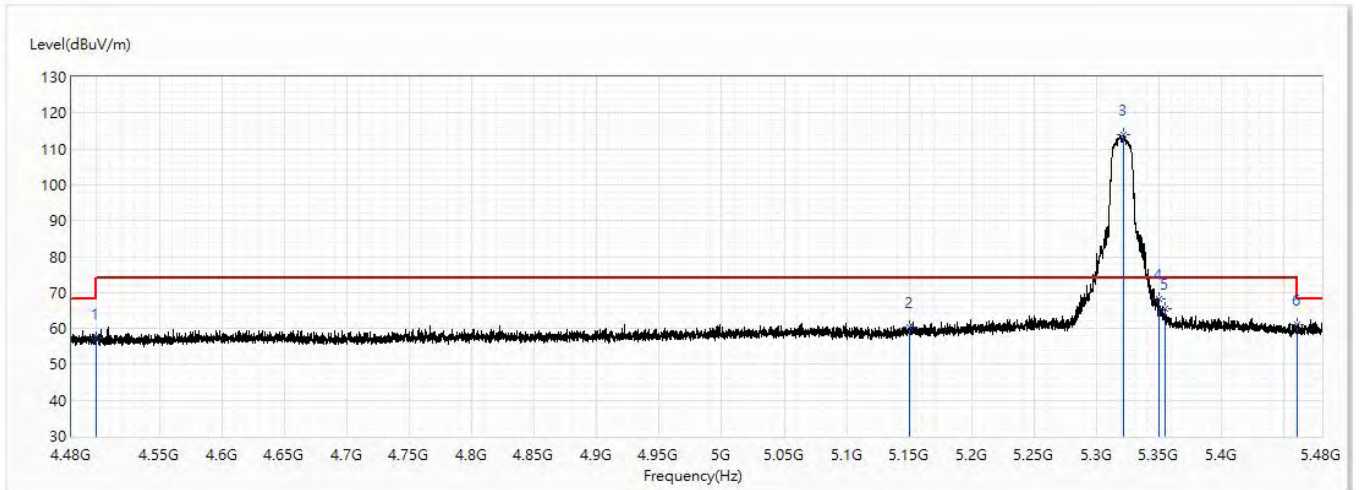


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	57.24	74.00	-16.76	33.22	24.02	PK
2	5150	60.27	74.00	-13.73	35.34	24.93	PK
! 3	5321.25	113.83	74.00	39.83	88.44	25.39	PK
4	5350	68.06	74.00	-5.94	42.55	25.51	PK
5	5354.75	65.50	74.00	-8.50	39.97	25.53	PK
6	5460	61.00	74.00	-13.00	35.21	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5320MHz	Humidity (%RH)	58.0

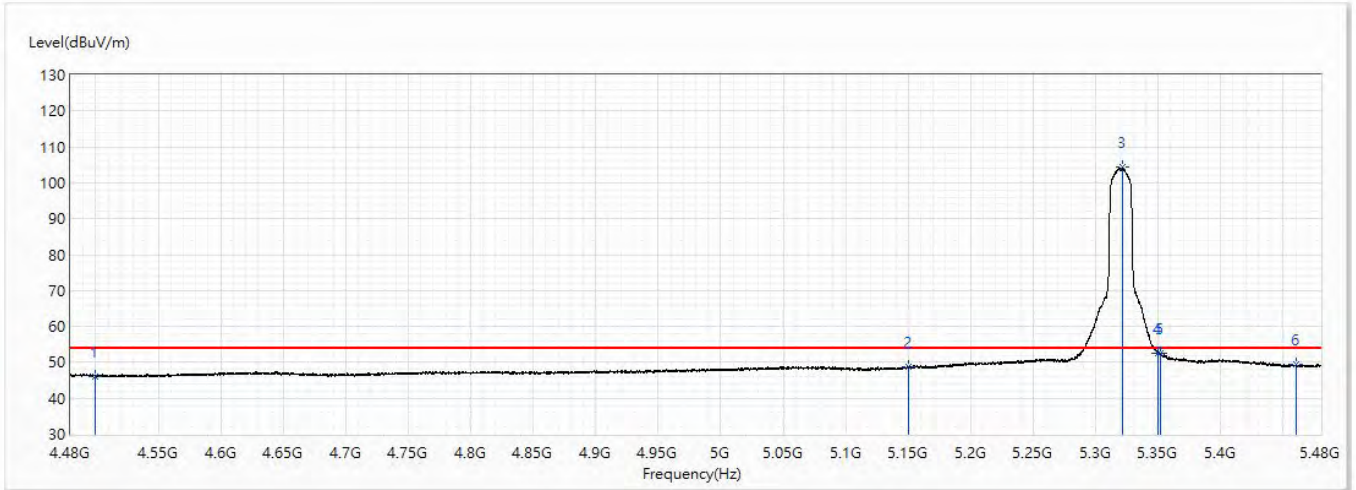


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.14	54.00	-7.86	22.12	24.02	AV
2	5150	48.64	54.00	-5.36	23.71	24.93	AV
! 3	5321	104.26	54.00	50.26	78.87	25.39	AV
4	5350	52.44	54.00	-1.56	26.93	25.51	AV
5	5351.875	52.46	54.00	-1.54	26.94	25.52	AV
6	5460	49.32	54.00	-4.68	23.53	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5260MHz	Humidity (%RH)	58.0

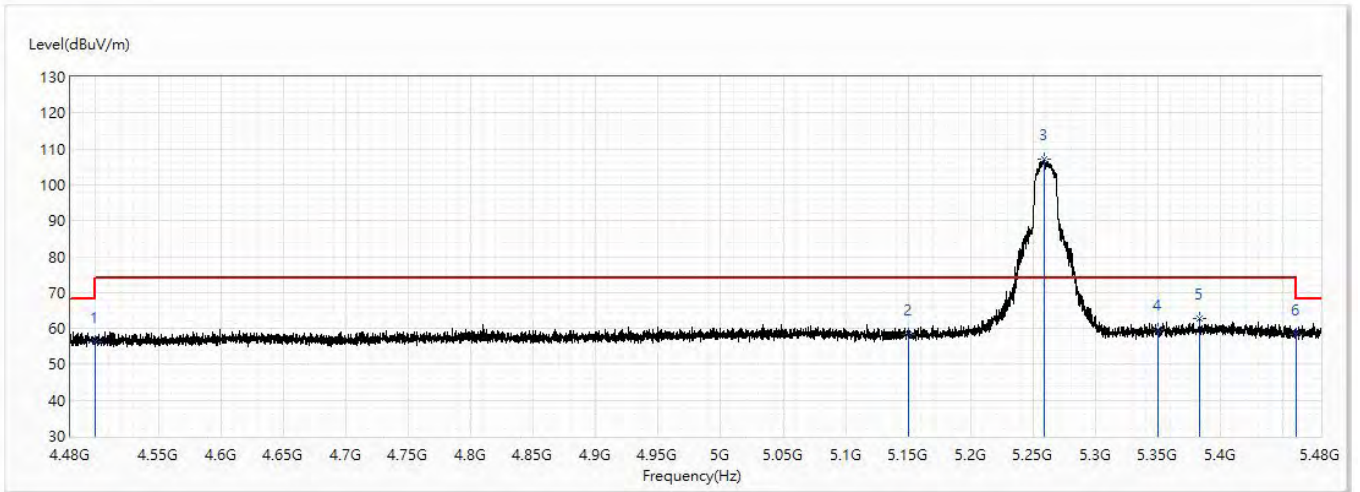


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.37	74.00	-17.63	32.35	24.02	PK
2	5150	58.34	74.00	-15.66	33.41	24.93	PK
! 3	5259	107.06	74.00	33.06	81.85	25.21	PK
4	5350	59.79	74.00	-14.21	34.28	25.51	PK
5	5383.125	62.72	74.00	-11.28	37.06	25.66	PK
6	5460	58.27	74.00	-15.73	32.48	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5260MHz	Humidity (%RH)	58.0

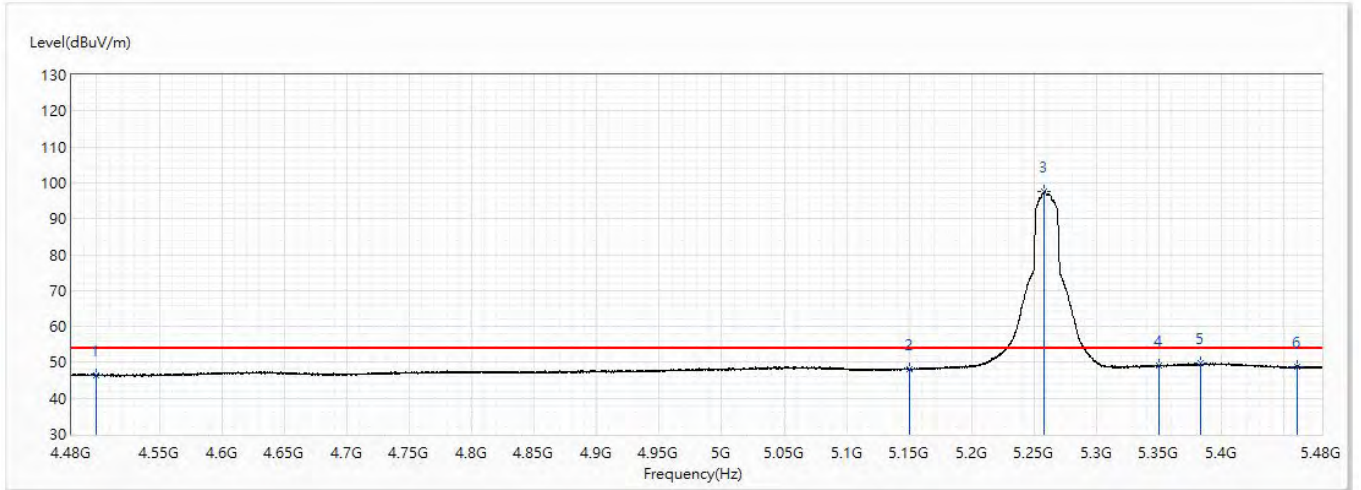

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.50	54.00	-7.50	22.48	24.02	AV
2	5150	48.04	54.00	-5.96	23.11	24.93	AV
! 3	5258.375	97.54	54.00	43.54	72.33	25.21	AV
4	5350	49.03	54.00	-4.97	23.52	25.51	AV
5	5383.375	49.86	54.00	-4.14	24.20	25.66	AV
6	5460	48.72	54.00	-5.28	22.93	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.