


Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5260MHz	Humidity (%RH)	58.0

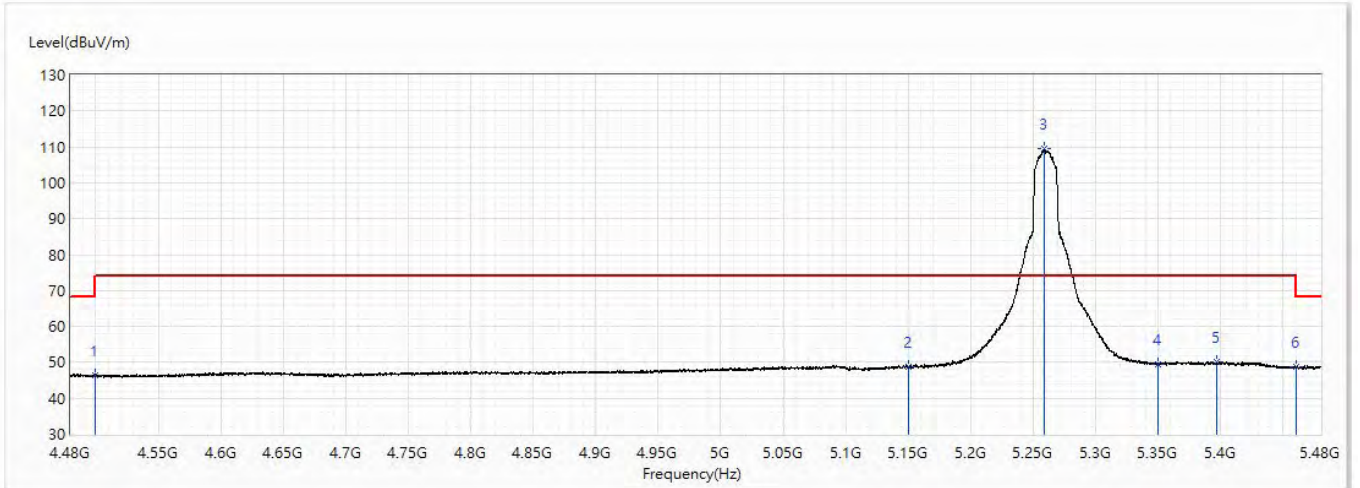


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.24	74.00	-27.76	22.22	24.02	PK
2	5150	48.61	74.00	-25.39	23.68	24.93	PK
! 3	5258.625	109.47	74.00	35.47	84.26	25.21	PK
4	5350	49.60	74.00	-24.40	24.09	25.51	PK
5	5397.125	50.15	74.00	-23.85	24.43	25.72	PK
6	5460	48.64	74.00	-25.36	22.85	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5260MHz	Humidity (%RH)	58.0

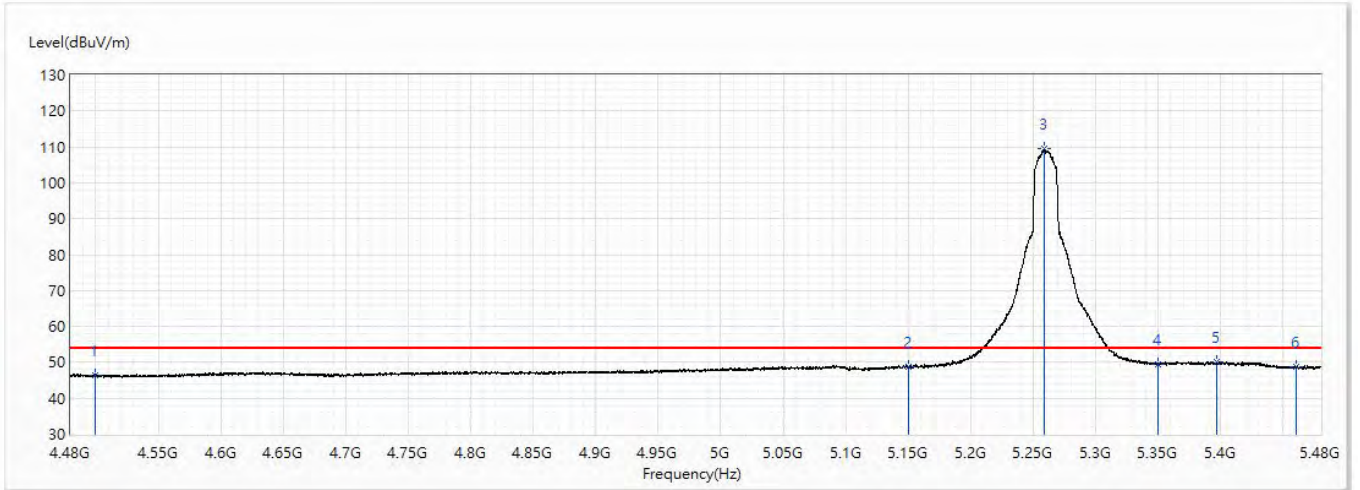


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.24	54.00	-7.76	22.22	24.02	AV
2	5150	48.61	54.00	-5.39	23.68	24.93	AV
! 3	5258.625	109.47	54.00	55.47	84.26	25.21	AV
4	5350	49.60	54.00	-4.40	24.09	25.51	AV
5	5397.125	50.15	54.00	-3.85	24.43	25.72	AV
6	5460	48.64	54.00	-5.36	22.85	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5300MHz	Humidity (%RH)	58.0

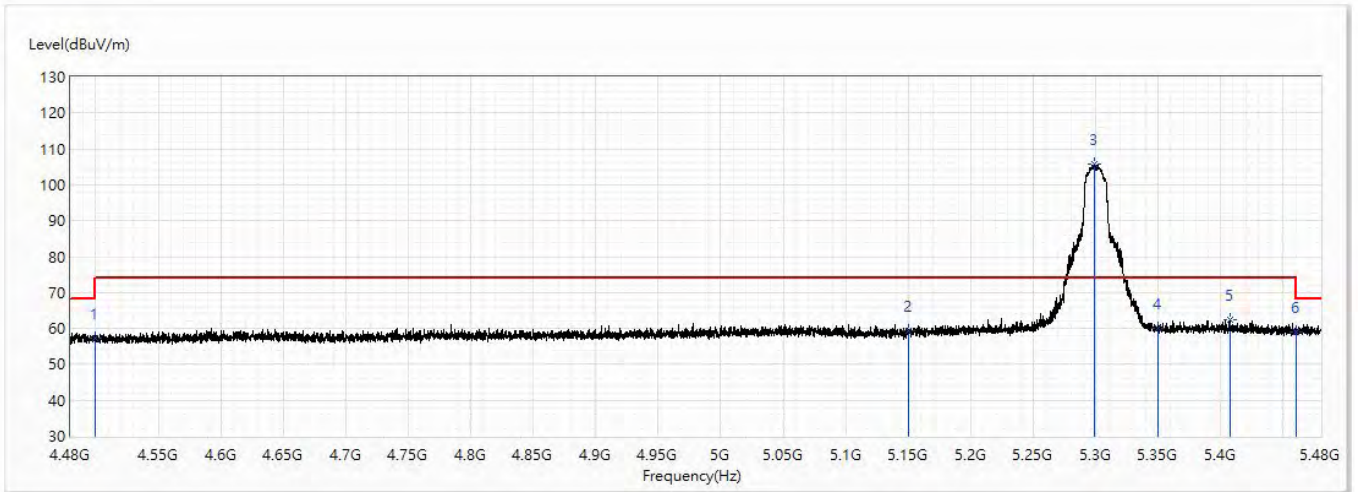


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	57.43	74.00	-16.57	33.41	24.02	PK
2	5150	59.50	74.00	-14.50	34.57	24.93	PK
! 3	5299	105.82	74.00	31.82	80.52	25.30	PK
4	5350	60.12	74.00	-13.88	34.61	25.51	PK
5	5407.5	62.43	74.00	-11.57	36.69	25.74	PK
6	5460	59.06	74.00	-14.94	33.27	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5300MHz	Humidity (%RH)	58.0

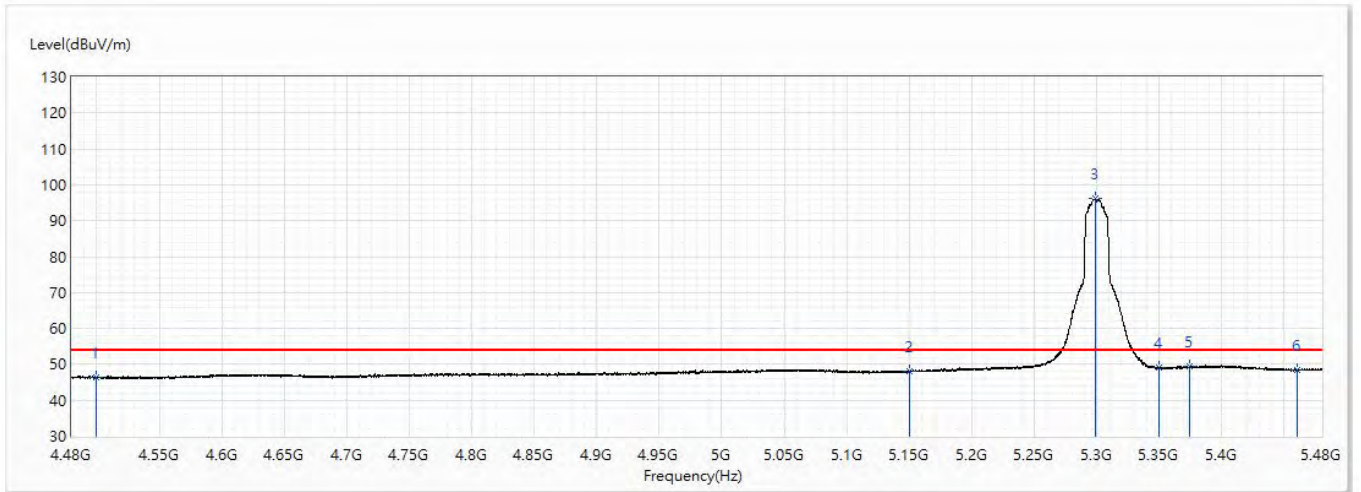


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.47	54.00	-7.53	22.45	24.02	AV
2	5150	48.06	54.00	-5.94	23.13	24.93	AV
! 3	5298.5	96.11	54.00	42.11	70.81	25.30	AV
4	5350	48.95	54.00	-5.05	23.44	25.51	AV
5	5374.75	49.38	54.00	-4.62	23.77	25.61	AV
6	5460	48.44	54.00	-5.56	22.65	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5300MHz	Humidity (%RH)	58.0

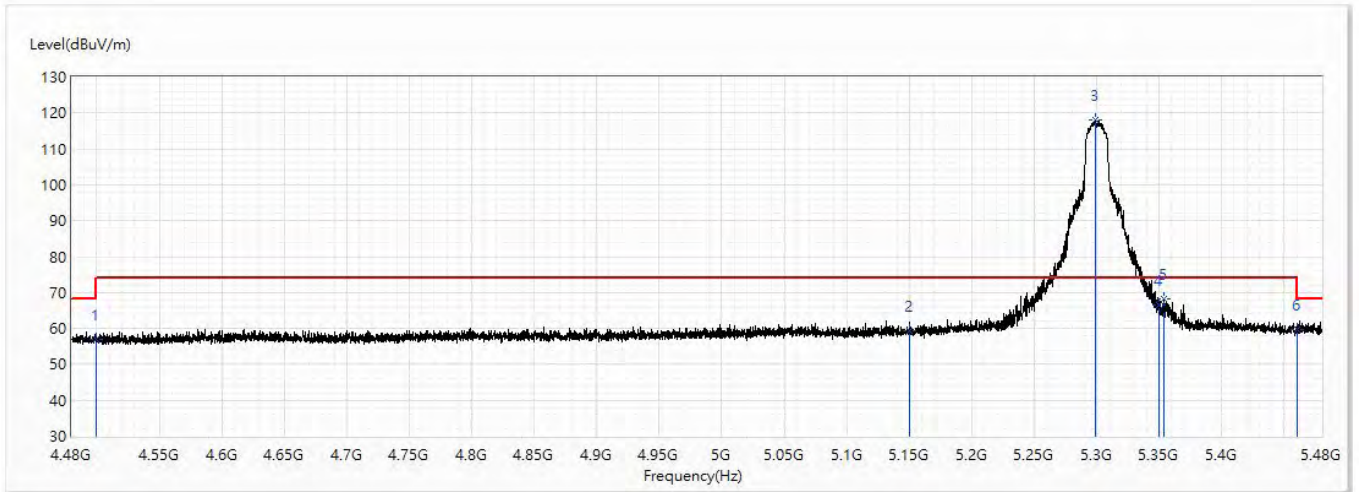


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.91	74.00	-17.09	32.89	24.02	PK
2	5150	59.47	74.00	-14.53	34.54	24.93	PK
! 3	5299.375	118.14	74.00	44.14	92.84	25.30	PK
4	5350	66.37	74.00	-7.63	40.86	25.51	PK
5	5353.75	68.19	74.00	-5.81	42.66	25.53	PK
6	5460	59.59	74.00	-14.41	33.80	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5300MHz	Humidity (%RH)	58.0

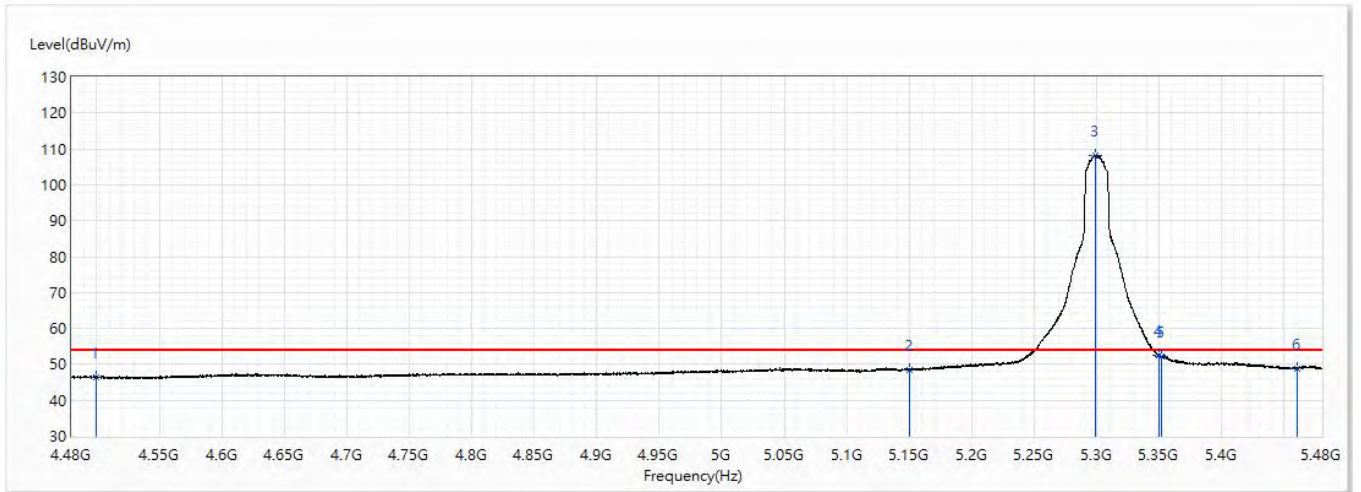


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.34	54.00	-7.66	22.32	24.02	AV
2	5150	48.51	54.00	-5.49	23.58	24.93	AV
! 3	5298.5	108.26	54.00	54.26	82.96	25.30	AV
4	5350	52.58	54.00	-1.42	27.07	25.51	AV
5	5351.75	52.10	54.00	-1.90	26.58	25.52	AV
6	5460	48.83	54.00	-5.17	23.04	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5320MHz	Humidity (%RH)	58.0

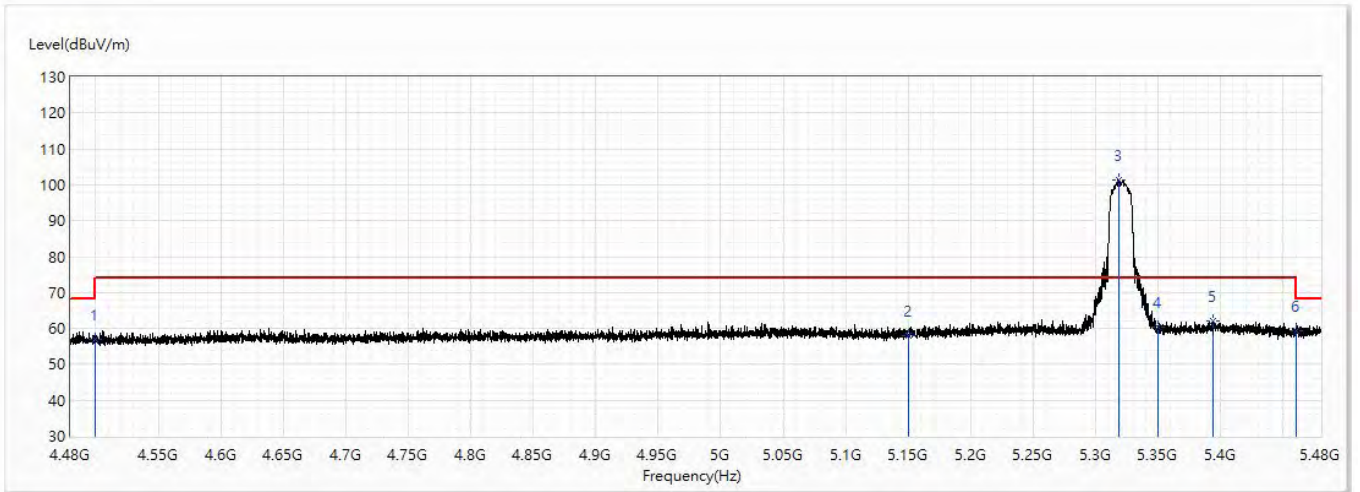


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.95	74.00	-17.05	32.93	24.02	PK
2	5150	58.01	74.00	-15.99	33.08	24.93	PK
! 3	5318.625	101.41	74.00	27.41	76.03	25.38	PK
4	5350	60.32	74.00	-13.68	34.81	25.51	PK
5	5394.25	62.19	74.00	-11.81	36.49	25.70	PK
6	5460	59.27	74.00	-14.73	33.48	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5320MHz	Humidity (%RH)	58.0

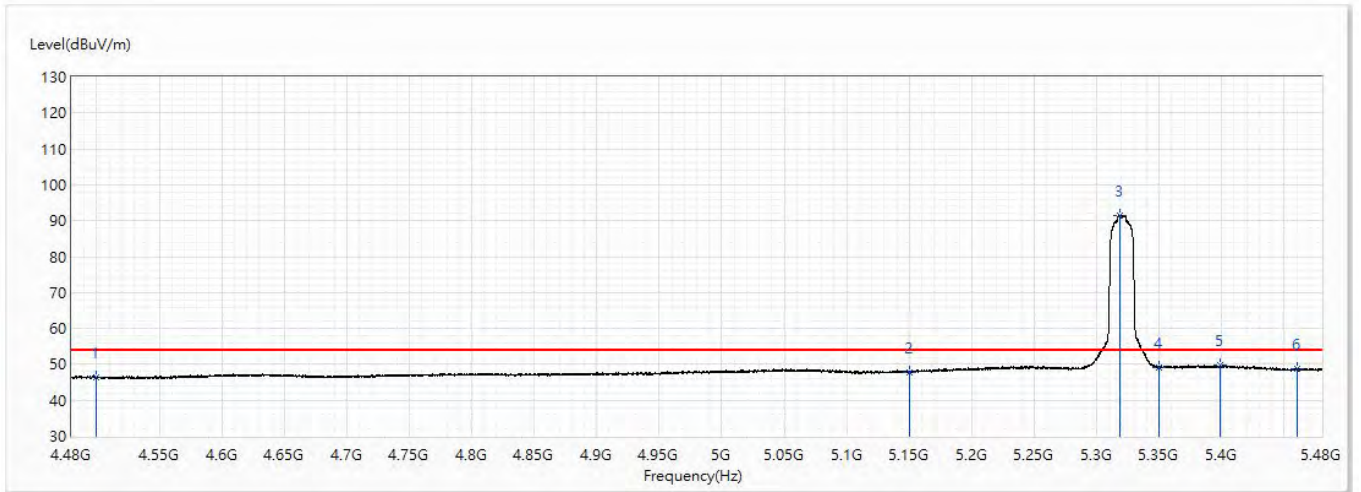


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.47	54.00	-7.53	22.45	24.02	AV
2	5150	47.78	54.00	-6.22	22.85	24.93	AV
! 3	5318.75	91.60	54.00	37.60	66.22	25.38	AV
4	5350	49.11	54.00	-4.89	23.60	25.51	AV
5	5398.875	49.76	54.00	-4.24	24.03	25.73	AV
6	5460	48.62	54.00	-5.38	22.83	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5320MHz	Humidity (%RH)	58.0

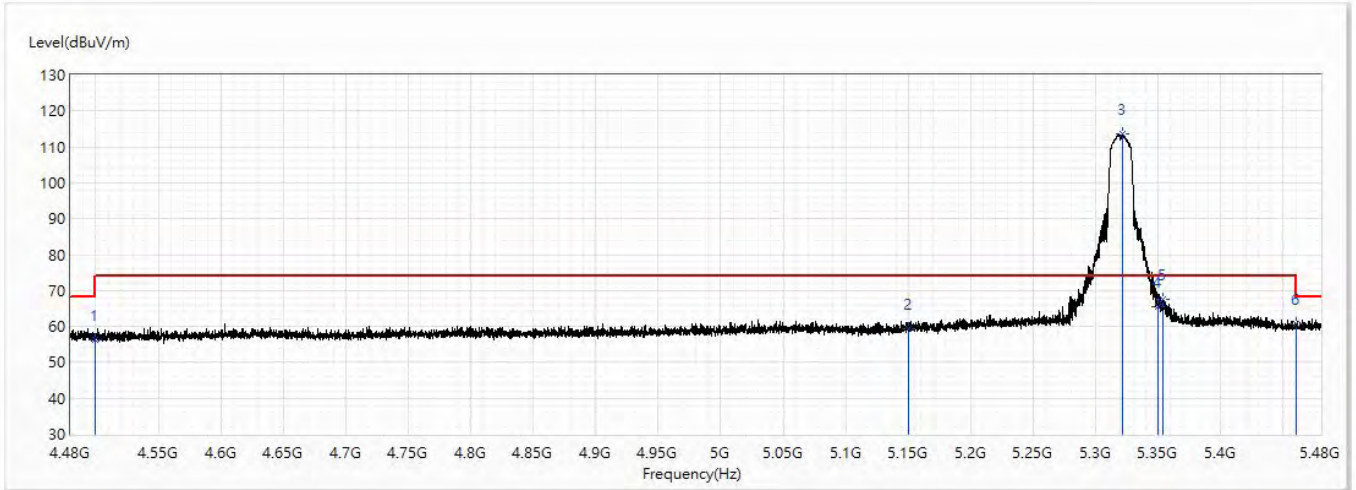


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.42	74.00	-17.58	32.40	24.02	PK
2	5150	59.23	74.00	-14.77	34.30	24.93	PK
! 3	5321.5	113.52	74.00	39.52	88.13	25.39	PK
4	5350	65.44	74.00	-8.56	39.93	25.51	PK
5	5354.25	67.50	74.00	-6.50	41.97	25.53	PK
6	5460	60.63	74.00	-13.37	34.84	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5320MHz	Humidity (%RH)	58.0

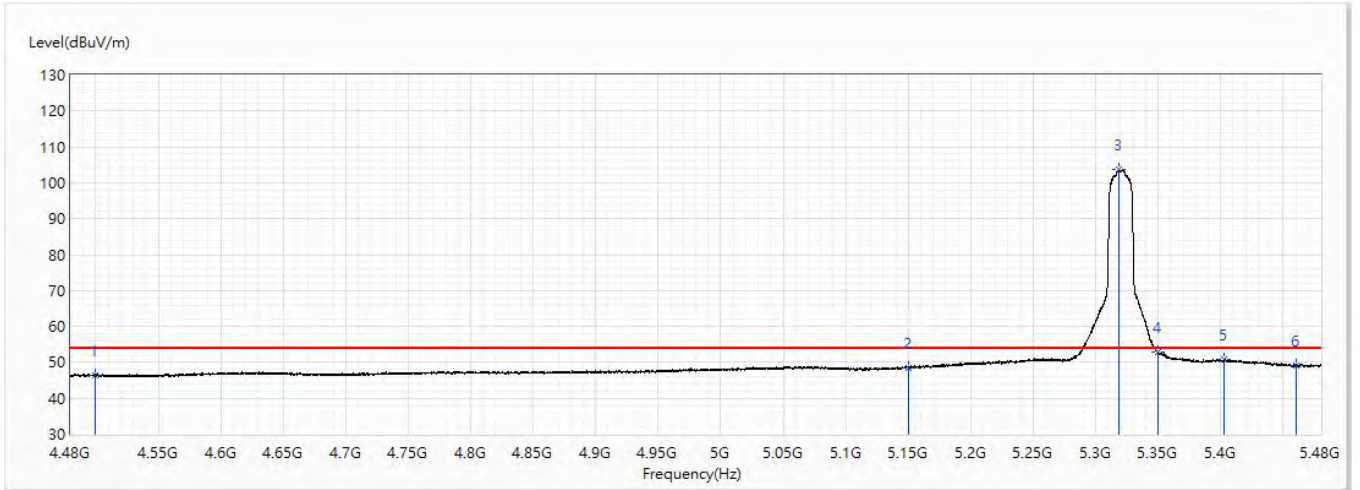


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.52	54.00	-7.48	22.50	24.02	AV
2	5150	48.49	54.00	-5.51	23.56	24.93	AV
! 3	5318.75	103.72	54.00	49.72	78.34	25.38	AV
4	5350	53.02	54.00	-0.98	27.51	25.51	AV
5	5402.875	50.87	54.00	-3.13	25.14	25.73	AV
6	5460	49.23	54.00	-4.77	23.44	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5270MHz	Humidity (%RH)	58.0

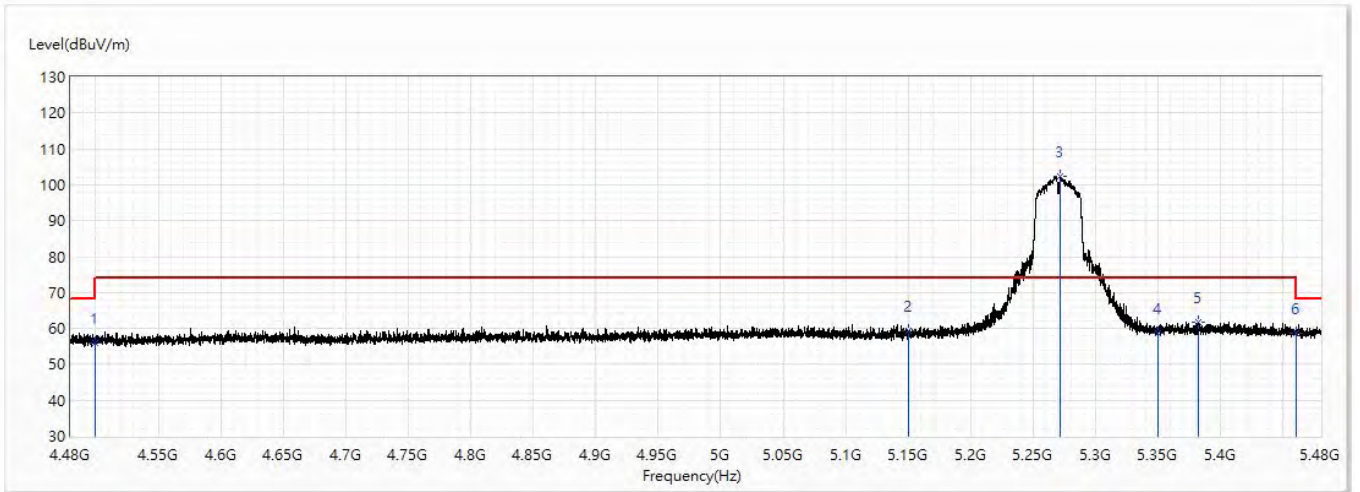


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	55.86	74.00	-18.14	31.84	24.02	PK
2	5150	59.30	74.00	-14.70	34.37	24.93	PK
! 3	5271.625	102.46	74.00	28.46	77.23	25.23	PK
4	5350	58.78	74.00	-15.22	33.27	25.51	PK
5	5382.5	61.88	74.00	-12.12	36.22	25.66	PK
6	5460	58.64	74.00	-15.36	32.85	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5270MHz	Humidity (%RH)	58.0

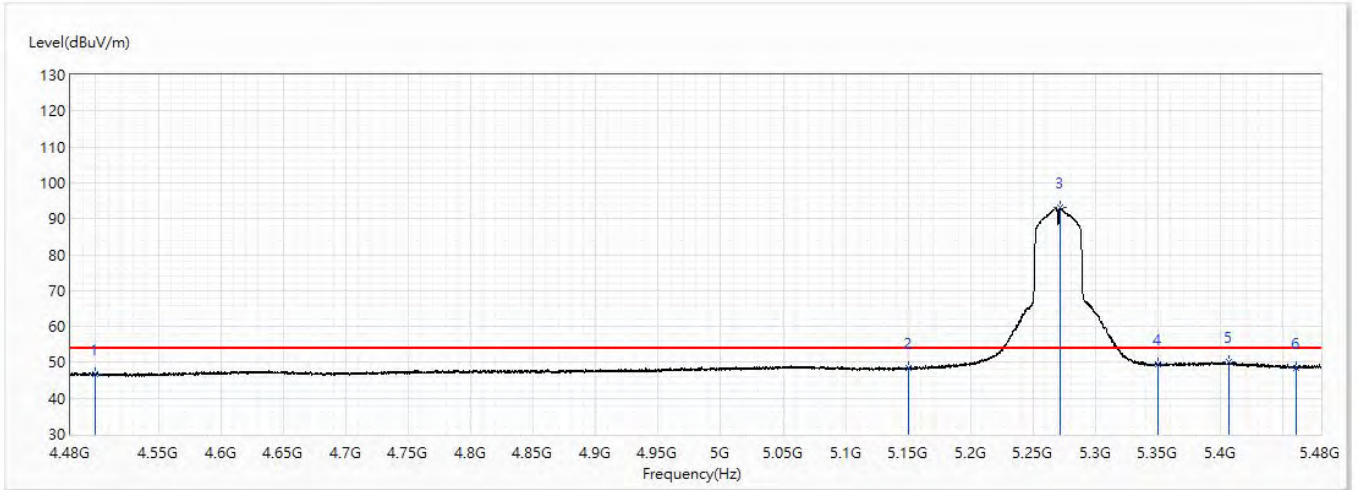


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.67	54.00	-7.33	22.65	24.02	AV
2	5150	48.42	54.00	-5.58	23.49	24.93	AV
! 3	5271.75	93.15	54.00	39.15	67.92	25.23	AV
4	5350	49.44	54.00	-4.56	23.93	25.51	AV
5	5406.25	50.09	54.00	-3.91	24.35	25.74	AV
6	5460	48.59	54.00	-5.41	22.80	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5270MHz	Humidity (%RH)	58.0

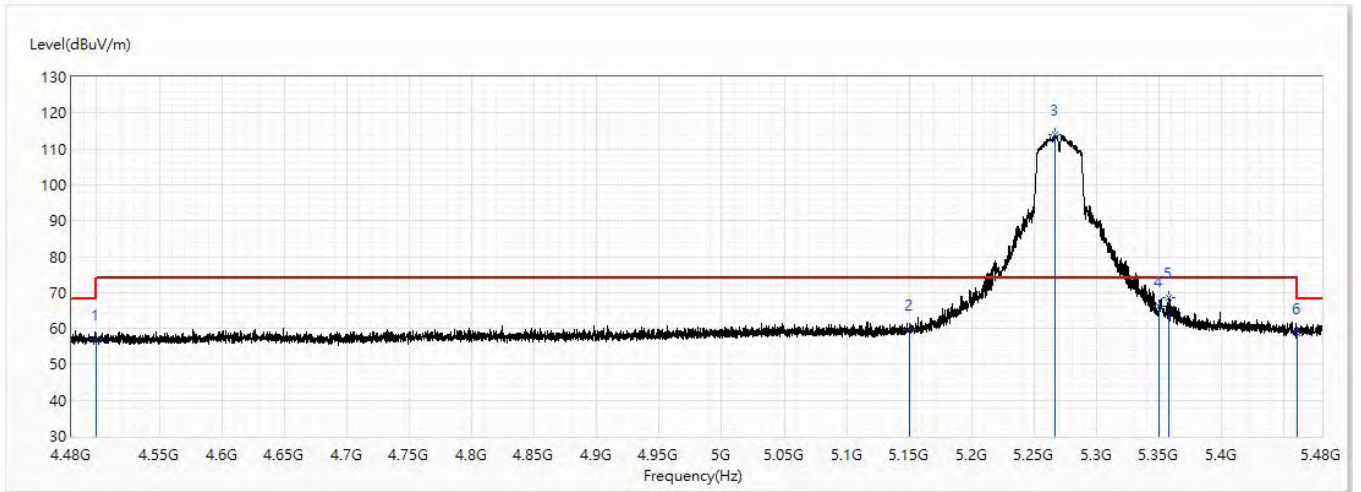


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.95	74.00	-17.05	32.93	24.02	PK
2	5150	59.70	74.00	-14.30	34.77	24.93	PK
! 3	5267	113.96	74.00	39.96	88.73	25.23	PK
4	5350	66.06	74.00	-7.94	40.55	25.51	PK
5	5357.5	68.43	74.00	-5.57	42.88	25.55	PK
6	5460	58.74	74.00	-15.26	32.95	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5270MHz	Humidity (%RH)	58.0

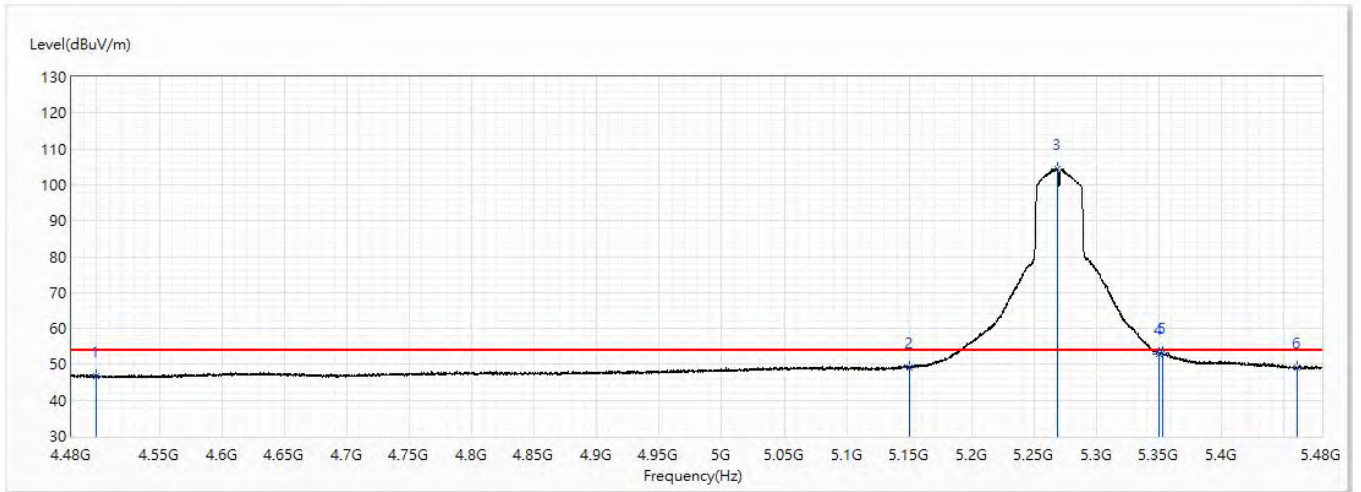


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.81	54.00	-7.19	22.79	24.02	AV
2	5150	49.28	54.00	-4.72	24.35	24.93	AV
! 3	5268.375	104.52	54.00	50.52	79.29	25.23	AV
4	5350	52.98	54.00	-1.02	27.47	25.51	AV
5	5352.625	53.25	54.00	-0.75	27.73	25.52	AV
6	5460	49.02	54.00	-4.98	23.23	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5310MHz	Humidity (%RH)	58.0

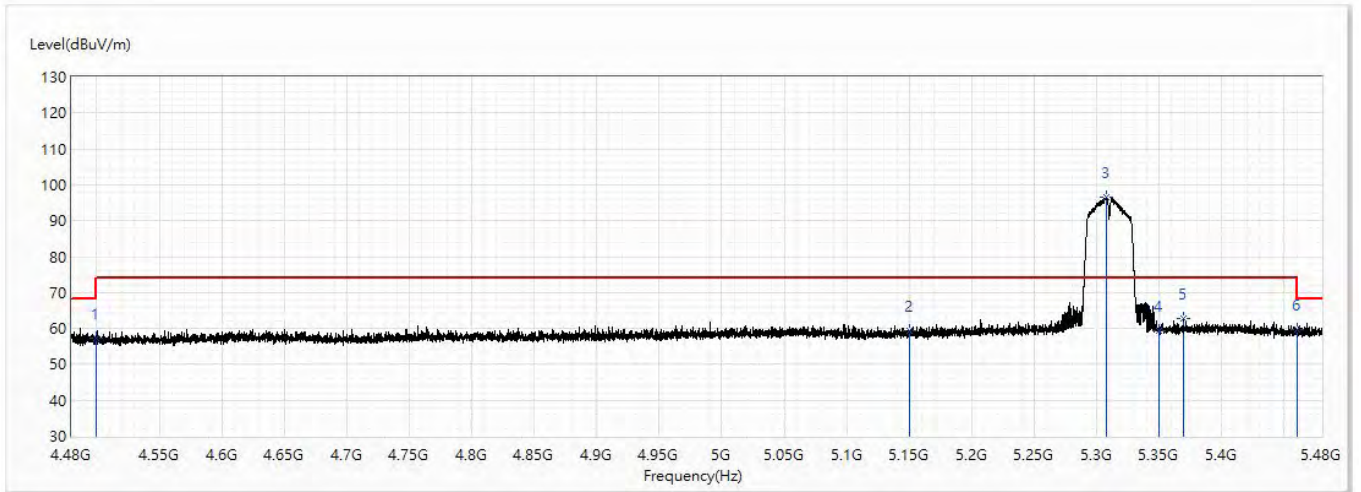


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	57.14	74.00	-16.86	33.12	24.02	PK
2	5150	59.22	74.00	-14.78	34.29	24.93	PK
! 3	5307.625	96.41	74.00	22.41	71.08	25.33	PK
4	5350	59.32	74.00	-14.68	33.81	25.51	PK
5	5369.5	62.80	74.00	-11.20	37.20	25.60	PK
6	5460	59.56	74.00	-14.44	33.77	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5310MHz	Humidity (%RH)	58.0

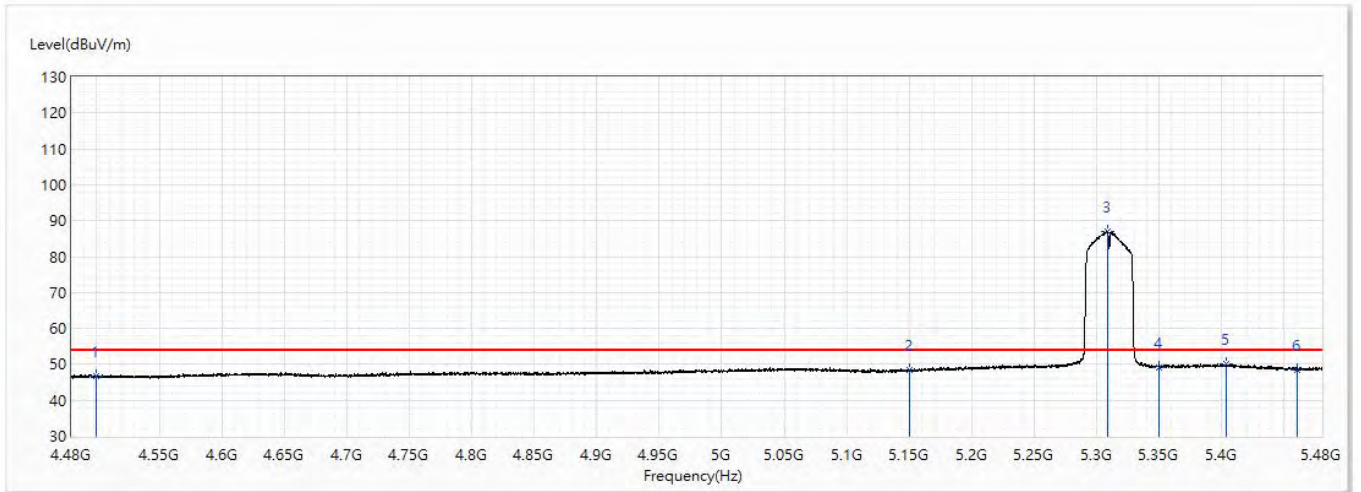


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.84	54.00	-7.16	22.82	24.02	AV
2	5150	48.33	54.00	-5.67	23.40	24.93	AV
! 3	5308.375	87.11	54.00	33.11	61.77	25.34	AV
4	5350	49.21	54.00	-4.79	23.70	25.51	AV
5	5403.875	50.20	54.00	-3.80	24.47	25.73	AV
6	5460	48.58	54.00	-5.42	22.79	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5310MHz	Humidity (%RH)	58.0

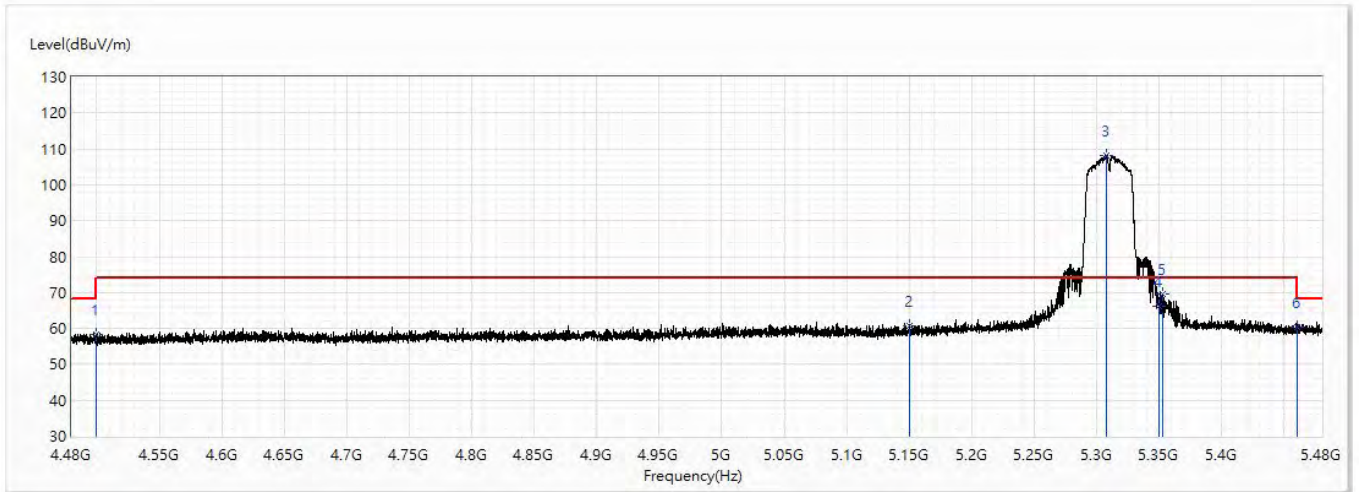


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	58.45	74.00	-15.55	34.43	24.02	PK
2	5150	60.83	74.00	-13.17	35.90	24.93	PK
! 3	5307.875	108.18	74.00	34.18	82.85	25.33	PK
4	5350	66.32	74.00	-7.68	40.81	25.51	PK
5	5352.5	69.47	74.00	-4.53	43.95	25.52	PK
6	5460	60.31	74.00	-13.69	34.52	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5310MHz	Humidity (%RH)	58.0

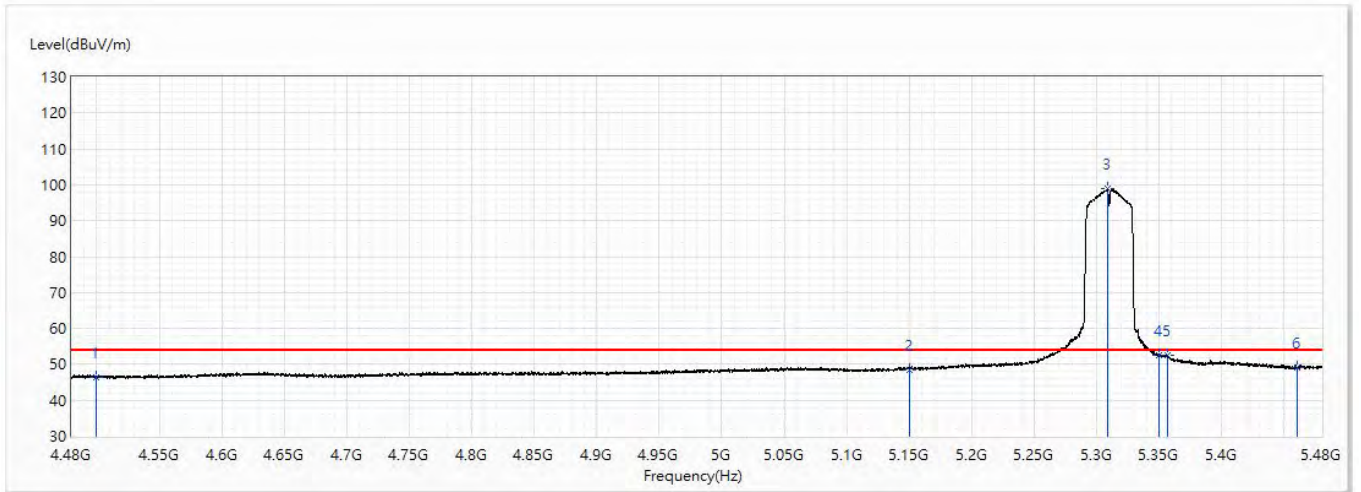


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.48	54.00	-7.52	22.46	24.02	AV
2	5150	48.59	54.00	-5.41	23.66	24.93	AV
! 3	5308.625	98.82	54.00	44.82	73.48	25.34	AV
4	5350	52.61	54.00	-1.39	27.10	25.51	AV
5	5356.25	52.54	54.00	-1.46	27.00	25.54	AV
6	5460	49.16	54.00	-4.84	23.37	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5290MHz	Humidity (%RH)	58.0

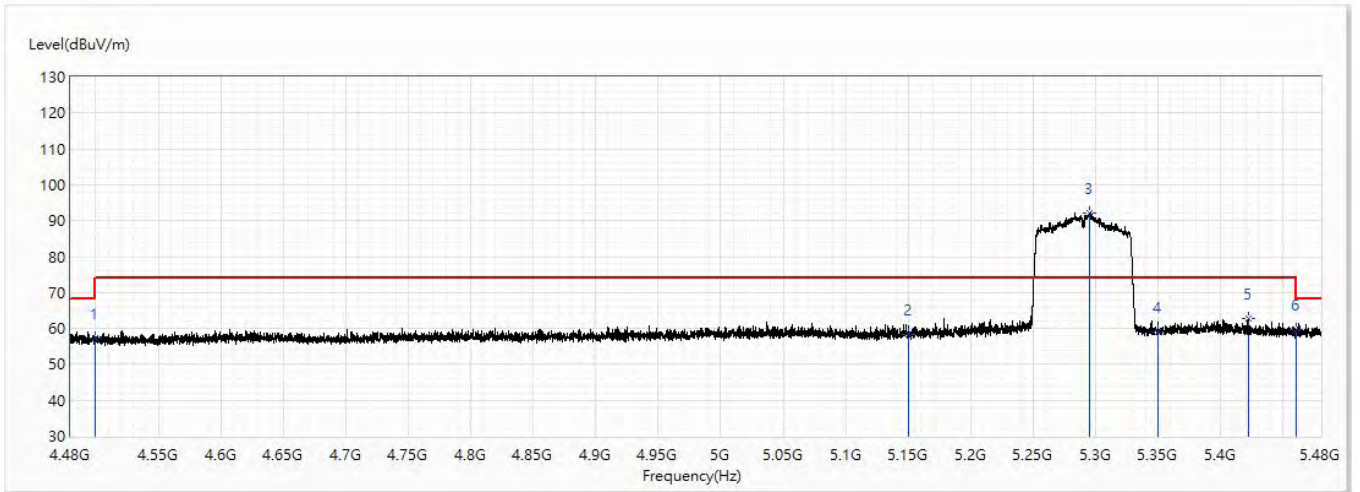


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	57.39	74.00	-16.61	33.37	24.02	PK
2	5150	58.38	74.00	-15.62	33.45	24.93	PK
! 3	5295.125	92.27	74.00	18.27	66.97	25.30	PK
4	5350	58.86	74.00	-15.14	33.35	25.51	PK
5	5421.875	62.69	74.00	-11.31	36.94	25.75	PK
6	5460	59.56	74.00	-14.44	33.77	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5290MHz	Humidity (%RH)	58.0

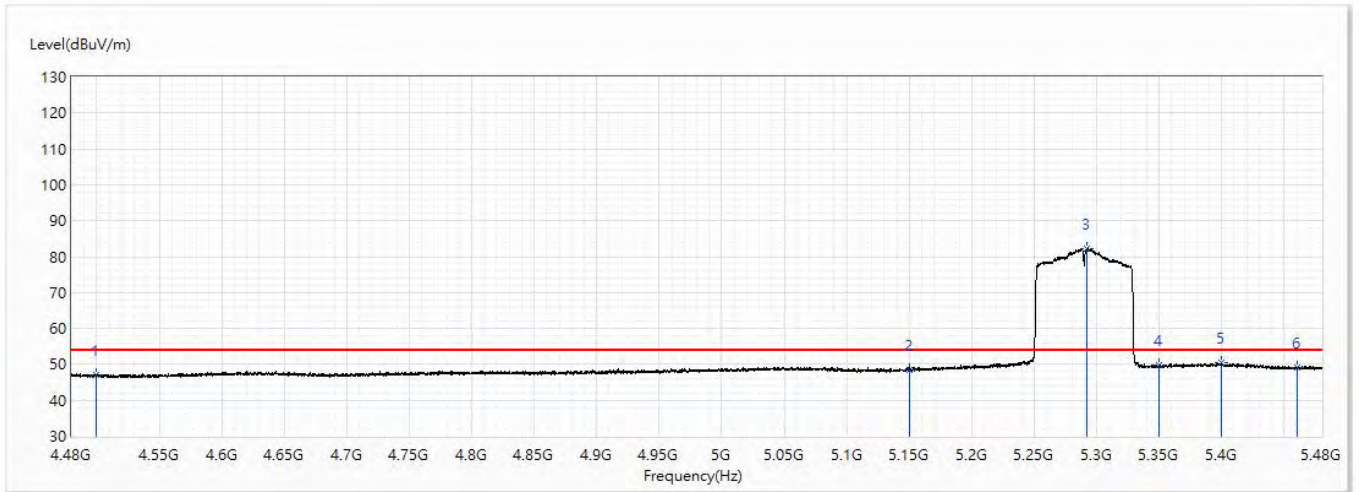


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.95	54.00	-7.05	22.93	24.02	AV
2	5150	48.37	54.00	-5.63	23.44	24.93	AV
! 3	5292.125	82.38	54.00	28.38	57.10	25.28	AV
4	5350	49.74	54.00	-4.26	24.23	25.51	AV
5	5400.125	50.52	54.00	-3.48	24.79	25.73	AV
6	5460	49.14	54.00	-4.86	23.35	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5290MHz	Humidity (%RH)	58.0

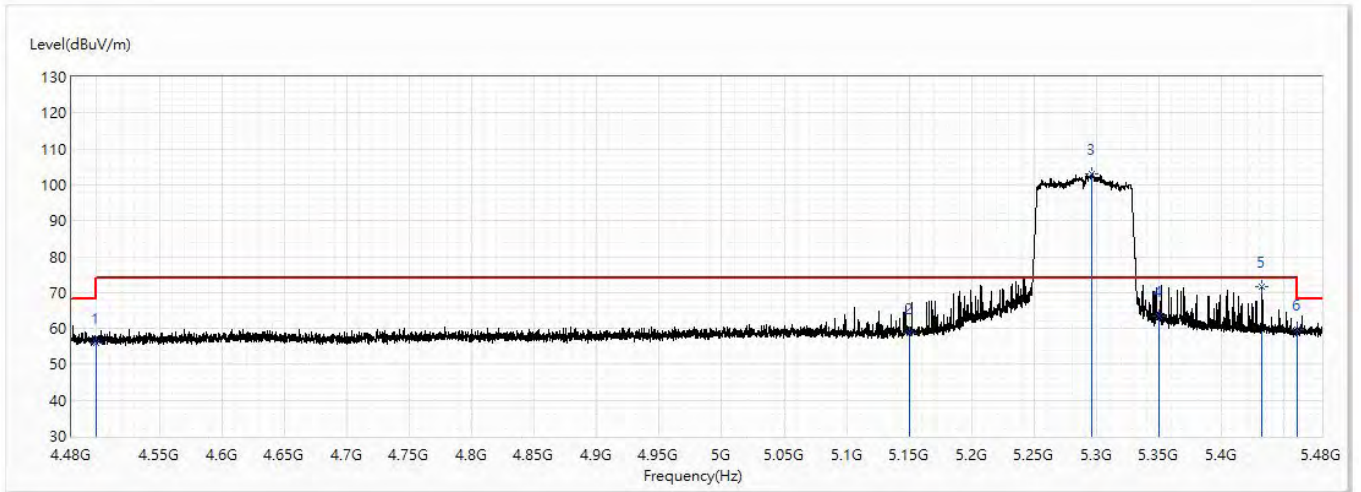


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	56.09	74.00	-17.91	32.07	24.02	PK
2	5150	58.68	74.00	-15.32	33.75	24.93	PK
! 3	5296.25	103.00	74.00	29.00	77.70	25.30	PK
4	5350	63.34	74.00	-10.66	37.83	25.51	PK
5	5432.375	71.79	74.00	-2.21	46.02	25.77	PK
6	5460	59.57	74.00	-14.43	33.78	25.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5290MHz	Humidity (%RH)	58.0

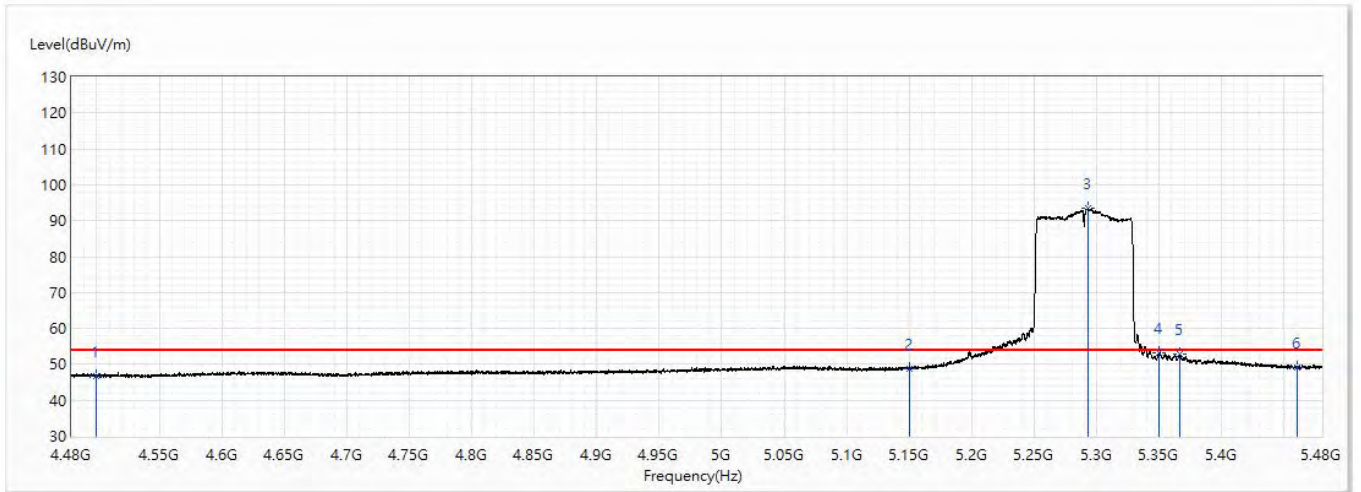


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4500	46.79	54.00	-7.21	22.77	24.02	AV
2	5150	48.75	54.00	-5.25	23.82	24.93	AV
! 3	5293.25	93.42	54.00	39.42	68.14	25.28	AV
4	5350	53.27	54.00	-0.73	27.76	25.51	AV
5	5366.25	52.95	54.00	-1.05	27.36	25.59	AV
6	5460	49.27	54.00	-4.73	23.48	25.79	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. "!", means this data is the worst emission level.
5. Emission Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
7. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5500MHz	Humidity (%RH)	58.0

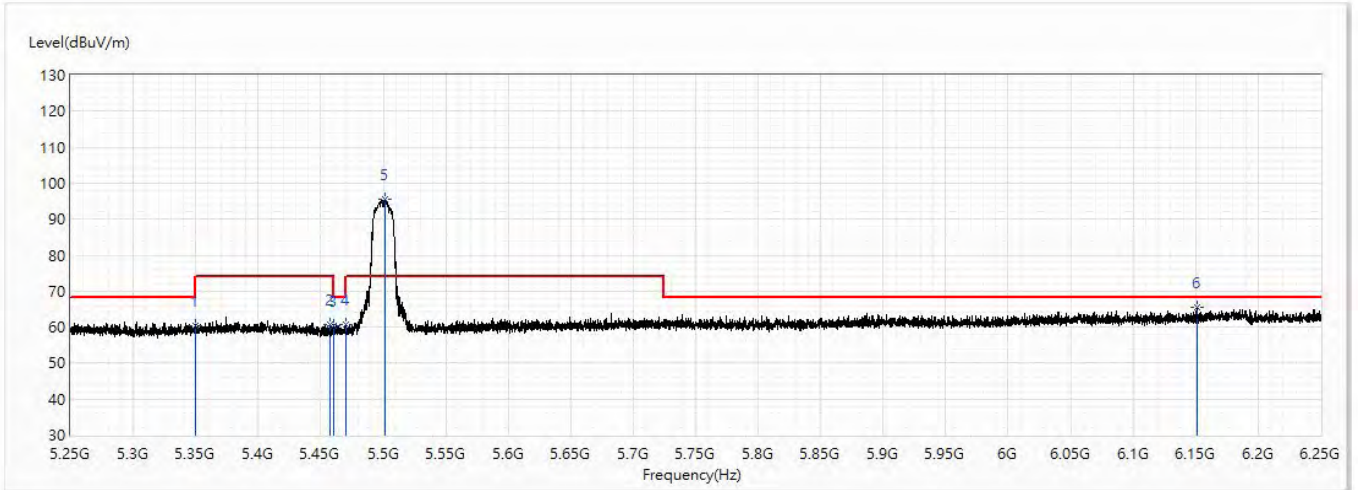


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.25	74.00	-13.75	34.74	25.51	PK
2	5457.125	60.75	74.00	-13.25	34.96	25.79	PK
3	5460	60.47	74.00	-13.53	34.68	25.79	PK
4	5469.75	60.66	68.20	-7.54	34.86	25.80	PK
! 5	5501.5	95.59	74.00	21.59	69.75	25.84	PK
6	6151.5	65.46	68.20	-2.74	37.28	28.18	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5500MHz	Humidity (%RH)	58.0

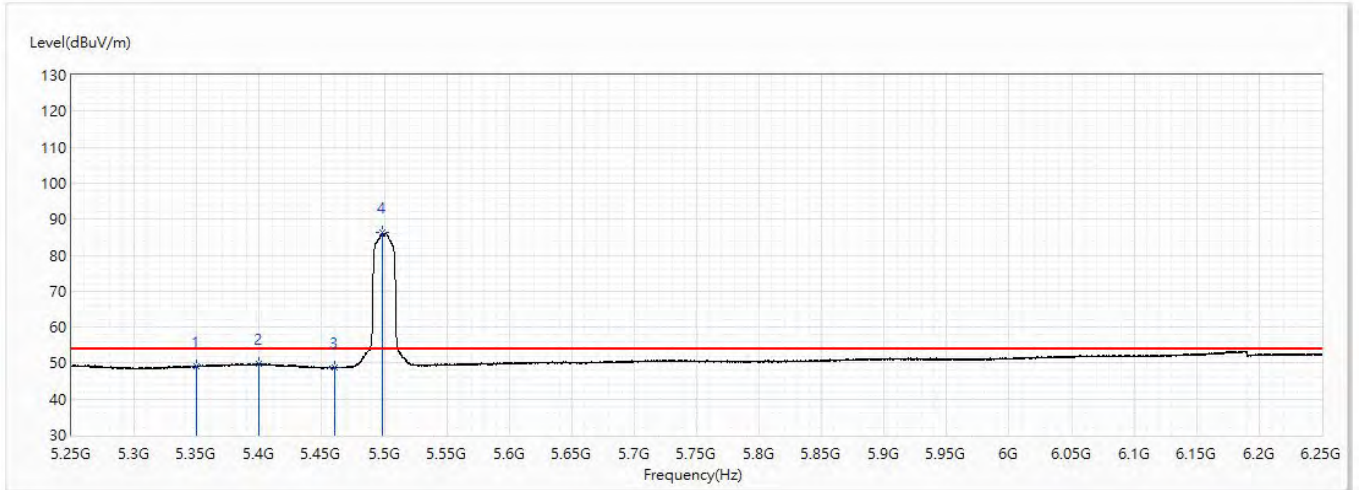


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.12	54.00	-4.88	23.61	25.51	AV
2	5399.5	49.73	54.00	-4.27	24.00	25.73	AV
3	5460	48.73	54.00	-5.27	22.94	25.79	AV
! 4	5498.875	86.30	54.00	32.30	60.46	25.84	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Note	802.11a_5500MHz	Humidity (%RH)	58.0

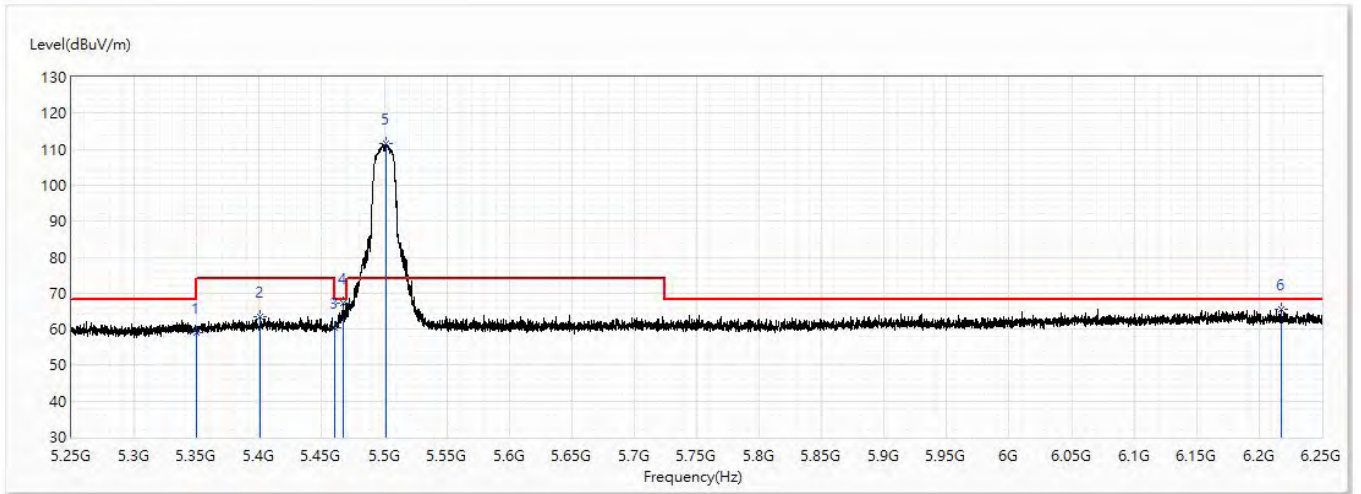


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.04	74.00	-14.96	33.53	25.51	PK
2	5401	63.54	74.00	-10.46	37.81	25.73	PK
3	5460	60.23	74.00	-13.77	34.44	25.79	PK
4	5467.25	67.25	68.20	-0.95	41.45	25.80	PK
!5	5501.375	111.47	74.00	37.47	85.63	25.84	PK
6	6217.75	65.45	68.20	-2.75	36.90	28.55	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Note	802.11a_5500MHz	Humidity (%RH)	58.0

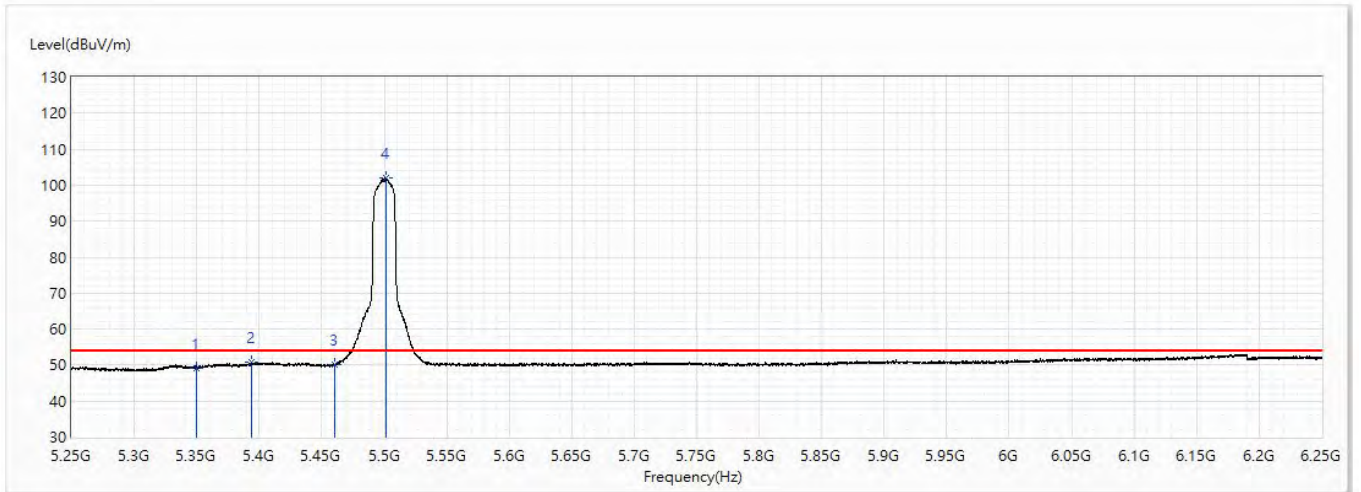


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.28	54.00	-4.72	23.77	25.51	AV
2	5393.625	50.74	54.00	-3.26	25.04	25.70	AV
3	5460	50.24	54.00	-3.76	24.45	25.79	AV
! 4	5501	101.97	54.00	47.97	76.13	25.84	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5580MHz	Humidity (%RH)	58.0

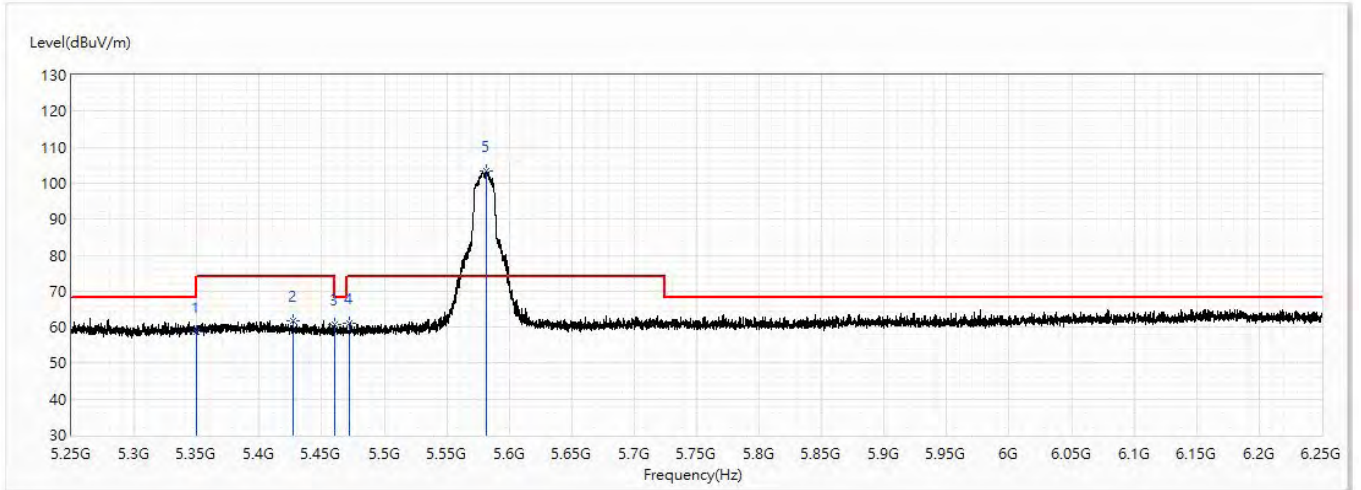


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.67	74.00	-15.33	33.16	25.51	PK
2	5426.75	61.83	74.00	-12.17	36.06	25.77	PK
3	5460	60.82	74.00	-13.18	35.03	25.79	PK
4	5472.375	61.05	74.00	-12.95	35.25	25.80	PK
! 5	5581.375	103.21	74.00	29.21	76.94	26.27	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5580MHz	Humidity (%RH)	58.0

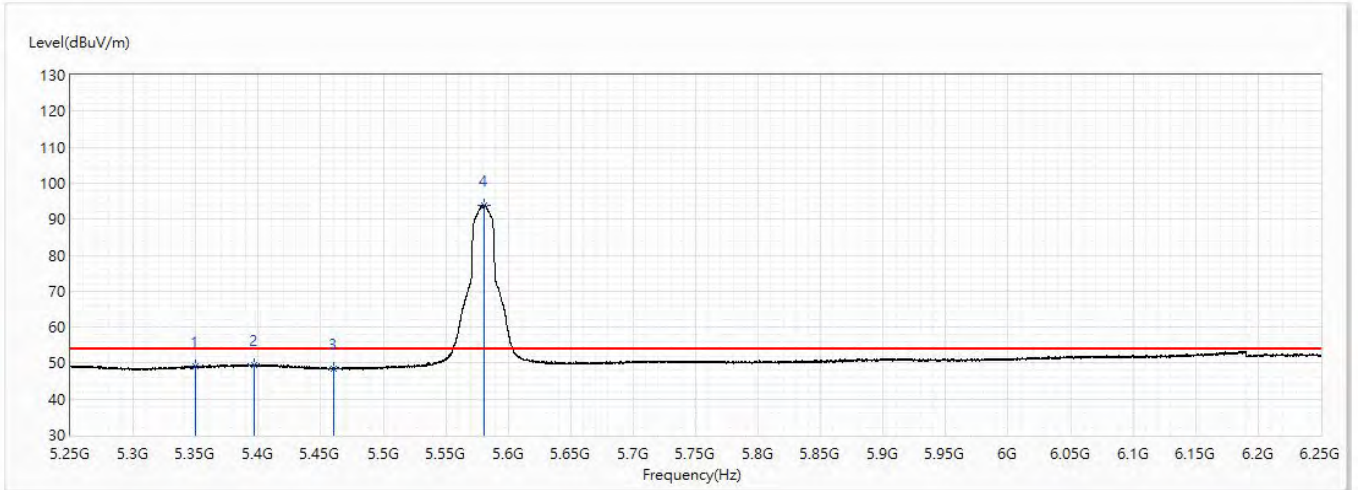


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.97	54.00	-5.03	23.46	25.51	AV
2	5397.125	49.37	54.00	-4.63	23.65	25.72	AV
3	5460	48.37	54.00	-5.63	22.58	25.79	AV
! 4	5581	93.97	54.00	39.97	67.70	26.27	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5580MHz	Humidity (%RH)	58.0

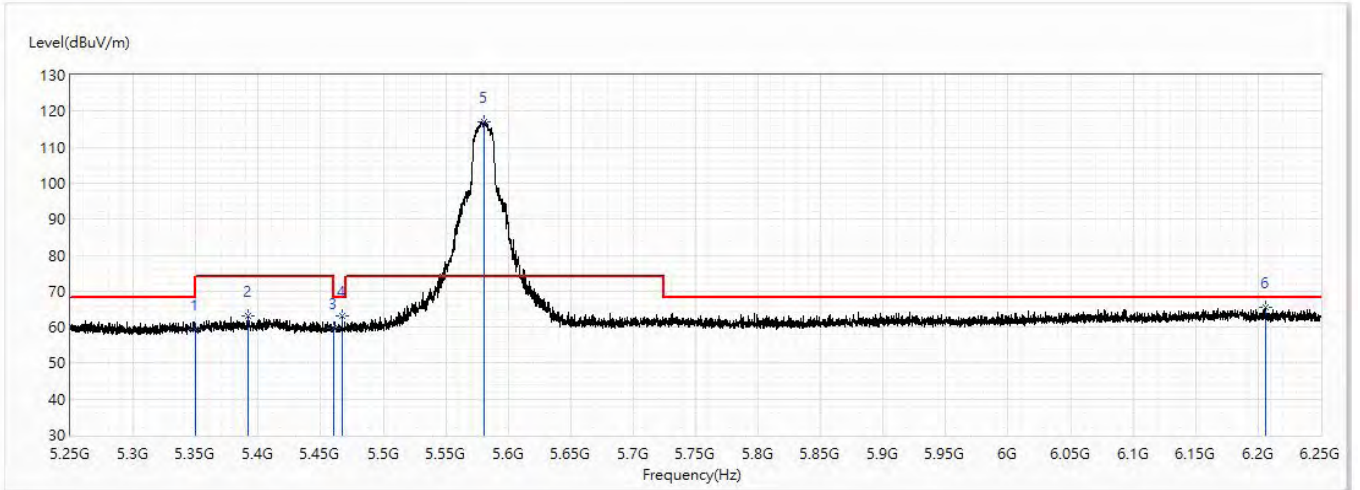


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.48	74.00	-14.52	33.97	25.51	PK
2	5391.5	63.21	74.00	-10.79	37.52	25.69	PK
3	5460	59.53	74.00	-14.47	33.74	25.79	PK
4	5467.5	62.96	68.20	-5.24	37.16	25.80	PK
! 5	5581.125	117.17	74.00	43.17	90.90	26.27	PK
6	6205.625	65.59	68.20	-2.61	37.12	28.47	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5580MHz	Humidity (%RH)	58.0

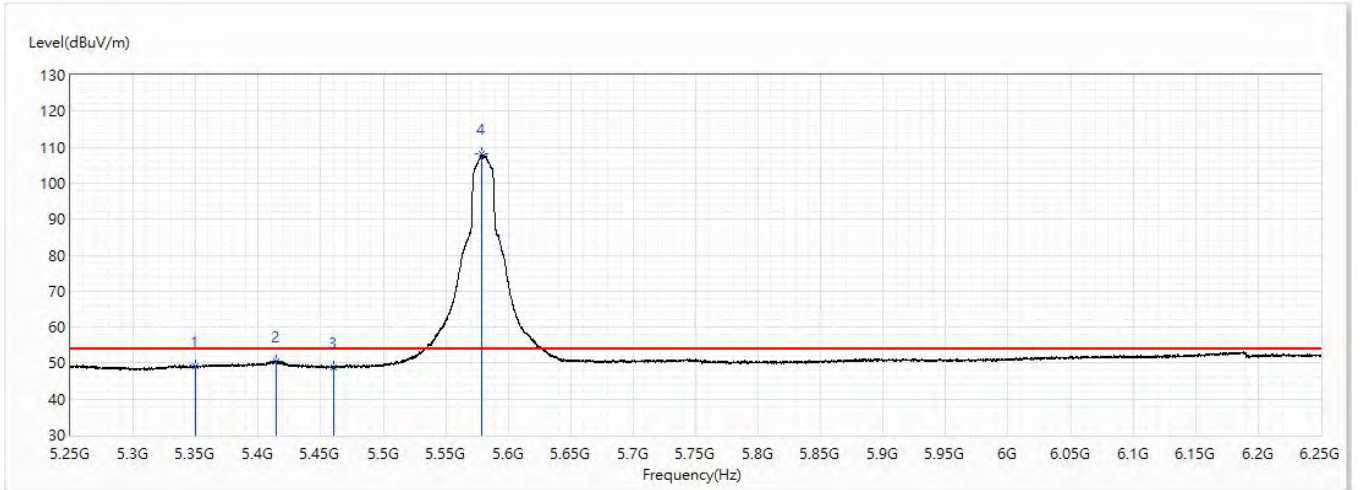


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.18	54.00	-4.82	23.67	25.51	AV
2	5414	50.52	54.00	-3.48	24.78	25.74	AV
3	5460	48.72	54.00	-5.28	22.93	25.79	AV
! 4	5578.875	107.99	54.00	53.99	81.74	26.25	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5700MHz	Humidity (%RH)	58.0

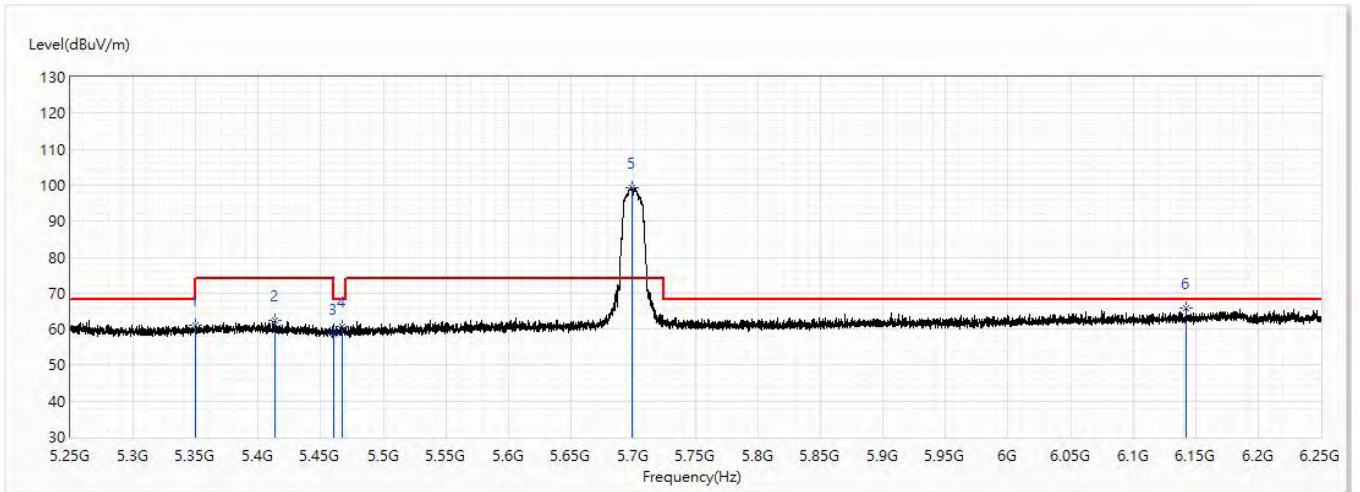


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	61.22	74.00	-12.78	35.71	25.51	PK
2	5413	62.39	74.00	-11.61	36.65	25.74	PK
3	5460	58.53	74.00	-15.47	32.74	25.79	PK
4	5467.125	60.74	68.20	-7.46	34.94	25.80	PK
! 5	5698.75	99.41	74.00	25.41	72.94	26.47	PK
6	6142.75	65.76	68.20	-2.44	37.64	28.12	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5700MHz	Humidity (%RH)	58.0

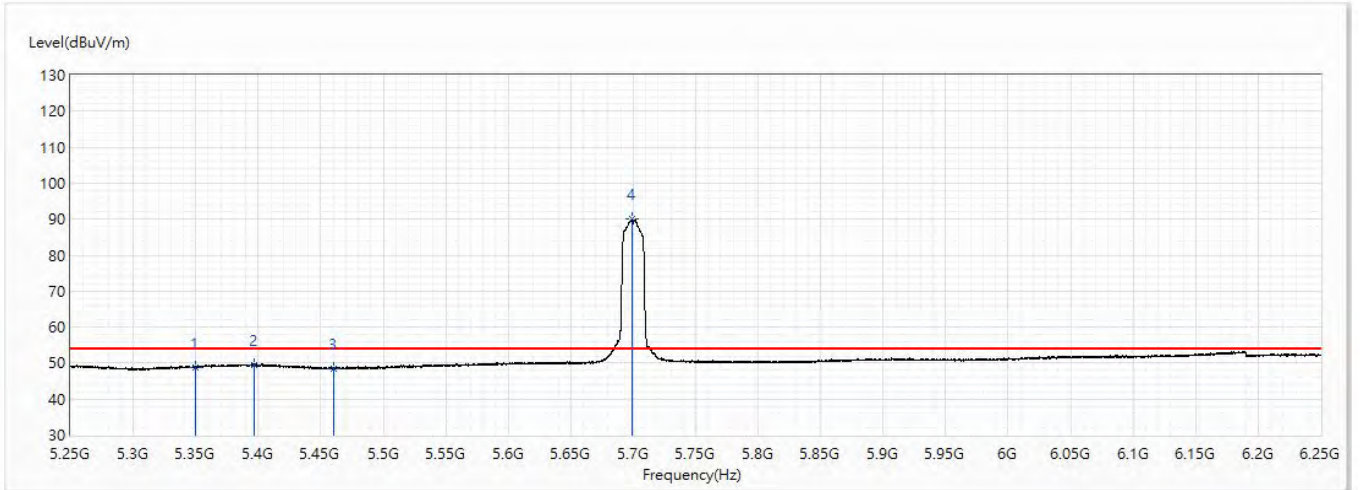


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.91	54.00	-5.09	23.40	25.51	AV
2	5397	49.61	54.00	-4.39	23.89	25.72	AV
3	5460	48.60	54.00	-5.40	22.81	25.79	AV
! 4	5698.875	90.02	54.00	36.02	63.55	26.47	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5700MHz	Humidity (%RH)	58.0

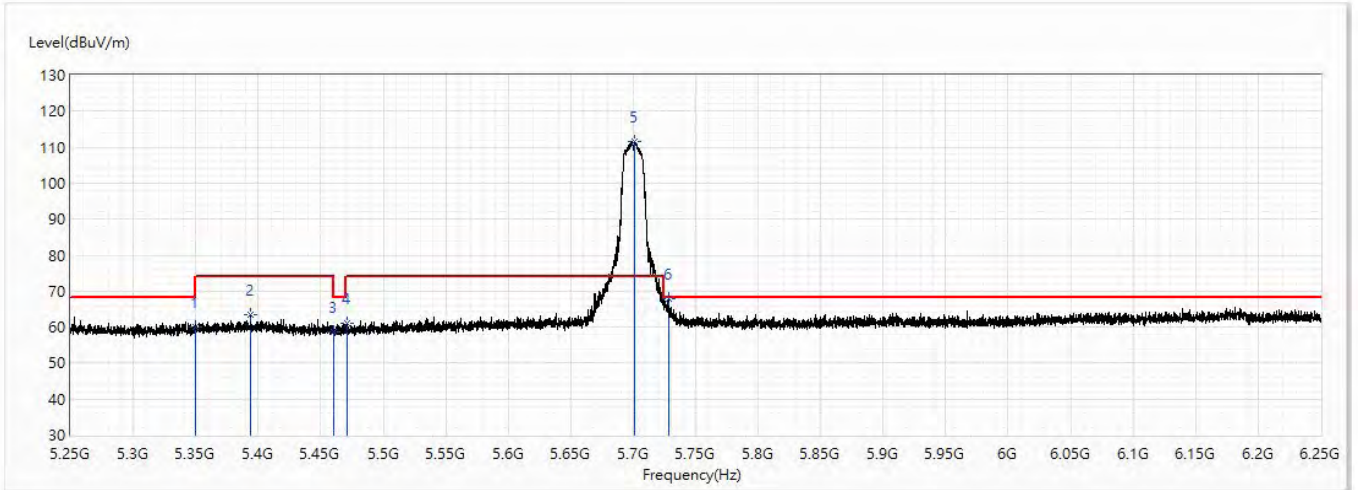


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.14	74.00	-13.86	34.63	25.51	PK
2	5394.125	63.40	74.00	-10.60	37.70	25.70	PK
3	5460	58.77	74.00	-15.23	32.98	25.79	PK
4	5470.75	61.01	74.00	-12.99	35.21	25.80	PK
! 5	5701.25	111.69	74.00	37.69	85.22	26.47	PK
6	5728.625	67.86	68.20	-0.34	41.26	26.60	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5700MHz	Humidity (%RH)	58.0

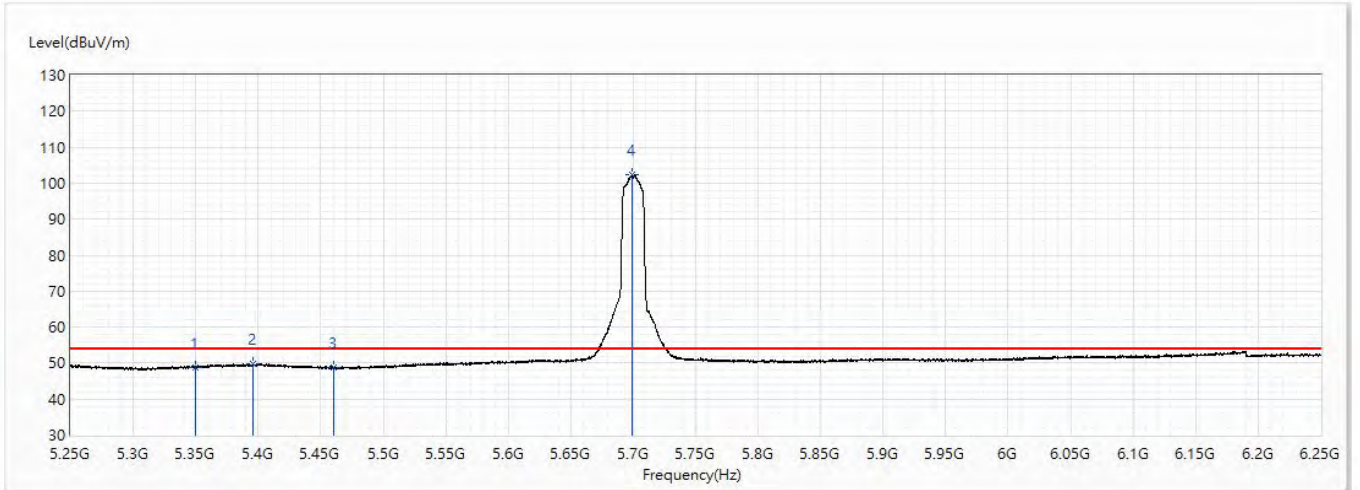


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.72	54.00	-5.28	23.21	25.51	AV
2	5395.875	49.80	54.00	-4.20	24.08	25.72	AV
3	5460	48.85	54.00	-5.15	23.06	25.79	AV
! 4	5698.875	102.29	54.00	48.29	75.82	26.47	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5500MHz	Humidity (%RH)	58.0

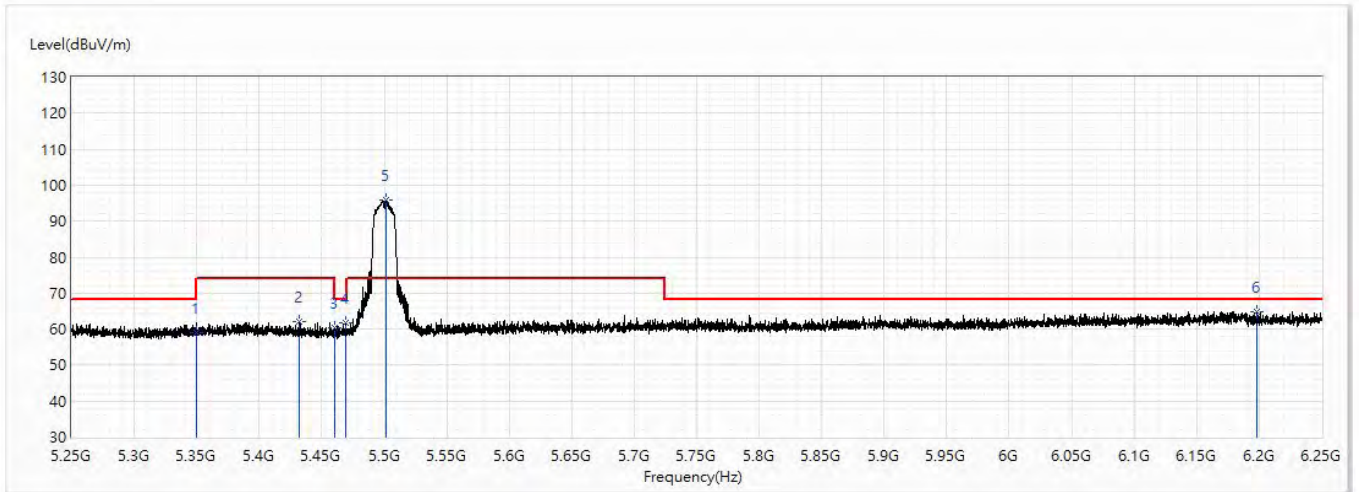


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.01	74.00	-14.99	33.50	25.51	PK
2	5431.625	62.13	74.00	-11.87	36.36	25.77	PK
3	5460	60.37	74.00	-13.63	34.58	25.79	PK
4	5468.875	61.70	68.20	-6.50	35.90	25.80	PK
!5	5501.5	95.71	74.00	21.71	69.87	25.84	PK
6	6198.5	64.87	68.20	-3.33	36.44	28.43	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5500MHz	Humidity (%RH)	58.0

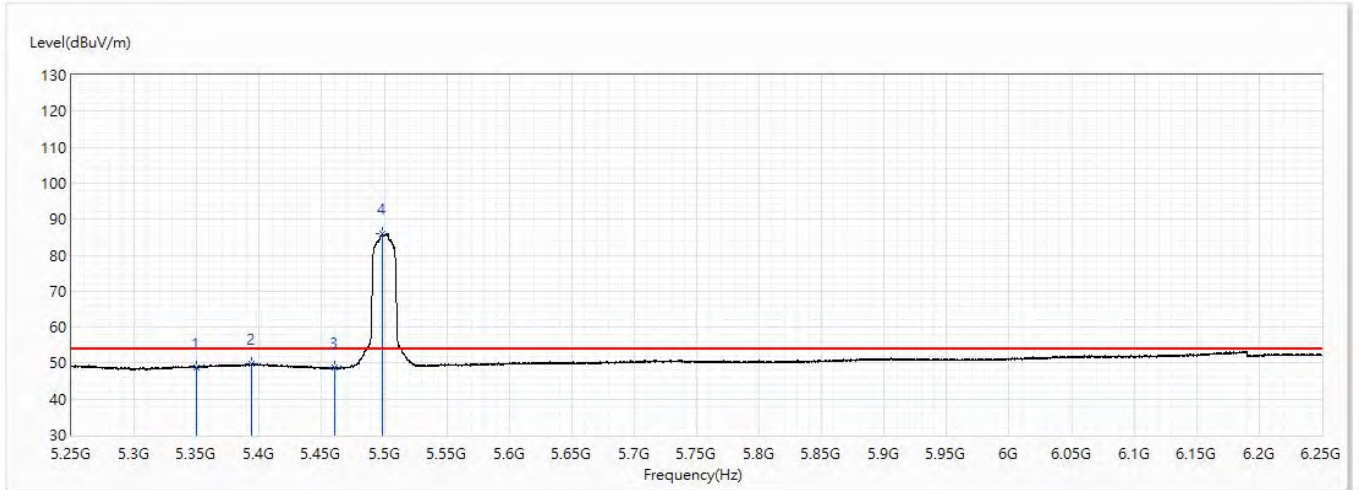


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.80	54.00	-5.20	23.29	25.51	AV
2	5393.875	49.83	54.00	-4.17	24.13	25.70	AV
3	5460	48.62	54.00	-5.38	22.83	25.79	AV
! 4	5498.5	86.03	54.00	32.03	60.19	25.84	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5500MHz	Humidity (%RH)	58.0

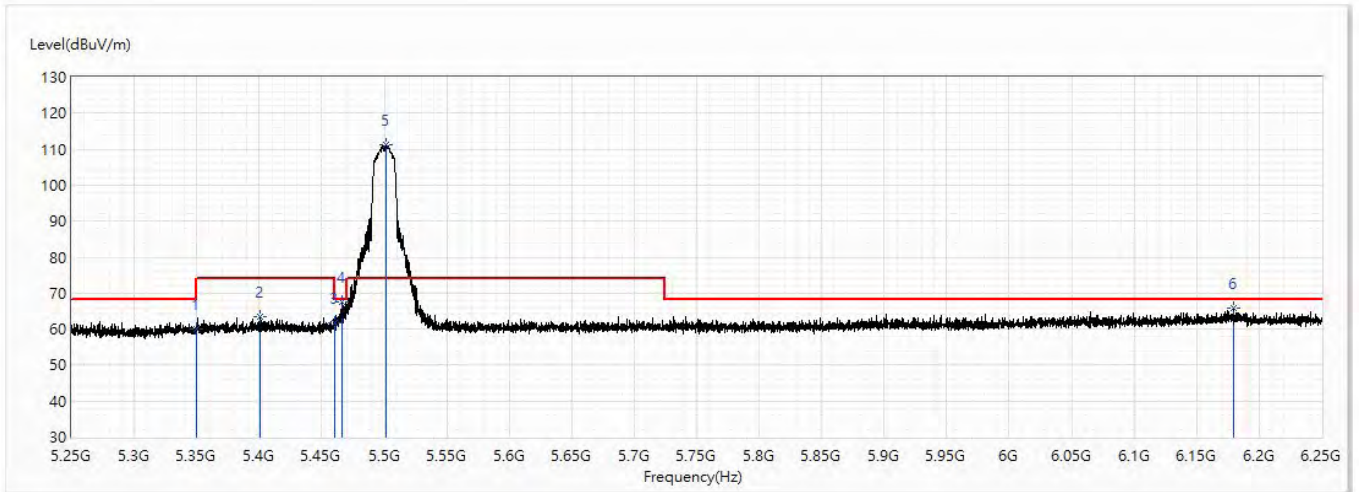


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.98	74.00	-14.02	34.47	25.51	PK
2	5401.125	63.54	74.00	-10.46	37.81	25.73	PK
3	5460	61.81	74.00	-12.19	36.02	25.79	PK
4	5466.5	67.53	68.20	-0.67	41.73	25.80	PK
! 5	5501.25	111.07	74.00	37.07	85.23	25.84	PK
6	6179.375	65.75	68.20	-2.45	37.42	28.33	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5500MHz	Humidity (%RH)	58.0

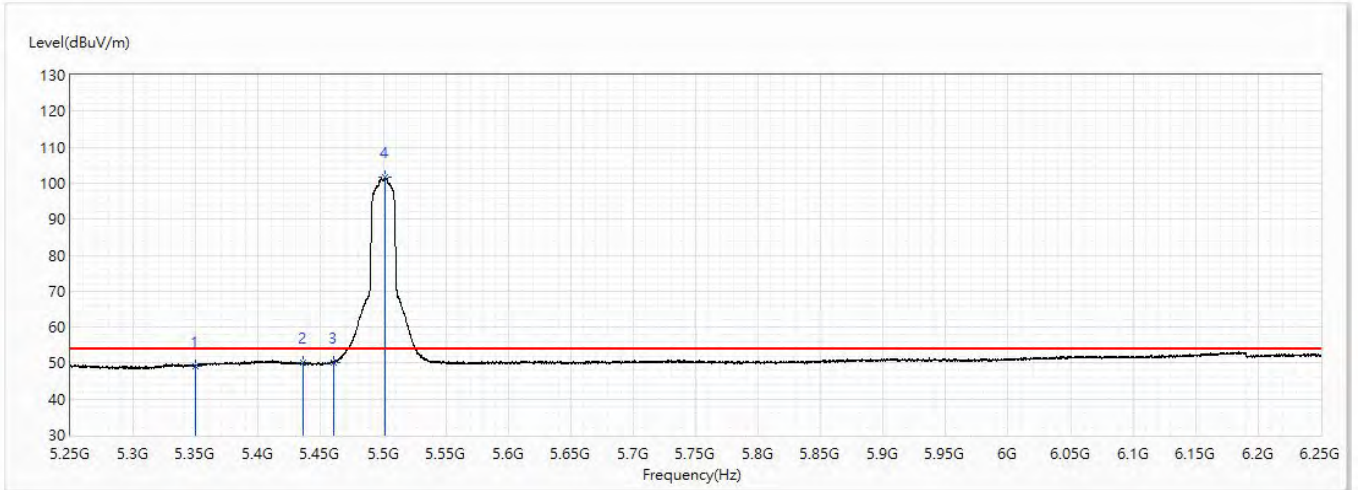


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.25	54.00	-4.75	23.74	25.51	AV
2	5436.25	50.06	54.00	-3.94	24.28	25.78	AV
3	5460	50.13	54.00	-3.87	24.34	25.79	AV
! 4	5501.375	101.56	54.00	47.56	75.72	25.84	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5580MHz	Humidity (%RH)	58.0

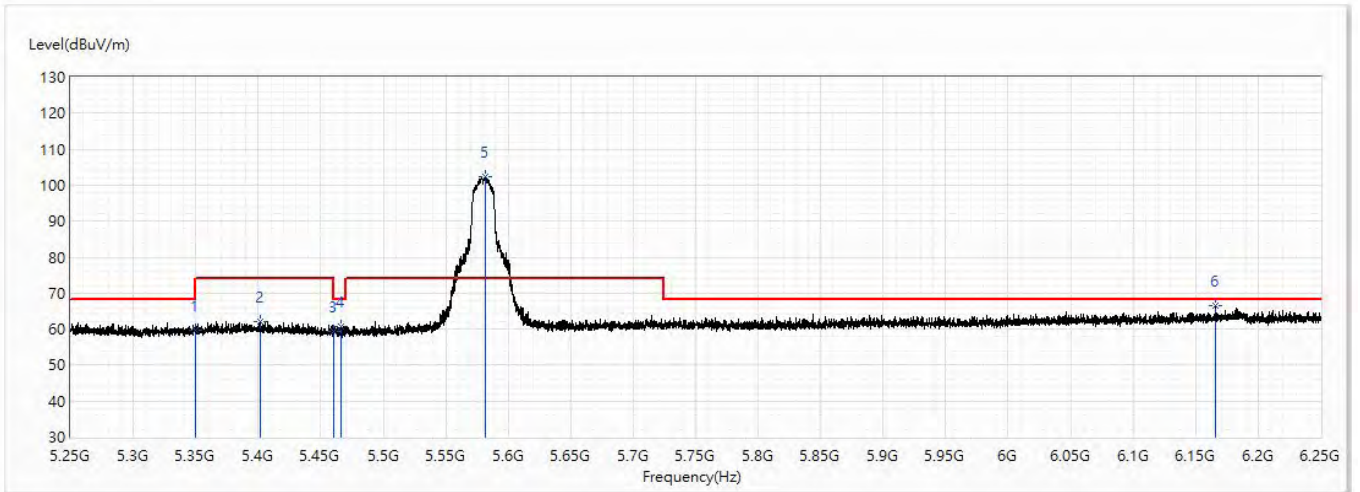


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.69	74.00	-14.31	34.18	25.51	PK
2	5402	62.02	74.00	-11.98	36.29	25.73	PK
3	5460	59.37	74.00	-14.63	33.58	25.79	PK
4	5466.625	60.55	68.20	-7.65	34.75	25.80	PK
! 5	5581.5	102.45	74.00	28.45	76.18	26.27	PK
6	6165.625	66.43	68.20	-1.77	38.18	28.25	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5580MHz	Humidity (%RH)	58.0

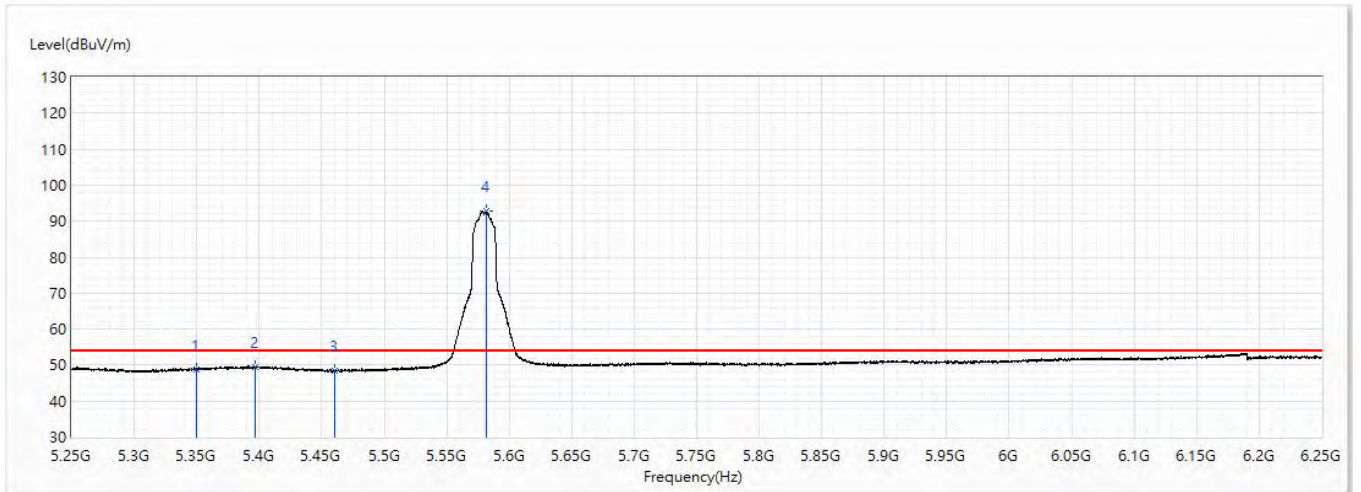


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.86	54.00	-5.14	23.35	25.51	AV
2	5397	49.42	54.00	-4.58	23.70	25.72	AV
3	5460	48.43	54.00	-5.57	22.64	25.79	AV
! 4	5581.375	92.77	54.00	38.77	66.50	26.27	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5580MHz	Humidity (%RH)	58.0

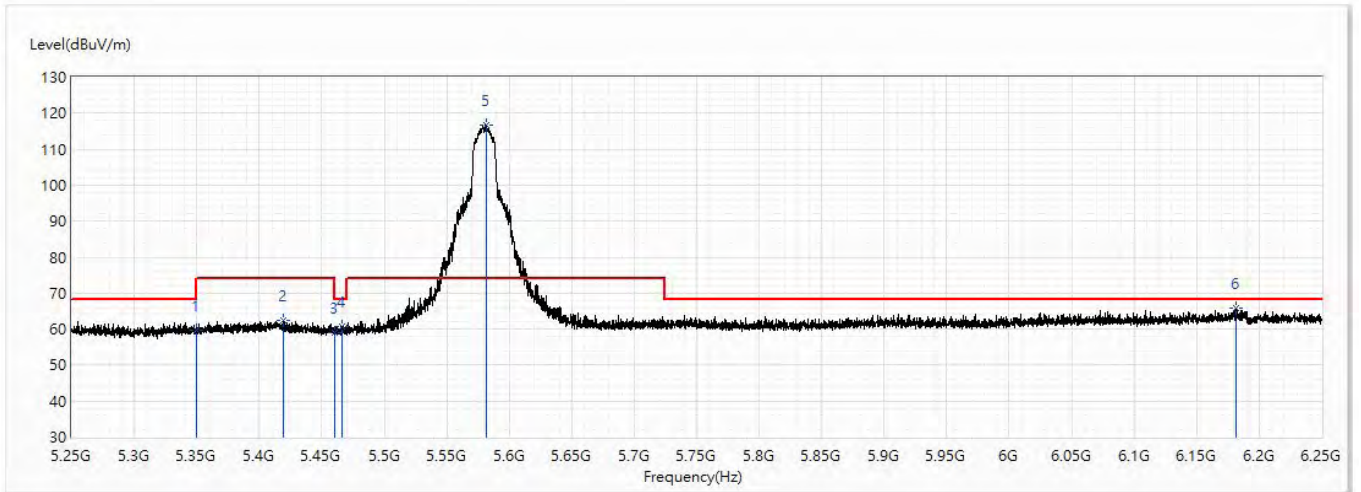


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.62	74.00	-14.38	34.11	25.51	PK
2	5419.25	62.35	74.00	-11.65	36.60	25.75	PK
3	5460	59.05	74.00	-14.95	33.26	25.79	PK
4	5466.625	60.78	68.20	-7.42	34.98	25.80	PK
! 5	5581.25	116.68	74.00	42.68	90.41	26.27	PK
6	6181.125	65.92	68.20	-2.28	37.58	28.34	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5580MHz	Humidity (%RH)	58.0

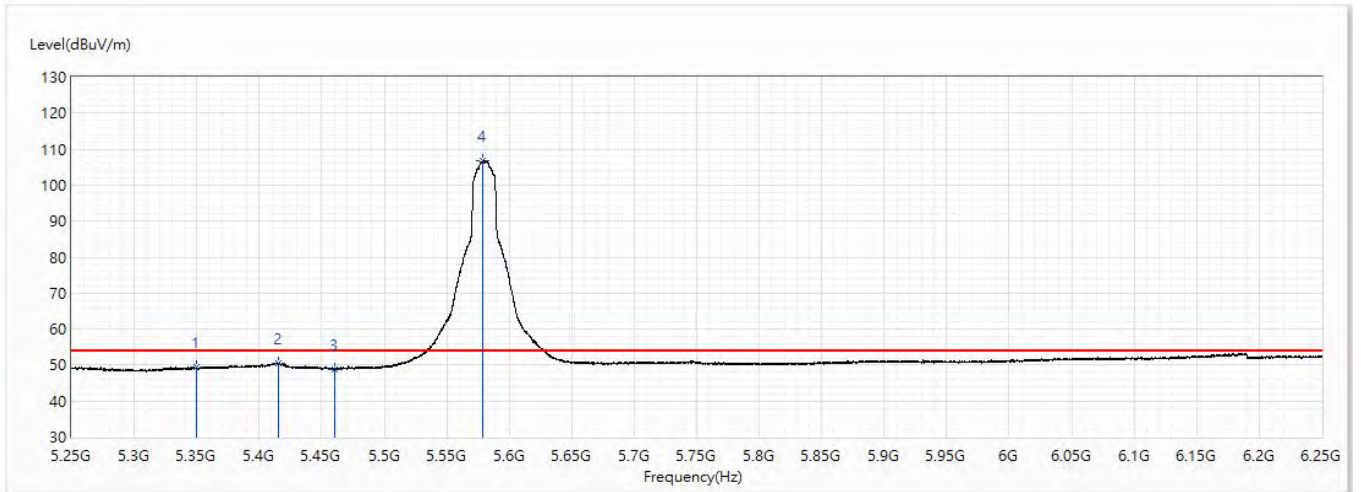


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.30	54.00	-4.70	23.79	25.51	AV
2	5415.75	50.53	54.00	-3.47	24.78	25.75	AV
3	5460	48.89	54.00	-5.11	23.10	25.79	AV
! 4	5578.625	106.91	54.00	52.91	80.66	26.25	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5700MHz	Humidity (%RH)	58.0

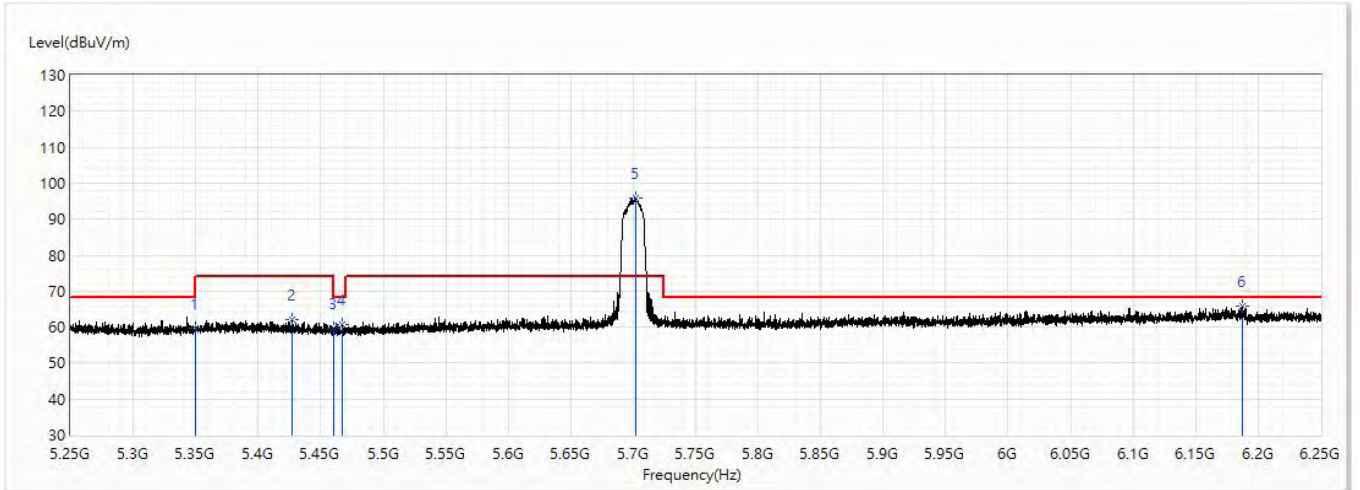


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.73	74.00	-14.27	34.22	25.51	PK
2	5426.75	62.12	74.00	-11.88	36.35	25.77	PK
3	5460	59.55	74.00	-14.45	33.76	25.79	PK
4	5467.375	60.59	68.20	-7.61	34.79	25.80	PK
!5	5701.625	95.73	74.00	21.73	69.26	26.47	PK
6	6187.75	65.67	68.20	-2.53	37.30	28.37	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5700MHz	Humidity (%RH)	58.0

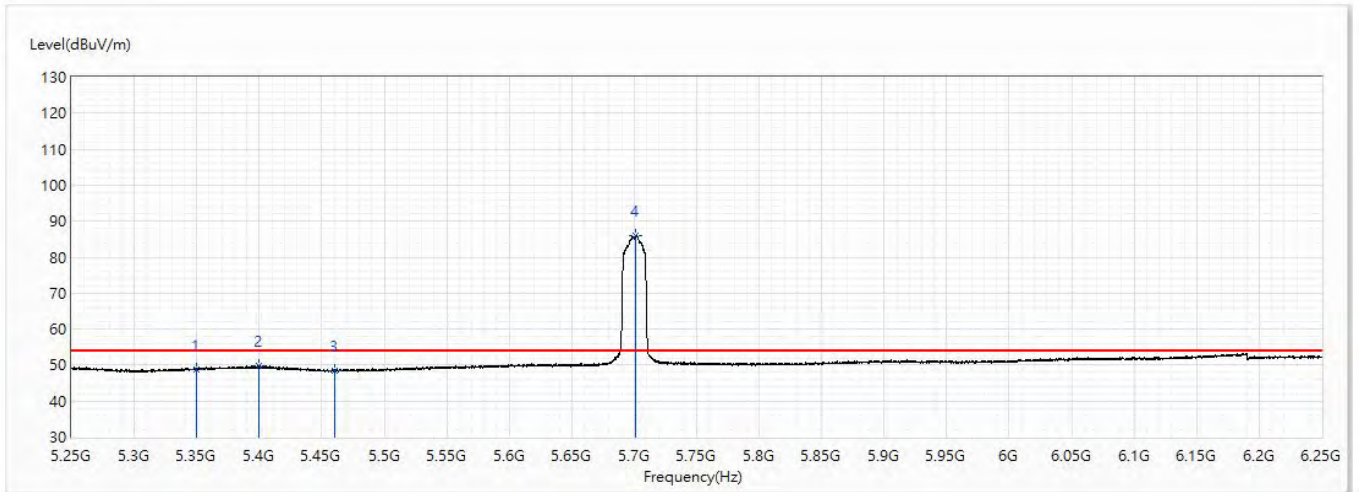


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.76	54.00	-5.24	23.25	25.51	AV
2	5399.5	49.70	54.00	-4.30	23.97	25.73	AV
3	5460	48.34	54.00	-5.66	22.55	25.79	AV
! 4	5701.375	86.06	54.00	32.06	59.59	26.47	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5700MHz	Humidity (%RH)	58.0

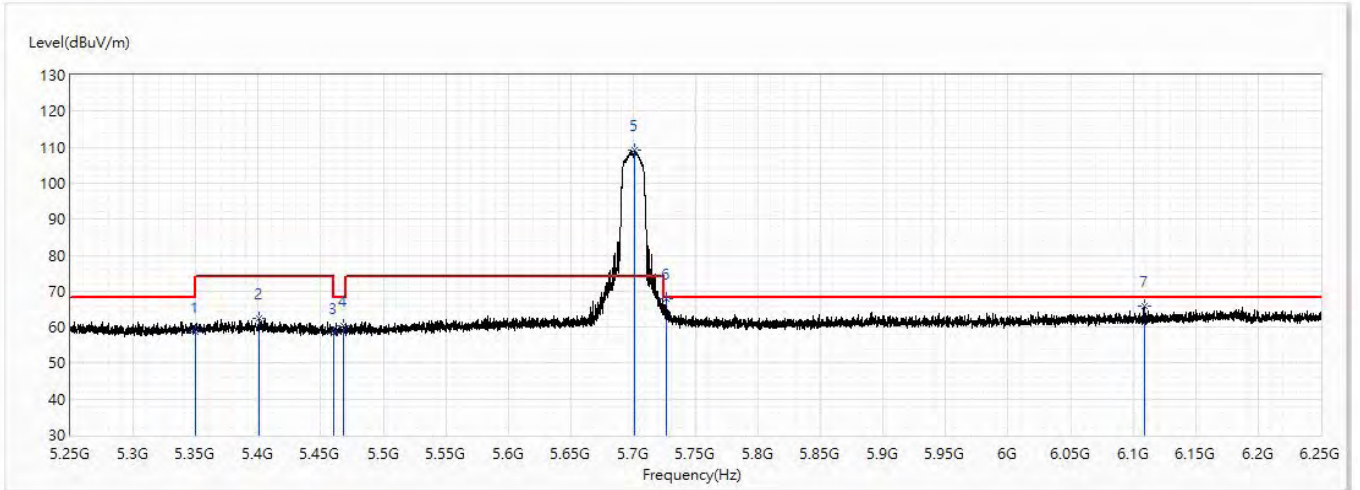


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.55	74.00	-15.45	33.04	25.51	PK
2	5400.75	62.31	74.00	-11.69	36.58	25.73	PK
3	5460	58.22	74.00	-15.78	32.43	25.79	PK
4	5468.375	60.24	68.20	-7.96	34.44	25.80	PK
!5	5701.5	109.15	74.00	35.15	82.68	26.47	PK
6	5726.625	67.73	68.20	-0.47	41.13	26.60	PK
7	6108.625	65.81	68.20	-2.39	37.88	27.93	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5700MHz	Humidity (%RH)	58.0

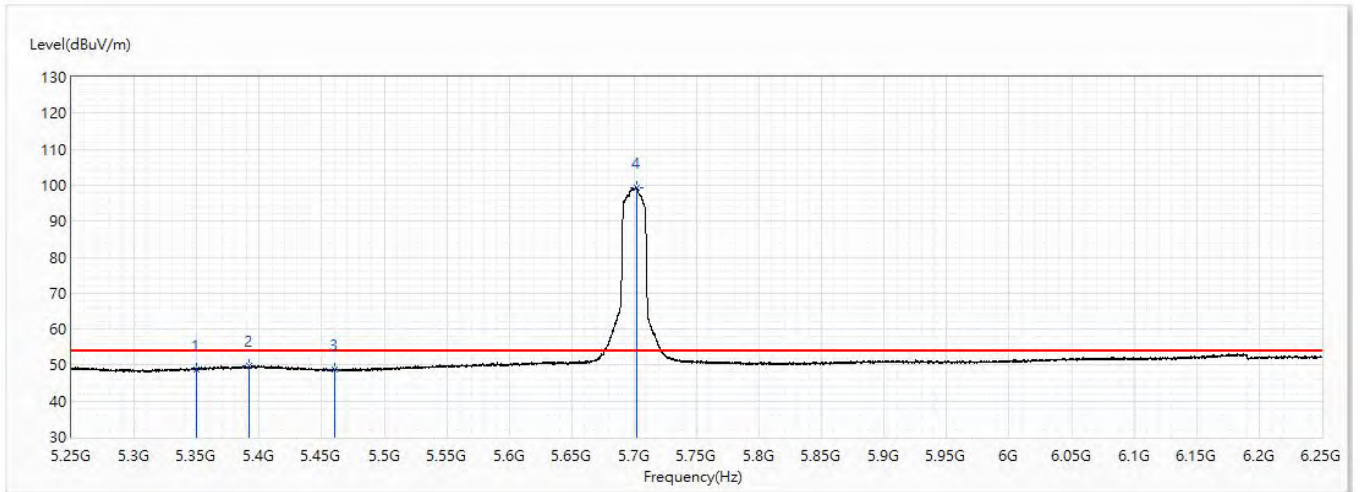


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.92	54.00	-5.08	23.41	25.51	AV
2	5392.125	49.81	54.00	-4.19	24.11	25.70	AV
3	5460	48.72	54.00	-5.28	22.93	25.79	AV
! 4	5701.625	99.25	54.00	45.25	72.78	26.47	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5510MHz	Humidity (%RH)	58.0

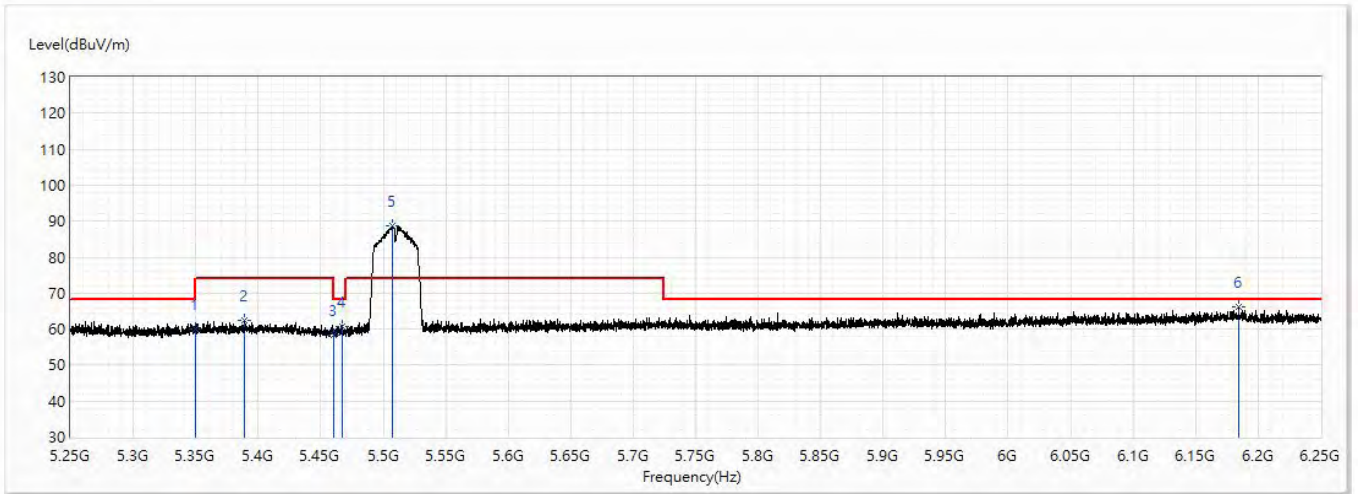


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.99	74.00	-14.01	34.48	25.51	PK
2	5389.25	62.50	74.00	-11.50	36.81	25.69	PK
3	5460	58.49	74.00	-15.51	32.70	25.79	PK
4	5467.375	60.84	68.20	-7.36	35.04	25.80	PK
! 5	5507.375	88.63	74.00	14.63	62.76	25.87	PK
6	6184.125	66.11	68.20	-2.09	37.75	28.36	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5510MHz	Humidity (%RH)	58.0

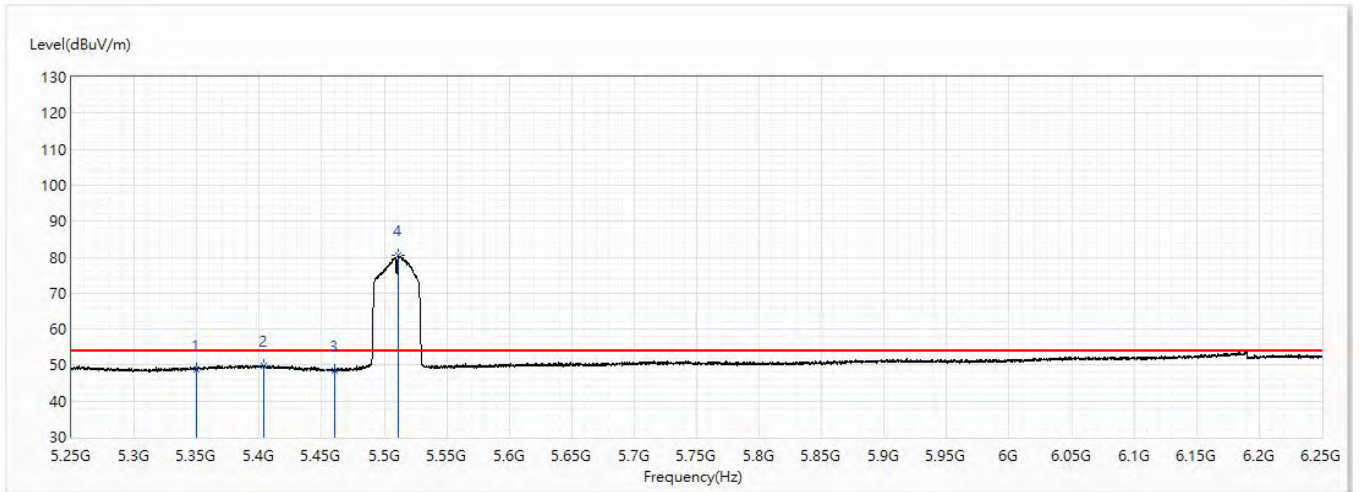


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.90	54.00	-5.10	23.39	25.51	AV
2	5404	49.80	54.00	-4.20	24.07	25.73	AV
3	5460	48.45	54.00	-5.55	22.66	25.79	AV
! 4	5511.375	80.38	54.00	26.38	54.48	25.90	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5510MHz	Humidity (%RH)	58.0

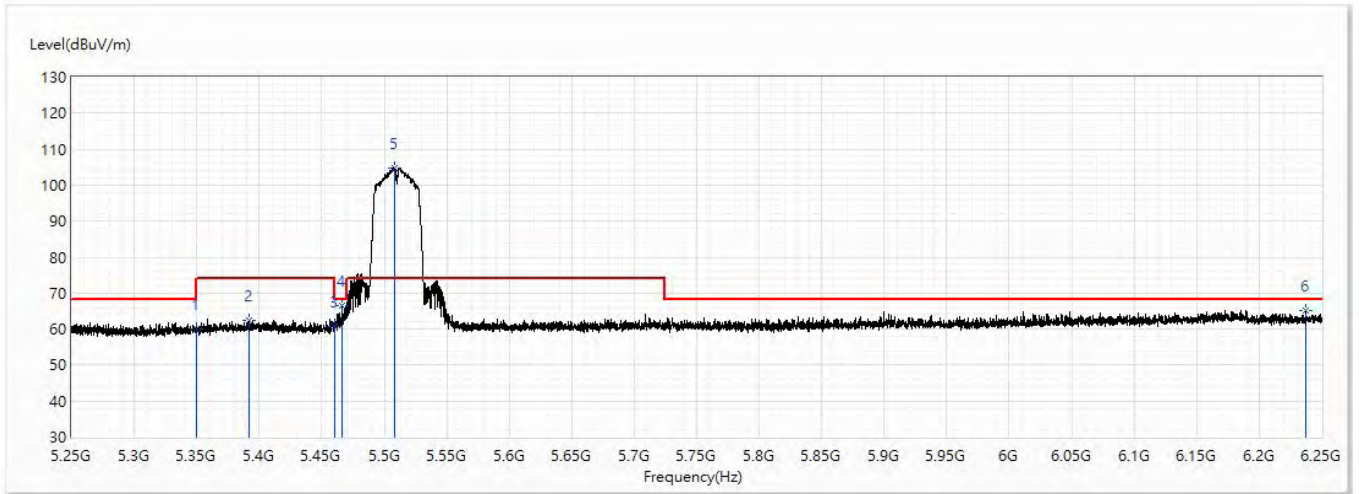


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.10	74.00	-13.90	34.59	25.51	PK
2	5391.5	62.31	74.00	-11.69	36.62	25.69	PK
3	5460	60.82	74.00	-13.18	35.03	25.79	PK
4	5466	66.53	68.20	-1.67	40.73	25.80	PK
! 5	5507.875	104.85	74.00	30.85	78.98	25.87	PK
6	6237.375	65.17	68.20	-3.03	36.49	28.68	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/5
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5510MHz	Humidity (%RH)	58.0

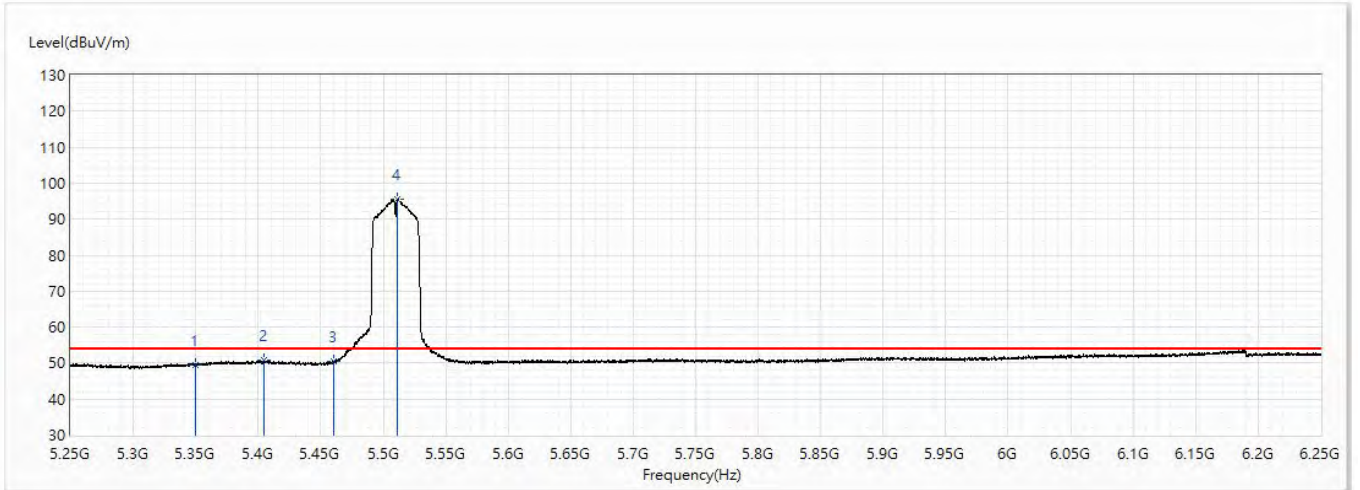


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.47	54.00	-4.53	23.96	25.51	AV
2	5404.625	50.75	54.00	-3.25	25.02	25.73	AV
3	5460	50.31	54.00	-3.69	24.52	25.79	AV
! 4	5511.5	95.61	54.00	41.61	69.71	25.90	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5550MHz	Humidity (%RH)	58.0

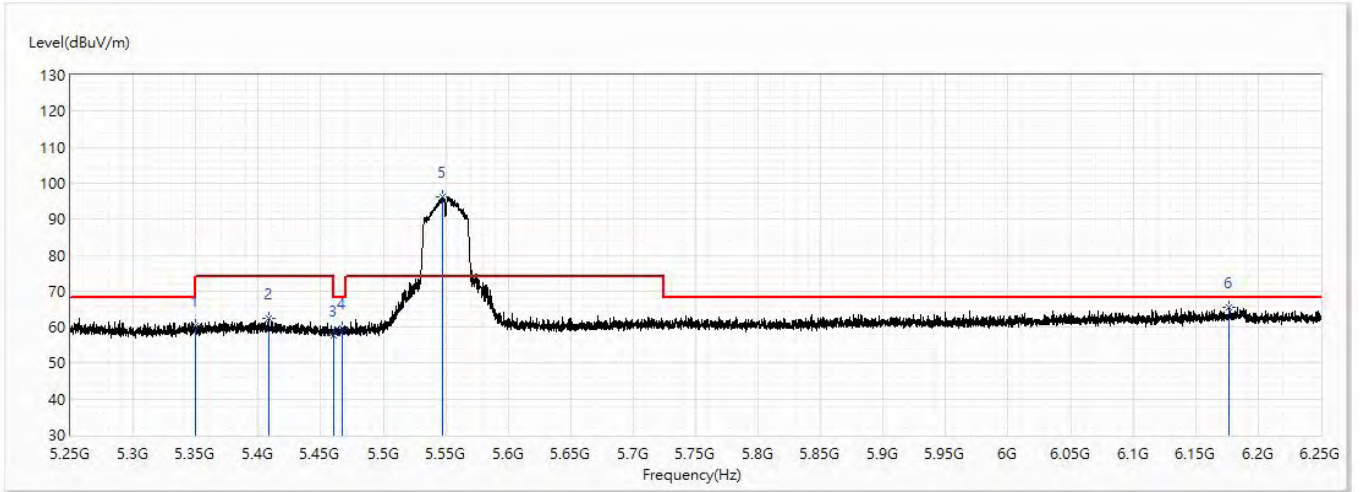


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.31	74.00	-13.69	34.80	25.51	PK
2	5408.75	62.55	74.00	-11.45	36.81	25.74	PK
3	5460	57.71	74.00	-16.29	31.92	25.79	PK
4	5467.375	59.64	68.20	-8.56	33.84	25.80	PK
! 5	5547	96.15	74.00	22.15	70.07	26.08	PK
6	6176.5	65.35	68.20	-2.85	37.04	28.31	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5550MHz	Humidity (%RH)	58.0

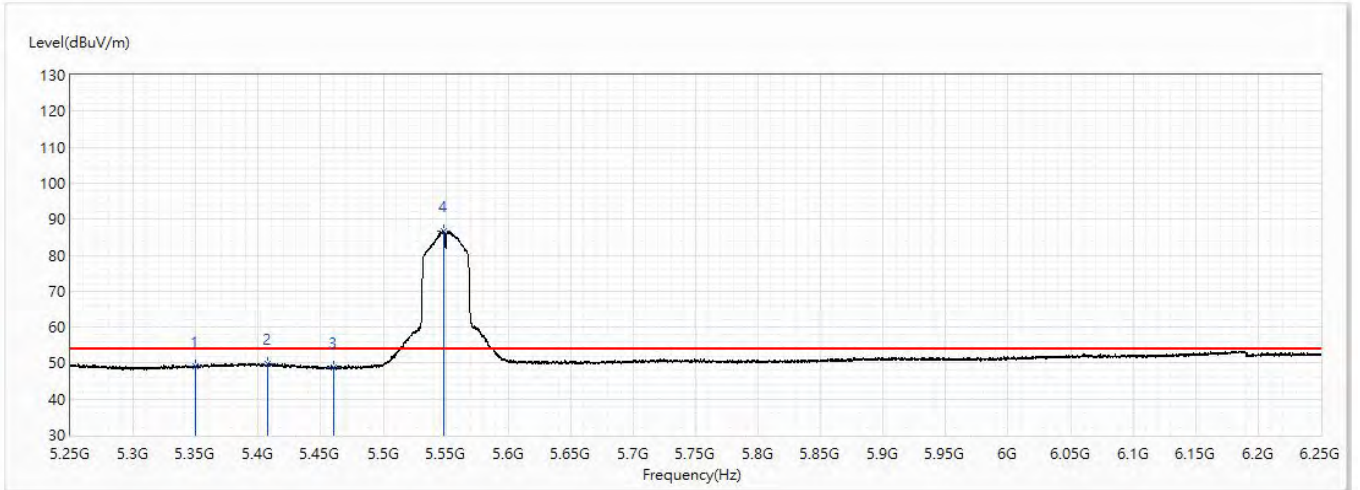


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.03	54.00	-4.97	23.52	25.51	AV
2	5407.75	49.79	54.00	-4.21	24.05	25.74	AV
3	5460	48.84	54.00	-5.16	23.05	25.79	AV
! 4	5548.5	86.70	54.00	32.70	60.60	26.10	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5550MHz	Humidity (%RH)	58.0

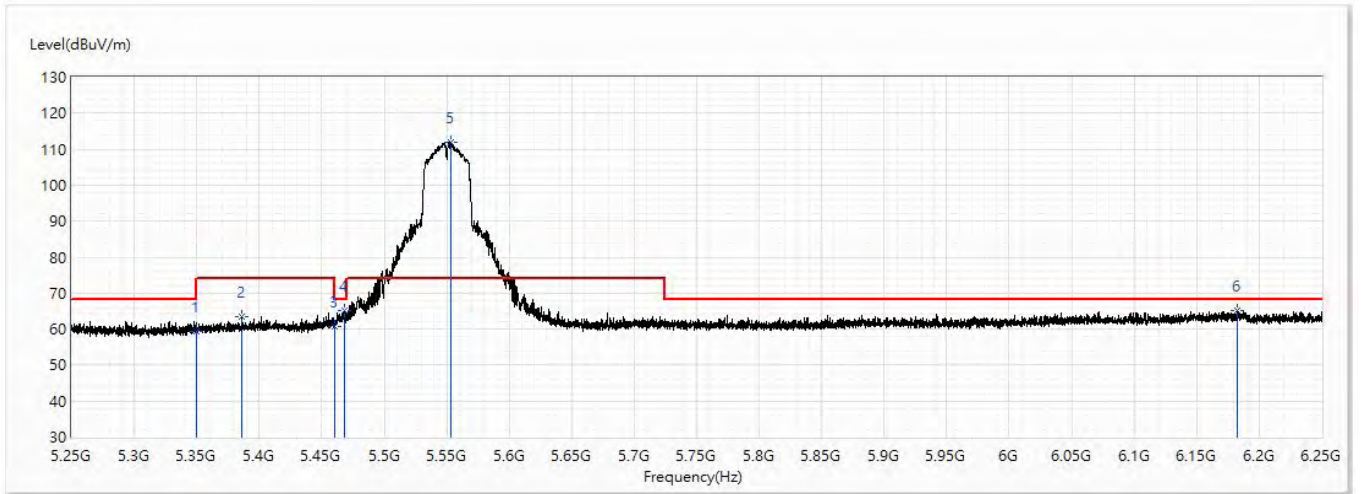


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.39	74.00	-14.61	33.88	25.51	PK
2	5386	63.44	74.00	-10.56	37.76	25.68	PK
3	5460	60.85	74.00	-13.15	35.06	25.79	PK
4	5468.125	65.30	68.20	-2.90	39.50	25.80	PK
!5	5552.875	111.91	74.00	37.91	85.79	26.12	PK
6	6182.625	65.22	68.20	-2.98	36.88	28.34	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5550MHz	Humidity (%RH)	58.0

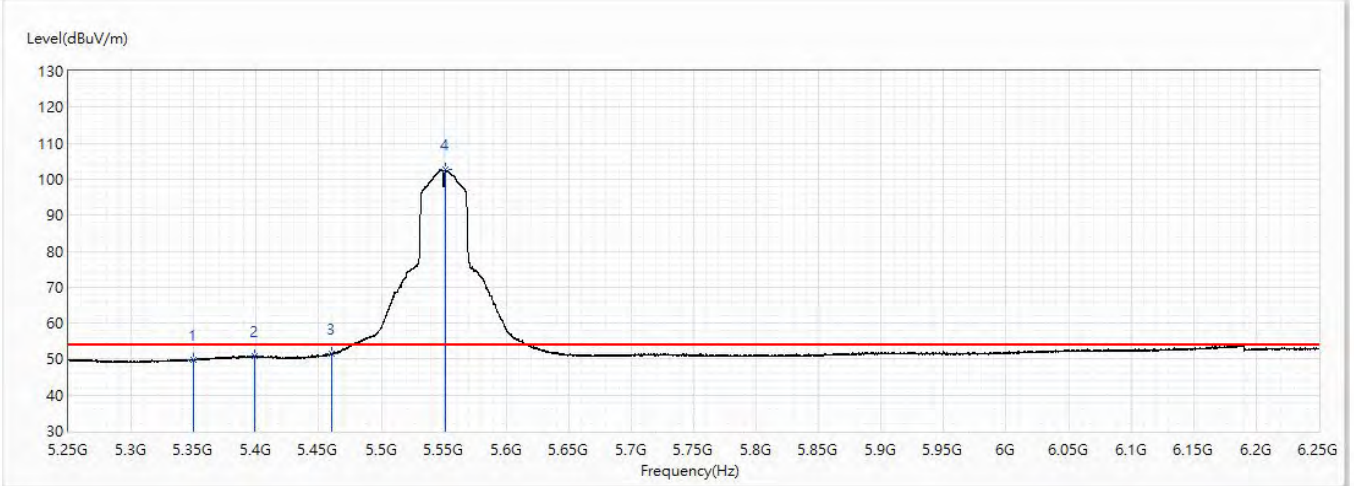


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.77	54.00	-4.23	24.26	25.51	AV
2	5398.375	50.87	54.00	-3.13	25.15	25.72	AV
3	5460	51.43	54.00	-2.57	25.64	25.79	AV
! 4	5551.625	102.56	54.00	48.56	76.46	26.10	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5670MHz	Humidity (%RH)	58.0

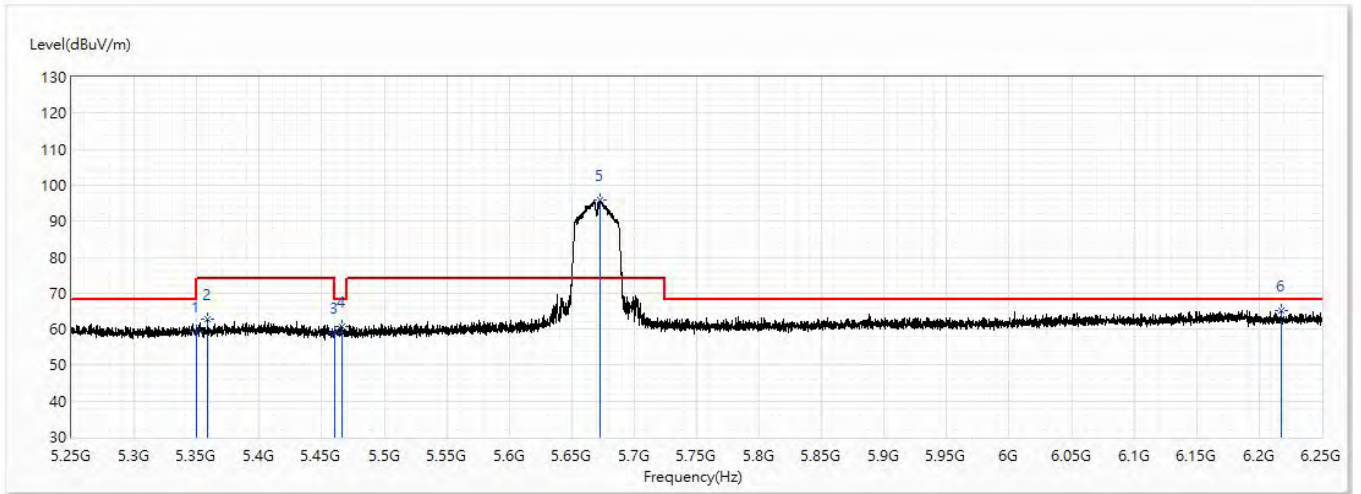


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.27	74.00	-14.73	33.76	25.51	PK
2	5358.5	62.76	74.00	-11.24	37.21	25.55	PK
3	5460	59.08	74.00	-14.92	33.29	25.79	PK
4	5466.5	60.59	68.20	-7.61	34.79	25.80	PK
!5	5672.875	95.75	74.00	21.75	69.31	26.44	PK
6	6217.875	65.17	68.20	-3.03	36.62	28.55	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5670MHz	Humidity (%RH)	58.0

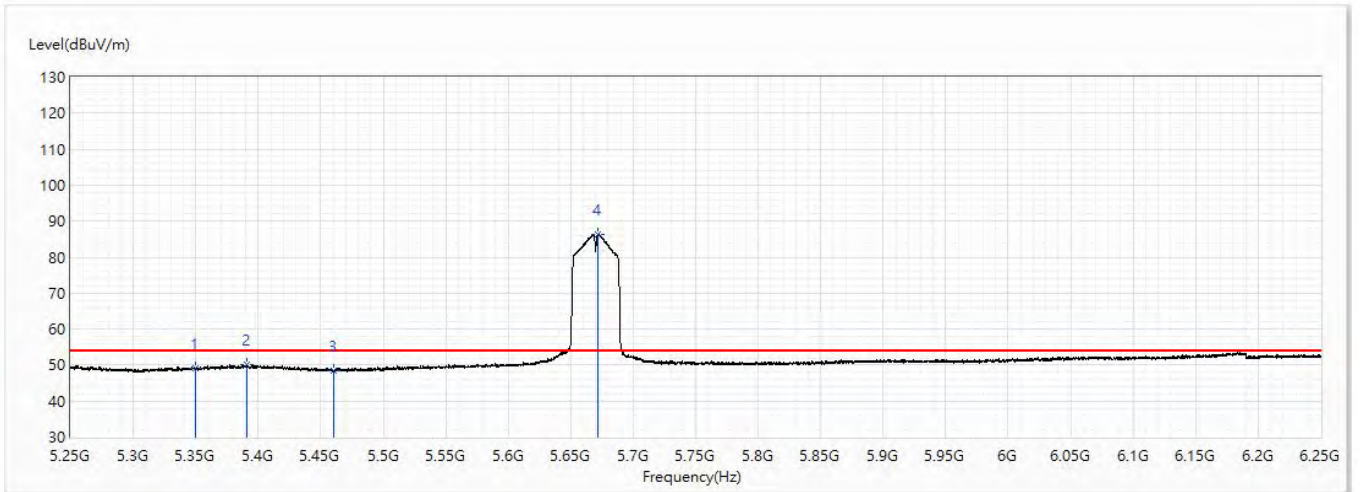


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.01	54.00	-4.99	23.50	25.51	AV
2	5391.25	50.04	54.00	-3.96	24.35	25.69	AV
3	5460	48.31	54.00	-5.69	22.52	25.79	AV
! 4	5671.375	86.34	54.00	32.34	59.90	26.44	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5670MHz	Humidity (%RH)	58.0

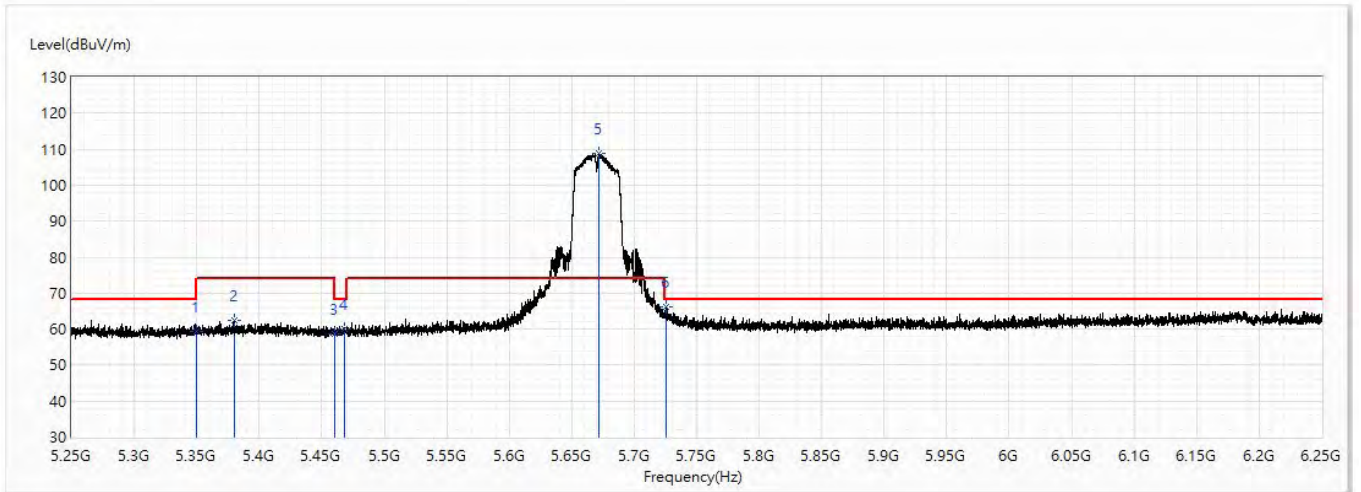


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.42	74.00	-14.58	33.91	25.51	PK
2	5379.75	62.38	74.00	-11.62	36.73	25.65	PK
3	5460	58.52	74.00	-15.48	32.73	25.79	PK
4	5467.875	60.00	68.20	-8.20	34.20	25.80	PK
! 5	5671.625	108.68	74.00	34.68	82.24	26.44	PK
6	5725.875	66.04	68.20	-2.16	39.44	26.60	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5670MHz	Humidity (%RH)	58.0

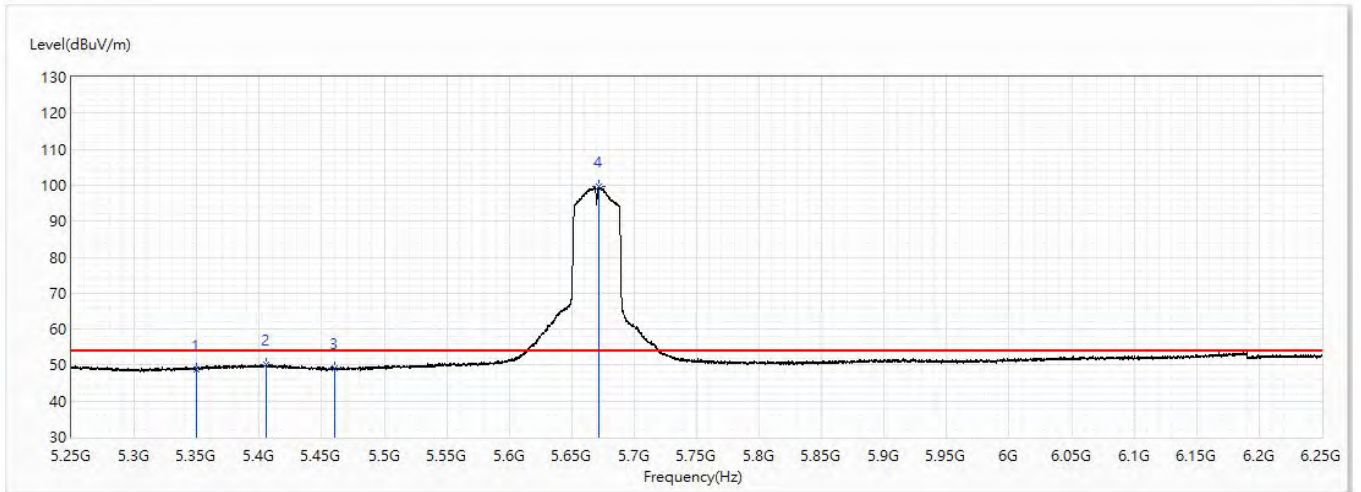


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	48.85	54.00	-5.15	23.34	25.51	AV
2	5405.125	50.19	54.00	-3.81	24.45	25.74	AV
3	5460	49.04	54.00	-4.96	23.25	25.79	AV
! 4	5671.375	99.46	54.00	45.46	73.02	26.44	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5530MHz	Humidity (%RH)	58.0

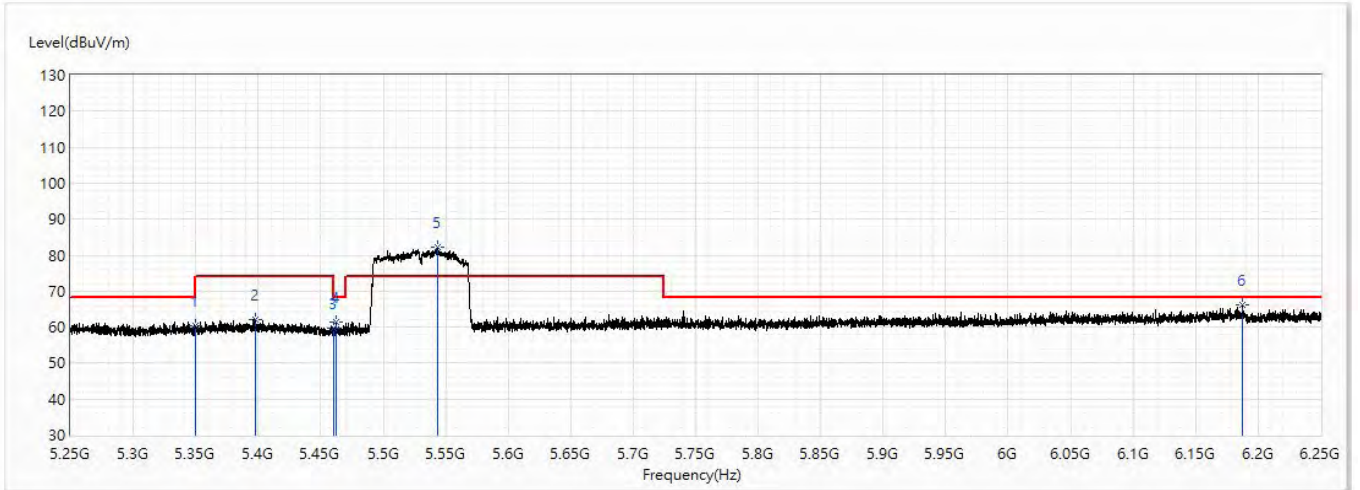


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.42	74.00	-13.58	34.91	25.51	PK
2	5397.5	62.10	74.00	-11.90	36.38	25.72	PK
3	5460	59.63	74.00	-14.37	33.84	25.79	PK
4	5462.5	61.32	68.20	-6.88	35.53	25.79	PK
! 5	5543.125	82.06	74.00	8.06	55.99	26.07	PK
6	6187.25	66.10	68.20	-2.10	37.73	28.37	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5530MHz	Humidity (%RH)	58.0

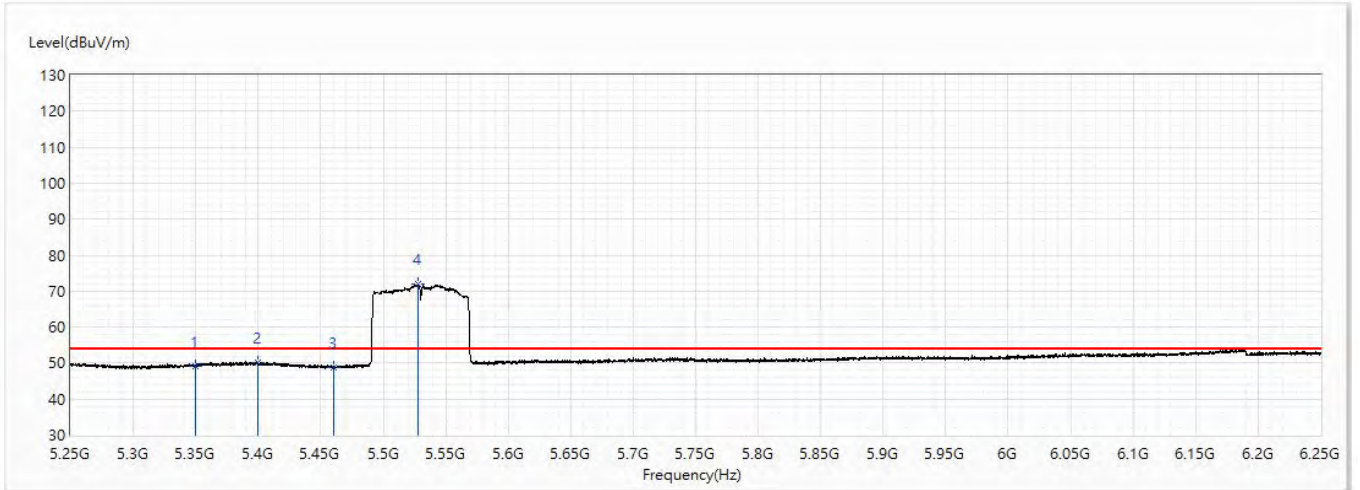


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.05	54.00	-4.95	23.54	25.51	AV
2	5399.25	50.08	54.00	-3.92	24.35	25.73	AV
3	5460	48.78	54.00	-5.22	22.99	25.79	AV
! 4	5527.875	71.98	54.00	17.98	45.99	25.99	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5530MHz	Humidity (%RH)	58.0

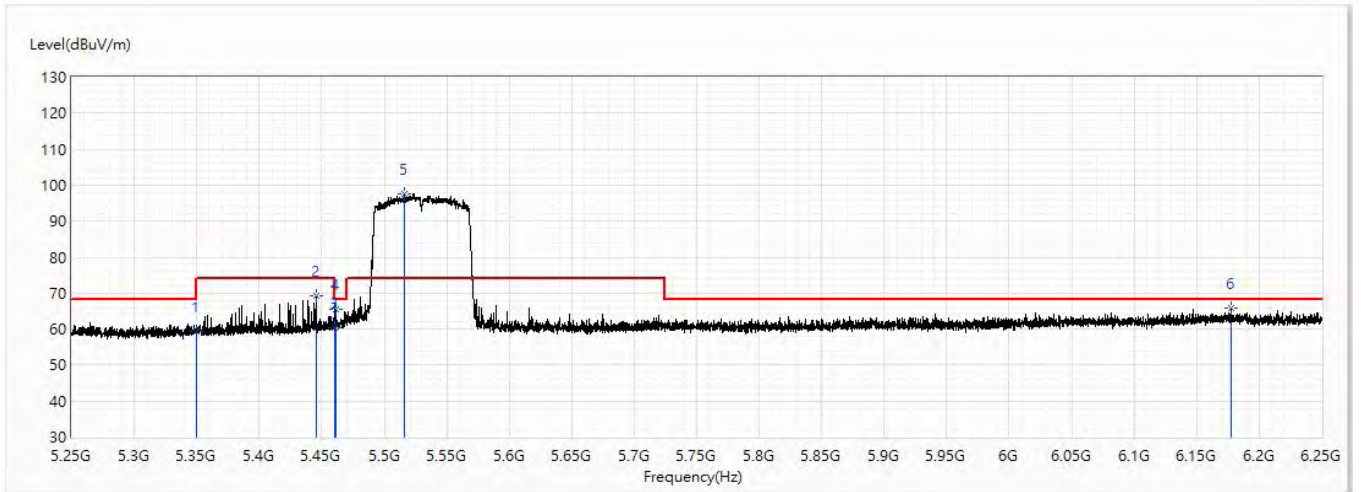


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.41	74.00	-14.59	33.90	25.51	PK
2	5445.625	69.11	74.00	-4.89	43.32	25.79	PK
3	5460	60.52	74.00	-13.48	34.73	25.79	PK
4	5460.875	65.52	68.20	-2.68	39.73	25.79	PK
!5	5516.375	97.72	74.00	23.72	71.79	25.93	PK
6	6177.5	65.72	68.20	-2.48	37.40	28.32	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/6
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5530MHz	Humidity (%RH)	58.0

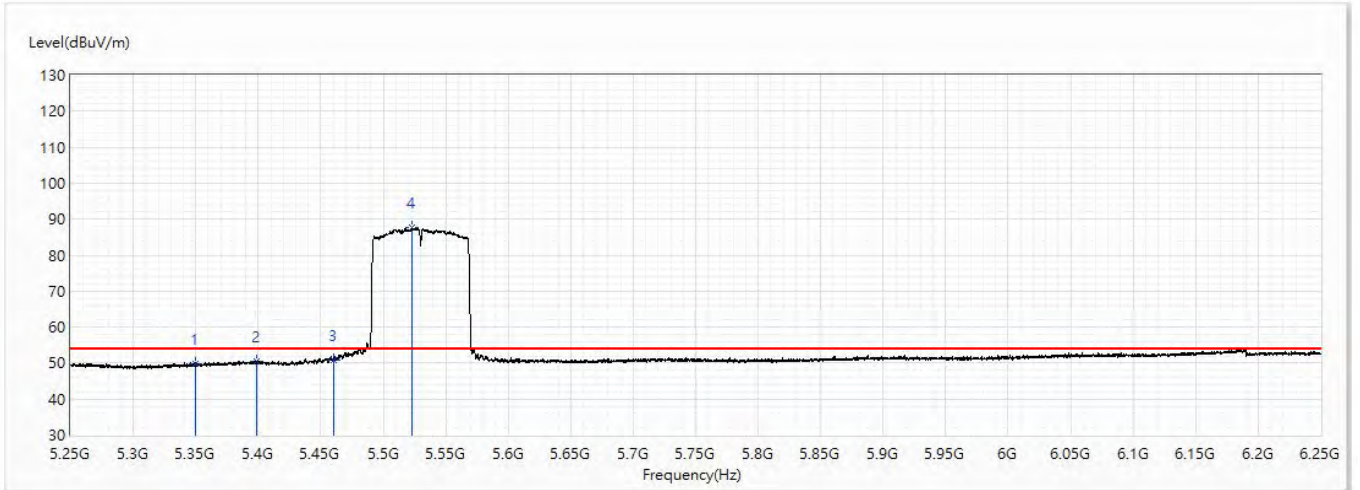


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.68	54.00	-4.32	24.17	25.51	AV
2	5399	50.45	54.00	-3.55	24.72	25.73	AV
3	5460	50.91	54.00	-3.09	25.12	25.79	AV
! 4	5523.125	87.55	54.00	33.55	61.60	25.95	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5610MHz	Humidity (%RH)	58.0

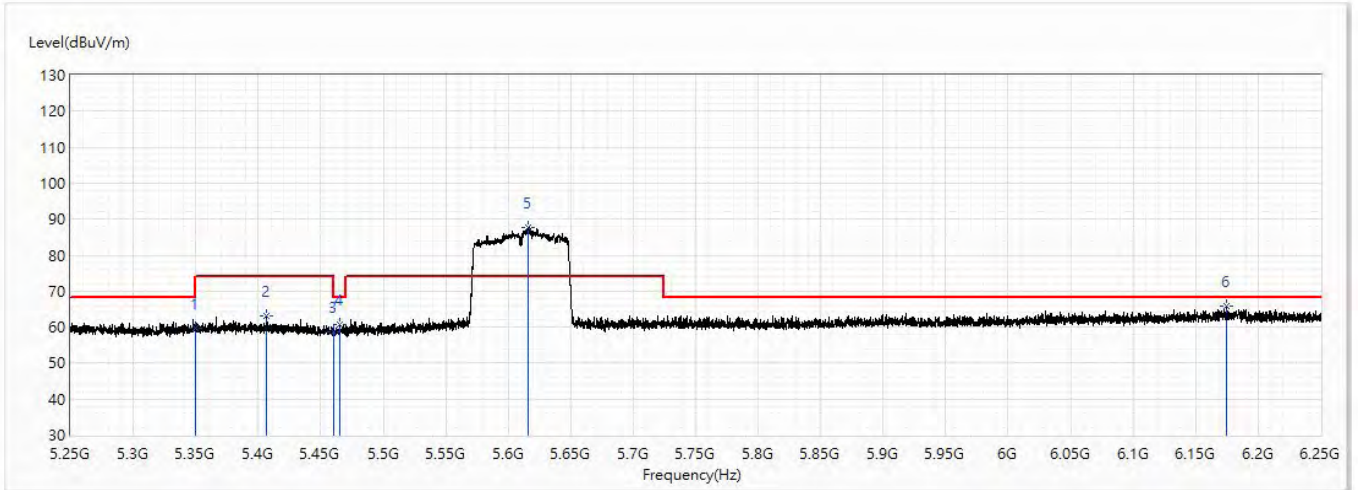


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.81	74.00	-14.19	34.30	25.51	PK
2	5406.875	62.97	74.00	-11.03	37.23	25.74	PK
3	5460	58.79	74.00	-15.21	33.00	25.79	PK
4	5465	60.84	68.20	-7.36	35.04	25.80	PK
! 5	5616.125	87.63	74.00	13.63	61.25	26.38	PK
6	6175.125	65.67	68.20	-2.53	37.36	28.31	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5610MHz	Humidity (%RH)	58.0

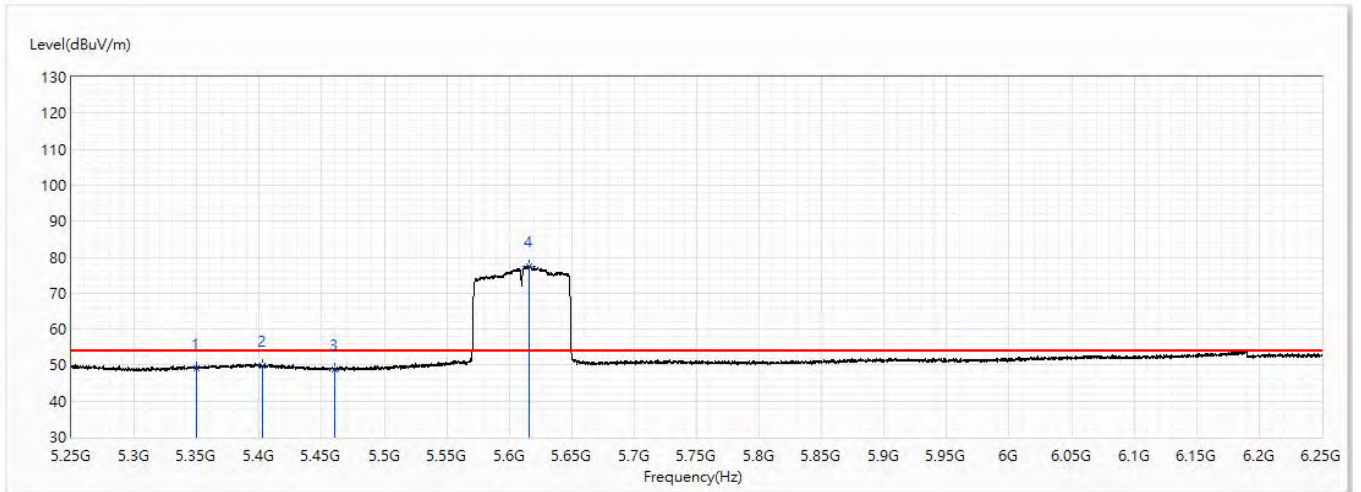


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.18	54.00	-4.82	23.67	25.51	AV
2	5402.75	49.67	54.00	-4.33	23.94	25.73	AV
3	5460	48.90	54.00	-5.10	23.11	25.79	AV
! 4	5616	77.58	54.00	23.58	51.20	26.38	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5610MHz	Humidity (%RH)	58.0

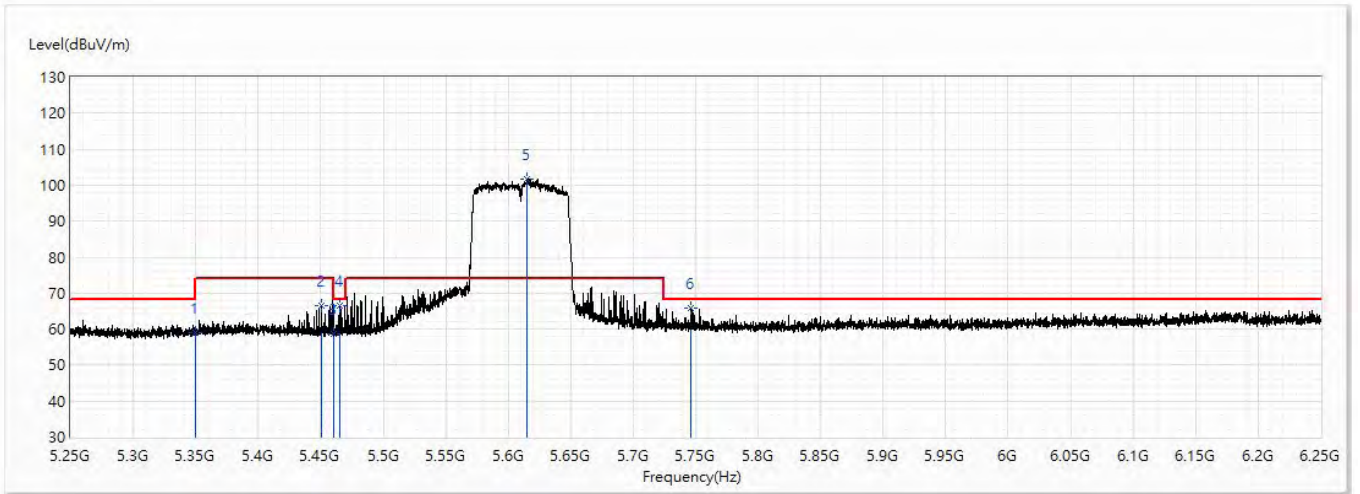


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.00	74.00	-15.00	33.49	25.51	PK
2	5450.625	66.66	74.00	-7.34	40.88	25.78	PK
3	5460	58.81	74.00	-15.19	33.02	25.79	PK
4	5465.625	66.56	68.20	-1.64	40.76	25.80	PK
!5	5615.25	101.76	74.00	27.76	75.38	26.38	PK
6	5746.5	65.85	68.20	-2.35	39.17	26.68	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/7
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5610MHz	Humidity (%RH)	58.0

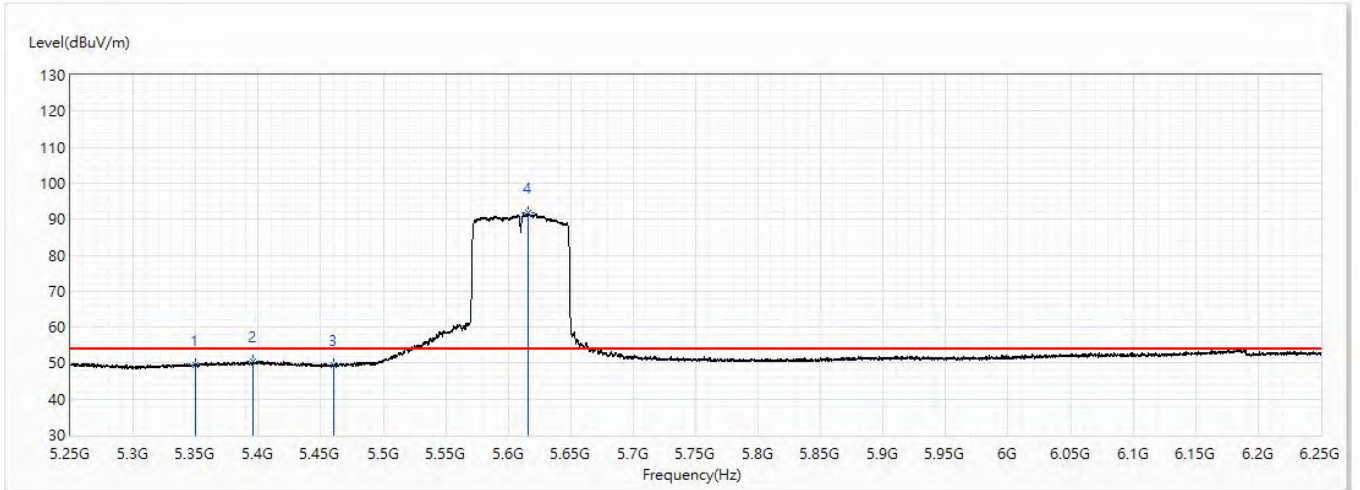


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	49.49	54.00	-4.51	23.98	25.51	AV
2	5396	50.55	54.00	-3.45	24.83	25.72	AV
3	5460	49.59	54.00	-4.41	23.80	25.79	AV
! 4	5616	91.76	54.00	37.76	65.38	26.38	AV

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5745MHz	Humidity (%RH)	58.0

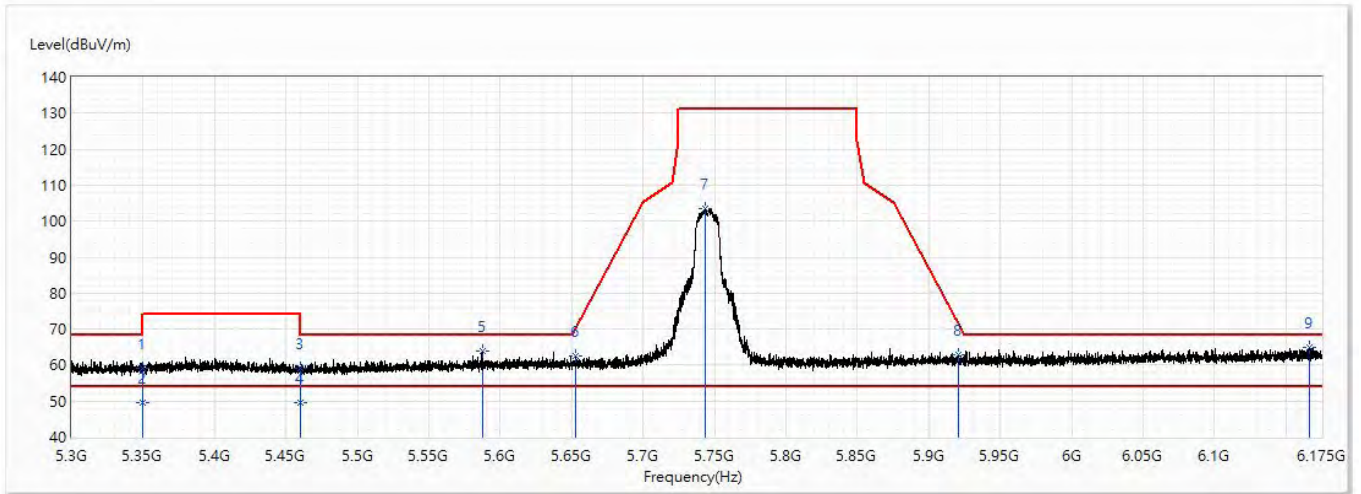


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.02	74.00	-14.98	33.51	25.51	PK
2	5350	49.65	54.00	-4.35	24.14	25.51	AV
3	5460	59.04	74.00	-14.96	33.25	25.79	PK
4	5460	49.55	54.00	-4.45	23.76	25.79	AV
5	5587.328	64.03	68.20	-4.17	37.74	26.29	PK
6	5652.844	62.48	70.31	-7.83	36.06	26.42	PK
7	5743.516	103.45	131.20	-27.75	76.77	26.68	PK
8	5921.141	62.78	71.04	-8.27	35.61	27.17	PK
* 9	6166.25	64.97	68.20	-3.23	36.72	28.25	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Rueyyan
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5745MHz	Humidity (%RH)	58.0

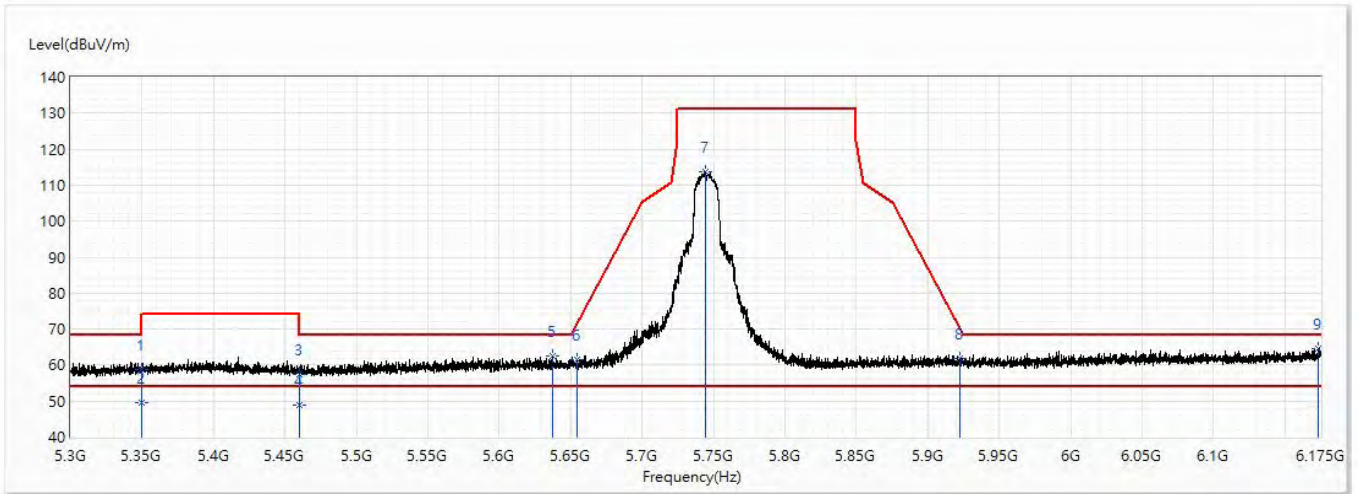


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.91	74.00	-15.09	33.40	25.51	PK
2	5350	49.41	54.00	-4.59	23.90	25.51	AV
3	5460	57.45	74.00	-16.55	31.66	25.79	PK
4	5460	48.91	54.00	-5.09	23.12	25.79	AV
5	5637.313	62.54	68.20	-5.66	36.14	26.40	PK
6	5654.594	61.51	71.61	-10.10	35.09	26.42	PK
7	5744.063	113.69	131.20	-17.51	87.01	26.68	PK
8	5922.016	61.77	70.40	-8.63	34.60	27.17	PK
* 9	6173.688	64.65	68.20	-3.55	36.36	28.29	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5785MHz	Humidity (%RH)	58.0

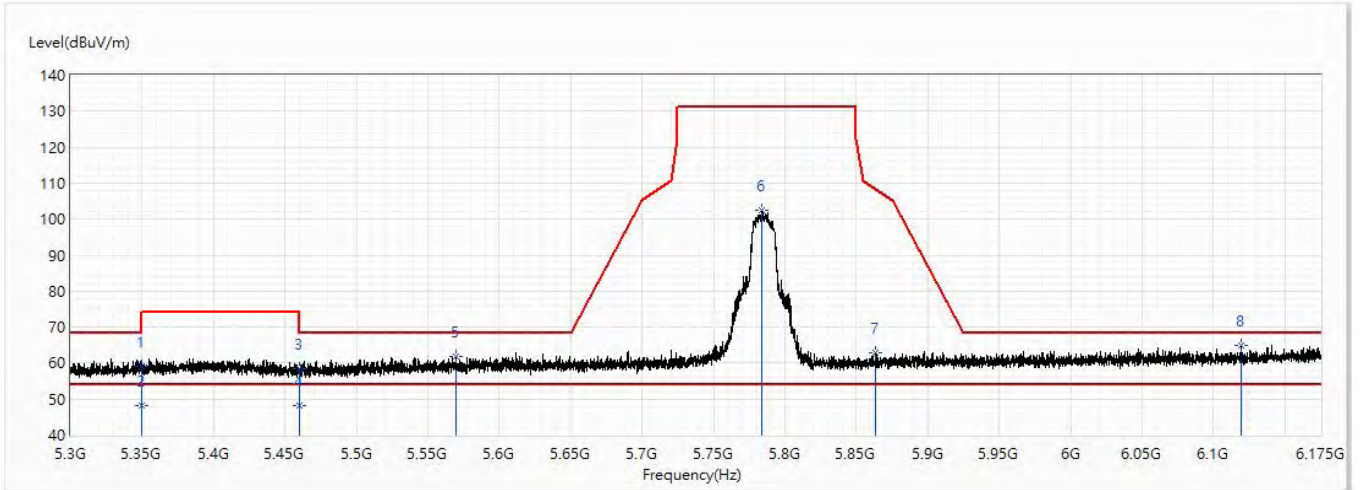


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.21	74.00	-14.79	33.70	25.51	PK
2	5350	48.15	54.00	-5.85	22.64	25.51	AV
3	5460	58.46	74.00	-15.54	32.67	25.79	PK
4	5460	48.25	54.00	-5.75	22.46	25.79	AV
5	5569.938	61.90	68.20	-6.30	35.69	26.21	PK
6	5783.43	102.29	131.20	-28.91	75.44	26.85	PK
7	5863.391	62.72	108.45	-45.72	35.68	27.04	PK
* 8	6119.109	64.83	68.20	-3.37	36.84	27.99	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5785MHz	Humidity (%RH)	58.0

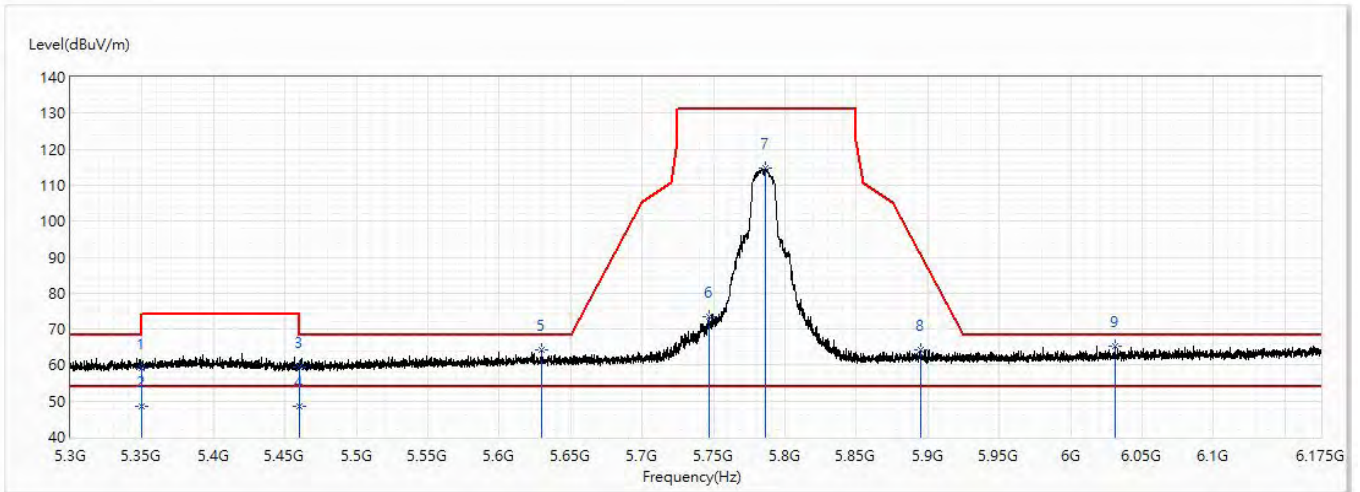


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.10	74.00	-14.90	33.59	25.51	PK
2	5350	48.65	54.00	-5.35	23.14	25.51	AV
3	5460	59.60	74.00	-14.40	33.81	25.79	PK
4	5460	48.63	54.00	-5.37	22.84	25.79	AV
5	5629.656	64.07	68.20	-4.13	37.68	26.39	PK
6	5746.906	73.42	131.20	-57.78	46.74	26.68	PK
7	5786.281	114.81	131.20	-16.39	87.94	26.87	PK
8	5895.438	64.34	90.04	-25.69	37.24	27.10	PK
* 9	6031.281	65.24	68.20	-2.96	37.70	27.54	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a_5825MHz	Humidity (%RH)	58.0

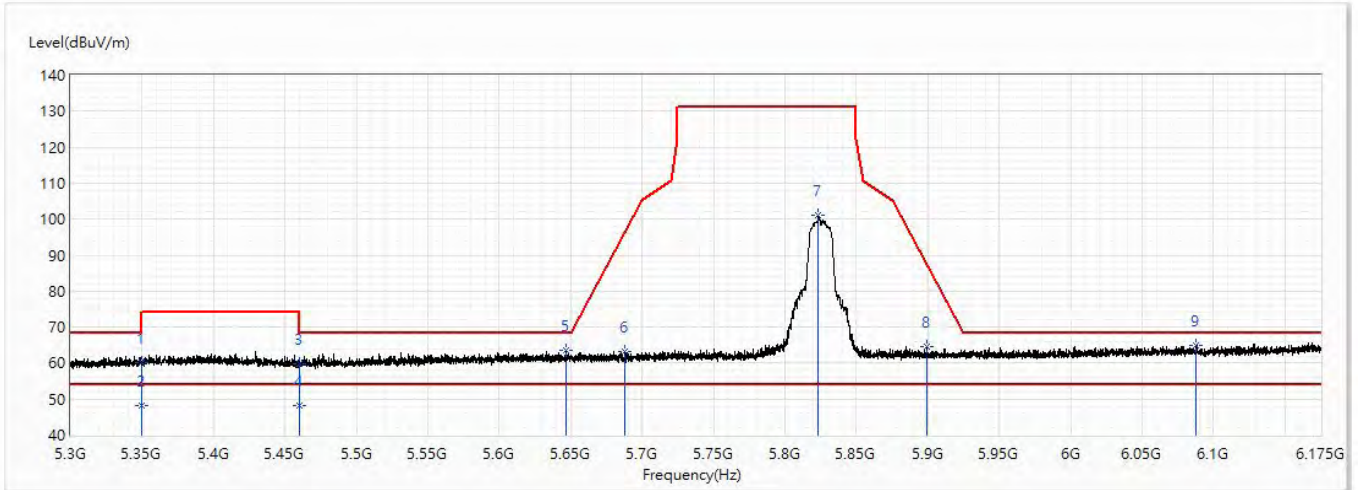


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.18	74.00	-13.82	34.67	25.51	PK
2	5350	48.22	54.00	-5.78	22.71	25.51	AV
3	5460	59.70	74.00	-14.30	33.91	25.79	PK
4	5460	48.15	54.00	-5.85	22.36	25.79	AV
5	5647.156	63.50	68.20	-4.70	37.09	26.41	PK
6	5687.734	63.17	96.15	-32.95	36.71	26.46	PK
7	5823.469	101.06	131.20	-30.14	74.09	26.97	PK
8	5899.266	64.73	87.20	-22.51	37.62	27.11	PK
* 9	6087.938	64.87	68.20	-3.33	37.04	27.83	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a_5825MHz	Humidity (%RH)	58.0

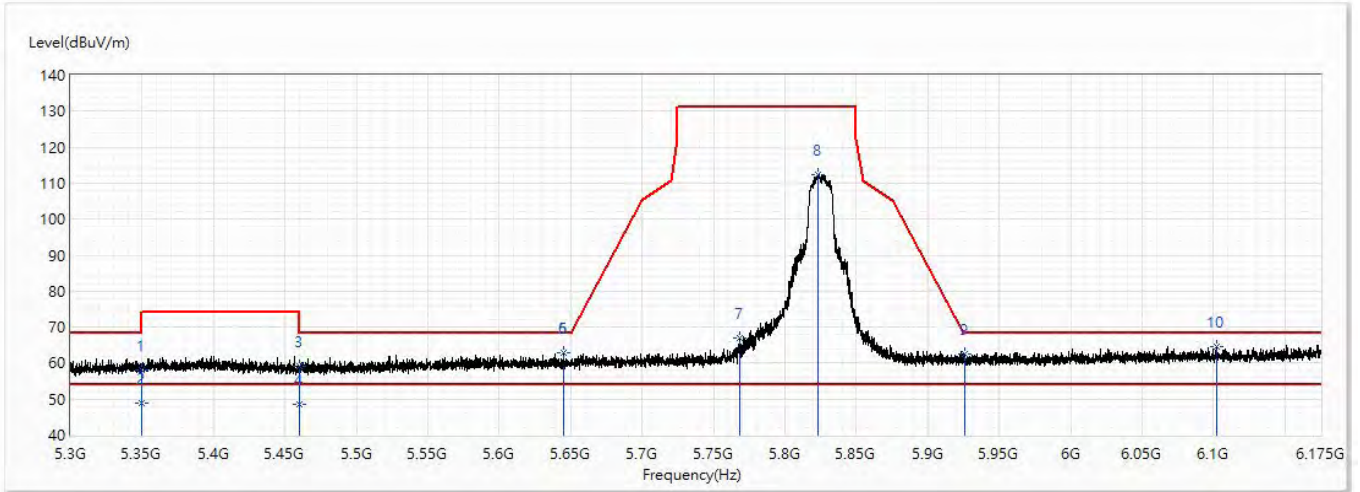


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	57.96	74.00	-16.04	32.45	25.51	PK
2	5350	48.71	54.00	-5.29	23.20	25.51	AV
3	5460	59.02	74.00	-14.98	33.23	25.79	PK
4	5460	48.66	54.00	-5.34	22.87	25.79	AV
5	5645.078	62.83	68.20	-5.37	36.42	26.41	PK
6	5645.078	62.83	68.20	-5.37	36.42	26.41	PK
7	5768.344	66.90	131.20	-64.30	40.12	26.78	PK
8	5823.469	112.49	131.20	-18.71	85.52	26.97	PK
9	5926.172	62.67	68.20	-5.53	35.48	27.19	PK
* 10	6101.938	64.69	68.20	-3.51	36.79	27.90	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5745MHz	Humidity (%RH)	58.0

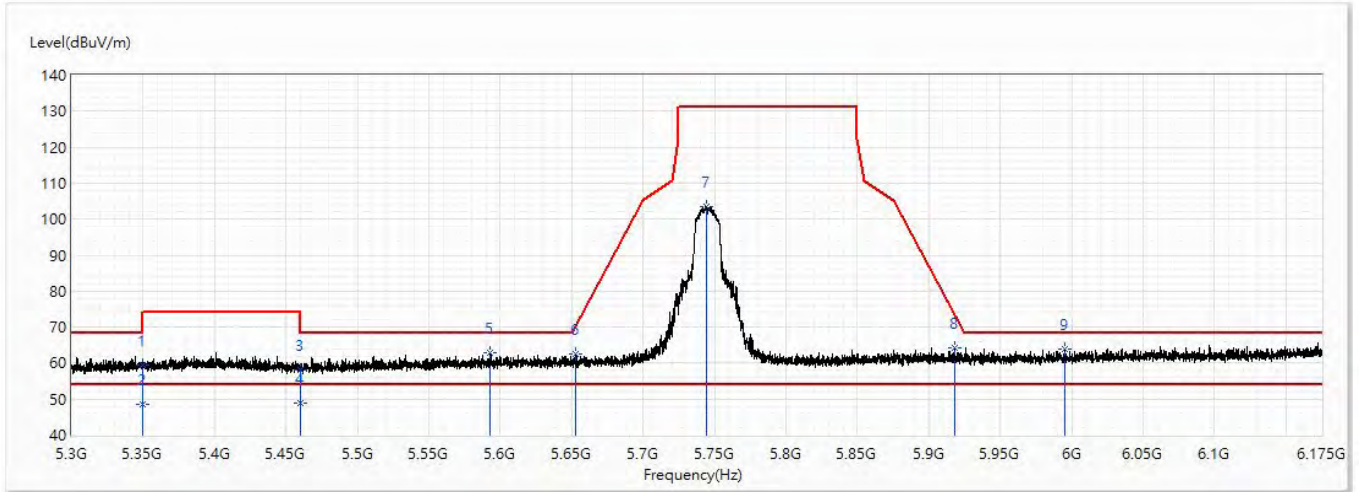


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.38	74.00	-14.62	33.87	25.51	PK
2	5350	48.65	54.00	-5.35	23.14	25.51	AV
3	5460	58.11	74.00	-15.89	32.32	25.79	PK
4	5460	48.75	54.00	-5.25	22.96	25.79	AV
5	5593.016	62.72	68.20	-5.48	36.39	26.33	PK
6	5652.844	62.39	70.31	-7.92	35.97	26.42	PK
7	5743.953	103.53	131.20	-27.67	76.85	26.68	PK
8	5918.297	64.15	73.14	-8.99	36.99	27.16	PK
* 9	5995.516	63.95	68.20	-4.25	36.58	27.37	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5745MHz	Humidity (%RH)	58.0

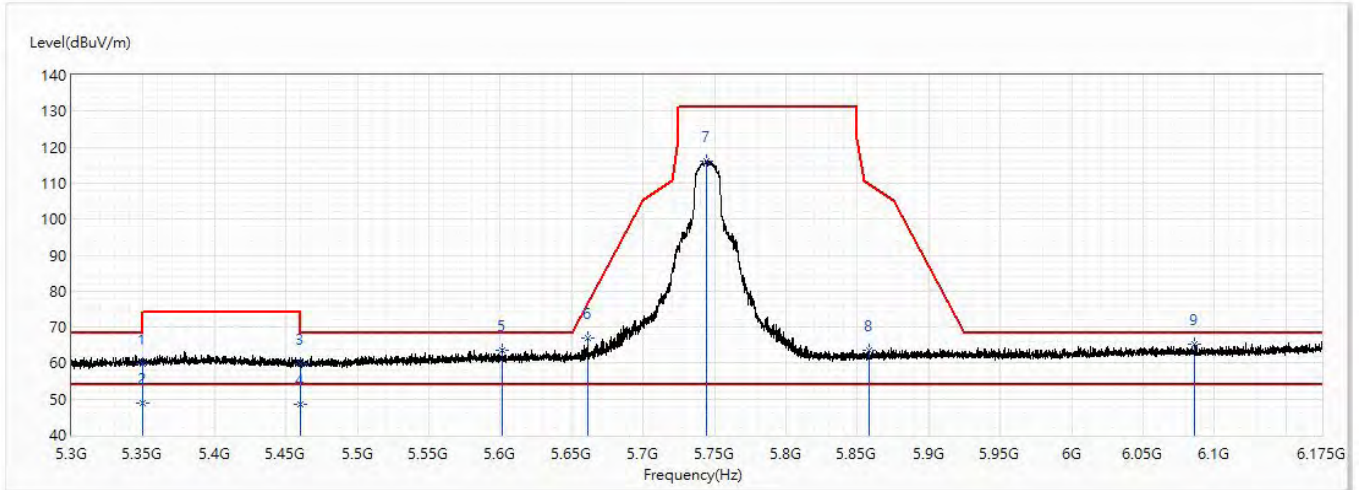


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.78	74.00	-14.22	34.27	25.51	PK
2	5350	48.89	54.00	-5.11	23.38	25.51	AV
3	5460	59.67	74.00	-14.33	33.88	25.79	PK
4	5460	48.56	54.00	-5.44	22.77	25.79	AV
5	5601.219	63.72	68.20	-4.48	37.36	26.36	PK
6	5661.484	66.84	76.73	-9.88	40.41	26.43	PK
7	5743.953	116.16	131.20	-15.04	89.48	26.68	PK
8	5858.141	63.71	109.92	-46.21	36.68	27.03	PK
* 9	6086.297	65.20	68.20	-3.00	37.38	27.82	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5785MHz	Humidity (%RH)	58.0

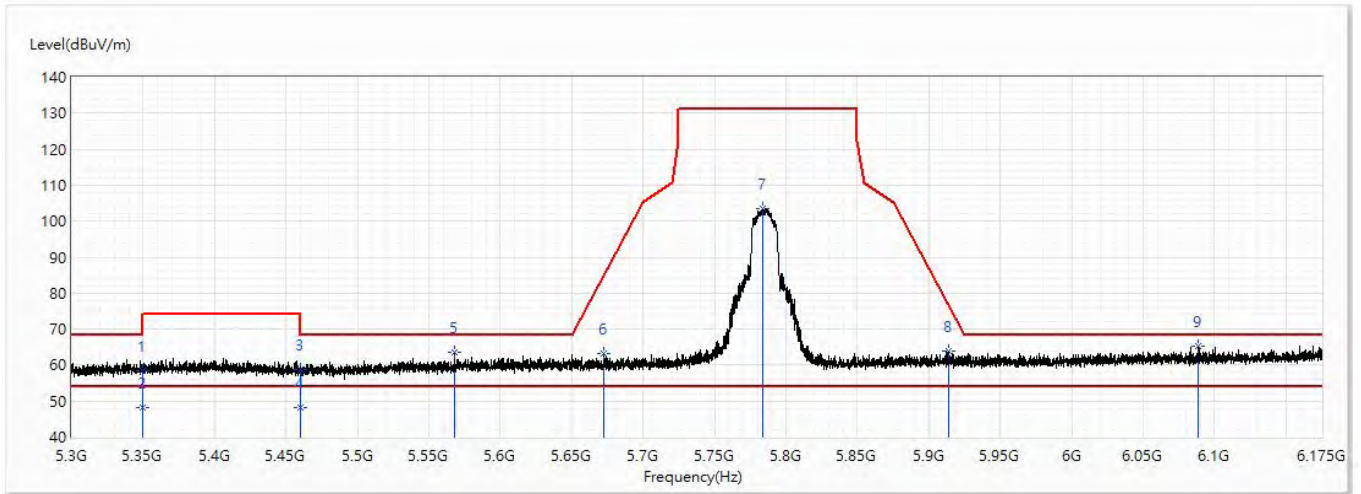


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	58.54	74.00	-15.46	33.03	25.51	PK
2	5350	48.29	54.00	-5.71	22.78	25.51	AV
3	5460	58.90	74.00	-15.10	33.11	25.79	PK
4	5460	48.36	54.00	-5.64	22.57	25.79	AV
5	5568.188	63.65	68.20	-4.55	37.46	26.19	PK
6	5672.641	63.08	84.99	-21.91	36.64	26.44	PK
7	5783.875	103.63	131.20	-27.57	76.78	26.85	PK
8	5913.484	63.92	76.69	-12.77	36.78	27.14	PK
* 9	6088.922	65.32	68.20	-2.88	37.48	27.84	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5785MHz	Humidity (%RH)	58.0

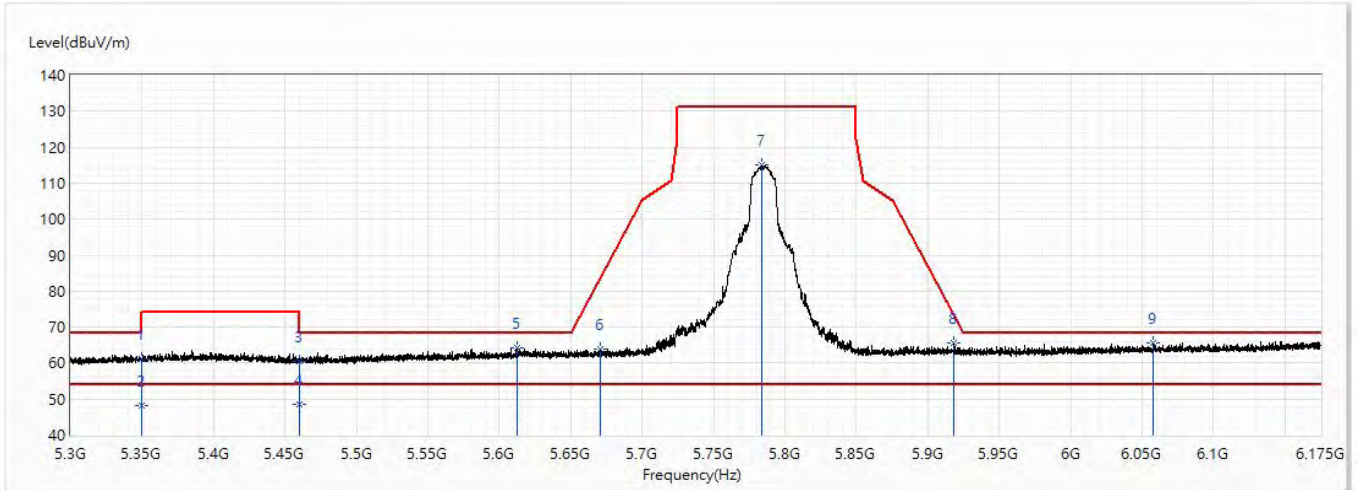


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	61.28	74.00	-12.72	35.77	25.51	PK
2	5350	48.23	54.00	-5.77	22.72	25.51	AV
3	5460	60.32	74.00	-13.68	34.53	25.79	PK
4	5460	48.51	54.00	-5.49	22.72	25.79	AV
5	5612.813	64.37	68.20	-3.83	38.00	26.37	PK
6	5670.891	63.92	83.70	-19.78	37.48	26.44	PK
7	5783.766	115.05	131.20	-16.15	88.20	26.85	PK
8	5918.516	65.65	72.98	-7.33	38.49	27.16	PK
* 9	6057.75	65.73	68.20	-2.47	38.06	27.67	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5825MHz	Humidity (%RH)	58.0

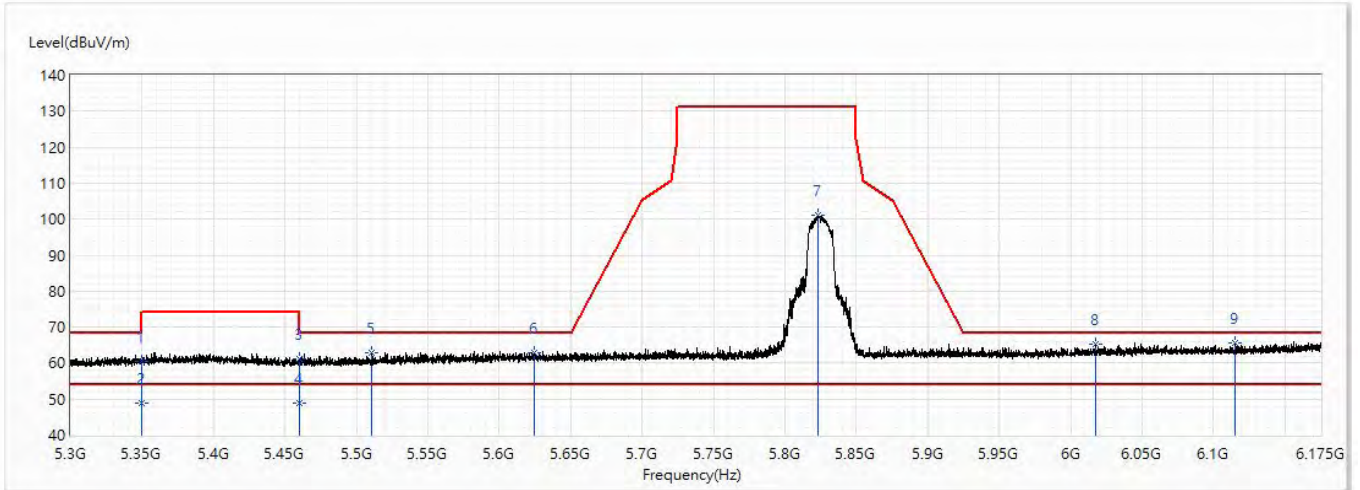


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.51	74.00	-13.49	35.00	25.51	PK
2	5350	48.88	54.00	-5.12	23.37	25.51	AV
3	5460	61.03	74.00	-12.97	35.24	25.79	PK
4	5460	49.02	54.00	-4.98	23.23	25.79	AV
5	5510.438	62.88	68.20	-5.32	36.98	25.90	PK
6	5624.625	62.93	68.20	-5.27	36.55	26.38	PK
7	5823.469	101.09	131.20	-30.11	74.12	26.97	PK
8	6017.391	65.31	68.20	-2.89	37.84	27.47	PK
* 9	6115.391	65.69	68.20	-2.51	37.72	27.97	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_20M_5825MHz	Humidity (%RH)	58.0

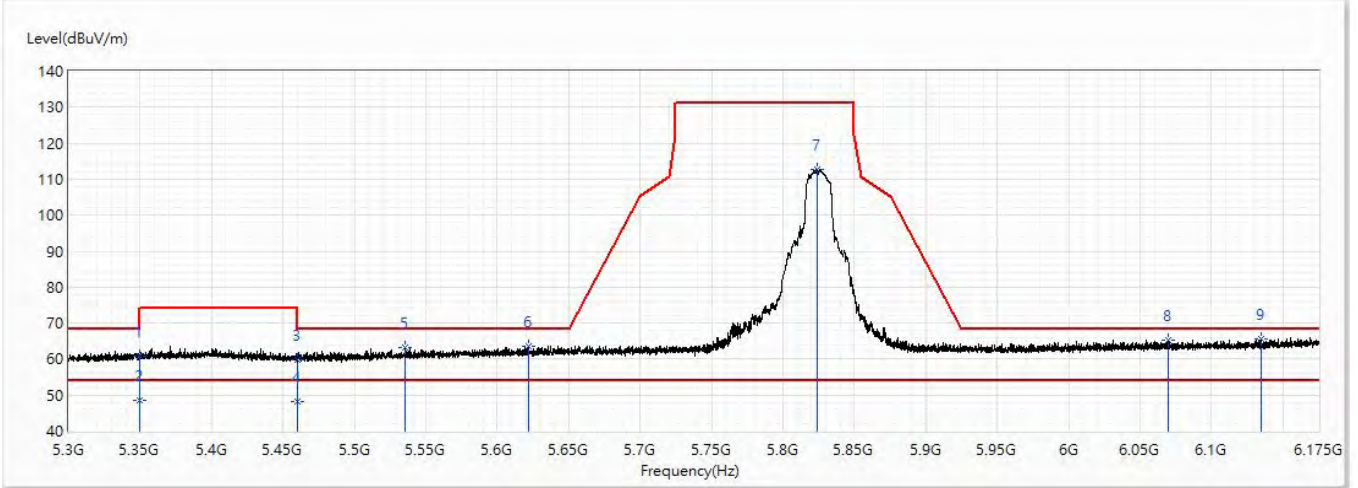


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.89	74.00	-13.11	35.38	25.51	PK
2	5350	48.46	54.00	-5.54	22.95	25.51	AV
3	5460	59.93	74.00	-14.07	34.14	25.79	PK
4	5460	48.36	54.00	-5.64	22.57	25.79	AV
5	5535.703	63.22	68.20	-4.98	37.20	26.02	PK
6	5621.672	63.46	68.20	-4.74	37.08	26.38	PK
7	5823.688	112.79	131.20	-18.41	85.82	26.97	PK
8	6069.453	65.18	68.20	-3.02	37.45	27.73	PK
* 9	6135.078	65.69	68.20	-2.51	37.61	28.08	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5755MHz	Humidity (%RH)	58.0

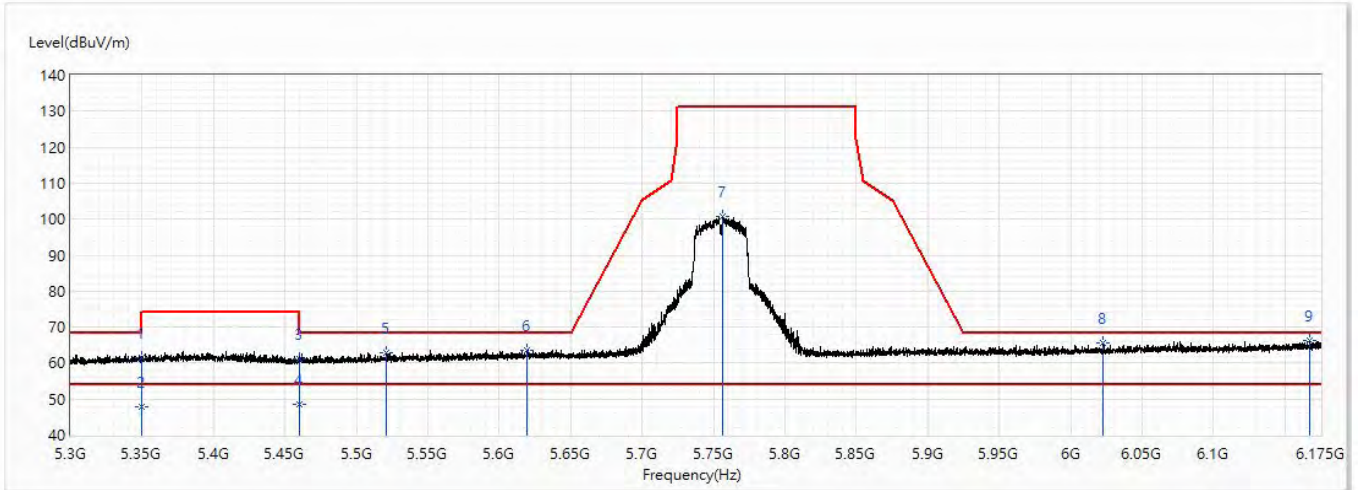


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	61.44	74.00	-12.56	35.93	25.51	PK
2	5350	48.01	54.00	-5.99	22.50	25.51	AV
3	5460	61.11	74.00	-12.89	35.32	25.79	PK
4	5460	48.55	54.00	-5.45	22.76	25.79	AV
5	5520.609	62.97	68.20	-5.23	37.02	25.95	PK
6	5619.703	63.40	68.20	-4.80	37.02	26.38	PK
7	5756.422	100.79	131.20	-30.41	74.07	26.72	PK
8	6022.969	65.57	68.20	-2.63	38.07	27.50	PK
* 9	6167.016	66.40	68.20	-1.80	38.15	28.25	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5755MHz	Humidity (%RH)	58.0

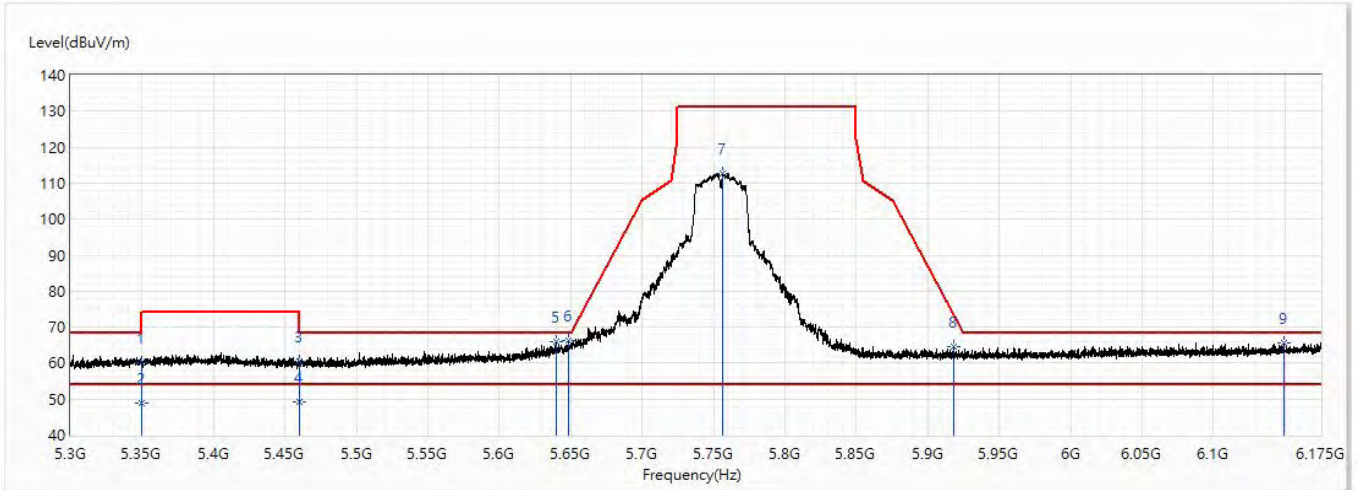


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.01	74.00	-13.99	34.50	25.51	PK
2	5350	49.01	54.00	-4.99	23.50	25.51	AV
3	5460	60.39	74.00	-13.61	34.60	25.79	PK
4	5460	49.19	54.00	-4.81	23.40	25.79	AV
5	5640.266	66.06	68.20	-2.14	39.66	26.40	PK
* 6	5648.359	66.33	68.20	-1.87	39.91	26.42	PK
7	5756.422	112.59	131.20	-18.61	85.87	26.72	PK
8	5918.406	64.59	73.06	-8.47	37.43	27.16	PK
9	6149.297	65.50	68.20	-2.70	37.34	28.16	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5795MHz	Humidity (%RH)	58.0

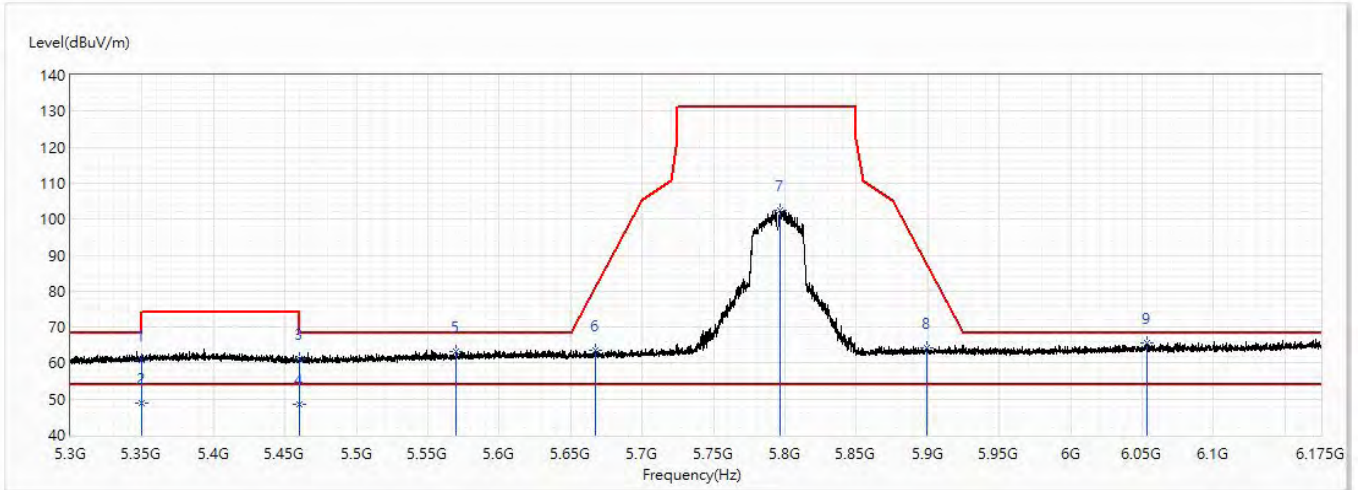


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.83	74.00	-13.17	35.32	25.51	PK
2	5350	48.78	54.00	-5.22	23.27	25.51	AV
3	5460	61.08	74.00	-12.92	35.29	25.79	PK
4	5460	48.65	54.00	-5.35	22.86	25.79	AV
5	5569.938	63.21	68.20	-4.99	37.00	26.21	PK
6	5667.172	63.50	80.94	-17.44	37.07	26.43	PK
7	5796.453	102.31	131.20	-28.89	75.40	26.91	PK
8	5899.484	64.30	87.04	-22.74	37.19	27.11	PK
* 9	6053.594	65.72	68.20	-2.48	38.07	27.65	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_40M_5795MHz	Humidity (%RH)	58.0

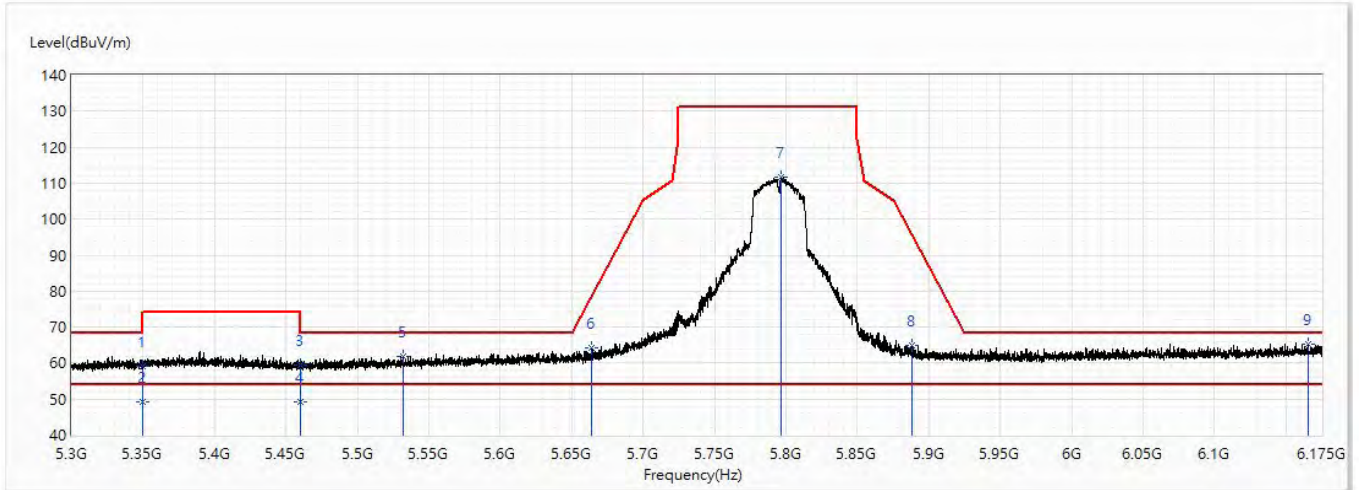


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.13	74.00	-14.87	33.62	25.51	PK
2	5350	49.26	54.00	-4.74	23.75	25.51	AV
3	5460	59.59	74.00	-14.41	33.80	25.79	PK
4	5460	49.32	54.00	-4.68	23.53	25.79	AV
5	5532.203	61.78	68.20	-6.42	35.77	26.01	PK
6	5663.672	64.17	78.35	-14.18	37.74	26.43	PK
7	5796.563	111.59	131.20	-19.61	84.68	26.91	PK
8	5887.781	64.99	95.71	-30.72	37.90	27.09	PK
* 9	6165.484	65.37	68.20	-2.83	37.12	28.25	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5775MHz	Humidity (%RH)	58.0

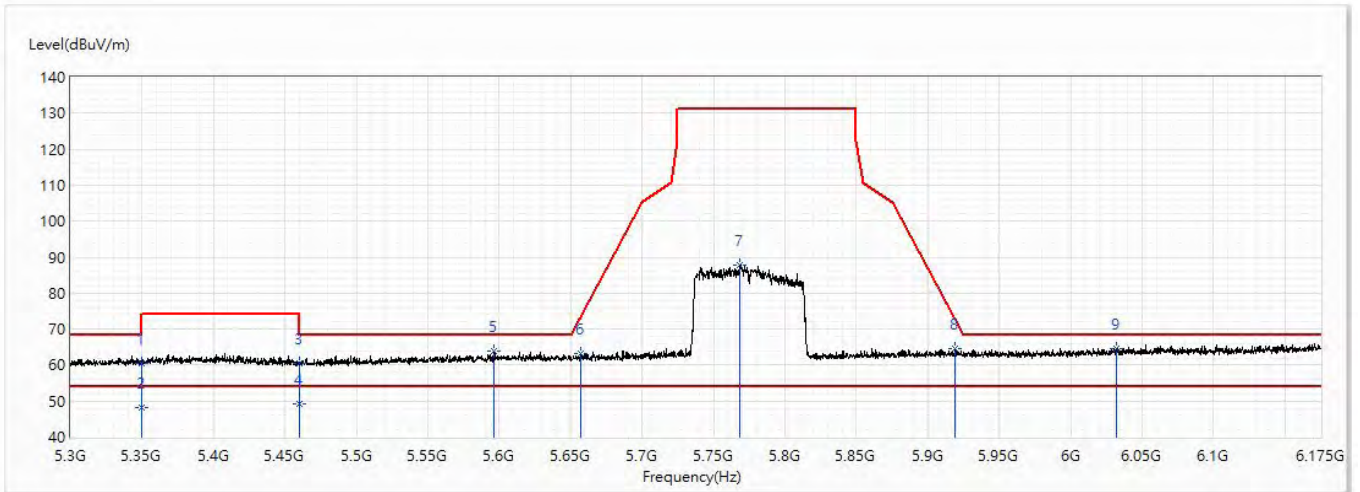


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	60.63	74.00	-13.37	35.12	25.51	PK
2	5350	48.12	54.00	-5.88	22.61	25.51	AV
3	5460	60.48	74.00	-13.52	34.69	25.79	PK
4	5460	49.20	54.00	-4.80	23.41	25.79	AV
5	5595.969	63.73	68.20	-4.47	37.39	26.34	PK
6	5656.781	63.06	73.24	-10.18	36.64	26.42	PK
7	5768.563	87.73	131.20	-43.47	60.95	26.78	PK
8	5919.281	64.54	72.42	-7.87	37.38	27.16	PK
* 9	6031.938	64.49	68.20	-3.71	36.94	27.55	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CSD-ELINK2	Site	CB2-H
Test Voltage	DC 5V	Test Date	2020/3/4
Test Mode	Mode 1: Transmit Mode	Engineer	Scott
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ac_80M_5775MHz	Humidity (%RH)	58.0

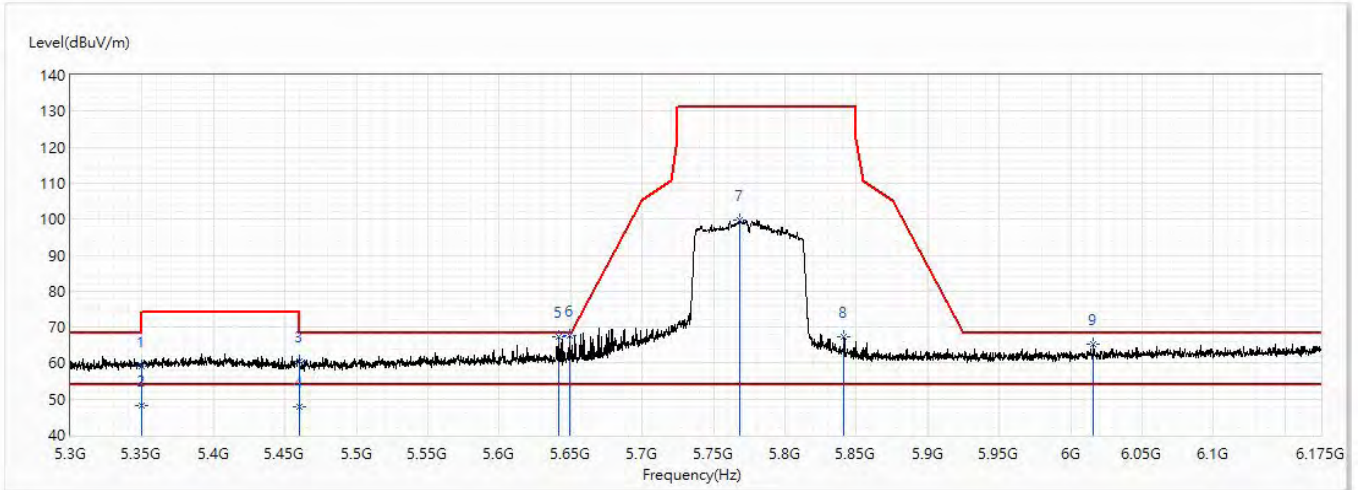

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5350	59.09	74.00	-14.91	33.58	25.51	PK
2	5350	48.25	54.00	-5.75	22.74	25.51	AV
3	5460	60.44	74.00	-13.56	34.65	25.79	PK
4	5460	47.95	54.00	-6.05	22.16	25.79	AV
5	5641.906	67.28	68.20	-0.92	40.86	26.42	PK
* 6	5648.906	67.58	68.20	-0.62	41.16	26.42	PK
7	5768.344	99.87	131.20	-31.33	73.09	26.78	PK
8	5841.406	67.18	131.20	-64.02	40.18	27.00	PK
9	6015.969	65.24	68.20	-2.96	37.78	27.46	PK

Note:

1. All reading above 1GHz is performed with peak measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.