
NP-F-0039 13-MAY-2019

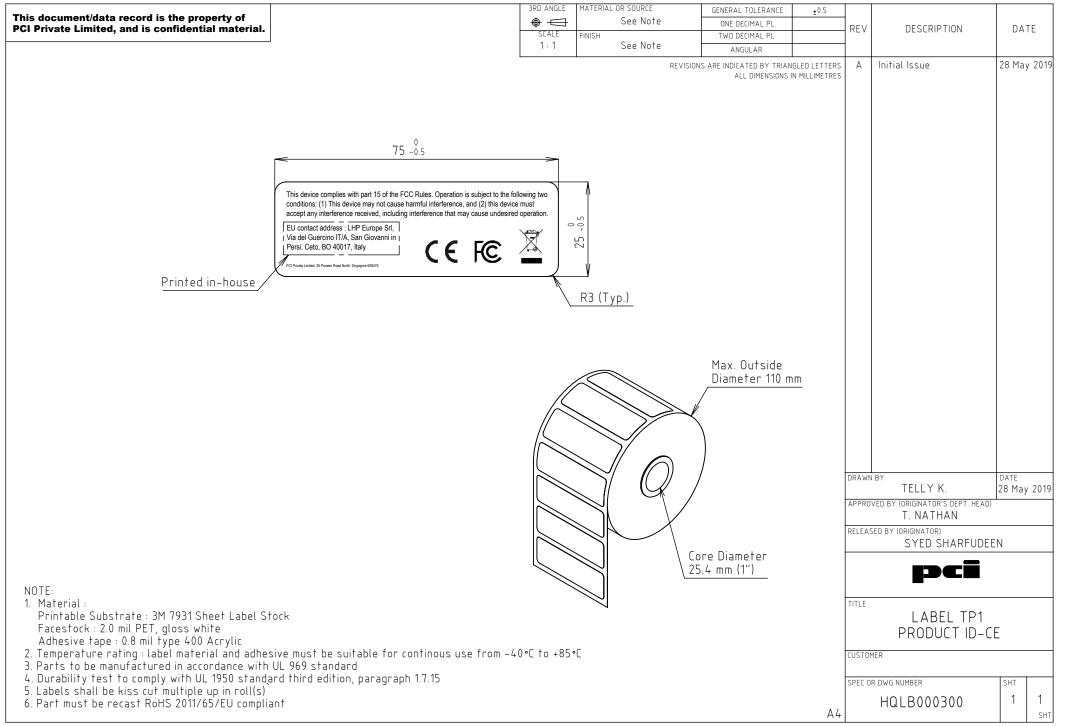

2D

Barcode

This document/data record is the property of PCI Private Limited, and is confidential material.

MATERIAL OR SOURCE 3RD ANGLE GENERAL TOLERANCE ±0.5 See Note ⊕ 🖶 ONE DECIMAL PL REV DESCRIPTION DATE SCALE FINISH TWO DECIMAL PL 1:1 See Note ANGULAR

REVISIONS ARE INDICATED BY TRIANGLED LETTERS ALL DIMENSIONS IN MILLIMETRES

Initial Issue 28 May 2019

Model: PCI-TP1 MCN: P18-TP001-300 SN: 100YYWWXXXXXX

IMEI: XXXXXXXXXXXXXXXXX

Input: DC 12V --- 0.5A or 24V --- 0.25A Contains FCC ID: LY5-PCITP100 MADE IN INDONESIA

ICC ID: XXXXXXXXXXXXXXXXXXX FCC ID : LY5-PCITP1

IC: 5113A-PCITP1 Class: CAN ICES-3(A)/NMB-3(A) Contains IC: 5113A-PCITP100

NOTES:

Refer to separate drawing for blank label material spec (HQLB000100)

2. This part must comply with RoHS

Label Contents:

Serial Number: 100YYWWXXXXX 100 - Hardware Version YYWW - Date Code XXXXXX- 6 Digits Running Number Starting from 000001

MCN: P18-TP001-100 P - PCI Design 18 - FY18 Project TP001 - Product Code 100 - Build Version (i.e. 100 for P1, 120 for P1.2 build, ...)

Content	Info	Format	Font	Size
Model	PCI-TP1	7 characters	Arial Narrow, Bold	8
MCN	P18-TP001-200	13 characters	Arial Narrow, Bold	6
Serial Number	100YYWWXXXXX	13 characters	Arial Narrow, Bold	6
Serial Number Barcode	Barcode Symbiology Code 128	13 characters	-	-
IMEI	XXXXXXXXXXXX	15 characters	Arial Narrow	6
IMEI Barcode	Barcode Symbiology Code 128	15 characters	-	-
Contains FCC ID	LY5-PCITP100	12 characters	Arial Narrow	5
Contains IC	5113A-PCITP100	14 characters	Arial Narrow	5
FCC ID	LY5-PCITP1	10 characters	Arial Narrow	6
IC	5113A-PCITP1	12 characters	Arial Narrow	6
Class	CAN ICES-3(A)/NMB-3(A)	22 characters	Arial Narrow	6
ICC ID	XXXXXXXXXXXX	20 characters	Arial Narrow	6
Input	DC 12V === 0.5A or 24V === 0.25A	-	Arial Narrow	5
Country of Origin	MADE IN INDONESIA	17 characters	Arial Narrow	5
2D Barcode	See 2D Barcode Definition	-	-	-

2D Barcode Contents:

Position	Description	Content	
1–13	MCN	13 characters MCN #	
14	Semicolon	;	
15-27	Serial Number	13 characters Serial Number	
28	Semicolon	į.	
29-43	IMEI	15 characters IMEI	
44	Semicolon	;	
45-64	ICC ID	20 characters ICC ID	
65	Semicolon	;	
66-77	MAC Address (Ethernet)	12 digits MAC Address	
78	Semicolon	;	
79-90	MAC Address (Bluetooth Modem)	12 digits MAC Address	
91	Semicolon	;	
92-103	MAC Address (Wi-Fi Modem)	12 digits MAC Address	
104	Semicolon	;	
105-121	MADE IN INDONESIA	17 characters Country of Origin	
122	Semicolon	;	

DRAWN BY TELLY K. 28 May 2019 APPROVED BY (ORIGINATOR'S DEPT. HEAD) T. NATHAN RELEASED BY (ORIGINATOR) SYED SHARFUDEEN PCI TITLE Printing for TP1 ID LABEL CUSTOMER SPEC OR DWG NUMBER SHT 1 Α4