

# FCC Test Report

for

## Industrial Remote Control

**Trade Name : Fomotech**  
**Model Number : Alpha 608 series; Alpha 607 series**  
**FCC ID. : LZ6ALPHA600SERIES**  
**IC ID. : 2838A-A600**  
**Report Number : RF-A340-0805-093**  
**Date of Receipt : May 13, 2008**  
**Date of Report : July 4, 2008**

Prepared for

### **Fomotech International Corp.**

2F-1, No.286-3, Hsin Ya Rd., Chien Chen District, Kaohsiung City 806, Taiwan (R.O.C.)

Prepared by



### **Central Research Technology Co. EMC Test Laboratory**

No.11, Lane41, Fushuen St., Jungshan Chiu, Taipei, Taiwan, 104, R.O.C.



NVLAP LAB CODE 200575-0

**This report shall not be reproduced, except in full, without the written approval of Central Research Technology Co.. It may be duplicated completely in its entirety for legal use with the permission of the applicant. It should not be used to claim product endorsement by NVLAP, NIST or any U.S. government agency. The test result in the report applies only to the sample tested.**

# Verification of Compliance

Equipment under Test : Industrial Remote Control  
Trade Name : Fomotech  
Model No. : Alpha 608 series; Alpha 607 series  
FCC ID : LZ6ALPHA600SERIES  
IC ID. : 2838A-A600  
Manufacturer : Fomotech International Corp.  
Applicant : Fomotech International Corp.  
Address : 2F-1, No.286-3, Hsin Ya Rd., Chien Chen District,  
Kaohsiung City 806, Taiwan (R.O.C.)  
Applicable Standards : 47 CFR part 15, Subpart C  
RSS-210 Issue 7  
Date of Testing : June 28~30, 2008  
Deviation : N/A  
Condition of Test Sample : Engineering Sample



We, **Central Research Technology Co.**, hereby certify that one sample of the designated product was tested in our facility during the period mentioned above. The test records, data evaluation and Equipment Under Test (EUT) configurations shown in the present report are true and accurate representation of the measurements of the sample's RF characteristics under the conditions herein specified.

The test results show that the EUT as described in the present report is in compliance with the requirements set forth in the standards mentioned above and apply to the tested sample identified in the present report only. The test report shall not be reproduced, except in its entirety, without the written approval of Central Research Technology Co.

**PREPARED BY** : Rosa Hsieh , **DATE** : July 4, 2008  
(Rosa Hsieh/System Executive)

**APPROVED BY** : J. Y. Shih , **DATE** : July 4, 2008  
(Tsun-Yu Shih/Laboratory Head)

## Contents

<b>1</b>	<b>General Description .....</b>	<b>4</b>
1.1	General Description of EUT.....	4
1.2	Test Methodology.....	4
1.3	Applied standards .....	5
1.5	Layout of Setup .....	7
1.6	Test Capability .....	8
1.7	Measurement Uncertainty .....	10
<b>2</b>	<b>Radiated Emission .....</b>	<b>11</b>
2.1	Applied standard.....	11
2.2	Test Instruments .....	12
2.3	Measurement Procedure .....	14
2.4	Test configuration.....	15
2.5	Test Data .....	16
<b>3</b>	<b>Bandwidth.....</b>	<b>28</b>
3.1	Applied standard.....	28
3.2	Test Instruments .....	28
3.3	Measurement Procedure .....	29
3.4	Test configuration.....	29
3.5	Test Data .....	30
<b>4</b>	<b>Dwell Time .....</b>	<b>34</b>
4.1	Applied standard.....	34
4.2	Test Instruments .....	34
4.3	Measurement Procedure .....	35
4.4	Test configuration.....	35
4.5	Test Data .....	36

**Attachment 1 – Photographs of the Test Configurations**

**Attachment 2 –External Photographs of EUT**

**Attachment 3 –Internal Photographs of EUT**

# 1 General Description

## 1.1 General Description of EUT

Equipment underTest : Industrial Remote Control  
 Model No. : Alpha 608 series; Alpha 607 series  
 Power in : DC 2.4V  
 Test Voltage : DC 2.4V (rechargeable battery\*2)  
 Manufacturer : Fomotech International Corp.  
 Channel Numbers : 30  
 Frequency Range : 433.075MHz ~ 434.300MHz  
 Channel Spacing : 25kHz  
 Test Frequency : 433.075MHz, 434.300MHz  
 Function Modulation : F1D  
 Function Description :

The EUT is used to transmit control command only. Please refer to the user’s manual for the details.

There are two types of EUT and which are shown as below.

<b>Model No.</b>	<b>Difference</b>
Alpha 608B	8 buttons
Alpha 607B	7 buttons

The electric circuit of different models are all identical, the Model No. Alpha 608B was selected to perform all tests. It is taken as the representative condition for the testing and its data are recorded in the present document.

## 1.2 Test Methodology

For this E.U.T., the radiated emissions measurement performed according to the procedures illustrated in ANSI C63.4:2003 and other required were illustrated in separate sections of this test report for detail.

Since the EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axes. There for only the test data of the worse case- x axis was used for Radiated test.

**1.3 Applied standards**

(1) Radiated Emission Requirement

In addition to the provisions of **Section 15.205** and **RSS-210 A1.1.5.(1)**, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 – 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

\*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

(2) Bandwidth (**FCC 15.231(c)** and **RSS-210 A1.1.3**)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

(3) Dwell Time (**FCC 15.231(a)** and **RSS-210 A1.1.5.(2)**)

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(4) Restricted Band

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
<sup>2</sup> 1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

**1.4 The Support Units :**

No.	Unit	Model No./ Serial No.	Teade Name	PowerCode	Supported by lab.
NA	*	*	*	*	*

**1.5 Layout of Setup**



(Transmitter)

**Connecting Cables :**

No.	Cable	Length	Shielded	Core	Shielded Backshell	Supported by lab.	Note
NA	*	*	*	*	*	*	*

**Justification:**

For both conducted and radiated emission below 1GHz, the system was configured for typical fashion as a customer could normal use it.

For radiated emission, measurement of radiated emission from digital circuit is performed with normal transmitting.

## 1.6 Test Capability

### Test Facility

The test facility used for evaluating the conformance of the EUT with each standard in the present report meets what required in CISPR16-1-4, CISPR16-2-3 and ANSI C63.4.

Test Room	Type of Test Room	Descriptions
TR1	10m semi-anechoic chamber (23m×14m×9m)	Complying with the NSA requirements in documents CISPR 22 and ANSI C63.4. For the radiated emission measurement.
TR10	3m semi-anechoic chamber (9m × 6m × 6m)	
TR11	3m semi-anechoic chamber (9m × 6m × 6m)	
TR4	Shielding Room (5m×3m×3m)	For the RF conducted emission measurement.
TR5	Shielding Room (8m×5m×4m)	For the conducted emission measurement.



**Test Laboratory Competence Information**

Central Research Technology Co. has been accredited/filed/authorized by the agencies listed in the following table.

<b>Certificate</b>	<b>Nation</b>	<b>Agency</b>	<b>Code</b>	<b>Mark</b>
Accreditation Certificate	USA	NVLAP	200575-0	ISO/IEC 17025
	R.O.C. (Taiwan)	TAF	0905	ISO/IEC 17025
	R.O.C. (Taiwan)	BSMI	SL2-IN-E-0033,SL2-IS-E-0033,SL2-A1-E-0033	ISO/IEC 17025
Site Filing Document	USA	FCC	474046, TW-1021	Test facility list & NSA Data
	Canada	IC	4699A	Test facility list & NSA Data
	Japan	VCCI	R-1527,C-1609,T-131	Test facility list & NSA Data
Authorization Certificate	Germany	TUV	10021687-2007	ISO/IEC 17025

The copy of each certificate can be downloaded from our web site: [www.crc-lab.com](http://www.crc-lab.com)

## 1.7 Measurement Uncertainty

The assessed measurement uncertainty with a suitable coverage factor K to ensure 95% confidence level for the normal distribution are shown as below, the values are less than  $U_{cispr}$  in table 1 of CISPR 16-4-2.

Test Item	Measurement Uncertainty
Radiated Emission: (30MHz~200MHz)	Horizontal: 2.8dB ; Vertical: 3.5dB
Radiated Emission: (200MHz~1GHz)	Horizontal: 3.4dB ; Vertical: 2.8dB
Radiated Emission: (1GHz~18GHz)	Horizontal: 2.5dB ; Vertical: 2.4dB
Bandwidth	58.4Hz

## 2 Radiated Emission

**Test Result: Pass**

### 2.1 Applied standard

According to 15.231(b) and RSS-210 A1.1.5(1), In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundament (uV/m)	Field Strength of Spurious Emission (uV/m)
40.66 - 40.70	2250	225
70 – 130	1250	125
130 – 174	1250 to 3750**	125 to 375**
174 – 260	3750	375
260 – 470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

\*\* linear interpolations

The formula for calculating the limit of field strength of fundament is  $41.6667 \times 433.075 - 7083.3333 = 10961.46 \text{ uV/m} = 80.80 \text{ dBuV/m}$ , the limit of spurious emission is  $60.8 \text{ dBuV/m}$  (Average)

The formula for calculating the limit of field strength of fundament is  $41.6667 \times 434.300 - 7083.3333 = 11012.50 \text{ uV/m} = 80.84 \text{ dBuV/m}$ , the limit of spurious emission is  $60.84 \text{ dBuV/m}$  (Average)

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in Section 15.209 and RSS-210 A1.1.5.(3), whichever limit permits a higher field strength.

## 2.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESCS 30/ 836858/020	Jul. 28, 2007	Jul. 27, 2008
Spectrum	R&S	FSP 40/ 100031	Jun. 21, 2007	Jun. 20, 2008
Spectrum	Agilent	E4407B/ MY45106706	Mar. 25, 2008	Mar. 24, 2009
Broadband Antenna	EMCO	3142C/ 52088	Jul. 27, 2007	Jul. 26, 2008
Horn Antenna	EMCO	3117/ 57408	Feb. 13, 2008	Feb. 12, 2009
Horn Antenna	EMCO	3116/ 58959	Feb. 14, 2008	Feb. 14, 2009
Pre-Amplifier	MITEQ	AMF-6F-260400- 33-8P/928336	Jul. 31, 2007	Jul. 30, 2008
Pre-Amplifier	MITEQ	JS4-18002600-30 -5A/741923	Jul. 31, 2007	Jul. 30, 2008
Pre-Amplifier	MITEQ	JS4-00101800-28 -5A/742229	Jul. 31, 2007	Jul. 30, 2008
Pre-Amplifier	Mini Circuit	ZKL-2/ 004	Feb. 14, 2008	Aug. 13, 2008
Semi - anechoic Chamber	ETS. LINDGREN	TR11/ 906-A	Jul. 1, 2008	Jun. 30, 2009

## Note:

1. The calibrations are traceable to NML/ROC.
2. NCR : No Calibration Required.
3. The calibration date of the semi-anechoic chamber listed above is the date of NSA measurement.

**Instrument Setting**

<b>RBW</b>	<b>VBW</b>	<b>Detector</b>	<b>Trace</b>	<b>Comment</b>
100KHz	N/A	Peak/Average	Maxhold	Field Strength of Fundament
120kHz	N/A	Quasi-Peak	Maxhold	Below 1GHz
1MHz	1MHz/100Hz	Peak/Average	Maxhold	Above 1GHz Peak



**Climatic Condition**

Ambient Temperature : 27°C;      Relative Humidity : 65%

### **2.3 Measurement Procedure**

- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.
- c. If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 meters above the reference ground plane in the semi-anechoic chamber. If the EUT is floor-standing equipment, it was placed on a non-conducted support with a height of 12 millimeters above the reference ground plane in the semi-anechoic chamber.
- d. The EUT was set 3m away from the interference receiving antenna.
- e. Rapidly sweep the signal in the test frequency range by using the spectrum through the Maximum-peak detector.
- f. Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4 meters above the reference ground plane continuously to determine at least six frequencies associated with higher emission levels and record them.
- g. Then measure each frequency found from step f. by using the spectrum with rotating the EUT and positioning the receiving antenna height to determine the maximum level.
- h. For measurement of frequency above 1000MHz, the beamwidth of receiving horn antenna should keep covering EUT when the receiving horn antenna height varied.
- i. For measurement of frequency above 1000MHz, set the spectrum detector to be Peak or Average to find out the maximum level occurred, if any.
- j. Record frequency, azimuth angle of the turntable, height, and polarization of the receiving antenna and compare the maximum level with the required limit.
- k. Change the receiving antenna to another polarization to measure radiated emission by following step e. to j. again.
- l. If the peak emission level below 1000MHz measured from step f. is 4dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate Q.P. value will be measured and presented.
- m. If the peak emission level above 1000MHz measured from step f. is 20dB lower than the limit specified, then the emission values presented will be the peak value only. Otherwise, accurate A.V. value will be measured and presented.

2.4 Test configuration

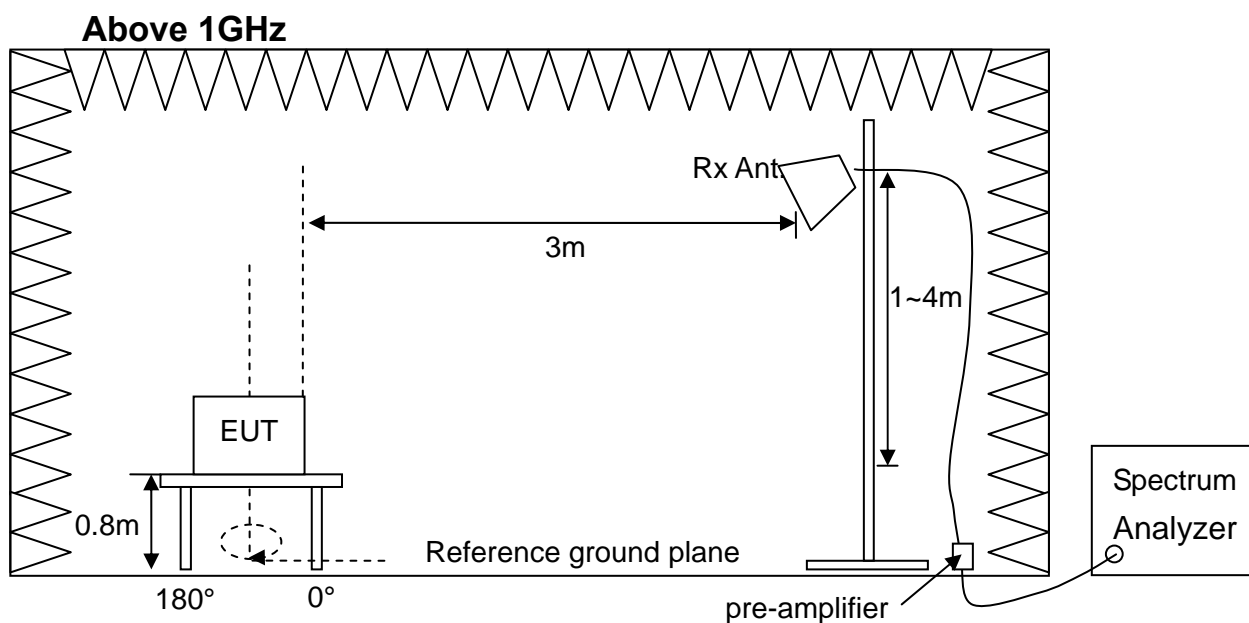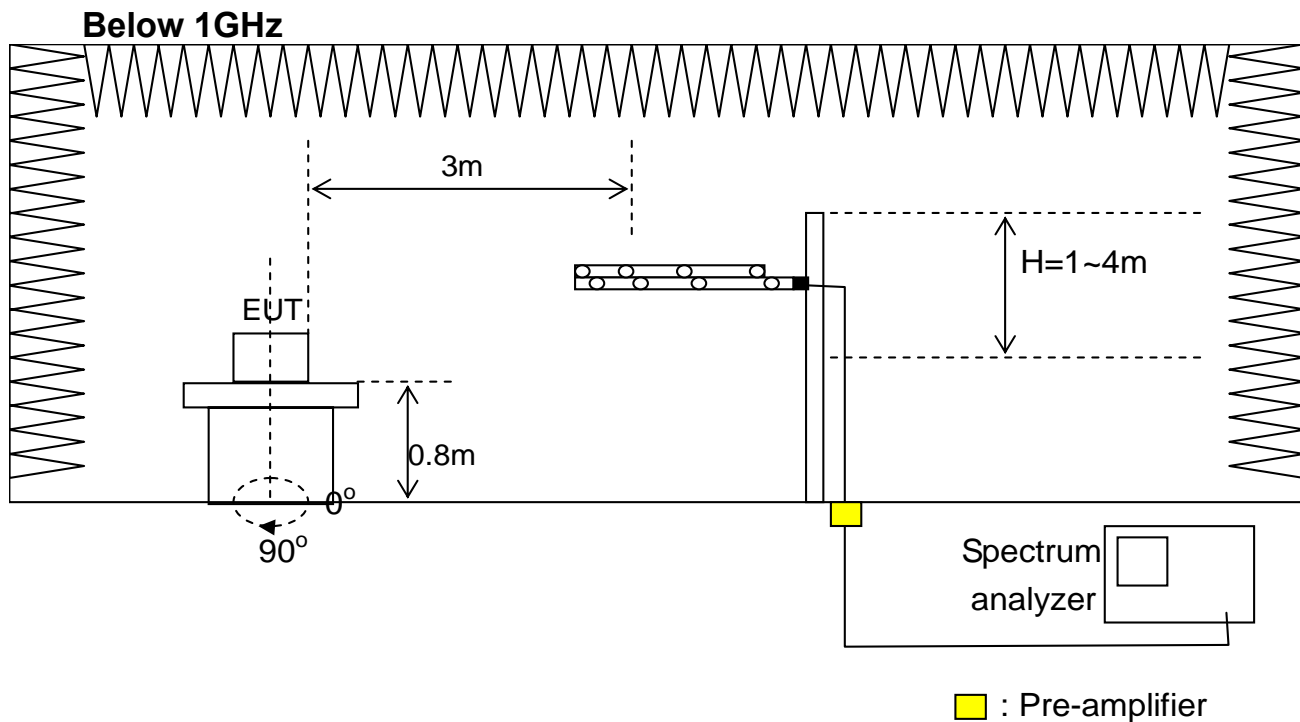

**2.5 Test Data**

**Field Strength of Fundament**

**Operating Frequency** : 433.075MHz                      **Test Mode** : **Transmitting**  
**Test Distance** : 3m    **Tester** : **Bill**

Frequency (MHz)	Polarization	Reading Data (dBuV)		Correction Factor (dB/m)	Field Strength (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
433.075	V	84.48	N/A	-8.62	75.86	68.73	100.8	80.8	24.94	12.07
433.075	H	94.73	N/A	-8.62	86.11	78.98	100.8	80.8	14.69	1.82

**Operating Frequency** : 434.300MHz                      **Test Mode** : **Transmitting**  
**Test Distance** : 3m    **Tester** : **Bill**

Frequency (MHz)	Polarization	Reading Data (dBuV)		Correction Factor (dB/m)	Field Strength (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
434.300	V	84.42	N/A	-8.6	75.82	68.69	100.84	80.84	25.02	12.15
434.300	H	94.18	N/A	-8.6	85.58	78.45	100.84	80.84	15.26	2.39

Note :

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Preamplifier
2. Field Strength (dBuV/m) = Reading Data + Correction Factor
3. Margin (dB) = Limit – Field Strength
4. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle)  
 Where the duty factor is calculated from following formula:


$$20\log(\text{Duty cycle}) = 20\log \frac{44}{100} = -7.13\text{dB}$$

please see page 19 for plotted duty cycle.




Operating Frequency : 433.075MHz

V Polarization, PK

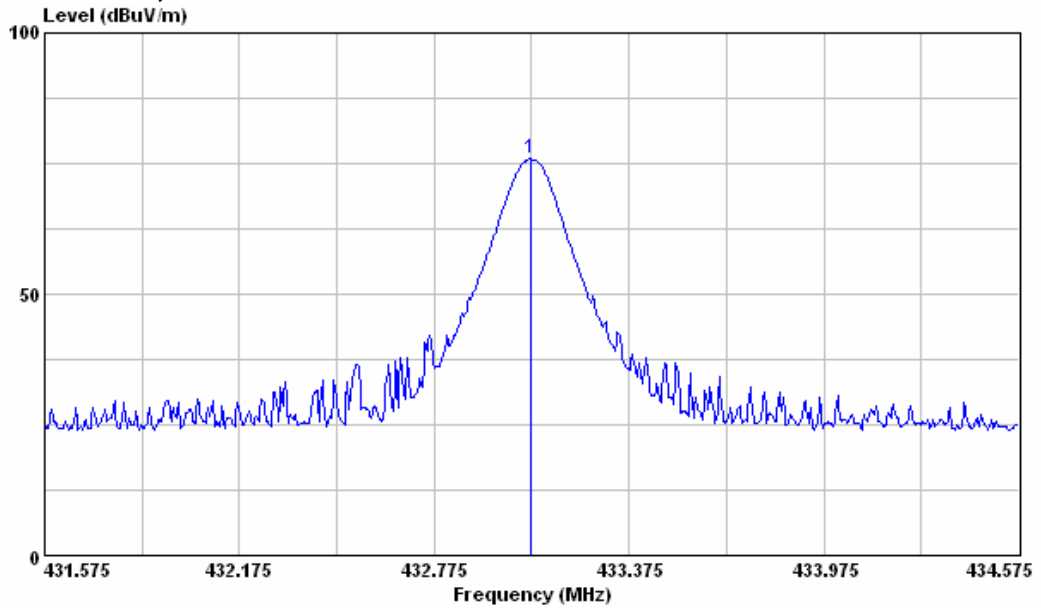


H Polarization, PK

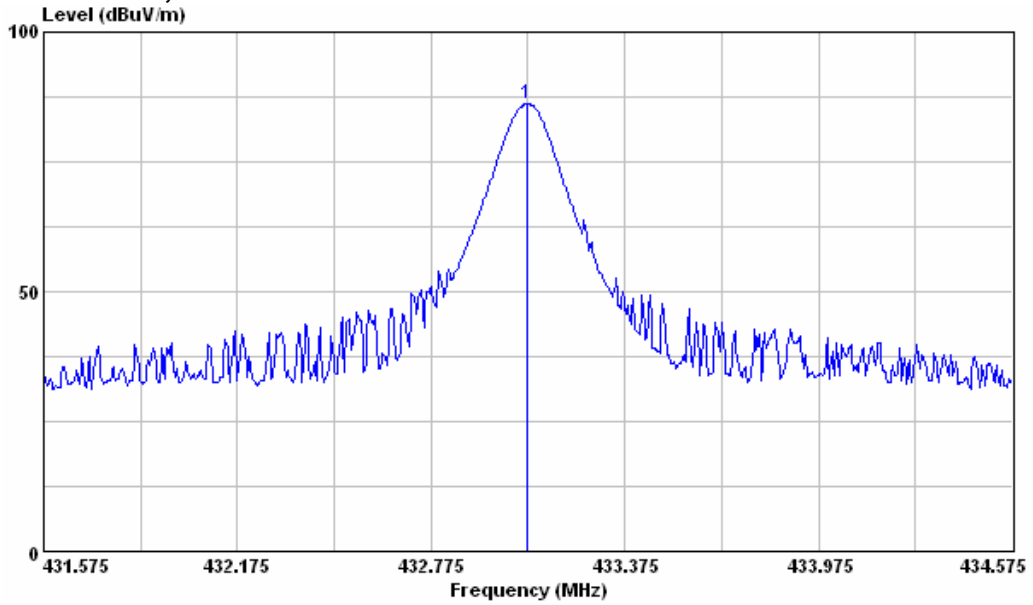


Operating Frequency : 434.300MHz



V Polarization, PK

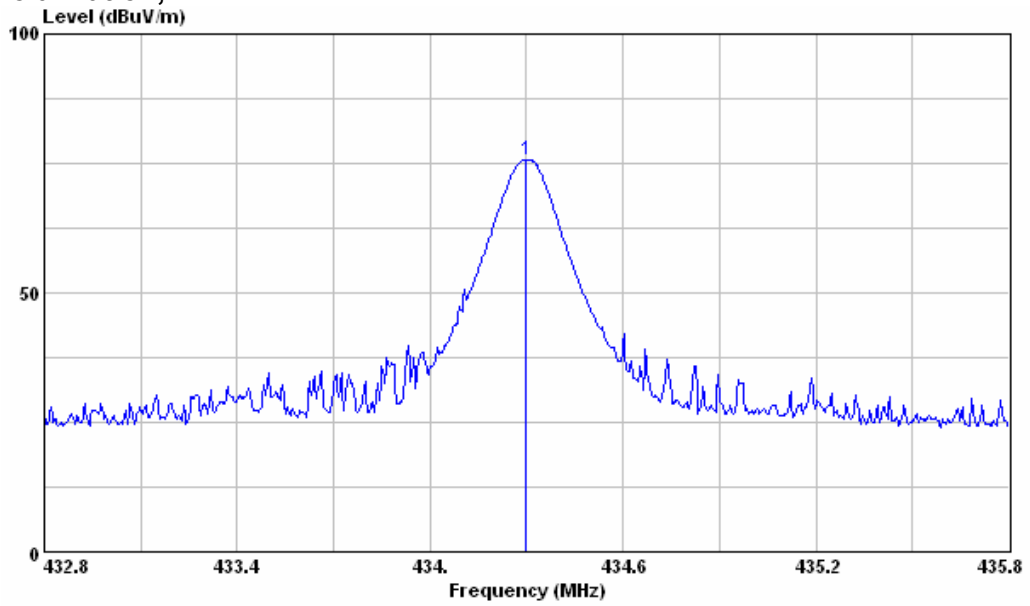

H Polarization, PK

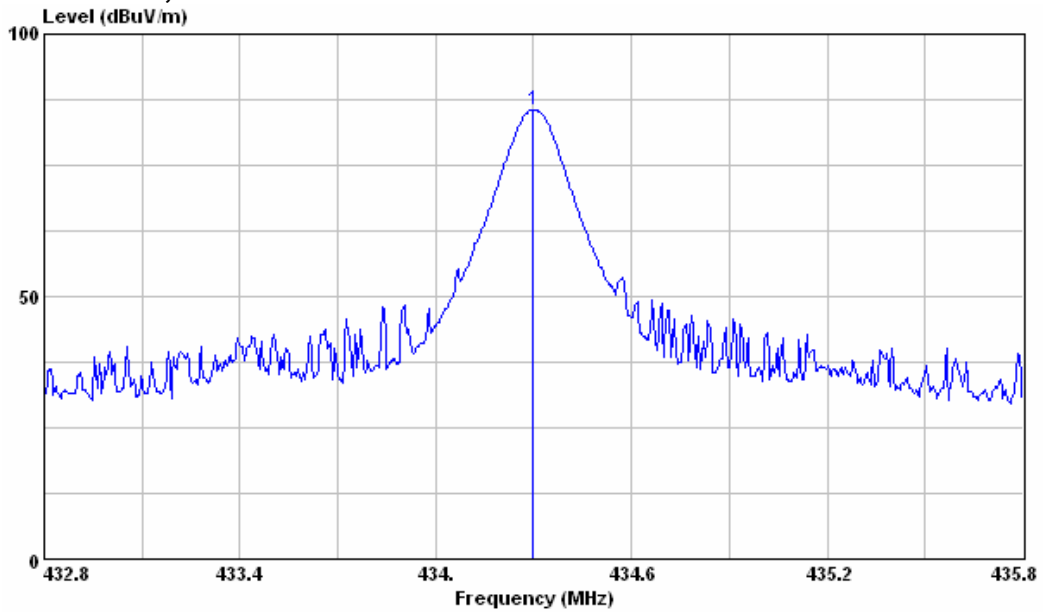


Duty cycle

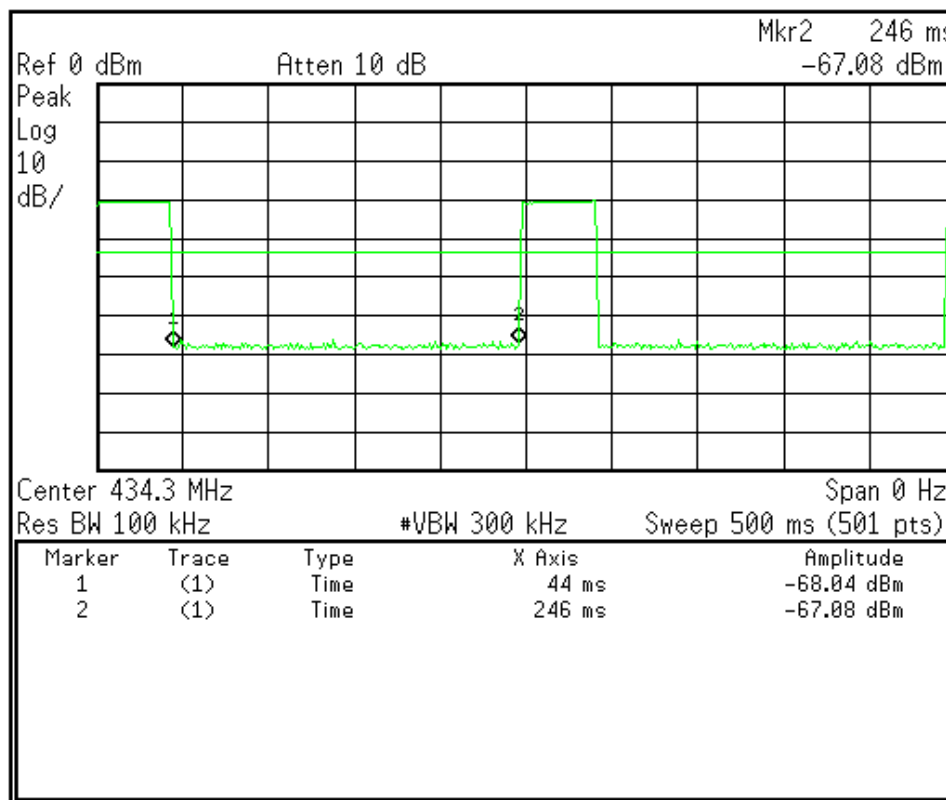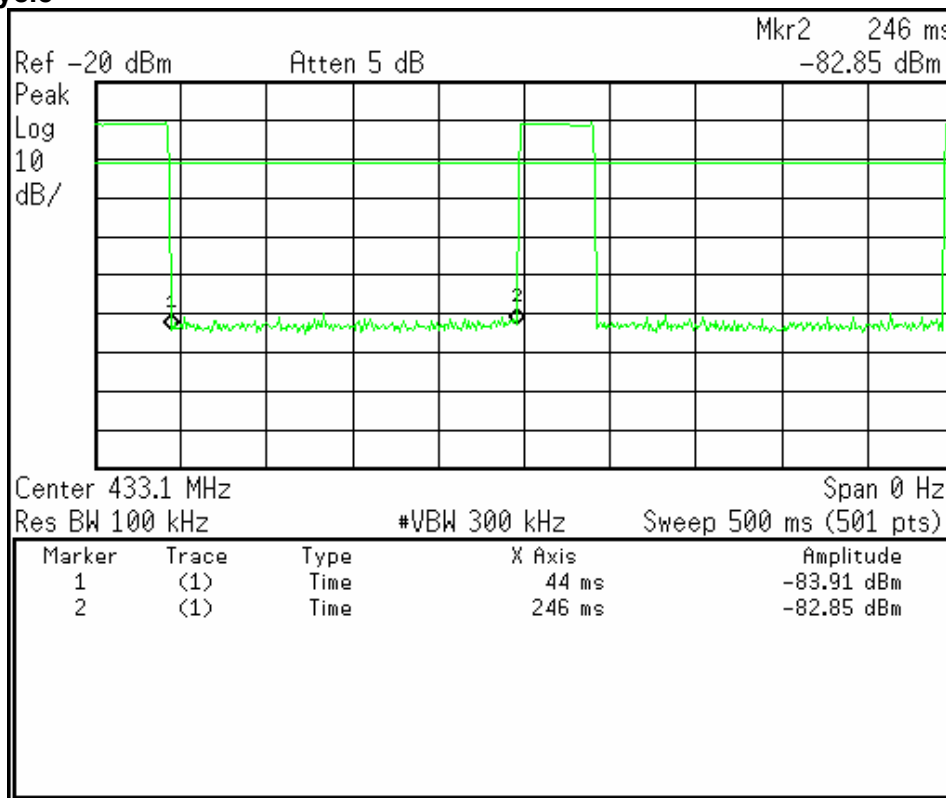

**Radiated Emission Measurement below 1000MHz**

Operating Frequency : 433.075MHz      Test Mode : Transmitting  
 Test Distance : 3m      Tester : Bill  
 Polarization : Vertical      Frequency Range : 30MHz~1GHz

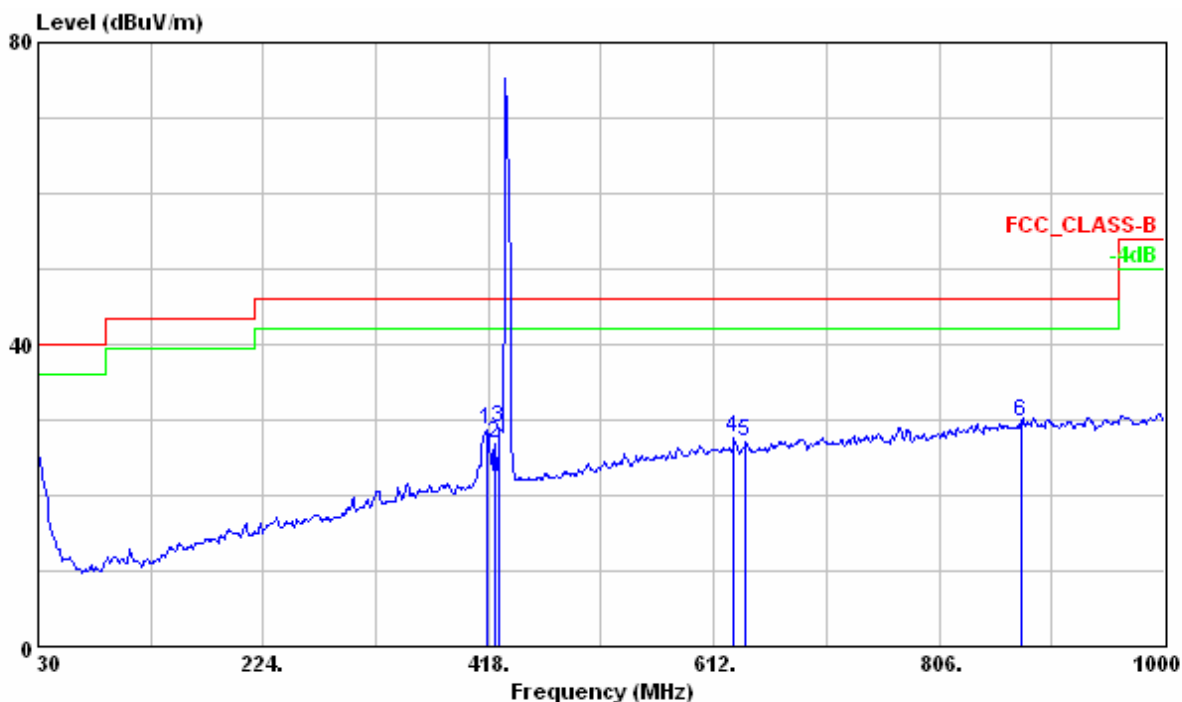


	Freq	Level	Read Level	Limit	Over	Ant	Table	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	416.060	28.62	37.60	-8.98	46.00	-17.38	---	---	VERTICAL Peak
2	422.850	26.92	35.76	-8.84	46.00	-19.08	---	---	VERTICAL Peak
3	427.700	28.97	37.71	-8.74	46.00	-17.03	---	---	VERTICAL Peak
4	629.460	27.60	32.16	-4.56	46.00	-18.40	---	---	VERTICAL Peak
5	639.160	27.01	31.51	-4.50	46.00	-18.99	---	---	VERTICAL Peak
6	876.810	29.84	30.88	-1.04	46.00	-16.16	---	---	VERTICAL Peak

Note:

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor

**Operating Frequency** : 433.075MHz      **Test Mode** : Transmitting  
**Test Distance** : 3m      **Tester** : Bill  
**Polarization** : Horizontal      **Frequency Range** : 30MHz~1GHz

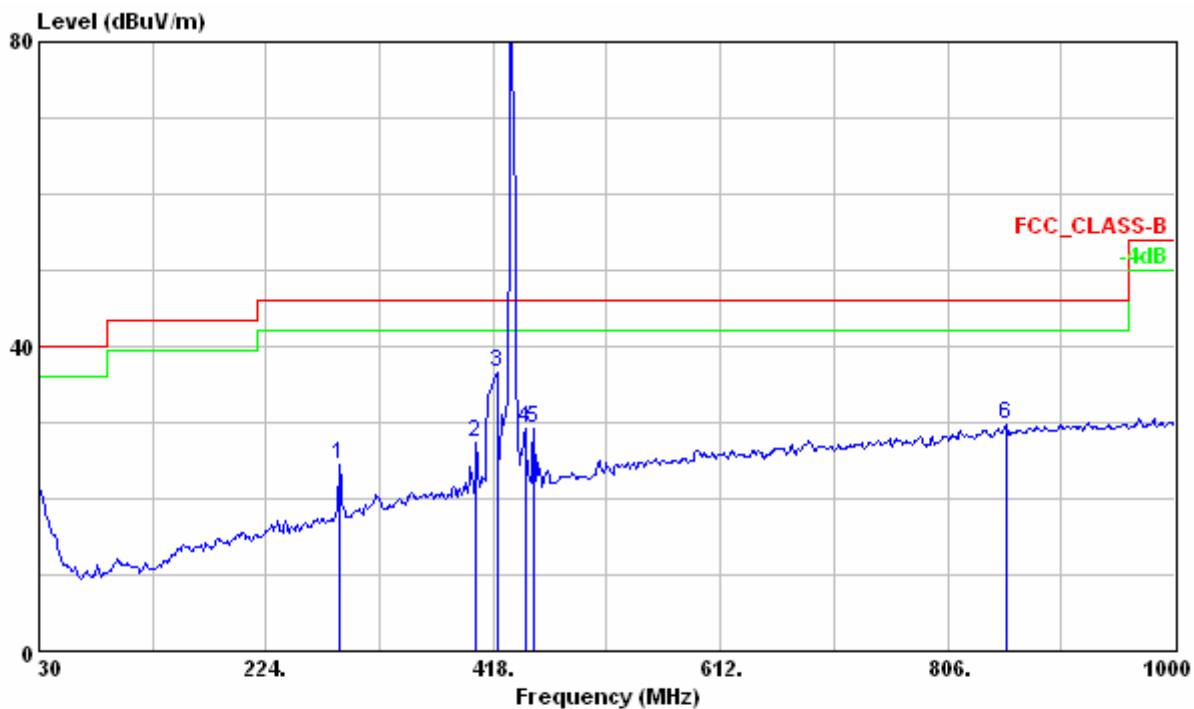


	Freq	Level	Read Level	Limit	Over	Ant	Table	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	287.050	24.59	37.65	-13.06	46.00	-21.41	---	---	HORIZONTAL Peak
2	403.450	27.24	36.48	-9.24	46.00	-18.76	---	---	HORIZONTAL Peak
3	420.910	36.59	45.46	-8.87	46.00	-9.41	---	---	HORIZONTAL Peak
4	445.160	29.09	37.47	-8.38	46.00	-16.91	---	---	HORIZONTAL Peak
5	451.950	29.27	37.50	-8.23	46.00	-16.73	---	---	HORIZONTAL Peak
6	855.470	29.62	30.98	-1.36	46.00	-16.38	---	---	HORIZONTAL Peak

Note:

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor

**Operating Frequency** : 434.300MHz                      **Test Mode** : Transmitting  
**Test Distance** : 3m    **Tester** : Bill  
**Polarization** : Vertical    **Frequency Range** : 30MHz~1GHz

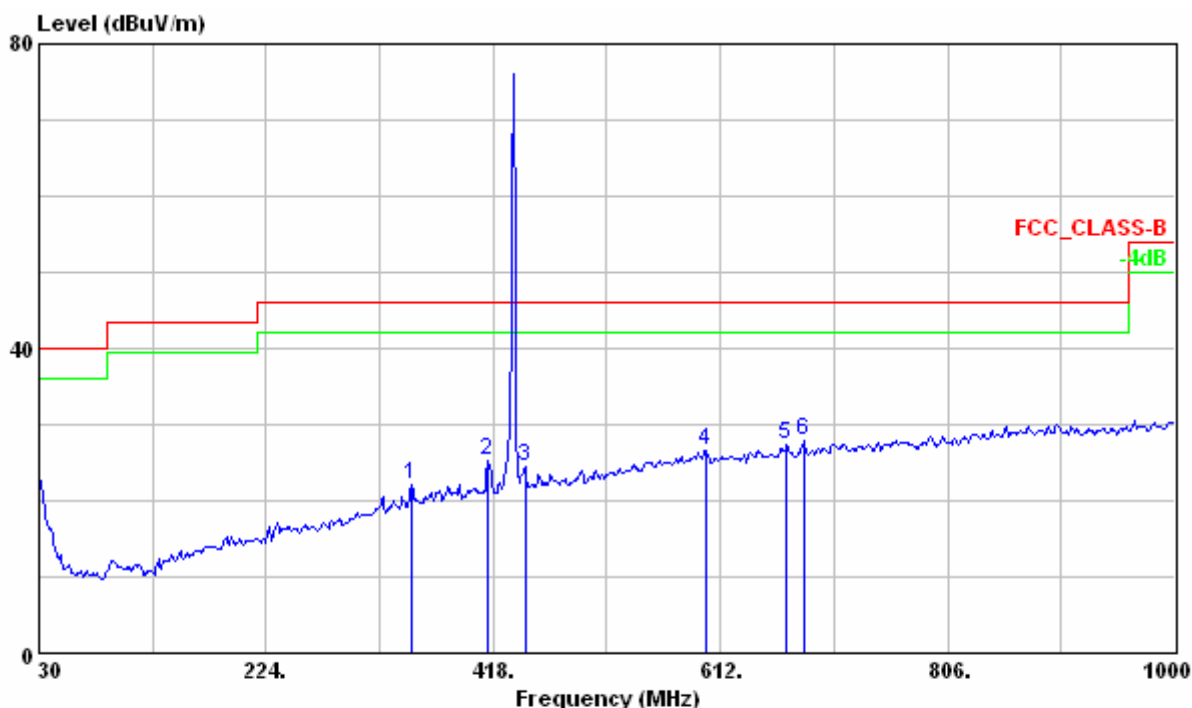


	Freq	Level	Read	Limit	Over	Ant	Table		
	MHz	dBuV/m	Level	Line	Limit	Pos	Pos	Pol/Phase	Remark
			dBuV	dB/m	dBuV/m	dB	cm	deg	
1	348.160	22.19	32.71	-10.52	46.00	-23.81	---	---	VERTICAL Peak
2	413.150	25.27	34.30	-9.03	46.00	-20.73	---	---	VERTICAL Peak
3	445.160	24.46	32.84	-8.38	46.00	-21.54	---	---	VERTICAL Peak
4	600.360	26.55	31.26	-4.71	46.00	-19.45	---	---	VERTICAL Peak
5	668.260	27.29	31.25	-3.96	46.00	-18.71	---	---	VERTICAL Peak
6	682.810	27.86	31.43	-3.57	46.00	-18.14	---	---	VERTICAL Peak

Note:

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor

Operating Frequency : 434.300MHz  
 Test Distance : 3m  
 Polarization : Horizontal

Test Mode : Transmitting  
 Tester : Bill  
 Frequency Range : 30MHz~1GHz

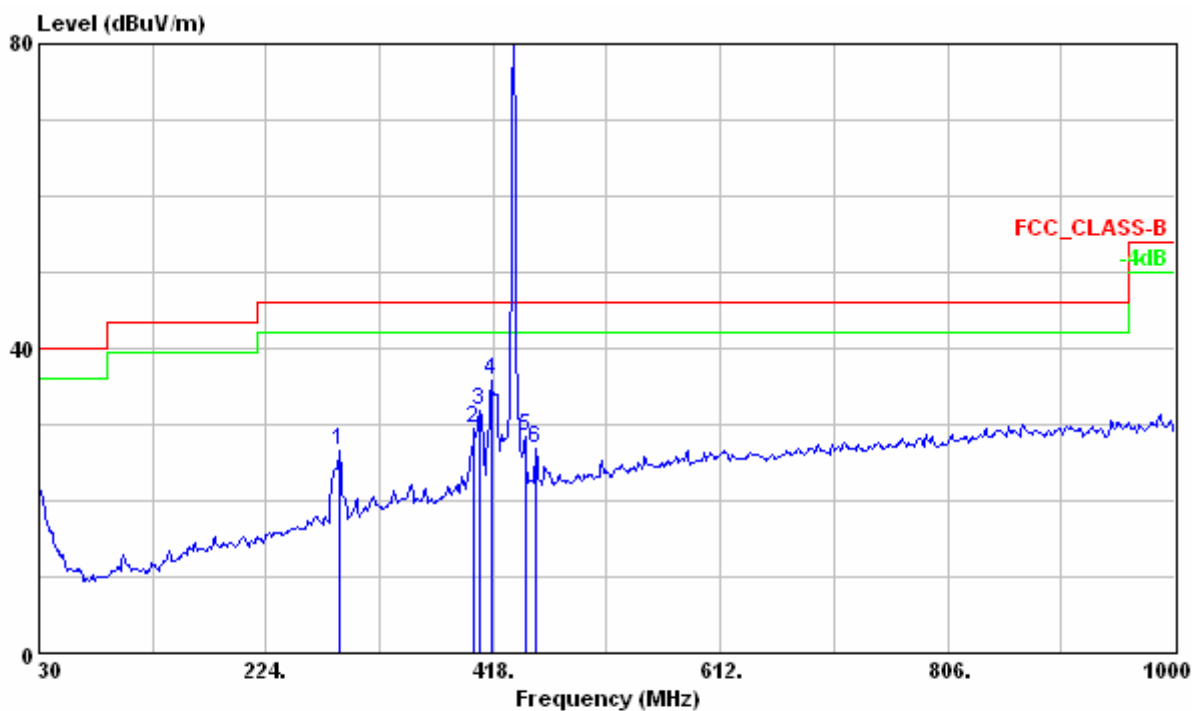


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	287.050	26.57	39.63	-13.06	46.00	-19.43	---	---	HORIZONTAL	Peak
2	401.510	29.35	38.63	-9.28	46.00	-16.65	---	---	HORIZONTAL	Peak
3	406.360	31.74	40.91	-9.17	46.00	-14.26	---	---	HORIZONTAL	Peak
4	416.060	35.72	44.70	-8.98	46.00	-10.28	---	---	HORIZONTAL	Peak
5	445.160	28.33	36.71	-8.38	46.00	-17.67	---	---	HORIZONTAL	Peak
6	454.860	26.94	35.10	-8.16	46.00	-19.06	---	---	HORIZONTAL	Peak

Note:

1. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier
2. Emission Level (dBuV/m) = Reading Data + Correction Factor

**Radiated Emission Measurement above 1000MHz**

Operating Frequency : 433.075MHz                      Test Mode : Transmitting  
 Test Distance : 3m    Tester : Bill  
 Polarization : Vertical                                      Frequency Range : 1GHz~4.5GHz

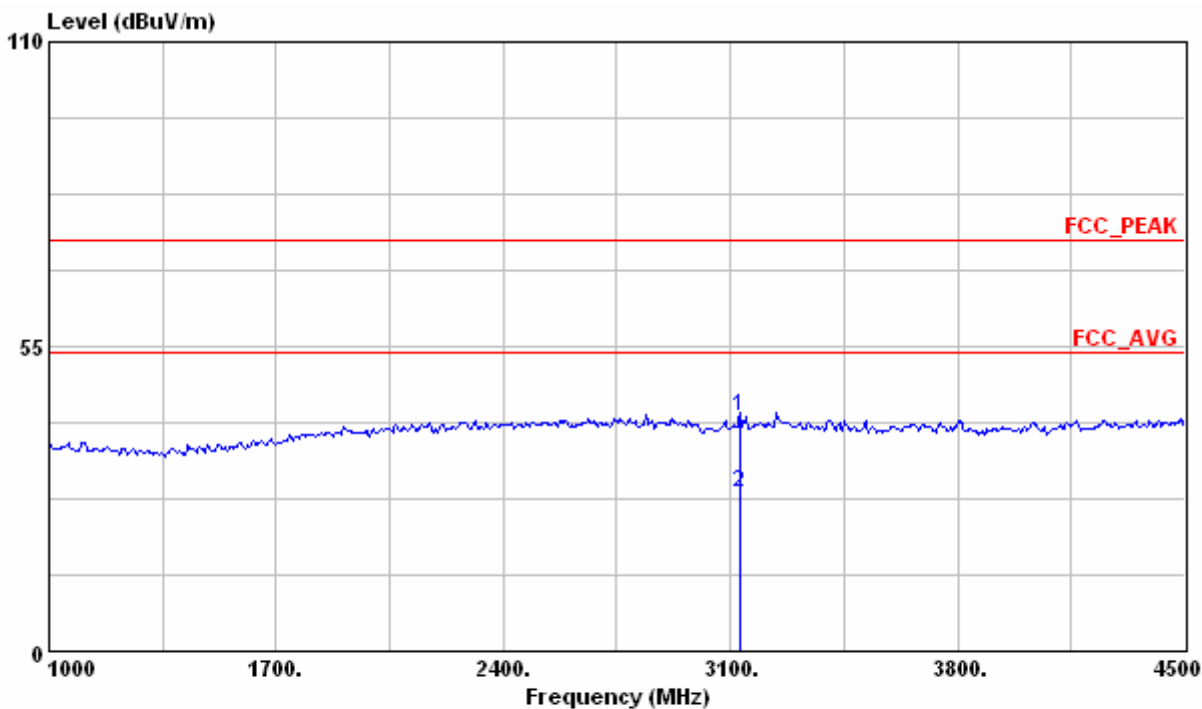

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	3127.887	42.49	69.39	-26.90	74.00	-31.51	101	11	VERTICAL	Peak
2	3127.887	28.52	55.42	-26.90	54.00	-25.48	101	11	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier.



**Operating Frequency** : 433.075MHz


**Test Mode** : Transmitting

**Test Distance** : 3m

**Tester** : Bill

**Polarization** : Horizontal

**Frequency Range** : 1GHz~4.5GHz

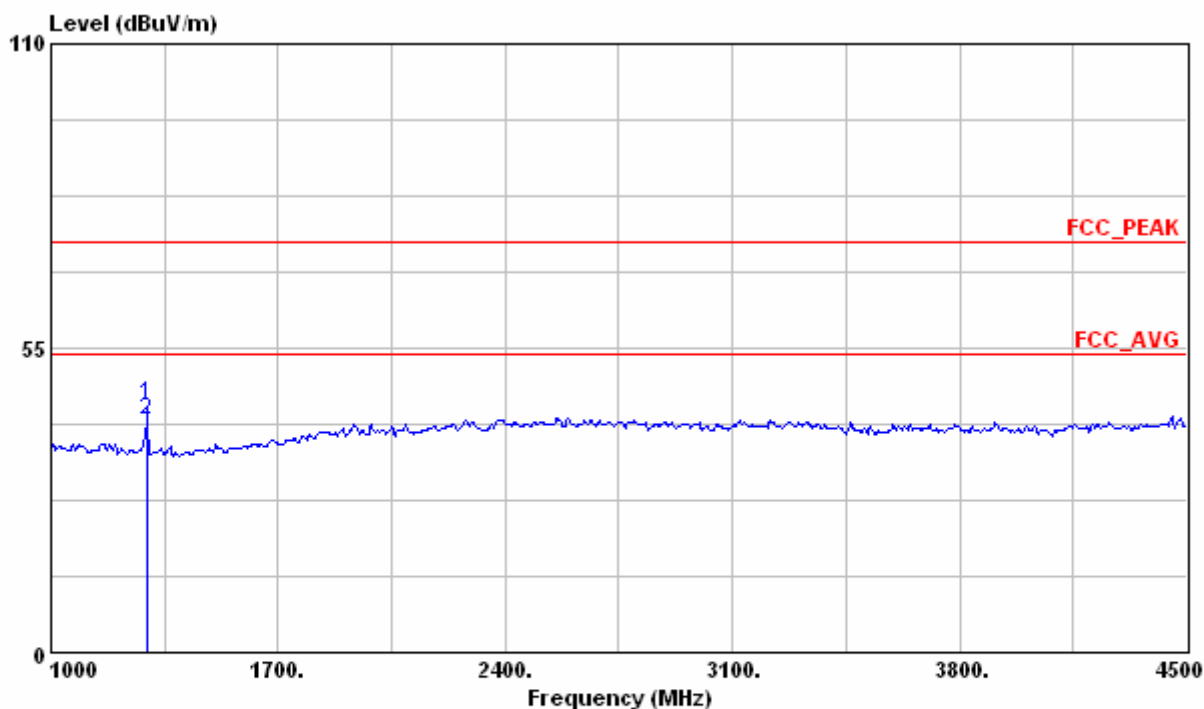


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	1299.250	44.71	77.82	-33.11	74.00	-29.29	100	137	HORIZONTAL	Peak
2	1299.250	42.08	75.19	-33.11	54.00	-11.92	100	137	HORIZONTAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier.

**Operating Frequency** : 434.300MHz  
**Test Distance** : 3m  
**Polarization** : Vertical

**Test Mode** : Transmitting  
**Tester** : Bill  
**Frequency Range** : 1GHz~4.5GHz

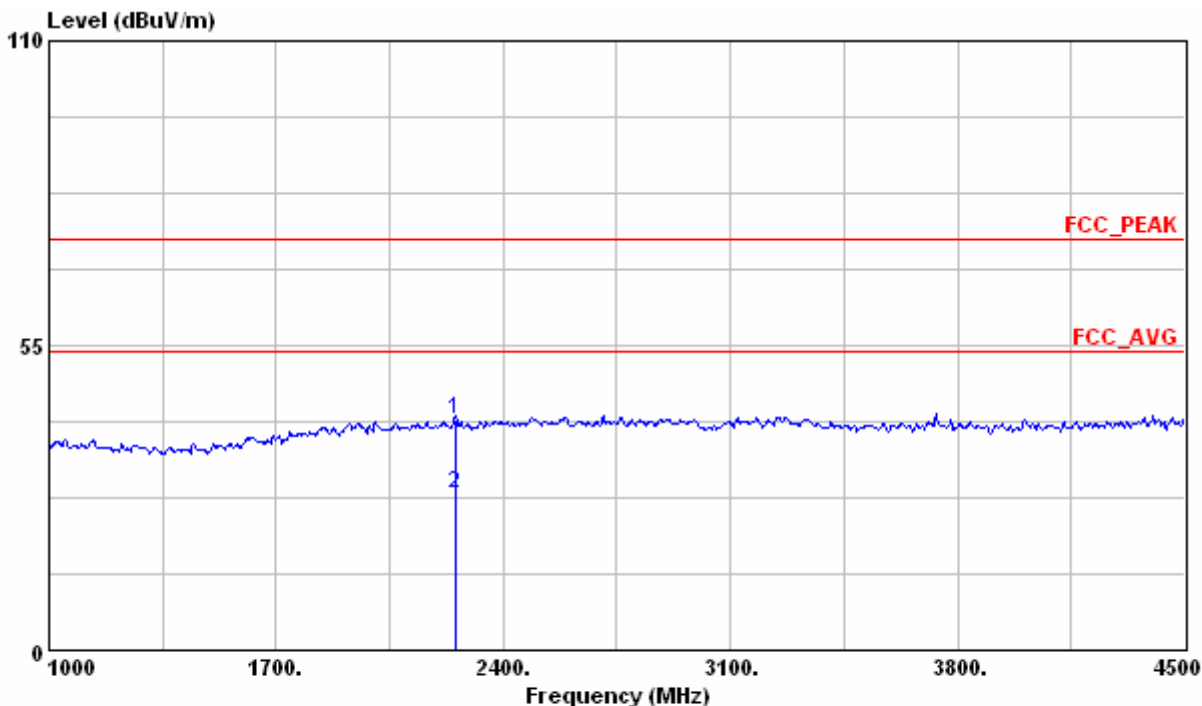


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2255.750	41.70	69.71	-28.01	74.00	-32.30	101	166	VERTICAL	Peak
2	2255.750	28.29	56.30	-28.01	54.00	-25.71	101	166	VERTICAL	Average

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier.

**Operating Frequency** : 434.300MHz  
**Test Distance** : 3m  
**Polarization** : Horizontal

**Test Mode** : Transmitting  
**Tester** : Bill  
**Frequency Range** : 1GHz~4.5GHz

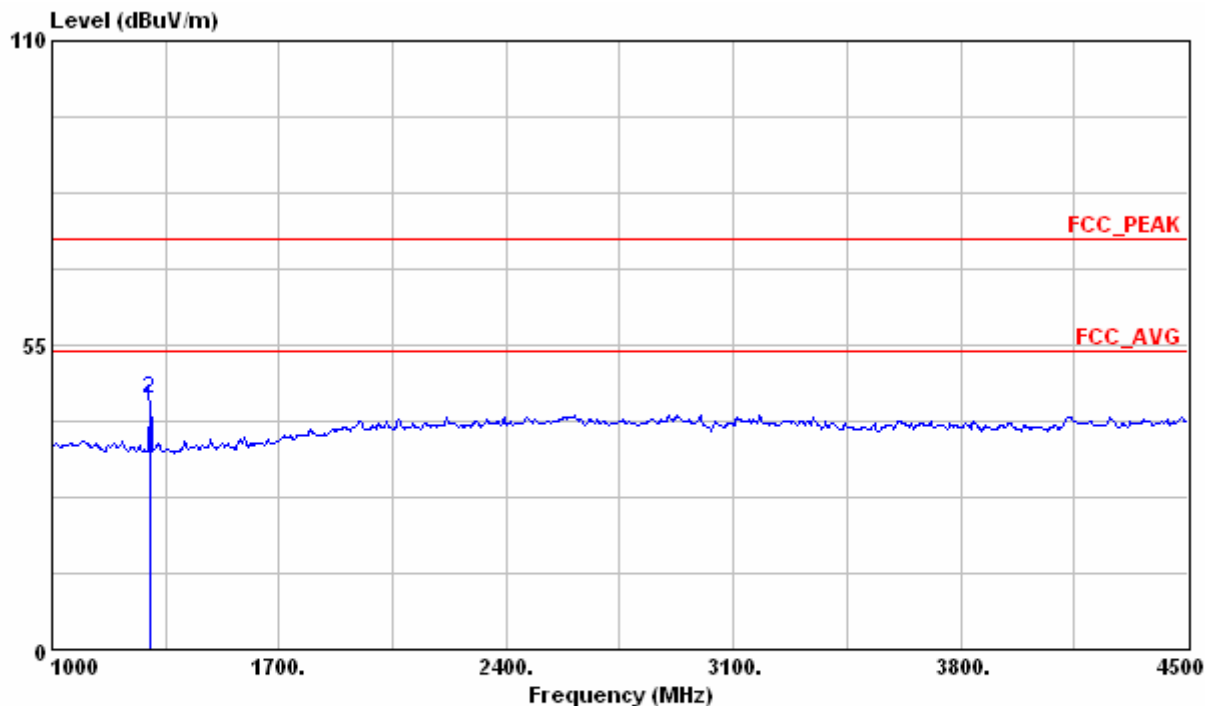

	Freq	Level	Read Level	Factor	Limit	Over Limit	Ant Pos	Table Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	1302.825	43.67	76.78	-33.11	54.00	-10.33	100	145	HORIZONTAL	Average
2	1302.875	45.39	78.50	-33.11	74.00	-28.61	100	145	HORIZONTAL	Peak

Note:

1. Emission Level (dBuV/m) = Reading Value + Correction Factor.
2. Correction Factor (dB/m) = Cable Loss + Antenna Factor – Gain of Pre-amplifier.

### 3 Bandwidth

Test Result: Pass

#### 3.1 Applied standard

According to FCC 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

According to RSS-210 A1.1.3, the 99% bandwidth shall be no wider than 0.25% of the centre frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency.

#### 3.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Data	Calibration Due Data
Shielded Room	ETS.LINDGREN	TR4/ 15353-E	NCR	NCR
Spectrum	Agilent	E4407B/ MY45106706	Mar. 25, 2008	Mar. 24, 2009

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

#### Instrument Setting

RBW	VBW	Span	Detector	Comment
100Hz	300Hz	Peak	Maxhold	

#### Climatic Condition


Ambient Temperature : 26°C;

Relative Humidity : 64%

### 3.3 Measurement Procedure

1. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
2. The Transmitter output of EUT was connected to the spectrum analyzer.
3. Measure the bandwidth and compare with the required limit.

### 3.4 Test configuration

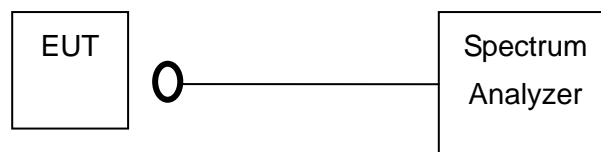


3.5 Test Data

Test Mode : Transmitting

Emission Freq. : 433.075MHz

Tester

: Bill

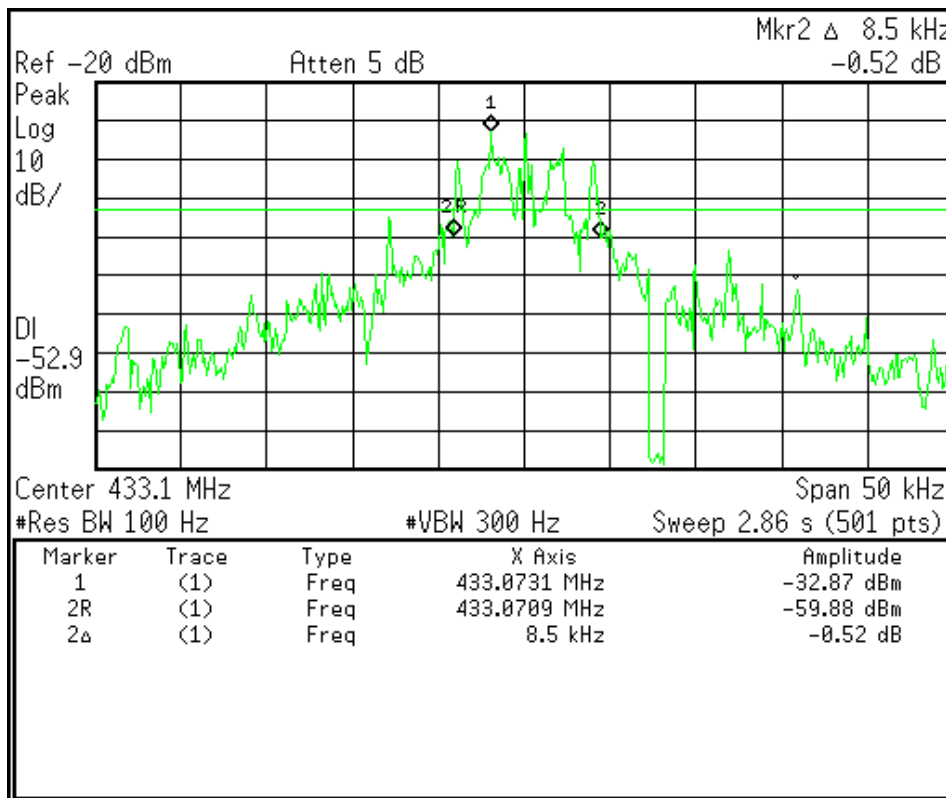


Measured 20dB bandwidth is 8.5kHz < 433.075MHzX0.25% = 1082.6875kHz.

**Test Mode : Transmitting**

**Emission Freq. : 434.300MHz**

**Tester**

**: Bill**

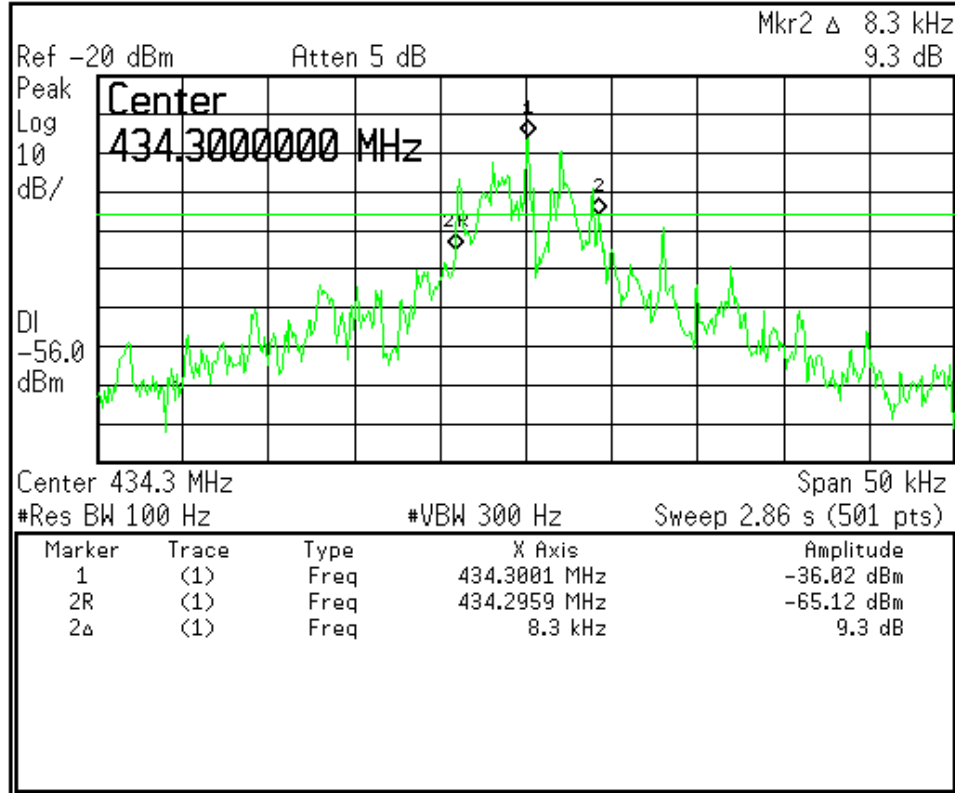


**Measured 20dB bandwidth is 8.3kHz < 434.300MHzX0.25% = 1085.75kHz.**

Test Mode : Transmitting

Emission Freq. : 433.075MHz

Tester

: Bill

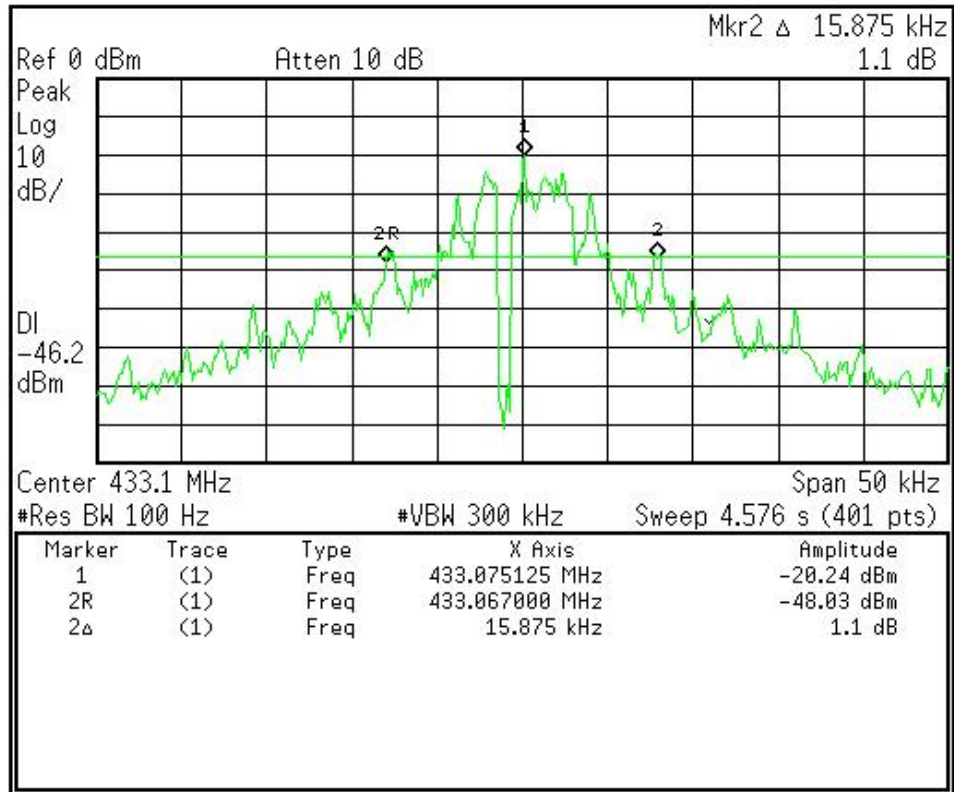

Measured 99% Occupied bandwidth is 15.875kHz < 433.075MHzX0.25% = 1082.6875kHz




Test Mode : Transmitting

Emission Freq. : 434.300MHz

Tester

: Bill

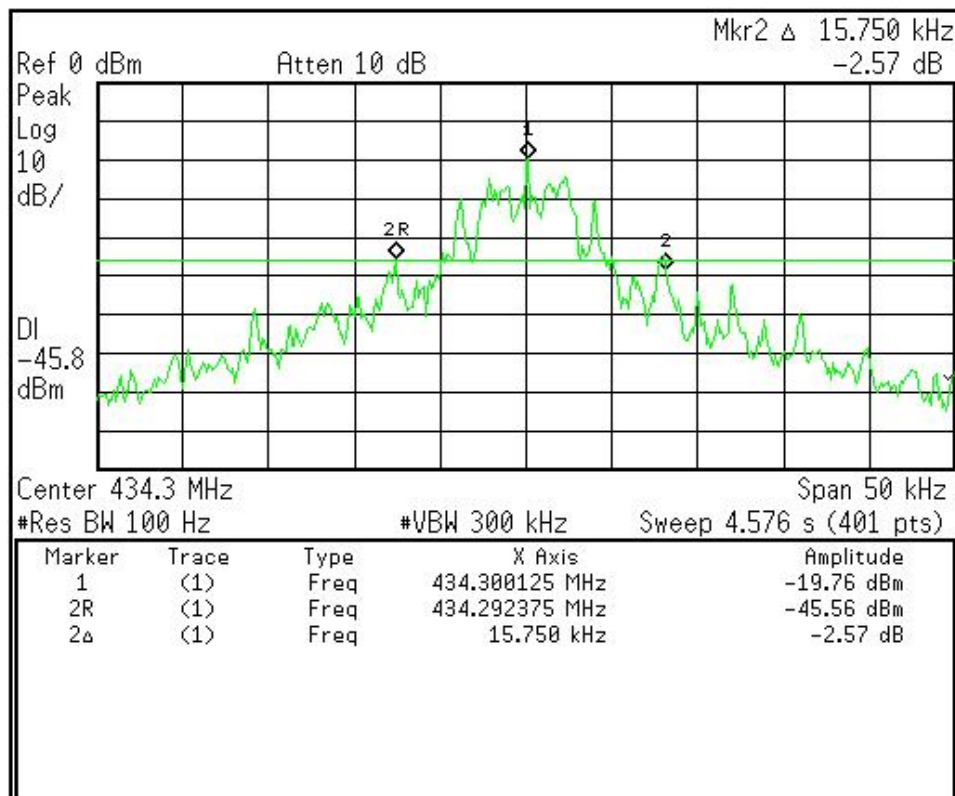

Measured 99% Occupied bandwidth is 15.750kHz < 434.300MHzX0.25% = 1085.75kHz.

## 4 Dwell Time

**Test Result:** Pass

### 4.1 Applied standard

According to 15.231(a) and RSS-210 A1.1.5.(2), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 4.2 Test Instruments

Test Site and Equipment	Manufacturer	Model No./ Serial No.	Last Calibration Data	Calibration Due Data
Shielded Room	ETS.LINDGREN	TR4/ 15353-E	NCR	NCR
Spectrum	Agilent	E4407B/ MY45106706	Mar. 25, 2008	Mar. 24, 2009

Note:

1. The calibrations are traceable to NML/ROC.
2. NCR:No Calibration Required.

### Instrument Setting

RBW	VBW	Detector	Trace	Comment
100KHz	300kHz	Peak	Maxhold	


### Climatic Condition

Ambient Temperature : 26°C;                      Relative Humidity : 64%

### 4.3 Measurement Procedure


- a. The EUT was set up per the test configuration figured in the next section of this chapter to simulate the typical usage per the user's manual.
- b. The Transmitter output of EUT was connected to the spectrum analyzer through an attenuator.
- c. Measure the dwell time and compare with the required limit.

### 4.4 Test configuration

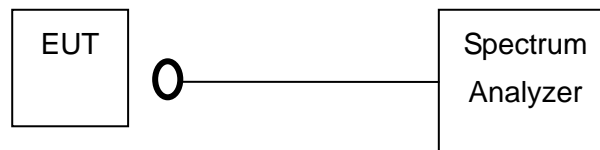

4.5 Test Data


Test Mode : Transmitting  
 Operating Freq. : 433.075MHz Tester : Bill

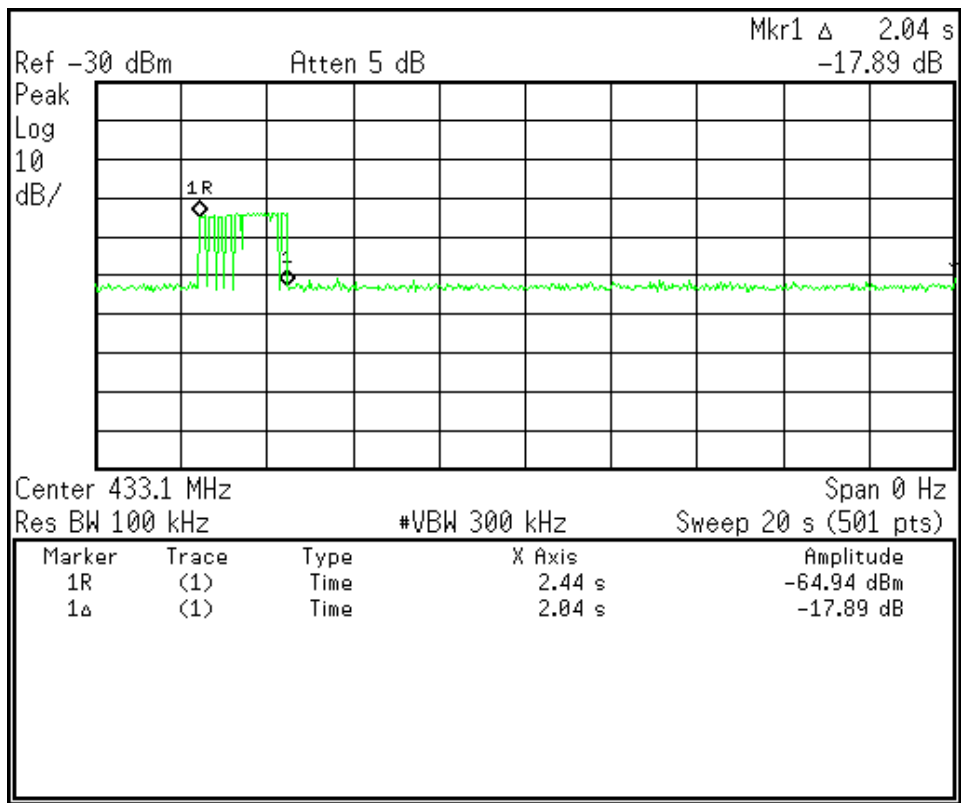

The transmitter will automatically deactivate within 2.04 second after release the button of the transmitter.

**Test Mode : Transmitting**  
**Operating Freq. : 434.300MHz**

**Tester : Bill**

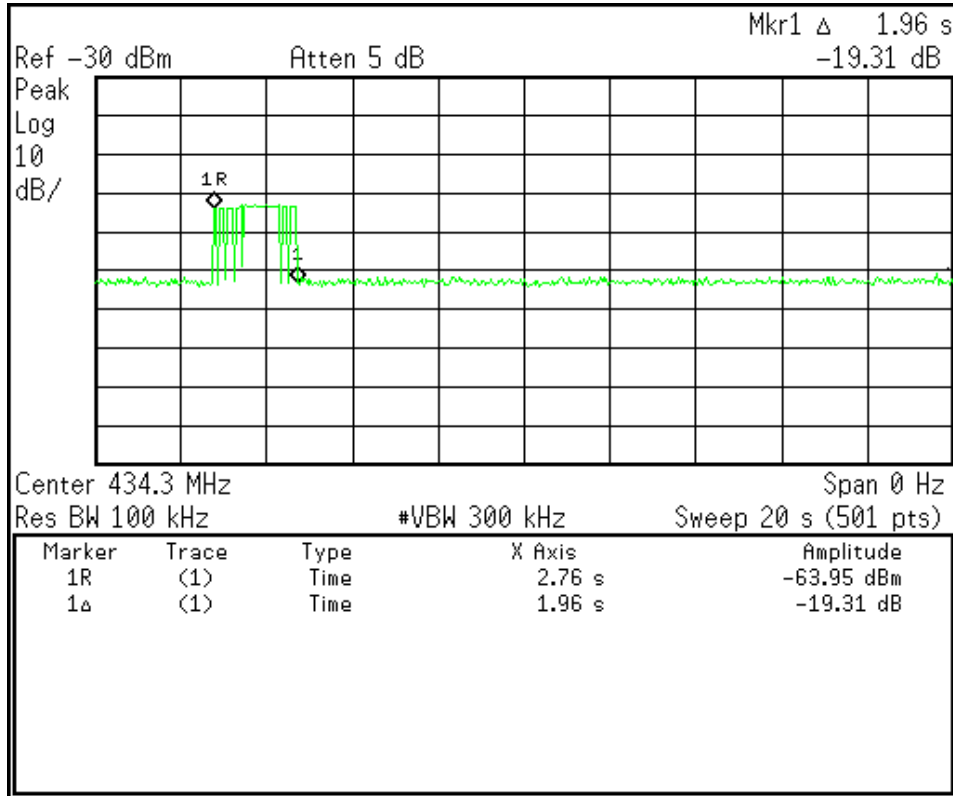

The transmitter will automatically deactivate within 1.96 second after release the button of the transmitter.