

The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, MI 48109-2122
Tel: (734) 764-0500

Measured Radio Frequency Emissions
From

**Siemens SKREEK RKE Transmitter
Series 5WY72XX**

Report No. 415031-215
July 28, 2004


Copyright © 2004

For:
Siemens VDO Automotive
4685 Investment Drive
Troy, MI 48098

Contact:
Charles Muma
E-mail: charles.muma@siemens.com
Tel: (248) 764-6783
Fax: (248) 764-7183
PO: 205205072

Measurements made by:
Ed Courtney

Tests supervised by:
Report approved by:

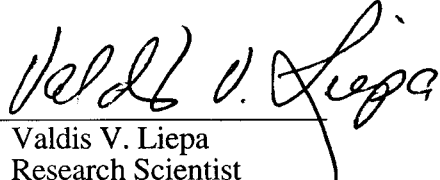
Valdis V. Liepa
Research Scientist

Summary

Tests for compliance with FCC Regulations, Part 15, Subpart C, and for compliance with Industry Canada RSS-210, were performed on Siemens RKE transmitter. This device is subject to the Rules and Regulations as a transmitter and as a digital device.

In testing performed on May 26, 2004, the device tested in the worst case met the allowed specifications for radiated emissions by 3.7 dB at the fundamental and by 1.8 dB at the harmonics (see p. 6). Besides harmonics, there were no other significant spurious emissions found; emissions from digital circuitry were negligible. The line conducted emission tests do not apply, since the device is powered by a 3-volt battery.

1. Introduction

Siemens RKE Transmitter was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 5, dated November 1, 2001. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057).

2. Test Procedure and Equipment Used

The pertinent test equipment commonly used in our facility for measurements is listed in Table 2.1 below. The middle column identifies the specific equipment used in these tests.

Table 2.1. Test equipment.

Test Instrument	Eqpt Used	Manufacturer/Model
Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard, 182T/8558B
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E, SN: 3412A01131
Spectrum Analyzer (9kHz-26GHz)		Hewlett-Packard 8563E, SN: 3310A01174
Spectrum Analyzer (9kHz-40GHz)		Hewlett-Packard 8564E, SN: 3745A01031
Power Meter		Hewlett-Packard, 432A
Power Meter		Anritsu, ML4803A/MP
Harmonic Mixer (26-40 GHz)		Hewlett-Packard 11970A, SN: 3003A08327
Harmonic Mixer (40-60 GHz)		Hewlett-Packard 11970U, SN: 2332A00500
Harmonic Mixer (75-110 GHz)		Hewlett-Packard 11970W, SN: 2521A00179
Harmonic Mixer (140-220 GHz)		Pacific Millimeter Prod., GMA, SN: 26
S-Band Std. Gain Horn		S/A, Model SGH-2.6
C-Band Std. Gain Horn		University of Michigan, NRL design
XN-Band Std. Gain Horn		University of Michigan, NRL design
X-Band Std. Gain Horn		S/A, Model 12-8.2
X-band horn (8.2- 12.4 GHz)		Narda 640
X-band horn (8.2- 12.4 GHz)		Scientific Atlanta , 12-8.2, SN: 730
K-band horn (18-26.5 GHz)		FXR, Inc., K638KF
Ka-band horn (26.5-40 GHz)		FXR, Inc., U638A
U-band horn (40-60 GHz)		Custom Microwave, HO19
W-band horn(75-110 GHz)		Custom Microwave, HO10
G-band horn (140-220 GHz)		Custom Microwave, HO5R
Bicone Antenna (30-250 MHz)	X	University of Michigan, RLBC-1
Bicone Antenna (200-1000 MHz)	X	University of Michigan, RLBC-2
Dipole Antenna Set (30-1000 MHz)	X	University of Michigan, RLDP-1,-2,-3
Dipole Antenna Set (30-1000 MHz)		EMCO 2131C, SN: 992
Active Rod Antenna (30 Hz-50 MHz)		EMCO 3301B, SN: 3223
Active Loop Antenna (30 Hz-50 MHz)		EMCO 6502, SN:2855
Ridge-horn Antenna (300-5000 MHz)		University of Michigan
Amplifier (5-1000 MHz)	X	Avantak, A11-1, A25-1S
Amplifier (5-4500 MHz)	X	Avantak
Amplifier (4.5-13 GHz)		Avantek, AFT-12665
Amplifier (6-16 GHz)		Trek
Amplifier (16-26 GHz)		Avantek
LISN (50 μ H)		University of Michigan
Signal Generator (0.1-2060 MHz)		Hewlett-Packard, 8657B
Signal Generator (0.01-20 GHz)		Hewlett-Packard

3. Configuration and Identification of Device Under Test

The DUT is a family of three, four and six button transmitters, all based on the same PC board, electronics, and software, designed to send identification and control signals to a companion receiver. There are a total of six models differing in the number of buttons (plastic) and the car make logo. The DUT also contains a "passive" 125 kHz Immobilizer transponder circuit. The DUT is activated by depressing any of the buttons. When the transmitter is activated by momentary push, it transmits four words for about 370 ms. If the button is kept depressed, it will transmit up to 25 seconds. The emission is Manchester encoded format, ASK modulated on a 315.0 MHz carrier. The DUT was designed by Siemens VDO Automotive, 4685 Investment Drive, Troy, MI 48098. It is identified as:

Siemens SKREEK RKE Transmitter
PN: 5WY7218/5WY7260
S/N: E-19 (PC Board)
FCC ID: M3N5WY72XX
IC: 267F-5WY72XX

One PC board was used for testing, which had test options to provide CW and normal modes of transmission. Radiated emissions tests were performed in CW mode. The PC board was placed in a six button with Dodge logo variation and completely tested. Then versions for other number of buttons were tested for worst case.

The PNs covered by the tests are:

- (1) 3-button RS Chrysler, PN: 5WY7214/ 5WY7256
- (2) 3-button RS Dodge, PN: 5WY7217/ 5WY7257
- (3) 4-button CS Chrysler, PN: 5WY7215/ 5WY7258
- (4) 4-button KJ Jeep, PN: 5WY7423/ 5WY7424
- (5) 6-button RS Chrysler, PN: 5WY7216/ 5WY7259
- (3) 6-button RS Dodge, PN: 5WY7218/ 5WY7260

3.1 EMI Relevant Modifications

No modifications were made to the DUT by this laboratory.

4. Emission Limits

4.1 Radiated Emission Limits

The DUT tested falls under the category of an Intentional Radiators and the Digital Devices. For FCC, it is subject to Part 15, Subpart C, (Section 15.231), Subpart B, (Section 15.109), and Subpart A, (Section 15.33). For Industry Canada it is subject to RSS-210, (Sections 6.1 and 6.3). The applicable testing frequencies with corresponding emission limits are given in Tables 4.1 and 4.2 below. As a digital device, the DUT is considered as a Class B device.

Table 4.1. Radiated Emission Limits (FCC: 15.33, 15.35, 15.109; IC: RSS-210, 6.2.2(r)).
(Digital Class B)

Freq. (MHz)	E_{lim} (3m) μ V/m	E_{lim} dB(μ V/m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Average readings apply above 1000 MHz (1 MHz BW)
Quasi-Peak readings apply to 1000 MHz (120 kHz BW)

Table 4.2. Radiated Emission Limits (FCC: 15.231(b), 15.205(a); IC: RSS-210; 6.1, 6.3).
(Transmitter)

Frequency (MHz)	Fundamental Ave. E _{lim} (3m)		Spurious** Ave. E _{lim} (3m)	
	(μ V/m)	dB (μ V/m)	(μ V/m)	dB (μ V/m)
260.0-470.0	3750-12500*		375-1250	
322-335.4 399.9-410 608-614	Restricted Bands		200	46.0
960-1240 1300-1427 1435-1626.5 1660-1710 1718.9-1722.2 2200-2300	Restricted Bands		500	54.0

* Linear interpolation, formula: $E = -7083 + 41.67 * f$ (MHz)

** Measure up to tenth harmonic; 120 kHz BW up to 1 GHz, 1 MHz BW above 1 GHz

4.2 Conductive Emission Limits

The conductive emission limits and tests do not apply here, since the DUT is powered by one internal 3-volt battery.

5. Radiated Emission Tests and Results

5.1 Anechoic Chamber Measurements

To familiarize with the radiated emission behavior of the DUT, the DUT was first studied and measured in a shielded anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with a turntable, an antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

In testing for radiated emissions, the transmitter was activated using the lock/unlock button with a special wooden clamp for repeated pulse emissions. It was placed on the test table flat, on its side, or on its end.

In the chamber we studied and recorded all the emissions using a bicone antenna up to 300 MHz and a ridged horn antenna above 200 MHz. The measurements made in the chamber below 1 GHz are used for pre-test evaluation only. The measurements made above 1 GHz are used in pre-test evaluation and in the final compliance assessment. We note that for the horn antenna, the antenna pattern is more directive and hence the measurement is essentially that of free space (no ground reflection). Consequently it is not essential to measure the DUT for both antenna polarizations, as long as the DUT is measured on all three of its major axis. In the chamber we also recorded the spectrum and modulation characteristics of the carrier. These data are presented in subsequent sections. We also note that in scanning from 30 MHz to 3.15 GHz using bicone and the ridge horn antennas, there were no other significant spurious emissions observed.

5.2 Outdoor Measurements

After the chamber measurements, the emissions were re-measured on the outdoor 3-meter site at fundamental and harmonics up to 1 GHz using tuned dipoles and/or the high frequency bicone.

Photographs in Appendix (at end of this report) show the DUT on the open in site table (OATS).

5.3 Computations and Results

To convert the dBm measured on the spectrum analyzer to dB(μ V/m), we use expression

$$E_3(\text{dB}\mu\text{V/m}) = 107 + P_R + K_A - K_G + K_E$$

where P_R = power recorded on spectrum analyzer, dBm, measured at 3m
 K_A = antenna factor, dB/m
 K_G = pre-amplifier gain, including cable loss, dB
 K_E = pulse operation correction factor, dB (see 6.1)

When presenting the data, at each frequency the highest measured emission under all of the possible orientations is given. Computations and results are given in Table 5.1. There we see that the DUT meets the limits by 1.8 dB.

6. Other Measurements and Computations

6.1 Correction For Pulse Operation

When the transmitter is activated by momentary push, it transmits four ASK encoded (repeated) words. When a button is kept depressed, it transmits repeated words for up to 25 seconds. Manchester format coding is used: ones and zeros are encoded as low-high, high-low transitions. Thus all the bits are of same width. When a pulse appears wide, that is a result of two adjacent highs. See Fig. 6.1 for recorded ASK pattern. The word is 51.25 ms long, and the period of repetition is 103.75 ms. In a bit, the on time is 220 μ s, and the period is 435 μ s. The duty factor is thus

$$K_E = 51.25\text{ms} \times (220\mu\text{s}/435\mu\text{s})/100\text{ms} = 0.26 \text{ or } -11.7 \text{ dB.}$$

6.2 Emission Spectrum

Using the ridge-horn antenna and DUT placed in its aperture, emission spectrum was recorded and is shown in Figure 6.2.

6.3 Bandwidth of the Emission Spectrum

The measured spectrum of the signal is shown in Figure 6.3. The allowed (-20 dB) bandwidth is 0.25% of 315 MHz, or 787.25 KHz. From the plot we see that the -20 dB bandwidth is 53.0 kHz, and the center frequency is 314.93 MHz.

6.4 Effect of Supply Voltage Variation

The DUT has been designed to be powered by 3 VDC battery. For this test, the battery was replaced by a laboratory variable power supply. Relative power radiated was measured at the fundamental as the voltage was varied from 2.25 to 4.0 volts. The emission variation is shown in Figure 6.4.

6.5 Input Voltage at Battery Terminals

Batteries: before testing $V_{oc} = 3.28 \text{ V}$
 after testing $V_{oc} = 3.11 \text{ V}$

Ave. current from batteries $I = 1.50 \text{ mA}$ (pulsed)

6.6 Verification for Deactivation Within 5 Seconds

When a button is kept depressed, the DUT transmits up to about 25 seconds. When the button is released, the transmission essentially ceases at that time. For a short button press, the emission is less than 5 seconds. See Figure 6.5.

Table 5.1 Highest Emissions Measured

Radiated Emission - RF										Siemens Skreek TX; FCC/IC	
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3* dBμV/m	E3lim dBμV/m	Pass dB	Comments
1	315.0	Dip	H	-21.6	Pk	18.9	20.8	71.9	75.6	3.7	flat, 6 button/Dodge
2	315.0	Dip	V	-23.9	Pk	18.9	20.8	69.6	75.6	6.0	side
3	630.0	Dip	H	-48.6	Pk	25.2	19.0	52.9	55.6	2.7	flat
4	630.0	Dip	V	-48.0	Pk	25.2	19.0	53.5	55.6	2.1	side
5	945.0	Dip	H	-59.6	Pk	28.9	16.8	47.8	55.6	7.8	flat
6	945.0	Dip	V	-59.0	Pk	28.9	16.8	48.4	55.6	7.2	end
7	1260.0	Horn	H	-38.4	Pk	20.4	28.1	49.2	55.6	6.4	side
8	1575.0	Horn	H	-37.4	Pk	21.4	28.2	51.1	54.0	2.9	side
9	1890.0	Horn	H	-56.0	Pk	22.1	28.1	33.3	55.6	22.3	end
10	2205.0	Horn	H	-50.7	Pk	22.9	27.0	40.5	54.0	13.5	end
11	2520.0	Horn	H	-46.3	Pk	24.0	26.6	46.4	55.6	9.2	side
12	2835.0	Horn	H	-47.5	Pk	24.9	25.4	47.3	54.0	6.7	flat
13	3150.0	Horn	H	-51.3	Pk	25.2	24.8	44.4	55.6	11.2	side
14											
15	Other versions for the worst case:										
16	630.0	Dip	V	-47.7	Pk	25.2	19.0	53.8	55.6	1.8	side, 3 button
17	630.0	Dip	V	-49.3	Pk	25.2	19.0	52.2	55.6	3.4	side, 4 button
18											
19											
20	* Includes 11.7 dB duty factor										
21											

Digital Emissions											
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3* dBμV/m	E3lim dBμV/m	Pass dB	Comments
1											
2											
3	Digital emissions are more than 20 dB below FCC Class B limit										
4											

Conducted Emissions							
#	Freq. MHz	Line Side	Det. Used	Vtest dBμV	Vlim dBμV	Pass dB	Comments
1							
2	Not applicable						
3							
4							

Meas. 5/26/04; U of Mich.

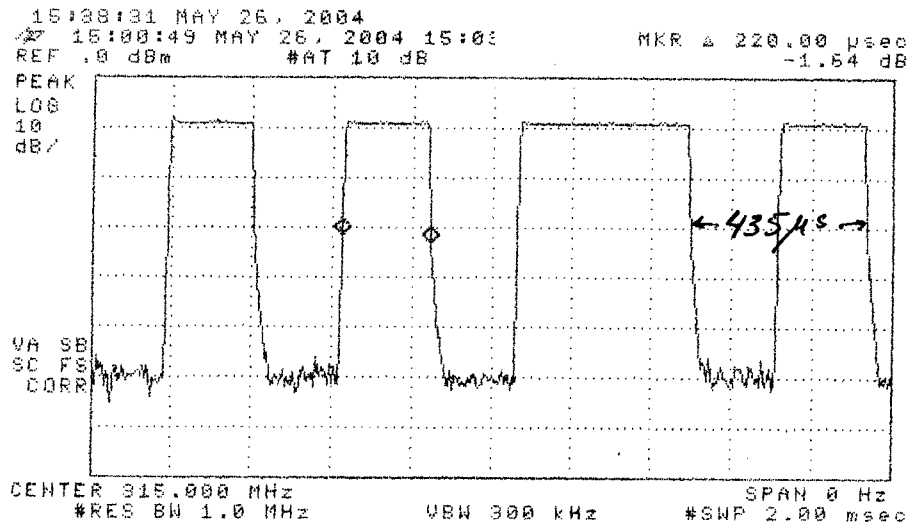
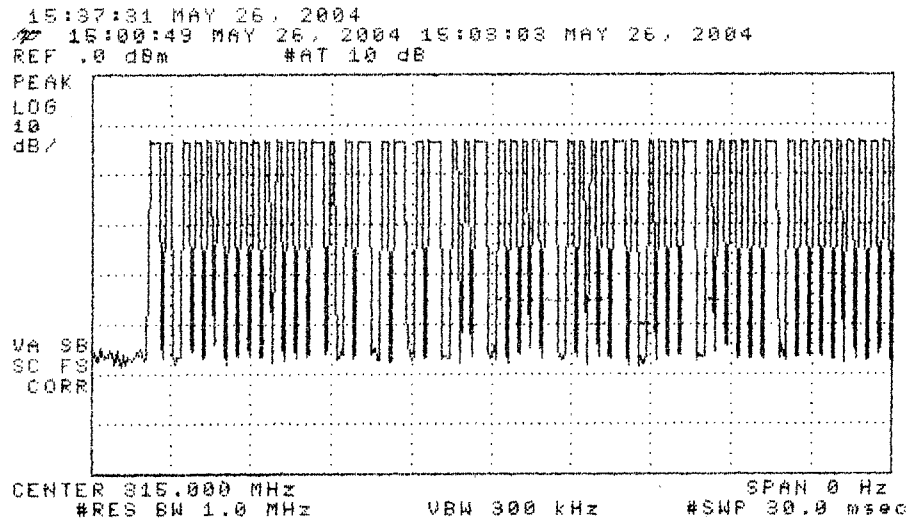
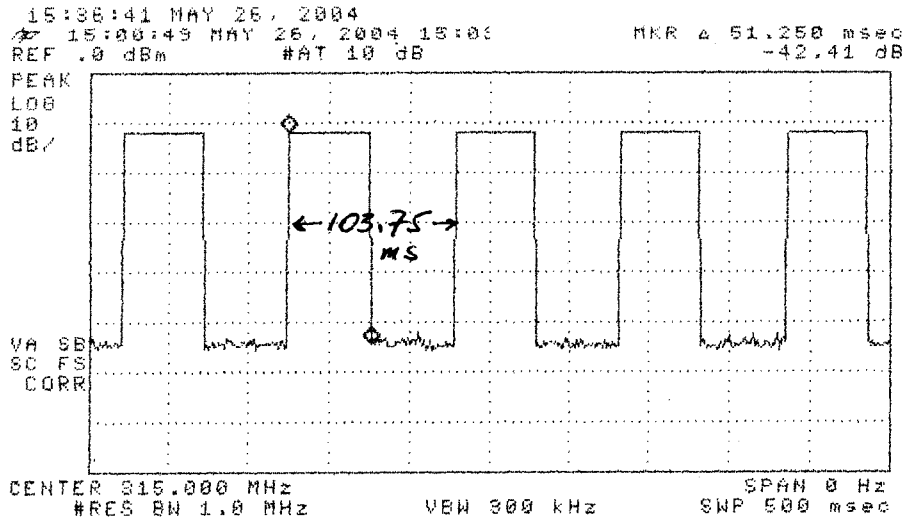


Figure 6.1. Transmissions modulation characteristics: (top) complete transmission, (center) expanded word, (bottom) expanded bits.

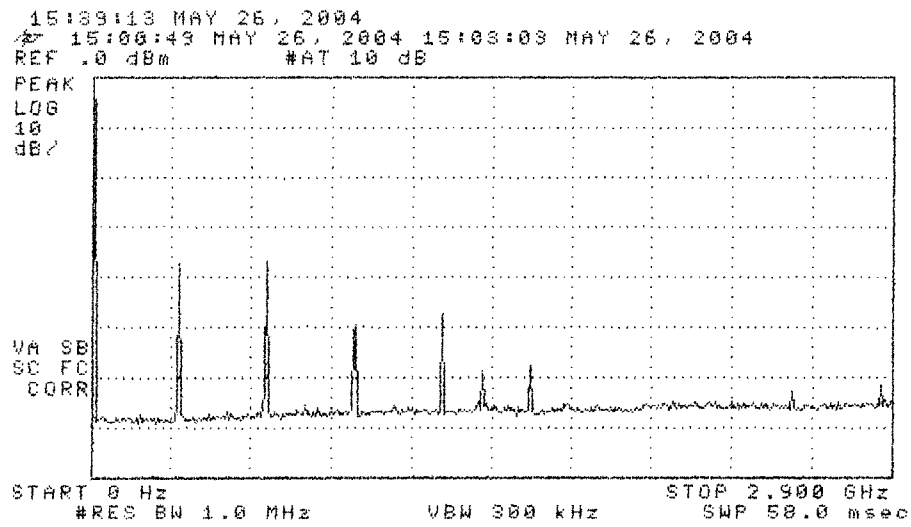


Figure 6.2. Emission spectrum of the DUT (pulsed emission).
The amplitudes are only indicative (not calibrated).

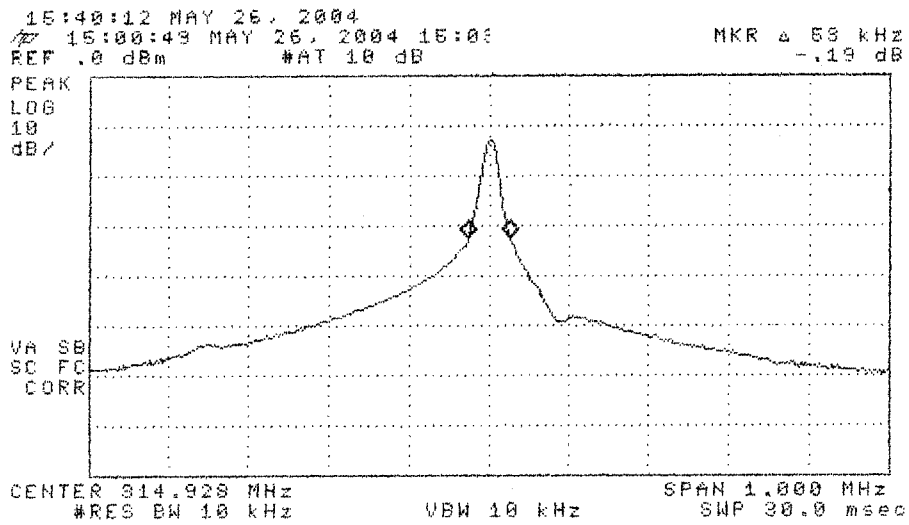


Figure 6.3. Measured bandwidth of the DUT (pulsed emission).

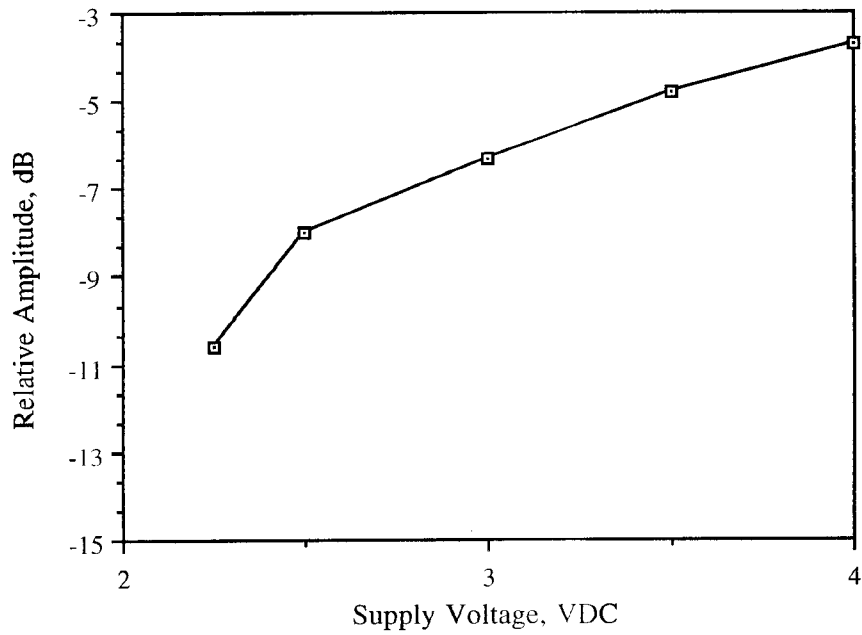


Figure 6.4. Relative emission at 315.0 MHz vs. supply voltage (pulsed emission).


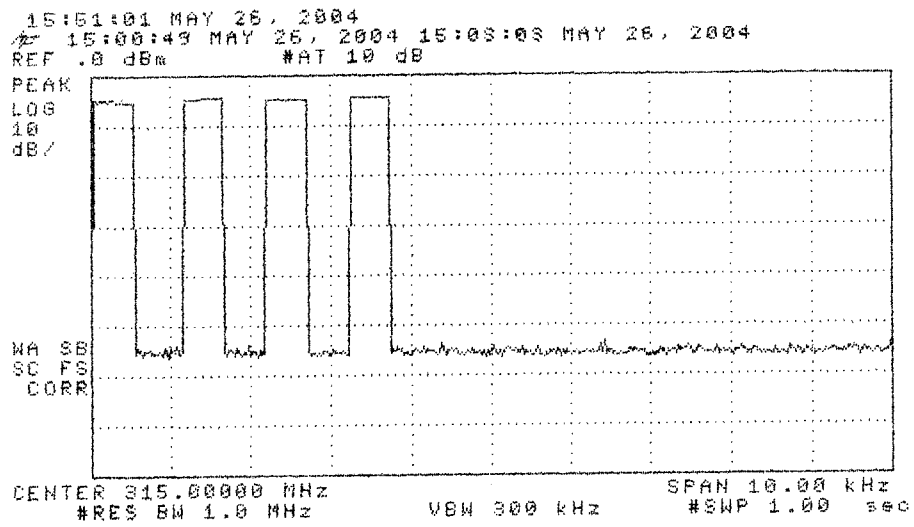


Figure 6.5. Emission for momentary activation.



Appendix: DUT on OATS

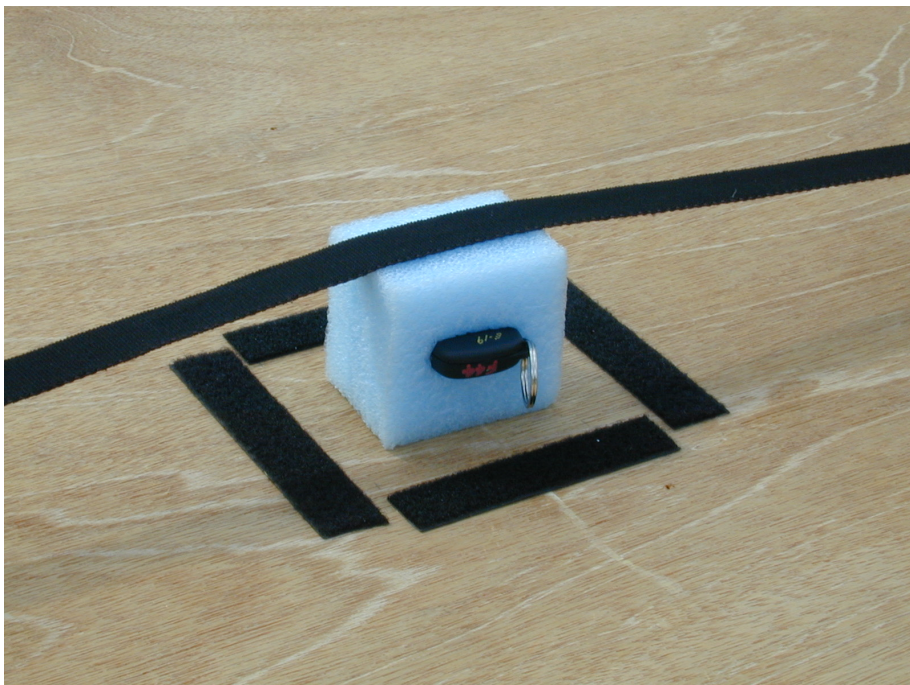

Appendix: Close-up of the DUT on OATS