

I. INTRODUCTION

This measurement report is submitted in support of an Application for Certification in accordance with Part 2, Subpart J and Part 15, Subpart C (effective 6/23/89) of the Federal Communications Commission's Rules and Regulations.

The equipment under test (EUT) is a low power pulsed RF transmitter. This transmitter operates at a fixed frequency within the band from 26.99 MHz to 27.26 MHz and is powered by two 9 Volt battery. It is identified as the Cox Recon Transmitter (FCC ID:M45460209). Operation under the transition provisions of Paragraph 15.37 is not requested for this device. The measurements contained in this report demonstrate compliance with the limitations in effect since 6/23/89.

II. INFORMATION REQUIRED FOR CERTIFICATION

Paragraph(s)

2.1033(a) This Application for Certification is filed on FCC Form 731 with all questions answered. An application fee of \$895 is attached.

2.1033(b)(1) The full name and mailing address of the manufacturer of the device and applicant for certification is:

Centuri Corporation
1295 H. Street
Penrose, CO 81240

- (2) The FCC Identifier of the device is M45460209.
- (3) A copy of the installation and operating instructions to be furnished to the user is included in the exhibits section of this application.
- (4) The transmitter is a hand-held unit and is powered by two 9 Volt transistor battery. It is designed to operate on one of the following fixed frequencies: 26.995 MHz, 27.045 MHz, 27.095 MHz, 27.146 MHz, and 27.195 MHz. Complete circuit schematics are provided in the exhibits section.
- (5) A block diagram of the device is included in Exhibits.

- (6) A report of measurements is included in this report.
- (7) Photographs of this device showing the FCC label placement (engineering drawing for label content is included), chassis assembly, and circuit layout are included as Exhibits in this application.
- (8) This equipment is a stand-alone unit. No peripherals or accessories are involved.
- (9) Certification under the transition provisions of Paragraph 15.37 is not being requested for this device.
- (10) N/A.

III. GENERAL TEST CONDITIONS AND PROCEDURES

Measurement procedures were used as outlined in MP-1 as specified in Part 15.31, *except as noted herein*. The open-field tests were performed on a three-meter range maintained by Carl T. Jones Corporation at the Springfield facility. Complete description and measurement data for the site have been placed on file with the Commission. Carl T. Jones Corporation is listed by the FCC as a facility available to do measurement work for others on a contract basis. Prior to open-field testing, the equipment was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics.

IV. RADIATED EMISSION MEASUREMENTS

The transmitter was assembled on a rotatable wooden test stand 0.8 meters in height. The transmitter's antenna was fully extended. The emission spectrum was examined up to 1000 MHz using a Hewlett-Packard 8568B spectrum analyzer and Compliance Design "Roberts" tuned dipole antennas.

At each emission frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB bandwidth was set to 100 kHz. The analyzer was operated using its *peak detection* mode for measurements of emissions less than 1000 MHz. No post-detector video filters were used. The EUT was investigated in three orthogonal planes. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in Table 1.

The actual field intensity in decibels above one microvolt per meter (dBuV/m) is determined by algebraically adding the measured level in dBuV, the antenna factor (dB), and the cable loss (dB) at the appropriate frequency.

$$FI_a \text{ (dBuV/m)} = FI_m \text{ (dBuV)} + AF \text{ (dB)} + CL \text{ (dB)}$$

FI_a = Actual Field Intensity
 FI_m = Measured Field Intensity
AF = Antenna Factor
CL = Cable Loss

As a sample calculation, assume a particular device emits a signal with a frequency of 27.146 MHz. The received signal level is measured as 68.5 dBuV. The total attenuation factor (antenna factor plus cable loss) for 27.147 MHz is 0 dB. The actual radiated field is calculated as follows:

$$68.5 \text{ dB}\mu\text{V} + (0 \text{ dB}) = 68.5 \text{ dB}\mu\text{V/m @ 3 meters, or } 2,660 \mu\text{V/m @ 3 meters}$$

The field strength of the fundamental did not exceed 10,000 $\mu\text{V}/\text{m}$ (80 $\text{dB}\mu\text{V}/\text{m}$) at 3 meters, as specified in Paragraph 15.227.

As per the requirements defined in 15.209, the radiated emission limit at the band edges is 49.5 $\text{dB}\mu\text{V}/\text{m}$ at 3 meters. As per the occupied bandwidth spectral plot, the highest emission level below the lower band edge is 38 dB below the modulated carrier. At the upper band edge the highest emission recorded is 34 dB below the modulated carrier. Note: because the EUT complies using peak detection (worst case) quasi-peak detection was not used. Based on the maximized peak radiation measurements of the carrier, these emission levels are:

Lower Band Edge

68.5 $\text{dB}\mu\text{V}/\text{m}$ - 38.0 dB = **30.5 $\text{dB}\mu\text{V}/\text{m}$** (peak) at 3 meters (*Limit = 49.5 $\text{dB}\mu\text{V}/\text{m}$, quasi-peak*)

Upper Band Edge

68.5 $\text{dB}\mu\text{V}/\text{m}$ - 34.0 dB = **34.5 $\text{dB}\mu\text{V}/\text{m}$** (peak) at 3 meters (*Limit = 49.5 $\text{dB}\mu\text{V}/\text{m}$, quasi-peak*)

Radiated measurements to the EUT's 10th harmonic are included in this report as Table 1. All other emissions were found to be in compliance with the restrictions of Paragraph 15.209(a) of the Commission's Rules. Because the emissions were below the limits using peak detection, average to peak ratio's were not calculated.

V. OCCUPIED BANDWIDTH MEASUREMENTS

In order to demonstrate that the EUT's fundamental frequency is within the 26.96 to 27.28 MHz frequency band an occupied bandwidth spectral plots of the EUT's fundamental frequency are~~s~~ included. Paragraph 15.227(b) specifies that all emissions which fall outside the frequency range of 26.96 - 27.28 MHz must be under the general radiation limitations of Paragraph 15.209. Although the actual measurements were performed on a transmitter operating at the frequency of 27.146 MHz, the lowest frequency at which this device will operate is 26.995 MHz, and the highest frequency is 27.195 MHz.

VI. POWER LINE CONDUCTED EMISSIONS MEASUREMENTS

Measurements of the power line conducted emissions were not performed since the EUT has no means for connection to the public power utility grid.

**TABLE 1
FIELD STRENGTH
RADIATED EMISSIONS DATA SHEET**

EMISSION FREQUENCY (MHZ)	ANTENNA POLARITY (H,V)	EMISSION LEVEL (dBuV)		ANTENNA FACTOR AND CABLE LOSS (dB)		EMISSION LEVEL (dBuV/m)	FCC LIMIT (3 METERS) (dBuV/m)
27.146	V	68.5	+	0.0	=	68.5	80.0
27.146	H	68.4	+	0.0	=	68.4	80.0
54.292	V	28.0	+	5.4	=	33.4	40.0
54.292	H	<25.0	+	5.4	=	<30.4	40.0
81.438	V&H	<14.5	+	9.2	=	<23.7	40.0
108.584	V&H	<13.0	+	13.2	=	<26.2	40.0
135.730	V&H	<10.5	+	15.5	=	<26.0	40.0
162.876	V&H	<6.1	+	17.1	=	<23.2	40.0
190.022	V&H	<3.5	+	19.0	=	<22.5	40.0
217.168	V&H	<3.5	+	19.9	=	<23.4	46.0
244.314	V&H	<3.5	+	20.9	=	<24.4	46.0
271.460	V&H	<3.5	+	22.0	=	<25.5	46.0

All emission levels are reported in Peak.

CLIENT: Centuri Corporation
FCC ID: M45460209
MODEL: Cox Recon Transmitter
TEST DATE: 06/12/98
TEST ENGINEER: MICHAEL A. NICOLAY


SIGNATURE: 


EXHIBIT 5
Spectral Plots

DL=LIMIT of 49.5dBuV/m at 3 meters
REF 68.9 dB μ V ATTEN 10 dB

7p MKR 27.146 MHz
67.90 dB μ V

10 dB/

DL
48.9
dB μ V

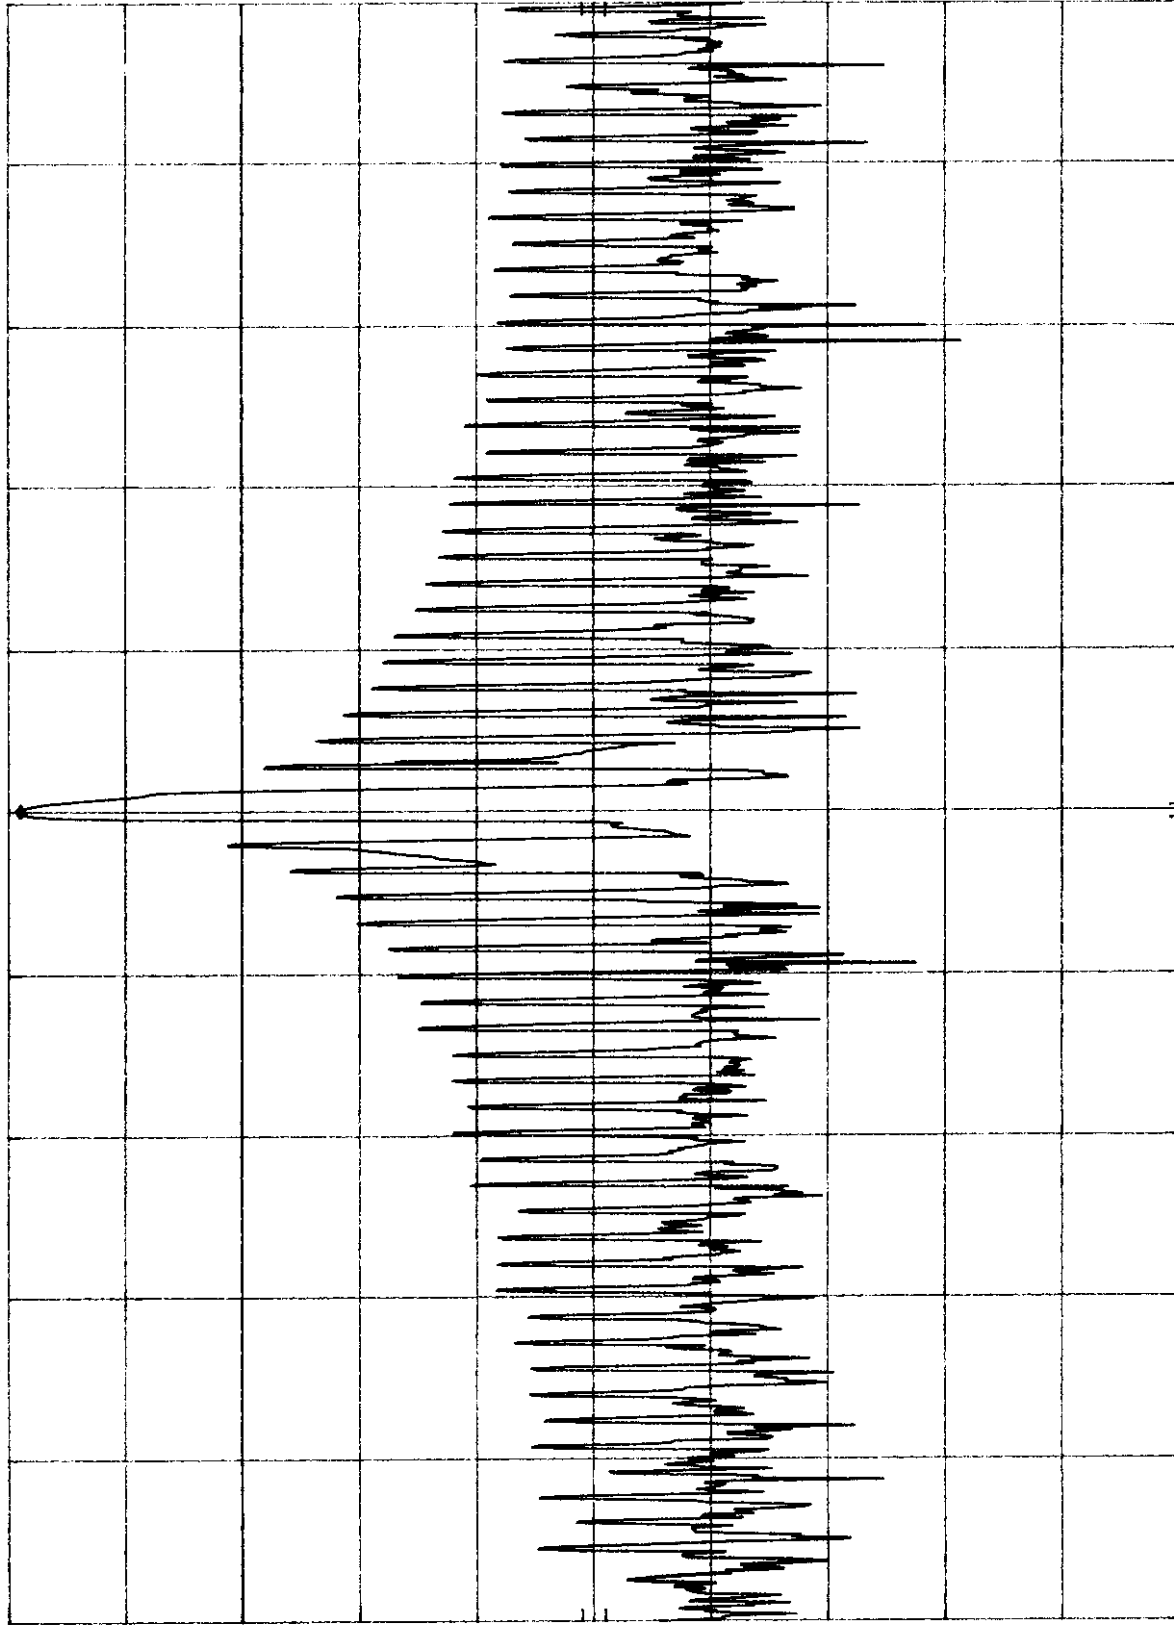

CENTER 27.146 MHz
RES BW 10 KHZ
SPAN 1.000 MHz
SWP 30 msec

VBW 30 KHZ


DL

DL=LIMIT of 49.5dBuV/m at 3 meters
REF 68.9 dB μ V ATTEN 10 dB

h ρ MKR 27.1455 MHz
67.90 dB μ V

10 dB/

DL
48.9
dB μ V

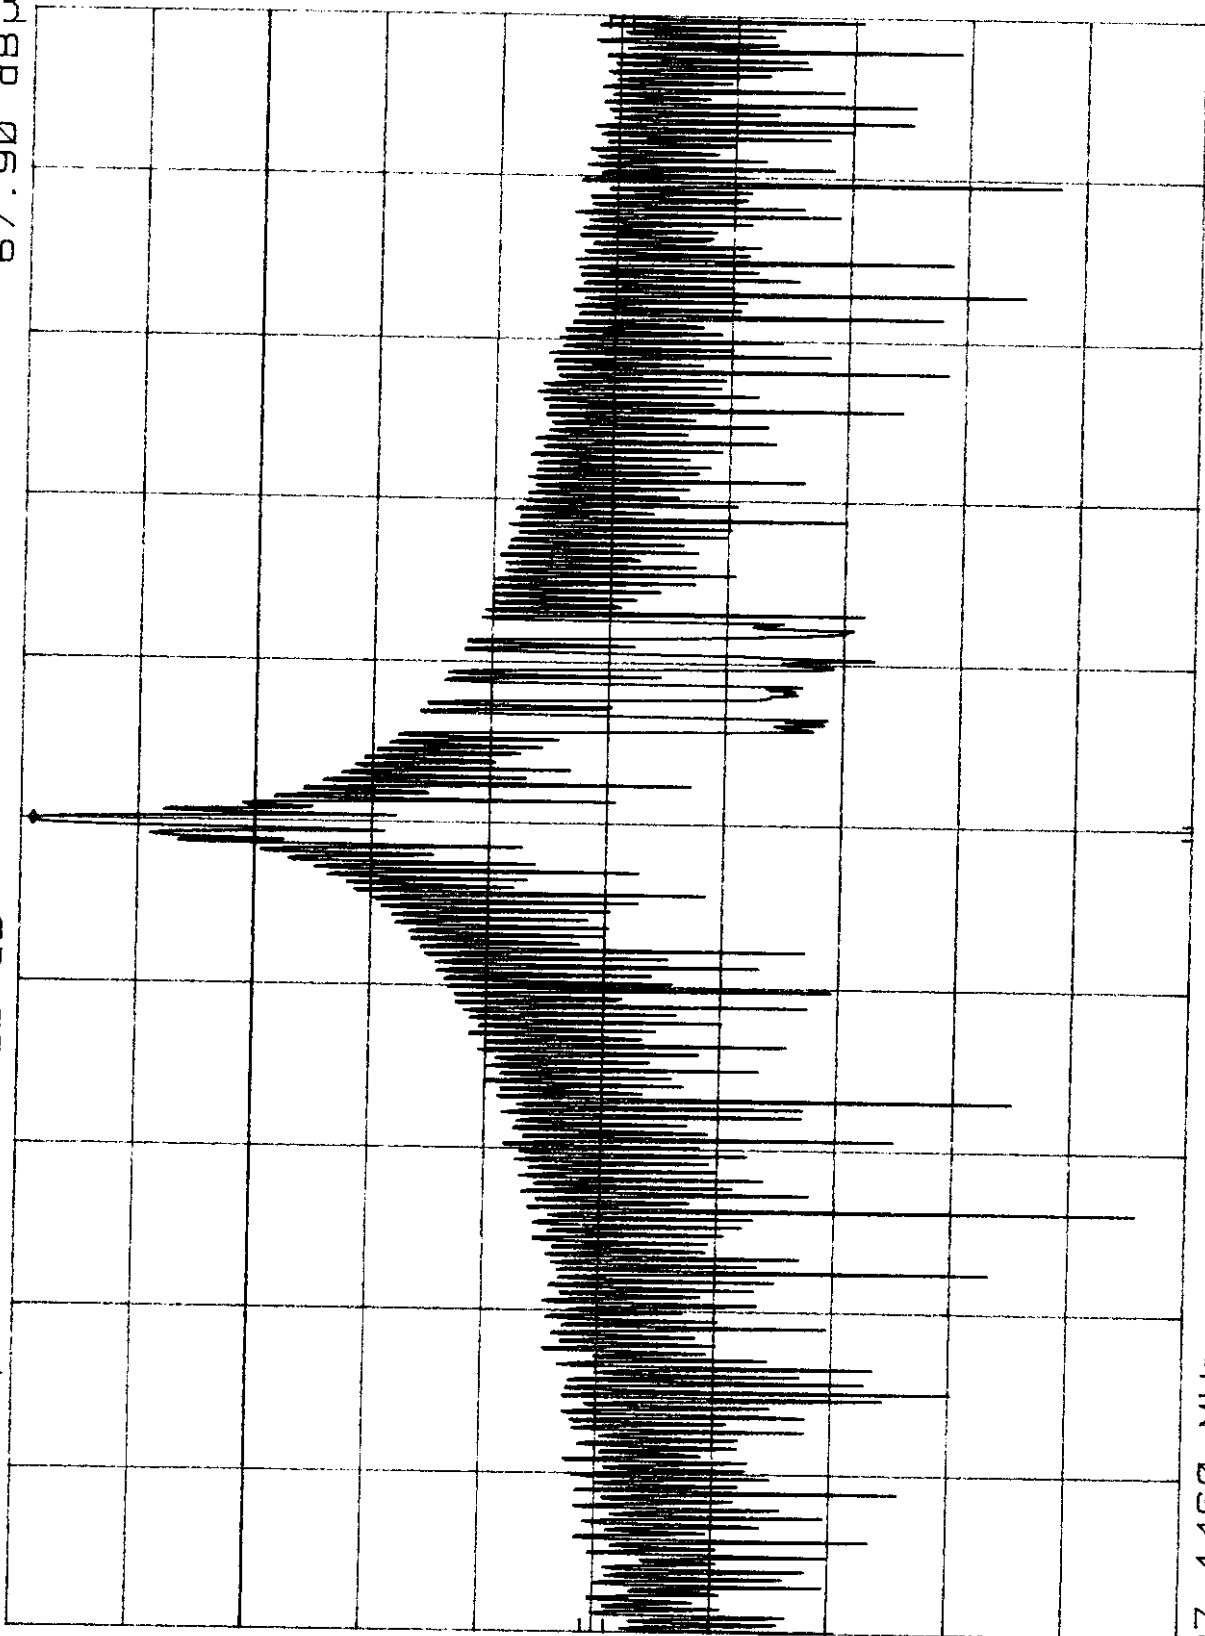

CENTER 27.1460 MHz
RES BW 3 KHZ

VBW 30 KHZ

SPAN 500.0 KHZ
SWP 100 msec

EXHIBIT 6
TEST EQUIPMENT USED FOR FCC COMPLIANCE TESTING
BY CARL T. JONES CORPORATION

<u>MANUFACTURER</u>	<u>DEVICE</u>	<u>MODEL NUMBER</u>	<u>QUANTITY</u>
Hewlett Packard	Spectrum Analyzer	8568B	1
Hewlett Packard	Quasi-Peak Adapter	8565OA	1
Hewlett Packard	Spectrum Analyzer	141 T	1
Hewlett Packard	RF Section	8555A	1
Hewlett Packard	RF Section	8553B	1
Hewlett Packard	IF Section	8552A	1
Tektronix	Spectrum Analyzer	7L13	1
Electro-Metrics	Spectrum Analyzer	ESA-1000	2
Hewlett Packard	Frequency Counter	5245L	1
Hewlett Packard	Frequency Converter	5253B	1
Hewlett Packard	Pre-Amplifier	8447E	2
Hewlett Packard	Signal Generator	8656B	2
Hewlett Packard	Signal Generator	606B	1
Boonton Electronics	Signal Generator	102B	1
Boonton Electronics	Power Meter	42B	1
Tektronix	Oscilloscope	475	1
Marconi Instruments	AM/FM Modulation Meter	TF2300	1
Compliance Design	20 MHz-1000 MHz	AntennasRoberts	tm 1 Set
Solar Electronics	50 Microhenry LISN	8028-50-TS-24-BNC	1
Solar Electronics	50 Microhenry LISN	8012-50-R-24-BNC	2