



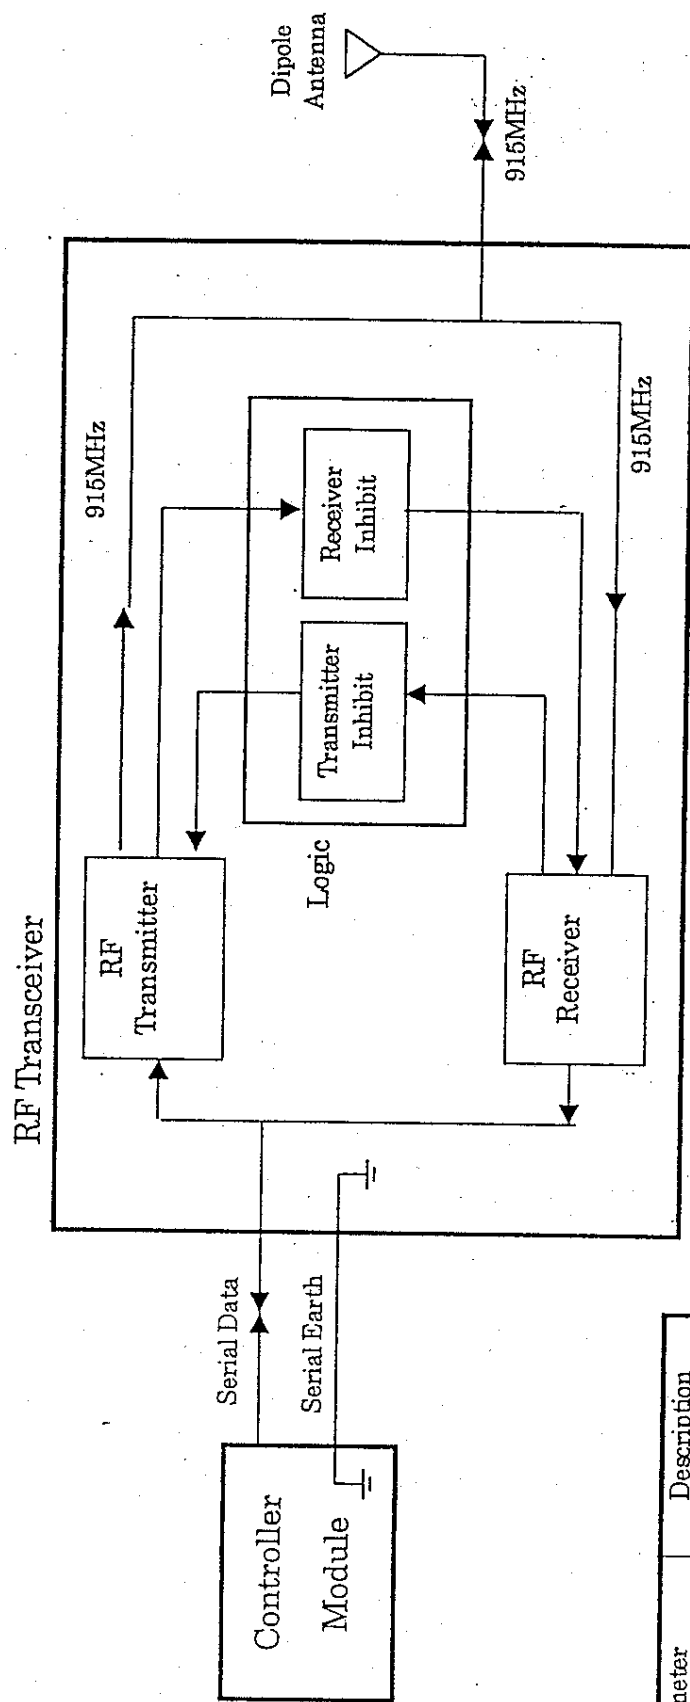

Parameter	Description
Serial Data Protocol	SAE J1850
Data Rate	10.4kbit/sec
Direction of Data Flow	Bi-Directional

Fig2. Block Diagram of RF Transceiver

915MHz RFユニット

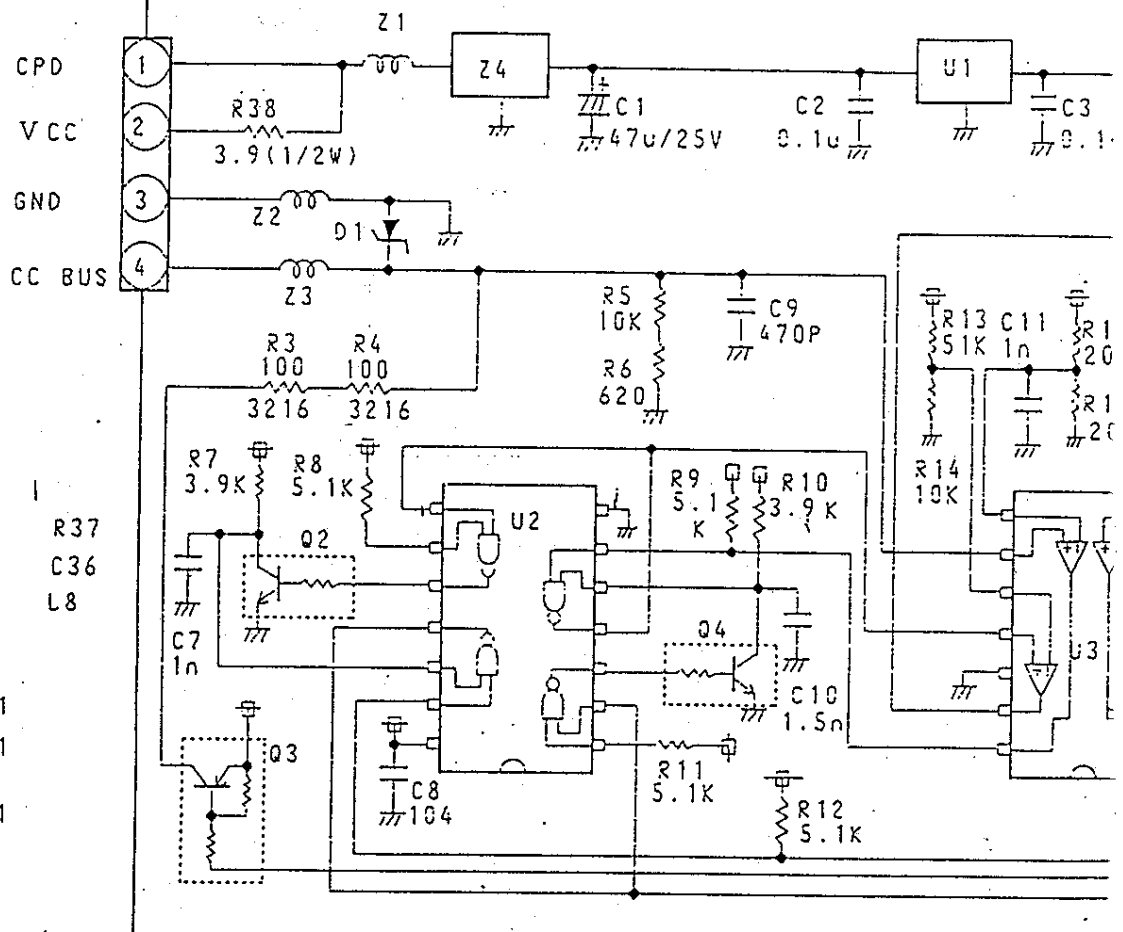

U4 R37
Q5 C36
D5 L8

Z4
DR1
VR1
F1
CT1

U1;TA78DL08S
U2;TC40938F
U3;uPC177G2
U4;INA-10386-TR1


Q1;2SB624
Q2;Q4;RN1441
Q3;RN2423
Q5;2SC3606


D1;1ZC16
D2;DA114
D3;HSM198S
D4,D5;HVU131

Z1,Z2,Z3;
N2012ZA6018A*3
Z4;DSS710D223S12-22

DR1;DRR030KER***TC
VR1;ST-4B100Q(100)
CT1;TZC03Z060A110A*12
F1;DFC2R915P026HHE

R34;18 ohm
R37(3.9K);added
C15,C16;1u to 0.1u
C29(1n);deleted
L3,L4;changed to adj. coil

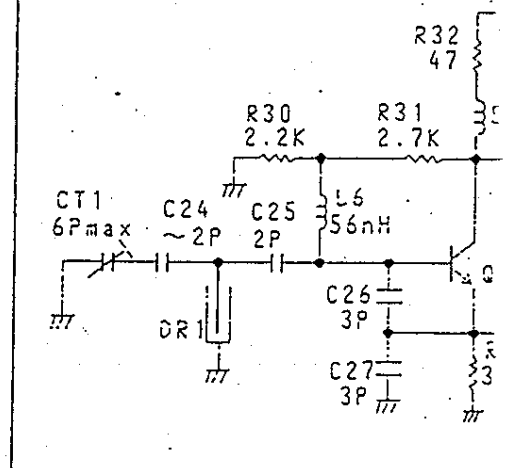

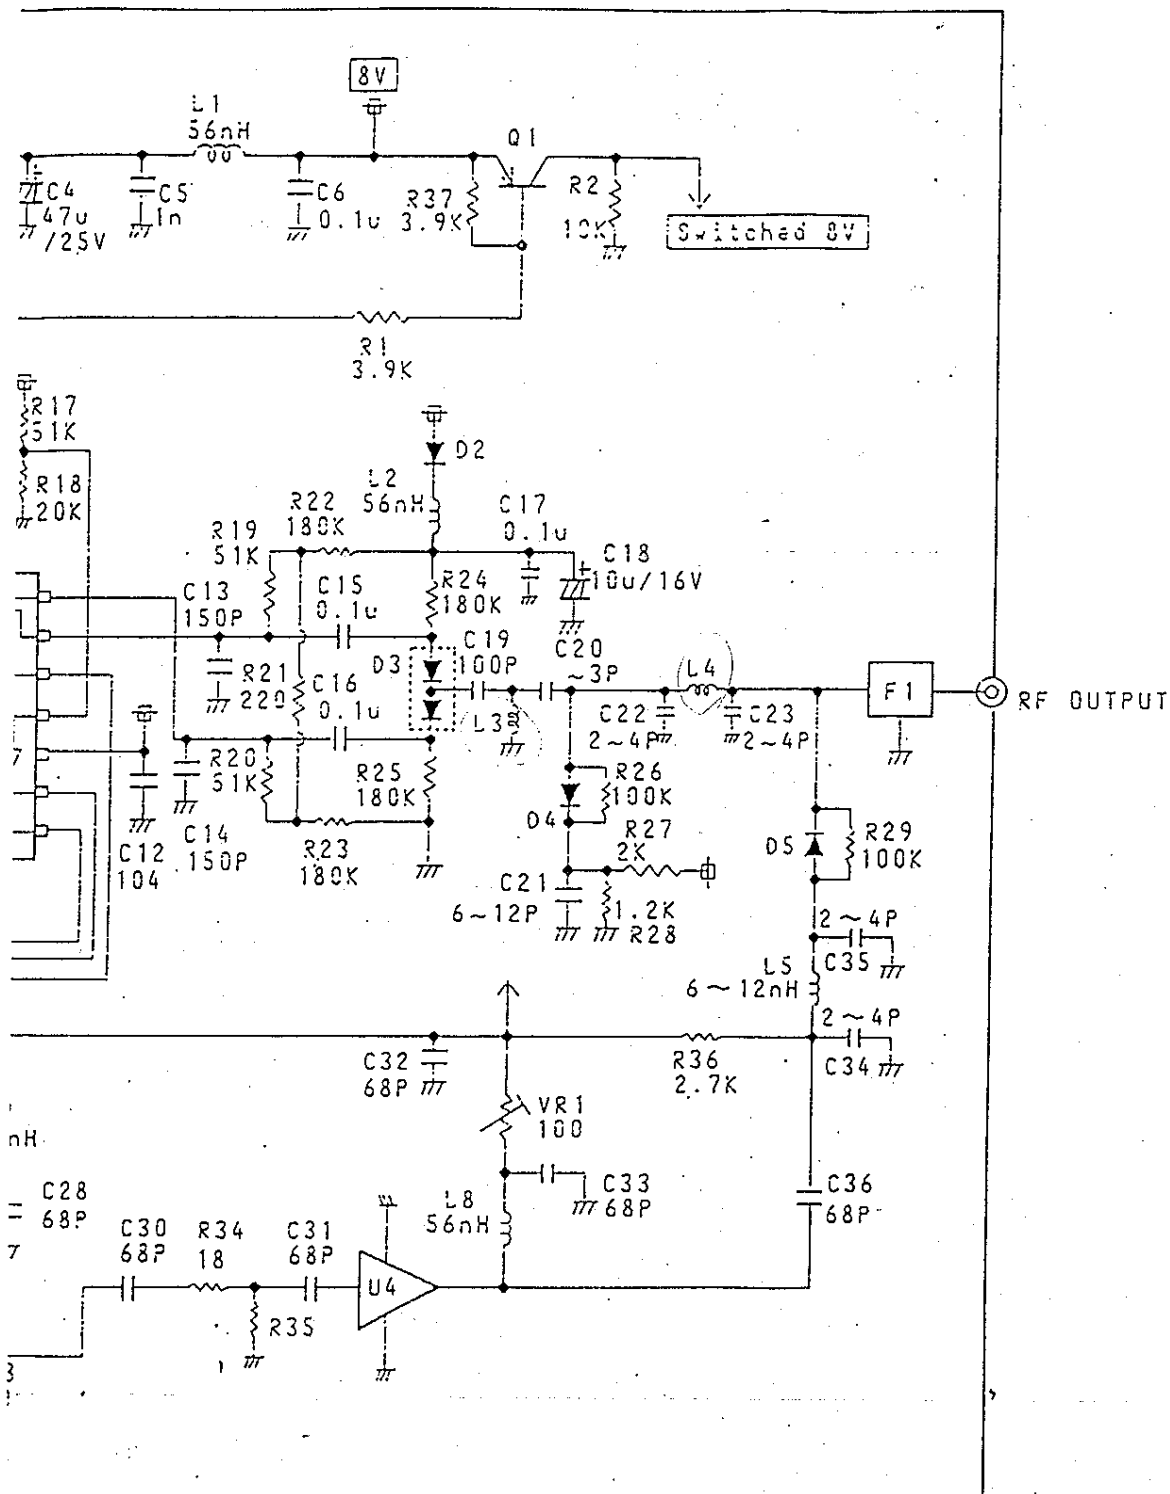

						ALPS ELECTRIC CO., LTD		
						DSGD.	98.2.24 千葉(株)	SCALE 2:1
						CHKD.	98.2.24 千葉(株)	TITLE 製品図(回路図)
						APPD.	98.2.24 千葉(株)	UNIT mm
ZONE	SYMB	DATE	APPD	CHKD	DSGD	DOCUMENT NO. TFWD5U114 (2/2)		

FURUKAWA DIV.

(A3)

98/02/23 16