


| △ | ECO NO. | REVISION | APP. | DES. | DATE | TOLERANCE GRADE (±) | | | |
|---|---------|----------|------|------|------|---------------------|-------|------|------|
| | | | | | | LENGTH | GRADE | A | B |
| | | | | | | ~ 6 | 0.05 | 0.08 | 0.20 |
| | | | | | | 6 ~ 18 | 0.08 | 0.10 | 0.30 |
| | | | | | | 18 ~ 50 | 0.10 | 0.15 | 0.40 |
| | | | | | | 50 ~ 180 | 0.20 | 0.30 | 0.80 |

備註：

1. 材質：25# 反銀龍貼紙
2. 印刷顏色：黑色印刷
3. 印刷圖案及字體需清晰
4. 表面需加保護膜
5. 紙張厚度 (含背膠):0.08mm
6. 公差 :+/-0.2mm
7. 須捲狀進料，捲狀規格請參照頁面二

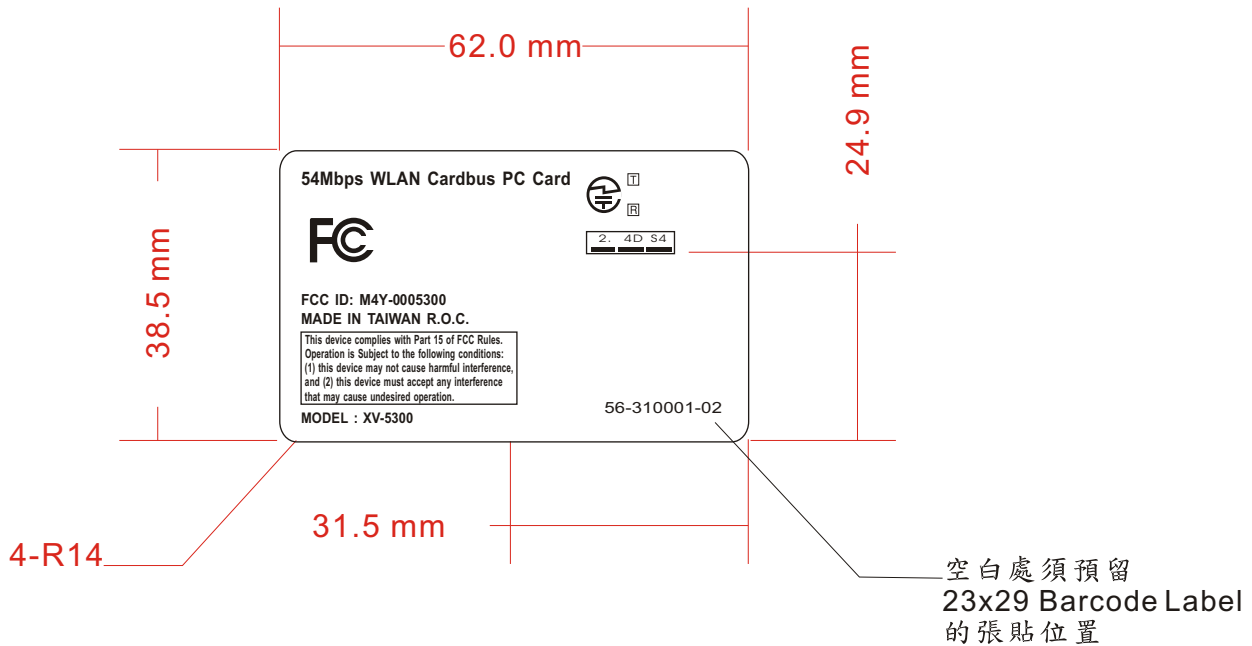


DWG NO. NPA0051V0.1

| SCALE | UNITS | TOLERANCE | | | Z-Com, Inc. | | | A |
|-----------------|-------|-----------|--------|------|-------------|----------------------|-------|-------|
| 1 / 1 | M.M. | GRADE | ANGLE | | MODEL | NB XV-5300 | SHEET | 1 / 2 |
| DRW. | DES. | CKD. | RECKD. | APP. | NAME | NB XV-5300 FCC Label | | |
| Carol 910328 | | | | | PART NO. | 56-310001-02 | | |

| △ | ECO NO. | REVISION | APP. | DES. | DATE | TOLERANCE GRADE (±) | | | | |
|---|---------|----------|------|------|------|---------------------|-------|------|------|------|
| | | | | | | LENGTH | GRADE | A | B | C |
| | | | | | | ~ 6 | | 0.05 | 0.08 | 0.20 |
| | | | | | | 6 ~ 18 | | 0.08 | 0.10 | 0.30 |
| | | | | | | 18 ~ 50 | | 0.10 | 0.15 | 0.40 |
| | | | | | | 50 ~ 180 | | 0.20 | 0.30 | 0.80 |

備註:

- 離形紙厚度 0.08~0.10mm
- 離形紙材質：葛拉辛紙
(半透明 / 直向纖維)
- 刀模請勿打太深以防扯斷
- 前端預留空白離形紙約100cm
- A&A'為4~6mm之任一數值
且全長範圍內 |A-A'| ≤ 0.20mm
- B&B'為4~6mm之任一數值
且全長範圍內 |B-B'| ≤ 0.20mm

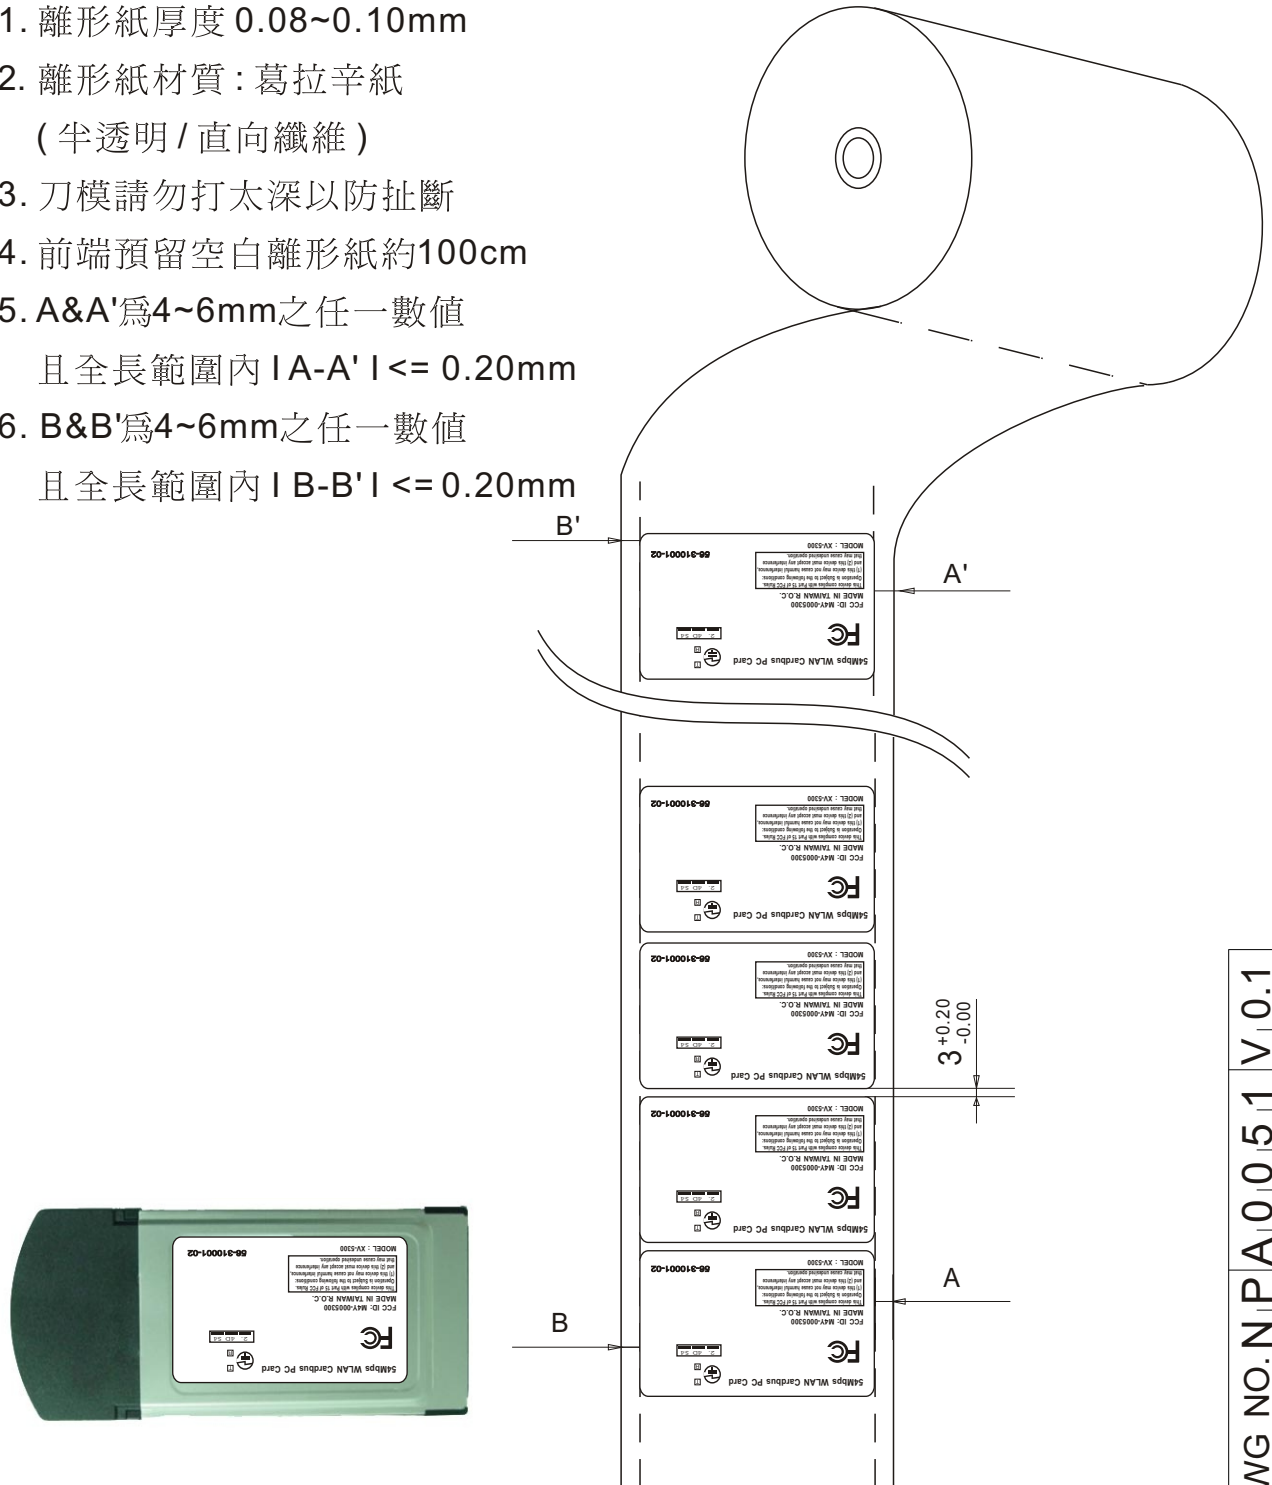

DWG NO. NPA0051 V0.1

| SCALE | UNITS | TOLERANCE | | | Z-Com, Inc. | | | A |
|-----------------|-------|-----------|---------|------|-------------|----------------------|-------|-------|
| | | GRADE | ANGLE ± | | | | | |
| 1 / 1 | M.M. | | | | MODEL | NB XV-5300 | SHEET | 2 / 2 |
| DRW. | DES. | CKD. | RECKD. | APP. | NAME | NB XV-5300 FCC Label | | |
| Carol 910328 | | | | | PART NO. | 56-310001-02 | | |