

2Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2403.50	20.8	12.6	6.2	2	-2	-8.2	6.1
2403.55	19.8	12.6	5.2	2	-3	-8.2	4.8
2403.60	19.8	12.6	5.2	2	-3	-8.2	5.7
2403.65	19.8	12.6	5.2	2	-3	-8.2	6.2
2403.70	19.8	12.6	5.2	2	-3	-8.2	6.7
2403.75	19.8	12.6	5.2	2	-3	-8.2	5.4
2403.80	19.8	12.6	5.2	2	-3	-8.2	5.2
2403.85	18.8	12.6	4.2	2	-4	-8.2	5.8
2403.90	19.8	12.6	5.2	2	-3	-8.2	6.1
2403.95	19.8	12.6	5.2	2	-3	-8.2	6.7
2404.00	19.8	12.6	5.2	2	-3	-8.2	6.6
2404.05	19.8	12.6	5.2	2	-3	-8.2	5.7
2404.10	20.8	12.6	6.2	2	-2	-8.2	5.6
2404.15	20.8	12.6	6.2	2	-2	-8.2	6.2
2404.20	18.8	12.6	4.2	2	-4	-8.2	6.4
2404.25	20.8	12.6	6.2	2	-2	-8.2	4.8
2404.30	20.8	12.6	6.2	2	-2	-8.2	6.3
2404.35	20.8	12.6	6.2	2	-2	-8.2	5.4
2404.40	20.8	12.6	6.2	2	-2	-8.2	6.1
2404.45	19.8	12.6	5.2	2	-3	-8.2	6.2
2404.50	19.8	12.6	5.2	2	-3	-8.2	5.8
2404.55	19.8	12.6	5.2	2	-3	-8.2	6.7
2404.60	19.8	12.6	5.2	2	-3	-8.2	6.2
2404.65	19.8	12.6	5.2	2	-3	-8.2	6.3
2404.70	19.8	12.6	5.2	2	-3	-8.2	6.6
2404.75	18.8	12.6	4.2	2	-4	-8.2	6.5
2404.80	19.8	12.6	5.2	2	-3	-8.2	6.9
2404.85	18.8	12.6	4.2	2	-4	-8.2	7.6
2404.90	18.8	12.6	4.2	2	-4	-8.2	6.3
2404.95	19.8	12.6	5.2	2	-3	-8.2	5.9
2405.00	18.8	12.6	4.2	2	-4	-8.2	6.4
2405.05	19.8	12.6	5.2	2	-3	-8.2	6.1
2405.10	19.8	12.6	5.2	2	-3	-8.2	6.2
2405.15	19.8	12.6	5.2	2	-3	-8.2	5.8
2405.20	19.8	12.6	5.2	2	-3	-8.2	5.3
2405.25	19.8	12.6	5.2	2	-3	-8.2	5.6
2405.30	19.8	12.6	5.2	2	-3	-8.2	5.5
2405.35	19.8	12.6	5.2	2	-3	-8.2	6.3
2405.40	17.8	12.6	3.2	2	-5	-8.2	9.8
2405.45	18.8	12.6	4.2	2	-4	-8.2	6.6
2405.50	18.8	12.6	4.2	2	-4	-8.2	6.1
2405.55	18.8	12.6	4.2	2	-4	-8.2	6.7
2405.60	18.8	12.6	4.2	2	-4	-8.2	5.7
2405.65	18.8	12.6	4.2	2	-4	-8.2	7.6
2405.70	18.8	12.6	4.2	2	-4	-8.2	7.2
2405.75	17.8	12.6	3.2	2	-5	-8.2	7.1
2405.80	16.8	12.6	2.2	2	-6	-8.2	6.8
2405.85	17.8	12.6	3.2	2	-5	-8.2	6.3
2405.90	17.8	12.6	3.2	2	-5	-8.2	6.5
2405.95	16.8	12.6	2.2	2	-6	-8.2	6.1
2406.00	18.8	12.6	4.2	2	-4	-8.2	6.2
2406.05	16.8	12.6	2.2	2	-6	-8.2	6.9
2406.10	17.8	12.6	3.2	2	-5	-8.2	6.6
2406.15	18.8	12.6	4.2	2	-4	-8.2	6.1
2406.20	17.8	12.6	3.2	2	-5	-8.2	6.7

2Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2406.25	20.8	12.6	6.2	2	-2	-8.2	6.6
2406.30	19.8	12.6	5.2	2	-3	-8.2	6.3
2406.35	21.8	12.6	7.2	2	-1	-8.2	6.8
2406.40	22.8	12.6	8.2	2	0	-8.2	6.1
2406.45	22.8	12.6	8.2	2	0	-8.2	6.7
2406.50	22.8	12.6	8.2	2	0	-8.2	6.4
2406.55	22.8	12.6	8.2	2	0	-8.2	4.8
2406.60	20.8	12.6	6.2	2	-2	-8.2	5.6
2406.65	18.8	12.6	4.2	2	-4	-8.2	6.3
2406.70	18.8	12.6	4.2	2	-4	-8.2	6.7
2406.75	17.8	12.6	3.2	2	-5	-8.2	6.2
2406.80	17.8	12.6	3.2	2	-5	-8.2	6.8
2406.85	15.8	12.6	1.2	2	-7	-8.2	6.3
2406.90	15.8	12.6	1.2	2	-7	-8.2	5.9
2406.95	14.8	12.6	0.2	2	-8	-8.2	6
2407.00	15.8	12.6	1.2	2	-7	-8.2	5.7
2407.05	13.8	12.6	-0.8	2	-9	-8.2	7.9
2407.10	15.8	12.6	1.2	2	-7	-8.2	6.4
2407.15	15.8	12.6	1.2	2	-7	-8.2	4.8
2407.20	15.8	12.6	1.2	2	-7	-8.2	6.9
2407.25	14.8	12.6	0.2	2	-8	-8.2	5.4
2407.30	14.8	12.6	0.2	2	-8	-8.2	6.5
2407.35	15.8	12.6	1.2	2	-7	-8.2	7.6
2407.40	16.8	12.6	2.2	2	-6	-8.2	7.1
2407.45	12.8	12.6	-1.8	2	-10	-8.2	6.7
2407.50	12.8	12.6	-1.8	2	-10	-8.2	5.6
2407.55	14.8	12.6	0.2	2	-8	-8.2	7.4
2407.60	15.8	12.6	1.2	2	-7	-8.2	6.8
2407.65	15.8	12.6	1.2	2	-7	-8.2	6.3
2407.70	12.8	12.6	-1.8	2	-10	-8.2	5.9
2407.75	15.8	12.6	1.2	2	-7	-8.2	6.2
2407.80	14.8	12.6	0.2	2	-8	-8.2	7.1
2407.85	14.8	12.6	0.2	2	-8	-8.2	7.3
2407.90	14.8	12.6	0.2	2	-8	-8.2	7.4
2407.95	14.8	12.6	0.2	2	-8	-8.2	6.8
2408.00	15.8	12.6	1.2	2	-7	-8.2	5.8
2408.05	13.8	12.6	-0.8	2	-9	-8.2	6.7
2408.10	13.8	12.6	-0.8	2	-9	-8.2	6.6
2408.15	13.8	12.6	-0.8	2	-9	-8.2	6.9
2408.20	12.8	12.6	-1.8	2	-10	-8.2	7
2408.25	14.8	12.6	0.2	2	-8	-8.2	7.6
2408.30	14.8	12.6	0.2	2	-8	-8.2	6.3
2408.35	14.8	12.6	0.2	2	-8	-8.2	5.2
2408.40	15.8	12.6	1.2	2	-7	-8.2	5.4
2408.45	13.8	12.6	-0.8	2	-9	-8.2	4.6
2408.50	15.8	12.6	1.2	2	-7	-8.2	5.6
2408.55	15.8	12.6	1.2	2	-7	-8.2	7.4
2408.60	14.8	12.6	0.2	2	-8	-8.2	6.8
2408.65	16.8	12.6	2.2	2	-6	-8.2	6.3
2408.70	13.8	12.6	-0.8	2	-9	-8.2	5.9
2408.75	13.8	12.6	-0.8	2	-9	-8.2	6.2
2408.80	10.8	12.6	-3.8	2	-12	-8.2	7.1
2408.85	12.8	12.6	-1.8	2	-10	-8.2	7.3
2408.90	12.8	12.6	-1.8	2	-10	-8.2	7.4
2408.95	13.8	12.6	-0.8	2	-9	-8.2	6.1

2Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2409.00	13.8	12.6	-0.8	2	-9	-8.2	5.8
2409.05	13.8	12.6	-0.8	2	-9	-8.2	6.7
2409.10	14.8	12.6	0.2	2	-8	-8.2	5.3
2409.15	14.8	12.6	0.2	2	-8	-8.2	5.8
2409.20	13.8	12.6	-0.8	2	-9	-8.2	6.3
2409.25	13.8	12.6	-0.8	2	-9	-8.2	6.7
2409.30	13.8	12.6	-0.8	2	-9	-8.2	6.2
2409.35	14.8	12.6	0.2	2	-8	-8.2	5.6
2409.40	14.8	12.6	0.2	2	-8	-8.2	6.3
2409.45	14.8	12.6	0.2	2	-8	-8.2	6.8
2409.50	14.8	12.6	0.2	2	-8	-8.2	6.1
2409.55	14.8	12.6	0.2	2	-8	-8.2	6.9
2409.60	9.8	12.6	-4.8	2	-13	-8.2	6.2
2409.65	13.8	12.6	-0.8	2	-9	-8.2	5.9
2409.70	11.8	12.6	-2.8	2	-11	-8.2	6.1
2409.75	13.8	12.6	-0.8	2	-9	-8.2	5.7
2409.80	13.8	12.6	-0.8	2	-9	-8.2	6.6
2409.85	10.8	12.6	-3.8	2	-12	-8.2	4.8
2409.90	9.8	12.6	-4.8	2	-13	-8.2	5
2409.95	14.8	12.6	0.2	2	-8	-8.2	4.4
2410.00	12.8	12.6	-1.8	2	-10	-8.2	5.8
2410.05	12.8	12.6	-1.8	2	-10	-8.2	7.1
2410.10	14.8	12.6	0.2	2	-8	-8.2	4.8
2410.15	13.8	12.6	-0.8	2	-9	-8.2	5.7
2410.20	10.8	12.6	-3.8	2	-12	-8.2	6.5
2410.25	13.8	12.6	-0.8	2	-9	-8.2	5.8
2410.30	12.8	12.6	-1.8	2	-10	-8.2	6.7
2410.35	11.8	12.6	-2.8	2	-11	-8.2	6.6
2410.40	14.8	12.6	0.2	2	-8	-8.2	6.1
2410.45	14.8	12.6	0.2	2	-8	-8.2	5.9
2410.50	14.8	12.6	0.2	2	-8	-8.2	6.2
2410.55	14.8	12.6	0.2	2	-8	-8.2	5.6
2410.60	12.8	12.6	-1.8	2	-10	-8.2	6.8
2410.65	14.8	12.6	0.2	2	-8	-8.2	6.3
2410.70	14.8	12.6	0.2	2	-8	-8.2	5.9
2410.75	13.8	12.6	-0.8	2	-9	-8.2	5.7
2410.80	15.8	12.6	1.2	2	-7	-8.2	6.3
2410.85	14.8	12.6	0.2	2	-8	-8.2	6
2410.90	14.8	12.6	0.2	2	-8	-8.2	6.1
2410.95	15.8	12.6	1.2	2	-7	-8.2	5.7
2411.00	14.8	12.6	0.2	2	-8	-8.2	5.9
2411.05	12.8	12.6	-1.8	2	-10	-8.2	5.5
2411.10	13.8	12.6	-0.8	2	-9	-8.2	5.3
2411.15	14.8	12.6	0.2	2	-8	-8.2	5.4
2411.20	13.8	12.6	-0.8	2	-9	-8.2	5.1
2411.25	13.8	12.6	-0.8	2	-9	-8.2	5.4
2411.30	13.8	12.6	-0.8	2	-9	-8.2	6.3
2411.35	13.8	12.6	-0.8	2	-9	-8.2	7.6
2411.40	14.8	12.6	0.2	2	-8	-8.2	7.1
2411.45	14.8	12.6	0.2	2	-8	-8.2	7
2411.50	14.8	12.6	0.2	2	-8	-8.2	6.3
2411.55	14.8	12.6	0.2	2	-8	-8.2	5.4
2411.60	15.8	12.6	1.2	2	-7	-8.2	5.8
2411.65	15.8	12.6	1.2	2	-7	-8.2	6.2
2411.70	14.8	12.6	0.2	2	-8	-8.2	7


2Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2411.75	17.8	12.6	3.2	2	-5	-8.2	6.3
2411.80	18.8	12.6	4.2	2	-4	-8.2	6.9
2411.85	19.8	12.6	5.2	2	-3	-8.2	5.7
2411.90	14.8	12.6	0.2	2	-8	-8.2	5.2
2411.95	19.8	12.6	5.2	2	-3	-8.2	7.1
2412.00	19.8	12.6	5.2	2	-3	-8.2	6.7
2412.05	16.8	12.6	2.2	2	-6	-8.2	6.3
2412.10	19.8	12.6	5.2	2	-3	-8.2	6.4
2412.15	18.8	12.6	4.2	2	-4	-8.2	6.8
2412.20	17.8	12.6	3.2	2	-5	-8.2	7
2412.25	16.8	12.6	2.2	2	-6	-8.2	6.3
2412.30	15.8	12.6	1.2	2	-7	-8.2	6.7
2412.35	15.8	12.6	1.2	2	-7	-8.2	6
2412.40	14.8	12.6	0.2	2	-8	-8.2	6.3
2412.45	14.8	12.6	0.2	2	-8	-8.2	6.6
2412.50	13.8	12.6	-0.8	2	-9	-8.2	7.2
2412.55	13.8	12.6	-0.8	2	-9	-8.2	6.1
2412.60	13.8	12.6	-0.8	2	-9	-8.2	6.4
2412.65	13.8	12.6	-0.8	2	-9	-8.2	6.9
2412.70	12.8	12.6	-1.8	2	-10	-8.2	6.8
2412.75	13.8	12.6	-0.8	2	-9	-8.2	7.1
2412.80	13.8	12.6	-0.8	2	-9	-8.2	6.3
2412.85	13.8	12.6	-0.8	2	-9	-8.2	5.8
2412.90	13.8	12.6	-0.8	2	-9	-8.2	6.5
2412.95	13.8	12.6	-0.8	2	-9	-8.2	6.3
2413.00	10.8	12.6	-3.8	2	-12	-8.2	5.7
2413.05	13.8	12.6	-0.8	2	-9	-8.2	6.3
2413.10	13.8	12.6	-0.8	2	-9	-8.2	5.2
2413.15	14.8	12.6	0.2	2	-8	-8.2	5.4
2413.20	13.8	12.6	-0.8	2	-9	-8.2	4.6
2413.25	12.8	12.6	-1.8	2	-10	-8.2	5.6
2413.30	14.8	12.6	0.2	2	-8	-8.2	7.4
2413.35	13.8	12.6	-0.8	2	-9	-8.2	6.8
2413.40	14.8	12.6	0.2	2	-8	-8.2	6.3
2413.45	12.8	12.6	-1.8	2	-10	-8.2	5.9
2413.50	14.8	12.6	0.2	2	-8	-8.2	6.2
2413.55	10.8	12.6	-3.8	2	-12	-8.2	7.1
2413.60	13.8	12.6	-0.8	2	-9	-8.2	7.3
2413.65	13.8	12.6	-0.8	2	-9	-8.2	7.4
2413.70	9.8	12.6	-4.8	2	-13	-8.2	6.1
2413.75	14.8	12.6	0.2	2	-8	-8.2	5.8
2413.80	14.8	12.6	0.2	2	-8	-8.2	6.7
2413.85	13.8	12.6	-0.8	2	-9	-8.2	5.3
2413.90	14.8	12.6	0.2	2	-8	-8.2	5.8
2413.95	14.8	12.6	0.2	2	-8	-8.2	6.3
2414.00	12.8	12.6	-1.8	2	-10	-8.2	6.7
2414.05	13.8	12.6	-0.8	2	-9	-8.2	6.2
2414.10	14.8	12.6	0.2	2	-8	-8.2	5.6
2414.15	13.8	12.6	-0.8	2	-9	-8.2	6.3
2414.20	12.8	12.6	-1.8	2	-10	-8.2	6.8
2414.25	12.8	12.6	-1.8	2	-10	-8.2	6.1
2414.30	12.8	12.6	-1.8	2	-10	-8.2	6.9
2414.35	10.8	12.6	-3.8	2	-12	-8.2	6.2
2414.40	14.8	12.6	0.2	2	-8	-8.2	5.9
2414.45	14.8	12.6	0.2	2	-8	-8.2	6.1

2Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2414.50	14.8	12.6	0.2	2	-8	-8.2	5.7
2414.55	12.8	12.6	-1.8	2	-10	-8.2	6.6
2414.60	13.8	12.6	-0.8	2	-9	-8.2	4.8
2414.65	13.8	12.6	-0.8	2	-9	-8.2	5
2414.70	13.8	12.6	-0.8	2	-9	-8.2	4.4
2414.75	11.8	12.6	-2.8	2	-11	-8.2	5.8
2414.80	14.8	12.6	0.2	2	-8	-8.2	7.1
2414.85	13.8	12.6	-0.8	2	-9	-8.2	4.8
2414.90	12.8	12.6	-1.8	2	-10	-8.2	5.7
2414.95	12.8	12.6	-1.8	2	-10	-8.2	6.5
2415.00	13.8	12.6	-0.8	2	-9	-8.2	5.8
2415.05	13.8	12.6	-0.8	2	-9	-8.2	6.7
2415.10	13.8	12.6	-0.8	2	-9	-8.2	6.6
2415.15	13.8	12.6	-0.8	2	-9	-8.2	6.1
2415.20	12.8	12.6	-1.8	2	-10	-8.2	5.9
2415.25	12.8	12.6	-1.8	2	-10	-8.2	6.2
2415.30	13.8	12.6	-0.8	2	-9	-8.2	5.6
2415.35	12.8	12.6	-1.8	2	-10	-8.2	6.8
2415.40	12.8	12.6	-1.8	2	-10	-8.2	6.3
2415.45	13.8	12.6	-0.8	2	-9	-8.2	5.9
2415.50	15.8	12.6	1.2	2	-7	-8.2	5.7
2415.55	11.8	12.6	-2.8	2	-11	-8.2	6.3
2415.60	13.8	12.6	-0.8	2	-9	-8.2	6
2415.65	12.8	12.6	-1.8	2	-10	-8.2	6.1
2415.70	12.8	12.6	-1.8	2	-10	-8.2	5.7
2415.75	13.8	12.6	-0.8	2	-9	-8.2	5.9
2415.80	14.8	12.6	0.2	2	-8	-8.2	5.5
2415.85	13.8	12.6	-0.8	2	-9	-8.2	5.3
2415.90	15.8	12.6	1.2	2	-7	-8.2	5.4
2415.95	14.8	12.6	0.2	2	-8	-8.2	5.1
2416.00	14.8	12.6	0.2	2	-8	-8.2	5.4
2416.05	13.8	12.6	-0.8	2	-9	-8.2	6.3
2416.10	14.8	12.6	0.2	2	-8	-8.2	7.6
2416.15	12.8	12.6	-1.8	2	-10	-8.2	7.1
2416.20	13.8	12.6	-0.8	2	-9	-8.2	7
2416.25	15.8	12.6	1.2	2	-7	-8.2	6.3
2416.30	15.8	12.6	1.2	2	-7	-8.2	5.4
2416.35	15.8	12.6	1.2	2	-7	-8.2	5.8
2416.40	13.8	12.6	-0.8	2	-9	-8.2	6.2
2416.45	16.8	12.6	2.2	2	-6	-8.2	7
2416.50	15.8	12.6	1.2	2	-7	-8.2	6.3
2416.55	13.8	12.6	-0.8	2	-9	-8.2	6.9
2416.60	15.8	12.6	1.2	2	-7	-8.2	5.7
2416.65	13.8	12.6	-0.8	2	-9	-8.2	5.2
2416.70	14.8	12.6	0.2	2	-8	-8.2	7.1
2416.75	14.8	12.6	0.2	2	-8	-8.2	6.7
2416.80	15.8	12.6	1.2	2	-7	-8.2	6.3
2416.85	14.8	12.6	0.2	2	-8	-8.2	6.4
2416.90	13.8	12.6	-0.8	2	-9	-8.2	6.8
2416.95	13.8	12.6	-0.8	2	-9	-8.2	7
2417.00	14.8	12.6	0.2	2	-8	-8.2	6.3
2417.05	15.8	12.6	1.2	2	-7	-8.2	6.7
2417.10	16.8	12.6	2.2	2	-6	-8.2	6
2417.15	17.8	12.6	3.2	2	-5	-8.2	6.3
2417.20	17.8	12.6	3.2	2	-5	-8.2	6.6

2Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2417.25	17.8	12.6	3.2	2	-5	-8.2	7.2
2417.30	16.8	12.6	2.2	2	-6	-8.2	6.1
2417.35	18.8	12.6	4.2	2	-4	-8.2	6.4
2417.40	21.8	12.6	7.2	2	-1	-8.2	6.9
2417.45	21.8	12.6	7.2	2	-1	-8.2	6.8
2417.50	22.8	12.6	8.2	2	0	-8.2	7.1
2417.55	22.8	12.6	8.2	2	0	-8.2	6.3
2417.60	20.8	12.6	6.2	2	-2	-8.2	5.8
2417.65	19.8	12.6	5.2	2	-3	-8.2	6.5
2417.70	18.8	12.6	4.2	2	-4	-8.2	6.3
2417.75	18.8	12.6	4.2	2	-4	-8.2	5.7
2417.80	18.8	12.6	4.2	2	-4	-8.2	5.9
2417.85	18.8	12.6	4.2	2	-4	-8.2	6.1
2417.90	17.8	12.6	3.2	2	-5	-8.2	6
2417.95	15.8	12.6	1.2	2	-7	-8.2	6.3
2418.00	17.8	12.6	3.2	2	-5	-8.2	5.9
2418.05	15.8	12.6	1.2	2	-7	-8.2	6.5
2418.10	15.8	12.6	1.2	2	-7	-8.2	7.1
2418.15	16.8	12.6	2.2	2	-6	-8.2	6.7
2418.20	15.8	12.6	1.2	2	-7	-8.2	6
2418.25	17.8	12.6	3.2	2	-5	-8.2	6.4
2418.30	16.8	12.6	2.2	2	-6	-8.2	6.6
2418.35	17.8	12.6	3.2	2	-5	-8.2	6.3
2418.40	17.8	12.6	3.2	2	-5	-8.2	6.2
2418.45	18.8	12.6	4.2	2	-4	-8.2	5.9
2418.50	17.8	12.6	3.2	2	-5	-8.2	6.2
2418.55	18.8	12.6	4.2	2	-4	-8.2	5.8
2418.60	19.8	12.6	5.2	2	-3	-8.2	5.6
2418.65	17.8	12.6	3.2	2	-5	-8.2	4.9
2418.70	18.8	12.6	4.2	2	-4	-8.2	5
2418.75	19.8	12.6	5.2	2	-3	-8.2	5.3
2418.80	19.8	12.6	5.2	2	-3	-8.2	5.7
2418.85	18.8	12.6	4.2	2	-4	-8.2	6
2418.90	19.8	12.6	5.2	2	-3	-8.2	6.2
2418.95	19.8	12.6	5.2	2	-3	-8.2	6
2419.00	18.8	12.6	4.2	2	-4	-8.2	6.1
2419.05	19.8	12.6	5.2	2	-3	-8.2	5.8
2419.10	15.8	12.6	1.2	2	-7	-8.2	5.6
2419.15	19.8	12.6	5.2	2	-3	-8.2	5.7
2419.20	19.8	12.6	5.2	2	-3	-8.2	5.2
2419.25	19.8	12.6	5.2	2	-3	-8.2	5.8
2419.30	19.8	12.6	5.2	2	-3	-8.2	6.4
2419.35	19.8	12.6	5.2	2	-3	-8.2	9.9
2419.40	17.8	12.6	3.2	2	-5	-8.2	7.4
2419.45	19.8	12.6	5.2	2	-3	-8.2	6.3
2419.50	20.8	12.6	6.2	2	-2	-8.2	5.6
2419.55	20.8	12.6	6.2	2	-2	-8.2	6.4
2419.60	20.8	12.6	6.2	2	-2	-8.2	7.6
2419.65	20.8	12.6	6.2	2	-2	-8.2	6.8
2419.70	21.8	12.6	7.2	2	-1	-8.2	6.6
2419.75	21.8	12.6	7.2	2	-1	-8.2	6.2
2419.80	21.8	12.6	7.2	2	-1	-8.2	6.8
2419.85	20.8	12.6	6.2	2	-2	-8.2	6.5
2419.90	20.8	12.6	6.2	2	-2	-8.2	6.3
2419.95	21.8	12.6	7.2	2	-1	-8.2	6.9

2Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2420.00	20.8	12.6	6.2	2	-2	-8.2	6.3
2420.05	20.8	12.6	6.2	2	-2	-8.2	6.8
2420.10	20.8	12.6	6.2	2	-2	-8.2	6.1
2420.15	20.8	12.6	6.2	2	-2	-8.2	6.9
2420.20	20.8	12.6	6.2	2	-2	-8.2	6.2
2420.25	21.8	12.6	7.2	2	-1	-8.2	5.9
2420.30	21.8	12.6	7.2	2	-1	-8.2	6.1
2420.35	21.8	12.6	7.2	2	-1	-8.2	5.7
2420.40	21.8	12.6	7.2	2	-1	-8.2	6.6
2420.45	21.8	12.6	7.2	2	-1	-8.2	4.8
2420.50	21.8	12.6	7.2	2	-1	-8.2	6.2

Processing Gain (dB) @20th Percentile= 13.8

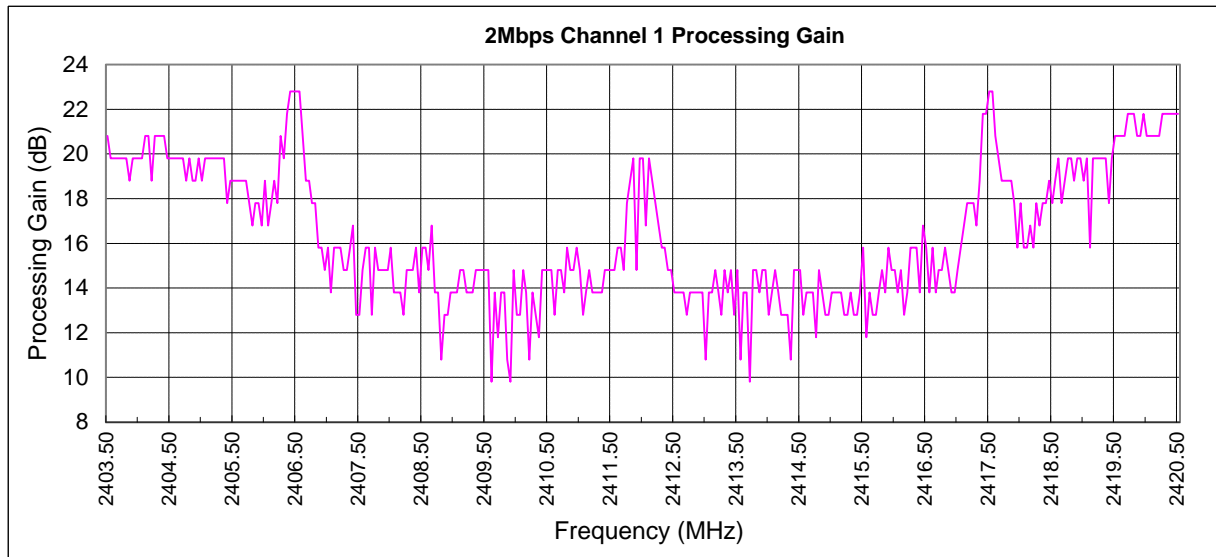

2Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2428.50	20.8	12.6	6.2	2	-2	-8.2	5.9
2428.55	20.8	12.6	6.2	2	-2	-8.2	6.7
2428.60	20.8	12.6	6.2	2	-2	-8.2	6.3
2428.65	19.8	12.6	5.2	2	-3	-8.2	5.9
2428.70	20.8	12.6	6.2	2	-2	-8.2	5.8
2428.75	19.8	12.6	5.2	2	-3	-8.2	7.2
2428.80	19.8	12.6	5.2	2	-3	-8.2	6.2
2428.85	21.8	12.6	7.2	2	-1	-8.2	7.1
2428.90	20.8	12.6	6.2	2	-2	-8.2	6.3
2428.95	20.8	12.6	6.2	2	-2	-8.2	6.7
2429.00	20.8	12.6	6.2	2	-2	-8.2	4.8
2429.05	20.8	12.6	6.2	2	-2	-8.2	5.6
2429.10	20.8	12.6	6.2	2	-2	-8.2	5.1
2429.15	20.8	12.6	6.2	2	-2	-8.2	7
2429.20	20.8	12.6	6.2	2	-2	-8.2	5.3
2429.25	20.8	12.6	6.2	2	-2	-8.2	6.7
2429.30	20.8	12.6	6.2	2	-2	-8.2	7.3
2429.35	20.8	12.6	6.2	2	-2	-8.2	5.7
2429.40	18.8	12.6	4.2	2	-4	-8.2	6.4
2429.45	20.8	12.6	6.2	2	-2	-8.2	5.9
2429.50	18.8	12.6	4.2	2	-4	-8.2	5.7
2429.55	19.8	12.6	5.2	2	-3	-8.2	5.8
2429.60	19.8	12.6	5.2	2	-3	-8.2	5.1
2429.65	19.8	12.6	5.2	2	-3	-8.2	6.3
2429.70	19.8	12.6	5.2	2	-3	-8.2	6.9
2429.75	17.8	12.6	3.2	2	-5	-8.2	7
2429.80	19.8	12.6	5.2	2	-3	-8.2	5.4
2429.85	19.8	12.6	5.2	2	-3	-8.2	7.1
2429.90	19.8	12.6	5.2	2	-3	-8.2	7.6
2429.95	19.8	12.6	5.2	2	-3	-8.2	6.8
2430.00	17.8	12.6	3.2	2	-5	-8.2	6.8
2430.05	19.8	12.6	5.2	2	-3	-8.2	6.2
2430.10	19.8	12.6	5.2	2	-3	-8.2	5.6
2430.15	18.8	12.6	4.2	2	-4	-8.2	6.3
2430.20	19.8	12.6	5.2	2	-3	-8.2	6.7
2430.25	19.8	12.6	5.2	2	-3	-8.2	4.8
2430.30	17.8	12.6	3.2	2	-5	-8.2	5.6
2430.35	19.8	12.6	5.2	2	-3	-8.2	5.1
2430.40	19.8	12.6	5.2	2	-3	-8.2	7
2430.45	19.8	12.6	5.2	2	-3	-8.2	5.3
2430.50	18.8	12.6	4.2	2	-4	-8.2	6.7
2430.55	17.8	12.6	3.2	2	-5	-8.2	7.3
2430.60	18.8	12.6	4.2	2	-4	-8.2	5.7
2430.65	18.8	12.6	4.2	2	-4	-8.2	6.4
2430.70	17.8	12.6	3.2	2	-5	-8.2	5.9
2430.75	16.8	12.6	2.2	2	-6	-8.2	5.7
2430.80	16.8	12.6	2.2	2	-6	-8.2	5.6
2430.85	16.8	12.6	2.2	2	-6	-8.2	5.7
2430.90	17.8	12.6	3.2	2	-5	-8.2	5.6
2430.95	17.8	12.6	3.2	2	-5	-8.2	6
2431.00	17.8	12.6	3.2	2	-5	-8.2	7.6
2431.05	17.8	12.6	3.2	2	-5	-8.2	6.4
2431.10	18.8	12.6	4.2	2	-4	-8.2	5.3
2431.15	18.8	12.6	4.2	2	-4	-8.2	5.9
2431.20	19.8	12.6	5.2	2	-3	-8.2	6.1

2Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2431.25	20.8	12.6	6.2	2	-2	-8.2	6.3
2431.30	20.8	12.6	6.2	2	-2	-8.2	5.7
2431.35	21.8	12.6	7.2	2	-1	-8.2	6.4
2431.40	22.8	12.6	8.2	2	0	-8.2	7.2
2431.45	23.8	12.6	9.2	2	1	-8.2	7.3
2431.50	22.8	12.6	8.2	2	0	-8.2	6.2
2431.55	23.8	12.6	9.2	2	1	-8.2	6.3
2431.60	21.8	12.6	7.2	2	-1	-8.2	6.5
2431.65	21.8	12.6	7.2	2	-1	-8.2	6.7
2431.70	16.8	12.6	2.2	2	-6	-8.2	6.8
2431.75	17.8	12.6	3.2	2	-5	-8.2	7.1
2431.80	15.8	12.6	1.2	2	-7	-8.2	5.8
2431.85	15.8	12.6	1.2	2	-7	-8.2	5.9
2431.90	17.8	12.6	3.2	2	-5	-8.2	5.6
2431.95	17.8	12.6	3.2	2	-5	-8.2	6.2
2432.00	16.8	12.6	2.2	2	-6	-8.2	6.3
2432.05	14.8	12.6	0.2	2	-8	-8.2	6
2432.10	14.8	12.6	0.2	2	-8	-8.2	7.5
2432.15	15.8	12.6	1.2	2	-7	-8.2	6.8
2432.20	14.8	12.6	0.2	2	-8	-8.2	7.4
2432.25	13.8	12.6	-0.8	2	-9	-8.2	7.1
2432.30	14.8	12.6	0.2	2	-8	-8.2	7.7
2432.35	13.8	12.6	-0.8	2	-9	-8.2	7.3
2432.40	16.8	12.6	2.2	2	-6	-8.2	6
2432.45	15.8	12.6	1.2	2	-7	-8.2	5.4
2432.50	16.8	12.6	2.2	2	-6	-8.2	6.1
2432.55	17.8	12.6	3.2	2	-5	-8.2	7.1
2432.60	14.8	12.6	0.2	2	-8	-8.2	5.7
2432.65	13.8	12.6	-0.8	2	-9	-8.2	5.4
2432.70	15.8	12.6	1.2	2	-7	-8.2	7.1
2432.75	15.8	12.6	1.2	2	-7	-8.2	7.6
2432.80	13.8	12.6	-0.8	2	-9	-8.2	6.8
2432.85	16.8	12.6	2.2	2	-6	-8.2	6.8
2432.90	15.8	12.6	1.2	2	-7	-8.2	6.2
2432.95	15.8	12.6	1.2	2	-7	-8.2	5.6
2433.00	16.8	12.6	2.2	2	-6	-8.2	6.3
2433.05	13.8	12.6	-0.8	2	-9	-8.2	6.7
2433.10	14.8	12.6	0.2	2	-8	-8.2	4.8
2433.15	15.8	12.6	1.2	2	-7	-8.2	5.6
2433.20	14.8	12.6	0.2	2	-8	-8.2	5.1
2433.25	14.8	12.6	0.2	2	-8	-8.2	7
2433.30	15.8	12.6	1.2	2	-7	-8.2	5.2
2433.35	14.8	12.6	0.2	2	-8	-8.2	5.8
2433.40	16.8	12.6	2.2	2	-6	-8.2	4.5
2433.45	16.8	12.6	2.2	2	-6	-8.2	6.2
2433.50	13.8	12.6	-0.8	2	-9	-8.2	5.6
2433.55	13.8	12.6	-0.8	2	-9	-8.2	5.7
2433.60	16.8	12.6	2.2	2	-6	-8.2	5.4
2433.65	16.8	12.6	2.2	2	-6	-8.2	6
2433.70	14.8	12.6	0.2	2	-8	-8.2	5.6
2433.75	11.8	12.6	-2.8	2	-11	-8.2	6.3
2433.80	12.8	12.6	-1.8	2	-10	-8.2	6.3
2433.85	13.8	12.6	-0.8	2	-9	-8.2	6.4
2433.90	12.8	12.6	-1.8	2	-10	-8.2	5.5
2433.95	15.8	12.6	1.2	2	-7	-8.2	5.8

2Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2434.00	13.8	12.6	-0.8	2	-9	-8.2	5.6
2434.05	14.8	12.6	0.2	2	-8	-8.2	5.7
2434.10	13.8	12.6	-0.8	2	-9	-8.2	5.7
2434.15	12.8	12.6	-1.8	2	-10	-8.2	5.9
2434.20	14.8	12.6	0.2	2	-8	-8.2	5.6
2434.25	12.8	12.6	-1.8	2	-10	-8.2	6.1
2434.30	13.8	12.6	-0.8	2	-9	-8.2	6.4
2434.35	12.8	12.6	-1.8	2	-10	-8.2	6.3
2434.40	14.8	12.6	0.2	2	-8	-8.2	5.6
2434.45	14.8	12.6	0.2	2	-8	-8.2	6.4
2434.50	14.8	12.6	0.2	2	-8	-8.2	6.6
2434.55	14.8	12.6	0.2	2	-8	-8.2	6.7
2434.60	14.8	12.6	0.2	2	-8	-8.2	4.8
2434.65	14.8	12.6	0.2	2	-8	-8.2	5.6
2434.70	12.8	12.6	-1.8	2	-10	-8.2	5.1
2434.75	11.8	12.6	-2.8	2	-11	-8.2	7
2434.80	12.8	12.6	-1.8	2	-10	-8.2	5.2
2434.85	14.8	12.6	0.2	2	-8	-8.2	5.8
2434.90	14.8	12.6	0.2	2	-8	-8.2	4.5
2434.95	15.8	12.6	1.2	2	-7	-8.2	6.2
2435.00	13.8	12.6	-0.8	2	-9	-8.2	5.6
2435.05	14.8	12.6	0.2	2	-8	-8.2	7.3
2435.10	13.8	12.6	-0.8	2	-9	-8.2	5.7
2435.15	14.8	12.6	0.2	2	-8	-8.2	6
2435.20	13.8	12.6	-0.8	2	-9	-8.2	7.1
2435.25	14.8	12.6	0.2	2	-8	-8.2	6.7
2435.30	13.8	12.6	-0.8	2	-9	-8.2	7.4
2435.35	14.8	12.6	0.2	2	-8	-8.2	6.9
2435.40	13.8	12.6	-0.8	2	-9	-8.2	6.8
2435.45	14.8	12.6	0.2	2	-8	-8.2	5.2
2435.50	11.8	12.6	-2.8	2	-11	-8.2	5.6
2435.55	14.8	12.6	0.2	2	-8	-8.2	5.4
2435.60	11.8	12.6	-2.8	2	-11	-8.2	6.1
2435.65	14.8	12.6	0.2	2	-8	-8.2	5.2
2435.70	15.8	12.6	1.2	2	-7	-8.2	6.3
2435.75	13.8	12.6	-0.8	2	-9	-8.2	6.5
2435.80	15.8	12.6	1.2	2	-7	-8.2	7.3
2435.85	14.8	12.6	0.2	2	-8	-8.2	5.7
2435.90	11.8	12.6	-2.8	2	-11	-8.2	6
2435.95	14.8	12.6	0.2	2	-8	-8.2	7.1
2436.00	14.8	12.6	0.2	2	-8	-8.2	6.7
2436.05	14.8	12.6	0.2	2	-8	-8.2	7.4
2436.10	13.8	12.6	-0.8	2	-9	-8.2	6.9
2436.15	13.8	12.6	-0.8	2	-9	-8.2	6.8
2436.20	11.8	12.6	-2.8	2	-11	-8.2	5.2
2436.25	13.8	12.6	-0.8	2	-9	-8.2	5.6
2436.30	13.8	12.6	-0.8	2	-9	-8.2	5.4
2436.35	13.8	12.6	-0.8	2	-9	-8.2	6.1
2436.40	14.8	12.6	0.2	2	-8	-8.2	5.2
2436.45	13.8	12.6	-0.8	2	-9	-8.2	6.3
2436.50	13.8	12.6	-0.8	2	-9	-8.2	5.2
2436.55	14.8	12.6	0.2	2	-8	-8.2	5.7
2436.60	11.8	12.6	-2.8	2	-11	-8.2	6.8
2436.65	15.8	12.6	1.2	2	-7	-8.2	5.3
2436.70	16.8	12.6	2.2	2	-6	-8.2	6.2


2Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2436.75	17.8	12.6	3.2	2	-5	-8.2	6.1
2436.80	18.8	12.6	4.2	2	-4	-8.2	3.2
2436.85	19.8	12.6	5.2	2	-3	-8.2	4.2
2436.90	19.8	12.6	5.2	2	-3	-8.2	4.8
2436.95	19.8	12.6	5.2	2	-3	-8.2	5.5
2437.00	19.8	12.6	5.2	2	-3	-8.2	7.4
2437.05	19.8	12.6	5.2	2	-3	-8.2	5.2
2437.10	19.8	12.6	5.2	2	-3	-8.2	5.4
2437.15	17.8	12.6	3.2	2	-5	-8.2	5.3
2437.20	17.8	12.6	3.2	2	-5	-8.2	5.3
2437.25	17.8	12.6	3.2	2	-5	-8.2	6.2
2437.30	12.8	12.6	-1.8	2	-10	-8.2	5.2
2437.35	15.8	12.6	1.2	2	-7	-8.2	6.7
2437.40	12.8	12.6	-1.8	2	-10	-8.2	4.8
2437.45	14.8	12.6	0.2	2	-8	-8.2	6.8
2437.50	13.8	12.6	-0.8	2	-9	-8.2	6.1
2437.55	13.8	12.6	-0.8	2	-9	-8.2	7.1
2437.60	13.8	12.6	-0.8	2	-9	-8.2	6.3
2437.65	13.8	12.6	-0.8	2	-9	-8.2	7.3
2437.70	13.8	12.6	-0.8	2	-9	-8.2	6.6
2437.75	13.8	12.6	-0.8	2	-9	-8.2	5.8
2437.80	13.8	12.6	-0.8	2	-9	-8.2	5.4
2437.85	13.8	12.6	-0.8	2	-9	-8.2	5.4
2437.90	13.8	12.6	-0.8	2	-9	-8.2	6.3
2437.95	13.8	12.6	-0.8	2	-9	-8.2	5.3
2438.00	14.8	12.6	0.2	2	-8	-8.2	5.2
2438.05	13.8	12.6	-0.8	2	-9	-8.2	6.6
2438.10	13.8	12.6	-0.8	2	-9	-8.2	5.7
2438.15	14.8	12.6	0.2	2	-8	-8.2	6
2438.20	13.8	12.6	-0.8	2	-9	-8.2	6
2438.25	12.8	12.6	-1.8	2	-10	-8.2	7.1
2438.30	13.8	12.6	-0.8	2	-9	-8.2	6.2
2438.35	12.8	12.6	-1.8	2	-10	-8.2	5.9
2438.40	14.8	12.6	0.2	2	-8	-8.2	5.3
2438.45	14.8	12.6	0.2	2	-8	-8.2	6.1
2438.50	14.8	12.6	0.2	2	-8	-8.2	6.5
2438.55	12.8	12.6	-1.8	2	-10	-8.2	6.3
2438.60	13.8	12.6	-0.8	2	-9	-8.2	7
2438.65	13.8	12.6	-0.8	2	-9	-8.2	4.8
2438.70	12.8	12.6	-1.8	2	-10	-8.2	5.4
2438.75	11.8	12.6	-2.8	2	-11	-8.2	5.7
2438.80	14.8	12.6	0.2	2	-8	-8.2	6.9
2438.85	13.8	12.6	-0.8	2	-9	-8.2	7
2438.90	14.8	12.6	0.2	2	-8	-8.2	7
2438.95	14.8	12.6	0.2	2	-8	-8.2	5.8
2439.00	12.8	12.6	-1.8	2	-10	-8.2	7.3
2439.05	13.8	12.6	-0.8	2	-9	-8.2	5.3
2439.10	14.8	12.6	0.2	2	-8	-8.2	4.9
2439.15	13.8	12.6	-0.8	2	-9	-8.2	5.3
2439.20	12.8	12.6	-1.8	2	-10	-8.2	5.1
2439.25	11.8	12.6	-2.8	2	-11	-8.2	5.6
2439.30	14.8	12.6	0.2	2	-8	-8.2	6.8
2439.35	13.8	12.6	-0.8	2	-9	-8.2	5.3
2439.40	14.8	12.6	0.2	2	-8	-8.2	7.4
2439.45	14.8	12.6	0.2	2	-8	-8.2	7.9

2Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2439.50	13.8	12.6	-0.8	2	-9	-8.2	6.6
2439.55	13.8	12.6	-0.8	2	-9	-8.2	6.3
2439.60	13.8	12.6	-0.8	2	-9	-8.2	5.7
2439.65	10.8	12.6	-3.8	2	-12	-8.2	5.7
2439.70	11.8	12.6	-2.8	2	-11	-8.2	7.2
2439.75	11.8	12.6	-2.8	2	-11	-8.2	7.3
2439.80	12.8	12.6	-1.8	2	-10	-8.2	7
2439.85	13.8	12.6	-0.8	2	-9	-8.2	6.8
2439.90	13.8	12.6	-0.8	2	-9	-8.2	6.6
2439.95	14.8	12.6	0.2	2	-8	-8.2	6.2
2440.00	13.8	12.6	-0.8	2	-9	-8.2	5.6
2440.05	14.8	12.6	0.2	2	-8	-8.2	5.8
2440.10	14.8	12.6	0.2	2	-8	-8.2	6.7
2440.15	12.8	12.6	-1.8	2	-10	-8.2	6.3
2440.20	13.8	12.6	-0.8	2	-9	-8.2	6.3
2440.25	12.8	12.6	-1.8	2	-10	-8.2	5.9
2440.30	14.8	12.6	0.2	2	-8	-8.2	5.4
2440.35	14.8	12.6	0.2	2	-8	-8.2	5.3
2440.40	13.8	12.6	-0.8	2	-9	-8.2	7.3
2440.45	15.8	12.6	1.2	2	-7	-8.2	5.7
2440.50	14.8	12.6	0.2	2	-8	-8.2	5.9
2440.55	15.8	12.6	1.2	2	-7	-8.2	6.1
2440.60	13.8	12.6	-0.8	2	-9	-8.2	6.3
2440.65	14.8	12.6	0.2	2	-8	-8.2	5.8
2440.70	14.8	12.6	0.2	2	-8	-8.2	5.4
2440.75	13.8	12.6	-0.8	2	-9	-8.2	5.6
2440.80	14.8	12.6	0.2	2	-8	-8.2	5
2440.85	15.8	12.6	1.2	2	-7	-8.2	7.3
2440.90	15.8	12.6	1.2	2	-7	-8.2	6.3
2440.95	15.8	12.6	1.2	2	-7	-8.2	5.8
2441.00	16.8	12.6	2.2	2	-6	-8.2	7.2
2441.05	14.8	12.6	0.2	2	-8	-8.2	5.9
2441.10	12.8	12.6	-1.8	2	-10	-8.2	6
2441.15	15.8	12.6	1.2	2	-7	-8.2	5.8
2441.20	15.8	12.6	1.2	2	-7	-8.2	6.2
2441.25	13.8	12.6	-0.8	2	-9	-8.2	6.1
2441.30	14.8	12.6	0.2	2	-8	-8.2	5.2
2441.35	16.8	12.6	2.2	2	-6	-8.2	6.7
2441.40	14.8	12.6	0.2	2	-8	-8.2	6.3
2441.45	16.8	12.6	2.2	2	-6	-8.2	6.3
2441.50	12.8	12.6	-1.8	2	-10	-8.2	5.9
2441.55	16.8	12.6	2.2	2	-6	-8.2	5.4
2441.60	12.8	12.6	-1.8	2	-10	-8.2	5.3
2441.65	14.8	12.6	0.2	2	-8	-8.2	7.3
2441.70	14.8	12.6	0.2	2	-8	-8.2	5.7
2441.75	12.8	12.6	-1.8	2	-10	-8.2	5.9
2441.80	13.8	12.6	-0.8	2	-9	-8.2	6.1
2441.85	12.8	12.6	-1.8	2	-10	-8.2	6.3
2441.90	16.8	12.6	2.2	2	-6	-8.2	5.8
2441.95	15.8	12.6	1.2	2	-7	-8.2	5.4
2442.00	13.8	12.6	-0.8	2	-9	-8.2	5.6
2442.05	15.8	12.6	1.2	2	-7	-8.2	5
2442.10	14.8	12.6	0.2	2	-8	-8.2	6.8
2442.15	18.8	12.6	4.2	2	-4	-8.2	6.3
2442.20	15.8	12.6	1.2	2	-7	-8.2	6.9

2Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2442.25	17.8	12.6	3.2	2	-5	-8.2	5.7
2442.30	17.8	12.6	3.2	2	-5	-8.2	5.6
2442.35	21.8	12.6	7.2	2	-1	-8.2	6.2
2442.40	22.8	12.6	8.2	2	0	-8.2	6.1
2442.45	20.8	12.6	6.2	2	-2	-8.2	6.3
2442.50	22.8	12.6	8.2	2	0	-8.2	5.8
2442.55	22.8	12.6	8.2	2	0	-8.2	7.1
2442.60	21.8	12.6	7.2	2	-1	-8.2	4.8
2442.65	20.8	12.6	6.2	2	-2	-8.2	6.8
2442.70	18.8	12.6	4.2	2	-4	-8.2	6.6
2442.75	19.8	12.6	5.2	2	-3	-8.2	6.3
2442.80	18.8	12.6	4.2	2	-4	-8.2	5.1
2442.85	18.8	12.6	4.2	2	-4	-8.2	5.7
2442.90	17.8	12.6	3.2	2	-5	-8.2	6.4
2442.95	16.8	12.6	2.2	2	-6	-8.2	6.3
2443.00	16.8	12.6	2.2	2	-6	-8.2	4.9
2443.05	17.8	12.6	3.2	2	-5	-8.2	5.7
2443.10	17.8	12.6	3.2	2	-5	-8.2	5.7
2443.15	17.8	12.6	3.2	2	-5	-8.2	6.1
2443.20	16.8	12.6	2.2	2	-6	-8.2	6.8
2443.25	16.8	12.6	2.2	2	-6	-8.2	6.3
2443.30	17.8	12.6	3.2	2	-5	-8.2	6.9
2443.35	17.8	12.6	3.2	2	-5	-8.2	5.7
2443.40	17.8	12.6	3.2	2	-5	-8.2	5.6
2443.45	18.8	12.6	4.2	2	-4	-8.2	6.2
2443.50	18.8	12.6	4.2	2	-4	-8.2	6.1
2443.55	16.8	12.6	2.2	2	-6	-8.2	6.3
2443.60	18.8	12.6	4.2	2	-4	-8.2	5.8
2443.65	18.8	12.6	4.2	2	-4	-8.2	7.1
2443.70	19.8	12.6	5.2	2	-3	-8.2	4.8
2443.75	17.8	12.6	3.2	2	-5	-8.2	6.8
2443.80	19.8	12.6	5.2	2	-3	-8.2	6.6
2443.85	19.8	12.6	5.2	2	-3	-8.2	6.3
2443.90	19.8	12.6	5.2	2	-3	-8.2	5.1
2443.95	18.8	12.6	4.2	2	-4	-8.2	5.7
2444.00	19.8	12.6	5.2	2	-3	-8.2	4.8
2444.05	19.8	12.6	5.2	2	-3	-8.2	6.5
2444.10	19.8	12.6	5.2	2	-3	-8.2	5.3
2444.15	19.8	12.6	5.2	2	-3	-8.2	5.8
2444.20	19.8	12.6	5.2	2	-3	-8.2	5.7
2444.25	19.8	12.6	5.2	2	-3	-8.2	6.2
2444.30	19.8	12.6	5.2	2	-3	-8.2	6.1
2444.35	19.8	12.6	5.2	2	-3	-8.2	6.3
2444.40	20.8	12.6	6.2	2	-2	-8.2	5.8
2444.45	20.8	12.6	6.2	2	-2	-8.2	6.5
2444.50	20.8	12.6	6.2	2	-2	-8.2	6.2
2444.55	20.8	12.6	6.2	2	-2	-8.2	5.8
2444.60	20.8	12.6	6.2	2	-2	-8.2	5.8
2444.65	22.8	12.6	8.2	2	0	-8.2	5.9
2444.70	21.8	12.6	7.2	2	-1	-8.2	6.1
2444.75	21.8	12.6	7.2	2	-1	-8.2	7.2
2444.80	20.8	12.6	6.2	2	-2	-8.2	7.5
2444.85	20.8	12.6	6.2	2	-2	-8.2	7.3
2444.90	21.8	12.6	7.2	2	-1	-8.2	4.9
2444.95	20.8	12.6	6.2	2	-2	-8.2	5.9

2Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2445.00	20.8	12.6	6.2	2	-2	-8.2	6.7
2445.05	20.8	12.6	6.2	2	-2	-8.2	6.3
2445.10	20.8	12.6	6.2	2	-2	-8.2	5.9
2445.15	20.8	12.6	6.2	2	-2	-8.2	5.4
2445.20	22.8	12.6	8.2	2	0	-8.2	5.6
2445.25	20.8	12.6	6.2	2	-2	-8.2	5
2445.30	19.8	12.6	5.2	2	-3	-8.2	6.8
2445.35	21.8	12.6	7.2	2	-1	-8.2	6.3
2445.40	21.8	12.6	7.2	2	-1	-8.2	5.7
2445.45	21.8	12.6	7.2	2	-1	-8.2	5.8
2445.50	21.8	12.6	7.2	2	-1	-8.2	4.6

Processing Gain (dB) @20th Percentile= 13.8

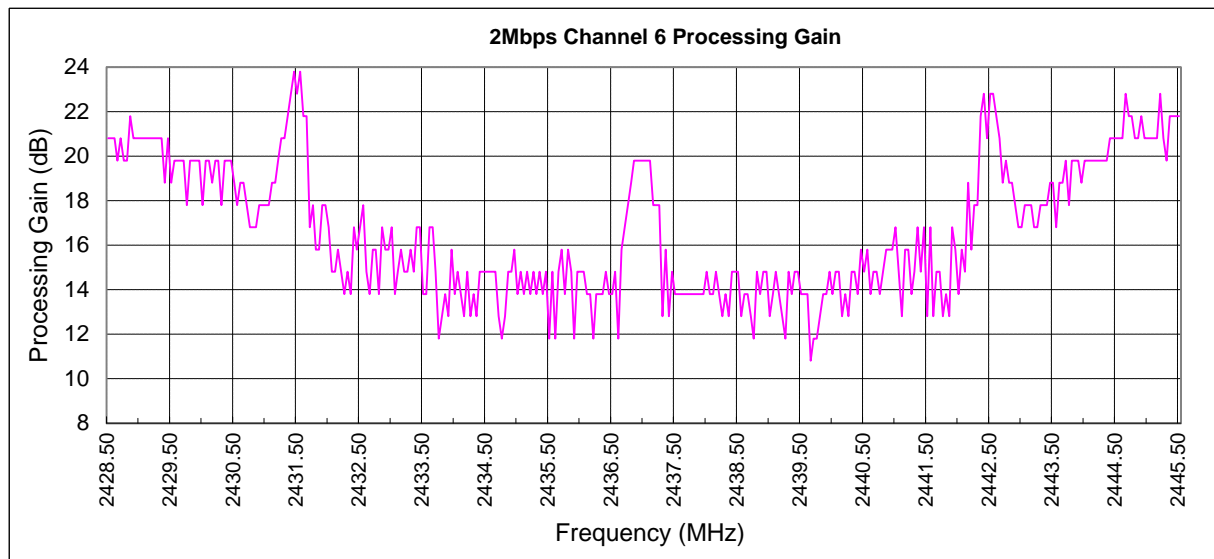

2Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2453.50	20.8	12.6	6.2	2	-2	-8.2	7.5
2453.55	20.8	12.6	6.2	2	-2	-8.2	6.8
2453.60	20.8	12.6	6.2	2	-2	-8.2	7.3
2453.65	20.8	12.6	6.2	2	-2	-8.2	6.2
2453.70	20.8	12.6	6.2	2	-2	-8.2	7.5
2453.75	20.8	12.6	6.2	2	-2	-8.2	6.8
2453.80	20.8	12.6	6.2	2	-2	-8.2	7.1
2453.85	20.8	12.6	6.2	2	-2	-8.2	5.7
2453.90	20.8	12.6	6.2	2	-2	-8.2	7.8
2453.95	20.8	12.6	6.2	2	-2	-8.2	6.8
2454.00	20.8	12.6	6.2	2	-2	-8.2	6.3
2454.05	20.8	12.6	6.2	2	-2	-8.2	6.5
2454.10	20.8	12.6	6.2	2	-2	-8.2	5.8
2454.15	20.8	12.6	6.2	2	-2	-8.2	7.1
2454.20	21.8	12.6	7.2	2	-1	-8.2	6.1
2454.25	20.8	12.6	6.2	2	-2	-8.2	6.3
2454.30	20.8	12.6	6.2	2	-2	-8.2	5.8
2454.35	20.8	12.6	6.2	2	-2	-8.2	7.2
2454.40	20.8	12.6	6.2	2	-2	-8.2	7.3
2454.45	20.8	12.6	6.2	2	-2	-8.2	5.9
2454.50	20.8	12.6	6.2	2	-2	-8.2	4.8
2454.55	20.8	12.6	6.2	2	-2	-8.2	7.1
2454.60	19.8	12.6	5.2	2	-3	-8.2	7.3
2454.65	18.8	12.6	4.2	2	-4	-8.2	5.7
2454.70	19.8	12.6	5.2	2	-3	-8.2	5.8
2454.75	19.8	12.6	5.2	2	-3	-8.2	5.2
2454.80	19.8	12.6	5.2	2	-3	-8.2	6.1
2454.85	19.8	12.6	5.2	2	-3	-8.2	6.3
2454.90	19.8	12.6	5.2	2	-3	-8.2	6.4
2454.95	19.8	12.6	5.2	2	-3	-8.2	7.1
2455.00	19.8	12.6	5.2	2	-3	-8.2	5.8
2455.05	19.8	12.6	5.2	2	-3	-8.2	6.3
2455.10	19.8	12.6	5.2	2	-3	-8.2	6.5
2455.15	19.8	12.6	5.2	2	-3	-8.2	7.3
2455.20	19.8	12.6	5.2	2	-3	-8.2	5.9
2455.25	20.8	12.6	6.2	2	-2	-8.2	5.8
2455.30	19.8	12.6	5.2	2	-3	-8.2	6.3
2455.35	19.8	12.6	5.2	2	-3	-8.2	6.4
2455.40	19.8	12.6	5.2	2	-3	-8.2	6.6
2455.45	15.8	12.6	1.2	2	-7	-8.2	6.3
2455.50	18.8	12.6	4.2	2	-4	-8.2	7.3
2455.55	18.8	12.6	4.2	2	-4	-8.2	7.3
2455.60	17.8	12.6	3.2	2	-5	-8.2	7.8
2455.65	18.8	12.6	4.2	2	-4	-8.2	5.1
2455.70	17.8	12.6	3.2	2	-5	-8.2	7.3
2455.75	17.8	12.6	3.2	2	-5	-8.2	5.7
2455.80	16.8	12.6	2.2	2	-6	-8.2	7.2
2455.85	18.8	12.6	4.2	2	-4	-8.2	7.3
2455.90	18.8	12.6	4.2	2	-4	-8.2	4.8
2455.95	16.8	12.6	2.2	2	-6	-8.2	5.3
2456.00	18.8	12.6	4.2	2	-4	-8.2	5.7
2456.05	18.8	12.6	4.2	2	-4	-8.2	6.3
2456.10	19.8	12.6	5.2	2	-3	-8.2	6.1
2456.15	18.8	12.6	4.2	2	-4	-8.2	6.4
2456.20	19.8	12.6	5.2	2	-3	-8.2	6.5

2Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2456.25	18.8	12.6	4.2	2	-4	-8.2	7.1
2456.30	21.8	12.6	7.2	2	-1	-8.2	7.2
2456.35	21.8	12.6	7.2	2	-1	-8.2	5.8
2456.40	22.8	12.6	8.2	2	0	-8.2	6
2456.45	22.8	12.6	8.2	2	0	-8.2	6.3
2456.50	22.8	12.6	8.2	2	0	-8.2	6.2
2456.55	15.8	12.6	1.2	2	-7	-8.2	5.9
2456.60	20.8	12.6	6.2	2	-2	-8.2	5.8
2456.65	20.8	12.6	6.2	2	-2	-8.2	6.1
2456.70	18.8	12.6	4.2	2	-4	-8.2	5.1
2456.75	17.8	12.6	3.2	2	-5	-8.2	5.7
2456.80	18.8	12.6	4.2	2	-4	-8.2	5.6
2456.85	17.8	12.6	3.2	2	-5	-8.2	5.7
2456.90	18.8	12.6	4.2	2	-4	-8.2	6.3
2456.95	16.8	12.6	2.2	2	-6	-8.2	6.4
2457.00	15.8	12.6	1.2	2	-7	-8.2	6.5
2457.05	15.8	12.6	1.2	2	-7	-8.2	6.9
2457.10	13.8	12.6	-0.8	2	-9	-8.2	7.3
2457.15	15.8	12.6	1.2	2	-7	-8.2	5.1
2457.20	16.8	12.6	2.2	2	-6	-8.2	7.1
2457.25	15.8	12.6	1.2	2	-7	-8.2	5.9
2457.30	13.8	12.6	-0.8	2	-9	-8.2	6.1
2457.35	15.8	12.6	1.2	2	-7	-8.2	6.5
2457.40	15.8	12.6	1.2	2	-7	-8.2	6
2457.45	16.8	12.6	2.2	2	-6	-8.2	7.1
2457.50	17.8	12.6	3.2	2	-5	-8.2	9.1
2457.55	17.8	12.6	3.2	2	-5	-8.2	9.5
2457.60	14.8	12.6	0.2	2	-8	-8.2	7.3
2457.65	15.8	12.6	1.2	2	-7	-8.2	5.7
2457.70	16.8	12.6	2.2	2	-6	-8.2	7.2
2457.75	14.8	12.6	0.2	2	-8	-8.2	7.3
2457.80	15.8	12.6	1.2	2	-7	-8.2	4.8
2457.85	13.8	12.6	-0.8	2	-9	-8.2	5.3
2457.90	14.8	12.6	0.2	2	-8	-8.2	5.7
2457.95	15.8	12.6	1.2	2	-7	-8.2	6.3
2458.00	12.8	12.6	-1.8	2	-10	-8.2	6.1
2458.05	13.8	12.6	-0.8	2	-9	-8.2	6.4
2458.10	12.8	12.6	-1.8	2	-10	-8.2	6.5
2458.15	14.8	12.6	0.2	2	-8	-8.2	7.1
2458.20	12.8	12.6	-1.8	2	-10	-8.2	7.2
2458.25	15.8	12.6	1.2	2	-7	-8.2	5.8
2458.30	16.8	12.6	2.2	2	-6	-8.2	6
2458.35	12.8	12.6	-1.8	2	-10	-8.2	6.3
2458.40	14.8	12.6	0.2	2	-8	-8.2	6.2
2458.45	16.8	12.6	2.2	2	-6	-8.2	5.9
2458.50	15.8	12.6	1.2	2	-7	-8.2	5.8
2458.55	16.8	12.6	2.2	2	-6	-8.2	6.1
2458.60	14.8	12.6	0.2	2	-8	-8.2	5.1
2458.65	12.8	12.6	-1.8	2	-10	-8.2	5.7
2458.70	13.8	12.6	-0.8	2	-9	-8.2	6.8
2458.75	15.8	12.6	1.2	2	-7	-8.2	5.7
2458.80	13.8	12.6	-0.8	2	-9	-8.2	6.3
2458.85	14.8	12.6	0.2	2	-8	-8.2	6.4
2458.90	12.8	12.6	-1.8	2	-10	-8.2	6.5
2458.95	14.8	12.6	0.2	2	-8	-8.2	4.7

2Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2459.00	14.8	12.6	0.2	2	-8	-8.2	6.1
2459.05	12.8	12.6	-1.8	2	-10	-8.2	5.8
2459.10	13.8	12.6	-0.8	2	-9	-8.2	5.1
2459.15	14.8	12.6	0.2	2	-8	-8.2	5.3
2459.20	12.8	12.6	-1.8	2	-10	-8.2	5.7
2459.25	12.8	12.6	-1.8	2	-10	-8.2	6.1
2459.30	12.8	12.6	-1.8	2	-10	-8.2	6.3
2459.35	11.8	12.6	-2.8	2	-11	-8.2	6.9
2459.40	12.8	12.6	-1.8	2	-10	-8.2	7.4
2459.45	14.8	12.6	0.2	2	-8	-8.2	4.8
2459.50	14.8	12.6	0.2	2	-8	-8.2	5.9
2459.55	14.8	12.6	0.2	2	-8	-8.2	5.7
2459.60	13.8	12.6	-0.8	2	-9	-8.2	5.9
2459.65	14.8	12.6	0.2	2	-8	-8.2	6.6
2459.70	11.8	12.6	-2.8	2	-11	-8.2	6.1
2459.75	13.8	12.6	-0.8	2	-9	-8.2	4.8
2459.80	15.8	12.6	1.2	2	-7	-8.2	4.9
2459.85	14.8	12.6	0.2	2	-8	-8.2	5.3
2459.90	15.8	12.6	1.2	2	-7	-8.2	7.3
2459.95	14.8	12.6	0.2	2	-8	-8.2	7.5
2460.00	14.8	12.6	0.2	2	-8	-8.2	6.8
2460.05	14.8	12.6	0.2	2	-8	-8.2	6.1
2460.10	14.8	12.6	0.2	2	-8	-8.2	6.3
2460.15	12.8	12.6	-1.8	2	-10	-8.2	6.1
2460.20	13.8	12.6	-0.8	2	-9	-8.2	6.3
2460.25	13.8	12.6	-0.8	2	-9	-8.2	6.4
2460.30	14.8	12.6	0.2	2	-8	-8.2	6.5
2460.35	14.8	12.6	0.2	2	-8	-8.2	6.7
2460.40	14.8	12.6	0.2	2	-8	-8.2	6.6
2460.45	14.8	12.6	0.2	2	-8	-8.2	6.3
2460.50	14.8	12.6	0.2	2	-8	-8.2	6.5
2460.55	14.8	12.6	0.2	2	-8	-8.2	7.1
2460.60	15.8	12.6	1.2	2	-7	-8.2	7.3
2460.65	14.8	12.6	0.2	2	-8	-8.2	7.4
2460.70	14.8	12.6	0.2	2	-8	-8.2	5.8
2460.75	15.8	12.6	1.2	2	-7	-8.2	5.9
2460.80	15.8	12.6	1.2	2	-7	-8.2	7
2460.85	14.8	12.6	0.2	2	-8	-8.2	7.1
2460.90	15.8	12.6	1.2	2	-7	-8.2	6.2
2460.95	15.8	12.6	1.2	2	-7	-8.2	6.8
2461.00	14.8	12.6	0.2	2	-8	-8.2	6.6
2461.05	12.8	12.6	-1.8	2	-10	-8.2	6.4
2461.10	12.8	12.6	-1.8	2	-10	-8.2	5.8
2461.15	14.8	12.6	0.2	2	-8	-8.2	5.9
2461.20	13.8	12.6	-0.8	2	-9	-8.2	5.9
2461.25	11.8	12.6	-2.8	2	-11	-8.2	6.2
2461.30	13.8	12.6	-0.8	2	-9	-8.2	6.7
2461.35	14.8	12.6	0.2	2	-8	-8.2	6.3
2461.40	13.8	12.6	-0.8	2	-9	-8.2	5.7
2461.45	14.8	12.6	0.2	2	-8	-8.2	7.8
2461.50	14.8	12.6	0.2	2	-8	-8.2	6.3
2461.55	14.8	12.6	0.2	2	-8	-8.2	6.5
2461.60	15.8	12.6	1.2	2	-7	-8.2	6.3
2461.65	15.8	12.6	1.2	2	-7	-8.2	6
2461.70	16.8	12.6	2.2	2	-6	-8.2	5.3


2Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2461.75	11.8	12.6	-2.8	2	-11	-8.2	6.3
2461.80	18.8	12.6	4.2	2	-4	-8.2	6.5
2461.85	18.8	12.6	4.2	2	-4	-8.2	5.7
2461.90	19.8	12.6	5.2	2	-3	-8.2	6
2461.95	19.8	12.6	5.2	2	-3	-8.2	6.3
2462.00	19.8	12.6	5.2	2	-3	-8.2	6.1
2462.05	20.8	12.6	6.2	2	-2	-8.2	5.7
2462.10	18.8	12.6	4.2	2	-4	-8.2	5.6
2462.15	19.8	12.6	5.2	2	-3	-8.2	0.2
2462.20	17.8	12.6	3.2	2	-5	-8.2	5.8
2462.25	16.8	12.6	2.2	2	-6	-8.2	5.9
2462.30	16.8	12.6	2.2	2	-6	-8.2	6.6
2462.35	15.8	12.6	1.2	2	-7	-8.2	6.1
2462.40	12.8	12.6	-1.8	2	-10	-8.2	4.8
2462.45	14.8	12.6	0.2	2	-8	-8.2	6.8
2462.50	14.8	12.6	0.2	2	-8	-8.2	6.3
2462.55	13.8	12.6	-0.8	2	-9	-8.2	6.4
2462.60	13.8	12.6	-0.8	2	-9	-8.2	6.5
2462.65	13.8	12.6	-0.8	2	-9	-8.2	6.6
2462.70	13.8	12.6	-0.8	2	-9	-8.2	6.1
2462.75	13.8	12.6	-0.8	2	-9	-8.2	6.2
2462.80	13.8	12.6	-0.8	2	-9	-8.2	5.8
2462.85	13.8	12.6	-0.8	2	-9	-8.2	6.3
2462.90	13.8	12.6	-0.8	2	-9	-8.2	5.7
2462.95	14.8	12.6	0.2	2	-8	-8.2	7.3
2463.00	14.8	12.6	0.2	2	-8	-8.2	7.5
2463.05	13.8	12.6	-0.8	2	-9	-8.2	5.8
2463.10	14.8	12.6	0.2	2	-8	-8.2	6.1
2463.15	14.8	12.6	0.2	2	-8	-8.2	6.1
2463.20	13.8	12.6	-0.8	2	-9	-8.2	5.4
2463.25	13.8	12.6	-0.8	2	-9	-8.2	5.3
2463.30	14.8	12.6	0.2	2	-8	-8.2	6.2
2463.35	14.8	12.6	0.2	2	-8	-8.2	6.3
2463.40	14.8	12.6	0.2	2	-8	-8.2	6.1
2463.45	14.8	12.6	0.2	2	-8	-8.2	5.9
2463.50	14.8	12.6	0.2	2	-8	-8.2	6.2
2463.55	14.8	12.6	0.2	2	-8	-8.2	6.7
2463.60	12.8	12.6	-1.8	2	-10	-8.2	6.3
2463.65	13.8	12.6	-0.8	2	-9	-8.2	5.7
2463.70	12.8	12.6	-1.8	2	-10	-8.2	7.8
2463.75	12.8	12.6	-1.8	2	-10	-8.2	6.3
2463.80	11.8	12.6	-2.8	2	-11	-8.2	6.5
2463.85	12.8	12.6	-1.8	2	-10	-8.2	6.3
2463.90	13.8	12.6	-0.8	2	-9	-8.2	6
2463.95	14.8	12.6	0.2	2	-8	-8.2	5.3
2464.00	14.8	12.6	0.2	2	-8	-8.2	6.3
2464.05	14.8	12.6	0.2	2	-8	-8.2	6.5
2464.10	14.8	12.6	0.2	2	-8	-8.2	5.7
2464.15	14.8	12.6	0.2	2	-8	-8.2	6
2464.20	13.8	12.6	-0.8	2	-9	-8.2	6.3
2464.25	13.8	12.6	-0.8	2	-9	-8.2	6.1
2464.30	13.8	12.6	-0.8	2	-9	-8.2	5.7
2464.35	13.8	12.6	-0.8	2	-9	-8.2	5.6
2464.40	14.8	12.6	0.2	2	-8	-8.2	0.2
2464.45	12.8	12.6	-1.8	2	-10	-8.2	5.8

2Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2464.50	14.8	12.6	0.2	2	-8	-8.2	4.9
2464.55	13.8	12.6	-0.8	2	-9	-8.2	5.3
2464.60	10.8	12.6	-3.8	2	-12	-8.2	5.3
2464.65	13.8	12.6	-0.8	2	-9	-8.2	5.7
2464.70	9.8	12.6	-4.8	2	-13	-8.2	6.3
2464.75	11.8	12.6	-2.8	2	-11	-8.2	6.5
2464.80	14.8	12.6	0.2	2	-8	-8.2	6.6
2464.85	13.8	12.6	-0.8	2	-9	-8.2	6.3
2464.90	12.8	12.6	-1.8	2	-10	-8.2	5.7
2464.95	13.8	12.6	-0.8	2	-9	-8.2	7.3
2465.00	12.8	12.6	-1.8	2	-10	-8.2	7.5
2465.05	13.8	12.6	-0.8	2	-9	-8.2	4.8
2465.10	14.8	12.6	0.2	2	-8	-8.2	5.7
2465.15	13.8	12.6	-0.8	2	-9	-8.2	5.8
2465.20	14.8	12.6	0.2	2	-8	-8.2	5.6
2465.25	12.8	12.6	-1.8	2	-10	-8.2	5.7
2465.30	13.8	12.6	-0.8	2	-9	-8.2	6.2
2465.35	14.8	12.6	0.2	2	-8	-8.2	6.3
2465.40	12.8	12.6	-1.8	2	-10	-8.2	6.5
2465.45	15.8	12.6	1.2	2	-7	-8.2	6.7
2465.50	14.8	12.6	0.2	2	-8	-8.2	6.3
2465.55	15.8	12.6	1.2	2	-7	-8.2	5.7
2465.60	14.8	12.6	0.2	2	-8	-8.2	7.1
2465.65	13.8	12.6	-0.8	2	-9	-8.2	7.3
2465.70	14.8	12.6	0.2	2	-8	-8.2	7.1
2465.75	13.8	12.6	-0.8	2	-9	-8.2	7.3
2465.80	14.8	12.6	0.2	2	-8	-8.2	7.8
2465.85	13.8	12.6	-0.8	2	-9	-8.2	6.8
2465.90	15.8	12.6	1.2	2	-7	-8.2	7.1
2465.95	14.8	12.6	0.2	2	-8	-8.2	5.7
2466.00	12.8	12.6	-1.8	2	-10	-8.2	7.3
2466.05	14.8	12.6	0.2	2	-8	-8.2	6.3
2466.10	14.8	12.6	0.2	2	-8	-8.2	6.8
2466.15	15.8	12.6	1.2	2	-7	-8.2	6.7
2466.20	15.8	12.6	1.2	2	-7	-8.2	7.5
2466.25	13.8	12.6	-0.8	2	-9	-8.2	5.7
2466.30	13.8	12.6	-0.8	2	-9	-8.2	7.7
2466.35	17.8	12.6	3.2	2	-5	-8.2	6.3
2466.40	16.8	12.6	2.2	2	-6	-8.2	7.8
2466.45	17.8	12.6	3.2	2	-5	-8.2	6.7
2466.50	15.8	12.6	1.2	2	-7	-8.2	7.7
2466.55	13.8	12.6	-0.8	2	-9	-8.2	6.3
2466.60	14.8	12.6	0.2	2	-8	-8.2	6.5
2466.65	12.8	12.6	-1.8	2	-10	-8.2	6.1
2466.70	12.8	12.6	-1.8	2	-10	-8.2	7.2
2466.75	12.8	12.6	-1.8	2	-10	-8.2	7.3
2466.80	12.8	12.6	-1.8	2	-10	-8.2	7.5
2466.85	15.8	12.6	1.2	2	-7	-8.2	6.8
2466.90	15.8	12.6	1.2	2	-7	-8.2	7.3
2466.95	14.8	12.6	0.2	2	-8	-8.2	6.2
2467.00	16.8	12.6	2.2	2	-6	-8.2	7.5
2467.05	14.8	12.6	0.2	2	-8	-8.2	6.8
2467.10	17.8	12.6	3.2	2	-5	-8.2	7.1
2467.15	17.8	12.6	3.2	2	-5	-8.2	5.1
2467.20	16.8	12.6	2.2	2	-6	-8.2	5.8

2Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2467.25	15.8	12.6	1.2	2	-7	-8.2	7.8
2467.30	21.8	12.6	7.2	2	-1	-8.2	6.6
2467.35	19.8	12.6	5.2	2	-3	-8.2	6.8
2467.40	22.8	12.6	8.2	2	0	-8.2	6.7
2467.45	19.8	12.6	5.2	2	-3	-8.2	4.2
2467.50	22.8	12.6	8.2	2	0	-8.2	5.7
2467.55	22.8	12.6	8.2	2	0	-8.2	7.7
2467.60	20.8	12.6	6.2	2	-2	-8.2	6.3
2467.65	20.8	12.6	6.2	2	-2	-8.2	6.7
2467.70	19.8	12.6	5.2	2	-3	-8.2	7.3
2467.75	17.8	12.6	3.2	2	-5	-8.2	7.1
2467.80	19.8	12.6	5.2	2	-3	-8.2	7.7
2467.85	16.8	12.6	2.2	2	-6	-8.2	7.6
2467.90	17.8	12.6	3.2	2	-5	-8.2	7.1
2467.95	17.8	12.6	3.2	2	-5	-8.2	6.8
2468.00	15.8	12.6	1.2	2	-7	-8.2	7.6
2468.05	13.8	12.6	-0.8	2	-9	-8.2	6.7
2468.10	15.8	12.6	1.2	2	-7	-8.2	7.8
2468.15	15.8	12.6	1.2	2	-7	-8.2	6.8
2468.20	17.8	12.6	3.2	2	-5	-8.2	7.8
2468.25	16.8	12.6	2.2	2	-6	-8.2	6.7
2468.30	17.8	12.6	3.2	2	-5	-8.2	7.5
2468.35	17.8	12.6	3.2	2	-5	-8.2	6.6
2468.40	14.8	12.6	0.2	2	-8	-8.2	4.6
2468.45	17.8	12.6	3.2	2	-5	-8.2	6.7
2468.50	16.8	12.6	2.2	2	-6	-8.2	7.3
2468.55	18.8	12.6	4.2	2	-4	-8.2	6.6
2468.60	18.8	12.6	4.2	2	-4	-8.2	7.6
2468.65	18.8	12.6	4.2	2	-4	-8.2	6.4
2468.70	19.8	12.6	5.2	2	-3	-8.2	3.9
2468.75	17.8	12.6	3.2	2	-5	-8.2	6.3
2468.80	19.8	12.6	5.2	2	-3	-8.2	5.1
2468.85	19.8	12.6	5.2	2	-3	-8.2	5.8
2468.90	19.8	12.6	5.2	2	-3	-8.2	7.8
2468.95	19.8	12.6	5.2	2	-3	-8.2	6.6
2469.00	19.8	12.6	5.2	2	-3	-8.2	6.8
2469.05	19.8	12.6	5.2	2	-3	-8.2	6.7
2469.10	19.8	12.6	5.2	2	-3	-8.2	4.2
2469.15	19.8	12.6	5.2	2	-3	-8.2	5.7
2469.20	19.8	12.6	5.2	2	-3	-8.2	7.7
2469.25	19.8	12.6	5.2	2	-3	-8.2	6.3
2469.30	19.8	12.6	5.2	2	-3	-8.2	7.3
2469.35	20.8	12.6	6.2	2	-2	-8.2	6.7
2469.40	20.8	12.6	6.2	2	-2	-8.2	7.7
2469.45	20.8	12.6	6.2	2	-2	-8.2	6.3
2469.50	20.8	12.6	6.2	2	-2	-8.2	6
2469.55	20.8	12.6	6.2	2	-2	-8.2	6.1
2469.60	20.8	12.6	6.2	2	-2	-8.2	7.2
2469.65	21.8	12.6	7.2	2	-1	-8.2	4.8
2469.70	21.8	12.6	7.2	2	-1	-8.2	7.5
2469.75	19.8	12.6	5.2	2	-3	-8.2	6.8
2469.80	21.8	12.6	7.2	2	-1	-8.2	7.3
2469.85	21.8	12.6	7.2	2	-1	-8.2	7.3
2469.90	21.8	12.6	7.2	2	-1	-8.2	6.6
2469.95	21.8	12.6	7.2	2	-1	-8.2	7.6

2Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2470.00	20.8	12.6	6.2	2	-2	-8.2	6.4
2470.05	20.8	12.6	6.2	2	-2	-8.2	6.6
2470.10	20.8	12.6	6.2	2	-2	-8.2	6.3
2470.15	21.8	12.6	7.2	2	-1	-8.2	7.3
2470.20	21.8	12.6	7.2	2	-1	-8.2	6.5
2470.25	21.8	12.6	7.2	2	-1	-8.2	7.8
2470.30	21.8	12.6	7.2	2	-1	-8.2	6.6
2470.35	19.8	12.6	5.2	2	-3	-8.2	6.8
2470.40	21.8	12.6	7.2	2	-1	-8.2	6.7
2470.45	21.8	12.6	7.2	2	-1	-8.2	7.5
2470.50	22.8	12.6	8.2	2	0	-8.2	5.8

Processing Gain (dB) @20th Percentile= 13.8

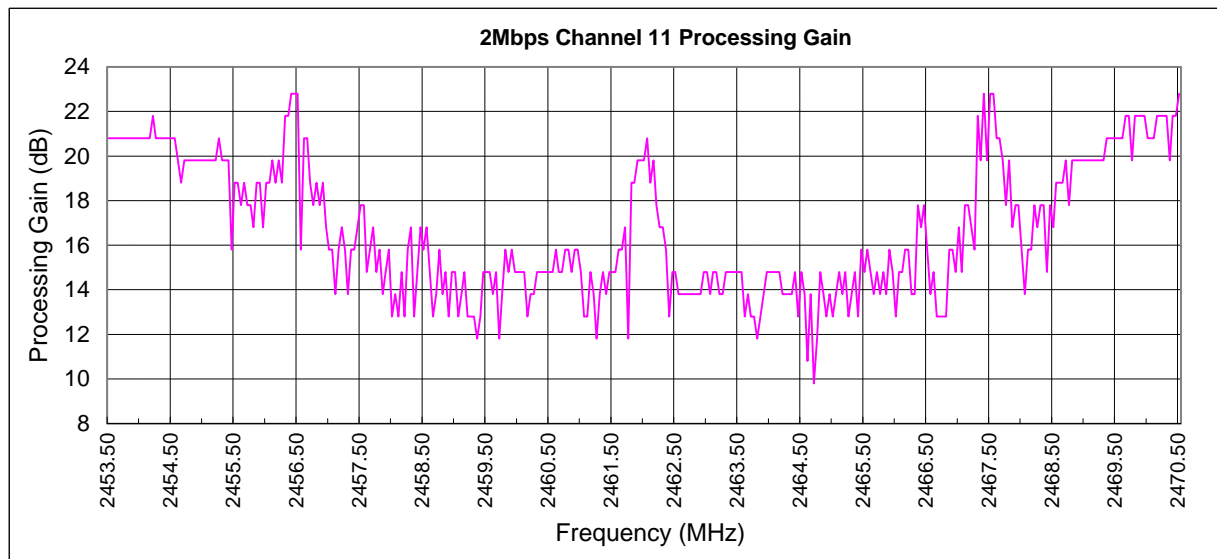

11Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2403.50	23.6	16.4	5.2	2	-3	-8.2	7.5
2403.55	23.6	16.4	5.2	2	-3	-8.2	7.6
2403.60	23.6	16.4	5.2	2	-3	-8.2	7.1
2403.65	23.6	16.4	5.2	2	-3	-8.2	7.4
2403.70	23.6	16.4	5.2	2	-3	-8.2	5.9
2403.75	23.6	16.4	5.2	2	-3	-8.2	5.6
2403.80	23.6	16.4	5.2	2	-3	-8.2	5.8
2403.85	23.6	16.4	5.2	2	-3	-8.2	6.3
2403.90	23.6	16.4	5.2	2	-3	-8.2	6.1
2403.95	23.6	16.4	5.2	2	-3	-8.2	6.2
2404.00	22.6	16.4	4.2	2	-4	-8.2	6.3
2404.05	23.6	16.4	5.2	2	-3	-8.2	6.1
2404.10	23.6	16.4	5.2	2	-3	-8.2	7.2
2404.15	23.6	16.4	5.2	2	-3	-8.2	7.6
2404.20	22.6	16.4	4.2	2	-4	-8.2	7.7
2404.25	21.6	16.4	3.2	2	-5	-8.2	7.3
2404.30	22.6	16.4	4.2	2	-4	-8.2	7.8
2404.35	22.6	16.4	4.2	2	-4	-8.2	7.3
2404.40	22.6	16.4	4.2	2	-4	-8.2	7.7
2404.45	21.6	16.4	3.2	2	-5	-8.2	7.6
2404.50	21.6	16.4	3.2	2	-5	-8.2	7.8
2404.55	21.6	16.4	3.2	2	-5	-8.2	7.6
2404.60	20.6	16.4	2.2	2	-6	-8.2	7.4
2404.65	19.6	16.4	1.2	2	-7	-8.2	7.6
2404.70	20.6	16.4	2.2	2	-6	-8.2	7.2
2404.75	19.6	16.4	1.2	2	-7	-8.2	6.3
2404.80	20.6	16.4	2.2	2	-6	-8.2	7.1
2404.85	19.6	16.4	1.2	2	-7	-8.2	7.2
2404.90	19.6	16.4	1.2	2	-7	-8.2	7.3
2404.95	19.6	16.4	1.2	2	-7	-8.2	7.7
2405.00	18.6	16.4	0.2	2	-8	-8.2	7.4
2405.05	19.6	16.4	1.2	2	-7	-8.2	7.4
2405.10	18.6	16.4	0.2	2	-8	-8.2	7.5
2405.15	18.6	16.4	0.2	2	-8	-8.2	7.8
2405.20	18.6	16.4	0.2	2	-8	-8.2	7.4
2405.25	17.6	16.4	-0.8	2	-9	-8.2	7.6
2405.30	17.6	16.4	-0.8	2	-9	-8.2	7.9
2405.35	17.6	16.4	-0.8	2	-9	-8.2	7.5
2405.40	18.6	16.4	0.2	2	-8	-8.2	7.7
2405.45	17.6	16.4	-0.8	2	-9	-8.2	7.6
2405.50	17.6	16.4	-0.8	2	-9	-8.2	7.6
2405.55	16.6	16.4	-1.8	2	-10	-8.2	7.9
2405.60	17.6	16.4	-0.8	2	-9	-8.2	7.8
2405.65	14.6	16.4	-3.8	2	-12	-8.2	6.1
2405.70	16.6	16.4	-1.8	2	-10	-8.2	6.2
2405.75	11.6	16.4	-6.8	2	-15	-8.2	6.3
2405.80	12.6	16.4	-5.8	2	-14	-8.2	6.1
2405.85	12.6	16.4	-5.8	2	-14	-8.2	7.2
2405.90	12.6	16.4	-5.8	2	-14	-8.2	7.6
2405.95	11.6	16.4	-6.8	2	-15	-8.2	7.1
2406.00	10.6	16.4	-7.8	2	-16	-8.2	7.8
2406.05	11.6	16.4	-6.8	2	-15	-8.2	7.8
2406.10	10.6	16.4	-7.8	2	-16	-8.2	6
2406.15	11.6	16.4	-6.8	2	-15	-8.2	7.5
2406.20	10.6	16.4	-7.8	2	-16	-8.2	7.7

11Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2406.25	9.6	16.4	-8.8	2	-17	-8.2	7.7
2406.30	9.6	16.4	-8.8	2	-17	-8.2	7.9
2406.35	9.6	16.4	-8.8	2	-17	-8.2	7.9
2406.40	8.6	16.4	-9.8	2	-18	-8.2	7.9
2406.45	8.6	16.4	-9.8	2	-18	-8.2	7.5
2406.50	8.6	16.4	-9.8	2	-18	-8.2	7.9
2406.55	8.6	16.4	-9.8	2	-18	-8.2	7.5
2406.60	8.6	16.4	-9.8	2	-18	-8.2	7.3
2406.65	9.6	16.4	-8.8	2	-17	-8.2	7.6
2406.70	9.6	16.4	-8.8	2	-17	-8.2	7.9
2406.75	8.6	16.4	-9.8	2	-18	-8.2	7.4
2406.80	10.6	16.4	-7.8	2	-16	-8.2	7.5
2406.85	10.6	16.4	-7.8	2	-16	-8.2	7.9
2406.90	11.6	16.4	-6.8	2	-15	-8.2	7.7
2406.95	9.6	16.4	-8.8	2	-17	-8.2	7.5
2407.00	11.6	16.4	-6.8	2	-15	-8.2	7.7
2407.05	11.6	16.4	-6.8	2	-15	-8.2	7.7
2407.10	11.6	16.4	-6.8	2	-15	-8.2	7.5
2407.15	11.6	16.4	-6.8	2	-15	-8.2	7.9
2407.20	10.6	16.4	-7.8	2	-16	-8.2	7.9
2407.25	10.6	16.4	-7.8	2	-16	-8.2	7.8
2407.30	11.6	16.4	-6.8	2	-15	-8.2	7.5
2407.35	12.6	16.4	-5.8	2	-14	-8.2	7.5
2407.40	11.6	16.4	-6.8	2	-15	-8.2	7.9
2407.45	10.6	16.4	-7.8	2	-16	-8.2	7.7
2407.50	11.6	16.4	-6.8	2	-15	-8.2	7.9
2407.55	11.6	16.4	-6.8	2	-15	-8.2	7.8
2407.60	11.6	16.4	-6.8	2	-15	-8.2	7.9
2407.65	12.6	16.4	-5.8	2	-14	-8.2	7.9
2407.70	11.6	16.4	-6.8	2	-15	-8.2	7.7
2407.75	11.6	16.4	-6.8	2	-15	-8.2	7.8
2407.80	10.6	16.4	-7.8	2	-16	-8.2	7.9
2407.85	11.6	16.4	-6.8	2	-15	-8.2	7.5
2407.90	11.6	16.4	-6.8	2	-15	-8.2	7.6
2407.95	11.6	16.4	-6.8	2	-15	-8.2	7.4
2408.00	11.6	16.4	-6.8	2	-15	-8.2	7.4
2408.05	11.6	16.4	-6.8	2	-15	-8.2	7.5
2408.10	11.6	16.4	-6.8	2	-15	-8.2	7.8
2408.15	10.6	16.4	-7.8	2	-16	-8.2	7.4
2408.20	10.6	16.4	-7.8	2	-16	-8.2	7.6
2408.25	11.6	16.4	-6.8	2	-15	-8.2	7.9
2408.30	11.6	16.4	-6.8	2	-15	-8.2	7.5
2408.35	11.6	16.4	-6.8	2	-15	-8.2	6.5
2408.40	12.6	16.4	-5.8	2	-14	-8.2	7.6
2408.45	11.6	16.4	-6.8	2	-15	-8.2	4.8
2408.50	11.6	16.4	-6.8	2	-15	-8.2	7.9
2408.55	12.6	16.4	-5.8	2	-14	-8.2	7.8
2408.60	12.6	16.4	-5.8	2	-14	-8.2	7.5
2408.65	12.6	16.4	-5.8	2	-14	-8.2	3.9
2408.70	11.6	16.4	-6.8	2	-15	-8.2	7.5
2408.75	11.6	16.4	-6.8	2	-15	-8.2	7.7
2408.80	11.6	16.4	-6.8	2	-15	-8.2	7.7
2408.85	11.6	16.4	-6.8	2	-15	-8.2	5.6
2408.90	12.6	16.4	-5.8	2	-14	-8.2	7.6
2408.95	12.6	16.4	-5.8	2	-14	-8.2	7.7

11Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2409.00	12.6	16.4	-5.8	2	-14	-8.2	7.5
2409.05	12.6	16.4	-5.8	2	-14	-8.2	7.8
2409.10	11.6	16.4	-6.8	2	-15	-8.2	7.5
2409.15	10.6	16.4	-7.8	2	-16	-8.2	6
2409.20	11.6	16.4	-6.8	2	-15	-8.2	6.3
2409.25	11.6	16.4	-6.8	2	-15	-8.2	6.2
2409.30	11.6	16.4	-6.8	2	-15	-8.2	5.9
2409.35	11.6	16.4	-6.8	2	-15	-8.2	5.8
2409.40	10.6	16.4	-7.8	2	-16	-8.2	6.1
2409.45	10.6	16.4	-7.8	2	-16	-8.2	5.1
2409.50	10.6	16.4	-7.8	2	-16	-8.2	5.7
2409.55	10.6	16.4	-7.8	2	-16	-8.2	6.8
2409.60	11.6	16.4	-6.8	2	-15	-8.2	5.7
2409.65	11.6	16.4	-6.8	2	-15	-8.2	6.3
2409.70	11.6	16.4	-6.8	2	-15	-8.2	6.4
2409.75	11.6	16.4	-6.8	2	-15	-8.2	6.5
2409.80	10.6	16.4	-7.8	2	-16	-8.2	4.7
2409.85	11.6	16.4	-6.8	2	-15	-8.2	6.1
2409.90	11.6	16.4	-6.8	2	-15	-8.2	5.8
2409.95	11.6	16.4	-6.8	2	-15	-8.2	5.1
2410.00	11.6	16.4	-6.8	2	-15	-8.2	5.3
2410.05	12.6	16.4	-5.8	2	-14	-8.2	5.7
2410.10	11.6	16.4	-6.8	2	-15	-8.2	6.1
2410.15	11.6	16.4	-6.8	2	-15	-8.2	6.3
2410.20	10.6	16.4	-7.8	2	-16	-8.2	6.9
2410.25	11.6	16.4	-6.8	2	-15	-8.2	7.4
2410.30	11.6	16.4	-6.8	2	-15	-8.2	4.8
2410.35	11.6	16.4	-6.8	2	-15	-8.2	5.9
2410.40	11.6	16.4	-6.8	2	-15	-8.2	5.7
2410.45	11.6	16.4	-6.8	2	-15	-8.2	5.9
2410.50	11.6	16.4	-6.8	2	-15	-8.2	6.6
2410.55	11.6	16.4	-6.8	2	-15	-8.2	7.6
2410.60	11.6	16.4	-6.8	2	-15	-8.2	7.7
2410.65	12.6	16.4	-5.8	2	-14	-8.2	7.2
2410.70	12.6	16.4	-5.8	2	-14	-8.2	7.9
2410.75	10.6	16.4	-7.8	2	-16	-8.2	7.6
2410.80	10.6	16.4	-7.8	2	-16	-8.2	7.3
2410.85	11.6	16.4	-6.8	2	-15	-8.2	8
2410.90	12.6	16.4	-5.8	2	-14	-8.2	7.7
2410.95	12.6	16.4	-5.8	2	-14	-8.2	7.9
2411.00	11.6	16.4	-6.8	2	-15	-8.2	7.3
2411.05	12.6	16.4	-5.8	2	-14	-8.2	7.8
2411.10	12.6	16.4	-5.8	2	-14	-8.2	7.8
2411.15	10.6	16.4	-7.8	2	-16	-8.2	7.8
2411.20	9.6	16.4	-8.8	2	-17	-8.2	7.7
2411.25	8.6	16.4	-9.8	2	-18	-8.2	7.8
2411.30	9.6	16.4	-8.8	2	-17	-8.2	7.9
2411.35	9.6	16.4	-8.8	2	-17	-8.2	7.9
2411.40	8.6	16.4	-9.8	2	-18	-8.2	7.9
2411.45	8.6	16.4	-9.8	2	-18	-8.2	7.9
2411.50	7.6	16.4	-10.8	2	-19	-8.2	6.9
2411.55	6.6	16.4	-11.8	2	-20	-8.2	7.4
2411.60	7.6	16.4	-10.8	2	-19	-8.2	4.8
2411.65	7.6	16.4	-10.8	2	-19	-8.2	5.9
2411.70	6.6	16.4	-11.8	2	-20	-8.2	5.7


11Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2411.75	5.6	16.4	-12.8	2	-21	-8.2	5.9
2411.80	4.6	16.4	-13.8	2	-22	-8.2	6.6
2411.85	4.6	16.4	-13.8	2	-22	-8.2	7.6
2411.90	5.6	16.4	-12.8	2	-21	-8.2	7.7
2411.95	7.6	16.4	-10.8	2	-19	-8.2	7.2
2412.00	7.6	16.4	-10.8	2	-19	-8.2	6.3
2412.05	7.6	16.4	-10.8	2	-19	-8.2	7.1
2412.10	5.6	16.4	-12.8	2	-21	-8.2	7.2
2412.15	3.6	16.4	-14.8	2	-23	-8.2	6
2412.20	4.6	16.4	-13.8	2	-22	-8.2	7.6
2412.25	5.6	16.4	-12.8	2	-21	-8.2	5.9
2412.30	6.6	16.4	-11.8	2	-20	-8.2	3.9
2412.35	6.6	16.4	-11.8	2	-20	-8.2	6.2
2412.40	7.6	16.4	-10.8	2	-19	-8.2	7.3
2412.45	6.6	16.4	-11.8	2	-20	-8.2	7.2
2412.50	6.6	16.4	-11.8	2	-20	-8.2	7.2
2412.55	8.6	16.4	-9.8	2	-18	-8.2	7.2
2412.60	8.6	16.4	-9.8	2	-18	-8.2	7.2
2412.65	9.6	16.4	-8.8	2	-17	-8.2	7.9
2412.70	10.6	16.4	-7.8	2	-16	-8.2	7.3
2412.75	8.6	16.4	-9.8	2	-18	-8.2	7.4
2412.80	10.6	16.4	-7.8	2	-16	-8.2	7.3
2412.85	10.6	16.4	-7.8	2	-16	-8.2	7.5
2412.90	10.6	16.4	-7.8	2	-16	-8.2	7.4
2412.95	12.6	16.4	-5.8	2	-14	-8.2	7.5
2413.00	12.6	16.4	-5.8	2	-14	-8.2	7.2
2413.05	12.6	16.4	-5.8	2	-14	-8.2	5.9
2413.10	11.6	16.4	-6.8	2	-15	-8.2	5.7
2413.15	10.6	16.4	-7.8	2	-16	-8.2	5.9
2413.20	10.6	16.4	-7.8	2	-16	-8.2	6.6
2413.25	10.6	16.4	-7.8	2	-16	-8.2	7.6
2413.30	11.6	16.4	-6.8	2	-15	-8.2	7.7
2413.35	12.6	16.4	-5.8	2	-14	-8.2	7.2
2413.40	11.6	16.4	-6.8	2	-15	-8.2	6.3
2413.45	11.6	16.4	-6.8	2	-15	-8.2	7.1
2413.50	11.6	16.4	-6.8	2	-15	-8.2	7.2
2413.55	11.6	16.4	-6.8	2	-15	-8.2	6
2413.60	11.6	16.4	-6.8	2	-15	-8.2	7.6
2413.65	12.6	16.4	-5.8	2	-14	-8.2	5.9
2413.70	11.6	16.4	-6.8	2	-15	-8.2	3.9
2413.75	11.6	16.4	-6.8	2	-15	-8.2	7.4
2413.80	11.6	16.4	-6.8	2	-15	-8.2	7.8
2413.85	11.6	16.4	-6.8	2	-15	-8.2	8
2413.90	11.6	16.4	-6.8	2	-15	-8.2	7.7
2413.95	11.6	16.4	-6.8	2	-15	-8.2	7.3
2414.00	11.6	16.4	-6.8	2	-15	-8.2	7.8
2414.05	12.6	16.4	-5.8	2	-14	-8.2	7.3
2414.10	11.6	16.4	-6.8	2	-15	-8.2	7.7
2414.15	11.6	16.4	-6.8	2	-15	-8.2	7.6
2414.20	10.6	16.4	-7.8	2	-16	-8.2	7.8
2414.25	10.6	16.4	-7.8	2	-16	-8.2	7.6
2414.30	11.6	16.4	-6.8	2	-15	-8.2	7.4
2414.35	11.6	16.4	-6.8	2	-15	-8.2	7.6
2414.40	10.6	16.4	-7.8	2	-16	-8.2	7.2
2414.45	10.6	16.4	-7.8	2	-16	-8.2	6.3

11Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2414.50	10.6	16.4	-7.8	2	-16	-8.2	7.1
2414.55	10.6	16.4	-7.8	2	-16	-8.2	7.2
2414.60	10.6	16.4	-7.8	2	-16	-8.2	6
2414.65	11.6	16.4	-6.8	2	-15	-8.2	7.6
2414.70	11.6	16.4	-6.8	2	-15	-8.2	5.9
2414.75	10.6	16.4	-7.8	2	-16	-8.2	3.9
2414.80	10.6	16.4	-7.8	2	-16	-8.2	7.4
2414.85	10.6	16.4	-7.8	2	-16	-8.2	7.8
2414.90	10.6	16.4	-7.8	2	-16	-8.2	8
2414.95	10.6	16.4	-7.8	2	-16	-8.2	7.7
2415.00	11.6	16.4	-6.8	2	-15	-8.2	7.3
2415.05	11.6	16.4	-6.8	2	-15	-8.2	7.8
2415.10	11.6	16.4	-6.8	2	-15	-8.2	7.3
2415.15	10.6	16.4	-7.8	2	-16	-8.2	8
2415.20	12.6	16.4	-5.8	2	-14	-8.2	7.9
2415.25	12.6	16.4	-5.8	2	-14	-8.2	7.5
2415.30	11.6	16.4	-6.8	2	-15	-8.2	8
2415.35	12.6	16.4	-5.8	2	-14	-8.2	7.7
2415.40	11.6	16.4	-6.8	2	-15	-8.2	7.6
2415.45	11.6	16.4	-6.8	2	-15	-8.2	7.7
2415.50	11.6	16.4	-6.8	2	-15	-8.2	8
2415.55	11.6	16.4	-6.8	2	-15	-8.2	7.6
2415.60	11.6	16.4	-6.8	2	-15	-8.2	7.7
2415.65	12.6	16.4	-5.8	2	-14	-8.2	7.5
2415.70	11.6	16.4	-6.8	2	-15	-8.2	7.9
2415.75	10.6	16.4	-7.8	2	-16	-8.2	7.4
2415.80	10.6	16.4	-7.8	2	-16	-8.2	7.3
2415.85	11.6	16.4	-6.8	2	-15	-8.2	8
2415.90	12.6	16.4	-5.8	2	-14	-8.2	7.2
2415.95	12.6	16.4	-5.8	2	-14	-8.2	7.5
2416.00	12.6	16.4	-5.8	2	-14	-8.2	7.4
2416.05	10.6	16.4	-7.8	2	-16	-8.2	7.8
2416.10	10.6	16.4	-7.8	2	-16	-8.2	7.3
2416.15	12.6	16.4	-5.8	2	-14	-8.2	7.9
2416.20	12.6	16.4	-5.8	2	-14	-8.2	7.5
2416.25	11.6	16.4	-6.8	2	-15	-8.2	7.5
2416.30	12.6	16.4	-5.8	2	-14	-8.2	7.1
2416.35	13.6	16.4	-4.8	2	-13	-8.2	7.4
2416.40	13.6	16.4	-4.8	2	-13	-8.2	7.6
2416.45	12.6	16.4	-5.8	2	-14	-8.2	7.8
2416.50	12.6	16.4	-5.8	2	-14	-8.2	7.5
2416.55	11.6	16.4	-6.8	2	-15	-8.2	7.3
2416.60	12.6	16.4	-5.8	2	-14	-8.2	7.6
2416.65	12.6	16.4	-5.8	2	-14	-8.2	8
2416.70	11.6	16.4	-6.8	2	-15	-8.2	7.8
2416.75	10.6	16.4	-7.8	2	-16	-8.2	7.3
2416.80	11.6	16.4	-6.8	2	-15	-8.2	7.6
2416.85	11.6	16.4	-6.8	2	-15	-8.2	7.6
2416.90	12.6	16.4	-5.8	2	-14	-8.2	7.6
2416.95	11.6	16.4	-6.8	2	-15	-8.2	7.3
2417.00	12.6	16.4	-5.8	2	-14	-8.2	7.4
2417.05	10.6	16.4	-7.8	2	-16	-8.2	7.9
2417.10	10.6	16.4	-7.8	2	-16	-8.2	7.3
2417.15	9.6	16.4	-8.8	2	-17	-8.2	7.7
2417.20	9.6	16.4	-8.8	2	-17	-8.2	7.7

11Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2417.25	8.6	16.4	-9.8	2	-18	-8.2	7.9
2417.30	9.6	16.4	-8.8	2	-17	-8.2	8
2417.35	8.6	16.4	-9.8	2	-18	-8.2	7.4
2417.40	8.6	16.4	-9.8	2	-18	-8.2	6.8
2417.45	8.6	16.4	-9.8	2	-18	-8.2	7.2
2417.50	8.6	16.4	-9.8	2	-18	-8.2	7.1
2417.55	8.6	16.4	-9.8	2	-18	-8.2	6.5
2417.60	9.6	16.4	-8.8	2	-17	-8.2	6.4
2417.65	9.6	16.4	-8.8	2	-17	-8.2	5.3
2417.70	9.6	16.4	-8.8	2	-17	-8.2	7.1
2417.75	9.6	16.4	-8.8	2	-17	-8.2	6.8
2417.80	10.6	16.4	-7.8	2	-16	-8.2	7.5
2417.85	11.6	16.4	-6.8	2	-15	-8.2	7.1
2417.90	12.6	16.4	-5.8	2	-14	-8.2	6.3
2417.95	12.6	16.4	-5.8	2	-14	-8.2	6.5
2418.00	13.6	16.4	-4.8	2	-13	-8.2	5.8
2418.05	14.6	16.4	-3.8	2	-12	-8.2	5.9
2418.10	15.6	16.4	-2.8	2	-11	-8.2	6.1
2418.15	15.6	16.4	-2.8	2	-11	-8.2	6.2
2418.20	14.6	16.4	-3.8	2	-12	-8.2	6
2418.25	13.6	16.4	-4.8	2	-13	-8.2	5.7
2418.30	15.6	16.4	-2.8	2	-11	-8.2	5.8
2418.35	16.6	16.4	-1.8	2	-10	-8.2	5.7
2418.40	14.6	16.4	-3.8	2	-12	-8.2	7
2418.45	15.6	16.4	-2.8	2	-11	-8.2	6.8
2418.50	13.6	16.4	-4.8	2	-13	-8.2	6.7
2418.55	16.6	16.4	-1.8	2	-10	-8.2	6.8
2418.60	16.6	16.4	-1.8	2	-10	-8.2	5.9
2418.65	16.6	16.4	-1.8	2	-10	-8.2	7.3
2418.70	17.6	16.4	-0.8	2	-9	-8.2	7.2
2418.75	16.6	16.4	-1.8	2	-10	-8.2	7.1
2418.80	14.6	16.4	-3.8	2	-12	-8.2	7
2418.85	18.6	16.4	0.2	2	-8	-8.2	6.8
2418.90	18.6	16.4	0.2	2	-8	-8.2	6.7
2418.95	17.6	16.4	-0.8	2	-9	-8.2	6.8
2419.00	17.6	16.4	-0.8	2	-9	-8.2	5.9
2419.05	18.6	16.4	0.2	2	-8	-8.2	6.1
2419.10	19.6	16.4	1.2	2	-7	-8.2	5.7
2419.15	18.6	16.4	0.2	2	-8	-8.2	6.1
2419.20	19.6	16.4	1.2	2	-7	-8.2	6.2
2419.25	19.6	16.4	1.2	2	-7	-8.2	6.3
2419.30	20.6	16.4	2.2	2	-6	-8.2	6.1
2419.35	19.6	16.4	1.2	2	-7	-8.2	5.8
2419.40	20.6	16.4	2.2	2	-6	-8.2	5.9
2419.45	19.6	16.4	1.2	2	-7	-8.2	6.1
2419.50	20.6	16.4	2.2	2	-6	-8.2	7.1
2419.55	20.6	16.4	2.2	2	-6	-8.2	7.3
2419.60	21.6	16.4	3.2	2	-5	-8.2	7.4
2419.65	20.6	16.4	2.2	2	-6	-8.2	7.5
2419.70	21.6	16.4	3.2	2	-5	-8.2	7.6
2419.75	21.6	16.4	3.2	2	-5	-8.2	7.1
2419.80	22.6	16.4	4.2	2	-4	-8.2	7.4
2419.85	21.6	16.4	3.2	2	-5	-8.2	5.9
2419.90	23.6	16.4	5.2	2	-3	-8.2	5.6
2419.95	23.6	16.4	5.2	2	-3	-8.2	5.8

11Mbps Channel 1 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2420.00	23.6	16.4	5.2	2	-3	-8.2	6.3
2420.05	24.6	16.4	6.2	2	-2	-8.2	6.1
2420.10	24.6	16.4	6.2	2	-2	-8.2	6.2
2420.15	24.6	16.4	6.2	2	-2	-8.2	6.3
2420.20	24.6	16.4	6.2	2	-2	-8.2	6.1
2420.25	24.6	16.4	6.2	2	-2	-8.2	6.5
2420.30	24.6	16.4	6.2	2	-2	-8.2	6.3
2420.35	24.6	16.4	6.2	2	-2	-8.2	6.4
2420.40	25.6	16.4	7.2	2	-1	-8.2	5.9
2420.45	25.6	16.4	7.2	2	-1	-8.2	6.2
2420.50	25.6	16.4	7.2	2	-1	-8.2	4.3

Processing Gain (dB) @20th Percentile= 10.6

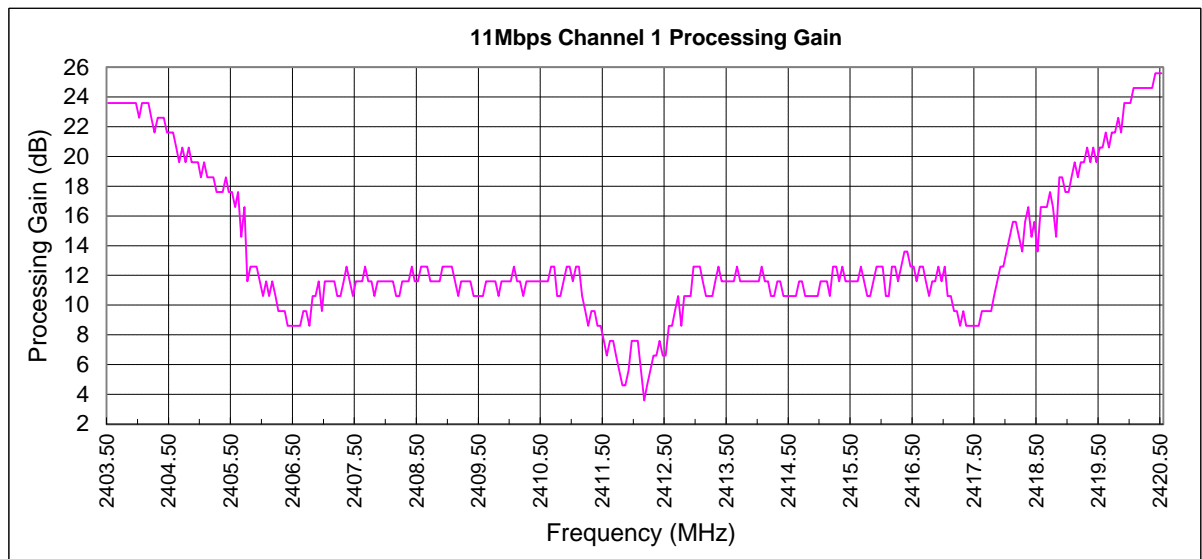

11Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2428.50	24.6	16.4	6.2	2	-2	-8.2	5.6
2428.55	24.6	16.4	6.2	2	-2	-8.2	5.4
2428.60	24.6	16.4	6.2	2	-2	-8.2	5.6
2428.65	23.6	16.4	5.2	2	-3	-8.2	4.8
2428.70	23.6	16.4	5.2	2	-3	-8.2	3.4
2428.75	23.6	16.4	5.2	2	-3	-8.2	6.7
2428.80	23.6	16.4	5.2	2	-3	-8.2	6.1
2428.85	23.6	16.4	5.2	2	-3	-8.2	5.6
2428.90	23.6	16.4	5.2	2	-3	-8.2	5.1
2428.95	23.6	16.4	5.2	2	-3	-8.2	6.2
2429.00	23.6	16.4	5.2	2	-3	-8.2	5.6
2429.05	23.6	16.4	5.2	2	-3	-8.2	3.9
2429.10	23.6	16.4	5.2	2	-3	-8.2	7.2
2429.15	23.6	16.4	5.2	2	-3	-8.2	6.5
2429.20	22.6	16.4	4.2	2	-4	-8.2	6.7
2429.25	21.6	16.4	3.2	2	-5	-8.2	4.2
2429.30	22.6	16.4	4.2	2	-4	-8.2	6.2
2429.35	22.6	16.4	4.2	2	-4	-8.2	5.4
2429.40	22.6	16.4	4.2	2	-4	-8.2	5.2
2429.45	21.6	16.4	3.2	2	-5	-8.2	6
2429.50	21.6	16.4	3.2	2	-5	-8.2	5.6
2429.55	21.6	16.4	3.2	2	-5	-8.2	6.4
2429.60	20.6	16.4	2.2	2	-6	-8.2	5.6
2429.65	20.6	16.4	2.2	2	-6	-8.2	6.7
2429.70	20.6	16.4	2.2	2	-6	-8.2	6.8
2429.75	19.6	16.4	1.2	2	-7	-8.2	6.7
2429.80	19.6	16.4	1.2	2	-7	-8.2	5.5
2429.85	20.6	16.4	2.2	2	-6	-8.2	7.5
2429.90	19.6	16.4	1.2	2	-7	-8.2	7.8
2429.95	19.6	16.4	1.2	2	-7	-8.2	7.6
2430.00	18.6	16.4	0.2	2	-8	-8.2	5.6
2430.05	18.6	16.4	0.2	2	-8	-8.2	6.7
2430.10	18.6	16.4	0.2	2	-8	-8.2	5.7
2430.15	18.6	16.4	0.2	2	-8	-8.2	6.3
2430.20	17.6	16.4	-0.8	2	-9	-8.2	7.6
2430.25	17.6	16.4	-0.8	2	-9	-8.2	7
2430.30	17.6	16.4	-0.8	2	-9	-8.2	7.1
2430.35	17.6	16.4	-0.8	2	-9	-8.2	7.4
2430.40	17.6	16.4	-0.8	2	-9	-8.2	7.5
2430.45	17.6	16.4	-0.8	2	-9	-8.2	5.6
2430.50	17.6	16.4	-0.8	2	-9	-8.2	6.1
2430.55	17.6	16.4	-0.8	2	-9	-8.2	5.6
2430.60	17.6	16.4	-0.8	2	-9	-8.2	5.1
2430.65	16.6	16.4	-1.8	2	-10	-8.2	6.9
2430.70	16.6	16.4	-1.8	2	-10	-8.2	6.9
2430.75	14.6	16.4	-3.8	2	-12	-8.2	7.3
2430.80	14.6	16.4	-3.8	2	-12	-8.2	7.5
2430.85	16.6	16.4	-1.8	2	-10	-8.2	6.8
2430.90	12.6	16.4	-5.8	2	-14	-8.2	7.4
2430.95	13.6	16.4	-4.8	2	-13	-8.2	6.8
2431.00	13.6	16.4	-4.8	2	-13	-8.2	7.9
2431.05	12.6	16.4	-5.8	2	-14	-8.2	7.2
2431.10	12.6	16.4	-5.8	2	-14	-8.2	7.9
2431.15	11.6	16.4	-6.8	2	-15	-8.2	7
2431.20	9.6	16.4	-8.8	2	-17	-8.2	6.2

11Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2431.25	9.6	16.4	-8.8	2	-17	-8.2	6.5
2431.30	9.6	16.4	-8.8	2	-17	-8.2	5.9
2431.35	8.6	16.4	-9.8	2	-18	-8.2	3.9
2431.40	8.6	16.4	-9.8	2	-18	-8.2	7.2
2431.45	8.6	16.4	-9.8	2	-18	-8.2	6.5
2431.50	8.6	16.4	-9.8	2	-18	-8.2	6.7
2431.55	8.6	16.4	-9.8	2	-18	-8.2	4.2
2431.60	8.6	16.4	-9.8	2	-18	-8.2	6.2
2431.65	8.6	16.4	-9.8	2	-18	-8.2	6.8
2431.70	8.6	16.4	-9.8	2	-18	-8.2	6.4
2431.75	8.6	16.4	-9.8	2	-18	-8.2	7.9
2431.80	9.6	16.4	-8.8	2	-17	-8.2	7.8
2431.85	9.6	16.4	-8.8	2	-17	-8.2	6.5
2431.90	11.6	16.4	-6.8	2	-15	-8.2	7.8
2431.95	12.6	16.4	-5.8	2	-14	-8.2	4.3
2432.00	11.6	16.4	-6.8	2	-15	-8.2	5.1
2432.05	10.6	16.4	-7.8	2	-16	-8.2	7.5
2432.10	10.6	16.4	-7.8	2	-16	-8.2	6.8
2432.15	11.6	16.4	-6.8	2	-15	-8.2	6.8
2432.20	10.6	16.4	-7.8	2	-16	-8.2	5.9
2432.25	10.6	16.4	-7.8	2	-16	-8.2	6.5
2432.30	11.6	16.4	-6.8	2	-15	-8.2	6.9
2432.35	12.6	16.4	-5.8	2	-14	-8.2	5.1
2432.40	11.6	16.4	-6.8	2	-15	-8.2	7.6
2432.45	11.6	16.4	-6.8	2	-15	-8.2	6.3
2432.50	11.6	16.4	-6.8	2	-15	-8.2	5
2432.55	11.6	16.4	-6.8	2	-15	-8.2	6.6
2432.60	11.6	16.4	-6.8	2	-15	-8.2	5.6
2432.65	11.6	16.4	-6.8	2	-15	-8.2	6.7
2432.70	11.6	16.4	-6.8	2	-15	-8.2	6.8
2432.75	11.6	16.4	-6.8	2	-15	-8.2	6.1
2432.80	11.6	16.4	-6.8	2	-15	-8.2	5.4
2432.85	11.6	16.4	-6.8	2	-15	-8.2	7
2432.90	11.6	16.4	-6.8	2	-15	-8.2	7.2
2432.95	11.6	16.4	-6.8	2	-15	-8.2	5.2
2433.00	11.6	16.4	-6.8	2	-15	-8.2	4.2
2433.05	11.6	16.4	-6.8	2	-15	-8.2	7.9
2433.10	11.6	16.4	-6.8	2	-15	-8.2	7.8
2433.15	10.6	16.4	-7.8	2	-16	-8.2	6.5
2433.20	10.6	16.4	-7.8	2	-16	-8.2	7.8
2433.25	11.6	16.4	-6.8	2	-15	-8.2	4.3
2433.30	11.6	16.4	-6.8	2	-15	-8.2	5.1
2433.35	10.6	16.4	-7.8	2	-16	-8.2	7.5
2433.40	10.6	16.4	-7.8	2	-16	-8.2	6.8
2433.45	10.6	16.4	-7.8	2	-16	-8.2	5.9
2433.50	11.6	16.4	-6.8	2	-15	-8.2	6.5
2433.55	12.6	16.4	-5.8	2	-14	-8.2	6.9
2433.60	12.6	16.4	-5.8	2	-14	-8.2	6.9
2433.65	11.6	16.4	-6.8	2	-15	-8.2	5.2
2433.70	11.6	16.4	-6.8	2	-15	-8.2	4.8
2433.75	11.6	16.4	-6.8	2	-15	-8.2	4.7
2433.80	11.6	16.4	-6.8	2	-15	-8.2	7.8
2433.85	11.6	16.4	-6.8	2	-15	-8.2	5.3
2433.90	11.6	16.4	-6.8	2	-15	-8.2	0.2
2433.95	11.6	16.4	-6.8	2	-15	-8.2	6.7

11Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2434.00	11.6	16.4	-6.8	2	-15	-8.2	7.1
2434.05	11.6	16.4	-6.8	2	-15	-8.2	4.3
2434.10	11.6	16.4	-6.8	2	-15	-8.2	5.1
2434.15	10.6	16.4	-7.8	2	-16	-8.2	4.9
2434.20	10.6	16.4	-7.8	2	-16	-8.2	7.2
2434.25	10.6	16.4	-7.8	2	-16	-8.2	6.7
2434.30	10.6	16.4	-7.8	2	-16	-8.2	5.3
2434.35	11.6	16.4	-6.8	2	-15	-8.2	4.9
2434.40	11.6	16.4	-6.8	2	-15	-8.2	5.3
2434.45	10.6	16.4	-7.8	2	-16	-8.2	6.8
2434.50	10.6	16.4	-7.8	2	-16	-8.2	7.2
2434.55	10.6	16.4	-7.8	2	-16	-8.2	6.8
2434.60	11.6	16.4	-6.8	2	-15	-8.2	5.3
2434.65	11.6	16.4	-6.8	2	-15	-8.2	6.1
2434.70	10.6	16.4	-7.8	2	-16	-8.2	5.9
2434.75	10.6	16.4	-7.8	2	-16	-8.2	4.8
2434.80	10.6	16.4	-7.8	2	-16	-8.2	5.8
2434.85	11.6	16.4	-6.8	2	-15	-8.2	5.3
2434.90	12.6	16.4	-5.8	2	-14	-8.2	7.8
2434.95	12.6	16.4	-5.8	2	-14	-8.2	5.2
2435.00	11.6	16.4	-6.8	2	-15	-8.2	6.8
2435.05	11.6	16.4	-6.8	2	-15	-8.2	6.5
2435.10	11.6	16.4	-6.8	2	-15	-8.2	7.4
2435.15	11.6	16.4	-6.8	2	-15	-8.2	6.4
2435.20	10.6	16.4	-7.8	2	-16	-8.2	7.2
2435.25	11.6	16.4	-6.8	2	-15	-8.2	5.8
2435.30	11.6	16.4	-6.8	2	-15	-8.2	6.2
2435.35	11.6	16.4	-6.8	2	-15	-8.2	4.8
2435.40	12.6	16.4	-5.8	2	-14	-8.2	6.3
2435.45	11.6	16.4	-6.8	2	-15	-8.2	7.2
2435.50	11.6	16.4	-6.8	2	-15	-8.2	6.8
2435.55	11.6	16.4	-6.8	2	-15	-8.2	5.6
2435.60	11.6	16.4	-6.8	2	-15	-8.2	7.3
2435.65	12.6	16.4	-5.8	2	-14	-8.2	6.8
2435.70	12.6	16.4	-5.8	2	-14	-8.2	6.2
2435.75	10.6	16.4	-7.8	2	-16	-8.2	7.9
2435.80	10.6	16.4	-7.8	2	-16	-8.2	6.3
2435.85	11.6	16.4	-6.8	2	-15	-8.2	6.5
2435.90	12.6	16.4	-5.8	2	-14	-8.2	6.8
2435.95	10.6	16.4	-7.8	2	-16	-8.2	7.6
2436.00	11.6	16.4	-6.8	2	-15	-8.2	6.8
2436.05	11.6	16.4	-6.8	2	-15	-8.2	5.6
2436.10	11.6	16.4	-6.8	2	-15	-8.2	4.4
2436.15	10.6	16.4	-7.8	2	-16	-8.2	4.4
2436.20	9.6	16.4	-8.8	2	-17	-8.2	5.6
2436.25	9.6	16.4	-8.8	2	-17	-8.2	6.7
2436.30	10.6	16.4	-7.8	2	-16	-8.2	5.6
2436.35	8.6	16.4	-9.8	2	-18	-8.2	6.8
2436.40	7.6	16.4	-10.8	2	-19	-8.2	7.2
2436.45	7.6	16.4	-10.8	2	-19	-8.2	5.6
2436.50	7.6	16.4	-10.8	2	-19	-8.2	4.2
2436.55	7.6	16.4	-10.8	2	-19	-8.2	6.8
2436.60	8.6	16.4	-9.8	2	-18	-8.2	4.7
2436.65	7.6	16.4	-10.8	2	-19	-8.2	6.8
2436.70	6.6	16.4	-11.8	2	-20	-8.2	6.2


11Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2436.75	4.6	16.4	-13.8	2	-22	-8.2	7.4
2436.80	3.6	16.4	-14.8	2	-23	-8.2	7.3
2436.85	5.6	16.4	-12.8	2	-21	-8.2	6.9
2436.90	6.6	16.4	-11.8	2	-20	-8.2	6.8
2436.95	8.6	16.4	-9.8	2	-18	-8.2	7.2
2437.00	7.6	16.4	-10.8	2	-19	-8.2	5.7
2437.05	7.6	16.4	-10.8	2	-19	-8.2	6.2
2437.10	6.6	16.4	-11.8	2	-20	-8.2	5.6
2437.15	4.6	16.4	-13.8	2	-22	-8.2	6.8
2437.20	4.6	16.4	-13.8	2	-22	-8.2	7.2
2437.25	4.6	16.4	-13.8	2	-22	-8.2	6.2
2437.30	6.6	16.4	-11.8	2	-20	-8.2	5.6
2437.35	7.6	16.4	-10.8	2	-19	-8.2	6.8
2437.40	7.6	16.4	-10.8	2	-19	-8.2	7.2
2437.45	7.6	16.4	-10.8	2	-19	-8.2	7
2437.50	7.6	16.4	-10.8	2	-19	-8.2	4.8
2437.55	8.6	16.4	-9.8	2	-18	-8.2	6.3
2437.60	8.6	16.4	-9.8	2	-18	-8.2	7.2
2437.65	9.6	16.4	-8.8	2	-17	-8.2	6.8
2437.70	9.6	16.4	-8.8	2	-17	-8.2	5.6
2437.75	9.6	16.4	-8.8	2	-17	-8.2	7.3
2437.80	9.6	16.4	-8.8	2	-17	-8.2	6.8
2437.85	10.6	16.4	-7.8	2	-16	-8.2	6.2
2437.90	9.6	16.4	-8.8	2	-17	-8.2	7.9
2437.95	10.6	16.4	-7.8	2	-16	-8.2	6.3
2438.00	11.6	16.4	-6.8	2	-15	-8.2	6.5
2438.05	11.6	16.4	-6.8	2	-15	-8.2	5.6
2438.10	11.6	16.4	-6.8	2	-15	-8.2	6.2
2438.15	11.6	16.4	-6.8	2	-15	-8.2	4.3
2438.20	10.6	16.4	-7.8	2	-16	-8.2	5.7
2438.25	11.6	16.4	-6.8	2	-15	-8.2	5.6
2438.30	11.6	16.4	-6.8	2	-15	-8.2	6.8
2438.35	11.6	16.4	-6.8	2	-15	-8.2	7.2
2438.40	10.6	16.4	-7.8	2	-16	-8.2	6.8
2438.45	10.6	16.4	-7.8	2	-16	-8.2	6.8
2438.50	12.6	16.4	-5.8	2	-14	-8.2	5.4
2438.55	10.6	16.4	-7.8	2	-16	-8.2	4.3
2438.60	11.6	16.4	-6.8	2	-15	-8.2	6.8
2438.65	11.6	16.4	-6.8	2	-15	-8.2	7.2
2438.70	11.6	16.4	-6.8	2	-15	-8.2	7.1
2438.75	10.6	16.4	-7.8	2	-16	-8.2	7.3
2438.80	10.6	16.4	-7.8	2	-16	-8.2	5.2
2438.85	11.6	16.4	-6.8	2	-15	-8.2	6.8
2438.90	11.6	16.4	-6.8	2	-15	-8.2	7.2
2438.95	11.6	16.4	-6.8	2	-15	-8.2	6.8
2439.00	11.6	16.4	-6.8	2	-15	-8.2	7.2
2439.05	11.6	16.4	-6.8	2	-15	-8.2	6.8
2439.10	11.6	16.4	-6.8	2	-15	-8.2	6.5
2439.15	11.6	16.4	-6.8	2	-15	-8.2	5.6
2439.20	10.6	16.4	-7.8	2	-16	-8.2	6.2
2439.25	10.6	16.4	-7.8	2	-16	-8.2	5.6
2439.30	11.6	16.4	-6.8	2	-15	-8.2	6.8
2439.35	11.6	16.4	-6.8	2	-15	-8.2	7.6
2439.40	10.6	16.4	-7.8	2	-16	-8.2	5.7
2439.45	10.6	16.4	-7.8	2	-16	-8.2	6.2

11Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2439.50	11.6	16.4	-6.8	2	-15	-8.2	5.6
2439.55	10.6	16.4	-7.8	2	-16	-8.2	6.8
2439.60	11.6	16.4	-6.8	2	-15	-8.2	7.2
2439.65	11.6	16.4	-6.8	2	-15	-8.2	6.2
2439.70	10.6	16.4	-7.8	2	-16	-8.2	5.6
2439.75	10.6	16.4	-7.8	2	-16	-8.2	6.8
2439.80	10.6	16.4	-7.8	2	-16	-8.2	7.2
2439.85	11.6	16.4	-6.8	2	-15	-8.2	6.6
2439.90	10.6	16.4	-7.8	2	-16	-8.2	4.8
2439.95	10.6	16.4	-7.8	2	-16	-8.2	6.3
2440.00	10.6	16.4	-7.8	2	-16	-8.2	7.2
2440.05	11.6	16.4	-6.8	2	-15	-8.2	6.8
2440.10	11.6	16.4	-6.8	2	-15	-8.2	6.9
2440.15	10.6	16.4	-7.8	2	-16	-8.2	6.8
2440.20	12.6	16.4	-5.8	2	-14	-8.2	6.5
2440.25	10.6	16.4	-7.8	2	-16	-8.2	6.8
2440.30	11.6	16.4	-6.8	2	-15	-8.2	6.5
2440.35	11.6	16.4	-6.8	2	-15	-8.2	6.2
2440.40	11.6	16.4	-6.8	2	-15	-8.2	5.6
2440.45	11.6	16.4	-6.8	2	-15	-8.2	5.4
2440.50	11.6	16.4	-6.8	2	-15	-8.2	5.6
2440.55	11.6	16.4	-6.8	2	-15	-8.2	4.8
2440.60	11.6	16.4	-6.8	2	-15	-8.2	3.4
2440.65	12.6	16.4	-5.8	2	-14	-8.2	6.7
2440.70	11.6	16.4	-6.8	2	-15	-8.2	6.1
2440.75	10.6	16.4	-7.8	2	-16	-8.2	5.6
2440.80	10.6	16.4	-7.8	2	-16	-8.2	5.1
2440.85	11.6	16.4	-6.8	2	-15	-8.2	6.2
2440.90	11.6	16.4	-6.8	2	-15	-8.2	5.6
2440.95	12.6	16.4	-5.8	2	-14	-8.2	7
2441.00	10.6	16.4	-7.8	2	-16	-8.2	7.1
2441.05	11.6	16.4	-6.8	2	-15	-8.2	5.8
2441.10	10.6	16.4	-7.8	2	-16	-8.2	6.2
2441.15	10.6	16.4	-7.8	2	-16	-8.2	5.3
2441.20	10.6	16.4	-7.8	2	-16	-8.2	5.6
2441.25	10.6	16.4	-7.8	2	-16	-8.2	6.2
2441.30	10.6	16.4	-7.8	2	-16	-8.2	7.2
2441.35	10.6	16.4	-7.8	2	-16	-8.2	5.1
2441.40	11.6	16.4	-6.8	2	-15	-8.2	6.8
2441.45	11.6	16.4	-6.8	2	-15	-8.2	6.5
2441.50	11.6	16.4	-6.8	2	-15	-8.2	6.7
2441.55	12.6	16.4	-5.8	2	-14	-8.2	5.8
2441.60	10.6	16.4	-7.8	2	-16	-8.2	6.2
2441.65	10.6	16.4	-7.8	2	-16	-8.2	6.8
2441.70	11.6	16.4	-6.8	2	-15	-8.2	2.2
2441.75	11.6	16.4	-6.8	2	-15	-8.2	4.6
2441.80	10.6	16.4	-7.8	2	-16	-8.2	6.2
2441.85	11.6	16.4	-6.8	2	-15	-8.2	5.4
2441.90	11.6	16.4	-6.8	2	-15	-8.2	6.8
2441.95	11.6	16.4	-6.8	2	-15	-8.2	6.2
2442.00	11.6	16.4	-6.8	2	-15	-8.2	5.6
2442.05	11.6	16.4	-6.8	2	-15	-8.2	6.8
2442.10	10.6	16.4	-7.8	2	-16	-8.2	4.2
2442.15	9.6	16.4	-8.8	2	-17	-8.2	5.9
2442.20	8.6	16.4	-9.8	2	-18	-8.2	4.4

11Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2442.25	8.6	16.4	-9.8	2	-18	-8.2	6.6
2442.30	7.6	16.4	-10.8	2	-19	-8.2	7.1
2442.35	8.6	16.4	-9.8	2	-18	-8.2	5.6
2442.40	7.6	16.4	-10.8	2	-19	-8.2	6.4
2442.45	7.6	16.4	-10.8	2	-19	-8.2	6.3
2442.50	7.6	16.4	-10.8	2	-19	-8.2	6.9
2442.55	7.6	16.4	-10.8	2	-19	-8.2	7.2
2442.60	7.6	16.4	-10.8	2	-19	-8.2	6.2
2442.65	8.6	16.4	-9.8	2	-18	-8.2	5.4
2442.70	7.6	16.4	-10.8	2	-19	-8.2	5.1
2442.75	8.6	16.4	-9.8	2	-18	-8.2	4.3
2442.80	9.6	16.4	-8.8	2	-17	-8.2	4.9
2442.85	10.6	16.4	-7.8	2	-16	-8.2	5.8
2442.90	10.6	16.4	-7.8	2	-16	-8.2	7.2
2442.95	11.6	16.4	-6.8	2	-15	-8.2	6.3
2443.00	11.6	16.4	-6.8	2	-15	-8.2	5.7
2443.05	10.6	16.4	-7.8	2	-16	-8.2	6.5
2443.10	11.6	16.4	-6.8	2	-15	-8.2	5.5
2443.15	11.6	16.4	-6.8	2	-15	-8.2	5.9
2443.20	12.6	16.4	-5.8	2	-14	-8.2	6.4
2443.25	11.6	16.4	-6.8	2	-15	-8.2	6.7
2443.30	12.6	16.4	-5.8	2	-14	-8.2	6.2
2443.35	15.6	16.4	-2.8	2	-11	-8.2	5.4
2443.40	16.6	16.4	-1.8	2	-10	-8.2	5.1
2443.45	15.6	16.4	-2.8	2	-11	-8.2	5.6
2443.50	16.6	16.4	-1.8	2	-10	-8.2	4.8
2443.55	17.6	16.4	-0.8	2	-9	-8.2	6.8
2443.60	15.6	16.4	-2.8	2	-11	-8.2	4.3
2443.65	16.6	16.4	-1.8	2	-10	-8.2	4.2
2443.70	17.6	16.4	-0.8	2	-9	-8.2	5.6
2443.75	17.6	16.4	-0.8	2	-9	-8.2	6.7
2443.80	17.6	16.4	-0.8	2	-9	-8.2	7.8
2443.85	17.6	16.4	-0.8	2	-9	-8.2	5.4
2443.90	18.6	16.4	0.2	2	-8	-8.2	4.9
2443.95	18.6	16.4	0.2	2	-8	-8.2	7
2444.00	18.6	16.4	0.2	2	-8	-8.2	5.6
2444.05	18.6	16.4	0.2	2	-8	-8.2	6.8
2444.10	18.6	16.4	0.2	2	-8	-8.2	5.3
2444.15	18.6	16.4	0.2	2	-8	-8.2	5.9
2444.20	18.6	16.4	0.2	2	-8	-8.2	5.2
2444.25	18.6	16.4	0.2	2	-8	-8.2	6.3
2444.30	19.6	16.4	1.2	2	-7	-8.2	4.8
2444.35	20.6	16.4	2.2	2	-6	-8.2	5.4
2444.40	20.6	16.4	2.2	2	-6	-8.2	4.7
2444.45	20.6	16.4	2.2	2	-6	-8.2	5.9
2444.50	20.6	16.4	2.2	2	-6	-8.2	7
2444.55	20.6	16.4	2.2	2	-6	-8.2	6.7
2444.60	21.6	16.4	3.2	2	-5	-8.2	4.7
2444.65	21.6	16.4	3.2	2	-5	-8.2	4.8
2444.70	21.6	16.4	3.2	2	-5	-8.2	6
2444.75	21.6	16.4	3.2	2	-5	-8.2	6.1
2444.80	21.6	16.4	3.2	2	-5	-8.2	5.9
2444.85	22.6	16.4	4.2	2	-4	-8.2	3.9
2444.90	22.6	16.4	4.2	2	-4	-8.2	7.2
2444.95	23.6	16.4	5.2	2	-3	-8.2	6.5

11Mbps Channel 6 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2445.00	23.6	16.4	5.2	2	-3	-8.2	6.7
2445.05	24.6	16.4	6.2	2	-2	-8.2	4.2
2445.10	22.6	16.4	4.2	2	-4	-8.2	6.2
2445.15	24.6	16.4	6.2	2	-2	-8.2	5.4
2445.20	24.6	16.4	6.2	2	-2	-8.2	5.2
2445.25	24.6	16.4	6.2	2	-2	-8.2	6
2445.30	24.6	16.4	6.2	2	-2	-8.2	5.6
2445.35	25.6	16.4	7.2	2	-1	-8.2	6.4
2445.40	25.6	16.4	7.2	2	-1	-8.2	6.2
2445.45	25.6	16.4	7.2	2	-1	-8.2	6.7
2445.50	25.6	16.4	7.2	2	-1	-8.2	5.1

Processing Gain (dB) @20th Percentile= 10.6

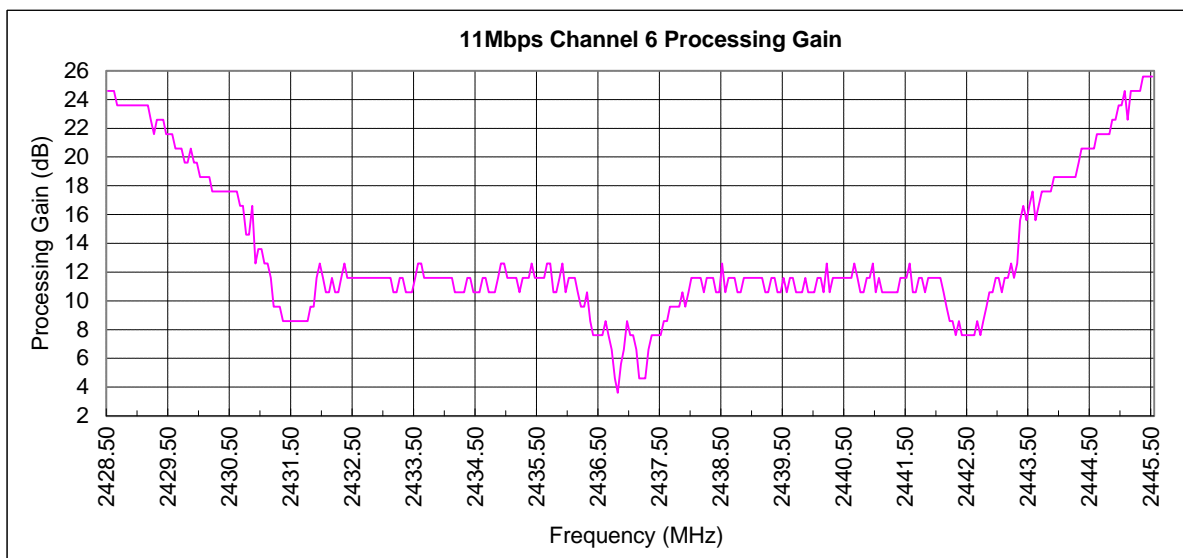

11Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2453.50	24.6	16.4	6.2	2	-2	-8.2	6.6
2453.55	24.6	16.4	6.2	2	-2	-8.2	7.8
2453.60	24.6	16.4	6.2	2	-2	-8.2	4.8
2453.65	24.6	16.4	6.2	2	-2	-8.2	6.5
2453.70	23.6	16.4	5.2	2	-3	-8.2	6.3
2453.75	24.6	16.4	6.2	2	-2	-8.2	5.8
2453.80	24.6	16.4	6.2	2	-2	-8.2	6.5
2453.85	24.6	16.4	6.2	2	-2	-8.2	6.9
2453.90	23.6	16.4	5.2	2	-3	-8.2	7.8
2453.95	23.6	16.4	5.2	2	-3	-8.2	7.2
2454.00	23.6	16.4	5.2	2	-3	-8.2	7.8
2454.05	23.6	16.4	5.2	2	-3	-8.2	5.8
2454.10	23.6	16.4	5.2	2	-3	-8.2	5.3
2454.15	23.6	16.4	5.2	2	-3	-8.2	6.2
2454.20	22.6	16.4	4.2	2	-4	-8.2	5.8
2454.25	22.6	16.4	4.2	2	-4	-8.2	6.2
2454.30	22.6	16.4	4.2	2	-4	-8.2	5.1
2454.35	23.6	16.4	5.2	2	-3	-8.2	6.2
2454.40	21.6	16.4	3.2	2	-5	-8.2	5.8
2454.45	22.6	16.4	4.2	2	-4	-8.2	5.8
2454.50	21.6	16.4	3.2	2	-5	-8.2	7.5
2454.55	21.6	16.4	3.2	2	-5	-8.2	6.3
2454.60	21.6	16.4	3.2	2	-5	-8.2	6.5
2454.65	20.6	16.4	2.2	2	-6	-8.2	5.8
2454.70	20.6	16.4	2.2	2	-6	-8.2	8.3
2454.75	20.6	16.4	2.2	2	-6	-8.2	6.2
2454.80	19.6	16.4	1.2	2	-7	-8.2	5.6
2454.85	19.6	16.4	1.2	2	-7	-8.2	6.8
2454.90	19.6	16.4	1.2	2	-7	-8.2	7.5
2454.95	19.6	16.4	1.2	2	-7	-8.2	6.8
2455.00	18.6	16.4	0.2	2	-8	-8.2	7.8
2455.05	18.6	16.4	0.2	2	-8	-8.2	6.5
2455.10	18.6	16.4	0.2	2	-8	-8.2	6
2455.15	19.6	16.4	1.2	2	-7	-8.2	6.8
2455.20	18.6	16.4	0.2	2	-8	-8.2	7
2455.25	17.6	16.4	-0.8	2	-9	-8.2	6.5
2455.30	17.6	16.4	-0.8	2	-9	-8.2	6.3
2455.35	16.6	16.4	-1.8	2	-10	-8.2	6.8
2455.40	18.6	16.4	0.2	2	-8	-8.2	5.5
2455.45	17.6	16.4	-0.8	2	-9	-8.2	5.8
2455.50	17.6	16.4	-0.8	2	-9	-8.2	6.2
2455.55	15.6	16.4	-2.8	2	-11	-8.2	6.8
2455.60	15.6	16.4	-2.8	2	-11	-8.2	7.8
2455.65	16.6	16.4	-1.8	2	-10	-8.2	5.6
2455.70	16.6	16.4	-1.8	2	-10	-8.2	6.3
2455.75	13.6	16.4	-4.8	2	-13	-8.2	5.8
2455.80	13.6	16.4	-4.8	2	-13	-8.2	6.8
2455.85	13.6	16.4	-4.8	2	-13	-8.2	5.2
2455.90	12.6	16.4	-5.8	2	-14	-8.2	6.2
2455.95	11.6	16.4	-6.8	2	-15	-8.2	6.4
2456.00	11.6	16.4	-6.8	2	-15	-8.2	5.8
2456.05	10.6	16.4	-7.8	2	-16	-8.2	6.2
2456.10	11.6	16.4	-6.8	2	-15	-8.2	5.9
2456.15	9.6	16.4	-8.8	2	-17	-8.2	5.8
2456.20	9.6	16.4	-8.8	2	-17	-8.2	6.2

11Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2456.25	9.6	16.4	-8.8	2	-17	-8.2	5.6
2456.30	8.6	16.4	-9.8	2	-18	-8.2	4.2
2456.35	8.6	16.4	-9.8	2	-18	-8.2	5.1
2456.40	8.6	16.4	-9.8	2	-18	-8.2	6.3
2456.45	8.6	16.4	-9.8	2	-18	-8.2	4.9
2456.50	8.6	16.4	-9.8	2	-18	-8.2	5.1
2456.55	8.6	16.4	-9.8	2	-18	-8.2	5.8
2456.60	8.6	16.4	-9.8	2	-18	-8.2	6.4
2456.65	9.6	16.4	-8.8	2	-17	-8.2	5.9
2456.70	8.6	16.4	-9.8	2	-18	-8.2	5.6
2456.75	9.6	16.4	-8.8	2	-17	-8.2	6.1
2456.80	9.6	16.4	-8.8	2	-17	-8.2	7
2456.85	11.6	16.4	-6.8	2	-15	-8.2	6
2456.90	11.6	16.4	-6.8	2	-15	-8.2	5.9
2456.95	11.6	16.4	-6.8	2	-15	-8.2	5.8
2457.00	12.6	16.4	-5.8	2	-14	-8.2	6
2457.05	12.6	16.4	-5.8	2	-14	-8.2	7.5
2457.10	11.6	16.4	-6.8	2	-15	-8.2	7.2
2457.15	11.6	16.4	-6.8	2	-15	-8.2	6.8
2457.20	11.6	16.4	-6.8	2	-15	-8.2	7.1
2457.25	10.6	16.4	-7.8	2	-16	-8.2	6.3
2457.30	12.6	16.4	-5.8	2	-14	-8.2	5.6
2457.35	11.6	16.4	-6.8	2	-15	-8.2	4.5
2457.40	12.6	16.4	-5.8	2	-14	-8.2	6.6
2457.45	11.6	16.4	-6.8	2	-15	-8.2	7.4
2457.50	10.6	16.4	-7.8	2	-16	-8.2	7
2457.55	11.6	16.4	-6.8	2	-15	-8.2	7.4
2457.60	12.6	16.4	-5.8	2	-14	-8.2	9
2457.65	12.6	16.4	-5.8	2	-14	-8.2	5.3
2457.70	11.6	16.4	-6.8	2	-15	-8.2	5.6
2457.75	10.6	16.4	-7.8	2	-16	-8.2	5.2
2457.80	10.6	16.4	-7.8	2	-16	-8.2	5.9
2457.85	11.6	16.4	-6.8	2	-15	-8.2	6.2
2457.90	11.6	16.4	-6.8	2	-15	-8.2	7.2
2457.95	11.6	16.4	-6.8	2	-15	-8.2	6.7
2458.00	11.6	16.4	-6.8	2	-15	-8.2	6.7
2458.05	11.6	16.4	-6.8	2	-15	-8.2	6.7
2458.10	11.6	16.4	-6.8	2	-15	-8.2	6.1
2458.15	10.6	16.4	-7.8	2	-16	-8.2	5.7
2458.20	10.6	16.4	-7.8	2	-16	-8.2	7.2
2458.25	10.6	16.4	-7.8	2	-16	-8.2	6.6
2458.30	12.6	16.4	-5.8	2	-14	-8.2	6.4
2458.35	10.6	16.4	-7.8	2	-16	-8.2	6.6
2458.40	11.6	16.4	-6.8	2	-15	-8.2	5.2
2458.45	10.6	16.4	-7.8	2	-16	-8.2	5.6
2458.50	11.6	16.4	-6.8	2	-15	-8.2	5.4
2458.55	11.6	16.4	-6.8	2	-15	-8.2	6
2458.60	12.6	16.4	-5.8	2	-14	-8.2	5.7
2458.65	10.6	16.4	-7.8	2	-16	-8.2	6
2458.70	11.6	16.4	-6.8	2	-15	-8.2	5.8
2458.75	11.6	16.4	-6.8	2	-15	-8.2	6.5
2458.80	12.6	16.4	-5.8	2	-14	-8.2	6.3
2458.85	10.6	16.4	-7.8	2	-16	-8.2	6.8
2458.90	11.6	16.4	-6.8	2	-15	-8.2	5.5
2458.95	11.6	16.4	-6.8	2	-15	-8.2	5.8

11Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2459.00	12.6	16.4	-5.8	2	-14	-8.2	6.2
2459.05	11.6	16.4	-6.8	2	-15	-8.2	6.8
2459.10	11.6	16.4	-6.8	2	-15	-8.2	7.8
2459.15	11.6	16.4	-6.8	2	-15	-8.2	5.6
2459.20	10.6	16.4	-7.8	2	-16	-8.2	6.3
2459.25	10.6	16.4	-7.8	2	-16	-8.2	5.8
2459.30	11.6	16.4	-6.8	2	-15	-8.2	6.8
2459.35	11.6	16.4	-6.8	2	-15	-8.2	5.2
2459.40	10.6	16.4	-7.8	2	-16	-8.2	6.2
2459.45	11.6	16.4	-6.8	2	-15	-8.2	6.4
2459.50	10.6	16.4	-7.8	2	-16	-8.2	5.8
2459.55	11.6	16.4	-6.8	2	-15	-8.2	7.2
2459.60	11.6	16.4	-6.8	2	-15	-8.2	6.6
2459.65	12.6	16.4	-5.8	2	-14	-8.2	6.5
2459.70	11.6	16.4	-6.8	2	-15	-8.2	7.2
2459.75	11.6	16.4	-6.8	2	-15	-8.2	7.8
2459.80	11.6	16.4	-6.8	2	-15	-8.2	6.7
2459.85	12.6	16.4	-5.8	2	-14	-8.2	7.6
2459.90	12.6	16.4	-5.8	2	-14	-8.2	6.2
2459.95	11.6	16.4	-6.8	2	-15	-8.2	5.8
2460.00	11.6	16.4	-6.8	2	-15	-8.2	6.5
2460.05	12.6	16.4	-5.8	2	-14	-8.2	5.7
2460.10	11.6	16.4	-6.8	2	-15	-8.2	5.8
2460.15	11.6	16.4	-6.8	2	-15	-8.2	5.6
2460.20	10.6	16.4	-7.8	2	-16	-8.2	3.6
2460.25	11.6	16.4	-6.8	2	-15	-8.2	5.6
2460.30	11.6	16.4	-6.8	2	-15	-8.2	6.1
2460.35	11.6	16.4	-6.8	2	-15	-8.2	5.9
2460.40	11.6	16.4	-6.8	2	-15	-8.2	6
2460.45	11.6	16.4	-6.8	2	-15	-8.2	6.7
2460.50	10.6	16.4	-7.8	2	-16	-8.2	5.4
2460.55	11.6	16.4	-6.8	2	-15	-8.2	5.6
2460.60	12.6	16.4	-5.8	2	-14	-8.2	3.6
2460.65	12.6	16.4	-5.8	2	-14	-8.2	5.6
2460.70	12.6	16.4	-5.8	2	-14	-8.2	6.1
2460.75	10.6	16.4	-7.8	2	-16	-8.2	5.9
2460.80	11.6	16.4	-6.8	2	-15	-8.2	6
2460.85	10.6	16.4	-7.8	2	-16	-8.2	5.8
2460.90	10.6	16.4	-7.8	2	-16	-8.2	4.3
2460.95	10.6	16.4	-7.8	2	-16	-8.2	5.2
2461.00	10.6	16.4	-7.8	2	-16	-8.2	5.8
2461.05	10.6	16.4	-7.8	2	-16	-8.2	4.7
2461.10	10.6	16.4	-7.8	2	-16	-8.2	5.4
2461.15	8.6	16.4	-9.8	2	-18	-8.2	5.2
2461.20	8.6	16.4	-9.8	2	-18	-8.2	4.6
2461.25	8.6	16.4	-9.8	2	-18	-8.2	4.8
2461.30	8.6	16.4	-9.8	2	-18	-8.2	4.5
2461.35	9.6	16.4	-8.8	2	-17	-8.2	5.8
2461.40	8.6	16.4	-9.8	2	-18	-8.2	5.5
2461.45	9.6	16.4	-8.8	2	-17	-8.2	6.4
2461.50	7.6	16.4	-10.8	2	-19	-8.2	6.8
2461.55	8.6	16.4	-9.8	2	-18	-8.2	6
2461.60	7.6	16.4	-10.8	2	-19	-8.2	5.8
2461.65	7.6	16.4	-10.8	2	-19	-8.2	6.4
2461.70	7.6	16.4	-10.8	2	-19	-8.2	7.5

11Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2461.75	5.6	16.4	-12.8	2	-21	-8.2	7.2
2461.80	4.6	16.4	-13.8	2	-22	-8.2	7.8
2461.85	6.6	16.4	-11.8	2	-20	-8.2	6.7
2461.90	6.6	16.4	-11.8	2	-20	-8.2	7.6
2461.95	8.6	16.4	-9.8	2	-18	-8.2	6.2
2462.00	9.6	16.4	-8.8	2	-17	-8.2	5.8
2462.05	9.6	16.4	-8.8	2	-17	-8.2	6.5
2462.10	6.6	16.4	-11.8	2	-20	-8.2	5.7
2462.15	4.6	16.4	-13.8	2	-22	-8.2	5.8
2462.20	4.6	16.4	-13.8	2	-22	-8.2	5.6
2462.25	6.6	16.4	-11.8	2	-20	-8.2	3.6
2462.30	7.6	16.4	-10.8	2	-19	-8.2	5.6
2462.35	8.6	16.4	-9.8	2	-18	-8.2	6.1
2462.40	6.6	16.4	-11.8	2	-20	-8.2	5.9
2462.45	6.6	16.4	-11.8	2	-20	-8.2	6
2462.50	6.6	16.4	-11.8	2	-20	-8.2	5.8
2462.55	8.6	16.4	-9.8	2	-18	-8.2	4.3
2462.60	8.6	16.4	-9.8	2	-18	-8.2	5.2
2462.65	9.6	16.4	-8.8	2	-17	-8.2	5.8
2462.70	9.6	16.4	-8.8	2	-17	-8.2	4.7
2462.75	8.6	16.4	-9.8	2	-18	-8.2	5.8
2462.80	9.6	16.4	-8.8	2	-17	-8.2	6.8
2462.85	10.6	16.4	-7.8	2	-16	-8.2	5.4
2462.90	10.6	16.4	-7.8	2	-16	-8.2	4.8
2462.95	11.6	16.4	-6.8	2	-15	-8.2	5.8
2463.00	11.6	16.4	-6.8	2	-15	-8.2	6
2463.05	11.6	16.4	-6.8	2	-15	-8.2	6.9
2463.10	11.6	16.4	-6.8	2	-15	-8.2	7.3
2463.15	11.6	16.4	-6.8	2	-15	-8.2	5.7
2463.20	10.6	16.4	-7.8	2	-16	-8.2	5.9
2463.25	11.6	16.4	-6.8	2	-15	-8.2	6.2
2463.30	11.6	16.4	-6.8	2	-15	-8.2	5.6
2463.35	12.6	16.4	-5.8	2	-14	-8.2	6.2
2463.40	12.6	16.4	-5.8	2	-14	-8.2	5.2
2463.45	11.6	16.4	-6.8	2	-15	-8.2	6.2
2463.50	11.6	16.4	-6.8	2	-15	-8.2	7.5
2463.55	10.6	16.4	-7.8	2	-16	-8.2	6.3
2463.60	12.6	16.4	-5.8	2	-14	-8.2	5.8
2463.65	12.6	16.4	-5.8	2	-14	-8.2	6.3
2463.70	11.6	16.4	-6.8	2	-15	-8.2	7.2
2463.75	11.6	16.4	-6.8	2	-15	-8.2	7.8
2463.80	10.6	16.4	-7.8	2	-16	-8.2	6.7
2463.85	12.6	16.4	-5.8	2	-14	-8.2	7.6
2463.90	12.6	16.4	-5.8	2	-14	-8.2	6.2
2463.95	11.6	16.4	-6.8	2	-15	-8.2	5.8
2464.00	12.6	16.4	-5.8	2	-14	-8.2	6.5
2464.05	11.6	16.4	-6.8	2	-15	-8.2	5.7
2464.10	11.6	16.4	-6.8	2	-15	-8.2	5.8
2464.15	11.6	16.4	-6.8	2	-15	-8.2	5.6
2464.20	10.6	16.4	-7.8	2	-16	-8.2	3.6
2464.25	11.6	16.4	-6.8	2	-15	-8.2	5.6
2464.30	12.6	16.4	-5.8	2	-14	-8.2	6.1
2464.35	11.6	16.4	-6.8	2	-15	-8.2	5.9
2464.40	11.6	16.4	-6.8	2	-15	-8.2	6
2464.45	11.6	16.4	-6.8	2	-15	-8.2	6.3

11Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2464.50	10.6	16.4	-7.8	2	-16	-8.2	6.2
2464.55	10.6	16.4	-7.8	2	-16	-8.2	6.4
2464.60	11.6	16.4	-6.8	2	-15	-8.2	6.8
2464.65	11.6	16.4	-6.8	2	-15	-8.2	5.8
2464.70	11.6	16.4	-6.8	2	-15	-8.2	5.2
2464.75	10.6	16.4	-7.8	2	-16	-8.2	5.4
2464.80	10.6	16.4	-7.8	2	-16	-8.2	4.3
2464.85	11.6	16.4	-6.8	2	-15	-8.2	5.7
2464.90	10.6	16.4	-7.8	2	-16	-8.2	6.8
2464.95	10.6	16.4	-7.8	2	-16	-8.2	6.8
2465.00	10.6	16.4	-7.8	2	-16	-8.2	7.2
2465.05	10.6	16.4	-7.8	2	-16	-8.2	6.3
2465.10	11.6	16.4	-6.8	2	-15	-8.2	6.5
2465.15	11.6	16.4	-6.8	2	-15	-8.2	6.9
2465.20	11.6	16.4	-6.8	2	-15	-8.2	7.1
2465.25	10.6	16.4	-7.8	2	-16	-8.2	7.2
2465.30	11.6	16.4	-6.8	2	-15	-8.2	7
2465.35	11.6	16.4	-6.8	2	-15	-8.2	7.4
2465.40	11.6	16.4	-6.8	2	-15	-8.2	6.6
2465.45	10.6	16.4	-7.8	2	-16	-8.2	7
2465.50	10.6	16.4	-7.8	2	-16	-8.2	6.5
2465.55	11.6	16.4	-6.8	2	-15	-8.2	7.4
2465.60	11.6	16.4	-6.8	2	-15	-8.2	7
2465.65	12.6	16.4	-5.8	2	-14	-8.2	6.8
2465.70	12.6	16.4	-5.8	2	-14	-8.2	7.1
2465.75	10.6	16.4	-7.8	2	-16	-8.2	3.6
2465.80	10.6	16.4	-7.8	2	-16	-8.2	5.6
2465.85	11.6	16.4	-6.8	2	-15	-8.2	6.1
2465.90	12.6	16.4	-5.8	2	-14	-8.2	5.9
2465.95	12.6	16.4	-5.8	2	-14	-8.2	6
2466.00	12.6	16.4	-5.8	2	-14	-8.2	6.3
2466.05	11.6	16.4	-6.8	2	-15	-8.2	6.2
2466.10	12.6	16.4	-5.8	2	-14	-8.2	6.4
2466.15	11.6	16.4	-6.8	2	-15	-8.2	6.8
2466.20	11.6	16.4	-6.8	2	-15	-8.2	5.8
2466.25	11.6	16.4	-6.8	2	-15	-8.2	5.2
2466.30	12.6	16.4	-5.8	2	-14	-8.2	5.4
2466.35	11.6	16.4	-6.8	2	-15	-8.2	4.3
2466.40	11.6	16.4	-6.8	2	-15	-8.2	5.7
2466.45	11.6	16.4	-6.8	2	-15	-8.2	6.8
2466.50	11.6	16.4	-6.8	2	-15	-8.2	6.3
2466.55	11.6	16.4	-6.8	2	-15	-8.2	7.3
2466.60	12.6	16.4	-5.8	2	-14	-8.2	6.6
2466.65	12.6	16.4	-5.8	2	-14	-8.2	6.5
2466.70	11.6	16.4	-6.8	2	-15	-8.2	7.3
2466.75	11.6	16.4	-6.8	2	-15	-8.2	7.9
2466.80	10.6	16.4	-7.8	2	-16	-8.2	6.6
2466.85	10.6	16.4	-7.8	2	-16	-8.2	7.4
2466.90	11.6	16.4	-6.8	2	-15	-8.2	6.2
2466.95	9.6	16.4	-8.8	2	-17	-8.2	6.9
2467.00	10.6	16.4	-7.8	2	-16	-8.2	6.8
2467.05	9.6	16.4	-8.8	2	-17	-8.2	6.5
2467.10	9.6	16.4	-8.8	2	-17	-8.2	7.3
2467.15	7.6	16.4	-10.8	2	-19	-8.2	5.7
2467.20	8.6	16.4	-9.8	2	-18	-8.2	5.8

11Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2467.25	9.6	16.4	-8.8	2	-17	-8.2	5.2
2467.30	7.6	16.4	-10.8	2	-19	-8.2	6.1
2467.35	8.6	16.4	-9.8	2	-18	-8.2	6.3
2467.40	8.6	16.4	-9.8	2	-18	-8.2	6.4
2467.45	8.6	16.4	-9.8	2	-18	-8.2	7.1
2467.50	7.6	16.4	-10.8	2	-19	-8.2	5.8
2467.55	8.6	16.4	-9.8	2	-18	-8.2	6.3
2467.60	8.6	16.4	-9.8	2	-18	-8.2	6.5
2467.65	9.6	16.4	-8.8	2	-17	-8.2	7.3
2467.70	8.6	16.4	-9.8	2	-18	-8.2	5.9
2467.75	8.6	16.4	-9.8	2	-18	-8.2	5.8
2467.80	10.6	16.4	-7.8	2	-16	-8.2	6.3
2467.85	10.6	16.4	-7.8	2	-16	-8.2	6.7
2467.90	11.6	16.4	-6.8	2	-15	-8.2	6.5
2467.95	12.6	16.4	-5.8	2	-14	-8.2	7.3
2468.00	11.6	16.4	-6.8	2	-15	-8.2	6.2
2468.05	12.6	16.4	-5.8	2	-14	-8.2	5.7
2468.10	10.6	16.4	-7.8	2	-16	-8.2	5.9
2468.15	13.6	16.4	-4.8	2	-13	-8.2	5.6
2468.20	12.6	16.4	-5.8	2	-14	-8.2	6.1
2468.25	13.6	16.4	-4.8	2	-13	-8.2	6.3
2468.30	13.6	16.4	-4.8	2	-13	-8.2	6.5
2468.35	13.6	16.4	-4.8	2	-13	-8.2	7.3
2468.40	14.6	16.4	-3.8	2	-12	-8.2	5.9
2468.45	15.6	16.4	-2.8	2	-11	-8.2	5.8
2468.50	16.6	16.4	-1.8	2	-10	-8.2	6.3
2468.55	17.6	16.4	-0.8	2	-9	-8.2	4.7
2468.60	16.6	16.4	-1.8	2	-10	-8.2	5.5
2468.65	17.6	16.4	-0.8	2	-9	-8.2	5.8
2468.70	16.6	16.4	-1.8	2	-10	-8.2	5.6
2468.75	17.6	16.4	-0.8	2	-9	-8.2	5.7
2468.80	15.6	16.4	-2.8	2	-11	-8.2	4.9
2468.85	16.6	16.4	-1.8	2	-10	-8.2	5.9
2468.90	18.6	16.4	0.2	2	-8	-8.2	5.6
2468.95	17.6	16.4	-0.8	2	-9	-8.2	6.1
2469.00	18.6	16.4	0.2	2	-8	-8.2	6.3
2469.05	19.6	16.4	1.2	2	-7	-8.2	6.5
2469.10	19.6	16.4	1.2	2	-7	-8.2	5.8
2469.15	18.6	16.4	0.2	2	-8	-8.2	6.3
2469.20	19.6	16.4	1.2	2	-7	-8.2	4.7
2469.25	18.6	16.4	0.2	2	-8	-8.2	5.5
2469.30	17.6	16.4	-0.8	2	-9	-8.2	5.8
2469.35	19.6	16.4	1.2	2	-7	-8.2	6.5
2469.40	20.6	16.4	2.2	2	-6	-8.2	7.3
2469.45	18.6	16.4	0.2	2	-8	-8.2	6.2
2469.50	18.6	16.4	0.2	2	-8	-8.2	5.1
2469.55	21.6	16.4	3.2	2	-5	-8.2	5.5
2469.60	22.6	16.4	4.2	2	-4	-8.2	6.3
2469.65	21.6	16.4	3.2	2	-5	-8.2	6.9
2469.70	20.6	16.4	2.2	2	-6	-8.2	6.7
2469.75	22.6	16.4	4.2	2	-4	-8.2	6.5
2469.80	22.6	16.4	4.2	2	-4	-8.2	7.1
2469.85	23.6	16.4	5.2	2	-3	-8.2	5.9
2469.90	23.6	16.4	5.2	2	-3	-8.2	5.8
2469.95	23.6	16.4	5.2	2	-3	-8.2	6.3

11Mbps Channel 11 Processing Gain							
Gp=(S/N)o+Mj+Lsys							
Freq. (MHz)	Gp (dB)	(S/N)o (dB)	Mj = J/S (dB)	Lsys (dB)	Jammer (dBm)	Lvl (dBm)	FER
2470.00	19.6	16.4	1.2	2	-7	-8.2	4.7
2470.05	24.6	16.4	6.2	2	-2	-8.2	5.5
2470.10	24.6	16.4	6.2	2	-2	-8.2	5.8
2470.15	22.6	16.4	4.2	2	-4	-8.2	5.6
2470.20	25.6	16.4	7.2	2	-1	-8.2	5.7
2470.25	23.6	16.4	5.2	2	-3	-8.2	6.9
2470.30	25.6	16.4	7.2	2	-1	-8.2	6.5
2470.35	25.6	16.4	7.2	2	-1	-8.2	6.9
2470.40	25.6	16.4	7.2	2	-1	-8.2	6.7
2470.45	25.6	16.4	7.2	2	-1	-8.2	6.3
2470.50	26.6	16.4	8.2	2	0	-8.2	7.1

Processing Gain (dB) @20th Percentile= 10.6

