

FCC RADIO TEST REPORT

Applicant's company	Z-Com, Inc.
Applicant Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan
FCC ID	M4Y-AG623G2
Manufacturer's company	Z-Com, Inc.
Manufacturer Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan

Product Name	IEEE 802.11 a/b/g Wireless Network Mini PCI
Brand Name	ZCOM
Model Name	AG-623G2
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Jan. 20, 2010
Final Test Date	Jan. 29, 2010
Submission Type	Original Equipment



Statement

Test result included is for the 802.11a (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting	7
3.9. Test Configurations	8
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 99% Occupied Bandwidth Measurement	22
4.3. Maximum Conducted Output Power Measurement.....	26
4.4. Power Spectral Density Measurement	31
4.5. Peak Excursion Measurement	35
4.6. Radiated Emissions Measurement	39
4.7. Band Edge Emissions Measurement	73
4.8. Frequency Stability Measurement	80
4.9. Antenna Requirements	84
5. LIST OF MEASURING EQUIPMENTS	85
6. TEST LOCATION.....	86
7. TAF CERTIFICATE OF ACCREDITATION	87
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A16
APPENDIX B. TEST PHOTOS.....	B1 ~ B12
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~ C3

History of This Test Report

Original Issue Date: Feb. 03, 2010

Report No.: FR011919AA

- ☒ No additional attachment.
- ☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. CERTIFICATE OF COMPLIANCE

Product Name : IEEE 802.11 a/b/g Wireless Network Mini PCI
Brand Name : ZCOM
Model Name : AG-623G2
Applicant : Z-Com, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 20, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao 2010.2.9

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	18.95 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.24 dB
4.4	15.407(a)	Power Spectral Density	Complies	6.59 dB
4.5	15.407(a)	Peak Excursion	Complies	7.74 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.53 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.14 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54/108)
Frequency Range	5150 ~ 5250MHz
Channel Number	6+1
Channel Band Width (99%)	11a: 18.08 MHz ; 11a Turbo: 33.60 MHz
Conducted Output Power	11a: 15.76 dBm ; 11a Turbo: 15.56 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Antenna Gain (dBi)		Loss of External Cable (dB)	Antenna Total Gain (dBi)
1	WHA YU	C034-510656-A	Dipole Antenna	I-PEX	2.4GHz	3.66	1.10	2.56
	WHA YU	C034-510656-A	Dipole Antenna	I-PEX	5GHz	3.35	1.80	1.55
2	SMARTANT	ZXL04-050280	Omni Directional	N Jack	2.4GHz	8.00	4.10	3.90
3	SMARTANT	ZXL05-200920	Omni Directional	N female	5GHz	8.00	2.10	5.90
4	WHA YU	C034-510580-A	Dipole Antenna	SMA Jack Reverse	2.4GHz	3.66	1.10	2.56
	WHA YU	C034-510580-A	Dipole Antenna	SMA Jack Reverse	5GHz	3.35	1.80	1.55
5	WHA YU	C034-510604-A	PIFA Antenna	Hirose	2.4GHz	1.80	0	1.80
	WHA YU	C034-510604-A	PIFA Antenna	Hirose	5GHz	1.80	0	1.80
6	WHA YU	C034-510591-A	Dipole Antenna	SMA Jack Reverse	2.4GHz	3.66	1.30	2.36
	WHA YU	C034-510591-A	Dipole Antenna	SMA Jack Reverse	5GHz	3.35	2.00	1.35
7	WHA YU	C034-510506-A	Dipole Antenna	Reversed-SMA	2.4GHz	2.00	2.00	0
	WHA YU	C034-510506-A	Dipole Antenna	Reversed-SMA	5GHz	3.00	2.00	1.00


Note:

The EUT has two antennas (1TX/1RX), and the connector 1(J3) supports the antenna with TX/RX function.

There are seven sets of antenna provided to this EUT and all of them can be used as transmitting and receiving antenna.

Due to Ant. 4 is the highest gain value among all dipole antennas, so Ant. 3、Ant. 4 and Ant. 5 were tested and recorded in this test report.

Connector 1(J3): TX/RX

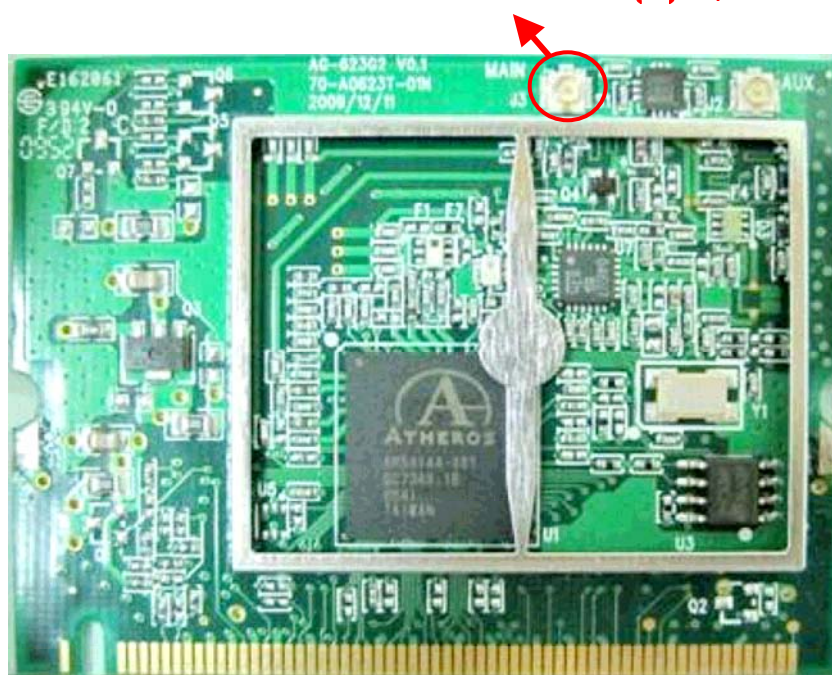

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz (USA/Canada) Band 1	36	5180 MHz	Turbo 42	5210 MHz
	38	5190 MHz	-	-
	40	5200 MHz	-	-
	44	5220 MHz	-	-
	46	5230 MHz	-	-
	48	5240 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		Auto	-	3/4/5
Max. Conducted Output Power	11a/BPSK	Band 1	6Mbps	36/40/48	3/4/5
	11a Turbo/BPSK	Band 1	12Mbps	42	3/4/5
26dB Spectrum Bandwidth	11a/BPSK	Band 1	6Mbps	36/40/48	3/4/5
99% Occupied Bandwidth Measurement	11a Turbo/BPSK	Band 1	12Mbps	42	3/4/5
Power Spectral Density					
Peak Excursion					
Radiated Emission Below 1GHz	Normal Link		Auto	-	3/4/5
Radiated Emission Above 1GHz	11a/BPSK	Band 1	6Mbps	36/40/48	3/4/5
	11a Turbo/BPSK	Band 1	12Mbps	42	3/4/5
Band Edge Emission	11a/BPSK	Band 1	6Mbps	36/40/48	3/4/5
	11a Turbo/BPSK	Band 1	12Mbps	42	3/4/5
Frequency Stability	Un-modulation		-	40	3/4/5

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D400	E2K24GBRL
Mouse	iCooky	AMS0706W	DoC
Modem	ACEEX	DM1414	IFAXDM1414
Wireless AP	Planex	GW-AP54SGX	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Antenna 3 / Antenna 4 / Antenna 5>:

Power Parameters of IEEE 802.11a

Test Software Version	ART Revision 5.4 BUILD #7		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	13	13	13
Frequency	5210 MHz	-	-
IEEE 802.11a Turbo	13	-	-

Note 1:

Ant. 3, Ant. 4 and Ant. 5 have been tested. However since the power setting for each antenna is exactly the same, so there is only one data recorded for 26dB Spectrum Bandwidth, Maximum Conducted Output Power, Power Spectral Density, Peak Excursion Measurements in this report.

Note 2:

During the test, the following programs under WIN XP were executed:


Executed " ART Revision 5.4 BUILD #7" to control the EUT continuously transmit RF signal.

3.9. Test Configurations


3.9.1. Radiation Emissions Test Configuration

Test Configuration: 9KHz~1GHz


<For Antenna 3>:

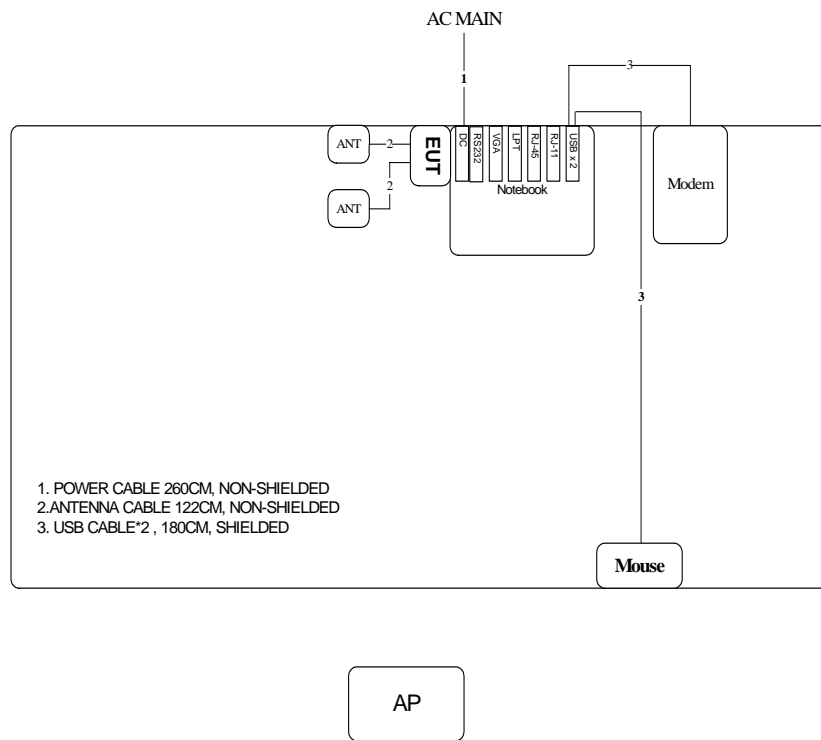

<For Antenna 4>:

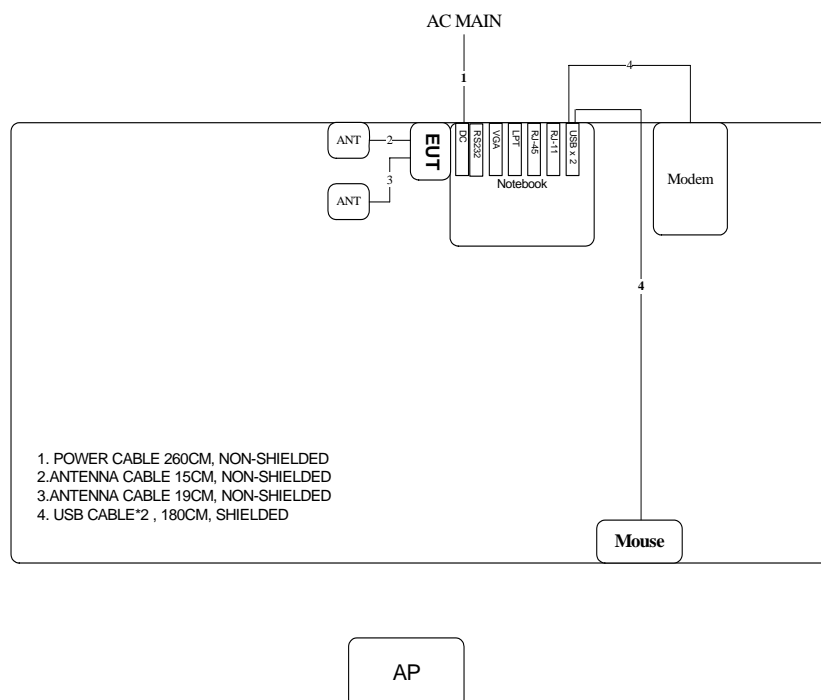


<For Antenna 5>:

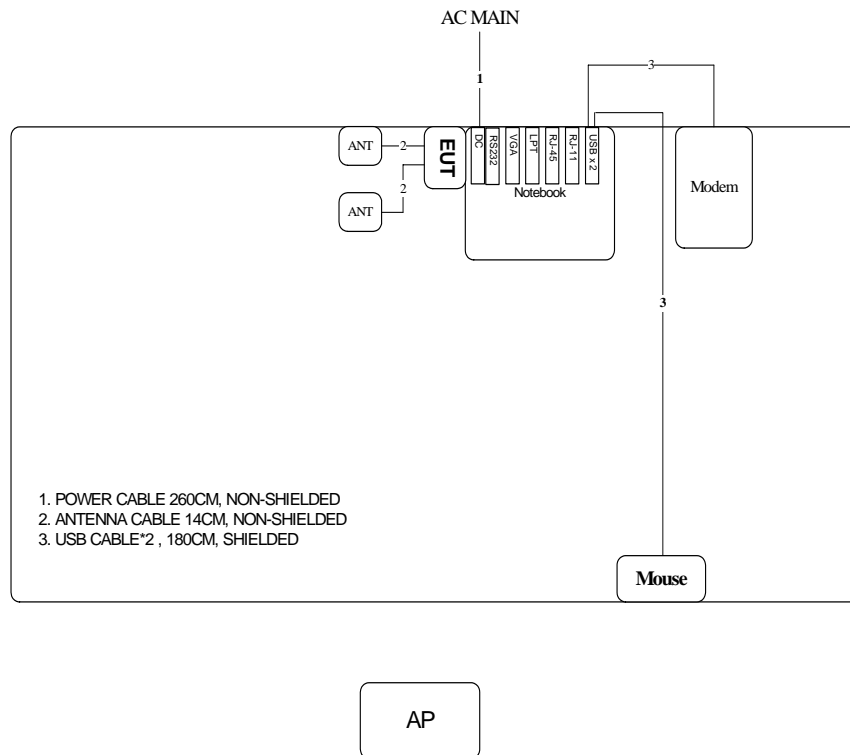


Test Configuration: Above 1GHz


<For Antenna 3>:

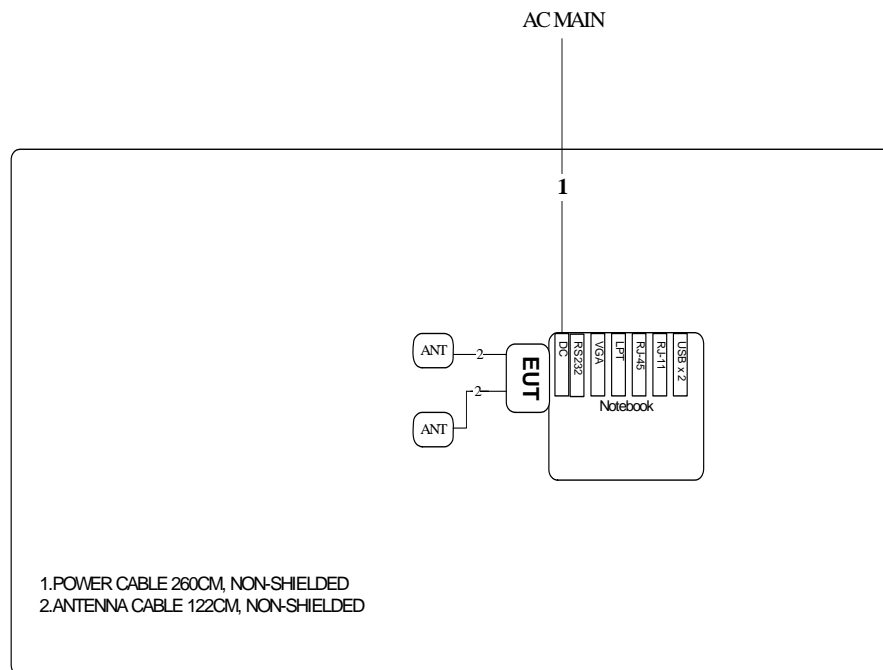

<For Antenna 4>:

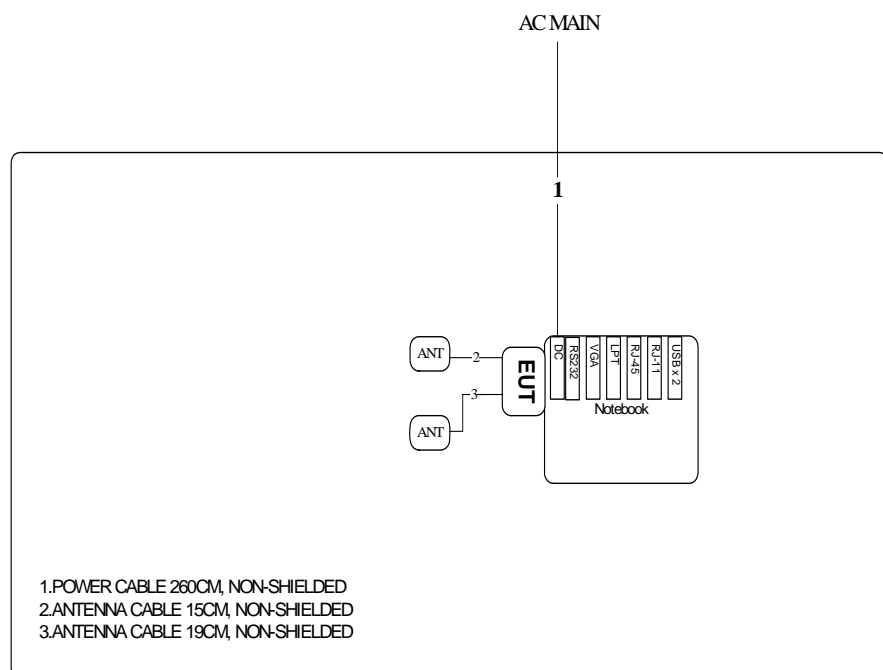


<For Antenna 5>:

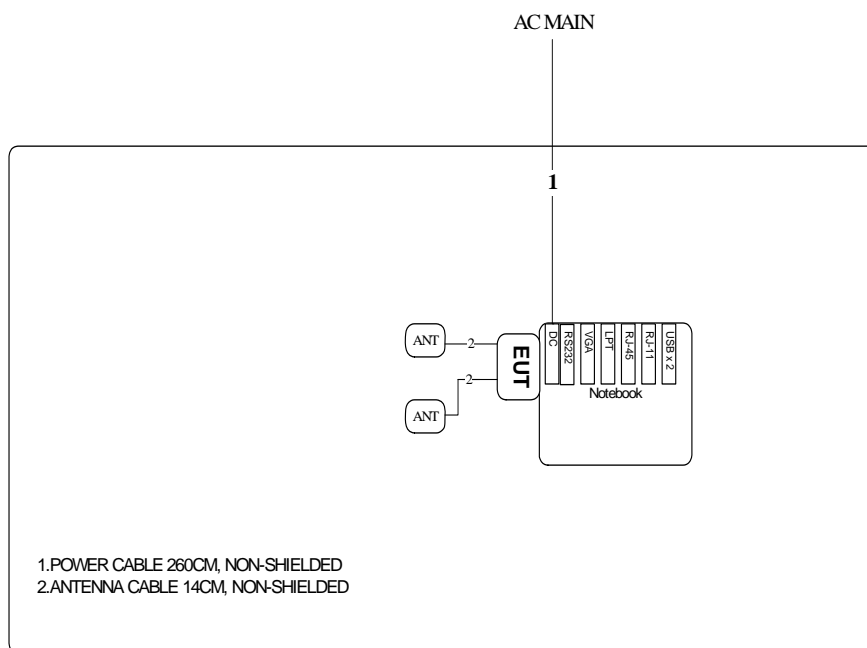


3.9.2. AC Power Line Conduction Emissions Test Configuration


<For Antenna 3>:

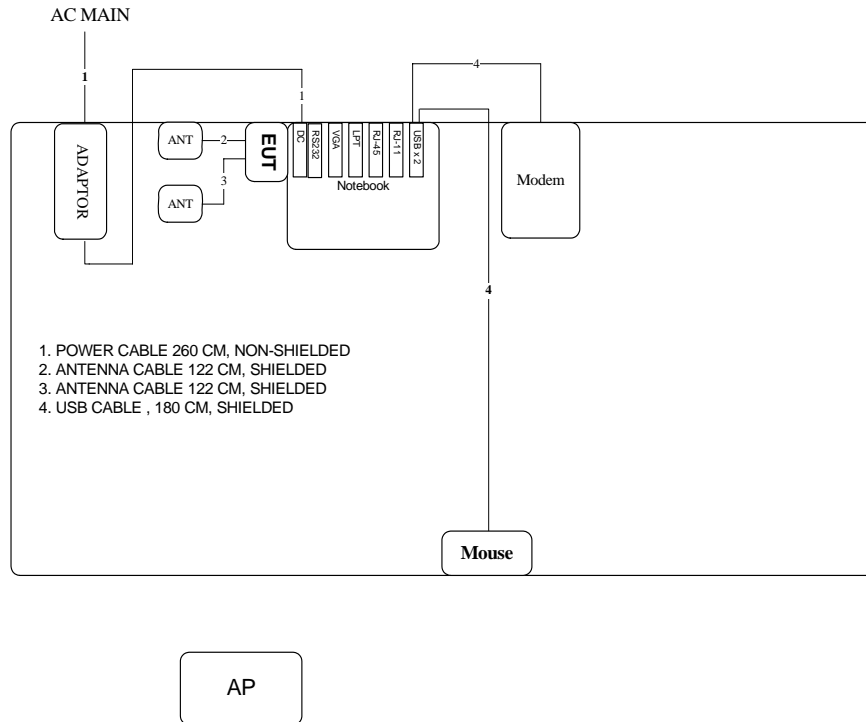

<For Antenna 4>:

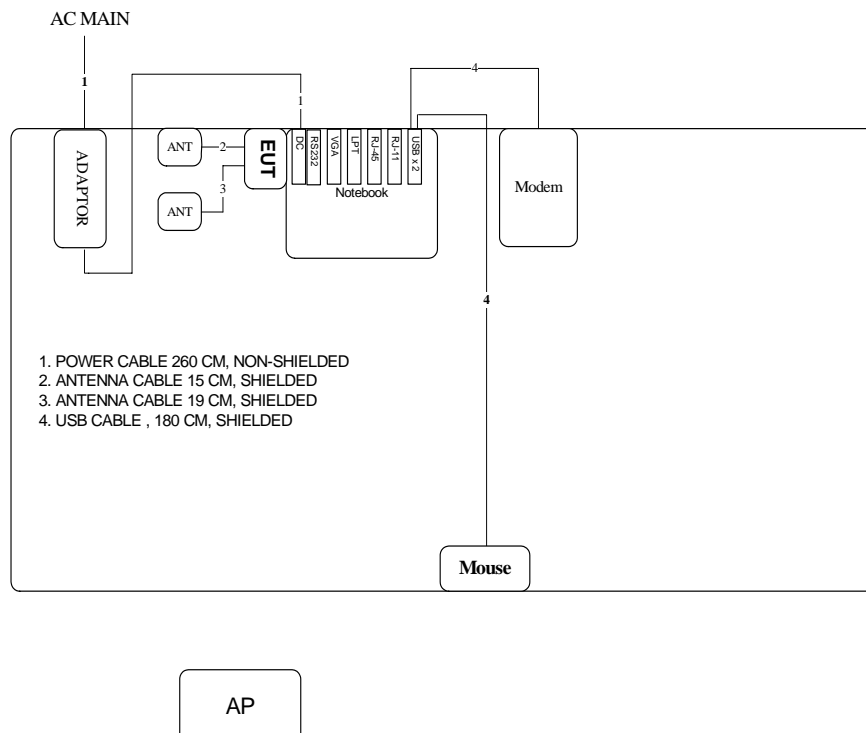

<For Antenna 5>:

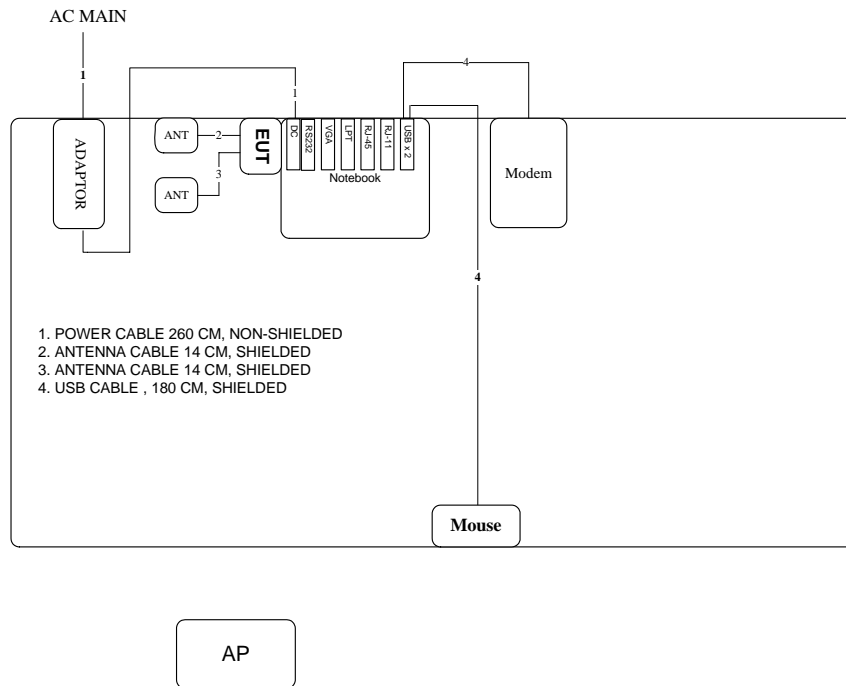

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

[illegible]

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.


There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


<For Antenna 3>:

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

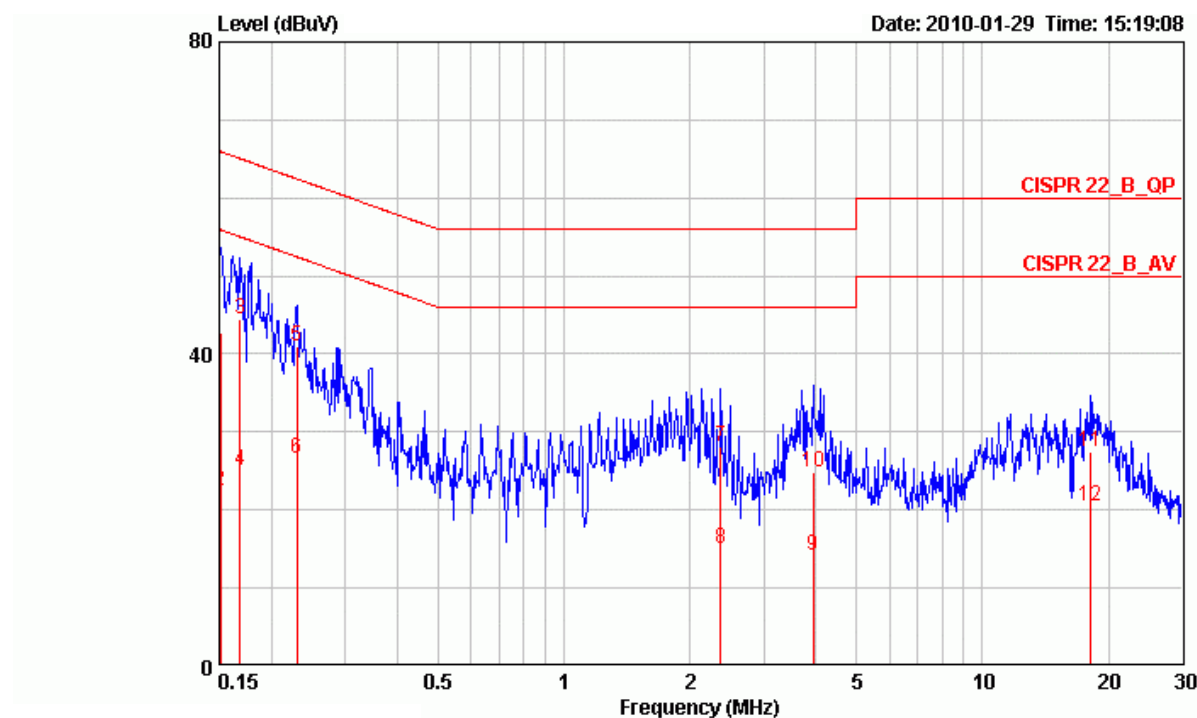

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15080	42.70	-23.25	65.96	42.43	0.07	0.20	QP
2	0.15080	22.51	-33.44	55.96	22.24	0.07	0.20	AVERAGE
3	0.16854	44.38	-20.65	65.03	44.12	0.06	0.20	QP
4	0.16854	25.17	-29.86	55.03	24.91	0.06	0.20	AVERAGE
5	0.23040	41.05	-21.39	62.44	40.80	0.05	0.20	QP
6	0.23040	26.63	-25.81	52.44	26.38	0.05	0.20	AVERAGE
7	2.371	28.13	-27.87	56.00	27.87	0.06	0.20	QP
8	2.371	15.06	-30.94	46.00	14.80	0.06	0.20	AVERAGE
9	3.943	14.20	-31.80	46.00	13.80	0.10	0.30	AVERAGE
10	3.943	24.75	-31.25	56.00	24.35	0.10	0.30	QP
11	18.135	27.44	-32.56	60.00	26.21	0.73	0.50	QP
12	18.135	20.52	-29.48	50.00	19.29	0.73	0.50	AVERAGE

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

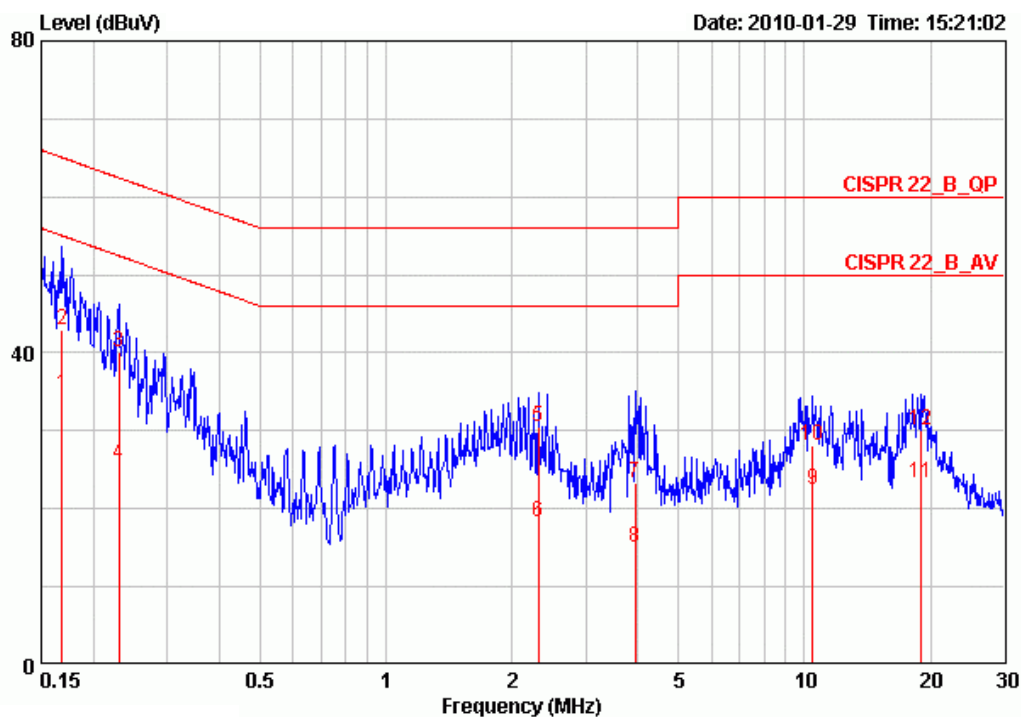


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16854	34.74	-20.29	55.03	34.45	0.09	0.20	AVERAGE
2	0.16854	43.04	-21.99	65.03	42.75	0.09	0.20	QP
3	0.23040	40.19	-22.25	62.44	39.91	0.08	0.20	QP
4	0.23040	25.80	-26.64	52.44	25.52	0.08	0.20	AVERAGE
5	2.309	30.53	-25.47	56.00	30.23	0.10	0.20	QP
6	2.309	18.29	-27.71	46.00	17.99	0.10	0.20	AVERAGE
7	3.943	23.23	-32.77	56.00	22.79	0.14	0.30	QP
8	3.943	15.06	-30.94	46.00	14.62	0.14	0.30	AVERAGE
9	10.452	22.53	-27.47	50.00	21.73	0.41	0.39	AVERAGE
10	10.452	28.21	-31.79	60.00	27.41	0.41	0.39	QP
11	18.920	23.33	-26.67	50.00	22.07	0.76	0.50	AVERAGE
12	18.920	30.19	-29.81	60.00	28.93	0.76	0.50	QP

Note: Level = Read Level + LISN Factor + Cable Loss.


<For Antenna 4>:

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

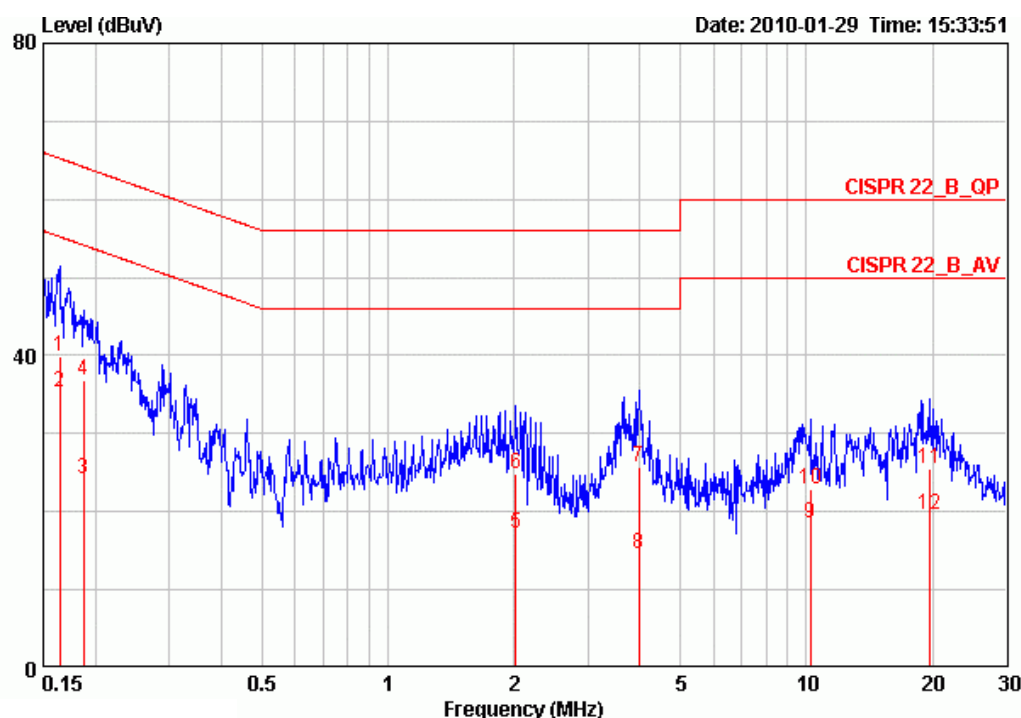

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16414	39.93	-25.32	65.25	39.66	0.07	0.20	QP
2	0.16414	35.35	-19.90	55.25	35.08	0.07	0.20	AVERAGE
3	0.18739	24.28	-29.88	54.15	24.02	0.06	0.20	AVERAGE
4	0.18739	36.76	-27.40	64.15	36.50	0.06	0.20	QP
5	2.023	17.18	-28.82	46.00	16.93	0.05	0.20	AVERAGE
6	2.023	24.95	-31.05	56.00	24.70	0.05	0.20	QP
7	3.985	25.64	-30.36	56.00	25.24	0.10	0.30	QP
8	3.985	14.65	-31.35	46.00	14.25	0.10	0.30	AVERAGE
9	10.233	18.47	-31.53	50.00	17.76	0.36	0.34	AVERAGE
10	10.233	22.97	-37.03	60.00	22.26	0.36	0.34	QP
11	19.635	25.50	-34.51	60.00	24.19	0.80	0.50	QP
12	19.635	19.65	-30.36	50.00	18.34	0.80	0.50	AVERAGE

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

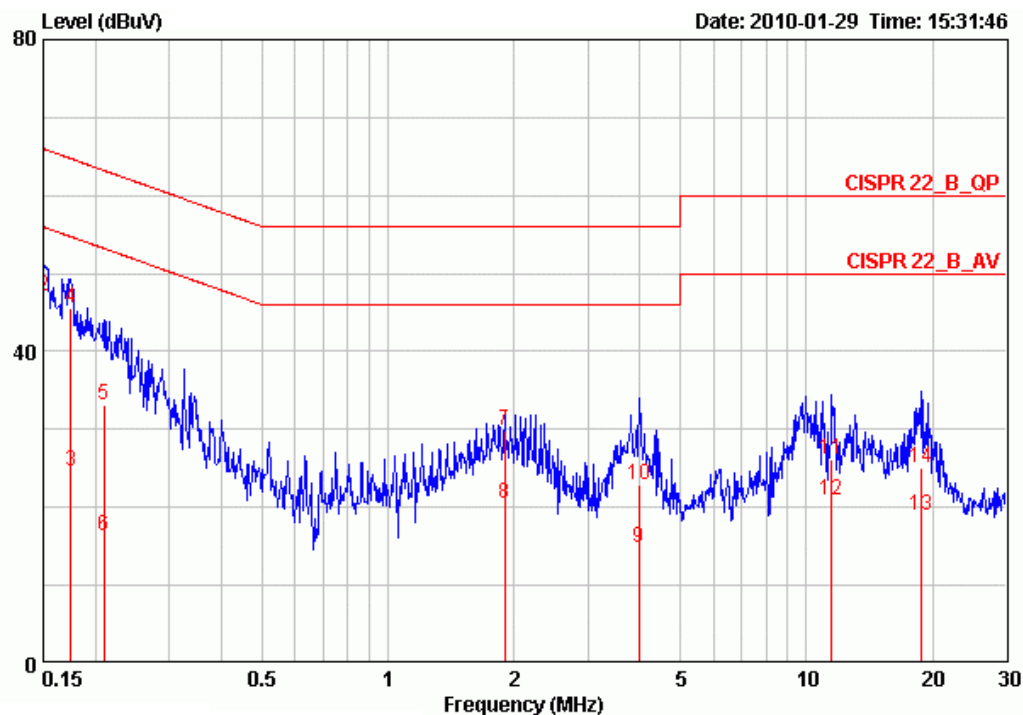


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15000	32.23	-23.77	56.00	31.92	0.11	0.20	AVERAGE
2	0.15000	47.05	-18.95	66.00	46.74	0.11	0.20	QP
3	0.17491	24.61	-30.11	54.72	24.32	0.09	0.20	AVERAGE
4	0.17491	45.46	-19.26	64.72	45.17	0.09	0.20	QP
5	0.20944	33.20	-30.03	63.23	32.92	0.08	0.20	QP
6	0.20944	16.33	-36.90	53.23	16.05	0.08	0.20	AVERAGE
7	1.898	29.87	-26.13	56.00	29.60	0.09	0.18	QP
8	1.898	20.58	-25.42	46.00	20.31	0.09	0.18	AVERAGE
9	3.985	14.77	-31.23	46.00	14.33	0.14	0.30	AVERAGE
10	3.985	22.95	-33.05	56.00	22.51	0.14	0.30	QP
11	11.498	26.19	-33.81	60.00	25.34	0.45	0.40	QP
12	11.498	21.00	-29.00	50.00	20.15	0.45	0.40	AVERAGE
13	18.721	18.92	-31.08	50.00	17.67	0.75	0.50	AVERAGE
14	18.721	25.06	-34.94	60.00	23.81	0.75	0.50	QP

Note: Level = Read Level + LISN Factor + Cable Loss.


<For Antenna 5>:

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

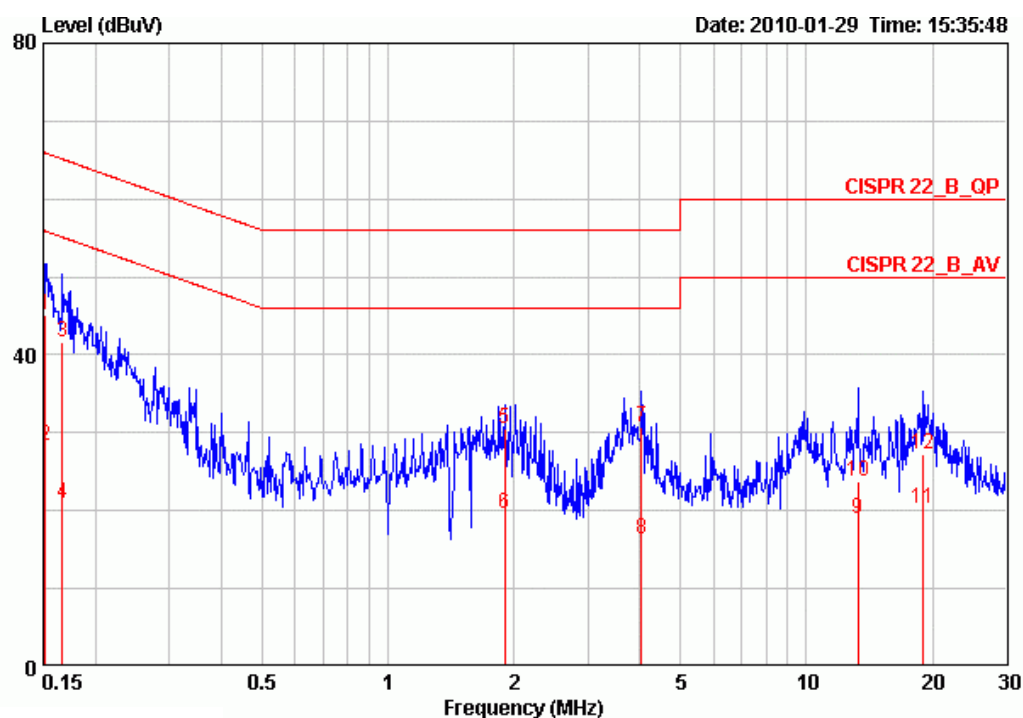

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15160	45.08	-20.83	65.91	44.81	0.07	0.20	QP
2	0.15160	28.37	-27.54	55.91	28.10	0.07	0.20	AVERAGE
3	0.16677	41.62	-23.50	65.12	41.35	0.07	0.20	QP
4	0.16677	20.97	-34.15	55.12	20.70	0.07	0.20	AVERAGE
5	1.898	30.50	-25.50	56.00	30.27	0.05	0.18	QP
6	1.898	19.59	-26.41	46.00	19.36	0.05	0.18	AVERAGE
7	4.027	30.82	-25.18	56.00	30.42	0.10	0.30	QP
8	4.027	16.44	-29.56	46.00	16.04	0.10	0.30	AVERAGE
9	13.267	18.89	-31.11	50.00	18.00	0.49	0.40	AVERAGE
10	13.267	23.82	-36.18	60.00	22.93	0.49	0.40	QP
11	18.920	20.38	-29.62	50.00	19.11	0.77	0.50	AVERAGE
12	18.920	27.27	-32.73	60.00	26.00	0.77	0.50	QP

Temperature	21.2°C	Humidity	49.2%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

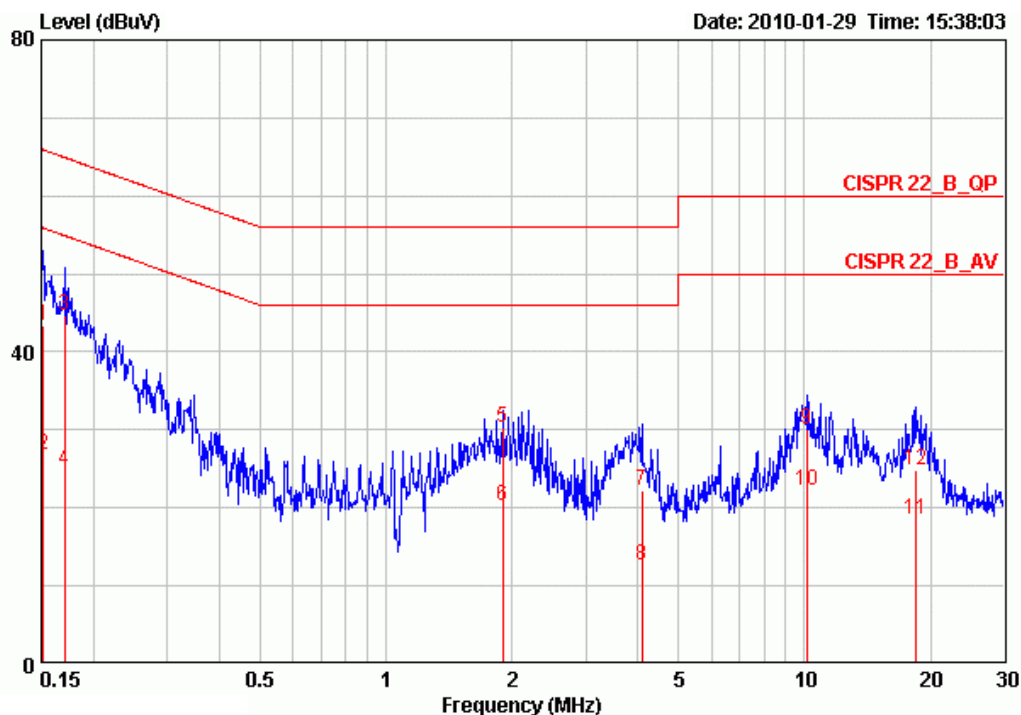

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15160	43.27	-22.64	65.91	42.97	0.10	0.20	QP
2	0.15160	26.88	-29.03	55.91	26.58	0.10	0.20	AVERAGE
3	0.17034	44.67	-20.27	64.94	44.38	0.09	0.20	QP
4	0.17034	24.88	-30.06	54.94	24.59	0.09	0.20	AVERAGE
5	1.898	30.27	-25.73	56.00	30.00	0.09	0.18	QP
6	1.898	20.28	-25.72	46.00	20.01	0.09	0.18	AVERAGE
7	4.092	22.23	-33.77	56.00	21.78	0.15	0.30	QP
8	4.092	12.68	-33.32	46.00	12.23	0.15	0.30	AVERAGE
9	10.125	30.12	-29.88	60.00	29.40	0.39	0.32	QP
10	10.125	22.34	-27.66	50.00	21.62	0.39	0.32	AVERAGE
11	18.426	18.47	-31.53	50.00	17.23	0.74	0.50	AVERAGE
12	18.426	24.83	-35.17	60.00	23.59	0.74	0.50	QP

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.

4.2.4. Test Setup Layout

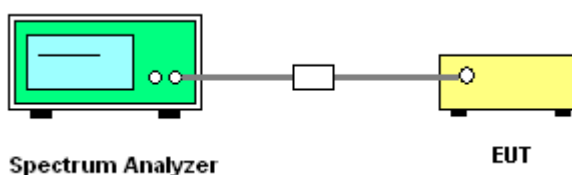

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 99% Occupied Bandwidth

<For Antenna 3 / Antenna 4 / Antenna 5>:

Temperature	21°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	802.11a / 802.11a Turbo

Configuration IEEE 802.11a


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	29.28	17.76
40	5200 MHz	28.64	18.08
48	5240 MHz	28.48	17.76

Configuration IEEE 802.11a Turbo

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	46.60	33.60


<For Antenna 3 / Antenna 4 / Antenna 5>:

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

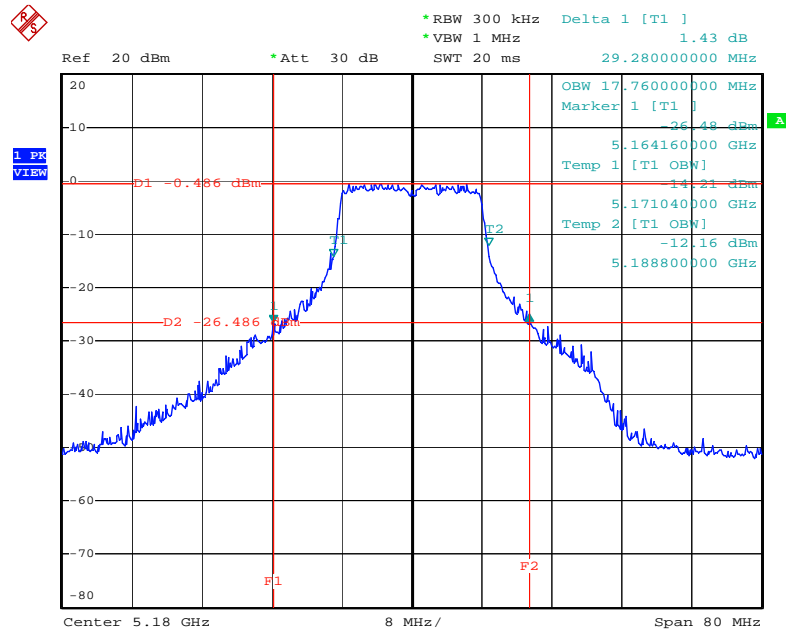


Date: 22.JAN.2010 10:40:13

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

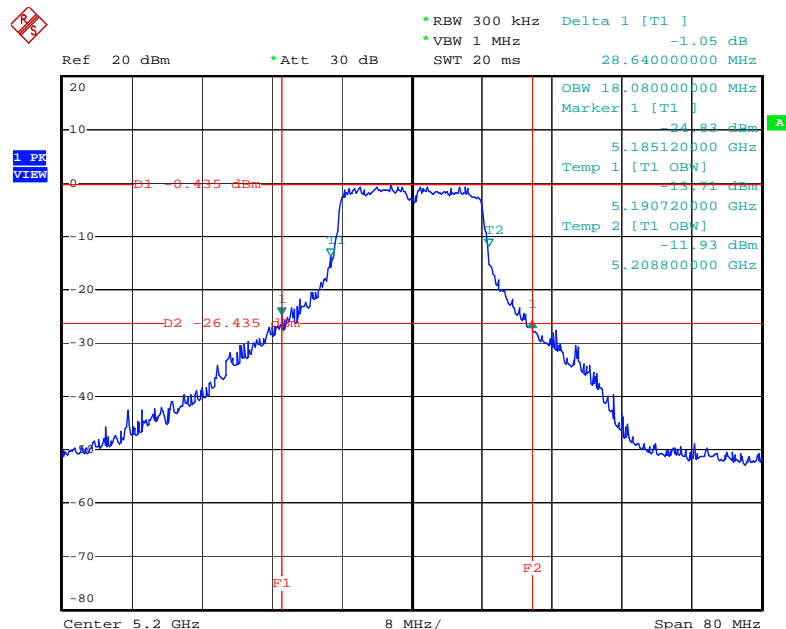


Date: 22.JAN.2010 10:37:34

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

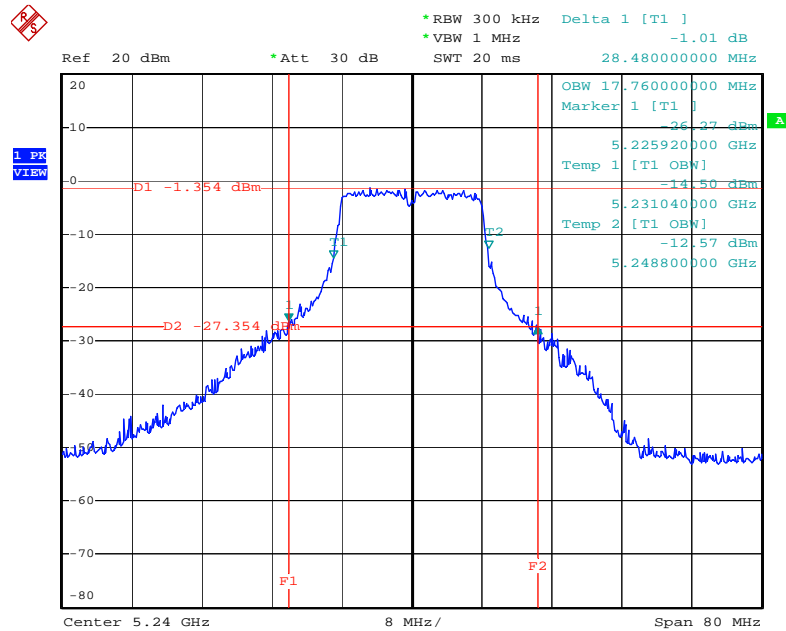

Date: 22.JAN.2010 10:38:33

26 dB Bandwidth Plot on Configuration IEEE 802.11a Turbo / 5210 MHz

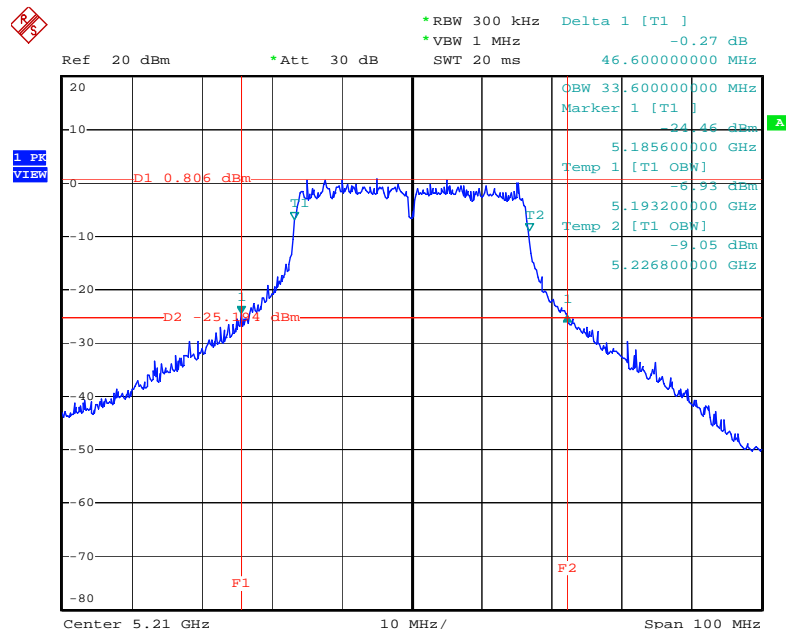

Date: 22.JAN.2010 10:18:22

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	MAX HOLD
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with FCC Public Notice DA 02-2138, August 30, 2002.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

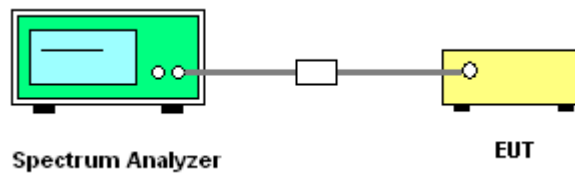

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

<For Antenna 3 / Antenna 4 / Antenna 5>:

Temperature	21°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	802.11a / 802.11a Turbo

Configuration IEEE 802.11a


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	15.40	17.00	Complies
40	5200 MHz	15.76	17.00	Complies
48	5240 MHz	15.52	17.00	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
42	5210 MHz	15.56	17.00	Complies


<For Antenna 3 / Antenna 4 / Antenna 5>:

Conducted Output Power Plot on Configuration IEEE 802.11a / 5180 MHz

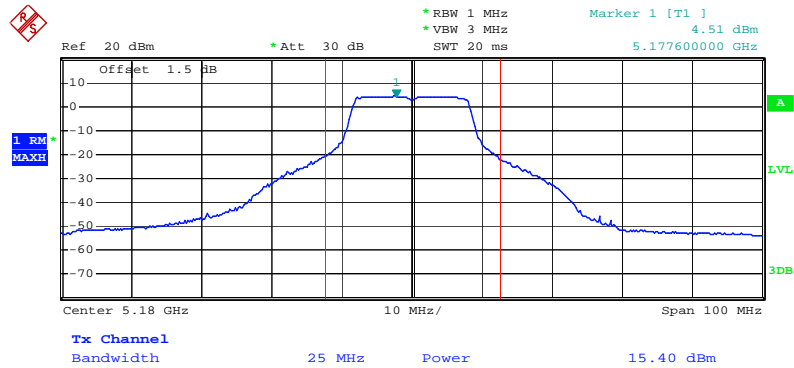


Date: 7.FEB.2010 18:28:00

Conducted Output Power Plot on Configuration IEEE 802.11a / 5200 MHz

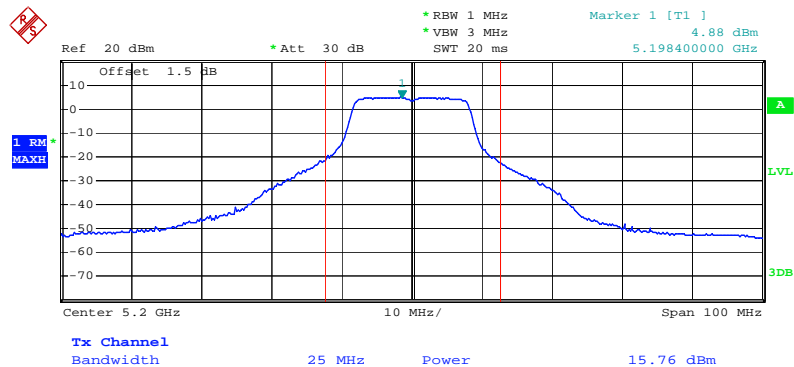


Date: 7.FEB.2010 18:28:41

Conducted Output Power Plot on Configuration IEEE 802.11a / 5240 MHz

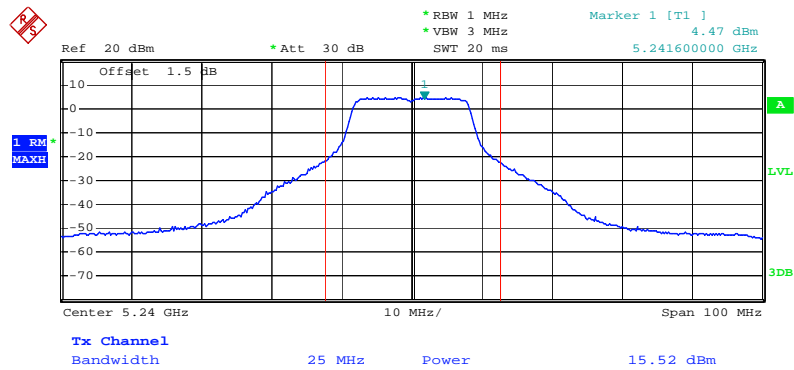

Date: 7.FEB.2010 18:29:29

Conducted Output Power Plot on Configuration IEEE 802.11a Turbo / 5210 MHz

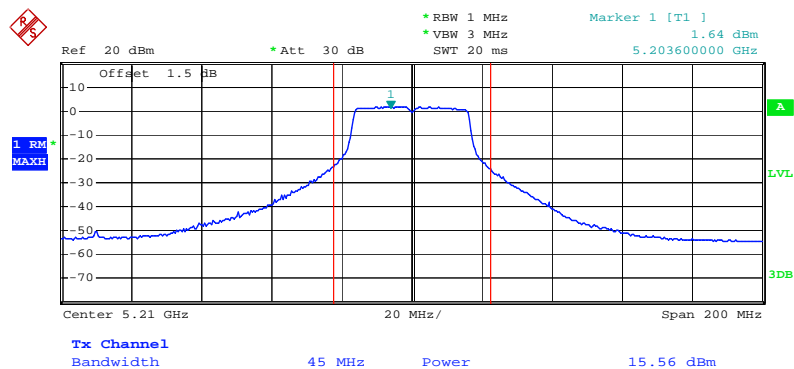

Date: 7.FEB.2010 18:31:09

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

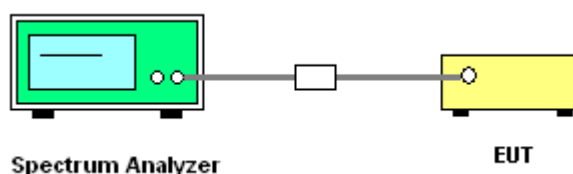

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

<For Antenna 3 / Antenna 4 / Antenna 5>:

Temperature	21°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	802.11a / 802.11a Turbo

Configuration IEEE 802.11a


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	-2.63	4.00	Complies
40	5200 MHz	-3.16	4.00	Complies
48	5240 MHz	-3.77	4.00	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
42	5210 MHz	-2.59	4.00	Complies


<For Antenna 3 / Antenna 4 / Antenna 5>:

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

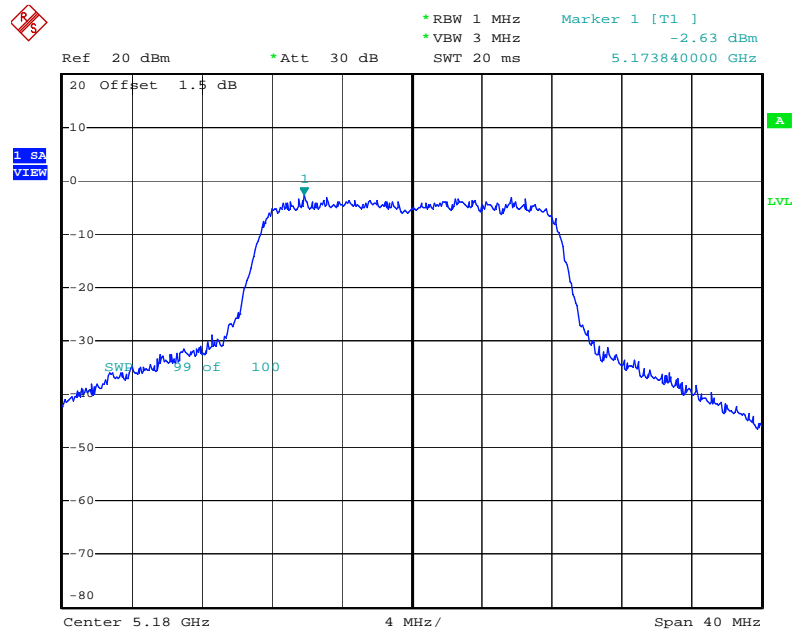


Date: 22.JAN.2010 10:40:20

Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

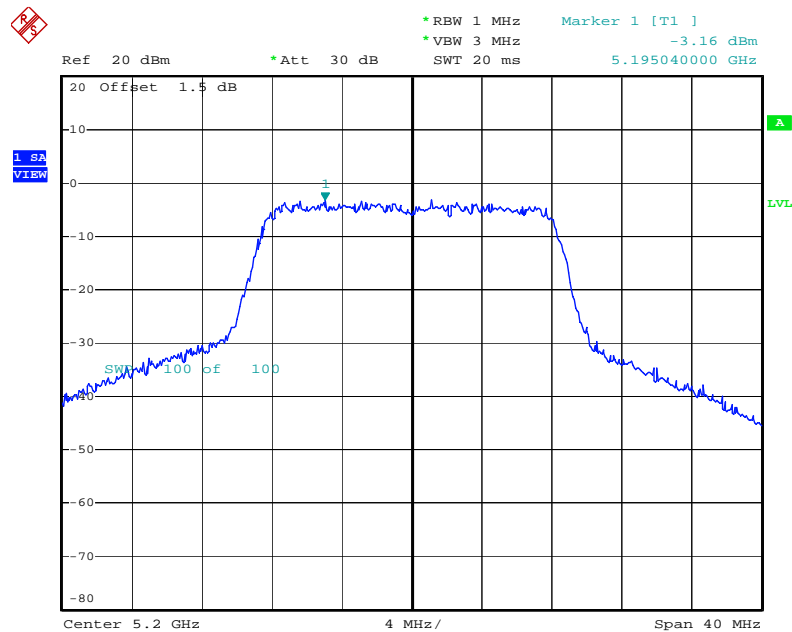


Date: 22.JAN.2010 10:37:41

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

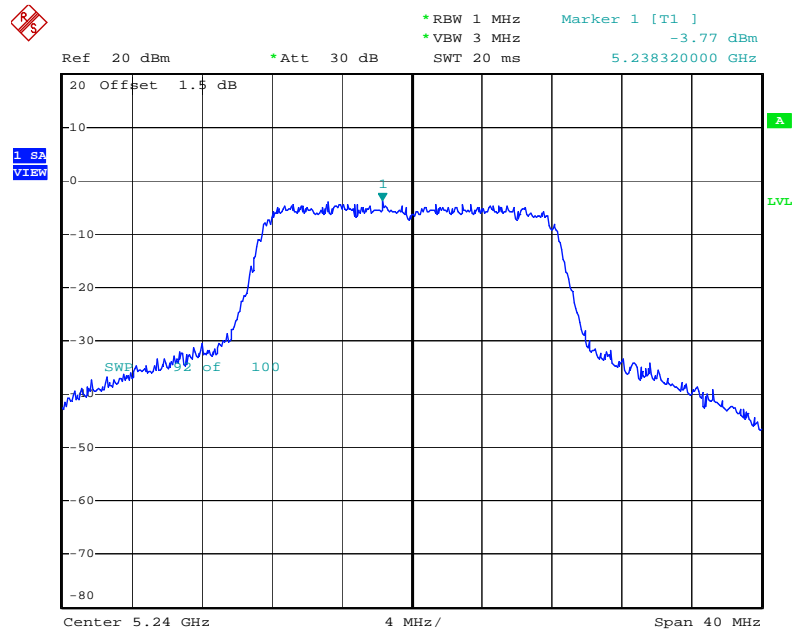

Date: 22.JAN.2010 10:38:40

Power Density Plot on Configuration IEEE 802.11a Turbo / 5210 MHz

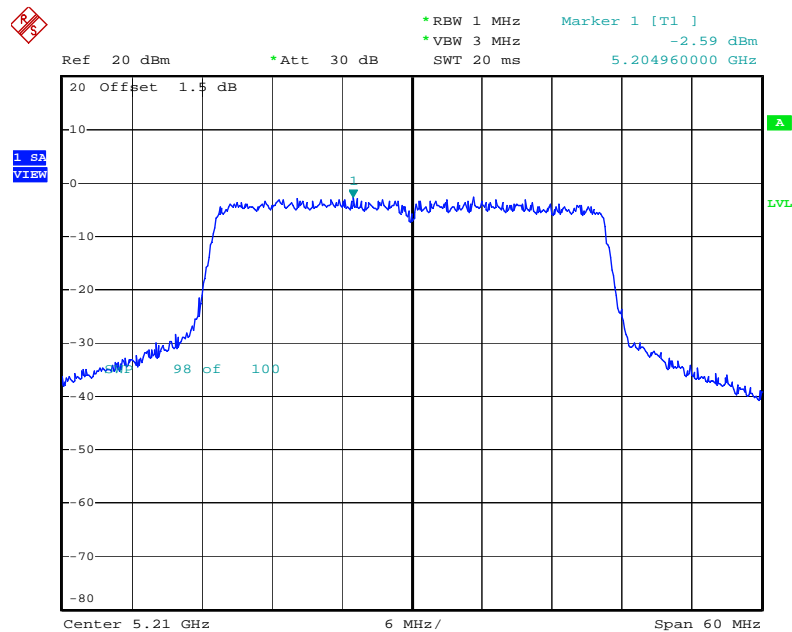

Date: 22.JAN.2010 10:18:29

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW $\geq 1/T$ (IEEE 802.11n VBW = 300kHz $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.5.4. Test Setup Layout

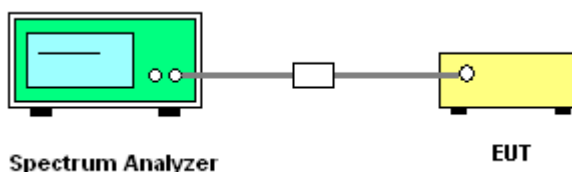

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

<For Antenna 3 / Antenna 4 / Antenna 5>:

Temperature	21°C	Humidity	60%
Test Engineer	Allen Liu	Configurations	802.11a / 802.11a Turbo

Configuration IEEE 802.11a


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	5.26	13	Complies
40	5200 MHz	5.21	13	Complies
48	5240 MHz	5.26	13	Complies

Configuration IEEE 802.11a Turbo

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
42	5210 MHz	5.06	13	Complies


<For Antenna 3>:

Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

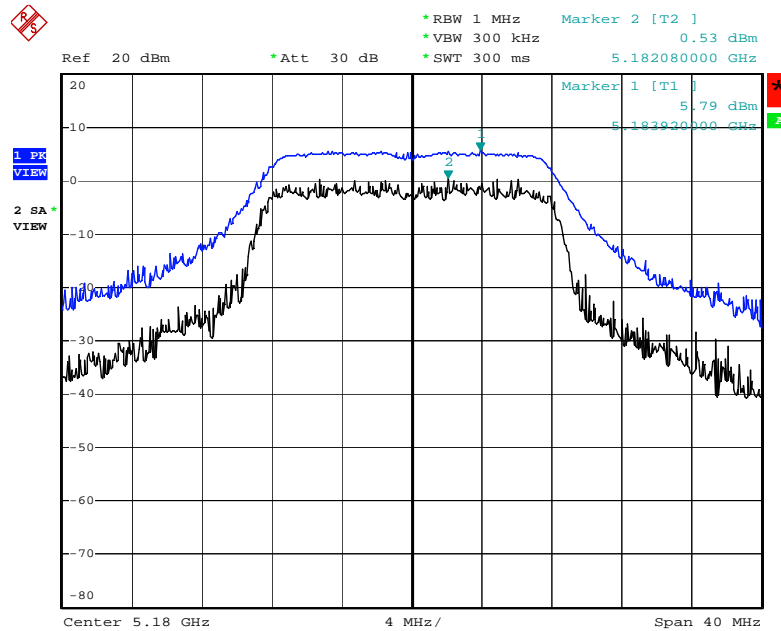


Date: 22.JAN.2010 10:40:32

Peak Excursion Plot on Configuration IEEE 802.11a / 5200 MHz

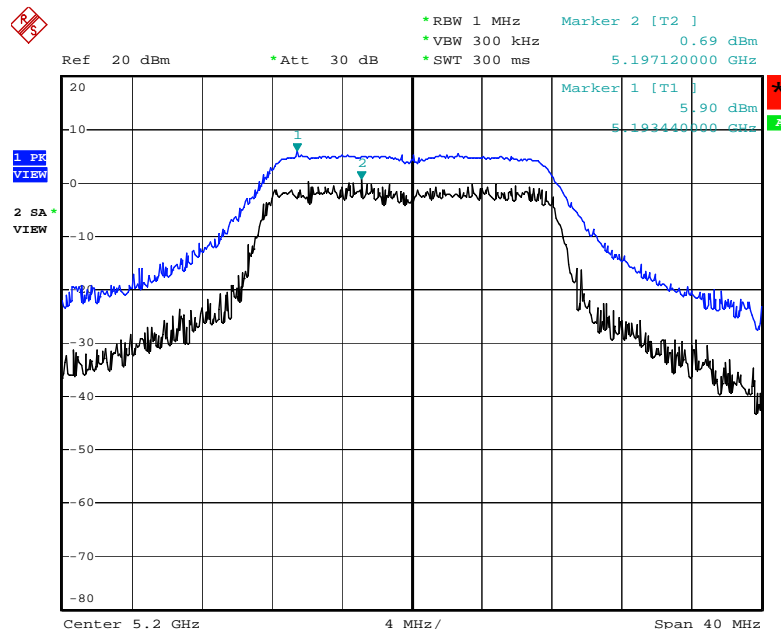


Date: 22.JAN.2010 10:37:53

Peak Excursion Plot on Configuration IEEE 802.11a / 5240 MHz

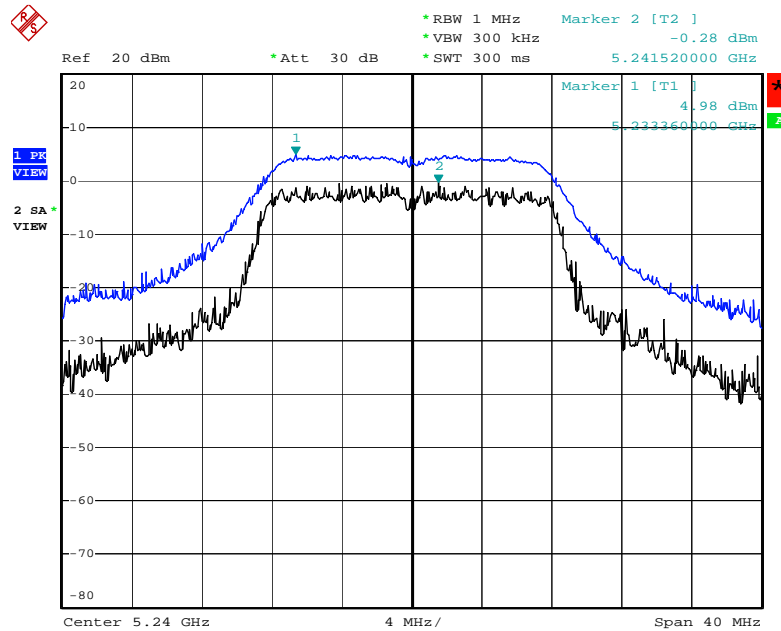

Date: 22.JAN.2010 10:38:52

Peak Excursion Plot on Configuration IEEE 802.11a Turbo / 5210 MHz

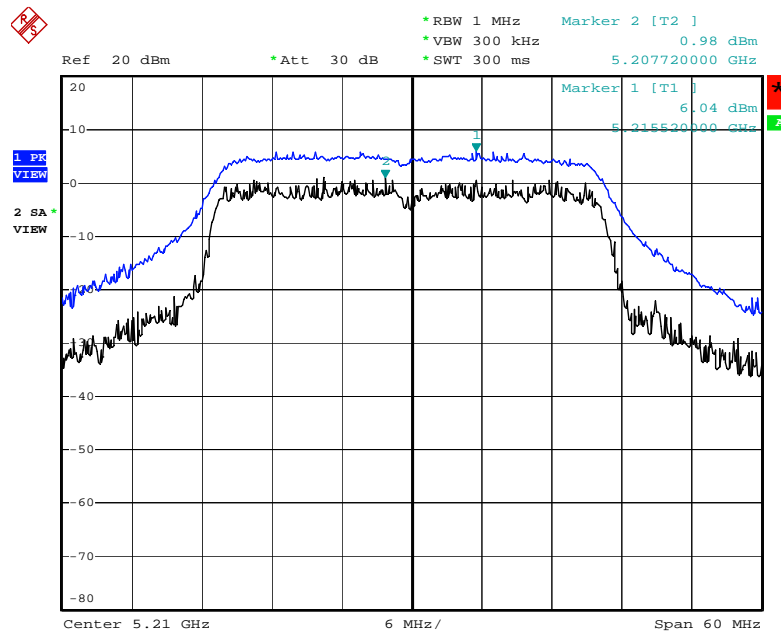

Date: 22.JAN.2010 10:18:41

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15~5.25 GHz band: all emissions outside of the 5.15~5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

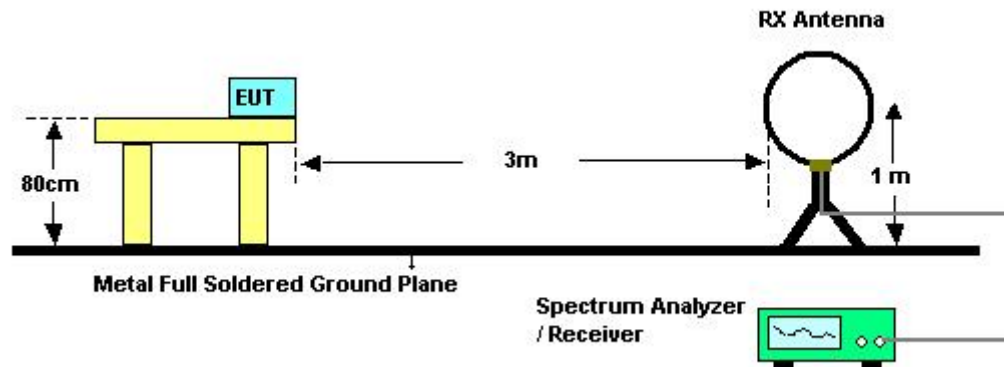

For radiated emissions above 30MHz

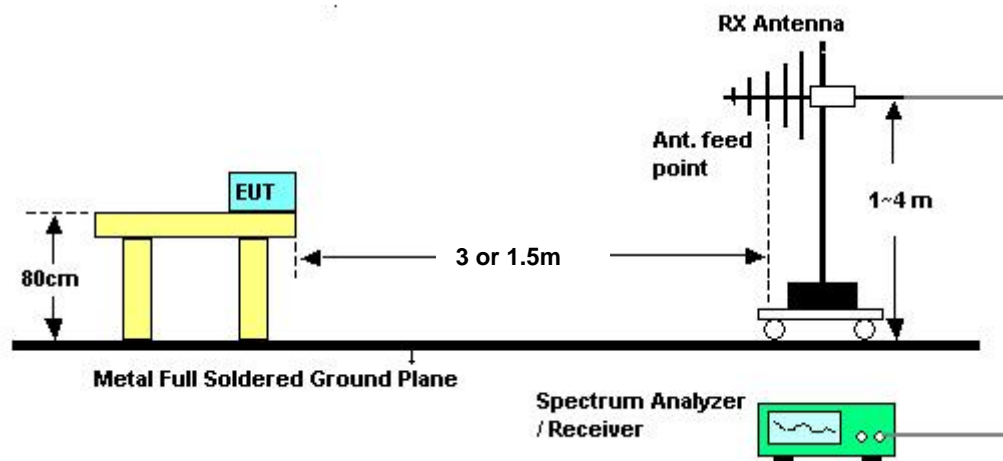

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link
Evaluating Date	Jan. 22, 2010		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)

<For Antenna 3>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

Horizontal

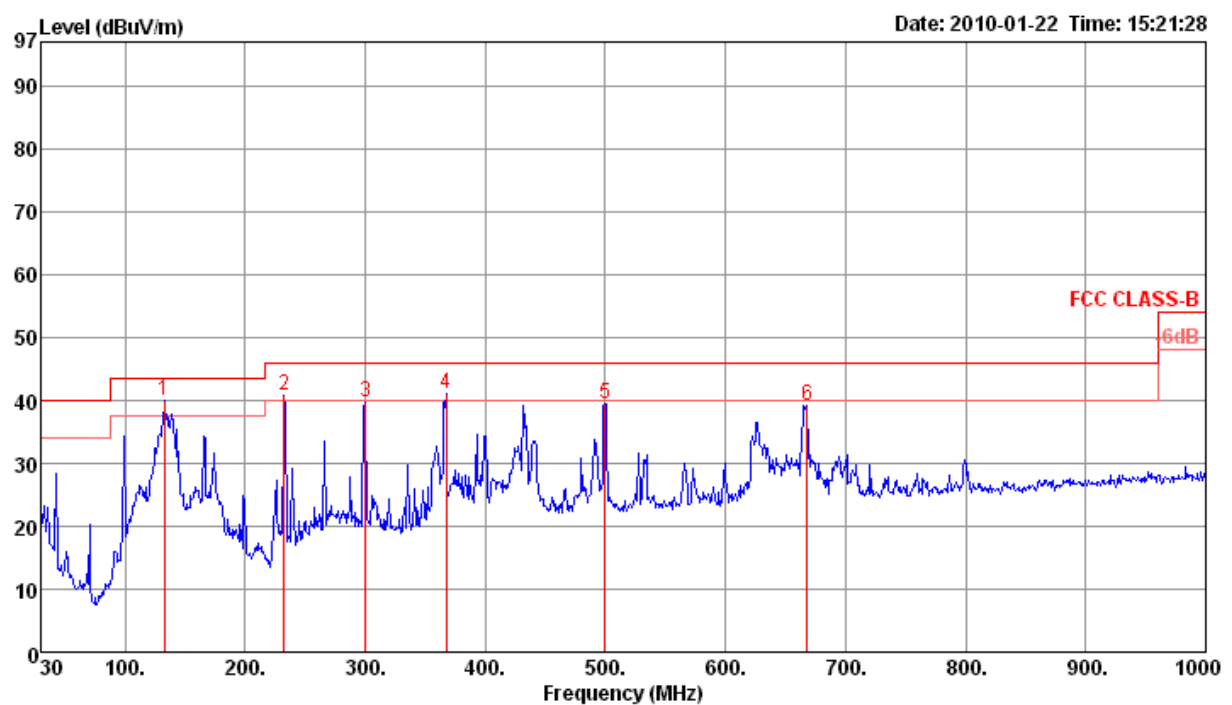

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	132.82	39.97	43.50	-3.53	53.79	1.33	27.43	12.28	0	100	Peak	HORIZONTAL
2 !	232.73	40.79	46.00	-5.21	54.51	1.83	27.03	11.48	0	100	Peak	HORIZONTAL
3	300.63	39.75	46.00	-6.25	51.16	2.10	26.90	13.39	0	100	Peak	HORIZONTAL
4 !	367.56	41.17	46.00	-4.83	51.12	2.24	27.38	15.19	0	100	Peak	HORIZONTAL
5	499.48	39.51	46.00	-6.49	47.29	2.70	28.09	17.61	0	100	Peak	HORIZONTAL
6	668.26	39.16	46.00	-6.84	44.77	3.43	28.03	18.99	0	100	Peak	HORIZONTAL

Vertical

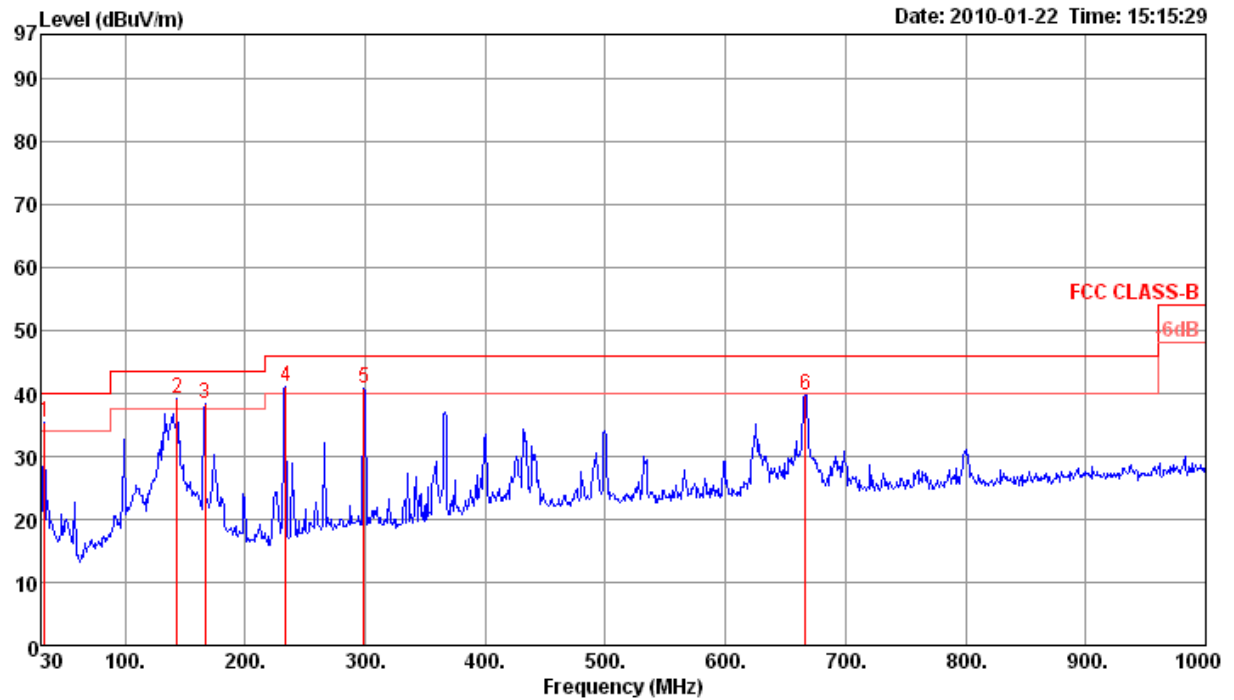

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	32.91	35.47	40.00	-4.53	45.62	0.50	27.80	17.15	0	400	Peak	VERTICAL
2 p	143.49	39.05	43.50	-4.45	52.84	1.42	27.38	12.17	0	400	Peak	VERTICAL
3 !	166.77	38.46	43.50	-5.04	51.66	1.53	27.27	12.54	0	400	Peak	VERTICAL
4 !	233.70	41.17	46.00	-4.83	54.82	1.83	27.03	11.55	0	400	Peak	VERTICAL
5 !	298.69	40.74	46.00	-5.26	52.19	2.10	26.90	13.35	0	400	Peak	VERTICAL
6	666.32	39.77	46.00	-6.23	45.39	3.43	28.03	18.98	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 4>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

Horizontal

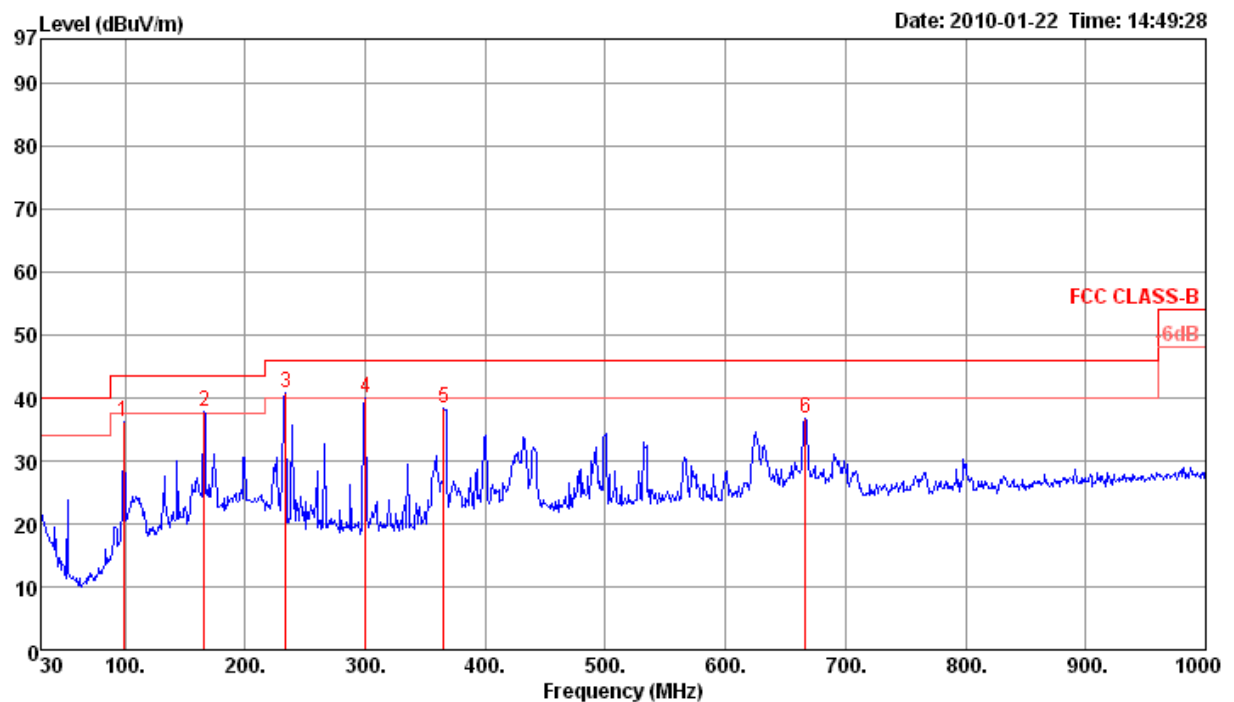

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	98.87	36.20	43.50	-7.30	51.84	1.18	27.61	10.79	0	100	Peak	HORIZONTAL
2	165.80	37.85	43.50	-5.65	51.12	1.53	27.27	12.47	0	100	Peak	HORIZONTAL
3	233.70	40.87	46.00	-5.13	54.52	1.83	27.03	11.55	0	100	Peak	HORIZONTAL
4	300.63	39.89	46.00	-6.11	51.30	2.10	26.90	13.39	0	100	Peak	HORIZONTAL
5	365.62	38.41	46.00	-7.59	48.40	2.23	27.36	15.14	0	100	Peak	HORIZONTAL
6	666.32	36.67	46.00	-9.33	42.29	3.43	28.03	18.98	0	100	Peak	HORIZONTAL

Vertical

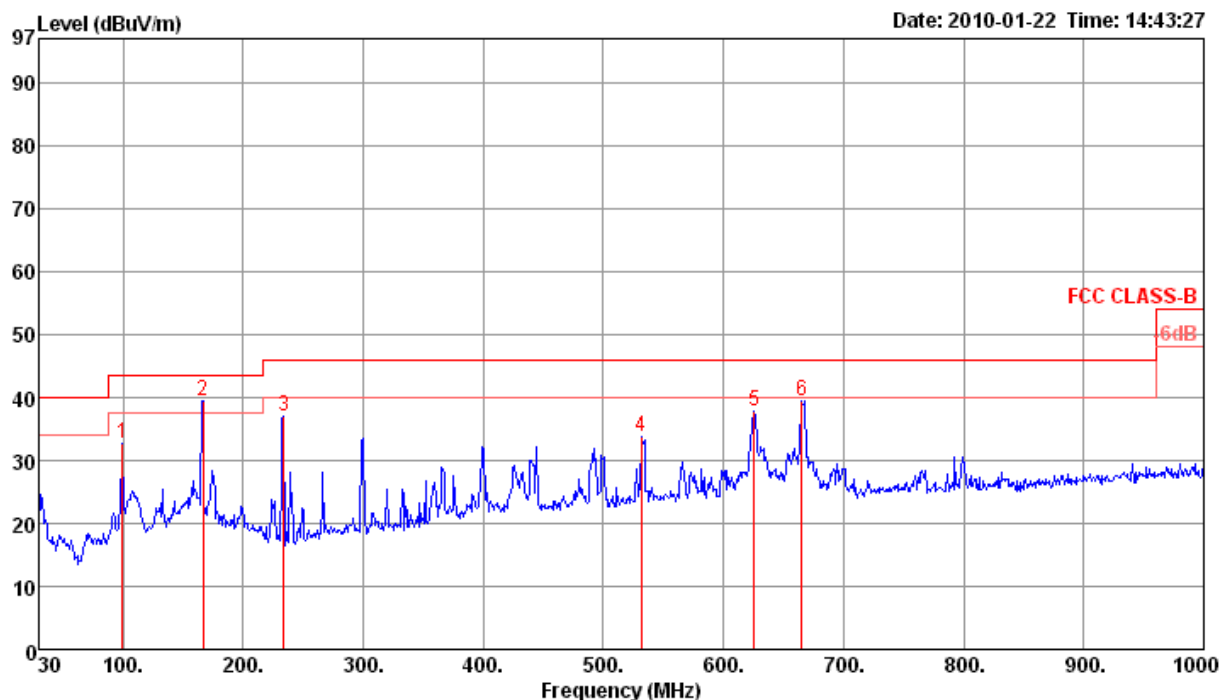

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	99.84	32.56	43.50	-10.94	47.97	1.20	27.60	10.99	0	400	Peak	VERTICAL
2	166.77	39.50	43.50	-4.00	52.70	1.53	27.27	12.54	0	400	Peak	VERTICAL
3	233.70	36.96	46.00	-9.04	50.61	1.83	27.03	11.55	0	400	Peak	VERTICAL
4	531.49	33.75	46.00	-12.25	41.11	2.76	28.10	17.98	0	400	Peak	VERTICAL
5	625.58	37.71	46.00	-8.29	43.88	3.05	28.07	18.85	0	400	Peak	VERTICAL
6	665.35	39.57	46.00	-6.43	45.18	3.44	28.03	18.98	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna 5>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

Horizontal

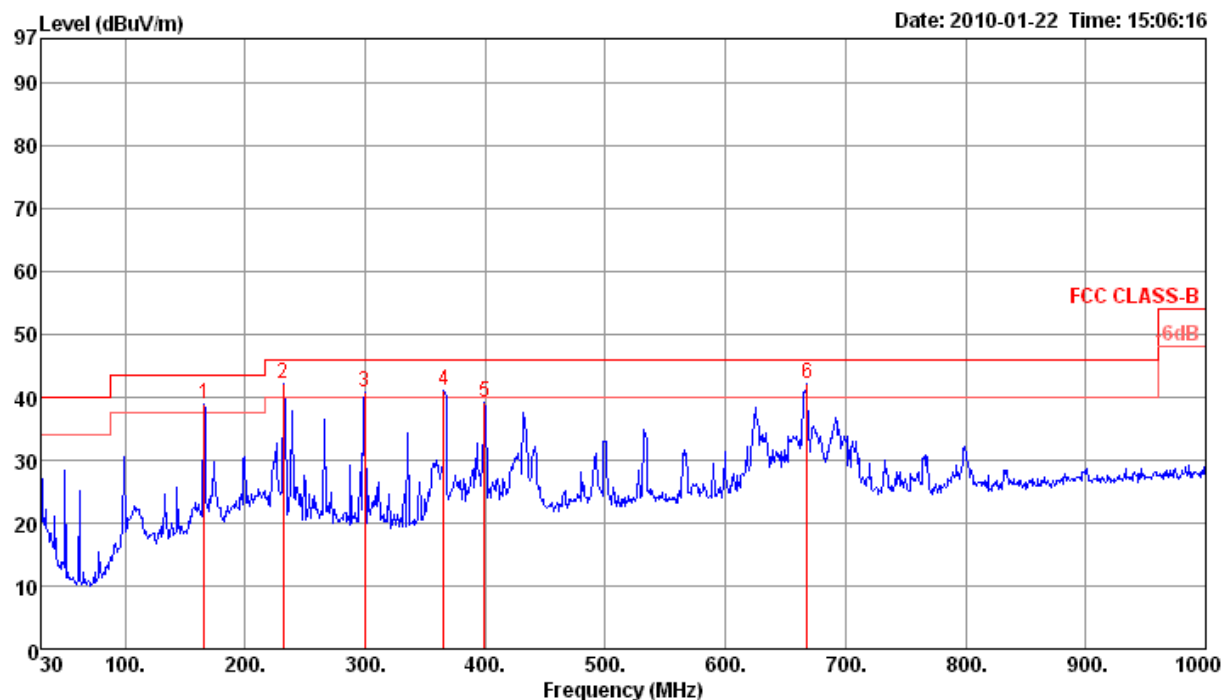

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	165.80	39.01	43.50	-4.49	52.28	1.53	27.27	12.47	0	100	Peak	HORIZONTAL
2 !	231.76	42.04	46.00	-3.96	55.84	1.83	27.04	11.41	0	100	Peak	HORIZONTAL
3 !	299.66	40.68	46.00	-5.32	52.12	2.10	26.90	13.36	0	100	Peak	HORIZONTAL
4 !	365.62	41.19	46.00	-4.81	51.18	2.23	27.36	15.14	0	100	Peak	HORIZONTAL
5	399.57	39.07	46.00	-6.93	48.31	2.30	27.60	16.06	0	100	Peak	HORIZONTAL
6 p	668.26	42.09	46.00	-3.91	47.70	3.43	28.03	18.99	0	100	Peak	HORIZONTAL

Vertical

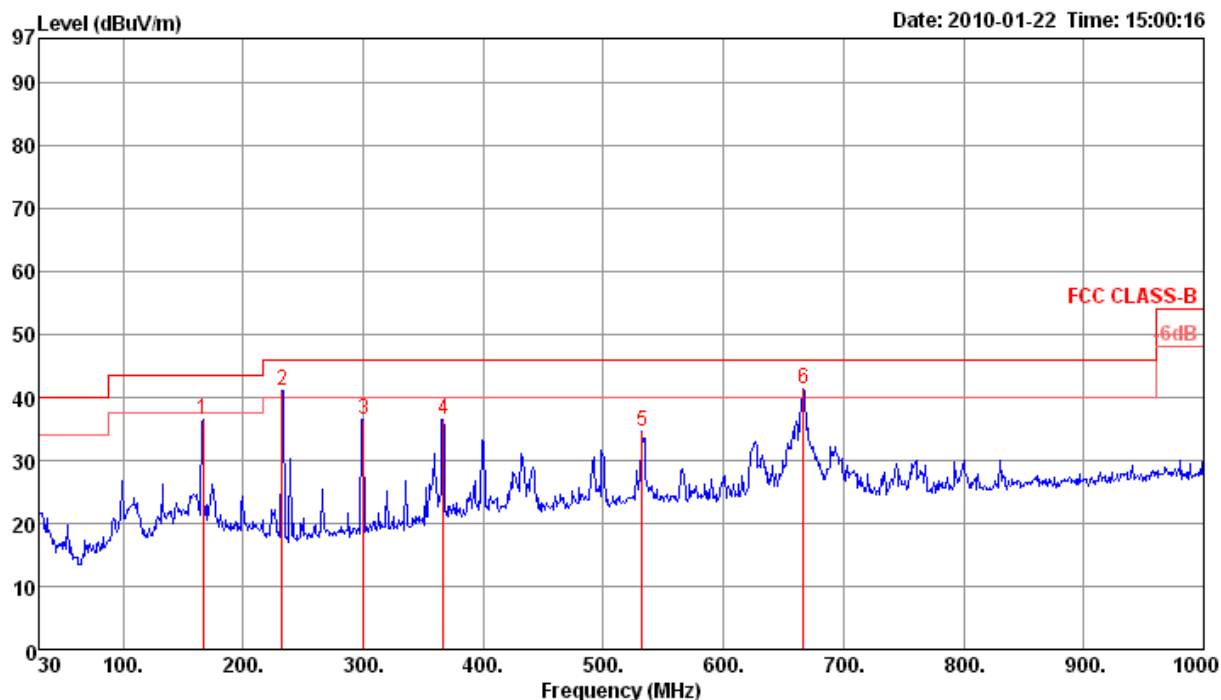

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	166.77	36.52	43.50	-6.98	49.72	1.53	27.27	12.54	0	400	Peak	VERTICAL
2	232.73	41.12	46.00	-4.88	54.84	1.83	27.03	11.48	0	400	Peak	VERTICAL
3	300.63	36.57	46.00	-9.43	47.98	2.10	26.90	13.39	0	400	Peak	VERTICAL
4	366.59	36.42	46.00	-9.58	46.39	2.23	27.37	15.17	0	400	Peak	VERTICAL
5	532.46	34.65	46.00	-11.35	41.99	2.76	28.10	18.00	0	400	Peak	VERTICAL
6	666.32	41.47	46.00	-4.53	47.09	3.43	28.03	18.98	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<For Antenna 3>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 36 / Ant. 3

Horizontal

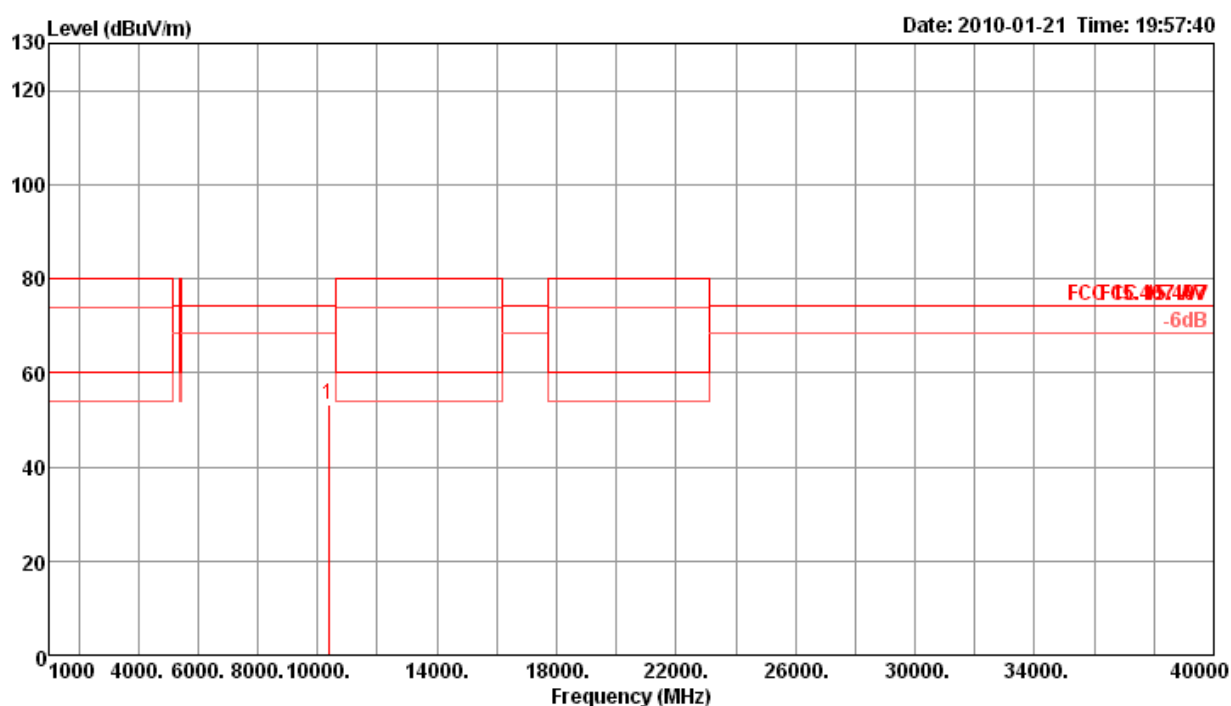

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10360.00	53.08	74.30	-21.22	45.27	4.65	35.36	38.52	325	100	Peak	HORIZONTAL


Vertical

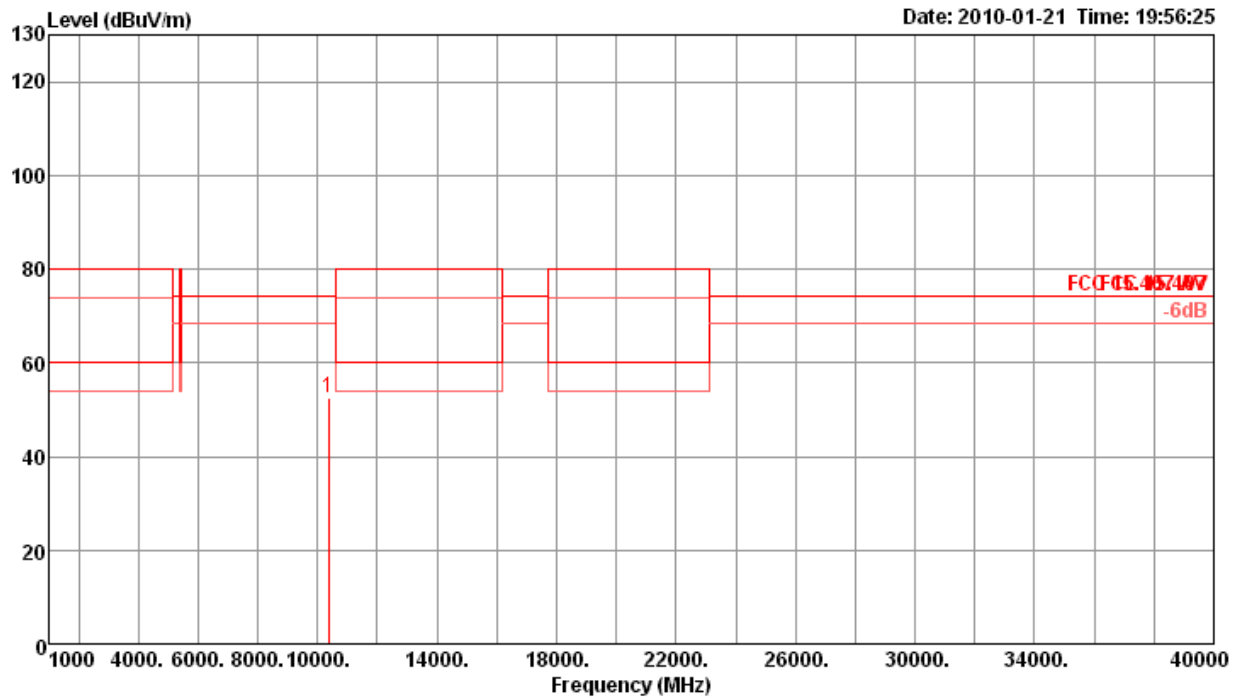

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10360.02	52.50	74.30	-21.80	44.69	4.65	35.36	38.52	185	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 40 / Ant. 3

Horizontal

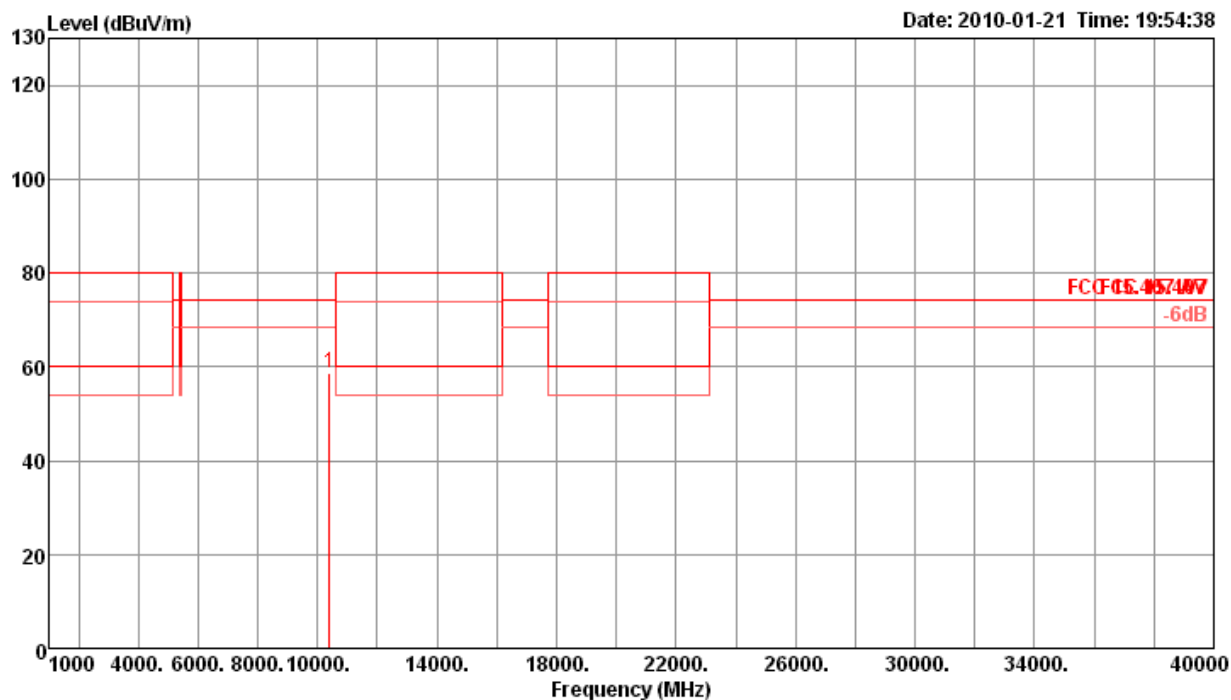

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10400.02	58.56	74.30	-15.74	50.62	4.70	35.30	38.54	111	100	Peak	HORIZONTAL


Vertical

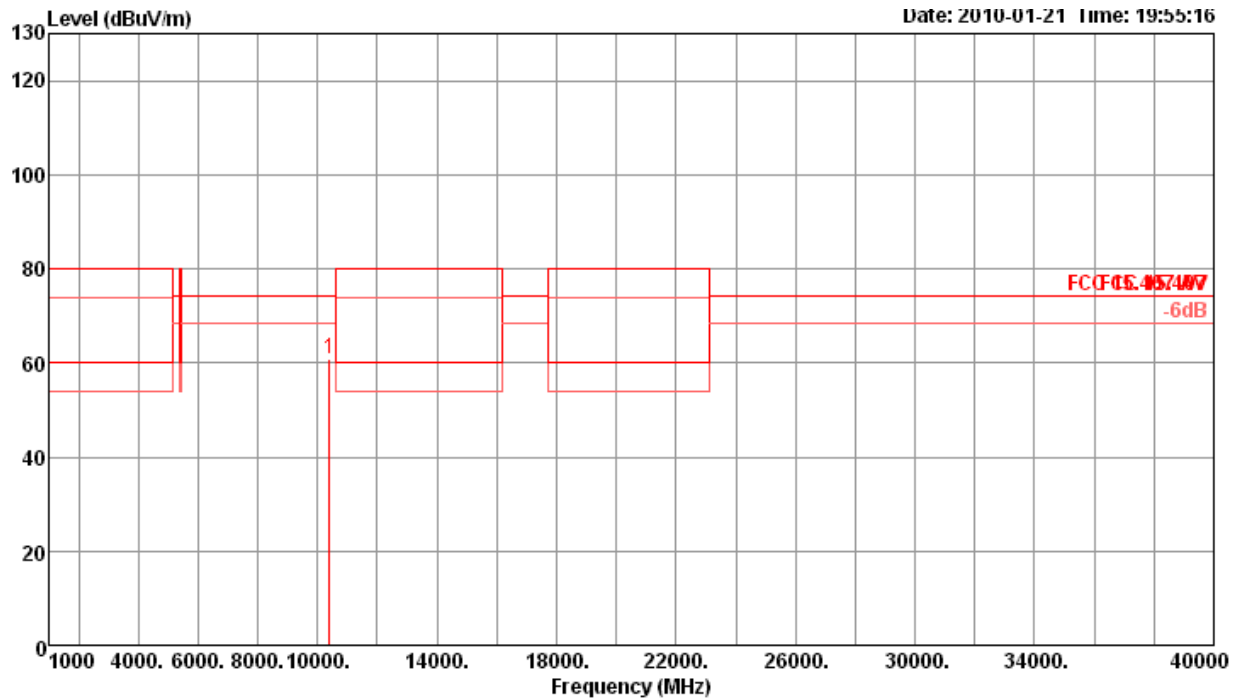

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10400.01	60.93	74.30	-13.37	52.99	4.70	35.30	38.54	92	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 48 / Ant. 3

Horizontal

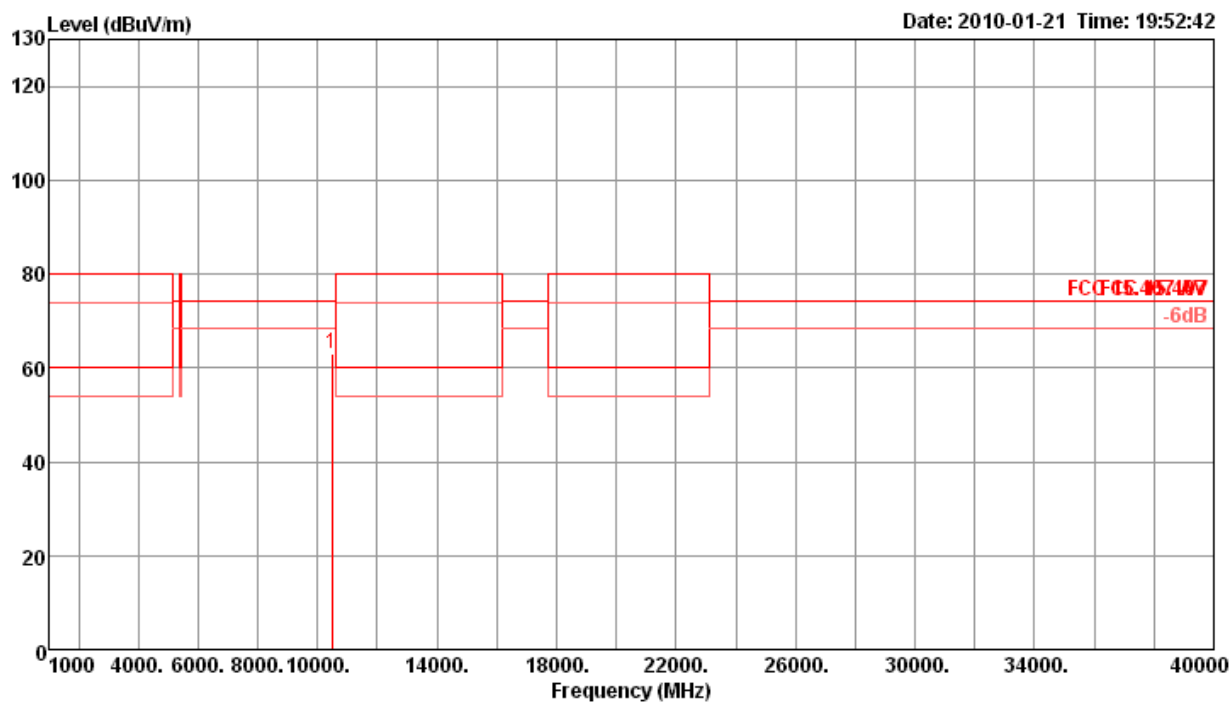


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10479.98	62.85	74.30	-11.45	54.71	4.76	35.21	38.59	111	100	Peak	HORIZONTAL


Vertical

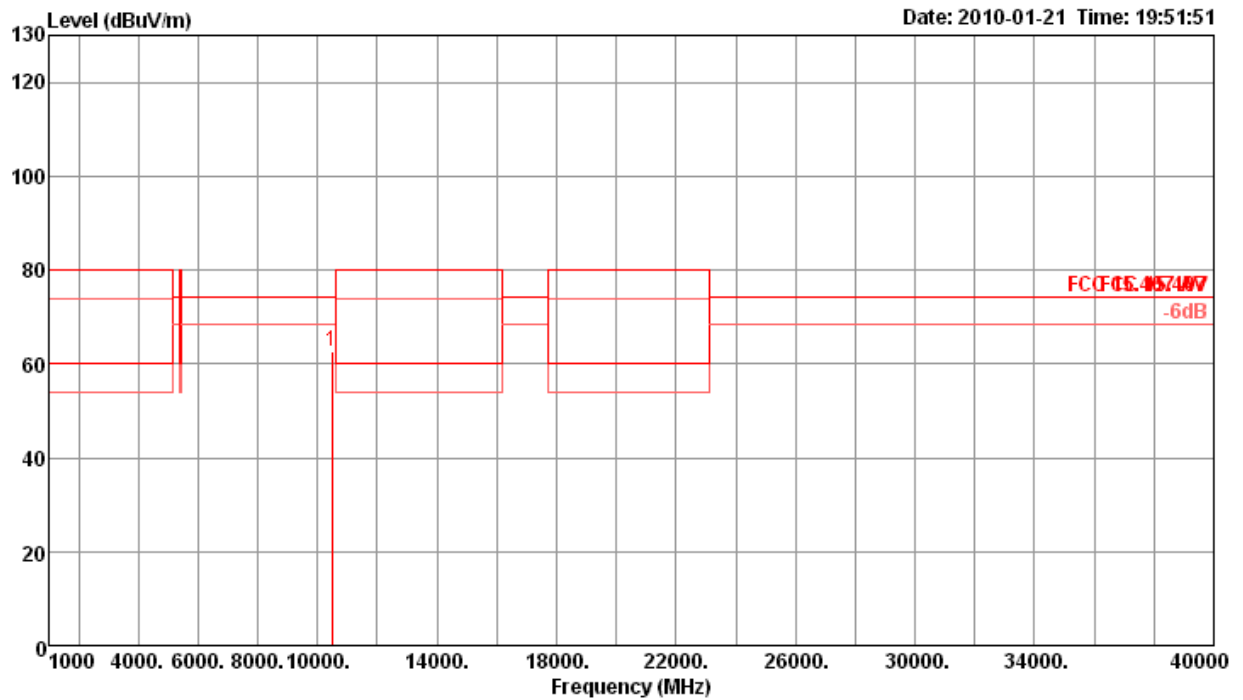

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10480.00	62.60	74.30	-11.70	54.46	4.76	35.21	38.59	233	100	Peak	VERTICAL

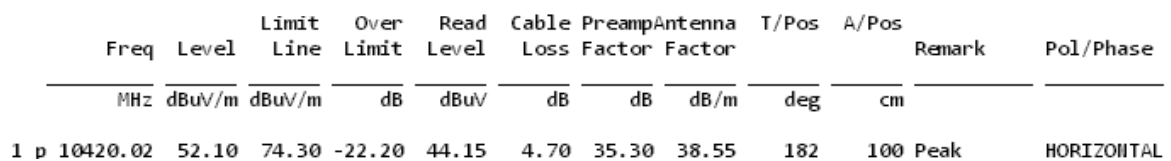**Horizontal**

Vertical

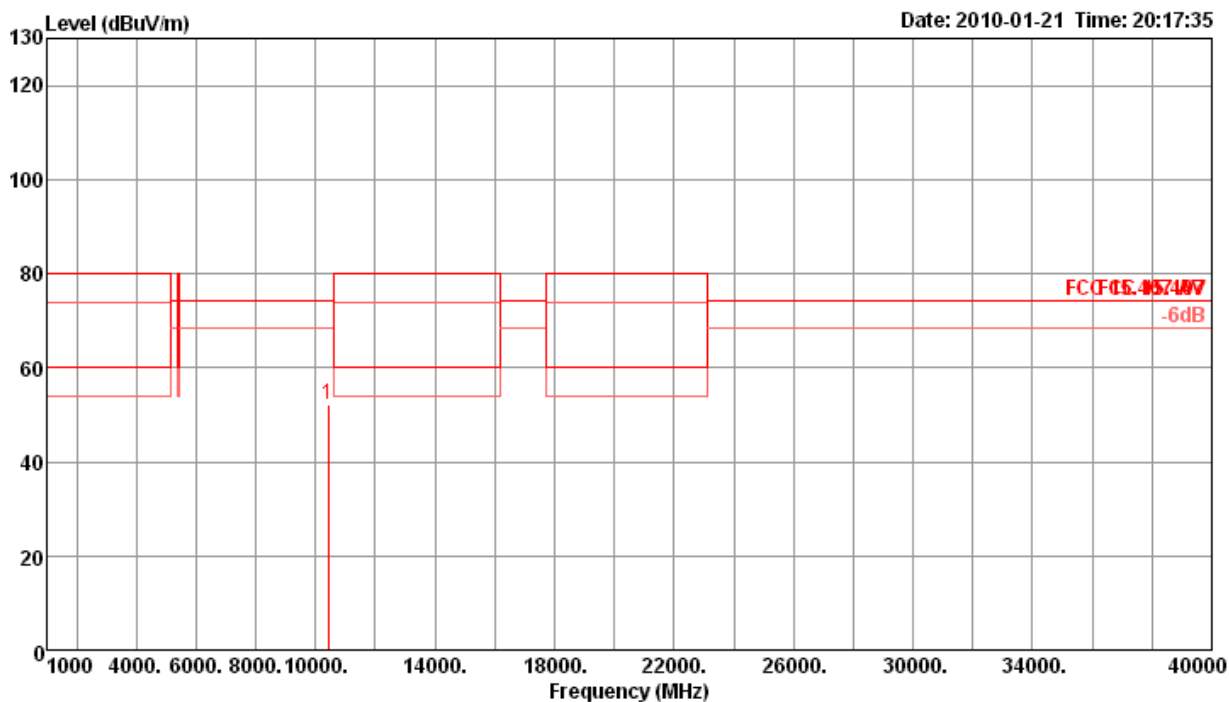

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10419.99	51.99	74.30	-22.31	44.04	4.70	35.30	38.55	252	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.


Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

<For Antenna 4>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 36 / Ant. 4

Horizontal

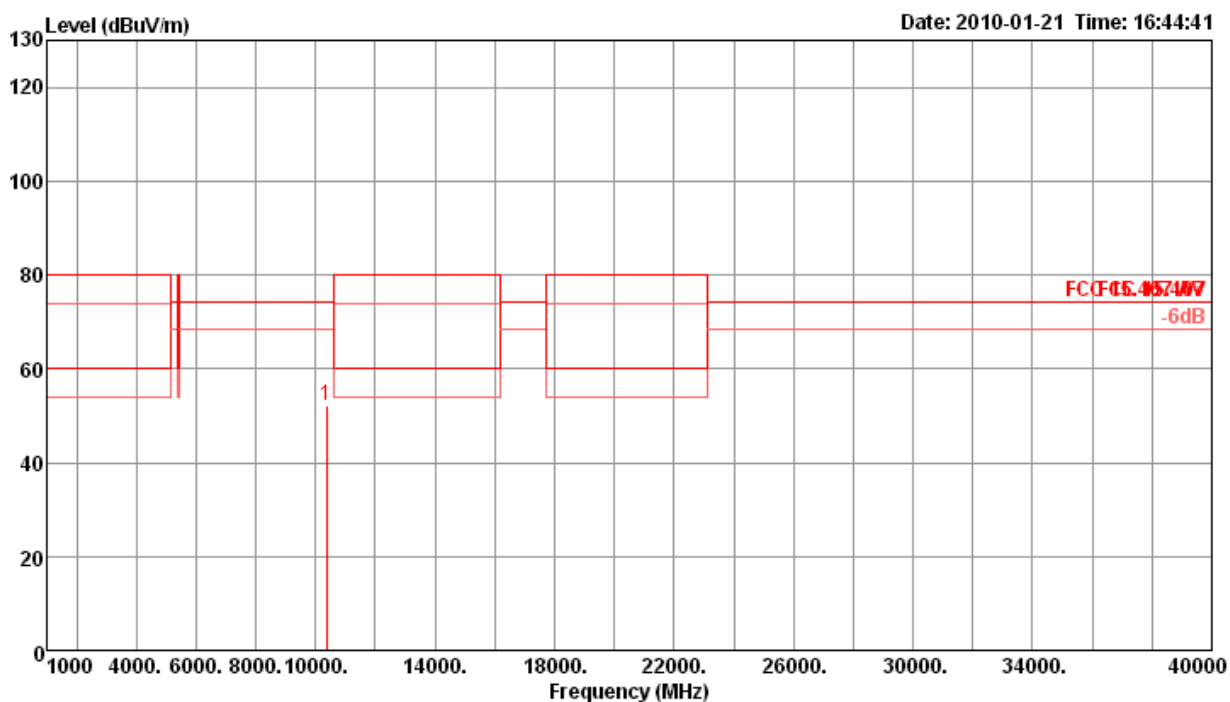

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10359.99	52.26	74.30	-22.04	44.45	4.65	35.36	38.52	154	100	Peak	HORIZONTAL


Vertical

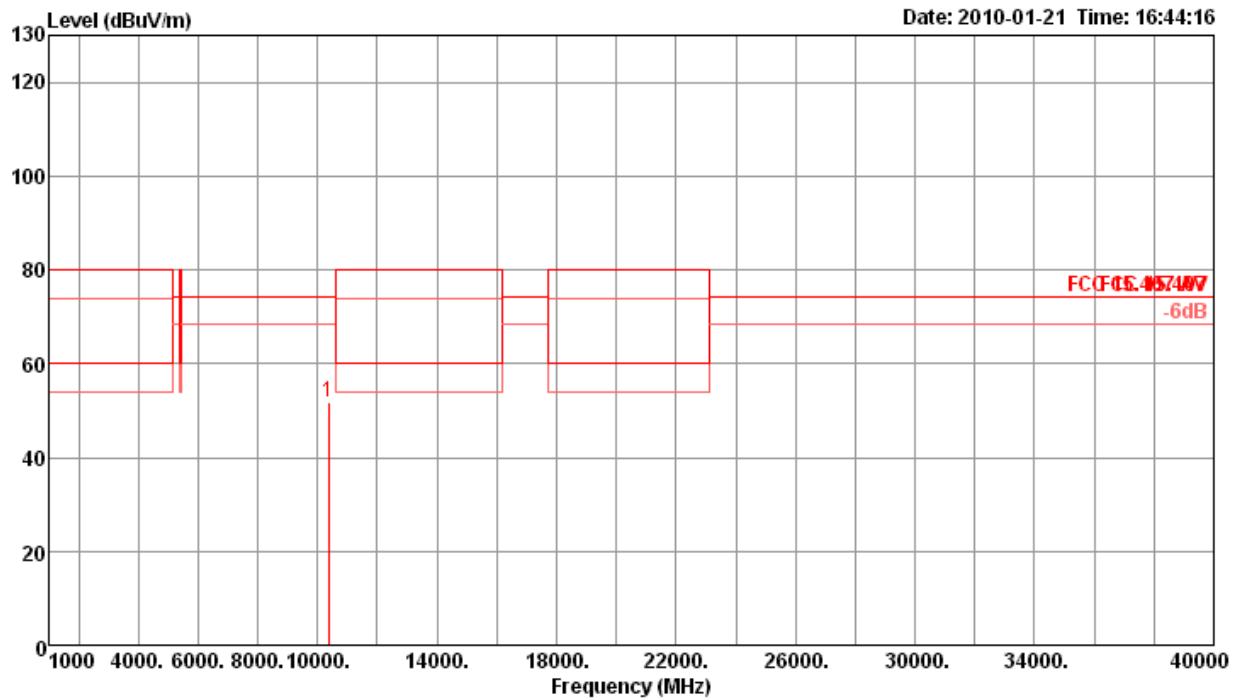

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10359.99	51.68	74.30	-22.62	43.87	4.65	35.36	38.52	238	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 40 / Ant. 4

Horizontal

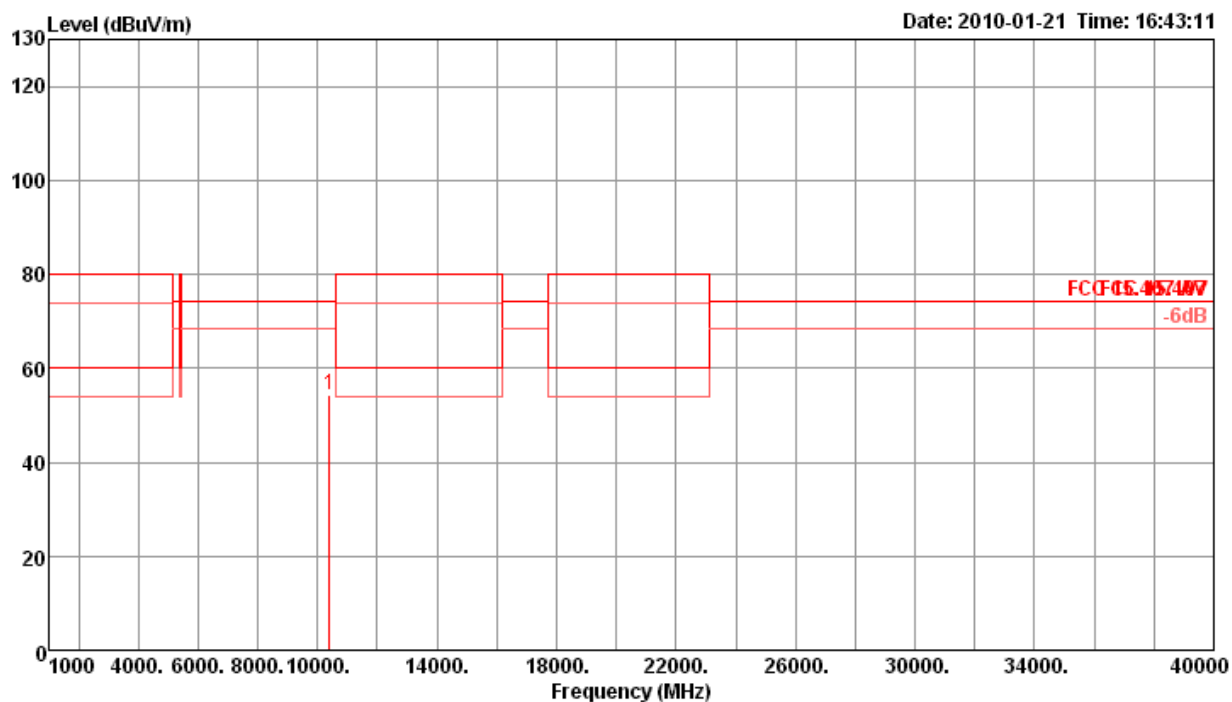

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	10400.00	54.23	74.30	-20.07	46.29	4.70	35.30	38.54	250	100	Peak	HORIZONTAL


Vertical

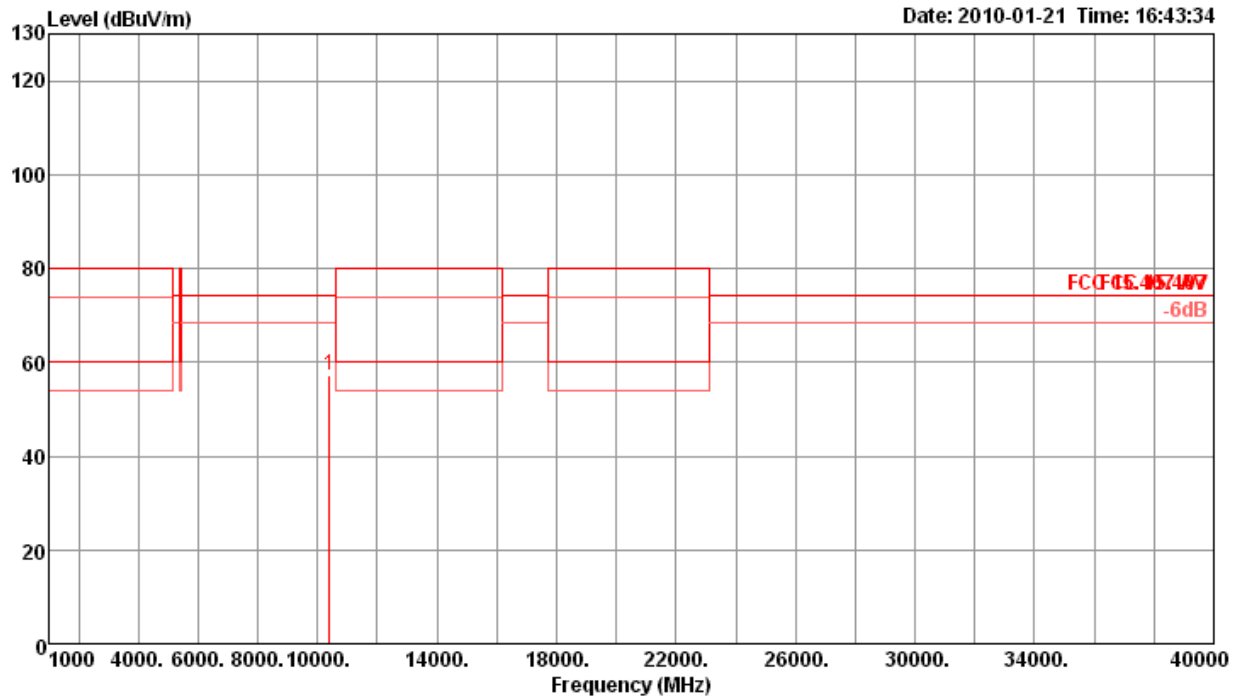

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10400.00	57.10	74.30	-17.20	49.16	4.70	35.30	38.54	137	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 48 / Ant. 4

Horizontal

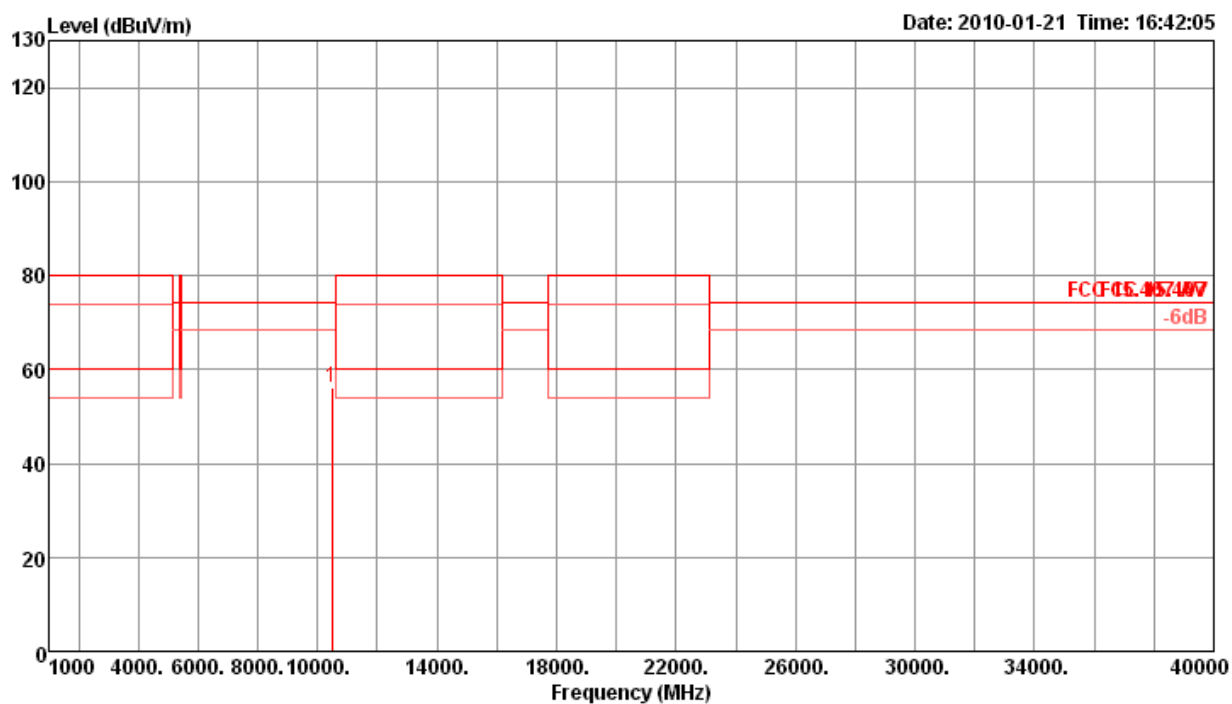

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	10479.99	55.97	74.30	-18.33	47.83	4.76	35.21	38.59	197	100	Peak	HORIZONTAL


Vertical

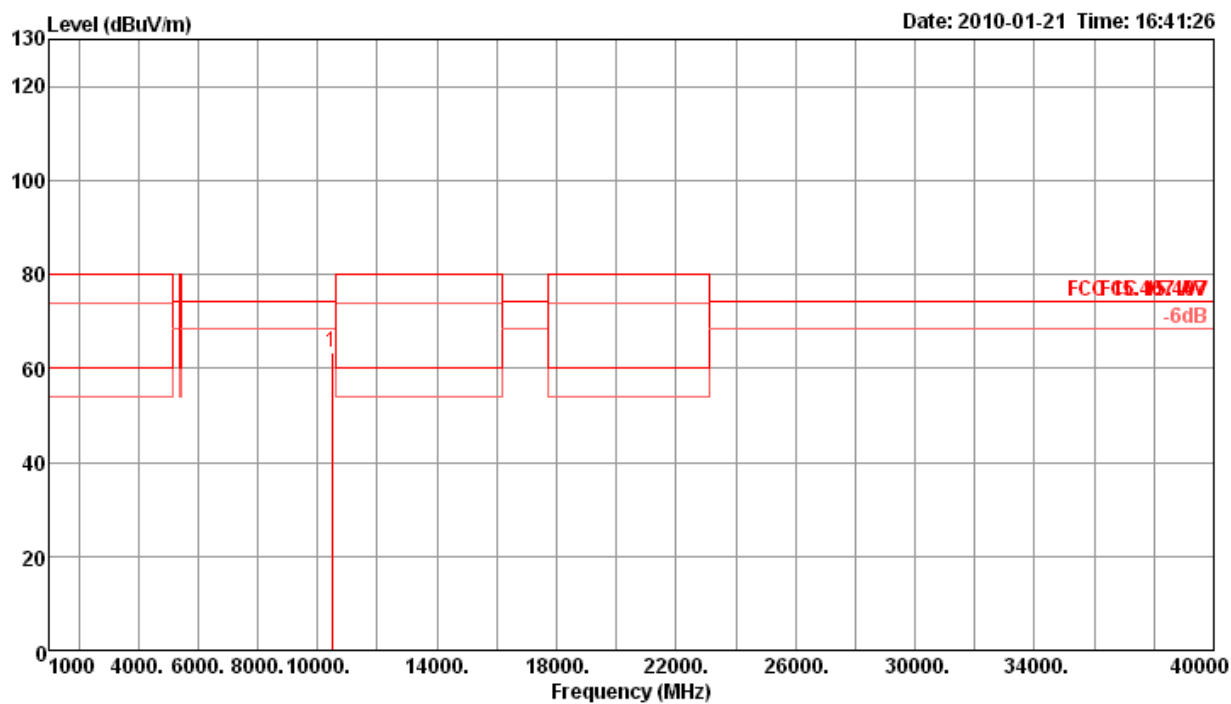

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10480.01	63.26	74.30	-11.04	55.12	4.76	35.21	38.59	180	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo Ch 42 / Ant. 4

Horizontal

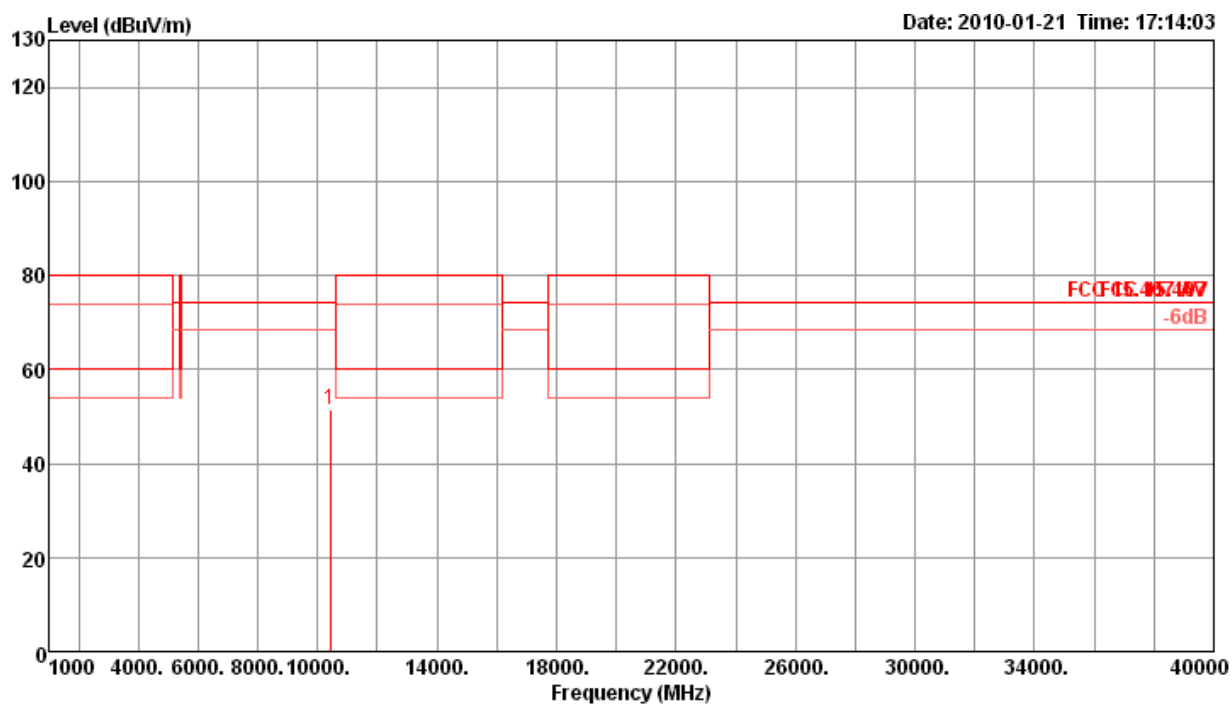

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10420.50	51.28	74.30	-23.02	43.33	4.70	35.30	38.55	173	100	Peak	HORIZONTAL

Vertical

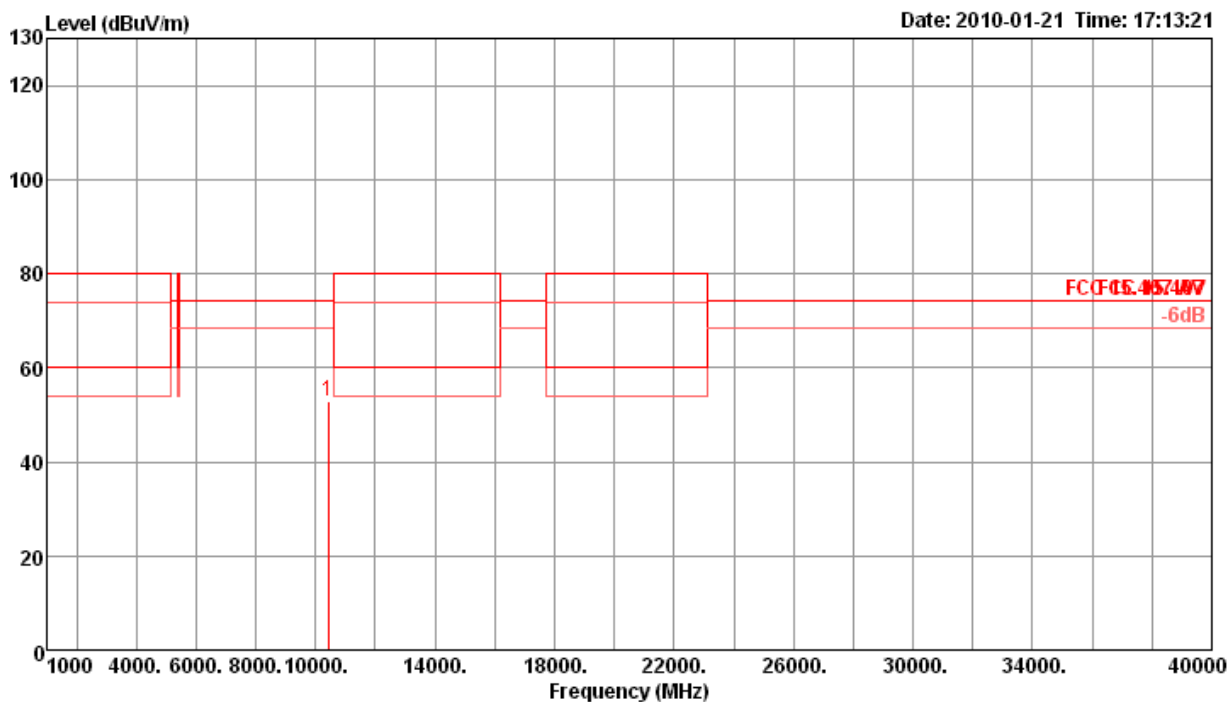

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p 10420.22	52.78	74.30	-21.52	44.83	4.70	35.30	38.55	256	123	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.


Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

<For Antenna 5>:


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 36 / Ant. 5

Horizontal

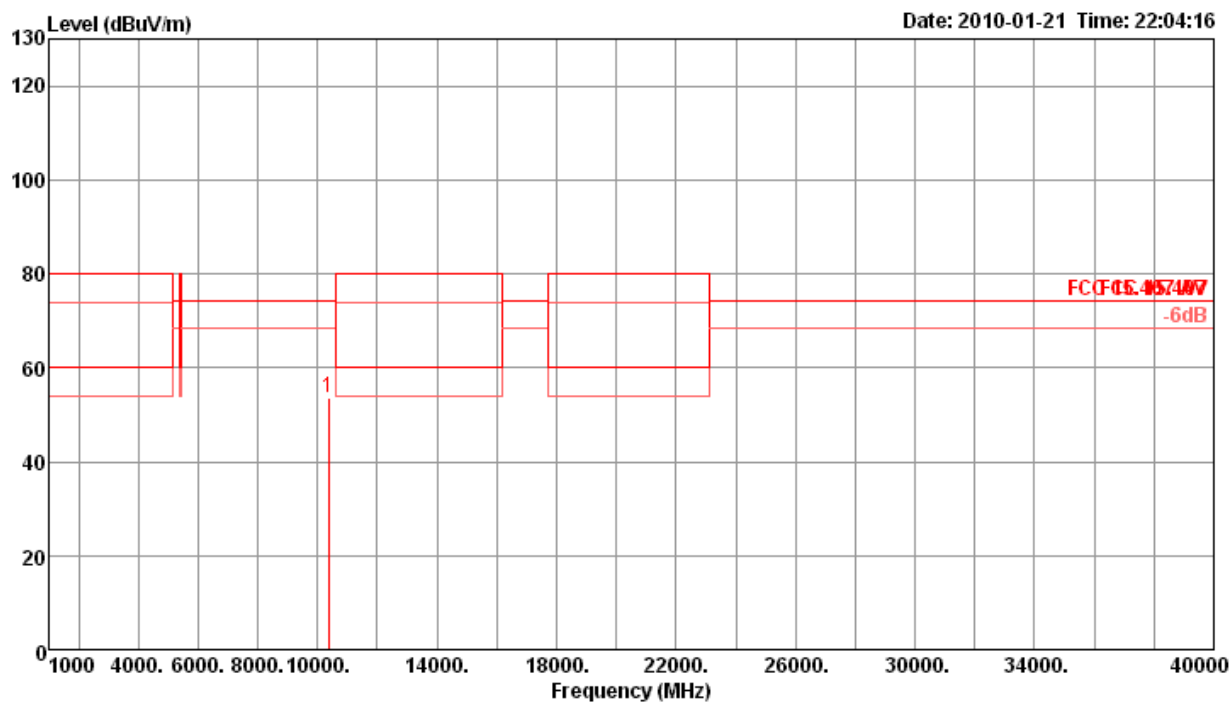

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10359.98	53.55	74.30	-20.75	45.74	4.65	35.36	38.52	139	100	Peak	HORIZONTAL


Vertical

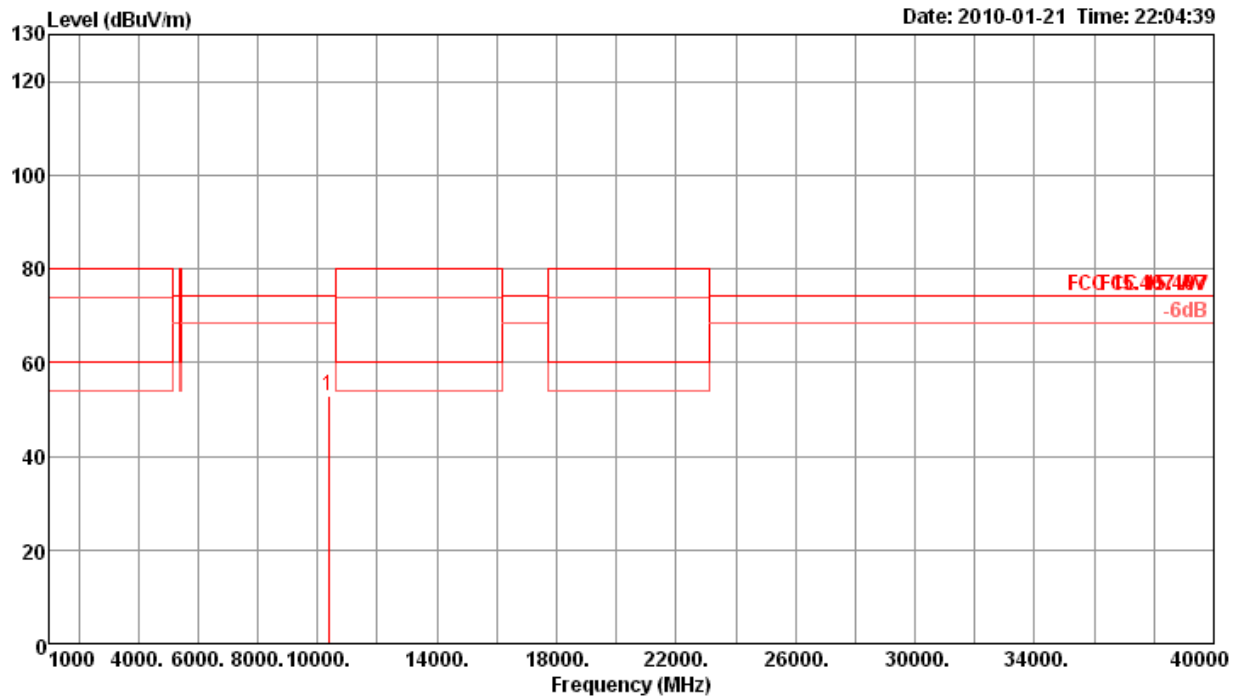

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10360.02	52.71	74.30	-21.59	44.90	4.65	35.36	38.52	219	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 40 / Ant. 5

Horizontal

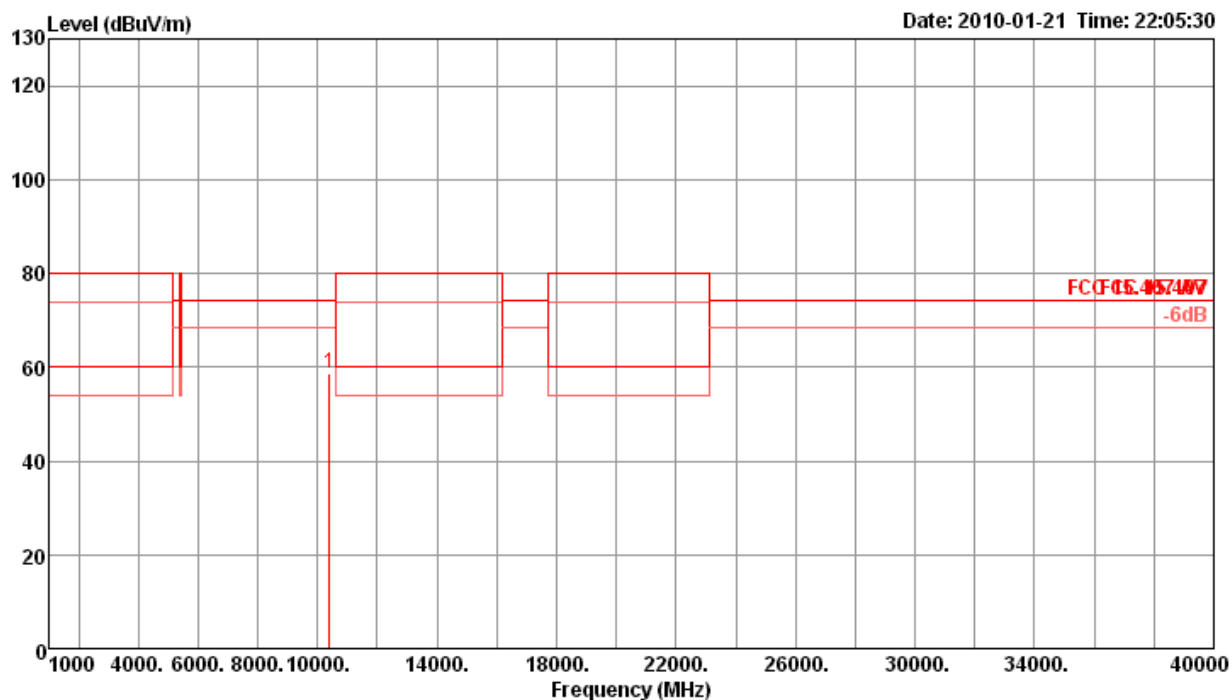

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10400.00	58.81	74.30	-15.49	50.87	4.70	35.30	38.54	121	100	Peak	HORIZONTAL


Vertical

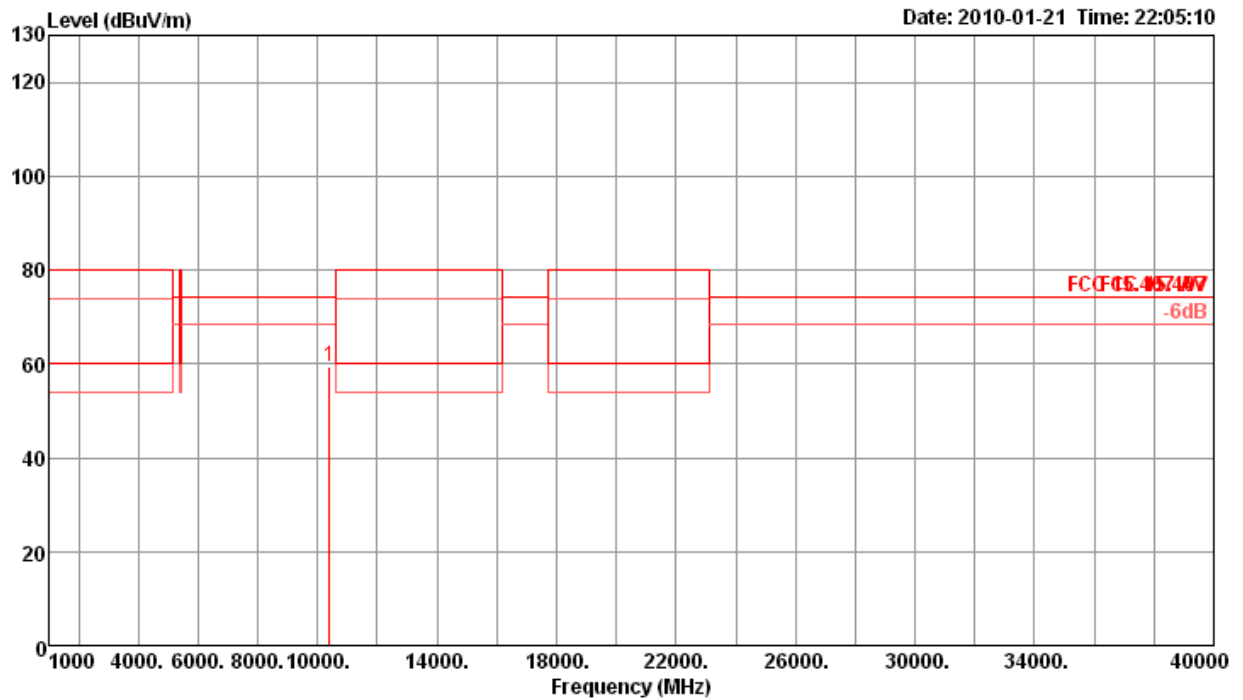

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10400.00	59.30	74.30	-15.00	51.36	4.70	35.30	38.54	188	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 48 / Ant. 5

Horizontal

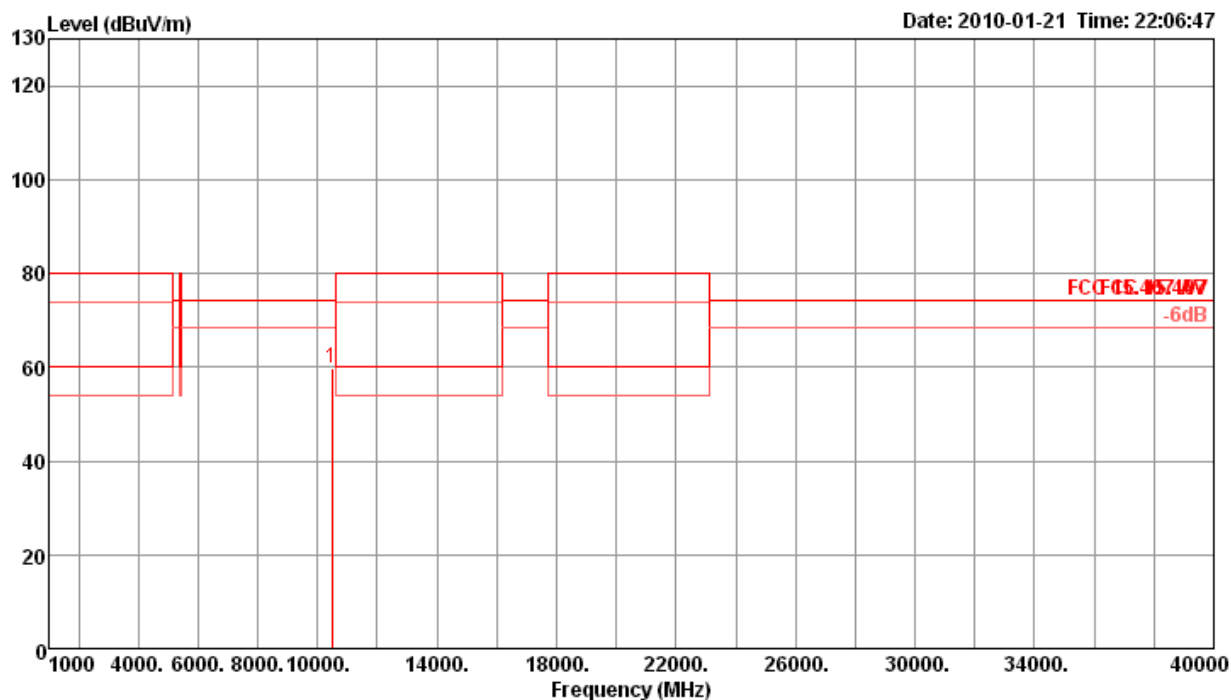

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10480.02	59.77	74.30	-14.53	51.63	4.76	35.21	38.59	238	100	Peak	HORIZONTAL


Vertical

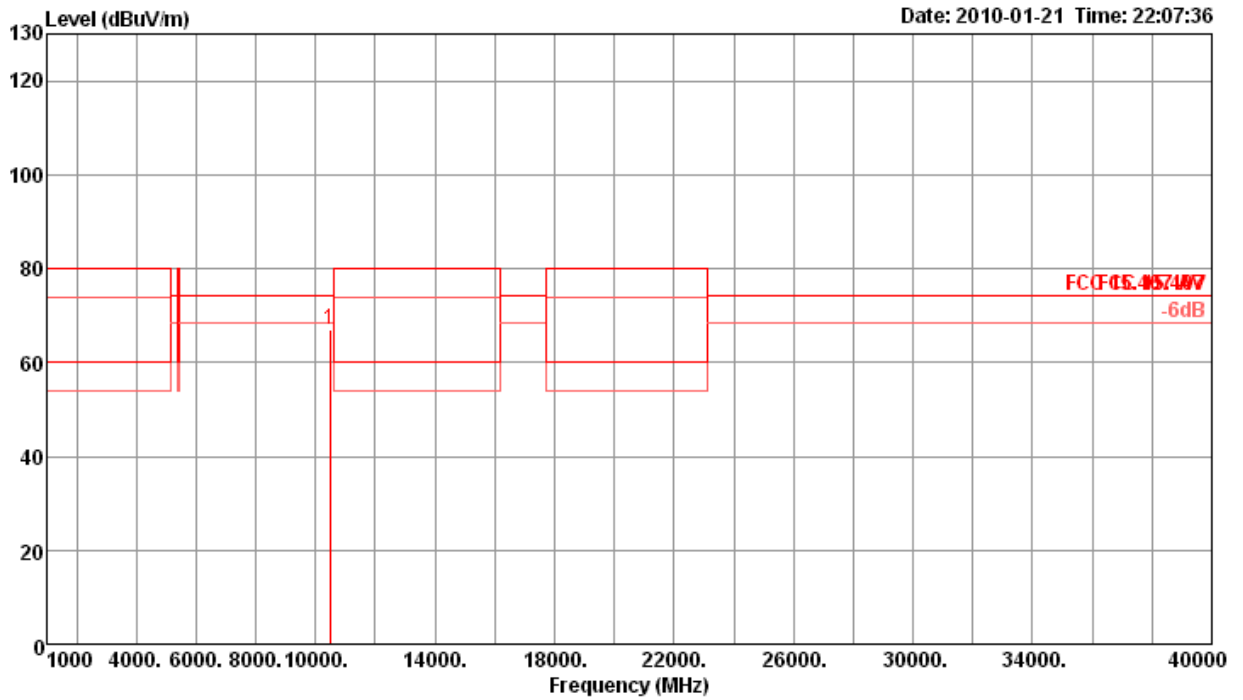

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10479.99	67.06	74.30	-7.24	58.92	4.76	35.21	38.59	118	100	Peak	VERTICAL


Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo Ch 42 / Ant. 5

Horizontal

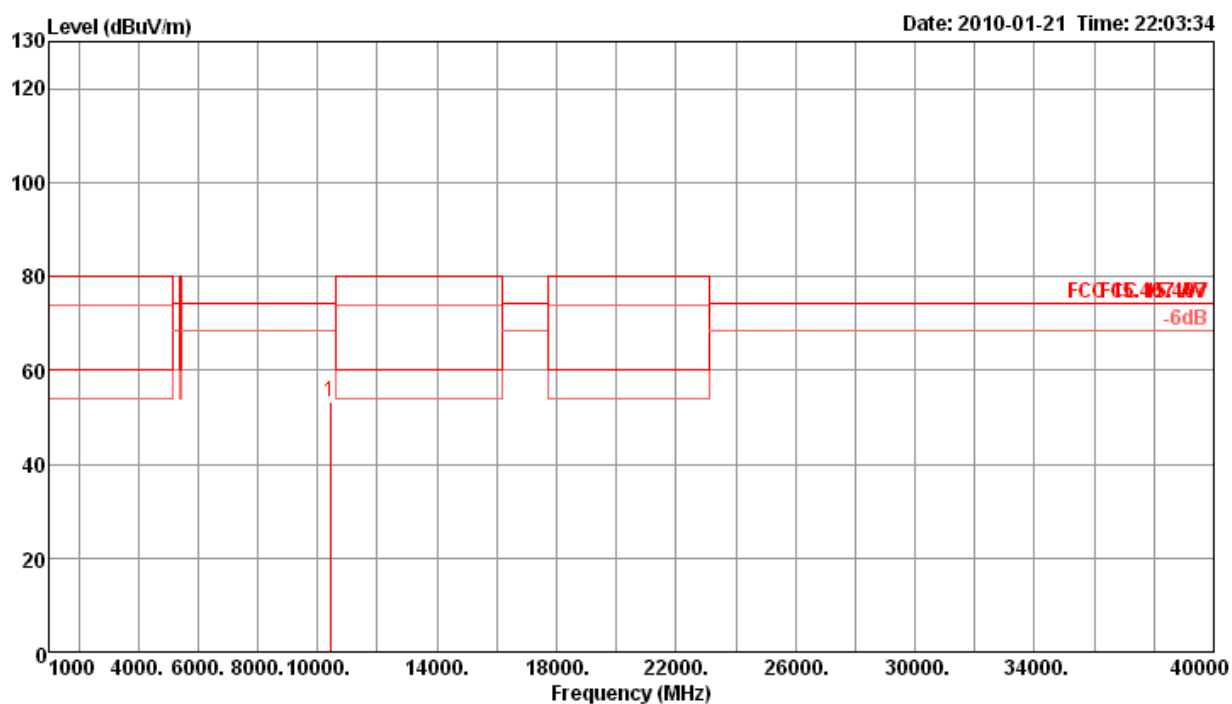

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	10420.02	53.09	74.30	-21.21	45.14	4.70	35.30	38.55	100	100	Peak	HORIZONTAL

Vertical

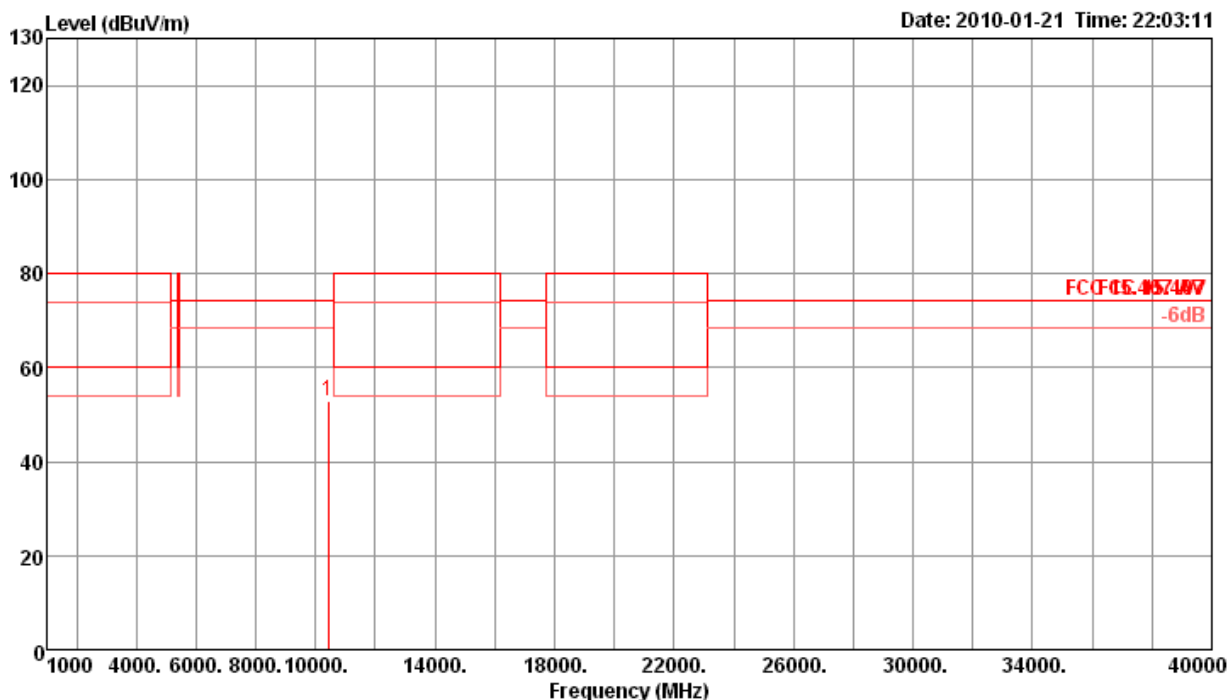

Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 10420.00	52.93	74.30	-21.37	44.98	4.70	35.30	38.55	135	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15~5.25 GHz band: all emissions outside of the 5.15~5.25 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 1 MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

<For Antenna 3>:

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 36, 40 / Ant. 3
Test Date	Jan. 21, 2010		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1 !	5149.60	78.89	80.00	-1.11	42.73	3.09	0.00	33.07	225	100	Peak	VERTICAL
2 !	5150.00	59.48	60.00	-0.52	23.32	3.09	0.00	33.07	225	100	Average	VERTICAL
3 p	5177.00	119.47	74.30			3.10	0.00	33.13	225	100	Peak	VERTICAL
4 a	5183.20	109.26	74.30			3.10	0.00	33.13	225	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1 !	5148.80	79.85	80.00	-0.15	43.69	3.09	0.00	33.07	226	109	Peak	VERTICAL
2 !	5150.00	59.67	60.00	-0.33	23.51	3.09	0.00	33.07	226	109	Average	VERTICAL
3 p	5195.60	122.98	74.30			3.11	0.00	33.16	226	109	Peak	VERTICAL
4 a	5198.00	112.33	74.30			3.11	0.00	33.16	226	109	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo Ch 42 / Ant. 3
Test Date	Jan. 21, 2010		

Turbo Channel 42

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5148.80	79.86	80.00	-0.14	43.70	3.09	0.00	33.07	226	100	Peak	VERTICAL
2 !	5150.00	59.76	60.00	-0.24	23.60	3.09	0.00	33.07	226	100	Average	VERTICAL
3 a	5199.60	106.24	74.30			3.11	0.00	33.16	226	100	Average	VERTICAL
4 p	5200.00	115.34	74.30			3.11	0.00	33.16	226	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

<For Antenna 4>:

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 36, 40 / Ant. 4
Test Date	Jan. 21, 2010		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5148.60	79.81	80.00	-0.19	43.65	3.09	0.00	33.07	173	130	Peak	VERTICAL
2 !	5150.00	59.68	60.00	-0.32	23.52	3.09	0.00	33.07	173	130	Average	VERTICAL
3 p	5174.00	116.90	74.30			3.10	0.00	33.13	173	130	Peak	VERTICAL
4 a	5175.00	106.22	74.30			3.10	0.00	33.13	173	130	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	5143.60	73.96	80.00	-6.04	37.81	3.08	0.00	33.07	320	124	Peak	VERTICAL
2 !	5150.00	58.20	60.00	-1.80	22.04	3.09	0.00	33.07	320	124	Average	VERTICAL
3 p	5194.40	118.32	74.30			3.10	0.00	33.16	320	124	Peak	VERTICAL
4 a	5198.40	108.92	74.30			3.11	0.00	33.16	320	124	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo Ch 42 / Ant. 4
Test Date	Jan. 21, 2010		

Turbo Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5146.80	75.64	80.00	-4.36	39.48	3.09	0.00	33.07	37	123	Peak	VERTICAL
2 !	5150.00	59.82	60.00	-0.18	23.66	3.09	0.00	33.07	37	123	Average	VERTICAL
3 a	5200.00	102.77	74.30			3.11	0.00	33.16	37	123	Average	VERTICAL
4 p	5205.60	112.95	74.30			3.11	0.00	33.16	37	123	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

<For Antenna 5>:

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Ch 36, 40 / Ant. 5
Test Date	Jan. 21, 2010		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5149.40	79.62	80.00	-0.38	43.46	3.09	0.00	33.07	324	130	Peak	HORIZONTAL
2 !	5150.00	59.35	60.00	-0.65	23.19	3.09	0.00	33.07	324	130	Average	HORIZONTAL
3 a	5173.60	106.31	74.30			3.10	0.00	33.13	324	130	Average	HORIZONTAL
4 p	5173.60	116.37	74.30			3.10	0.00	33.13	324	130	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5148.40	76.87	80.00	-3.13	40.71	3.09	0.00	33.07	227	121	Peak	HORIZONTAL
2 !	5150.00	59.02	60.00	-0.98	22.86	3.09	0.00	33.07	227	121	Average	HORIZONTAL
3 a	5202.40	109.91	74.30			3.11	0.00	33.16	227	121	Average	HORIZONTAL
4 p	5203.20	120.01	74.30			3.11	0.00	33.16	227	121	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

Temperature	24°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	802.11a Turbo Ch 42 / Ant. 5
Test Date	Jan. 21, 2010		

Turbo Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	5148.40	77.07	80.00	-2.93	40.91	3.09	0.00	33.07	226	126	Peak	HORIZONTAL
2 !	5150.00	59.65	60.00	-0.35	23.49	3.09	0.00	33.07	226	126	Average	HORIZONTAL
3 a	5199.20	104.35	74.30			3.11	0.00	33.16	226	126	Average	HORIZONTAL
4 p	5201.60	113.47	74.30			3.11	0.00	33.16	226	126	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.
8. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.8.4. Test Setup Layout

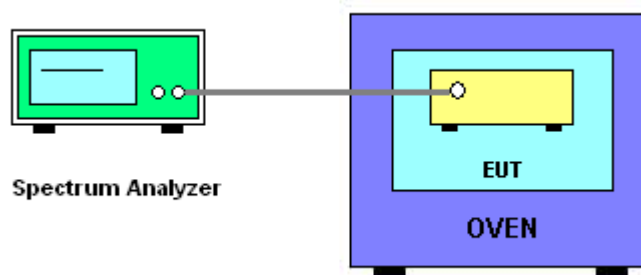

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

<For Antenna 3>:

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
(V)	5200	5210
126.50	5199.994600	5210.015
110.00	5199.999400	5210.021
93.50	5200.002400	5210.02
Max. Deviation (MHz)	0.005400	0.021000
Max. Deviation (ppm)	1.04	4.03

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
(°C)	5200	5210
-30	5200.035400	5210.0306
-20	5200.033000	5210.0396
-10	5200.024600	5210.045
0	5200.021600	5210.0414
10	5200.001200	5210.0288
20	5199.999800	5210.0062
30	5199.996800	5210.0114
40	5199.994600	5210.0012
50	5199.992300	5210.003
Max. Deviation (MHz)	0.035400	0.045000
Max. Deviation (ppm)	6.81	8.64

<For Antenna 4>:

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
(V)	5200	5210
126.50	5199.994600	5210.015
110.00	5199.999400	5210.021
93.50	5200.002400	5210.02
Max. Deviation (MHz)	0.005400	0.021000
Max. Deviation (ppm)	1.04	4.03

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
(°C)	5200	5210
-30	5200.035400	5210.0306
-20	5200.033000	5210.0396
-10	5200.024600	5210.045
0	5200.021600	5210.0414
10	5200.001200	5210.0288
20	5199.999800	5210.0062
30	5199.996800	5210.0114
40	5199.994600	5210.0012
50	5199.992300	5210.003
Max. Deviation (MHz)	0.035400	0.045000
Max. Deviation (ppm)	6.81	8.64

<For Antenna 5>:

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
(V)	5200	5210
126.50	5199.994600	5210.015
110.00	5199.999400	5210.021
93.50	5200.002400	5210.02
Max. Deviation (MHz)	0.005400	0.021000
Max. Deviation (ppm)	1.04	4.03

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
(°C)	5200	5210
-30	5200.035400	5210.0306
-20	5200.033000	5210.0396
-10	5200.024600	5210.045
0	5200.021600	5210.0414
10	5200.001200	5210.0288
20	5199.999800	5210.0062
30	5199.996800	5210.0114
40	5199.994600	5210.0012
50	5199.992300	5210.003
Max. Deviation (MHz)	0.035400	0.045000
Max. Deviation (ppm)	6.81	8.64

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 20, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2010	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

PI, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix