



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Z-Com, Inc.
Applicant Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan
FCC ID	<b>M4Y-XG-623G</b>
Manufacturer's company	Z-Com, Inc.
Manufacturer Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan

Product Name	802.11b/g Wireless mini PCI module
Brand Name	ZCOM
Model Name	XG-623G
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 13, 2006
Final Test Date	Oct. 23, 2006
Submission Type	Original Equipment



### Statement

**Test result included is only for the 802.11b/g part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies .....	3
3.5. Table for Test Modes .....	4
3.6. Table for Testing Locations.....	4
3.7. Table for Supporting Units .....	4
3.8. Table for Parameters of Test Software Setting .....	5
3.9. Test Configurations .....	6
<b>4. TEST RESULT .....</b>	<b>8</b>
4.1. AC Power Line Conducted Emissions Measurement.....	8
4.2. Maximum Peak Output Power Measurement .....	13
4.3. Power Spectral Density Measurement .....	15
4.4. 6dB Spectrum Bandwidth Measurement .....	21
4.5. Radiated Emissions Measurement .....	27
4.6. Band Edge Emissions Measurement .....	47
4.7. Antenna Requirements .....	56
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>57</b>
<b>6. TEST LOCATION.....</b>	<b>59</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A6</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B7</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~C3</b>



### History of This Test Report

Original Issue Date: Oct. 24, 2006

Report No.: FR6O1322

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



## 1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g Wireless mini PCI module  
Brand Name : ZCOM  
Model Name : XG-623G  
Applicant : Z-Com, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 13, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

*Sharon Jiang 24.10.06*

Prepared By:

Sharon Jiang / Specialist

*Steven Lu 24.10.06*

Tested By:

Steven Lu / Engineer

*Wayne Hsu 24.10.06*

Reviewed By:

Wayne Hsu

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.27 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	9.44 dB
4.3	15.247(e)	Power Spectral Density	Complies	17.99 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.69 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.12 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.776dB	Confidence levels of 95%
Power Spectral Density	±0.506dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±1.64×10 <sup>-6</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.754dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.89dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.89dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.86dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±0.04%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54/108)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.60 MHz ; 11g: 16.52 MHz ; 11g Turbo: 32.88MHz
Conducted Output Power	11b: 17.66 dBm ; 11g: 20.56 dBm ; 11g Turbo: 20.25dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### 3.2. Accessories

NA

#### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Wha Yu	C056-510256-A	Dipole Antenna	Reversed-SMA; UFL	4.62

RF Cable: RG-178 Coaxial cable (with Core). Core Brand: King core (K5B RH 9\*16\*5)

#### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	Turbo 6	2437 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	11 Mbps	6	1
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	11b/BPSK	1 Mbps	1/6/11	NA
	11g/BPSK	6 Mbps	1/6/11	NA
	11g/BPSK Turbo	12 Mbps	6	NA
Radiated Emissions 9kHz~1GHz	11g/BPSK	6 Mbps	6	1
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11g/BPSK Turbo	12 Mbps	6	1
Band Edge Emissions	11b/BPSK	1 Mbps	1/11	1
	11g/BPSK	6 Mbps	1/11	1
	11g/BPSK Turbo	12 Mbps	6	1

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D505	E2K24GBRL
Printer	EPSON	LQ-300	DoC
Modem	ACEEX	DM1414	IFAXDM1414
AP	PLANEX	GW-AP54SGX	0090CC0F670

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11b/g

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	16.5	16.5	16.5
IEEE 802.11g	16	16	16
IEEE 802.11g Turbo	-	16.5	-

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

Turn on the power of all equipment.

The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.

The NB sends " H " messages to the printer, then the printer prints them on the paper.

The NB sends " H " messages to the modem.

At the same time, the following programs were executed:

Executed " ART " to control the EUT continuously transmit RF signal.


Executed "ping.exe" to link with the remote workstation to receive and transmit data by WLAN.




### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9kHz~1GHz

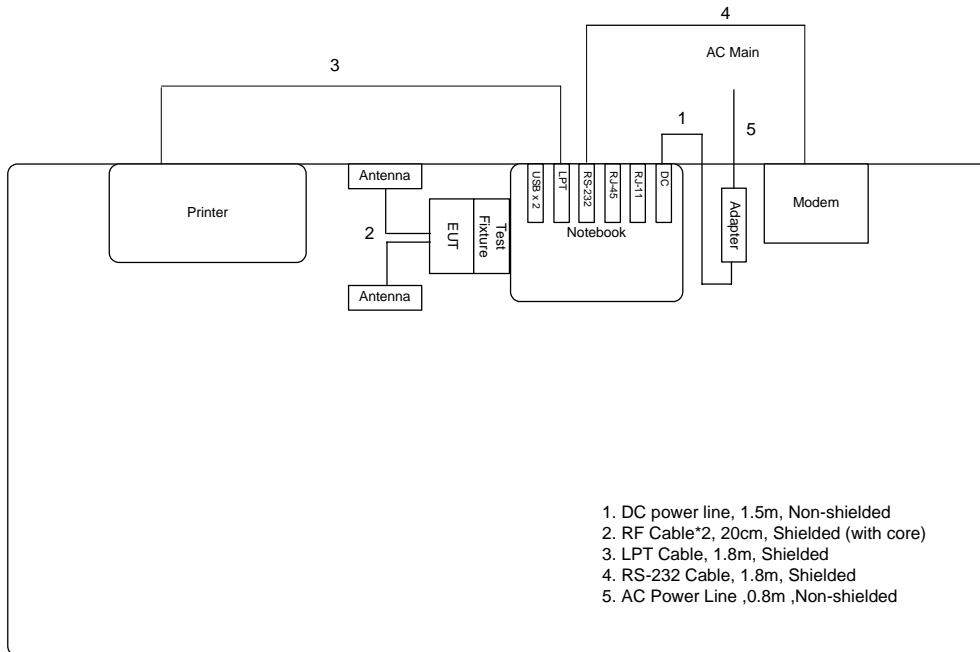

Test Configuration: Above 1GHz

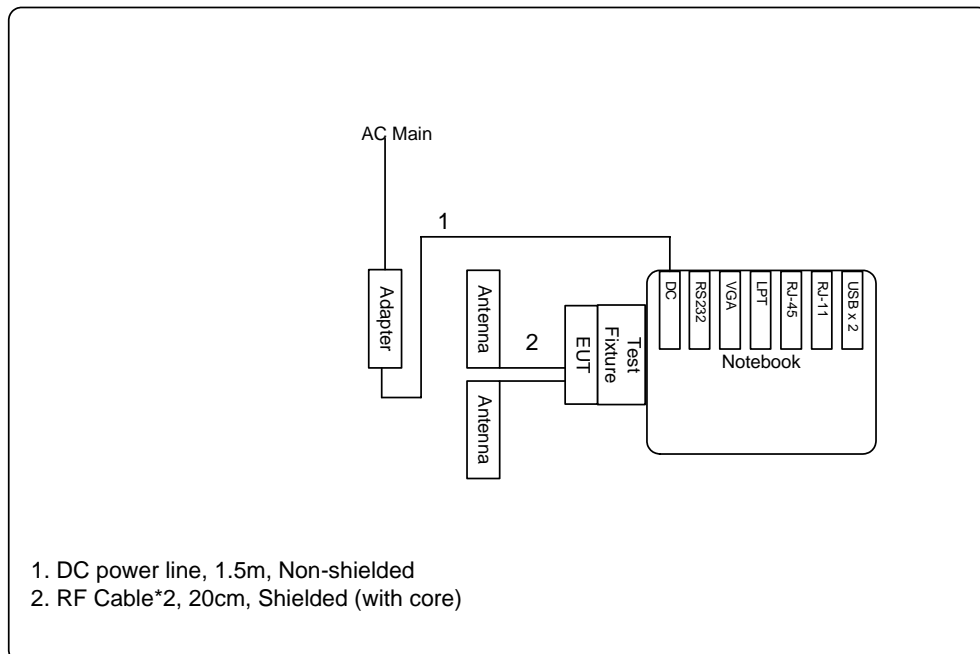

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

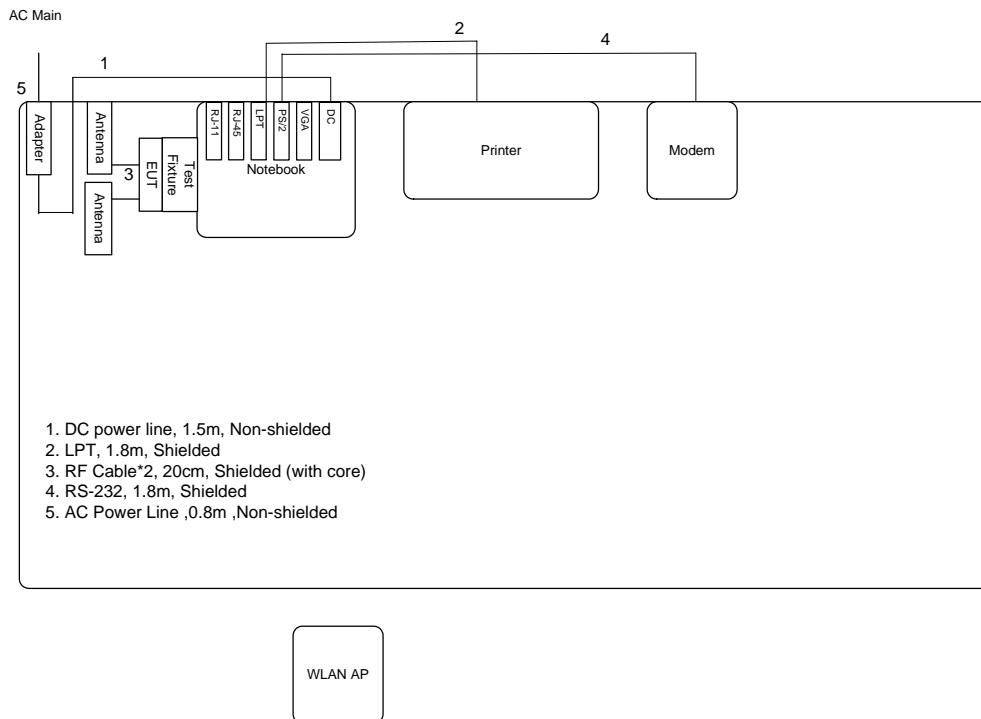

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

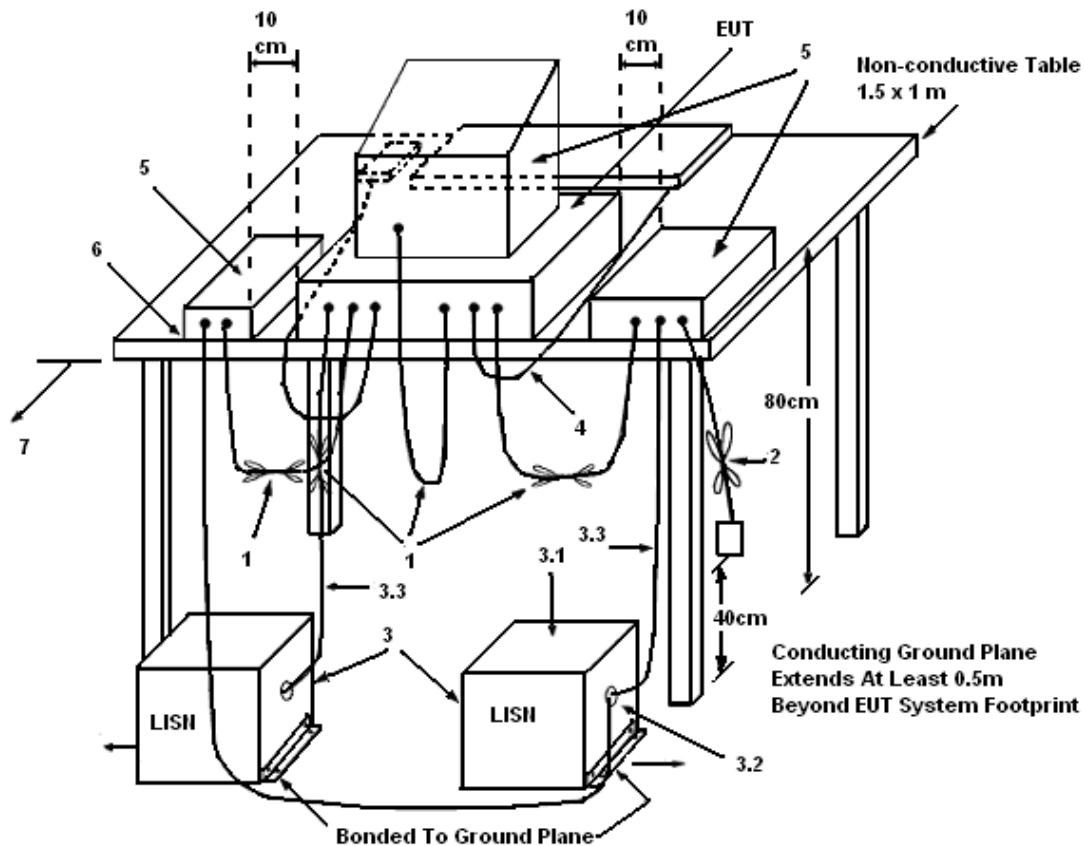

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	27.9°C	Humidity	54%
Test Engineer	Steven Lu	Phase	Line
Configuration	Normal Link		

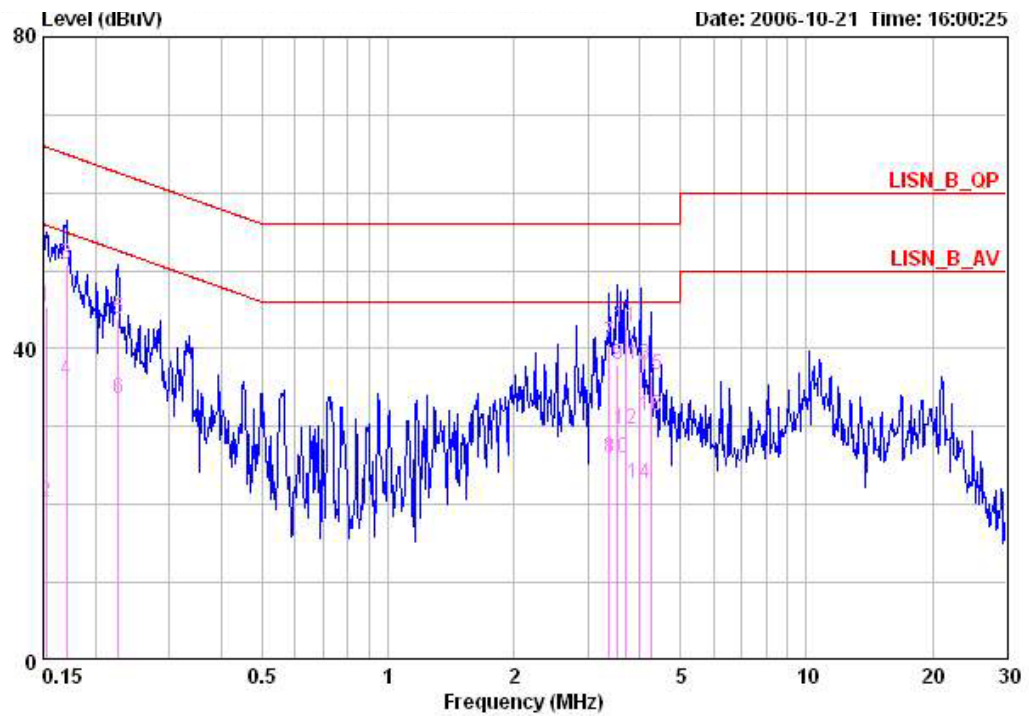

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15240	45.29	-20.58	65.87	44.40	0.69	0.20	QP
2	0.15240	20.28	-35.59	55.87	19.39	0.69	0.20	AVERAGE
3	0.17034	50.74	-14.20	64.94	49.87	0.67	0.20	QP
4	0.17034	36.06	-18.88	54.94	35.19	0.67	0.20	AVERAGE
5	0.22676	43.77	-18.80	62.57	42.93	0.64	0.20	QP
6	0.22676	33.51	-19.06	52.57	32.67	0.64	0.20	AVERAGE
7	3.371	40.75	-15.25	56.00	40.13	0.34	0.27	QP
8	3.371	25.90	-20.10	46.00	25.28	0.34	0.27	AVERAGE
9	3.547	37.85	-18.15	56.00	37.21	0.34	0.30	QP
10	3.547	25.99	-20.01	46.00	25.35	0.34	0.30	AVERAGE
11	3.703	42.77	-13.23	56.00	42.14	0.33	0.30	QP
12	3.703	29.66	-16.34	46.00	29.03	0.33	0.30	AVERAGE
13	3.986	37.98	-18.02	56.00	37.36	0.32	0.30	QP
14	3.986	22.75	-23.25	46.00	22.13	0.32	0.30	AVERAGE
15	4.269	36.69	-19.31	56.00	36.07	0.32	0.30	QP
16	4.269	31.37	-14.63	46.00	30.75	0.32	0.30	AVERAGE

Temperature	27.9°C	Humidity	54%
Test Engineer	Steven Lu	Phase	Neutral
Configuration	Normal Link		

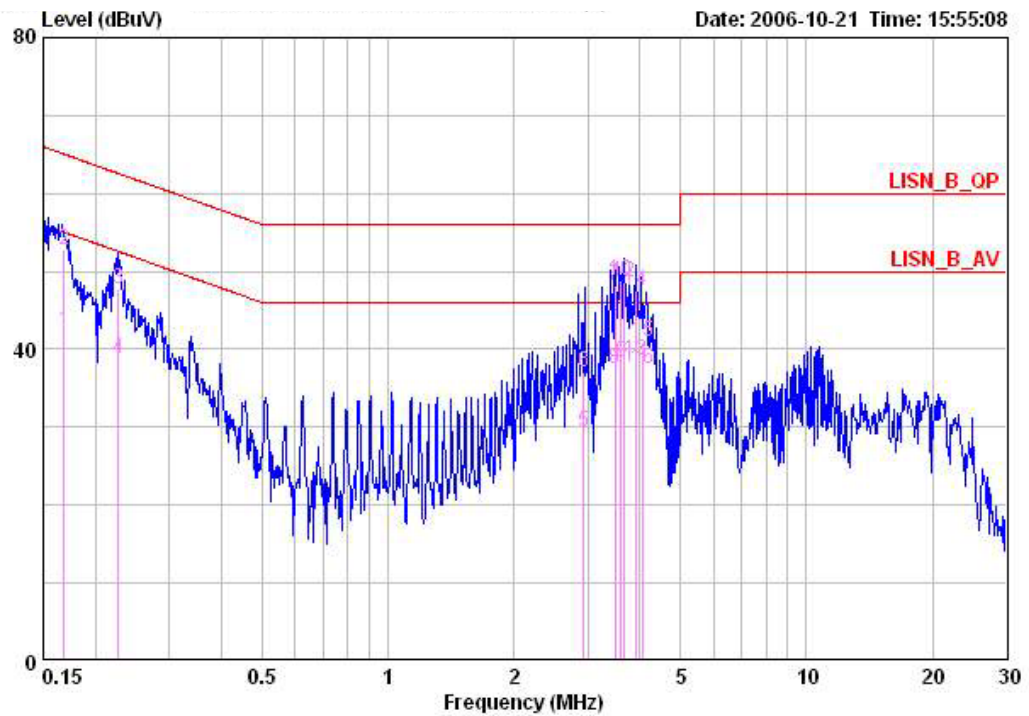

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16785	42.26	-12.81	55.07	41.38	0.68	0.20	AVERAGE
2	0.16785	52.79	-12.28	65.07	51.91	0.68	0.20	QP
3	0.22676	47.73	-14.84	62.57	46.89	0.64	0.20	QP
4	0.22676	38.75	-13.82	52.57	37.91	0.64	0.20	AVERAGE
5	2.935	29.40	-16.60	46.00	28.84	0.36	0.20	AVERAGE
6	2.935	37.02	-18.98	56.00	36.46	0.36	0.20	QP
7	3.496	48.16	-7.84	56.00	47.52	0.34	0.30	QP
8	3.496	37.56	-8.44	46.00	36.92	0.34	0.30	AVERAGE
9	3.610	38.28	-7.72	46.00	37.65	0.33	0.30	AVERAGE
10	3.610	48.73	-7.27	56.00	48.10	0.33	0.30	QP
11	3.681	37.81	-8.19	46.00	37.18	0.33	0.30	AVERAGE
12	3.681	48.65	-7.35	56.00	48.02	0.33	0.30	QP
13	3.901	38.61	-7.39	46.00	37.98	0.33	0.30	AVERAGE
14	3.901	47.51	-8.49	56.00	46.88	0.33	0.30	QP
15	4.056	41.06	-14.94	56.00	40.44	0.32	0.30	QP
16	4.056	37.41	-8.59	46.00	36.79	0.32	0.30	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Peak Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

### 4.2.4. Test Setup Layout

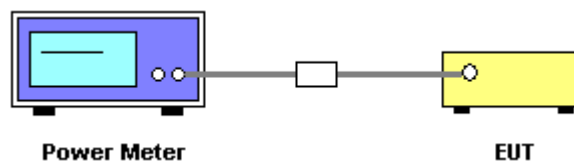

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.2.7. Test Result of Maximum Peak Output Power

<b>Temperature</b>	27.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b/g

##### Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.54	30.00	Complies
6	2437 MHz	17.63	30.00	Complies
11	2462 MHz	17.66	30.00	Complies

##### Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.05	30.00	Complies
6	2437 MHz	20.21	30.00	Complies
11	2462 MHz	20.56	30.00	Complies

##### Configuration IEEE 802.11g Turbo

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
6	2437 MHz	20.25	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

#### 4.3.4. Test Setup Layout

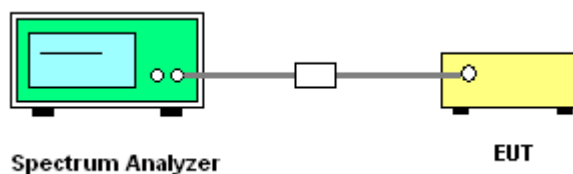

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

<b>Temperature</b>	27.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b/g

##### Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-9.99	8.00	Complies
6	2437 MHz	-10.08	8.00	Complies
11	2462 MHz	-10.63	8.00	Complies


##### Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-12.23	8.00	Complies
6	2437 MHz	-11.61	8.00	Complies
11	2462 MHz	-11.10	8.00	Complies

##### Configuration IEEE 802.11g Turbo


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
6	2437 MHz	-13.89	8	Complies

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz**

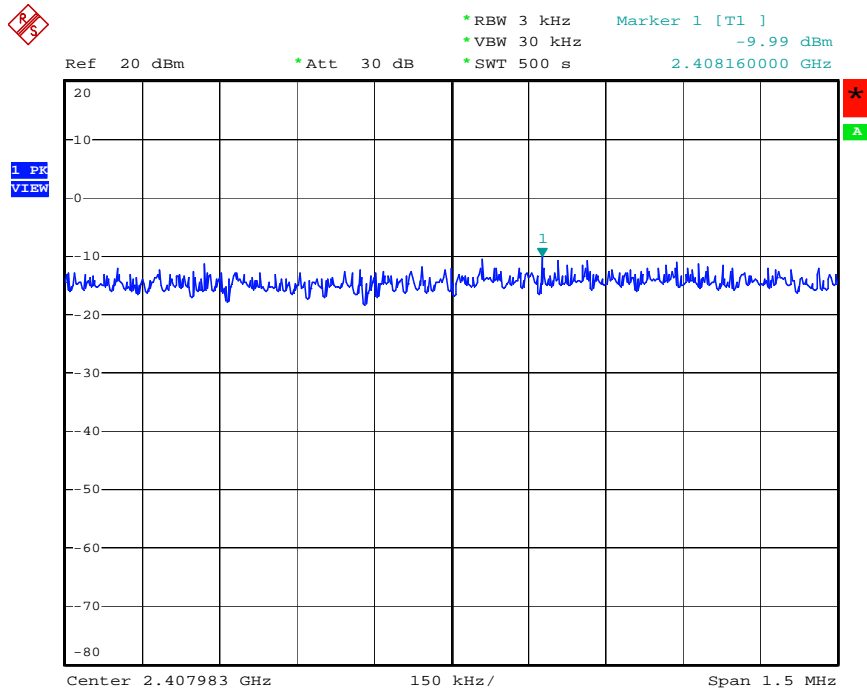


Date: 23.OCT.2006 12:22:39

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz**

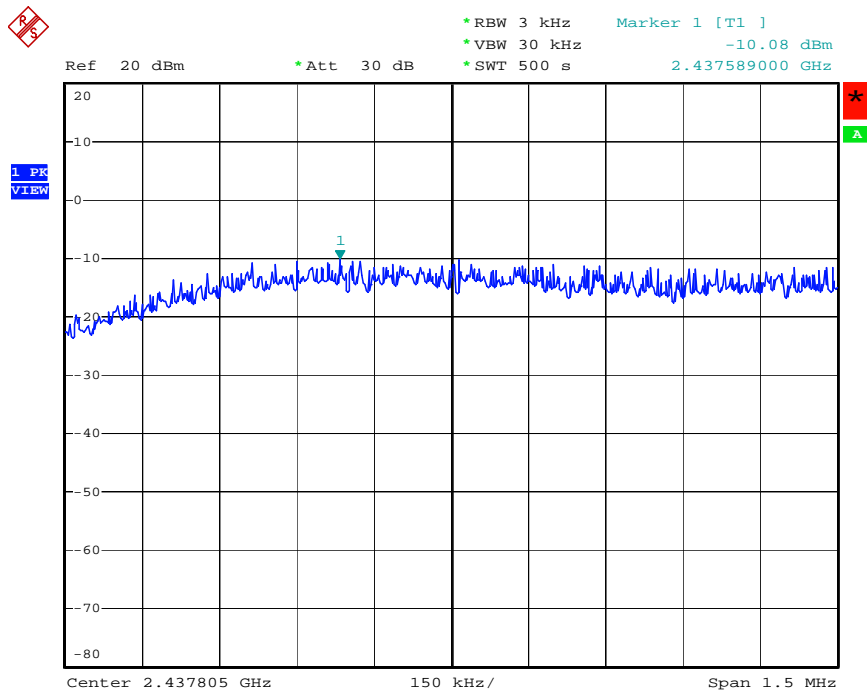


Date: 23.OCT.2006 12:09:37

**Power Density Plot on Configuration IEEE 802.11b / 2462 MHz**

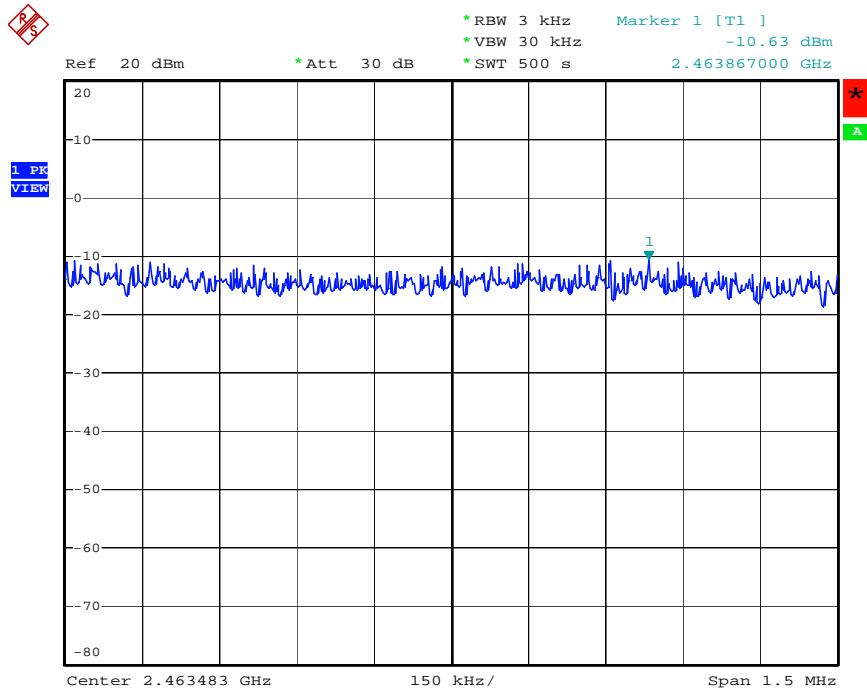


Date: 23.OCT.2006 12:10:14

**Power Density Plot on Configuration IEEE 802.11g / 2412 MHz**

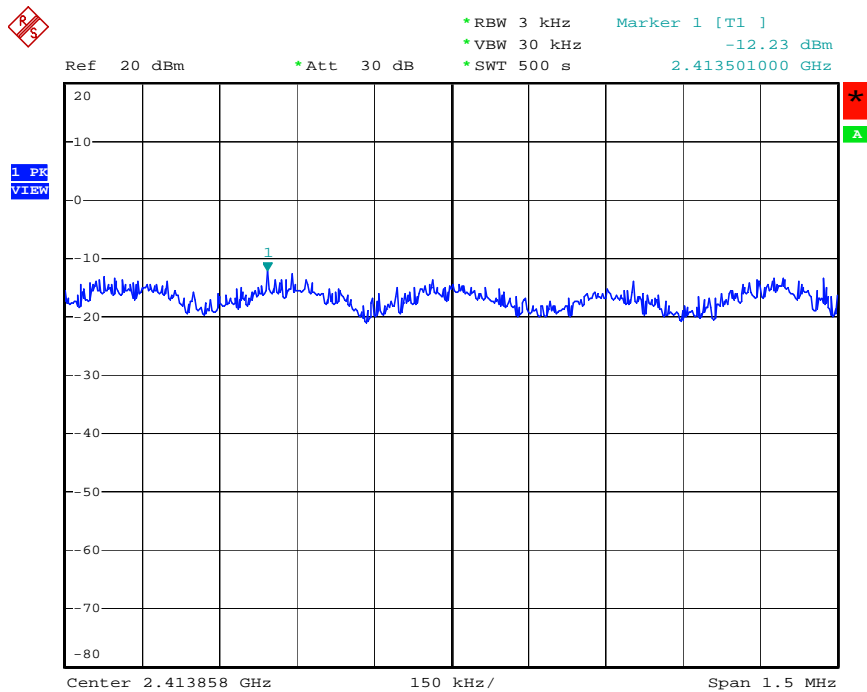


Date: 23.OCT.2006 11:34:25

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz**

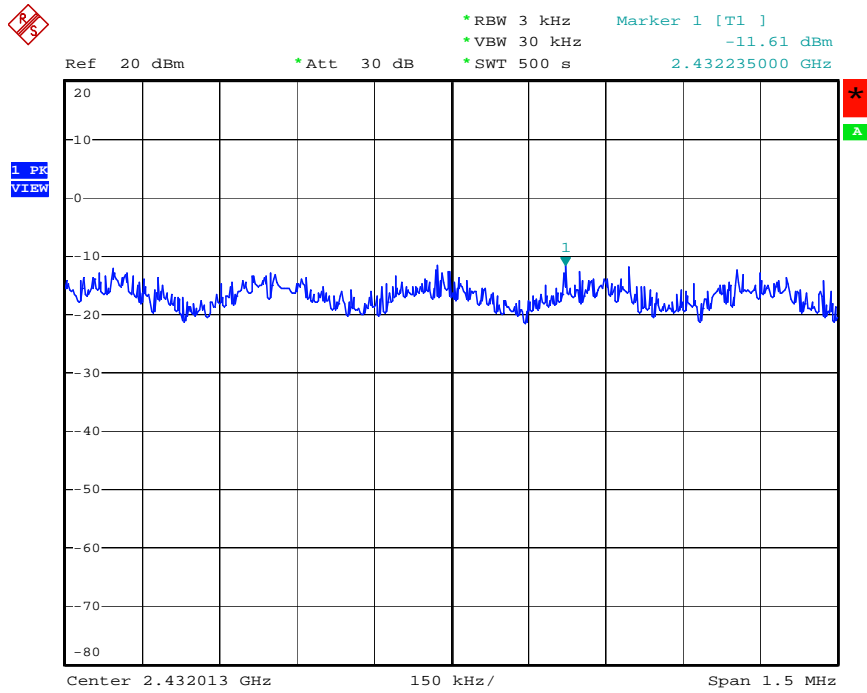


Date: 23.OCT.2006 11:47:37

**Power Density Plot on Configuration IEEE 802.11g / 2462 MHz**

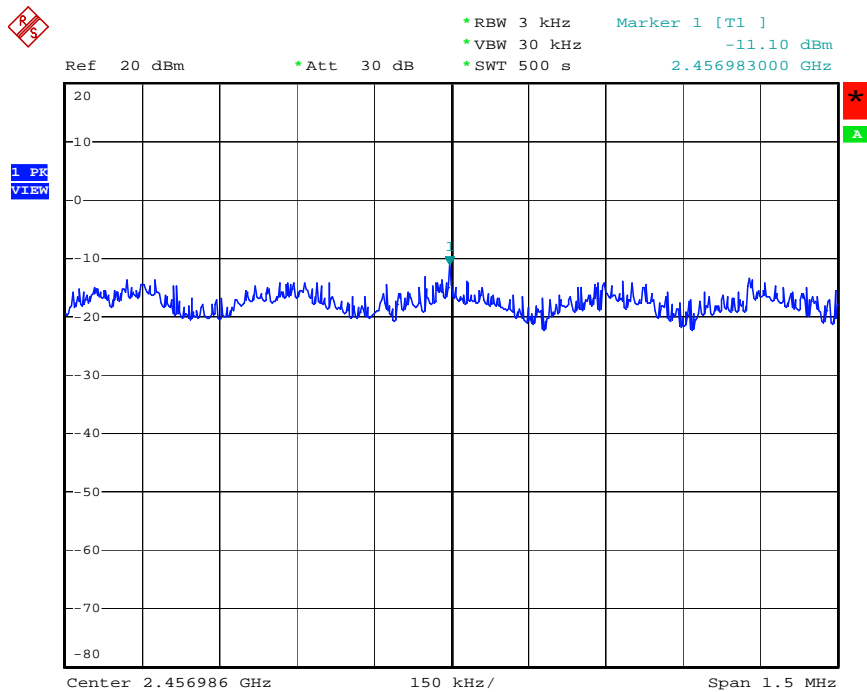

Date: 23.OCT.2006 11:35:50

### Power Density Plot on Configuration IEEE 802.11g Turbo / 2437 MHz

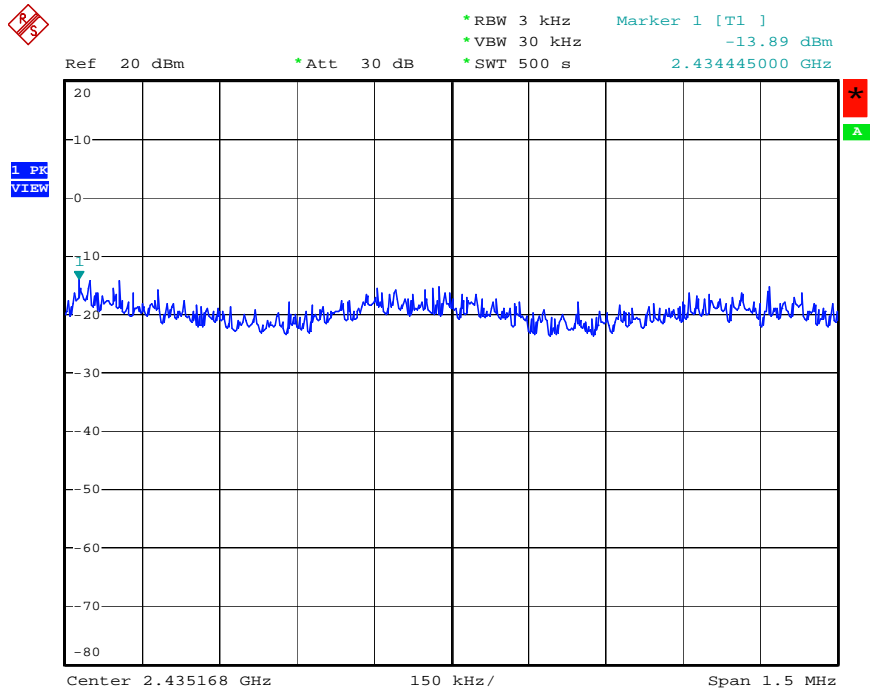

Date: 23.OCT.2006 11:38:45

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

##### 4.4.4. Test Setup Layout

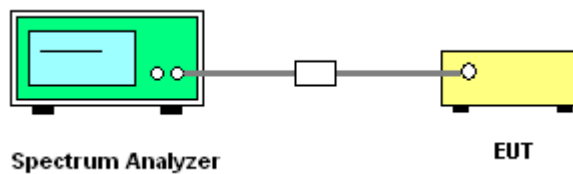



#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	27.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Leo Hung	<b>Configurations</b>	802.11b/g

##### Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.04	15.60	500	Complies
6	2437 MHz	11.08	15.52	500	Complies
11	2462 MHz	11.56	15.56	500	Complies


##### Configuration IEEE 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.32	16.48	500	Complies
6	2437 MHz	16.36	16.52	500	Complies
11	2462 MHz	16.40	16.48	500	Complies

##### Configuration IEEE 802.11g Turbo


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
6	2437 MHz	31.28	32.88	500	Complies

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

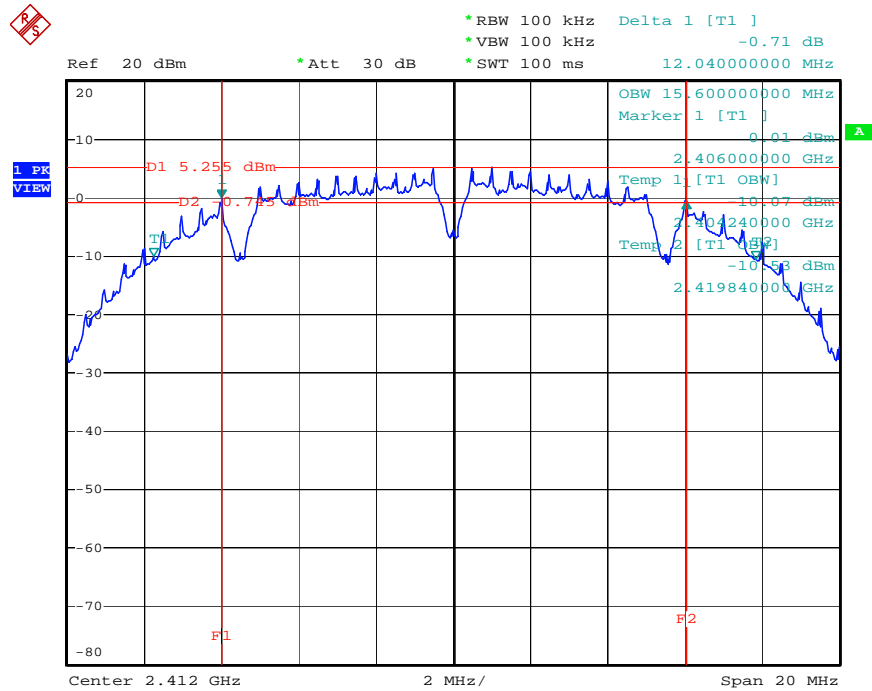


Date: 23.OCT.2006 12:08:27

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

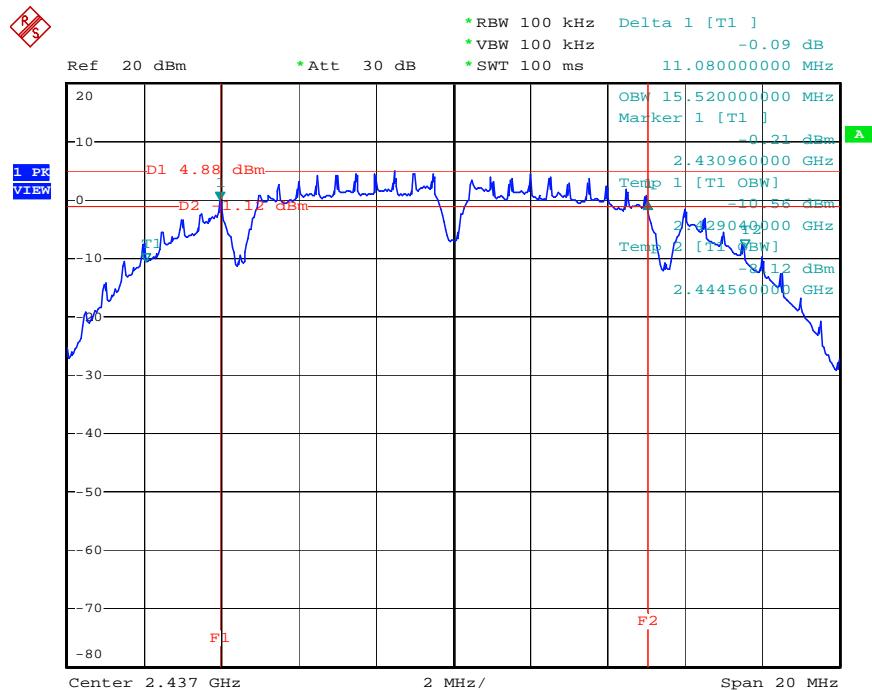


Date: 23.OCT.2006 12:09:20

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

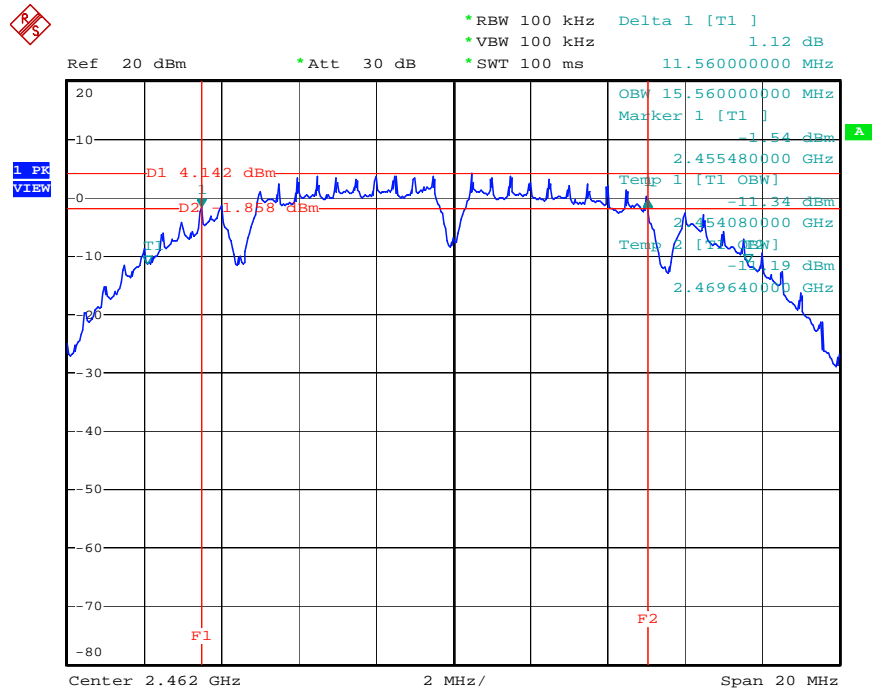


Date: 23.OCT.2006 12:09:58

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

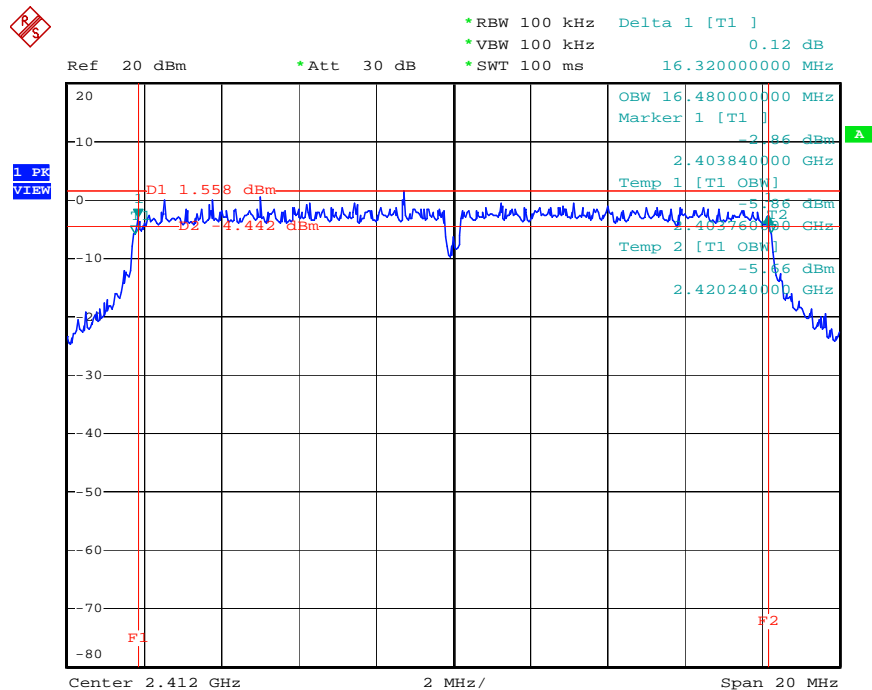


Date: 23.OCT.2006 11:33:59

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

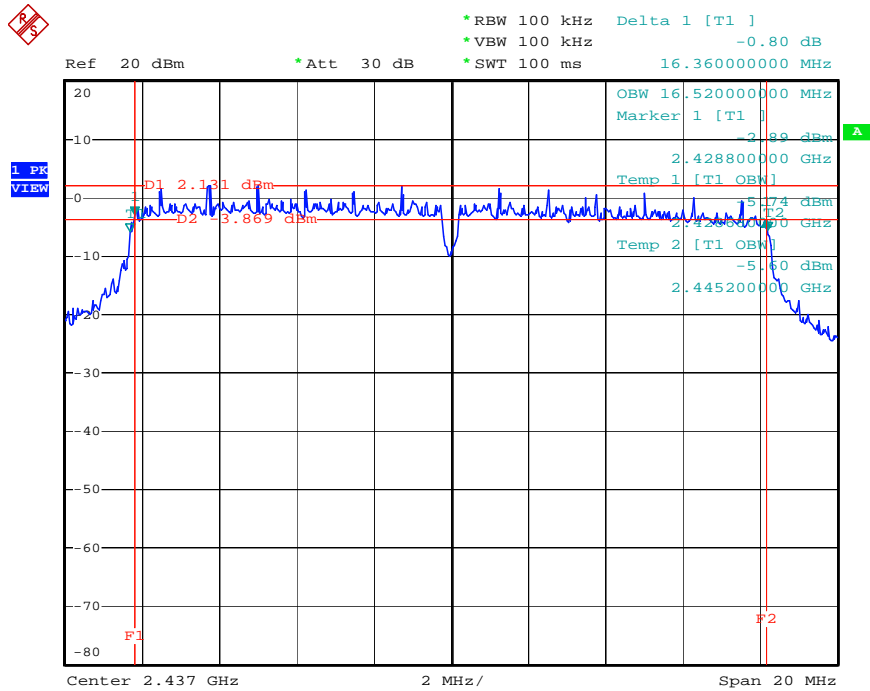


Date: 23.OCT.2006 11:47:20

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

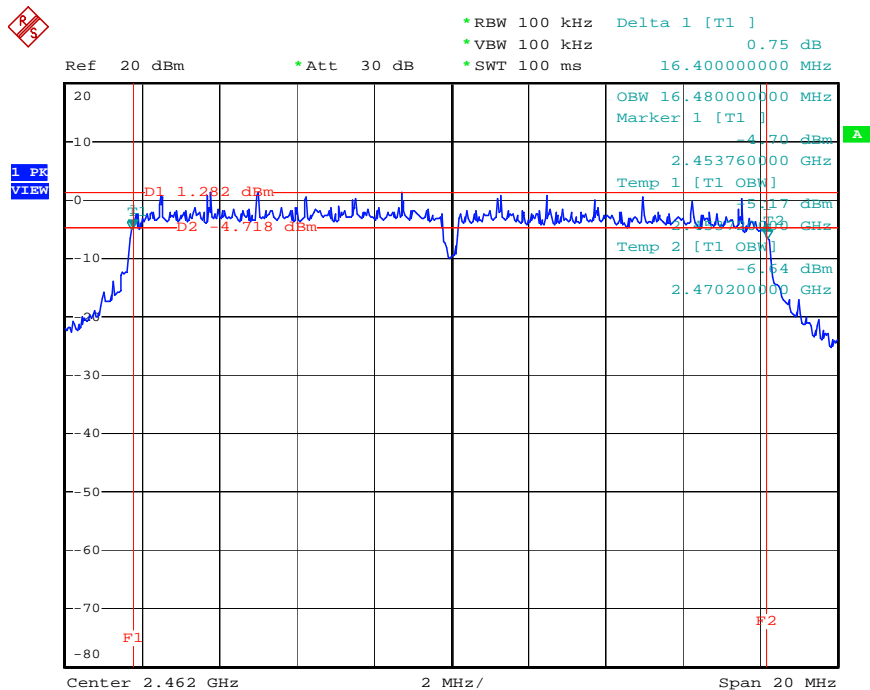

Date: 23.OCT.2006 11:35:34

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Turbo / 2437 MHz

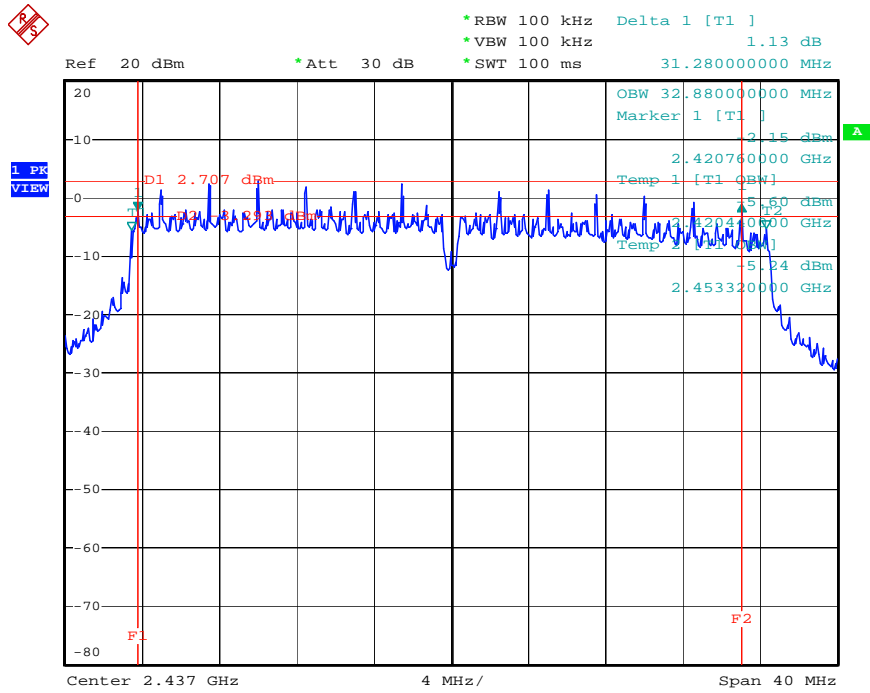

Date: 23.OCT.2006 11:38:28

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

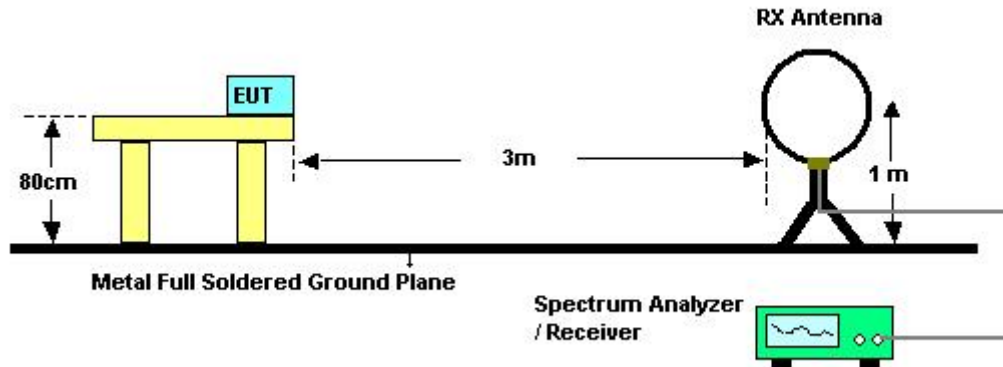

For radiated emissions above 30MHz

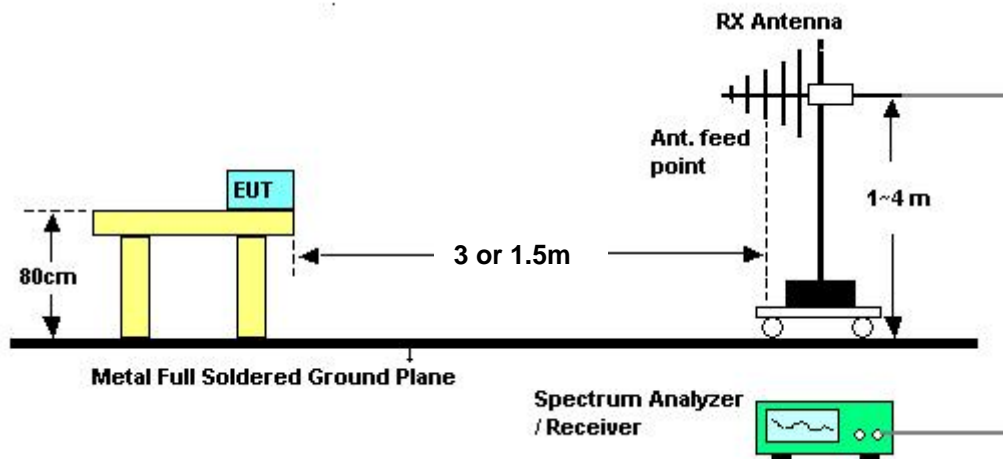

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	24°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jordan Hsiao	<b>Configurations</b>	802.11g CH 6

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	62%
Test Engineer	Jordan Hsiao	Configurations	802.11g CH 6

Vertical

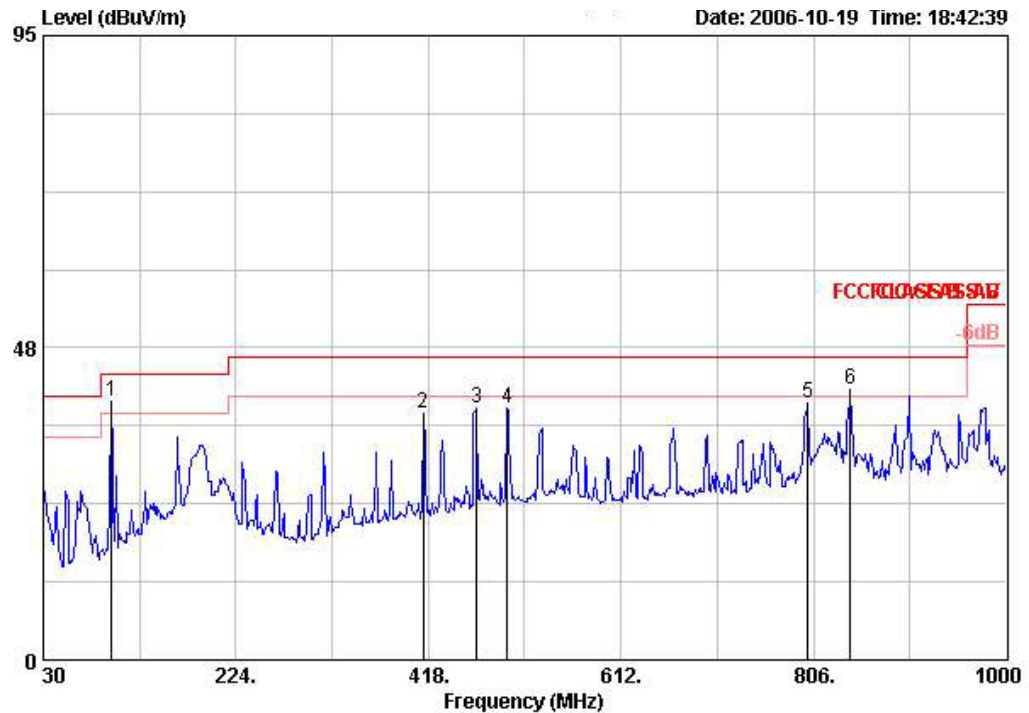

	Freq	Level	Over	Limit	Read	Cable	Preamp	Remark	Ant	TableAntenna	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor		Pos	Pos Factor	
			dB	dBuV/m	dBuV	dB	dB		cm	deg	dB/m
1 !	98.870	39.25	-4.25	43.50	58.45	1.50	31.72	Peak	---	---	11.02
2	413.150	37.52	-8.48	46.00	49.01	2.75	31.00	Peak	---	---	16.76
3	466.500	38.41	-7.59	46.00	48.86	3.04	30.93	Peak	---	---	17.43
4	497.540	38.30	-7.70	46.00	48.11	3.27	30.94	Peak	---	---	17.86
5	800.180	39.21	-6.79	46.00	44.89	3.80	30.18	Peak	---	---	20.70
6 !	842.860	41.12	-4.88	46.00	46.06	3.98	30.13	Peak	---	---	21.22

Horizontal

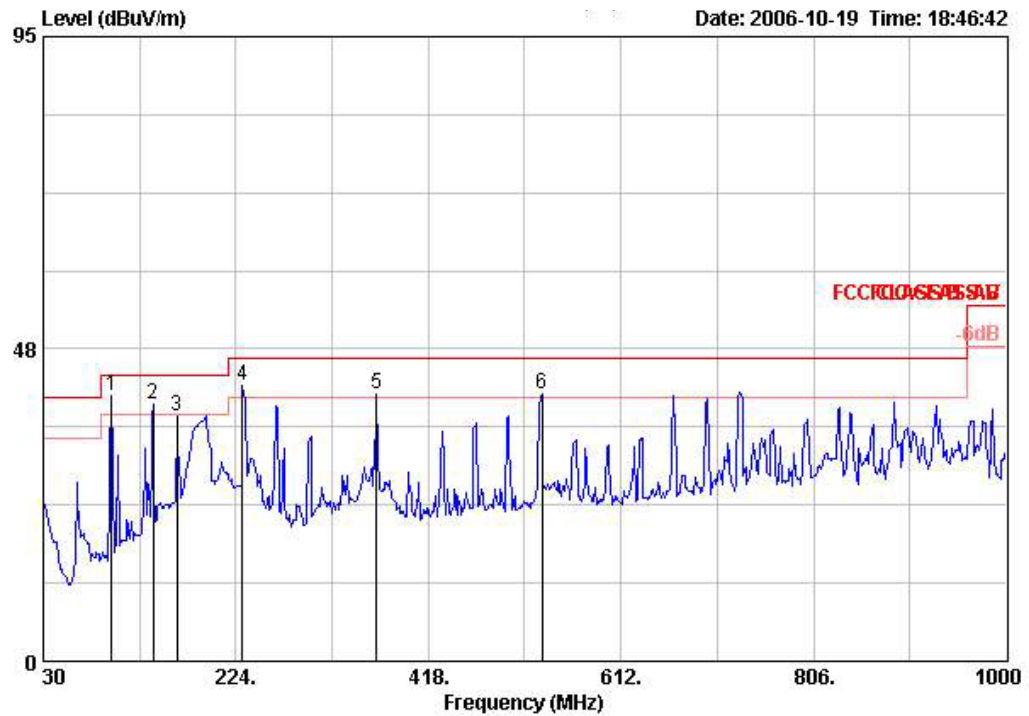

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Antenna Pos	Antenna Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg	dB/m
1 !	98.870	40.38	-3.12	43.50	59.58	1.50	31.72	Peak	---	---	11.02
2 !	140.580	38.97	-4.53	43.50	57.10	1.70	31.57	Peak	---	---	11.75
3	164.830	37.15	-6.35	43.50	56.24	2.00	31.54	Peak	---	---	10.45
4 !	230.790	41.84	-4.16	46.00	59.82	2.21	31.38	Peak	---	---	11.20
5 !	365.620	40.56	-5.44	46.00	53.46	2.49	31.17	Peak	---	---	15.78
6 !	532.460	40.58	-5.42	46.00	49.62	3.24	30.82	Peak	---	---	18.55

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Temperature	24°C	Humidity	62%
Test Engineer	Jordan Hsiao	Configurations	802.11b CH 1

Vertical

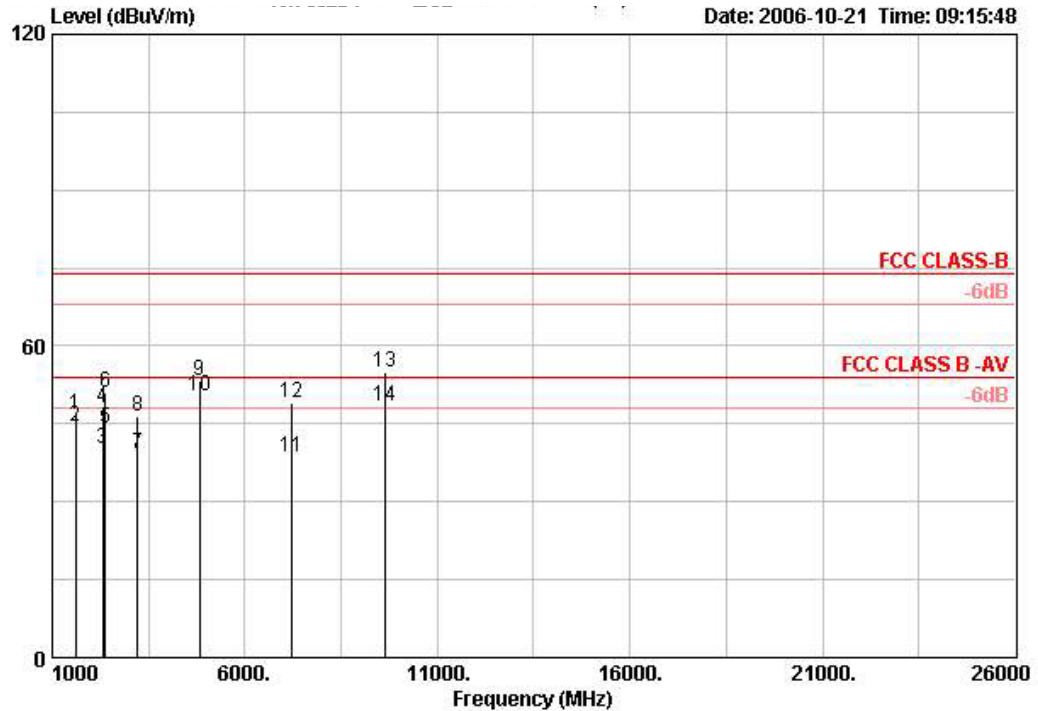

	Freq	Level	Over	Limit	Read	Cable	Preamp		Ant	Table	Antenna
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos	Factor
			dB	dBuV/m	dBuV	dB	dB		cm	deg	dB/m
1	1607.990	46.84	-27.16	74.00	53.51	2.28	34.72	PEAK	124	0	25.77
2	1608.020	44.63	-9.37	54.00	51.30	2.28	34.72	AVERAGE	124	0	25.77
3	2320.000	40.32	-13.68	54.00	44.66	2.71	35.07	AVERAGE	121	178	28.02
4	2320.060	48.15	-25.85	74.00	52.48	2.71	35.07	PEAK	121	178	28.02
5	2374.800	44.16	-9.84	54.00	48.36	2.76	35.10	AVERAGE	148	182	28.13
6	2375.040	51.10	-22.90	74.00	55.31	2.76	35.10	PEAK	148	182	28.13
7	3215.970	39.34	-14.66	54.00	41.31	3.15	35.12	AVERAGE	119	53	30.00
8	3216.150	46.49	-27.51	74.00	48.45	3.15	35.12	PEAK	119	53	30.00
9	4823.910	53.30	-20.70	74.00	51.11	4.30	35.16	PEAK	144	37	33.06
10 !	4823.970	50.24	-3.76	54.00	48.05	4.30	35.16	AVERAGE	144	37	33.06
11	7233.200	38.44	-15.56	54.00	32.36	5.51	35.21	AVERAGE	100	144	35.78
12	7236.560	49.01	-24.99	74.00	42.92	5.51	35.20	PEAK	100	144	35.78
13	9647.800	55.08	-18.92	74.00	44.55	7.33	35.37	PEAK	123	166	38.58
14 !	9647.930	48.37	-5.63	54.00	37.85	7.33	35.37	AVERAGE	123	166	38.58


Horizontal

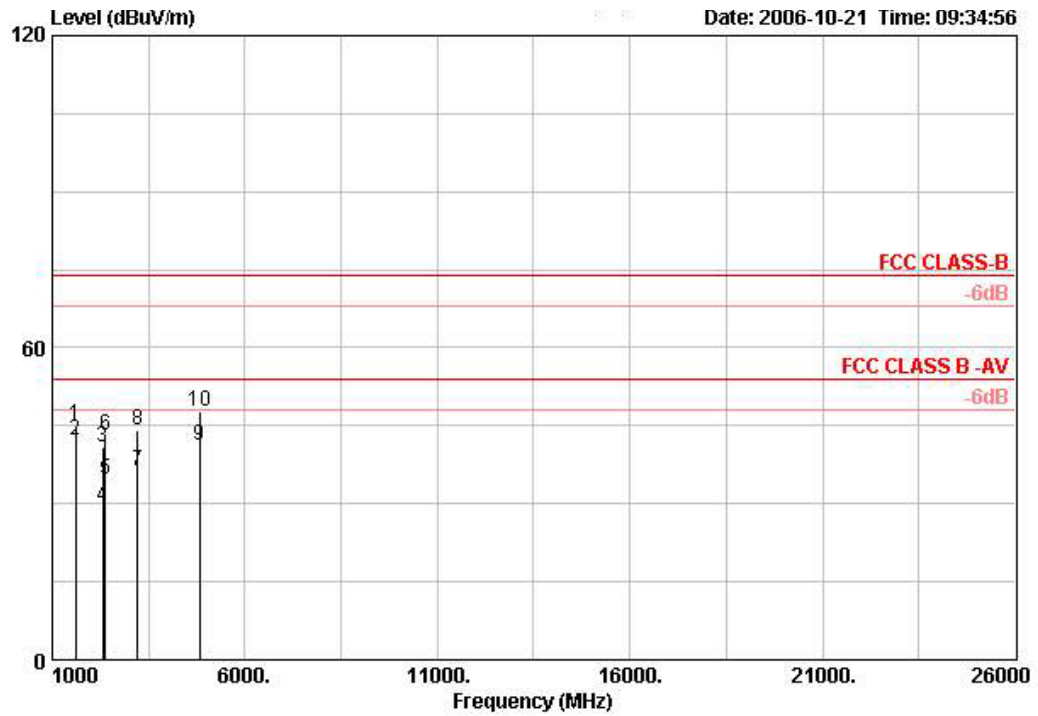

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Antenna Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg	dB/m
1	1608.000	45.00	-29.00	74.00	51.67	2.28	34.72	PEAK	100	35	25.77
2	1608.020	42.26	-11.74	54.00	48.94	2.28	34.72	AVERAGE	100	35	25.77
3	2319.740	40.85	-33.15	74.00	45.18	2.71	35.07	PEAK	149	363	28.02
4	2319.950	29.37	-24.63	54.00	33.70	2.71	35.07	AVERAGE	149	363	28.02
5	2374.840	34.57	-19.43	54.00	38.77	2.76	35.10	AVERAGE	149	39	28.13
6	2375.080	43.07	-30.93	74.00	47.27	2.76	35.10	PEAK	149	39	28.13
7	3216.040	36.41	-17.59	54.00	38.38	3.15	35.12	AVERAGE	100	166	30.00
8	3216.080	44.30	-29.70	74.00	46.27	3.15	35.12	PEAK	100	166	30.00
9	4823.920	41.09	-12.91	54.00	38.90	4.30	35.16	AVERAGE	136	116	33.06
10	4823.980	47.72	-26.28	74.00	45.53	4.30	35.16	PEAK	136	116	33.06


Temperature	24°C	Humidity	62%
Test Engineer	Jordan Hsiao	Configurations	802.11b CH 6

Vertical

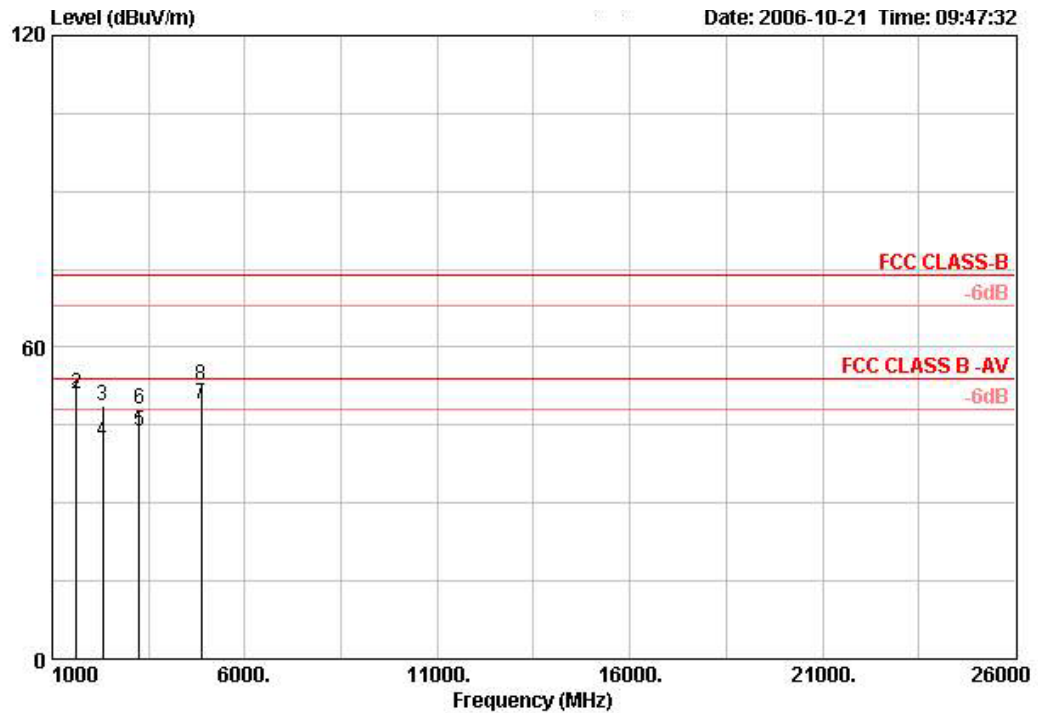

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Antenna Pos	Antenna Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg	dB/m
1 !	1624.680	49.79	-4.21	54.00	56.39	2.28	34.72	AVERAGE	121	113	25.83
2	1624.690	50.90	-23.10	74.00	57.51	2.28	34.72	PEAK	121	113	25.83
3	2319.880	48.59	-25.41	74.00	52.93	2.71	35.07	PEAK	151	261	28.02
4	2319.970	41.90	-12.10	54.00	46.24	2.71	35.07	AVERAGE	151	261	28.02
5	3249.350	43.93	-10.07	54.00	45.89	3.15	35.12	AVERAGE	100	261	30.00
6	3249.460	48.03	-25.97	74.00	50.00	3.15	35.12	PEAK	100	261	30.00
7 !	4873.980	49.18	-4.82	54.00	46.88	4.30	35.15	AVERAGE	128	38	33.16
8	4874.120	52.58	-21.42	74.00	50.27	4.30	35.15	PEAK	128	38	33.16


Horizontal

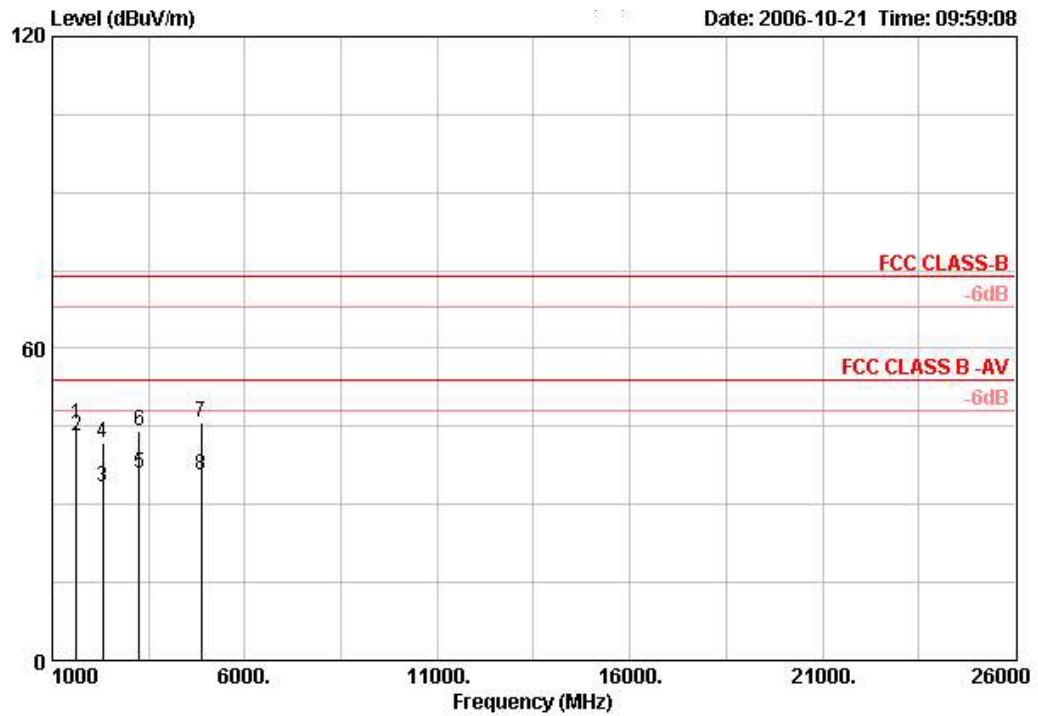

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Antenna Factor
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB	dB		cm	deg	dB/m
1	1624.580	45.47	-28.53	74.00	52.08	2.28	34.72	PEAK	131	141	25.83
2	1624.660	43.32	-10.68	54.00	49.92	2.28	34.72	AVERAGE	131	141	25.83
3	2320.050	33.27	-20.73	54.00	37.60	2.71	35.07	AVERAGE	100	87	28.02
4	2320.230	41.81	-32.19	74.00	46.15	2.71	35.07	PEAK	100	87	28.02
5	3249.280	35.84	-18.16	54.00	37.81	3.15	35.12	AVERAGE	134	264	30.00
6	3249.360	43.99	-30.01	74.00	45.96	3.15	35.12	PEAK	134	264	30.00
7	4873.980	45.79	-28.21	74.00	43.49	4.30	35.15	PEAK	139	140	33.16
8	4874.110	35.77	-18.23	54.00	33.47	4.30	35.15	AVERAGE	139	140	33.16

Temperature	24°C	Humidity	62%
Test Engineer	Jordan Hsiao	Configurations	802.11b CH 11

Vertical

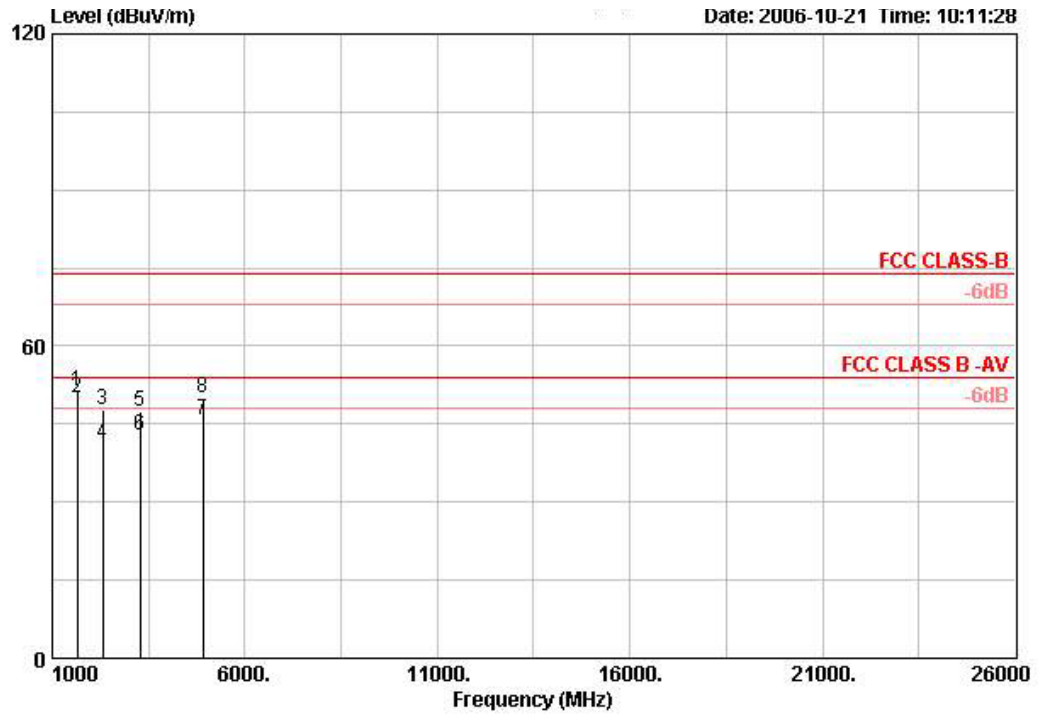

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Antenna Pos	Antenna Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg	dB/m
1	1641.320	51.18	-22.82	74.00	57.71	2.30	34.73	PEAK	130	300	25.90
2 !	1641.330	50.03	-3.97	54.00	56.56	2.30	34.73	AVERAGE	130	300	25.90
3	2319.960	47.58	-26.42	74.00	51.91	2.71	35.07	PEAK	100	163	28.02
4	2319.970	41.04	-12.96	54.00	45.38	2.71	35.07	AVERAGE	100	163	28.02
5	3282.510	47.45	-26.55	74.00	49.39	3.18	35.12	PEAK	100	260	30.00
6	3282.670	42.89	-11.11	54.00	44.84	3.18	35.12	AVERAGE	100	260	30.00
7	4923.960	45.80	-8.20	54.00	43.38	4.30	35.14	AVERAGE	130	32	33.26
8	4923.960	50.07	-23.93	74.00	47.65	4.30	35.14	PEAK	130	32	33.26