

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF
Product Name:	IEEE 802.11 b/g/n Wireless CPE
Brand Name:	ZDC
Model No.:	ZN-7200-2EI-O, ZAC-1023-2, ZAC-503, ZWA-3090
Model Difference:	Different models for the market segmentation
FCC ID:	M4Y-ZAC10232
Report No.:	E2/2014/80007
Issue Date:	Sep. 29, 2014
FCC Rule Part:	§15.247, Cat: DTS
Prepared for:	Z-Com,Inc. 5F, No.8, Hsin Ann Rd., Hsinchu Science Park, Hsinchu, 30078 Taiwan
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803
MUM FAR	<i>Note:</i> This report shall not be reproduced except in full,



without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



VERIFICATION OF COMPLIANCE

Applicant:	Z-Com,Inc.
	5F, No.8, Hsin Ann Rd., Hsinchu Science Park, Hsinchu, 30078 Taiwan
Product Name:	IEEE 802.11 b/g/n Wireless CPE
Brand Name:	ZDC
Model No.:	ZN-7200-2EI-O, ZAC-1023-2, ZAC-503, ZWA-3090
Model Difference:	Different models for the market segmentation
FCC ID:	M4Y-ZAC10232
File Number:	E2/2014/80007
Date of test:	Aug. 08, 2014 ~ Sep. 29, 2014
Date of EUT Received:	Aug. 08, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Marcus Tseng	Date	Sep. 29, 2014	
Prepared By:	Marcus Tseng/Engineer Julia Chang		Sep. 29, 2014	
Approved By:	Julia Chang / Clerk Jim Ch an	J Date	Sep. 29, 2014	

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Version

Version No.	Date	Description				
00	Sep. 29, 2014	Initial creation of document				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's old responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. ScS Taiwan Ltd. No.134, WukungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



FCC ID: M4Y-ZAC10232

Table of Contents

1	GEN	ERAL INFORMATION	6
	1.1	Product description	6
	1.2	Related Submittal(s) / Grant (s)	10
	1.3	Test Methodology	10
	1.4	Test Facility	10
	1.5	Special Accessories	10
	1.6	Equipment Modifications	10
2	SYS	FEM TEST CONFIGURATION	11
	2.1	EUT Configuration	11
	2.2	EUT Exercise	11
	2.3	Test Procedure	11
	2.4	Configuration of Tested System	12
3	SUM	IMARY OF TEST RESULTS	13
4	DES	CRIPTION OF TEST MODES	14
5	MEA	SUREMENT UNCERTAINTY	15
6	CON	DUCTED EMISSION TEST	
	6.1	Standard Applicable:	
	6.2	Measurement Equipment Used:	
	6.3	EUT Setup:	16
	6.4	Test SET-UP (Block Diagram of Configuration)	
	6.5	Measurement Procedure:	
	6.6	Measurement Result:	17
7	PEA	K OUTPUT POWER MEASUREMENT	20
	7.1	Standard Applicable:	
	7.2	Measurement Equipment Used:	21
	7.3	Test Set-up:	21
	7.4	Measurement Procedure:	22
	7.5	Measurement Result (Worst Case Data Rate):	26
8	6dB	BANDWIDTH	31
	8.1	Standard Applicable:	31
	8.2	Measurement Equipment Used:	31
	8.3	Test Set-up:	32
	8.4	Measurement Procedure:	32
	8.5	Measurement Result:	33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅針測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuckungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



FCC ID: M4Y-ZAC10232

9	BAN	D EDGES MEASUREMENT	40
	9.1	Standard Applicable:	40
	9.2	Measurement Equipment Used:	40
	9.3	Test SET-UP:	42
	9.4	Measurement Procedure:	43
	9.5	Field Strength Calculation:	44
	9.6	Measurement Result:	44
10	SPUR	RIOUS EMISSION TEST	
	10.1	Standard Applicable	57
	10.2	Measurement Equipment Used:	57
	10.3	Test SET-UP:	57
	10.4	Measurement Procedure:	58
	10.5	Field Strength Calculation	58
	10.6	Measurement Result:	58
11	PEAH	K POWER SPECTRAL DENSITY	
	11.1	Standard Applicable:	
	11.2	Measurement Equipment Used:	95
	11.3	Test Set-up:	95
	11.4	Measurement Procedure (following the measurement procedure 10.2 of KDB558074):	95
	11.5	Measurement Result:	96
12	ANTI	ENNA REQUIREMENT	103
	12.1	Standard Applicable:	
	12.2	Antenna Connected Construction:	103

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INO 133 WuKungRoad NewTaipeiforts</u> WukuDistrict NewTaipeifcity. Taiwan24803/新 t. **a** 5. Bigs <u>h</u> t. **b** 5. Bigs <u></u>



GENERAL INFORMATION 1

Product description 1.1

General:

Product Name:	IEEE 802.11 b/g/n Wireless CPE					
Brand Name:	ZDC					
Model No.:	ZN-7200-2EI-O, ZAC-1023-2, ZAC-503, ZWA-3090					
Model Difference:	Different models for the market segmentation					
Hardware Version:	N/A					
Software Version:	N/A					
Pole Mounting Ring:	Model No.: N/A, Supplier: N	//A				
Ferrite Suppression Core:	Model No.: N/A, Supplier: N	/A				
Grounding Wire:	Model No.: N/A, Supplier: N	/A				
	24Vdc from Power Cord & P	oE Injector				
Power Supply:	Power Cord & PoE Injector:	Model No.: GRT-240100 Supplier: GREAT POWER SUPPLY CO. LTD				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavailed and offenders may be prosecuted to the fulle attent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power (Peak)	Modulation Technology			
11b/g	2412-2462	11	b: 22.34dBm g: 23.77dBm	DSSS, OFDM			
11n HT20	2412-2462	11	MIMO Chain0: 20.15dBm MIMO Chain1: 20.25dBm MIMO Chain0+1: 23.21dBm	OFDM			
11n HT40	2422-2452	7 MIMO Chain0: 19.89dBm 7 MIMO Chain1: 20.11dBm MIMO Chain0+1: 20.11dBm		OFDM			
Antenna Des	signation:	Model No.:	Dipole Antenna, Peak Gain: 7.02dBi (Main), 7.02dBi (Aux) Model No.: IWX-1551RSX9-999, Supplier: Joymax Electronics Co. Ltd.				
Modulation	type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM					
Transition R	ate:	802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 144Mbps 802.11 n_40MHz: 13.5 – 300Mbps					

The 2.4G max antenna gain is 7.02dBi which was choosing for Radiated Spurious Emission test.

The test report applies for WLAN 802.11 b/g/n function.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavailed and offenders may be prosecuted to the fulle attent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



IEEE 802.11n Spec:

MCS					NG	nna	NID	nna		Datarat	e(Mbps)	
Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		800nsGI		400	nsGI
- 2003 (State 1942)					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bite per single carrier
NCBPS	Number of coded bite per symbol
NDBPS	Number of data bite per symbol
GI	Guard interval

802.11n_HT20 MCS8 -15

1.00		R	N _{BPSCS} (iss)	N _{SD}	11	N _{CBPS}	N _{DBPS}	Data rate (Mb/s)		
MCS Index	Modulation				N _{SP}			800 ns GI	400 ns GI (see NOTE)	
8	BPSK	1/2	1	52	4	104	52	13.0	14.4	
9	QPSK	1/2	2	52	4	208	104	26.0	28.9	
10	QPSK	3/4	2	52	4	208	156	39.0	43.3	
11	16-QAM	1/2	4	52	4	416	208	52.0	57.8	
12	16-QAM	3/4	4	52	4	416	312	78.0	86.7	
13	64-QAM	2/3	6	52	4	624	416	104.0	115.6	
14	64-QAM	3/4	6	52	4	624	468	117.0	130.0	
15	64-QAM	5/6	6	52	4	624	520	130.0	144.4	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



802.11n_HT40 MCS8 -15

MCS	MCS Index Modulation	R	N	N	N	N	N	Data rate (Mb/s)		
Index		ĸ	N _{BPSCS} (i _{SS})	N _{SD}	N _{SP}	N _{CBPS}	N _{DBPS}	800 ns GI	400 ns GI	
8	BPSK	1/2	1	108	6	216	108	27.0	30.0	
9	QPSK	1/2	2	108	6	432	216	54.0	60.0	
10	QPSK	3/4	2	108	6	432	324	81.0	90.0	
11	16-QAM	1/2	4	108	6	864	432	108.0	120.0	
12	16-QAM	3/4	4	108	6	864	648	162.0	180.0	
13	64-QAM	2/3	6	108	6	1296	864	216.0	240.0	
14	64-QAM	3/4	6	108	6	1296	972	243.0	270.0	
15	64-QAM	5/6	6	108	6	1296	1080	270.0	300.0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Related Submittal(s) / Grant (s) 1.2

This submittal(s) (test report) is intended for FCC ID: M4Y-ZAC10232 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.3 **Test Methodology**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Jun 2014 KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 requirements.

Test Facility 1.4

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009. FCC Registration Number: 990257. The address of SGS Taiwan Ltd. Electronics & Communication Laboratory 1F, No.134, Wukung Road New Taipei City TAIWAN 24803, Canada Registration Number: 4620A-5

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. FCC Registration Number: 455997. The address of SGS Taiwan Ltd. Electronics & Communication Laboratory 1F, No.134, Wukung Road New Taipei City TAIWAN 24803, IC Registration Number: 4620A-6.

1.5 **Special Accessories**

There are no special accessories used while test was conducted.

Equipment Modifications 1.6

There was no modification incorporated into the EUT.

Since States the Since States and Since States and Since States States Since Stat tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 SYSTEM TEST CONFIGURATION

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and of ANSI C63.4:2009.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Since States the Since States and Since States and Since States States Since Stat tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.4 **Configuration of Tested System**

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	Atheros	Atheros Radio Test 2	N/A	N/A	N/A
2.	Notebook	Lenovo	L420	LR-7HXZA	shielding	Un-shielding

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



SUMMARY OF TEST RESULTS 3

FCC	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n_20MHz mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

802.11 n_40MHz: Lowest (2422MHz) and mid (2437MHz) and high (2452MHz) with 13.5Mbps lowest data rate are chosen for full testing.

The worst case is determined by the output power that generates the highest emission. As examined in the section of output power measurement, the section 7.5, the lowest data rate at b/g/n_HT20/n_HT40 resulted the highest level of fundamental emission, and therefore, the lowest data rate is chosen as the worst-case to conduct the remaining of other mandatory test cases.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

Note: The highest power level setting is set for the measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5 **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 1.55dB (for Spectrum) +/- 1.42 dB (for Power Meter)
6dB Bandwidth	+/- 123.36 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB
Peak Power Density	+/- 1.55 dB
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
Measurement uncertainty (Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Content was stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to 10 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



6 **CONDUCTED EMISSION TEST**

6.1 **Standard Applicable:**

According to §15.207 frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)				
MHz	Quasi-peak Average				
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30 60 50					
Note					
1. The lower limit shall apply at the transition frequencies					
2. The limit decreases linearly with t	he logarithm of the frequency in the ra	ange 0.15 MHz to 0.50 MHz.			

Measurement Equipment Used: 6.2

Conducted Emission Test Site						
EQUIPMENT	MFR MODEL		SERIAL	LAST	CAL DUE.	
ТҮРЕ		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015	
LISN	Rolf-Heine	NNB-2/16Z	99012	03/26/2014	03/25/2015	
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/19/2014	03/18/2015	
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2013	11/25/2014	

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6.4 Test SET-UP (Block Diagram of Configuration)

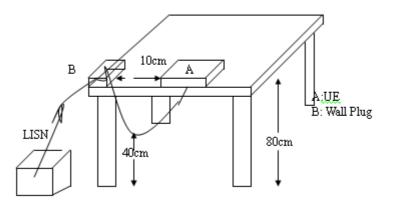

Measurement Procedure: 6.5

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 **Measurement Result:**


Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



AC POWER LINE CONDUCTED EMISSION TEST DATA

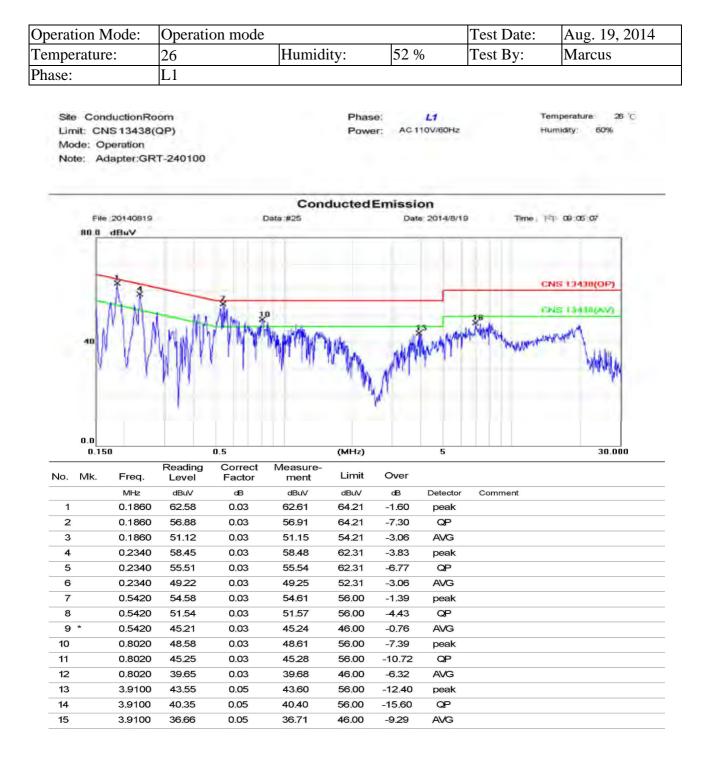

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gness other was stated in count of an an an action of the form of the state and the tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd



FCC ID: M4Y-ZAC10232

peration 1	Mode:	Operation	on mode]	Test Date:	Sep. 09, 2014
emperatu	re:	26		Humidit	y:	52 %]	Femperature:	26
nase:		Ν							
Limit: Ch Mode: O	ductionRo NS 13438((peration dapter:GR	QP)	8		Phase Powe		N 10V/60Hz		emperature: 25 C umidity: 60%
		_	-		ducted				
	18uV		1	Data #26		Date	e, 2014/8/19	Time ;)	9 09:59:13
-		8.	Mar i	ų.		1	-	I STATE	NS 13438(QP)
-40		UNA C	i alle	W. Ala	W Mulle	UM TH	Marchese and	A A A A A A A A A A A A A A A A A A A	Julikith a
	V Y	11 a		- fi	r m	J.			- Anna
0.0 0.15	50	114	0.5		(MHz)	June .	5		30.000
	50 Freq.	Reading	0.5 Correct Factor	Measure- ment	(MHz) Limit	Over	5		30.000
0.18 No. Mk.	Freq. MHz	dBuV	Correct Factor œ	ment dBuV	Limit dBuV	dB	Detector	Comment	30.000
0.18 No. Mk. 1	Freq. MHz 0.1780	Level dBu∨ 62.27	Correct Factor dB 0.03	ment dBuV 62.30	Limit dBuV 64.58	dB -2.28	Detector peak	Comment	30.000
0.18 No. Mk. 1 2	Freq. MHz 0.1780 0.1780	Level dBuV 62.27 58.88	Correct Factor dB 0.03 0.03	ment dBuV 62.30 58.91	Limit dBuV 64.58 64.58	dB -2.28 -5.67	Detector peak QP	Comment	30.000
0.15 No. Mk. 1 2 3	Freq. MHz 0.1780 0.1780 0.1780	Level dBuV 62.27 58.88 51.65	Correct Factor dB 0.03 0.03 0.03	ment dBuV 62.30 58.91 51.68	Limit dBuV 64.58 64.58 54.58	ав -2.28 -5.67 -2.90	Detector peak QP AVG	Comment	30.000
0.18 No. Mk. 1 2	Freq. MHz 0.1780 0.1780	Level dBuV 62.27 58.88	Correct Factor dB 0.03 0.03	ment dBuV 62.30 58.91	Limit dBuV 64.58 64.58	dB -2.28 -5.67	Detector peak QP	Comment	30.000
0.15 No. Mk. 1 2 3 4	Freq. MHz 0.1780 0.1780 0.1780 0.2380	Level dBuV 62.27 58.88 51.65 56.59	Correct Factor 0.03 0.03 0.03 0.03	ment dBuV 62.30 58.91 51.68 56.62	Limit dBuV 64.58 64.58 54.58 62.17	dB -2.28 -5.67 -2.90 -5.55	Detector peak QP AVG peak	Comment	30.000
0.15 No. Mk. 1 2 3 4 5	Freq. MHz 0.1780 0.1780 0.1780 0.2380 0.2380	Level dBuV 62.27 58.88 51.65 56.59 54.25	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03	ment dBuV 62.30 58.91 51.68 56.62 54.28	Limit dBuV 64.58 64.58 54.58 62.17 62.17	dB -2.28 -5.67 -2.90 -5.55 -7.89	Detector peak QP AVG peak QP	Comment	30.000
0.15 No. Mk. 1 2 3 4 5 6	Freq. MHz 0.1780 0.1780 0.1780 0.2380 0.2380 0.2380	Level dBuV 62.27 58.88 51.65 56.59 54.25 49.32	Correct Factor dB 0.03 0.03 0.03 0.03 0.03 0.03 0.03	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35	Limit dBuV 64.58 64.58 64.58 62.17 62.17 52.17	ев -2.28 -5.67 -2.90 -5.55 -7.89 -2.82	Detector peak QP AVG peak QP AVG	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2700	Level dBuV 62.27 58.88 51.65 56.59 54.25 49.32 53.98	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35 54.01	Limit dBuV 64.58 64.58 54.58 62.17 62.17 52.17 61.12	dB -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11	Detector peak QP AVG peak QP AVG peak	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7 8	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2380 0.2700 0.2700	Level dBuV 62.27 58.88 51.65 56.59 54.25 49.32 53.98 51.53	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35 54.01 51.56	Limit dBuV 64.58 64.58 62.17 62.17 62.17 52.17 61.12 61.12	dB -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11 -9.56	Detector peak QP AVG peak QP AVG peak QP	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7 8 9	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2380 0.2700 0.2700 0.2700	Level dBuV 62.27 58.88 51.65 56.59 54.25 49.32 53.98 51.53 47.45	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35 54.01 51.56 47.48	Limit dBuV 64.58 64.58 62.17 62.17 62.17 52.17 61.12 61.12 51.12	dB -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11 -9.56 -3.64	Detector peak QP AVG peak QP AVG peak QP	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7 8 9 10 11 12	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2380 0.2700 0.2700 0.2700 0.2700 0.4100	Level dBuV 62.27 58.88 51.65 56.59 54.25 49.32 53.98 51.53 47.45 50.65	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35 54.01 51.56 47.48 50.68	Limit dBuV 64.58 64.58 62.17 62.17 62.17 61.12 61.12 61.12 51.12 57.65	aB -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11 -9.56 -3.64 -6.97	Detector peak QP AV/G peak QP AV/G peak QP AV/G AV/G	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7 8 9 10 11 11 12 13 *	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2700 0.2700 0.2700 0.4100 0.4100 0.4100 0.5460	Level dBuV 62.27 58.88 51.65 54.25 49.32 53.98 51.53 47.45 50.65 48.22 44.21 54.42	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35 54.01 51.56 47.48 50.68 48.25 44.24 54.45	Limit dBuV 64.58 64.58 54.58 62.17 62.17 62.17 61.12 61.12 51.12 57.65 57.65 47.65 56.00	ab -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11 -9.56 -3.64 -6.97 -9.40 -3.41 -1.55	Detector peak QP AV/G peak QP AV/G peak QP AV/G peak QP AV/G peak	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7 7 8 9 10 11 11 12 13 * 14	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2380 0.2700 0.2700 0.2700 0.2700 0.4100 0.4100	Level dBuV 62.27 58.88 51.65 56.59 54.25 49.32 53.98 51.53 47.45 50.65 48.22 44.21	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35 54.01 51.56 47.48 50.68 48.25 44.24	Limit dBuV 64.58 64.58 62.17 62.17 62.17 61.12 61.12 61.12 51.12 57.65 57.65 47.65	aB -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11 -9.56 -3.64 -6.97 -9.40 -3.41	Detector peak QP AV/G peak AV/G peak QP AV/G AV/G peak QP	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7 7 8 9 10 11 12 13 * 14 15	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2700 0.2700 0.2700 0.2700 0.4100 0.4100 0.4100 0.5460 0.5460	Level dBuV 62.27 58.88 51.65 54.25 49.32 53.98 51.53 47.45 50.65 48.22 44.21 54.42 50.12 42.65	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 558.91 51.68 56.62 54.28 49.35 54.01 51.56 47.48 50.68 48.25 44.24 54.45 50.15 42.68	Limit dBuV 64.58 64.58 54.58 62.17 62.17 62.17 61.12 61.12 61.12 51.12 57.65 57.65 57.65 47.65 56.00 56.00 46.00	ab -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11 -9.56 -3.64 -6.97 -9.40 -3.41 -1.55 -5.85 -3.32	Detector peak QP AVG peak AVG AVG AVG AVG AVG AVG AVG QP AVG QP AVG	Comment	30.000
0.11 No. Mk. 1 2 3 4 5 6 7 7 8 9 10 11 11 12 13 * 14	Freq. MHz 0.1780 0.1780 0.2380 0.2380 0.2380 0.2380 0.2700 0.2700 0.4100 0.4100 0.5460	Level dBuV 62.27 58.88 51.65 54.25 49.32 53.98 51.53 47.45 50.65 48.22 44.21 54.42 50.12	Correct Factor 0.03 0.03 0.03 0.03 0.03 0.03 0.03 0.0	ment dBuV 62.30 58.91 51.68 56.62 54.28 49.35 54.01 51.56 47.48 50.68 48.25 44.24 54.45 50.15	Limit dBuV 64.58 64.58 54.58 62.17 62.17 62.17 61.12 61.12 61.12 51.12 57.65 57.65 57.65 47.65 56.00 56.00	ab -2.28 -5.67 -2.90 -5.55 -7.89 -2.82 -7.11 -9.56 -3.64 -6.97 -9.40 -3.41 -1.55 -5.85	Detector peak QP AVG peak AVG AVG AVG AVG AVG AVG AVG AVG AVG QP	Comment	30.000

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INO 133 WuKungRoad NewTaipeiforts</u> WukuDistrict NewTaipeifcity. Taiwan24803/新 t. **a** 5. Bigs <u>h</u> t. **b** 5. Bigs <u></u>

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



7 PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

According to §15.247 (b)

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note:

The antenna gain is greater than 6 dBi so the limit reduce as below: 2.4G Main Antenna Gain= 7.02dBi, Directional gain = gain of antenna element + 10 log (# of TX antenna elements) Effective Legacy Gain = 7.02+3.01=10.03dBi 802.11b/g/n20/n40 (Main): power limit= 30 dBm-(7.02-6)= 28.98 dBm= 0.790W(Peak) 802.11n20/n40(MIMO): power limit = 30 dBm-(10.03-6)= 25.97dBm = 0.395W(Peak)

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




7.2 **Measurement Equipment Used:**


Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
ТҮРЕ		NUMBER	NUMBER	CAL.		
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015	
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015	
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015	
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2014	03/07/2015	
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2014	02/26/2015	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015	
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2014	02/26/2015	
Splitter	Agilent	11636B	N/A	02/27/2014	02/26/2015	

7.3 Test Set-up:

Spectrum:



Power Meter:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavailed and offenders may be prosecuted to the fulle attent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.4 **Measurement Procedure:**

1. Place the EUT on the table and set it in transmitting mode.

2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Peak power setting on Spectrum: Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector = peak, Sweep = Auto. Setting on spectrum is adjusted based on the mandatory procedure in 9.1.2 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.1.3 in KDB558074 is followed.

(Avg. power setting on Spectrum: Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =Avg., Trace avg =100, Sweep = Auto, Setting on spectrum is adjusted based on the mandatory procedure in 9.2.2.4 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.2.3, option 3 in KDB558074 is followed.

3. Record the max. Reading as observed from Spectrum or Power Meter.

4. Repeat above procedures until all frequency of interest measured was complete.

Pre-anaysis Check: While conducting average power measurement, duty cycle of each mode (a/n ht20 /n_ht40) shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones

b = 99.3%, g = 96.1%, and $n_{t_20} (MIMO) = 92.7\%$, $n_{t_40} (MIMO) = 89.9\%$, where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Formula:

Duty Cycle = *Ton* / (*Ton*+*Toff*)

Test Procedure:

Set span = 0, RBW = 8MHz, VBW = 8MHz, Detector = Peak Duty Cycle:

	Antenna	Duty Cycle	Duty Factor (dBm)
802.11b	Single	0.993	0.03
802.11g	Single	0.961	0.17
802.11n_20 (2.4G)	MIMO	0.927	0.33
802.11n_40 (2.4G)	MIMO	0.899	0.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavailed and offenders may be prosecuted to the fulle attent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




Duty Factor:

802.11 b

	rum Analyzer - Swept S						. to see a second	0 2 3
RL	₩ 50 Q	PNO: Fast ++++	Trig: Free Run #Atten: 30 dB	Avg	Type: Log-Pwr	03:30:06 PM Sep TRACE TYPE DBT P	345	Frequency
0 d6/div	Ref Offset 11.1 Ref 30.00 dB				Δ	Mkr3 8.24 -0.1	0 ms 9 dB	Auto Tune
00 20.0 10.0 0.00		Xa				3∆4		Center Freq 2.412000000 GHz
100 200 100								Start Freq 2.412000000 GHz
40.9/ 50 ja 80 0								Stop Freq 2.412000000 GHz
enter 2.4 tes BW 8			8.0 MHz	UNCTION	Sweep 2	0.00 ms (100		CF Step 8.000000 MHz Auto Man
1 A2 1 2 F 1 3 A4 1 4 F 1 5 6 7 8	t (Δ) t t (Δ) t	8.180 ms (Δ) 7.460 ms 8.240 ms (Δ) 7.460 ms	-0.03 dB 21.24 dBm -0.19 dB 21.24 dBm	CIIC 11211				Freq Offset 0 Hz
9 10 11 50			_		STATU		-	

802.11 g

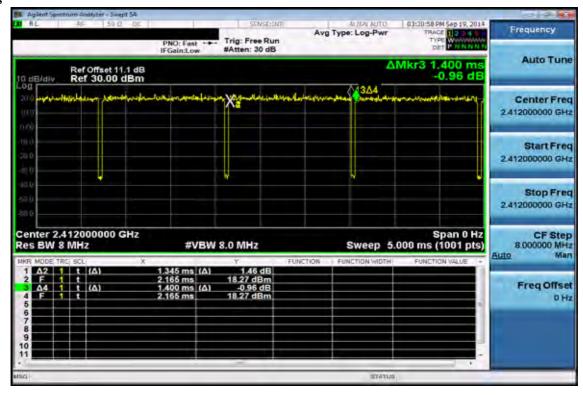


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Content was stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to 10 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11 n 20 MHz (MIMO)

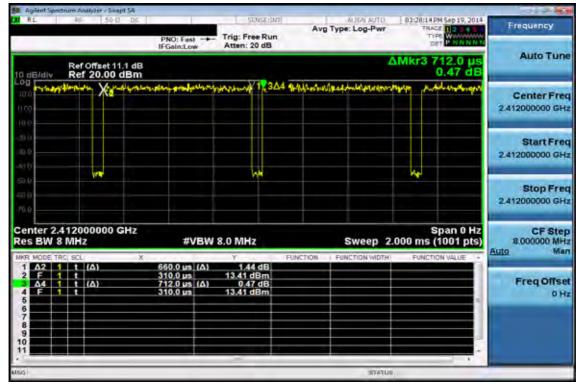

802.11 n 40 MHz (MIMO)

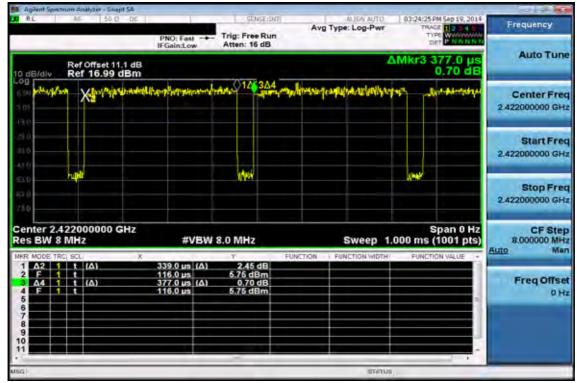

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gness other was stated in count of an an an action of the form of the state and the tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5 Measurement Result (Worst Case Data Rate):

802.11b (Main)

		Peak Power Output (dBm)		
CII	Frequency	Data Rate	De antine d Line 4	
СН	(MHz)	1	- Required Limit	
1	2412	20.98	0.79 Watt = 28.98 dBm	
6	2437	22.34	0.79 Watt = 28.98 dBm	
11	2462	21.57	0.79 Watt = 28.98 dBm	

		Average l	Power Output (dBm)
CII	Frequency (MHz)	Data Rate	Description de Linuit
СН		1	- Required Limit
1	2412	18.11	0.79 Watt = 28.98 dBm
6	2437	19.89	0.79 Watt = 28.98 dBm
11	2462	19.27	0.79 Watt = 28.98 dBm

802.11g (Main)

		Peak Pov	wer Output (dBm)
	Frequency (MHz)	Data Rate	D
СН		6	Required Limit
1	2412	18.39	0.79 Watt = 28.98 dBm
6	2437	23.77	0.79 Watt = 28.98 dBm
11	2462	16.78	0.79 Watt = 28.98 dBm

		Average P	ower Output (dBm)
CII	Frequency (MHz)	Data Rate	Deguined Limit
СН		6	Required Limit
1	2412	15.40	0.79 Watt = 28.98 dBm
6	2437	20.94	0.79 Watt = 28.98 dBm
11	2462	13.94	0.79 Watt = 28.98 dBm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavailed and offenders may be prosecuted to the fulle attent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11n 20M (MIMO Chain 0)

		Peak Po	wer Output (dBm)
СН	Frequency (MHz)	Data Rate	Dequined Limit
СП		MCS8	- Required Limit
1	2412	14.63	0.40 Watt = 25.97dBm
6	2437	20.15	0.40 Watt = 25.97dBm
11	2462	15.59	0.40 Watt = 25.97dBm

		Average P	ower Output (dBm)
СН	Frequency (MHz)	Data Rate	Dequined Limit
СП		MCS8	Required Limit
1	2412	11.97	0.40 Watt = 25.97dBm
6	2437	17.15	0.40 Watt = 25.97dBm
11	2462	12.97	0.40 Watt = 25.97dBm

802.11n 20M (MIMO Chain 1)

		Peak Pov	wer Output (dBm)
СП	Frequency (MHz)	Data Rate	D
СН		MCS8	Required Limit
1	2412	14.65	0.40 Watt = 25.97dBm
6	2437	20.25	0.40 Watt = 25.97dBm
11	2462	15.47	0.40 Watt = 25.97dBm

		Average P	ower Output (dBm)
CII	Frequency (MHz)	Data Rate	
СН		MCS8	Required Limit
1	2412	12.15	0.40 Watt = 25.97dBm
6	2437	17.26	0.40 Watt = 25.97dBm
11	2462	13.10	0.40 Watt = 25.97dBm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



802.11n 20M (MIMO Chain 0+1)

		Peak Po	wer Output (dBm)
	Frequency (MHz)	Data Rate	Degrined Limit
СН		MCS8	- Required Limit
1	2412	17.65	0.40 Watt = 25.97dBm
6	2437	23.21	0.40 Watt = 25.97dBm
11	2462	18.54	0.40 Watt = 25.97dBm

		Average F	Power Output (dBm)
	Frequency (MHz)	Data Rate	Degrating d Limit
СН		MCS8	- Required Limit
1	2412	15.07	0.40 Watt = 25.97dBm
6	2437	20.22	0.40 Watt = 25.97dBm
11	2462	16.05	0.40 Watt = 25.97dBm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavailed and offenders may be prosecuted to the fulle attent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11n_40M (MIMO Chain 0)

		Peak Po	ower Output (dBm)
CII	Frequency (MHz)	Data Rate	Deguined Limit
СН		MCS8	- Required Limit
1	2422	13.75	0.40 Watt = 25.97dBm
6	2437	19.89	0.40 Watt = 25.97dBm
11	2452	12.24	0.40 Watt = 25.97dBm

		Average F	Power Output (dBm)
GII	Frequency (MHz)	Data Rate	Degrined Limit
СН		MCS8	- Required Limit
1	2422	11.07	0.40 Watt = 25.97dBm
6	2437	17.24	0.40 Watt = 25.97dBm
11	2452	10.52	0.40 Watt = 25.97dBm

802.11n_40M (MIMO Chain 1)

		Peak Pov	wer Output (dBm)
СП	Frequency (MHz)	Data Rate	Demoissed Linuit
СН		MCS8	Required Limit
1	2422	13.68	0.40 Watt = 25.97dBm
6	2437	20.11	0.40 Watt = 25.97dBm
11	2452	13.18	0.40 Watt = 25.97dBm

		Average Power Output (dBm)		
I (H I	Frequency	Data Rate	Deguined Limit	
	(MHz)	MCS8	- Required Limit	
1	2422	10.76	0.40 Watt = 25.97dBm	
6	2437	17.34	0.40 Watt = 25.97dBm	
11	2452	10.81	0.40 Watt = 25.97dBm	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavailed and offenders may be prosecuted to the fulle attent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



802.11n 40M (MIMO Chain 0+1)

		Peak Power Output (dBm)		
СН	Frequency (MHz)	Data Rate	Deguined Limit	
		MCS8	Required Limit	
1	2422	16.73	0.40 Watt = 25.97dBm	
6	2437	20.11	0.40 Watt = 25.97dBm	
11	2452	13.18	0.40 Watt = 25.97dBm	

		Average Power Output (dBm)		
СН	Frequency (MHz)	Data Rate	Deguined Limit	
		MCS8	Required Limit	
1	2422	13.93	0.41 Watt = 26.11dBm	
6	2437	20.30	0.41 Watt = 26.11dBm	
11	2452	13.68	0.41 Watt = 26.11dBm	

* Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.

* Note: Offset =10.5dB for 2.4G 802.11b/g, 13.51dB for 2.4G 802.11n20/n40

* Note: Measured by Power meter

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Content was stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to 10 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB BANDWIDTH 8

8.1 **Standard Applicable:**

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz and 2400 - 2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

8.2 **Measurement Equipment Used:**

SGS Conducted Room					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY53400256	2013/10/26	2014/10/25
Power Meter	Anritsu	ML2496A	1326001	2014/06/20	2015/06/19
Power Sensor	Anritsu	MA2411B	1315048	2014/06/20	2015/06/19
Power Sensor	Anritsu	MA2411B	1315049	2014/06/20	2015/06/19
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	2	2014/01/06	2015/01/05
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	3	2014/01/06	2015/01/05
Coaxial Cable 80cm	WOKEN	00100A1F1A185C	1	2014/01/06	2015/01/05
DC Block	Mini-Circuits	BLK-18-S+	4	2014/01/06	2015/01/05
DC Block	PASTERNACK	PE8210	5	2014/01/06	2015/01/05
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-019	2014/01/06	2015/01/05
Splitter	WOKEN	NA	DOM35LW1A2	2014/01/06	2015/01/05
Attenuator	Mini-Circuits	BW-S10W2+	6	2014/01/06	2015/01/05
Attenuator	WOKEN	218FS-10	7	2014/01/06	2015/01/05
Temperature Chamber	TERCHY	MHK-120LK	1020582	2014/06/18	2015/06/17
Communication Tester	R&S	CMW500	131121	2014/01/16	2015/01/15
Communication Tester	Anritsu	MT8820C	6201107337	2014/04/24	2015/04/23
DC Power Supply	Agilent	E3640A	MY53140006	2014/05/31	2015/05/30
DC Power Supply	Agilent	E3640A	MY53130054	2014/05/21	2015/05/20


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report ferer only to the sample(s) tested and such sample(s) are related to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



8.3 **Test Set-up:**



Measurement Procedure: 8.4

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=Peak, Sweep=auto, the setting on spectrum is adjusted based on the procedure as guide in 8.1 option 1 of KDB558074.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.5 **Measurement Result:**

802.11b

Frequency Bandwidth		Limit	Result
(MHz)	(kHz)	(kHz)	
2412	10100	> 500	PASS
2437	10100	> 500	PASS
2462	10080	> 500	PASS

802.11g

Frequency	Frequency Bandwidth		Result
(MHz)	(kHz)	(kHz)	
2412	16300	> 500	PASS
2437	16340	> 500	PASS
2462	16110	> 500	PASS

802.11n_20M

Frequency Bandwidth		Limit	Result
(MHz)	(kHz)	(kHz)	
2412	17590	> 500	PASS
2437	17630	> 500	PASS
2462	17610	> 500	PASS

802.11n 40M

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2422	36370	> 500	PASS
2437	36400	> 500	PASS
2452	36200	> 500	PASS

* Note: Offset =11.1dB for 2.4G 802.11b/g, 14.11dB for 2.4G 802.11n20/n40


* Note: The arrow "->" reveals X decibel level, and refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



802.11b 6dB Band Width Test Data CH-Low

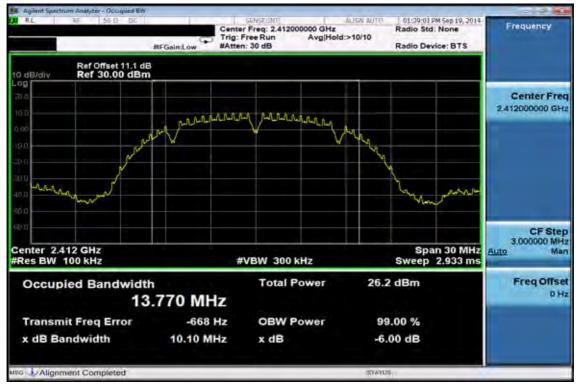

6dB Band Width Test Data CH-Mid

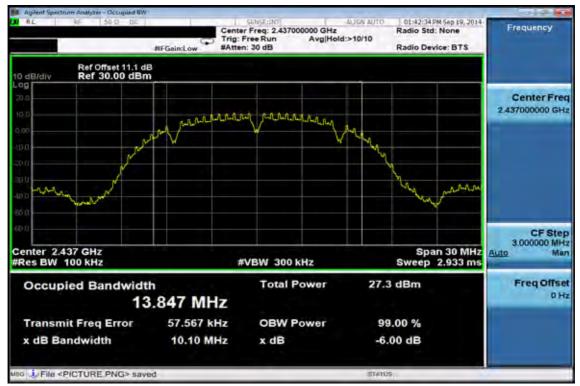


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

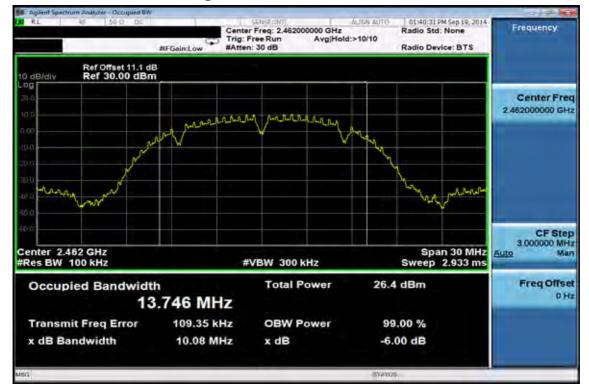

802.11g 6dB Band Width Test Data CH-Low

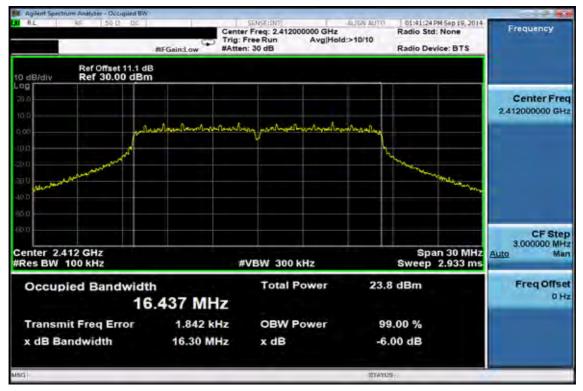


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-Mid

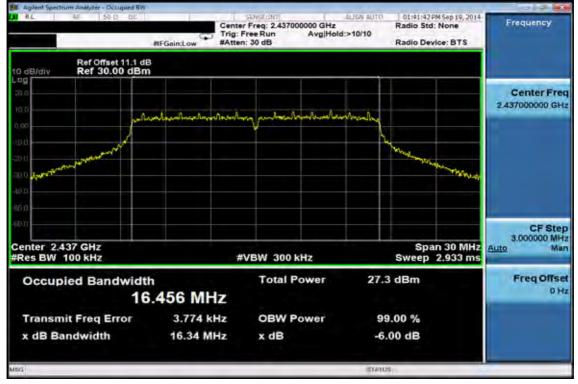

6dB Band Width Test Data CH-High

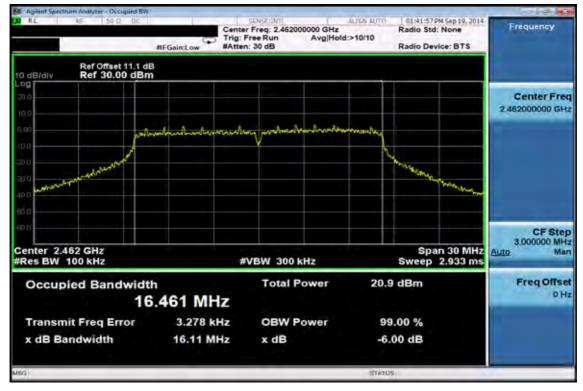


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11n 20M 6dB Band Width Test Data CH-Low

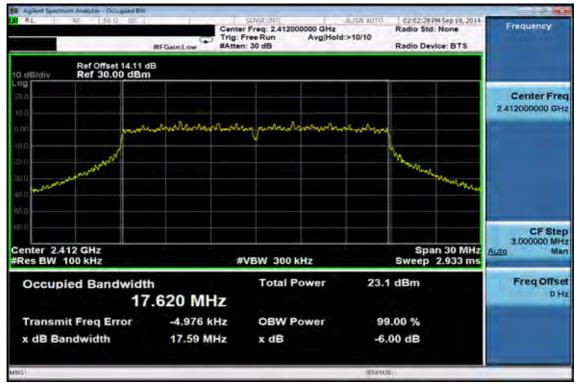

6dB Band Width Test Data CH-Mid

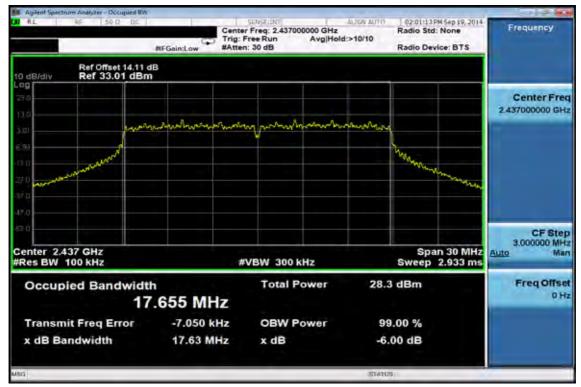


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




6dB Band Width Test Data CH-High

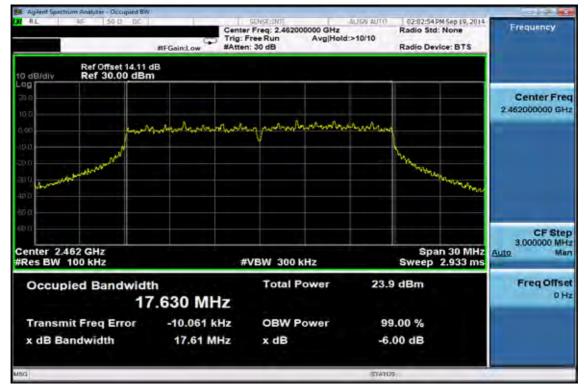

802.11n 40M

6dB Band Width Test Data CH-Low

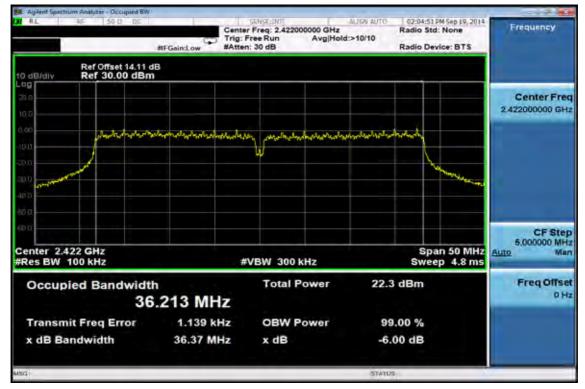


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-Mid

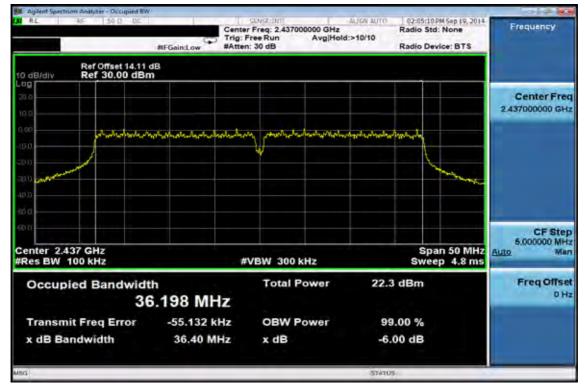

6dB Band Width Test Data CH-High

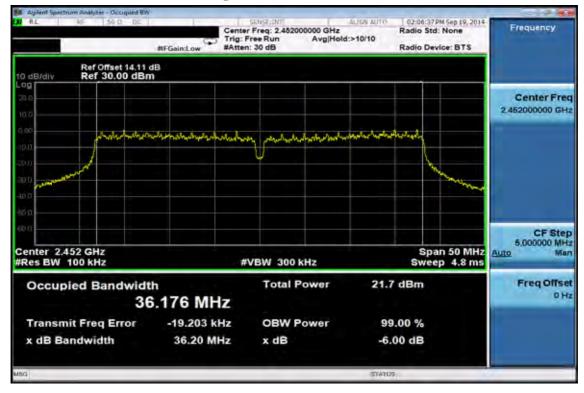

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9 **BAND EDGES MEASUREMENT**

9.1 **Standard Applicable:**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 **Measurement Equipment Used:**

Conducted Emission at antenna port: 9.2.1

Refer to section 7.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Since States the Since States and Since States and Since States States Since Stat tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is arrawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



9.2.2 Radiated emission:

966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015			
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015			
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	01/20/2014	01/19/2015			
Spectrum Analyzer	R&S	FSV-30	101398	10/22/2013	10/21/2014			
Loop Antenna	ETS.LINDGREN	6502	00148045	07/03/2014	07/02/2015			
Bilog Antenna	SCHWAZBECK	VULB9168	378	01/02/2014	01/01/2015			
Horn antenna	ETS.LINDGREN	3117	123995	05/19/2014	05/18/2015			
Horn Antenna	Schwarzbeck	BBHA9170	184	01/23/2014	01/22/2015			
Pre-Amplifier	Agilent	8447D	2944A07676	01/03/2014	01/02/2015			
Pre-Amplifier	Agilent	8449B	3008A00578	01/03/2014	01/02/2015			
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/24/2014	01/23/2015			
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M2	02/27/2014	02/26/2015			
Attenuator	Mini-Circuit	BW-S10W2+	004	02/27/2014	02/26/2015			
Turn Table	HD	DT420	N/A	N.C.R	N.C.R			
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R			
Controller	HD	HD100	N/A	N.C.R	N.C.R			
Low Loss Cable	Huber Suhner	966_Rx	9	01/03/2014	01/02/2015			
3m Site NSA	SGS	966 chamber	N/A	07/15/2014	07/14/2015			

Note: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms</u> and <u>conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.




9.3 **Test SET-UP:**

9.3.1 **Conducted Emission at antenna port:**




9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

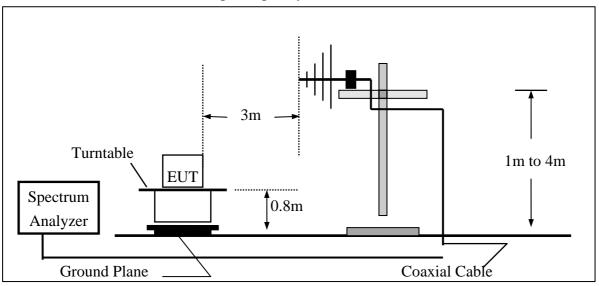

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

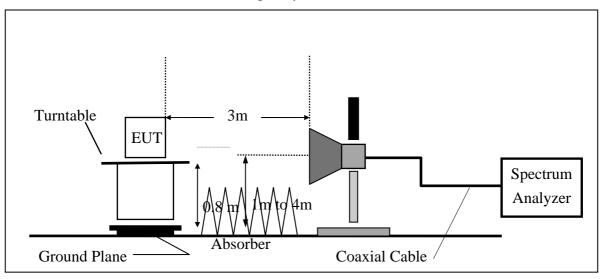

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contexts outrentwise stated the results shown in this test report ferer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4 **Measurement Procedure:**

Unwanted Emissions into Non-Restricted Frequency Bands, Measurement Procedure followed by 11.1 of KDB558074 D01

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 4. Set the spectrum analyzer as RBW, VBW=300KHz, Detector = Peak, Sweep = auto
- 5. Mark the highest reading of the emission as the reference level measurement.
- 6. Set DL as the limit = reading on marker 1 20dBm
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 KHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unwanted Emission falling into Restricted Frequency Bands, Measurement Procedure followed by 12.1 of KDB558074:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7.On spectrum, following 8.1.2, and RBW = 1MHz, VBW = 3MHz, & Marker 2390MHz, and 2483.5MHz (Peak Measurement). Average Measurement: following 8.2 with the modification span to 1MHz, &RBW = 1MHz, VBW = 3MHz and peak marker function to obtain the highest reading on 2390, and 2483.5MHz.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Since States the Since States and Since States and Since States States Since Stat tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.5 **Field Strength Calculation:**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 **Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11b - Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands): 802.11 b mode

Operation Band	:802.11 b		
ARFCN	:CH 01	Test Date	:2014-09-15
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C /61 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Lev	Factor	Actual FS	Limit @3m	Safe Margin
			e				U
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	45.77	2.48	48.25	54.00	-5.75
2390.00	Е	Peak	57.67	2.48	60.15	74.00	-13.85
Operation Ban ARFCN Fundamental F Operation Mod	Frequency	:802.11 b :CH 01 :2412 MHz :Band Edge I		Test Date Temp./Humi. Engineer		:2014-09-15 :25 deg_C / :Tin	
EUT Pol.		:E2 Plane		Measurement An	itenna Pol.	:HORIZON	TAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	39.40	2.48	41.88	54.00	-12.12
2390.00	E	Peak	50.73	2.48	53.21	74.00	-20.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



FCC ID: M4Y-ZAC10232

Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 47 of 103

Operation Ban ARFCN Fundamental F Operation Mod EUT Pol.	CN:CH 11Test Dateumental Frequency:2462 MHzTemp./Humi.ution Mode:Band Edge HIGHEngineer		:2014-09-15 :25 deg_C /61 RH :Tin :VERTICAL				
Actual FS(dB	$B\mu V/m) = S$	SPA. Reading	level(dBµV)	+ Factor(dB)			
Factor(dB) =	Antenna Fa	ctor(dBµV/n	n) + Cable Lo	oss(dB) – Pre_A	mplifier Gain((dB)	
Note : "F"	: denotes F	undamental Fi	requency.; "H	H": denotes Harn	nonic Frequenc	cy.	
"E"	: denotes B	and Edge Freq	uency. ; "S" :	denotes Spuriou	s Frequency.		
"	": denotes l	Noise Floor.					
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Lev	vel	FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	47.84	2.84	50.68	54.00	-3.32
2483.50	E	Peak	57.20	2.84	60.04	74.00	-13.96
Operation Band:802.11 bARFCN:CH 11Test DateFundamental Frequency:2462 MHzTemp./Humi.Operation Mode:Band Edge HIGHEngineer				:2014-09-1: :25 deg_C / :Tin :HORIZON	61 RH		
EUT Pol.	$D_{\rm m} V (m) = 0$:E2 Plane		Measurement Ar	itenna Pol.	.HORIZON	IAL
	•	SPA. Reading	•	+ $Factor(dB)$ $ss(dB) - Pre_A$	mplifior Goin((dp)	
		•		H": denotes Harn	-		
				denotes Spuriou	-	<i>.</i> y.	
	•" : denotes I		uency., 5	denotes Spuriou	s i requeire y.		
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
rreq.	1000	Mode	Reading Lev		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
				<u></u>			
2483.50	Е	Average	37.52	2.84	40.36	54.00	-13.64
2483.50	E	Peak	48.05	2.84	50.89	74.00	-23.11
	_						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INO 133 WuKungRoad NewTaipeiforts</u> WukuDistrict NewTaipeifcity. Taiwan24803/新 t. **a** 5. Bigs <u>h</u> t. **b** 5. Bigs <u></u>



802.11g - Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands): 802.11 g mode

Operation Band	:802.11 g		
ARFCN	:CH 01	Test Date	:2014-09-15
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C /61 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Lev	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	1/11/L/J	110/21/21	uDμν	dD			uD
2390.00	Е	Average	48.38	2.48	50.86	54.00	-3.14
2390.00	E	Peak	70.59	2.48	73.07	74.00	-0.93
Operation Ban ARFCN Fundamental F Operation Moo EUT Pol.	requency	:802.11 g :CH 01 :2412 MHz :Band Edge I :E2 Plane	LOW	Test Date Temp./Humi. Engineer Measurement An	tenna Pol.	:2014-09-15 :25 deg_C / :Tin :HORIZON	61 RH

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	37.40	2.48	39.88	54.00	-14.12
2390.00	E	Peak	50.86	2.48	53.34	74.00	-20.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



FCC ID: M4Y-ZAC10232


Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 50 of 103

Operation Ban ARFCN Fundamental F Operation Mod EUT Pol.	N:CH 11Test Datenental Frequency:2462 MHzTemp./Humi.on Mode:Band Edge HIGHEngineer		:2014-09-15 :25 deg_C /61 RH :Tin :VERTICAL				
Actual FS(dB	$B\mu V/m) = S$	SPA. Reading	level(dBµV)	+ Factor(dB)			
Factor(dB) =	Antenna Fa	ctor(dBµV/n	n) + Cable Lo	oss(dB) – Pre_A	mplifier Gain((dB)	
Note : "F"	: denotes F	undamental Fi	requency.;"H	H": denotes Harn	nonic Frequenc	cy.	
"E"	: denotes B	and Edge Freq	uency. ; "S" :	denotes Spuriou	s Frequency.		
"	": denotes l	Noise Floor.					
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Lev	vel	FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	48.86	2.84	51.70	54.00	-2.30
2483.50	E	Peak	69.38	2.84	72.22	74.00	-1.78
Operation Band:802.11 gARFCN:CH 11Test DateFundamental Frequency:2462 MHzTemp./Humi.Operation Mode:Band Edge HIGHEngineer				:2014-09-1: :25 deg_C / :Tin	61 RH		
EUT Pol.		:E2 Plane		Measurement Ar	ntenna Pol.	:HORIZON	ITAL
	•	SPA. Reading	•				
		•		$ss(dB) - Pre_A$	-		
				H": denotes Harn	-	cy.	
			uency. ; "S" :	denotes Spuriou	s Frequency.		
	": denotes l						
Freq.	Note	Detector	Spectrum		Actual	Limit	Safe
		Mode	Reading Lev		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	37.70	2.84	40.54	54.00	-13.46
2483.50	E	Peak	51.81	2.84	54.65	74.00	-19.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INO 133 WuKungRoad NewTaipeiforts</u> WukuDistrict NewTaipeifcity. Taiwan24803/新 t. **a** 5. Bigs <u>h</u> t. **b** 5. Bigs <u></u>



802.11n_20M- Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**

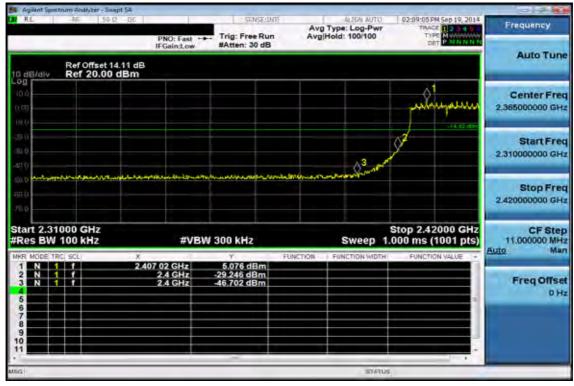

Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Emission: 802.11 n_20M mode

(Unwanted Emissions into Restricted Frequency Bands): 802.11 n_20M mode

Operation Band	:802.11 n20M		
ARFCN	:CH 01	Test Date	:2014-09-15
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C /61 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	47.44	2.48	49.92	54.00	-4.08
2390.00	Е	Peak	70.54	2.48	73.02	74.00	-0.98
Onenetien Den	.I.	.902 11 - 201	r				
Operation Ban	a	:802.11 n20M					
ARFCN		:CH 01	Test	Date		:2014-09-15	5
Fundamental H	Frequency	:2412 MHz	Tem	p./Humi.		:25 deg C/	61 RH

Fundamental Frequency	.2412 WILL	remp./mum.	$.25 \text{ ueg}_C / 01 \text{ Km}$
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	36.46	2.48	38.94	54.00	-15.06
2390.00	E	Peak	49.13	2.48	51.61	74.00	-22.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 53 of 103

Operation Band ARFCN Fundamental Fi Operation Mode EUT Pol.	requency	:802.11 n20N :CH 11 :2462 MHz :Band Edge I :E2 Plane	HIGH	Test Date Temp./Humi. Engineer Measurement An	tenna Pol.	:2014-09-15 :25 deg_C / :Tin :VERTICA	61 RH
Actual FS(dB	$\mu V/m) = S$	PA. Reading	level(dBµV) -	+ Factor(dB)			
Factor(dB) = A	Antenna Fa	ctor(dBµV/n	n) + Cable Los	ss(dB) – Pre_Ar	nplifier Gain(dB)	
Note : "F"	: denotes F	undamental Fi	requency. ; "H	": denotes Harm	nonic Frequenc	cy.	
"Е"	: denotes Ba	and Edge Frequ	uency. ; "S" : d	lenotes Spurious	s Frequency.		
···	: denotes l	Noise Floor.					
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Lev	el	FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	49.55	2.84	52.39	54.00	-1.61
2483.50	E	Peak	70.25	2.84	73.09	74.00	-0.91
Operation Band:802.11 n20MARFCN:CH 11Fundamental Frequency:2462 MHzOperation Mode:Band Edge HIGH		HIGH	Test Date Temp./Humi. Engineer		:2014-09-15 :25 deg_C /61 RH :Tin :HORIZONTAL		
EUT Pol.	V/ma) 6	:E2 Plane		Measurement An	tenna Pol.	.IIOKIZON	IAL
Actual FS(dB)		•	· • ·		nulifian Cain(
		•		ss(dB) – Pre_Ar	-		
				": denotes Harm lenotes Spurious		cy.	
	: denotes B	0 1	uency., S.C	ienotes Spurious	s riequency.		
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
Pieq.	Note	Mode	Reading Lev		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV∕m	dB
11112	1 / \mathbf{L} / \mathbf{D}		սորո	uD	αυμν/ 11	արուու	μD
2483 50	F	Average	3676	2.84	39.60	54.00	-14.40
2483.50 2483.50	E E	Average Peak	36.76 48.74	2.84 2.84	39.60 51.58	54.00 74.00	-14.40 -22.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INO 133 WuKungRoad NewTaipeiforts</u> WukuDistrict NewTaipeifcity. Taiwan24803/新 t. **a** 5. Bigs <u>h</u> t. **b** 5. Bigs <u></u>



802.11n_40M - Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Emission: 802.11 n_40M mode

(Unwanted Emissions into Restricted Frequency Bands): 802.11 n_40M mode

Operation Band	:802.11 n40M		
ARFCN	:CH 03	Test Date	:2014-09-15
Fundamental Frequency	:2422 MHz	Temp./Humi.	:25 deg_C /61 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	49.93	2.48	52.41	54.00	-1.59
2390.00	E	Peak	67.54	2.48	70.02	74.00	-3.98

Operation Band	:802.11 n40M		
ARFCN	:CH 03	Test Date	:2014-09-15
Fundamental Frequency	:2422 MHz	Temp./Humi.	:25 deg_C /61 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	37.22	2.48	39.70	54.00	-14.30
2390.00	E	Peak	58.42	2.48	60.90	74.00	-13.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 56 of 103

Operation Ban ARFCN Fundamental F Operation Mod EUT Pol.	Frequency	:802.11 n40N :CH 09 :2452 MHz :Band Edge I :E2 Plane	HIGH	Test Date Temp./Humi. Engineer Measurement Ar	ntenna Pol.	:2014-09-15 :25 deg_C / :Tin :VERTICA	61 RH
Actual FS(dH	$B\mu V/m$ = S	SPA. Reading	level(dBµV)	+ Factor(dB)			
Factor(dB) =	Antenna Fa	ctor(dBµV/n	n) + Cable Lo	$ss(dB) - Pre_A$	mplifier Gain((dB)	
Note : "F"	': denotes F	undamental Fi	requency.; "H	I" : denotes Harn	nonic Frequenc	ey.	
"Е"	': denotes B	and Edge Freq	uency. ; "S" : o	denotes Spuriou	s Frequency.		
"	": denotes l	Noise Floor.					
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Lev	vel	FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	49.69	2.84	52.53	54.00	-1.47
2483.50	E	Peak	68.97	2.84	71.81	74.00	-2.19
Operation Band:802.11 n40MARFCN:CH 09Fundamental Frequency:2452 MHzOperation Mode:Band Edge HIGHEUT Pol.:E2 Plane		HIGH	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2014-09-15 :25 deg_C /61 RH :Tin :HORIZONTAL		
	$\operatorname{SuV}/\mathrm{m}$) = S	SPA. Reading			itellia i ol.		
	•	•	• • •	$ss(dB) - Pre_A$	mplifier Gain((dB)	
		•		I'' : denotes Harn	-		
				denotes Spuriou	-		
	": denotes]	0 1					
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
1		Mode	Reading Lev		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV∕m	dB
2483.50	Е	Average	37.43	2.84	40.27	54.00	-13.73
2483.50	Е	Peak	56.17	2.84	59.01	74.00	-14.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> <u>INO 133 WuKungRoad NewTaipeiforts</u> WukuDistrict NewTaipeifcity. Taiwan24803/新 t. **a** 5. Bigs <u>h</u> t. **b** 5. Bigs <u></u>

10 SPURIOUS EMISSION TEST 10.1 Standard Applicable

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

10.2 Measurement Equipment Used:

10.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

10.2.2 Radiated emission:

Refer to section 9.2.2 for details.

10.3 Test SET-UP:

10.3.1 Conducted Emission at antenna port:

Refer to section 7.3 for details.

10.3.2 Radiated emission:

Refer to section 9.3.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 7. Repeat above procedures until all default test channel measured were complete.

Conducted Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz, 18G to 40GHz (applicable if operation mode is 5GHz)
- 4. Via Software, combine 5 spans of frequency range into one plot
- 5. Repeat above procedures until all default test channel measured were complete.

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

10.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz - 3GHz

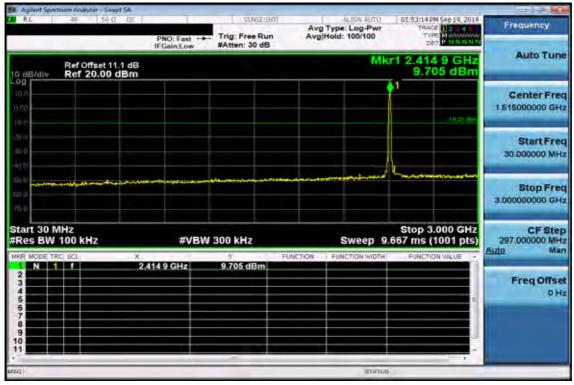


Ch Low 3GHz - 26.5GHz

29 PM Sep 19, 2014 Avg Type: Log-Pwi Avg|Hold: 17/100 Frequency Trig: Free Run PNO: Fast CP IFGain:Low n: 30 dB HAT Auto Tune 26.359 0 GHz Mkr1 Ref Offset 11.1 dB Ref 20.00 dBm -39.417 dBm 0 dB/di Center Freq 14,750000000 GHz Start Fred 3.00000000 GHz Stop Freq 26.50000000 GHz Start 3.00 GHz Stop 26.50 GHz CF Step #Res BW 100 kHz #VBW 300 kHz Sweep 76.40 ms (1001 pts) 2.350000000 GHz auto Man -39.417 dBm 26.359 0 GHz Freq Offset 0 Hz ie. 0


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch Mid 30MHz - 3GHz

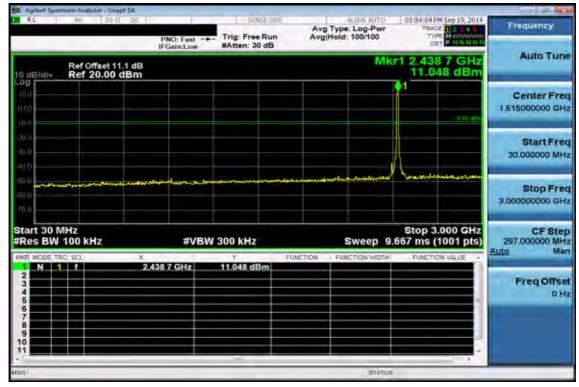


Ch Mid 3GHz - 26.5GHz

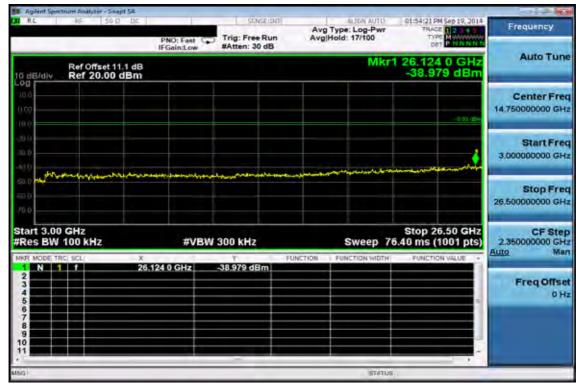


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch High 30MHz - 3GHz

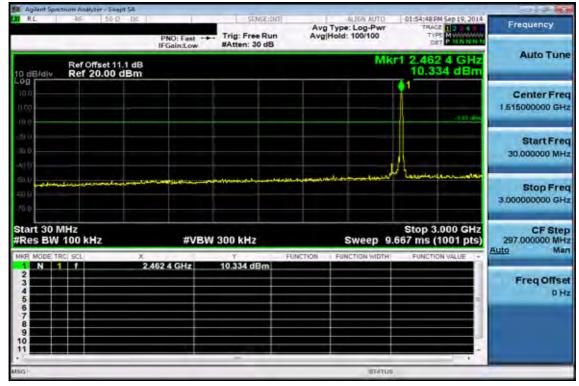

Ch High 3GHz - 26.5GHz

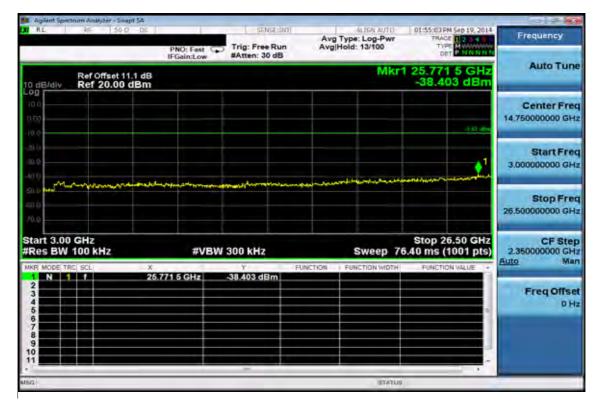


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report ferer only to the sample(s) tested and such sample(s) are related to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz - 3GHz

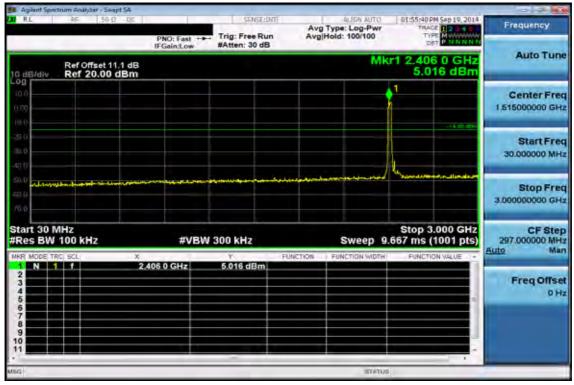


Ch Low 3GHz - 26.5GHz

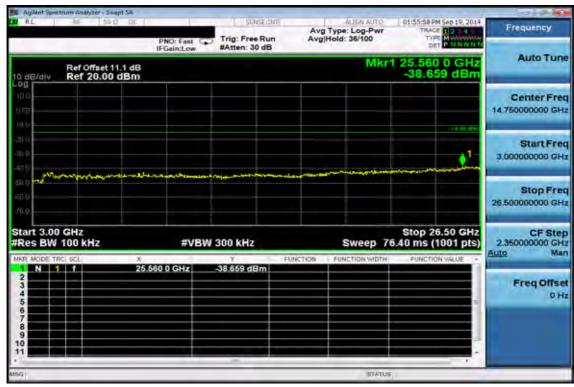


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch Mid 30MHz - 3GHz

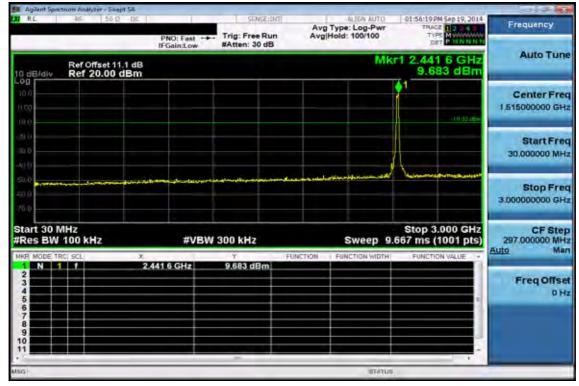


Ch Mid 3GHz - 26.5GHz

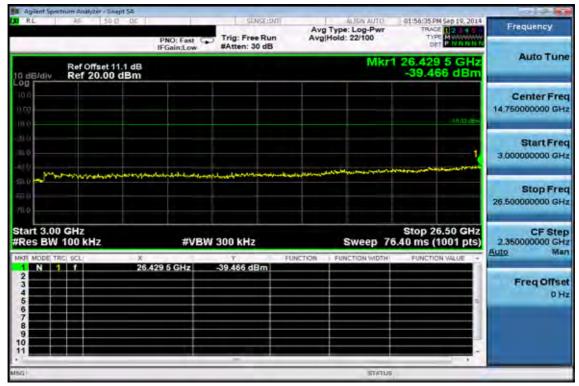


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch High 30MHz - 3GHz

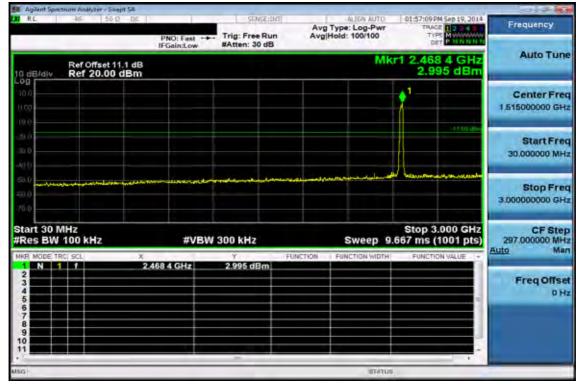


Ch High 3GHz - 26.5GHz

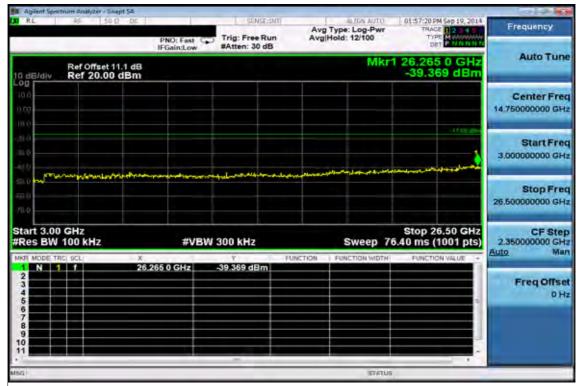


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Conducted Spurious Emission Measurement Result (802.11n_20M) Ch Low 30MHz - 3GHz

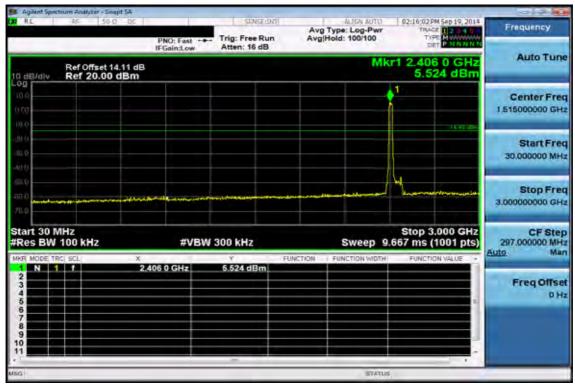

Ch Low 3GHz - 26.5GHz

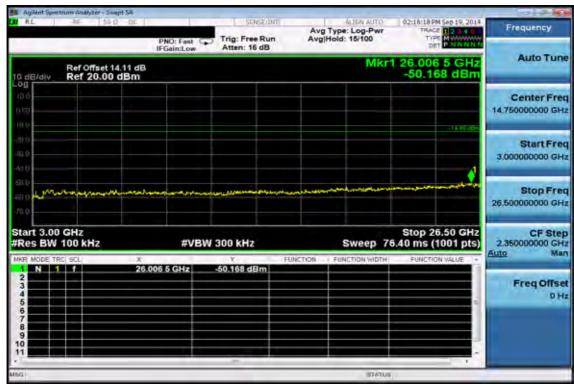


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gness other was stated in count of an an an action of the form of the state and the tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 GS Taiwan Ltd.



Ch Mid 30MHz - 3GHz

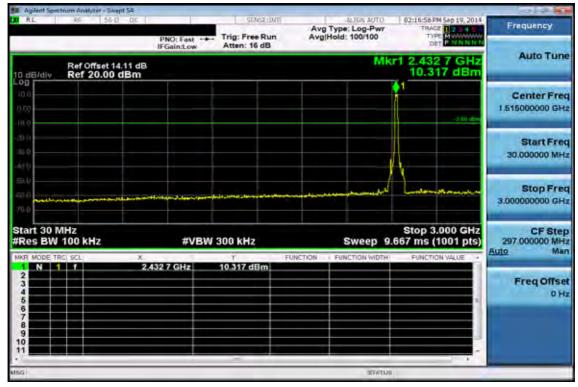


Ch Mid 3GHz - 26.5GHz

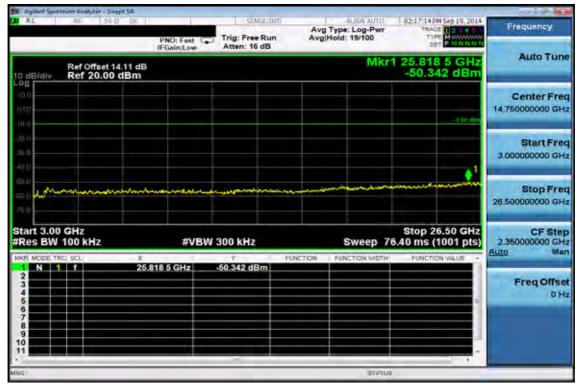


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch High 30MHz - 3GHz

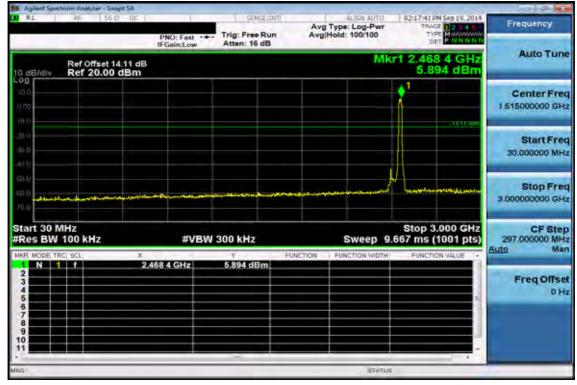


Ch High 3GHz - 26.5GHz

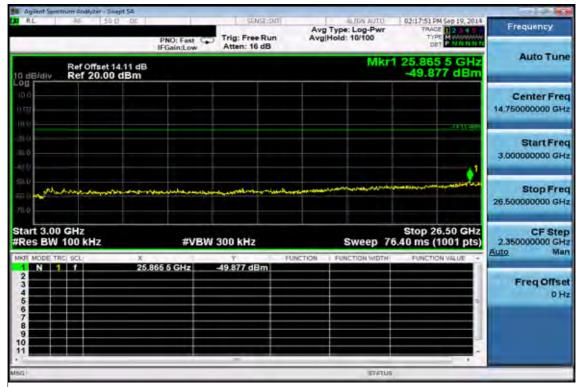


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Conducted Spurious Emission Measurement Result (802.11n_40M) Ch Low 30MHz - 3GHz

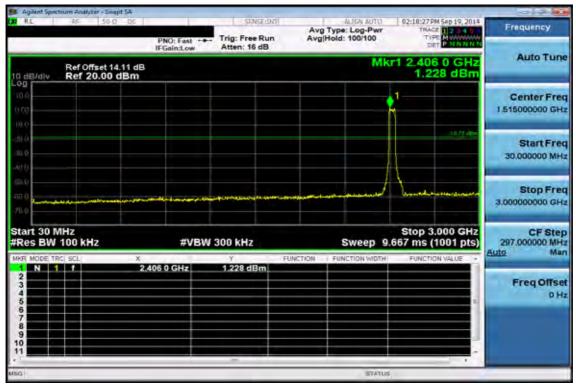


Ch Low 3GHz - 26.5GHz

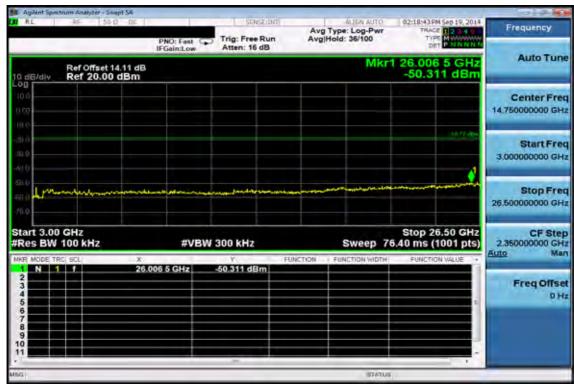


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Ch Mid 30MHz - 3GHz

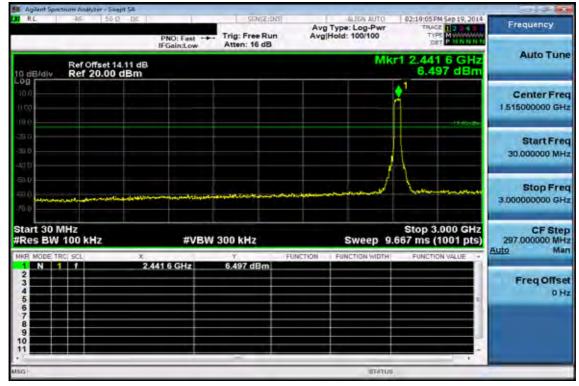

Ch Mid 3GHz - 26.5GHz

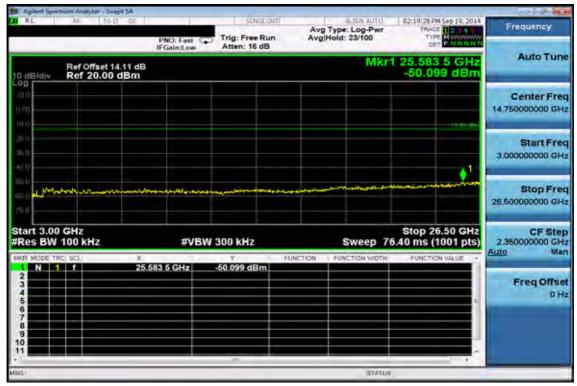


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Gness other was stated in count of an an other than the control of the term of the count of th tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Ch High 30MHz - 3GHz

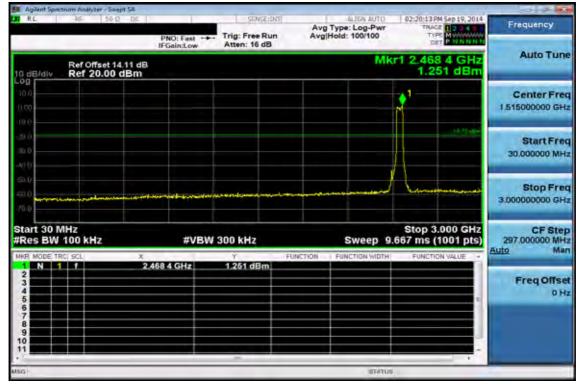

Ch High 3GHz - 26.5GHz

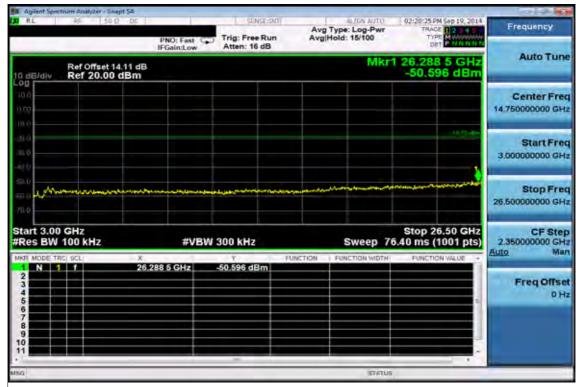

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gness other was stated in count of an an other than the control of the term of the count of th tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Spurious Emission Measurement Result (802.11b)

Operation Band	:802.11b		
ARFCN	:CH 01	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	50.92	-13.75	37.17	40.00	-2.83
74.62	S	Peak	49.89	-16.11	33.78	40.00	-6.22
104.69	S	Peak	48.32	-17.01	31.31	43.50	-12.19
264.74	S	Peak	39.54	-12.37	27.17	46.00	-18.83
380.17	S	Peak	51.25	-9.47	41.78	46.00	-4.22
916.58	S	Peak	27.20	-0.33	26.87	46.00	-19.13
4824.00	Н	Average	35.09	6.85	41.94	54.00	-12.06
4824.00	Н	Peak	39.72	6.85	46.57	74.00	-27.43
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						
24120.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 72 of 103

Operation Band	:802.11b		
ARFCN	:CH 01	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.29	-14.82	38.47	43.50	-5.03
354.95	S	Peak	48.57	-10.01	38.56	46.00	-7.44
380.17	S	Peak	49.87	-9.47	40.40	46.00	-5.60
700.27	S	Peak	27.93	-3.98	23.95	46.00	-22.05
809.88	S	Peak	31.38	-2.03	29.35	46.00	-16.65
925.31	S	Peak	27.47	-0.15	27.32	46.00	-18.68
4824.00	Н	Average	37.71	6.85	44.56	54.00	-9.44
4824.00	Н	Peak	41.53	6.85	48.38	74.00	-25.62
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						
24120.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Content was stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative to 10 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 73 of 103

Operation Band	:802.11b		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	51.12	-13.75	37.37	40.00	-2.63
74.62	S	Peak	49.71	-16.11	33.60	40.00	-6.40
109.54	S	Peak	47.47	-16.09	31.38	43.50	-12.12
204.60	S	Peak	43.08	-15.13	27.95	43.50	-15.55
380.17	S	Peak	51.72	-9.47	42.25	46.00	-3.75
929.19	S	Peak	28.52	-0.09	28.43	46.00	-17.57
4874.00	Н	Average	43.59	6.93	50.52	54.00	-3.48
4874.00	Н	Peak	45.88	6.93	52.81	74.00	-21.19
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 74 of 103

Operation Band	:802.11b		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.36	-14.82	38.54	43.50	-4.96
354.95	S	Peak	48.62	-10.01	38.61	46.00	-7.39
380.17	S	Peak	49.84	-9.47	40.37	46.00	-5.63
714.82	S	Peak	28.88	-4.17	24.71	46.00	-21.29
800.18	S	Peak	31.39	-2.19	29.20	46.00	-16.80
962.17	S	Peak	26.67	0.35	27.02	54.00	-26.98
4874.00	Н	Average	43.88	6.93	50.81	54.00	-3.19
4874.00	Н	Peak	46.66	6.93	53.59	74.00	-20.41
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 75 of 103

Operation Band	:802.11b		
ARFCN	:CH 11	Test Date	:2014-09-16
Fundamental Frequency	:2462 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	50.55	-13.75	36.80	40.00	-3.20
74.62	S	Peak	49.94	-16.11	33.83	40.00	-6.17
109.54	S	Peak	47.18	-16.09	31.09	43.50	-12.41
204.60	S	Peak	42.65	-15.13	27.52	43.50	-15.98
380.17	S	Peak	51.07	-9.47	41.60	46.00	-4.40
859.35	S	Peak	27.95	-1.44	26.51	46.00	-19.49
4924.00	Н	Average	33.81	6.99	40.80	54.00	-13.20
4924.00	Н	Peak	41.57	6.99	48.56	74.00	-25.44
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						
24620.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 76 of 103

Operation Band	:802.11b		
ARFCN	:CH 11	Test Date	:2014-09-16
Fundamental Frequency	:2462 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.43	-14.82	38.61	43.50	-4.89
354.95	S	Peak	48.72	-10.01	38.71	46.00	-7.29
380.17	S	Peak	49.73	-9.47	40.26	46.00	-5.74
719.67	S	Peak	28.09	-4.12	23.97	46.00	-22.03
809.88	S	Peak	30.60	-2.03	28.57	46.00	-17.43
960.23	S	Peak	26.94	0.36	27.30	54.00	-26.70
4924.00	Н	Average	38.85	6.99	45.84	54.00	-8.16
4924.00	Н	Peak	42.48	6.99	49.47	74.00	-24.53
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						
24620.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (802.11g)

Operation Band	:802.11 g		
ARFCN	:CH 01	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	51.06	-13.75	37.31	40.00	-2.69
74.62	S	Peak	49.98	-16.11	33.87	40.00	-6.13
109.54	S	Peak	47.18	-16.09	31.09	43.50	-12.41
204.60	S	Peak	43.16	-15.13	28.03	43.50	-15.47
380.17	S	Peak	51.28	-9.47	41.81	46.00	-4.19
926.28	S	Peak	27.88	-0.13	27.75	46.00	-18.25
4824.00	Н	Average	25.14	6.85	31.99	54.00	-22.01
4824.00	Н	Peak	36.45	6.85	43.30	74.00	-30.70
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						
24120.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 78 of 103

Operation Band	:802.11 g		
ARFCN	:CH 01	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.34	-14.82	38.52	43.50	-4.98
354.95	S	Peak	48.36	-10.01	38.35	46.00	-7.65
380.17	S	Peak	49.99	-9.47	40.52	46.00	-5.48
700.27	S	Peak	28.99	-3.98	25.01	46.00	-20.99
814.73	S	Peak	30.31	-2.01	28.30	46.00	-17.70
938.89	S	Peak	27.61	0.11	27.72	46.00	-18.28
4824.00	Н	Average	27.53	6.85	34.38	54.00	-19.62
4824.00	Н	Peak	38.48	6.85	45.33	74.00	-28.67
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						
24120.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 79 of 103

Operation Band	:802.11 g		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	50.83	-13.75	37.08	40.00	-2.92
74.62	S	Peak	49.96	-16.11	33.85	40.00	-6.15
109.54	S	Peak	46.89	-16.09	30.80	43.50	-12.70
264.74	S	Peak	40.03	-12.37	27.66	46.00	-18.34
380.17	S	Peak	51.33	-9.47	41.86	46.00	-4.14
930.16	S	Peak	27.14	-0.06	27.08	46.00	-18.92
4874.00	Н	Average	33.56	6.93	40.49	54.00	-13.51
4874.00	Н	Peak	46.34	6.93	53.27	74.00	-20.73
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 80 of 103

Operation Band	:802.11 g		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.24	-14.82	38.42	43.50	-5.08
354.95	S	Peak	48.57	-10.01	38.56	46.00	-7.44
380.17	S	Peak	50.19	-9.47	40.72	46.00	-5.28
691.54	S	Peak	27.70	-3.69	24.01	46.00	-21.99
809.88	S	Peak	30.68	-2.03	28.65	46.00	-17.35
961.20	S	Peak	27.06	0.36	27.42	54.00	-26.58
4874.00	Н	Average	33.28	6.93	40.21	54.00	-13.79
4874.00	Н	Peak	43.53	6.93	50.46	74.00	-23.54
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 81 of 103

Operation Band	:802.11 g		
ARFCN	:CH 11	Test Date	:2014-09-16
Fundamental Frequency	:2462 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	51.36	-13.75	37.61	40.00	-2.39
74.62	S	Peak	49.95	-16.11	33.84	40.00	-6.16
109.54	S	Peak	46.90	-16.09	30.81	43.50	-12.69
204.60	S	Peak	43.01	-15.13	27.88	43.50	-15.62
380.17	S	Peak	51.48	-9.47	42.01	46.00	-3.99
930.16	S	Peak	27.18	-0.06	27.12	46.00	-18.88
4924.00	Н	Average	25.07	6.99	32.06	54.00	-21.94
4924.00	Н	Peak	38.42	6.99	45.41	74.00	-28.59
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						
24620.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 82 of 103

Operation Band	:802.11 g		
ARFCN	:CH 11	Test Date	:2014-09-16
Fundamental Frequency	:2462 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.35	-14.82	38.53	43.50	-4.97
354.95	S	Peak	48.68	-10.01	38.67	46.00	-7.33
380.17	S	Peak	50.08	-9.47	40.61	46.00	-5.39
688.63	S	Peak	27.78	-3.64	24.14	46.00	-21.86
825.40	S	Peak	30.80	-2.02	28.78	46.00	-17.22
956.35	S	Peak	26.50	0.33	26.83	46.00	-19.17
4924.00	Н	Average	26.03	6.99	33.02	54.00	-20.98
4924.00	Н	Peak	37.83	6.99	44.82	74.00	-29.18
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						
24620.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (802.11n_20M)

Operation Band	:802.11 n20M		
ARFCN	:CH 01	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	51.06	-13.75	37.31	40.00	-2.69
74.62	S	Peak	50.13	-16.11	34.02	40.00	-5.98
109.54	S	Peak	46.51	-16.09	30.42	43.50	-13.08
204.60	S	Peak	42.77	-15.13	27.64	43.50	-15.86
380.17	S	Peak	51.19	-9.47	41.72	46.00	-4.28
918.52	S	Peak	26.66	-0.29	26.37	46.00	-19.63
4824.00	Н	Average	25.50	6.85	32.35	54.00	-21.65
4824.00	Н	Peak	38.11	6.85	44.96	74.00	-29.04
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						
24120.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 84 of 103

Operation Band	:802.11 n20M		
ARFCN	:CH 01	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.32	-14.82	38.50	43.50	-5.00
354.95	S	Peak	48.76	-10.01	38.75	46.00	-7.25
380.17	S	Peak	50.02	-9.47	40.55	46.00	-5.45
684.75	S	Peak	28.99	-3.63	25.36	46.00	-20.64
835.10	S	Peak	31.47	-2.03	29.44	46.00	-16.56
956.35	S	Peak	27.11	0.33	27.44	46.00	-18.56
4824.00	Н	Average	27.00	6.85	33.85	54.00	-20.15
4824.00	Н	Peak	37.31	6.85	44.16	74.00	-29.84
7236.00	Н						
9648.00	Н						
12060.00	Н						
14472.00	Н						
16884.00	Н						
19296.00	Н						
21708.00	Н						
24120.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 85 of 103

Operation Band	:802.11 n20M		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	51.26	-13.75	37.51	40.00	-2.49
74.62	S	Peak	49.75	-16.11	33.64	40.00	-6.36
109.54	S	Peak	46.86	-16.09	30.77	43.50	-12.73
204.60	S	Peak	42.77	-15.13	27.64	43.50	-15.86
385.02	S	Peak	51.80	-9.37	42.43	46.00	-3.57
920.46	S	Peak	27.39	-0.25	27.14	46.00	-18.86
4874.00	Н	Average	39.38	6.93	46.31	54.00	-7.69
4874.00	Н	Peak	51.10	6.93	58.03	74.00	-15.97
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 86 of 103

Operation Band	:802.11 n20M		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.31	-14.82	38.49	43.50	-5.01
354.95	S	Peak	48.84	-10.01	38.83	46.00	-7.17
380.17	S	Peak	49.90	-9.47	40.43	46.00	-5.57
719.67	S	Peak	30.38	-4.12	26.26	46.00	-19.74
809.88	S	Peak	30.88	-2.03	28.85	46.00	-17.15
951.50	S	Peak	26.96	0.29	27.25	46.00	-18.75
4874.00	Н	Average	36.35	6.93	43.28	54.00	-10.72
4874.00	Н	Peak	48.27	6.93	55.20	74.00	-18.80
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 87 of 103

Operation Band	:802.11 n20M		
ARFCN	:CH 11	Test Date	:2014-09-16
Fundamental Frequency	:2462 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	51.59	-13.75	37.84	40.00	-2.16
74.62	S	Peak	49.69	-16.11	33.58	40.00	-6.42
110.51	S	Peak	47.23	-15.96	31.27	43.50	-12.23
264.74	S	Peak	39.43	-12.37	27.06	46.00	-18.94
380.17	S	Peak	51.44	-9.47	41.97	46.00	-4.03
688.63	S	Peak	28.31	-3.64	24.67	46.00	-21.33
4924.00	Н	Average	25.55	6.99	32.54	54.00	-21.46
4924.00	Н	Peak	37.42	6.99	44.41	74.00	-29.59
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						
24620.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 88 of 103

Operation Band	:802.11 n20M		
ARFCN	:CH 11	Test Date	:2014-09-16
Fundamental Frequency	:2462 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
190.05	S	Peak	53.35	-14.82	38.53	43.50	-4.97
354.95	S	Peak	48.81	-10.01	38.80	46.00	-7.20
380.17	S	Peak	49.77	-9.47	40.30	46.00	-5.70
714.82	S	Peak	28.53	-4.17	24.36	46.00	-21.64
809.88	S	Peak	30.55	-2.03	28.52	46.00	-17.48
950.53	S	Peak	26.72	0.28	27.00	46.00	-19.00
4924.00	Н	Average	25.51	6.99	32.50	54.00	-21.50
4924.00	Н	Peak	37.90	6.99	44.89	74.00	-29.11
7386.00	Н						
9848.00	Н						
12310.00	Н						
14772.00	Н						
17234.00	Н						
19696.00	Н						
22158.00	Н						
24620.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result (802.11n_40M)

Operation Band	:802.11 n40M		
ARFCN	:CH 03	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	51.22	-13.75	37.47	40.00	-2.53
74.62	S	Peak	50.03	-16.11	33.92	40.00	-6.08
109.54	S	Peak	47.20	-16.09	31.11	43.50	-12.39
380.17	S	Peak	51.27	-9.47	41.80	46.00	-4.20
860.32	S	Peak	27.64	-1.42	26.22	46.00	-19.78
939.86	S	Peak	27.42	0.13	27.55	46.00	-18.45
4844.00	Н	Average	25.44	6.92	32.36	54.00	-21.64
4844.00	Н	Peak	36.93	6.92	43.85	74.00	-30.15
7266.00	Н						
9688.00	Н						
12110.00	Н						
14532.00	Н						
16954.00	Н						
19376.00	Н						
21798.00	Н						
24220.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 90 of 103

Operation Band	:802.11 n40M		
ARFCN	:CH 03	Test Date	:2014-09-16
Fundamental Frequency	:2412 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX LOW	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
139.61	S	Peak	45.39	-13.20	32.19	43.50	-11.31
190.05	S	Peak	53.23	-14.82	38.41	43.50	-5.09
380.17	S	Peak	49.88	-9.47	40.41	46.00	-5.59
654.68	S	Peak	27.46	-4.55	22.91	46.00	-23.09
800.18	S	Peak	31.06	-2.19	28.87	46.00	-17.13
942.77	S	Peak	26.96	0.17	27.13	46.00	-18.87
4844.00	Н	Average	25.53	6.92	32.45	54.00	-21.55
4844.00	Н	Peak	38.00	6.92	44.92	74.00	-29.08
7266.00	Н						
9688.00	Н						
12110.00	Н						
14532.00	Н						
16954.00	Н						
19376.00	Н						
21798.00	Н						
24220.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 91 of 103

Operation Band	:802.11 n40M		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	50.36	-13.75	36.61	40.00	-3.39
74.62	S	Peak	49.89	-16.11	33.78	40.00	-6.22
109.54	S	Peak	49.45	-16.09	33.36	43.50	-10.14
289.96	S	Peak	41.21	-11.43	29.78	46.00	-16.22
380.17	S	Peak	51.20	-9.47	41.73	46.00	-4.27
906.88	S	Peak	27.41	-0.59	26.82	46.00	-19.18
4874.00	Н	Average	35.30	6.93	42.23	54.00	-11.77
4874.00	Н	Peak	49.37	6.93	56.30	74.00	-17.70
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 92 of 103

Operation Band	:802.11 n40M		
ARFCN	:CH 06	Test Date	:2014-09-16
Fundamental Frequency	:2437 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX MID	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
139.61	S	Peak	45.50	-13.20	32.30	43.50	-11.20
190.05	S	Peak	53.21	-14.82	38.39	43.50	-5.11
380.17	S	Peak	49.80	-9.47	40.33	46.00	-5.67
599.39	S	Peak	27.45	-5.37	22.08	46.00	-23.92
800.18	S	Peak	30.97	-2.19	28.78	46.00	-17.22
944.71	S	Peak	27.07	0.21	27.28	46.00	-18.72
4874.00	Н	Average	34.55	6.93	41.48	54.00	-12.52
4874.00	Н	Peak	49.33	6.93	56.26	74.00	-17.74
7311.00	Н						
9748.00	Н						
12185.00	Н						
14622.00	Н						
17059.00	Н						
19496.00	Н						
21933.00	Н						
24370.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 93 of 103

Operation Band	:802.11 n40M		
ARFCN	:CH 09	Test Date	:2014-09-16
Fundamental Frequency	:2452 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
37.76	S	Peak	50.53	-13.68	36.85	40.00	-3.15
74.62	S	Peak	50.21	-16.11	34.10	40.00	-5.90
109.54	S	Peak	47.29	-16.09	31.20	43.50	-12.30
380.17	S	Peak	51.36	-9.47	41.89	46.00	-4.11
827.34	S	Peak	27.93	-2.04	25.89	46.00	-20.11
920.46	S	Peak	27.42	-0.25	27.17	46.00	-18.83
4904.00	Н	Average	25.02	6.94	31.96	54.00	-22.04
4904.00	Н	Peak	37.62	6.94	44.56	74.00	-29.44
7356.00	Н						
9808.00	Н						
12260.00	Н						
14712.00	Н						
17164.00	Н						
19616.00	Н						
22068.00	Н						
24520.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/80007 Issue Date: Sep. 29, 2014 Page: 94 of 103

Operation Band	:802.11 n40M		
ARFCN	:CH 09	Test Date	:2014-09-16
Fundamental Frequency	:2452 MHz	Temp./Humi.	:25 deg_C/61 RH
Operation Mode	:TX HIGH	Engineer	:Louis
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
110.51	S	Peak	47.28	-15.96	31.32	43.50	-12.18
190.05	S	Peak	53.25	-14.82	38.43	43.50	-5.07
354.95	S	Peak	48.59	-10.01	38.58	46.00	-7.42
380.17	S	Peak	49.79	-9.47	40.32	46.00	-5.68
760.41	S	Peak	28.69	-2.52	26.17	46.00	-19.83
909.79	S	Peak	28.13	-0.48	27.65	46.00	-18.35
4904.00	Н	Average	25.74	6.94	32.68	54.00	-21.32
4904.00	Н	Peak	36.75	6.94	43.69	74.00	-30.31
7356.00	Н						
9808.00	Н						
12260.00	Н						
14712.00	Н						
17164.00	Н						
19616.00	Н						
22068.00	Н						
24520.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11 PEAK POWER SPECTRAL DENSITY

11.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Measurement Equipment Used:

Refer to section 7.2 for details.

11.3 Test Set-up:

Refer to section 7.3 for details. (Spectrum Option)

11.4 Measurement Procedure (following the measurement procedure 10.2 of KDB558074):

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW \geq 3 kHz.
- 4. Set the VBW > 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Since States the Since States and Since States and Since States tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11.5 Measurement Result:

802.11b

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-4.688	8
2437	-3.540	8
2462	-4.129	8

802.11g

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-7.710	8
2437	-4.097	8
2462	-10.375	8

802.11n 20M

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-9.830	8
2437	-4.113	8
2462	-8.668	8

802.11n 40M

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2422	-12.763	8
2437	-7.262	8
2452	-13.310	8

* Note: Offset =11.1dB for 2.4G 802.11b/g, 14.11dB for 2.4G 802.11n20/n40 *Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.11b **Power Spectral Density Test Plot (CH-Low)**



Power Spectral Density Test Plot (CH-Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Power Spectral Density Test Plot (CH-High)



802.11g


Power Spectral Density Test Plot (CH-Low)

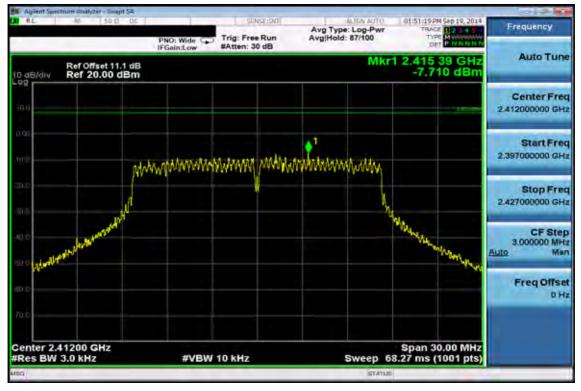


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Power Spectral Density Test Plot (CH-Mid)

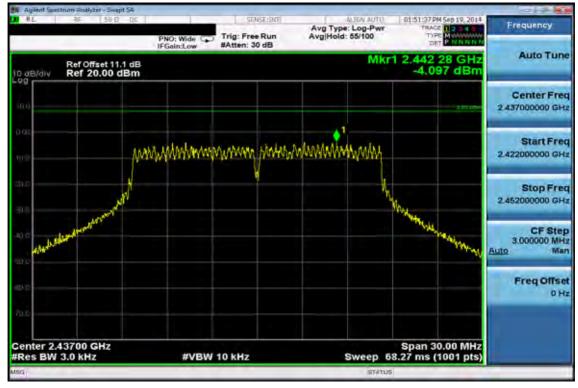

Power Spectral Density Test Plot (CH-High)

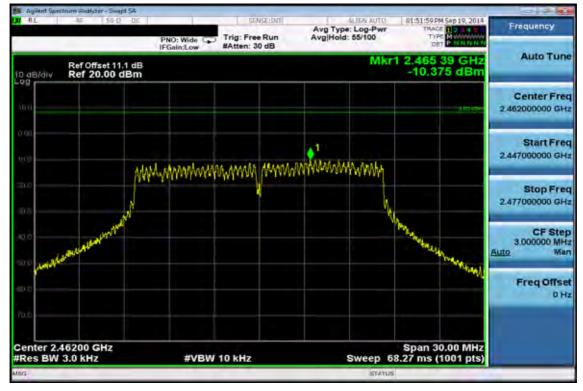

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Gness other was stated in count of an an other than the control of the term of the count of th tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Мал

OHz

802.11n 20M

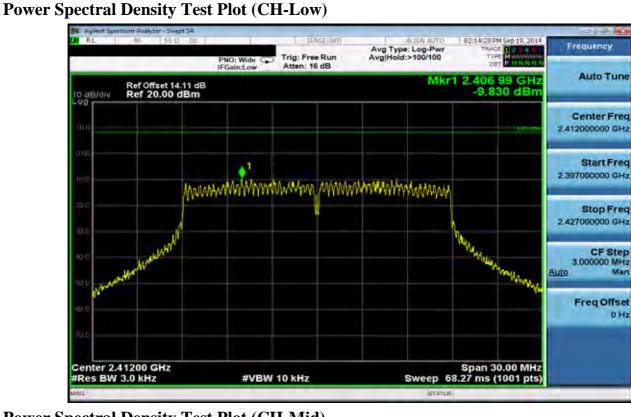


Power Spectral Density Test Plot (CH-Mid)

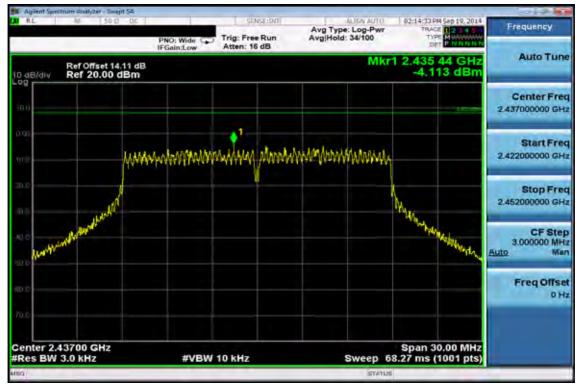

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Power Spectral Density Test Plot (CH-High)

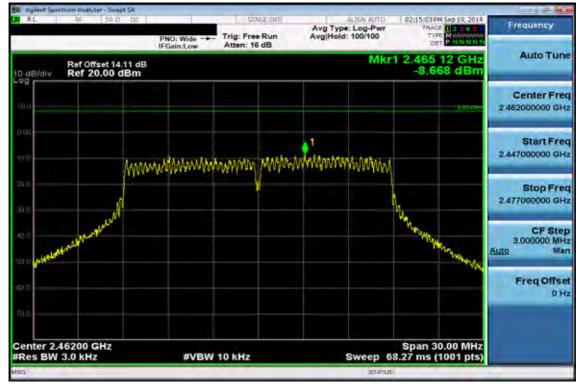

802.11n 40M


Power Spectral Density Test Plot (CH-Low)

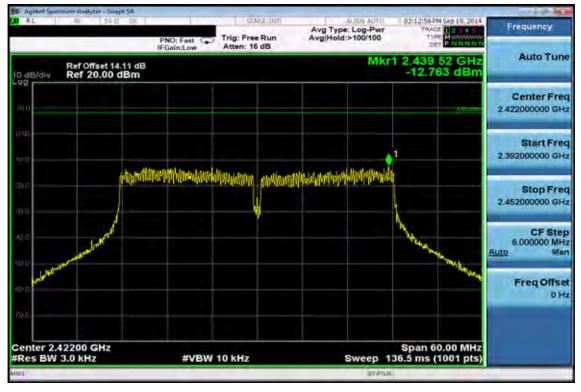


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Power Spectral Density Test Plot (CH-Mid)

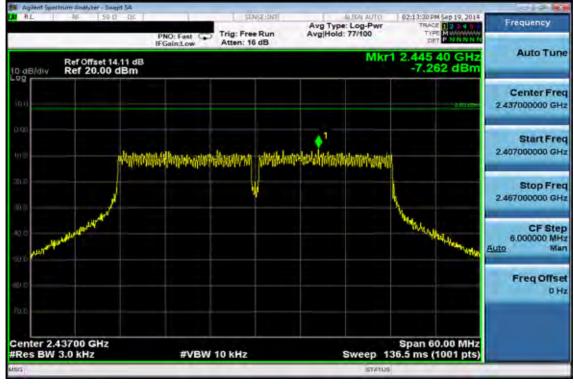

Power Spectral Density Test Plot (CH-High)

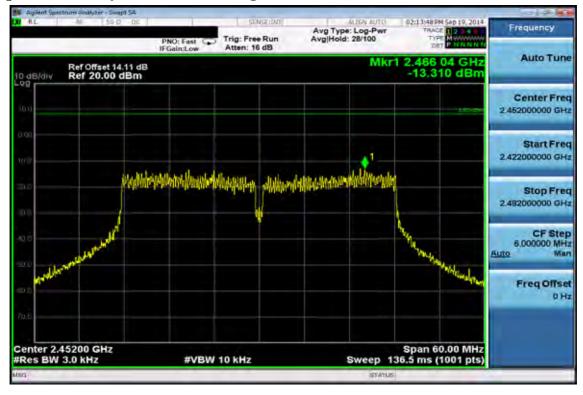

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gness other was stated in count of an an other than the control of the term of the count of th tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

12.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 7.02dBi for 2.4GHz (Main), 7.02dBi for 2.4GHz (Aux), 10.03dBi for 2.4GHz (MIMO) and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gine So data and the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.