


EMC TEST REPORT

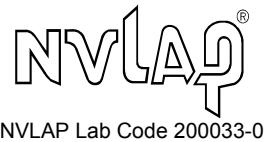

Standard(s):

47 CFR FCC Part 15.247
FCC ID: M4Z1000
Class II Permissive Change

Product: 3M Compact RFID Reader
Model: 1000
3M Division: TSSD

Report Number: RE1603020-1
Report Issue Date: June 7, 2016

Report Prepared By:

Signature: *Yuriy Litvinov*

Yuriy Litvinov
Lead EMC Engineer

Tested By:
3M Regulatory Engineering
EMC Laboratory
410 E. Fillmore Avenue, Building 76-01-1
St. Paul, Minnesota 55107-1000

This report is the confidential property for the exclusive internal use of 3M Company and applies only to the specific item tested under the stated test conditions. This test report shall not be reproduced except in full, without written approval of the 3M Company EMC laboratory. Any changes impacting the attributes, functionality or operational characteristics documented in this report shall be communicated to the body responsible for approving (certifying) the subject equipment.

TABLE OF CONTENTS

| Item | | Description | Page |
|-------------|------|---|-------------|
| 1.0 | | Test Summary | 3 |
| | 1.1 | Measurement Uncertainty | 3 |
| 2.0 | | Equipment Description | 4 |
| | 2.1 | Equipment Under Test | 4 |
| 3.0 | | EUT Configuration | 5 |
| | 3.1 | Support Equipment | 4 |
| | 3.2 | Input/output Ports | 4 |
| | 3.3 | Operating Condition of EUT | 4 |
| | 3.4 | Exercising of EUT | 4 |
| 4.0 | | Test Conditions and Results | 5 |
| | 4.1 | Conducted Emissions | 5 |
| | 4.2 | Radiated Emissions | 9 |
| | 4.3 | Carrier Frequency Separation | 13 |
| | 4.4 | Number of Hopping Frequencies | 20 |
| | 4.5 | Time of Occupancy (Dwell Time) | 22 |
| | 4.6 | 20dB Bandwidth | 25 |
| | 4.7 | Band-edge Compliance | 29 |
| | 4.8 | Conducted Output Power | 32 |
| | 4.9 | Spurious Conducted and Radiated Emissions | 38 |
| | 4.10 | RF Exposure Compliance | 43 |
| 5.0 | | Test Equipment | 44 |
| 6.0 | | Revision History | 44 |
| | | Certificate of Conformity | 45 |

1.0 Test Summary

Based on the results of our investigation, we have concluded the product tested complies with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

| No | Standard | Test Requirements | Result | Comments |
|------|------------------------|---|--------|----------|
| 4.1 | 15.107/15.207/RSS-Gen | Conducted Emissions | pass | |
| 4.2 | 15.109/15.209/RSS-Gen | Radiated Emissions | pass | |
| 4.3 | 15.247(a)(1)/A8.1(b) | Carrier Frequency Separation | pass | |
| 4.4 | 15.247(a)(1)/A8.1(d) | Number of Hopping Frequencies | pass | |
| 4.5 | 15.247(a)(1)/A8.1(d) | Time of Occupancy (Dwell Time) | pass | |
| 4.6 | 15.247(a)(1)/A8.1(a) | 20dB Bandwidth | pass | |
| 4.7 | 15.247(b)(3)/A8.4 | Band-edge Compliance | pass | |
| 4.8 | 15.247(c)/A8.5 | Conducted Output Power | pass | |
| 4.9 | 15.247(c)/A8.5 | Spurious Conducted and Radiated Emissions | pass | |
| 4.10 | 15.247(2)(h)(i)/RSS102 | RF Exposure Compliance | pass | |

Note:

Limited testing under Class II Permissive Change to include new antenna Model: A1001 (Section 4.9, pages 37-39). See 3M Company Test Report number RE1311030-1, issued on October 16, 2014 for the original FCC/IC certifications.

1.1 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements. The measurement uncertainty figures were calculated and correspond to a coverage factor of k=2, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

| | |
|-----------------------|---------|
| Radiated emissions | 5.20 dB |
| Conducted emissions | 3.60 dB |
| Harmonics and Flicker | 3.32 dB |

2.0 Equipment Description

| 2.1 Equipment Under Test | | |
|--------------------------------|--|--|
| Description: | 3M Model 1000 is a multi protocol four-Port Compact RFID Reader which can support up to four mono-static or two bi-static antennas. All antenna ports operate sequentially with only one port transmitting at the time from a single transmit source (RF path is switched between selected ports). One RF Section and one antenna multiplexing at the time. Antenna path is identical. | |
| Model(s): | 1000 | |
| Serial number: | N/A | |
| Client Contact: | Name: | Phone: |
| | Dave Missimer Randal D. Roebuck Aaron Mills | 919-281-1559 512- 984 5688 651- 736-3323 |
| 3M Division: | Traffic Safety and Security | |
| Modifications: | None | |
| Frequency Range (MHz) : | 902 – 928MHz | |
| Modulation Type: | FHSS | DSB-ASK, PR-ASK |
| Channel No.: | 50 | |
| Maximum Output Power: | 30.0dBm | |
| Antenna Type : | MT-262006/TRH/A – 6dBi Dual Polarized Dipole (7dBi max) | |
| | MT-242048/NRH – 4.5dBi Dual Polarized Dipole | |
| | A1001 -20dBi Short Range UHF Antenna (new antenna) | |
| Equipment Category: | <input checked="" type="checkbox"/> General <input type="checkbox"/> Portable <input type="checkbox"/> Indoor Use | |
| Rated Input Power: | Voltage: <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> VDC Frequency: <input type="checkbox"/> 50Hz <input checked="" type="checkbox"/> 60Hz Current: <input checked="" type="checkbox"/> 3.75A | |
| Test Dates: | 05/19/06/20/2014 - original certification 05/25/2016 – Class II PC | |
| Received Date: | 04/26/2014 | |
| Received Conditions: | <input type="checkbox"/> Poor <input checked="" type="checkbox"/> Good <input type="checkbox"/> Prototype <input checked="" type="checkbox"/> Production | |

3.0 EUT Configuration

3.1 Support Equipment

| No. | Product Type | Manufacturer | Model | Comments |
|-----|---------------------|--------------|-----------------|---------------------|
| 1 | 24 VDC Power Supply | Mean Well | p/n GS90A24-P1M | 100-240VAC, 50/60Hz |
| 2 | | | | |

3.2 Cables/Ports

| No. | Name | Type | Length | Shielding | Comments |
|-----|----------|-------|--------|-----------|------------------------|
| 1 | Ethernet | RG45 | 2m | Yes | Digital I/O Connection |
| 2 | USB | USB | 2m | No | |
| 3 | Serial | RS232 | 2m | No | |

3.3 Operating Condition of EUT

| Operation Modes | |
|-------------------------------------|---|
| <input type="checkbox"/> | Stand by |
| <input checked="" type="checkbox"/> | Continuous Monitored Operation |
| <input type="checkbox"/> | Continuous Unmonitored Operation |
| <input checked="" type="checkbox"/> | RFID reader was programmed for FHSS operation using RTS RFID software via Command Line Interface. |
| <input checked="" type="checkbox"/> | FCC Dense mode – 902.75-927.250MHz with 500KHz channels |
| <input checked="" type="checkbox"/> | FCC Band A - 902.75-912.100MHz with 200KHz channels |
| <input checked="" type="checkbox"/> | FCC Band B - 910.100-919.900MHz with 200KHz channels |
| <input checked="" type="checkbox"/> | FCC Band C - 917.900-927.700MHz with 200KHz channels |

3.4 Exercising of EUT

| No. | Description of EUT Exercising |
|-----|--|
| 1 | Transmitting at lowest, middle and highest channels of operation with un-modulated carrier |
| 2 | Transmitting with hopping channels enabled |
| 3 | Transmitting un-modulated carrier at maximum rated RF output power |



4.0 Test Conditions and Results

| 4.1 Conducted Emissions Data | | | | |
|---|---|--|-------------|----------|
| Method: | | The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN. | | |
| Test Verification: <input checked="" type="checkbox"/> | Laboratory Ambient Temperature | 21°C | | |
| | Relative Humidity | 35% | | |
| Reference Standard: | <input type="checkbox"/> ANSI C63.4:2003 <input checked="" type="checkbox"/> ANSI C63.4:2009 <input type="checkbox"/> ANSI C63.10:2013 <input checked="" type="checkbox"/> FCC Part 15.207/RSS Gen <input type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> | Measurement Point <input checked="" type="checkbox"/> Mains <input type="checkbox"/> Telecommunication ports <input type="checkbox"/> | | |
| Frequency Range: | <input checked="" type="checkbox"/> 150KHz to 30KHz <input type="checkbox"/> | | | |
| Nominal Voltage: | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> | | | |
| Tested By: | Mike Schultz <i>MS</i> Date: 05/22/2014 | | | |
| Limits | | | | |
| Frequency (MHz) | Limit dB (μ V) | | | |
| | Quasi-Peak | Average | Result | Comments |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 | pass | |
| 0.50 to 5 | 56 | 46 | pass | |
| 5 to 30 | 60 | 50 | pass | |

| | |
|-----------------------|--------------------------|
| Modifications: | <input type="checkbox"/> |
| Note: | |





| Frequency (MHz) | QP Line 1 dB (µV) | AVG Line 1 dB (µV) | QP Limit dB (µV) | AVG Limit dB (µV) | QP Margin dB | AVG Margin dB |
|-----------------|-------------------|---|------------------|-------------------|--------------|---------------|
| 0.17 | 42.23 | 36.78 | 64.92 | 54.92 | -22.70 | -18.14 |
| 0.27 | 42.50 | 38.23 | 61.07 | 51.07 | -18.57 | -12.84 |
| 0.36 | 43.97 | 42.54 | 58.70 | 48.70 | -14.73 | -6.16 |
| 0.45 | 47.02 | 45.74 | 56.89 | 46.89 | -9.87 | -1.15 |
| 0.63 | 40.94 | 35.81 | 56.00 | 46.00 | -15.06 | -10.19 |
| 14.39 | 39.15 | 32.09 | 60.00 | 50.00 | -20.85 | -17.91 |
| 14.59 | 41.08 | 32.14 | 60.00 | 50.00 | -18.92 | -17.86 |
| 15.06 | 38.83 | 30.78 | 60.00 | 50.00 | -21.17 | -19.22 |
| Frequency (MHz) | QP Line 2 dB (µV) | AVG Line 2 dB (µV) | QP Limit dB (µV) | AVG Limit dB (µV) | QP Margin dB | AVG Margin dB |
| 0.16 | 37.98 | 24.25 | 65.47 | 55.47 | -27.49 | -31.22 |
| 0.37 | 37.35 | 30.81 | 58.54 | 48.54 | -21.19 | -17.73 |
| 0.44 | 42.10 | 35.26 | 57.03 | 47.03 | -14.93 | -11.77 |
| 14.14 | 40.08 | 32.12 | 60.00 | 50.00 | -19.92 | -17.88 |
| 14.14 | 38.68 | 30.98 | 60.00 | 50.00 | -21.32 | -19.02 |
| 14.37 | 39.24 | 31.03 | 60.00 | 50.00 | -20.76 | -18.97 |
| 14.48 | 41.46 | 32.75 | 60.00 | 50.00 | -18.54 | -17.25 |
| 14.74 | 40.09 | 31.78 | 60.00 | 50.00 | -19.91 | -18.22 |
| Voltage | | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> | | | | |
| Notes | | | | | | |

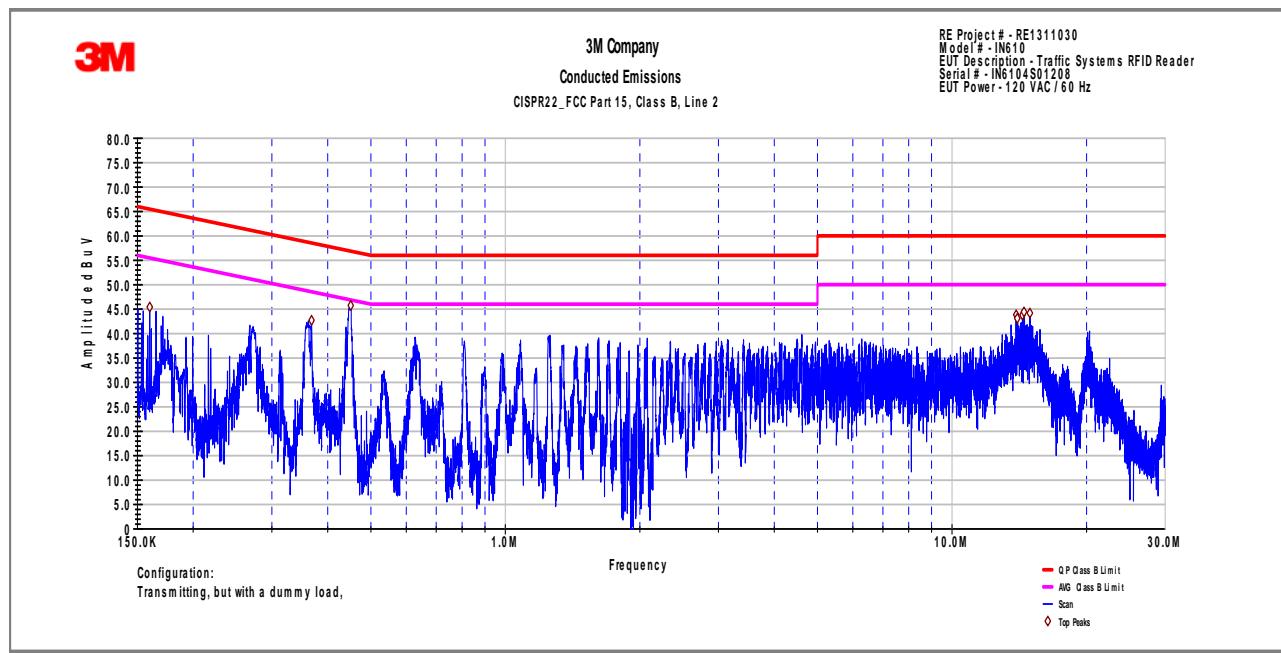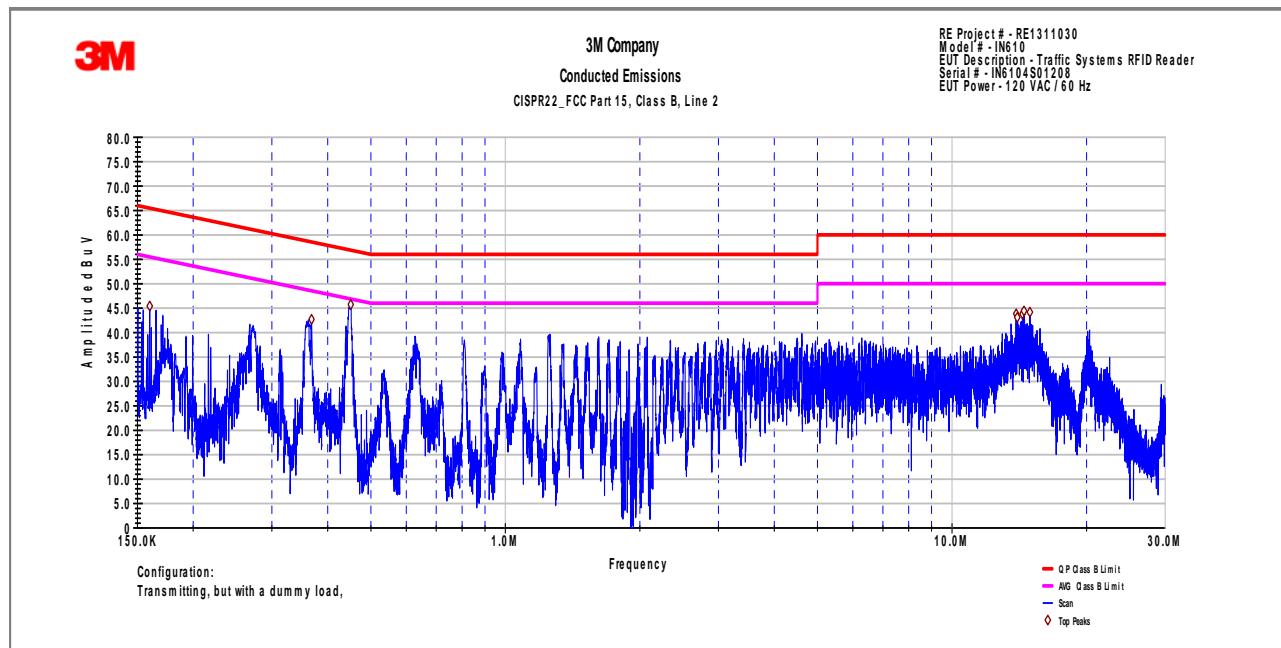

| 4.2 | | Radiated Emissions Data | | | | |
|---|---|---|--|-------------|--|--|
| Method: | Measurements were made in a 3-meter semi-anechoic chamber that complies to CISPR 16. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. | | | | | |
| Test Verification: <input checked="" type="checkbox"/> | | Laboratory Ambient Temperature | 23°C | | | |
| | | Relative Humidity | 35% | | | |
| Reference Standard: | | <input type="checkbox"/> ANSI C63.4:2003 <input checked="" type="checkbox"/> ANSI C63.4:2009 <input type="checkbox"/> ANSI C63.10:2013 <input checked="" type="checkbox"/> FCC Part 15.109/ICES 003 <input type="checkbox"/> FCC Part 15.247/RSS 210 <input checked="" type="checkbox"/> FCC Part 15.209 | Measurement Distance <input checked="" type="checkbox"/> 3 Meters <input type="checkbox"/>  | | | |
| Frequency Range: | | <input checked="" type="checkbox"/> 30 MHz TO 10GHz <input type="checkbox"/> | | | | |
| Nominal Voltage: | | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> | | | | |
| Tested By: | |  Mike Schultz  | Date: 05/28/2014 | | | |
| Limits | | | | | | |
| Frequency (MHz) | | Limit dB (μ V/m) | | | | |
| | | Quasi-Peak | Average | Distance | | |
| 0.009-0.490 | | 2400/F(KHz) | 300 | N/A | | |
| 0.490-1.705 | | 24000/F(KHz) | 30 | N/A | | |
| 1.705-30 | | 29.5 | 30 | N/A | | |
| 30 to 88 | | 40 | 3 | pass | | |
| 88-216 | | 43.5 | 3 | pass | | |
| 216-960 | | 46 | 3 | pass | | |
| Above 960 | | 54 | 3 | pass | | |
| Modifications: | |  | | | | |
| Note: | | For emission in the restricted bands, the limit of 15.209 was used. | | | | |

| Frequency (MHz) | Pol. | QP Reading dBμV/m | Total CF dB | Net at 3 m dBμV/m | Limit (dBμV/m) | Margin dB |
|----------------------------|-------------|---|------------------------|---|--------------------------------------|----------------------|
| 249.60 | H | 13.90 | 15.39 | 29.29 | 47.00 | -17.71 |
| 374.00 | H | 7.69 | 19.12 | 26.81 | 47.00 | -20.19 |
| 500.00 | H | 8.59 | 21.71 | 30.30 | 47.00 | -16.70 |
| 576.00 | H | 11.94 | 23.27 | 35.21 | 47.00 | -11.79 |
| 652.00 | H | 8.92 | 23.74 | 32.66 | 47.00 | -14.34 |
| 249.60 | H | 13.90 | 15.39 | 29.29 | 47.00 | -17.71 |
| | | | | | | |
| Notes | | Total CF = Antenna Factor + Cable Factor - AMP Gain | | | | |

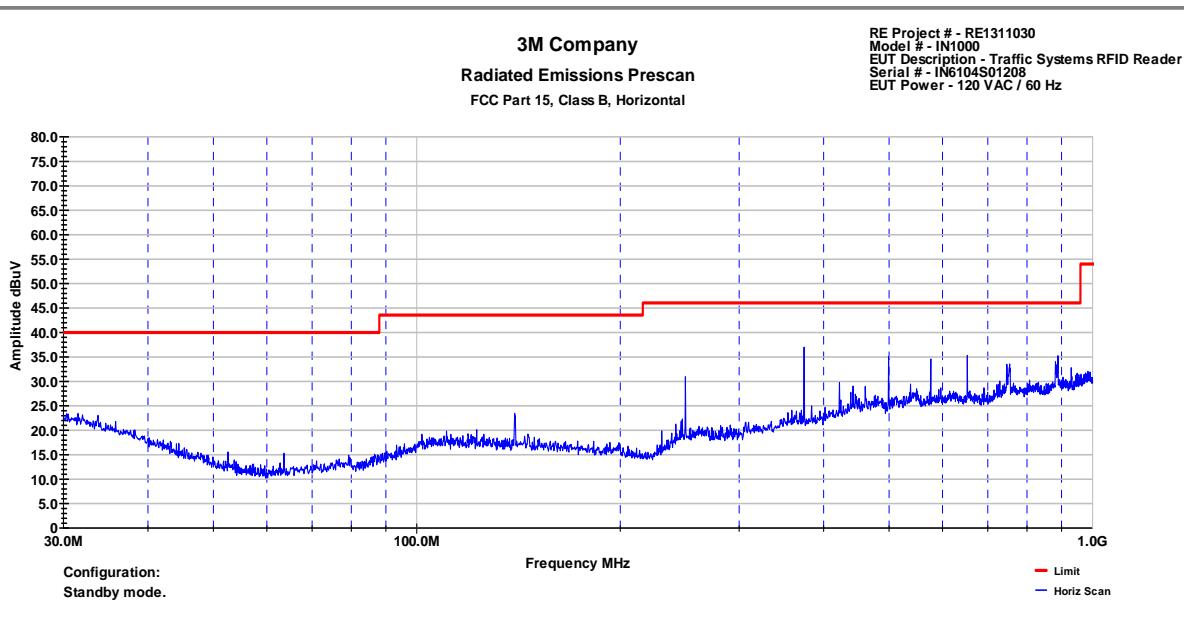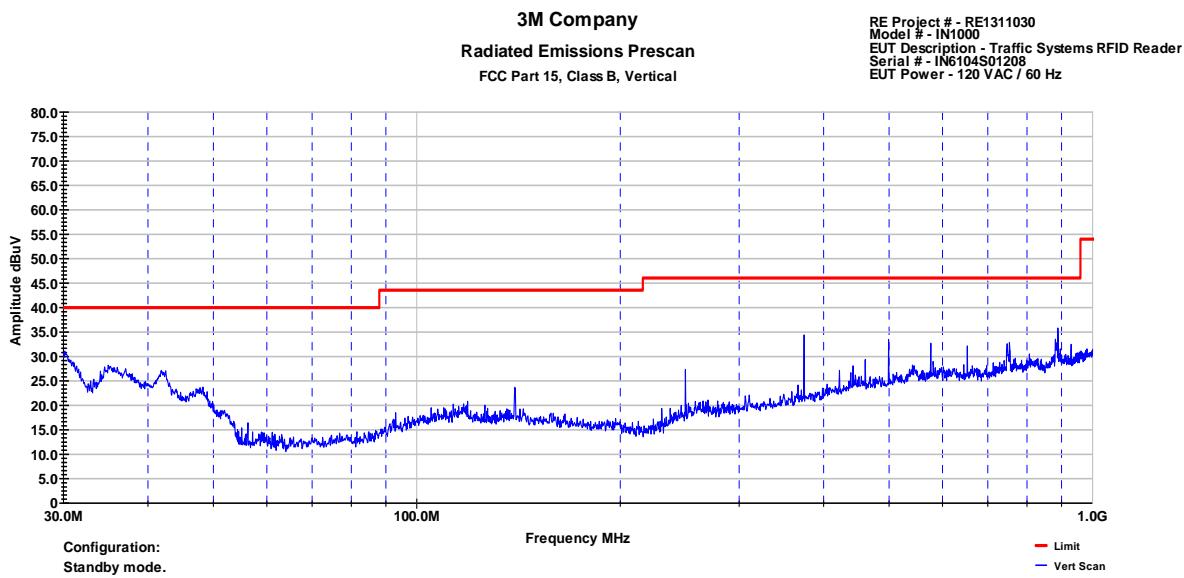




3M Company

FCC Part 15


RE 1GHz-18GHz, Vertical

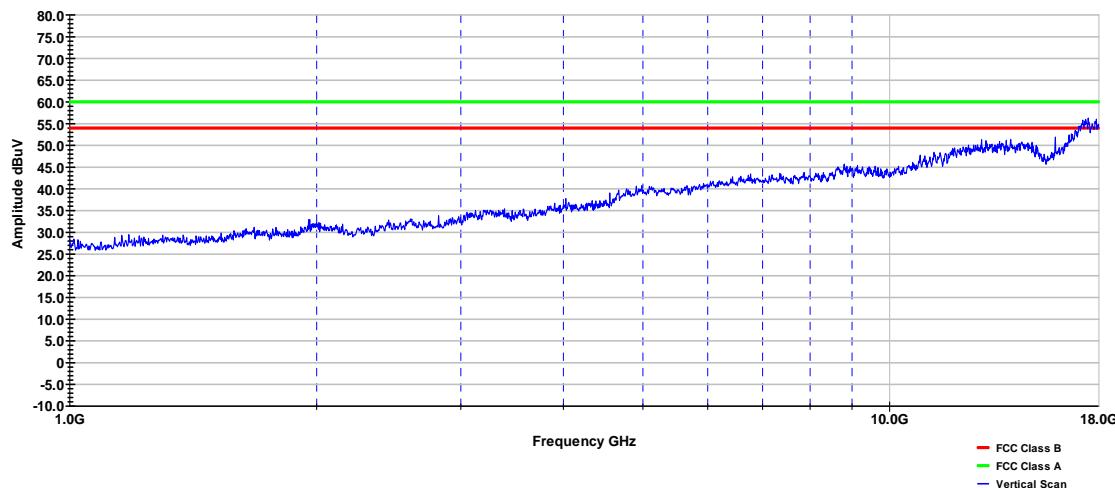RE Project # - RE1311030
Model # - IN1000
EUT Description - Traffic Systems RFID Reader
Serial # - IN6104S01208
EUT Power - 120 VAC / 60 Hz

3M Company

FCC Part 15


RE 1GHz-18GHz, Horizontal

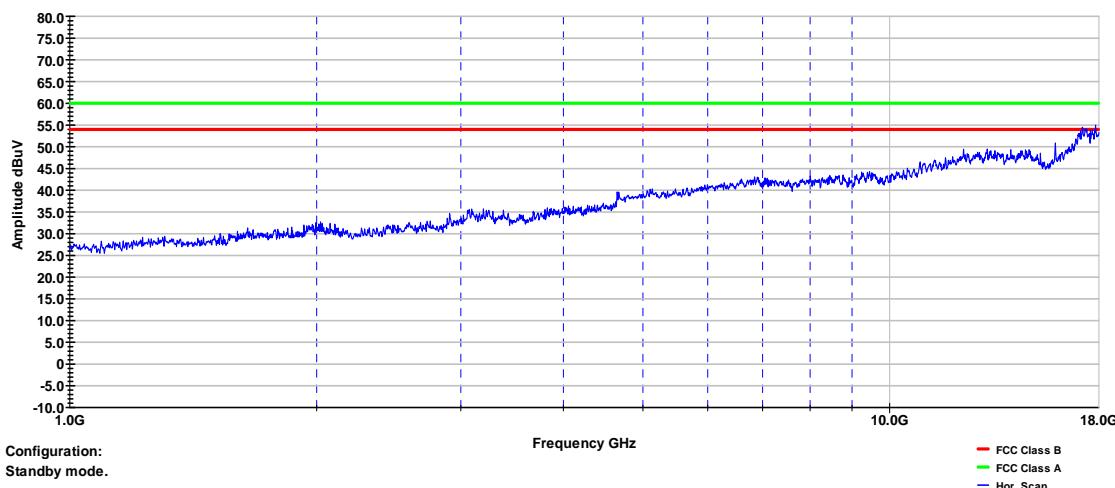RE Project # - RE1311030
Model # - IN1000
EUT Description - Traffic Systems RFID Reader
Serial # - IN6104S01208
EUT Power - 120 VAC / 60 Hz

| 4.3 Carrier Frequency Separation | | |
|----------------------------------|--|--|
| Method: | The measurements were made with transmitter set to transmit a continuously with hopping function enabled. The EUT antenna was removed and the cable was connected directly into the spectrum analyzer via 10dB attenuator. | |
| | Laboratory Ambient Temperature | 23°C |
| | Relative Humidity | 35% |
| Reference Standard: | <input type="checkbox"/> ANSI C63.4:2003 <input type="checkbox"/> ANSI C63.4:2009 <input checked="" type="checkbox"/> ANSI C63.10:2009 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input checked="" type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> FCC Part 15.209 | Measurement Point <input checked="" type="checkbox"/> Conducted <input type="checkbox"/> Radiated <input type="checkbox"/> |
| Frequency Range: | <input checked="" type="checkbox"/> 902.3-927.75MHz | |
| Antenna Gain: | <input checked="" type="checkbox"/> 6dBi | |
| Limit | <input type="checkbox"/> >25KHz <input checked="" type="checkbox"/> >20dB Bandwidth (110 KHz) | Dense Band A Band B Band C 499KHz 200KHz 200KHz 200KHz |
| Nominal Voltage: | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC | |
| Tested By: | Yuriy Litvinov | Date: 05/09/2014 |


Note:

The channel spacing was verified to be nominally 200KHz in Bands A, B and C. The dense mode utilizes 50 channels and the channel spacing in this mode was measured to be 500KHz.

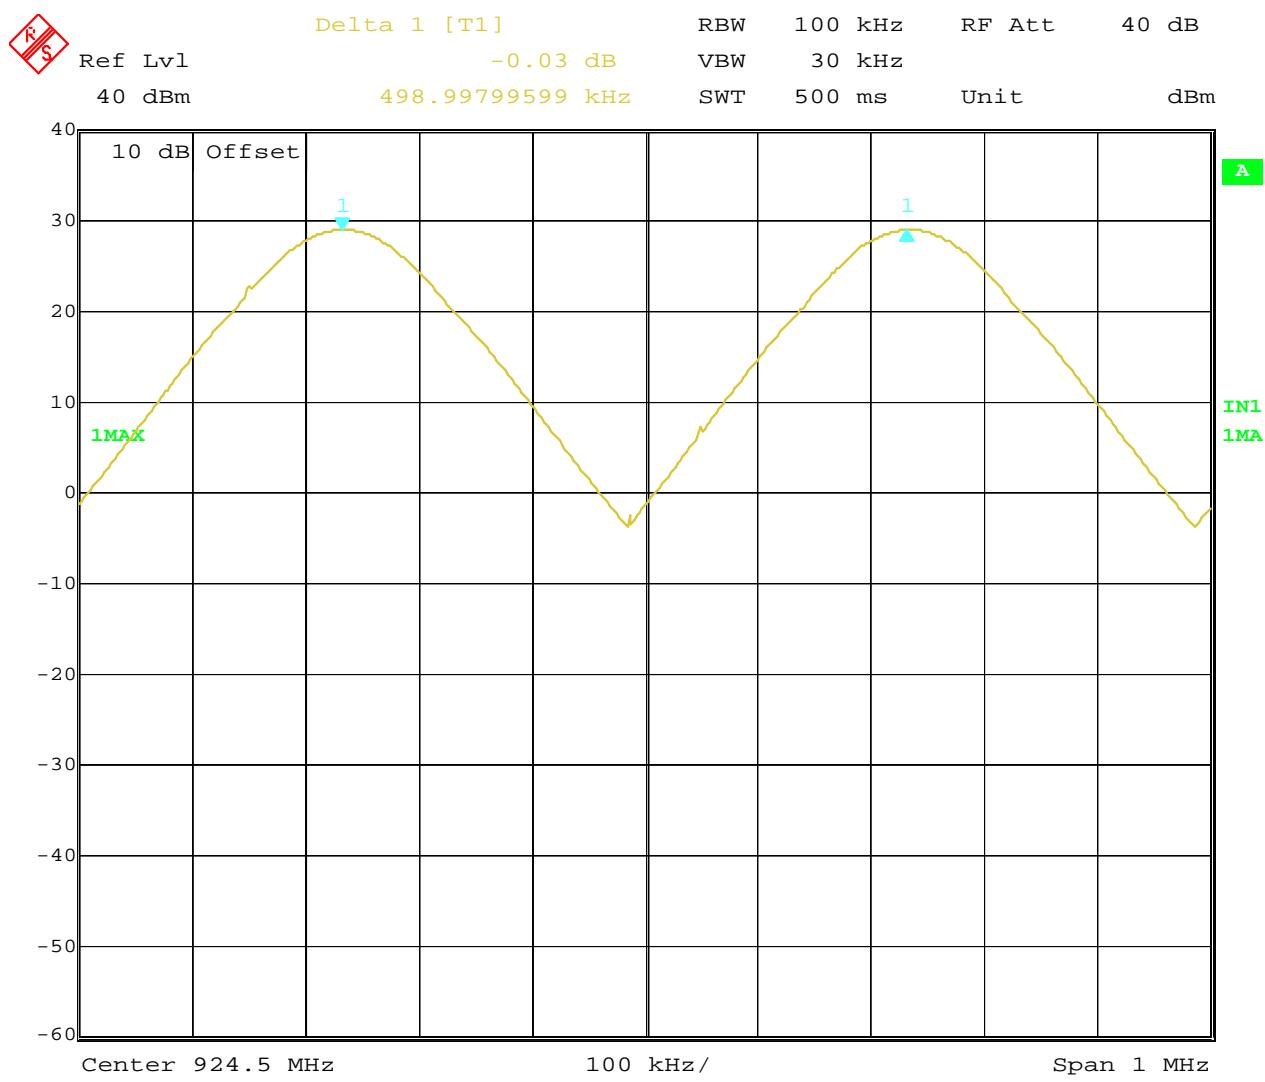


Date: 9.MAY.2014 13:55:26


Carrier Frequency Separation – Dense Mode

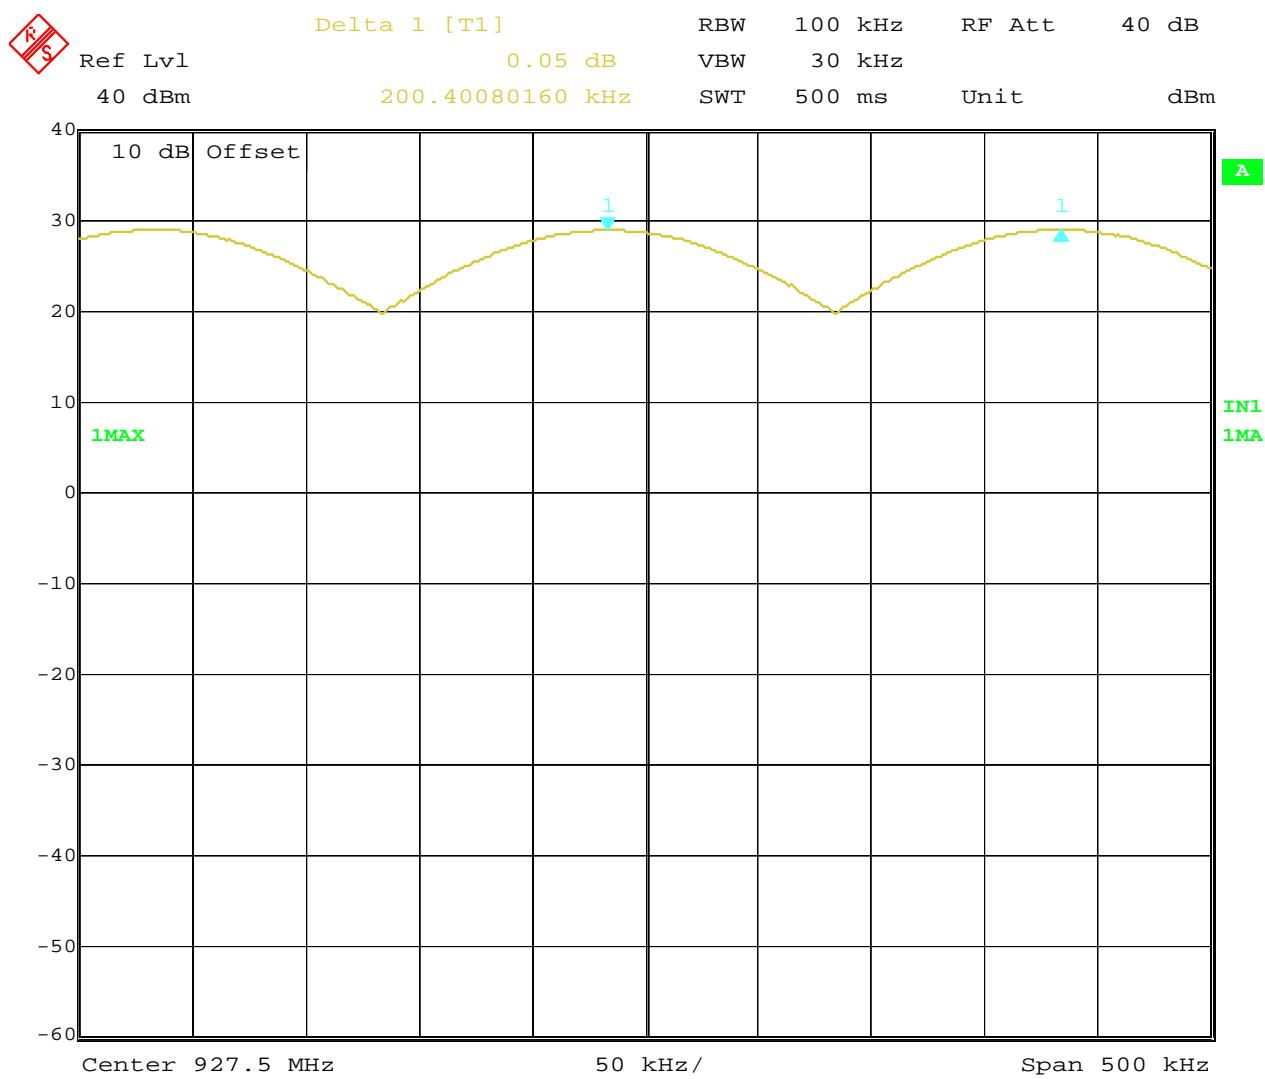

Carrier Frequency Separation – Band C

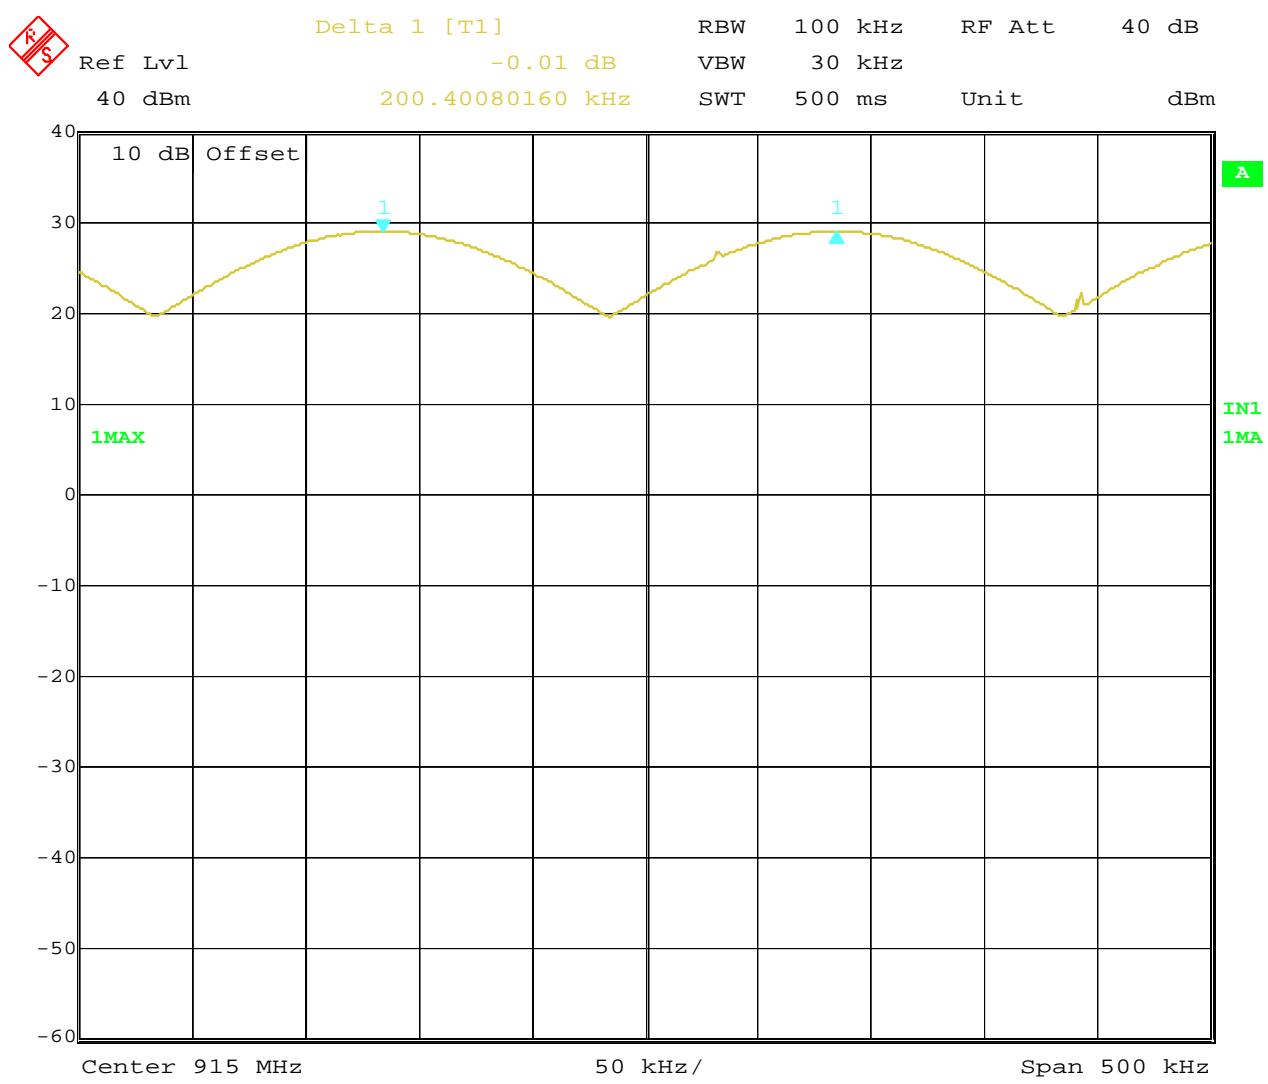


Carrier Frequency Separation – Band B

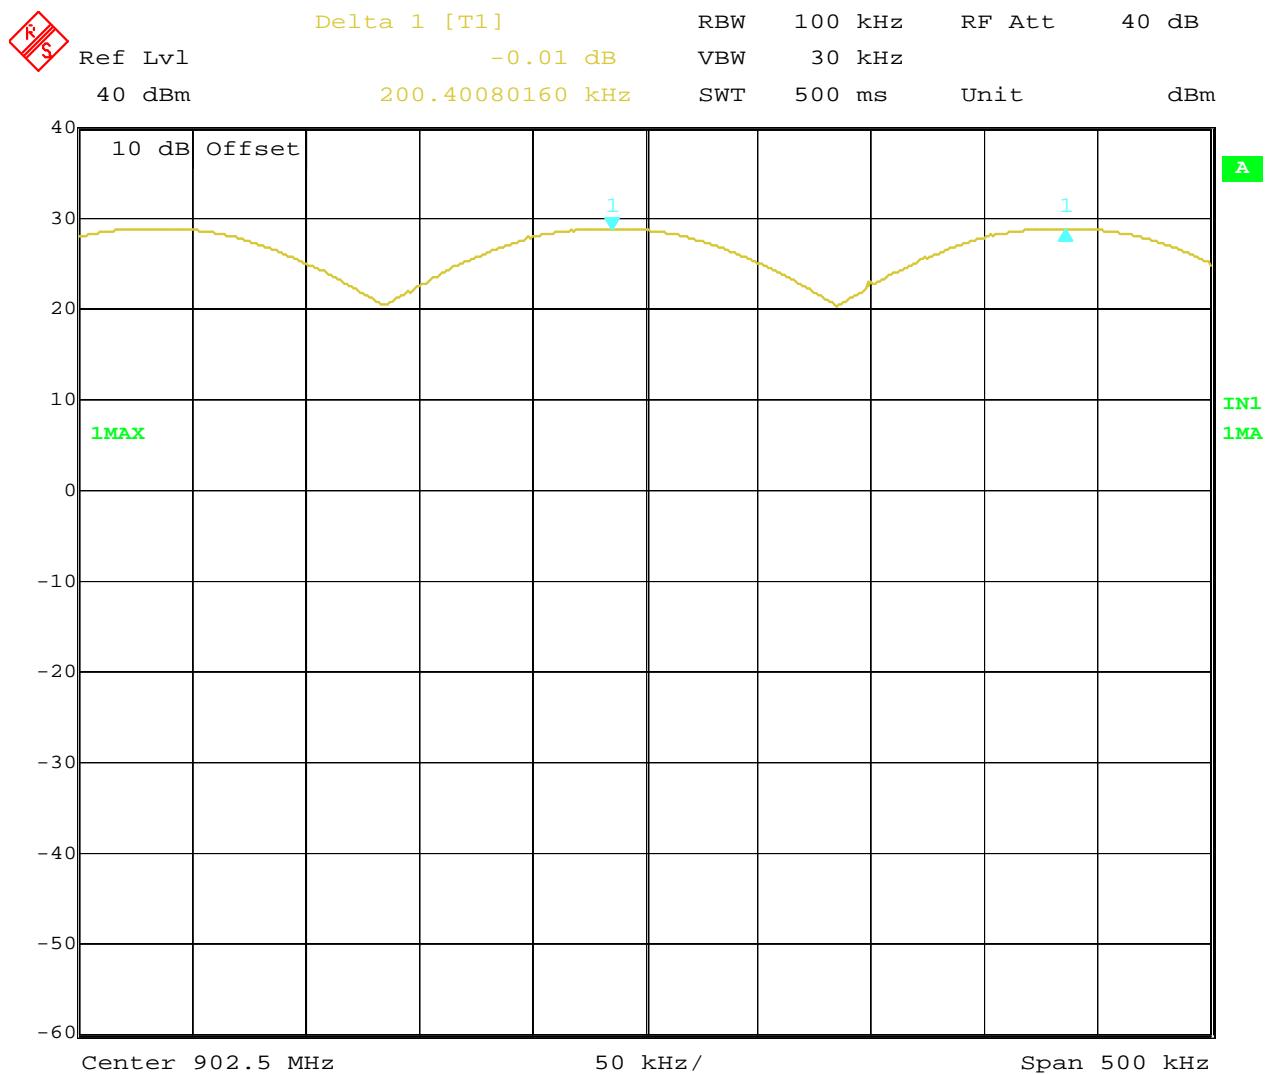

Carrier Frequency Separation – Band A


| 4.4 Number of Hopping Frequencies | | | |
|-----------------------------------|--|--|---------------|
| Method: | The measurements were made with transmitter set to transmit a continuously with hopping function enabled. The EUT antenna was removed and the cable was connected directly into the spectrum analyzer via 10dB attenuator. | | |
| | Laboratory Ambient Temperature | 23°C | |
| | Relative Humidity | 35% | |
| Reference Standard: | <input type="checkbox"/> ANSI C63.4:2009 <input checked="" type="checkbox"/> ANSI C63.10:2013 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input checked="" type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> FCC Part 15.209 | Measurement Point <input checked="" type="checkbox"/> Conducted <input type="checkbox"/> Radiated <input type="checkbox"/> | |
| Frequency Range: | <input checked="" type="checkbox"/> 902.3-927.75MHz | | |
| Antenna Gain: | <input checked="" type="checkbox"/> 6dBi | Number of Channels | Result |
| Limit | <input checked="" type="checkbox"/> > 50 Hopping Channels, BW <250KHz | 50 | Pass |
| | <input checked="" type="checkbox"/> >25 Hopping Channels, BW >250KHz | | |
| Nominal Voltage: | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC | | |
| Tested By: | Yuriy Litvinov | Date: 05/08/2014 | |

| | |
|-------|---|
| Note: |  |
|-------|---|

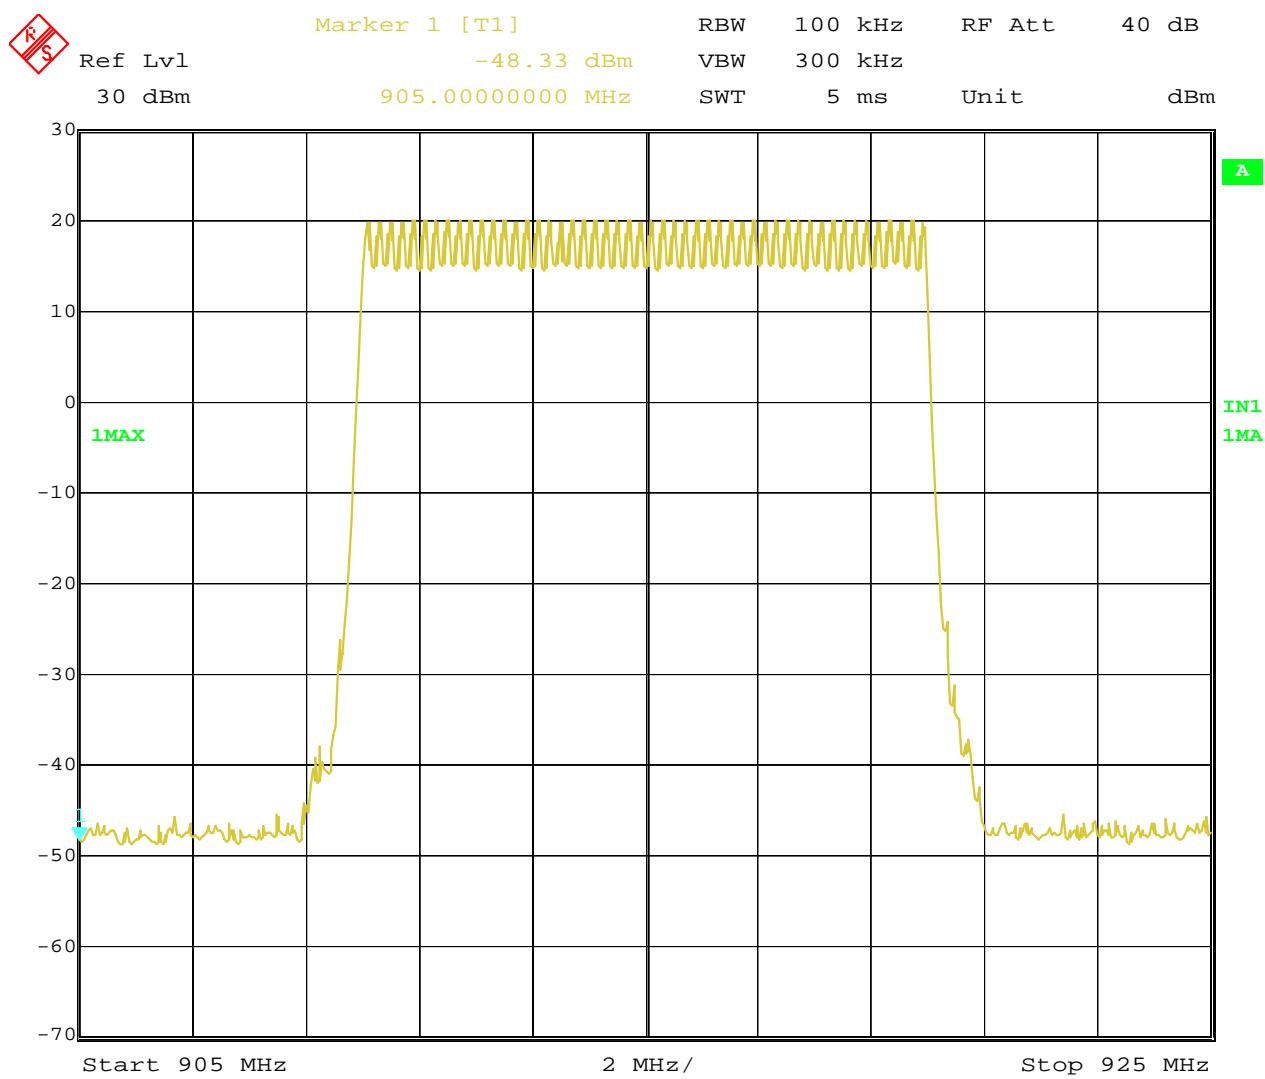


Date: 8.MAY.2014 15:33:15

Number of Channels – Band B

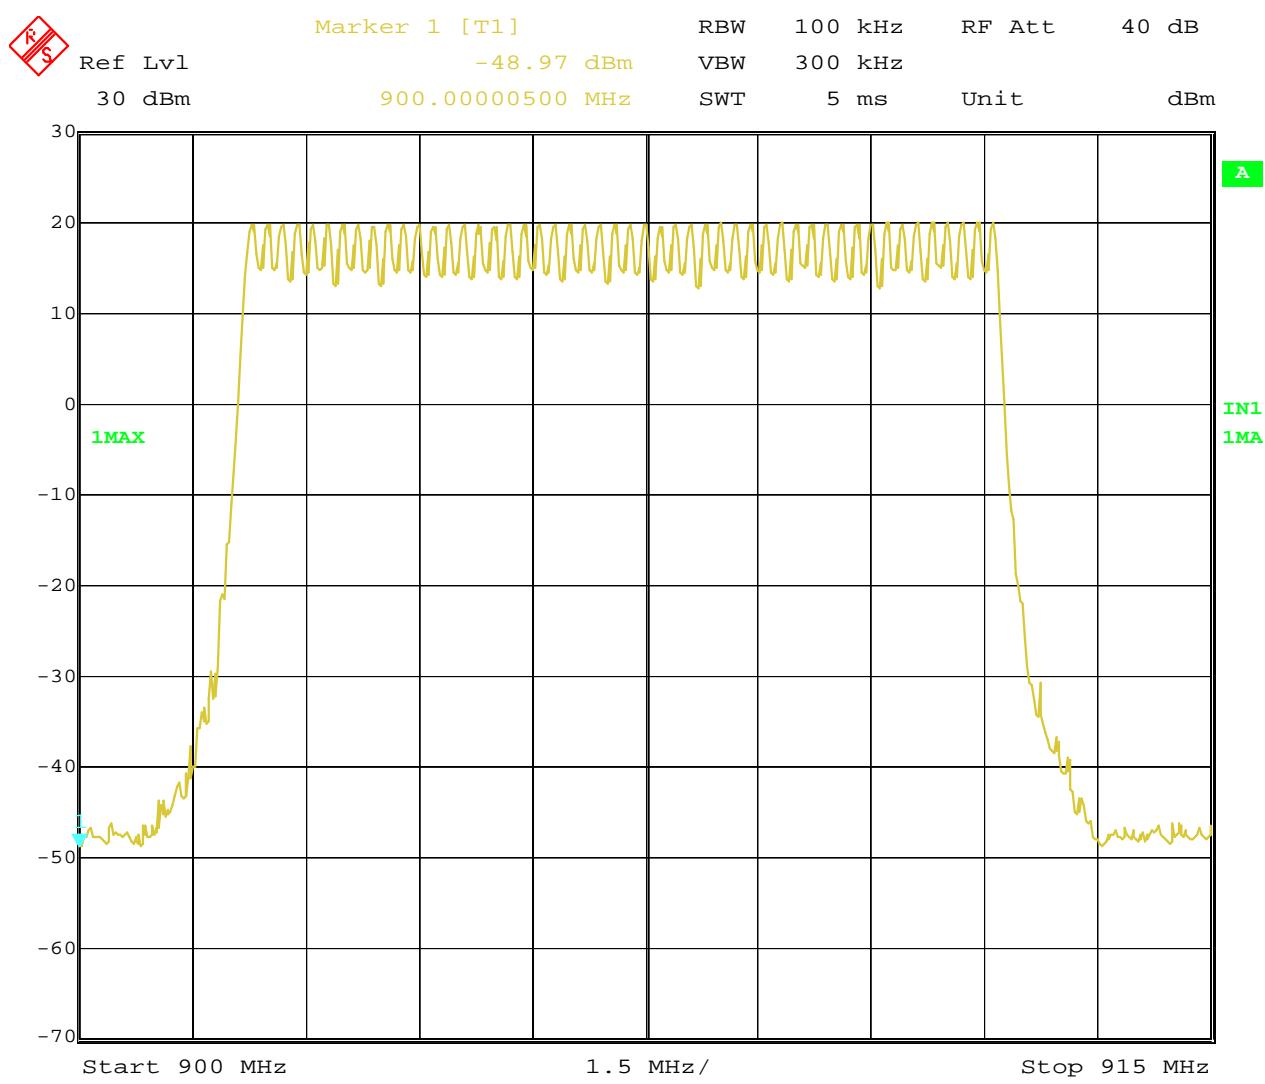

Number of Channels – Band A

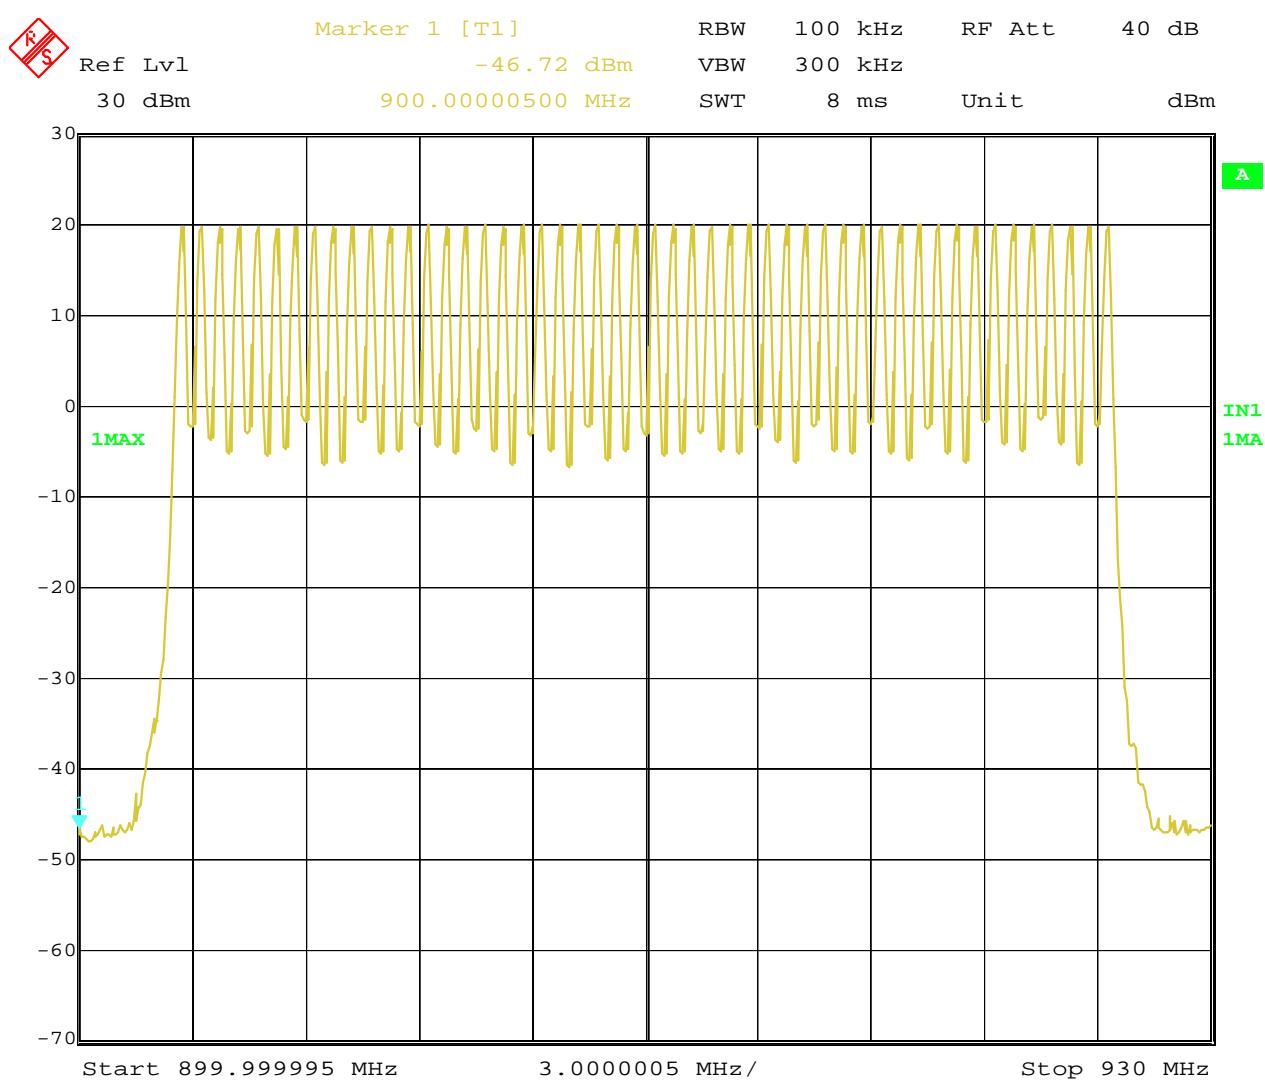


Date: 8.MAY.2014 15:28:37


Number of Channels – Dense Mode

| 4.5 Time of Occupancy | | |
|----------------------------|--|--|
| Method: | The measurements were made with transmitter set to transmit continuously with hopping function enabled. The EUT antenna was removed and the cable was connected directly into the spectrum analyzer via 10dB attenuator. | |
| | Laboratory Ambient Temperature | 23°C |
| | Relative Humidity | 35% |
| Reference Standard: | <input type="checkbox"/> ANSI C63.4:2009 <input checked="" type="checkbox"/> ANSI C63.10:2013 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input checked="" type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> FCC Part 15.209 | Measurement Point <input checked="" type="checkbox"/> Conducted <input type="checkbox"/> Radiated <input type="checkbox"/> |
| Frequency Range: | <input checked="" type="checkbox"/> 902.3-927.25MHz | |
| Antenna Gain: | <input type="checkbox"/> | |
| Limit (dwell time): | <input checked="" type="checkbox"/> 20dB<250KHz <input checked="" type="checkbox"/> 20dB>250KHz | <input checked="" type="checkbox"/> <0.4 sec within a period of 20s <input checked="" type="checkbox"/> <0.4 sec within a period of 10s |
| Nominal Voltage: | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC | |
| Tested By: | Yuriy Litvinov | Date: 10/09/2014 |


| | |
|--------------|---|
| Note: | Tested worst case using PR-ASK/DSB-ASK protocols. Single pulse duration is 290.0ms in a 10s/20s sweep period 1 pulse occurs, and therefore the total on time is 290.0 ms |
|--------------|---|

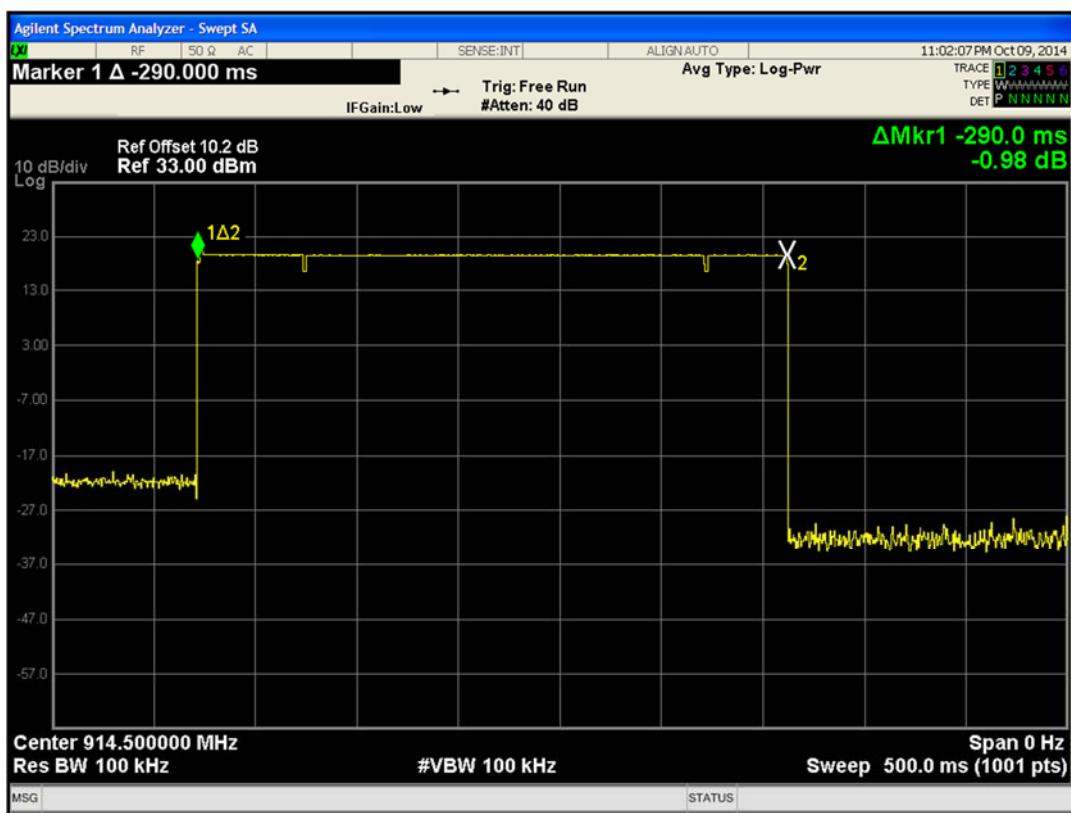

Duty Cycle

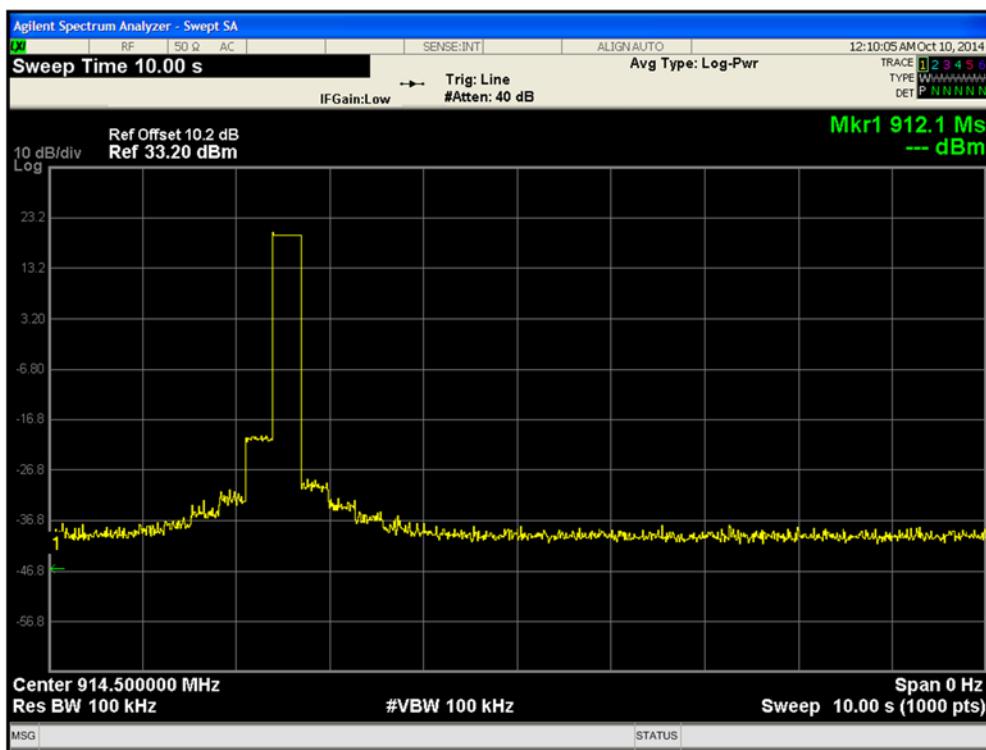

Total on Time – 20dB >250KHz

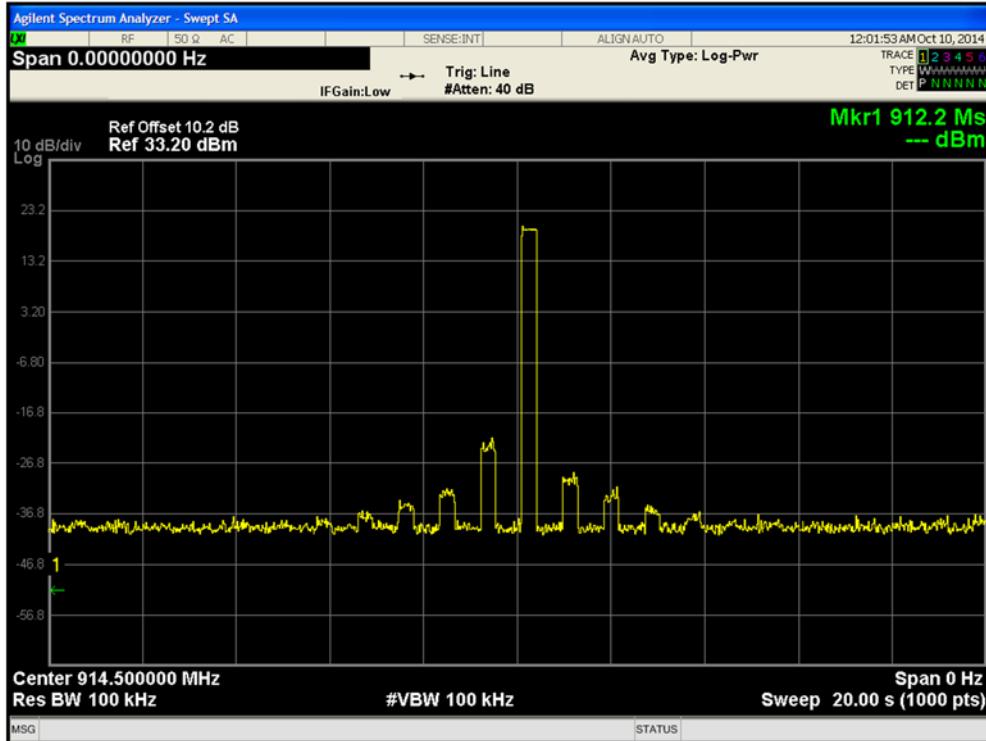


Total on Time – 20dB <250KHz

| 4.6 20dB Bandwidth | | |
|----------------------------|---|--|
| Method: | The measurements were made with transmitter set to transmit continuously modulated signal at low, mid and high channels. The marker delta method was used to determine the 20dB bandwidth. | |
| | Laboratory Ambient Temperature | 23°C |
| | Relative Humidity | 35% |
| Reference Standard: | <input type="checkbox"/> ANSI C63.4:2009 <input checked="" type="checkbox"/> ANSI C63.10:2013 <input checked="" type="checkbox"/> DA 00-705 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input checked="" type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> FCC Part 15.209 | Measurement Point <input checked="" type="checkbox"/> Conducted <input type="checkbox"/> Radiated <input type="checkbox"/> |
| Frequency Range: | <input checked="" type="checkbox"/> 902.3-927.75MHz | |
| Antenna Gain: | <input type="checkbox"/> [redacted] | |
| Nominal Voltage: | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC | |
| Tested By: | Yuriy Litvinov | Date: 10/09/2014 |


| | |
|--------------|---|
| Note: | The worst case modulations used by the device have been reported. |
|--------------|---|

| Frequency (MHz) (PR-ASK) | 20 dB Bandwidth (KHz) | Limit (KHz) | Results |
|-----------------------------|--------------------------|----------------|---------|
| 902.3 | 110.7 | 500 | pass |
| 914.5 | 108.2 | 500 | pass |
| 927.75 | 108.2 | 500 | pass |


| Frequency (MHz) (DSB-ASK) | 20 dB Bandwidth (KHz) | Limit (KHz) | Results |
|------------------------------|--------------------------|----------------|---------|
| 902.3 | 282 | 500 | pass |
| 914.5 | 282 | 500 | pass |
| 927.75 | 282 | 500 | pass |

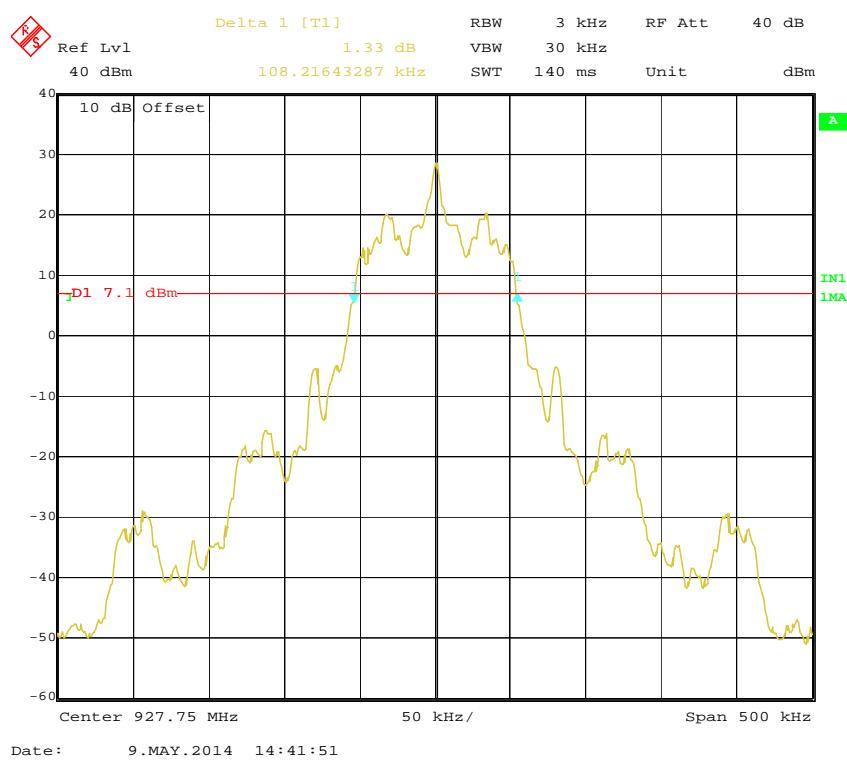


20dB BW Low Channel

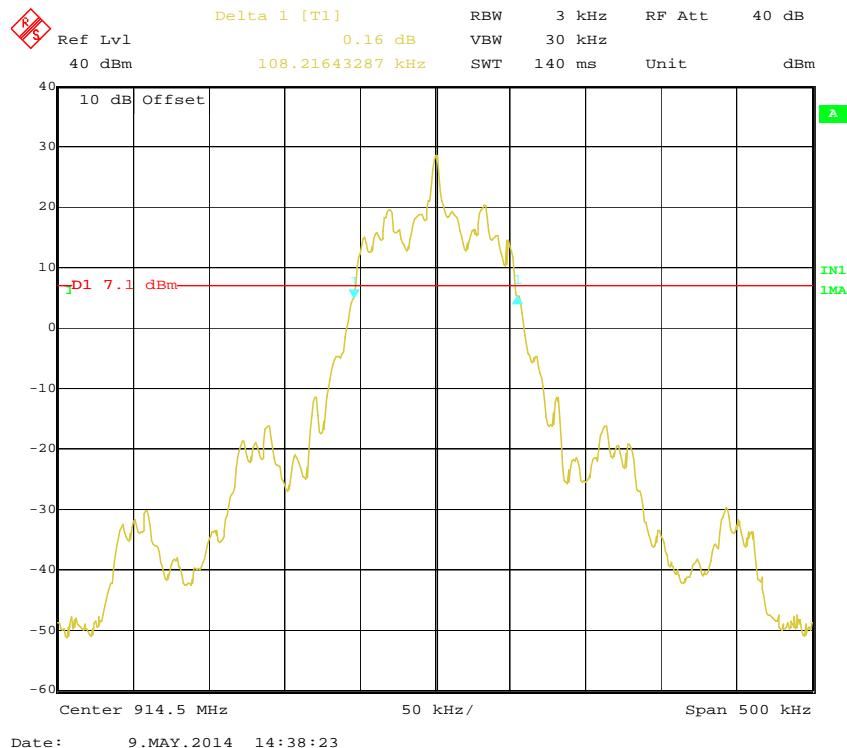


20dB BW Mid Channel

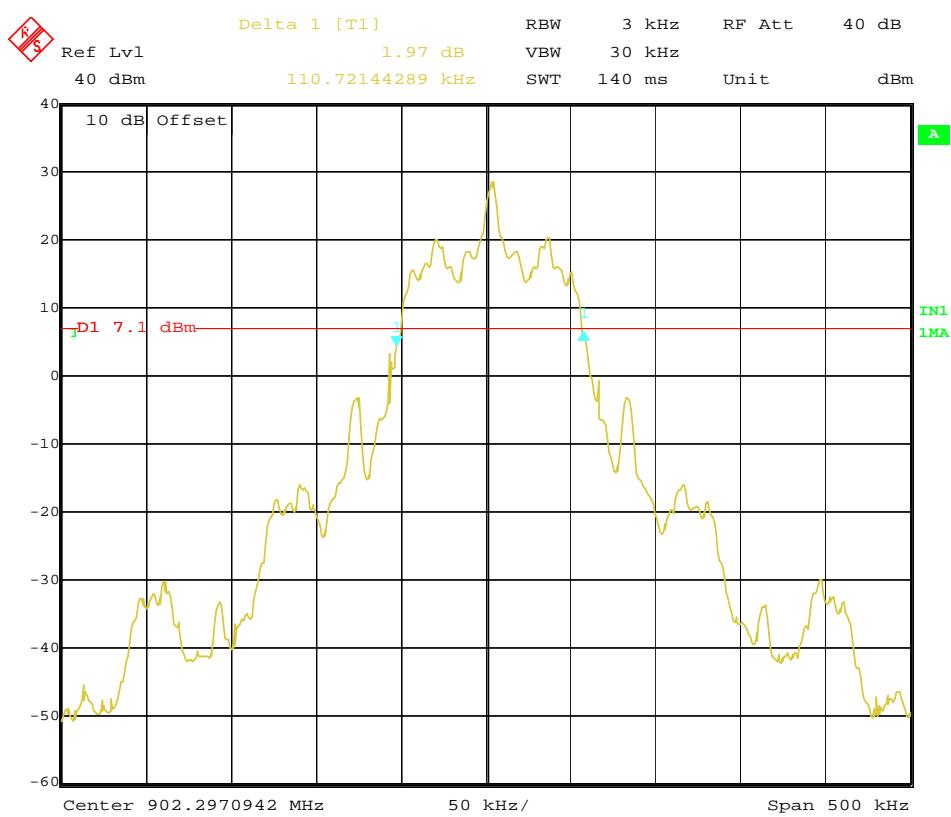


20dB BW High Channel

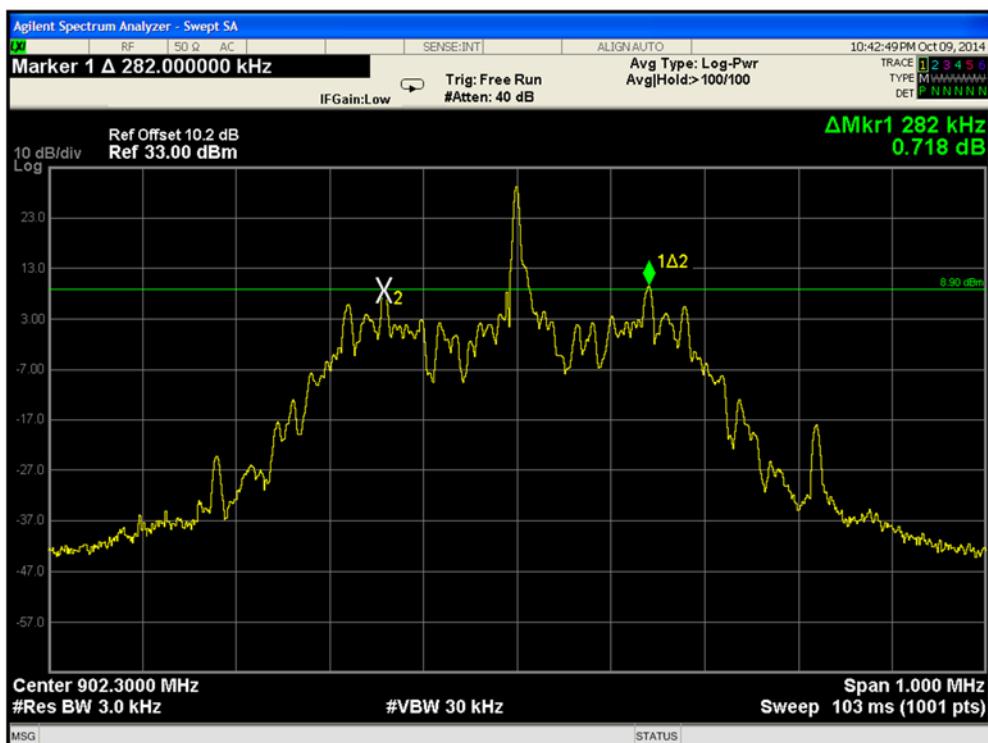

20dB BW Low Channel

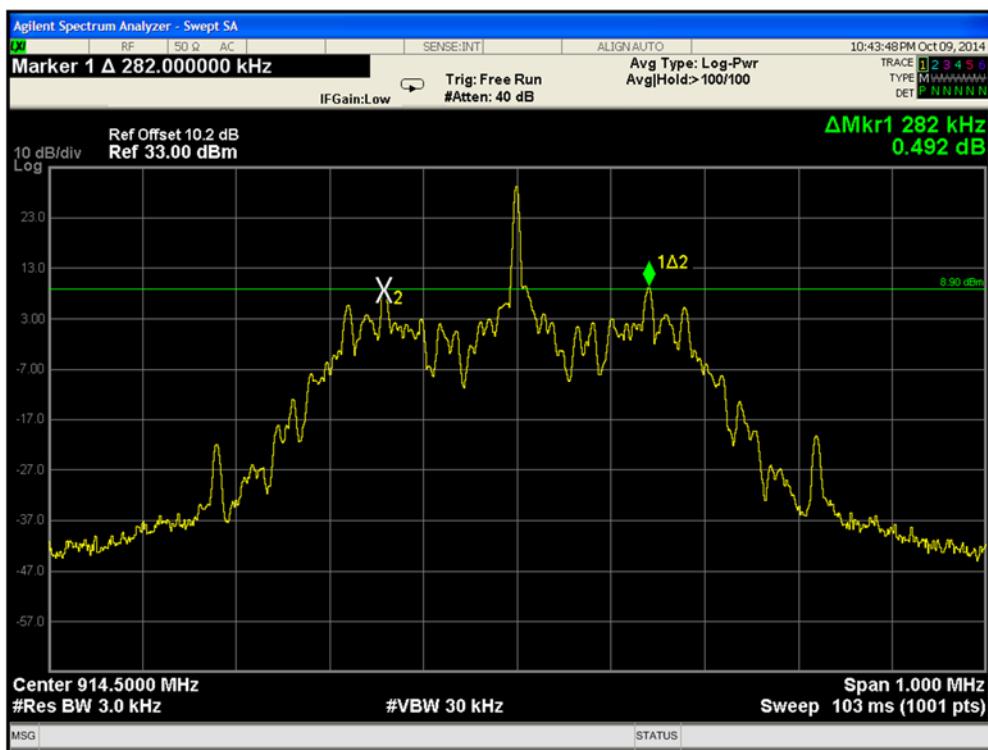


20dB BW Mid Channel

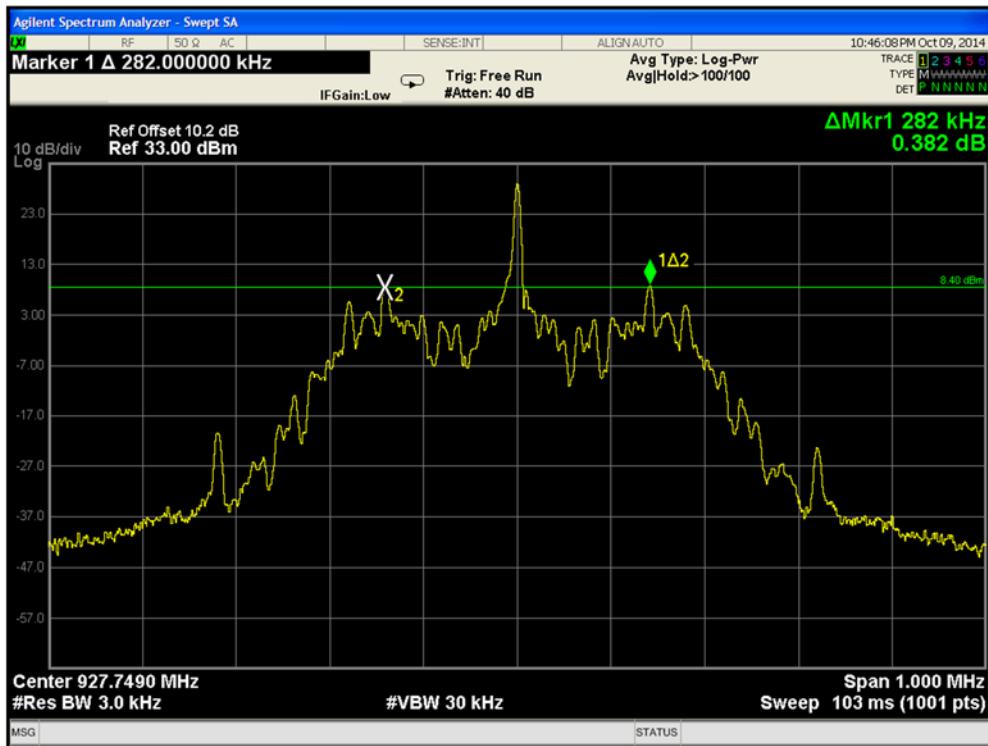


20dB BW High Channel

| 4.7 Band-Edge Compliance | | |
|----------------------------|--|--|
| Method: | The measurements were made with transmitter set to transmit continuously with un-modulated signal and hopping enabled at low and high channels. The marker delta method was used to determine band-edge compliance. | |
| | Laboratory Ambient Temperature | 23°C |
| | Relative Humidity | 35% |
| Reference Standard: | <input type="checkbox"/> ANSI C63.4:2009 <input checked="" type="checkbox"/> ANSI C63.10:2013 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input checked="" type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> FCC Part 15.209 | Measurement Point <input checked="" type="checkbox"/> Conducted <input type="checkbox"/> Radiated <input type="checkbox"/> |
| Frequency Range: | <input checked="" type="checkbox"/> 902.3-927.75MHz | |
| Antenna Gain: | <input checked="" type="checkbox"/> 6dBi | Results |
| Limit | <input checked="" type="checkbox"/> >20dBc <input type="checkbox"/> FCC Part 15.209 | ➤ 34dBc |
| Nominal Voltage: | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC | |
| Tested By: | Yuriy Litvinov | Date: 05/09/2014 |

| | |
|-------|--|
| Note: | |
|-------|--|

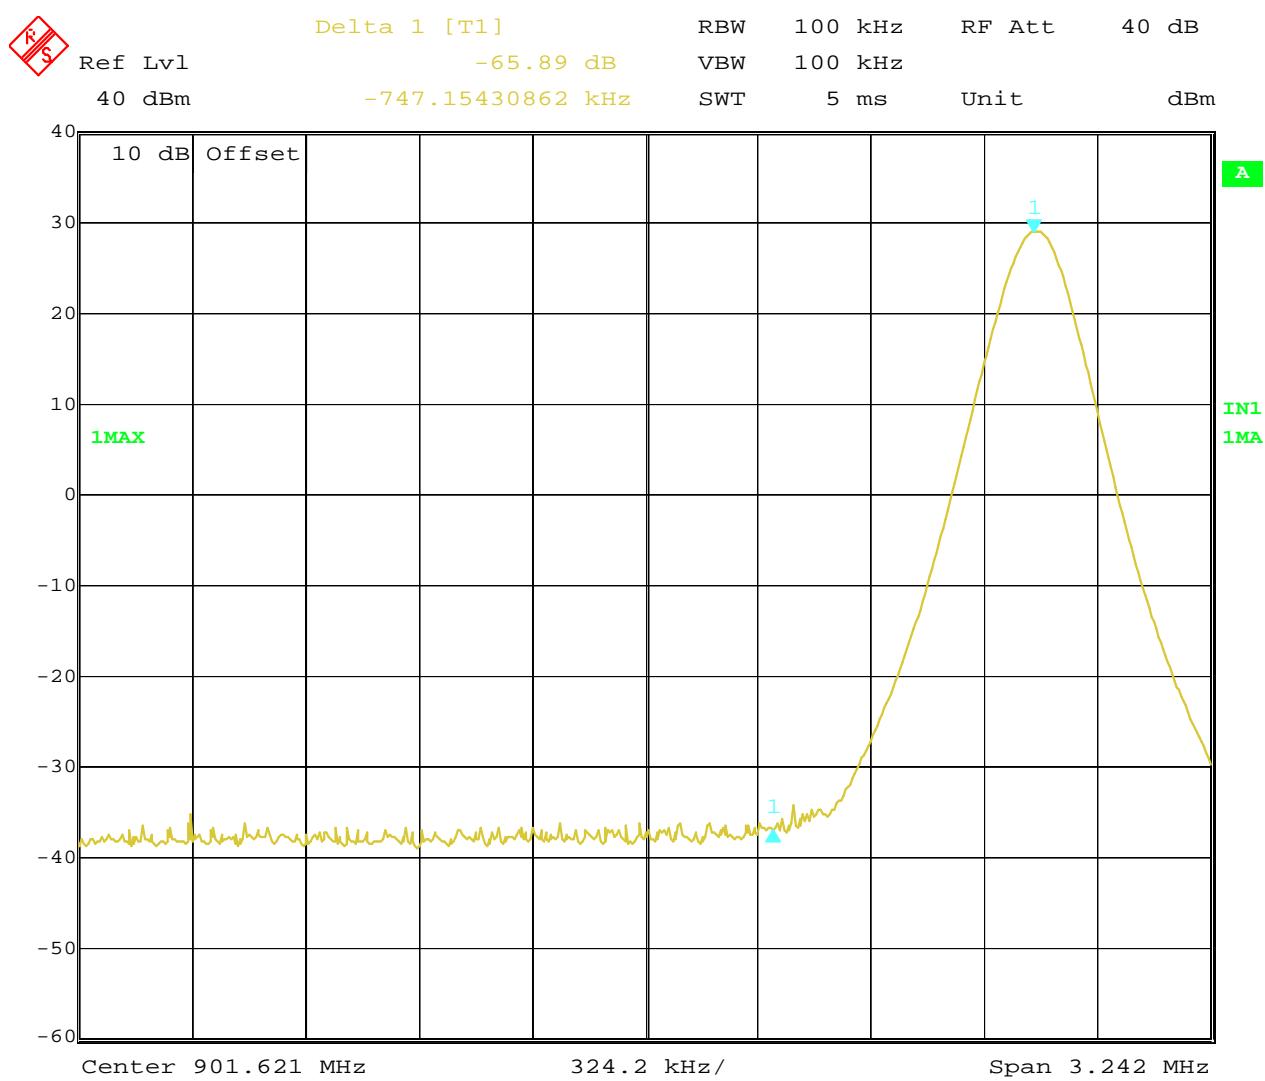

Date: 9.MAY.2014 15:04:13

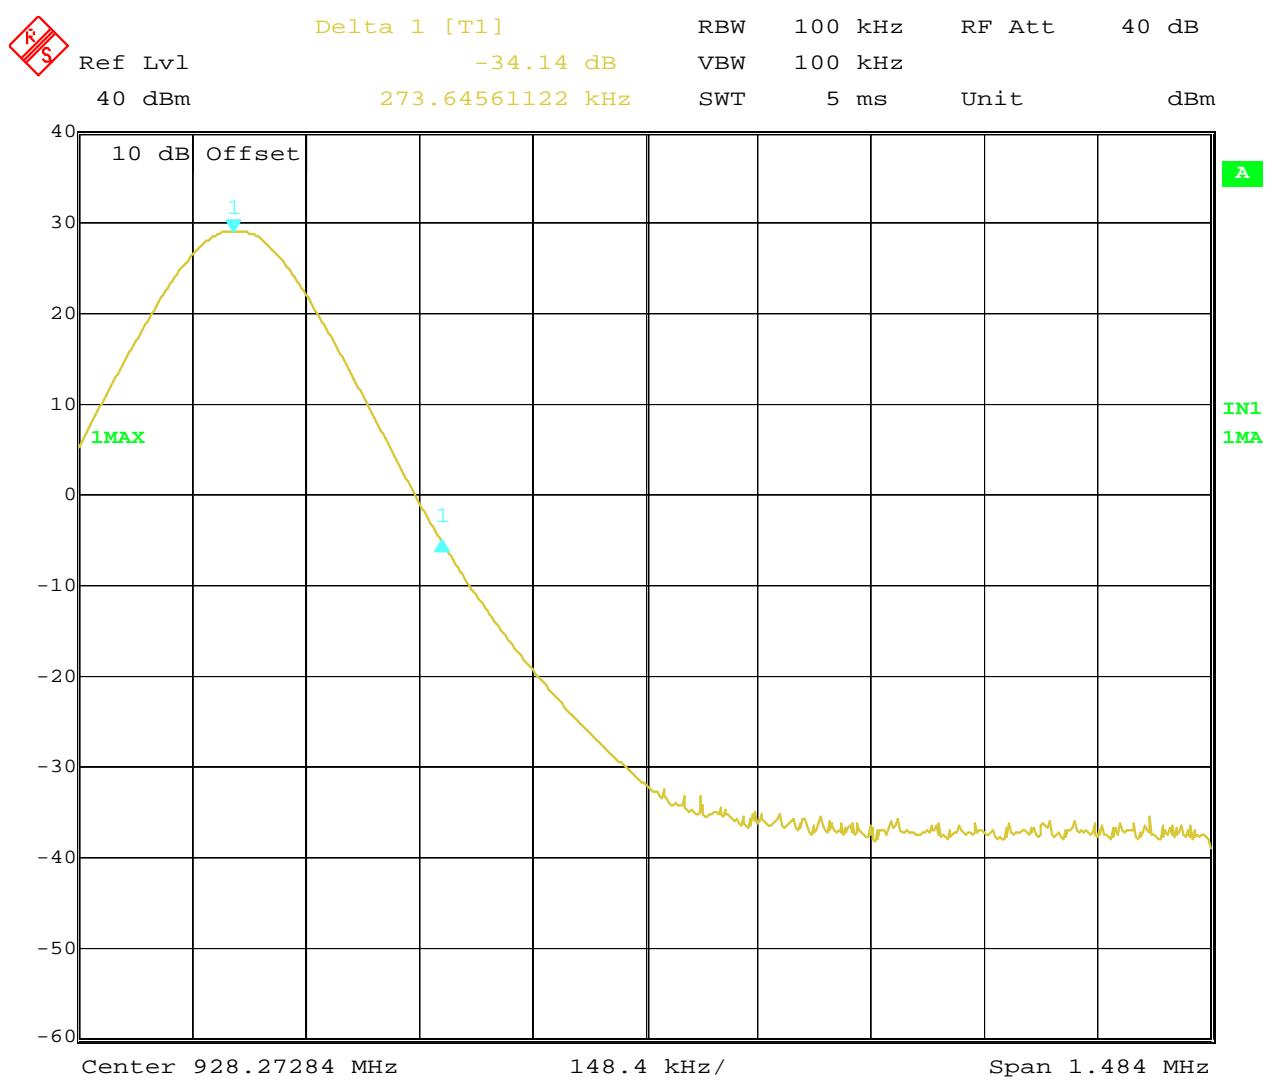

Date: 9.MAY.2014 14:58:23

| 4.8 | | Conducted Output Power | |
|----------------------------|--|--|--|
| Method: | | Measurements was performed with an un-modulated carrier at the highest power level at which the transmitter is intended to operate. The transmitter was configured to operate lowest, middle and highest power channels and connected to an antenna port. The carrier or mean power delivered to antenna was measured under normal test conditions. The analyzer offset was adjusted to compensate for the attenuator and other losses. The RF Power output listed in the table is the power delivered to the antenna. | |
| | | Laboratory Ambient Temperature | |
| | | 23°C | |
| | | Relative Humidity | |
| | | 55% | |
| Reference Standard: | | <input type="checkbox"/> ANSI C63.4:2009 <input checked="" type="checkbox"/> ANSI C63.10:2013 <input checked="" type="checkbox"/> FCC Part 15.247/RSS 210 <input type="checkbox"/> FCC Part 15.209 | |
| Frequency Range: | | <input checked="" type="checkbox"/> 902.3-927.75MHz | |
| Antenna Gain: | | <input type="checkbox"/> [REDACTED] | |
| Limit | | ≥50 Hopping Channels | |
| | | <input checked="" type="checkbox"/> 30dBm <input type="checkbox"/> [REDACTED] | |
| | | <input type="checkbox"/> 24dBm <input checked="" type="checkbox"/> [REDACTED] | |
| Nominal Voltage: | | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC | |
| Tested By: | | Date: 05/08/2014 | |

| Antenna Port | Channels Frequency (MHz) | Power Output Conducted (dBm) | Limit (dBm) | Results |
|--------------|--------------------------|------------------------------|-------------|-------------|
| 1 | 902.3 | 29.35 | 30 | pass |
| | 914.5 | 29.55 | 30 | pass |
| | 927.7 | 29.45 | 30 | pass |
| 2 | 902.3 | 29.40 | 30 | pass |
| | 914.5 | 29.54 | 30 | pass |
| | 927.7 | 29.51 | 30 | pass |
| 3 | 902.3 | 29.40 | 30 | pass |
| | 914.5 | 29.42 | 30 | pass |
| | 927.7 | 29.55 | 30 | pass |
| 4 | 902.3 | 29.51 | 30 | pass |
| | 914.5 | 29.47 | 30 | pass |
| | 927.7 | 29.43 | 30 | pass |

| | |
|--------------|--|
| Note: | Worst case modulation used by the device. $EIRP_{max} = P_{max}(dBm) + \text{Antenna Gain}(dBi) = 29.55dBm + 6dBi = 35.55dBm$ KDB 594280 - Professional installation. Authorized service personnel is required to configure radio parameters of RFID Reader using the software for adjusting total EIRP power at local installation to ensure compliance with FCC Rules. |
|--------------|--|

| 4.9 Transmitter spurious emissions | | | | |
|------------------------------------|--|-------------|----------|-------------|
| Method: | The measurements were made with transmitter set to transmit continuously with un-modulated signal and hopping enabled at low, mid and high channels. The level of spurious emissions was measured as conducted spurious emission and radiated power that falls in a restricted band. EUT was rotated through three orthogonal axes to determine which attitude (orientation) and arrangement produces the highest emission relative to the limit; the attitude and headset arrangement that produces the highest emission relative to the limit was used in making final radiated emission measurements. EUT was rotated 360 deg and radiated emissions was measured while the headset situated in three orthogonal planes with the measurement antenna set up in vertical and horizontal polarization. Spurious Radiated emissions measurements were performed with external preamp and a high pass filter. | | | |
| | Laboratory Ambient Temperature | | | |
| | 23°C | | | |
| | Relative Humidity | | | |
| | 35% | | | |
| Reference Standard: | <input type="checkbox"/> ANSI C63.4:2009 <input checked="" type="checkbox"/> ANSI C63.10:2013 <input type="checkbox"/> FCC Part 15.109/ICES 003 <input checked="" type="checkbox"/> FCC Part 15.247/RSS 210 <input checked="" type="checkbox"/> FCC Part 15.209 | | | |
| | Measurement Point <input checked="" type="checkbox"/> Conducted <input checked="" type="checkbox"/> Radiated | | | |
| Frequency Range: | <input checked="" type="checkbox"/> 902.3-927.75Mhz | | | |
| Limit | <input checked="" type="checkbox"/> >20dBc <input checked="" type="checkbox"/> FCC Part 15.209 | | | |
| | Restricted Band <input checked="" type="checkbox"/> 15.205 | | | |
| Nominal Voltage: | <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> VDC | | | |
| Tested By: | Mike Schultz  | | | |
| | Date: 05/28/2014 | | | |
| Limits | | | | |
| Frequency (MHz) | Limit dB (μ V/m) | | | |
| | Quasi-Peak | Average | Distance | Results |
| 0.009-0.490 | | 2400/F(KHz) | 300 | N/A |
| 0.490-1.705 | 24000/F(KHz) | | 30 | N/A |
| 1.705-30 | 29.5 | | 30 | N/A |
| 30 to 88 | 40 | | 3 | pass |
| 88-216 | 43.5 | | 3 | pass |
| 216-960 | 46 | | 3 | pass |
| Above 960 | | 54 | 3 | pass |
| Note: | No spurious emissions were detected in the frequency range above 5GHz. All antenna ports operate sequentially with only one port transmitting at the time from a single transmit source (RF path is switched between selected ports). One RF Section and one antenna multiplexing at the time. Antenna path is identical. | | | |

| Pol. | Frequency (MHz) | Reading dB μ V/m | Total CF dB | Net at 3 m dB μ V/m. | Limit dB μ V/m | Margin dB | Comments |
|-------|-----------------|--|-------------|--------------------------|--------------------|-----------|----------|
| V | 2708.00 | 49.7 | -13.0 | 36.7 | 74 | -37.3 | PK |
| V | 2708.00 | 36.5 | -13.0 | 23.5 | 54 | -30.5 | AV |
| H | 2708.00 | 48.5 | -13.0 | 35.5 | 74 | -38.5 | PK |
| H | 2708.00 | 36.5 | -13.0 | 23.5 | 54 | -30.5 | AV |
| V | 3610.00 | 48.5 | -11.0 | 37.5 | 74 | -36.5 | PK |
| V | 3610.00 | 33.8 | -11.0 | 22.8 | 54 | -31.2 | AV |
| H | 3610.00 | 48.2 | -11.0 | 37.2 | 74 | -36.8 | PK |
| H | 3610.00 | 33.9 | -11.0 | 22.9 | 54 | -31.1 | AV |
| Notes | | Total CF = Antenna Factor + Cable Factor - AMP Gain | | | | | |
| | | Low Channel. Average readings obtained with the 10Hz VBW MT-262006/TRH/A – 6dBi Dual Polarized Dipole | | | | | |
| V | 2744.00 | 49.9 | -12.0 | 37.9 | 74 | -36.1 | PK |
| V | 2744.00 | 37.1 | -12.0 | 25.1 | 54 | -28.9 | AV |
| H | 2744.00 | 49.5 | -12.0 | 37.5 | 74 | -36.5 | PK |
| H | 2744.00 | 36.2 | -12.0 | 24.2 | 54 | -29.8 | AV |
| V | 3658.0 | 48.6 | -10.7 | 37.9 | 74 | -36.1 | PK |
| V | 3658.0 | 34.1 | -10.7 | 23.4 | 54 | -30.6 | AV |
| H | 3658.0 | 45.6 | -10.7 | 34.9 | 74 | -39.1 | PK |
| H | 3658.0 | 34.0 | -10.7 | 23.3 | 54 | -30.7 | AV |
| Notes | | Total CF = Antenna Factor + Cable Factor - AMP Gain | | | | | |
| | | Mid Channel. Average readings obtained with the 10Hz VBW MT-262006/TRH/A – 6dBi Dual Polarized Dipole | | | | | |
| V | 2783.0 | 48.5 | -12.0 | 36.5 | 74 | -37.5 | PK |
| V | 2783.0 | 33.5 | -12.0 | 21.5 | 54 | -32.5 | AV |
| H | 2783.0 | 48.4 | -12.0 | 36.4 | 74 | -37.6 | PK |
| H | 2783.0 | 33.4 | -12.0 | 21.4 | 54 | -32.6 | AV |
| V | 3712.0 | 46.9 | -10.0 | 36.9 | 74 | -37.1 | PK |
| V | 3712.0 | 33.7 | -10.0 | 23.7 | 54 | -30.3 | AV |
| H | 3712.0 | 47.6 | -10.0 | 37.6 | 74 | -36.4 | PK |
| H | 3712.0 | 33.7 | -10.0 | 23.7 | 54 | -30.3 | AV |
| Notes | | Total CF = Antenna Factor + Cable Factor - AMP Gain | | | | | |
| | | High Channel. Average readings obtained with the 10Hz VBW MT-262006/TRH/A – 6dBi Dual Polarized Dipole | | | | | |



| Pol. | Frequency (MHz) | Reading dB μ V/m | Total CF dB | Net at 3 m dB μ V/m. | Limit dB μ V/m | Margin dB | Comments |
|------|-----------------|----------------------|-------------|--------------------------|--------------------|-----------|----------|
| V | 2706.90 | 47.7 | -13.0 | 34.7 | 74 | -39.3 | PK |
| V | 2706.90 | 35.5 | -13.0 | 22.5 | 54 | -31.5 | AV |
| H | 2706.90 | 47.8 | -13.0 | 34.8 | 74 | -39.2 | PK |
| H | 2706.90 | 35.0 | -13.0 | 22.0 | 54 | -32.0 | AV |
| V | 3609.2 | 46.3 | -11.0 | 35.3 | 74 | -38.7 | Pk |
| V | 3609.2 | 34.0 | -11.0 | 23.0 | 54 | -31.0 | AV |
| H | 3609.2 | 46.2 | -11.0 | 35.2 | 74 | -38.8 | Pk |
| H | 3609.2 | 33.9 | -11.0 | 22.9 | 54 | -31.1 | AV |

Total CF = Antenna Factor + Cable Factor - AMP Gain

Notes

Low Channel. Average readings obtained with the 10Hz VBW
A1001 -20dBi Short Range UHF Antenna

| | | | | | | | |
|---|---------|------|-------|------|----|-------|----|
| V | 2743.50 | 46.6 | -12.0 | 34.6 | 74 | -39.4 | PK |
| V | 2743.50 | 34.7 | -12.0 | 22.7 | 54 | -31.3 | AV |
| H | 2743.50 | 47.6 | -12.0 | 35.6 | 74 | -38.4 | PK |
| H | 2743.50 | 34.7 | -12.0 | 22.7 | 54 | -31.3 | AV |
| V | 3658.0 | 47.2 | -10.7 | 36.5 | 74 | -37.5 | Pk |
| V | 3658.0 | 34.4 | -10.7 | 23.7 | 54 | -30.3 | AV |
| H | 3658.0 | 34.5 | -10.7 | 23.8 | 74 | -50.2 | Pk |
| H | 3658.0 | 34.3 | -10.7 | 23.6 | 54 | -30.4 | AV |

Total CF = Antenna Factor + Cable Factor - AMP Gain

Notes



Mid Channel. Average readings obtained with the 10Hz VBW
A1001 -20dBi Short Range UHF Antenna


| | | | | | | | |
|---|---------|------|-------|------|----|-------|----|
| V | 2783.00 | 47.4 | -12.7 | 34.7 | 74 | -39.3 | PK |
| V | 2783.00 | 35.1 | -12.7 | 22.4 | 54 | -31.6 | AV |
| H | 2783.00 | 47.2 | -12.6 | 34.6 | 74 | -39.4 | PK |
| H | 2783.00 | 33.6 | -12.6 | 21.0 | 54 | -33.0 | AV |
| V | 3710.8 | 47.7 | -10.0 | 37.7 | 74 | -36.3 | Pk |
| V | 3710.8 | 35.0 | -10.0 | 25.0 | 54 | -29.0 | AV |
| H | 3710.8 | 46.5 | -10.0 | 36.5 | 74 | -37.5 | Pk |
| H | 3710.8 | 33.9 | -10.0 | 23.9 | 54 | -30.1 | AV |

Total CF = Antenna Factor + Cable Factor - AMP Gain

Notes



High Channel. Average readings obtained with the 10Hz VBW
A1001 -20dBi Short Range UHF Antenna

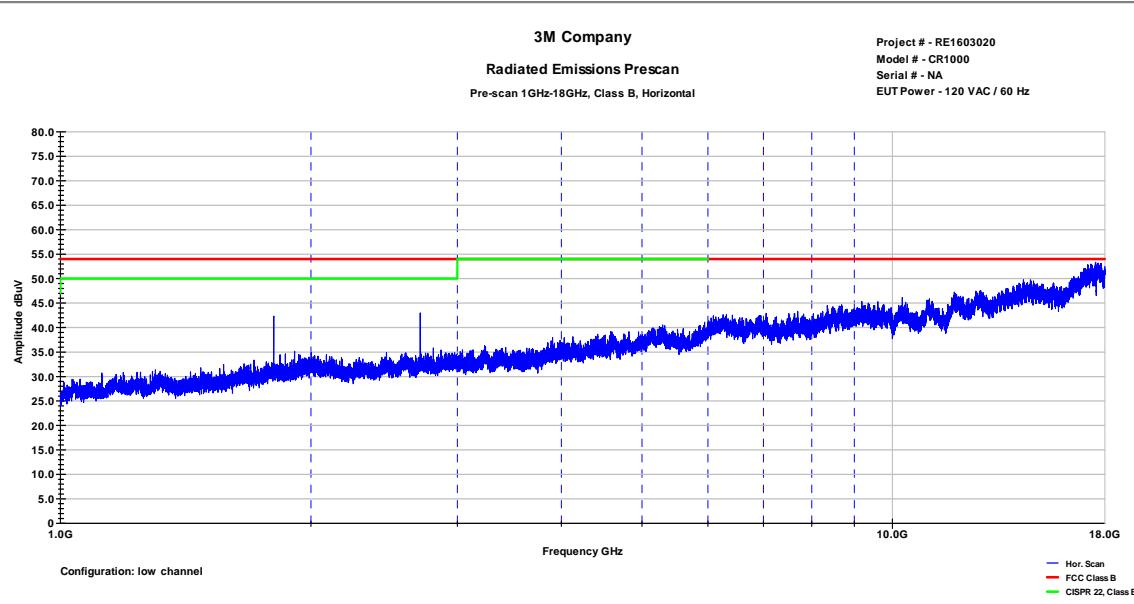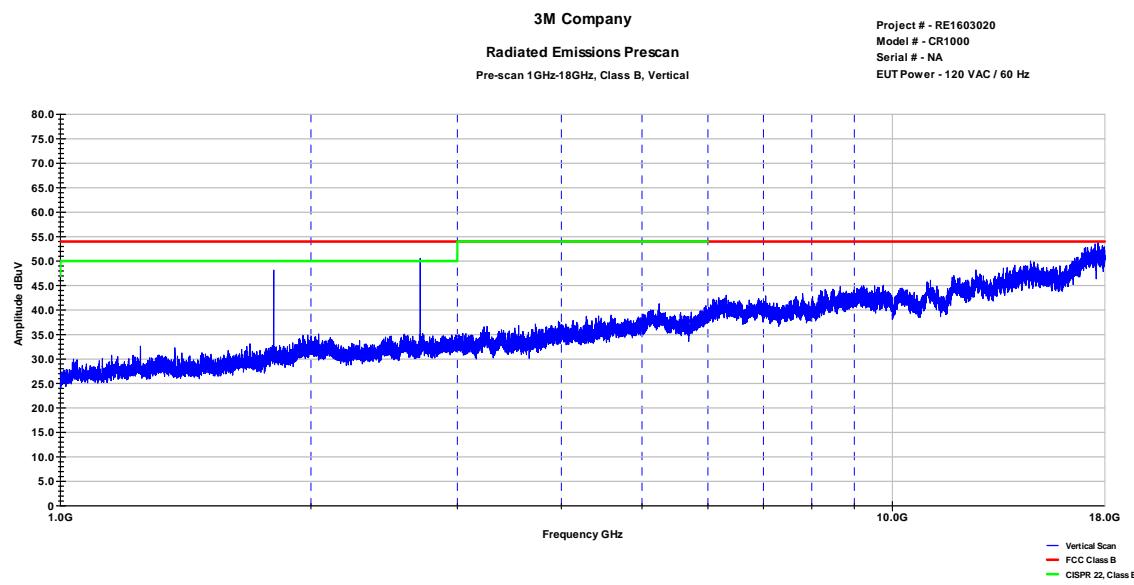

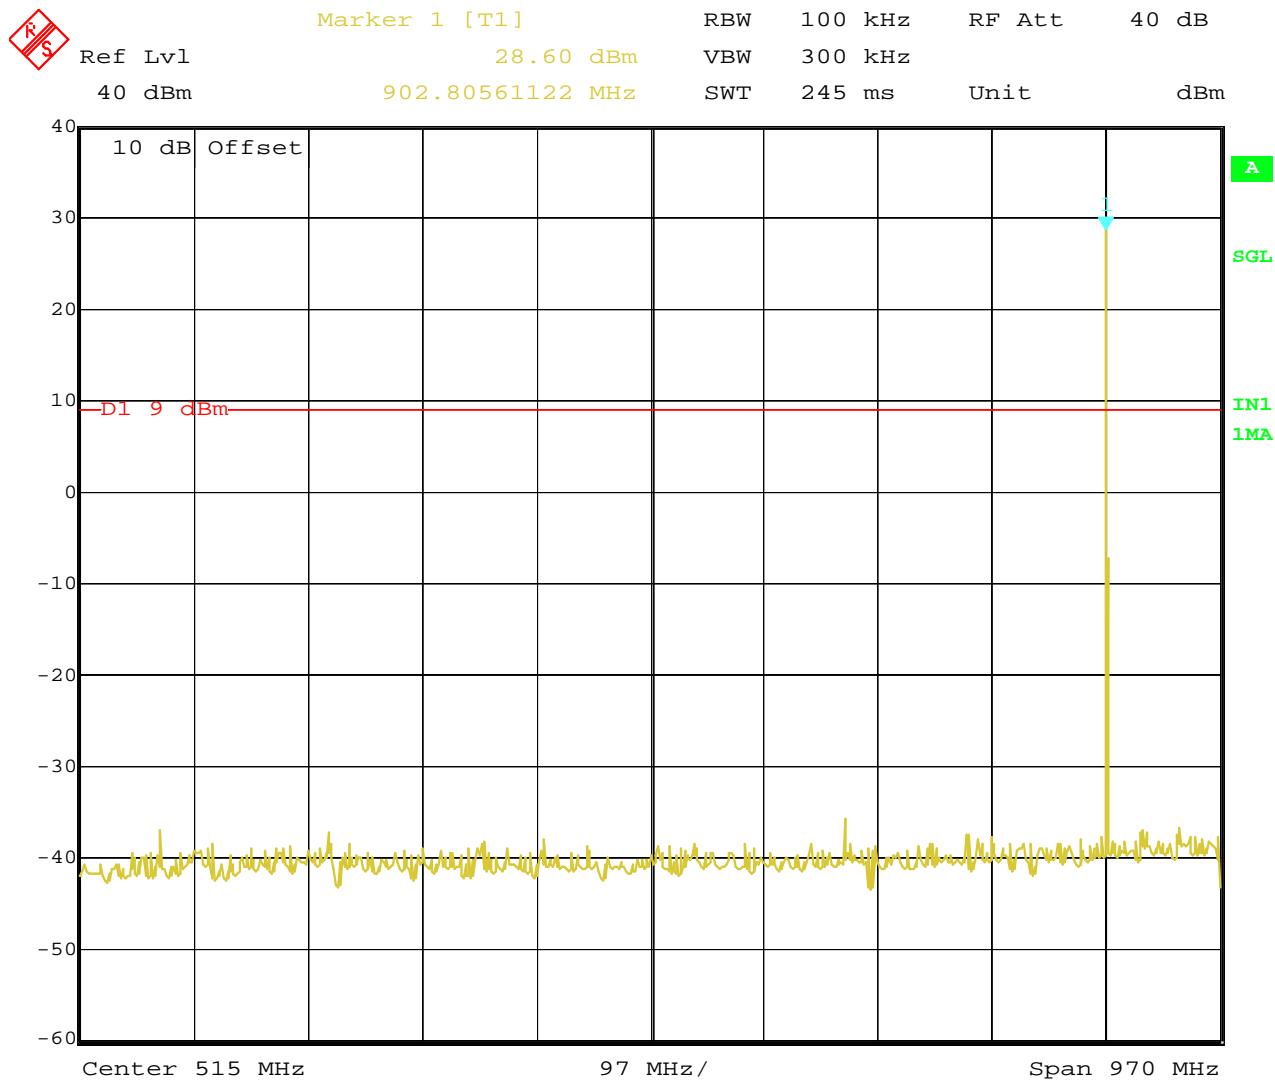


Date: 9.MAY.2014 15:18:28

Conducted Spurious Emissions Low channel

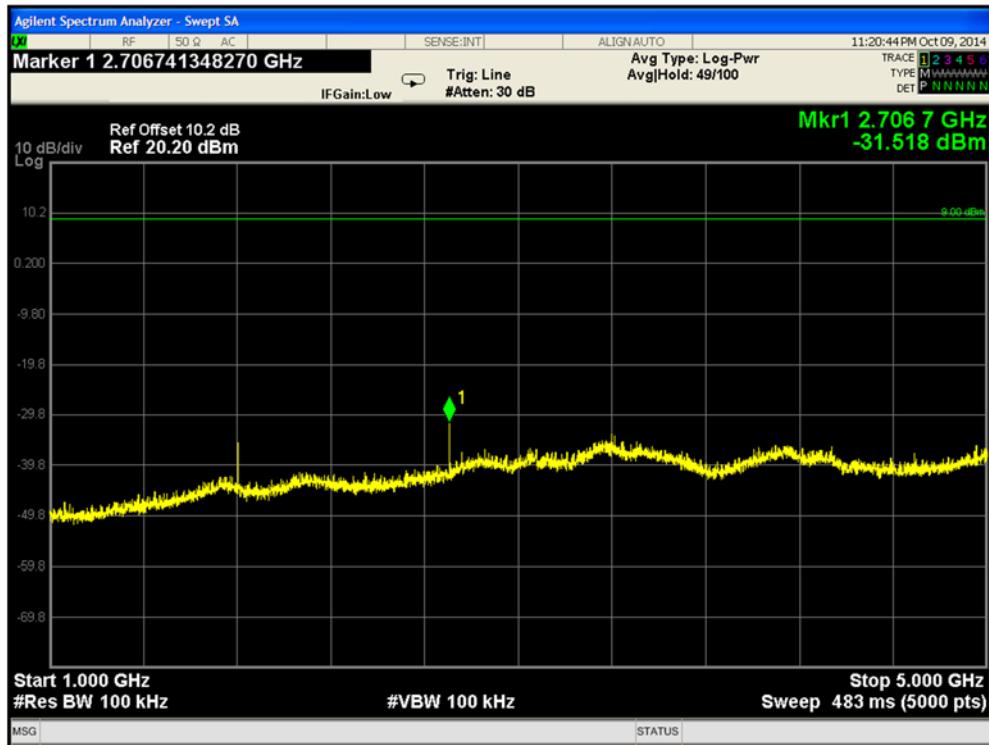
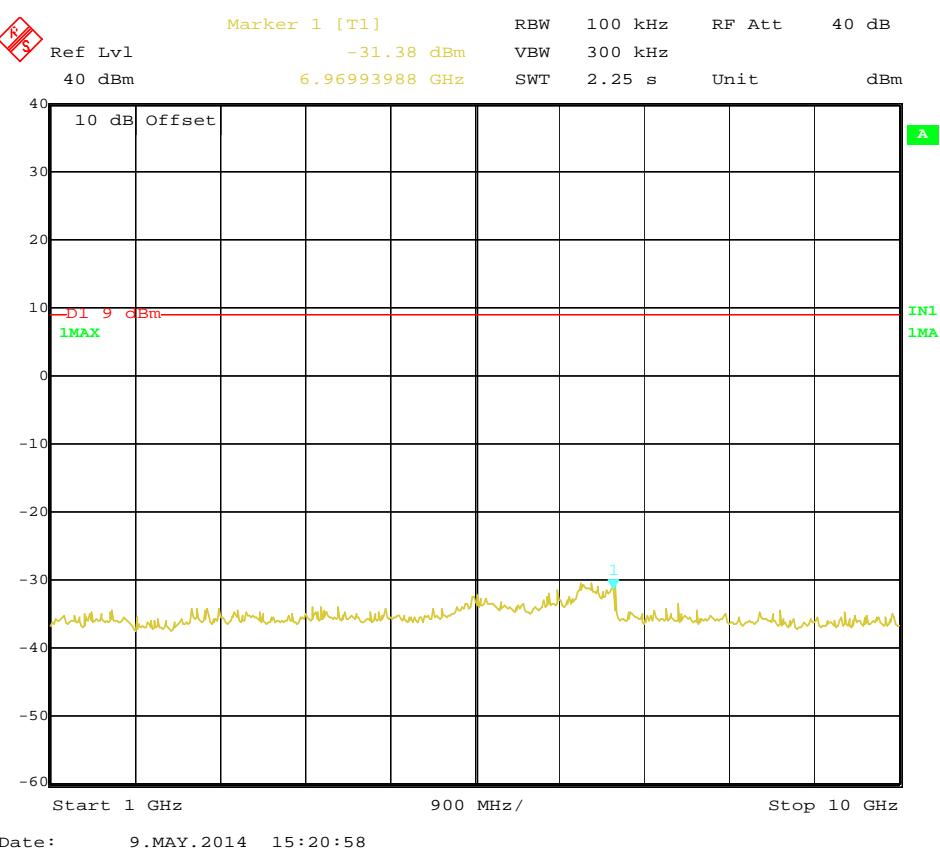


Conducted Spurious Emissions Low channel

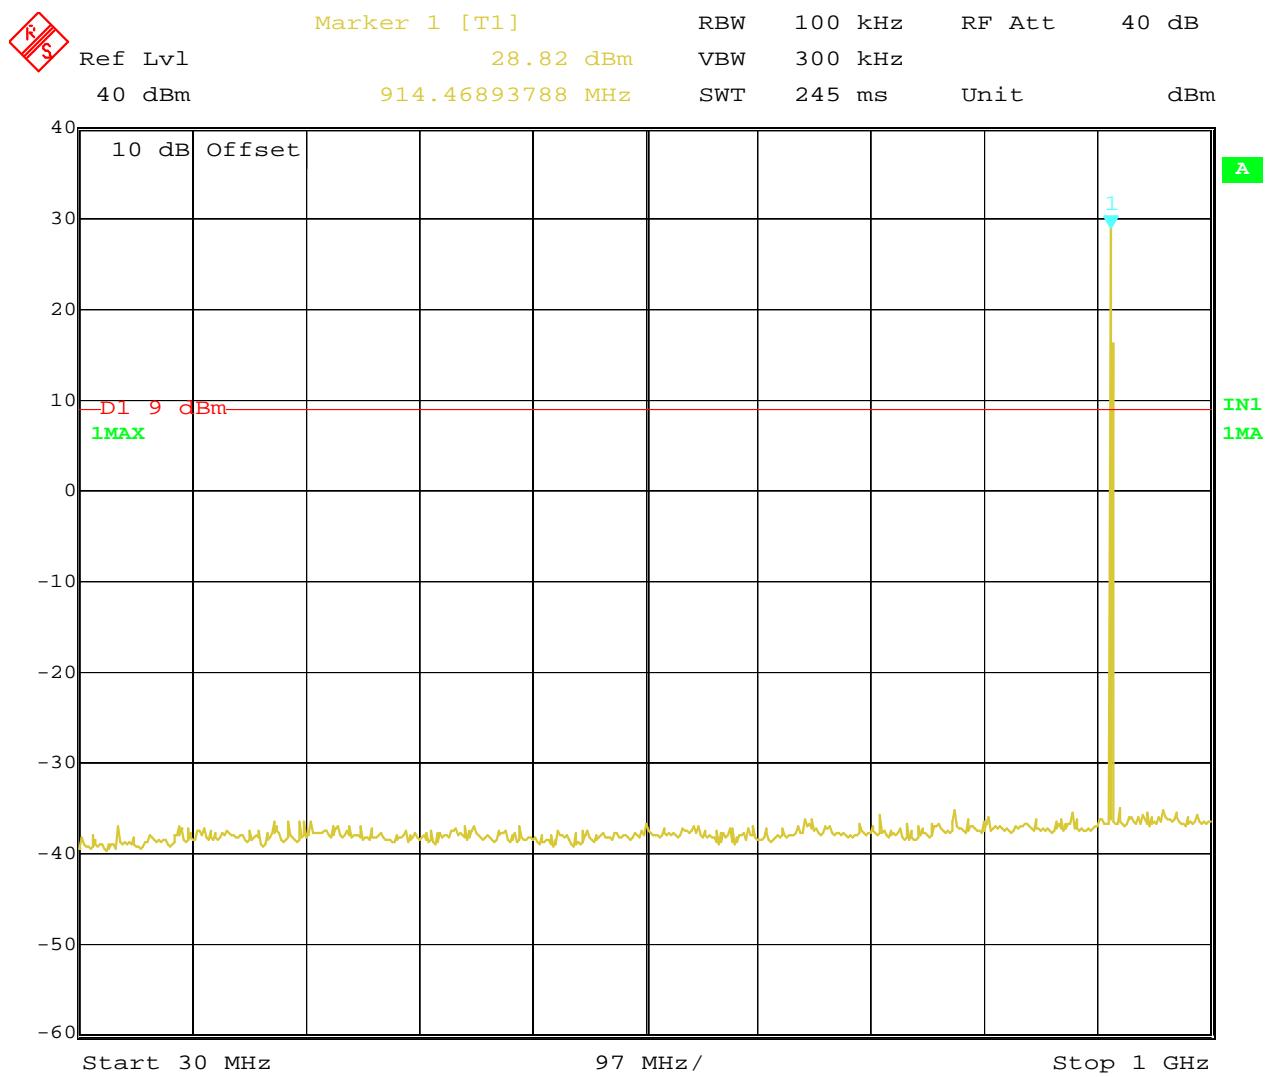




Date: 9.MAY.2014 15:20:22

Conducted Spurious Emissions Mid channel

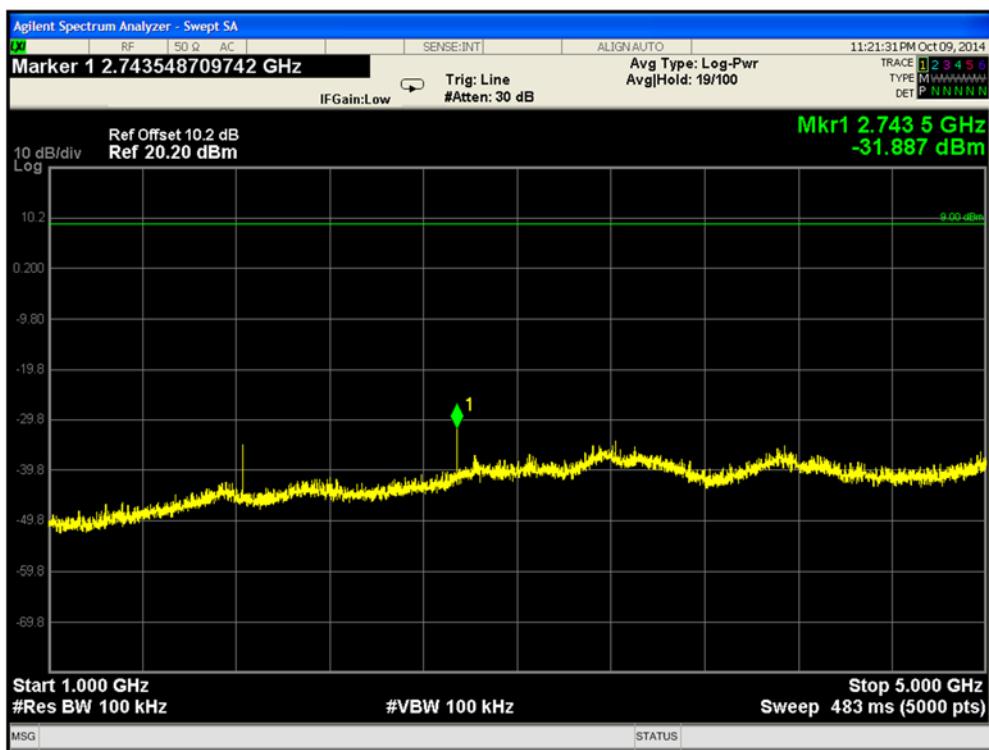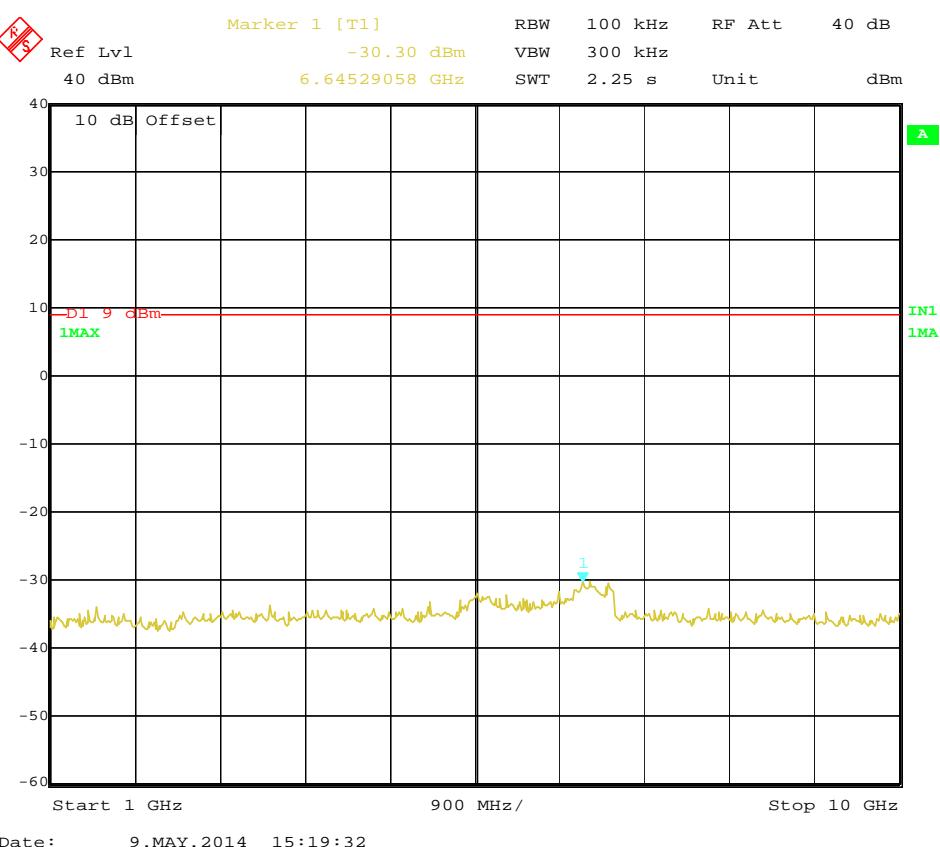

Conducted Spurious Emissions Mid channel

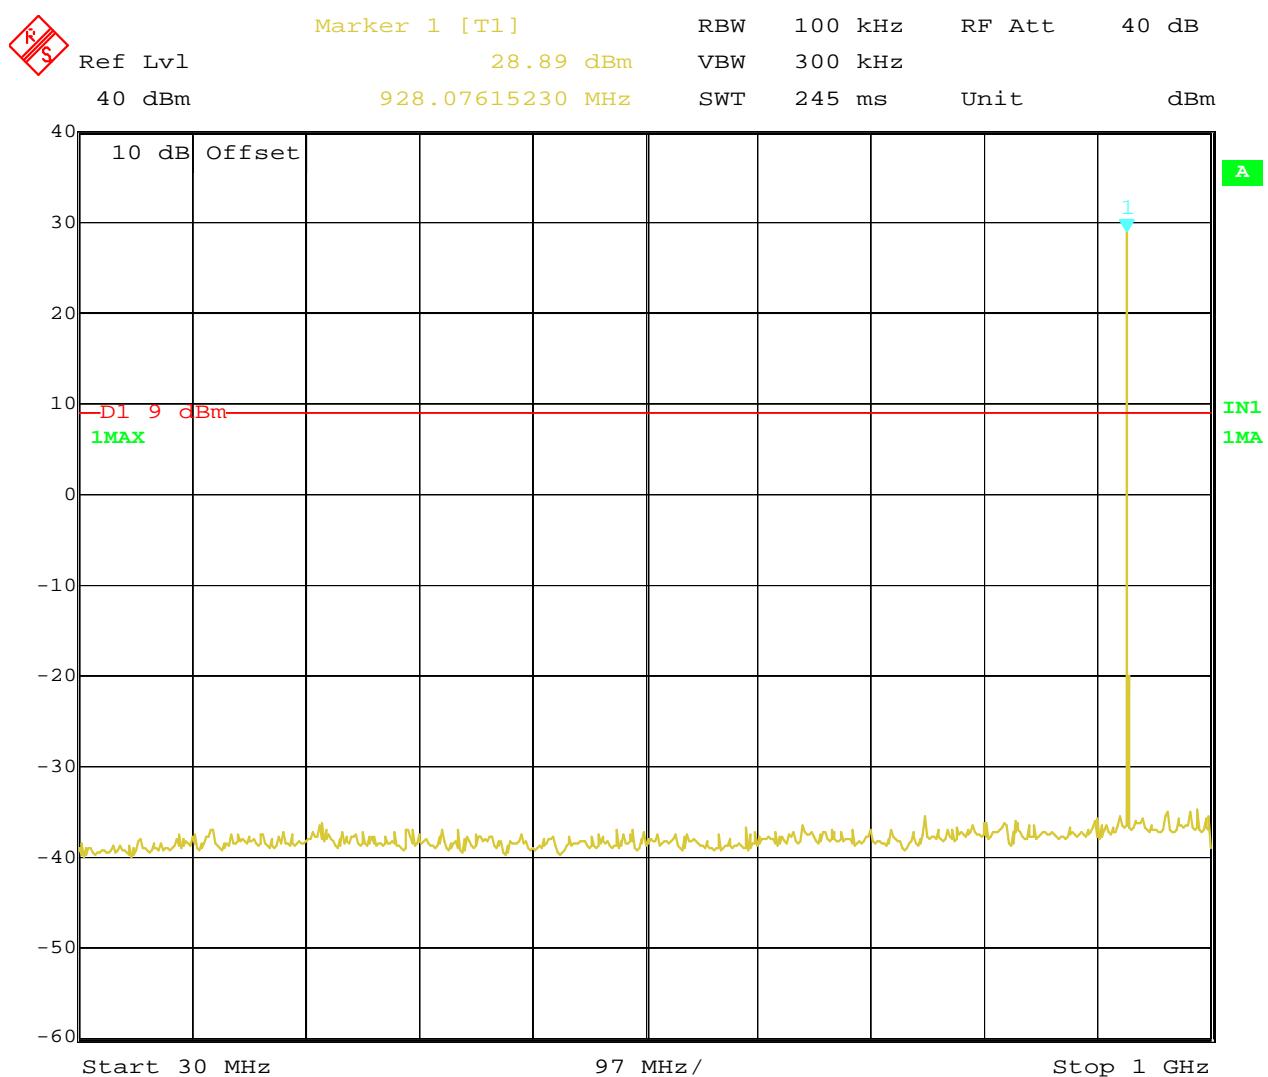

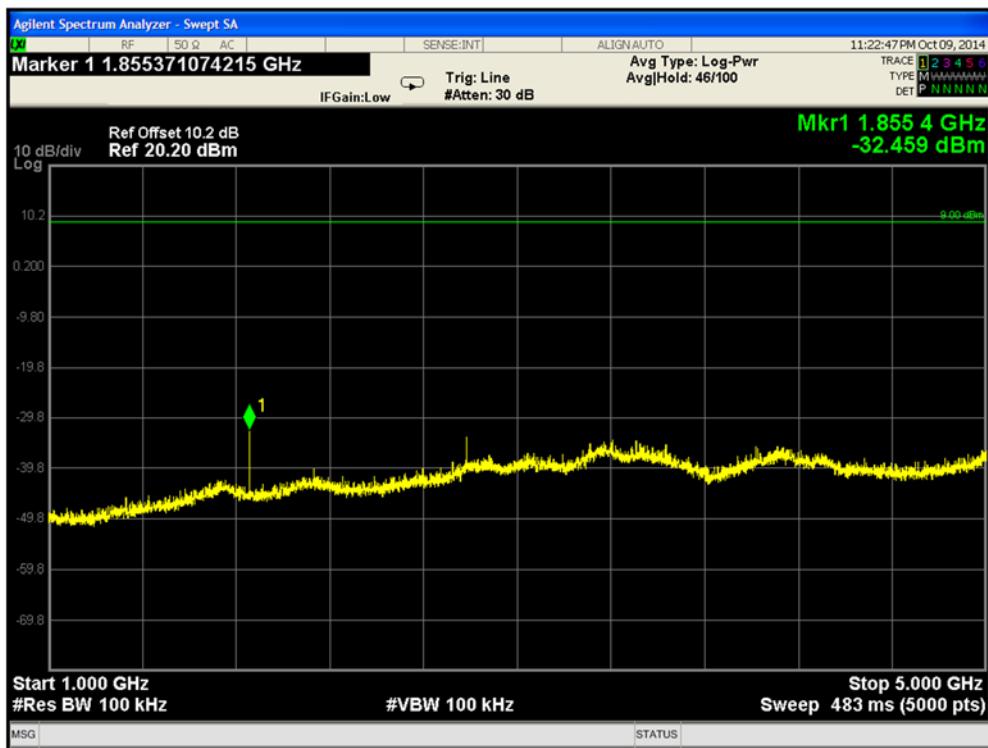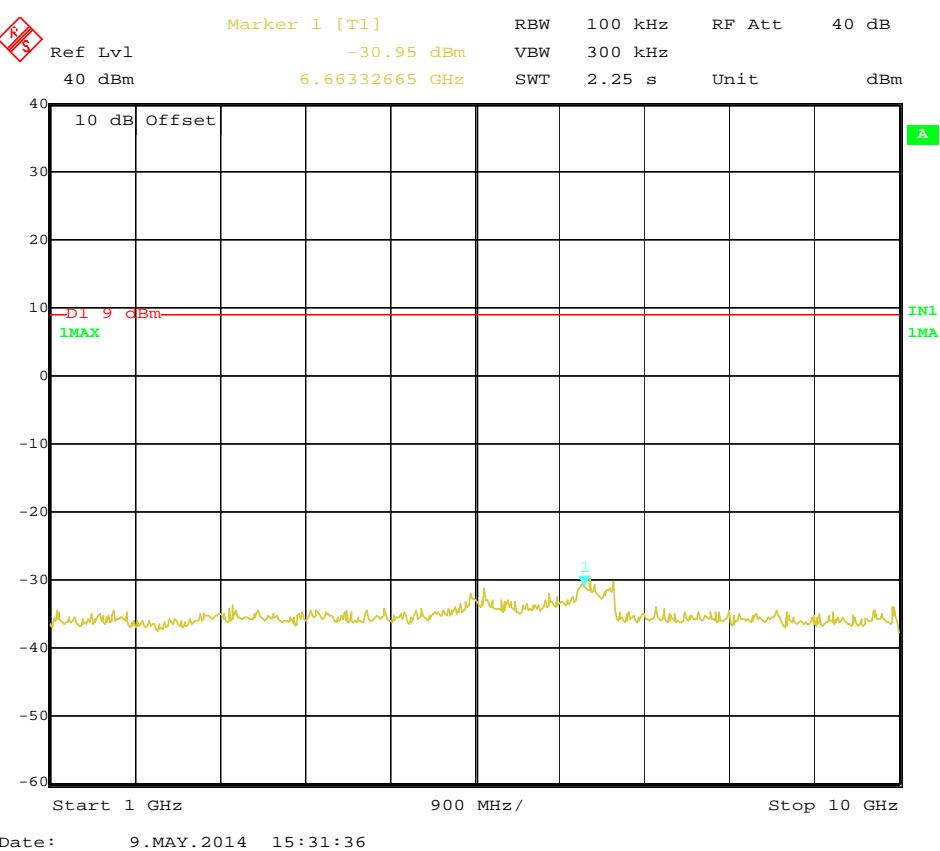

Conducted Spurious Emissions High channel

| 4.10 RF Exposure Compliance | | |
|---|---|--|
| Reference Standard: | <input checked="" type="checkbox"/> IEEE Std 1528a <input checked="" type="checkbox"/> RSS 102, Issue 4 <input checked="" type="checkbox"/> KDB 447498 <input type="checkbox"/> KDB [REDACTED] <input checked="" type="checkbox"/> FCC Parts 2.1091 and 2.1093 <input type="checkbox"/> OET 65 | <input checked="" type="checkbox"/> MPE <input type="checkbox"/> SAR Evaluation |
| Frequency Range: | <input checked="" type="checkbox"/> 902-928MHz | |
| Antenna Separation Distance | >100cm | >20cm |
| Antenna Model: | MT-262006/TRH/A | A1001 |
| Antenna Gain (maximum) | 7dBi (5.01 numeric gain) | -20dBi (0.01 numeric gain) |
| Maximum Output Power at antenna terminal | 29dBm (794mW) | 30dBm (1000mW) |
| Power Density | 0.032 mW/cm ² | 0.002 mW/cm ² |
| GENERAL POPULATION/UNCONTROLLED LIMIT | | |
| FCC/RSS102 | 0.610 mW/cm ² at 915MHz | |

| | |
|--------------|--|
| Note: | The highest RF output power of the unit was measured and recorded. According to §1.1310 of the FCC rules, the power density limit for General population/Uncontrolled Exposure is 0.610 mW/cm ² . The MPE shall be calculated at 20cm to show compliance with the power density limit. The following formula was used to calculate the Power Density: $S=PG/4\pi R^2$ |
|--------------|--|

| 5.0 | | Test Equipment | | | | |
|-------------------------|------------------|----------------|------------|----------|-------------------------------------|--|
| Test Equipment Used | | | | | | |
| Description | Manufacturer | Model | Identifier | Cal. Due | Check | |
| Biconilog Antenna | Schaffner | CBL6112B | 27491 | 10/2016 | <input checked="" type="checkbox"/> | |
| Horn Antenna | AH Systems | SAS 571 | 1010 | 10/2016 | <input checked="" type="checkbox"/> | |
| Loop Antenna | EMCO | ALR25M | 1011 | 10/2016 | <input type="checkbox"/> | |
| EMI Receiver | Rohde & Schwarz | ESIB 40 | 100235 | 10/2016 | <input type="checkbox"/> | |
| EMI Receiver | Agilent | E4448A | 1530975 | 10/2016 | <input checked="" type="checkbox"/> | |
| Signal Analyzer | Agilent | N9000A | MY53031040 | 10/2016 | <input checked="" type="checkbox"/> | |
| LISN | TESEQ | NNB51 | 1130 | 10/2016 | <input checked="" type="checkbox"/> | |
| Harmonic/Flicker Source | Cal. Instruments | C4-5001iX | 57162 | 10/2016 | <input type="checkbox"/> | |
| Amplifier | AR | 250W1000AM | 14354 | 10/2016 | <input type="checkbox"/> | |
| Amplifier | AR | 25S1G4A | 4003 | 10/2016 | <input type="checkbox"/> | |
| Signal Generator | HP | 8656A | 2326A05125 | 10/2016 | <input type="checkbox"/> | |
| Signal Generator | Agilent | E8257D | 160895 | 10/2016 | <input type="checkbox"/> | |
| Field Probe | AR | FL7006 | 25019 | 10/2016 | <input type="checkbox"/> | |
| Field Monitor | AR | FM2000 | 14292 | 10/2016 | <input type="checkbox"/> | |
| AC CDN | Schaffner | M316, | 21937 | 10/2016 | <input type="checkbox"/> | |
| AC CDN | Teseq | M016, | 26131 | 10/2016 | <input type="checkbox"/> | |
| ISN | Teseq | T4 | 25652 | 10/2016 | <input type="checkbox"/> | |
| Current Injection Coil | A.H. Systems | ICP-200/521 | 149 | 10/2016 | <input type="checkbox"/> | |
| RF Conducted System | TESEQ | NSG 4070-75 | 1141 | 10/2016 | <input type="checkbox"/> | |
| ESD Generator | KeyTek | MZ-15/EC | 609325 | 10/2016 | <input type="checkbox"/> | |
| EFT/Surge Generator | ThermoFisher | EMC Pro Plus | 1146 | 10/2016 | <input type="checkbox"/> | |
| EMF Meter | NARDA | ELT400 | 1139 | 10/2016 | <input type="checkbox"/> | |
| Absorbing Clamp | Rhode & Schwarz | MDS-21 | 1001 | 10/2016 | <input type="checkbox"/> | |
| EMF Test Generator | FCC | F-1000-4-8-G | 9940 | 10/2016 | <input type="checkbox"/> | |
| AC Power System | Titan | MAC-03 | 6619921 | 10/2016 | <input type="checkbox"/> | |
| EMC Software | ETS-Lindgren | TILE 7 | | 10/2016 | <input checked="" type="checkbox"/> | |
| Oscilloscope | Tektronix | DPO4104 | 1550 | 10/2016 | <input type="checkbox"/> | |

| 6.0 Report revision history | | | | |
|-----------------------------|------------|---------------|---------------------------------|--|
| Revision Level | Date | Report Number | Notes | |
| 0 | 10/15/2014 | RE1311030-1 | Original Issue | |
| 1 | 06/07/2016 | RE1603020-1 | Class II PC – Added new antenna | |

Certificate of Conformity

3M EMC Laboratory

SEMS Global Regulatory Engineering
Building 76-01-01
St. Paul, MN 55144-1000, USA

MANUFACTURER'S NAME
NAME OF EQUIPMENT
MODEL NUMBER(S)
TEST REPORT NUMBER
DATE OF ISSUE

3M COMPANY
COMPACT RFID READER
1000
RE1603020-1
June 7, 2016

Referring to the performance criteria and operating mode during the tests specified in this report the equipment complies with the essential requirements herein specified:

47 CFR Part 15 – Subpart C

FCC Part 15.247

Emissions

47 CFR, FCC Parts 15.107 and 15.109

Comments: Class II PC

Yuriy Litvinov

Yuriy Litvinov
Lead EMC Engineer

NVLAP[®]
NVLAP Lab Code 200033-0