

FCC & Industry Canada Certification Test Report
For the
Sirit Technologies Inc.
INfinity 610

FCC ID: M4ZIN610
IC: 3637B-IN610

WLL JOB# 12149-01 Rev 1
September 14, 2011
Re-issued September 28, 2011

Prepared for:

Sirit Technologies Inc.

1321 Valwood Parkway Ste 620
Carrollton, TX 75006

Prepared By:

Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879




Testing Certificate AT-1448

FCC & Industry Canada Certification Test Report
For the
Sirit Technologies Inc.
INfinity 610

FCC ID: M4ZIN610
IC: 3637B-IN610

WLL JOB# 12149-01 Rev 0
September 14, 2011
Re-issued September 28, 2011

Prepared by:



John P. Repella
Compliance Engineer

Reviewed by:



Steven D. Koster
VP, EMC & Wireless

Abstract

This report has been prepared on behalf of Sirit Technologies Inc. Inc. to support the attached Application for Equipment Authorization. The test report and application are submitted for a Frequency Hopping Spread Spectrum Transmitter under Part 15.247 (10/2009) of the FCC Rules and Regulations and Spectrum Management and Telecommunications Policy RSS-210 of Industry Canada. This Certification Test Report documents the test configuration and test results for the Sirit Technologies Inc. Inc. INfinity 610.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

The Sirit Technologies Inc. Inc. INfinity 610 complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247 and Industry Canada RSS-210.

Revision History	Description of Change	Date
Rev 0	Initial Release	September 14, 2011
Rev 1	Edited per client comments	September 28, 2011

Table of Contents

Abstract	ii
1 Introduction.....	1
1.1 Compliance Statement	1
1.2 Test Scope.....	1
1.3 Contract Information.....	1
1.4 Test and Support Personnel	1
1.5 Abbreviations.....	2
2 Equipment Under Test	3
2.1 EUT Identification & Description	3
2.2 Test Configuration	3
2.3 Testing Algorithm.....	3
2.4 Test Location	4
2.5 Measurements	4
2.5.1 References.....	4
2.6 Measurement Uncertainty	4
3 Test Equipment	6
4 Test Summary	7
5 Test Results.....	8
5.1 Time of Occupancy (15.247 (a)(1)(i) & RSS-210 [A8. 1 (c)]).....	8
5.2 RF Power Output: (15.247 (b)(2) & RSS-210 [A8.4 (1)])	10
5.3 Occupied Bandwidth: (15.247 (a) (1)(i) & RSS-210 [A8. 1 (c)])	12
5.4 Channel Spacing and Number of Hop Channels (FCC 15. 247(a)(1) & RSS-210 [A8.1 (b)]..	18
5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)	26
5.6 Radiated Spurious Emissions: (FCC Part 15.205, 15.209 & RSS-210 [A8. 5]).....	43
5.6.1 Test Procedure	43
5.7 Receiver Radiated Spurious Emissions: (§15.209, RSS-Gen [7.2.3.2] & RSS-210 sect 2.6) ..	47
5.7.1 Test Procedure	47
5.7.2 Test Summary	48
5.8 AC Conducted Emissions (FCC Pt.15.207, RSS-Gen [7.2.2]).....	50
5.8.1 Requirements	50
5.8.2 Test Procedure	50
5.8.3 Test Data	50

List of Tables

Table 1: Device Summary	3
Table 2: Expanded Uncertainty List	5
Table 3: Test Equipment List.....	6
Table 4: Test Summary Table.....	7
Table 5: RF Power Output.....	10
Table 6: 20dB Occupied Bandwidth Results.....	12
Table 7: 20dB Occupied Bandwidth Results (Dense Mode)	15
Table 8: Spectrum Analyzer Settings	43
Table 9: Radiated Emission Test Data, Low Frequency Data (<1GHz)	44
Table 10: Radiated Emission Test Data, High Frequency Data (>1GHz).....	45
Table 11: Receiver Radiated Emission Test Data	49
Table 12: Conducted Emissions Test Data	51

List of Figures

Figure 1: Duty Cycle Plot	8
Figure 2: Total on Time	9
Figure 3: RF Peak Power, Low Channel	10
Figure 4: RF Peak Power, Mid Channel	11
Figure 5: RF Peak Power, High Channel.....	12
Figure 6: Occupied Bandwidth (Band A), Low Channel	13
Figure 7: Occupied Bandwidth (Band B), Mid Channel	14
Figure 8: Occupied Bandwidth (Band C), High Channel	15
Figure 9: Occupied Bandwidth (Dense Mode), Low Channel	16
Figure 10: Occupied Bandwidth (Dense Mode), Mid Channel	17
Figure 11: Occupied Bandwidth (Dense Mode), High Channel.....	18
Figure 12: Channel Spacing, Band A	19
Figure 13: Channel Spacing, Band B.....	20
Figure 14: Channel Spacing, Band C.....	21
Figure 15: Channel Spacing, Dense Mode	22
Figure 16: Number of Channels, Dense Mode	23
Figure 17: Number of Channels, Band A	24
Figure 18: Number of Channels, Band B.....	25
Figure 19: Number of Channels, Band C.....	26
Figure 20: Conducted Spurious Emissions, Low Channel 30 - 900MHz.....	27
Figure 21: Conducted Spurious Emissions, Low Channel 900MHz – 930MHz.....	28
Figure 22: Band Edge Plot (Hopping), Low Channel TX @902.3MHz	29
Figure 23: Band Edge Plot (Non-Hopping), Low Channel TX @902.3MHz	30
Figure 24: Conducted Spurious Emissions, Low Channel 930MHz – 5GHz	31
Figure 25: Conducted Spurious Emissions, Low Channel 5 - 10GHz	32
Figure 26: Conducted Spurious Emissions, Mid Channel 30 - 900MHz	33
Figure 27: Conducted Spurious Emissions, Mid Channel 900MHz – 930MHz	34
Figure 28: Conducted Spurious Emissions, Mid Channel 930MHz– 5GHz	35
Figure 29: Conducted Spurious Emissions, Mid Channel 5 - 10GHz	36
Figure 30: Conducted Spurious Emissions, High Channel 30 - 900MHz.....	37
Figure 31: Conducted Spurious Emissions, High Channel 900MHz – 930MHz	38
Figure 32: Band Edge Plot (Hopping), Low Channel TX @927.7MHz	39
Figure 33: Band Edge Plot (Non-Hopping), Low Channel TX @927.7MHz	40
Figure 34: Conducted Spurious Emissions, High Channel 930MHz– 5GHz.....	41
Figure 35: Conducted Spurious Emissions, High Channel 5 - 10GHz.....	42

1 Introduction

1.1 Compliance Statement

The Sirit Technologies Inc. Inc. INfinity 610 complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247 (10/2009) and Industry Canada RSS-210.

1.2 Test Scope

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.3 Contract Information

Customer:	Sirit Technologies Inc. Inc. 1321 Valwood Parkway, Ste 620 Carrollton, TX 75006
Purchase Order Number:	248358
Quotation Number:	66355B
Test Dates	
Testing was performed on the following date(s):	06/12/11 – 07/01/11 & 8/11/2011

1.4 Test and Support Personnel

Washington Laboratories, LTD	John P. Repella
Customer Representative	Dave Missimer

1.5 Abbreviations

A	A mpere
ac	a lternating current
AM	A mplitude Modulation
Amps	A mperes
b/s	b its per second
BW	B and W idth
CE	C onducted E mission
cm	c entimeter
CW	C ontinuous W ave
dB	d eci B el
dc	d irect current
EMI	E lectromagnetic I nterference
EUT	E quipment U nder T est
FM	F requency M odulation
G	g iga - prefix for 10^9 multiplier
Hz	H ertz
IF	I ntermediate F requency
k	k ilo - prefix for 10^3 multiplier
LISN	L ine I mpedance S tabilization N etwork
M	M ega - prefix for 10^6 multiplier
m	m eter
μ	m icro - prefix for 10^{-6} multiplier
NB	N arrow b and
QP	Q uasi- P eak
RE	R adiated E missions
RF	R adio F requency
rms	r oot- m ean- s quare
SN	S erial N umber
S/A	S pectrum A nalyzer
V	V olt

2 Equipment Under Test

2.1 EUT Identification & Description

The SIRIT Inc. INfinity 610 is a fixed reader for RFID tags.

Table 1: Device Summary

ITEM	DESCRIPTION
Manufacturer:	SIRIT Technologies Inc.
FCC ID:	M4ZIN610
IC:	3637B-IN610
Model:	INfinity 610
FCC Rule Parts:	§15.247
Industry Canada:	RSS210 Issue 7
Frequency Range:	902-928MHz
Maximum Output Power:	30.00dBm
Modulation:	DB-ASK, PR-ASK
Occupied Bandwidth:	286.916kHz
Keying:	Automatic, Manual
Type of Information:	Data
Number of Channels:	50
Power Output Level	Fixed
Antenna Connector	External
Antenna Type	Dual Polarized Dipole(Horizontal and Vertical Components)
Antenna Gain:	6dBi
Interface Cables:	RS232, USB, LAN
Power Source & Voltage:	AC adapter (100-240VAC, 50-60Hz, 2.0A) DC 24VDC, 3.75A
Receiver spurious	25.8dBuV @69.08MHz
Transmitter spurious	48.17dBuV @ 2783.10MHz
Emissions Designator	287KGXD

2.2 Test Configuration

The INfinity 610 was configured for test with customer supplied software to exercise functionality. The scanner was connected via Ethernet cable to exercise functionality and the USB and RS 232 ports were populated for radiated emissions.

2.3 Testing Algorithm

The INfinity 610 was programmed for FHSS operation via RFIDDemo software provided by the customer.

Worst case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.2: Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4: Methods of Measurement of Radio Noise from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where u_c = standard uncertainty

$a, b, c, \dots$ = individual uncertainty elements

$Div_{a, b, c}$ = the individual uncertainty element divisor based on the probability distribution

Divisor = 1.732 for rectangular distribution

Divisor = 2 for normal distribution

Divisor = 1.414 for trapezoid distribution

Equation 2: Expanded Uncertainty

$$U = ku_c$$

Where

- U = expanded uncertainty
- k = coverage factor
- $k \leq 2$ for 95% coverage (ANSI/NCSL Z540-2 Annex G)
- u_c = standard uncertainty

The measurement uncertainty complies with the maximum allowed uncertainty from CISPR 16-4-2. Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

Table 2: Expanded Uncertainty List

Scope	Standard(s)	Expanded
Conducted Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	2.63 dB
Radiated Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	4.55 dB

3 Test Equipment

Table 3 shows a list of the test equipment used for measurements along with the calibration information.

Table 3: Test Equipment List

Test Name: Radiated Emissions		Test Date: 8/11/2011	
Asset #	Manufacturer/Model	Description	Cal. Due
69	HP - 85650A	ADAPTER QP	6/28/2012
73	HP - 8568B	ANALYZER SPECTRUM	6/26/2012
71	HP - 85685A	PRESELECTOR RF	6/26/2012
382	SUNOL SCIENCES CORPORATION - JB1	ANTENNA BICONLOG	1/12/2012
00728	AGILENT - 8564EC	SPECTRUM ANALYZER 30HZ - 40GHZ	4/28/2012
00640	MEGAPHASE - TM40-K1K5-36	1G-40GHZ RIGHT ANGLE	1/3/2012
00627	AGILENT - 8449B	AMPLIFIER 1-26GHZ	5/4/2012
00742	PENN ENGINEERING - WR284	2.2-4.15GHZ BANDPASS FILTER	7/19/2012
00337	WLL - 1.2-5GHZ	FILTER BAND PASS	3/24/2012
00280	ITC - 21C-3A1	WAVEGUIDE 3.45-11.0GHZ	3/24/2012
00282	ITC - 21X-3A1	WAVEGUIDE 6.8-15GHZ	3/24/2012

Test Name: Conducted Emissions Voltage		Test Date: 8/11/2011	
Asset #	Manufacturer/Model	Description	Cal. Due
72	HP - 8568B	ANALYZER SPECTRUM	6/22/2012
68	HP - 85650A	ADAPTER QP	6/22/2012
70	HP - 85685A	PRESELECTOR RF W/OPT 8ZE	6/22/2012
125	SOLAR - 8028-50-TS-24-BNC	LISN	7/7/2012
126	SOLAR - 8028-50-TS-24-BNC	LISN	7/7/2012

4 Test Summary

The Table Below shows the results of testing for compliance with a Digital Transmission System in accordance with FCC Part 15.247:2007 and RSS210e issue 7. Full results are shown in section 5.

Table 4: Test Summary Table

TX Test Summary (Frequency Hopping Spread Spectrum)			
FCC Rule Part	IC Rule Part	Description	Result
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	20dB Bandwidth	Pass
15.247 (b)(2)	RSS-210 [A8.4 (1)]	Transmit Output Power	Pass
15.247 (a)(1)	RSS-210 [A8.1 (b)]	Channel Separation	Pass
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	Number of Channels =50 minimum	Pass
15.247 (a)(1)(i)	RSS-210 [A8. 1 (c)]	Time of Occupancy	Pass
15.247 (d)	RSS-210 [A8. 5]	Occupied BW / Out-of-Band Emissions (Band Edge @ 20dB below)	Pass
15.205 15.209	RSS-210 Sect.2.2	General Field Strength Limits (Restricted Bands & RE Limits)	Pass
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions	Pass
RX/Digital Test Summary (Frequency Hopping Spread Spectrum)			
FCC Rule Part	IC Rule Part	Description	Result
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions	Pass
15.209	RSS-210 sect 2.6	General Field Strength Limits	Pass

5 Test Results

5.1 Time of Occupancy (15.247 (a)(1)(i) & RSS-210 [A8. 1 (c)])

247(a) 1(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is greater than 250 kHz, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. Additionally the maximum allowed 20dB bandwidth is 500 kHz for any channel.

From Figures 1 and 2 it is determined that:

Single pulse duration is 290.67ms in a 10 s sweep period 1 pulse occurs, and therefore the total on time is 290.67ms.

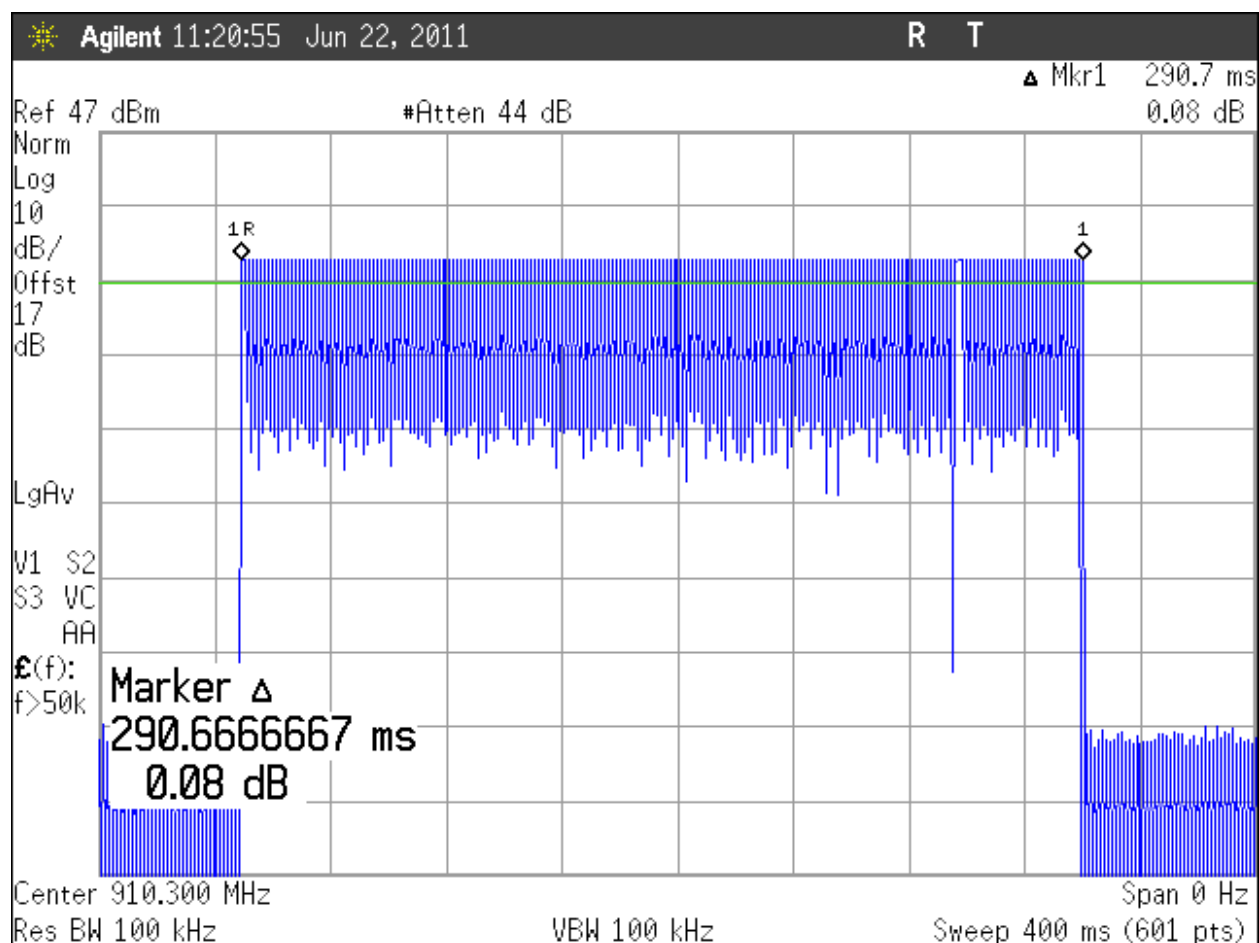


Figure 1: Duty Cycle Plot

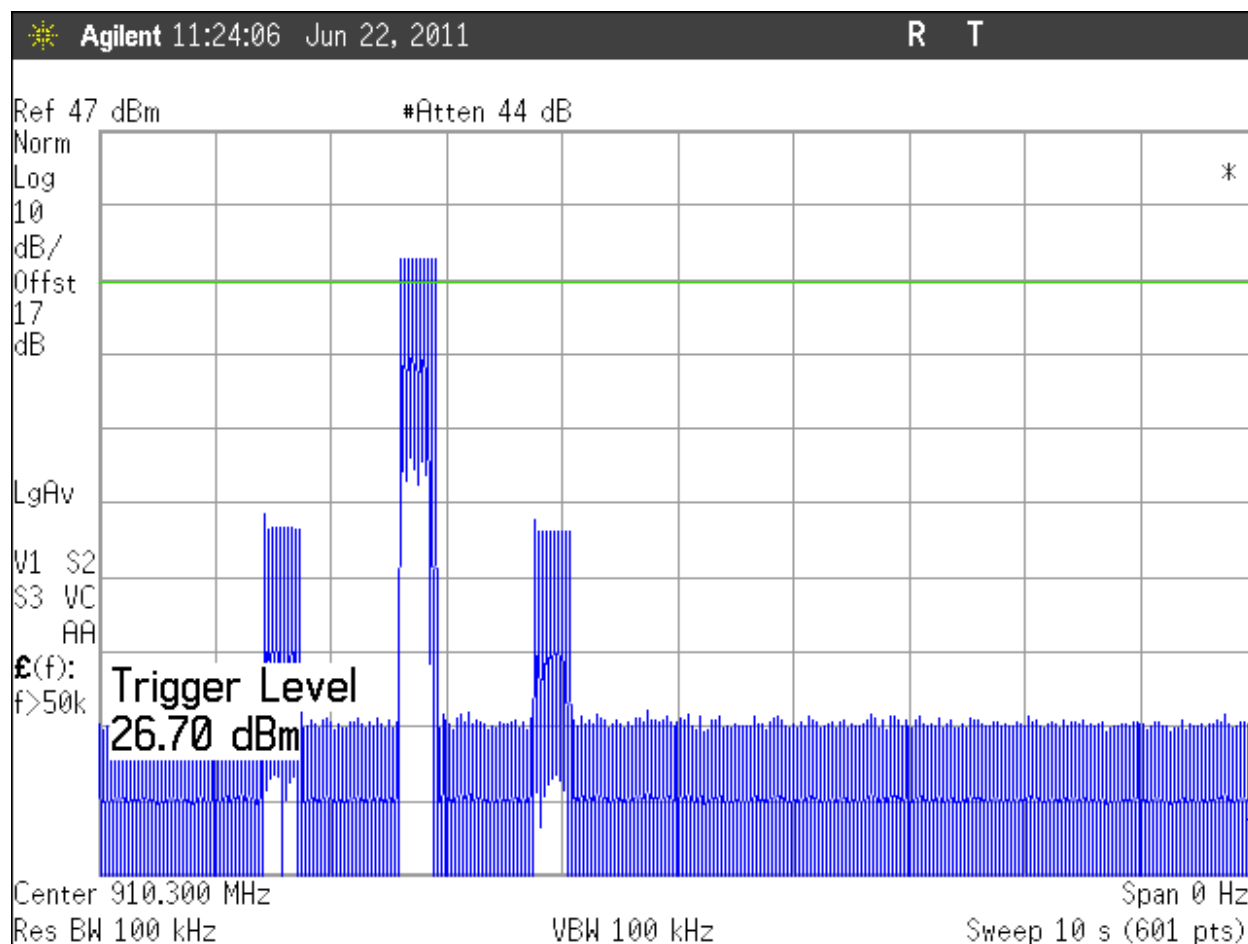


Figure 2: Total on Time

5.2 RF Power Output: (15.247 (b)(2) & RSS-210 [A8.4 (1)])

To measure the output power the hopping sequence was stopped while the frequency dwelled on a low, high and middle channel. The antenna cable was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator and other losses in the system. The RF Power Output recorded in Table 5 is the RF Power delivered to the antenna.

Table 5: RF Power Output

Frequency /Input to Antenna Port	Level	Limit	Pass/Fail
Low Channel: 902.3MHz	29.55dBm	30 dBm	Pass
Mid Channel: 914.5MHz	29.83dBm	30 dBm	Pass
High Channel: 927.75MHz	30.00dBm	30 dBm	Pass

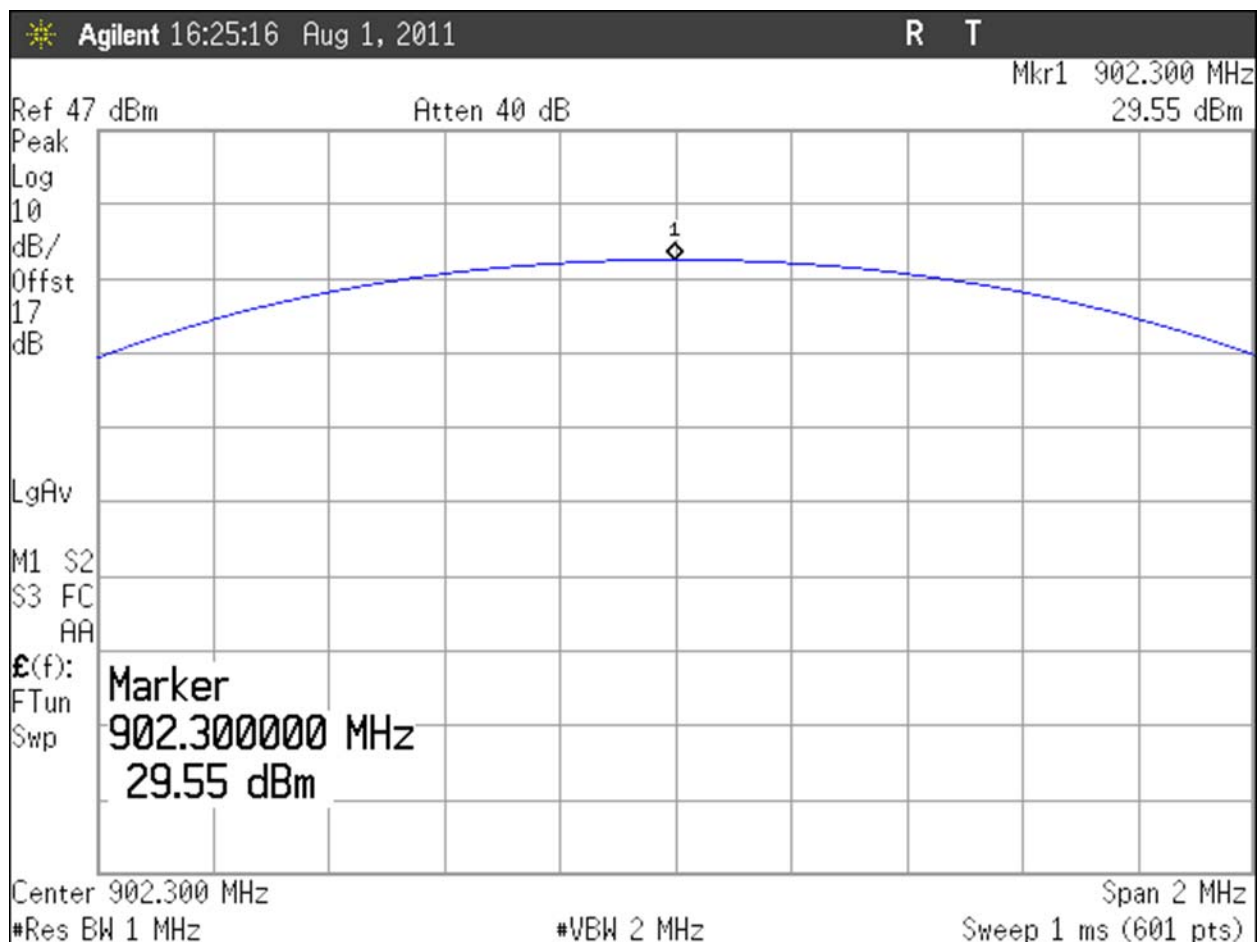


Figure 3: RF Peak Power, Low Channel



Figure 4: RF Peak Power, Mid Channel

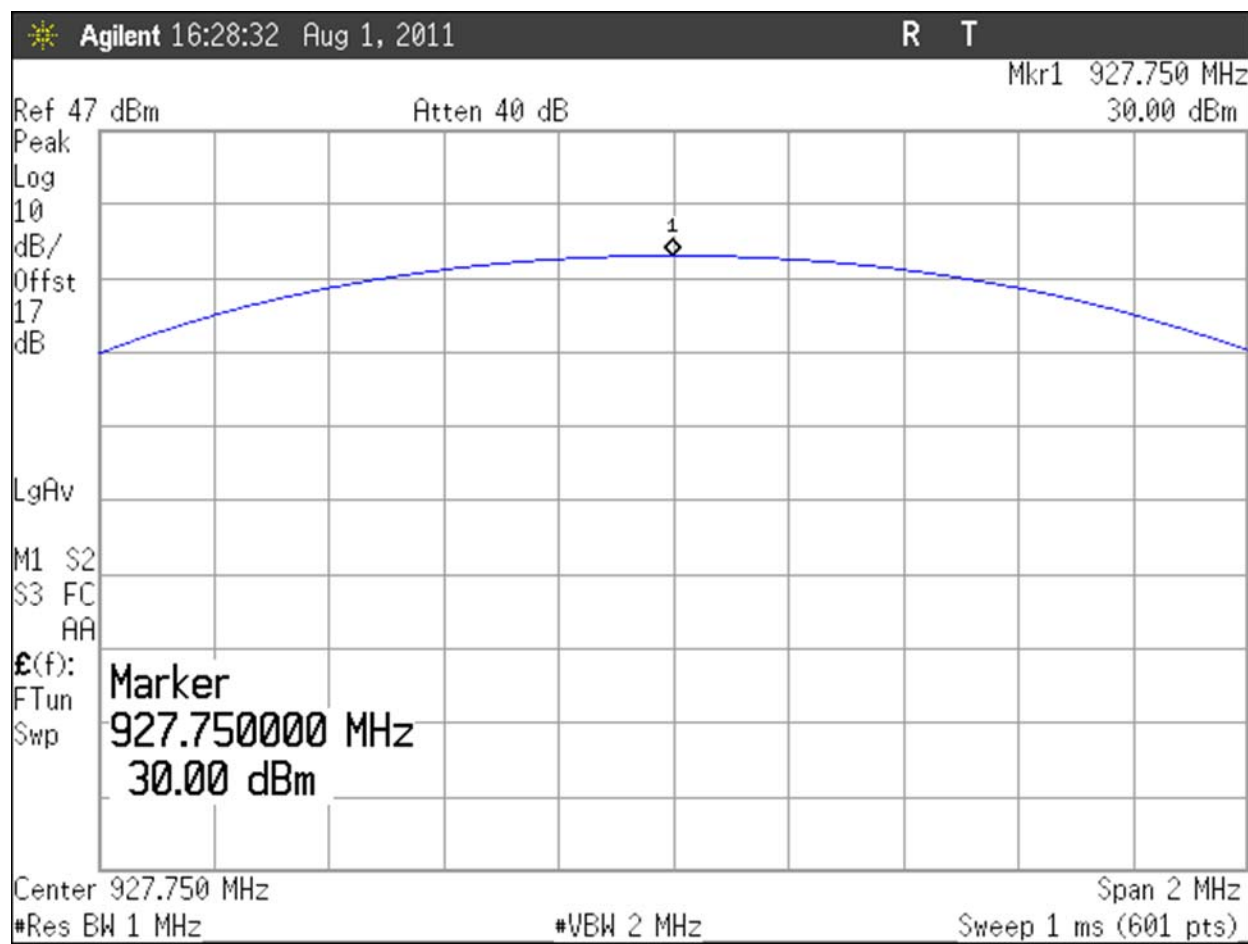


Figure 5: RF Peak Power, High Channel

5.3 Occupied Bandwidth: (15.247 (a) (1)(i) & RSS-210 [A8. 1 (c)])

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer. For Frequency Hopping Spread Spectrum Systems, FCC Part 15.247 requires the maximum 20 dB bandwidth not exceed 500 kHz. The marker delta method was used to determine the 20dB bandwidth.

At full modulation, the occupied bandwidth was measured as shown in the plots below. Table 6 and Table 7 provide a summary of the Occupied Bandwidth Results for the various modes available.

Table 6: 20dB Occupied Bandwidth Results

Frequency	Bandwidth	Limit	Pass/Fail
LowChannel(BandA): 902.30MHz	106.227kHz	500KHz	Pass
MidChannel(BandB): 910.10MHz	107.095kHz	500KHz	Pass
HighChannel(BandC):927.75MHz	107.514kHz	500KHz	Pass

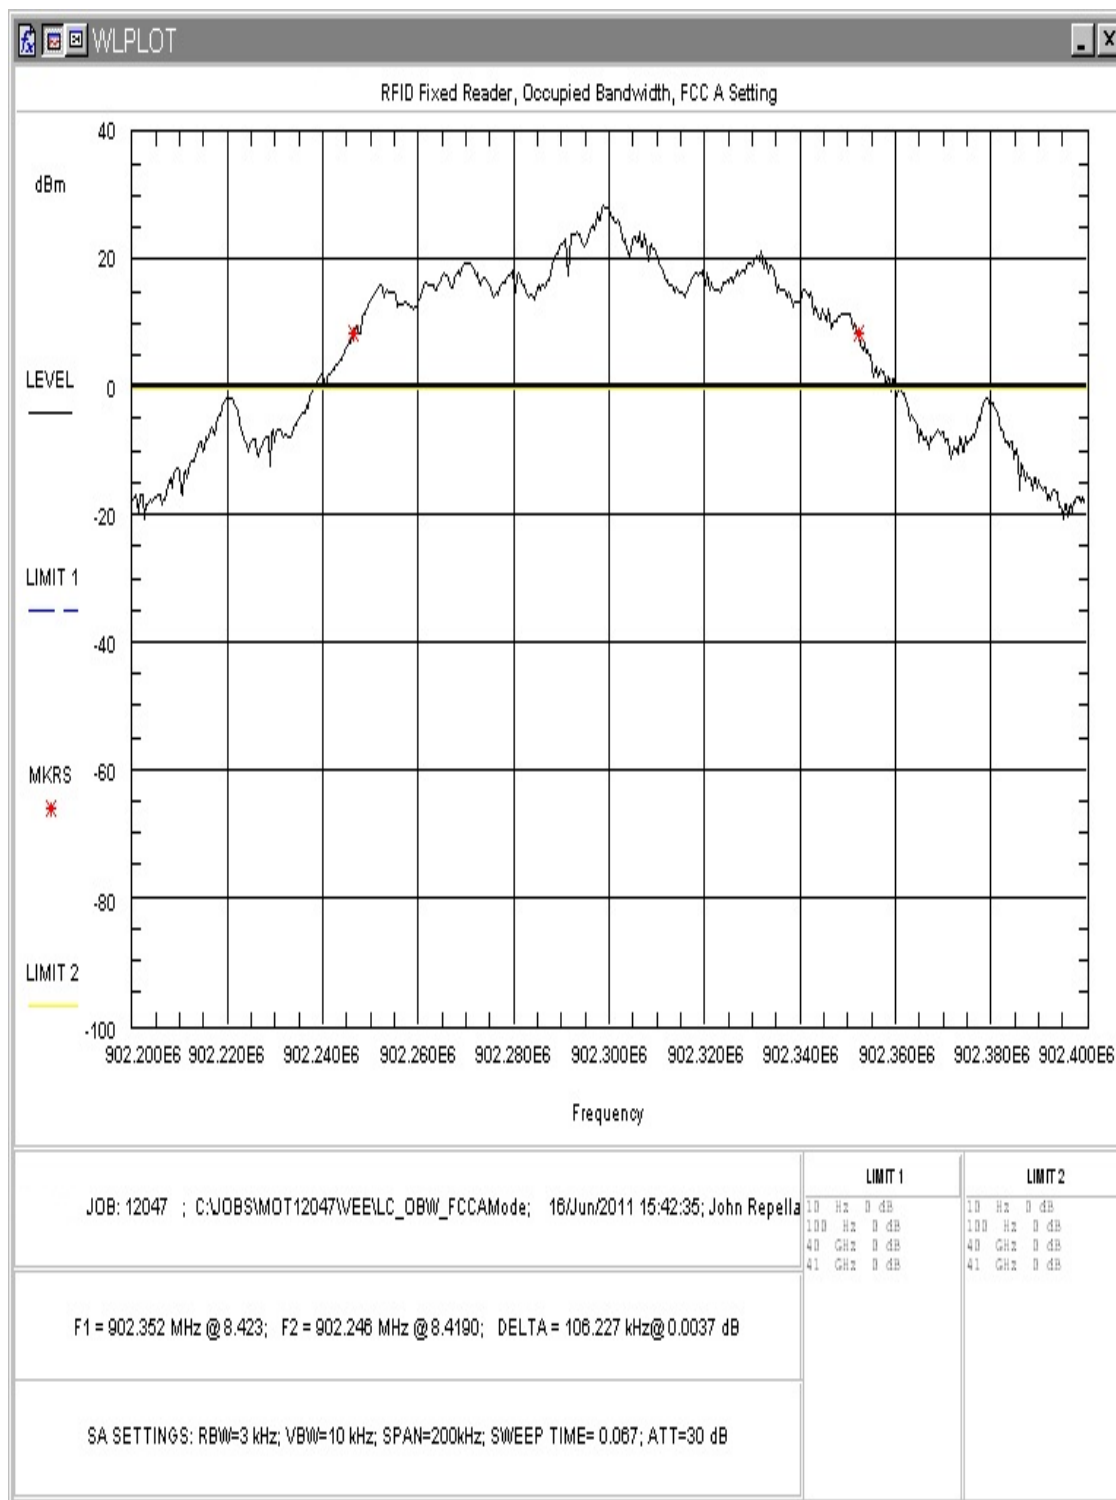


Figure 6: Occupied Bandwidth (Band A), Low Channel

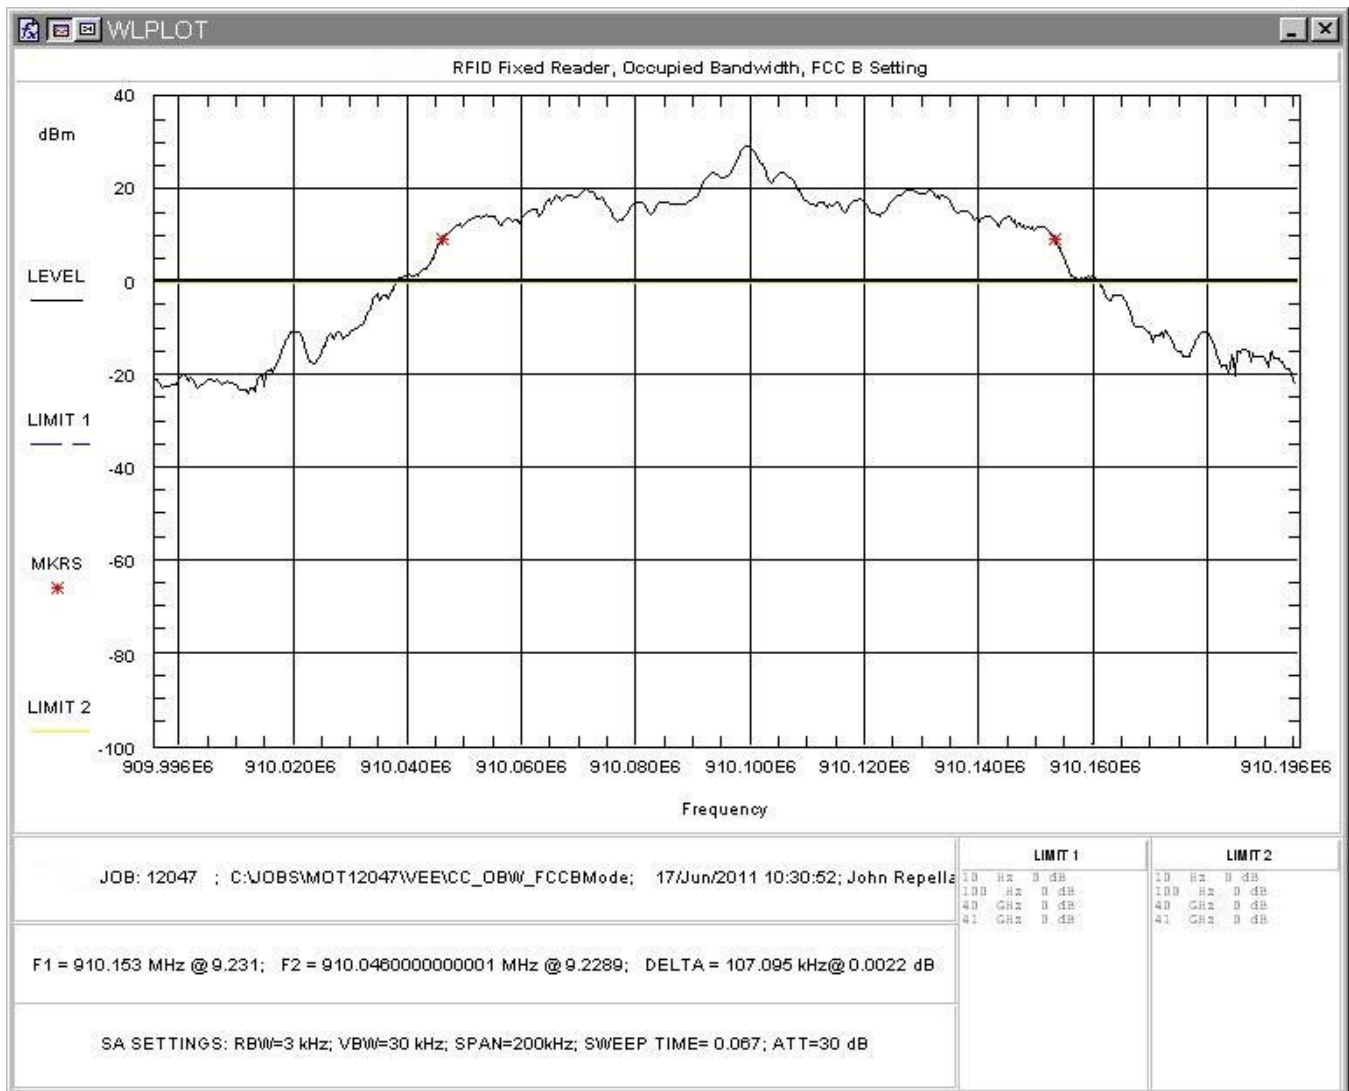


Figure 7: Occupied Bandwidth (Band B), Mid Channel

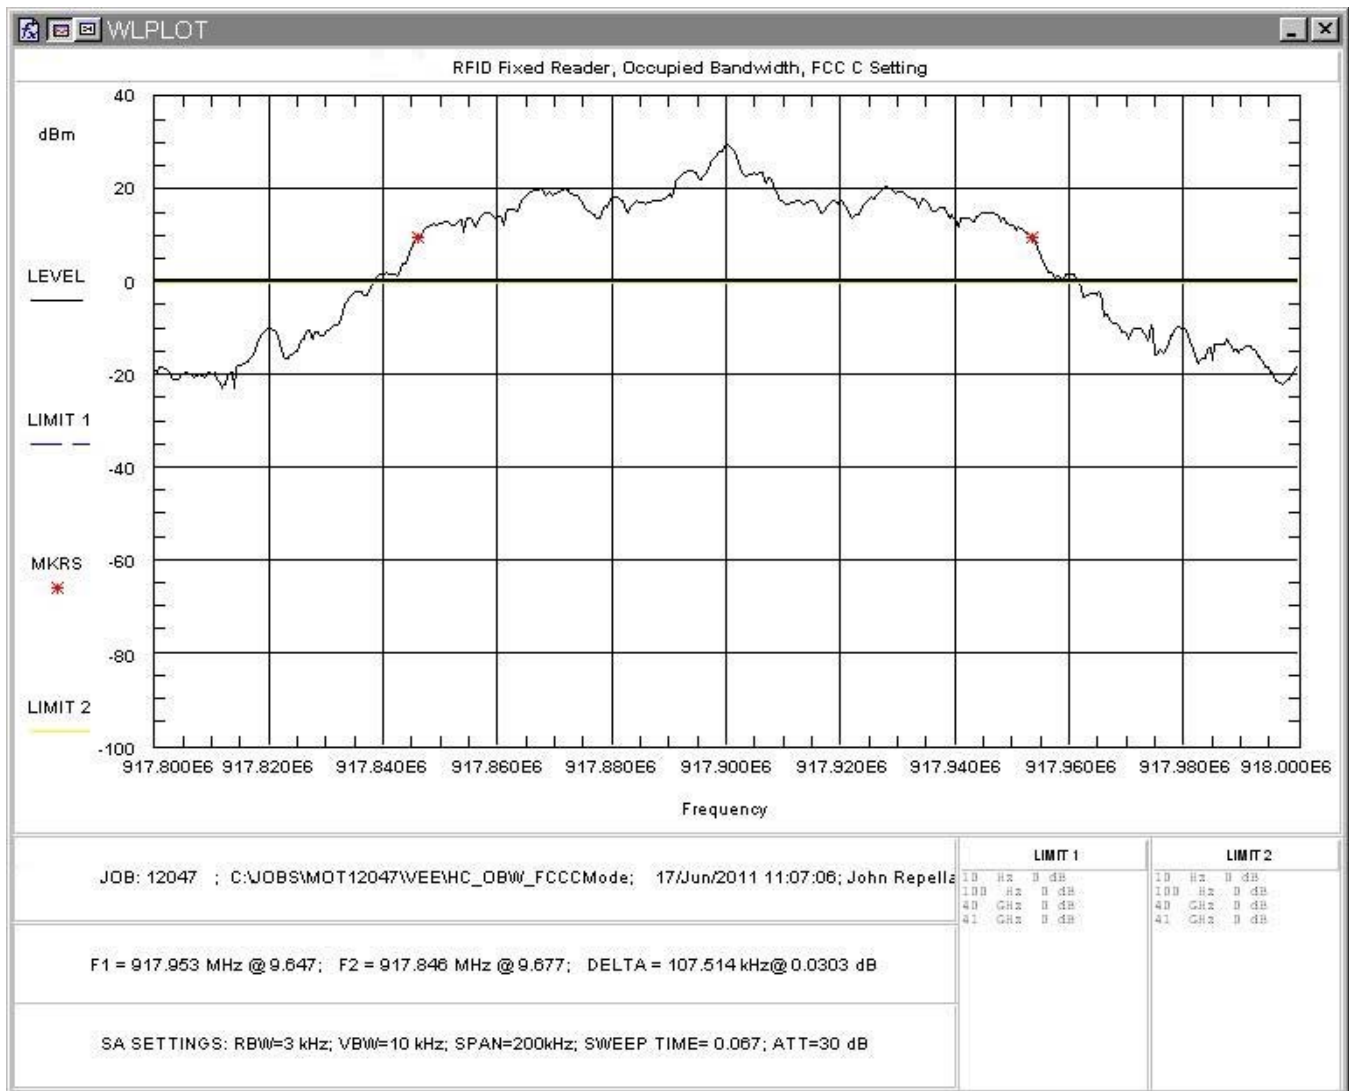


Figure 8: Occupied Bandwidth (Band C), High Channel

Table 7: 20dB Occupied Bandwidth Results (Dense Mode)

Frequency	Bandwidth	Limit	Pass/Fail
Low Channel: 902.30MHz	286.916kHz	500KHz	Pass
Mid Channel: 914.50MHz	283.436kHz	500KHz	Pass
High Channel: 927.75MHz	283.109kHz	500KHz	Pass

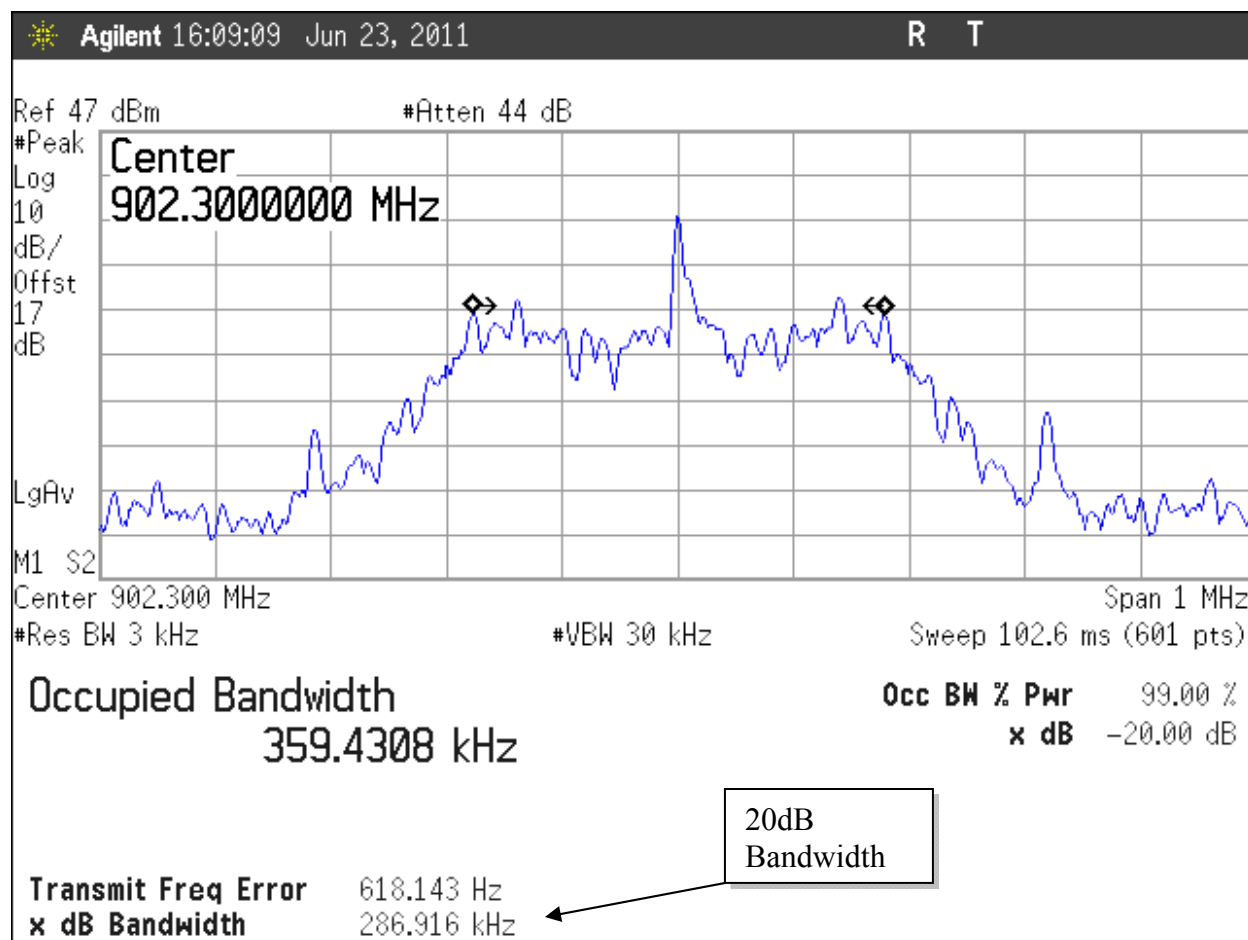


Figure 9: Occupied Bandwidth (Dense Mode), Low Channel

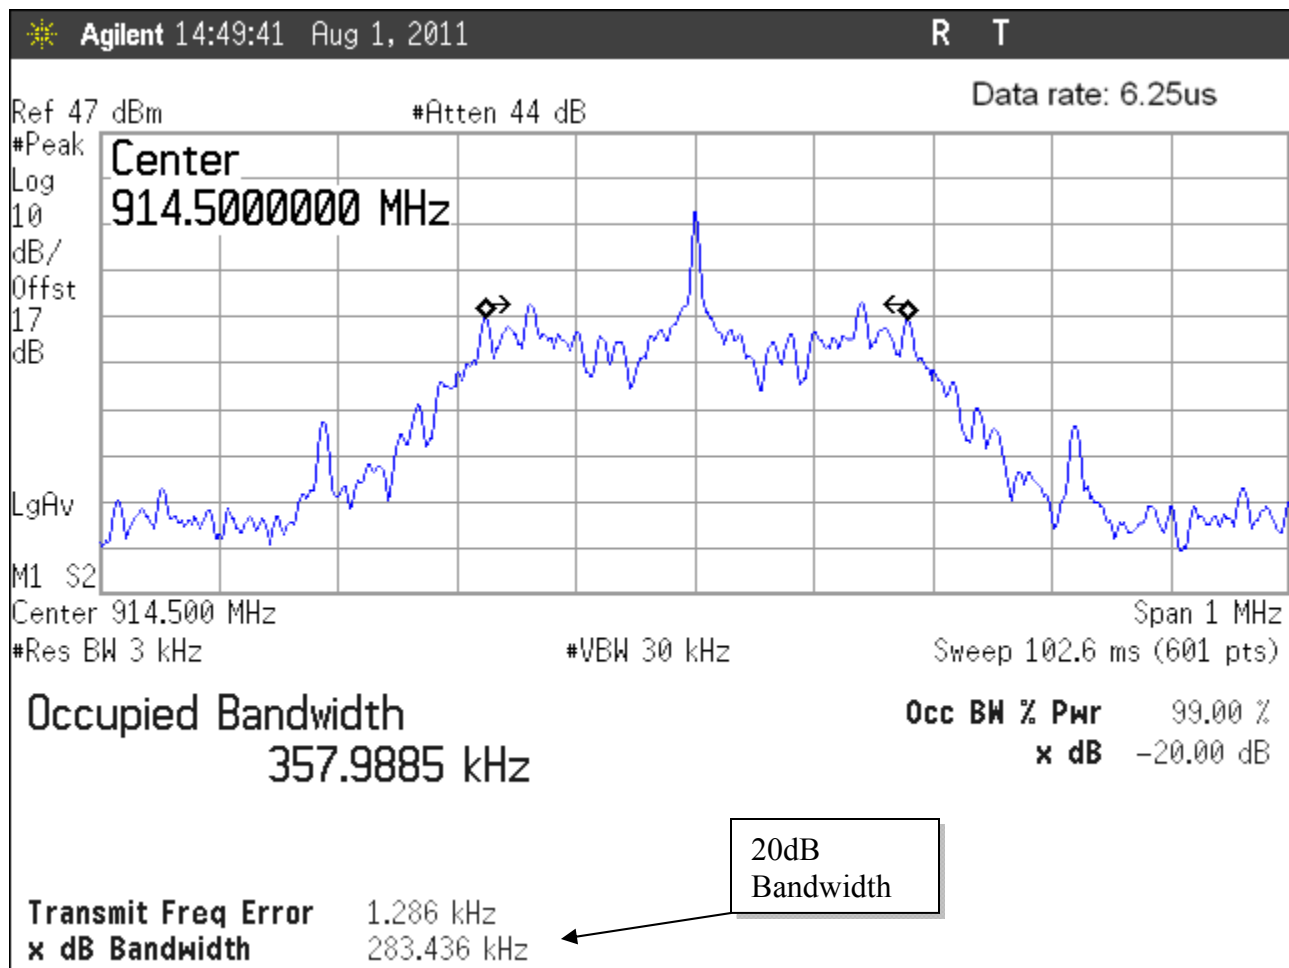


Figure 10: Occupied Bandwidth (Dense Mode), Mid Channel

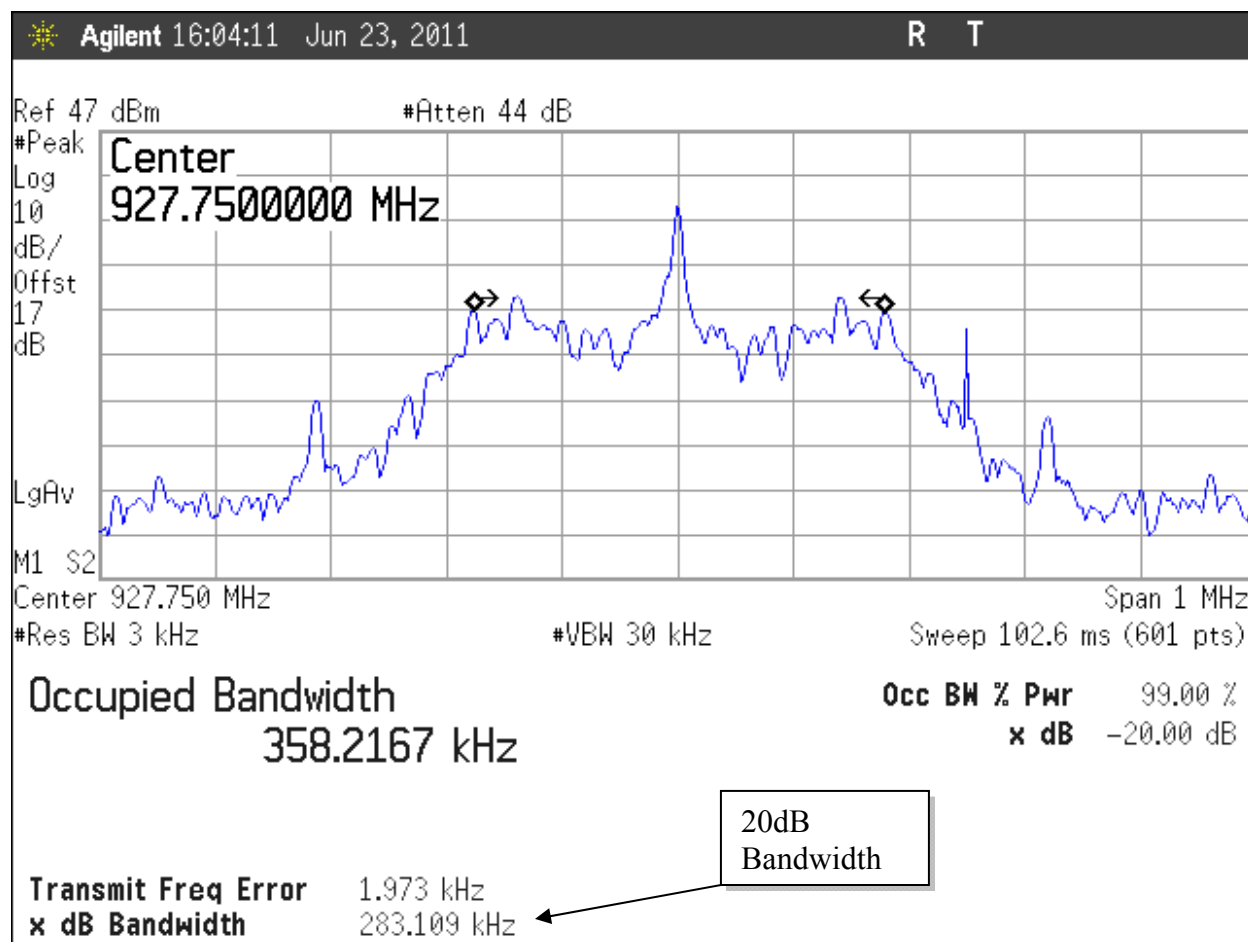


Figure 11: Occupied Bandwidth (Dense Mode), High Channel

5.4 Channel Spacing and Number of Hop Channels (FCC 15. 247(a)(1) & RSS-210 [A8.1 (b)])

Per the FCC requirements, frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth, whichever is greater. The maximum 20dB bandwidth measured is 286.916 kHz. In addition, for a 902-928MHz transmitter the number of hopping channels shall be stated.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 10 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 100 kHz. The channel spacing of 2 adjacent channels was measured using a spectrum analyzer span setting of 500 kHz. Also, the number of hopping channels was measured from 900MHz to 930MHz.

The following are plots of the channel spacing and number of hopping channels data. The channel spacing was verified to be nominally 200 kHz in Bands A, B and C. The dense mode utilizes 50 channels and the channel spacing in this mode was measured to be 500 kHz.

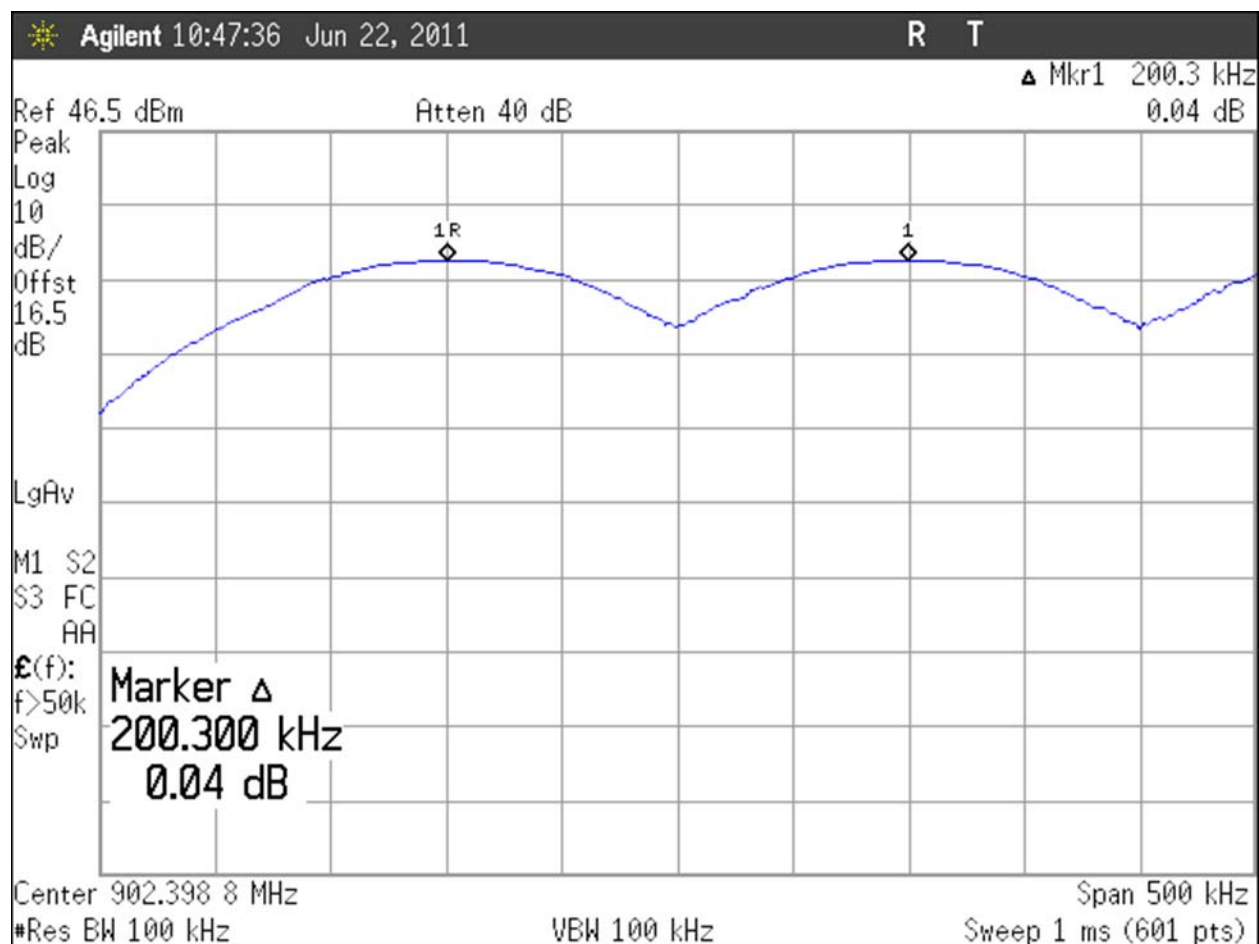


Figure 12: Channel Spacing, Band A

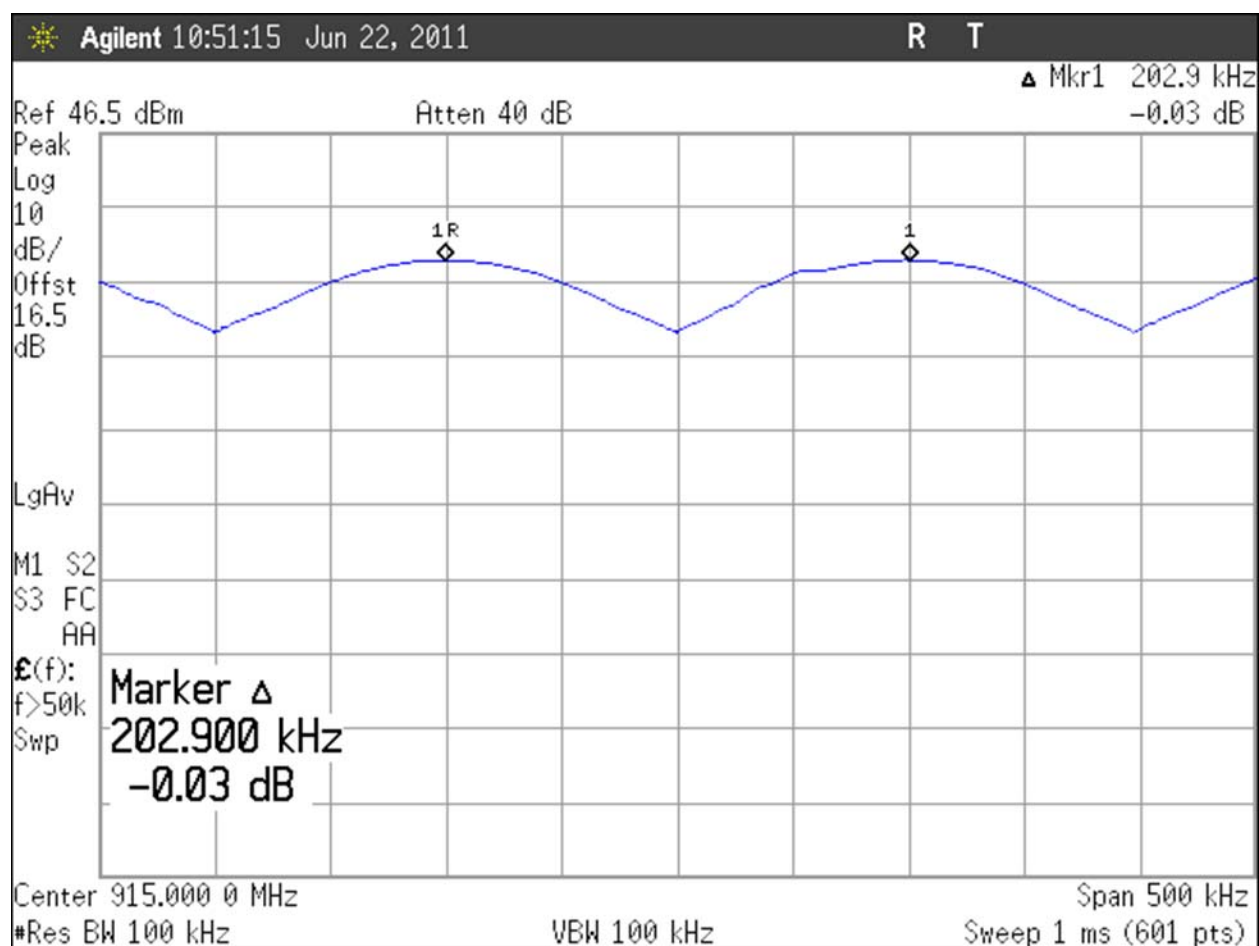


Figure 13: Channel Spacing, Band B

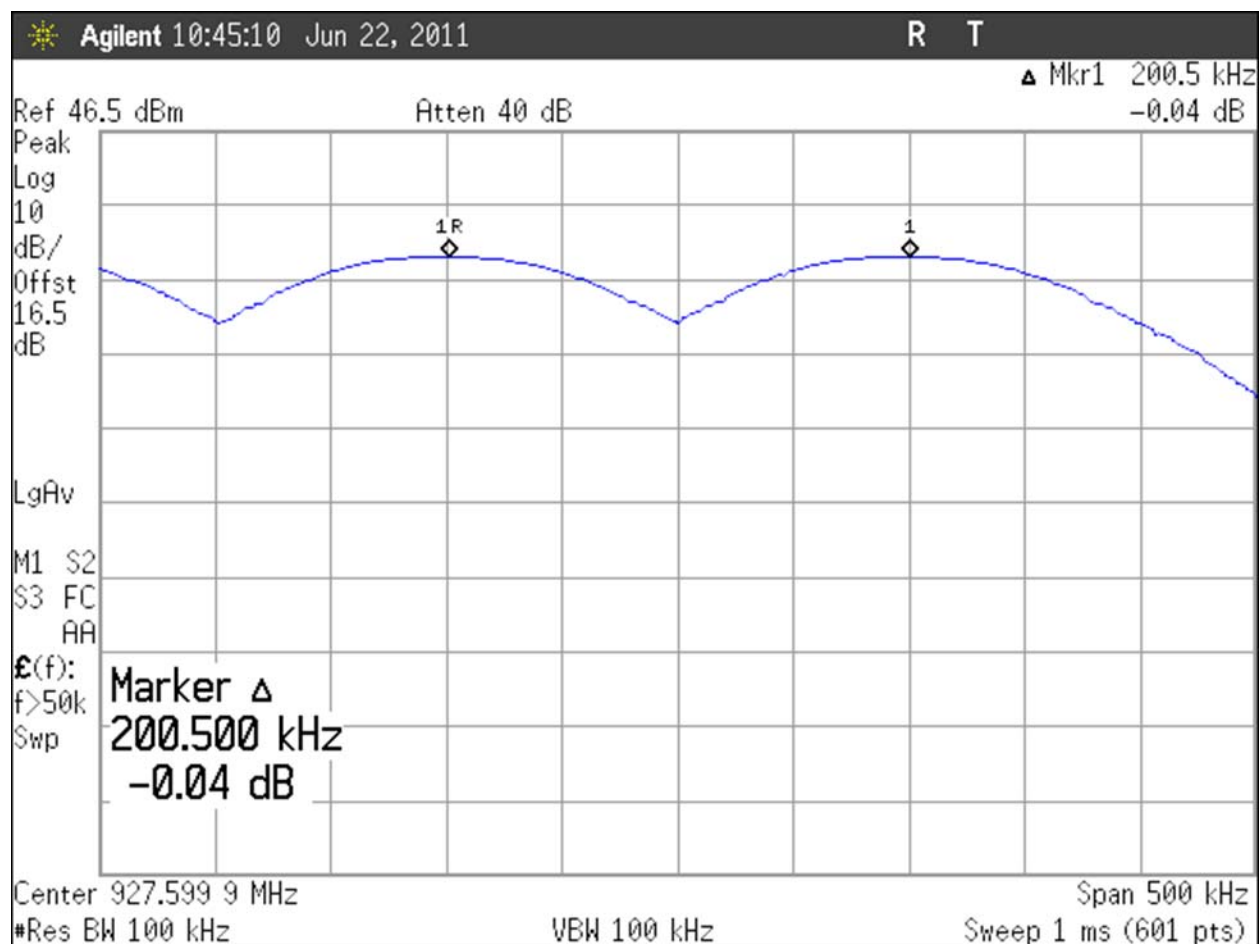


Figure 14: Channel Spacing, Band C

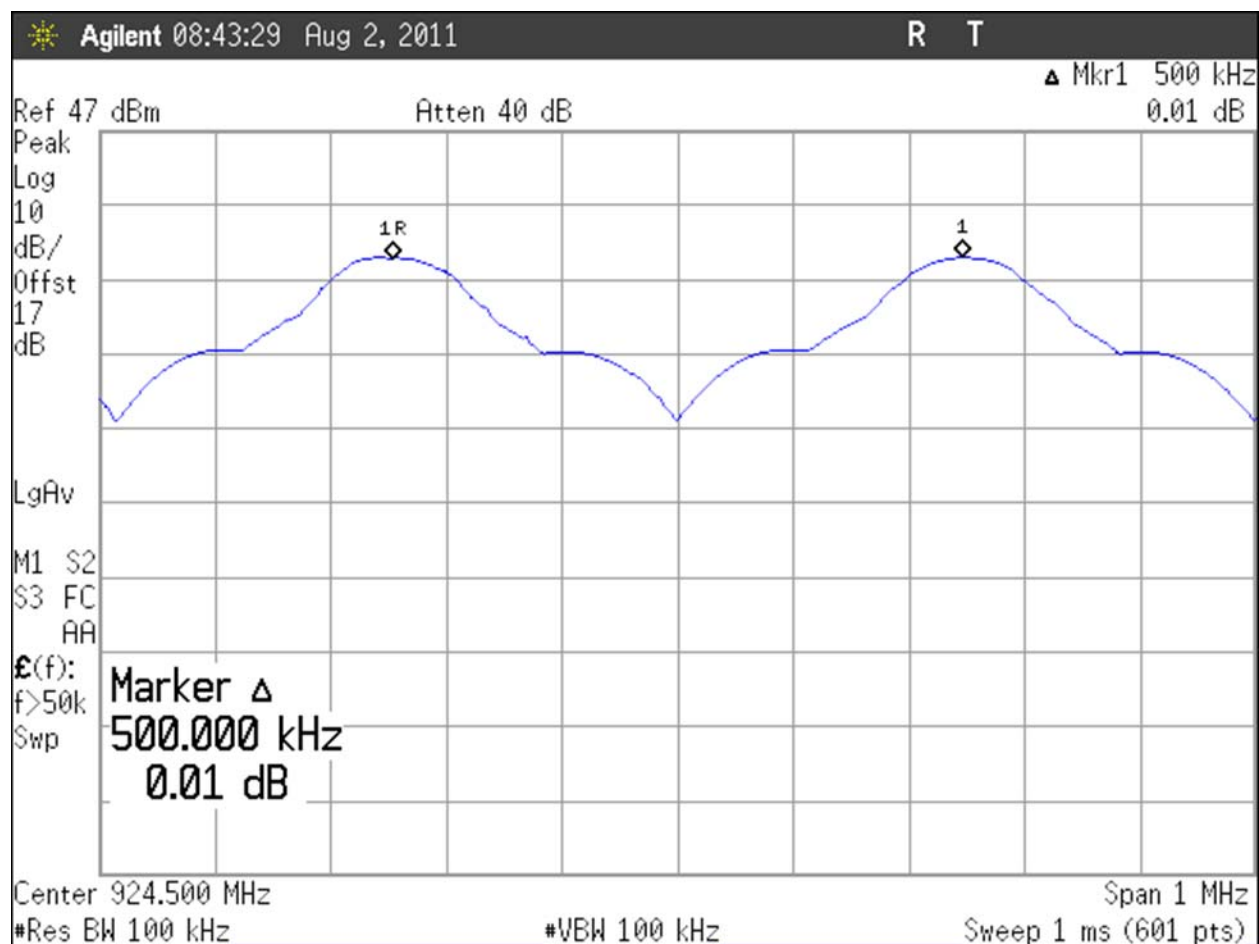


Figure 15: Channel Spacing, Dense Mode

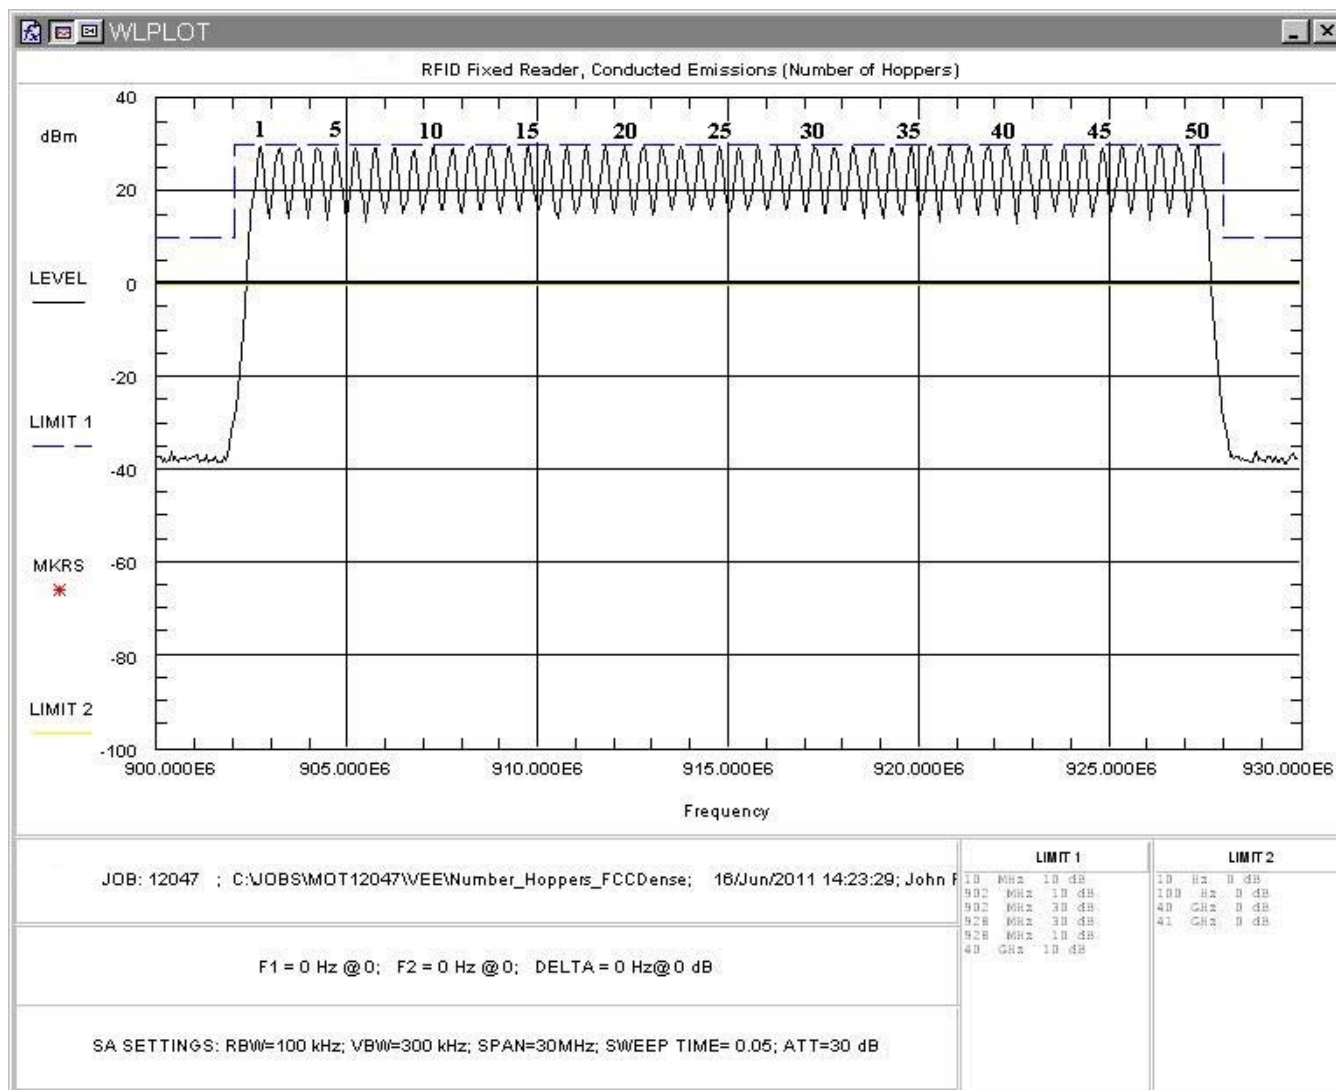


Figure 16: Number of Channels, Dense Mode

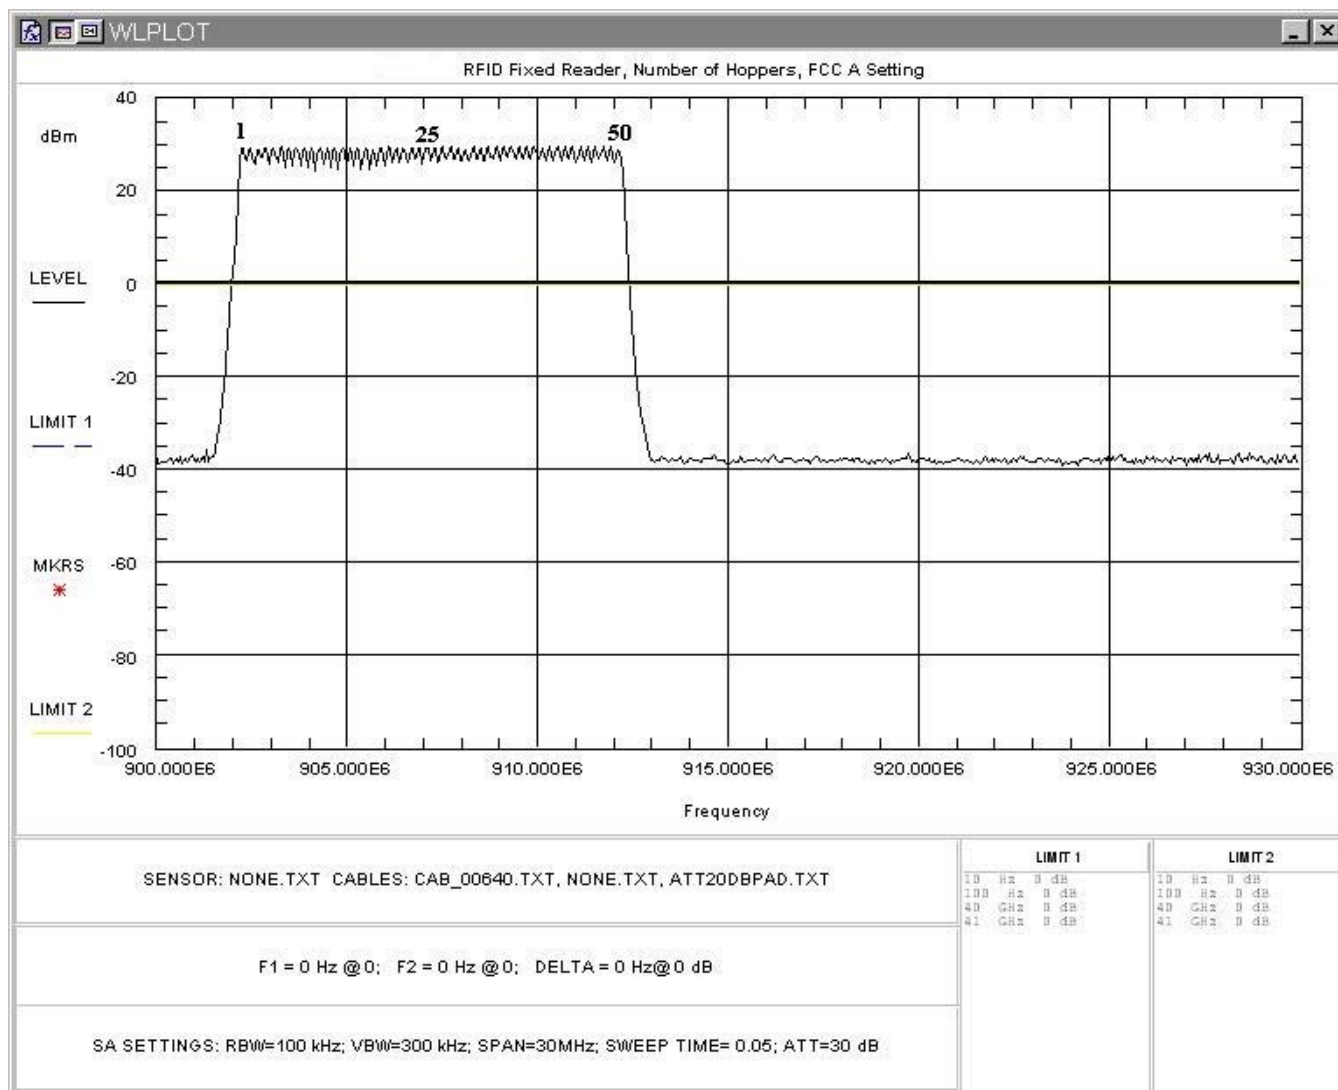


Figure 17: Number of Channels, Band A

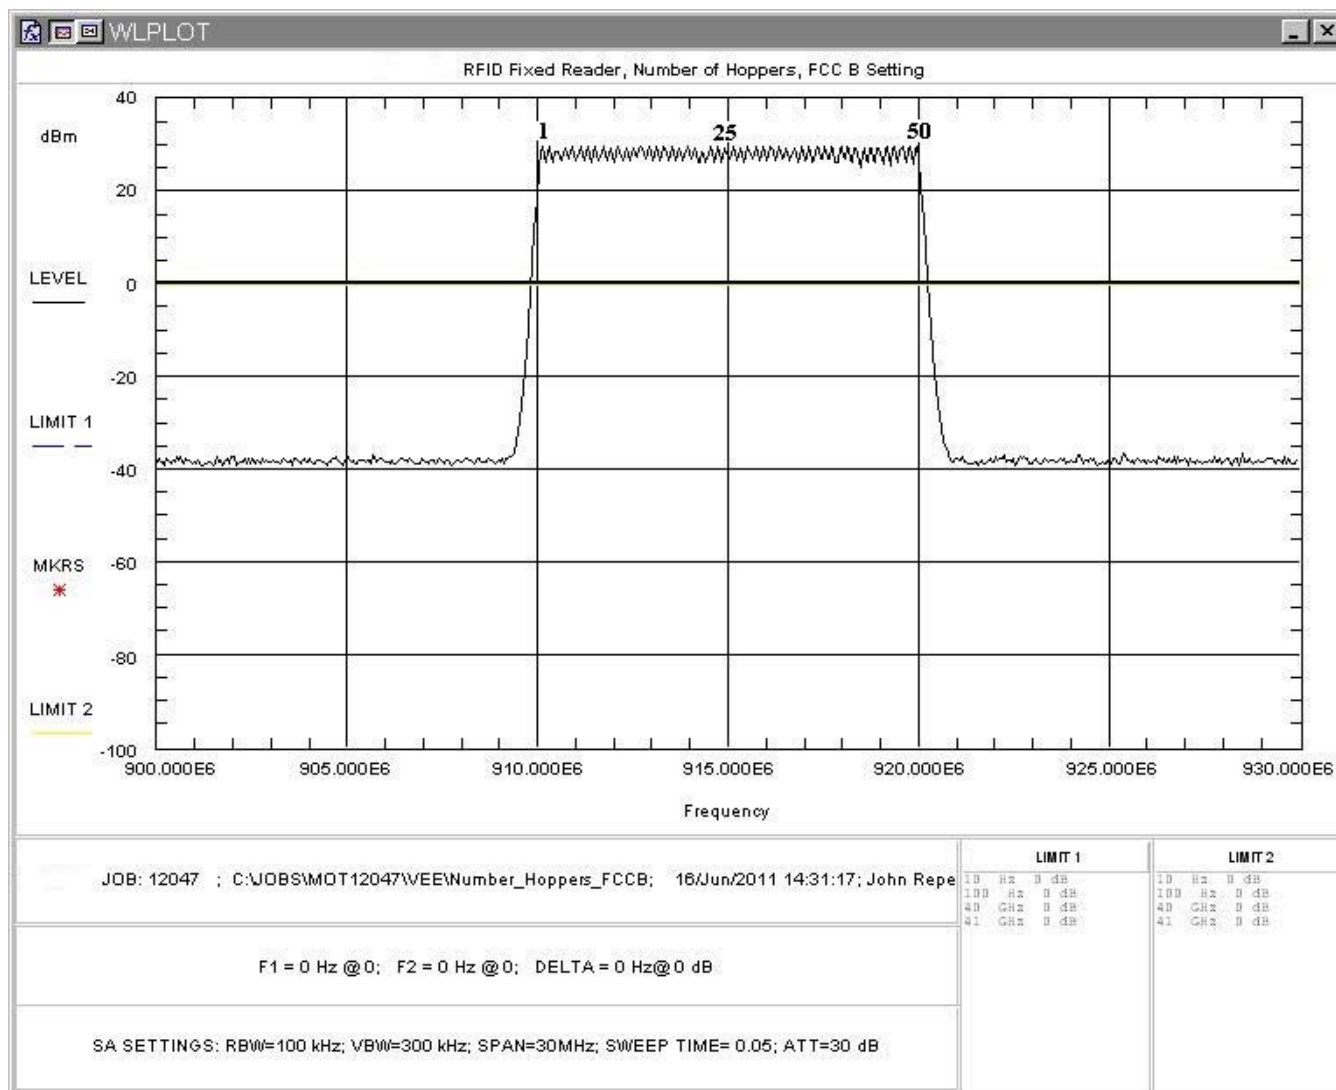


Figure 18: Number of Channels, Band B

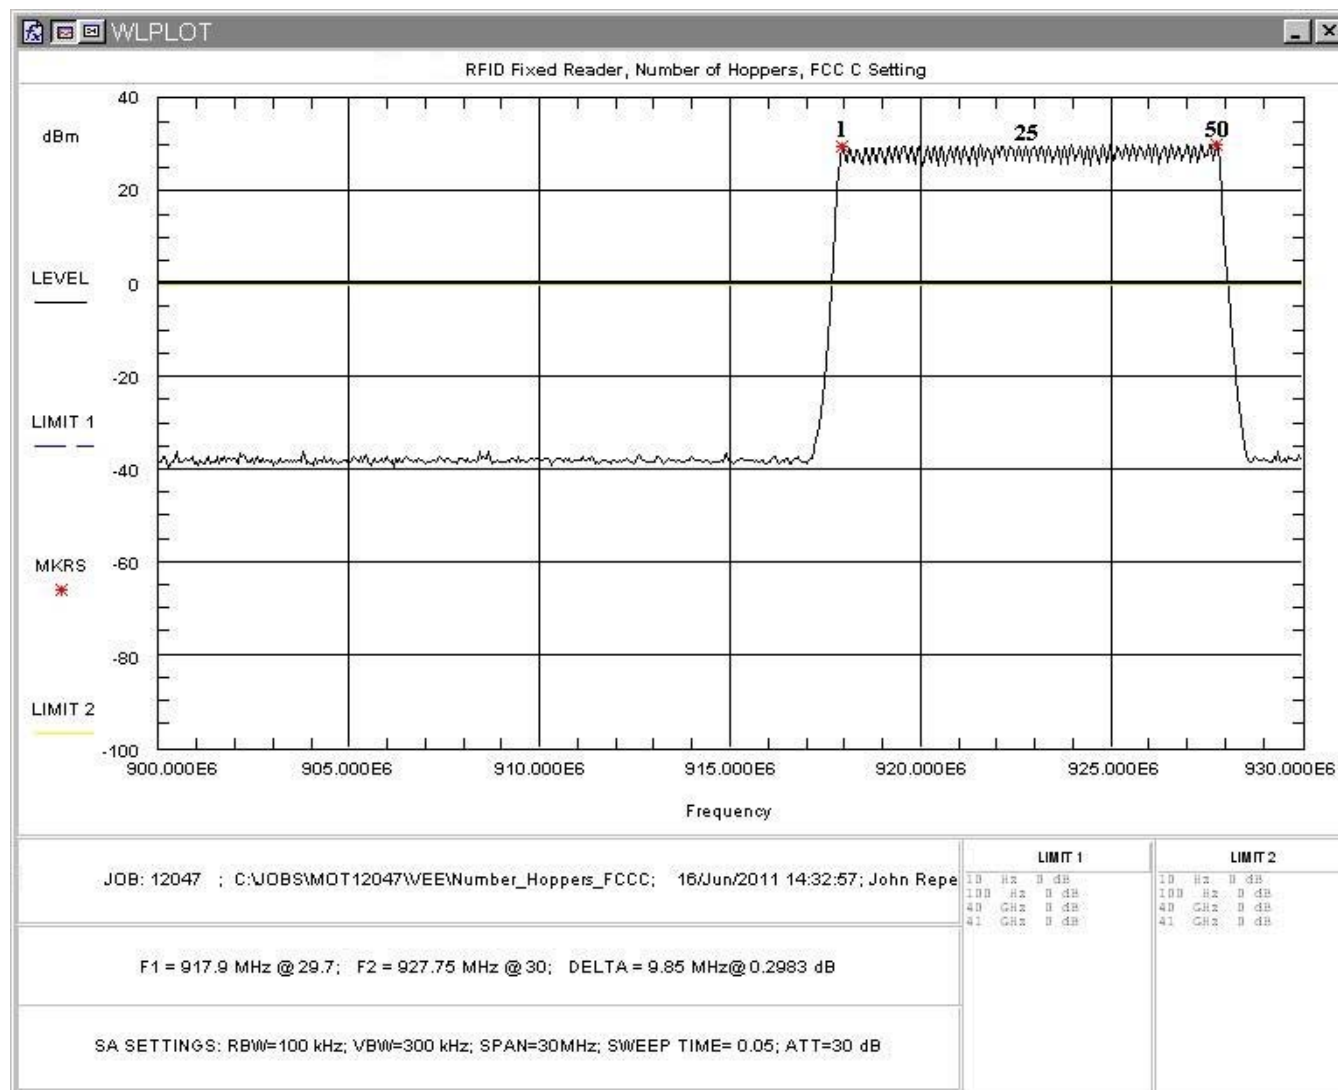


Figure 19: Number of Channels, Band C

5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)

The EUT must comply with requirements for spurious emissions at antenna terminals. Per §15.247(c) all spurious emissions in any 100 kHz bandwidth outside the frequency band in which the spread spectrum device is operating shall be attenuated 20 dB below the highest power level in a 100 kHz bandwidth within the band containing the highest level of the desired power.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 10 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 100 kHz. The amplitude of the EUT carrier frequency was measured to determine the emissions limit (20 dB below the carrier frequency amplitude). The emissions outside of the allocated frequency band were then scanned from 30 MHz up to the tenth harmonic of the carrier.

The following are plots of the conducted spurious emissions data.

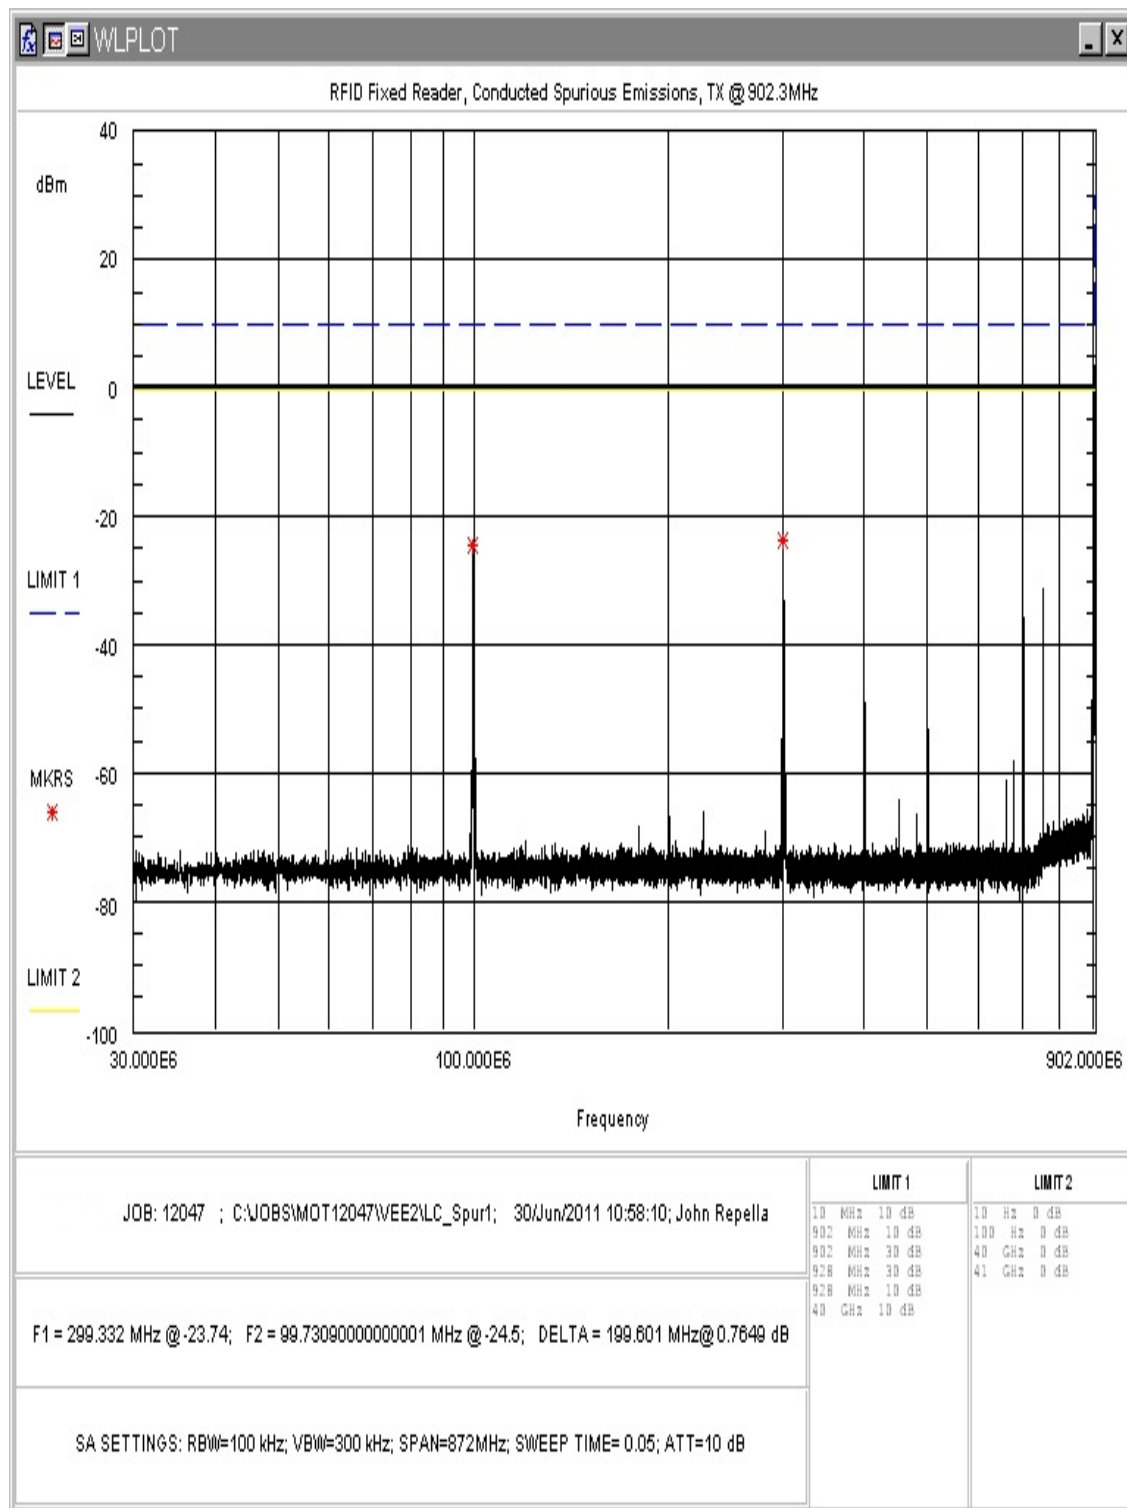


Figure 20: Conducted Spurious Emissions, Low Channel 30 - 900MHz

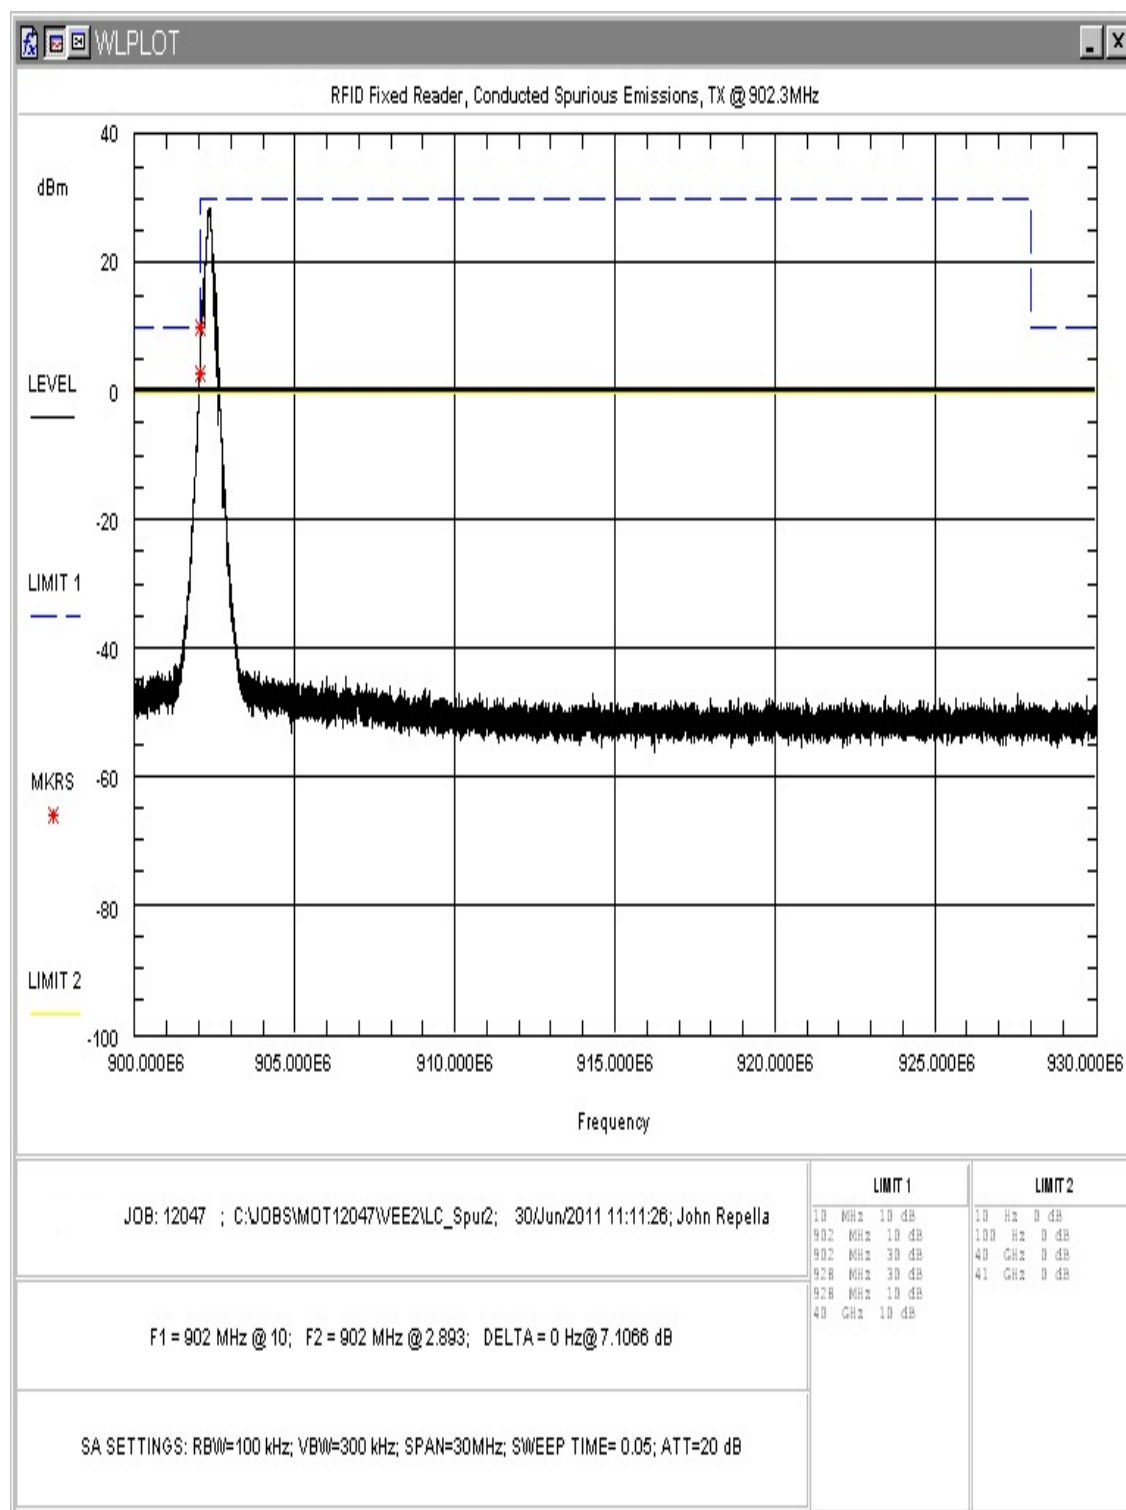


Figure 21: Conducted Spurious Emissions, Low Channel 900MHz – 930MHz

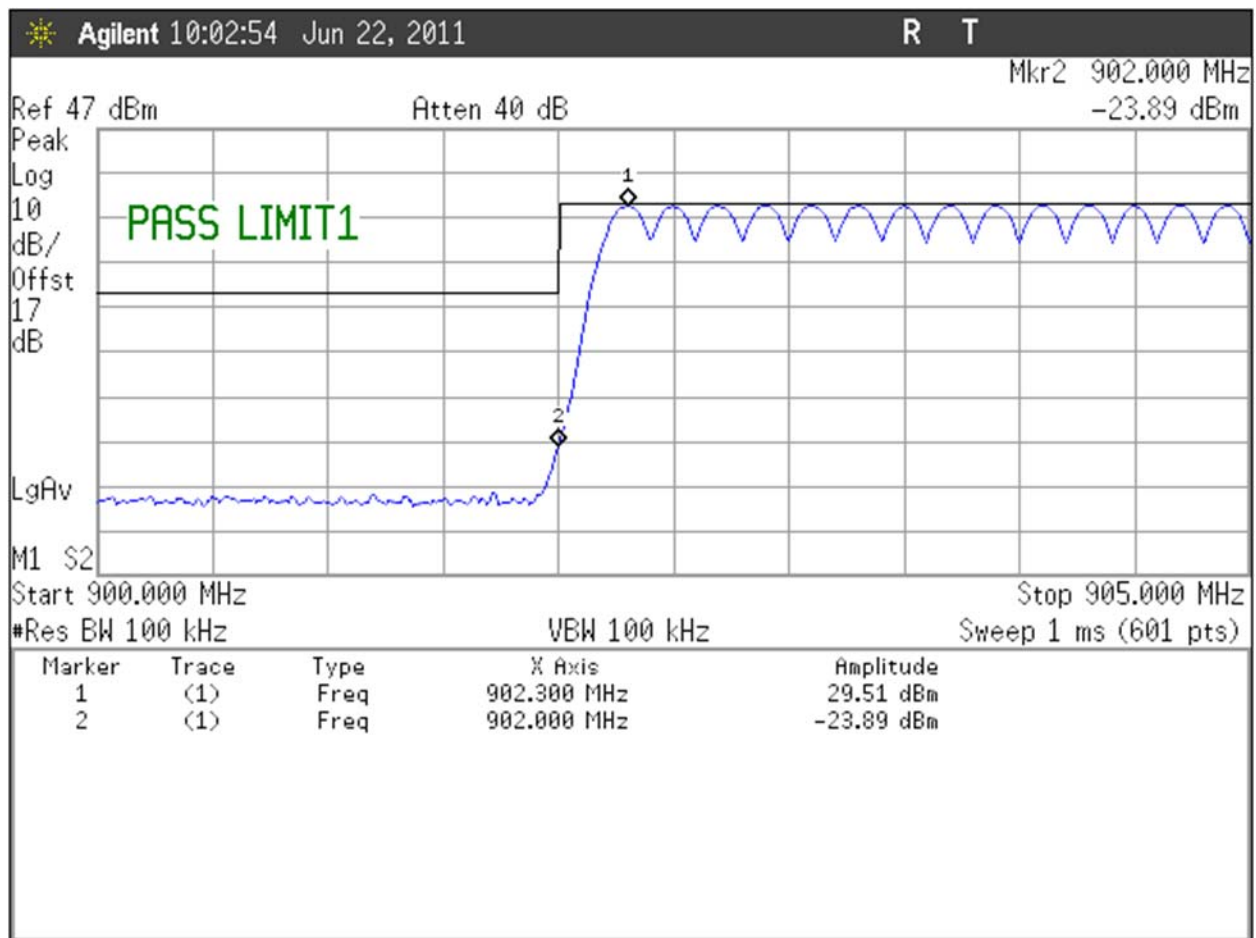


Figure 22: Band Edge Plot (Hopping), Low Channel TX @902.3MHz

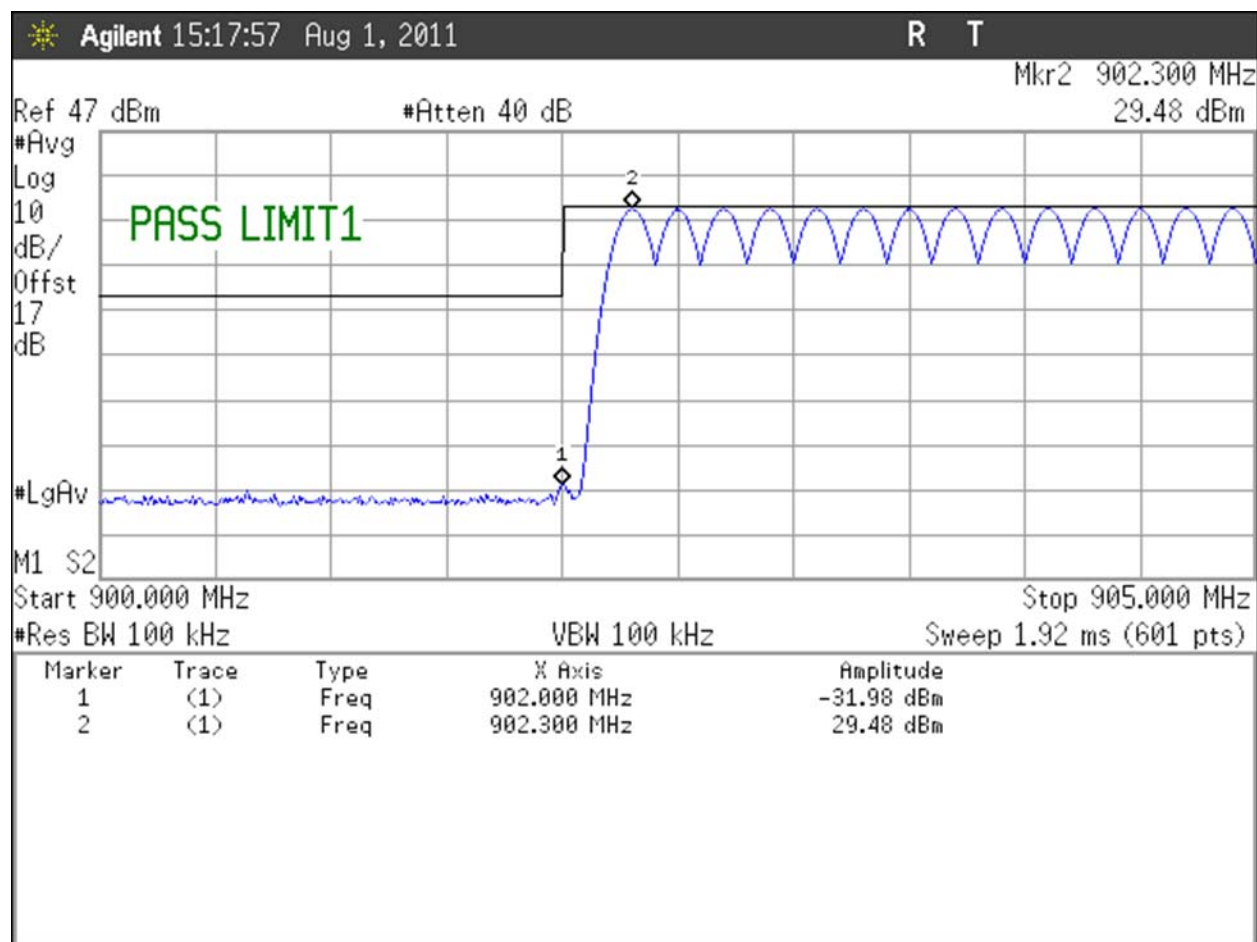


Figure 23: Band Edge Plot (Non-Hopping), Low Channel TX @902.3MHz

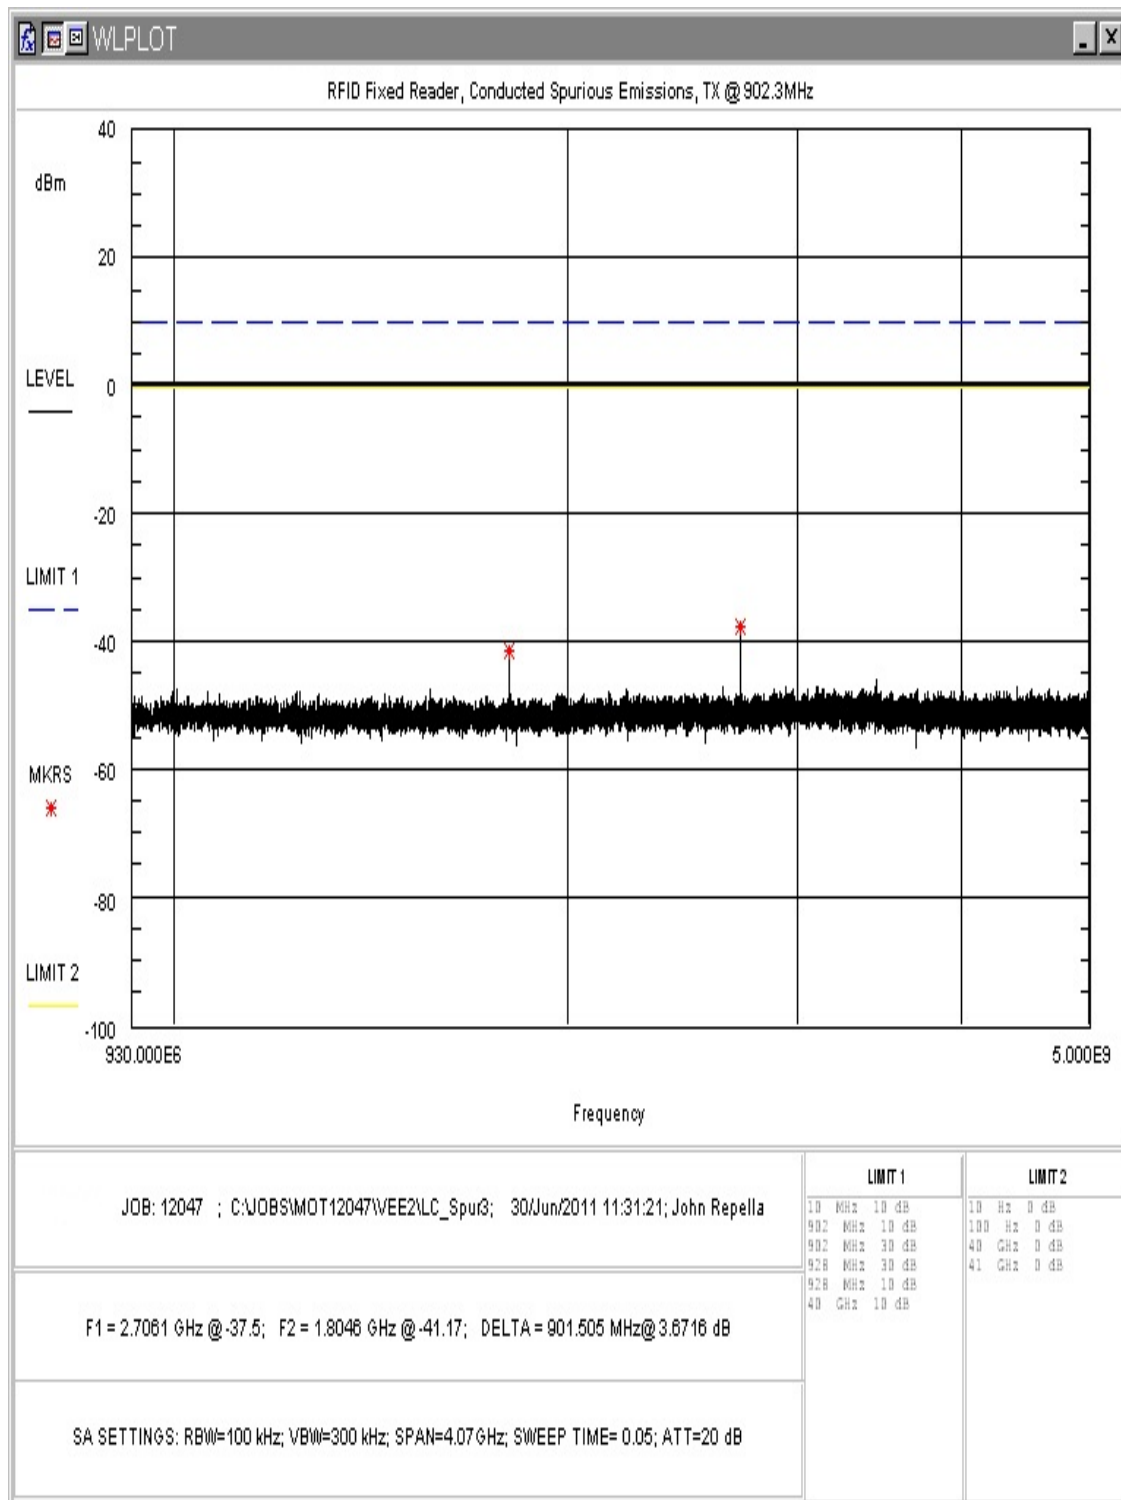


Figure 24: Conducted Spurious Emissions, Low Channel 930MHz – 5GHz

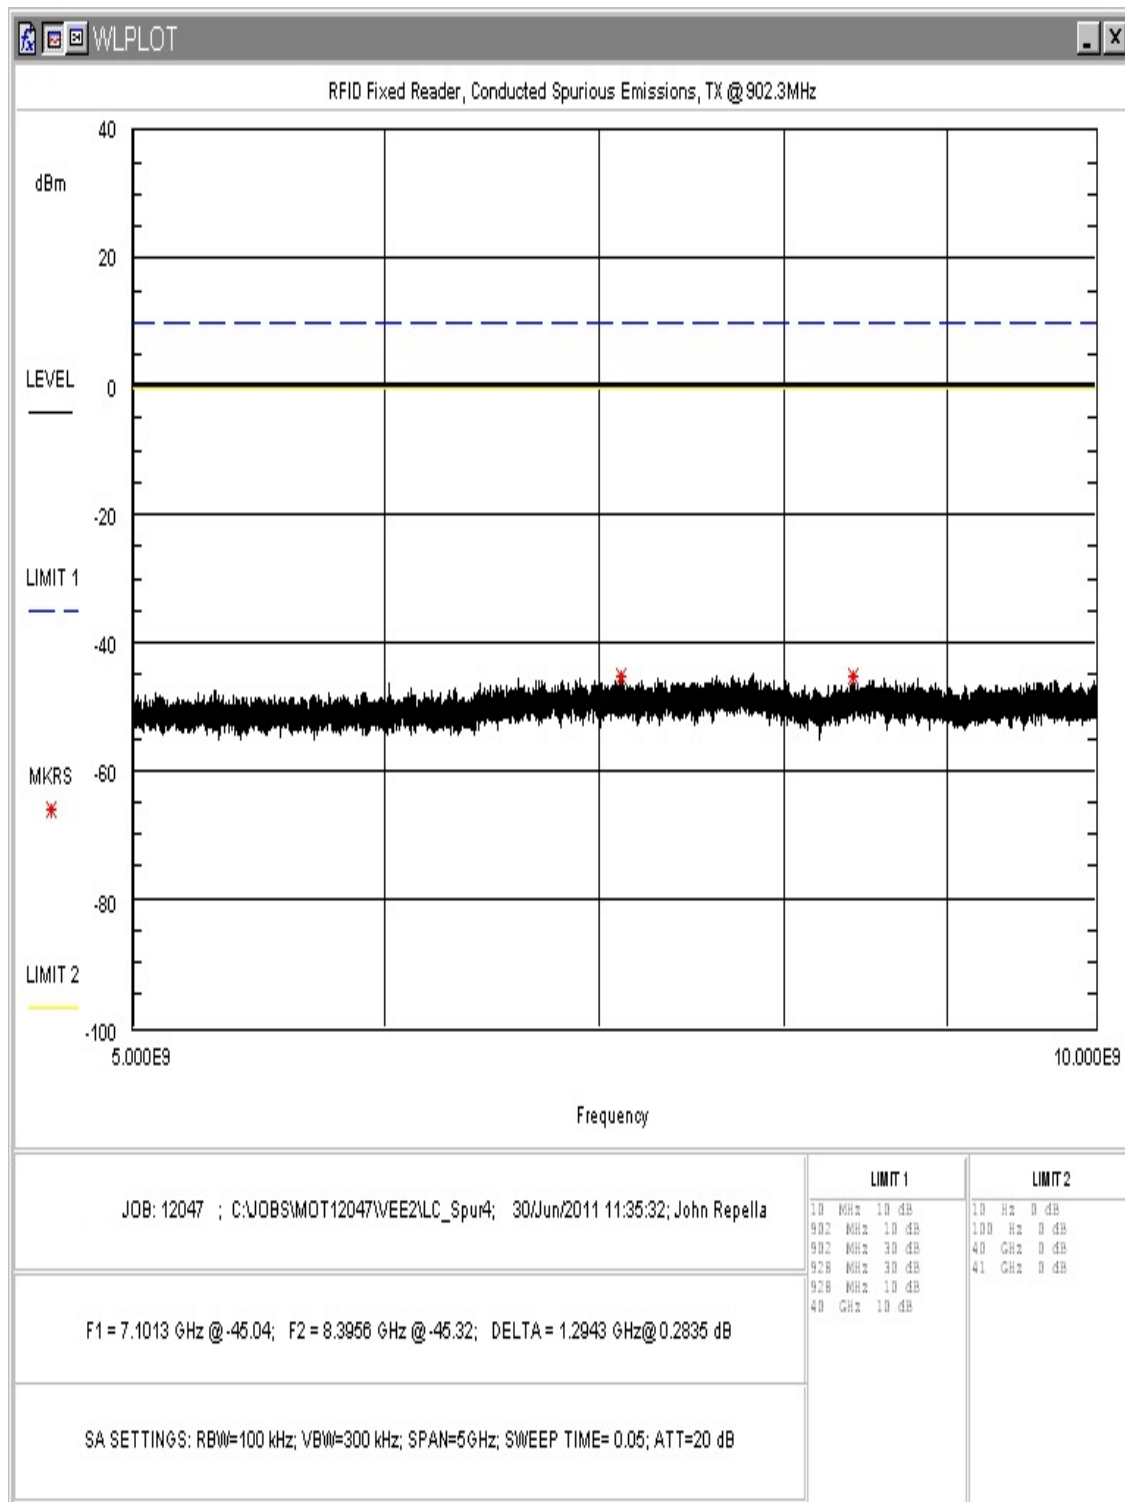


Figure 25: Conducted Spurious Emissions, Low Channel 5 - 10GHz

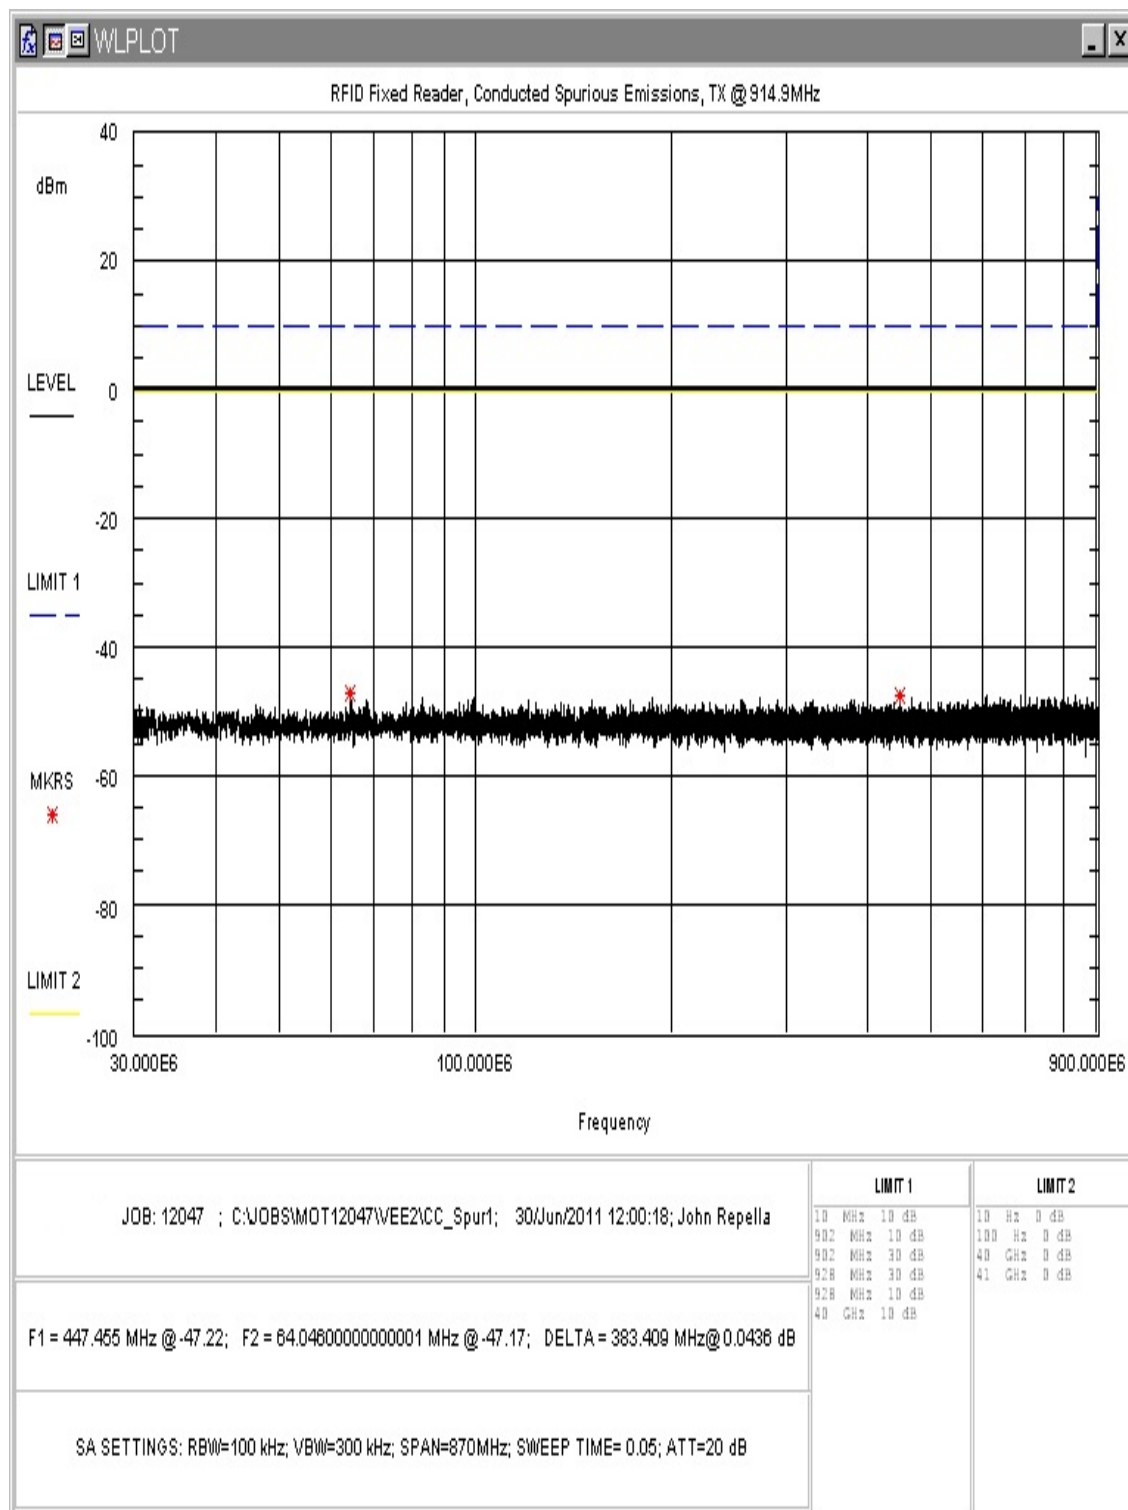


Figure 26: Conducted Spurious Emissions, Mid Channel 30 - 900MHz

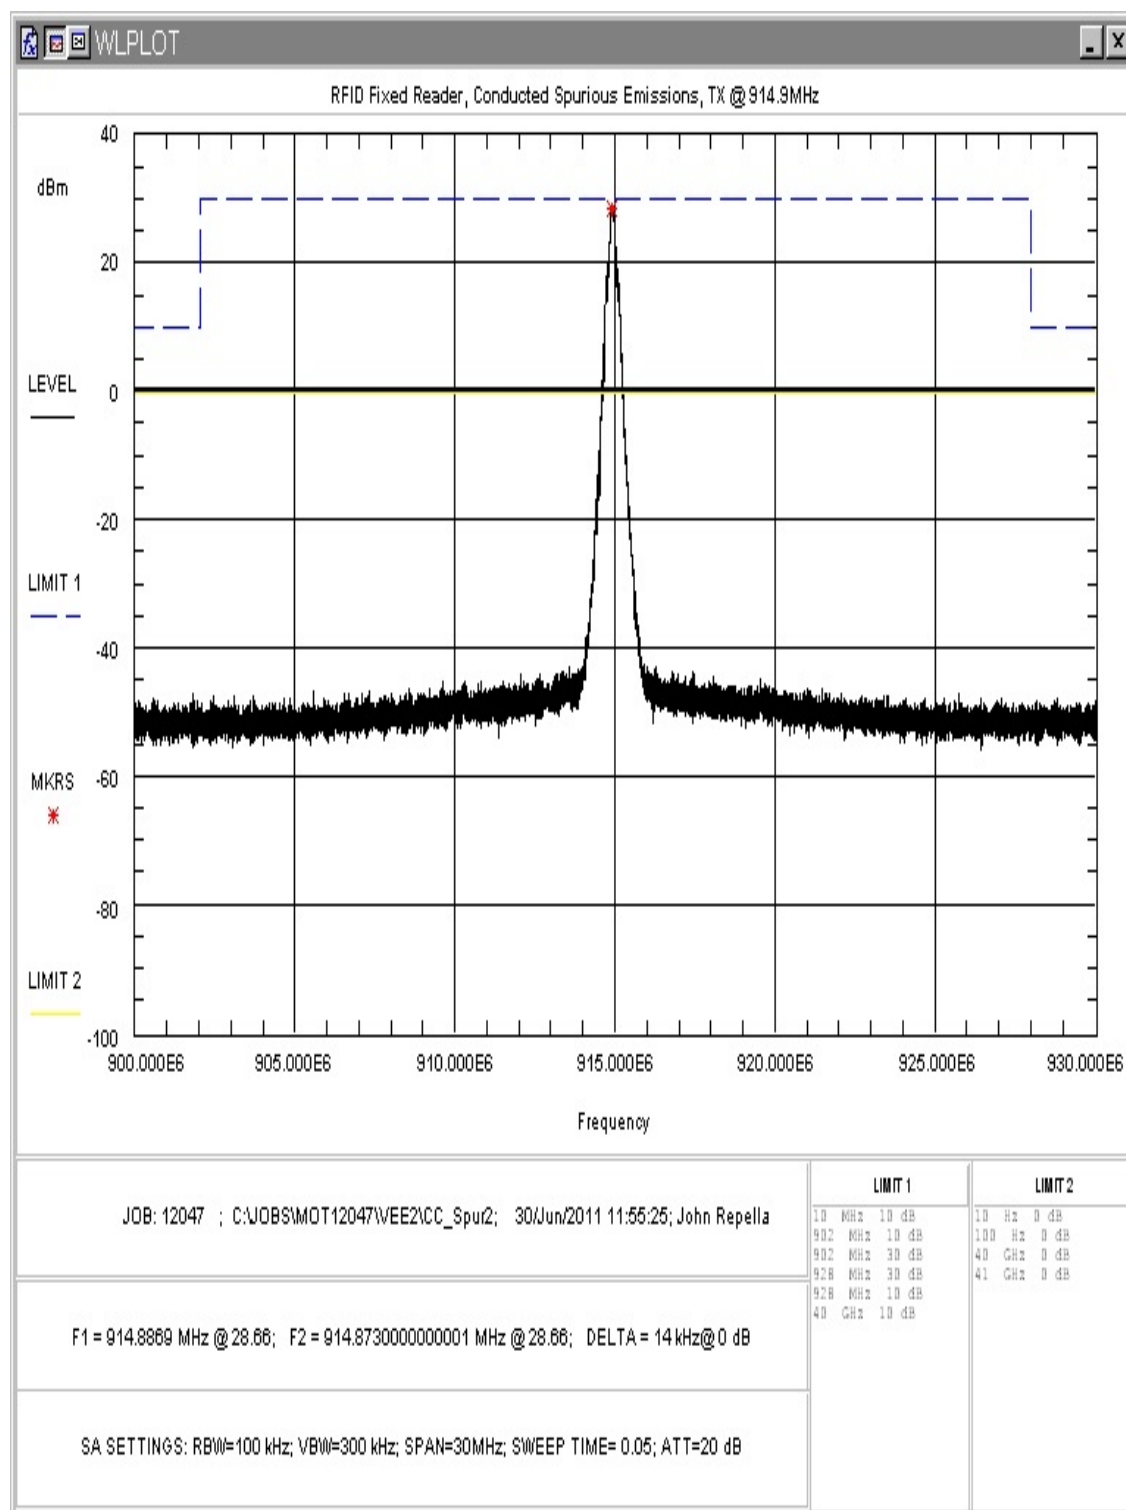


Figure 27: Conducted Spurious Emissions, Mid Channel 900MHz – 930MHz

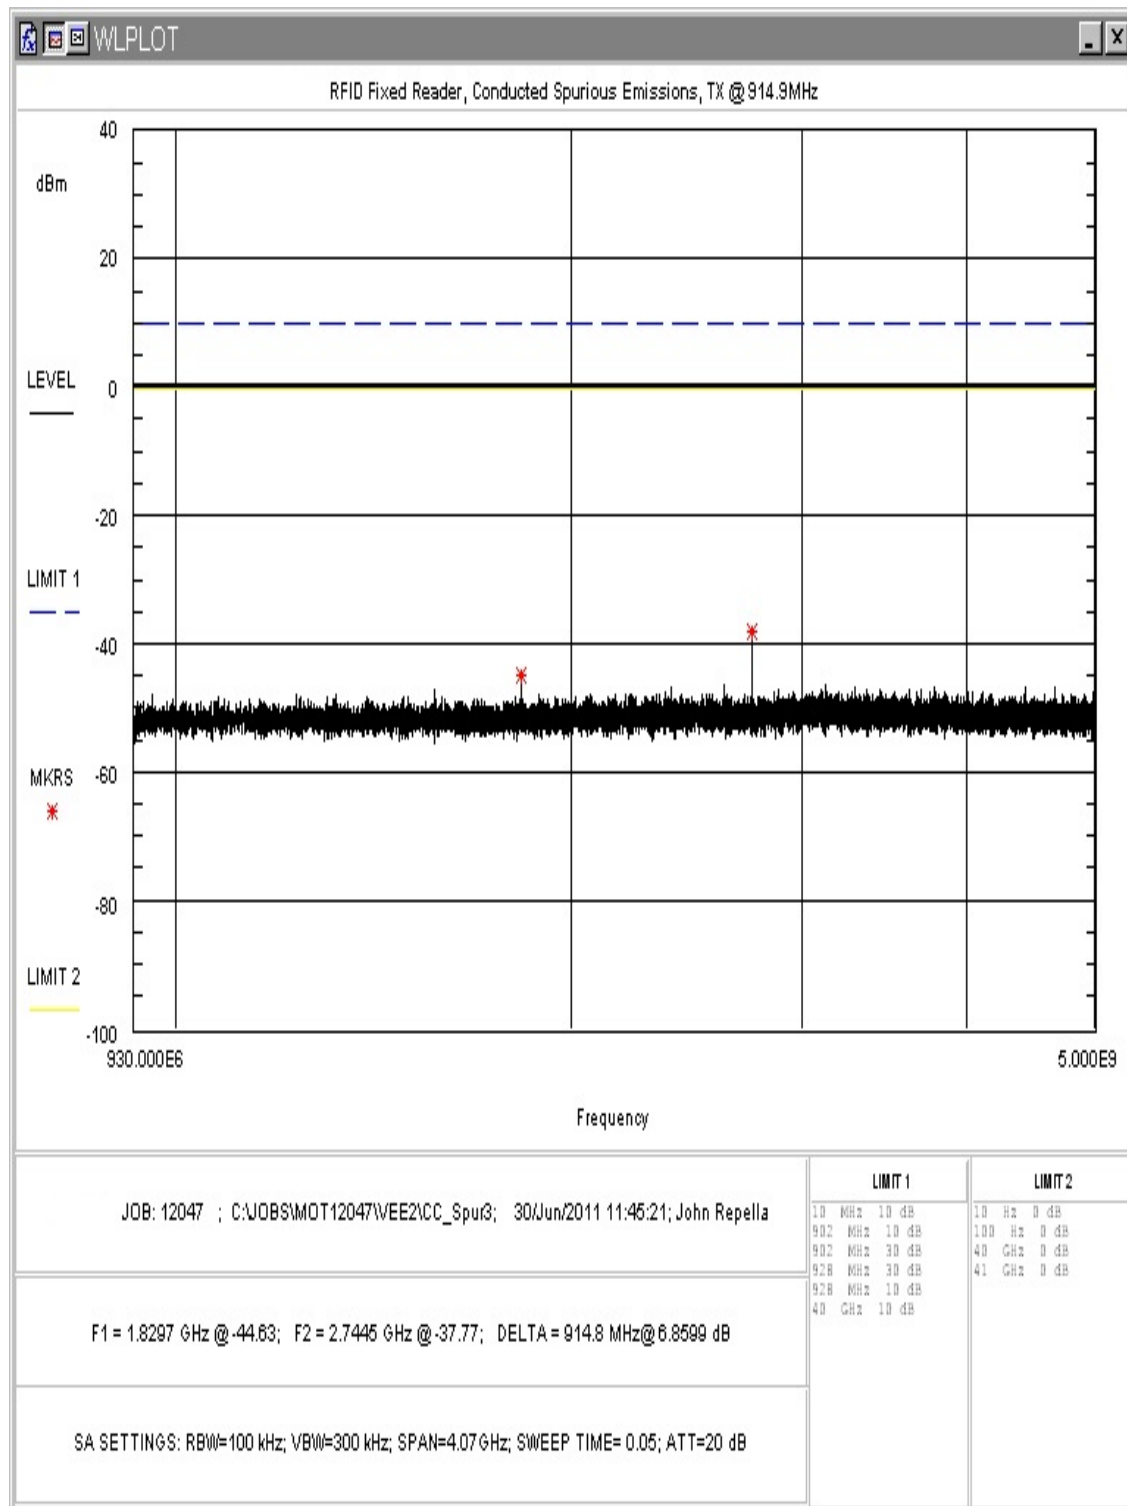


Figure 28: Conducted Spurious Emissions, Mid Channel 930MHz– 5GHz

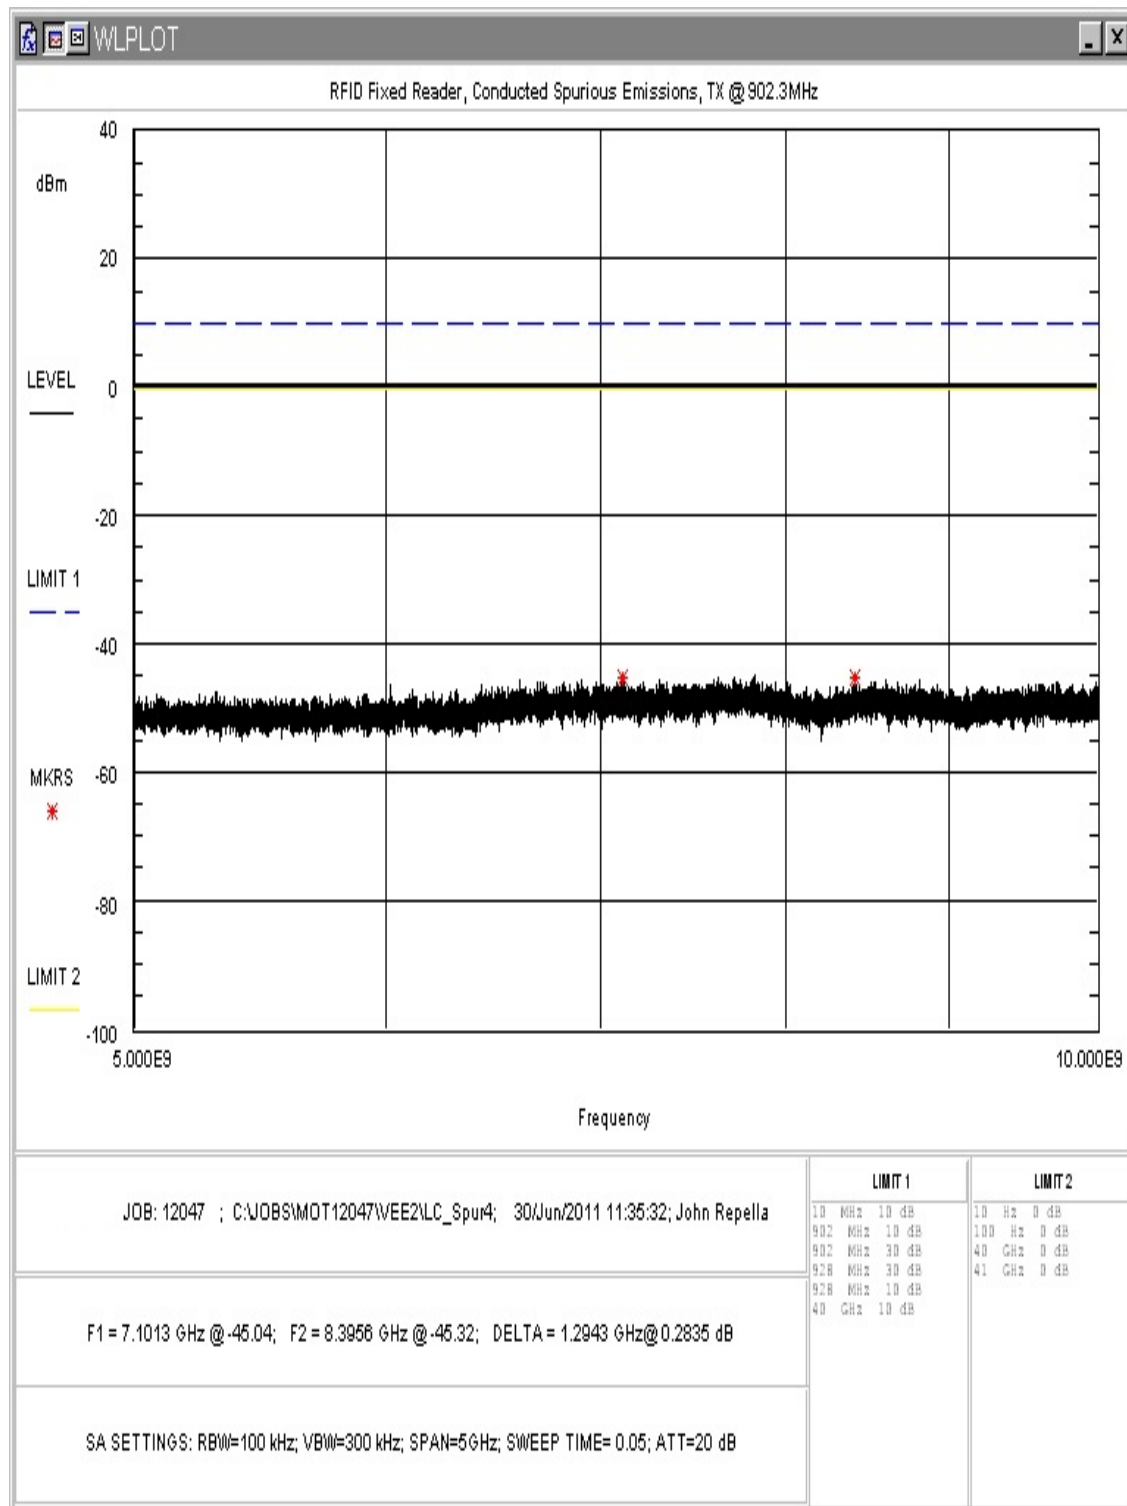


Figure 29: Conducted Spurious Emissions, Mid Channel 5 - 10GHz

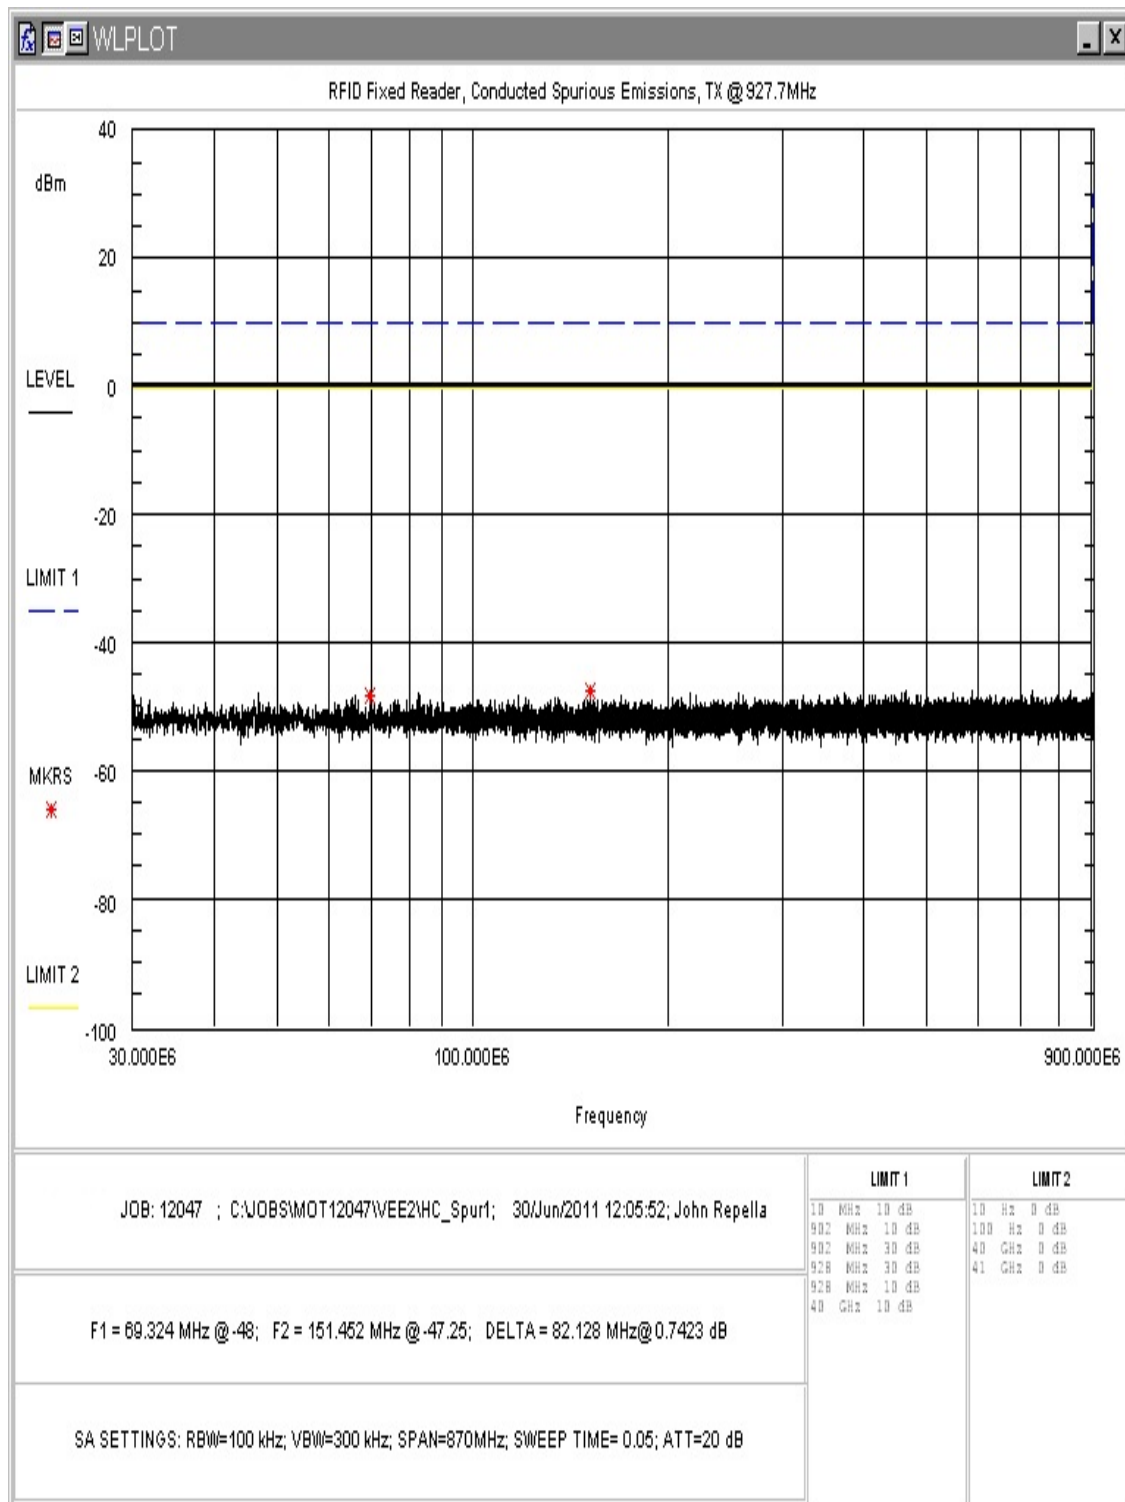


Figure 30: Conducted Spurious Emissions, High Channel 30 - 900MHz

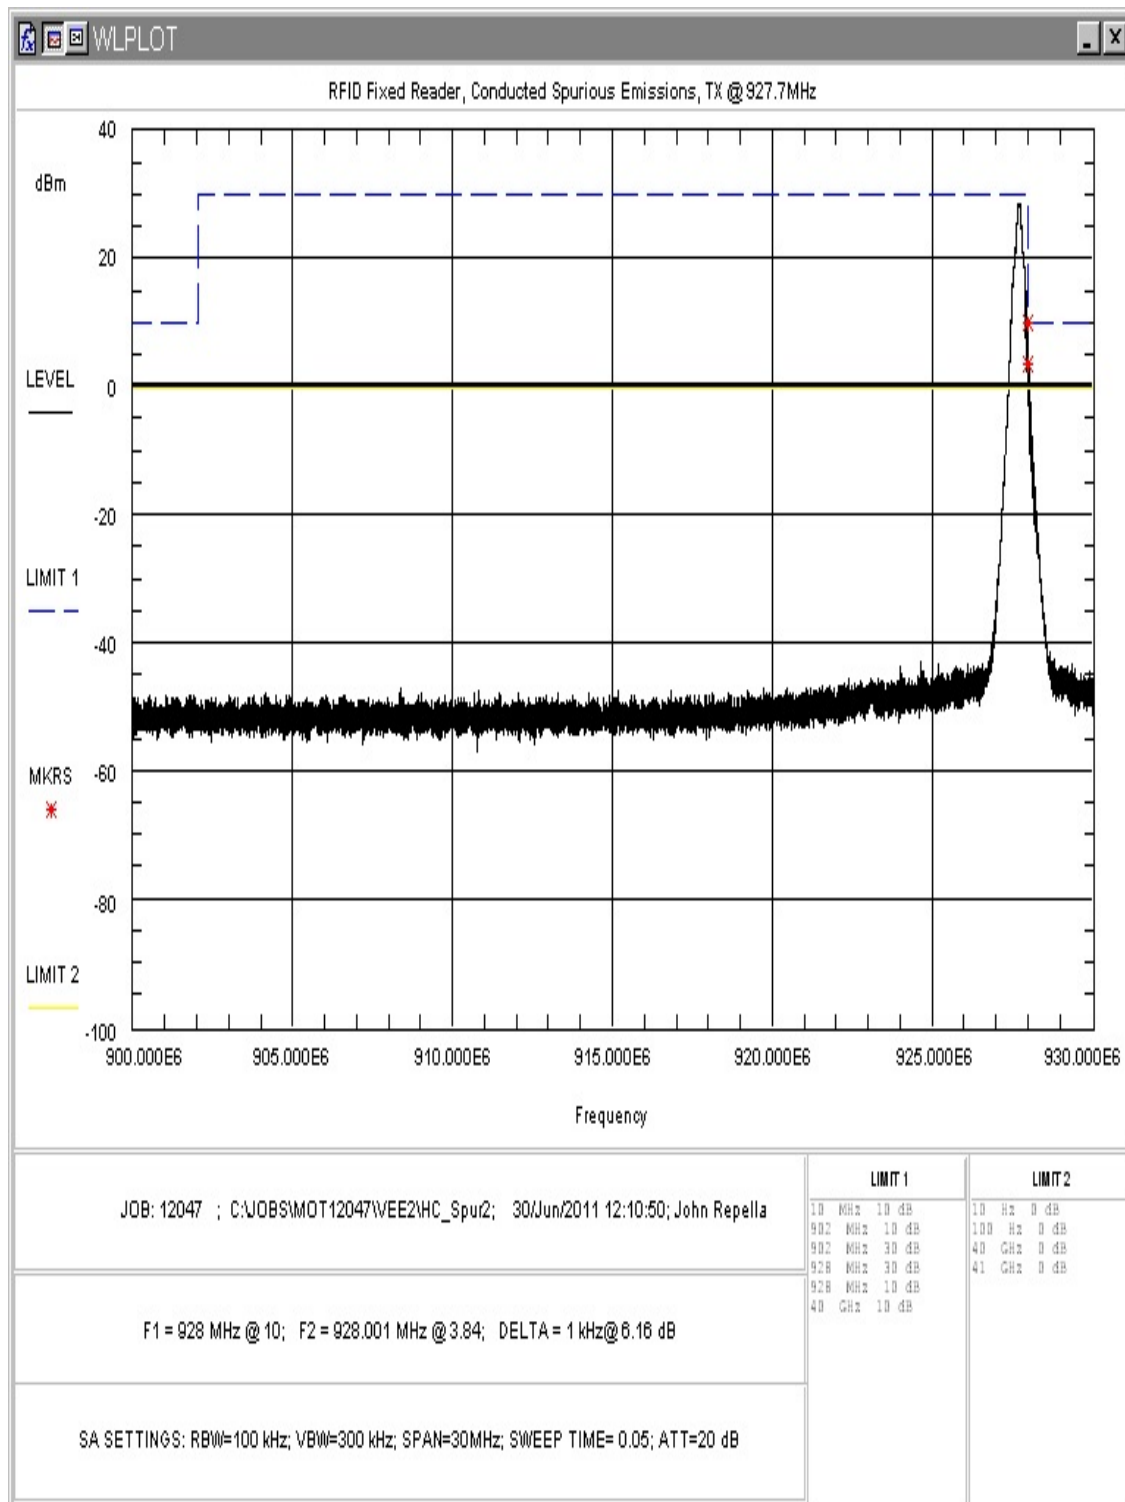


Figure 31: Conducted Spurious Emissions, High Channel 900MHz – 930MHz

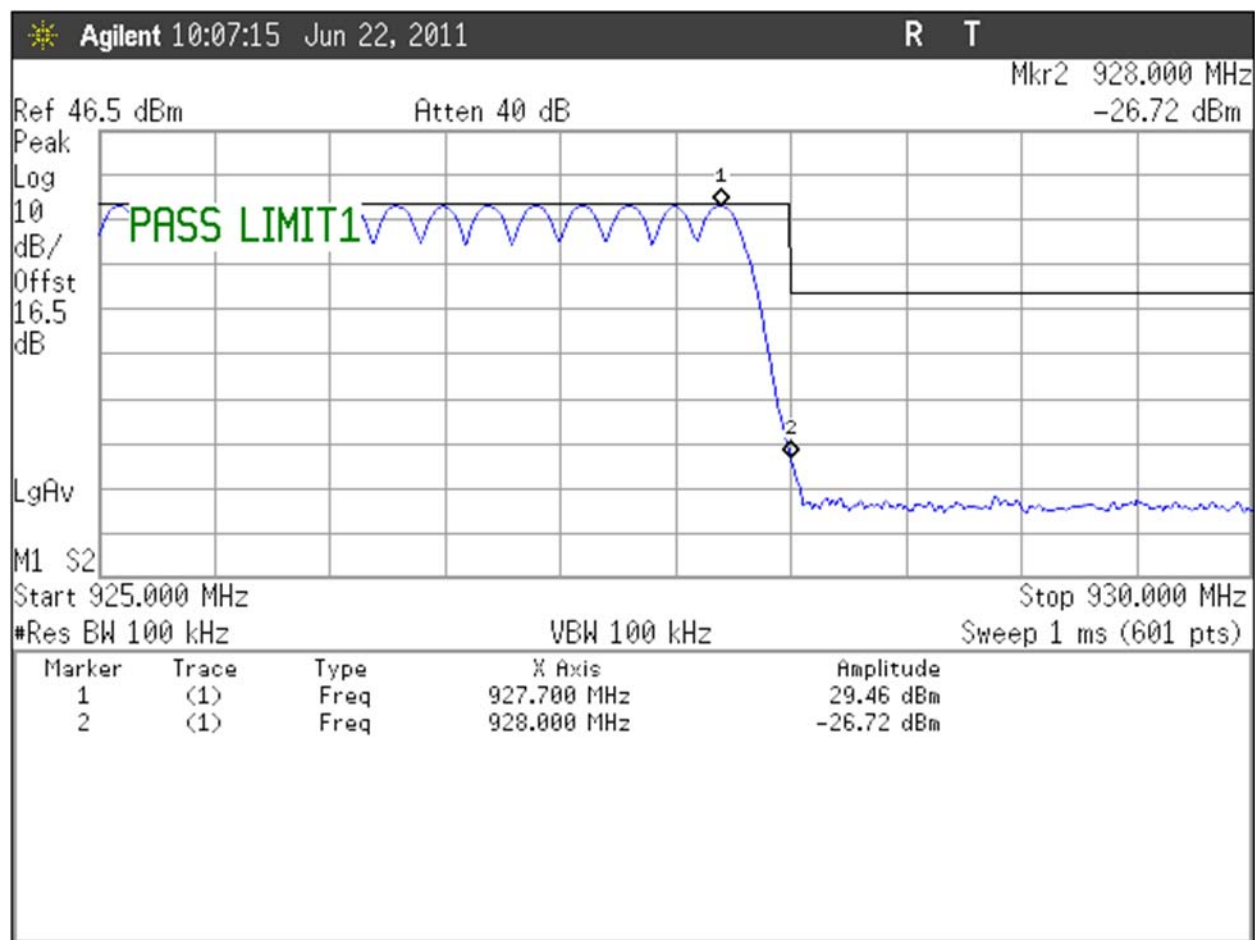


Figure 32: Band Edge Plot (Hopping), Low Channel TX @927.7MHz

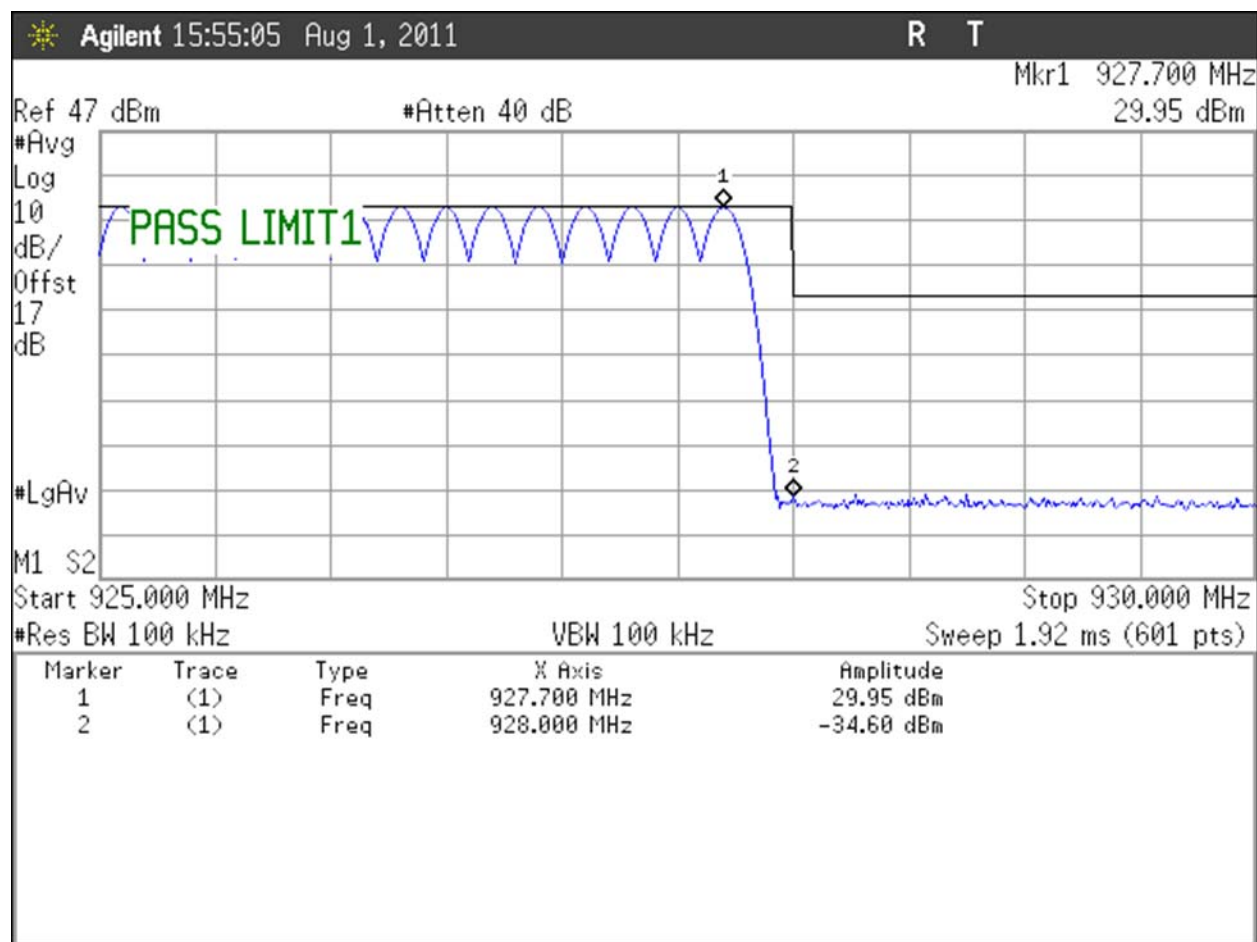


Figure 33: Band Edge Plot (Non-Hopping), Low Channel TX @927.7MHz

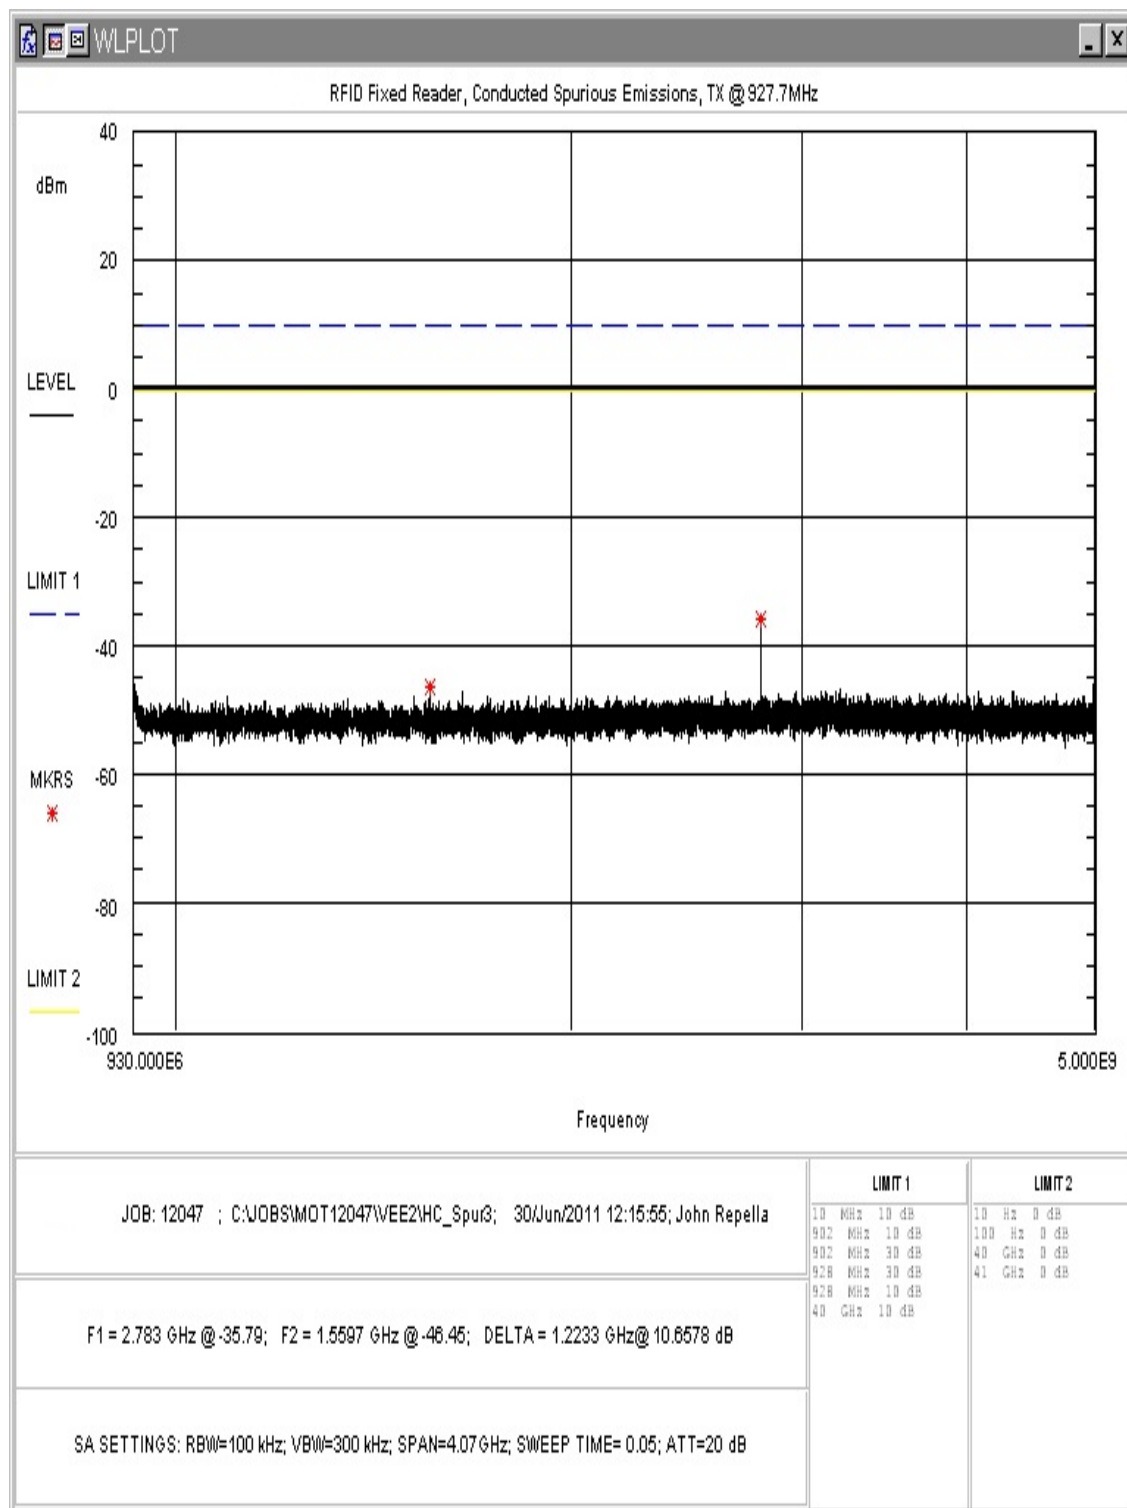


Figure 34: Conducted Spurious Emissions, High Channel 930MHz– 5GHz

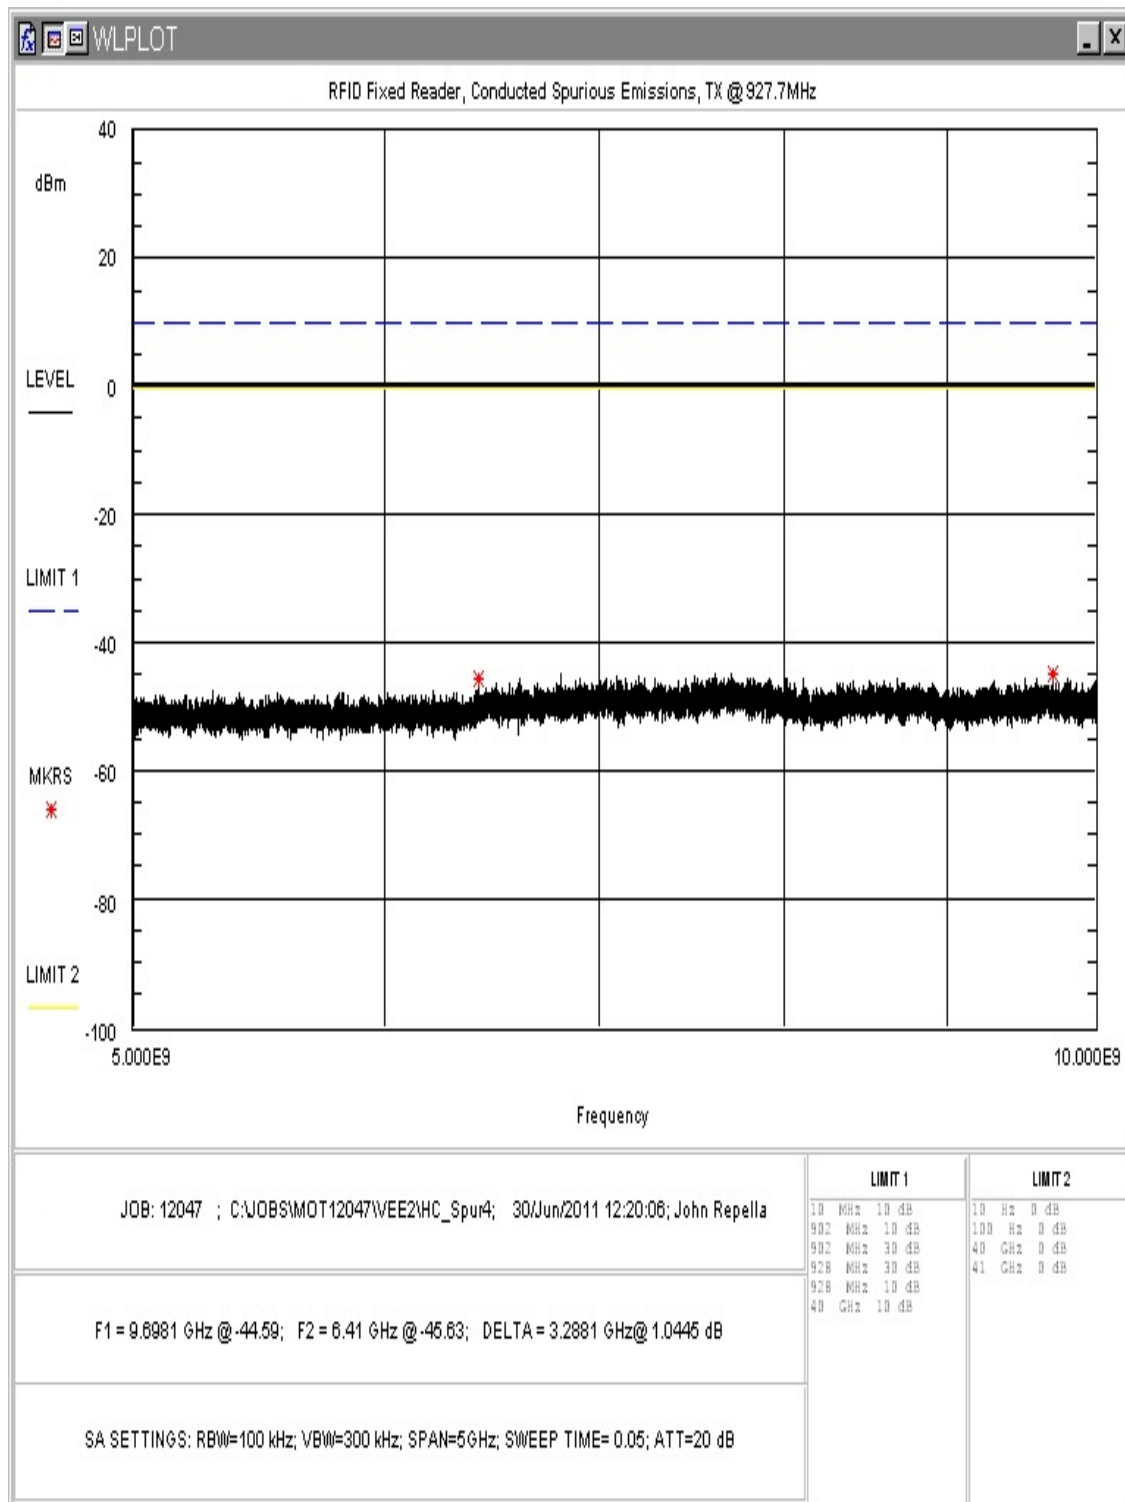


Figure 35: Conducted Spurious Emissions, High Channel 5 - 10GHz

5.6 Radiated Spurious Emissions: (FCC Part 15.205, 15.209 & RSS-210 [A8. 5])

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.205, §15.209, §15.35(b) and RSS 210 Table 1 for peak measurements.

5.6.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The emissions were measured using the following resolution bandwidths:

Table 8: Spectrum Analyzer Settings

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	<30 Hz (Avg.), 1MHz (Peak)

Table 9: Radiated Emission Test Data, Low Frequency Data (<1GHz)

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
34.65	V	190.0	1.3	10.0	17.3	23.1	100.0	-12.7	
43.76	V	270.0	1.2	9.9	11.4	11.6	100.0	-18.7	
49.03	V	45.0	1.6	15.6	8.9	16.9	100.0	-15.5	
54.19	V	45.0	1.3	18.2	8.4	21.5	100.0	-13.4	
58.71	V	180.0	1.5	20.8	8.4	28.7	100.0	-10.8	
62.76	V	90.0	1.4	15.2	8.5	15.2	100.0	-16.3	
69.08	V	180.0	1.7	14.2	8.8	14.2	100.0	-17.0	
79.19	V	220.0	1.5	13.5	9.5	14.2	100.0	-17.0	
114.40	V	180.0	2.3	7.3	14.7	12.7	150.0	-21.5	
124.79	V	10.0	1.5	7.2	15.6	13.8	150.0	-20.7	
250.03	V	10.0	2.0	16.5	15.0	37.7	200.0	-14.5	
275.00	V	180.00	1.00	9.40	17.6	22.4	200.0	-19.0	
300.00	V	225.00	1.75	9.70	17.3	22.3	200.0	-19.0	
325.00	V	315.00	1.30	8.70	18.6	23.2	200.0	-18.7	
350.00	V	315.00	1.30	6.40	19.0	18.7	200.0	-20.6	
375.00	V	315.00	1.30	12.00	19.9	39.5	200.0	-14.1	
500.00	V	180.00	1.00	7.80	23.2	35.3	200.0	-15.1	
34.65	H	90.0	3.6	6.2	17.3	14.9	100.0	-16.5	
43.76	H	200.0	3.7	11.8	11.4	14.5	100.0	-16.8	
49.03	H	90.0	3.7	18.1	8.9	22.5	100.0	-13.0	
54.19	H	90.0	3.8	13.0	8.4	11.8	100.0	-18.6	
58.71	H	90.0	3.3	11.6	8.4	9.9	100.0	-20.0	
62.76	H	90.0	3.7	10.3	8.5	8.7	100.0	-21.2	
69.08	H	180.0	3.7	26.1	8.8	55.7	100.0	-5.1	
79.19	H	180.0	3.6	7.2	9.5	6.9	100.0	-23.3	
114.40	H	90.0	3.7	7.0	14.7	12.2	150.0	-21.8	
124.99	H	0.0	2.8	14.2	15.6	31.0	150.0	-13.7	
250.00	H	220.0	2.4	16.4	15.0	37.2	200.0	-14.6	
275.00	H	0.00	1.00	9.70	17.6	23.2	200.0	-18.7	
300.00	H	45.00	1.40	10.00	17.3	23.1	200.0	-18.7	
325.00	H	45.00	1.40	6.40	18.6	17.8	200.0	-21.0	
350.00	H	90.00	1.80	7.50	19.0	21.2	200.0	-19.5	
375.00	H	90.00	1.80	10.50	19.9	33.2	200.0	-15.6	
500.00	H	315.00	1.80	6.00	23.2	28.7	200.0	-16.9	

Table 10: Radiated Emission Test Data, High Frequency Data (>1GHz)
(Restricted Bands)

TX @ 902.3MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2706.90	V	45.00	1.00	54.33	-2.6	385.7	5000.0	-22.3	
2706.90	V	45.00	1.00	46.00	-2.6	147.8	500.0	-10.6	
3609.20	V	0.00	1.00	48.30	-0.5	245.7	5000.0	-26.2	Amb
3609.20	V	0.00	1.00	37.10	-0.5	67.7	500.0	-17.4	Amb
4511.50	V	0.00	1.00	47.83	0.7	267.2	5000.0	-25.4	Amb
4511.50	V	0.00	1.00	36.67	0.7	73.9	500.0	-16.6	Amb
5413.80	V	0.00	1.00	47.00	3.4	329.7	5000.0	-23.6	Amb
5413.80	V	0.00	1.00	36.33	3.4	96.5	500.0	-14.3	Amb
8120.70	V	0.00	1.00	48.67	7.5	641.7	5000.0	-17.8	Amb
8120.70	V	0.00	1.00	38.00	7.5	187.9	500.0	-8.5	Amb
9023.00	V	0.00	1.00	49.33	9.0	826.5	5000.0	-15.6	Amb
9023.00	V	0.00	1.00	38.33	9.0	232.9	500.0	-6.6	Amb
2706.90	H	45.00	2.03	52.67	-2.6	318.6	5000.0	-23.9	
2706.90	H	45.00	2.03	43.33	-2.6	108.7	500.0	-13.3	
3609.20	H	0.00	2.00	48.17	-0.5	242.0	5000.0	-26.3	Amb
3609.20	H	0.00	2.00	37.00	-0.5	66.9	500.0	-17.5	Amb
4511.50	H	0.00	2.00	47.33	0.7	252.2	5000.0	-25.9	Amb
4511.50	H	0.00	2.00	36.33	0.7	71.1	500.0	-16.9	Amb
5413.80	H	0.00	2.00	48.83	3.4	407.1	5000.0	-21.8	Amb
5413.80	H	0.00	2.00	36.33	3.4	96.5	500.0	-14.3	Amb
8120.70	H	0.00	2.00	49.17	7.5	679.8	5000.0	-17.3	Amb
8120.70	H	0.00	2.00	38.33	7.5	195.1	500.0	-8.2	Amb
9023.00	H	0.00	2.00	50.33	9.0	927.4	5000.0	-14.6	Amb
9023.00	H	0.00	2.00	38.17	9.0	228.7	500.0	-6.8	Amb

TX @ 914.5MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2744.70	V	45.00	1.00	53.17	-2.6	339.1	5000.0	-23.4	
2744.70	V	45.00	1.00	42.83	-2.6	103.1	500.0	-13.7	
3659.60	V	0.00	1.00	48.50	-0.5	251.9	5000.0	-26.0	Amb
3659.60	V	0.00	1.00	37.10	-0.5	67.8	500.0	-17.4	Amb
4574.50	V	0.00	1.00	47.33	0.8	254.0	5000.0	-25.9	Amb
4574.50	V	0.00	1.00	36.50	0.8	73.0	500.0	-16.7	Amb
7319.20	V	0.00	1.00	47.50	7.5	565.0	5000.0	-18.9	Amb
7319.20	V	0.00	1.00	37.83	7.5	185.6	500.0	-8.6	Amb
8234.10	V	0.00	1.00	48.67	7.7	659.4	5000.0	-17.6	Amb
8234.10	V	0.00	1.00	38.00	7.7	193.0	500.0	-8.3	Amb
9149.00	V	0.00	1.00	49.00	9.2	811.7	5000.0	-15.8	Amb
9149.00	V	0.00	1.00	37.83	9.2	224.3	500.0	-7.0	Amb
2744.70	H	45.00	2.03	51.50	-2.6	279.8	5000.0	-25.0	
2744.70	H	45.00	2.03	42.60	-2.6	100.4	500.0	-13.9	
3659.60	H	0.00	2.00	48.50	-0.5	251.9	5000.0	-26.0	Amb
3659.60	H	0.00	2.00	37.00	-0.5	67.0	500.0	-17.5	Amb
4574.50	H	0.00	2.00	48.00	0.8	274.4	5000.0	-25.2	Amb
4574.50	H	0.00	2.00	36.50	0.8	73.0	500.0	-16.7	Amb
7319.20	H	0.00	2.00	48.83	7.5	658.5	5000.0	-17.6	Amb
7319.20	H	0.00	2.00	37.83	7.5	185.6	500.0	-8.6	Amb
8234.10	H	0.00	2.00	49.33	7.7	711.4	5000.0	-16.9	Amb
8234.10	H	0.00	2.00	37.83	7.7	189.3	500.0	-8.4	Amb
9149.00	H	0.00	2.00	49.33	9.2	843.1	5000.0	-15.5	Amb
9149.00	H	0.00	2.00	37.83	9.2	224.3	500.0	-7.0	Amb

TX @927.7MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2783.10	V	45.00	1.00	56.67	-2.5	509.8	5000.0	-19.8	
2783.10	V	45.00	1.00	48.17	-2.5	191.6	500.0	-8.3	
3710.80	V	0.00	1.00	49.50	-0.4	283.6	5000.0	-24.9	
3710.80	V	0.00	1.00	37.83	-0.4	74.0	500.0	-16.6	
4638.50	V	0.00	1.00	48.50	0.8	292.4	5000.0	-24.7	Amb
4638.50	V	0.00	1.00	36.00	0.8	69.3	500.0	-17.2	Amb
7421.60	V	0.00	1.00	48.83	7.2	632.8	5000.0	-18.0	Amb
7421.60	V	0.00	1.00	37.83	7.2	178.3	500.0	-9.0	Amb
8349.30	V	0.00	1.00	48.83	8.1	698.8	5000.0	-17.1	Amb
8349.30	V	0.00	1.00	37.67	8.1	193.3	500.0	-8.3	Amb
2783.10	H	45.00	2.20	53.33	-2.5	347.1	5000.0	-23.2	
2783.10	H	45.00	2.20	44.50	-2.5	125.6	500.0	-12.0	
3710.80	H	0.00	2.00	49.83	-0.4	294.5	5000.0	-24.6	
3710.80	H	0.00	2.00	38.67	-0.4	81.5	500.0	-15.8	
4638.50	H	0.00	2.00	47.83	0.8	270.7	5000.0	-25.3	Amb
4638.50	H	0.00	2.00	36.17	0.8	70.7	500.0	-17.0	Amb
7421.60	H	0.00	2.00	48.50	7.2	609.2	5000.0	-18.3	Amb
7421.60	H	0.00	2.00	37.83	7.2	178.3	500.0	-9.0	Amb
8349.30	H	0.00	2.00	49.17	8.1	726.7	5000.0	-16.8	Amb
8349.30	H	0.00	2.00	37.50	8.1	189.6	500.0	-8.4	Amb

5.7 Receiver Radiated Spurious Emissions: (§15.209, RSS-Gen [7.2.3.2] & RSS-210 sect 2.6)

The EUT must comply with the requirements for radiated spurious emissions from the receiver. These emissions must meet the limits specified in §15.209 and RSS-Gen.

5.7.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The emissions were measured using the following resolution bandwidths:

The Unit was tested with the RS232 and USB cable options.

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	> 100 kHz
>1000 MHz	1 MHz	10 Hz (Avg)

5.7.2 Test Summary

The EUT complied with the requirements for receiver radiated emissions FCC 15.209 IC RSS-Gen. Receiver Radiated Spurious Test Data. No emissions from the receiver within 20 dB of the limit were detected past 500 MHz.

Table 11: Receiver Radiated Emission Test Data

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
34.65	V	180.0	1.3	9.9	17.3	22.8	100.0	-12.8	
43.76	V	270.0	1.2	9.6	11.4	11.2	100.0	-19.0	
49.03	V	90.0	1.6	14.8	8.9	15.4	100.0	-16.3	
54.19	V	90.0	1.3	17.6	8.4	20.0	100.0	-14.0	
58.71	V	170.0	1.5	20.6	8.4	28.0	100.0	-11.0	
62.76	V	45.0	1.4	14.9	8.5	14.7	100.0	-16.6	
69.08	V	180.0	1.7	13.6	8.8	13.2	100.0	-17.6	
79.19	V	200.0	1.5	12.6	9.5	12.8	100.0	-17.9	
114.40	V	170.0	2.3	7.3	14.7	12.7	150.0	-21.5	
124.79	V	270.0	2.2	13.2	15.6	27.6	150.0	-14.7	
250.03	V	180.0	2.3	16.4	15.0	37.2	200.0	-14.6	
275.00	V	180.00	1.00	9.40	17.6	22.4	200.0	-19.0	
300.00	V	225.00	1.75	9.70	17.3	22.3	200.0	-19.0	
325.00	V	315.00	1.30	8.70	18.6	23.2	200.0	-18.7	
350.00	V	315.00	1.30	6.40	19.0	18.7	200.0	-20.6	
375.00	V	315.00	1.30	12.00	19.9	39.5	200.0	-14.1	
500.00	V	180.00	1.00	7.80	23.2	35.3	200.0	-15.1	
34.65	H	90.0	3.6	5.7	17.3	14.1	100.0	-17.0	
43.76	H	220.0	3.7	10.2	11.4	12.0	100.0	-18.4	
49.03	H	90.0	3.7	17.7	8.9	21.5	100.0	-13.4	
54.19	H	90.0	3.8	12.3	8.4	10.9	100.0	-19.3	
58.71	H	100.0	3.3	11.7	8.4	10.1	100.0	-19.9	
62.76	H	90.0	3.7	9.8	8.5	8.2	100.0	-21.7	
69.08	H	180.0	3.7	25.8	8.8	53.9	100.0	-5.4	
79.19	H	90.0	3.6	6.9	9.5	6.6	100.0	-23.6	
114.40	H	270.0	3.7	6.9	14.7	12.1	150.0	-21.9	
124.79	H	90.0	3.6	13.5	15.6	28.6	150.0	-14.4	
250.03	H	45.0	2.8	16.3	15.0	36.8	200.0	-14.7	
275.00	H	0.00	1.00	9.70	17.6	23.2	200.0	-18.7	
300.00	H	45.00	1.40	10.00	17.3	23.1	200.0	-18.7	
325.00	H	45.00	1.40	6.40	18.6	17.8	200.0	-21.0	
350.00	H	90.00	1.80	7.50	19.0	21.2	200.0	-19.5	
375.00	H	90.00	1.80	10.50	19.9	33.2	200.0	-15.6	
500.00	H	315.00	1.80	6.00	23.2	28.7	200.0	-16.9	

5.8 AC Conducted Emissions (FCC Pt.15.207, RSS-Gen [7.2.2])

5.8.1 Requirements

Test Arrangement: Table Top

Compliance Standard: FCC Class B

FCC Compliance Limits		
Frequency	Quasi-peak	Average
0.15 - 0.5MHz	66 to 56dB μ V	56 to 46dB μ V
0.5 - 5MHz	56dB μ V	46dB μ V
5 - 30MHz	60dB μ V	50dB μ V

5.8.2 Test Procedure

The EUT was placed on an 80 cm high 1 X 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50 Ω /50 μ H Line Impedance Stabilization Network bonded to a 3 X 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power was supplied to the peripherals through a second LISN. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Power and data cables were moved about to obtain maximum emissions.

The 50 Ω output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak, peak, or average as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth. For average measurements the post-detector filter was set to 10 Hz.

At frequencies where quasi-peak or peak measurements comply with the average limit, no average measurements need be performed.

At frequencies where quasi-peak or peak measurements comply with the average limit, no average measurements need be performed. The Conducted emissions level to be compared to the FCC limit is calculated as shown in the following example.

Example:

Spectrum Analyzer Voltage: VdB μ V

LISN Correction Factor: LISN dB

Cable Correction Factor: CF dB

Electric Field: EdB μ V = V dB μ V + LISN dB + CF dB

5.8.3 Test Data

The EUT complied with the Class B Conducted Emissions requirements. This system runs off of 120VAC. The below table provides the test results for phase and neutral line power line conducted emissions.

Table 12: Conducted Emissions Test Data

NEUTRAL										
Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.160	44.8	27.1	10.1	0.1	55.0	37.3	65.5	55.5	-10.5	-18.2
0.446	28.3	26.1	10.1	0.5	38.9	36.7	56.9	46.9	-18.1	-10.3
0.810	22.8	13.1	10.1	0.5	33.4	23.7	56.0	46.0	-22.6	-22.3
4.900	26.0	15.1	10.7	0.4	37.1	26.2	56.0	46.0	-18.9	-19.8
16.930	30.7	18.9	11.6	0.3	42.6	30.8	60.0	50.0	-17.4	-19.2
26.780	23.7	8.1	12.1	0.5	36.3	20.7	60.0	50.0	-23.7	-29.3
PHASE										
Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Corr Avg (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.150	46.3	26.3	10.1	0.5	56.9	36.9	66.0	56.0	-9.1	-19.1
0.446	28.1	23.8	10.1	0.7	38.8	34.5	56.9	46.9	-18.1	-12.4
2.531	25.2	13.9	10.6	0.8	36.6	25.3	56.0	46.0	-19.4	-20.7
17.310	30.8	19.1	11.6	0.2	42.5	30.8	60.0	50.0	-17.5	-19.2
24.150	21.4	13.0	11.9	0.2	33.5	25.1	60.0	50.0	-26.5	-24.9
26.780	21.7	8.1	12.1	0.3	34.1	20.5	60.0	50.0	-25.9	-29.5