



Report No.: 60.870.14.019.01F

Date: 2014-10-14

## TEST REPORT

**Applicant:** SIGMA Elektro GmbH.  
Dr. Julius Leber Str.15,  
Neustadt 67433, Germany

**Description of Samples:** Model name: Bike Computer  
Brand name: SIGMA  
Model no.: ATS-TX-2014  
FCCID: M5LBL14TX

**Date Samples Received:** 2014-07-15

**Date Tested:** 2014-07-16 to 2014-10-13

**Investigation Requested:** FCC Part 15, Section 15.209

**Conclusions:** The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remarks:** ----

Checked by:

Approved by:-

---

Ray Cheung  
Project Engineer  
Wireless & Telecom department

---

Jeff Pong  
Manager  
Wireless & Telecom department



Report No.: 60.870.14.019.01F

Date: 2014-10-14

**CONTENT:**

Cover	Page 1 of 16	
Content	Page 2 of 16	
<b><u>1.0</u></b>	<b><u>General Details</u></b>	
1.1	Test Laboratory	Page 4 of 16
1.2	Applicant Details	Page 4 of 16
1.3	Equipment Under Test [EUT]	Page 5 of 16
1.4	Equipment Modification	Page 5 of 16
1.5	Related Submittal(s) Grants	Page 5 of 16
<b><u>2.0</u></b>	<b><u>Technical Details</u></b>	
2.1	Investigations Requested	Page 6 of 16
2.2	Test Standards and Results Summary	Page 6 of 16
<b><u>3.0</u></b>	<b><u>Test Methodology</u></b>	
3.1	Radiated Emission	Page 7 of 16
3.2	Field Strength Calculation	Page 7 of 16
3.3	Conducted Emission	Page 7 of 16
<b><u>4.0</u></b>	<b><u>Test Results</u></b>	
4.1	Field Strength of Fundamental and Harmonics	Page 8-9 of 16
4.2	Spurious Radiated Emission	Page 10-13 of 16
4.3	Bandwidth Measurement	Page 14 of 16
4.4	Conducted Emission	Page 15 of 16



Report No.: 60.870.14.019.01F  
Date: 2014-10-14

**5.0**    **List of Measurement Equipments**

Page 16 of 16

**Appendix A**

Photos of Test Setup

**Appendix B**

External EUT Photos

**Appendix C**

Internal EUT Photos



**Report No.: 60.870.14.019.01F**

**Date: 2014-10-14**

**1.0    General Details**

**1.1    Test Laboratory**

TUV SUD Certification and Testing (China) Co., Ltd.  
Building 12 & 13, Zhiheng Wisdomland Business Park,  
Nantou Checkpoint Road 2, Shenzhen, 518052, China.  
Registration Number: 502708

Tested by:

A handwritten signature in blue ink, appearing to read 'Johnnie', is written over a horizontal line.

**1.2    Applicant Details**  
**Applicant**

**SIGMA ELEKTRO GmbH.**  
Dr. Julius Leter Str. 15, Neustadt 67433, Germany.

**Manufacturer**

**Lead Smart Electronics (HK) Limited**  
Units A-C, 25/F., Seabright Plaza, 9-23 Shell Street, North  
Point, Hong Kong



**Report No.: 60.870.14.019.01F**

**Date: 2014-10-14**

### **1.3 Equipment Under Test [EUT]**

#### **Description of EUT**

Model Name:	Bike Computer
Brand Name:	SIGMA
Model Number:	ATS-TX-2014
FCCID:	M5LBL14TX
Rating:	DC 3.0V (CR 2032 battery)
Antenna Type:	Integral
Operated Frequency:	112 kHz
No. of Channel:	1
Accessories and Auxiliary Equipment:	None
EUT Exercising Software:	None

#### **General Operation of EUT**

The Equipment Under Test (EUT) is a transmitter of Bike Computer operated at 112 kHz.

### **1.4 Equipment Modification**

No modification was made to the tested unit by TÜV SÜD Hong Kong Ltd.

### **1.5 Related Submittal(s) Grants**

This is a single application of certification for this transmitter.



Report No.: 60.870.14.019.01F

Date: 2014-10-14

## 2.0    Technical Details

### 2.1    Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with

CFR 47, Part 15 and ANSI C63.4: 2009.

### 2.2    Test Standards and Results Summary Tables

<b>EMISSION Results Summary</b>			
Test Condition	Test Requirement	Test Result	
		Pass	N/A
Field Strength of Fundamental and Harmonics	Part 15.209 (a)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Radiated Emission	Part 15.209 (a), Part 15.205	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Bandwidth Measurement	Part 15.215 (c)	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Conducted Emission	Part 15.207	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Note: N/A - Not Applicable



Report No.: 60.870.14.019.01F

Date: 2014-10-14

### **3.0 Test Methodology**

#### **3.1 Radiated Emission**

The sample was placed 0.8m above the ground plane on a standard emission test site \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

#### **3.2 Field Strength Calculation**

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$\begin{aligned} \text{FS} &= \text{R} + \text{System Factor} \\ \text{System Factor} &= \text{AF} + \text{CF} + \text{FA} - \text{PA} \end{aligned}$$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

#### **3.3 Conducted Emissions**

The EUT was placed on a non-metallic table 0.8m above the horizontal metal reference place and 0.4m from a vertical ground plane which is connected to the horizontal metal ground plane. Meanwhile, the AC main of EUT was connected to the distance of 0.8m line impedance stabilization network (LISN) during measurement.

Initial measurements were performed in quasi-peak and average detection modes by the test receiver, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Report No.: 60.870.14.019.01F


Date: 2014-10-14

#### 4.0    Test Results

##### 4.1    Field Strength of Fundamental and Harmonics

Test Requirement:	FCC part 15 section 15.209 (a)
Test Method:	ANSI C63.4:2009
Test Date:	2014-09-05
Mode of Operation:	Transmitting mode.
Detector Function:	Average and Peak
Measurement BW:	200 Hz (RBW)

##### Test Setup:

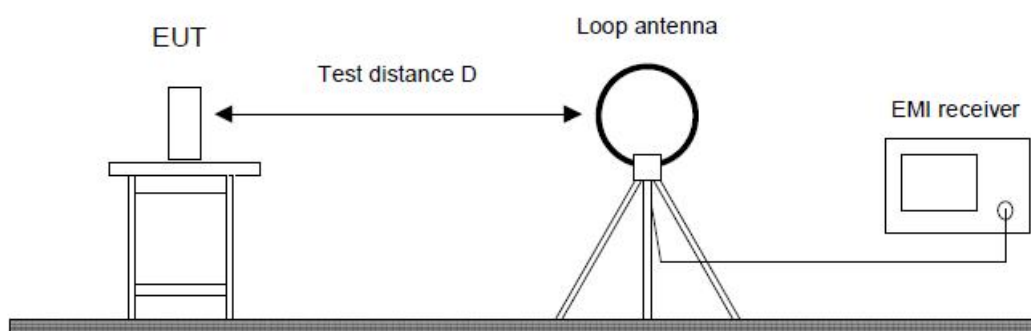



Report No.: 60.870.14.019.01F

Date: 2014-10-14

Results: PASS

Field Strength of Fundamental and Harmonics					
Value	Emissions Frequency	Field Strength (at 3m)	Limit Line (at 3m)	Delta to Limit	Remarks
	kHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
PK	112.00	49.68	106.61	-56.93	Fund.

Remark : - ( \* ) Radiated emissions which fall in the restricted bands as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2.

- Calculated measurement uncertainty:  $\pm 5.0$ dB

Limit for Radiated Emission [ Part 15 Section 15.209, RSS-Gen Section 7.2.5 ]:

Frequency (MHz)	Field Strength [ $\mu$ V/m]	Measurement Distance (Meter)
0.009 – 0.490	2400/F (kHz)	300
0.049 – 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Note :

- Emission Level (dB $\mu$ V/m) = 20 log Emission Level ( $\mu$ V/m)
- Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- Limit line = specific limit (dB $\mu$ V) + distance extrapolation factor.

Radiated emissions, which fall in the restricted bands, as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2, must also comply with the radiated emission limits as above.


Report No.: 60.870.14.019.01F

Date: 2014-10-14

#### 4.2 Spurious Radiated Emission

Test Requirement:	FCC part 15 section 15.209 (a)
Test Method:	ANSI C63.4:2009
Test Date:	2014-09-05
Mode of Operation:	Transmitting Mode
Detector Function:	Quasi-peak, Average and Peak
Measurement BW:	200 Hz (Below 150 kHz) 9 kHz (150kHz to 30 MHz) 120 kHz (30MHz to 1000 MHz) 1 MHz (Above 1000 MHz)

#### Test Setup:

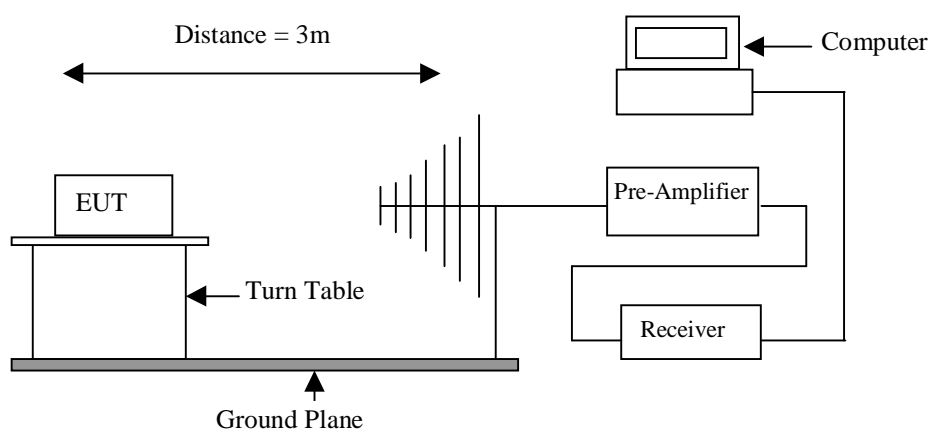



Report No.: 60.870.14.019.01F

Date: 2014-10-14

Results: PASS

Spurious Radiated Emissions (Below 30MHz)				
Value	Emissions Frequency	Field Strength (at 3m)	Limit Line (at 3m)	Delta to Limit
	MHz	dBµV/m	dBµV/m	dBµV/m
QP	0.02	45.29	69.54	-24.25

Spurious Radiated Emissions (Above 30MHz)							
Value	Emissions Frequency	E-Field Polarity	Reading	System Factor	Field Strength at 3m	Limit	Delta to Limit
	MHz		dBµV/m	dB	dBµV/m	dBµV/m	dBµV/m
QP	173.88	V	-0.16	14.46	14.30	43.50	-29.20
QP	419.62	V	-0.99	19.67	18.68	46.00	-27.32
QP	623.32	V	-2.23	23.25	21.02	46.00	-24.98
QP	760.73	V	-2.13	26.78	24.65	46.00	-21.35
QP	872.28	V	-2.13	27.89	25.76	46.00	-20.24
QP	969.28	V	-2.69	29.81	27.12	54.00	-26.88
QP	125.38	H	1.01	12.76	13.77	43.50	-29.73
QP	296.75	H	1.08	15.31	16.39	46.00	-29.61
QP	476.20	H	-0.11	20.87	20.76	46.00	-25.24
QP	681.52	H	-1.77	27.16	25.39	46.00	-20.61
QP	788.22	H	-1.77	27.16	25.39	46.00	-20.61
QP	906.23	H	0.54	28.78	29.32	46.00	-16.68

- Note:
- No further spurious emissions found between 150 kHz and lowest internal used / generated frequency.
  - Result data graph is shown at the following pages for reference.

- Remark :
- ( \* ) Radiated emissions which fall in the restricted bands as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2.
  - Calculated measurement uncertainty:  $\pm 3.28$ dB.



**Report No.: 60.870.14.019.01F**

**Date: 2014-10-14**

**Limit for Radiated Emission [ Part 15 Section 15.209 ]:**

Frequency (MHz)	Field Strength [ $\mu\text{V}/\text{m}$ ]	Measurement Distance (Meter)
0.009 – 0.490	2400/F (kHz)	300
0.049 – 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

Note :


- Emission Level ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20 \log$  Emission Level ( $\mu\text{V}/\text{m}$ )
- Distance extrapolation factor =  $40 \log$  (specific distance / test distance) (dB)
- Limit line = specific limit ( $\text{dB}\mu\text{V}$ ) + distance extrapolation factor.

Radiated emissions, which fall in the restricted bands, as defined in Part 15 Section 15.205(a) and RSS-Gen Section 7.2.2, must also comply with the radiated emission limits as above.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.


Report No.: 60.870.14.019.01F  
 Date: 2014-10-14

### Vertical (30 to 1000MHz)

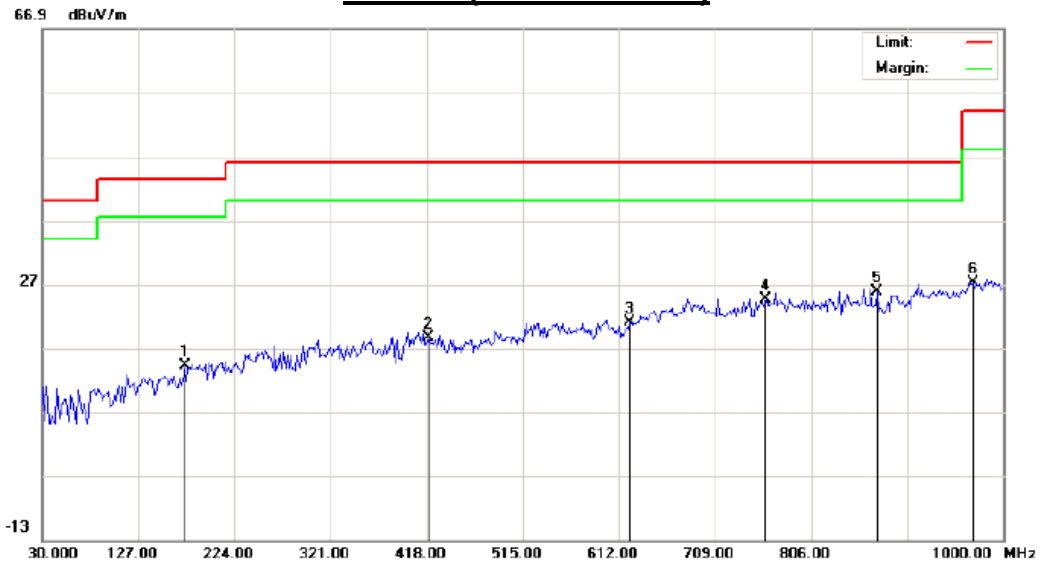

Remark: Only background noise was measured above 1GHz.

### Horizontal (30 to 1000MHz)

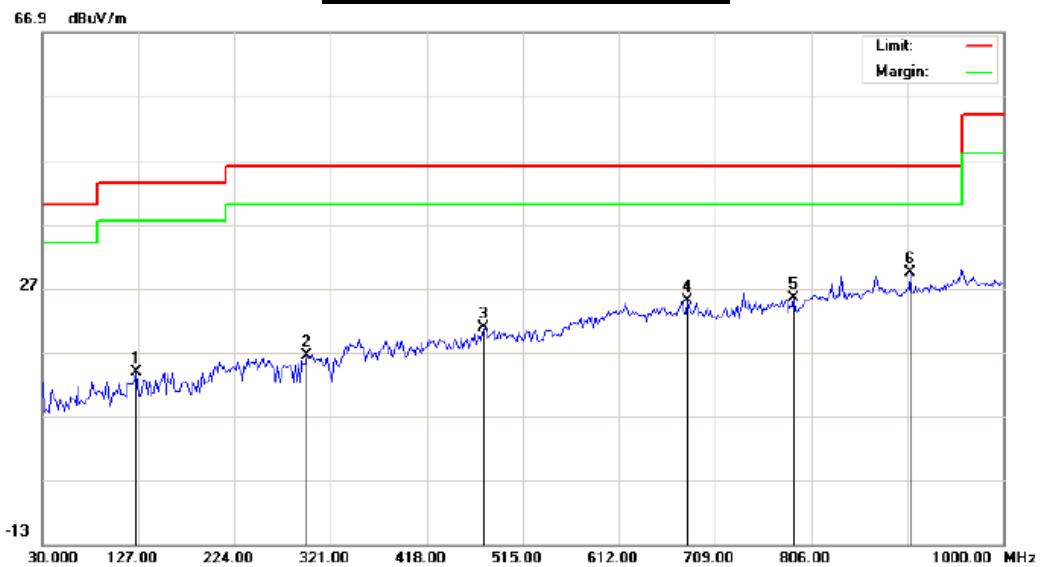

Remark: Only background noise was measured above 1GHz.



Report No.: 60.870.14.019.01F  
Date: 2014-10-14


#### 4.3 Bandwidth Measurement

Test Requirement:	FCC part 15 section 15.215 (c)
Test Method:	ANSI C63.4:2003
Test Date:	2014-09-05
Mode of Operation:	Transmitting mode
Detector Function:	Peak

Results: PASS

20 dB BW	Test Result
339.838 Hz	Complies

Remarks: Result data graph is shown at the following pages for reference.

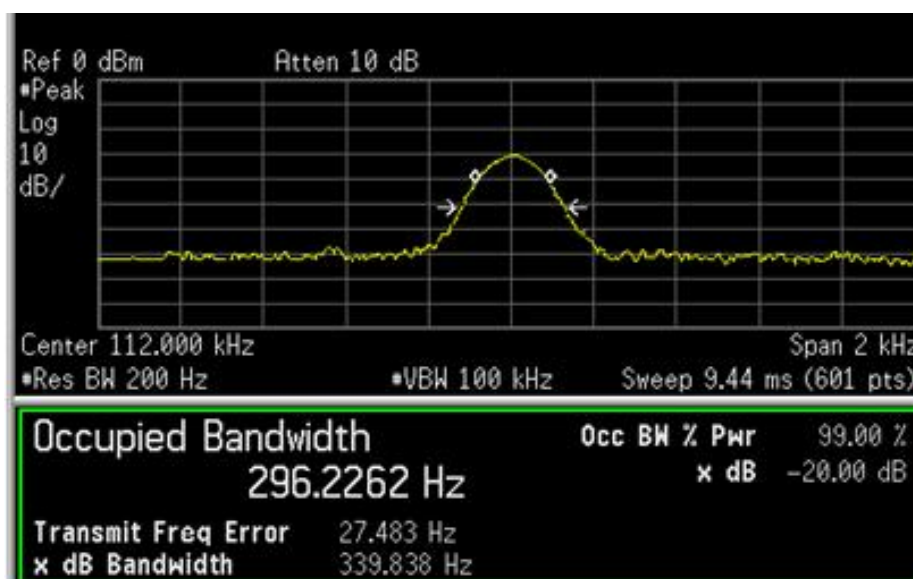

#### Limit for Bandwidth

The 20dB bandwidth of the emission shall be within the frequency band designated in the rule section under which the equipment is operated.



**Report No.: 60.870.14.019.01F**

**Date: 2014-10-14**

**4.4 Conducted Emissions (0.15MHz to 30MHz)**

Test Requirement: FCC part 15 Section 15.207 Class B  
Test Method: ANSI C63.4:2009  
Test Date: ---  
Mode of Operation: ---  
Detector Function: ---  
Measurement BW: ---

**Result : N/A**

**Note : This testing is not applicable for the battery operated EUT.**

**Limits for Conducted Emission [ FCC Part 15.207 and RSS-Gen table 2]:**

Frequency Range [MHz]	Quasi-Peak Limit [dB $\mu$ V]	Average Limit [dB $\mu$ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.



Report No.: 60.870.14.019.01F

Date: 2014-10-14

## 5.0 List of Measurement Equipment

### Radiated Emission and Bandwidth Emissions

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2015-8-17
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2017-8-17
Horn Antenna	Rohde & Schwarz	HF907	102294	2017-8-17
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100398	2015-08-17
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2015-8-17
Spectrum Analyzer	Agilent	E7405A	MY45111421	2015-8-19
3m Semi-anechoic chamber	TDK	9X6X6	----	2019-5-29

Remarks:

CM Corrective Maintenance

N/A Not Applicable or Not Available