



TEST REPORT

Report Number : 64.793.20.30846.01 Date of Issue: February 10, 2021

Model : EOX® Remote 500 (40101), EOX® Remote 500 (40105)

Product Type : E-bike Remote

Applicant : ZEITBIKE LLC

Manufacturer : SIGMA-ELEKTRO GmbH

Address of applicant : 298 Dalton Street, Ventura, California, United States , 93003 1539

Test Result : Positive Negative



Total pages including Appendices : 37

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment under Test	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks	7
7	Test Setups	8
8	Systems test configuration	9
9	Technical Requirement	10
9.1	Conducted Emission	10
9.2	Conducted peak output power.....	11
9.3	6dB bandwidth and 99% Occupied Bandwidth.....	13
9.4	Power spectral density.....	17
9.5	Spurious RF conducted emissions	19
9.6	Band edge	23
9.7	Spurious radiated emissions for transmitter	25
10	Test Equipment List.....	36
11	System Measurement Uncertainty	37



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Registration Number: 514049

IC Registration Number: 10320A

Telephone: 86 755 8828 6998
Fax: 86 755 828 5299

3 Description of the Equipment under Test

Product: E-bike Remote

Model no.: EOX® Remote 500 (40105)

FCC ID:M5LR500B

Battery type: 12VDC

Operating Frequency Range: 2402~2480MHz

No. of Operated Channel:40

Modulation: GFSK

Antenna Type: Ceramic Antenna

Antenna Gain: 5.54 dBi

Description of the EUT: EUT is an E-bike remote controller, Bluetooth 4.0 BLE technology was used for communicating.

Model difference:

The model EOX® Remote 500 (40105) was chosen to performed test.

Model	EOX® Remote 500 (40101)	EOX® Remote 500 (40105)
Supply voltage	48Vdc <50mA	12Vdc <50mA
RTC part and CR1025	No	Yes
Wake up circuit	The resistance tolerance of Wake up circuit is different	
Size	Same	
PCB layout	Same	



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2019 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB558074 D01 v05r02 and ANSI C63.10 (2013).



5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition		Pages	Test Result	Test Site
§15.207	Conducted emission AC power port	N/A	--	--
15.247(b)(1)	Conducted peak output power	11-12	Pass	Site 1
§15.247(a)(2)	6dB bandwidth and 99% occupied bandwidth	13-16	Pass	Site 1
§15.247(e)	Power spectral density	17-18	Pass	Site 1
§15.247(d)	Spurious RF conducted emissions	19-23	Pass	Site 1
§15.247(d)	Band edge	23-25	Pass	Site 1
§15.247(d) & §15.209	Spurious radiated emissions for transmitter and receiver	25-35	Pass	Site 1
§15.203	Antenna requirement	See note 1	Pass	--

Note 1: The EUT uses a ceramic Antenna, which gain is 5.54dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.
N/A means Not Applicable.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID:M5LR500B complies with Section 15.207, 15.247 of the FCC Part 15, Subpart C.

EOX® Remote 500(40101) and EOX® Remote 500(40105) are identical in critical components, only different in RTC circuit part, which will not affect RF & EMC performance.

Tests have been applied on EOX® Remote 500(40105) only.

This report is for the BLE part.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: January 10, 2021

Testing Start Date: February 2, 2021

Testing End Date: February 2, 2021

- TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch -

Reviewed by:


Prepared by:



Tony Liu
Project Reviewer




Samuel Zhang
Project Handler




Louise Liu
Test Engineer

7 Test Setups


7.1 AC Power Line Conducted Emission test setups

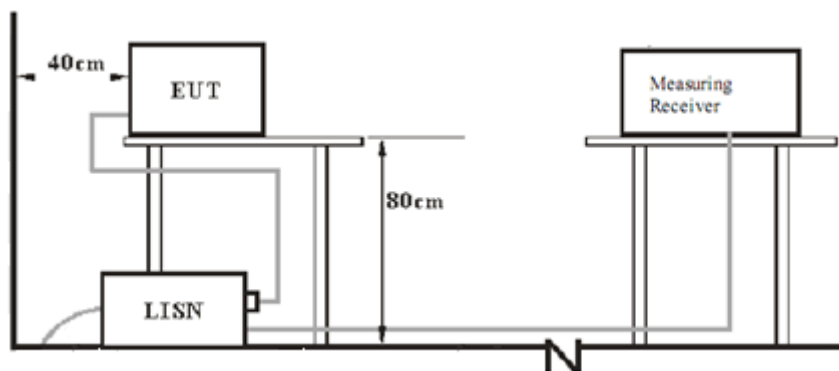


7.2 Radiated test setups Below 1GHz

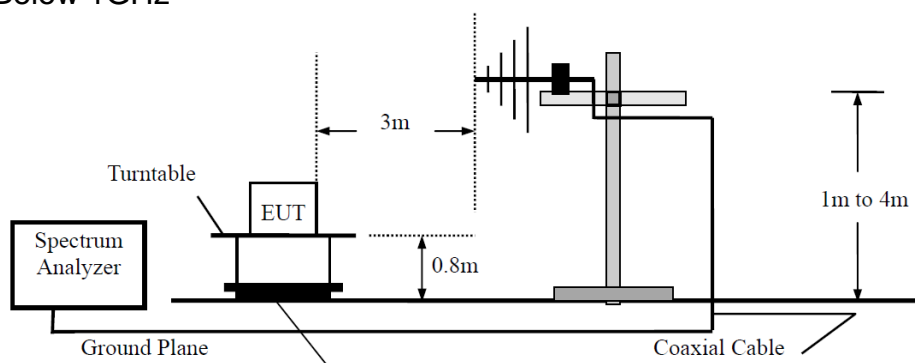

Above 1GHz

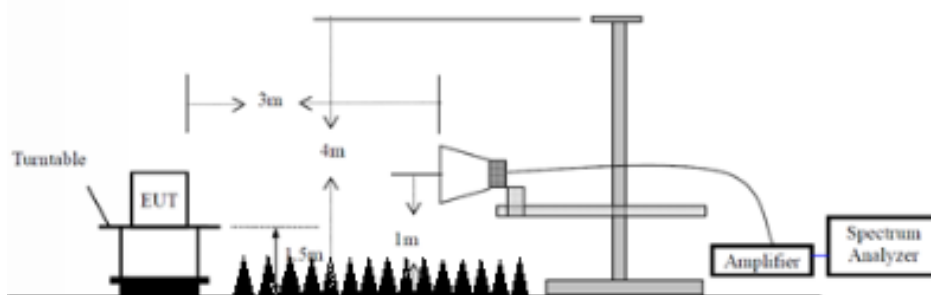

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
Mobile Phone	SAMSUNG	SAMSUNG Note2	---
Laptop	Lenovo	X240	L34015282
Stopwatch	Giant	Neostrack	---

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

* Decreasing linear

Test result: Not Applicable, because the EUT is powered by DC.

9.2 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
RBW > the 6 dB bandwidth of the emission being measured, VBW ≥ 3RBW, Span ≥ 3RBW
Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

Limits

Conducted Peak Output Power Limit:


Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

EIRP Limit :

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36


Test result as below table

Frequency MHz	Conducted Peak Output Power dBm	Result
Bottom channel 2402MHz	-6.94	Pass
Middle channel 2440MHz	-6.59	Pass
Top channel 2480MHz	-5.73	Pass

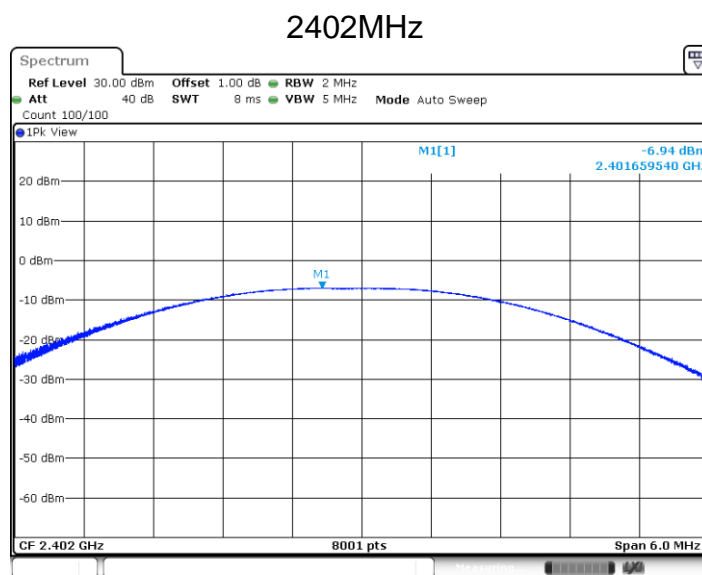


Date: 28 JAN 2021 16:06:35

2440MHz

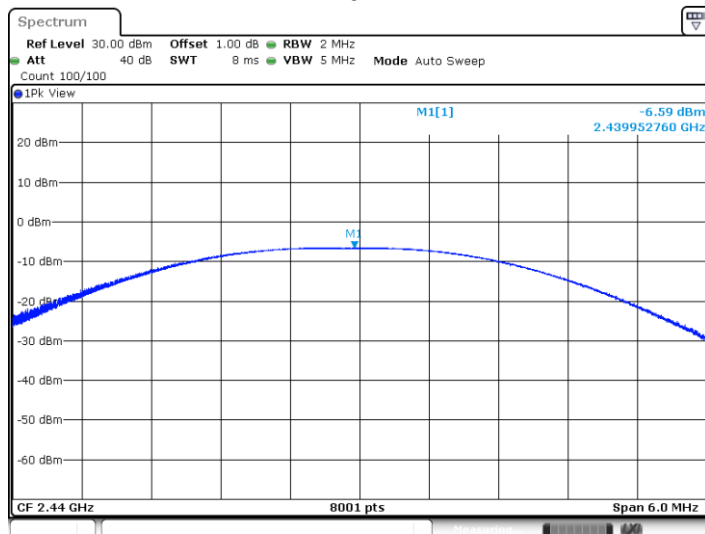

Date: 28 JAN 2021 16:08:45

2480MHz

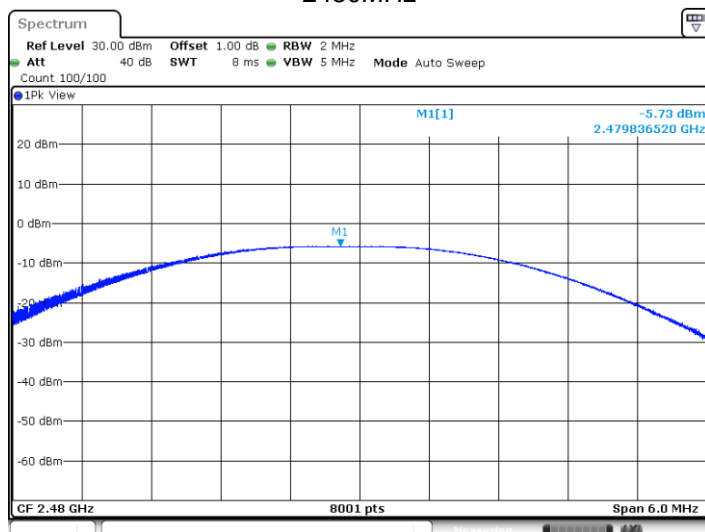

Date: 28 JAN 2021 16:12:22

9.3 6dB bandwidth and 99% Occupied Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit


Limit [kHz]

≥500

Test result


Test Mode	Channel [MHz]	6dB bandwidth [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE	2402	0.520	2401.564	2402.084	PASS
	2440	0.520	2439.560	2440.080	PASS
	2480	0.524	2479.556	2480.080	PASS

2402MHz

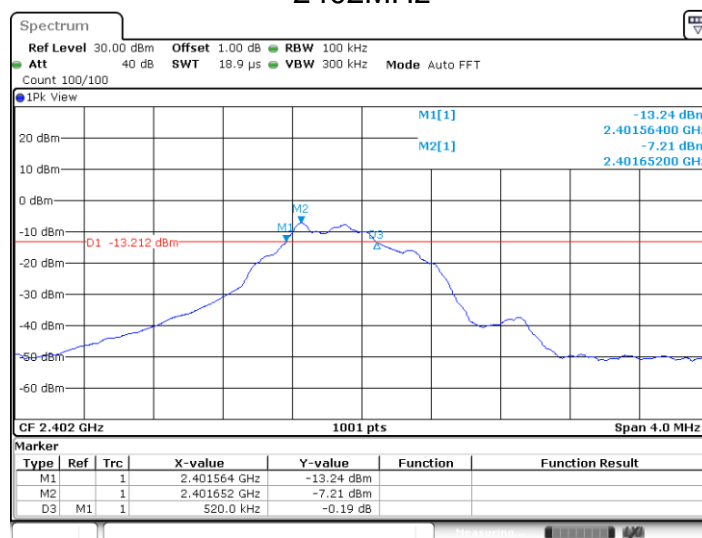


Date: 28. JAN 2021 16:06:18

2440MHz

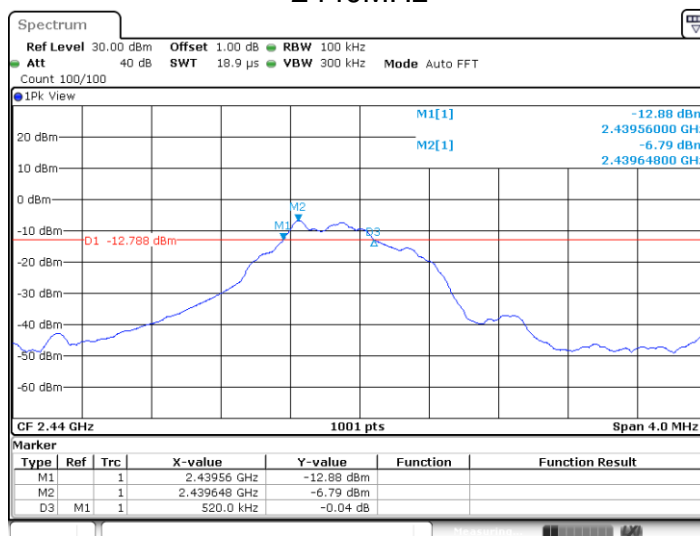

Date: 28. JAN 2021 16:08:28

2480MHz

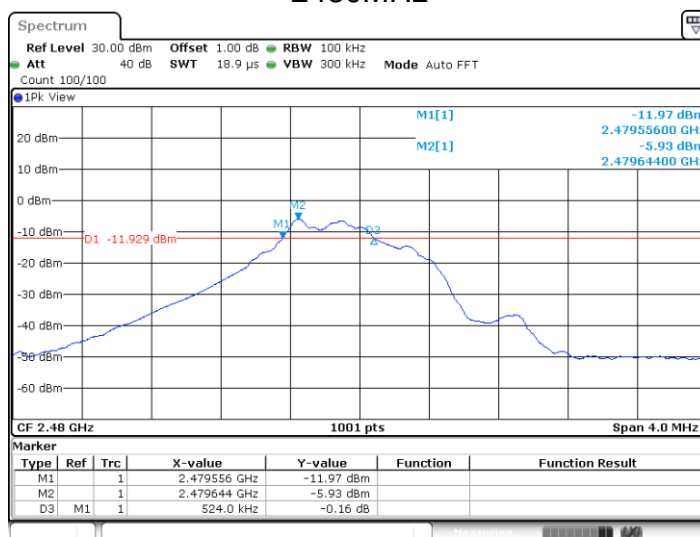

Date: 28. JAN 2021 16:12:05

TestMode	Channel [MHz]	99% OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE	2402	1.055	2401.381	2402.436	PASS
	2440	1.059	2439.373	2440.432	PASS
	2480	1.095	2479.333	2480.428	PASS

2402MHz



Date: 28.JAN.2021 16:06:28

2440MHz



Date: 28.JAN.2021 16:08:38

2480MHz



Date: 28 JAN 2021 16:12:15

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.
RBW=10kHz,VBW≥3RBW,Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤8

Test result


Frequency MHz	Power spectral density dBm/3KHz	Result
Bottom channel 2402MHz	-25.69	Pass
Middle channel 2440MHz	-25.41	Pass
Top channel 2480MHz	-24.53	Pass

2402MHz

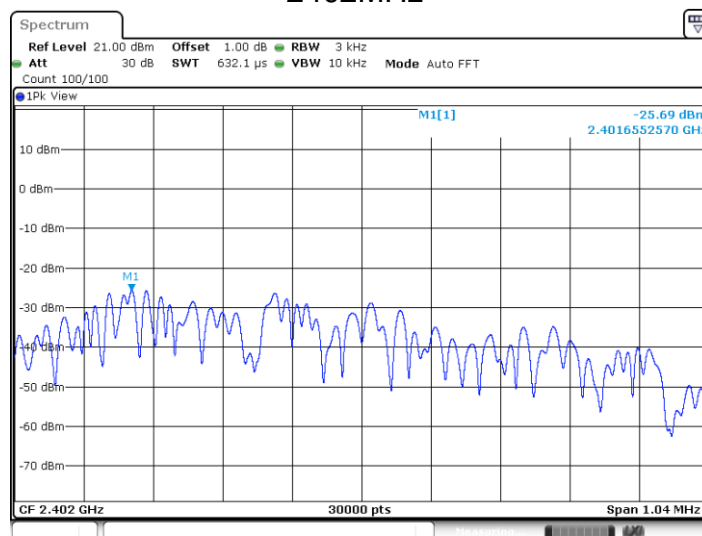


Date: 28 JAN 2021 16:06:40

2440MHz

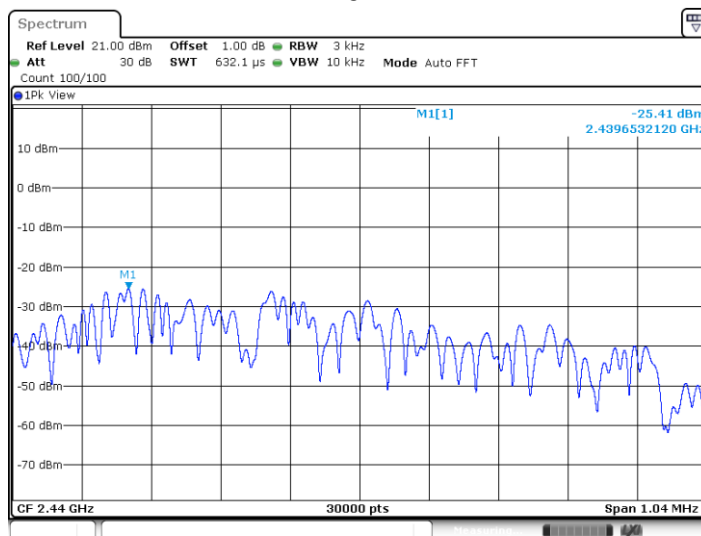

Date: 28 JAN 2021 16:08:50

2480MHz

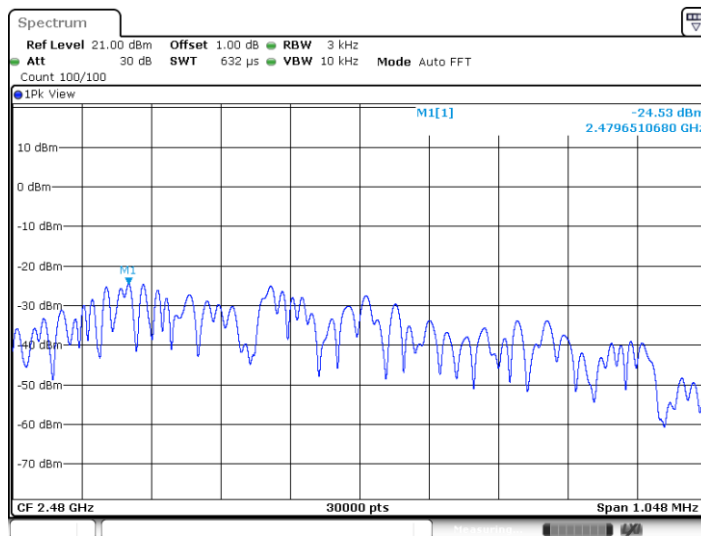

Date: 28 JAN 2021 16:12:27

9.5 Spurious RF conducted emissions


Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW \geq 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.


Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Spurious RF conducted emissions 2402MHz

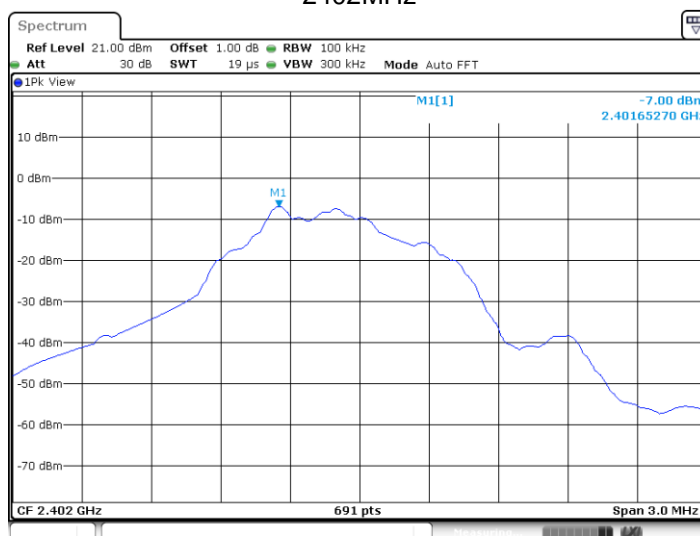

Date: 28 JAN 2021 16:06:56

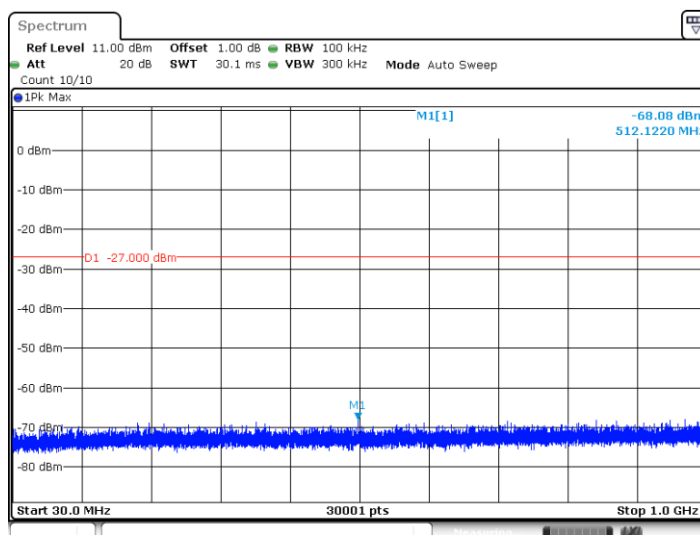


Date: 28 JAN 2021 16:07:02

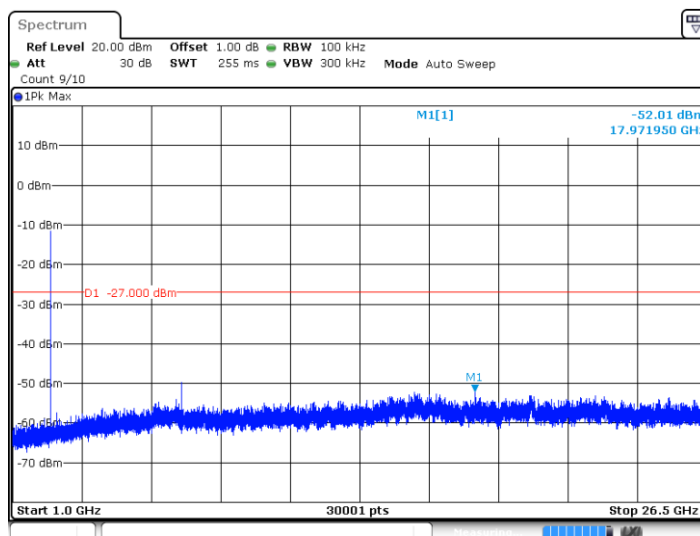


Date: 28 JAN 2021 16:07:10


2440MHz

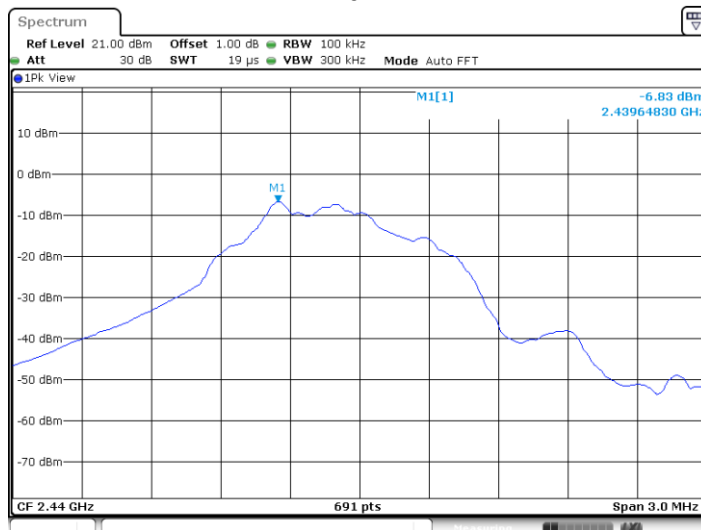

Date: 28 JAN 2021 16:08:56

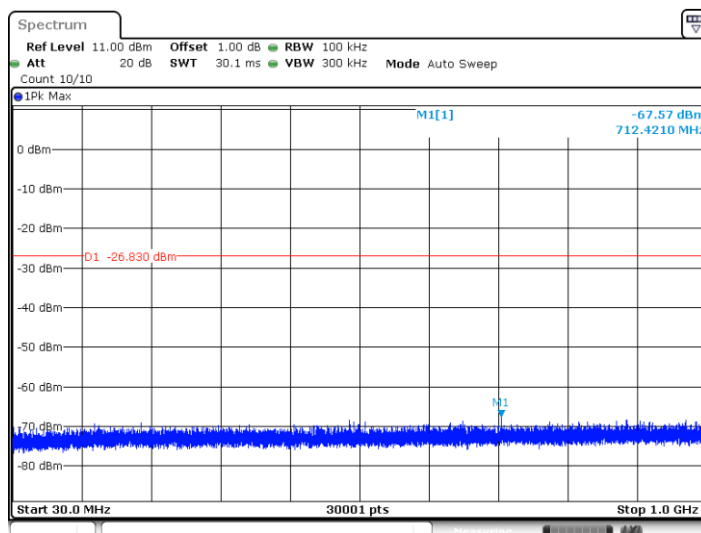


Date: 28 JAN 2021 16:09:02

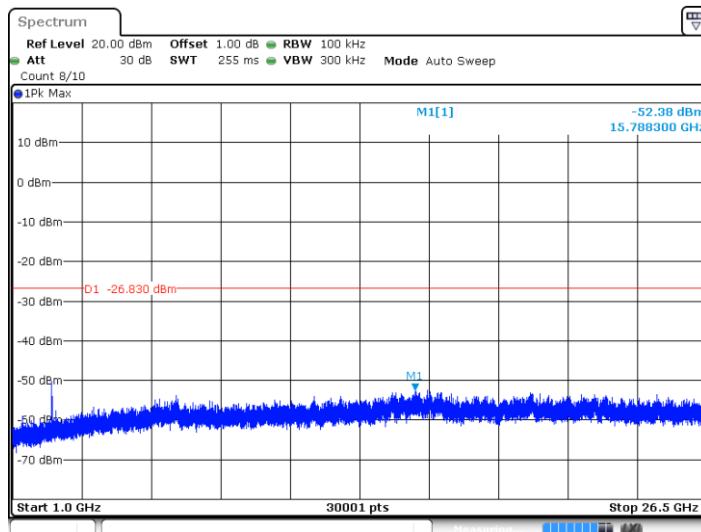


Date: 28 JAN 2021 16:09:10


2480MHz

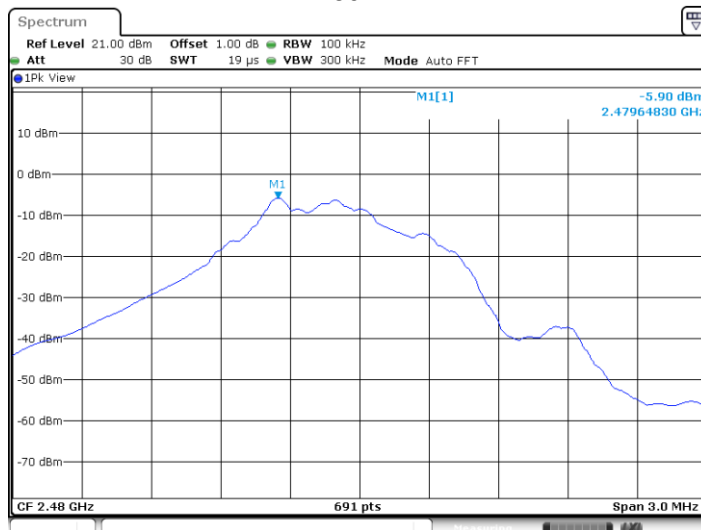

Date: 28 JAN 2021 16:12:42

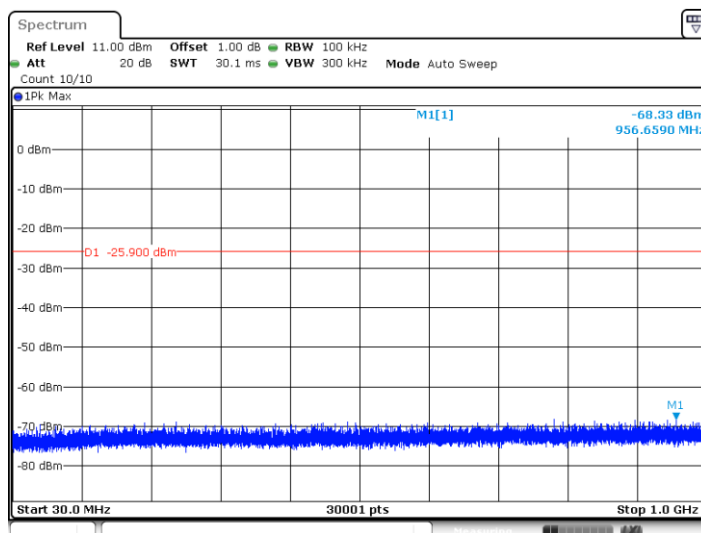

Date: 28 JAN 2021 16:12:48

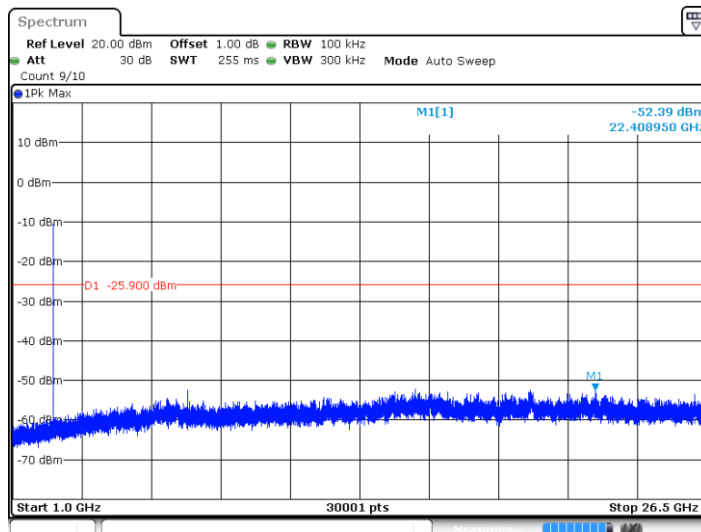

Date: 28 JAN 2021 16:12:56

9.6 Band edge


Test Method

- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.


Limit

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test result

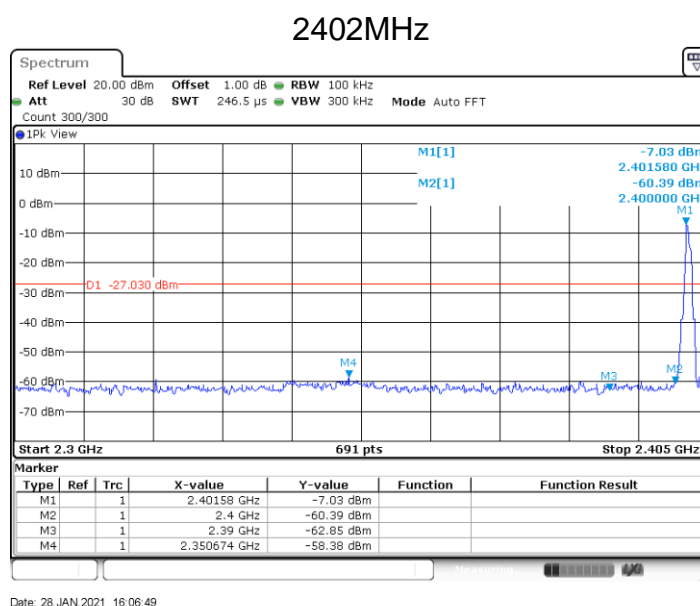

2480MHz

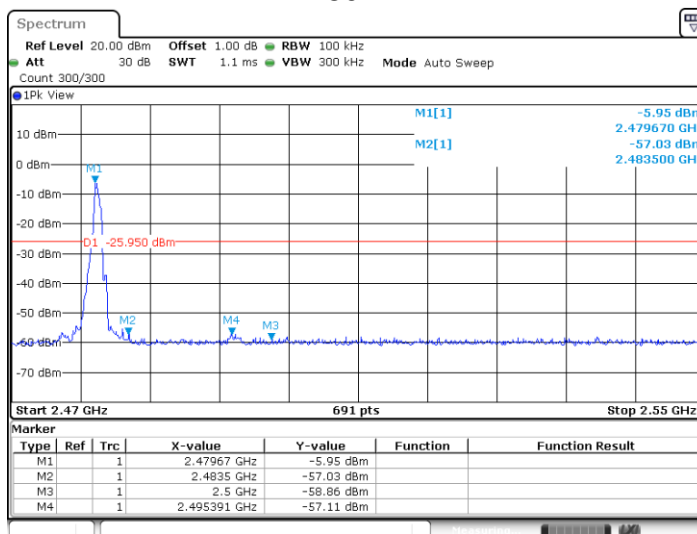

Date: 28.JAN.2021 16:12:36

9.7 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:
For Below 1GHz
Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz to 120KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1 MHz.
- b) VBW \geq [3 \times RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \geq RBW / 2.
Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the



emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK


Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.


Transmitting spurious emission test result as below:

Transmitting spurious emission test result as below:

30MHz - 1GHz


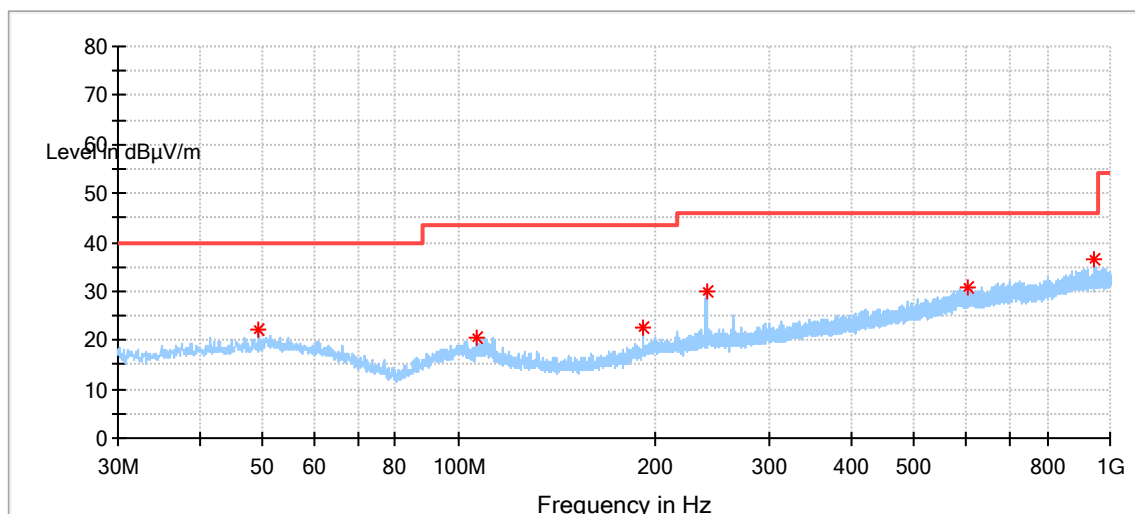


Frequency MHz	Peak Emission Level dBµV/m	Polarization	Limit dBµV/m	Detector	Result
49.400000	22.01	Horizontal	40.00	Peak	Pass
106.791667	20.67	Horizontal	43.50	Peak	Pass
191.990000	22.47	Horizontal	43.50	Peak	Pass
239.951111	29.75	Horizontal	46.00	Peak	Pass
605.479444	30.87	Horizontal	46.00	Peak	Pass
945.626111	36.52	Horizontal	46.00	Peak	Pass


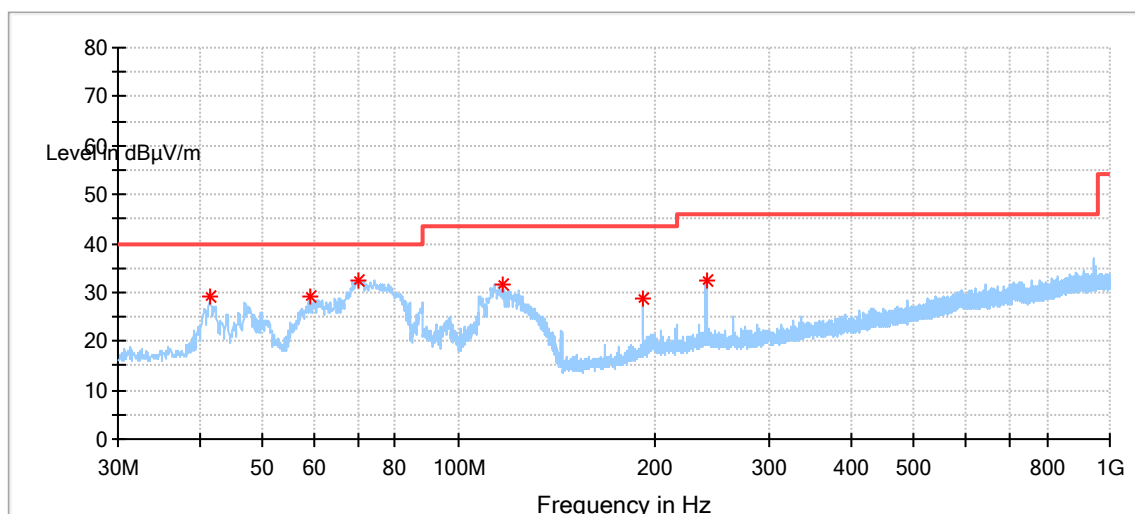


Frequency MHz	Emission Level dBµV/m	Polarization	Limit dBµV/m	Detector	Result
41.478333	28.94	Vertical	40.00	QP	Pass
59.100000	29.24	Vertical	40.00	QP	Pass
70.362778	32.60	Vertical	40.00	QP	Pass
117.192222	31.76	Vertical	43.50	QP	Pass
191.990000	28.78	Vertical	43.50	QP	Pass
240.005000	32.45	Vertical	46.00	QP	Pass



2402MHz (Above 1GHz)

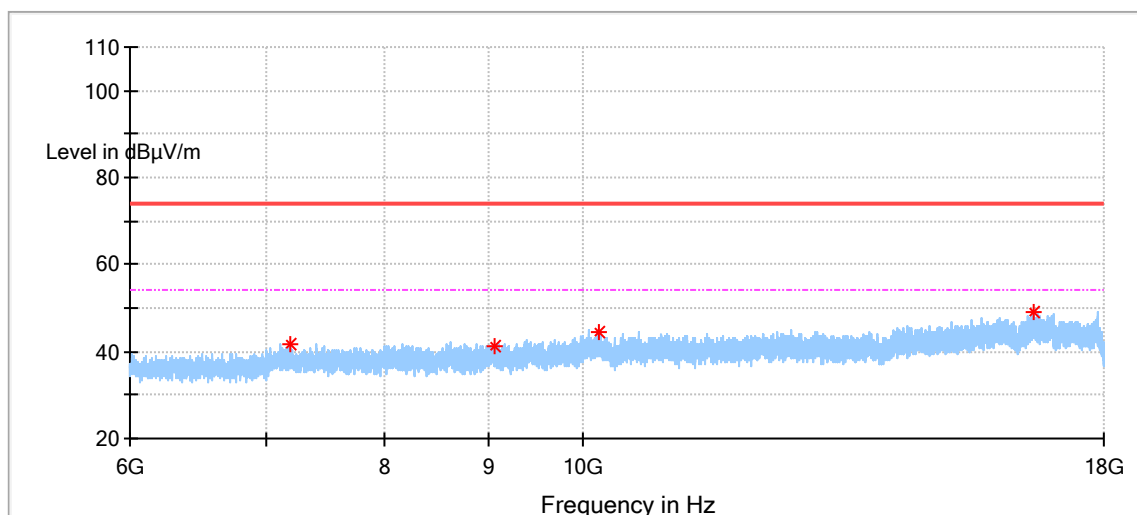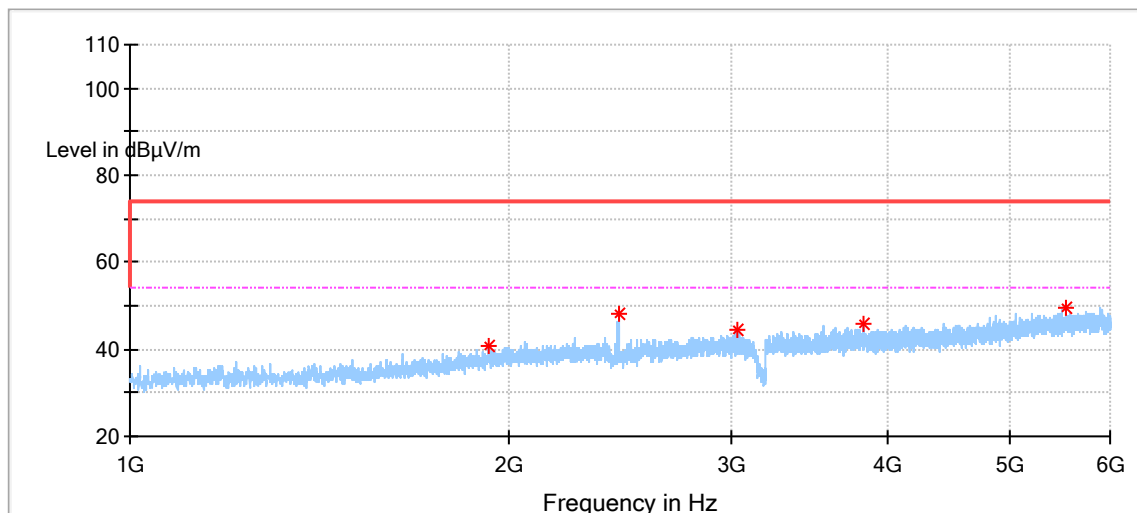



Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
1929.500000	40.91	Horizontal	74.00	PK	Pass
2444.500000	48.34	Horizontal	74.00	PK	Pass
3033.000000	44.32	Horizontal	74.00	PK	Pass
3818.500000	45.98	Horizontal	74.00	PK	Pass
5537.000000	49.64	Horizontal	74.00	PK	Pass
7187.000000	41.69	Horizontal	74.00	PK	Pass
9043.500000	41.27	Horizontal	74.00	PK	Pass
10180.000000	44.68	Horizontal	74.00	PK	Pass
16627.000000	49.20	Horizontal	74.00	PK	Pass

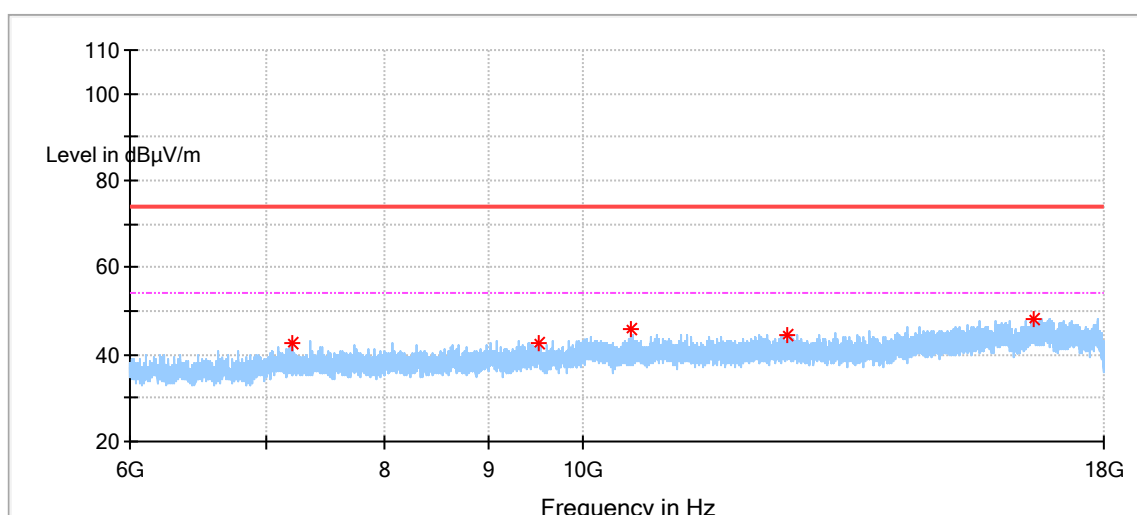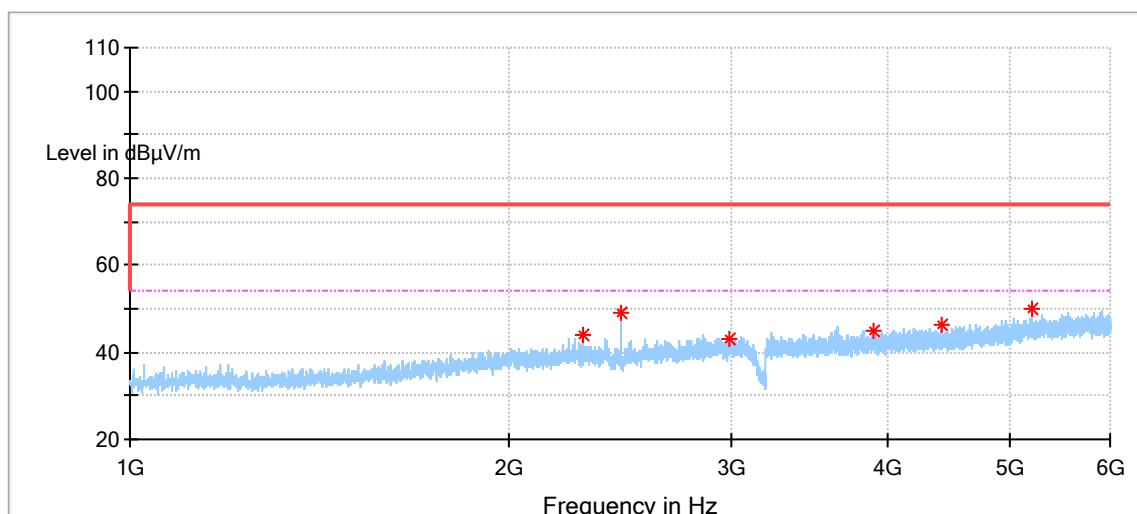

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
2289.500000	43.93	Vertical	74.00	PK	Pass
2452.000000	49.10	Vertical	74.00	PK	Pass
2993.000000	43.28	Vertical	74.00	PK	Pass
3887.000000	44.74	Vertical	74.00	PK	Pass
4418.000000	46.15	Vertical	74.00	PK	Pass
5201.500000	49.89	Vertical	74.00	PK	Pass
7206.500000	42.80	Vertical	74.00	PK	Pass
9515.000000	42.71	Vertical	74.00	PK	Pass
10566.500000	45.72	Vertical	74.00	PK	Pass
12595.000000	44.55	Vertical	74.00	PK	Pass
16620.000000	48.36	Vertical	74.00	PK	Pass

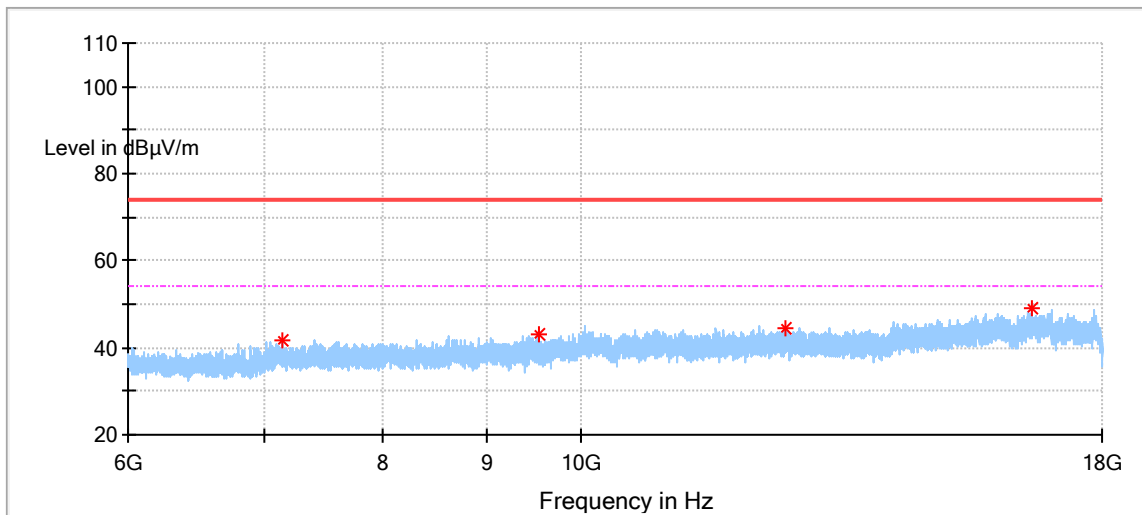
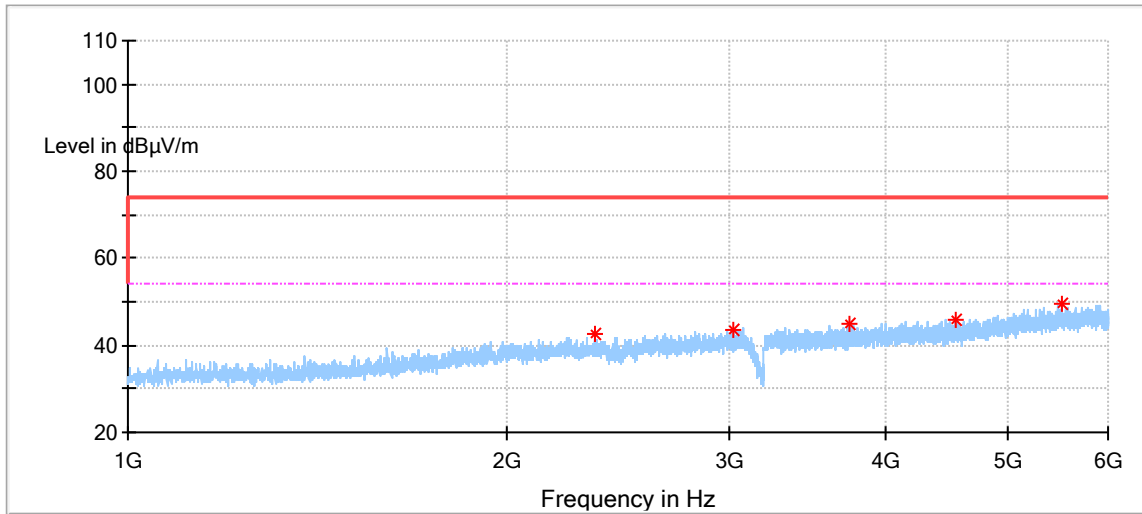


Frequency MHz	Emission Level dBµV/m	Polarization	Limit dBµV/m	Detector	Result
2345.000000	42.69	Horizontal	74	PK	Pass
3028.000000	43.56	Horizontal	74	PK	Pass
3740.000000	44.86	Horizontal	74	PK	Pass
4544.500000	46.06	Horizontal	74	PK	Pass
5519.000000	49.39	Horizontal	74	PK	Pass
7147.000000	41.64	Horizontal	74	PK	Pass
9526.500000	43.30	Horizontal	74	PK	Pass
12606.000000	44.33	Horizontal	74	PK	Pass
16647.500000	49.05	Horizontal	74	PK	Pass

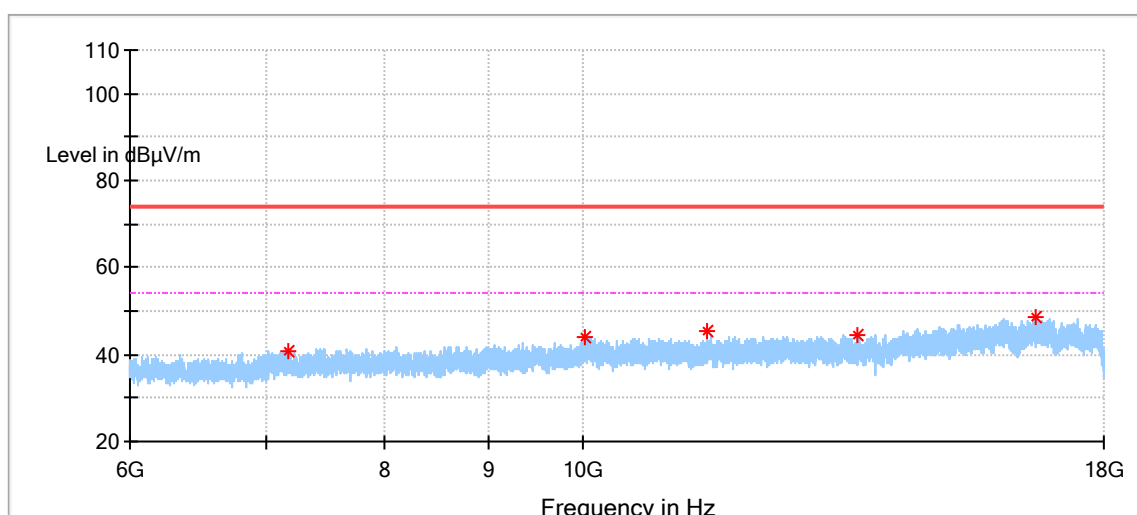
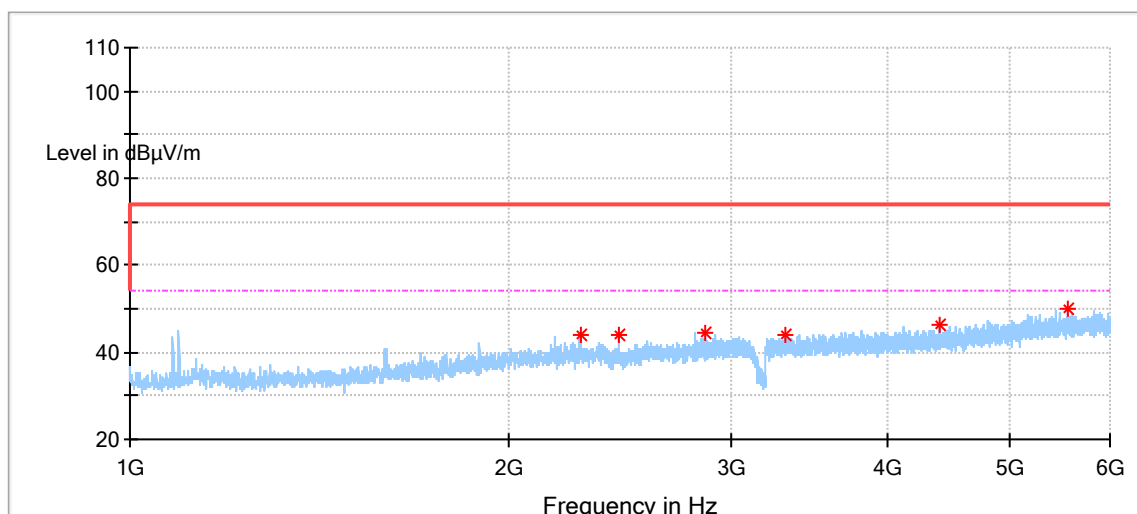


Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
2279.000000	43.87	Vertical	74	PK	Pass
2443.000000	43.79	Vertical	74	PK	Pass
2861.500000	44.26	Vertical	74	PK	Pass
3314.000000	43.84	Vertical	74	PK	Pass
4398.500000	46.23	Vertical	74	PK	Pass
5564.500000	49.85	Vertical	74	PK	Pass
7177.500000	40.91	Vertical	74	PK	Pass
10023.500000	43.95	Vertical	74	PK	Pass
11512.500000	45.55	Vertical	74	PK	Pass
13643.500000	44.27	Vertical	74	PK	Pass
16678.000000	48.72	Vertical	74	PK	Pass

2480MHz (Above 1GHz)

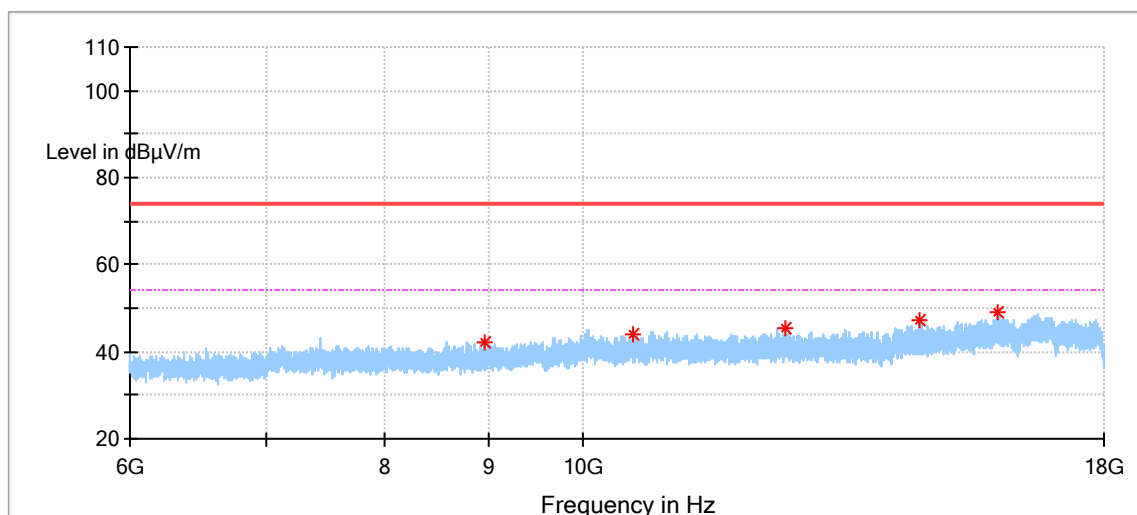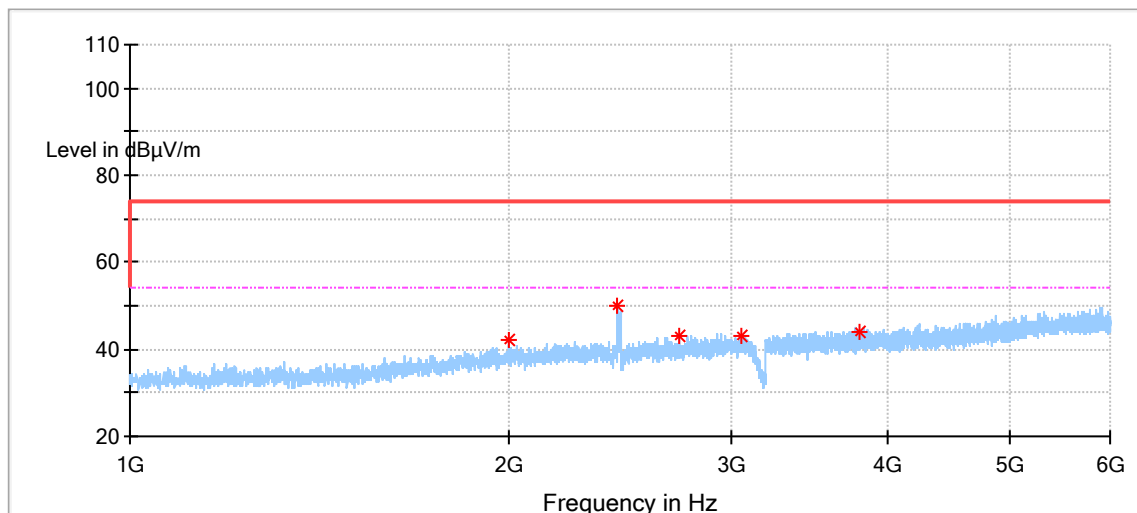

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
1999.000000	41.97	Horizontal	74.00	PK	Pass
2440.500000	50.17	Horizontal	74.00	PK	Pass
2726.000000	43.18	Horizontal	74.00	PK	Pass
3062.000000	43.27	Horizontal	74.00	PK	Pass
3789.500000	44.11	Horizontal	74.00	PK	Pass
8955.000000	42.36	Horizontal	74.00	PK	Pass
10575.000000	43.95	Horizontal	74.00	PK	Pass
12556.000000	45.31	Horizontal	74.00	PK	Pass
14623.500000	47.11	Horizontal	74.00	PK	Pass
15975.000000	49.09	Horizontal	74.00	PK	Pass

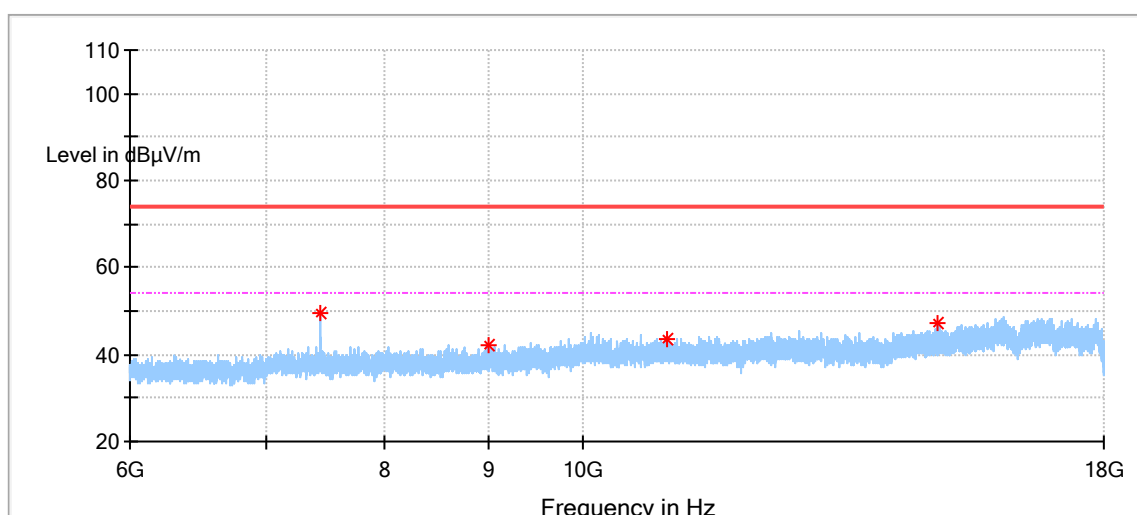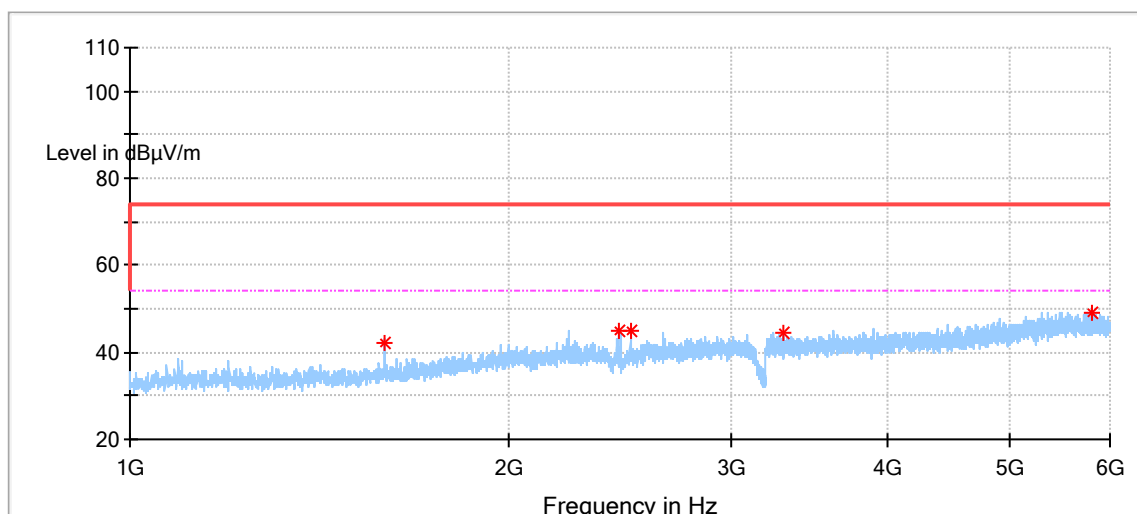

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBμV/m	Detector	Result
1593.500000	42.09	Vertical	74.00	PK	Pass
2449.000000	44.74	Vertical	74.00	PK	Pass
2496.500000	44.95	Vertical	74.00	PK	Pass
3304.500000	44.49	Vertical	74.00	PK	Pass
5811.500000	49.27	Vertical	74.00	PK	Pass
7439.000000	49.35	Vertical	74.00	PK	Pass
8994.500000	42.08	Vertical	74.00	PK	Pass
10992.000000	43.74	Vertical	74.00	PK	Pass
14936.500000	47.43	Vertical	74.00	PK	Pass



Remark:

- (1) Data of Data of measurement within frequency range 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.
- (2) Level = Reading Level + Correction Factor
Above 1GHz: Corrector factor = Antenna Factor + Cable Loss - Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

- Radiated Emission Test

Description	Manufacturer	Model no.	Serial no.	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2021-6-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2021-8-20
Horn Antenna	Rohde & Schwarz	HF907	102294	2021-6-22
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2021-7-7
Signal Generator	Rohde & Schwarz	SMY01	839369/005	2021-6-28
Attenuator	Agilent	8491A	MY39264334	2021-6-28
3m Semi-anechoic chamber	TDK	9X6X6	----	2021-6-28
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

- RF conducted test

Description	Manufacturer	Model no.	Serial no.	cal. due date
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2021-6-28
RF Switch Module	Rohde & Schwarz	OSP120/OSP	101226/100851	2021-6-28
Power Splitter	Weinschel	1580	SC319	2021-6-28
10dB Attenuator	Weinschel	4M-10	43152	2021-6-28
Test software	Rohde & Schwarz	EMC32	Version 10.38.00	N/A
Test software	Tonscend	System for BT/WIFI	Version 2.6	N/A



11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.81dB; Vertical: 4.89dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.69dB; Vertical: 4.68dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.89dB; Vertical: 4.87dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: 0.6×10^{-7} or 1%