

# EMC Technologies (NZ) Ltd

Test Report No 21216.2  
Report date: 16 January 2003

---

## TEST REPORT

### Cardax FT 1DT 125 Series Card Reader

*tested to*

#### 47 Code of Federal Regulations


#### Part 15 - Radio Frequency Devices

#### Subpart C – Intentional Radiators

*for*

### Gallagher Group Ltd

This Test Report is issued with the authority of:



---

**Andrew Cutler - General Manager**

Prepared by:



---

**Karen Miller – Office Administrator**



---

**EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)  
Web Site: [www.emctech.com.au](http://www.emctech.com.au)

# EMC Technologies (NZ) Ltd

Test Report No 21216.2  
Report date: 16 January 2003

---

## Table of Contents

1.	STATEMENT OF COMPLIANCE	3
2.	RESULTS SUMMARY	3
3.	INTRODUCTION	4
4.	CLIENT INFORMATION	4
5.	DESCRIPTION OF TEST SAMPLE	5
6.	RESULTS	5
7.	TEST EQUIPMENT USED	14
8.	ACCREDITATIONS	14
9.	PHOTOGRAPHS	15

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

## 1. STATEMENT OF COMPLIANCE

The **Cardax FT 1DT 125 Series Grey Card Reader** complies with FCC Part 15 Subpart C as an Intentional Radiator when the methods, as described in ANSI C63.4 - 1992, are applied.

## 2. RESULTS SUMMARY

The results from testing are summarised in the following table:

Clause	Parameter	Result
15.201	Equipment authorisation requirement	Certification required.
15.203	Antenna requirement	Complies. Antenna integral.
15.204	External PA and antenna modifications	Not applicable. No external devices.
15.205	Restricted bands of operation	Complies. Device transmits on 125 kHz.
15.207	Conducted limits	Complies with a 3.7 dB margin at 505 kHz.
15.209	Radiated emission limits - Fundamental	Complies with a 34.1 dB margin.
15.209	Radiated emission limits - Spurious emissions <30 MHz	Complies with a 39.8 dB margin at 625 kHz.
15.209	Radiated emission limits - Spurious emissions >30 MHz	Complies with a 1.7 dB margin at 64.000 MHz. Measurement falls within the window of uncertainty.

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

---

## 3. INTRODUCTION

This report describes the tests and measurements performed on the **Cardax FT 1DT 125 Series Grey Card Reader** for the purpose of determining compliance with the specification.

**The client selected the test sample.**

**This report relates only to the sample tested.**

**This report contains no corrections or erasures.**

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

## 4. CLIENT INFORMATION

<b>Company Name</b>	Gallagher Group Ltd
<b>Address</b>	Private Bag 3026
<b>City</b>	Hamilton
<b>Country</b>	New Zealand
<b>Contact</b>	Mr Dave Grant

# EMC Technologies (NZ) Ltd

Test Report No 21216.2  
Report date: 16 January 2003

---

## 5. DESCRIPTION OF TEST SAMPLE

<b>Brand Name</b>	Cardax
<b>Model Number</b>	FT 1DT 125 Series
<b>Product</b>	Card Reader
<b>Manufacturer</b>	Gallagher Group
<b>Country of Origin</b>	New Zealand
<b>Serial Number</b>	0248371077

## 6. RESULTS

### Standard

The sample was tested in accordance with 47 CFR Part 15 Subpart C.

### Methods and Procedures

The measurement methods and procedures as described in ANSI C63.4 - 1992 were used.

### Section 15.201: Equipment authorisation requirement

Certification as detailed in Subpart J of Part 2 is required for this device.

### Section 15.203: Antenna requirement

As can be seen from the attached photographs the antenna requirement does not apply to this transmitter, as the antenna is integral to the device.

**Result:** Complies.

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

---

## **Section 15.204: External radio frequency power amplifiers and antenna modifications**

From the attached photographs it can be seen that it is not possible to attach an external power amplifier to this transmitter. In addition the antenna is integral to the device and therefore only one antenna can be used with this transmitter.

**Result:** Complies.

## **Section 15.205: Restricted bands of operation**

The transmitter transmits on 125 kHz.

This falls between the restricted bands of 90 – 110 kHz and 495 – 505 kHz.

**Result:** Complies.

## **Section 15.207: Conducted limits**

Conducted emissions were carried out over the frequency range of 150 kHz to 30 MHz.

Testing for conducted emissions was carried out at the laboratory's MacKelvie Street premises in a 2.4 m x 2.4 m x 2.4 m screened room.

The device was placed 0.8 m away from the artificial mains terminal network on the emissions test table which is 1 m x 1.5 m, and is 0.8 m above the screened room floor which acts as the horizontal ground plane and is 0.4 m away from the screened room wall which acts as the vertical ground plane.

The device was powered at 110 V AC from the mains.

Measurements were made using a receiver with a quasi peak detector and a bandwidth of 9 kHz.

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

---

The transmitter under test is powered from a Cardax FT 5000 Controller, Sn#0023340123, which supplies the required 13.8 Vdc power source.

**Result:** Complies with a 3.7 dB margin at 505 kHz when the transmitter was operating continuously.

Measurement uncertainty with a confidence interval of 95% is:


- Conducted emissions test (0.15 - 30 MHz)  $\pm$  2.2 dB

# EMC Technologies (NZ) Ltd

Test Report No 21216.2  
Report date: 16 January 2003

## Conducted Emissions

<b>Comments:</b>	Device tested at 110 Vac using a Cardax FT 5000 Controller, which powered the transmitter. Transmitter transmitting continuously at 125 kHz.
------------------	--

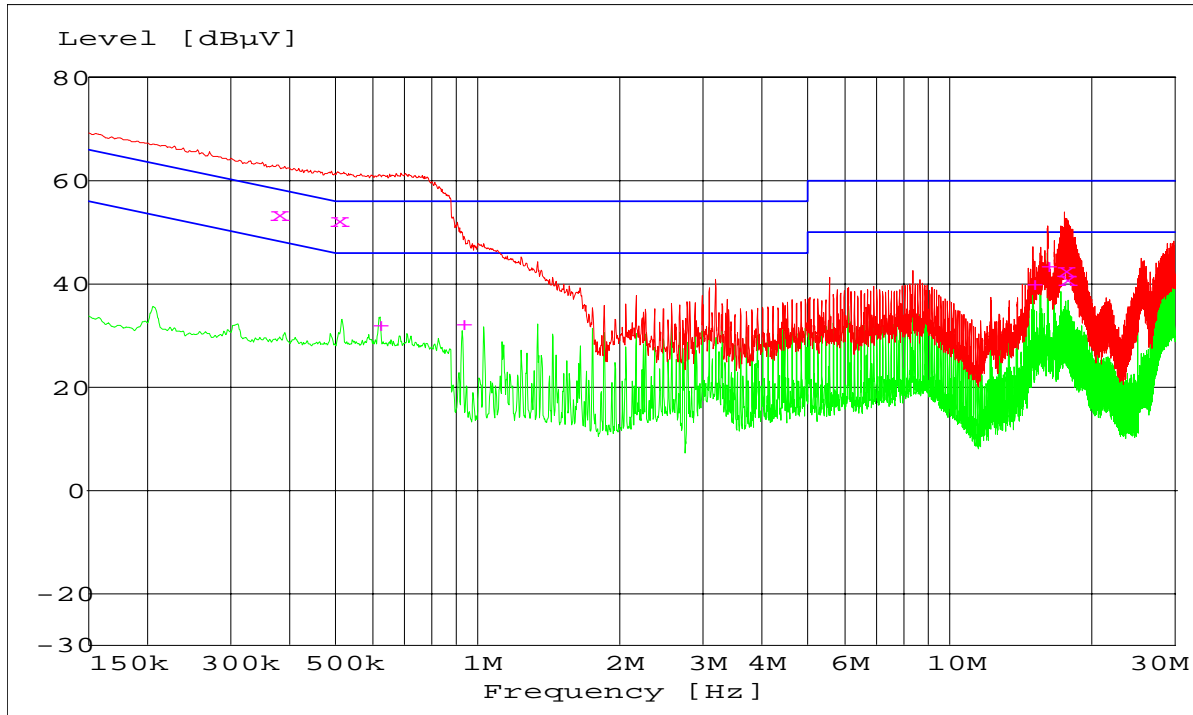

Peak -----	Average -----	Quasi Peak X	Average +
------------	---------------	--------------	-----------

### Quasi-Peak Measurements

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Exceed	Phase	Rechecks dBµV
0.377500	53.5	58.0	4.8		N	53.5
0.505000	52.3	56.0	3.7		L1	52.7
17.500000	42.7	60.0	17.3		N	
17.605000	40.9	60.0	19.1		N	

### Average Measurements

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Exceed	Phase	Rechecks dBµV
0.617500	32.1	46.0	13.9		N	
0.927500	32.2	46.0	13.8		N	
15.000000	40.1	50.0	9.9		N	
16.105000	43.5	50.0	6.5		L1	

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz  
Web Site: www.emctech.com.au



# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

## **Section 15.209: Radiated emission limits, general requirements**

Radiated emissions testing was carried out over the frequency range of 100 kHz to 1000 MHz.

Testing was carried out at the laboratory's open area test site - located at Driving Creek, Orere Point, Auckland, New Zealand.

This site conforms to the requirements of CISPR 16, Part 1, Clause 16, and ANSI C63.4 - 1992.

The device was placed on the test tabletop, which is a total of 0.8 m above the test site ground plane.

When an emission is located, it is positively identified and its maximum level is found by rotating the automated turntable, and by varying the antenna height, where appropriate, with an automated antenna tower.

The emission is measured in both vertical and horizontal antenna polarisations, where appropriate.

The emission level was determined in field strength by taking the following into consideration:

$$\text{Level (dB}\mu\text{V/m)} = \text{Receiver Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB)} + \text{Coax Loss (dB)}$$

### **Fundamental emission:**

Frequency kHz	Level dBuV/m	Limit dBuV/m	Margin dB	Result
125.000	51.6	85.7	-34.1	Pass

Magnetic loop measurements were made at a distance of 10 metres.

Measurements were made while the device was being powered at 110 Vac.

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

A receiver with an average detector with a 9 kHz bandwidth was used to make the above measurements.

The 300 metre limit of 25.6 dBuV/m (19.2 uV) has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2), which gives a limit of 85.6 dBuV/m at 10 metres.

**Result:** Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz - 30 MHz)  $\pm$  4.8 dB

## Section 15.209: Spurious Emissions (below 30 MHz)

Frequency kHz	Level dBuV/m	Limit dBuV/m	Margin dB	Result
250.0	8.0	79.6	-71.6	Pass
375.0	14.0	76.1	-62.1	Pass
500.0	-	53.6	-	Pass
625.0	14.0	51.7	-37.7	Pass
750.0	-	50.1	-	Pass
875.0	9.0	48.8	-39.8	Pass
1000.0	-	47.6	-	Pass
1125.0	4.0	46.6	-42.6	Pass
1250.0	-	45.7	-	Pass
1375.0	-	44.8	-	Pass
1500.0	-	44.1	-	Pass
1625.0	-	43.4	-	Pass

Magnetic loop measurements were made at a distance of 10 metres.

Measurements were made while the device was being powered at 110 Vac.

A receiver with an average detector with a 9 kHz bandwidth was used between 125 – 490 kHz and a quasi peak detector with a 9 kHz bandwidth was used between 490 kHz – 30.0 MHz.

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

---

The 300 metre limit between 125 – 490 kHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2) and the 30 metre limit between 490 - 1705 kHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

No further transmitter spurious emissions were detected above 1600.0 kHz.

The spurious emissions observed do not exceed the level of the fundament emission.

**Result:** Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz - 30 MHz)  $\pm$  4.8 dB

## **Section 15.209: Spurious Emissions (above 30 MHz)**

Measurements between 30 –1000 MHz have been made at a distance of 3 metres.

Measurements were made while the device was being powered at 110 Vac.

A receiver with a quasi peak detector with a 120 kHz bandwidth was used between 30 – 1000 MHz.

No transmitter spurious emissions were observed.

Measurements were carried out as the device contains a digital device.

A predominant emission of 32 MHz was observed.

The limits as described in Section 15.209 have been applied as follows:

30.0 – 88.0 MHz	100 uV/m	40 dBuV/m
88.0 – 216.0 MHz	150 uV/m	43.5 dBuV/m
216.9 – 960.0 MHz	200 uV/m	46.0 dBuV/m

In order to comply a Steward 28B2024-OAO ferrite clamp with 3 turns of cable was required to be placed at the input to the device under test.

Details of this modification are contained in the attached photographs.

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

**Result:** Complies with a 1.7 dB margin at 64.000 MHz. Measurement falls within the window of uncertainty.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 - 1000 MHz)  $\pm$  4.1 dB

## Spurious Emissions

Frequency MHz	Level		Recheck dBuV/m	Limit dBuV/m	Margin dB	Result	Worst Case Antenna
	Vertical dBuV/m	Hort dBuV/m					
32.000	26.9			40.0	13.1	Pass	Vertical
35.540	29.8			40.0	10.2	Pass	Vertical
37.790	29.5			40.0	10.5	Pass	Vertical
49.000	26.2			40.0	13.8	Pass	Vertical
50.000	36.2			40.0	3.8	Uncert	Vertical
56.100	24.5			40.0	15.5	Pass	Vertical
62.240	30.4			40.0	9.6	Pass	Vertical
64.000	38.3	32.0	38.2	40.0	1.7	Uncert	Vertical
66.000	32.0			40.0	8.0	Pass	Vertical
66.600	31.0			40.0	9.0	Pass	Vertical
69.700	28.3			40.0	11.7	Pass	Vertical
71.900	32.2			40.0	7.8	Pass	Vertical
76.700	28.0			40.0	12.0	Pass	Vertical
79.880	29.8			40.0	10.2	Pass	Vertical
87.560	30.6			40.0	9.4	Pass	Vertical
96.000	34.4			43.5	9.1	Pass	Vertical
100.000	32.1			43.5	11.4	Pass	Vertical
102.000	27.6			43.5	15.9	Pass	Vertical
103.300	28.8			43.5	14.7	Pass	Vertical
103.900	31.3			43.5	12.2	Pass	Vertical
107.475	25.3			43.5	18.2	Pass	Vertical
120.080	29.8			43.5	13.7	Pass	Vertical
125.800	35.7			43.5	7.8	Pass	Vertical
128.000	38.5	36.1	38.5	43.5	5.0	Pass	Vertical
130.050	31.4			43.5	12.1	Pass	Vertical

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

## Spurious Emissions Continued

Frequency MHz	Level		Recheck dBuV/m	Limit dBuV/m	Margin dB	Result	Worst Case Antenna
	Vertical dBuV/m	Hort dBuV/m					
150.000	30.2			43.5	13.3	Pass	Vertical
160.000	34.4	34.0		43.5	9.1	Pass	Vertical
175.000	39.4		39.4	43.5	4.1	Pass	Vertical
192.000	32.6			43.5	10.9	Pass	Vertical
200.000	31.4			43.5	12.1	Pass	Vertical
212.785	31.5			43.5	12.0	Pass	Vertical
216.000	25.5			43.5	18.0	Pass	Vertical
225.000	29.5			46.0	16.5	Pass	Vertical
228.000	24.4			46.0	21.6	Pass	Vertical
250.000	25.1			46.0	20.9	Pass	Vertical
268.890	27.6			46.0	18.4	Pass	Vertical
276.000	20.0			46.0	26.0	Pass	Vertical
300.000	23.2			46.0	22.8	Pass	Vertical

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

## 7. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial No	Asset Ref
Aerial Controller	EMCO	1090	9112-1062	RFS 3710
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708
Biconical Antenna	Schwarzbeck	BBA 9106	-	RFS 3612
Log Periodic Antenna	Schwarzbeck	UHALP 9107	-	RFS 3702
Measurement Receiver	Rohde & Schwarz	ESCS 30	847124/020	E1595
Measurement Receiver	Rohde & Schwarz	ESHS 10	828404/005	RFS 3728
2m Triple Loop Antenna	Rohde & Schwarz	HM020	843885/004	-
Loop Antenna	Schwarzbeck	FMZ 1514	-	RFS 3602
Magnetic Loops	Schwarzbeck	FMZ 15141	-	RFS 3653
Magnetic Loops	Schwarzbeck	FMZ 15142	-	RFS 3654
Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	881362/034	RFS 3628
Variac	General Radio	1592	-	RFS 3690
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709
VHF Balun Antenna	Schwarzbeck	VHA 9103		RFS 3603

## 8. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies Ltd registration with the Federal Communications Commission as a listed facility, registration number: 90838, which was updated on March 25<sup>th</sup>, 2002.

All testing was carried out in accordance with the terms of EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.1999.

All measurement equipment has been calibrated in accordance with the terms of the EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.1999.

International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with 46 accreditation bodies in 34 economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.

# EMC Technologies (NZ) Ltd

Test Report No 21216.2


Report date: 16 January 2003

## 9. PHOTOGRAPHS


Conducted emissions test set up



Controller external and internal photos

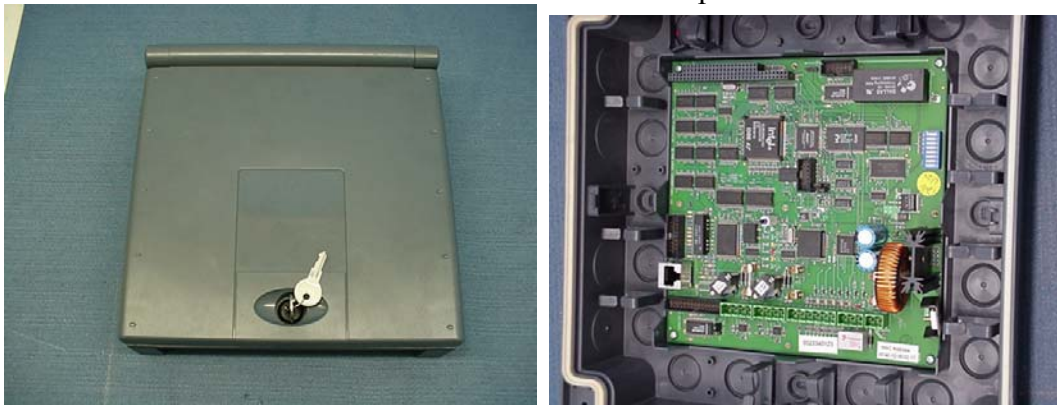

Power supply external and internal photos

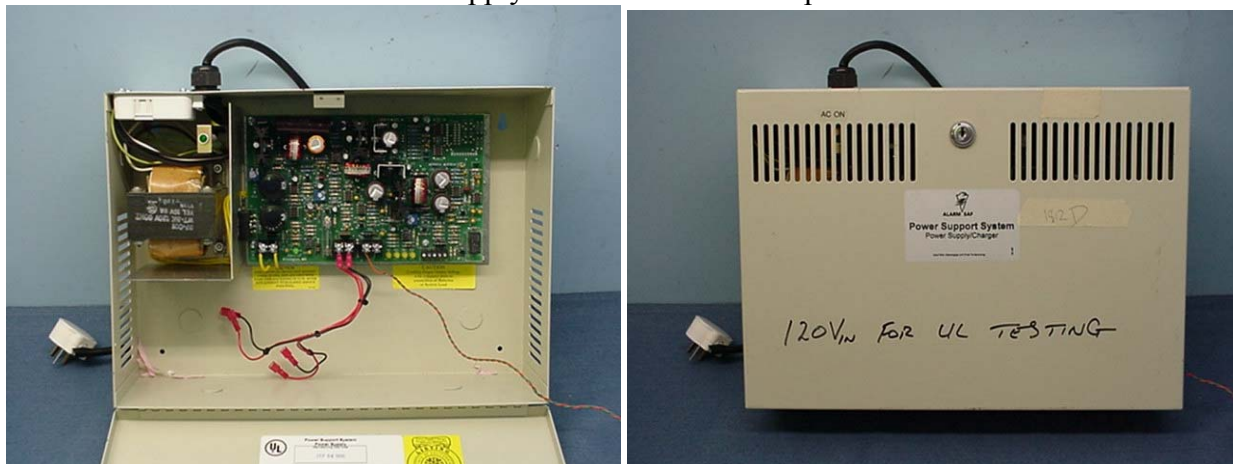

**EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Page 15 of 18 This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)

Web Site: [www.emctech.com.au](http://www.emctech.com.au)

# EMC Technologies (NZ) Ltd

Test Report No 21216.2  
Report date: 16 January 2003

Transmitter label, internal and external photos



**EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Page 16 of 18 This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)  
Web Site: [www.emctech.com.au](http://www.emctech.com.au)



# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

---

Radiated emissions test set up



---

**EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Page 17 of 18      This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)

Web Site: [www.emctech.com.au](http://www.emctech.com.au)

# EMC Technologies (NZ) Ltd

Test Report No 21216.2

Report date: 16 January 2003

---



---

**EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Page 18 of 18      This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)

Web Site: [www.emctech.com.au](http://www.emctech.com.au)