



EMC Technologies (NZ) Ltd
PO Box 68-307
Newton, Auckland
Phone 09 360 0862
Fax 09 360 0861
E-Mail Address: aucklab@ihug.co.nz
Web Site: www.emctech.com.au

TEST REPORT

Gallagher T12 Flush MiFare Card Reader

tested to

47 Code of Federal Regulations

Part 15 - Radio Frequency Devices

Subpart C – Intentional Radiators

Section 15.225

Operation within the band 13.110 -14.010 MHz

for

Gallagher Group Ltd

This Test Report is issued with the authority of:

A handwritten signature in black ink, appearing to read "Andrew Cutler".

Andrew Cutler- General Manager



All tests reported
herein have been
performed in accordance
with the laboratory's
scope of accreditation

Table of Contents

1.	STATEMENT OF COMPLIANCE	3
2.	RESULTS SUMMARY	3
3.	INTRODUCTION	4
4.	CLIENT INFORMATION	4
5.	DESCRIPTION OF TEST SAMPLE	4
6.	SETUPS AND PROCEDURES	5
7.	TEST EQUIPMENT USED	15
8.	ACCREDITATIONS	15
9.	PHOTOGRAPHS	16

1. STATEMENT OF COMPLIANCE

The **Gallagher T12 Flush MiFare Card Reader** complies with FCC Part 15 Subpart C Section 15.225 as an Intentional Radiator when the methods as described in ANSI C63.4 - 2003 are applied.

2. RESULTS SUMMARY

The results from testing are summarised in the following table:

Clause	Parameter	Result
15.201	Equipment authorisation requirement	Certification required.
15.203	Antenna requirement	Complies. Antennas internal to the device.
15.204	External PA and antenna modifications	Not applicable. No external devices.
15.205	Restricted bands of operation	Complies. Device transmits on 13.560 MHz.
15.207	Conducted limits	Complies.
15.209	Radiated emission limits - Spurious emissions <30 MHz	Complies with a 31.8 dB margin at 27.120 MHz
15.209	Radiated emission limits – Spurious emissions >30 MHz	Complies with a 3.9 dB margin at 40.680 MHz (Vertical).
15.225	Radiated emission limits - Fundamental	Complies with a 51.5 dB margin at 13.560 MHz.
15.225	Frequency stability	Complies

3. INTRODUCTION

This report describes the tests and measurements performed for the purpose of determining compliance with the specification.

The client selected the test sample.

This report relates only to the sample tested.

This report contains no corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

4. CLIENT INFORMATION

Company Name	Gallagher Group Ltd
Address	Kahikatea Drive
City	Hamilton
Country	New Zealand
Contact	Mr Brian Rose

5. DESCRIPTION OF TEST SAMPLE

Brand Name	Gallagher
Model Number	T12
Product	Flush MiFare Card Reader
Manufacturer	Gallagher Group Ltd
Country of Origin	New Zealand
Serial Number	1109207011
FCC ID	M5VC30022X

6. SETUPS AND PROCEDURES

Standard

The sample was tested in accordance with 47 CFR Part 15 Subpart C.

Methods and Procedures

The measurement methods and procedures as described in ANSI C63.4 - 2003 were used.

Section 15.201: Equipment authorisation requirement

Certification as detailed in Subpart J of Part 2 is required for this device.

Section 15.203: Antenna requirement

This device has an internal antenna for a 13.560 MHz transmitter.

Result: Complies.

Section 15.204: External radio frequency power amplifiers and antenna modifications

It is not possible to attach an external power amplifier to this transmitter.

Result: Complies.

Section 15.205: Restricted bands of operation

The transmitter transmits on 13.560 MHz.

This device would therefore fall into the band 13.110 – 14.010 MHz that is covered by Section 15.225.

Result: Complies.

Section 15.207: Conducted emissions testing

Conducted Emissions testing was carried out over the frequency range of 150 kHz to 30 MHz which was carried out at the laboratory's MacKelvie Street premises in a 2.4 m x 2.4 m x 2.4 m screened room

Testing was carried out using a representative AC power supply system that was powered at 120 Vac which supplied 12 Vdc to a GBUS URI device which in turn powered the Card Reader also at 12 Vdc.

The device operates on 13.560 MHz.

Testing was carried out with the 13.560 MHz transmitter operating with the standard antenna attached and with this antenna removed and replaced with a dummy load.

The device is deemed to comply providing it complies when the test is carried out with a dummy load attached and the overall emission signature for the product remains similar with no additional emissions being detected.

This is the case with this device.

The device was placed on top of the emissions table, which is 1 m x 1.5 m, 80 cm above the screened room floor which acts as the horizontal ground plane.

In addition the device was positioned 40 cm away from the screened room wall which acts as the vertical ground plane.

The artificial mains network was bonded to the screened room floor.

At all times the device was kept more than 80 cm from the artificial mains network.

The Class B limits have been applied.

The supplied plot is combined plot showing the worst case quasi peak and average results of both the phase and neutral lines to the representative AC power supply.

Quasi peak and average detectors have been used with resolution bandwidths of 9 kHz.


Measurement uncertainty with a confidence interval of 95% is:

- AC Mains port (0.15-30 MHz) \pm 2.8 dB

Conducted Emissions – AC Input Power Port

Setup: Device tested when powered at 120 Vac using a representative power supply and a GBUS URI with a card being presented to the card reader. Antenna attached as normal.

Peak ---
Average --
Quasi Peak X
Average +

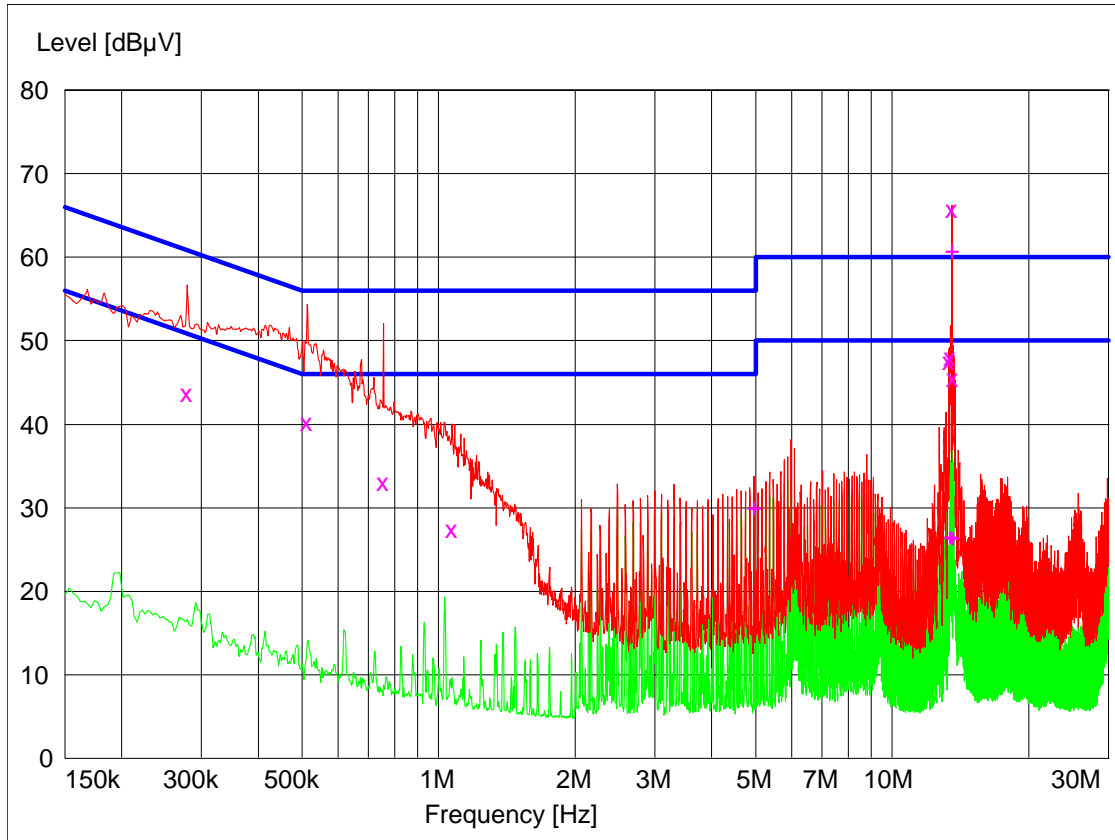

Final Quasi-Peak Measurements

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Phase	Rechecks dBµV
0.279000	43.70	60.8	17.1	L1	
0.513000	40.30	56.0	15.7	L1	
0.756000	33.10	56.0	22.9	L1	
1.071000	27.40	56.0	28.6	N	
13.349000	47.60	60.0	12.4	L1	
13.452500	48.10	60.0	11.9	L1	
13.560500	65.80	60.0	-5.8	L1	66.0
13.641500	45.60	60.0	14.4	L1	


Final Average Measurements

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Phase	Rechecks dBµV
4.956500	30.10	46.1	16.0	N	
13.443500	26.60	50.0	23.4	N	
13.560500	60.90	50.0	-10.9	L1	61.0
13.641500	26.50	50.0	23.5	L1	

Conducted Emissions – AC Input Power Port

Setup: Device tested when powered at 120 Vac using a representative power supply and a GBUS URI with a card being presented to the card reader. Antenna replaced by a dummy load.

Peak ---
 Average --
 Quasi Peak X
 Average +

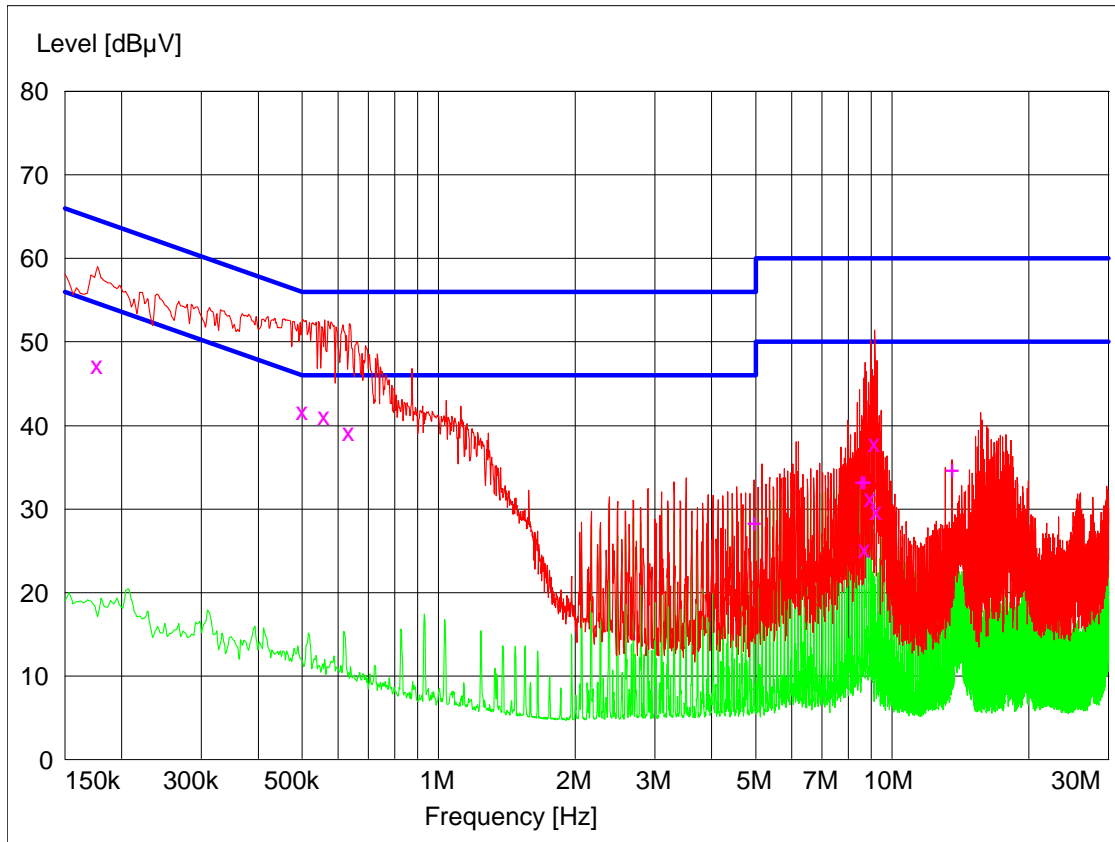

Final Quasi-Peak Measurements

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Phase	Rechecks dBµV
0.177000	47.20	64.6	17.4	N	
0.501000	41.80	56.0	14.2	N	
0.561000	41.10	56.0	15.0	N	
0.636000	39.20	56.0	16.8	L1	
8.709500	25.30	60.0	34.7	N	
8.966000	31.30	60.0	28.7	N	
9.164000	37.90	60.0	22.1	N	
9.263000	29.80	60.0	30.2	N	

Final Average Measurements

Frequency MHz	Level dBµV	Limit dBµV	Margin dB	Phase	Rechecks dBµV
4.961000	28.50	46.0	17.5	N	
8.574500	33.40	50.0	16.6	N	
8.678000	33.40	50.0	16.6	N	
13.560500	34.80	50.0	15.2	L1	35.0

Section 15.209: Radiated emission limits, general requirements

Radiated emissions testing was carried out over the frequency range of 13 MHz to 1000 MHz as the highest frequency in use is less than 108 MHz.

Testing was carried out at the laboratory's open area test site - located at Driving Creek, Orere Point, Auckland, New Zealand. This site conforms to the requirements of CISPR 16 and ANSI C63.4 - 2003.

Testing was carried out when the device was powered at 12 Vdc from a GBUS URI device which was in turn powered at 12 Vdc from a 120 Vac to 12 Vdc representative AC power supply.

The GBUS URI and representative AC power supply were placed 5 metres directly behind the device under test.

Testing was carried out with the device being placed in the centre of the test table standing vertically upright using a test jig that was supplied by the client.

The device was transmitting continuously on 13.560 MHz throughout the test with a card placed in front of the device which was continuously being read as indicated by an periodic audible beep.

When an emission is located, it is positively identified and its maximum level is found by rotating the automated turntable, and by varying the antenna height, where appropriate, with an automated antenna tower.

Below 30 MHz a magnetic loop is used with the centre of the loop being 1 metre above the ground with measurements being made using a quasi peak detector.

Above 30 MHz the emission is measured in both vertical and horizontal antenna polarisations, where appropriate, using a quasi peak detector.

The emission level was determined in field strength by taking the following into consideration:

Level (dB μ V/m) = Receiver Reading (dB μ V) + Antenna Factor (dB) + Coax Loss (dB)

Result: Complies

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 – 1000 MHz) \pm 4.1 dB
- Free radiation tests (100 kHz – 30 MHz) \pm 4.8 dB

Section 15.209: 13.560 MHz transmitter below 30 MHz spurious emission measurements

Frequency MHz	Level dBμV/m	Limit dBμV/m	Margin dB
27.120	17.7	49.5	31.8

Testing was carried out when the device was transmitting continuously.

Magnetic loop measurements were attempted at a distance of 10 metres.

A receiver with a quasi peak detector with a 9 kHz bandwidth was used between 490 kHz – 30.0 MHz.

The 30 metre limit between 1.705 MHz – 30 MHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

The limit at 27.120 MHz when measured at 30 metres is 30 uV/m or 29.54 dBuV/m.

Therefore the scaled limit at 10 metres will be 49.54 dBuV/m.

The spurious emission observed does not exceed the level of the fundamental emission.

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz) \pm 4.8 dB

Section 15.209: Spurious Emissions (above 30 MHz)

Measurements between 30 – 1000 MHz have been made at a distance of 3 metres.

A receiver with a quasi peak detector with a 120 kHz bandwidth was used between 30 – 1000 MHz.

The limits as described in Section 15.209 have been applied.

Frequency MHz	Vertical dB μ V/m	Horizontal dB μ V/m	Limit dB μ V/m	Margin dB	Result	Antenna
40.680	36.1	23.1	40.0	3.9	Pass	Vertical
54.240	27.1		40.0	12.9	Pass	Vertical
67.800	27.7		40.0	12.3	Pass	Vertical
81.360	15.5		40.0	24.5	Pass	Vertical
108.480	29.2	25.9	43.5	14.3	Pass	Vertical
122.040	30.8	25.7	43.5	12.7	Pass	Vertical
135.600	27.7	25.9	43.5	15.8	Pass	Vertical
149.160	28.6	29.4	43.5	14.1	Pass	Horizontal
162.720	34.0	31.6	43.5	9.5	Pass	Vertical
176.280	27.4	27.4	43.5	16.1	Pass	Vertical
216.960	22.5		46.0	23.5	Pass	Vertical
488.160	31.1	29.8	46.0	14.9	Pass	Vertical
515.280	30.4	29.8	46.0	15.6	Pass	Vertical
542.400	31.6	29.8	46.0	14.4	Pass	Vertical

All other emissions observed had a margin to the limit that exceeded 20 dB when measurements were attempted over the range of 30 – 1000 MHz using both vertical and horizontal polarisations.

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 MHz – 1000 MHz) \pm 4.1 dB

Section 15.225: Fundamental emission:

Measurements were made using a magnetic loop antenna and a receiver with a quasi peak detector using a 9 kHz bandwidth

Measurements were made at a distance of 10 metres with the limit being determined by using the extrapolation factor of 40 dB per decade limit, as detailed in section 15.31 f (2).


The limit at 30 m at 13.561 MHz is 15,848 uV/m or 84.0 dBuV/m.


Applying the extrapolation factor of 40 dB/ per decade, the limit is 104 dBuV/m.

Testing was carried out when the device was transmitting continuously when the 12 Vdc supply to the device was varied by +/- 15%.

Frequency MHz	Level dBuV/m	Distance metres	Limit dBuV/m	Voltage Vdc	Margin dB
13.560	52.2	10.0	104.0	10.2	51.8
13.560	52.5	10.0	104.0	12.0	51.5
13.560	52.2	10.0	104.0	13.8	51.8

A spectrum analyser plot shows that the carrier and modulation peaks within +/- 250 kHz of the carrier and within +/- 2 MHz of the carrier.

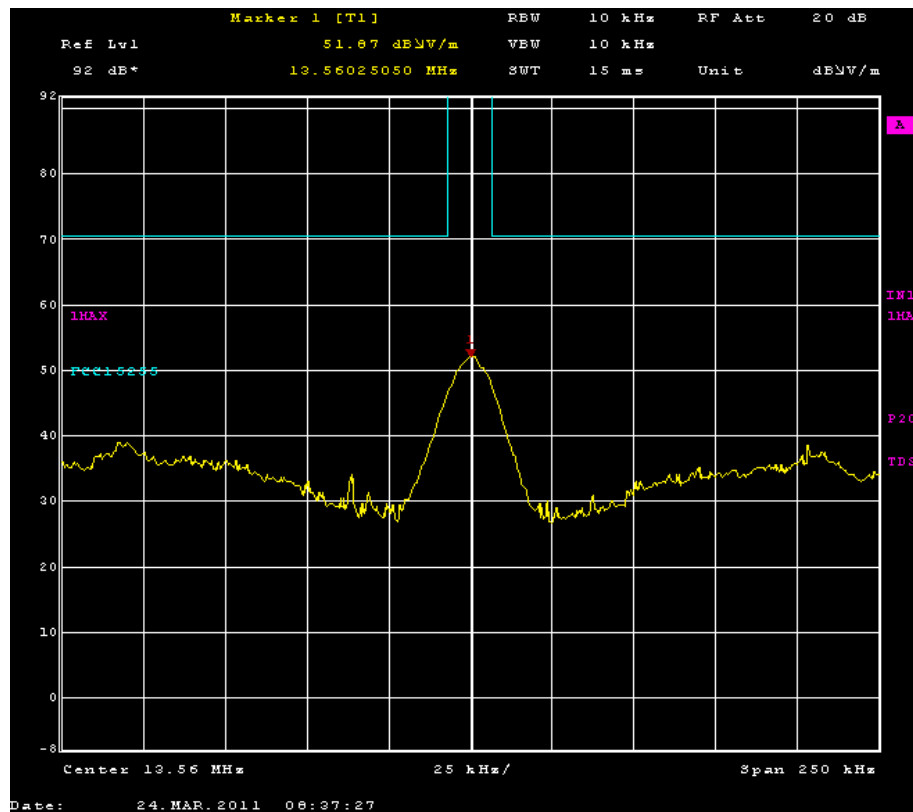

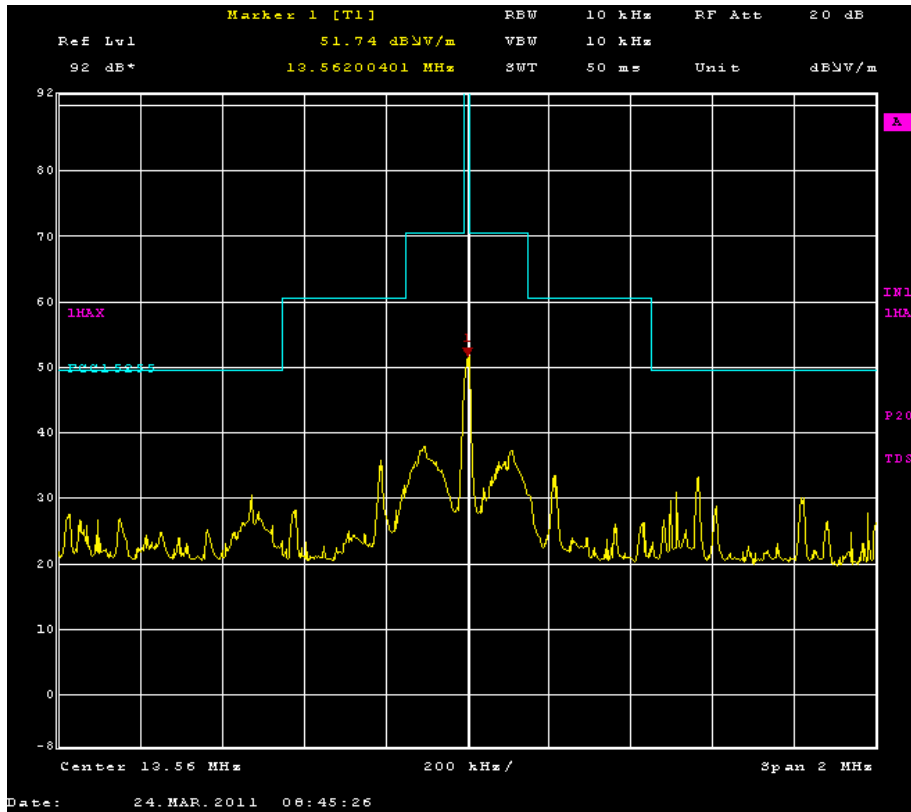

Result: Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz) ± 4.8 dB

Section 15.225: Frequency tolerance:

The frequency tolerance of the carrier is required to be +/- 0.01% of operating frequency when the temperature is varied between -20 degrees and +50 degrees.

The device operates on approximately 13.560 MHz which gives a frequency tolerance of +/- 1,356 Hz.

Temperature	Frequency MHz	Difference Hz
50.0	13.559 450	-550.0
40.0	13.559 390	-610.0
30.0	13.559 380	-620.0
20.0	13.559 380	-620.0
10.0	13.559 390	-610.0
0.0	13.559 395	-605.0
-10.0	13.559 400	-600.0
-20.0	13.559 360	-640.0

Variation of the 120 Vac supply to the AC power supply did not vary the 12 Vdc supply to the GBUS URI or the device under test.

As a worst case scenario the 12 Vdc supply to the device was varied between 85% and 115% of the supply voltage at -20 degrees.

Voltage Vdc	Frequency MHz	Difference Hz
10.2	13.559 380	-620.0
12.0	13.559 380	-620.0
13.8	13.559 380	-620.0

Result: Complies

Measurement uncertainty with a confidence interval of 95% is:

- Frequency tolerance \pm 50 Hz

7. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial No	Asset Ref	Cal Due
Aerial Controller	EMCO	1090	9112-1062	RFS 3710	Not applic
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708	Not applic
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709	Not applic
Receiver	R & S	ESHS 10	828404/005	3728	21 Nov 2011
Mains Network	R & S	ESH2-Z5	881362/032	3628	21 Aug 2011
Receiver	R & S	ESIB-40	100171	R-27-1	21 May 2011
Spectrum Analyser	Hewlett Packard	E7405A	US39150142	3771	20 April 2011
Loop Antenna	EMCO	6502	9003-2485	3798	7 Feb 2012
VHF Balun	Schwarzbeck	VHA 9103	-	RFS 3603	7 Feb 2012
Biconical Antenna	Schwarzbeck	BBA 9106	-	RFS 3612	7 Feb 2012
Log Periodic	Schwarzbeck	VUSLP 9111	9111-228	3785	7 Feb 2012

8. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies Ltd registration with the Federal Communications Commission as a listed facility, registration number: 90838, which was updated on February 15th, 2011.



All testing was carried out in accordance with the terms of EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025, 2005.

All measurement equipment has been calibrated in accordance with the terms of the EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025, 2005



International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with various accreditation bodies in a number of economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.

9. PHOTOGRAPHS


External photos and label

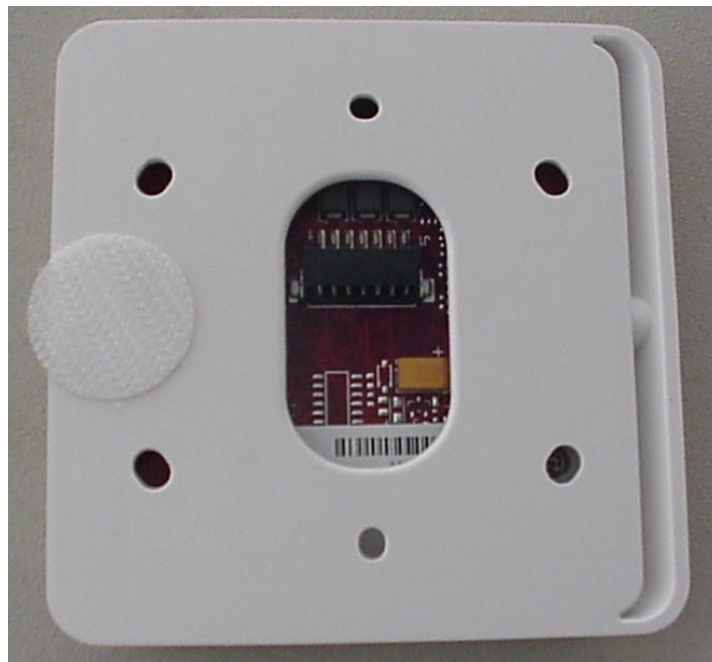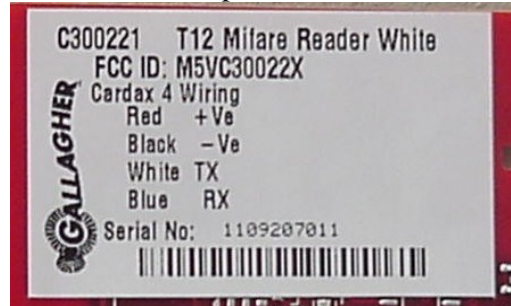

Internal Photos

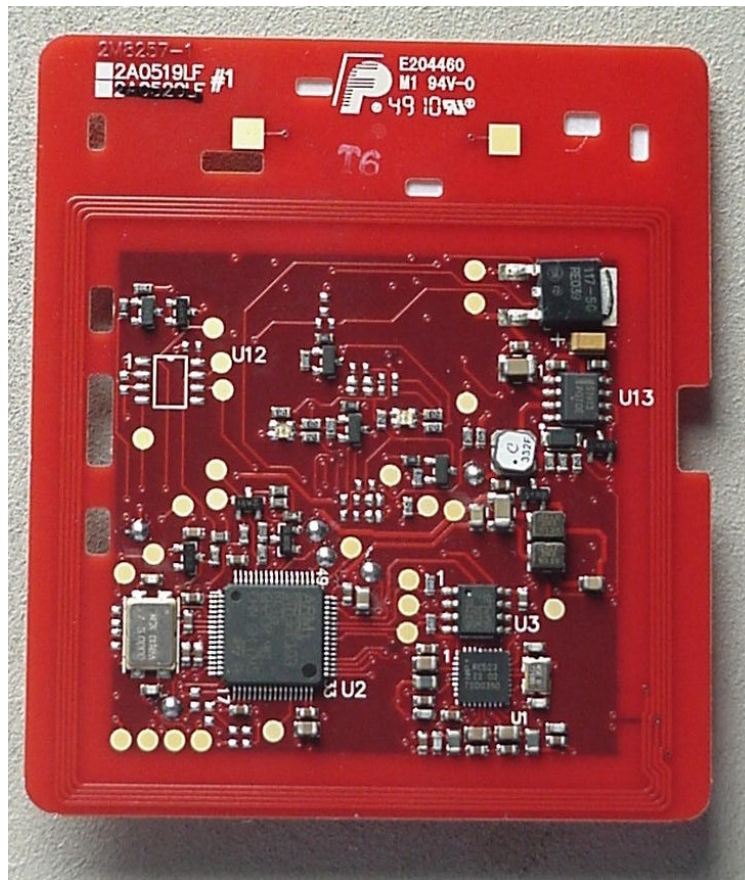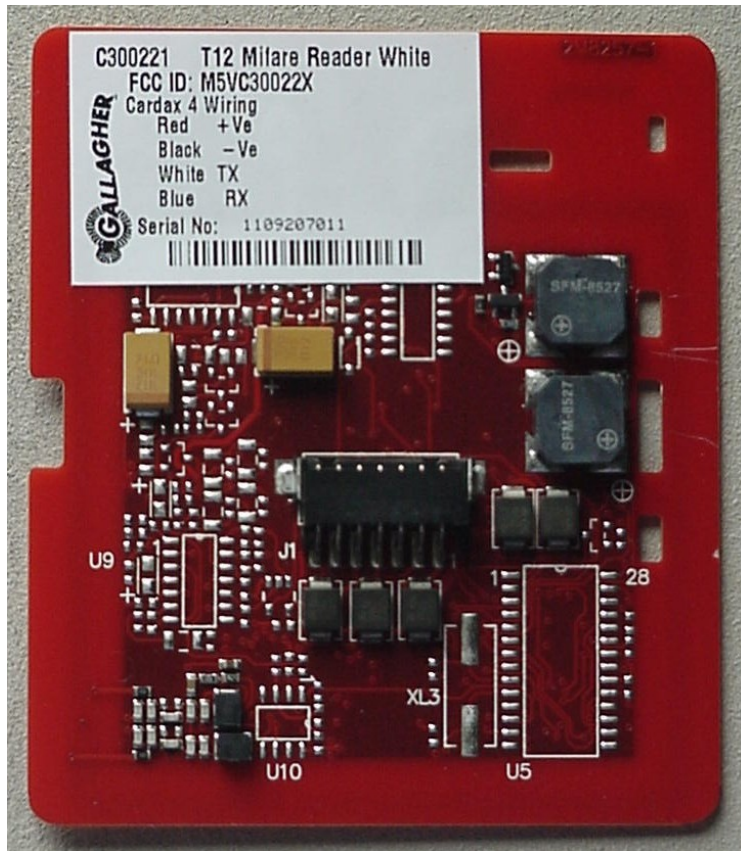

Radiated emissions test setup photos

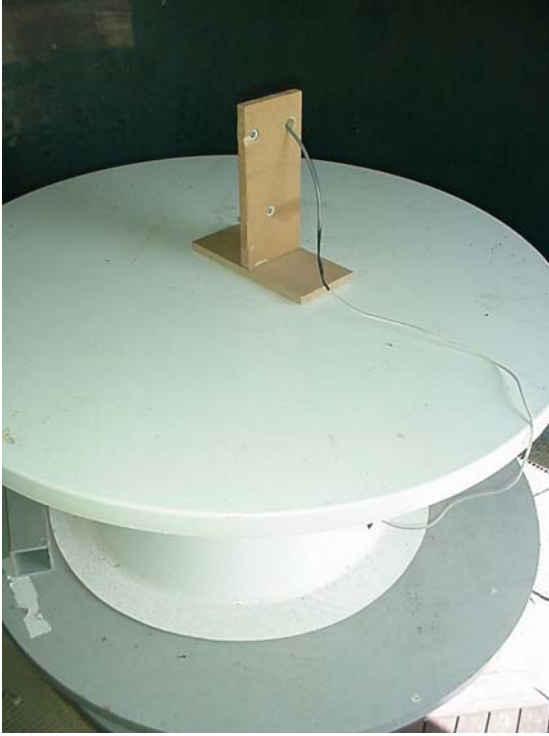

Conducted emissions test set up photos



Ancillary equipment – GBUS URI and the representative AC power supply

