

**dBi Corporation**  
**FCC Certification Test Report**

**Point Six, Inc.**  
**Wireless Infra-Red Transmitter**  
**FCC ID M5ZIR1**  
**Report Number 02dBi012**

## ADMINISTRATIVE INFORMATION

### **Historical Record:**

dBi Corporation is a test house, not a manufacturer, so the original test report will be provided to Point Six, Inc. dBi Corporation will keep a copy for its records to satisfy A2LA audit requirements. We strongly recommend archiving the unit that we tested, in case there are any future questions about the product.

### **FCC Records:**

The FCC requires the responsible party to retain the records for Class A/B products for at least two years after permanently discontinuing manufacturing/importation. These records should include the original certification/verification test report, quality audit data, and the test procedures used.

### **Measurement Uncertainties:**

The Lexmark Electromagnetic Compatibility Laboratory (EMC Lab) has documented calculations of the measurement uncertainties associated with tests performed at the Lexmark site.

### **Ongoing Compliance:**


The data in this test report applies only to the specific unit tested by dBi Corporation, under the conditions described herein. The manufacturer must build production units from components having identical electrical and mechanical characteristics, to ensure that they will have similar performance. The manufacturer is also fully responsible for ensuring that the product continues to comply with the FCC rules during its manufacturing life, by checking any modifications to the product that may change its interference profile.

### **Accreditation Status:**

The Federal Communications Commission (FCC) recognized the Lexmark site as meeting the requirements of section 2.948 of the FCC Rules in a letter dated December 10, 2001. This information is on file with the FCC under Registration No. 949691.

dBi Corporation is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA), to perform measurements under ANSI 63.4:1992. Copies of our Accreditation Certificate and Scope of Accreditation follow.

**Note:** This report may be reproduced as needed, but only if done so in its entirety.

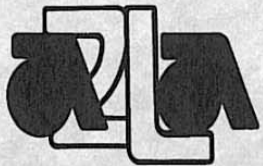

**THE AMERICAN  
ASSOCIATION  
FOR LABORATORY  
ACCREDITATION**

## **ACCREDITED LABORATORY**

A2LA has accredited

**DBI CORPORATION**  
**Lexington, KY**


for technical competence in the field of

### **Electrical Testing**

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002 (1994).

Presented this 14<sup>th</sup> day of June, 2002.



  
President  
For the Accreditation Council  
Certificate Number 1985-01  
Valid to September 30, 2004

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation



## American Association for Laboratory Accreditation

### SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999

dBi CORPORATION<sup>1</sup>  
216 Hillsboro Avenue  
Lexington, KY 40511-2105  
John R. Barnes Phone: 859 253 1178

### ELECTRICAL (EMC)

Valid To: September 30, 2004

Certificate Number: 1985-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following tests:

<u>Test Technology</u>	<u>Test Method(s)</u>
Radiated Emissions	CFR 47, FCC Method Part 15, Class A and B (using ANSI: C63.4-1992, C63.4-2000, C63.4-2001) AS/NZS 3548-1995, AS/NZS CISPR 22:2002 CISPR 22-1985, 1993, 1997 EN 55022-1994, 1998 VCCI 1997, 2002
Conducted Emissions	CFR 47, FCC Method Part 15, Class A and B (using ANSI C63.4-1992, C63.4-2000, C63.4-2001) AS/NZS 3548-1995, AS/NZS CISPR 22:2002 CISPR 22-1985, 1993, 1997 EN 55022-1994, 1998 VCCI 1997, 2002

On materials and products related to the following:

Information Technology Equipment - Computers, Printers, Peripheral Devices

<sup>1</sup> NOTE: Testing is performed using the equipment and facilities at Lexmark International EMC Laboratory (A2LA Accreditation Certificate 0872-01)

A handwritten signature in cursive script, appearing to read 'Peter M. Hays'.

(A2LA Cert. No. 1985.01) 06/14/02

Page 1 of 1



<b>ADMINISTRATIVE DATA</b>
----------------------------

**Manufacturer:**

Point Six, Inc.  
391 Codell Dr  
Lexington, KY 40509 USA

**Device:** Point Six Wireless Infra-Red Transmitter

**FCC ID:** M5ZIR1

**Rating:** Battery operated.

**Measurement Equipment Used:** see attached data sheets.

**Measurements According to:** ANSI C63.4:1992 Class B

**Report Prepared by:**

John R. Barnes

**Testing Performed by:**

dB

i Corporation  
216 Hillsboro Ave  
Lexington, KY 40511-2105, USA

**Testing Performed on:**

August 7, 2002

**Testing Performed at:**

Lexmark International, Inc.  
Development Lab  
Lexington, KY 40550 USA

**Suppression, Electrical Circuits:** See attached sheet

<b>INFORMATION RELATING TO PRODUCT RF INTERFERENCE</b>
--

**Device:** Point Six Wireless Infra-Red Transmitter

**Model/Serial Number:** 68CC0202

**Suppression Components:** none.

**Clock Frequencies:** 32.768kHz, 4MHz, 418MHz.

**Cables:** None.

**Electronic Circuit Boards:** P1317

**Size of Device:** 20 mm high by 45 mm wide by 60 mm deep. Weight 0.05 kg.

## RADIATED INTERFERENCE

**Device:** Point Six Wireless Infra-Red Transmitter

**Host and Other Peripherals:** None

**Name of Test:** Radiated Interference

**Test Location:** Lexmark test facility, located at Lexington Kentucky.

**Test Instrumentation:** See attached sheet

**Test Procedure:** ANSI C63.4:1992

**Note:** Transmitting at 1 second intervals to speed up testing. The radiated measurements were performed at 3 meters in the Lexmark 10m Semi-Anechoic chamber located at Lexington, KY.

**Test Results:** Tables 1, 2, and 3 show that this unit meets the Class B radiated interference requirements of FCC Part 15, for an intentional radiator licensed to operate at 418MHz under Section 15.231(e).

Under Section 15.231(e), the average limit for the fundamental is calculated by linear interpolation from 1500uV/m at 260MHz, to 5000uV/m at 470MHz:

$$\begin{aligned}\text{Average limit} &= ((5000\text{uV/m}-1500\text{uV/m})*(418\text{MHz}-260\text{MHz})/(470\text{MHz}-260\text{MHz}))+1500\text{uV/m} \\ &= 4133\text{uV/m} \\ &= 20*\log(4133 \text{ uV/m}) \\ &= 72.33\text{dB(uV/m)}\end{aligned}$$

Average limit for unwanted emissions is 20dB lower, or 52.33dB(uV/m).

$$\begin{aligned}\text{Peak limit} &= \text{Average limit} + 20\text{dB} \\ &= 92.33\text{dB(uV/m)}\end{aligned}$$

Peak limit for unwanted emissions is 20dB lower, or 72.33dB(uV/m).

**SIGNED** \_\_\_\_\_ **DATE** \_\_\_\_\_  
**John R. Barnes, PRESIDENT dBi Corp.**

<b>RADIATED MEASUREMENTS</b>
------------------------------

**TABLE 1 Quasipeak Measurements**

Receiver Meas. Freq. MHz	Vertical Reading dB(uV)	Horizontal Reading DB(uV)	Antenna Factor DB(1/m )	Cable Factor DB	Vertical Field Str. dB(uV/m)	Horizontal Field Str. DB(uV/m)	Class B Limit dB(uV/m)
417.88	55.74	60.26	17.19	1.11	74.04	78.56	-----
835.76	19.24	21.08	22.82	1.69	43.75	45.59	46.02

**TABLE 2 Average Measurements**


Receiver Meas. Freq. MHz	Vertical Reading dB(uV)	Horizontal Reading DB(uV)	Antenna Factor DB(1/m )	Cable Factor DB	Vertical Field Str. dB(uV/m)	Horizontal Field Str. DB(uV/m)	15.231(e) Limit dB(uV/m)
417.88	20.07	23.07	17.19	1.11	38.37	41.37	72.33
835.76	12.61	12.71	22.82	1.69	37.12	37.22	52.33
1253.72	16.60	16.60	24.06	2.13	42.79	42.79	52.33
1671.62	17.01	17.02	25.48	2.42	44.91	44.92	52.33
2089.53	18.71	18.73	26.90	2.89	48.50	48.52	52.33
2507.43	18.87	18.87	28.27	3.15	50.29	50.29	52.33
2925.34	18.17	18.19	29.65	3.63	51.45	51.47	52.33
3343.24	17.18	17.20	30.21	4.09	51.48	51.50	52.33
3761.15	17.22	17.23	30.59	4.07	51.88	51.89	52.33
4179.05	15.67	15.68	31.34	4.20	51.21	51.22	52.33

**TABLE 3 Peak Measurements**


Receiver Meas. Freq. MHz	Vertical Reading dB(uV)	Horizontal Reading DB(uV)	Antenna Factor DB(1/m )	Cable Factor DB	Vertical Field Str. DB(uV/m)	Horizontal Field Str. DB(uV/m)	15.231(e) Limit dB(uV/m)
417.88	59.52	64.01	17.19	1.11	77.82	82.31	92.33
835.76	26.02	28.57	22.82	1.69	50.53	53.08	72.33
1253.72	29.87	29.73	24.06	2.13	56.06	55.92	72.33
1671.62	30.37	30.10	25.48	2.42	58.27	58.00	72.33
2089.53	32.25	31.48	26.90	2.89	62.04	61.27	72.33
2507.43	33.32	32.00	28.27	3.15	64.74	63.42	72.33
2925.34	31.36	30.71	29.65	3.63	64.64	63.99	72.33
3343.24	30.84	31.24	30.21	4.09	65.14	65.54	72.33
3761.15	30.37	30.10	30.59	4.07	65.03	64.76	72.33
4179.05	28.57	29.09	31.34	4.20	64.11	64.63	72.33

**Sample Calculation:** Receiver reading dB(uV) plus Antenna correction factor dB(1/m) plus Cable factor dB equals Radiated Field Strength dB(uV/m).

**SIGNED** \_\_\_\_\_ **DATE** \_\_\_\_\_  
**John R. Barnes, PRESIDENT dB Corp.**

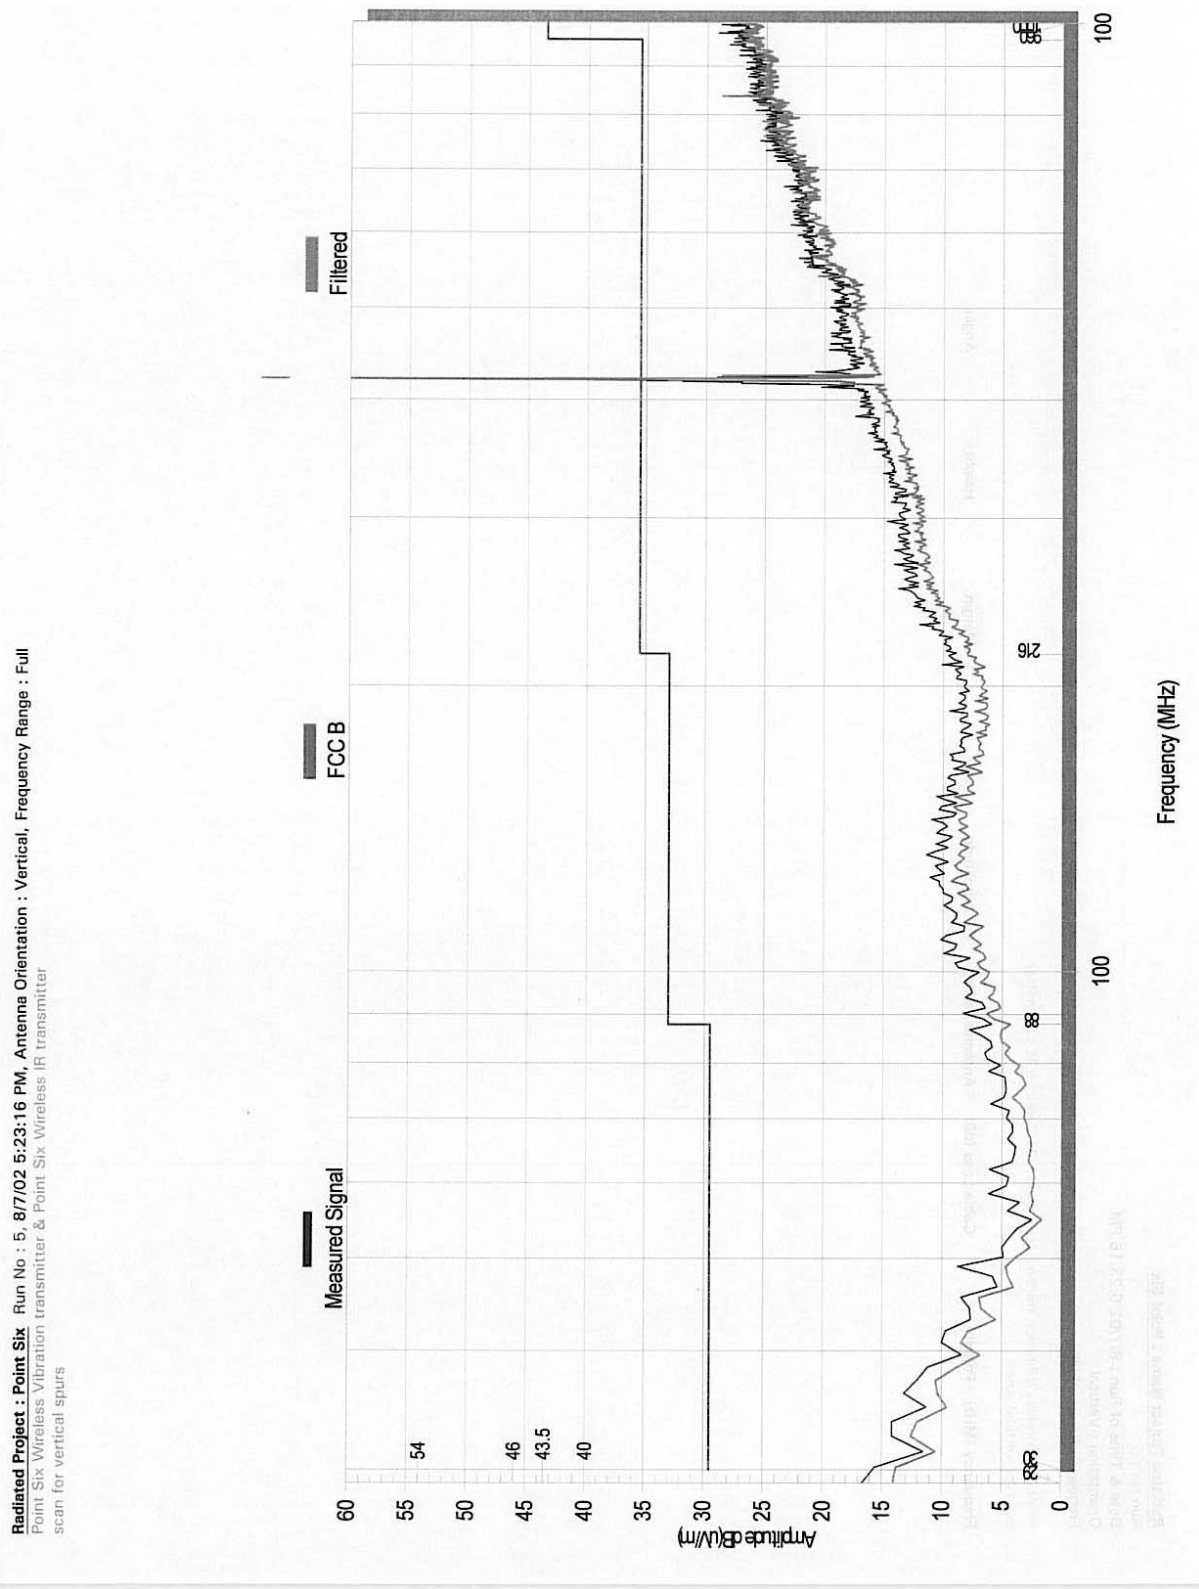

**Radiated Project : Point Six** Run No : 6, 8/7/02 5:29:28 PM, Antenna Orientation : Horizontal, Frequency Range : Full  
Point Six Wireless Vibration transmitter & Point Six Wireless IR transmitter  
scan for horizontal spurs

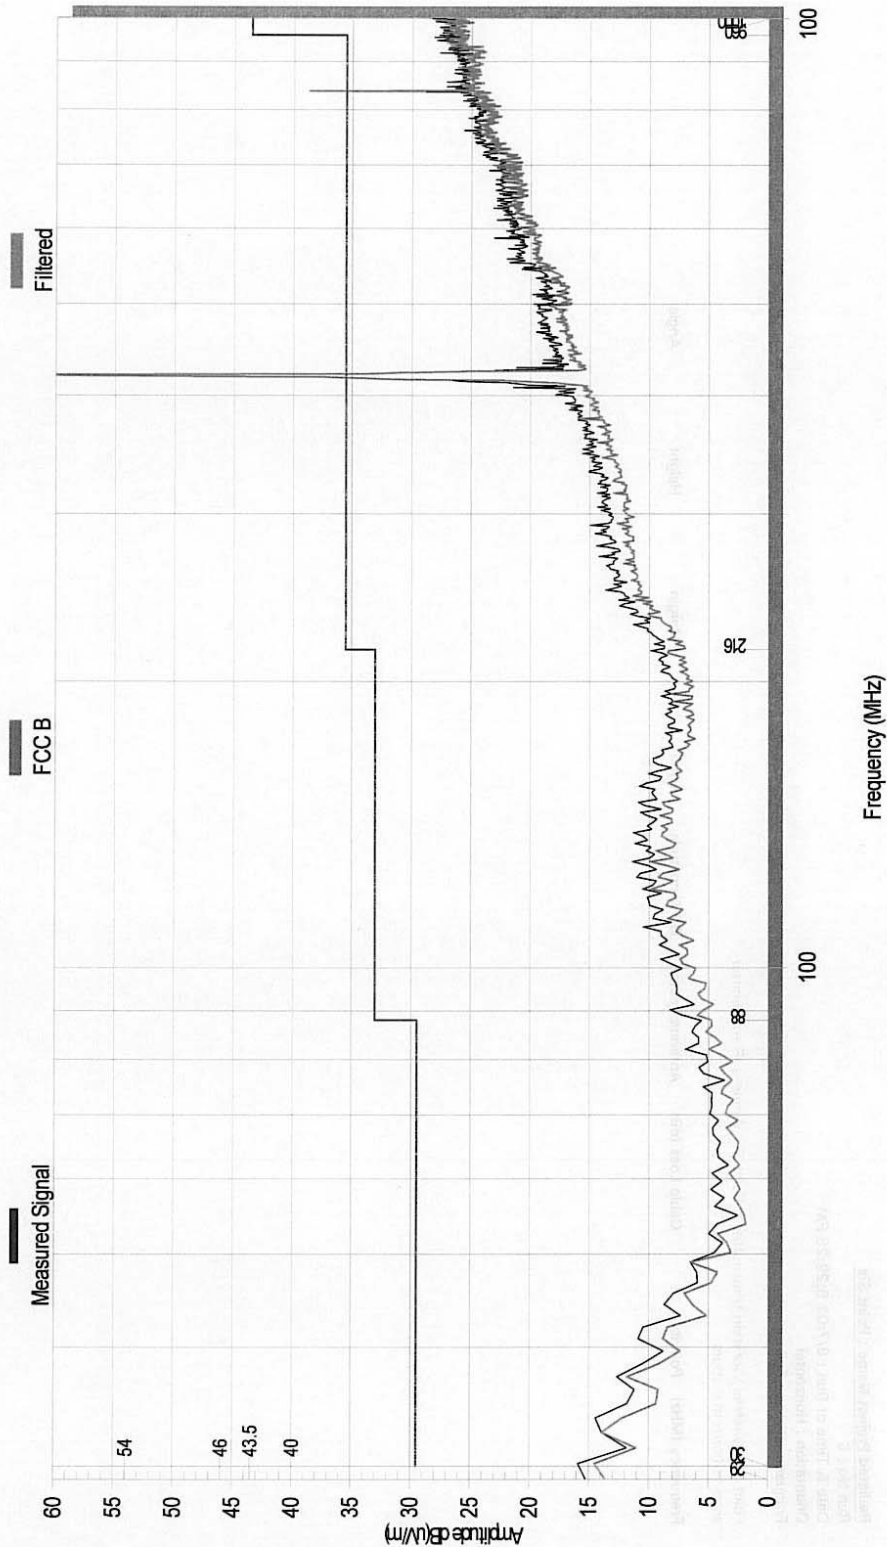

## TRANSMITTED BANDWIDTH MEASUREMENTS

The photo below shows that the 20dB transmitted bandwidth of the Wireless Infra-Red Transmitter is about 22.5kHz, well within the 1045kHz (0.25% of 418MHz) maximum bandwidth specified by FCC Part 15 Section 15.231(c). Each horizontal division is 25kHz, and each vertical division is 10dB.



SIGNED \_\_\_\_\_ DATE \_\_\_\_\_  
 John R. Barnes, PRESIDENT dBi Corp.

<b>CONDUCTED INTERFERENCE</b>
-------------------------------

**Device:** Point Six Wireless Infra-Red Transmitter

**Host and Other Peripherals:** None

**Name of Test:** Powerline Conducted Interference

**Test Location:** Lexmark test facility, located at Lexington Kentucky.

**Test Instrumentation:** See attached sheet

**Test Procedure:** ANSI C63.4:1992

**Note:** Transmitting at 1 second intervals to speed up testing.

**Test Results:** This unit operates off an internal battery, and has no mains port. Therefore it passes the the Class B conducted interference requirements of FCC Part 15 without testing.

**SIGNED** \_\_\_\_\_ **DATE** \_\_\_\_\_  
**John R. Barnes, PRESIDENT dBi Corp.**

<b>CONDUCTED MEASUREMENTS</b>
-------------------------------

**This unit operates off an internal battery and has no mains port. Therefore no conducted measurements were made.**

**SIGNED** \_\_\_\_\_ **DATE** \_\_\_\_\_  
**John R. Barnes, PRESIDENT dB**i Corp.

<b>TESTING AND MEASURING EQUIPMENT USED BY dBi</b>
--

**Radiated Interference Plots: 30...1,000 MHz**

Hewlett Packard	85462A/85460A, S/N 3807A00454/3704A00416
EMI Test Receiver #0413	(Cal date: 4/02, Cal due date: 4/03)
RF Filter Section	

Schaffner-Chase	CBL6111C, S/N 2459
BI-Log Antenna 30 to 1000 MHz #0509	(Cal date: 10/01, Cal due date: 10/02)

**Radiated Interference Measurements: 30...1,000 MHz**

Rohde & Schwarz	ESI40, S/N 839283/008
EMI Test Receiver #0543	(Cal date:10/01, Cal due date:10/02)

Schaffner-Chase	CBL6111C, S/N 2459
BI-Log Antenna 30 to 1000 MHz #0509	(Cal date: 10/01, Cal due date: 10/02)

**Radiated Interference Measurements: 1GHz and up**

Rohde & Schwarz	ESI40, S/N 839283/008
EMI Test Receiver #0543	(Cal date:10/01, Cal due date:10/02)

ARA	DRG-118/A
Horn Antenna, 1GHz to 18GHz #0389	(Cal date: 12/97, Cal due date: not needed)

**Transmitted Bandwidth Measurements: 30...1,000 MHz**

Hewlett Packard	HP8568B, S/N 2340A05705/2338A0
~Spectrum Analyzer #0033	(Cal date:4/02, Cal due date:4/03)

**Calibration:** The measuring equipment used at Lexmark is calibrated according to the Instruction manual once a day. Once a week the accuracy of the test system is checked. This includes the test equipment, associated cables, and antennas. This is accomplished with a calibrated radiating source for the radiated portion and a synthesized signal generator for the conducted measurements.


All of the above equipment and all associated accessories are verified by Lexmark, International.

## TEST SETUPS


### RADIATED TEST CONFIGURATION, 30-1000MHz, Front




### RADIATED TEST CONFIGURATION, 30-1000MHz, Back

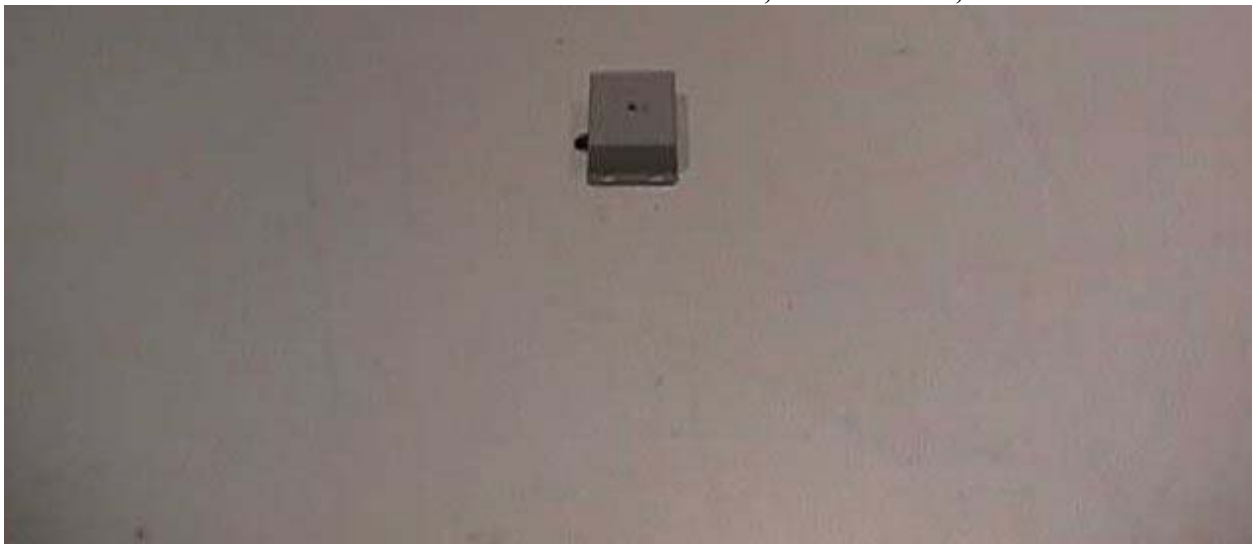

**RADIATED TEST CONFIGURATION, 1GHz AND UP, Front**

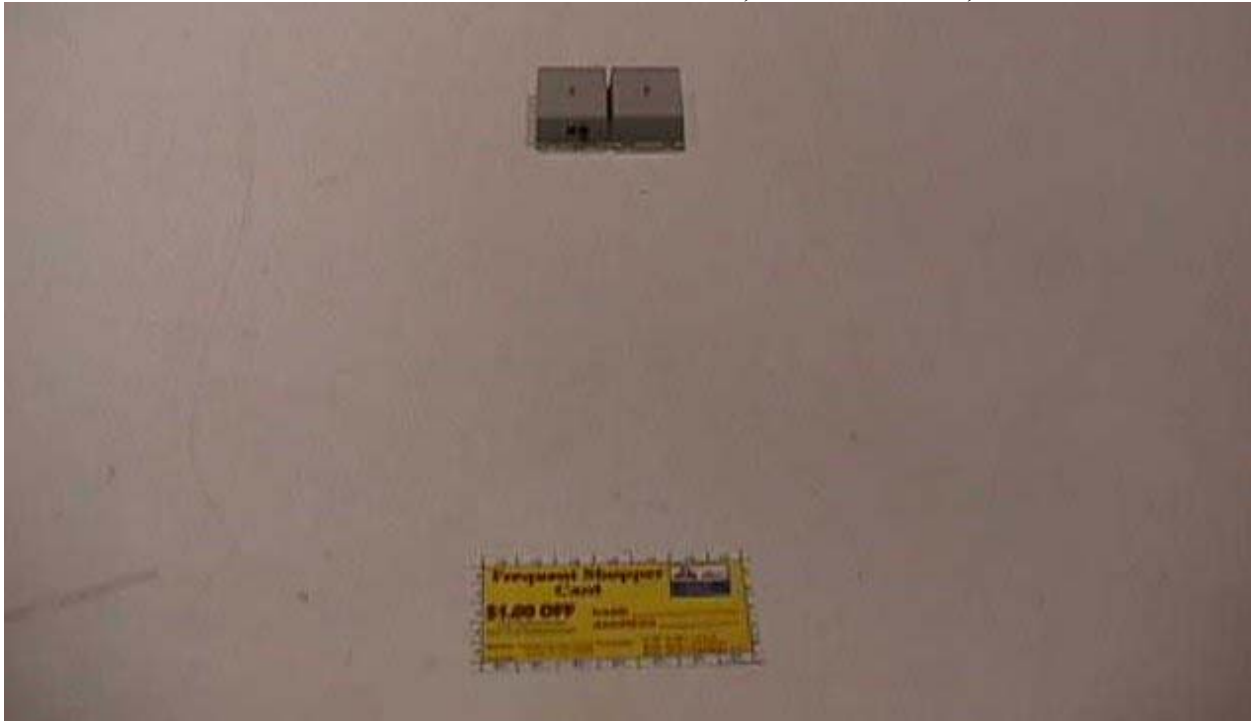

**RADIATED TEST CONFIGURATION, 1GHz AND UP, Back**

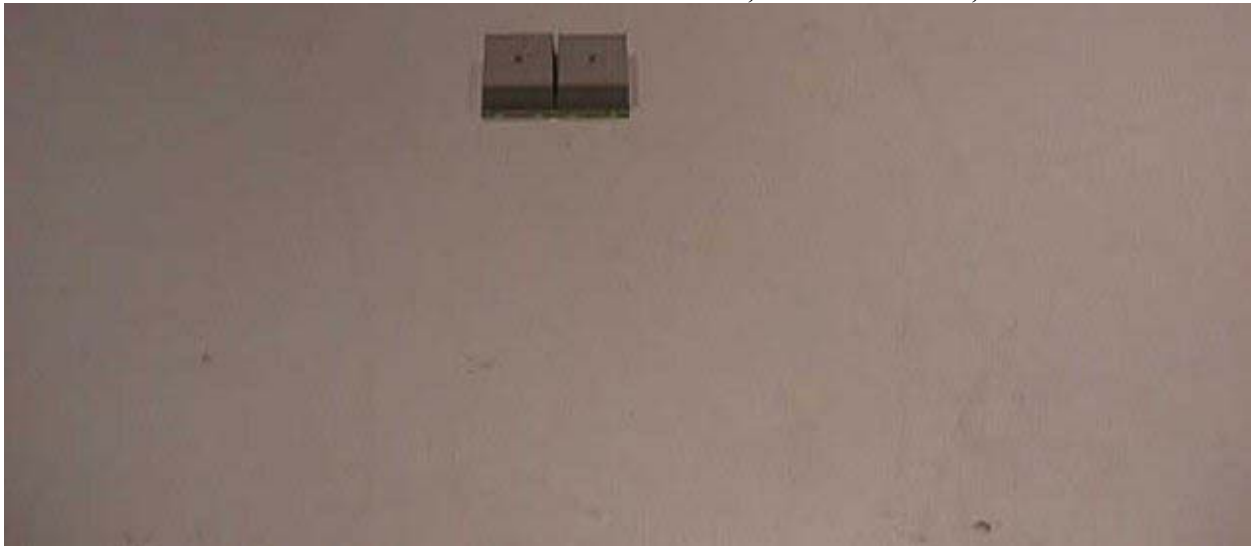

**TRANSMITTED BANDWIDTH CONFIGURATION**

