

Intertek Testing Services NA Inc.

3.1 Line Conducted Configuration Photograph

Worst Case Line Conducted Emissions

0.502 MHz

Front View




Intertek Testing Services NA Inc.

3.1 Line Conducted Configuration Photograph (cont)

Worst Case Line Conducted Emissions

0.502 MHz

Rear View

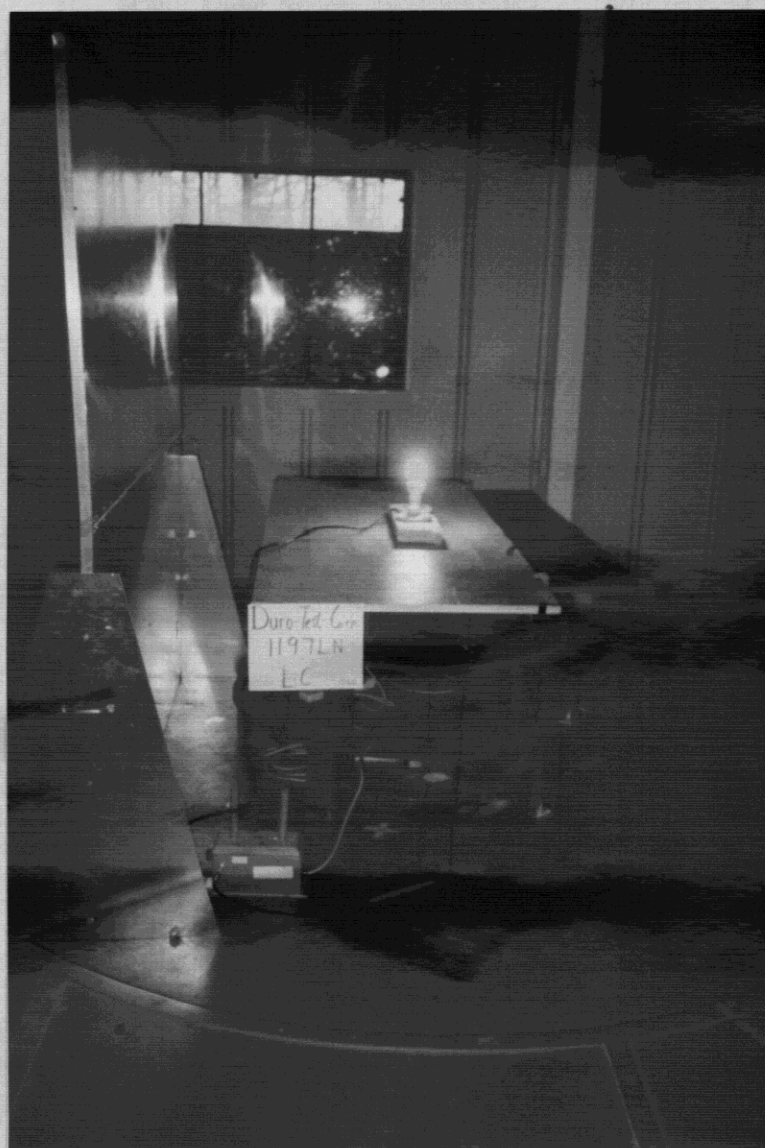

Intertek Testing Services NA Inc.

3.2 Line Conducted Emission Configuration Data - Model: 1197LN

The data on the following page lists the significant emission frequencies, the limit, and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 4 dB

* All readings are peak unless stated otherwise.

TEST PERSONNEL:

Andrew J. Bellezza For MSO

Tester Signature

Andrew J. Bellezza, EMI Engineering Supervisor

Typed/Printed Name

3-27-98

Date

Intertek Testing Services

Emissions Site 5 Marlborough, MA

Table:1

Company: Duro-Test Corporation

Model: 1197LN

Notes:

FCC Class B Conducted Emissions

Frequency (MHz)	Reading Side A (dBuV)	Reading Side B (dBuV)	Class B Limit (dBuV)	Margin (dB)
0.460	40	40	48	-8
0.501	43	43	48	-5
0.502	44	43	48	-4
0.597	43	40	48	-5
0.736	34	33	48	-14
0.786	34	33	48	-14

Test Engineer: Michael Ogunleye

Test Date: 02-24-1998

FCC Class B Line Conducted Emission Limits and Data from Table 1

Company: Duro-Test Corporation

Model: 1197LN

Date: 02-24-1998

