

Graco Children's Products, Inc

Video Baby Monitor

Model Number: A5066

Prepared for : Graco Children's Products, Inc  
150 Oaklands Boulevard Exton, PA19341

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F06545  
Date of Test : Oct.29~Nov.18,2006  
Date of Report : Nov.21,2006

## TABLE OF CONTENTS

Description	Page
Test Report Declaration	
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>4</b>
1.1. Description of Standards and Results .....	4
<b>2. GENERAL INFORMATION .....</b>	<b>2-1</b>
2.1. Description of Device (EUT) .....	2-1
2.2. Test Facility .....	2-2
2.3. Measurement Uncertainty .....	2-2
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>3-1</b>
3.1. Test Equipment .....	3-1
3.2. Block Diagram of Test Setup .....	3-1
3.3. Power Line Conducted Emission Test Limits .....	3-1
3.4. Configuration of EUT on Test .....	3-1
3.5. Operating Condition of EUT .....	3-2
3.6. Test Procedure .....	3-2
3.7. Power Line Conducted Emission Test Results .....	3-2
<b>4. RADIATED EMISSION TEST .....</b>	<b>4-1</b>
4.1. Test Equipment .....	4-1
4.2. Block Diagram of Test Setup .....	4-1
4.3. Radiated Emission Limit Standard: FCC 15.249 .....	4-2
4.4. EUT Configuration on Test .....	4-2
4.5. Operating Condition of EUT .....	4-3
4.6. Test Procedure .....	4-3
4.7. Radiated Emission Test Results .....	4-3
<b>5. BAND EDGES MEASUREMENT .....</b>	<b>5-1</b>
5.1. Test Equipment .....	5-1
5.2. Block Diagram of Test Setup .....	5-1
5.3. Test Standard .....	5-1
5.4. Band Edges Limit .....	5-1
5.5. Test Procedure .....	5-1
<b>6. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>6-1</b>
<b>7. PHOTOGRAPH .....</b>	<b>7-1</b>
7.1. Photos of Power line conducted Emission Test .....	7-1
7.2. Photos of Radiated Emission Test ( In Anechoic Chamber) .....	7-2

APPENDIX I	(3 pages)
APPENDIX II	(19 pages)

## TEST REPORT DECLARATION

Applicant : Graco Children's Products, Inc  
 Manufacturer : Honor Tone Limited  
 EUT Description : Video Baby Monitor  
 (A) MODEL NO. : A5066  
 (B) SERIAL NO. : N/A  
 (C) POWER SUPPLY : DC 5V Adaptor Input AC 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 2006

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Oct.29~Nov.18,2006

Prepared by : Sala Yang  
 Sala Yang / Assistant

Reviewer : Sean Xing  
 Sean Xing / Assistant Manager



Approved & Authorized Signer : Ken Lu  
 Ken Lu / Deputy Manager

Name of the Representative of the Responsible Party : \_\_\_\_\_

Signature : \_\_\_\_\_

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

<b>EMISSION</b>			
<b>Description of Test Item</b>	<b>Standard</b>	<b>Limits</b>	<b>Results</b>
Power Line Conducted Emission Test	FCC Part 15: 2006 ANSI C63.4-2003	Class C Limit	PASS
Radiated Emission Test	FCC Part 15: 2006 ANSI C63.4-2003	Class C Limit	PASS
Band edges measurement	FCC Part 15: 2006 ANSI C63.4-2003	Class C Limit	PASS

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description : Video Baby Monitor

Model Number : A5066

Applicant : Graco Children's Products, Inc  
150 Oaklands Boulevard Exton, PA19341

Manufacturer : Honor Tone Limited  
Block No.1 Tung Mun Industrial Zone, Dan Shui, HuiYang,  
Hui Zhou, Guang Dong Province, P.R.C Post Code: 516211

Adaptor : Manufacturer: GRACO, M/N: V045050D

Date of Test : Oct.29~Nov.18,2006

## 2.2. Test Facility

### Site Description

- 3m Anechoic Chamber : Jun. 13, 2006 File on Federal  
Communication Commission  
Registration Number: 90454
- 3m & 10m Anechoic Chamber : Mar.15, 2004 File on Federal  
Communication Commission  
Registration Number: 794232
- EMC Lab. : Accredited by DATech, German  
Registration Number: DAT-P-091/99-01  
Feb. 02, 2006
- Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Apr. 01, 2006

## 2.3. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	

### 3. POWER LINE CONDUCTED EMISSION TEST


#### 3.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May 15, 06	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	May 15, 06	1 Year
3.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	May 15, 06	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	May 15, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	LISN Cable 1#	Aug.16, 06	1/2 Year
6.	Coaxial Switch	Anritsu	MP59B	M55367	Aug.16, 06	1/2 Year
7.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100340	Aug.16, 06	1/2 Year

#### 3.2. Block Diagram of Test Setup

##### 3.2.1. Block diagram of connection between the EUT and simulators

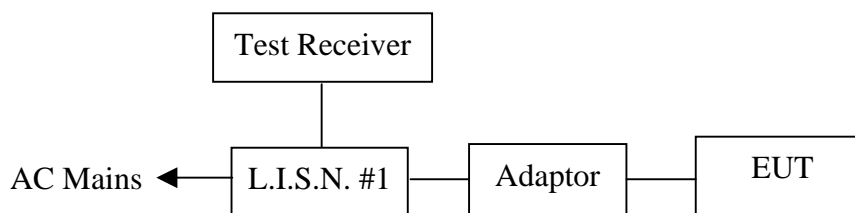

(EUT: Video Baby Monitor)

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

#### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the

commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4.1. Video Baby Monitor (EUT)

Model Number : A5066  
Serial Number : N/A  
Manufacturer : Honor Tone Limited

3.4.2. Support Equipment : As Tested Supporting System Detail, in Section 2.2..

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipment.

3.5.3. Let the EUT work in test mode (Running) and measure it.

### 3.6. Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

The test result are reported on Section 3.7., all the scanning waveforms for Conducted Emission Test are attached in Appendix I. Emission Test are attached in Appendix I.

### 3.7. Power Line Conducted Emission Test Results

**PASS.**

The frequency range from 150kHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.






NO.6 Ke Feng Road, Block 52,  
Shenzhen Science&Industry Park,  
Nantou, Shenzhen, Guangdong,  
China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 7

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R1d.EMI (12)

Date: 2006-11-05 Time: 14:01:16

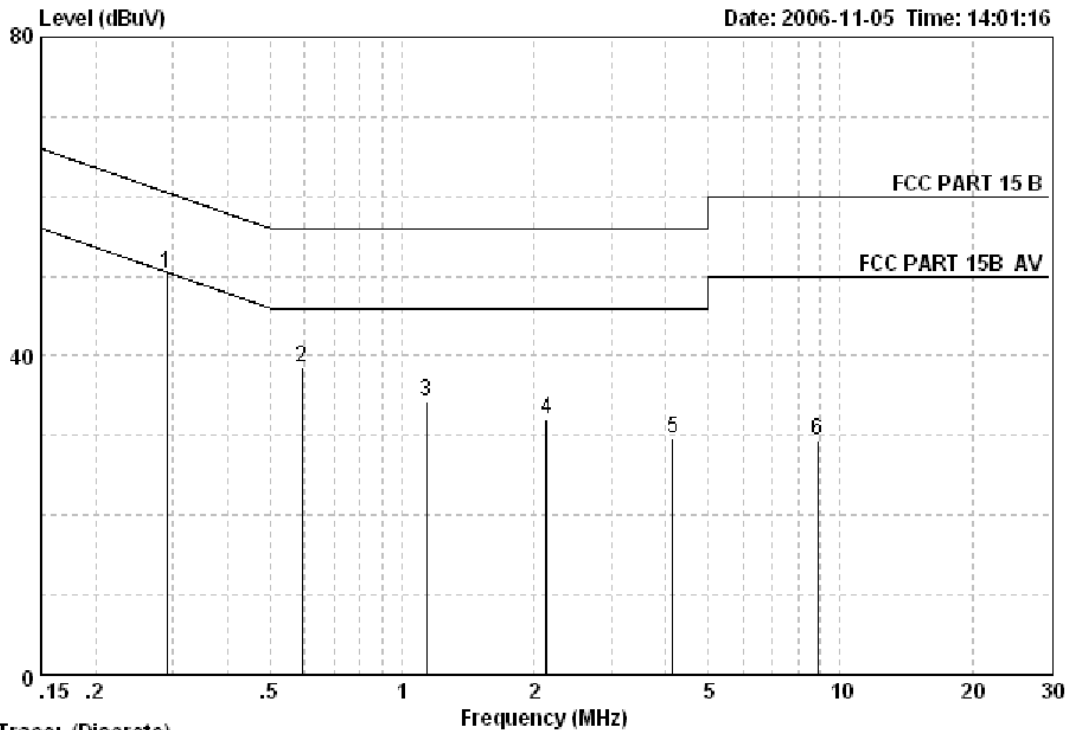

Trace: (Discrete)  
 Site no. : Audix 1# Shielded Room Conductionno. : 7  
 Dis. / Ant. : -- VA KNW-407 LISN Phase :  
 Limit : FCC PART 15 B  
 Env. / Ins. : 23.5°C/55% ESHS10 Engineer : Chinalee  
 EUT : Video Baby Monitor M/N:A5066  
 Power Rating : DC 5V Adaptor Input AC 120V/60Hz  
 Test Mode : Running

Freq. (MHz)	LISN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.29	10.08	39.82	50.32	60.50	-10.18	QP
2	0.59	10.12	28.08	38.44	56.00	-17.56	QP
3	1.14	10.16	23.86	34.23	56.00	-21.77	QP
4	2.13	10.15	21.69	32.04	56.00	-23.96	QP
5	4.14	10.18	19.35	29.73	56.00	-26.27	QP
6	8.90	10.23	19.00	29.44	60.00	-30.56	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




NO.6 Ke Feng Road, Block 52,  
Shenzhen Science&Industry Park,  
Nantou,Shenzhen,Guangdong,  
China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 8

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R1id.EMI (12)

Date: 2006-11-05 Time: 14:03:18

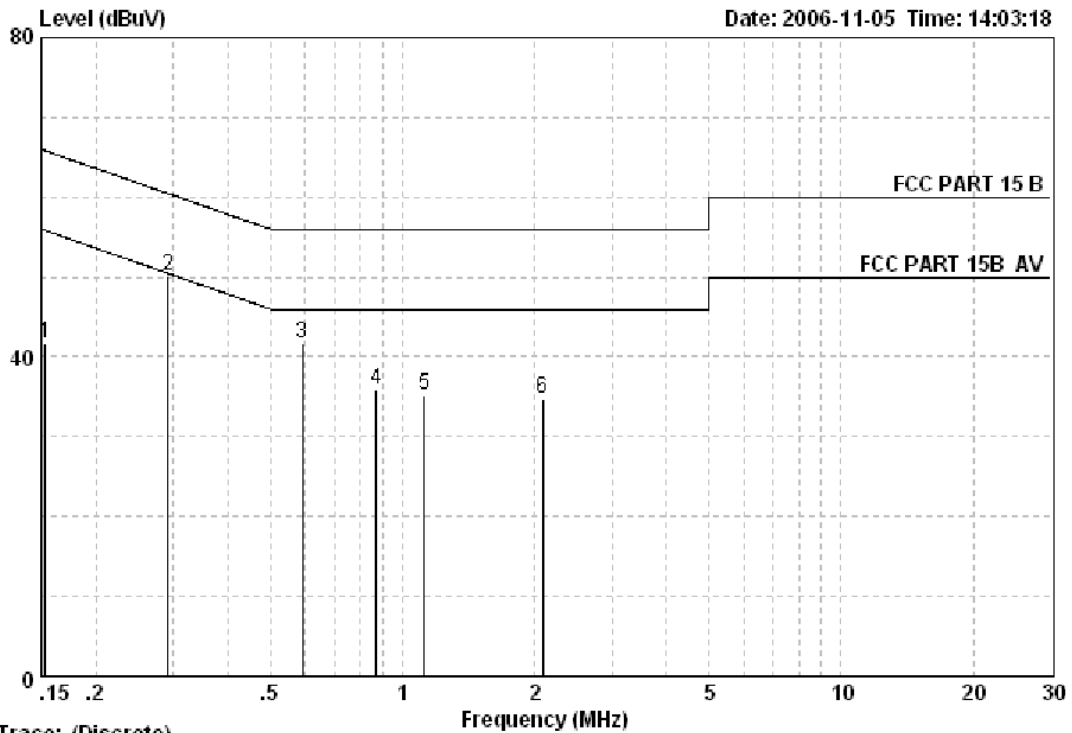

Trace: (Discrete)

Site no. : Audix 1# Shielded Room Conductionno. : 8  
 Dis. / Ant. : -- VB KNW-407 LISN Phase :  
 Limit : FCC PART 15 B  
 Env. / Ins. : 23.5°C/55% ESHS10 Engineer : Chinalee  
 EUT : Video Baby Monitor M/N:A5066  
 Power Rating : DC 5V Adaptor Input AC 120V/60Hz  
 Test Mode : Running

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	1.43	10.28	30.02	41.73	65.82	-24.09	QP
2	0.29	0.78	10.08	39.38	50.24	60.46	-10.22	QP
3	0.59	0.46	10.12	31.11	41.69	56.00	-14.31	QP
4	0.87	0.37	10.13	25.40	35.90	56.00	-20.10	QP
5	1.12	0.34	10.16	24.71	35.21	56.00	-20.79	QP
6	2.09	0.31	10.15	24.20	34.66	56.00	-21.34	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.  
 2. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment

The following test equipments are used during the radiated emission Test :

#### 4.1.1. For Anechoic Chamber

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 15, 06	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep. 12,06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 30, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 30, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 30, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 30, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 30, 06	1/2 Year

Frequency rang: above 1GHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	Agilent	E4407B	MY41440292	May 15, 06	1 Year
1.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
2.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
3.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
4.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 28, 06	1/2 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 28, 06	1/2 Year
6.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 28, 06	1/2 Year
8.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 28, 06	1/2 Year
9.	Spectrum	Agilent	E4407B	MY41440292	May 15, 06	1 Year
10.	Amp	HP	8449B	3008A00863	May 15, 06	1 Year
11.	Antenna	EMCO	3115	9607-4877	Jun. 05, 05	1.5 Year

### 4.2. Block Diagram of Test Setup


#### 4.2.1. Block Diagram of connection between EUT and simulators



(EUT: Video Baby Monitor)

## 4.2.2. Anechoic Chamber Setup Diagram

## ANTENNA TOWER

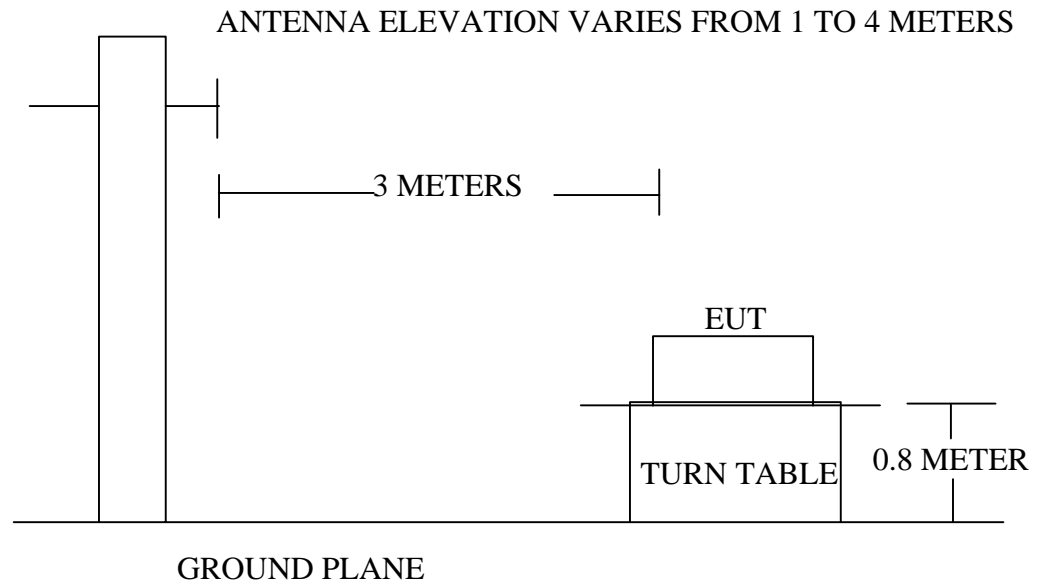

## 4.3. Radiated Emission Limit Standard: FCC 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Local Oscillator:	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) 114 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)	
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log$  Emission level  $\mu\text{V}/\text{m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 4.4.1. Video Baby Monitor (EUT)

Model Number : A5066  
 Serial Number : N/A  
 Manufacturer : Honor Tone Limited

## 4.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown in Section 4.2..

4.5.2. Let the EUT work in test modes (TX Mode) and test it.

## 4.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2003 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The frequency range from 30MHz to 1000MHz and above 1GHz. are checked.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

## 4.7. Radiated Emission Test Results


**PASS.**

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.



No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
http://www.audix.com.cn

Data: 14 File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

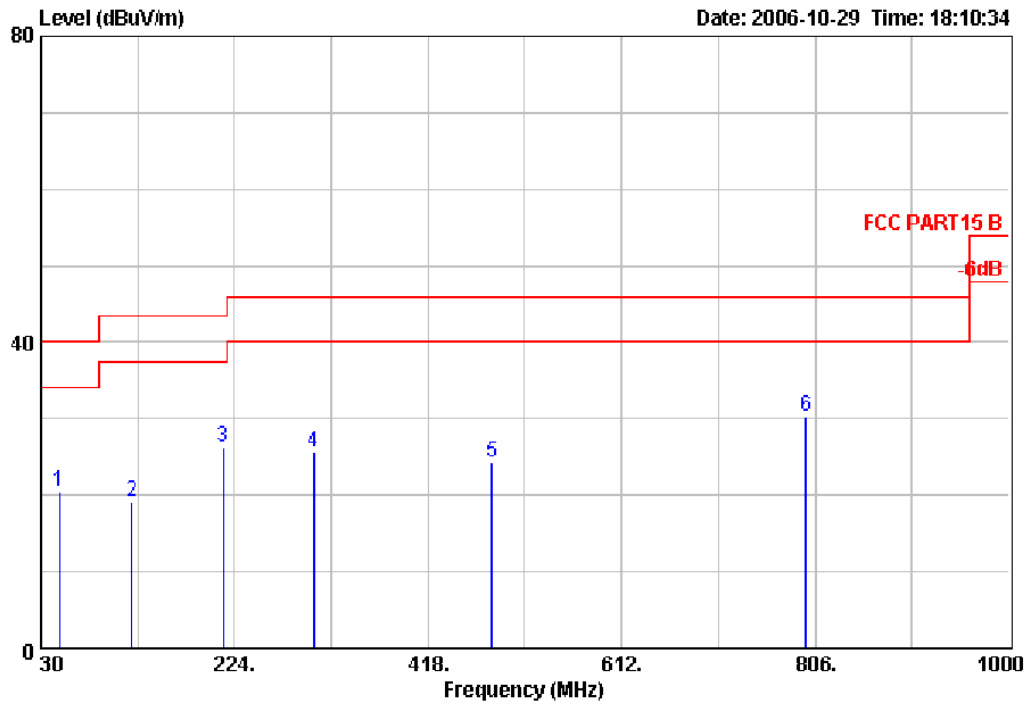

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 2598FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120W/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH1 2.403GHz


	Freq	Level	Over	Limit	ReadAntenna	Cable
	MHz	dBuV/m	Limit	Line	Level Factor	Loss
			dB	dBuV/m	dBuV	dB/m
1	48.43	20.46	-19.54	40.00	9.46	9.61
2	121.18	19.20	-24.30	43.50	5.16	11.75
3	212.36	26.35	-17.15	43.50	12.73	10.36
4	303.54	25.58	-20.42	46.00	7.70	13.88
5	482.02	24.33	-21.67	46.00	1.12	18.00
6	797.27	30.26	-15.74	46.00	0.97	22.23

Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading



No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
http://www.audix.com.cn

Data: 13 File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

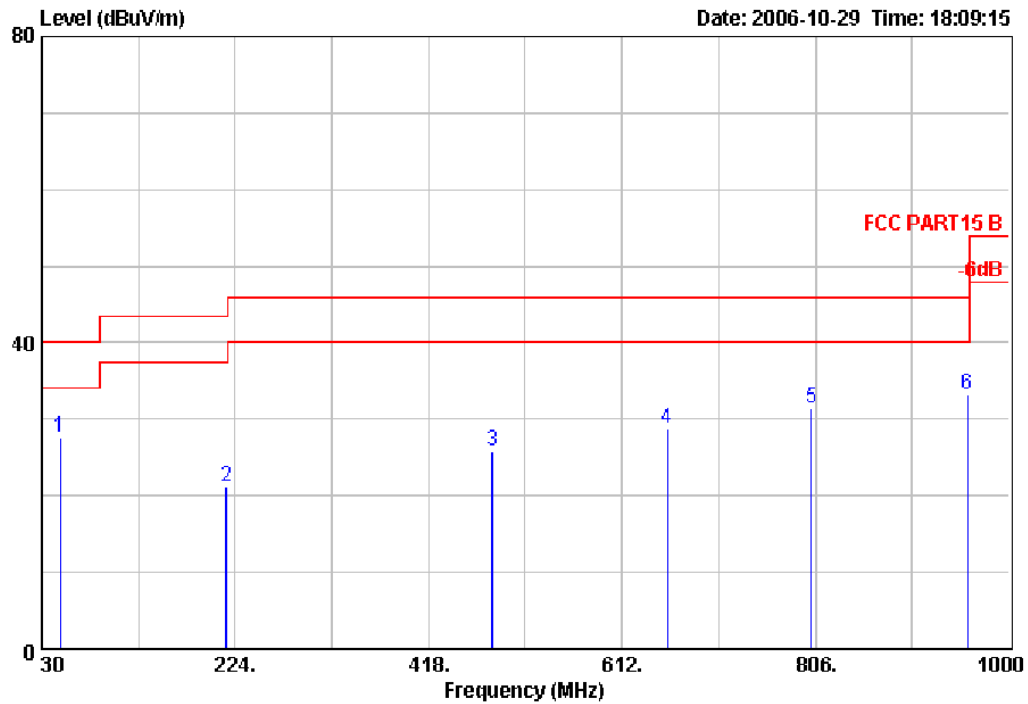

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 2598FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH1 2.403GHz

	Freq	Level	Over	Limit	Read	Antenna	Cable
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss
			dB	dBuV/m	dBuV	dB/m	dB
1	48.43	27.64	-12.36	40.00	16.64	9.61	1.39
2	215.27	21.20	-22.30	43.50	7.59	10.30	3.31
3	482.02	25.90	-20.10	46.00	2.69	18.00	5.21
4	657.59	28.75	-17.25	46.00	2.09	20.48	6.18
5	802.12	31.43	-14.57	46.00	2.20	22.30	6.93
6	958.29	33.26	-12.74	46.00	1.61	23.92	7.73


Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading



No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
http://www.audix.com.cn

Data: 15

File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

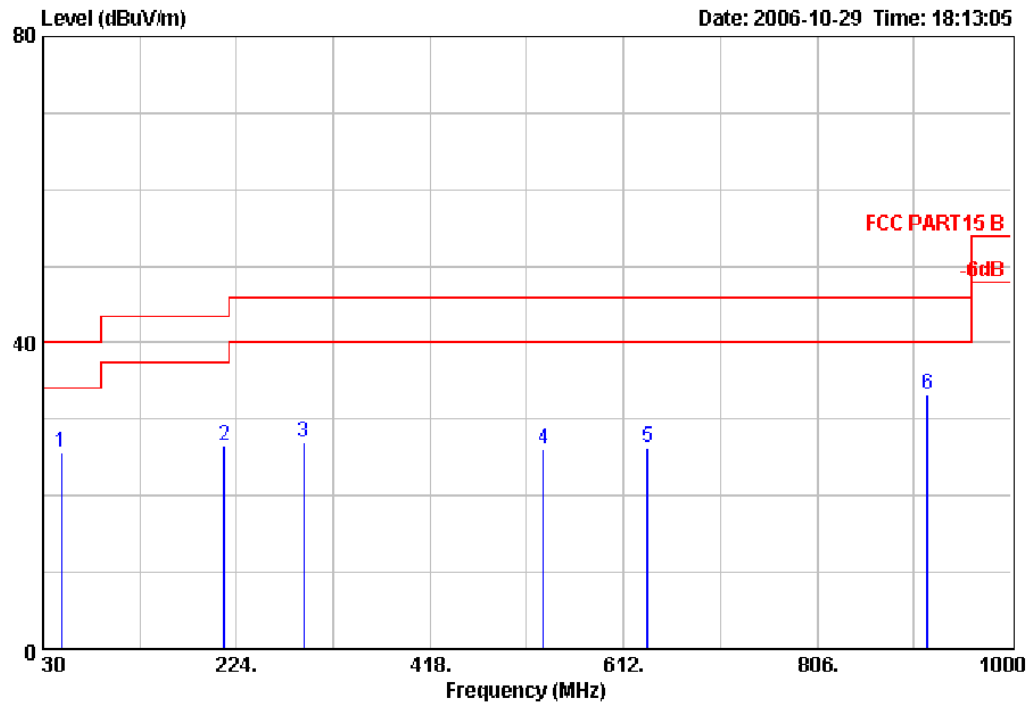

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 2598FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120W/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH9 2.4339GHz

	Freq	Level	Over	Limit	Read	Antenna	Cable
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss
			dB	dBuV/m	dBuV	dB/m	dB
1	48.43	25.70	-14.30	40.00	14.70	9.61	1.39
2	211.39	26.60	-16.90	43.50	12.99	10.37	3.24
3	290.93	26.96	-19.04	46.00	9.45	13.62	3.89
4	531.49	26.00	-20.00	46.00	2.06	18.58	5.36
5	636.25	26.38	-19.62	46.00	0.15	20.20	6.03
6	916.58	33.30	-12.70	46.00	2.35	23.51	7.44


Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss





No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
http://www.audix.com.cn

Data: 16 File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

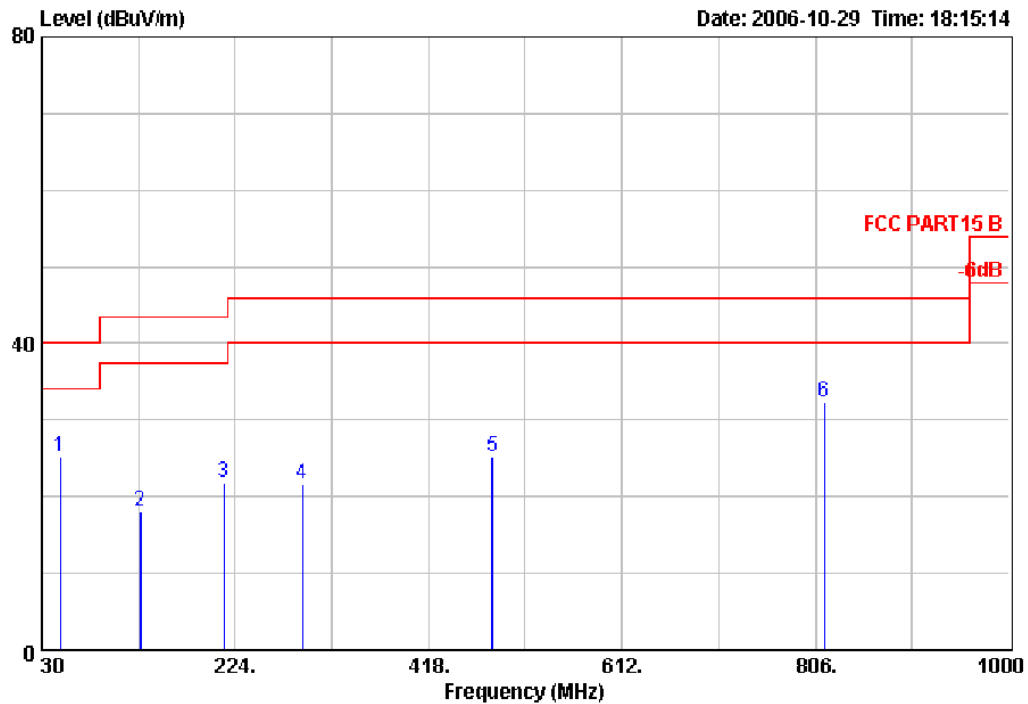

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 259%FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jamy  
 Comment : Temp:23°C Humi:53%  
 Memo : CH9 2.4339GHz


	Freq	Level	Over	Limit	Read	Antenna	Cable
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss
			dB	dBuV/m	dBuV	dB/m	dB
1	48.43	25.21	-14.79	40.00	14.21	9.61	1.39
2	128.94	18.03	-25.47	43.50	3.47	11.98	2.58
3	212.36	21.74	-21.76	43.50	8.12	10.36	3.26
4	290.93	21.56	-24.44	46.00	4.05	13.62	3.89
5	482.02	25.18	-20.82	46.00	1.97	18.00	5.21
6	814.73	32.32	-13.68	46.00	3.00	22.46	6.86

Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss



No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
http://www.audix.com.cn

Data: 18 File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

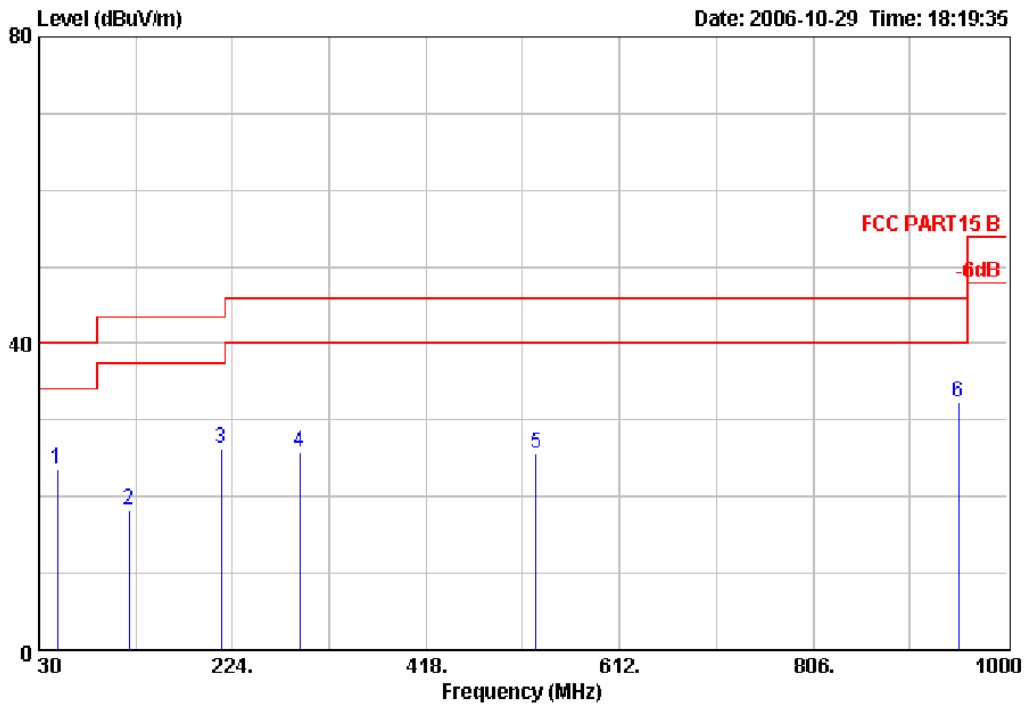

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 2598FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120W/60Hz  
 Test Engineer : Jamy  
 Comment : Temp:23°C Humi:53%  
 Memo : CH18 2.4794GHz

	Freq	Level	Over	Limit	ReadAntenna	Cable
	MHz	dBuV/m	Limit	Line	Level Factor	Loss
			dB	dBuV/m	dBuV	dB/m
1	48.43	23.68	-16.32	40.00	12.68	9.61
2	120.21	18.35	-25.15	43.50	4.31	11.72
3	212.36	26.22	-17.28	43.50	12.60	10.36
4	290.93	25.79	-20.21	46.00	8.28	13.62
5	528.58	25.62	-20.38	46.00	1.72	18.51
6	951.50	32.31	-13.69	46.00	0.70	23.85

Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss




No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
http://www.audix.com.cn

Data: 17

File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

Date: 2006-10-29 Time: 18:17:20

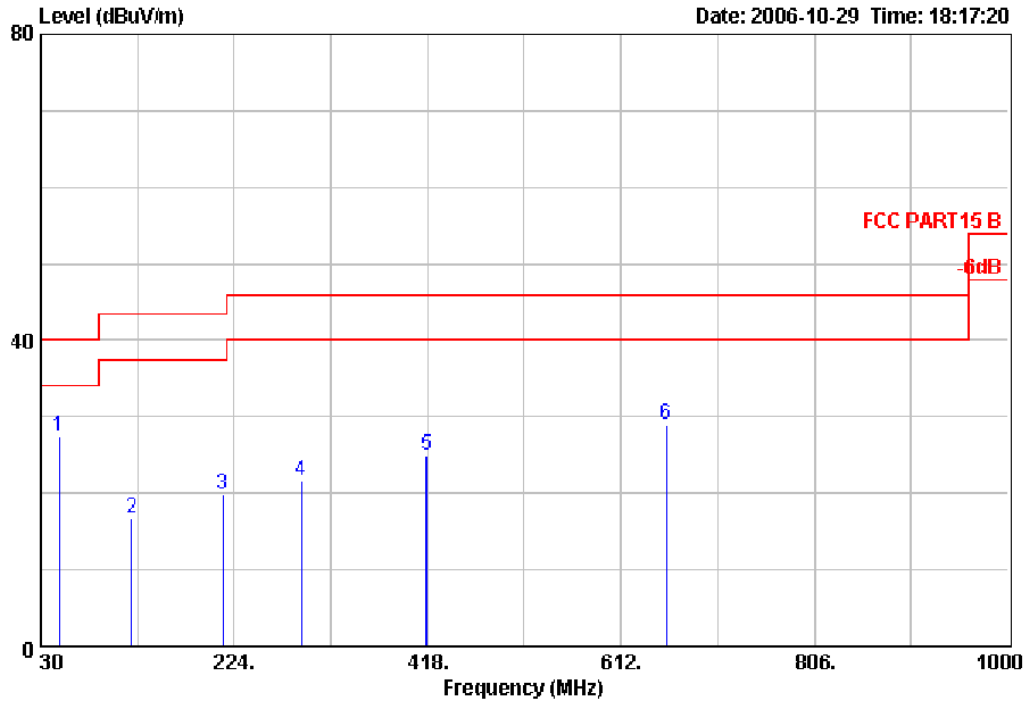

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 2598FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jamy  
 Comment : Temp:23°C Humi:53%  
 Memo : CH18 2.4794GHz


	Freq	Level	Over	Limit	ReadAntenna	Cable
	MHz	dBuV/m	Limit	Line	Level	Loss
			dB	dBuV/m	dBuV	dB/m
1	48.43	27.40	-12.60	40.00	16.40	9.61
2	121.18	16.67	-26.83	43.50	2.63	11.75
3	212.36	19.83	-23.67	43.50	6.21	10.36
4	290.93	21.56	-24.44	46.00	4.05	13.62
5	417.03	24.95	-21.05	46.00	2.99	17.15
6	657.59	29.05	-16.95	46.00	2.39	20.48

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss



7F8 km20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 2 File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24) Date: 2006-10-30 Time: 14:53:17

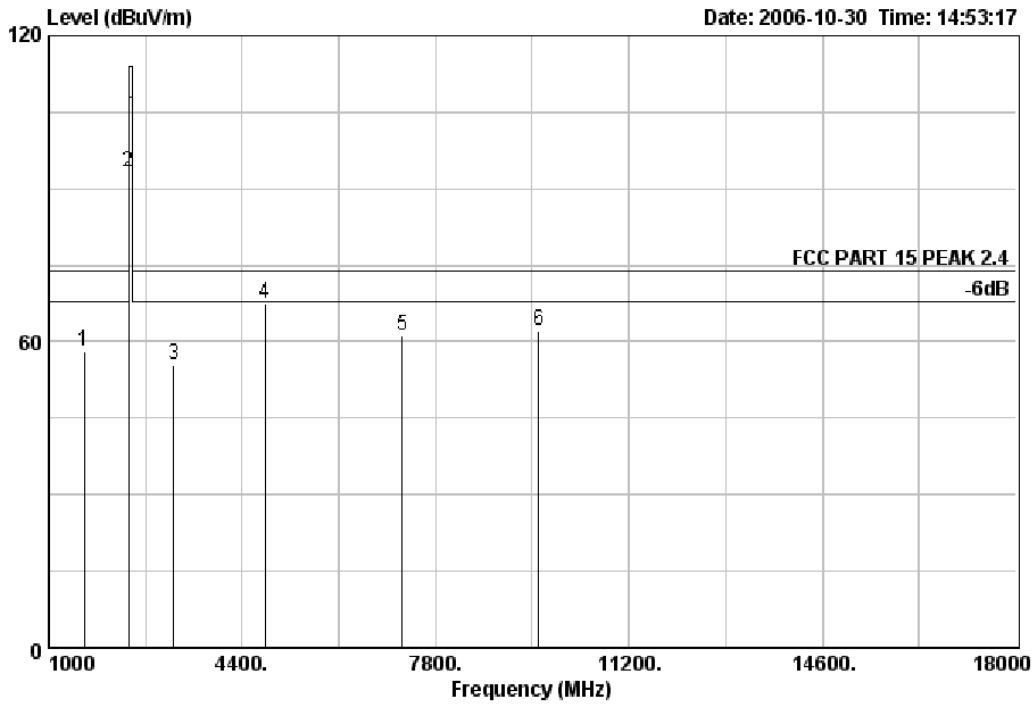

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp :23°C Humi :56%  
 Memo : CH1 2.403GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	1629.00	58.19	74.00	-15.81	26.09	27.21	4.89 Peak
2	2402.96	93.36	114.00	-20.64	29.03	58.13	6.20 Peak
3	3193.00	55.50	74.00	-18.50	31.52	16.42	7.56 Peak
4	4807.00	67.50	74.00	-6.50	33.98	23.97	9.55 Peak
5	7209.00	61.11	74.00	-12.89	37.33	13.02	10.76 Peak
6	9613.00	62.29	74.00	-11.71	38.13	12.62	11.54 Peak

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading +Cable Loss  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 km20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 13 File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24) Date: 2006-10-30 Time: 14:53:17

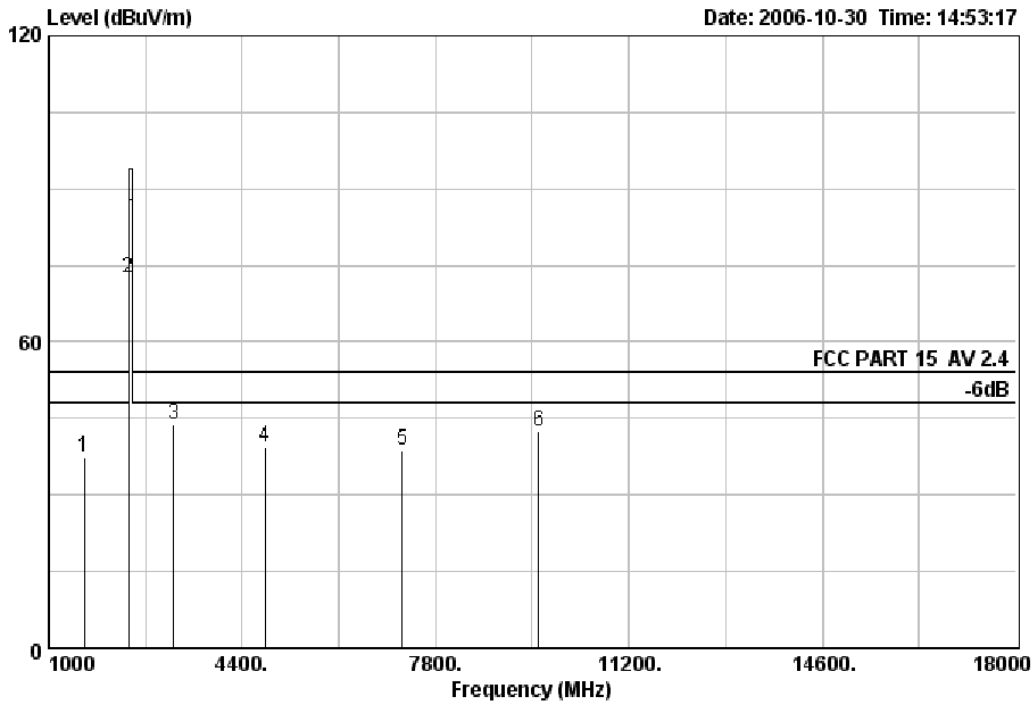

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH1 2.403GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	
	MHz	dBuV/m	Line	Limit	Level	Loss	Remark
			dBuV/m	dB	dB/m	dBuV	dB
1	1629.30	37.53	54.00	-16.47	26.09	42.19	4.89 Average
2	2402.89	72.59	54.00	-21.41	29.03	37.36	6.20 Average
3	3192.00	43.64	54.00	-10.36	31.52	39.50	7.56 Average
4	4807.00	39.53	54.00	-14.47	33.98	30.50	9.55 Average
5	7209.00	38.76	54.00	-15.24	37.33	25.11	10.76 Average
6	9613.50	42.39	54.00	-11.61	38.13	28.62	11.54 Average

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 hai20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 4 File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24)

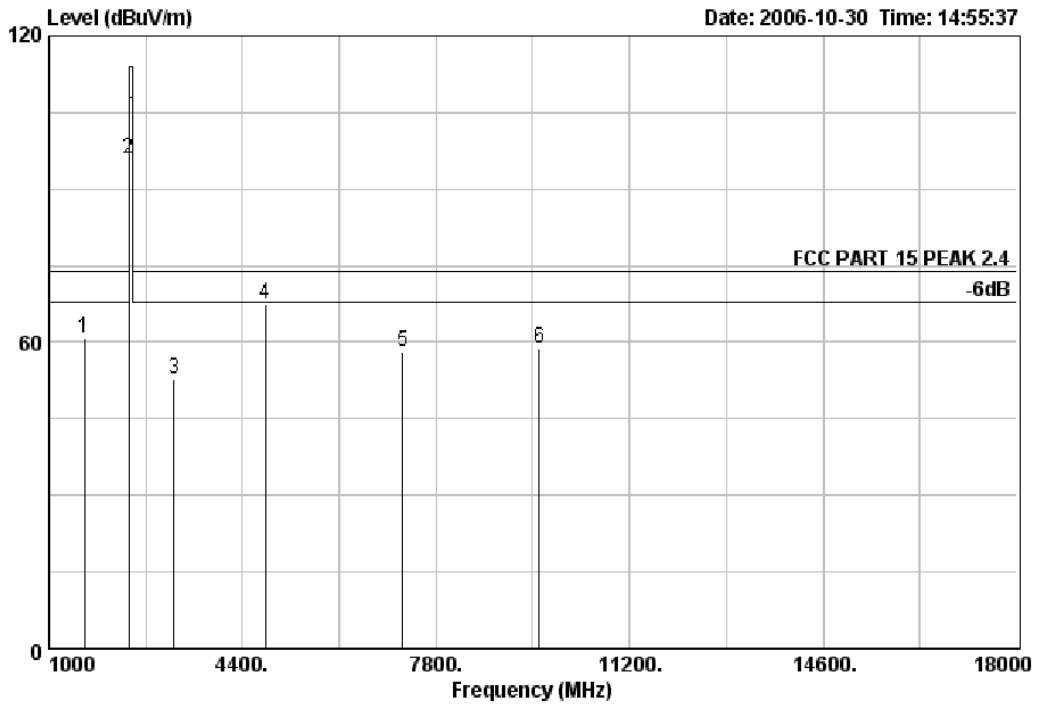

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH1 2.403GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	
1	1629.00	60.78	74.00	-13.22	26.09	4.89	Peak
2	2403.00	95.78	114.00	-18.22	29.03	6.20	Peak
3	3193.00	52.83	74.00	-21.17	31.52	7.56	Peak
4	4807.00	67.55	74.00	-6.45	33.98	9.55	Peak
5	7209.00	58.23	74.00	-15.77	37.33	10.76	Peak
6	9613.00	58.90	74.00	-15.10	38.13	11.54	Peak

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 hai20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 14 File: D:\2006 DATA\2006 Report Data\GRACOA5066.EMI (24)

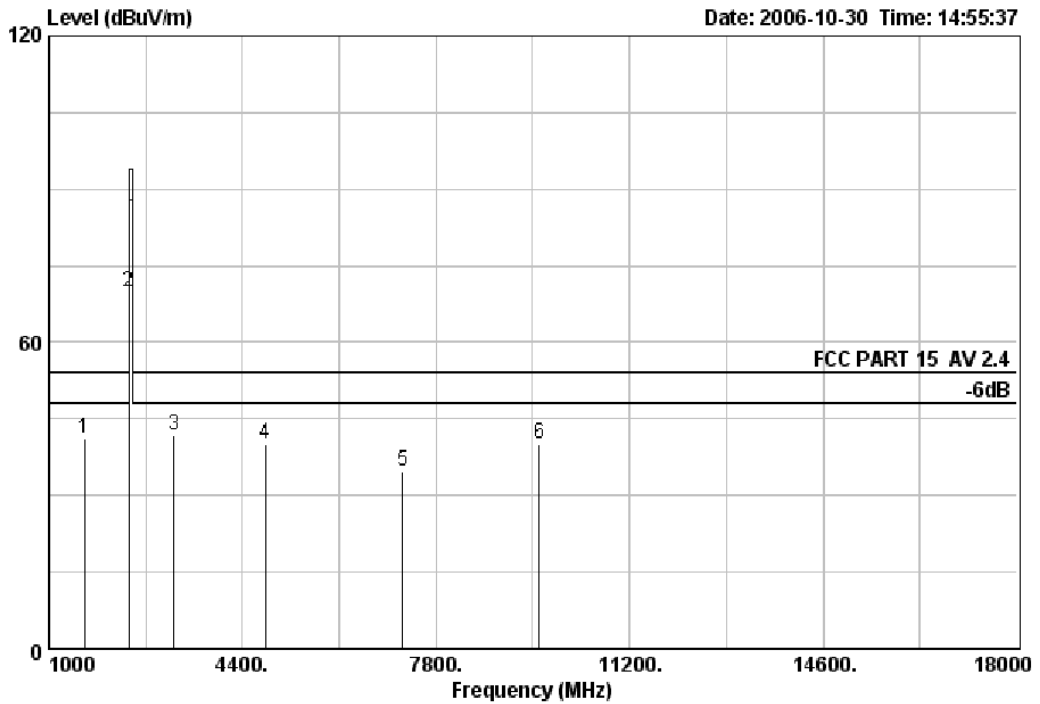

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH1 2.403GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	
1	1629.20	41.14	54.00	-12.86	26.09	45.80	4.89 Average
2	2403.10	69.78	94.00	-24.22	29.03	34.55	6.20 Average
3	3193.00	41.89	54.00	-12.11	31.52	37.75	7.56 Average
4	4807.01	40.05	54.00	-13.95	33.98	31.02	9.55 Average
5	7209.00	34.79	54.00	-19.21	37.33	21.14	10.76 Average
6	9612.00	40.02	54.00	-13.98	38.13	26.23	11.54 Average

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 hai20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 8 File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24)

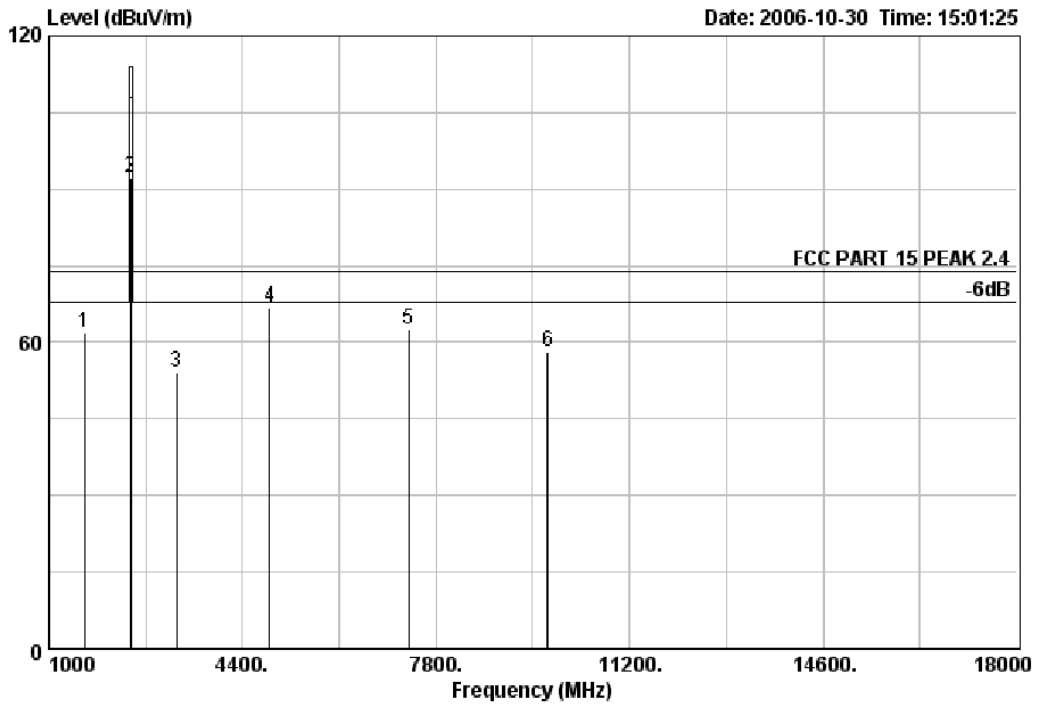

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH9 2.4389GHz

	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	
1	1629.00	61.77	74.00	-12.23	26.09	4.89	Peak
2	2438.98	92.28	114.00	-21.72	29.11	6.25	Peak
3	3244.00	54.00	74.00	-20.00	31.66	7.66	Peak
4	4877.80	66.86	74.00	-7.14	34.16	9.71	Peak
5	7316.70	62.44	74.00	-11.56	37.52	10.82	Peak
6	9755.60	58.22	74.00	-15.78	38.02	11.55	Peak


- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.





7F8 kai20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 16 File: D:\2006 DATA\2006 Report Data\GRACOA5066.EMI (24)

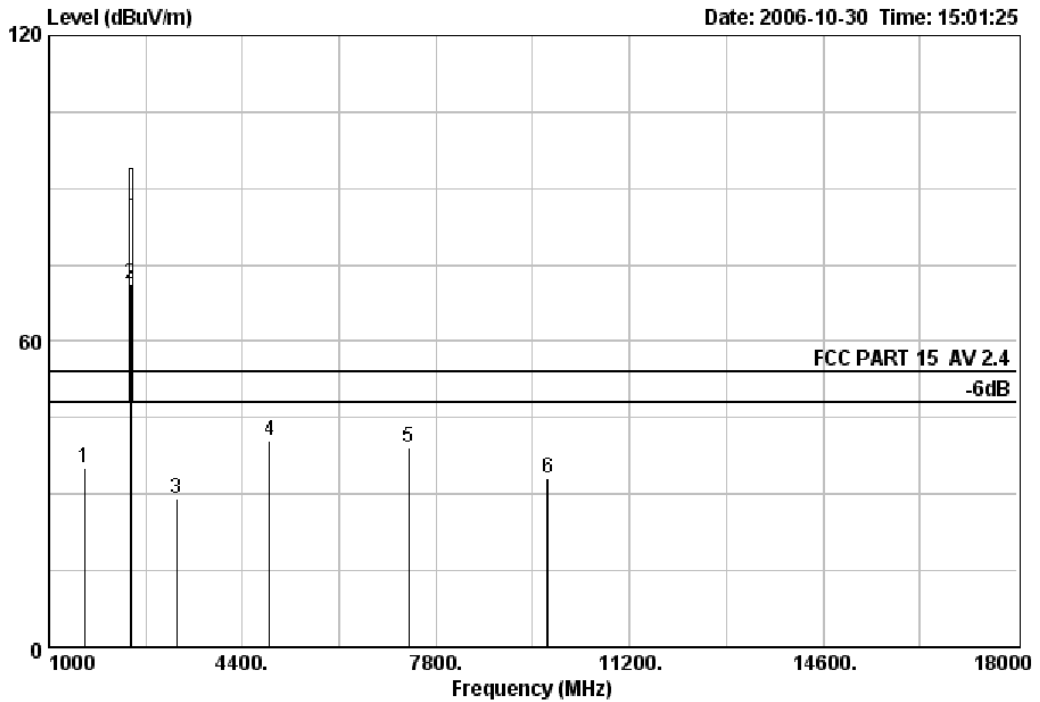

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH9 2.4389GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	1629.20	35.13	54.00	-18.87	26.09	39.79	4.89 Average
2	2438.98	71.28	94.00	-22.72	29.11	35.92	6.25 Average
3	3244.00	29.07	54.00	-24.93	31.66	24.67	7.66 Average
4	4877.50	40.38	54.00	-13.62	34.16	30.99	9.71 Average
5	7316.80	38.98	54.00	-15.02	37.52	25.11	10.82 Average
6	9755.40	33.22	54.00	-20.78	38.02	19.65	11.55 Average

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 hai20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel.+886-2-26594900  
 http://www.audix.com

Data: 6 File: D:\2006 DATA\2006 Report Data\GRACOA5066.EMI (24)

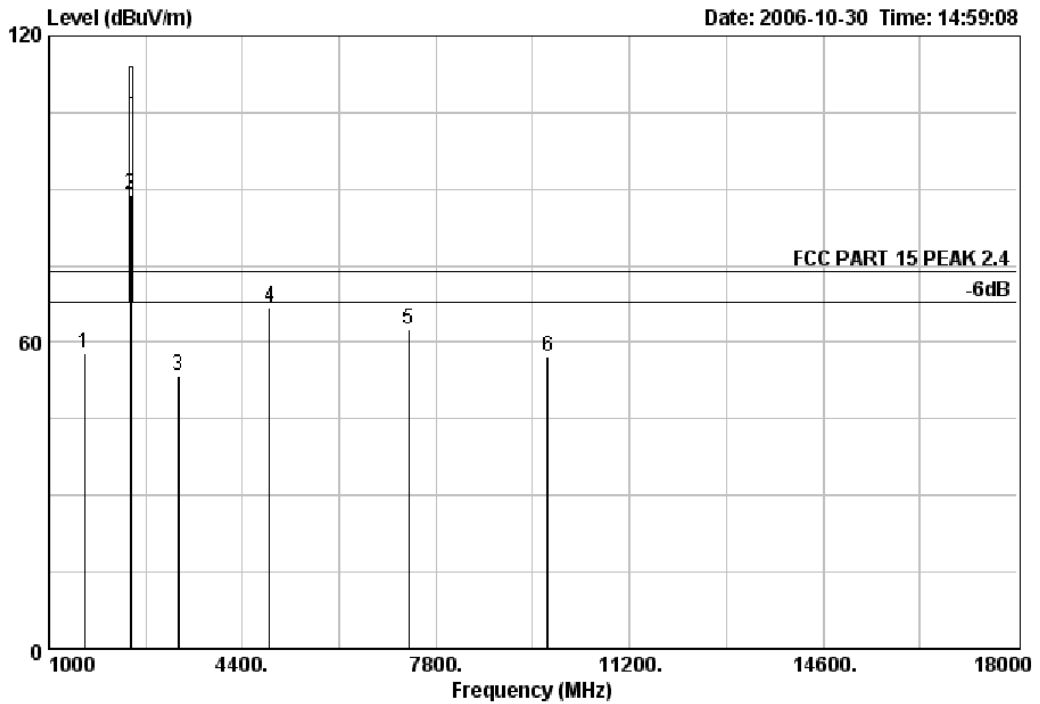

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH9 2.4389GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	
1	1629.00	57.98	74.00	-16.02	26.09	4.89	Peak
2	2438.98	89.03	114.00	-24.97	29.11	6.25	Peak
3	3278.00	53.47	74.00	-20.53	31.76	7.72	Peak
4	4877.70	66.97	74.00	-7.03	34.16	9.71	Peak
5	7316.50	62.50	74.00	-11.50	37.52	10.82	Peak
6	9755.60	57.19	74.00	-16.81	38.02	11.55	Peak

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 hai20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 15 File: D:\2006 DATA\2006 Report Data\GRACOA5066.EMI (24)

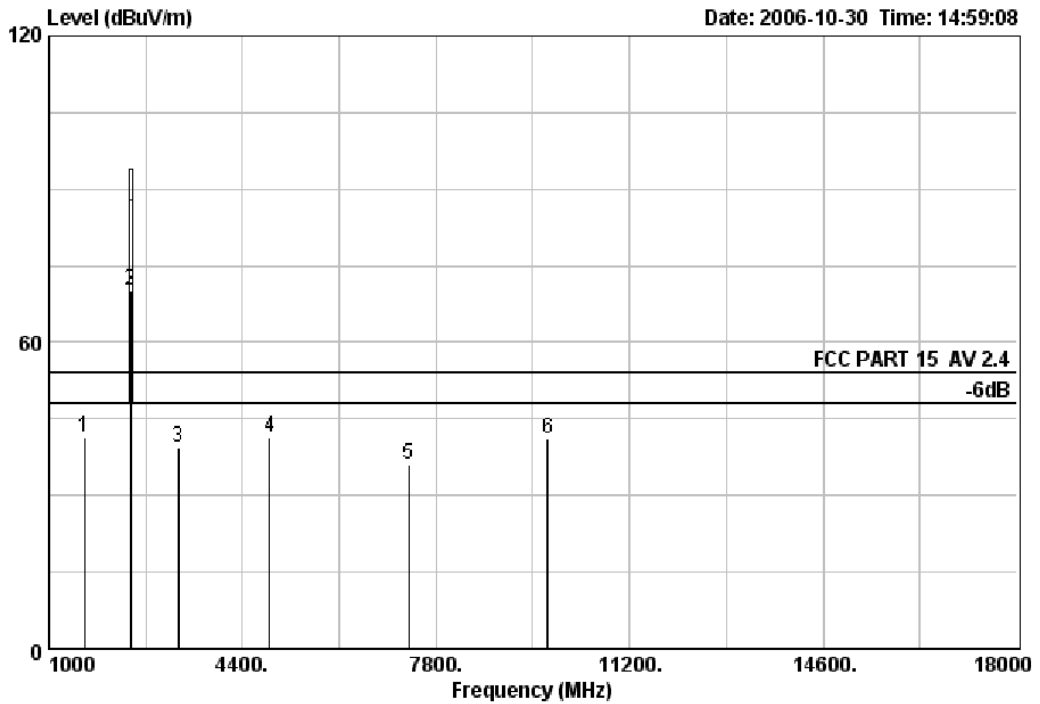

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH9 2.4389GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	
1	1629.50	41.34	54.00	-12.66	26.09	46.00	4.89 Average
2	2438.90	70.03	94.00	-23.97	29.11	34.67	6.25 Average
3	3278.00	39.55	54.00	-14.45	31.76	34.99	7.72 Average
4	4877.60	41.49	54.00	-12.51	34.16	32.10	9.71 Average
5	7316.40	36.03	54.00	-17.97	37.52	22.16	10.82 Average
6	9755.50	41.19	54.00	-12.81	38.02	27.62	11.55 Average

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 hai20 meihu rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 10 File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24)

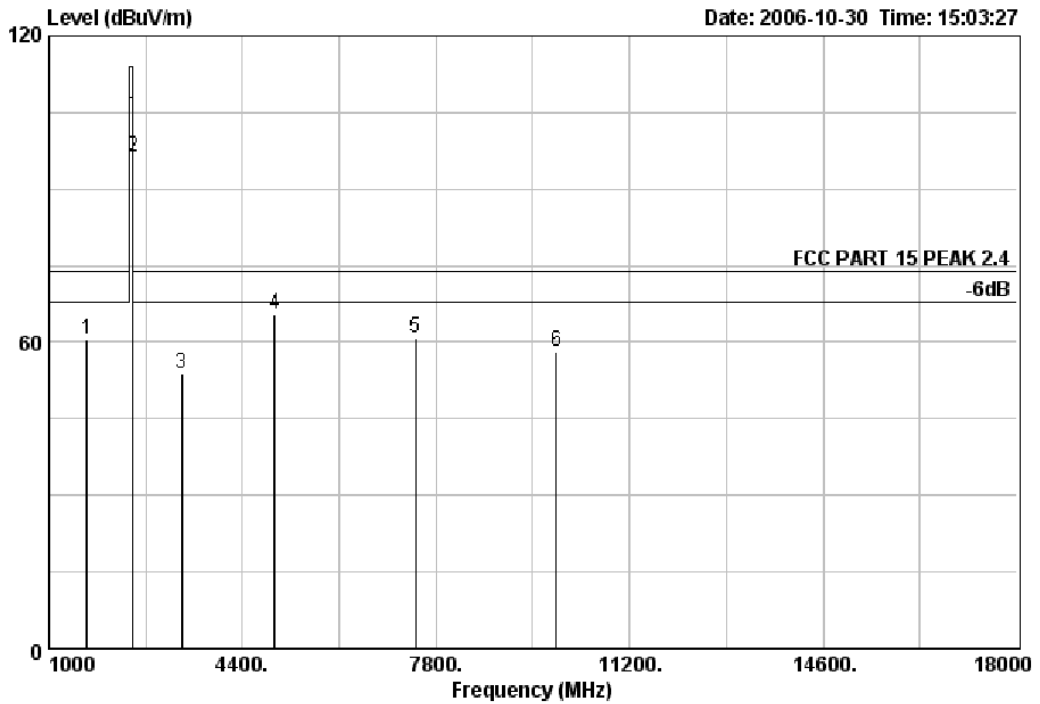


Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH18 2.4794GHz

	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	
1	1663.00	60.65	74.00	-13.35	26.27	4.96	Peak
2	2479.48	96.23	114.00	-17.77	29.19	6.30	Peak
3	3329.00	53.75	74.00	-20.25	31.90	7.78	Peak
4	4958.00	65.46	74.00	-8.54	34.38	9.86	Peak
5	7438.00	60.69	74.00	-13.31	37.72	10.90	Peak
6	9918.00	58.22	74.00	-15.78	37.89	11.56	Peak

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7f8 ln120 neihs rd secl  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

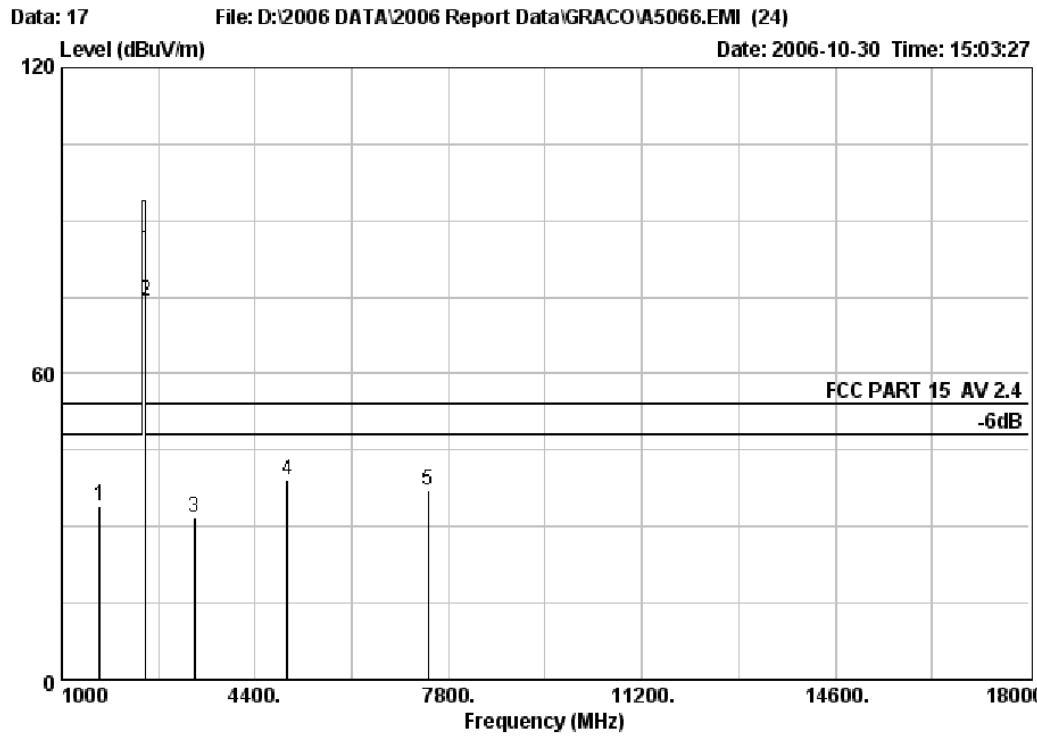

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR.HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp 23°C Humi 56%  
 Memo : CH18 2.4794GHz


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark	
	MHz	dBuV/m	dBuV/m	Limit	Factor	Level	Loss	
				dB	dB/m	dBuV	dB	
1	1663.00	34.06	54.00	-19.94	26.27	38.42	4.96	Average
2	2479.46	74.23	94.00	-19.77	29.19	38.74	6.30	Average
3	3329.00	31.85	54.00	-22.15	31.90	27.07	7.78	Average
4	4958.00	39.00	54.00	-15.00	34.38	29.22	9.86	Average
5	7438.00	37.20	54.00	-16.80	37.72	23.07	10.90	Average

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Amp  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 12 File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24)

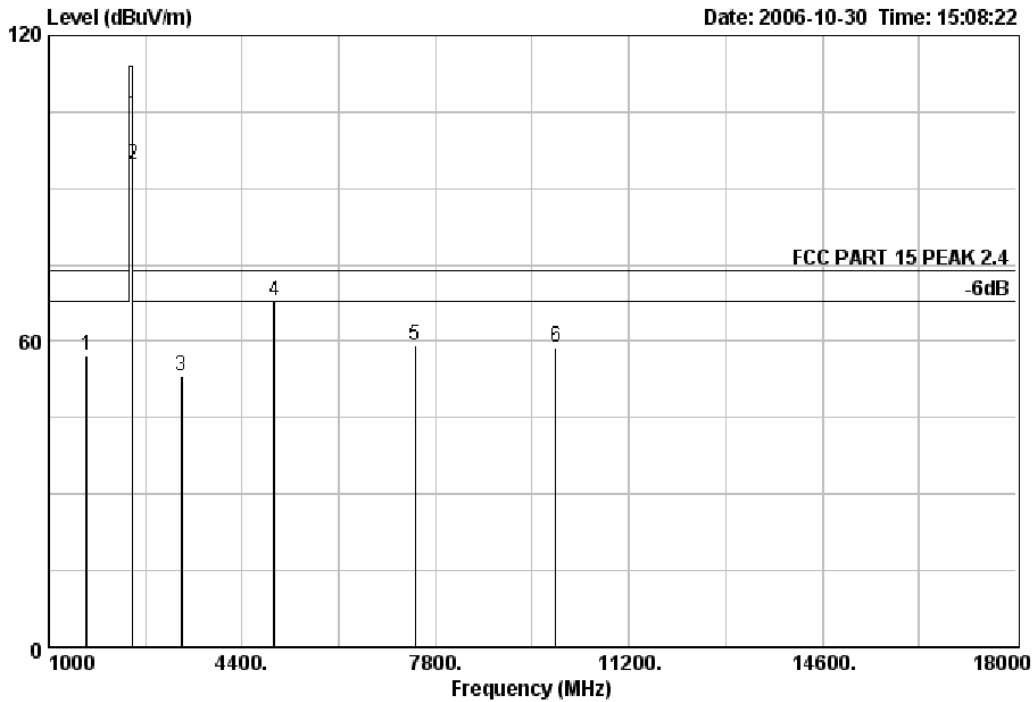


Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120W/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp .23°C Humi .56%  
 Memo : CH18 2.4794GHz

	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	Line	Limit	Level	Loss	
			dBuV/m	dB	dB/m	dBuV	dB
1	1663.00	57.06	74.00	-16.94	26.27	25.83	4.96 Peak
2	2479.50	94.62	114.00	-19.38	29.19	59.13	6.30 Peak
3	3329.00	52.99	74.00	-21.01	31.90	13.31	7.78 Peak
4	4958.00	67.98	74.00	-6.02	34.38	23.74	9.86 Peak
5	7438.00	59.12	74.00	-14.88	37.72	10.50	10.90 Peak
6	9918.00	58.78	74.00	-15.22	37.89	9.33	11.56 Peak

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7f8 ln120 neihs rd secl  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

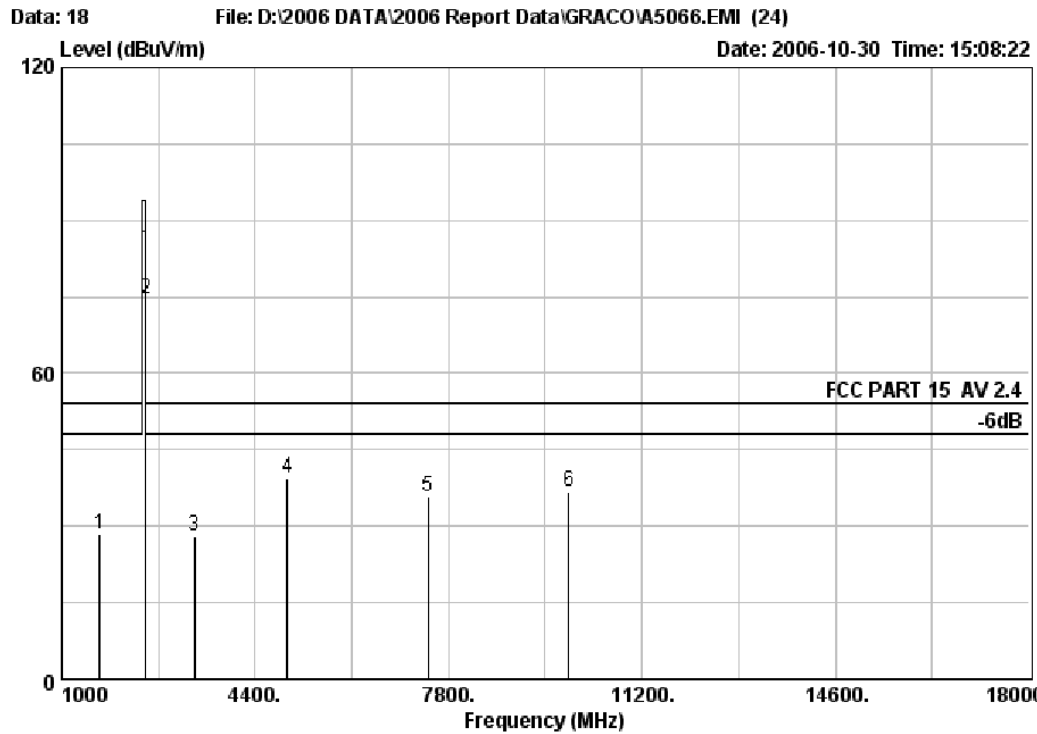

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120W/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp .23°C Humi .56%  
 Memo : CH18 2.4794GHz

	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	Line	Limit	Level	Loss	
			dBuV/m	Factor	dBuV	dB	
				dB	dB/m		
1	1663.20	28.47	54.00	-25.53	26.27	32.83	4.96 Average
2	2479.50	74.62	94.00	-19.38	29.19	39.13	6.30 Average
3	3329.00	28.08	54.00	-25.92	31.90	23.30	7.78 Average
4	4958.50	39.52	54.00	-14.48	34.38	29.74	9.86 Average
5	7438.00	35.63	54.00	-18.37	37.72	21.50	10.90 Average
6	9918.00	36.64	54.00	-17.36	37.89	23.33	11.56 Average

- Remark: 1. All readings are Average and Peak values.  
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp  
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.


## 5. BAND EDGES MEASUREMENT

### 5.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 22, 06	1 Year
2.	Amp	HP	8449B	3008A00863	May 22, 06	1 Year
3.	Antenna	EMCO	3115	9607-4877	Dec. 14, 05	1.5 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May 22, 06	1 Year

### 5.2. Block Diagram of Test Setup



*(EUT: Video Baby Monitor)*

### 5.3. Test Standard

The test completeness FCC 15.249.

### 5.4. Band Edges Limit


2400~2483.5MHz wide centered on the operation frequency.


### 5.5. Test Procedure

**PASS.**

The testing data was attached in the next pages.



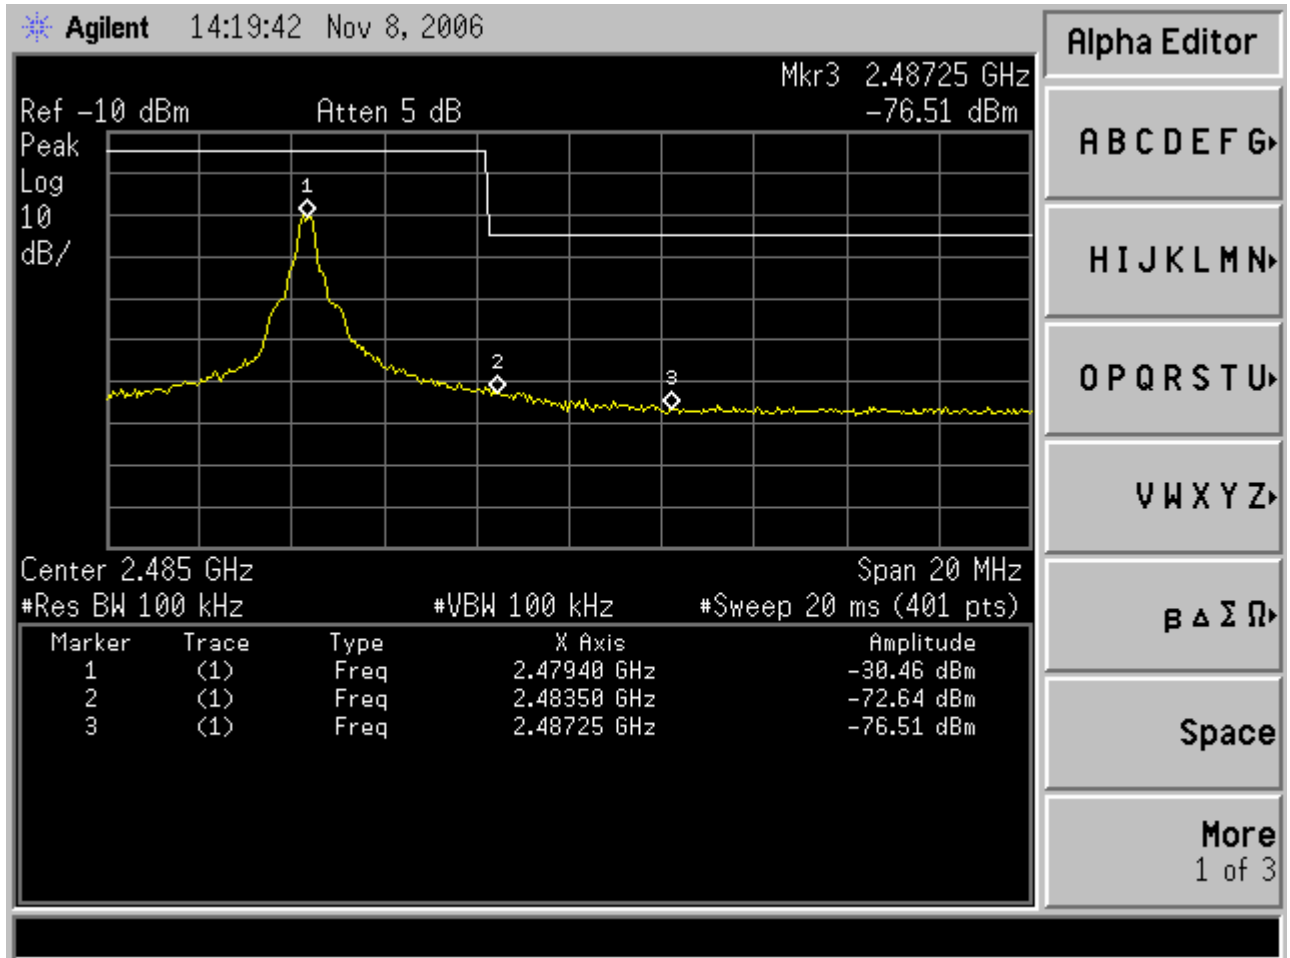

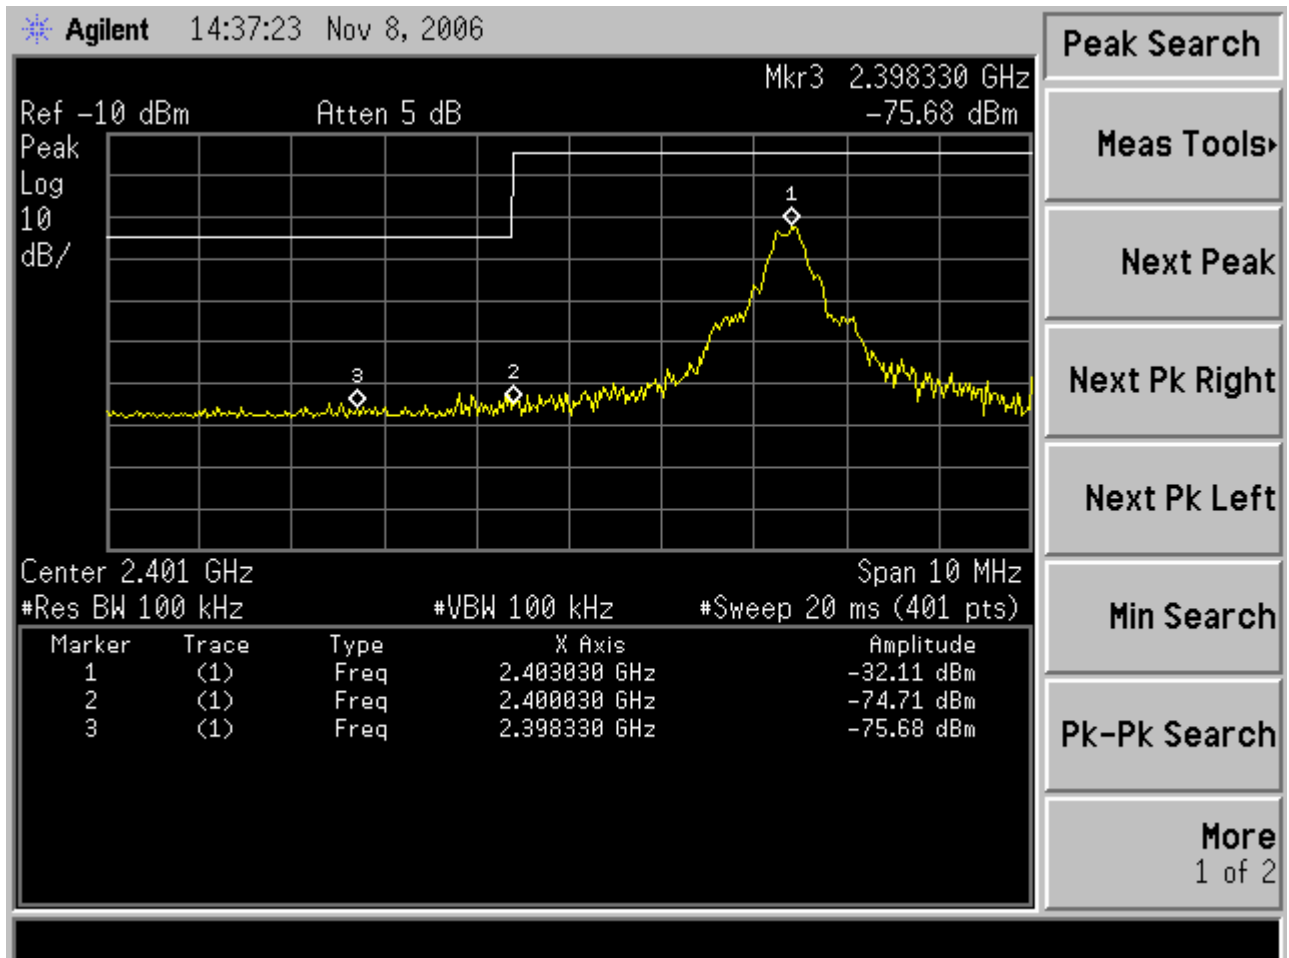

## **6. DEVIATION TO TEST SPECIFICATIONS**


[ NONE ]

# APPENDIX I



NO.6 Ke Feng Road, Block 52,  
 Shenzhen Science&Industry Park,  
 Nantou,Shenzhen,Guangdong,  
 China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 3 File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R1id.EMI (12) Date: 2006-11-05 Time: 14:01:16

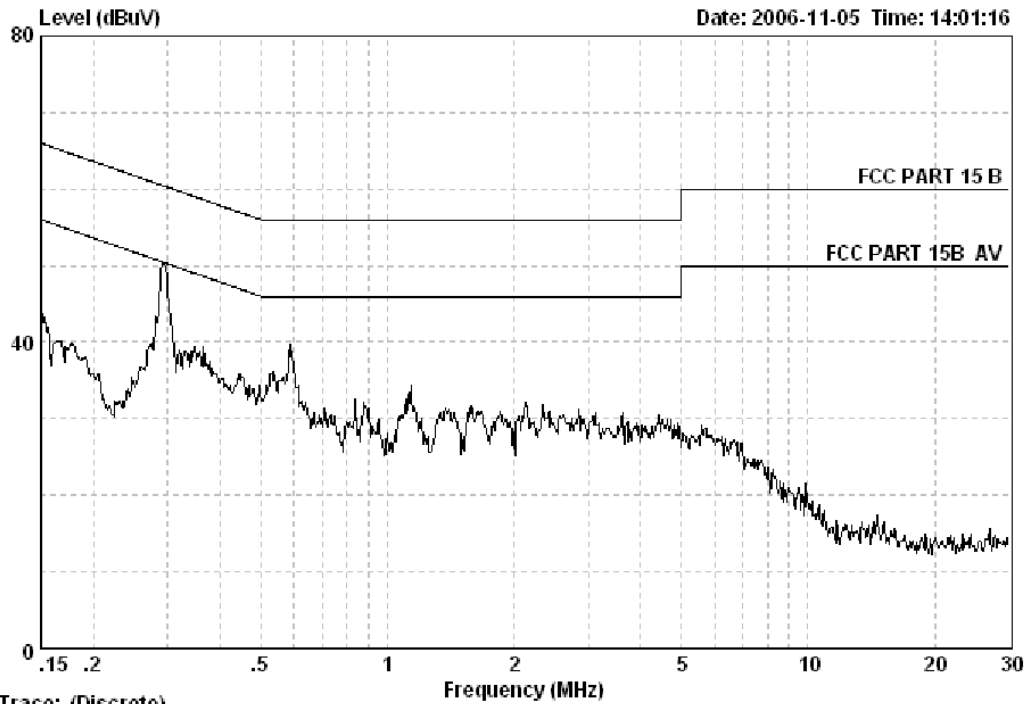

Trace: (Discrete)  
 Site no. : Audix 1# Shielded Room Conductionno. : 3  
 Dis. / Ant. : -- VA KNW-407 LISN Phase :  
 Limit : FCC PART 15 B  
 Env. / Ins. : 23.5\*C/55% ESHS10 Engineer : ChinaLee  
 EUT : Video Baby Monitor M/N:A5066  
 Power Rating : DC 5V Adaptor Input AC 120V/60Hz  
 Test Mode : Running




NO.6 Ke Feng Road, Block 52,  
Shenzhen Science&Industry Park,  
Nantou, Shenzhen, Guangdong,  
China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 4

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R1id.EMI (12)

Date: 2006-11-05 Time: 14:03:18

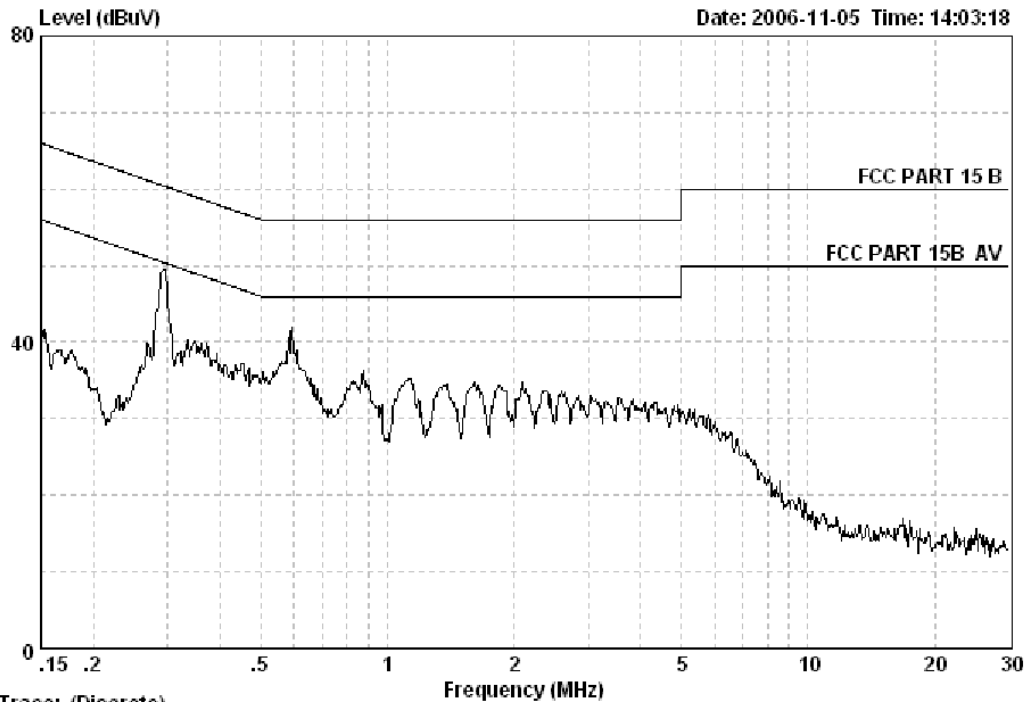

Trace: (Discrete)

Site no. : Audix 1# Shielded Room Conductionno. : 4  
Dis. / Ant. : -- VB KNW-407 LISN Phase :  
Limit : FCC PART 15 B  
Env. / Ins. : 23.5°C/55% ESHS10 Engineer : ChinaLee  
EUT : Video Baby Monitor M/N:A5066  
Power Rating : DC 5V Adaptor Input AC 120V/60Hz  
Test Mode : Running

# APPENDIX II




No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
<http://www.audix.com.cn>

Data: 2

File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

Date: 2006-10-29 Time: 18:10:34

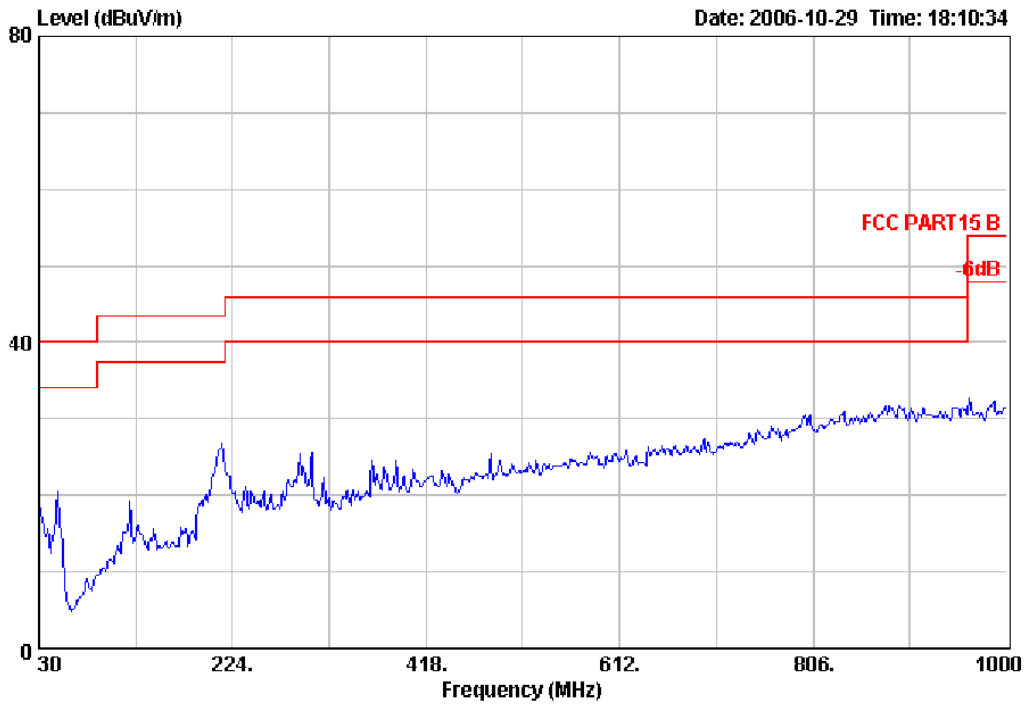

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 259%FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH1 2.403GHz






No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
<http://www.audix.com.cn>

Data: 1 File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

Date: 2006-10-29 Time: 18:09:15

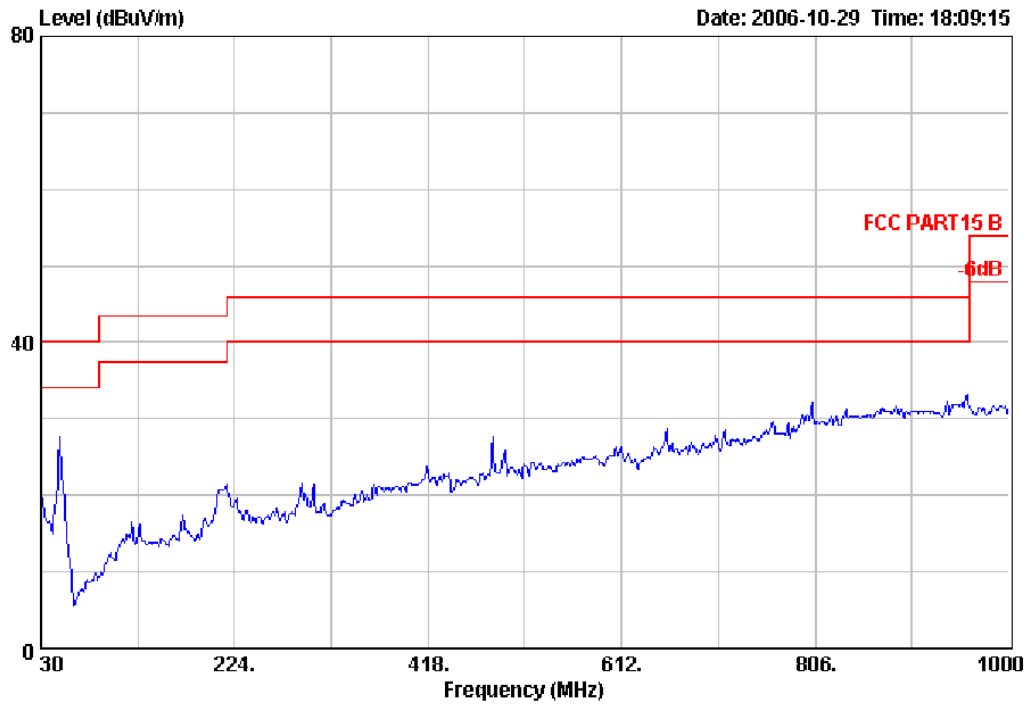

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 25%FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH1 2.403GHz




No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
<http://www.audix.com.cn>

Data: 3

File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)


Date: 2006-10-29 Time: 18:13:05

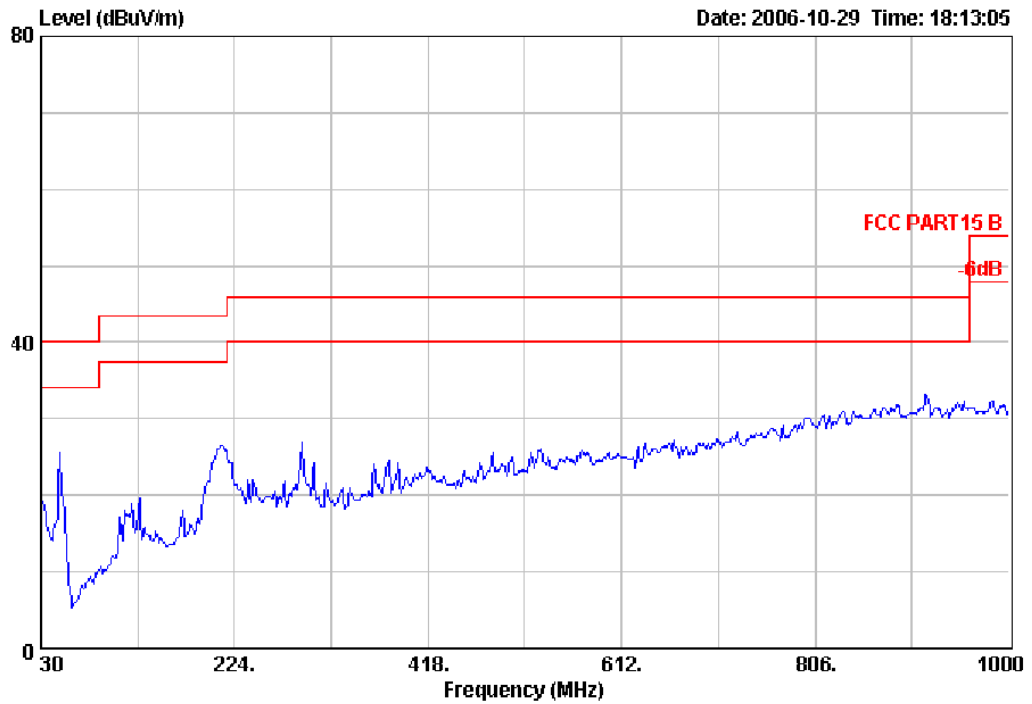

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 25%FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH9 2.4389GHz



No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
<http://www.audix.com.cn>

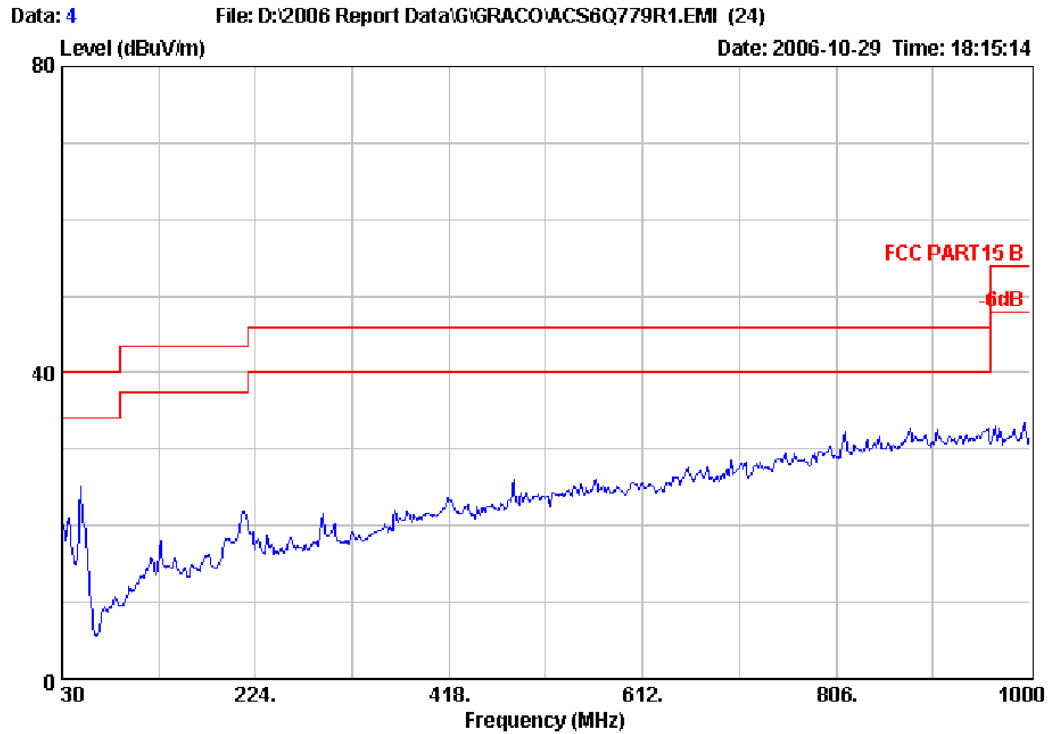


Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 259%FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH9 2.4389GHz



No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
<http://www.audix.com.cn>

Data: 6 File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24)

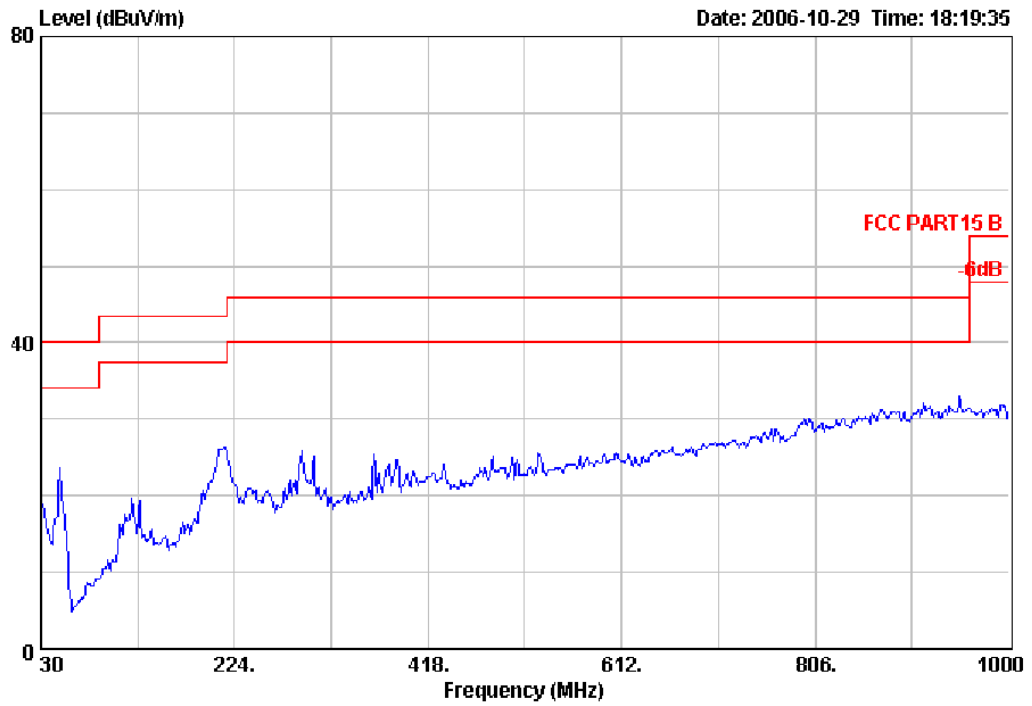


Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 259%FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jany  
 Comment : Temp:23°C Humi:53%  
 Memo : CH18 2.4794GHz



No.6 Ke Feng Road,Block 52,  
Nan shan Science&Industry  
shen zhen Guangdong  
<http://www.audix.com.cn>


Data: 5 File: D:\2006 Report Data\G\GRACO\ACS6Q779R1.EMI (24) Date: 2006-10-29 Time: 18:17:20

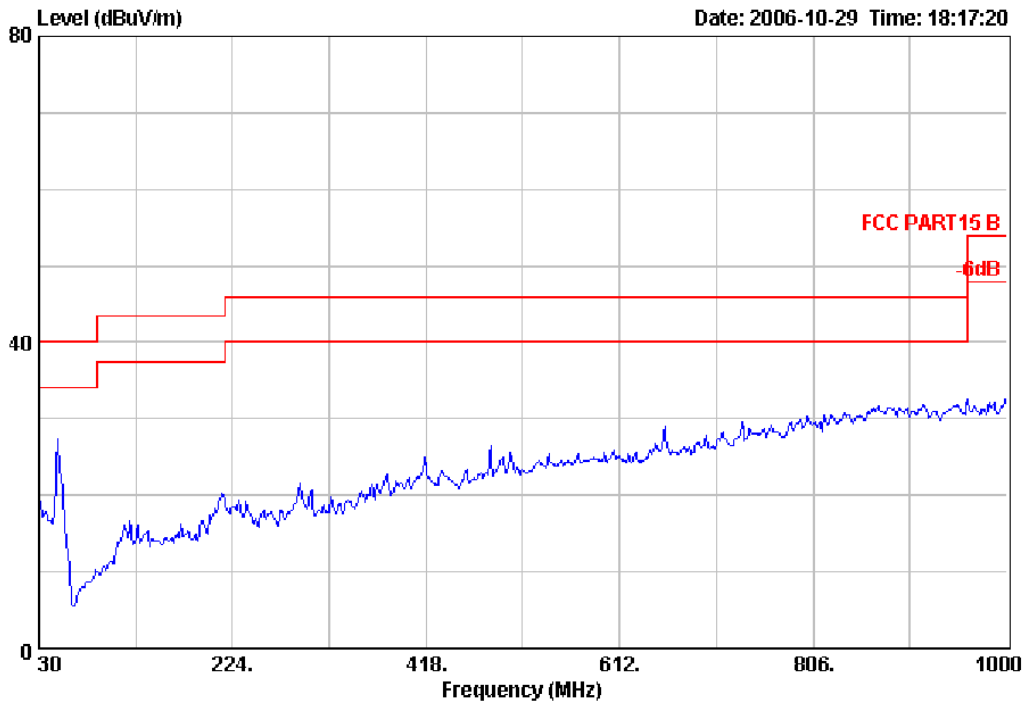

Site : 3# Chamber Radiation  
 Condition : FCC PART15 B 3m 259%FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : Tx mode  
 Test Spec : DC 5V From ADAPTOR 120V/60Hz  
 Test Engineer : Jany  
 Comment : Temp 23°C Humi 53%  
 Memo : CH18 2.4794GHz




7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

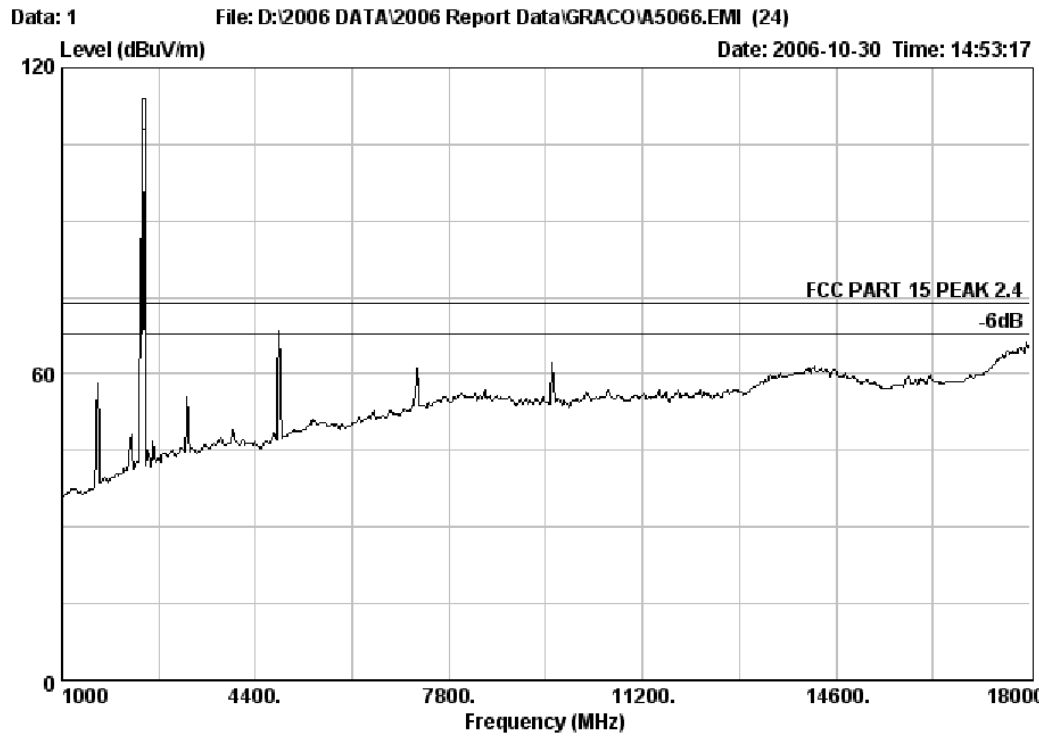

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp .23°C Humi .56%  
 Memo : CH1 2.403GHz




7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

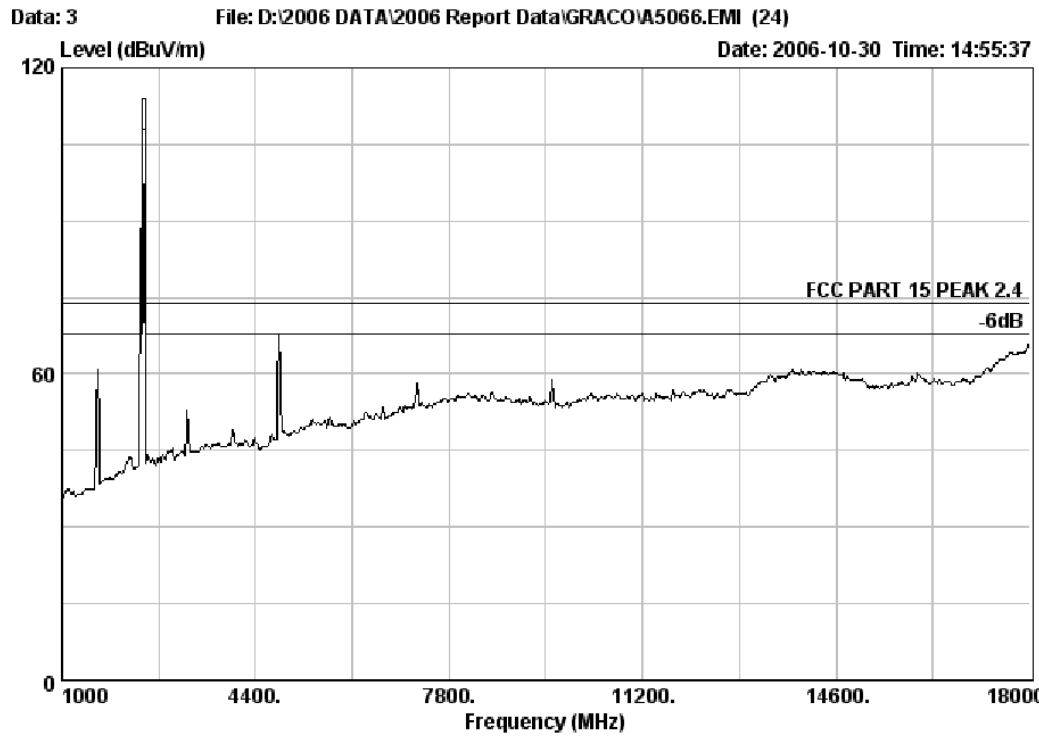

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp .23°C Humi .56%  
 Memo : CH1 2.403GHz



7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

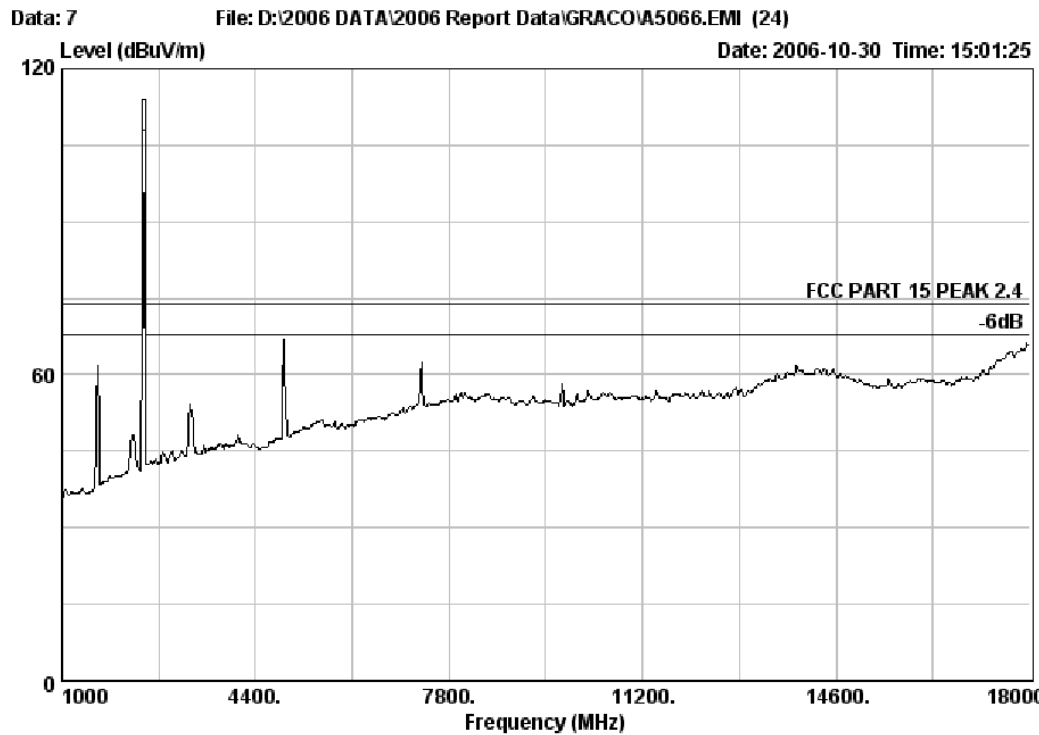


Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp :23°C Humi :56%  
 Memo : CH9 2.4389GHz






7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

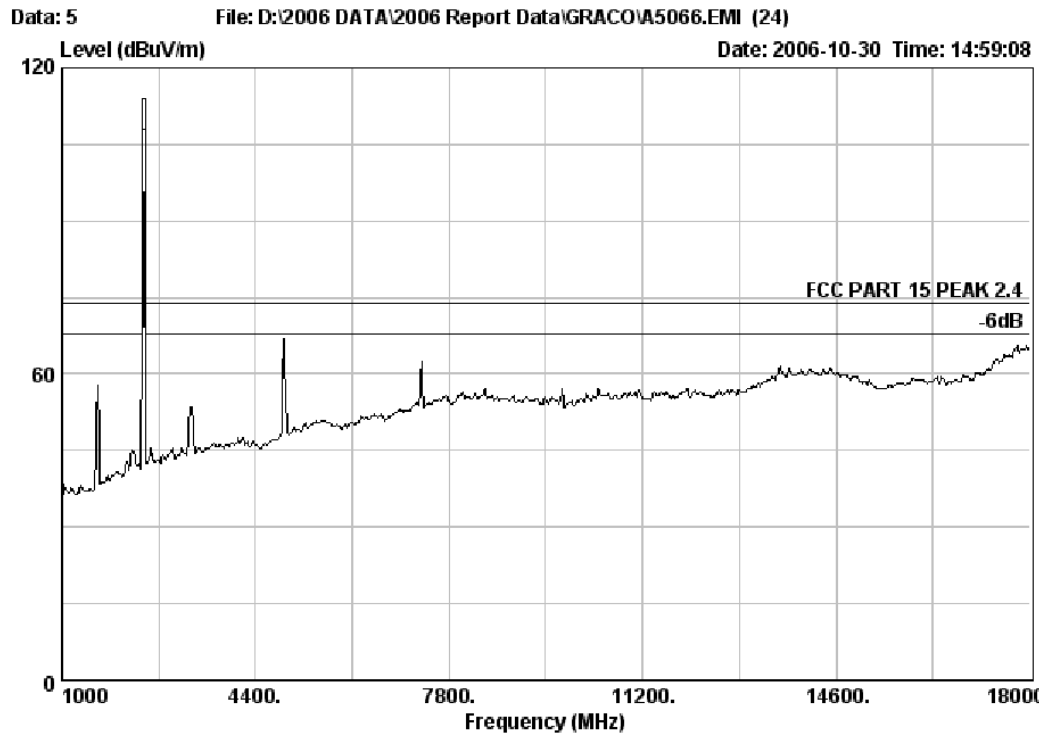

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp .23°C Humi .56%  
 Memo : CH9 2.4389GHz



7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

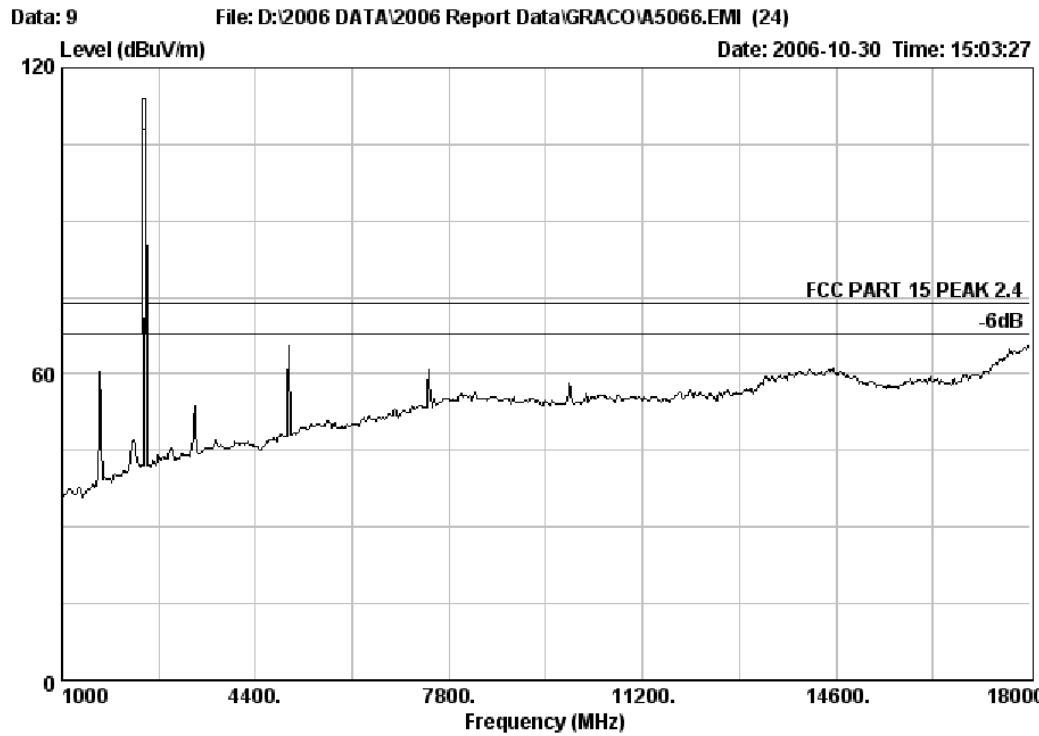


Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp .23°C Humi .56%  
 Memo : CH18 2.4794GHz



7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com


Data: 11 File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24)

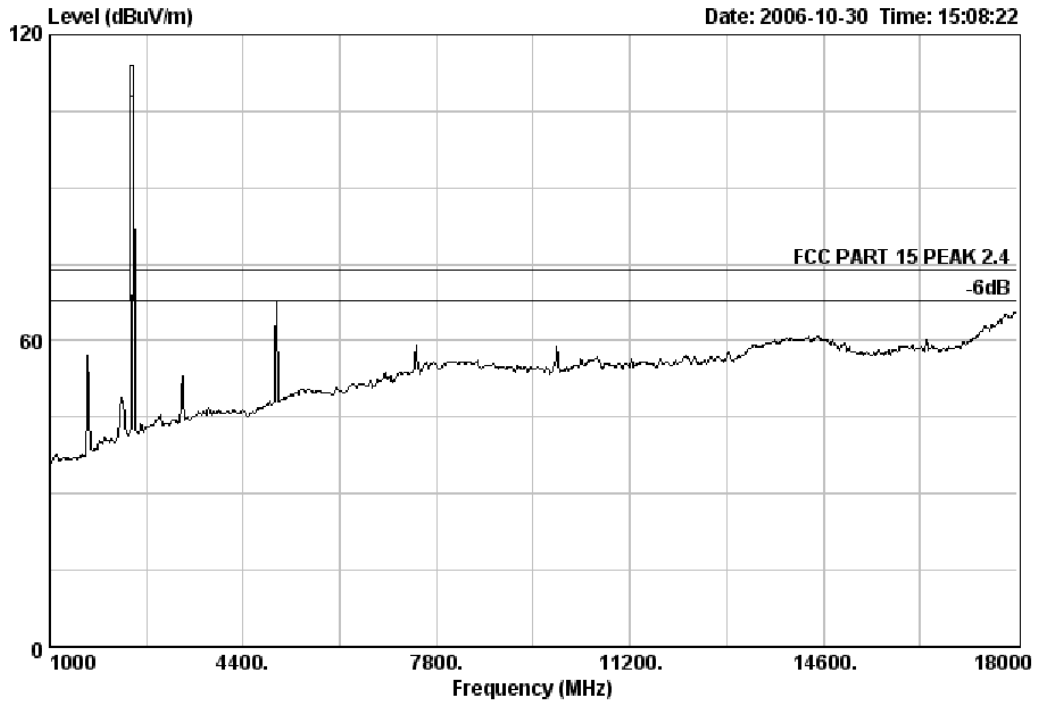

Site : Audix No.1 Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Icemen  
 Comment : Temp :23°C Humi :56%  
 Memo : CH18 2.4794GHz




7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

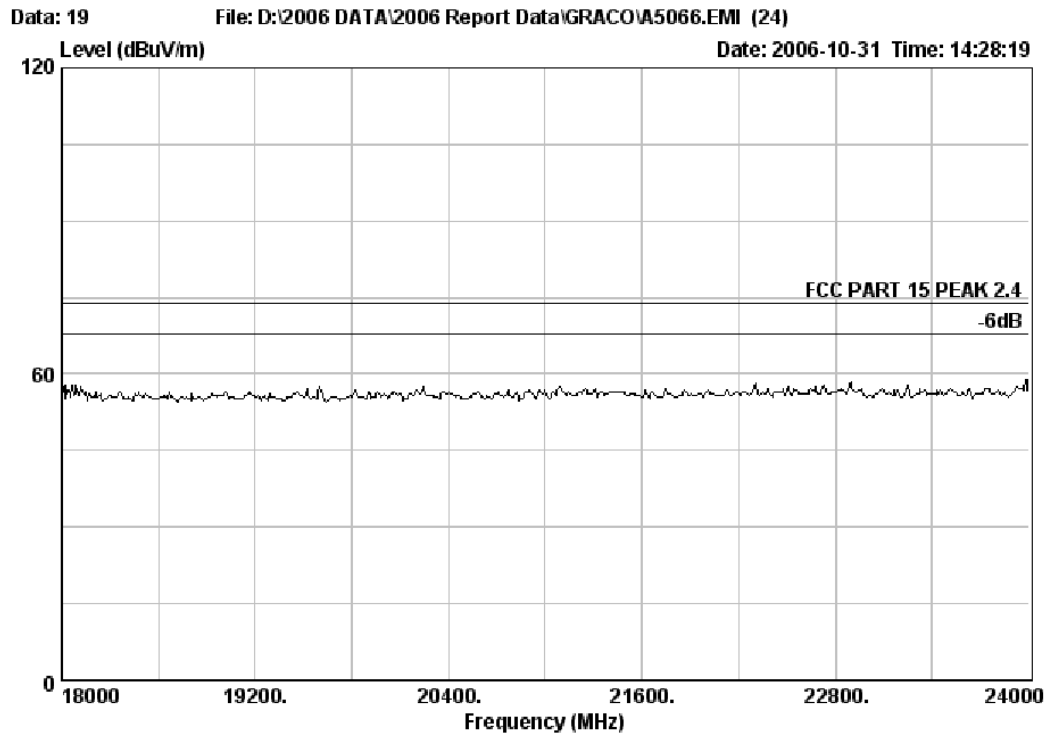

Site : 1# Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC 120V/60Hz  
 Test Spec : Tx Mode  
 Test Engineer : Iceman  
 Comment : Temp:23' Humi:50%  
 Memo : CH1 2.403GHz




7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

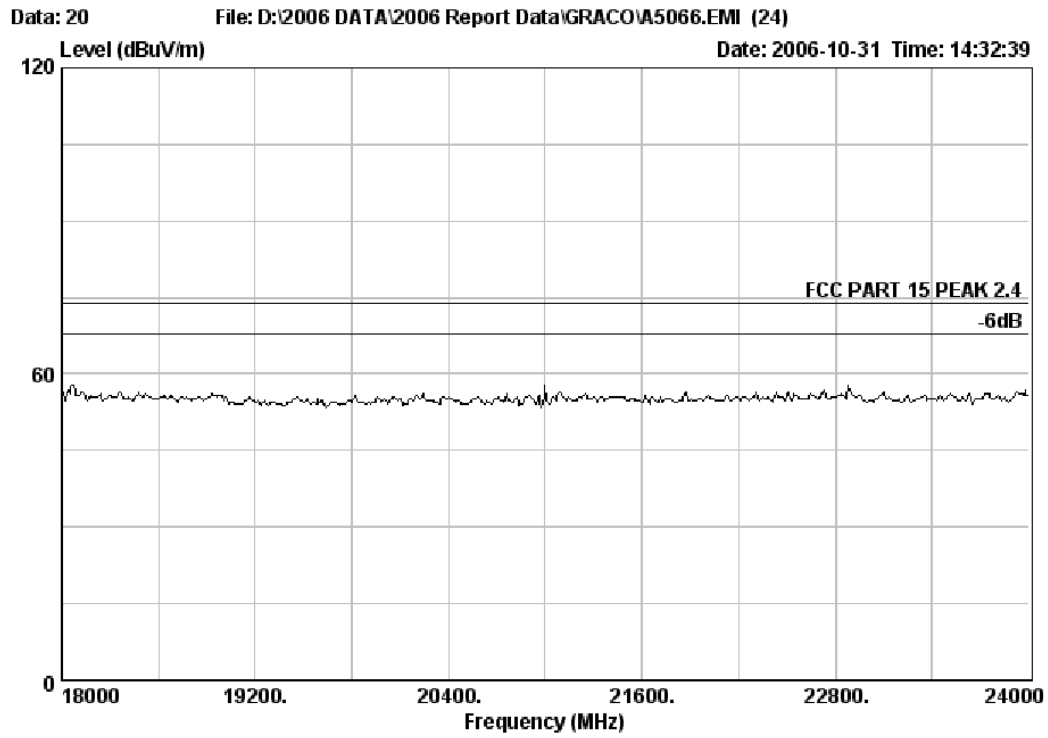

Site : 1# Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC 120V/60Hz  
 Test Spec : Iceman  
 Test Engineer : Tx Mode  
 Comment : Temp:23' Humi:50%  
 Memo : CH1 2.403GHz




7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

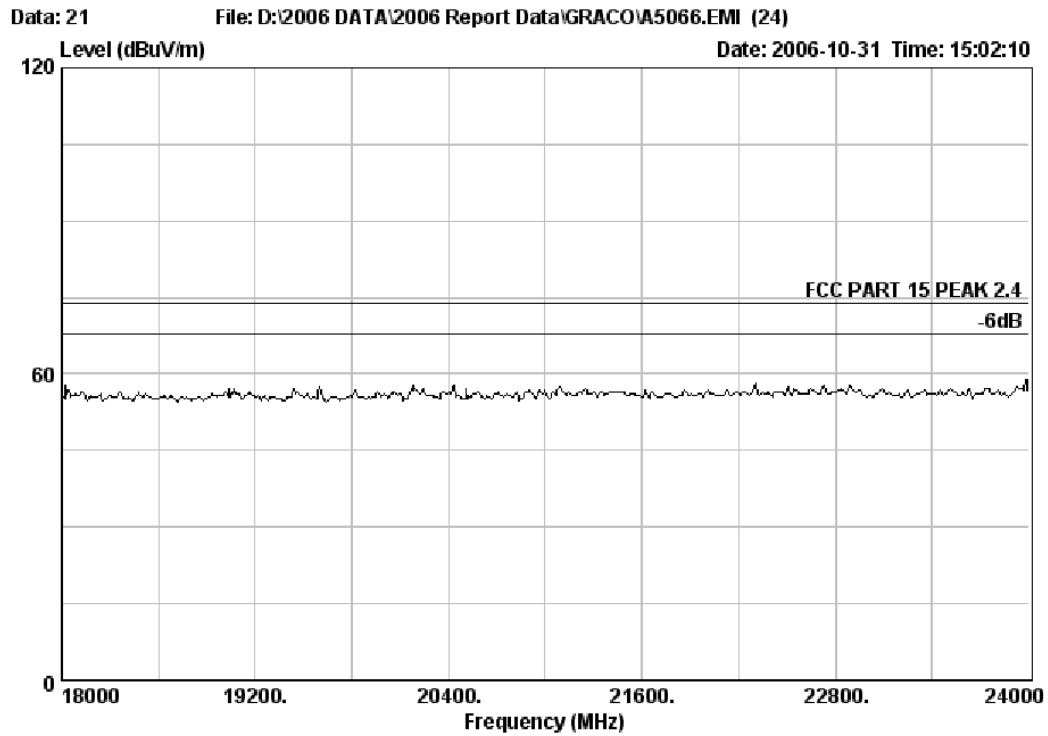

Site : 1# Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC 120V/60Hz  
 Test Spec : TX Mode  
 Test Engineer : Iceman  
 Comment : Temp:23' Humi:50%  
 Memo : CH9 2.4389GHz




7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

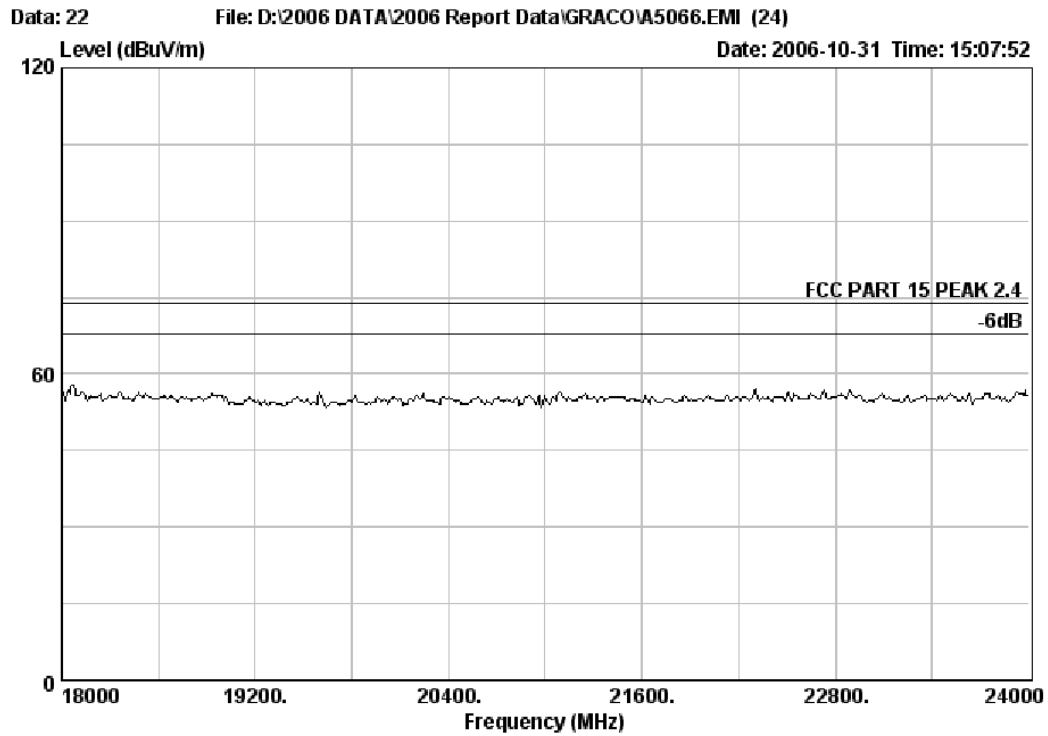

Site : 1# Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC 120V/60Hz  
 Test Spec : Iceman  
 Test Engineer : TX Mode  
 Comment : Temp:23' Humi:50%  
 Memo : CH9 2.4389GHz



7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

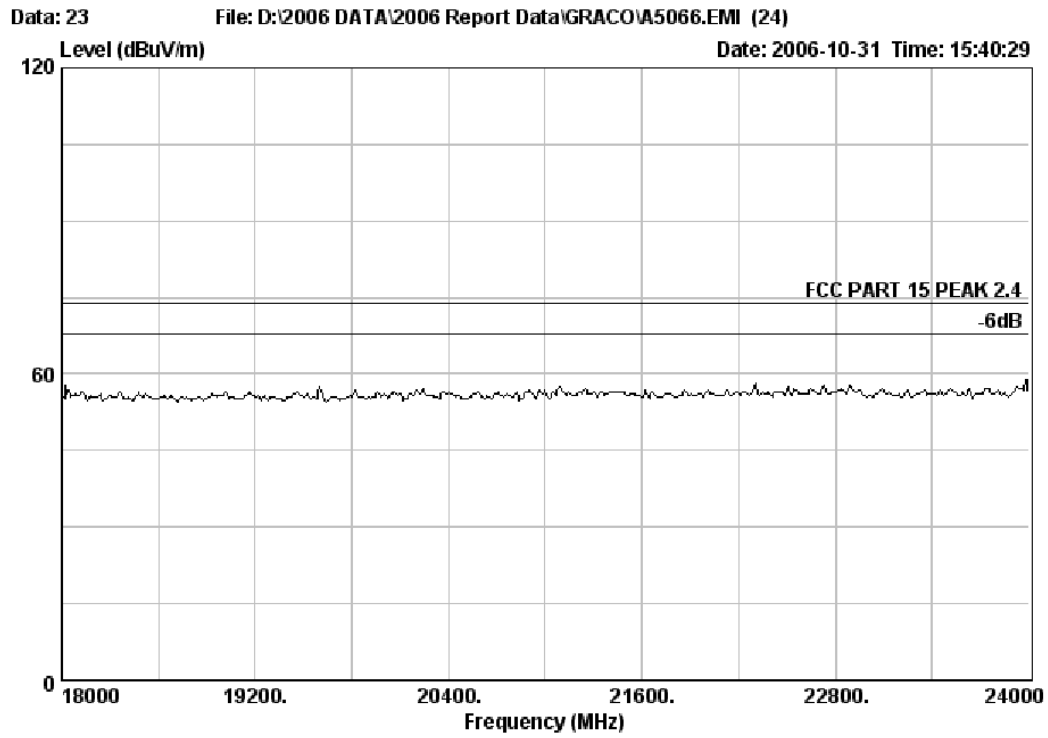

Site : 1# Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC 120V/60Hz  
 Test Spec : TX Mode  
 Test Engineer : Iceman  
 Comment : Temp:23' Humi:50%  
 Memo : CH18 2.4794GHz






7f8 ln120 neihs rd sec1  
 taipei, taiwan r.o.c.  
 tel:+886-2-26594900  
 http://www.audix.com

Data: 24

File: D:\2006 DATA\2006 Report Data\GRACO\A5066.EMI (24)

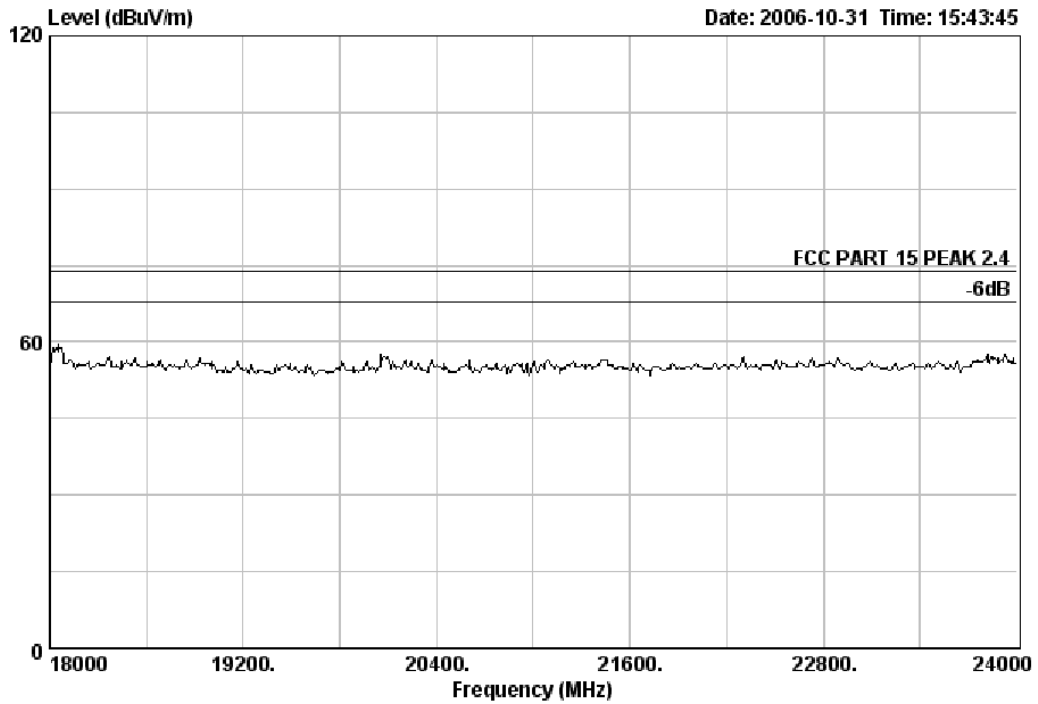

Site : 1# Chamber  
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL  
 EUT : Video Baby Monitor  
 M/N : A5066  
 OP Condition : DC 5V From Adaptor AC 120V/60Hz  
 Test Spec : Iceman  
 Test Engineer : TX Mode  
 Comment : Temp:23' Humi:50%  
 Memo : CH18 2.4794GHz