

Graco Children's Products, Inc

Video Baby Monitor

Model Number: A5083

Prepared for : Graco Children's Products, Inc
150 Oaklands Boulevard Exton, PA19341

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F06546
Date of Test : Oct.29~Nov.18,2006
Date of Report : Nov.20,2006

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION.....	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Facility	2-2
2.3. Measurement Uncertainty.....	2-2
3. POWER LINE CONDUCTED EMISSION TEST.....	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test.....	3-2
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST.....	4-1
4.1. Test Equipment.....	4-1
4.2. Block Diagram of Test Setup	4-2
4.3. Radiated Emission Limit Standard: FCC 15.249	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-4
4.7. Radiated Emission Test Results	4-4
5. BAND EDGES MEASUREMENT.....	5-1
5.1. Test Equipment.....	5-1
5.2. Block Diagram of Test Setup	5-1
5.3. Test Standard	5-1
5.4. Band Edges Limit	5-1
5.5. Test Procedure.....	5-1
6. DEVIATION TO TEST SPECIFICATIONS	6-1
7. PHOTOGRAPH	7-1
7.1. Photos of Radiated Emission Test (In Anechoic Chamber)	7-2

APPENDIX I (5 pages)
APPENDIX II (19 pages)

TEST REPORT DECLARATION

Applicant : Graco Children's Products, Inc
 Manufacturer : Honor Tone Limited
 EUT Description : Video Baby Monitor
 (A) MODEL NO. : A5083
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 4.5V Adaptor Input AC 120V/60Hz,
 DC 5V Adaptor Input AC 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 2006

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Oct.29~Nov.18, 2006

Prepared by : YoYo Wang
 YoYo Wang / Assistant

Reviewer : Sean Xing
 Sean Xing / Assistant Manager



Approved & Authorized Signer : Ken Lu
 Ken Lu / Deputy Manager

Name of the Representative of the Responsible Party : _____

Signature : _____

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Power Line Conducted Emission Test	FCC Part 15: 2006 ANSI C63.4-2003	Class C Limit	PASS
Radiated Emission Test	FCC Part 15: 2006 ANSI C63.4-2003	Class C Limit	PASS
Band edges measurement	FCC Part 15: 2006 ANSI C63.4-2003	Class C Limit	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	:	Video Baby Monitor
Model Number	:	A5083
Applicant	:	Graco Children's Products, Inc 150 Oaklands Boulevard Exton, PA19341
Manufacturer	:	Honor Tone Limited Block No.1 Tung Mun Industrial Zone, Dan Shui, Hui Yang, Hui Zhou, Guang Dong Province, P.R.C Post Code: 516211
Adaptor 1#	:	Manufacturer: GRACO, M/N: U045050D
Adaptor 2#	:	Manufacturer: GRACO, M/N: S005CU0500070
Date of Test	:	Oct.29~Nov.18, 2006

2.2. Test Facility

Site Description

- 3m Anechoic Chamber : Jun. 13, 2006 File on Federal
Communication Commission
Registration Number: 90454
- 3m & 10m Anechoic Chamber : Mar.15, 2004 File on Federal
Communication Commission
Registration Number: 794232
- EMC Lab. : Accredited by DATech, German
Registration Number: DAT-P-091/99-01
Feb. 02, 2004
- Accredited by NVLAP, USA
NVLAP Code: 200372-0
Apr.01, 2006

2.3. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	

3. POWER LINE CONDUCTED EMISSION TEST


3.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May 15, 06	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	May 15, 06	1 Year
3.	Terminator	Hubersuhner	50Ω	No. 1	May 15, 06	1 Year
4.	RF Cable	MIYAZAKI	5D-2W	LISN Cable 1#	Aug.16, 06	1/2 Year
5.	Coaxial Switch	Anritsu	MP59B	M55367	Aug.16, 06	1/2 Year
6.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100340	Aug.16, 06	1/2 Year

3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators

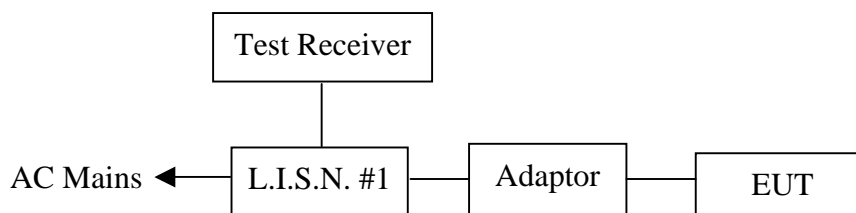

(EUT: Video Baby Monitor)

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Video Baby Monitor (EUT)

Model Number	:	A5083
Serial Number	:	N/A
Manufacturer	:	Honor Tone Limited

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipment.

3.5.3. Let the EUT work in test mode (Running) and measure it.

3.6. Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

The test result are reported on Section 3.7., all the scanning waveforms for Conducted Emission Test are attached in Appendix I.

3.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 150kHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.




NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou,Shenzhen,Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 6

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R1d.EMI (12)

Date: 2006-11-05 Time: 11:59:40

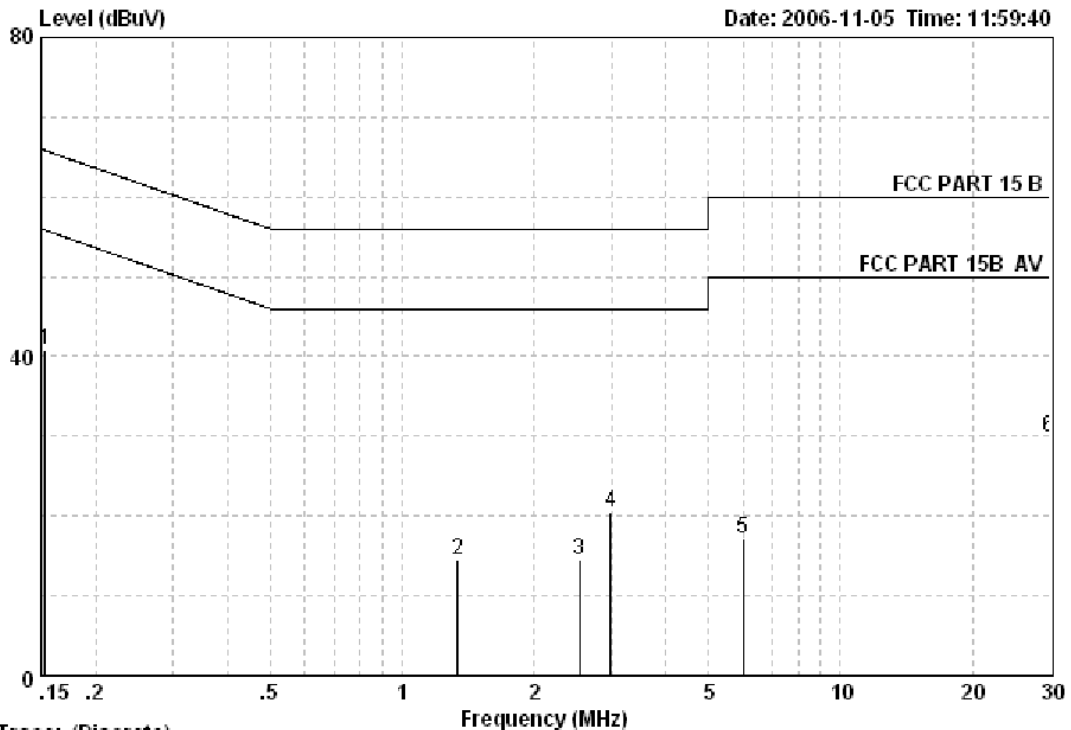

Trace: (Discrete)

Site no. : Audix 1# Shielded Room Conductionno. : 6
 Dis. / Ant. : -- VA KNW-407 LISN Phase :
 Limit : FCC PART 15 B
 Env. / Ins. : 23.5*C/55% ESHS10 Engineer : Chinalee
 EUT : Video Baby Monitor M/N:A5083
 Power Rating : DC 4.5V Adaptor Input AC 120V/60Hz
 Test Mode : Running
 : Adaptor 1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.80	10.28	29.76	40.84	65.82	-24.98	QP
2	1.34	0.21	10.17	4.09	14.47	56.00	-41.53	QP
3	2.53	0.21	10.17	4.20	14.58	56.00	-41.42	QP
4	2.99	0.21	10.17	10.16	20.54	56.00	-35.46	QP
5	5.99	0.20	10.20	6.70	17.10	60.00	-42.90	QP
6	30.00	0.72	10.20	18.86	29.78	60.00	-30.22	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.




NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou, Shenzhen, Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 5

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R\td.EMI (12)

Date: 2006-11-05 Time: 11:54:10

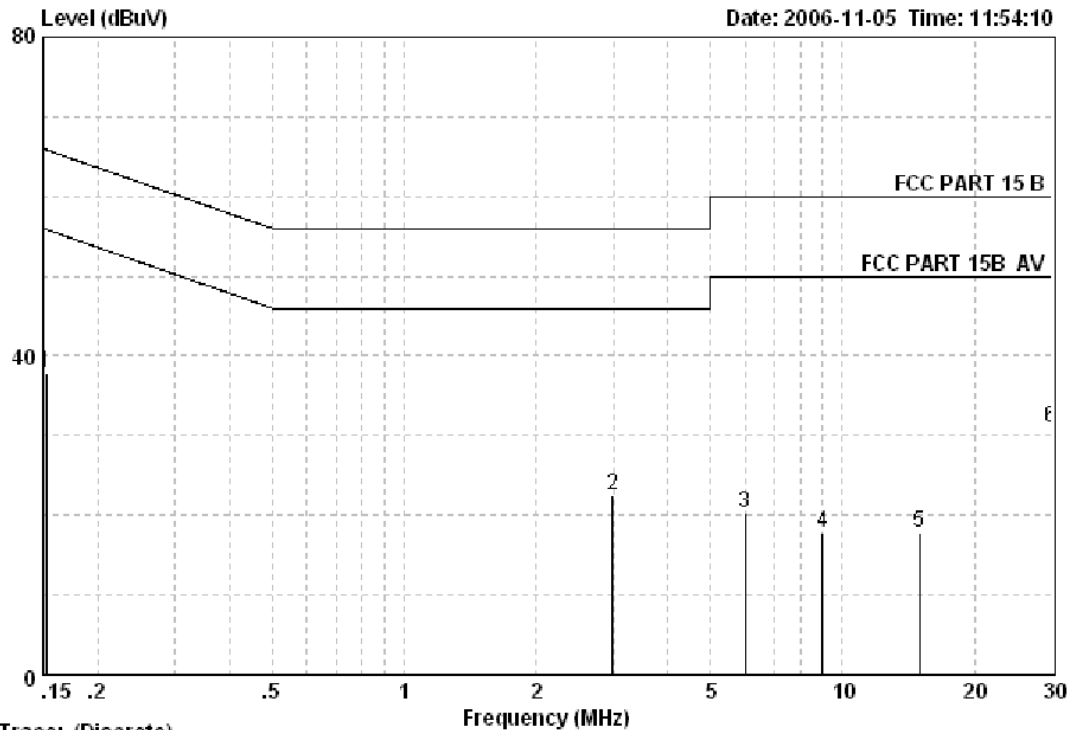

Trace: (Discrete)

Site no. : Audix 1# Shielded Room Conductionno. : 5
 Dis. / Ant. : -- VB KNW-407 LISN Phase :
 Limit : FCC PART 15 B
 Env. / Ins. : 23.5°C/55% ESHS10 Engineer : Chinalee
 EUT : Video Baby Monitor M/N:A5083
 Power Rating : DC 4.5V Adaptor Input AC 120V/60Hz
 Test Mode : Running
 : Adaptor 1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	1.44	10.28	26.08	37.80	65.87	-28.07	QP
2	2.99	0.31	10.17	12.04	22.52	56.00	-33.48	QP
3	5.99	0.32	10.20	9.78	20.30	60.00	-39.70	QP
4	9.01	0.37	10.24	7.14	17.75	60.00	-42.25	QP
5	14.99	0.54	10.28	7.02	17.84	60.00	-42.16	QP
6	30.00	0.82	10.20	19.88	30.90	60.00	-29.10	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.




NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou,Shenzhen,Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 12

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R1id.EMI (12)

Date: 2006-11-18 Time: 13:33:34

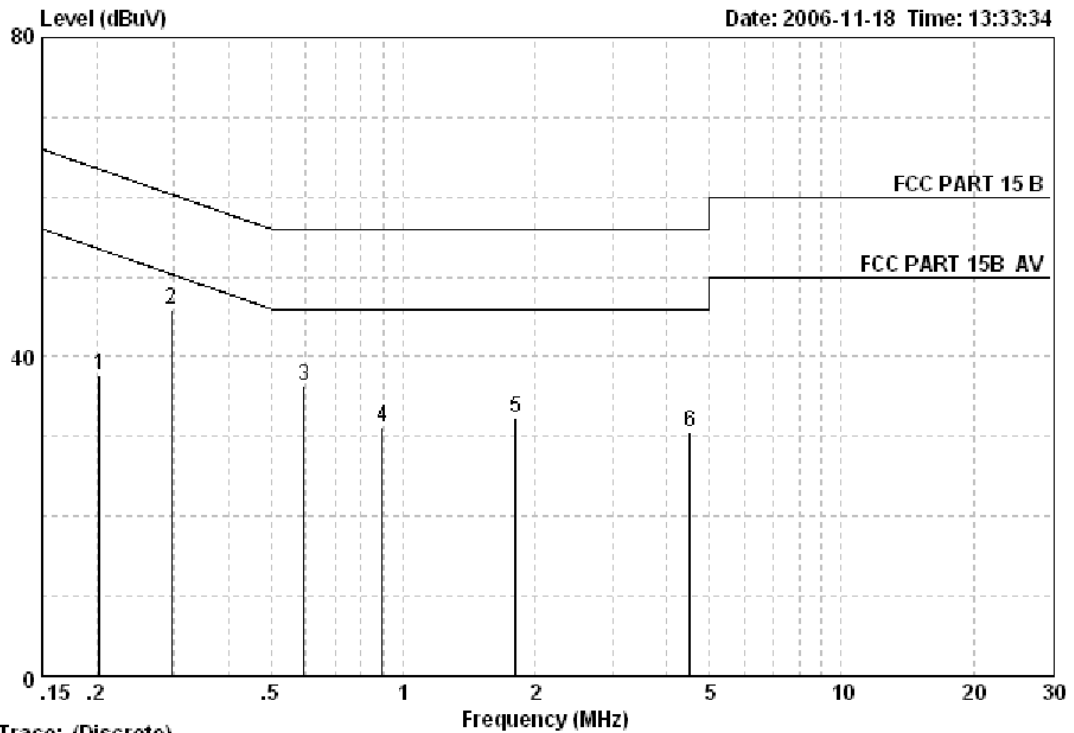

Trace: (Discrete)
 Site no. : Audix 1# Conduction Data no. : 12
 Dis. / Ant. : -- VA KNW-407 LISN Phase :
 Limit : FCC PART 15 B
 Env. / Ins. : 23.5°C/55% ESHS10 Engineer : Chinalee
 EUT : Video Baby Monitor M/N:A5083
 Power Rating : DC 5V Adaptor Input AC 120V/60Hz
 Test Mode : Running
 : Adaptor 2

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.20	0.53	10.15	27.00	37.68	63.49	-25.81	QP
2	0.30	0.42	10.08	35.40	45.90	60.37	-14.47	QP
3	0.59	0.24	10.12	26.04	36.40	56.00	-19.60	QP
4	0.89	0.22	10.13	20.82	31.17	56.00	-24.83	QP
5	1.81	0.20	10.15	21.90	32.25	56.00	-23.75	QP
6	4.50	0.20	10.18	20.06	30.44	56.00	-25.56	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou,Shenzhen,Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 10

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R1id.EMI (12)

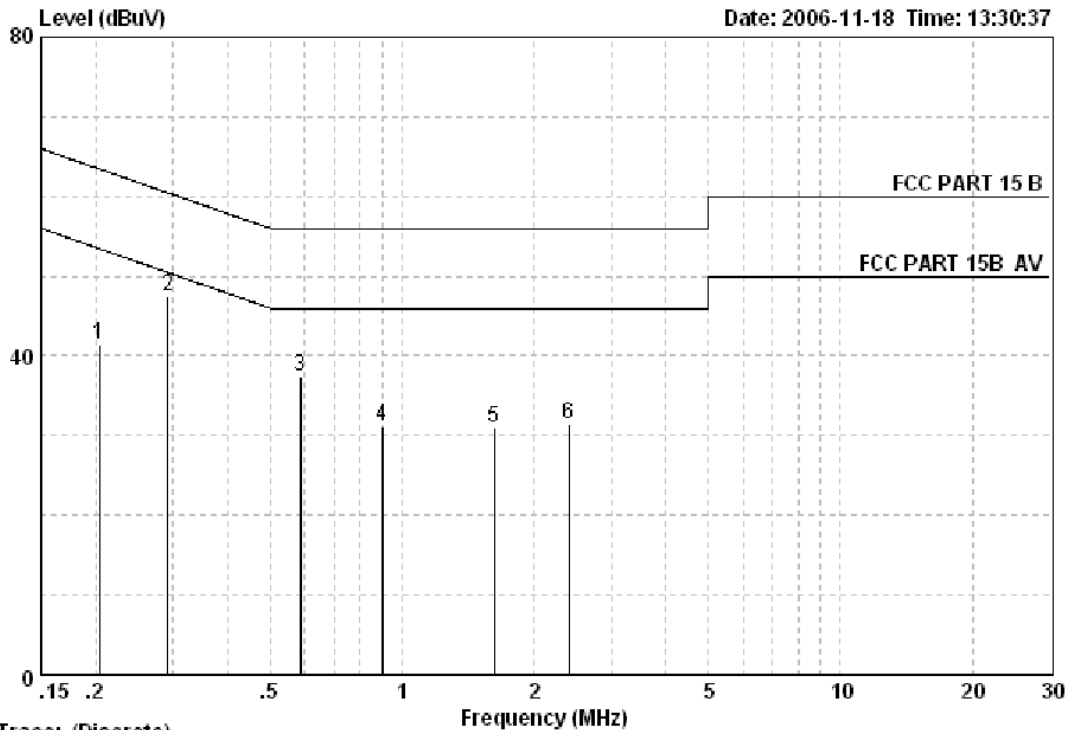

Trace: (Discrete)

Site no. : Audix 1# Conduction Data no. : 10
 Dis. / Ant. : -- VB KNW-407 LISN Phase :
 Limit : FCC PART 15 B
 Env. / Ins. : 23.5°C/55% ESHS10 Engineer : Chinalee
 EUT : Video Baby Monitor M/N:A5083
 Power Rating : DC 5V Adaptor Input AC 120V/60Hz
 Test Mode : Running
 : Adaptor 2

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.20	0.95	10.15	30.36	41.46	63.45	-21.99	QP
2	0.29	0.78	10.08	36.60	47.46	60.46	-13.00	QP
3	0.59	0.47	10.12	26.80	37.39	56.00	-18.61	QP
4	0.90	0.37	10.13	20.70	31.20	56.00	-24.80	QP
5	1.62	0.32	10.17	20.52	31.01	56.00	-24.99	QP
6	2.40	0.31	10.17	21.04	31.52	56.00	-24.48	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

The following test equipments are used during the radiated emission Test :

4.1.1. For Anechoic Chamber

Frequency rang: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 15, 06	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep. 12,06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 30, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 30, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 30, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 30, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 30, 06	1/2 Year

Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 15, 06	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 28, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 28, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 28, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 28, 06	1/2 Year
10.	Spectrum	Agilent	E4407B	MY41440292	May 15, 06	1 Year
11.	Amp	HP	8449B	3008A00863	May 15, 06	1 Year
12.	Antenna	EMCO	3115	9607-4877	Jun. 05, 05	1.5 Year

4.2. Block Diagram of Test Setup


4.2.1. Block Diagram of connection between EUT and simulators



(EUT: Video Baby Monitor)

4.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

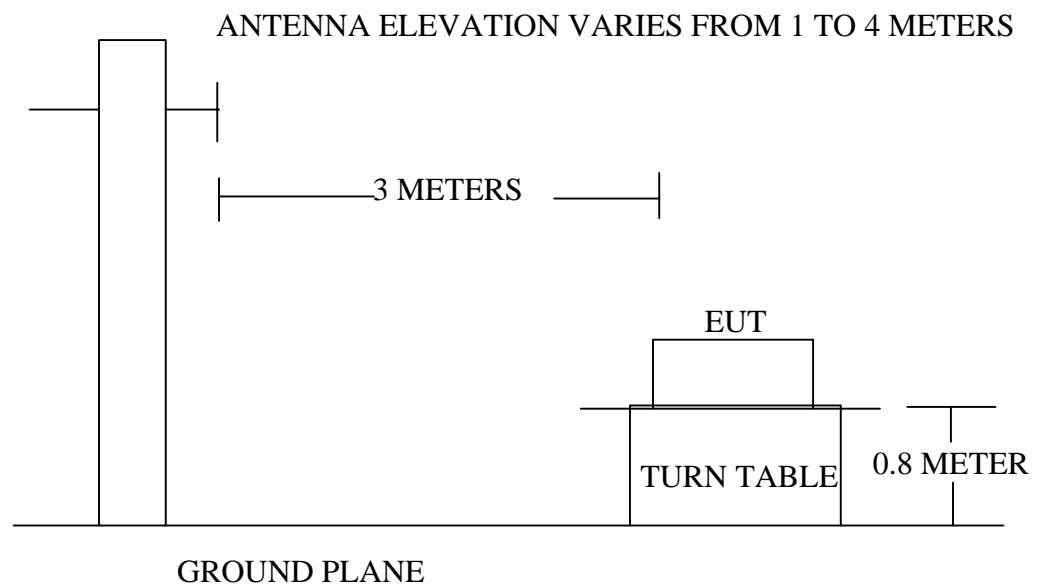

4.3. Radiated Emission Limit Standard: FCC 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Local Oscillator:	3	114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. Video Baby Monitor (EUT)

Model Number : A5083
 Serial Number : N/A
 Manufacturer : Honor Tone Limited

4.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown in Section 4.2..

4.5.2. Let the EUT work in test modes (TX Mode) and test it.

4.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2003 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the VBW is set at 3MHz and RBW is set at 1MHz for measurement below 1GHz.

The frequency range from 30MHz to 1000MHz and above 1GHz. are checked.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

4.7. Radiated Emission Test Results


PASS.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
http://www.audix.com.cn

Data: 7 File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

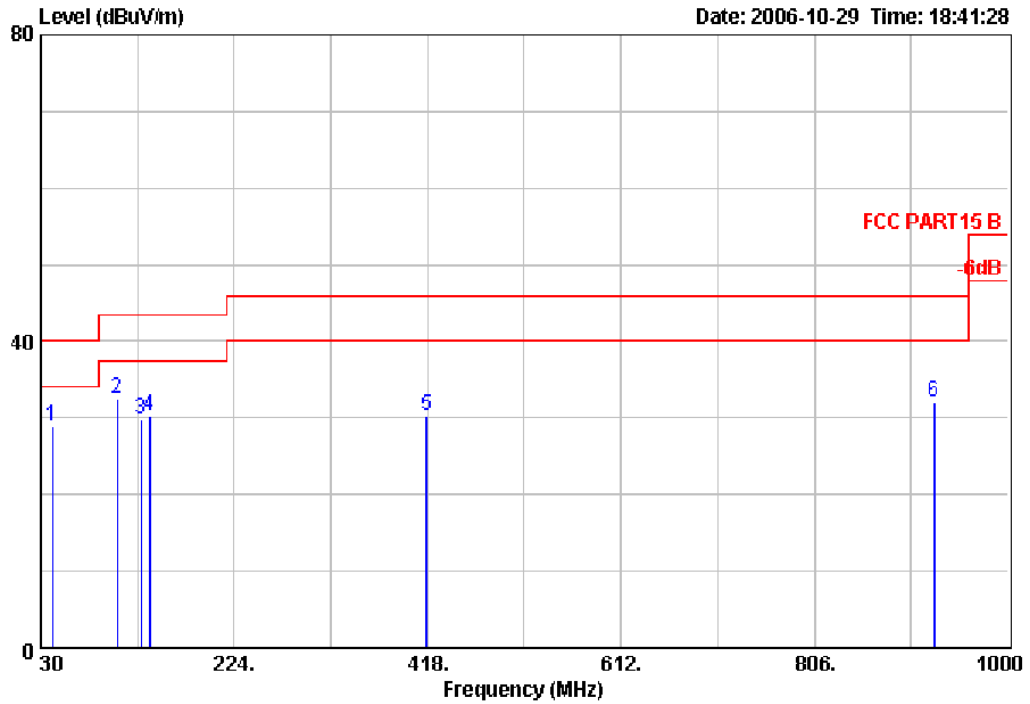

Site : 3# Chamber Radiation
Condition : FCC PART15 B 3m 2598FACTOR HORIZONTAL
EUT : Video Baby Monitor
M/N : A5083
OP Condition : Tx mode
Test Spec : DC 4.5W From ADAPTOR 120V/60Hz
Test Engineer : Jany
Comment : Temp:23°C Humi:53%
Memo : CH1 2.403GHz
: Adaptor 1


	Freq	Level	Over	Limit	Read	Antenna	Cable	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	
			dB	dBuV/m	dBuV	dB/m	dB	
1	41.64	28.97	-11.03	40.00	14.32	13.39	1.26	
2	106.63	32.47	-11.03	43.50	19.09	11.14	2.24	
3	130.88	29.89	-13.61	43.50	15.44	11.98	2.47	
4	138.64	30.22	-13.28	43.50	15.68	11.98	2.56	
5	417.03	30.28	-15.72	46.00	8.32	17.15	4.81	
6	926.28	32.19	-13.81	46.00	1.16	23.60	7.43	

Remark: 1. All readings are Quasi-Peak values.
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
http://www.audix.com.cn

Data: 8 File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

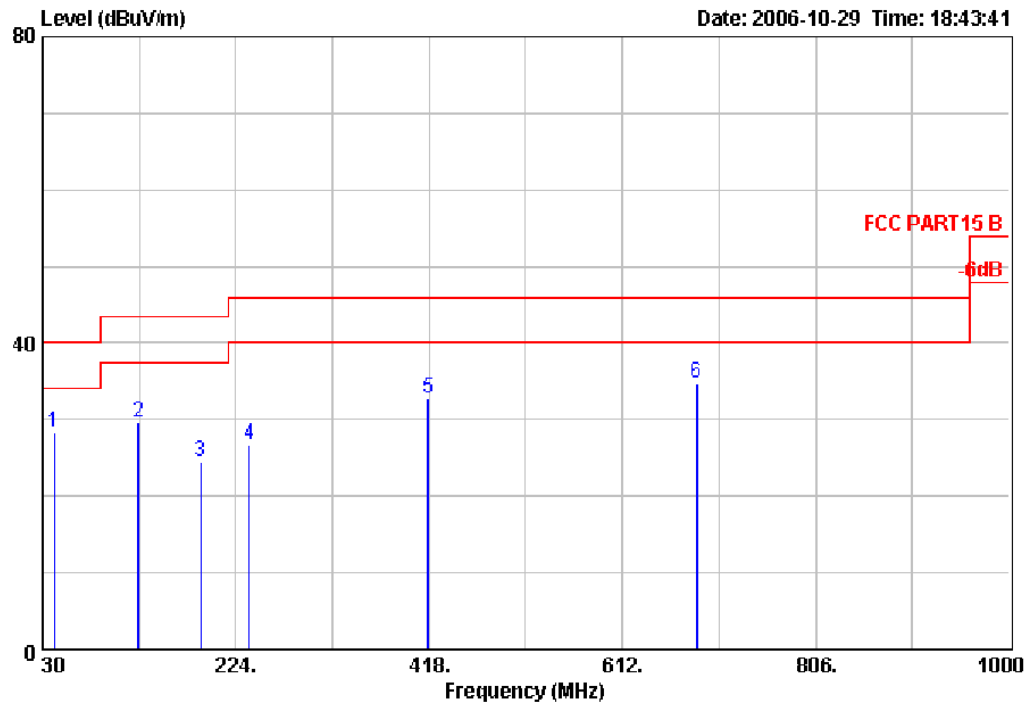

Site : 3# Chamber Radiation
 Condition : FCC PART15 B 3m 2598FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : Tx mode
 Test Spec : DC 4.5V From ADAPTOR 120V/60Hz
 Test Engineer : Jany
 Comment : Temp:23C Humi:53%
 Memo : CH1 2.403GHz
 : Adaptor 1


	Freq	Level	Over	Limit	Read	Antenna	Cable	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV/m	dBuV	dB/m	dB	
1	41.64	28.24	-11.76	40.00	13.59	13.39	1.26	
2	126.03	29.68	-13.82	43.50	15.37	11.92	2.39	
3	189.08	24.43	-19.07	43.50	11.82	9.56	3.05	
4	237.58	26.70	-19.30	46.00	11.57	11.65	3.48	
5	417.03	32.68	-13.32	46.00	10.72	17.15	4.81	
6	686.69	34.76	-11.24	46.00	7.57	20.90	6.29	

Remark: 1. All readings are Quasi-Peak values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
http://www.audix.com.cn

Data: 10 File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

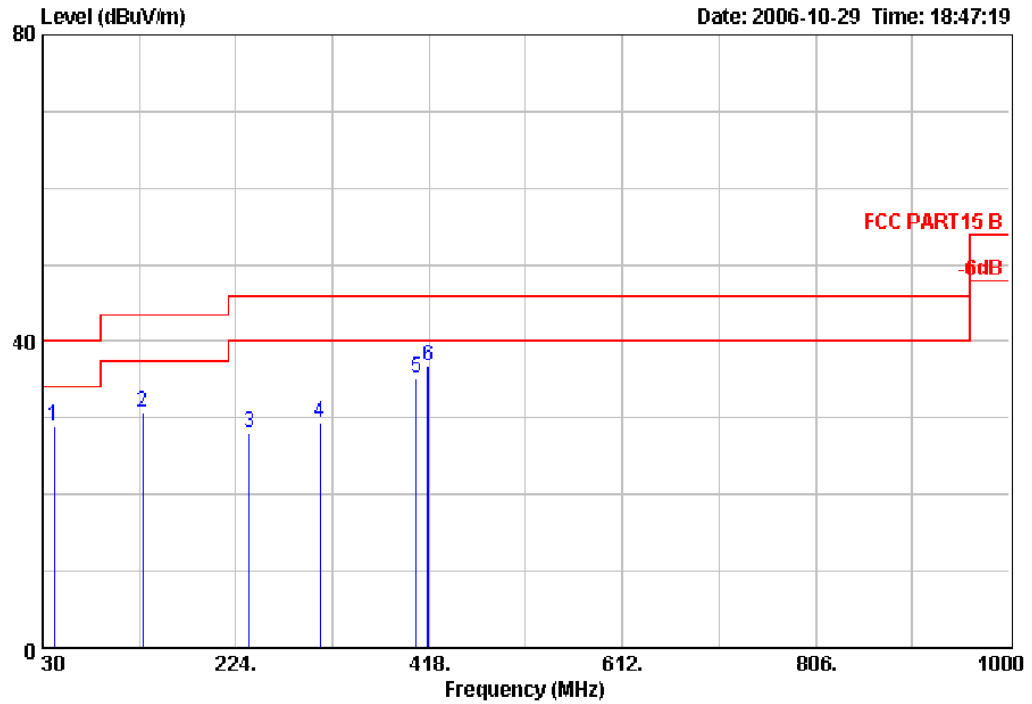

Site : 3# Chamber Radiation
 Condition : FCC PART15 B 3m 2598FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : Tx mode
 Test Spec : DC 4.5W From ADAPTOR 120V/60Hz
 Test Engineer : Jany
 Comment : Temp:23C Humi:53%
 Memo : CH9 2.4339GHz
 : Adaptor 1


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	41.64	29.08	-10.92	40.00	14.43	13.39	1.26	
2	130.88	30.84	-12.66	43.50	16.39	11.98	2.47	
3	237.58	27.99	-18.01	46.00	12.86	11.65	3.48	
4	308.39	29.31	-16.69	46.00	11.39	13.90	4.02	
5	405.39	35.15	-10.85	46.00	13.59	16.85	4.71	
6	417.03	36.66	-9.34	46.00	14.70	17.15	4.81	

Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
http://www.audix.com.cn

Data: 9 File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

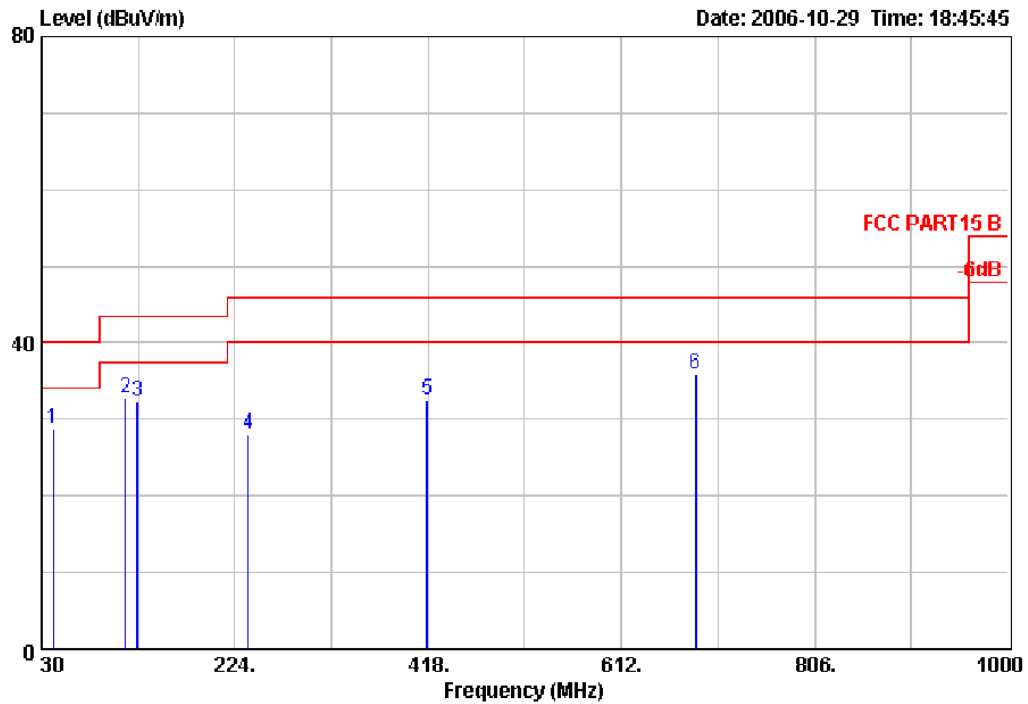

Site : 3# Chamber Radiation
 Condition : FCC PART15 B 3m 2598FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : Tx mode
 Test Spec : DC 4.5W From ADAPTOR 120V/60Hz
 Test Engineer : Jany
 Comment : Temp:23°C Humi:53%
 Memo : CH9 2.4339GHz
 : Adaptor 1


	Freq	Level	Over	Limit	Read	Antenna	Cable	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	
			dB	dBuV/m	dBuV	dB/m	dB	
1	41.64	28.64	-11.36	40.00	13.99	13.39	1.26	
2	114.39	32.82	-10.68	43.50	18.84	11.77	2.21	
3	126.03	32.27	-11.23	43.50	17.96	11.92	2.39	
4	237.58	28.12	-17.88	46.00	12.99	11.65	3.48	
5	417.03	32.52	-13.48	46.00	10.56	17.15	4.81	
6	686.69	35.95	-10.05	46.00	8.76	20.90	6.29	

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
http://www.audix.com.cn

Data: 11 File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

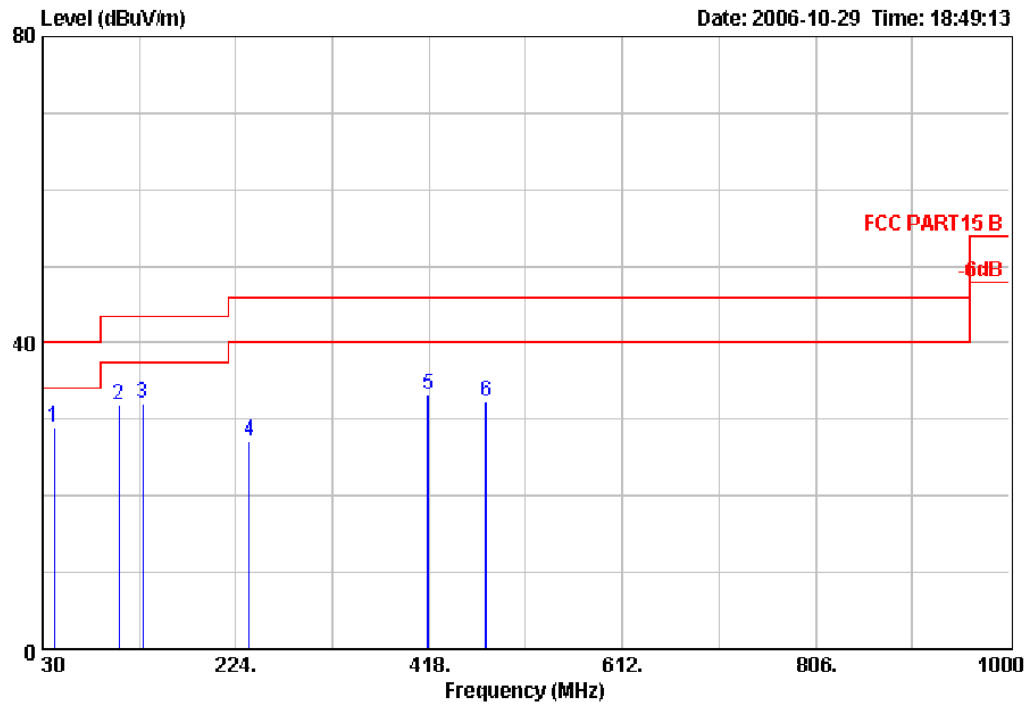

Site : 3# Chamber Radiation
 Condition : FCC PART15 B 3m 2598FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : Tx mode
 Test Spec : DC 4.5V From ADAPTOR 120V/60Hz
 Test Engineer : Jany
 Comment : Temp:23°C Humi:53%
 Memo : CH18 2.4794GHz
 : Adaptor 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB
1	41.64	28.92	-11.08	40.00	14.27	13.39	1.26
2	106.63	31.79	-11.71	43.50	18.41	11.14	2.24
3	130.88	32.04	-11.46	43.50	17.59	11.98	2.47
4	237.58	27.16	-18.84	46.00	12.03	11.65	3.48
5	417.03	33.12	-12.88	46.00	11.16	17.15	4.81
6	475.23	32.32	-13.68	46.00	9.70	17.80	4.82


Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
http://www.audix.com.cn

Data: 12

File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

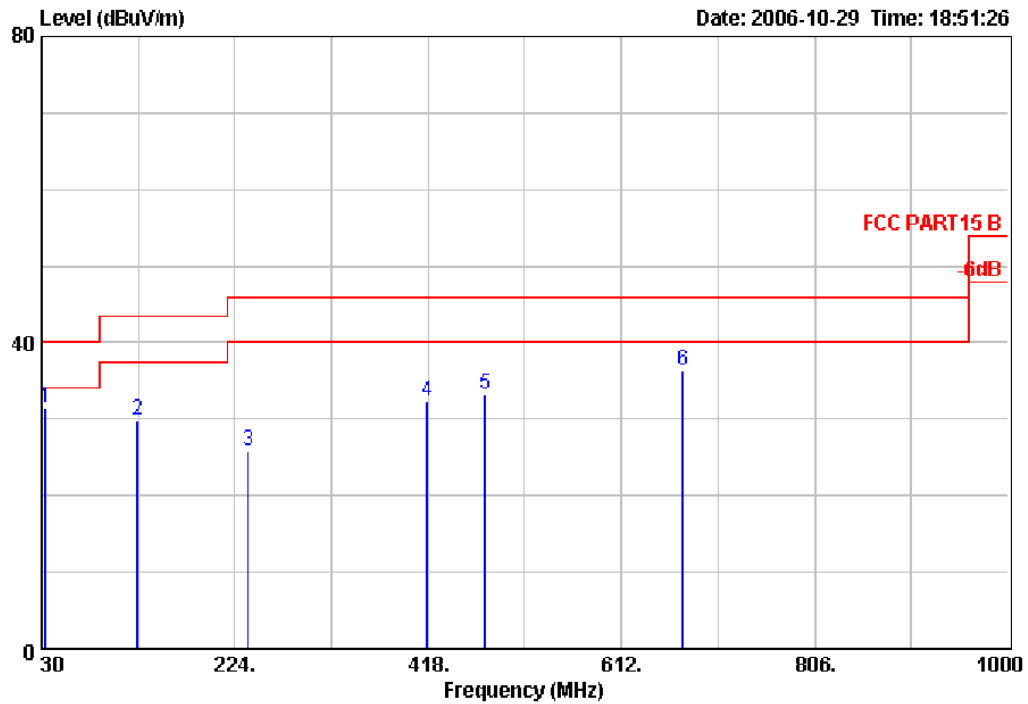


Site : 3# Chamber Radiation
 Condition : FCC PART15 B 3m 2598FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : Tx mode
 Test Spec : DC 4.5W From ADAPTOR 120V/60Hz
 Test Engineer : Jany
 Comment : Temp:23°C Humi:53%
 Memo : CH18 2.4794GHz
 : Adaptor 1

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	33.88	31.45	-8.55	40.00	12.58	17.59	1.28	
2	126.03	29.77	-13.73	43.50	15.46	11.92	2.39	
3	237.58	25.88	-20.12	46.00	10.75	11.65	3.48	
4	417.03	32.22	-13.78	46.00	10.26	17.15	4.81	
5	475.23	33.18	-12.82	46.00	10.56	17.80	4.82	
6	674.08	36.25	-9.75	46.00	9.26	20.74	6.25	

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading +Cable Loss



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

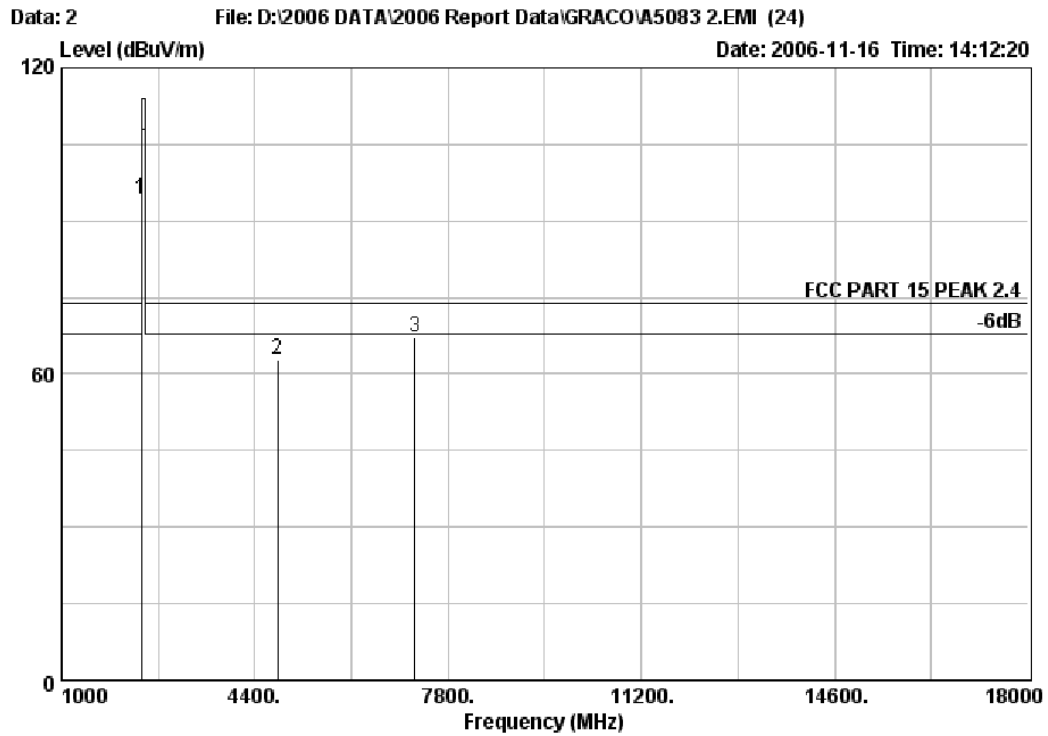

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp 23°C Humi 56%
 Memo : CH1 2.403GHz
 : Adaptor 2


	Freq	Level	Limit	Over	Antenna	Read	Cable	
	MHz	dBuV/m	Line	Limit	Factor	Level	Loss	Remark
			dBuV/m	dB	dB/m	dBuV	dB	
1	2402.90	94.35	114.00	-19.65	29.03	94.30	6.20	Peak
2	4805.89	62.92	74.00	-11.08	33.98	53.89	9.55	Peak
3	7208.89	67.32	74.00	-6.68	37.33	53.67	10.76	Peak

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

Data: 3 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

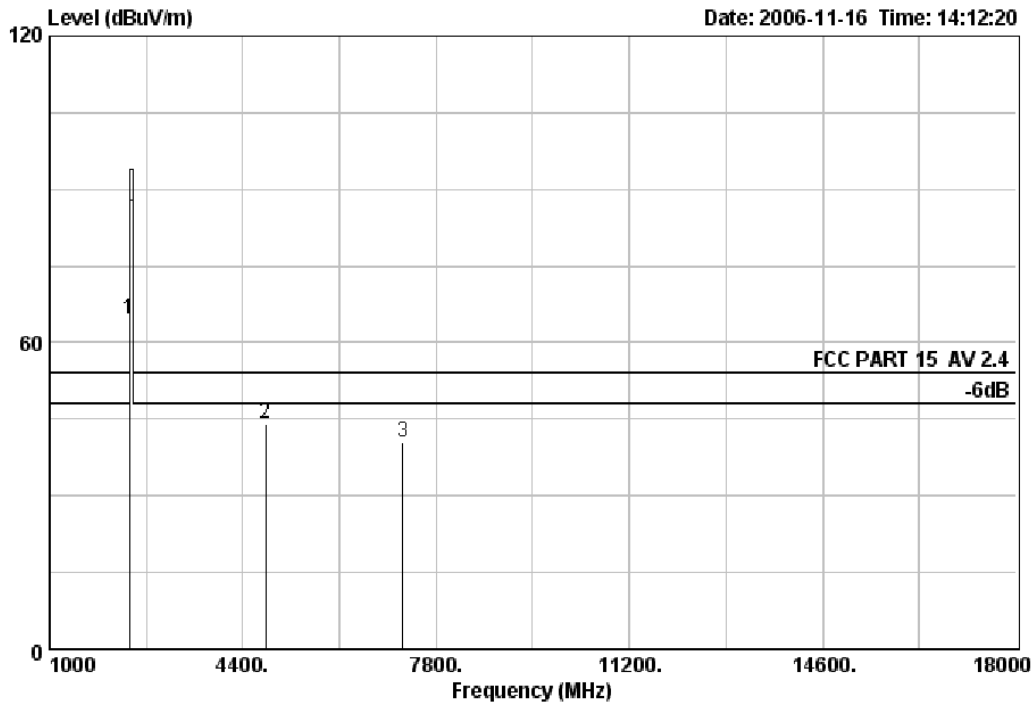

Site : Audix No.1 Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp 23°C Humi 56%
 Memo : CH1 2.403GHz
 : Adaptor 2


	Freq	Level	Limit	Over	Antenna	Read	Cable	
	MHz	dBuV/m	Line	Limit	Factor	Level	Loss	Remark
			dBuV/m	dB	dB/m	dBuV	dB	
1	2402.89	64.54	94.00	-29.46	29.03	64.49	6.20	Average
2	4805.89	44.18	54.00	-9.82	33.98	35.15	9.55	Average
3	7207.90	40.49	54.00	-13.51	37.33	26.84	10.76	Average

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

Data: 5 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

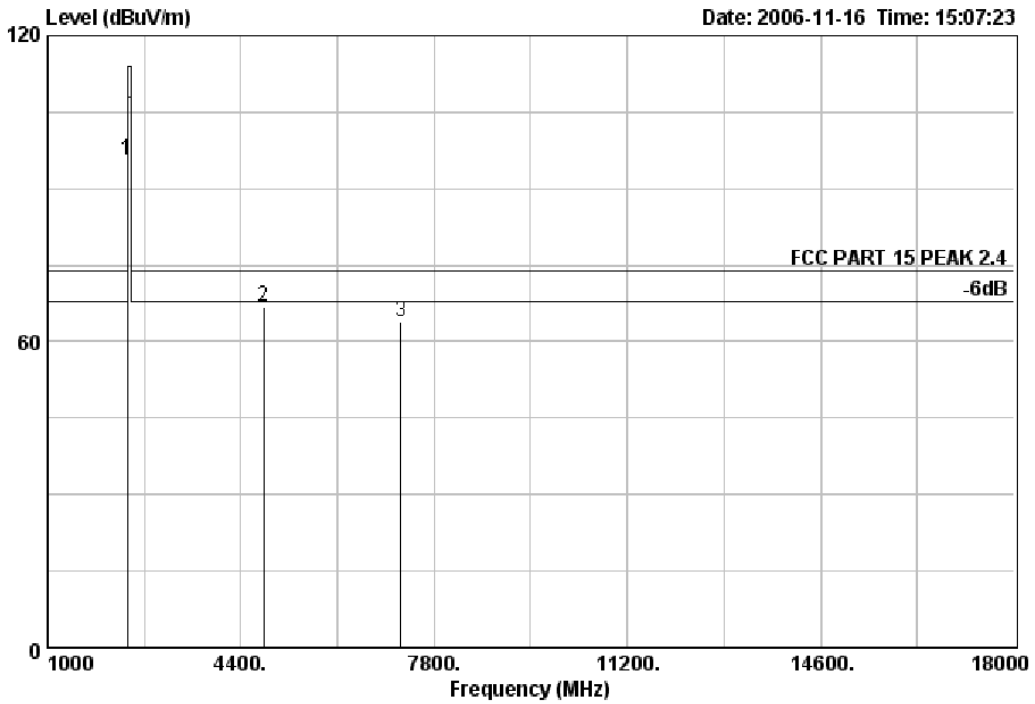

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : DC 5V From Adaptor AC120W/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23°C Humi :56%
 Memo : CH1 2.403GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	2403.00	95.55	114.00	-18.45	29.03	95.50	6.20 Peak
2	4806.00	66.97	74.00	-7.03	33.98	57.94	9.55 Peak
3	7208.90	63.81	74.00	-10.19	37.33	50.16	10.76 Peak

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

Data: 6 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

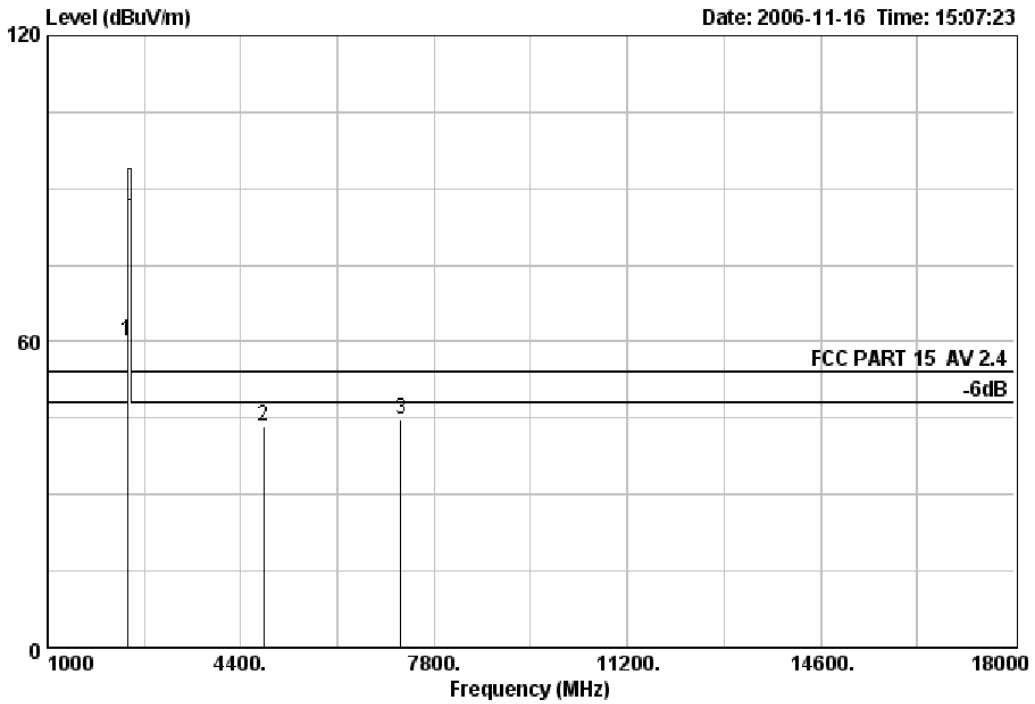

Site : Audix No.1 Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : DC 5V From Adaptor AC120W/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23°C Humi :56%
 Memo : CH1 2.403GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	2402.90	60.17	94.00	-33.83	29.03	60.12	6.20 Average
2	4805.81	43.31	54.00	-10.69	33.98	34.28	9.55 Average
3	7208.80	44.72	54.00	-9.28	37.33	31.07	10.76 Average

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 ln120 meihu rd secl
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

Data: 11 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

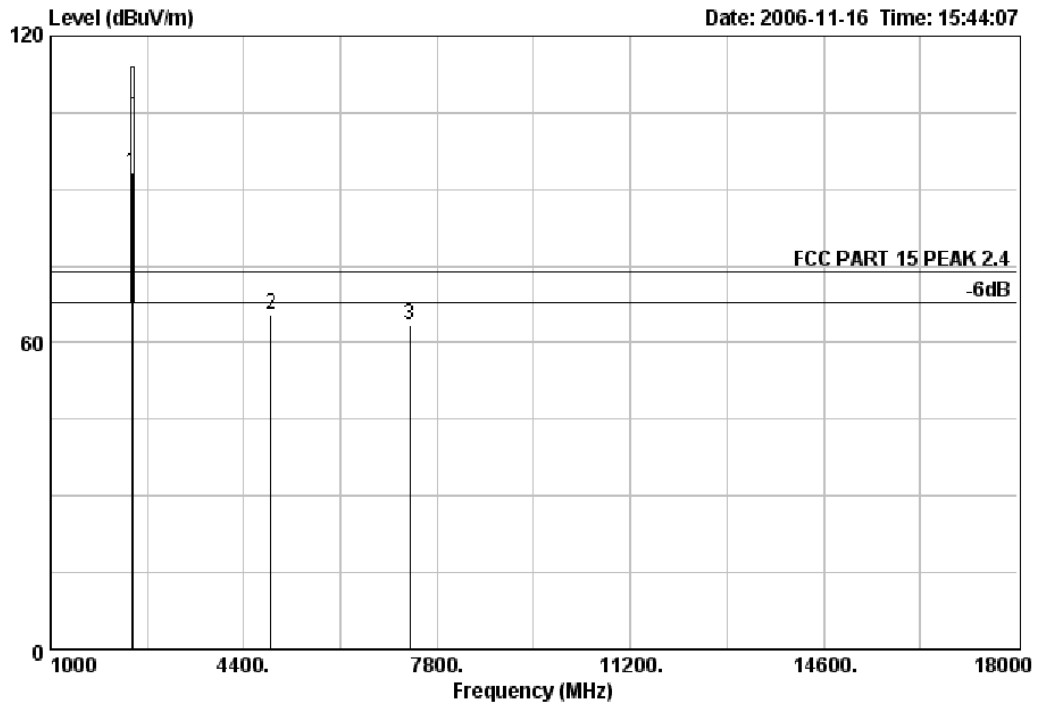

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jamy
 Comment : Temp 23°C Humi 56%
 Memo : CH9 2.4389GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	2439.00	93.20	114.00	-20.80	29.11	93.01	6.25 Peak
2	4878.00	65.49	74.00	-8.51	34.16	56.10	9.71 Peak
3	7317.00	63.42	74.00	-10.58	37.52	49.55	10.82 Peak

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 km20 meihu rd secl
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

Data: 12 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

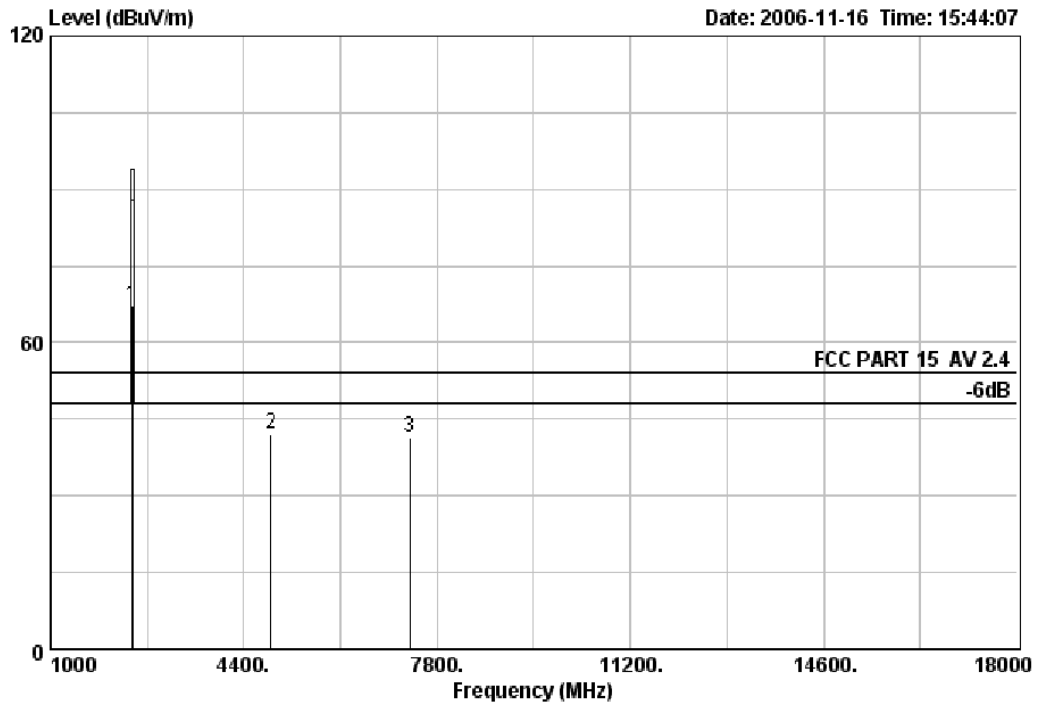

Site : Audix No.1 Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jamy
 Comment : Temp 23°C Humi 56%
 Memo : CH9 2.4389GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	2438.90	67.26	94.00	-26.74	29.11	67.07	6.25 Average
2	4877.90	42.02	54.00	-11.98	34.16	32.63	9.71 Average
3	7317.00	41.50	54.00	-12.50	37.52	27.63	10.82 Average

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 km20 meihu rd sect
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

Data: 8 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

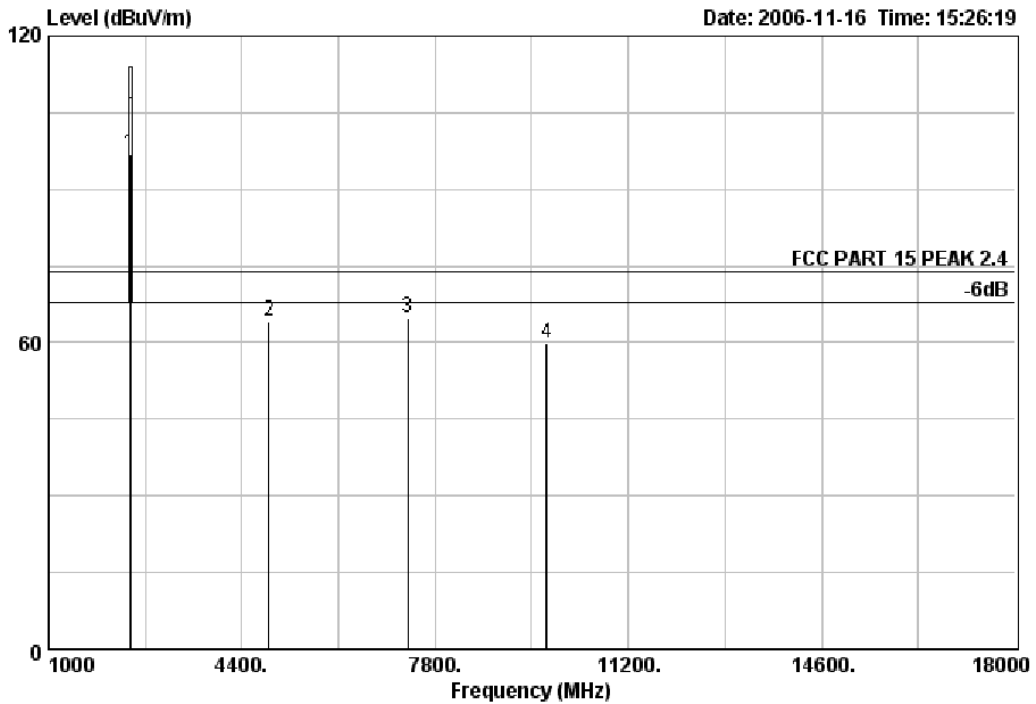

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jamy
 Comment : Temp 23°C Humi 56%
 Memo : CH9 2.4389GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	2439.00	96.90	114.00	-17.10	29.11	96.71	6.25 Peak
2	4877.95	64.17	74.00	-9.83	34.16	54.78	9.71 Peak
3	7316.80	64.96	74.00	-9.04	37.52	51.09	10.82 Peak
4	9755.90	59.81	74.00	-14.19	38.02	46.24	11.55 Peak

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 km20 meihu rd secl
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

Data: 9 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

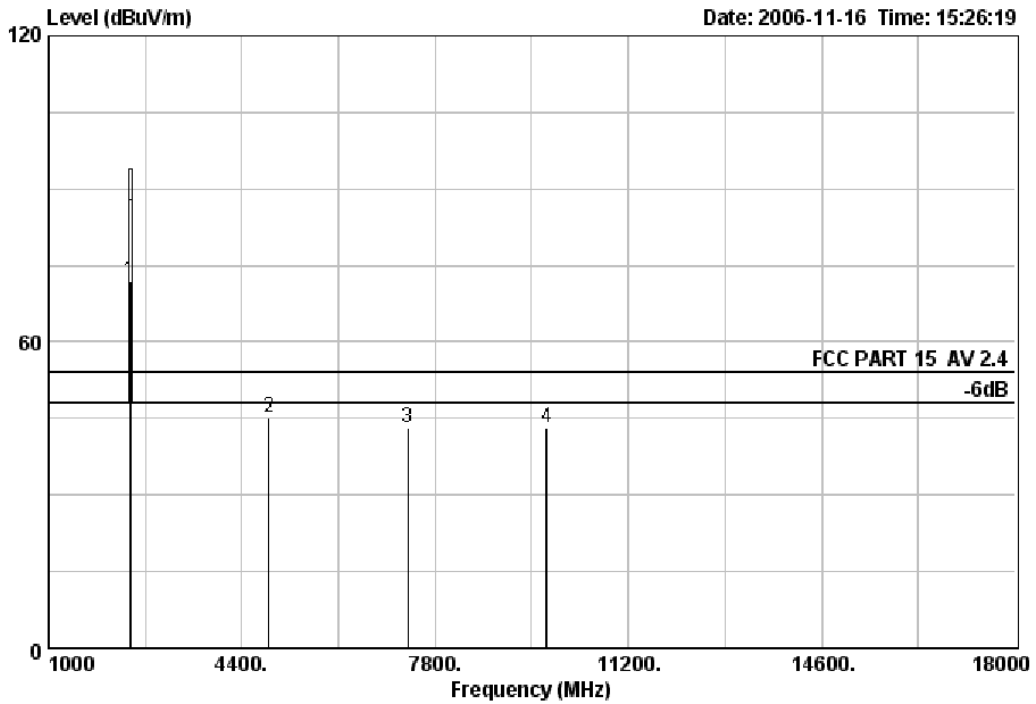

Site : Audix No.1 Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : DC 5V From Adaptor AC120W/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jamy
 Comment : Temp 23°C Humi 56%
 Memo : CH9 2.4389GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	Line	Limit	Level	Loss	
			dBuV/m	dB	dB/m	dB	
1	2438.90	71.76	94.00	-22.24	29.11	71.57	6.25 Average
2	4878.00	45.02	54.00	-8.98	34.16	35.63	9.71 Average
3	7316.90	42.96	54.00	-11.04	37.52	29.09	10.82 Average
4	9756.10	43.18	54.00	-10.82	38.02	29.61	11.55 Average

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 km20 meihu rd secl
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

Data: 14 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

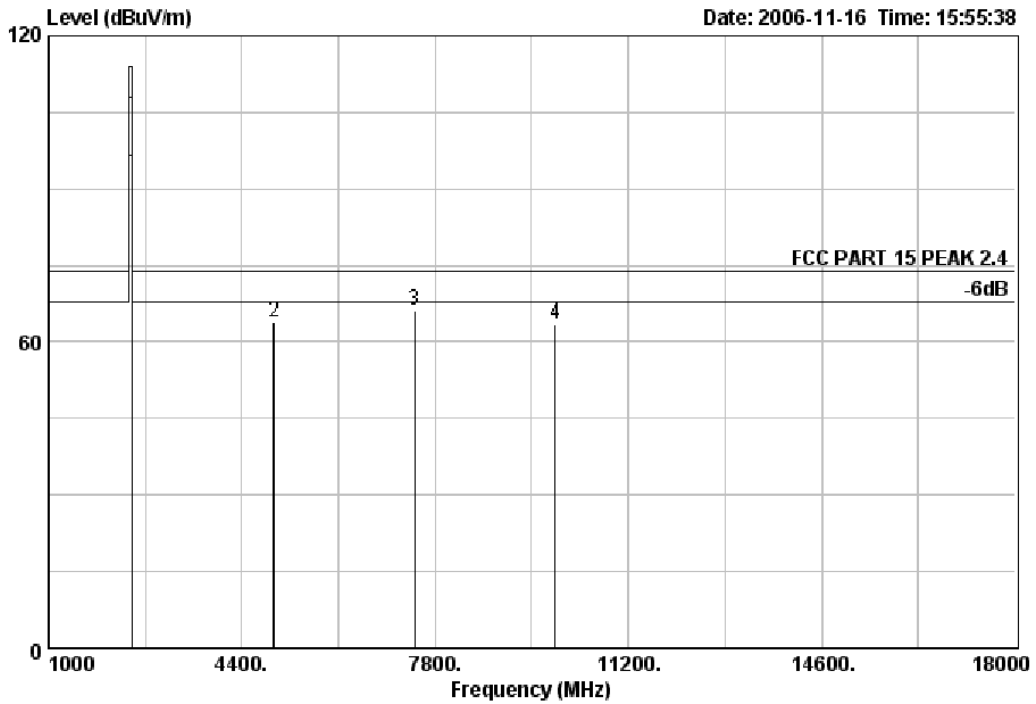

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : DC 5V From Adaptor AC120W/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jamy
 Comment : Temp 23°C Humi 56%
 Memo : CH18 2.4794GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	dBuV/m	dB	dB/m	dBuV	dB
1	2479.50	92.84	114.00	-21.16	29.19	92.51	6.30 Peak
2	4959.00	63.84	74.00	-10.16	34.38	54.06	9.86 Peak
3	7438.50	66.23	74.00	-7.77	37.72	52.10	10.90 Peak
4	9917.80	63.51	74.00	-10.49	37.89	50.20	11.56 Peak

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

Data: 15 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

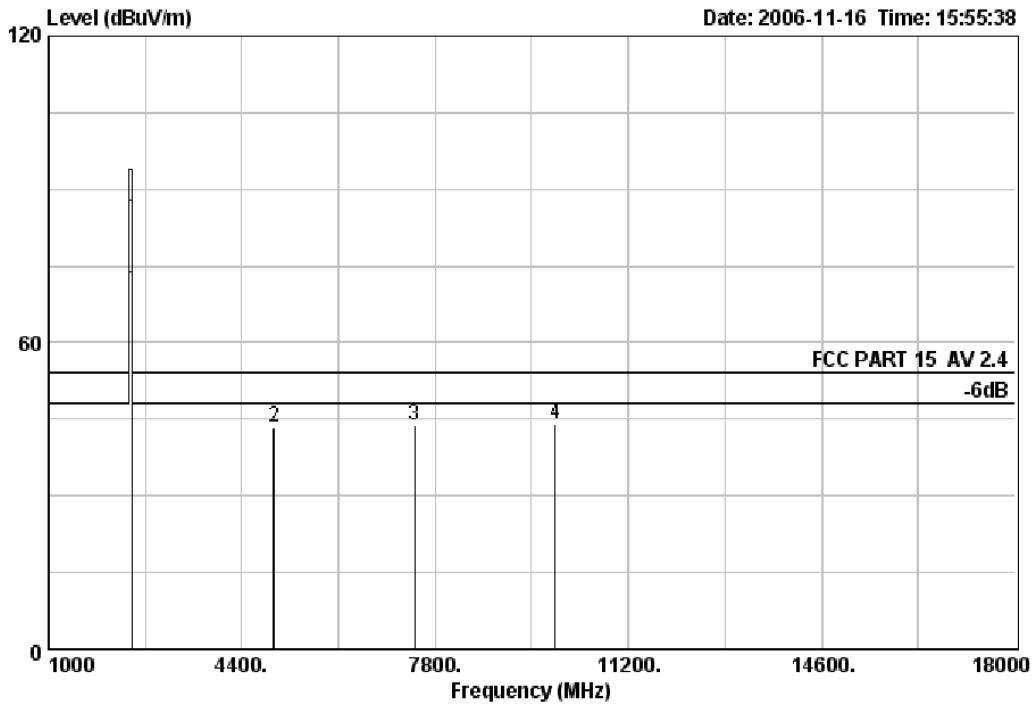

Site : Audix No.1 Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp 23°C Humi 56%
 Memo : CH18 2.4794GHz
 : Adaptor 2


	Freq	Level	Limit	OverAntenna	Read	Cable	Remark
	MHz	dBuV/m	Line	Limit	Level	Loss	
			dBuV/m	Factor	dBuV	dB	
				dB			
				dB/m			
1	2479.50	70.11	94.00	-23.89	29.19	69.78	6.30 Average
2	4959.00	43.47	54.00	-10.53	34.38	33.69	9.86 Average
3	7439.00	43.85	54.00	-10.15	37.72	29.72	10.90 Average
4	9917.90	44.08	54.00	-9.92	37.89	30.77	11.56 Average

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

Data: 17 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

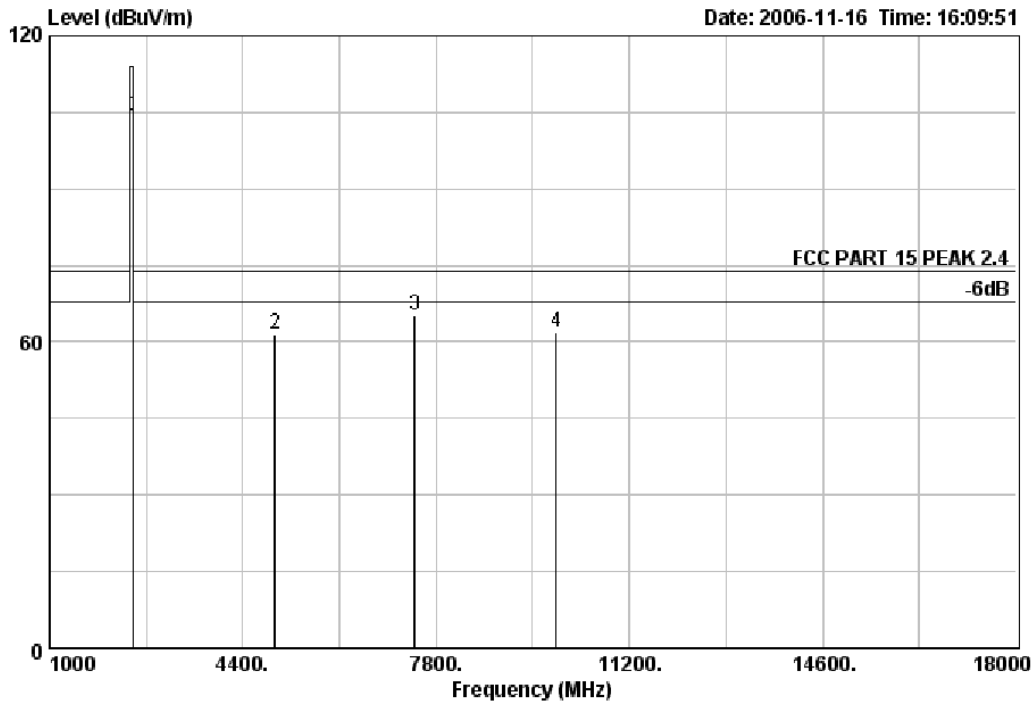

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp .23°C Humi .56%
 Memo : CH18 2.4794GHz
 : Adaptor 2


	Freq	Level	Limit	Over	Antenna	Read	Cable	Remark
	MHz	dBuV/m	Line	Limit	Factor	Level	Loss	
			dBuV/m	dB	dB/m	dBuV	dB	
1	2479.40	101.84	114.00	-12.16	29.19	101.51	6.30	Peak
2	4958.80	61.36	74.00	-12.64	34.38	51.58	9.86	Peak
3	7428.20	65.02	74.00	-8.98	37.69	50.93	10.89	Peak
4	9917.70	61.85	74.00	-12.15	37.89	48.54	11.56	Peak

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

Data: 18 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

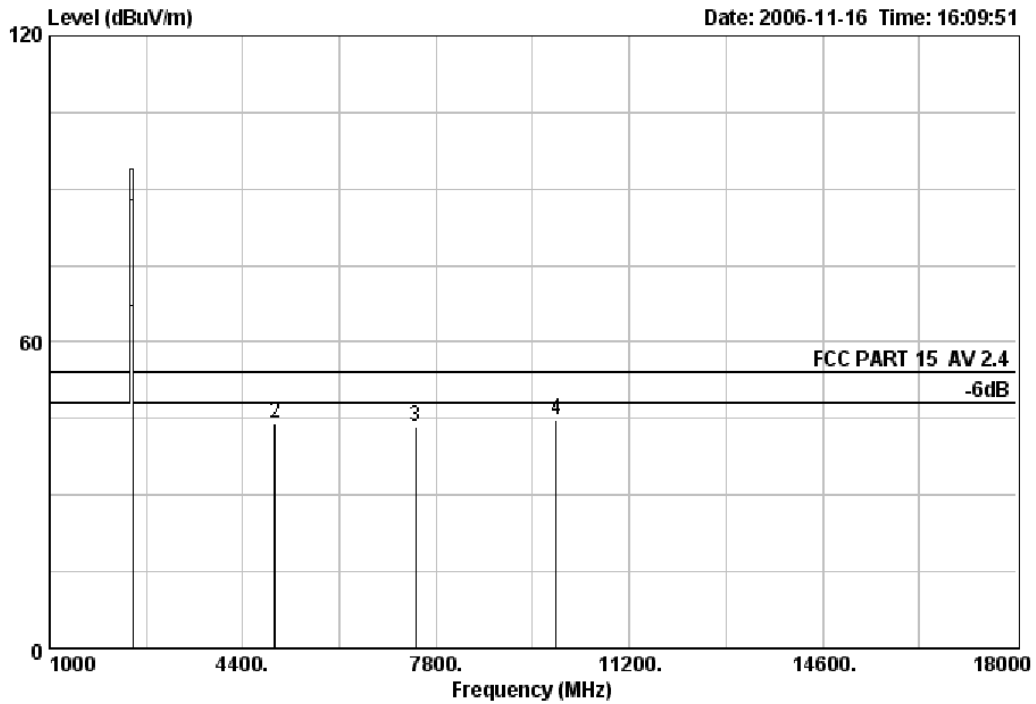

Site : Audix No.1 Chamber
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp .23°C Humi .56%
 Memo : CH18 2.4794GHz
 : Adaptor 2

	Freq	Level	Limit	Over	Antenna	Read	Cable	Remark
	MHz	dBuV/m	Line	Limit	Factor	Level	Loss	
			dBuV/m	dB	dB/m	dBuV	dB	
1	2478.80	63.54	94.00	-30.46	29.19	63.21	6.30	Average
2	4958.91	44.02	54.00	-9.98	34.38	34.24	9.86	Average
3	7438.40	43.38	54.00	-10.62	37.72	29.25	10.90	Average
4	9917.79	44.68	54.00	-9.32	37.89	31.37	11.56	Average

- Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading + Cable Loss - Amp
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.


5. BAND EDGES MEASUREMENT

5.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 22, 06	1 Year
2.	Amp	HP	8449B	3008A00863	May 22, 06	1 Year
3.	Antenna	EMCO	3115	9607-4877	Dec. 14, 05	1.5 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May 22, 06	1 Year

5.2. Block Diagram of Test Setup



(EUT: Video Baby Monitor)

5.3. Test Standard

The test completeness FCC 15.249.


5.4. Band Edges Limit


2400~2483.5MHz wide centered on the operation frequency.

5.5. Test Procedure

PASS.

The testing data was attached in the next pages.

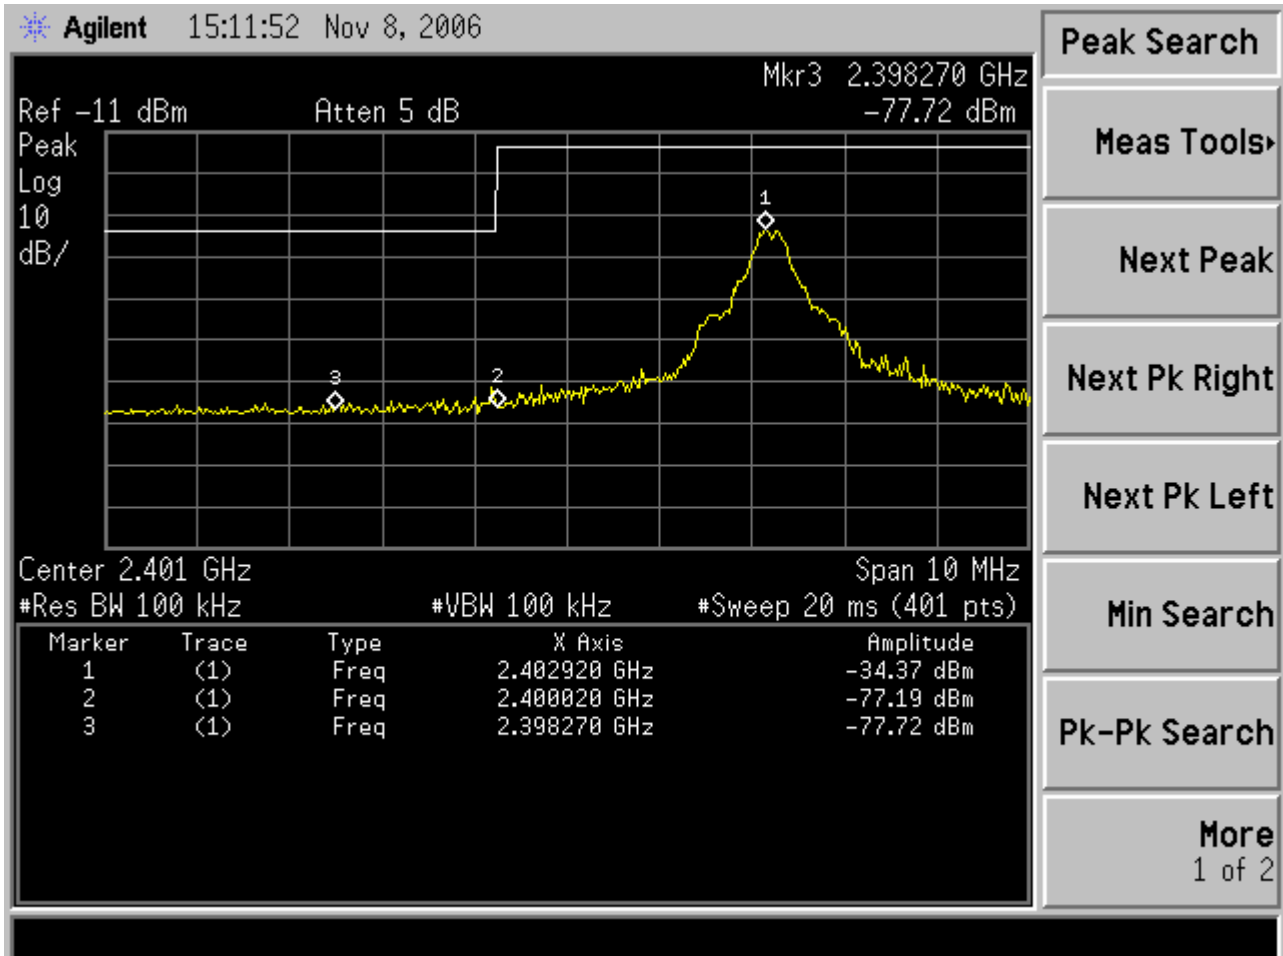

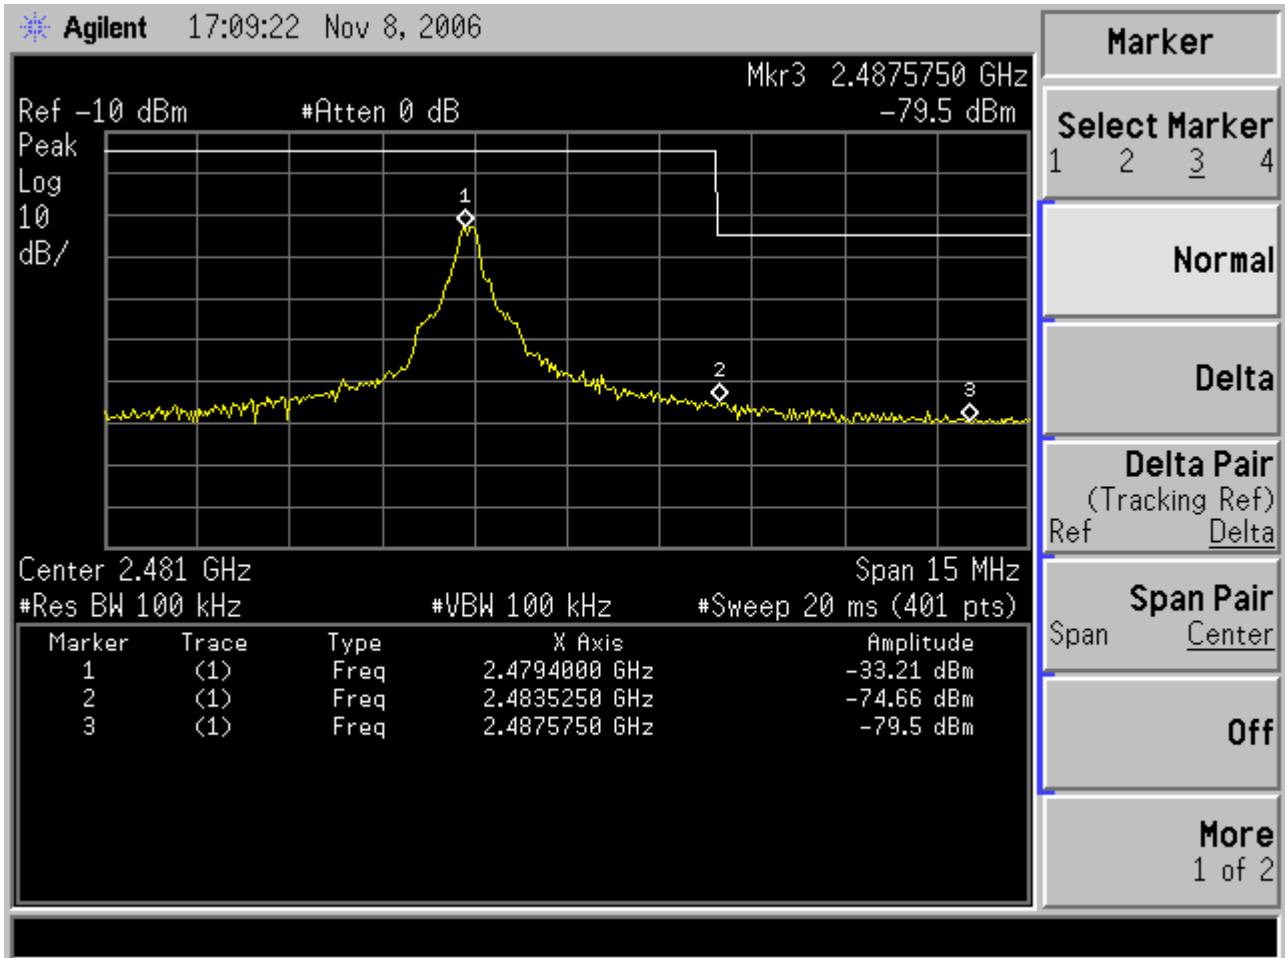

6. DEVIATION TO TEST SPECIFICATIONS

[NONE]

APPENDIX I




NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou, Shenzhen, Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 2

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R\fid.EMI (12)

Date: 2006-11-05 Time: 11:59:40

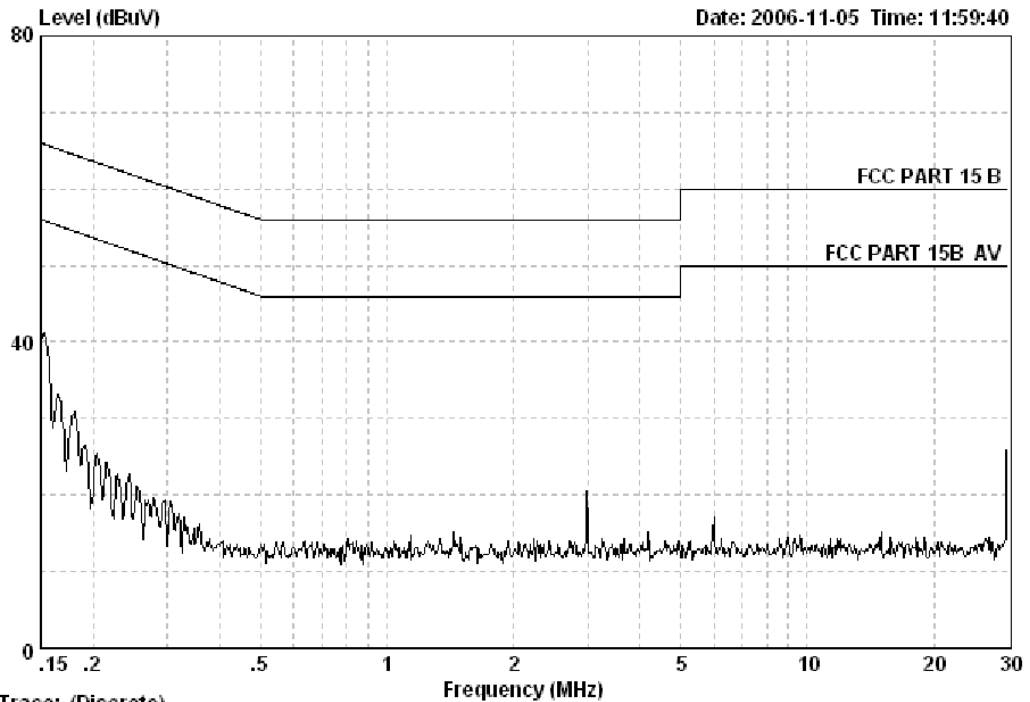

Trace: (Discrete)

Site no. : Audix 1# Shielded Room Conductionno. : 2
 Dis. / Ant. : -- VA KNW-407 LISN Phase :
 Limit : FCC PART 15 B
 Env. / Ins. : 23.5*C/55% ESHS10 Engineer : ChinaLee
 EUT : Video Baby Monitor M/N:A5083
 Power Rating : DC 4.5V Adaptor Input AC 120V/60Hz
 Test Mode : Running
 : Adaptor 1




NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou, Shenzhen, Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 1

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R\fid.EMI (12)

Date: 2006-11-05 Time: 11:54:10

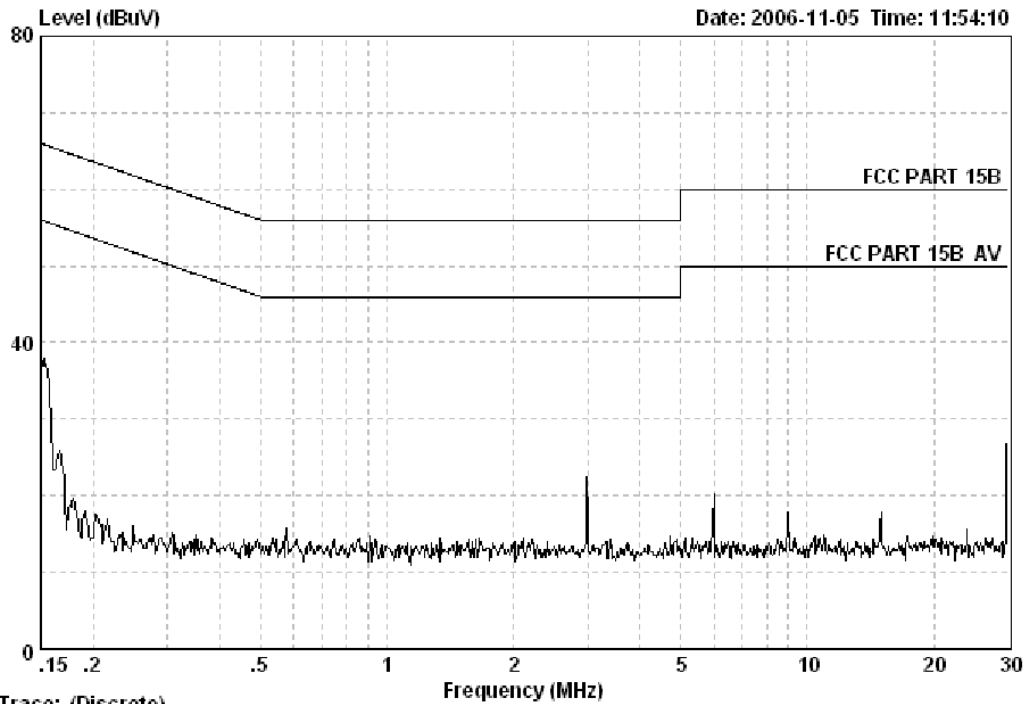

Trace: (Discrete)

Site no. : Audix 1# Shielded Room Conductionno. : 1
Dis. / Ant. : -- VB KNW-407 LISN Phase :
Limit : FCC PART 15B
Env. / Ins. : 23.5*C/55% ESHS10 Engineer : ChinaLee
EUT : Video Baby Monitor M/N:A5083
Power Rating : DC 4.5V Adaptor Input AC 120V/60Hz
Test Mode : Running
 : Adaptor 1




NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou, Shenzhen, Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 11

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R\1d.EMI (12)

Date: 2006-11-18 Time: 13:33:34

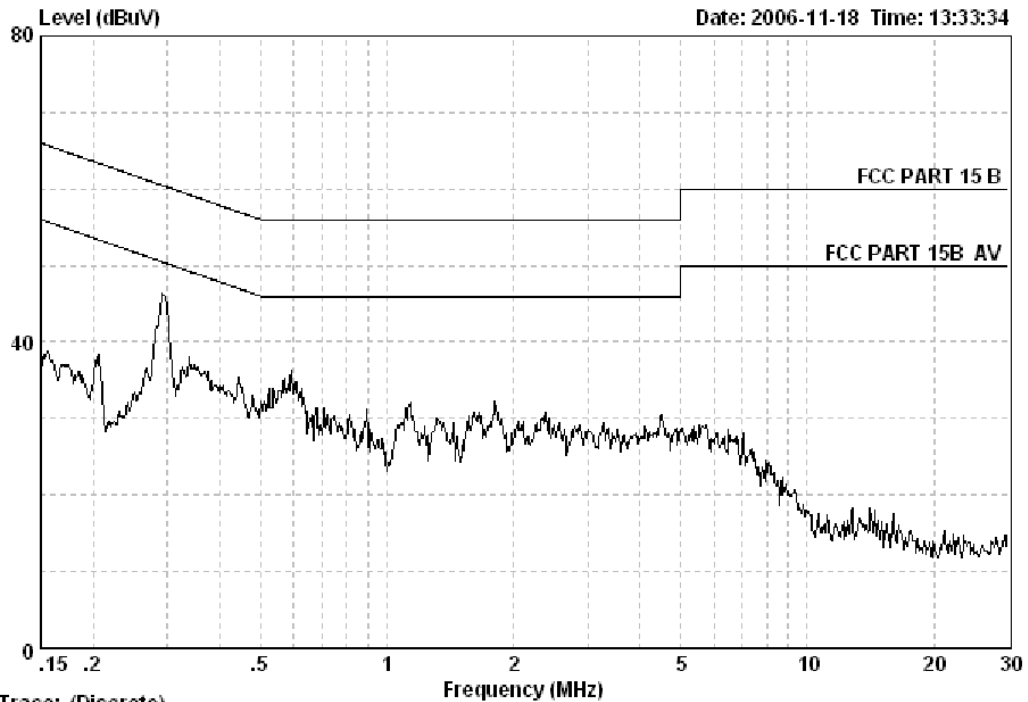

Trace: (Discrete)

Site no. : Audix 1# Conduction Data no. : 11
 Dis. / Ant. : -- VA KNW-407 LISN Phase :
 Limit : FCC PART 15 B
 Env. / Ins. : 23.5°C/55% ESHS10 Engineer : ChinaLee
 EUT : Video Baby Monitor M/N:A5083
 Power Rating : DC 5V Adaptor Input AC 120V/60Hz
 Test Mode : Running
 : Adaptor 2




NO.6 Ke Feng Road, Block 52,
Shenzhen Science&Industry Park,
Nantou, Shenzhen, Guangdong,
China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 9

File: D:\DATA\2006 Report\G\GRACO\新建文件夹\ACS6Q779R\fid.EMI (12)

Date: 2006-11-18 Time: 13:30:37

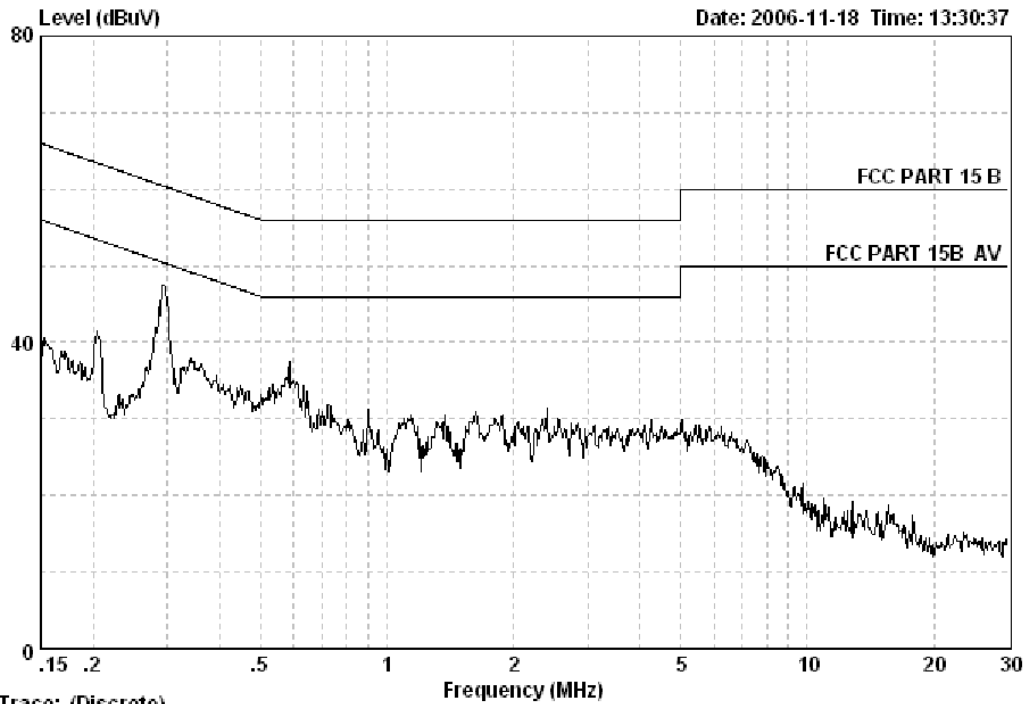


Trace: (Discrete)

Site no. : Audix 1# Conduction Data no. : 9
 Dis. / Ant. : -- VB KNW-407 LISN Phase :
 Limit : FCC PART 15 B
 Env. / Ins. : 23.5°C/55% ESHS10 Engineer : ChinaLee
 EUT : Video Baby Monitor M/N:A5083
 Power Rating : DC 5V Adaptor Input AC 120V/60Hz
 Test Mode : Running
 : Adaptor 2

APPENDIX II



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

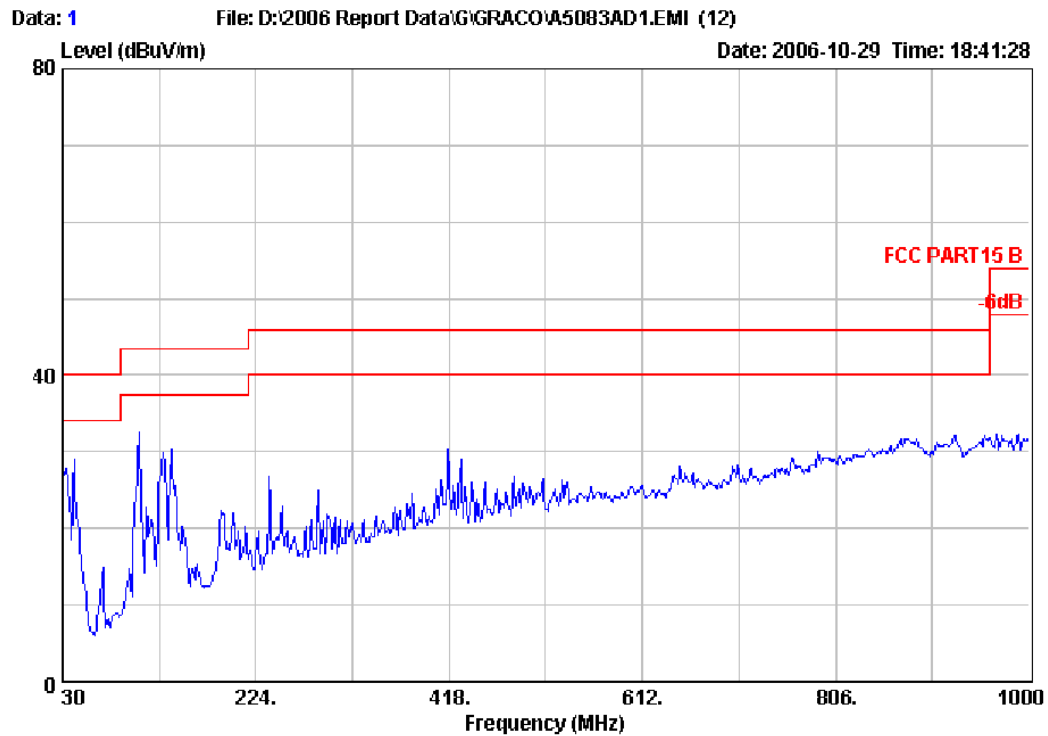


Site : 3# Chamber Radiation
Condition : FCC PART15 B 3m 2598FACTOR HORIZONTAL
EUT : Video Baby Monitor
M/N : A5083
OP Condition : Tx mode
Test Spec : DC 4.5V From ADAPTOR 120V/60Hz
Test Engineer : Jany
Comment : Temp:23°C Humi:53%
Memo : CH1 2.403GHz
: Adaptor 1



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 2 File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

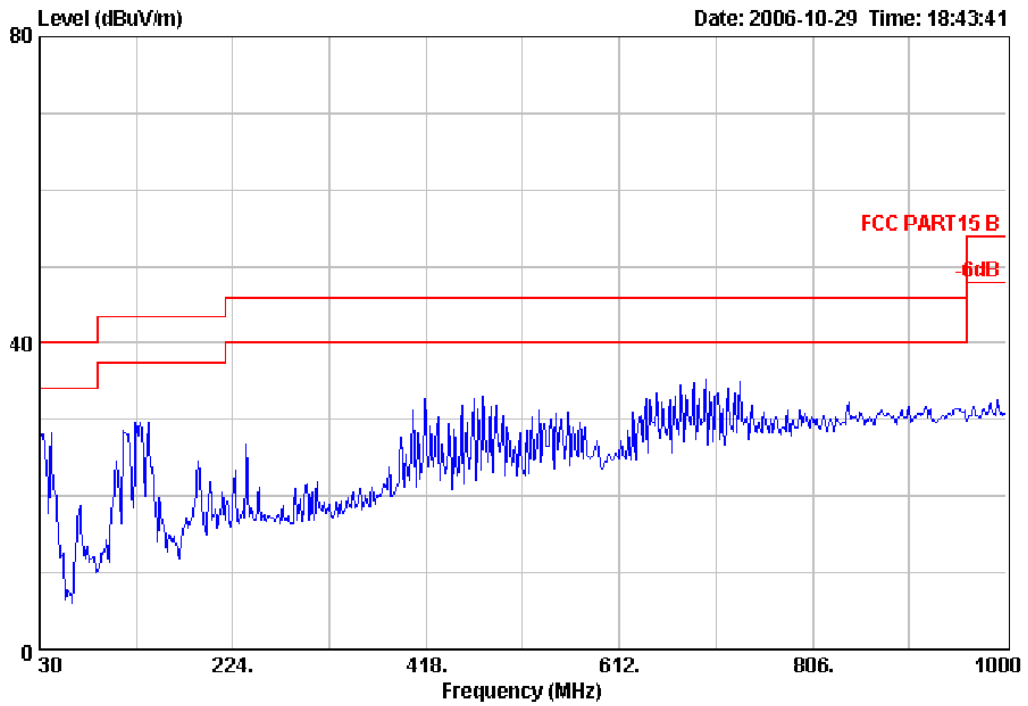


Site : 3# Chamber Radiation
 Condition : FCC PART15 B 3m 259%FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Condition : Tx mode
 Test Spec : DC 4.5V From ADAPTOR 120V/60Hz
 Test Engineer : Jany
 Comment : Temp:23°C Humi:53%
 Memo : CH1 2.403GHz
 : Adaptor 1



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 4 File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

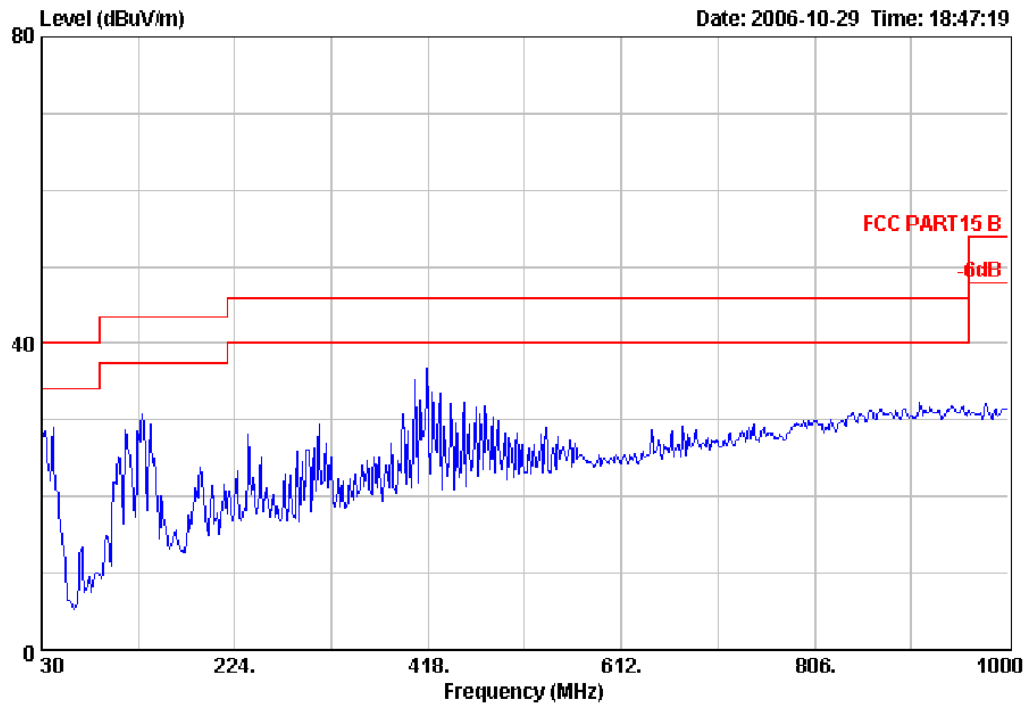


Site	: 3# Chamber Radiation
Condition	: FCC PART15 B 3m 2598FACTOR HORIZONTAL
EUT	: Video Baby Monitor
M/N	: A5083
OP Condition	: Tx mode
Test Spec	: DC 4.5V From ADAPTOR 120V/60Hz
Test Engineer	: Jany
Comment	: Temp:23°C Humi:53%
Memo	: CH9 2.4389GHz : Adaptor 1



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 3

File: D:\2006 Report Data\G\GRACOM\A5083AD1.EMI (12)

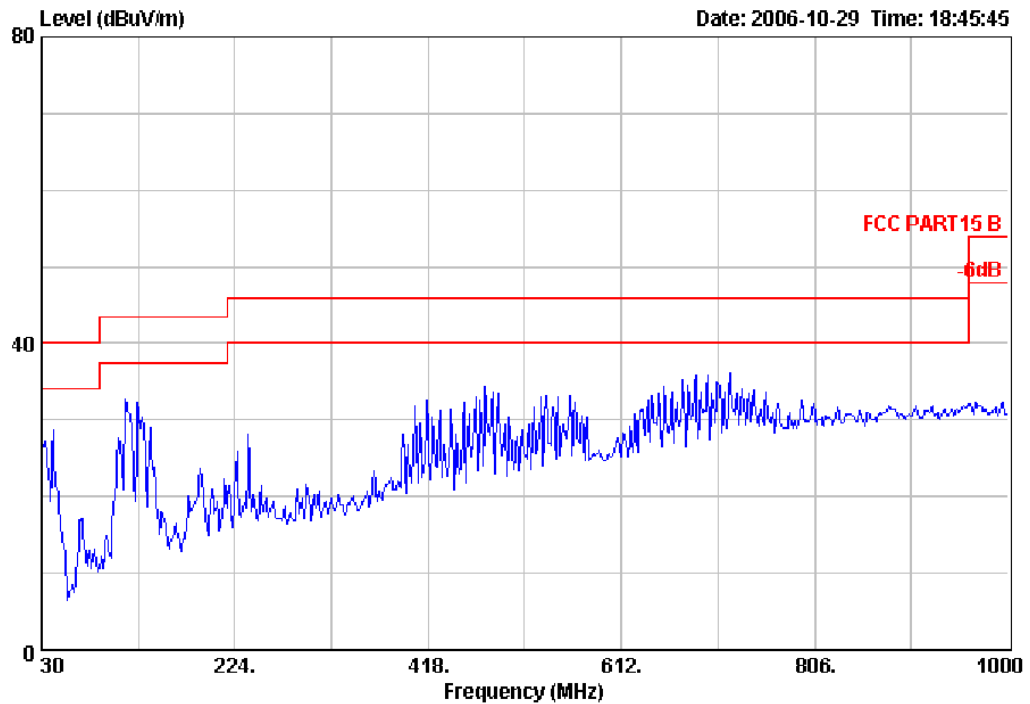


Site	: 3# Chamber Radiation
Condition	: FCC PART15 B 3m 2598FACTOR VERTICAL
EUT	: Video Baby Monitor
M/N	: A5083
OP Condition	: Tx mode
Test Spec	: DC 4.5V From ADAPTOR 120V/60Hz
Test Engineer	: Jany
Comment	: Temp:23°C Humi:53%
Memo	: CH9 2.4389GHz
	: Adaptor 1



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 5

File: D:\2006 Report Data\G\GRACO\A5083AD1.EMI (12)

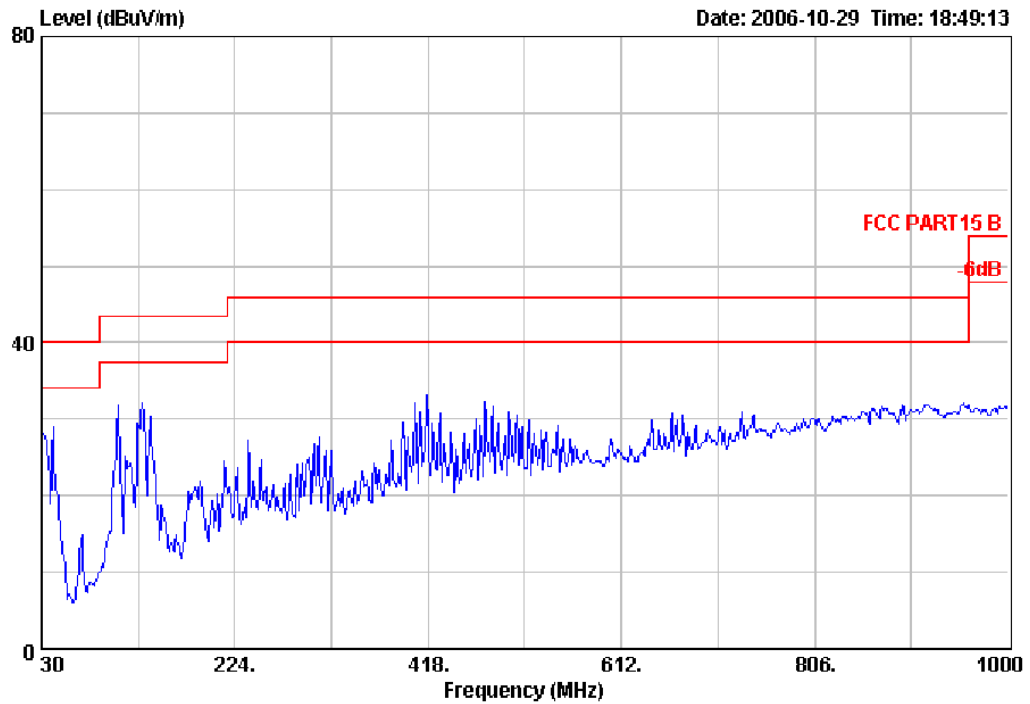


Site	: 3# Chamber Radiation
Condition	: FCC PART15 B 3m 259%FACTOR HORIZONTAL
EUT	: Video Baby Monitor
M/N	: A5083
OP Condition	: Tx mode
Test Spec	: DC 4.5V From ADAPTOR 120V/60Hz
Test Engineer	: Jany
Comment	: Temp:23°C Humi:53%
Memo	: CH18 2.4794GHz
	: Adaptor 1



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 6


File: D:\2006 Report Data\G\GRACOM\A5083AD1.EMI (12)

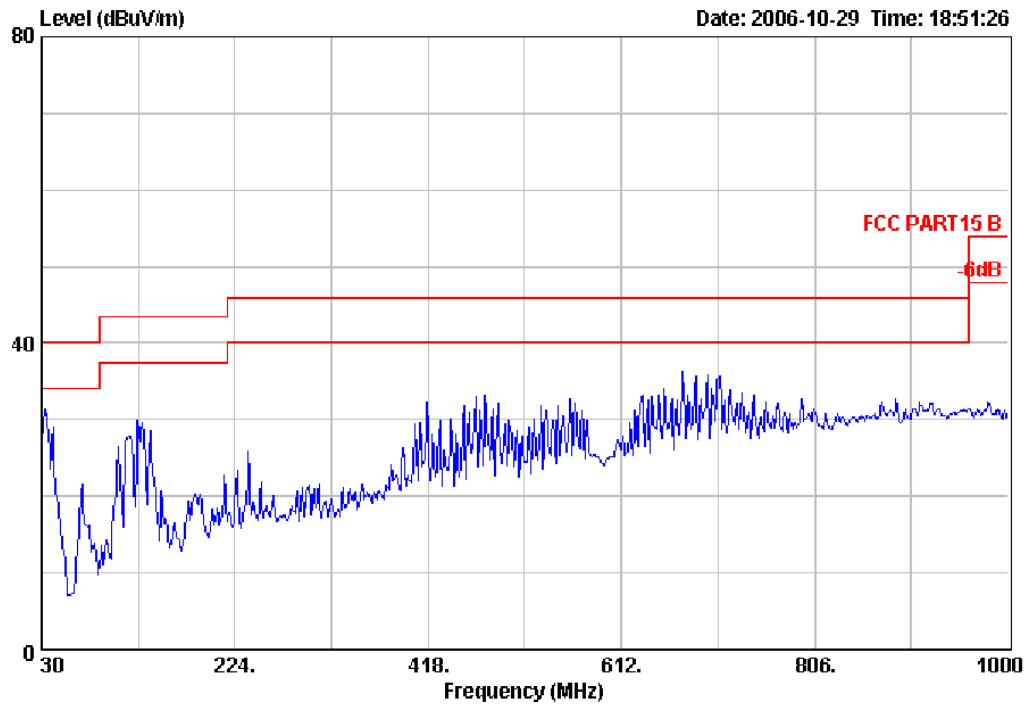

Site	: 3# Chamber Radiation
Condition	: FCC PART15 B 3m 259%FACTOR VERTICAL
EUT	: Video Baby Monitor
M/N	: A5083
OP Condition	: Tx mode
Test Spec	: DC 4.5V From ADAPTOR 120V/60Hz
Test Engineer	: Jany
Comment	: Temp:23°C Humi:53%
Memo	: CH18 2.4794GHz
	: Adaptor 1




7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

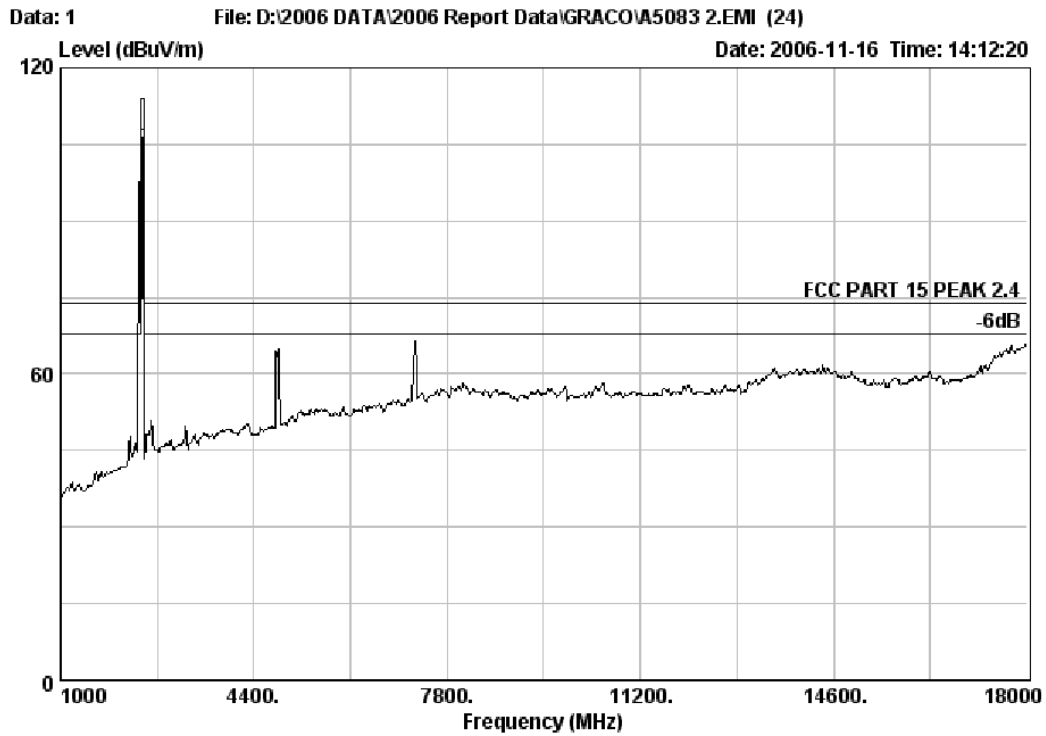

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From A daptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23°C Humi :56%
 Memo : CH1 2.403GHz
 : A daptor 2




7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

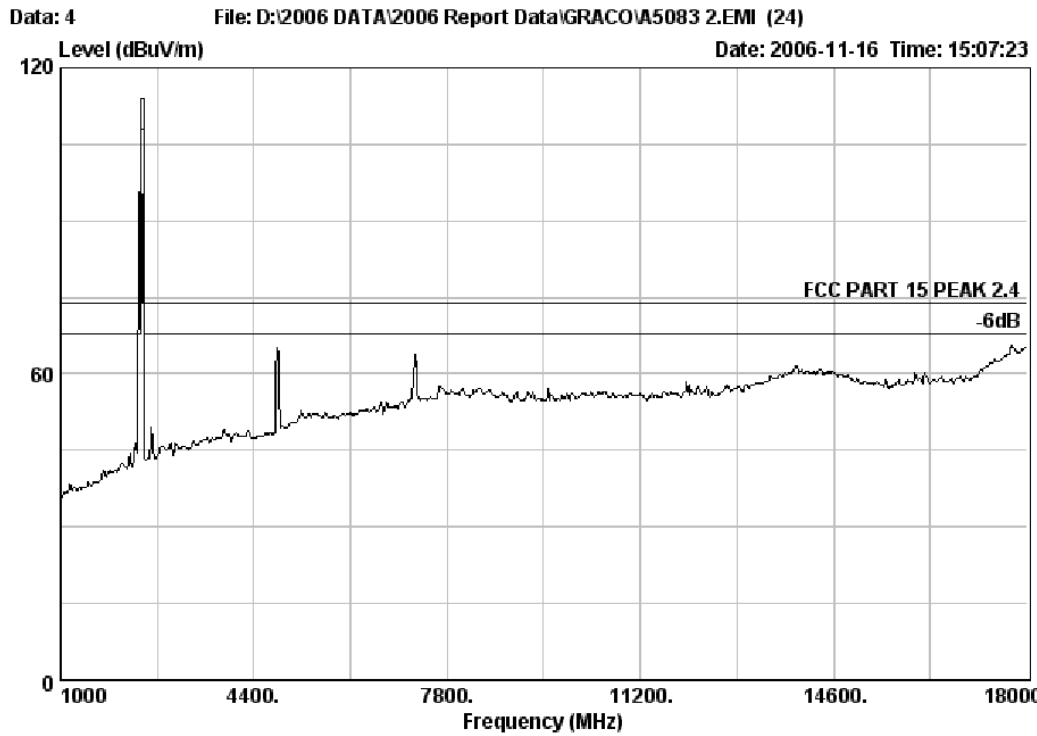

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23°C Humi :56%
 Memo : CH1 2.403GHz
 : Adaptor 2




7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

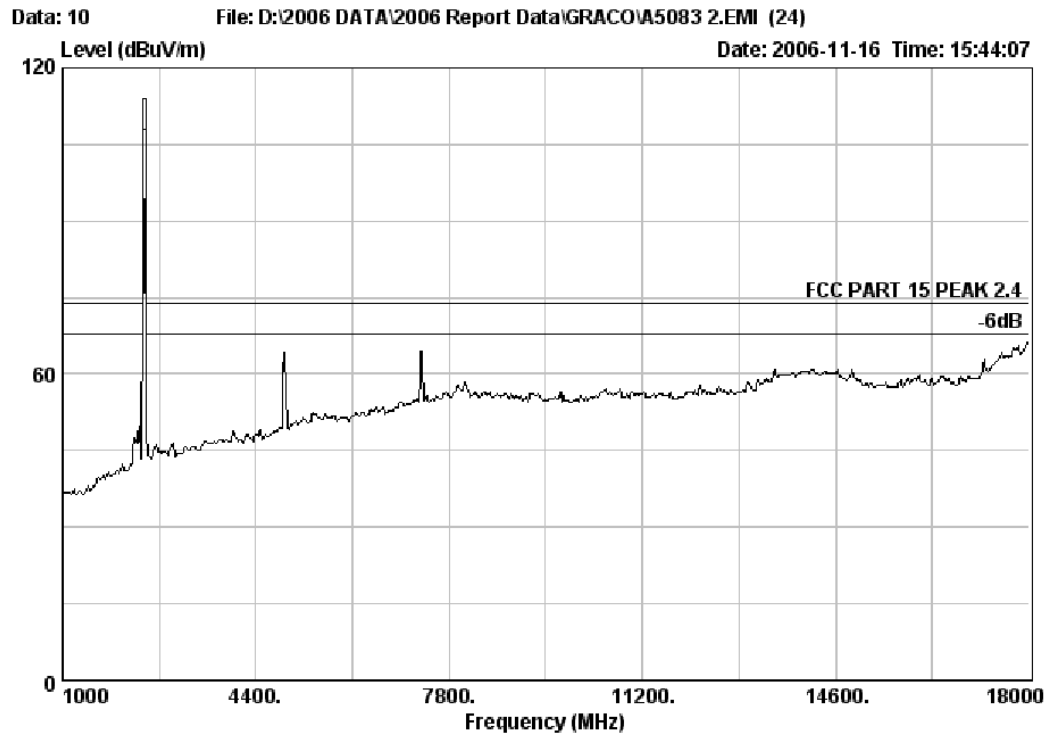

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From A daptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23°C Humi :56%
 Memo : CH9 2.4389GHz
 : A daptor 2




7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

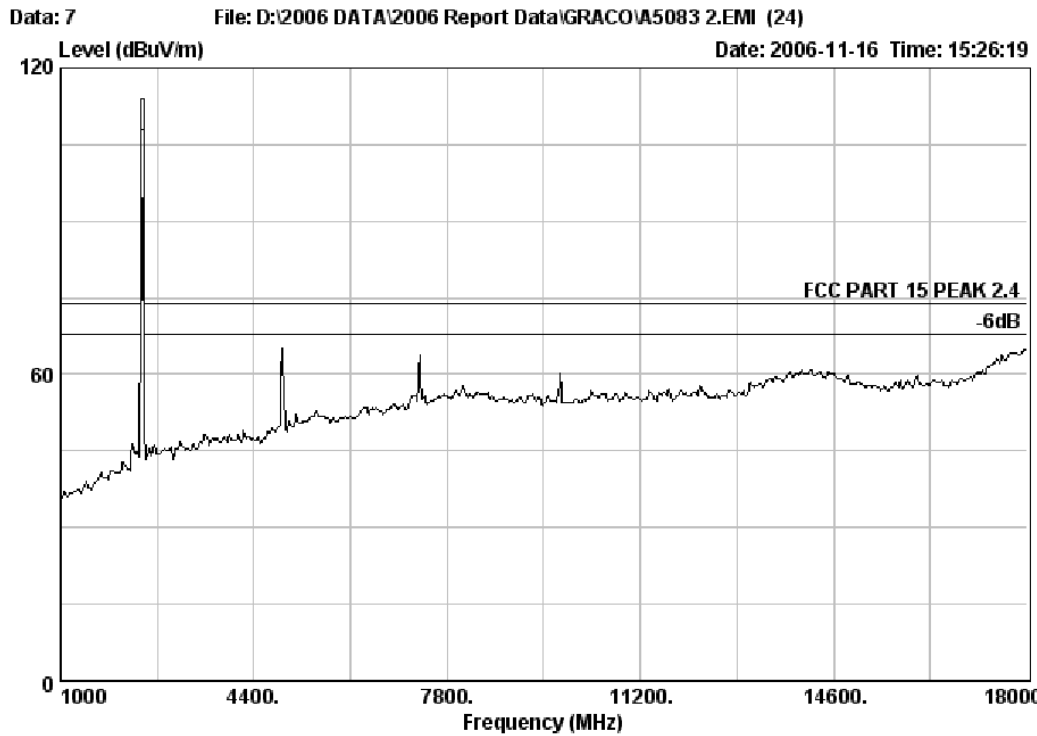

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From A daptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23°C Humi :56%
 Memo : CH9 2.4389GHz
 : A daptor 2




7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

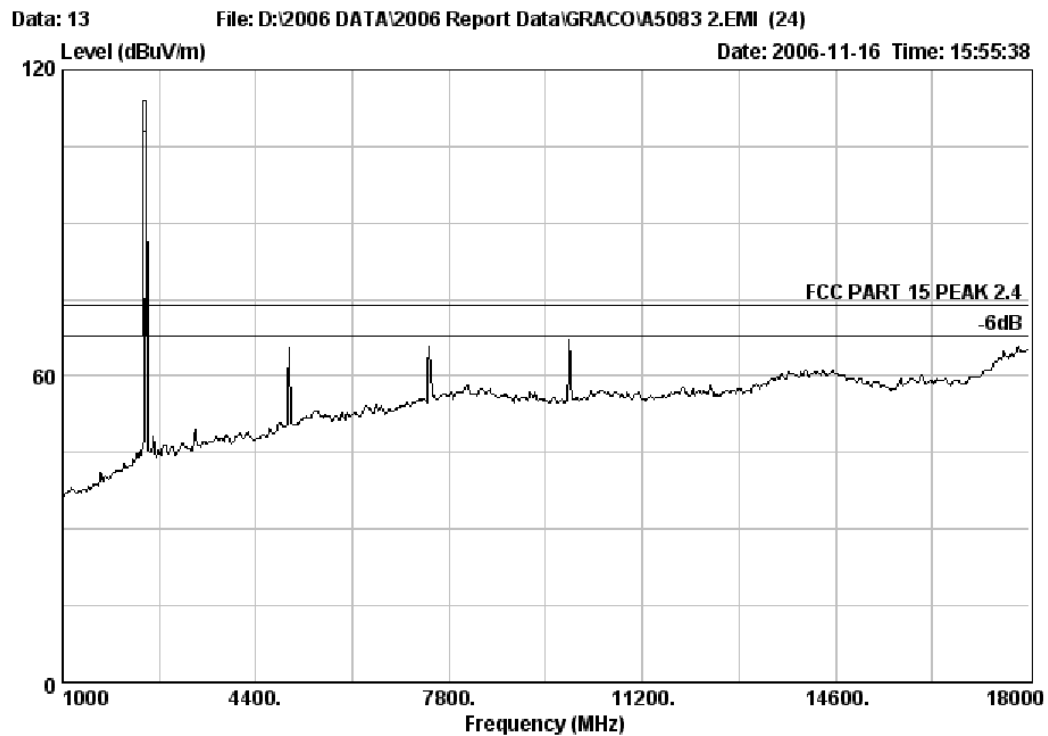

Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From A daptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23°C Humi :56%
 Memo : CH18 2.4794GHz
 : A daptor 2



7f8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel:+886-2-26594900
 http://www.audix.com

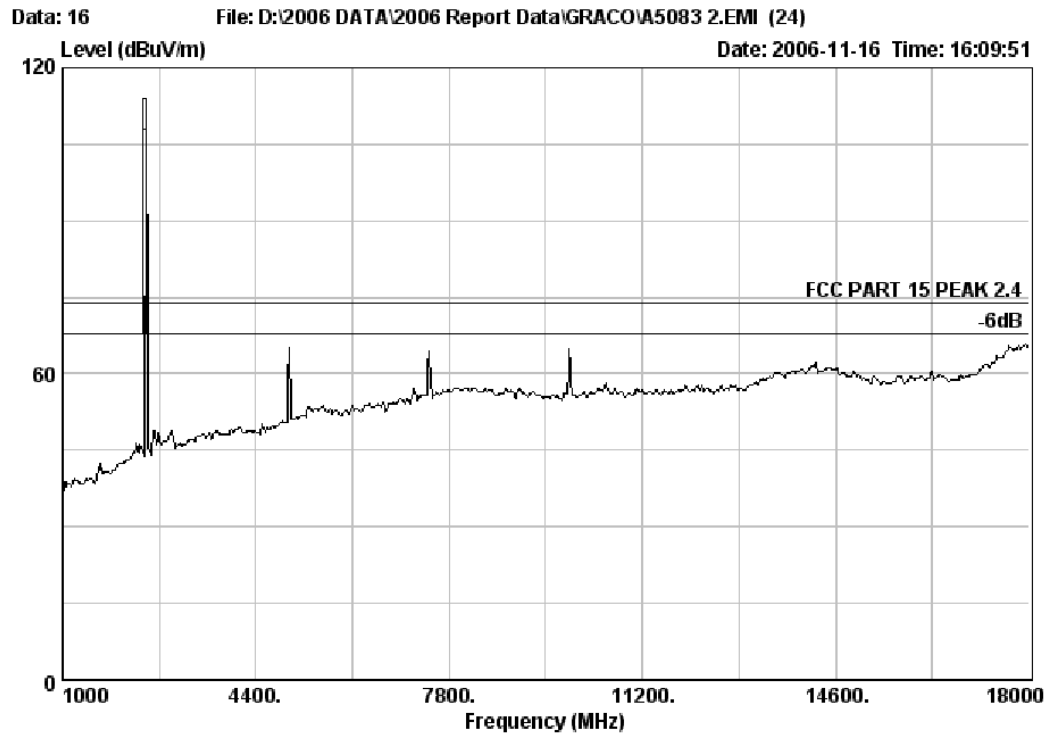


Site : Audix No.1 Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From A daptor AC120V/60Hz
 Test Spec : Tx Mode
 Test Engineer : Jany
 Comment : Temp :23C Humi :56%
 Memo : CH18 2.4794GHz
 : A daptor 2



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com


Data: 19 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

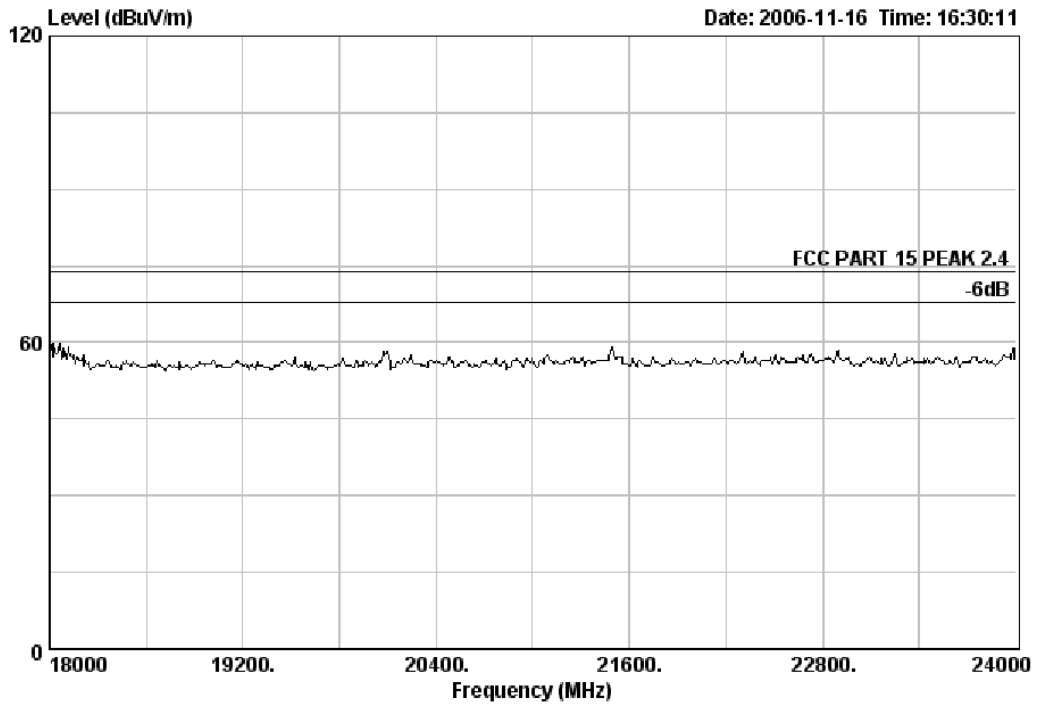

Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : TX Mode
 Test Engineer : Iceman
 Comment : Temp:23' Humi:50%
 Memo : CH1 2.403GHz
 : Adaptor 2




7F8 ln120 neihs rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

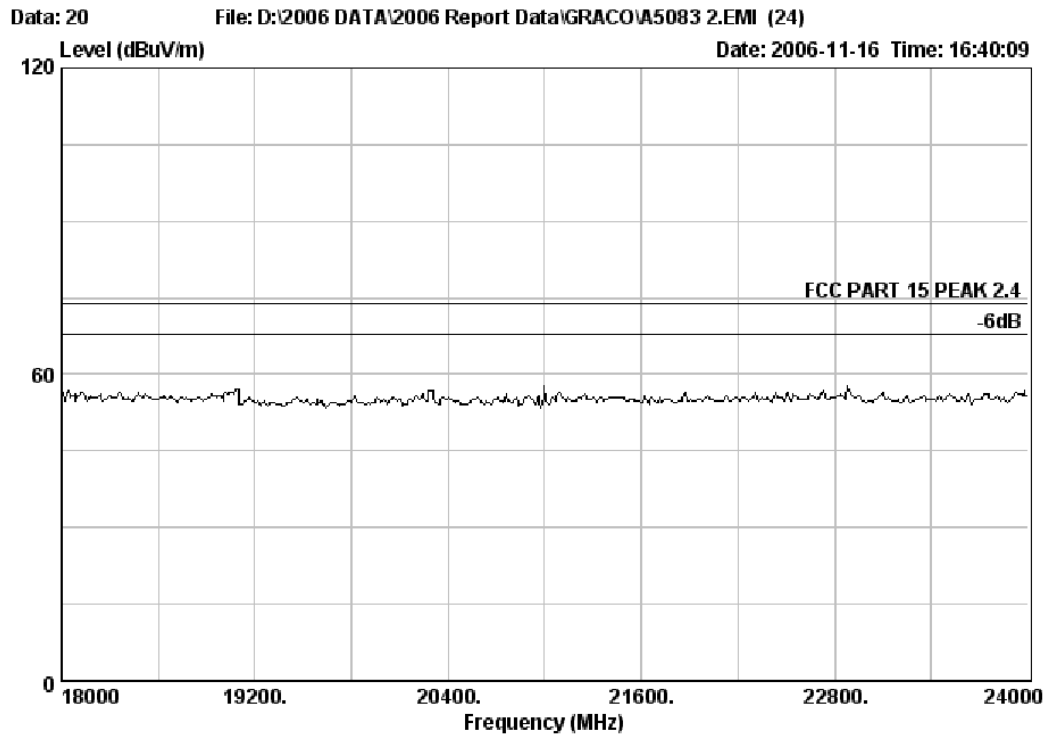

Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Iceman
 Test Engineer : TX Mode
 Comment : Temp:23' Humi:50%
 Memo : CH1 2.403GHz
 : Adaptor 2



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

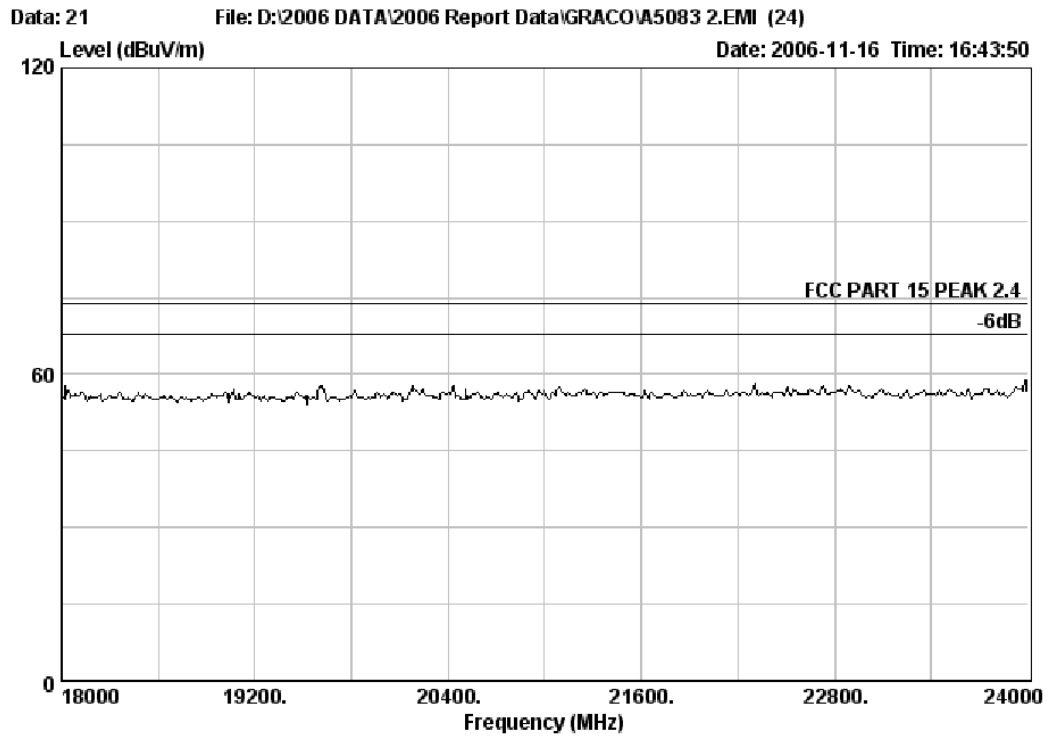


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : TX Mode
 Test Engineer : Iceman
 Comment : Temp:23' Humi:50%
 Memo : CH9 2.4389GHz
 : Adaptor 2



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

Data: 22 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

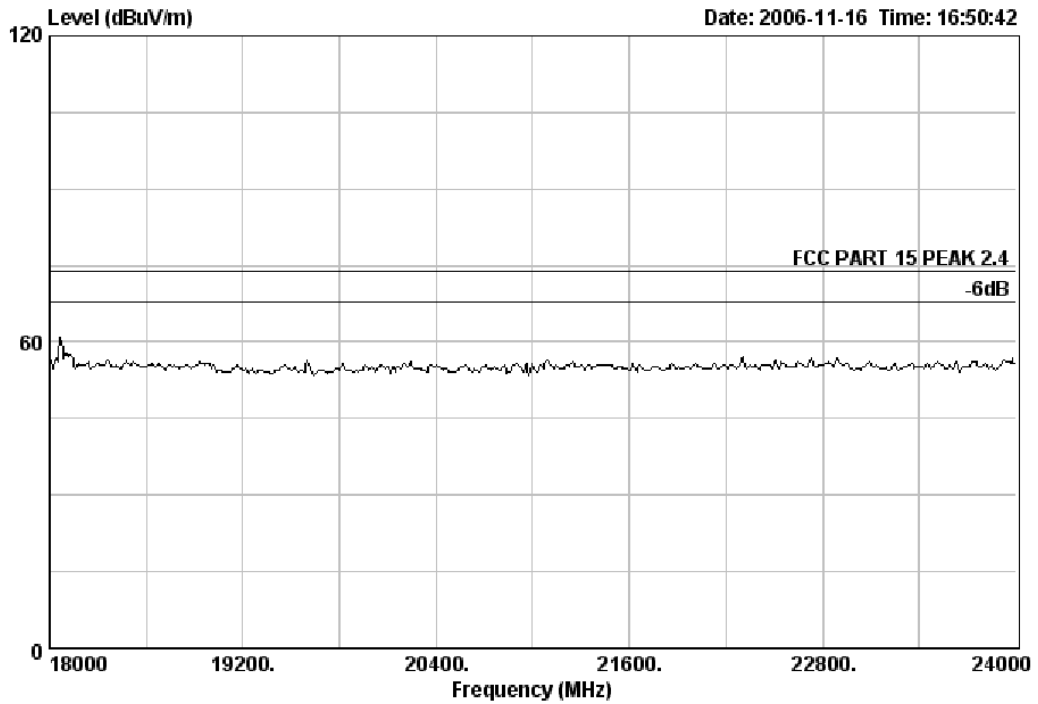


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Iceman
 Test Engineer : TX Mode
 Comment : Temp:23' Humi:50%
 Memo : CH9 2.4389GHz
 : Adaptor 2



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com


Data: 23 File: D:\2006 DATA\2006 Report Data\GRACO\A5083 2.EMI (24)

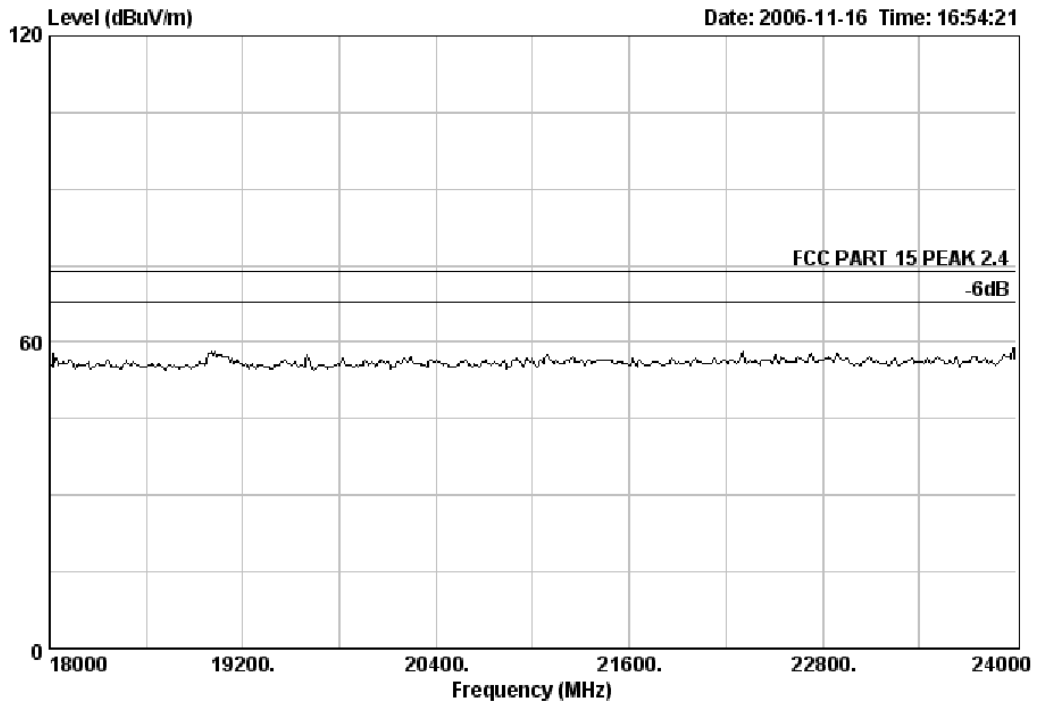

Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : TX Mode
 Test Engineer : Iceman
 Comment : Temp:23' Humi:50%
 Memo : CH18 2.4794GHz
 : Adaptor 2



7F8 ln120 neihu rd sec1
 taipei, taiwan r.o.c.
 tel.+886-2-26594900
 http://www.audix.com

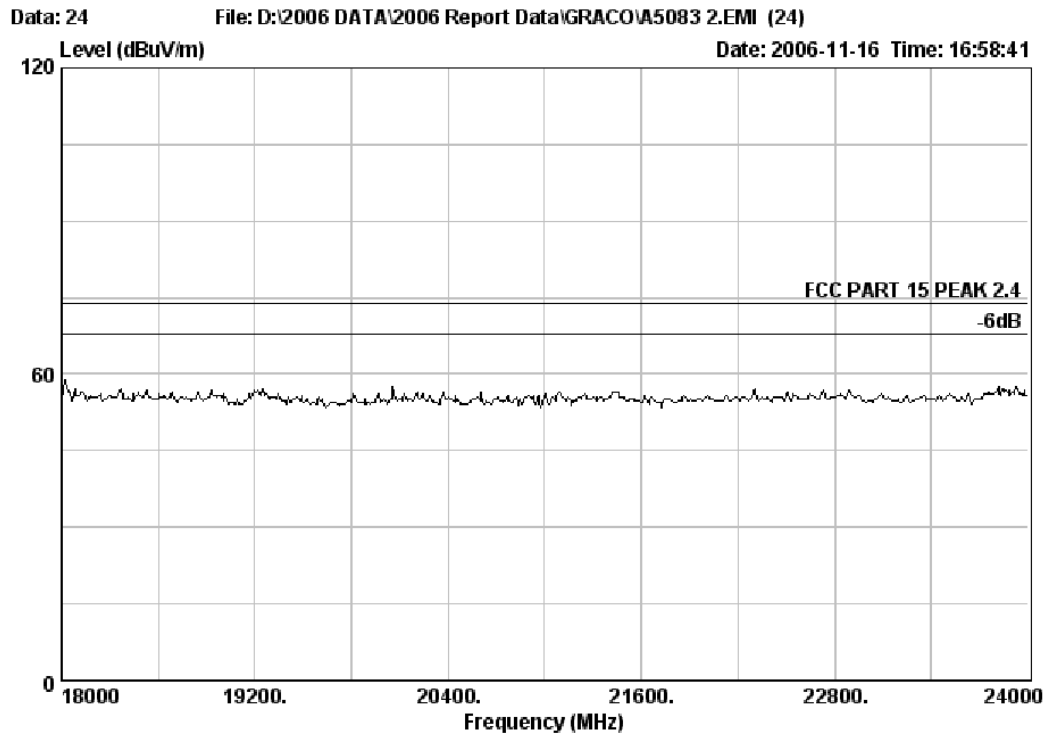

Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL
 EUT : Video Baby Monitor
 M/N : A5083
 OP Conditon : DC 5V From Adaptor AC120V/60Hz
 Test Spec : Iceman
 Test Engineer : TX Mode
 Comment : Temp:23' Humi:50%
 Memo : CH18 2.4794GHz
 : Adaptor 2