



HEADQUARTERS: 914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

2/18/2025

HP Inc.

1501 Old Page Mill Rd.

Palo Alto, CA 94304-1126

USA

Dear Samah Othman,

Enclosed is the EMC Wireless test report for compliance testing of the HP Inc. PATX-STX-32R as tested to the requirements of FCC 15.247 and RSS-247 Issue 3 for Intentional Radiators. This test report pertains specifically to the Bluetooth Low Energy (BLE) transmitter onboard which operates in the 2400-2483.5MHz band.

Thank you for using the services of Eurofins MET Labs. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,

EUROFINS MET LABS

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque

Documentation Department

Reference: WIRA – FCC15.247 RSS247 BLE\_R6

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs.

*The Nation's First Licensed Nationally Recognized Testing Laboratory*

Maryland | California | Texas  
[www.metlabs.com](http://www.metlabs.com)

## Bluetooth Low Energy Test Report

for the

HP Inc.  
PATX-STX-32R

**Tested under**  
FCC 15.247 and RSS-247 Issue 3  
For Intentional Radiators



Bryan Taylor, Wireless Team Lead  
Electromagnetic Compatibility Lab



Nancy LaBrecque  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Matthew Hinojosa  
EMC Manager, Austin Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	11/1/2024	Initial Issue.
1	11/6/2024	Customer requested changes
2	11/6/2024	Customer requested changes
3	11/8/2024	Customer requested changes
4	1/21/2025	Reviewer requested changes
5	2/13/2025	Fixed Typos
6	2/18/2025	Reviewer requested changes

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>8</b>
	A. Purpose of Test .....	9
	B. Executive Summary .....	9
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>10</b>
	A. Overview.....	11
	B. References.....	12
	C. Test Site .....	13
	D. Measurement Uncertainty .....	13
	E. Description of Test Sample.....	13
	F. Equipment Configuration.....	14
	G. Mode of Operation.....	15
	H. Method of Monitoring EUT Operation .....	15
	I. Modifications .....	15
	a) Modifications to EUT.....	15
	b) Modifications to Test Standard.....	15
	J. Disposition of EUT.....	15
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>16</b>
	§ 15.203 Antenna Requirement .....	17
	§ 15.207(a) Conducted Emissions Limits.....	18
	§ 15.247(a)(a) 6 dB and 99% Bandwidth .....	21
	RSS-GEN (6.7) 99% Bandwidth .....	22
	§ 15.247(b) Peak Power Output .....	25
	§ 15.247(e) Peak Power Spectral Density .....	28
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....	31
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	36
<b>IV.</b>	<b>Test Equipment .....</b>	<b>46</b>

## List of Tables

Table 1. Executive Summary .....	9
Table 2. EUT Summary Table.....	11
Table 3. References .....	12
Table 4. Uncertainty Calculations Summary.....	13
Table 5. Support Equipment.....	14
Table 6. Ports and Cabling Information .....	14
Table 7. Test Channels Utilized .....	15
Table 8. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	18
Table 9. Conducted Emissions, 15.207(a), Phase, Test Results .....	19
Table 10. Conducted Emissions, 15.207(a), Neutral, Test Results .....	20
Table 11. 99% and 6 dB Occupied Bandwidth, Test Results .....	22
Table 12. Output Power Requirements from §15.247(b) .....	25
Table 13. Peak Power and EIRP, Test Results .....	26
Table 14. Peak Power Spectral Density, Test Results .....	29
Table 15. Restricted Bands of Operation.....	36
Table 16. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....	37
Table 17. Test Equipment List .....	47

## List of Figures

Figure 1. EUT List .....	11
Figure 2. Block Diagram of Test Configuration.....	14
Figure 3. Block Diagram, Occupied Bandwidth Test Setup.....	22
Figure 4. Peak Power Output Test Setup.....	26
Figure 5. Block Diagram, Peak Power Spectral Density Test Setup .....	28
Figure 6. Analyzer Settings During Measurement .....	31
Figure 7. Block Diagram, Conducted Spurious Emissions Test Setup.....	31
Figure 8. -20dB Down Spurious Emissions (Low Channel, 1Mbps) .....	32
Figure 9. -20dB Down Spurious Emissions (Mid Channel, 1Mbps) .....	32
Figure 10. -20dB Down Spurious Emissions (High Channel, 1Mbps).....	32
Figure 11. -20dB Down Spurious Emissions (Low Channel, 2Mbps) .....	33
Figure 12. -20dB Down Spurious Emissions (Mid Channel, 2Mbps).....	33
Figure 13. -20dB Down Spurious Emissions (High Channel, 2Mbps).....	33
Figure 14. Restricted Band Edge Spurious Emissions (Low Band Edge, 1Mbps) .....	41
Figure 15. Restricted Band Edge Spurious Emissions (Low Band Edge, 2Mbps) .....	41
Figure 16. Restricted Band Edge Spurious Emissions (High Band Edge, 1Mbps) .....	41
Figure 17. Restricted Band Edge Spurious Emissions (High Band Edge, 2Mbps) .....	41
Figure 18. Worst Case Cabinet Radiation, 9kHz - 30MHz (1Mbps) .....	42
Figure 19. Worst Case Cabinet Radiation, 9kHz - 30MHz (2Mbps) .....	42
Figure 20. Worst Case Cabinet Radiation, 30MHz - 1GHz (1Mbps).....	42
Figure 21. Worst Case Cabinet Radiation, 30MHz - 1GHz (2Mbps).....	43
Figure 22. Worst Case Cabinet Radiation, Above 1GHz (1Mbps) .....	43
Figure 23. Worst Case Cabinet Radiation, Above 1GHz (2Mbps) .....	43

## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB $\mu$ A	Decibels above one <b>microamp</b>
dB $\mu$ V	Decibels above one <b>microvolt</b>
dB $\mu$ A/m	Decibels above one <b>microamp per meter</b>
dB $\mu$ V/m	Decibels above one <b>microvolt per meter</b>
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
$\mu$ H	microhenry
$\mu$	microfarad
$\mu$ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts <b>per meter</b>
VCP	Vertical Coupling Plane

# I. Executive Summary



## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the PATX-STX-32R, with the requirements of FCC 15.247 and RSS-247 Issue 3. HP Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the PATX-STX-32R, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC 15.247 and RSS-247 Issue 3, in accordance with HP Inc. purchase order number 9100374440. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2013.

FCC Reference 47 CFR Part 15.247	IC Reference RSS-247 Issue 3 RSS-GEN Issue 5	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	---	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-GEN(8.8)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	RSS-247 (5.2)	6dB Occupied Bandwidth	Compliant
---	RSS-GEN(6.7)	99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-247(5.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-GEN (6.13), (8.9), & (8.10)	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-247(5.5)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-247(5.2)	Peak Power Spectral Density	Compliant

**Table 1. Executive Summary**

## II. Equipment Configuration

## A. Overview

Eurofins MET Labs was contracted by HP Inc. to perform testing on the PATX-STX-32R, under HP Inc.'s purchase order number 9100374440.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the PATX-STX-32R.

The results obtained relate only to the item(s) tested.

<b>Product Marketing Name Tested:</b>	Poly Studio X32	
<b>Product Marketing Name Included by Similarity:</b>	Poly Studio V32 (Note: this is a software depopulated version of the Poly Studio X32)	
<b>Model Number Tested:</b>	PATX-STX-32R	
<b>FCCID:</b>	M72-STX32R	
<b>ICID:</b>	1849C-STX32R	
<b>Equipment Specifications:</b>	Primary Power:	100 – 230 VAC, 50/60 Hz
	Type of Modulations:	GFSK
	Equipment Code:	DTS
	Peak RF Output Power:	2.32 dBm
	EUT Frequency Ranges:	2402 MHz – 2480 MHz
	Antenna Gain <sup>1</sup> :	3.5 dBi
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Bryan Taylor, Sergio Gutierrez	
<b>Report Date(s):</b>	2/18/2025	

**Table 2. EUT Summary Table**

Description	Model Number	Part Number	Serial Number	Rev #
POE injector Delta	ADH-65AR F	N.A.	MEQD4710028	N.A.
Poly Studio X32 (conducted radio system)	PATX-STX-32R	2201-88325-001	8Y243585D826G1	N.A.
Poly Studio X32 (Radiated radio system)	PATX-STX-32R	2201-88325-001	8Y243585D826G1	N.A.

**Figure 1. EUT List**

<sup>1</sup> The antenna gain information was provided by HP Inc. and may affect compliance.

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>RSS-247, Issue 3, August 2023</b>	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
<b>RSS-GEN, Issue 5, March 2019</b>	General Requirements and Information for the Certification of Radio Apparatus
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2017</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All testing was performed at Eurofins MET Labs, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

### ISED Lab Info:

CAB Identifier: US0004  
Company Number: 2043D

### FCC Lab Info:

Designation Number: US1127

## D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
Occupied Bandwidth Measurements	±4.52 Hz	2	95%
Conducted Power Measurements	±2.74 dB	2	95%
Power Spectral Density Measurements	±2.74 dB	2	95%
Conducted Spurious Emissions	±2.80 dB	2	95%
Conducted Emissions (Mains)	±2.97 dB	2	95%
Radiated Spurious Emissions (9kHz – 1GHz)	±2.95 dB	2	95%
Radiated Spurious Emissions (1GHz - 40GHz)	±3.54 dB	2	95%

Table 4. Uncertainty Calculations Summary

## E. Description of Test Sample

PATX-STX-32R is a video conferencing bars designed to act as a Video endpoint over LAN networks. The device is powered by either direct POE from the local network OR via a supplied POE Midspan injector. The top-level model the PATX-STX-32R contains 2.4GHz / 5GHz Wi-Fi (6) and Bluetooth radio interfaces



**Figure 2. Block Diagram of Test Configuration**

## F. Equipment Configuration

The EUT was set up as outlined in Figure 2 above. The laptop computer was used to send test commands to force the transmitters to operate in the appropriate test mode.

## G. Support Equipment

Ref. ID	Name/Description	Manufacturer	Model Number	Customer Supplied Calibration Data
4k Monitors	HP	1B9T0AA	CN43292W2D	N/A
4k Monitors	HP	1B9T0AA	CN43292W2D	N/A
4KMonitor	LG	24UD58-B	301NTJJE7512	N/A
BT Remote	Poly/ Remotec	BW7640UN	N.A.	N/A
USB keyboard	HP	KU-0316	N.A.	N/A
USB mouse	HP	672652-001	N.A.	N/A
Laptop for content and pings	Dell	XPS 14	N.A.	N/A
Router Cisco gigabit router	Cisco	RN042G	NKS19023101	N/A
WIFI access point Cisco AIR Lap	Cisco	1142N-A-K9	FTX1605K0NE	N/A
Poly Studio X30	Poly	P018	BL1944507357FC	N/A

**Table 5. Support Equipment**

## H. Ports and Cabling Information

Ref. Id	Port Name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
--	HDMI cable	HDMI	No	6FT		Yes	4k Monitor
--	LAN cable	Cat 6	No			Yes	To POE Injector
--	HDMI cables	HDMI	No	6FT		No	4k Monitor
--	HDMI cables	HDMI	No	6FT		No	Laptop

**Table 6. Ports and Cabling Information**

## I. Mode of Operation

The support laptop provided a direct means of controlling transmitter parameters. Unless otherwise stated or shown, all tests were performed at worst-case modulation and data rates on the following channels.

Transmit Band	Modulation	Channel Frequencies Tested	Test Tool Power Setting	Test Tool Name
2400 – 2483.5MHz	BLE (GFSK)	2402MHz / 2440MHz / 2480MHz	8	WiFi_BT_DEBUG TOOL_v0.0.1.6

Table 7. Test Channels Utilized

## J. Method of Monitoring EUT Operation

A spectrum analyzer was used to confirm proper transmitter operation.

## K. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to HP Inc. upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. The TX antenna is permanently attached to the unit and is not accessible by the end user.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 10/07/2024

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):** **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 - 56	56 - 46
0.5-5	56	46
5-30	60	50

**Table 8. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a 0.8 m-high wooden table. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMI receiver. For the purpose of this testing, the transmitter was turned on.


**Test Software:** TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) was utilized to perform these measurements.

**Test Results:** The EUT was compliant with this requirement.

**Test Engineer(s):** Tyler Quintana

**Test Date(s):** 09/17/2024

## 15.207(a) Conducted Emissions Test Results

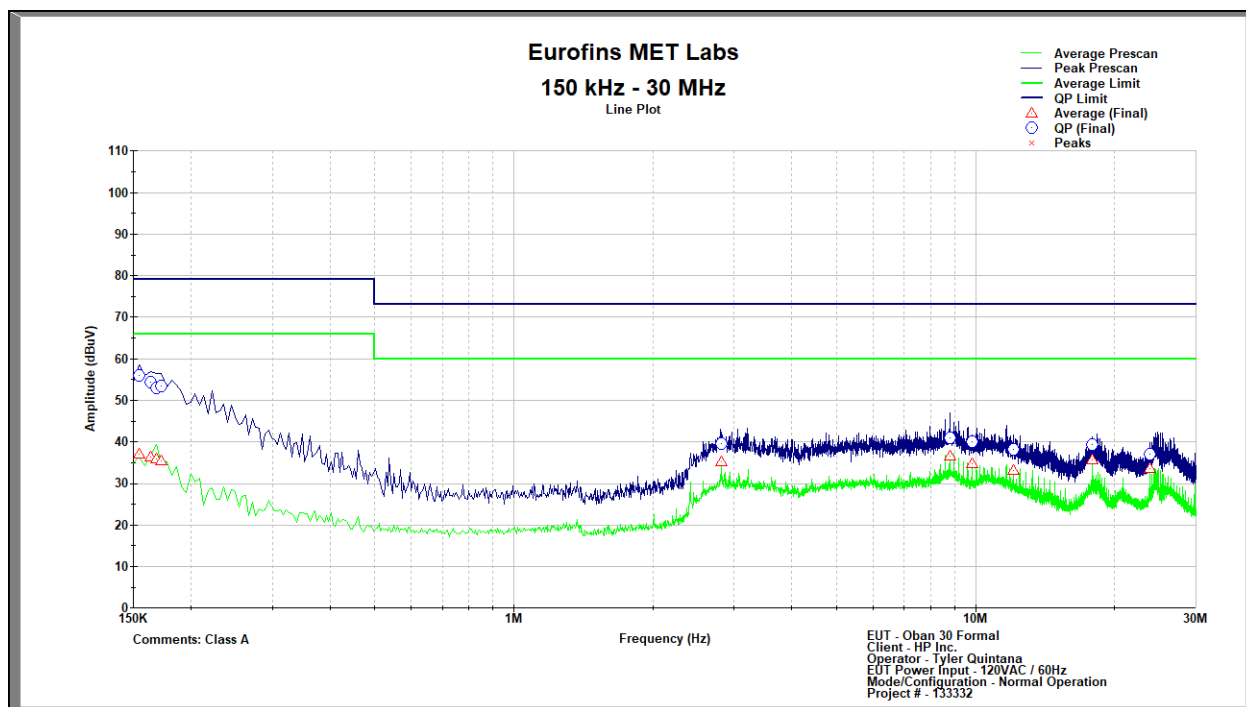


Conducted Emissions, 15.207(a), Phase

Frequency (MHz)	Quasi-Peak (dBμV/m)	Quasi-Peak Limit (dBμV/m)	Quasi-Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)
0.154	55.882	79.000	23.118	37.082	66.000	28.918
0.164	54.373	79.000	24.627	36.371	66.000	29.629
0.168	53.000	79.000	26.000	35.822	66.000	30.178
0.172	53.499	79.000	25.501	35.482	66.000	30.518
2.814	39.605	73.000	33.395	35.160	60.000	24.840
8.789	41.051	73.000	31.949	36.520	60.000	23.480
9.807	39.931	73.000	33.069	34.648	60.000	25.352
12.057	38.242	73.000	34.758	33.017	60.000	26.983
17.896	39.289	73.000	33.711	35.630	60.000	24.370
23.862	37.069	73.000	35.931	33.594	60.000	26.406

Table 9. Conducted Emissions, 15.207(a), Phase, Test Results

## 15.207(a) Conducted Emissions Test Results

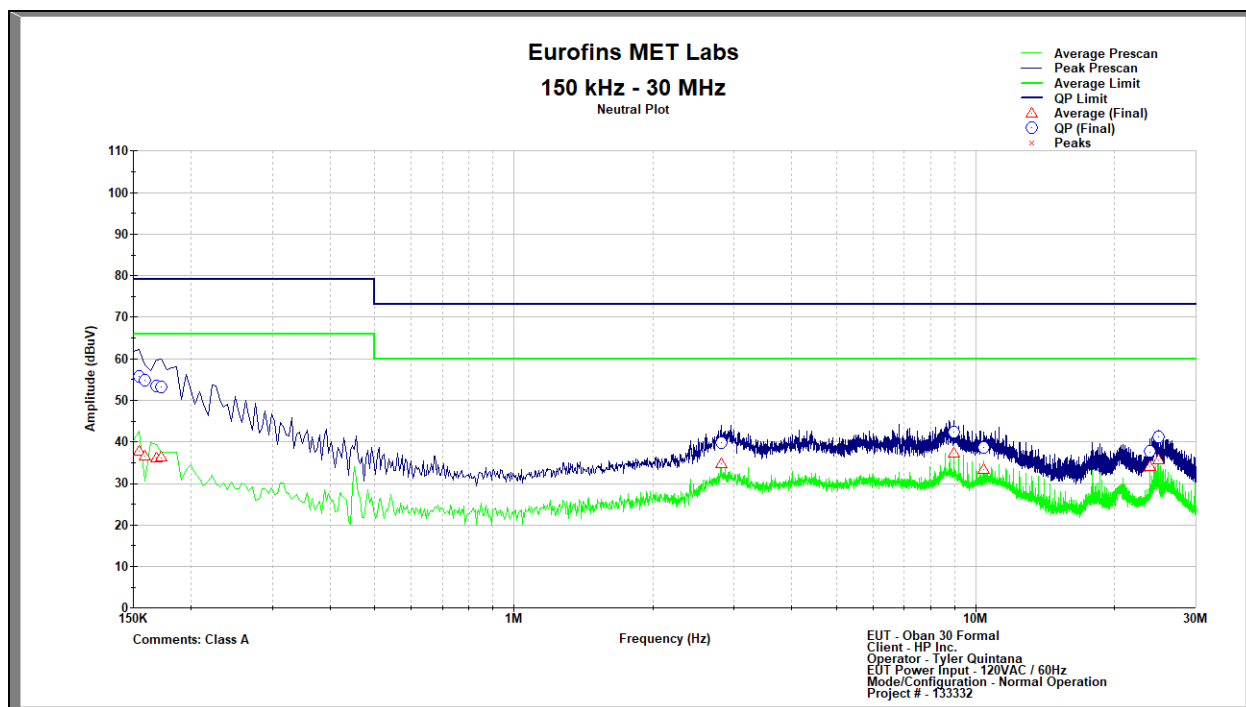

Conducted Emissions, 15.207(a), Neutral

Frequency (MHz)	Quasi-Peak (dBμV/m)	Quasi-Peak Limit (dBμV/m)	Quasi-Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)
0.154	55.859	79.000	23.141	37.693	66.000	28.307
0.159	54.899	79.000	24.101	36.603	66.000	29.397
0.168	53.356	79.000	25.644	36.136	66.000	29.864
0.172	53.130	79.000	25.870	36.225	66.000	29.775
2.814	39.791	73.000	33.209	34.691	60.000	25.309
8.991	42.292	73.000	30.708	37.220	60.000	22.780
10.424	38.655	73.000	34.345	33.278	60.000	26.722
23.862	37.620	73.000	35.380	33.973	60.000	26.027
24.930	41.299	73.000	31.701	35.624	60.000	24.376

Table 10. Conducted Emissions, 15.207(a), Neutral, Test Results

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(2) 6 dB Bandwidth

**Test Requirements:** § 15.247(a)(2): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

**Test Procedure:** The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, and the VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

**Test Results** The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was determined from the plots on the following pages.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 10/07/2024

## Electromagnetic Compatibility Criteria for Intentional Radiators

### RSS-GEN (6.7) 99% Bandwidth


**Test Requirements:** The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency rang between two points, one above and the other blow the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

**Test Procedure:** The transmitter was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, and the VBW > RBW. The 99% Bandwidth was measured and recorded.

**Test Results** The 99% Bandwidth determined from the plots on the following pages.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 10/07/2024





**Figure 3. Block Diagram, Occupied Bandwidth Test Setup**

Data Rate	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit (MHz)	99% Bandwidth (MHz)	Result
1Mbps	Low	2402	0.670	0.5	1.0252	Pass
	Middle	2440	0.670	0.5	1.0269	Pass
	High	2480	0.655	0.5	1.0227	Pass
2Mbps	Low	2402	1.110	0.5	2.0189	Pass
	Middle	2440	1.151	0.5	2.0217	Pass
	High	2480	1.129	0.5	2.0304	Pass

**Table 11. 99% and 6 dB Occupied Bandwidth, Test Results**

## Occupied Bandwidth Test Results

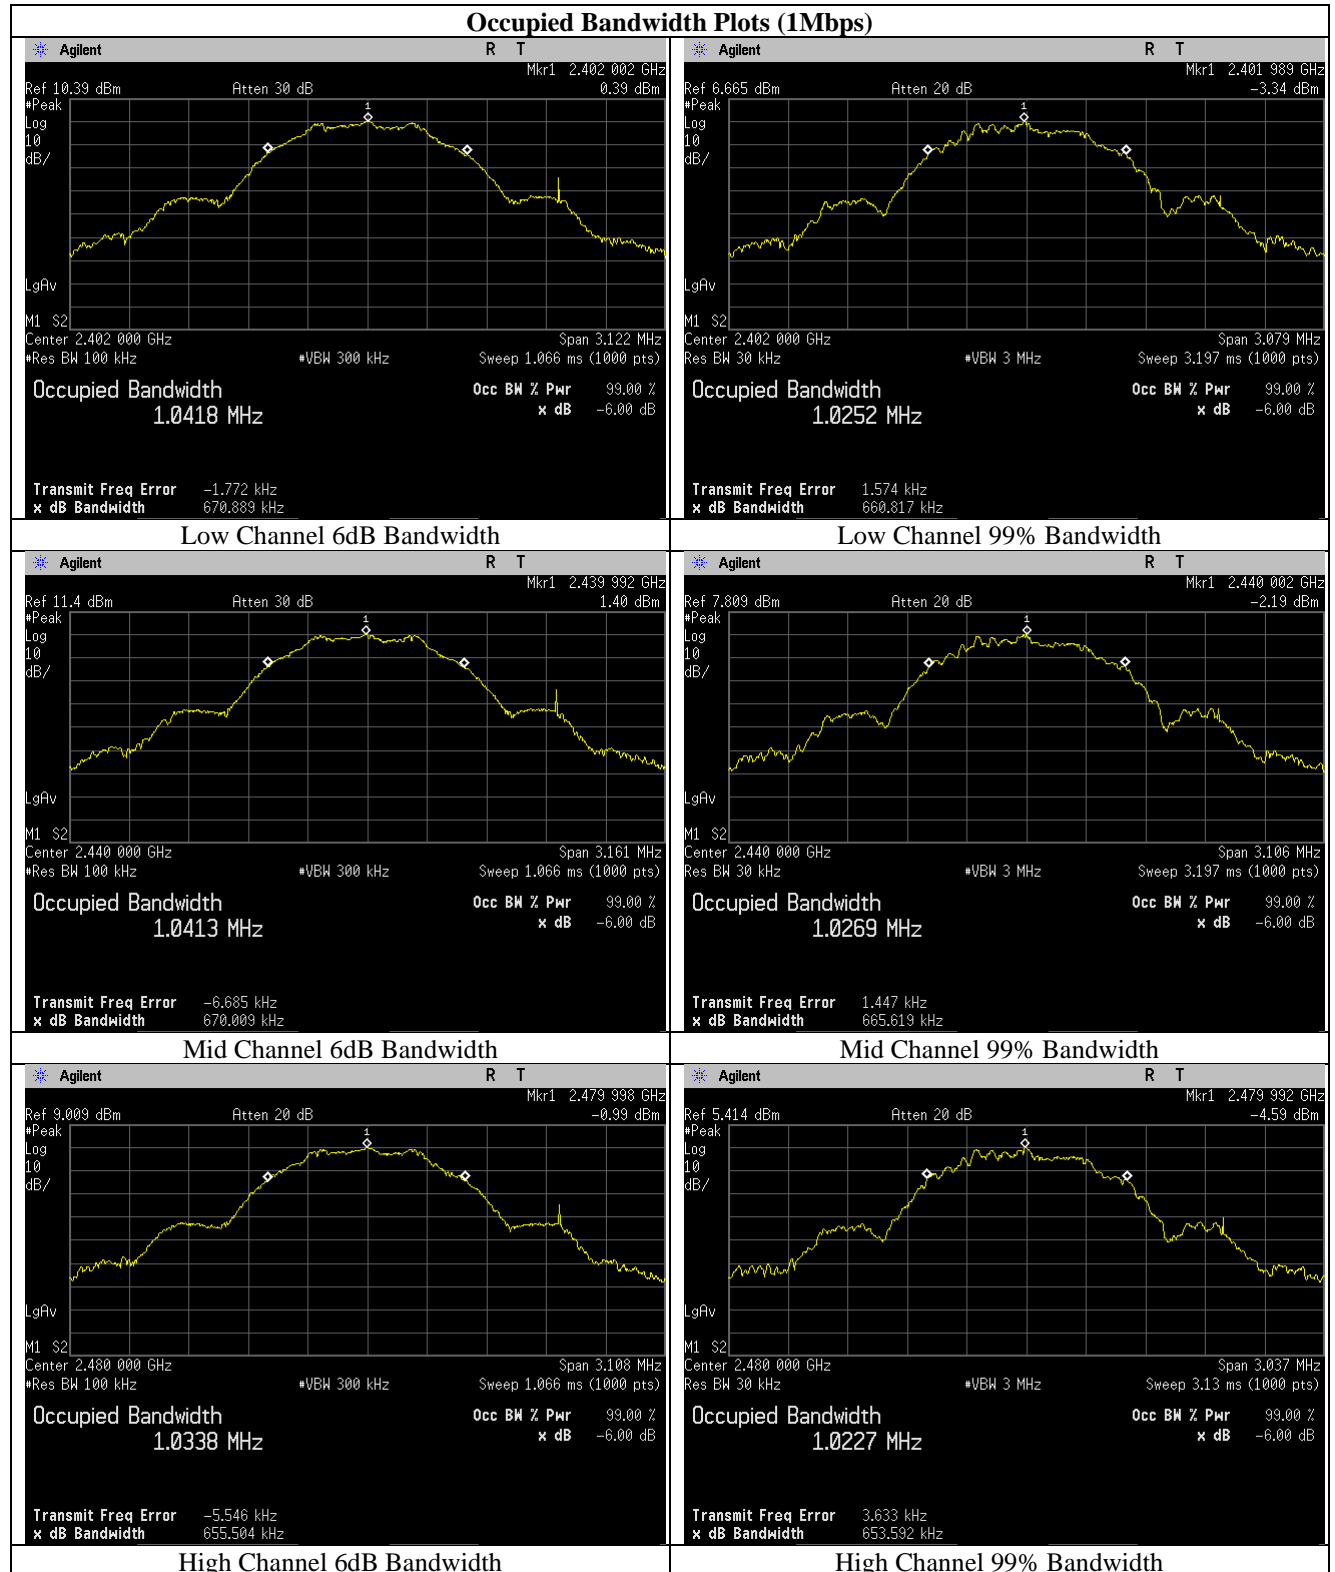

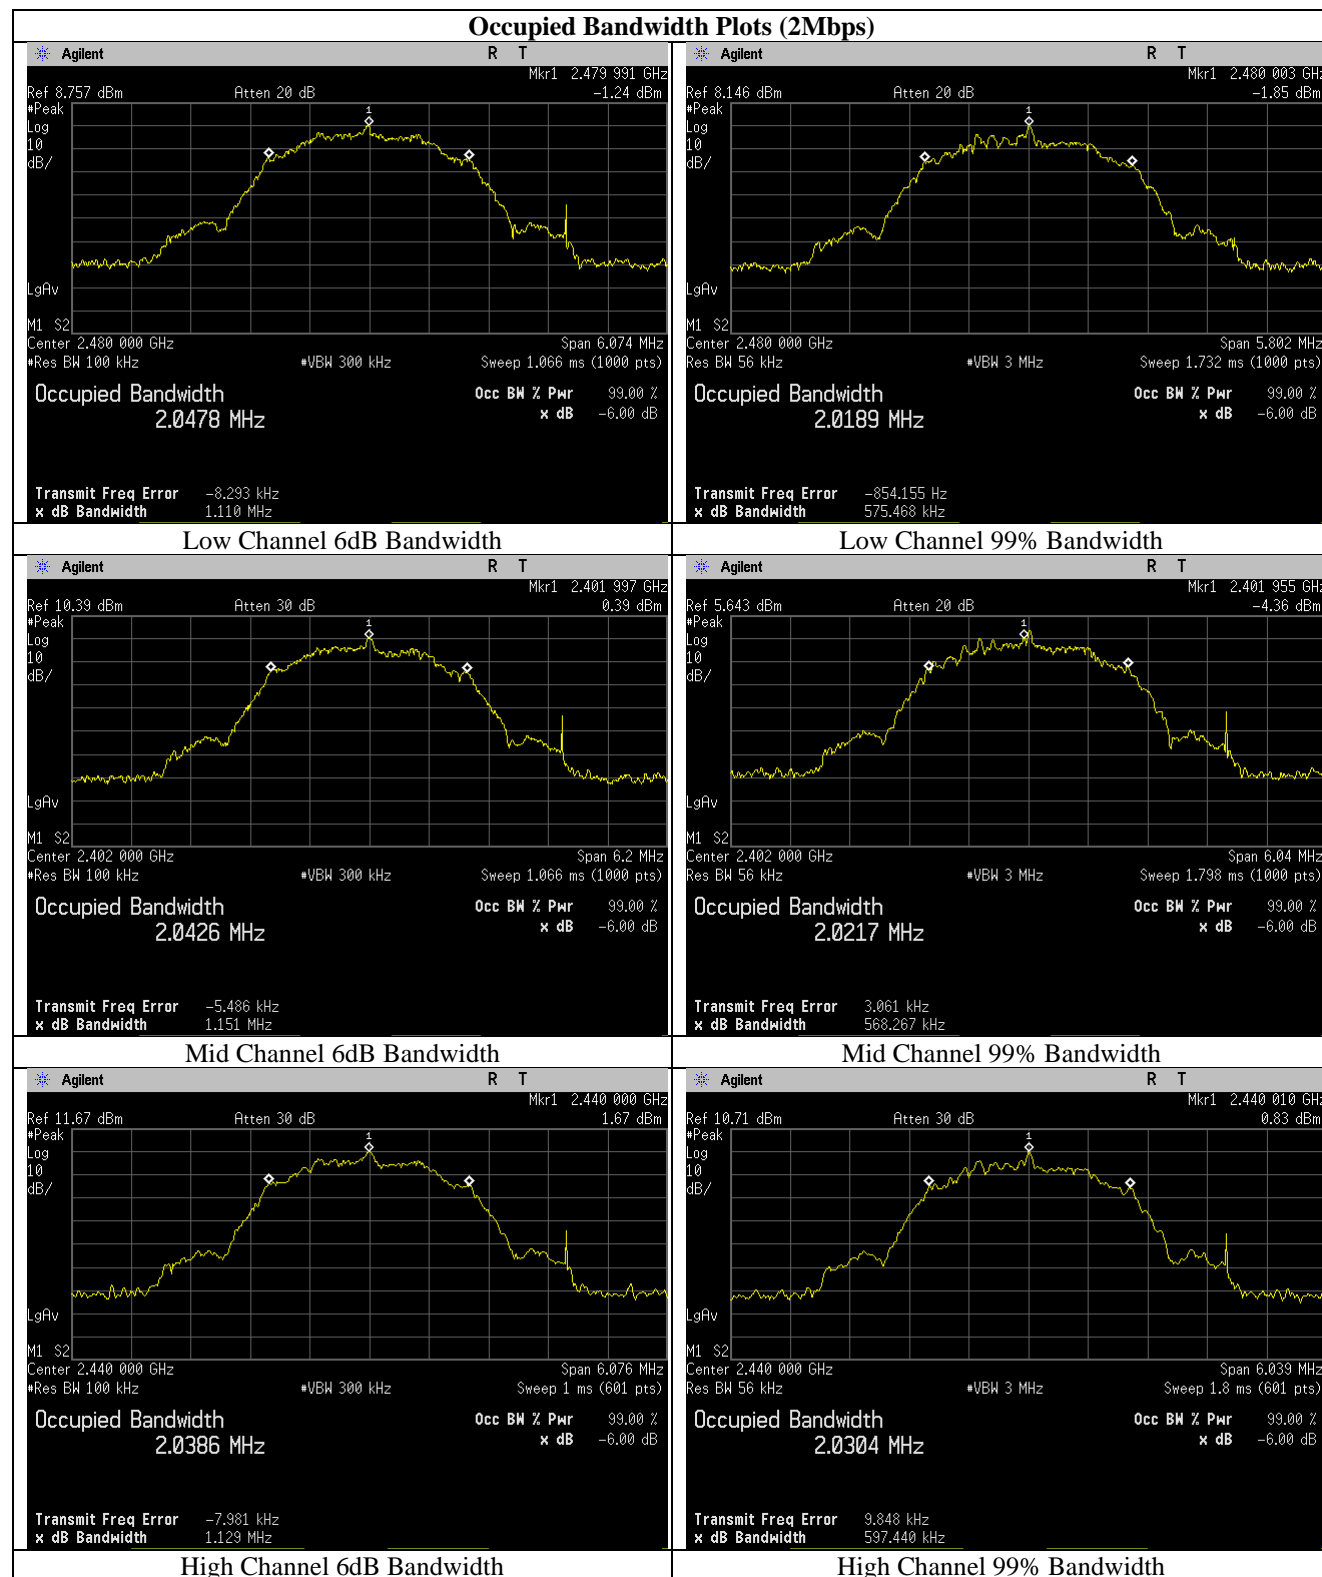



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

**Table 12. Output Power Requirements from §15.247(b)**

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 12, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.


**RSS-247 EIRP Limit:** For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

**Test Procedure:** The transmitter was connected to a calibrated spectrum analyzer. The analyzer reference level was offset by cable loss connecting to the test sample. The peak power was measured at the low, mid and high channels of each band at the maximum power level. The antenna gain provided by the manufacturer was added to the measured conducted power to arrive at the EIRP.

**Test Results:** The EUT was compliant with the Peak Power Output limits of §15.247(b) and the EIRP limits from RSS-247.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 10/07/2024




**Figure 4. Peak Power Output Test Setup**

## Peak Power Output Test Results

Data Rate	Channel	Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
1Mbps	Low	2402MHz	0.91	30	3.5	4.41	36	Pass
	Middle	2440MHz	2.09	30	3.5	5.59	36	Pass
	High	2480MHz	-0.47	30	3.5	3.03	36	Pass
2Mbps	Low	2402MHz	1.04	30	3.5	4.54	36	Pass
	Middle	2440MHz	2.32	30	3.5	5.82	36	Pass
	High	2480MHz	-0.28	30	3.5	3.22	36	Pass

**Table 13. Peak Power and EIRP, Test Results**

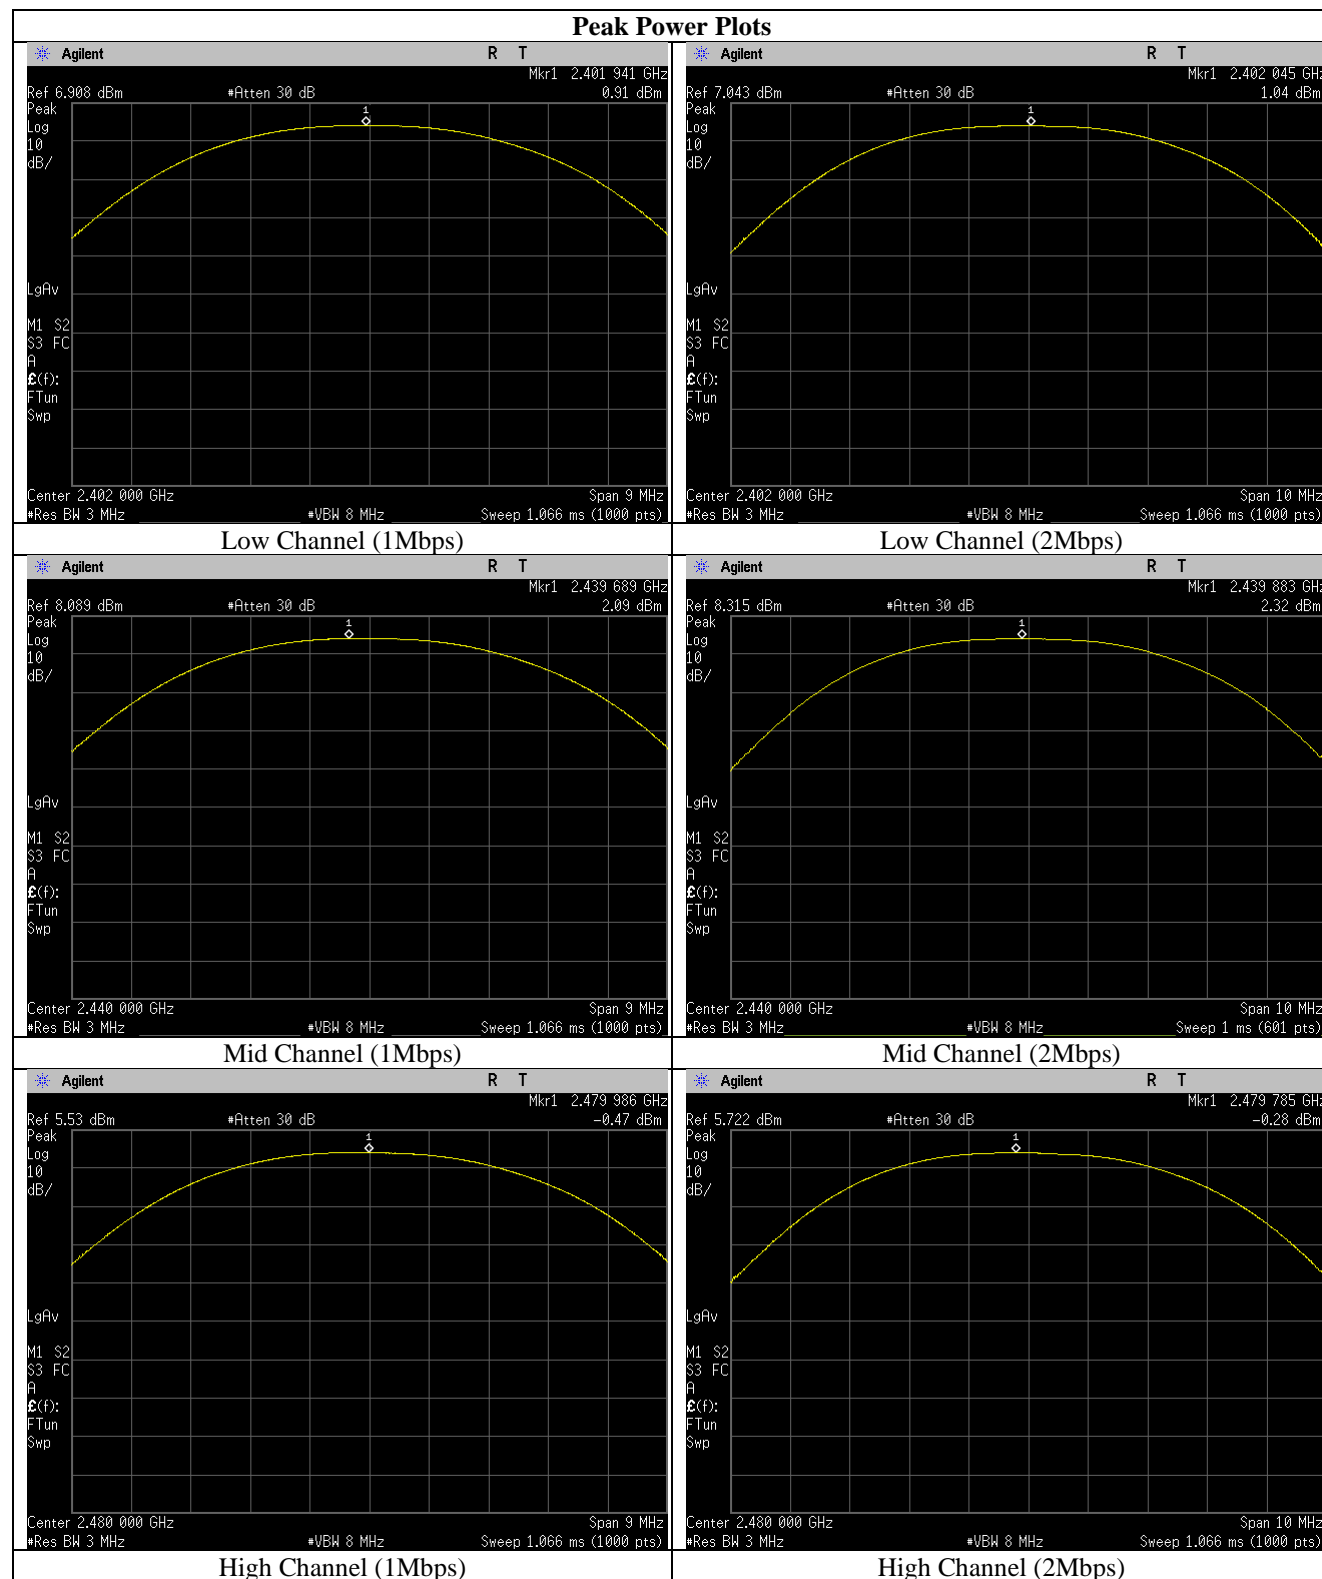

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density


**Test Requirements:** §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Procedure:** The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set between 3kHz and 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

**Test Results:** The EUT was compliant with the peak power spectral density limits of § 15.247 (e).

**Test Engineer:** Bryan Taylor


**Test Date:** 10/07/2024



**Figure 5. Block Diagram, Peak Power Spectral Density Test Setup**

Data Rate	Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Peak Power Spectral Density Limit (dBm)	Result
1Mbps	Low	2402MHz	-9.49	8	Pass
	Middle	2440MHz	-8.27	8	Pass
	High	2480MHz	-10.80	8	Pass
2Mbps	Low	2402MHz	-11.59	8	Pass
	Middle	2440MHz	-10.32	8	Pass
	High	2480MHz	-12.96	8	Pass

**Table 14. Peak Power Spectral Density, Test Results**

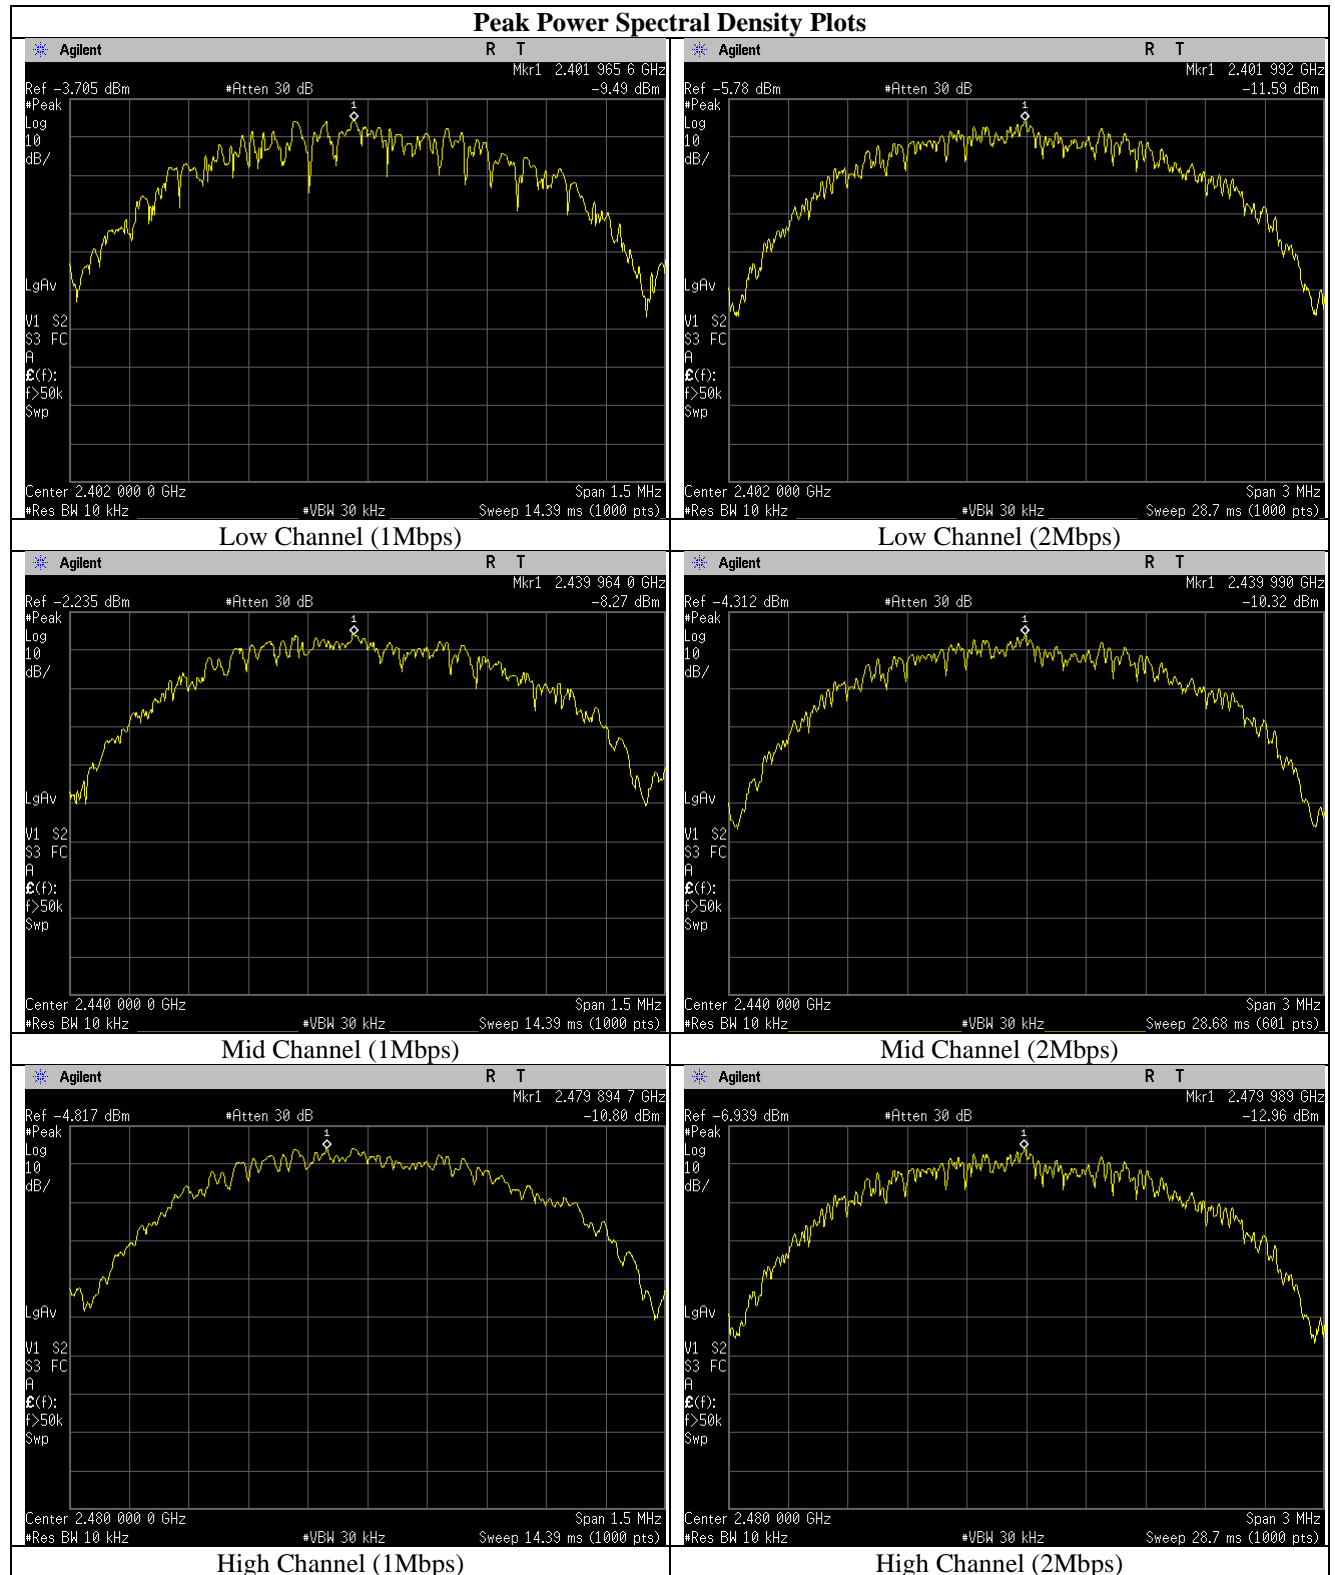

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) RF Conducted Spurious Emissions Requirements

**Test Requirement:** **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Procedure:** For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set to 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

See following pages for detailed test results with RF Conducted Spurious Emissions.

The analyzer settings are shown in the following table:

<b>RBW:</b>	100kHz	<b>Detector:</b>	Peak	<b>Reference Level:</b>	30dBm
<b>VBW:</b>	300kHz	<b>Sweep Time:</b>	Auto	<b>Internal Attenuation:</b>	30dB


**Figure 6. Analyzer Settings During Measurement**

**Test Software:** TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) was utilized to perform these measurements.

**Test Results:** The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 10/07/2024



**Figure 7. Block Diagram, Conducted Spurious Emissions Test Setup**

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
98.074	-51.85	-19.78	32.07	Pass
750.225	-56.24	-19.78	36.46	Pass
2989.537	-53.95	-19.78	34.17	Pass

Figure 8. -20dB Down Spurious Emissions (Low Channel, 1Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
98.108	-51.59	-17.73	33.86	Pass
116.704	-57.93	-17.73	40.2	Pass
4935.443	-55.44	-17.73	37.71	Pass
7700.943	-52.61	-17.73	34.88	Pass
14019.66	-49.19	-17.73	31.46	Pass
23357.23	-46.12	-17.73	28.39	Pass
24907.21	-45.48	-17.73	27.75	Pass
32971.25	-41.82	-17.73	24.09	Pass
36793.75	-36.69	-17.73	18.96	Pass

Figure 9. -20dB Down Spurious Emissions (Mid Channel, 1Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
98.074	-51.7	-20.08	31.62	Pass
3118.441	-54.03	-20.08	33.95	Pass
7711.411	-52.78	-20.08	32.7	Pass
13218.94	-49.01	-20.08	28.93	Pass
23492.86	-46.87	-20.08	26.79	Pass
24857.39	-44.05	-20.08	23.97	Pass
33037.5	-41.65	-20.08	21.57	Pass
36702.5	-35.48	-20.08	15.4	Pass

Figure 10. -20dB Down Spurious Emissions (High Channel, 1Mbps)



Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
98.108	-51.06	-21.61	29.45	Pass
464.7	-55.89	-21.61	34.28	Pass
2873.438	-53.57	-21.61	31.96	Pass
7616.097	-53.24	-21.61	31.63	Pass
24811.72	-44.71	-21.61	23.1	Pass
32993.75	-41.47	-21.61	19.86	Pass
36568.75	-37.39	-21.61	15.78	Pass


Figure 11. -20dB Down Spurious Emissions (Low Channel, 2Mbps)


Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
98.141	-51.57	-20.14	31.43	Pass
2982.113	-53.59	-20.14	33.45	Pass
13897.41	-48.7	-20.14	28.56	Pass
26747.81	-44.78	-20.14	24.64	Pass
33013.75	-41.26	-20.14	21.12	Pass
36472.5	-35.93	-20.14	15.79	Pass

Figure 12. -20dB Down Spurious Emissions (Mid Channel, 2Mbps)

Spurious Frequency (MHz)	Peak Amplitude (dBm)	-20dBd Limit (dBm)	Margin (dB)	Result
98.04	-51.65	-21.02	30.63	Pass
2894.025	-53.78	-21.02	32.76	Pass
8646.363	-52.89	-21.02	31.87	Pass
11705.21	-51.97	-21.02	30.95	Pass
13876.45	-49.07	-21.02	28.05	Pass
25639.3	-44.55	-21.02	23.53	Pass
33065	-41.39	-21.02	20.37	Pass
36643.75	-36.19	-21.02	15.17	Pass

Figure 13. -20dB Down Spurious Emissions (High Channel, 2Mbps)

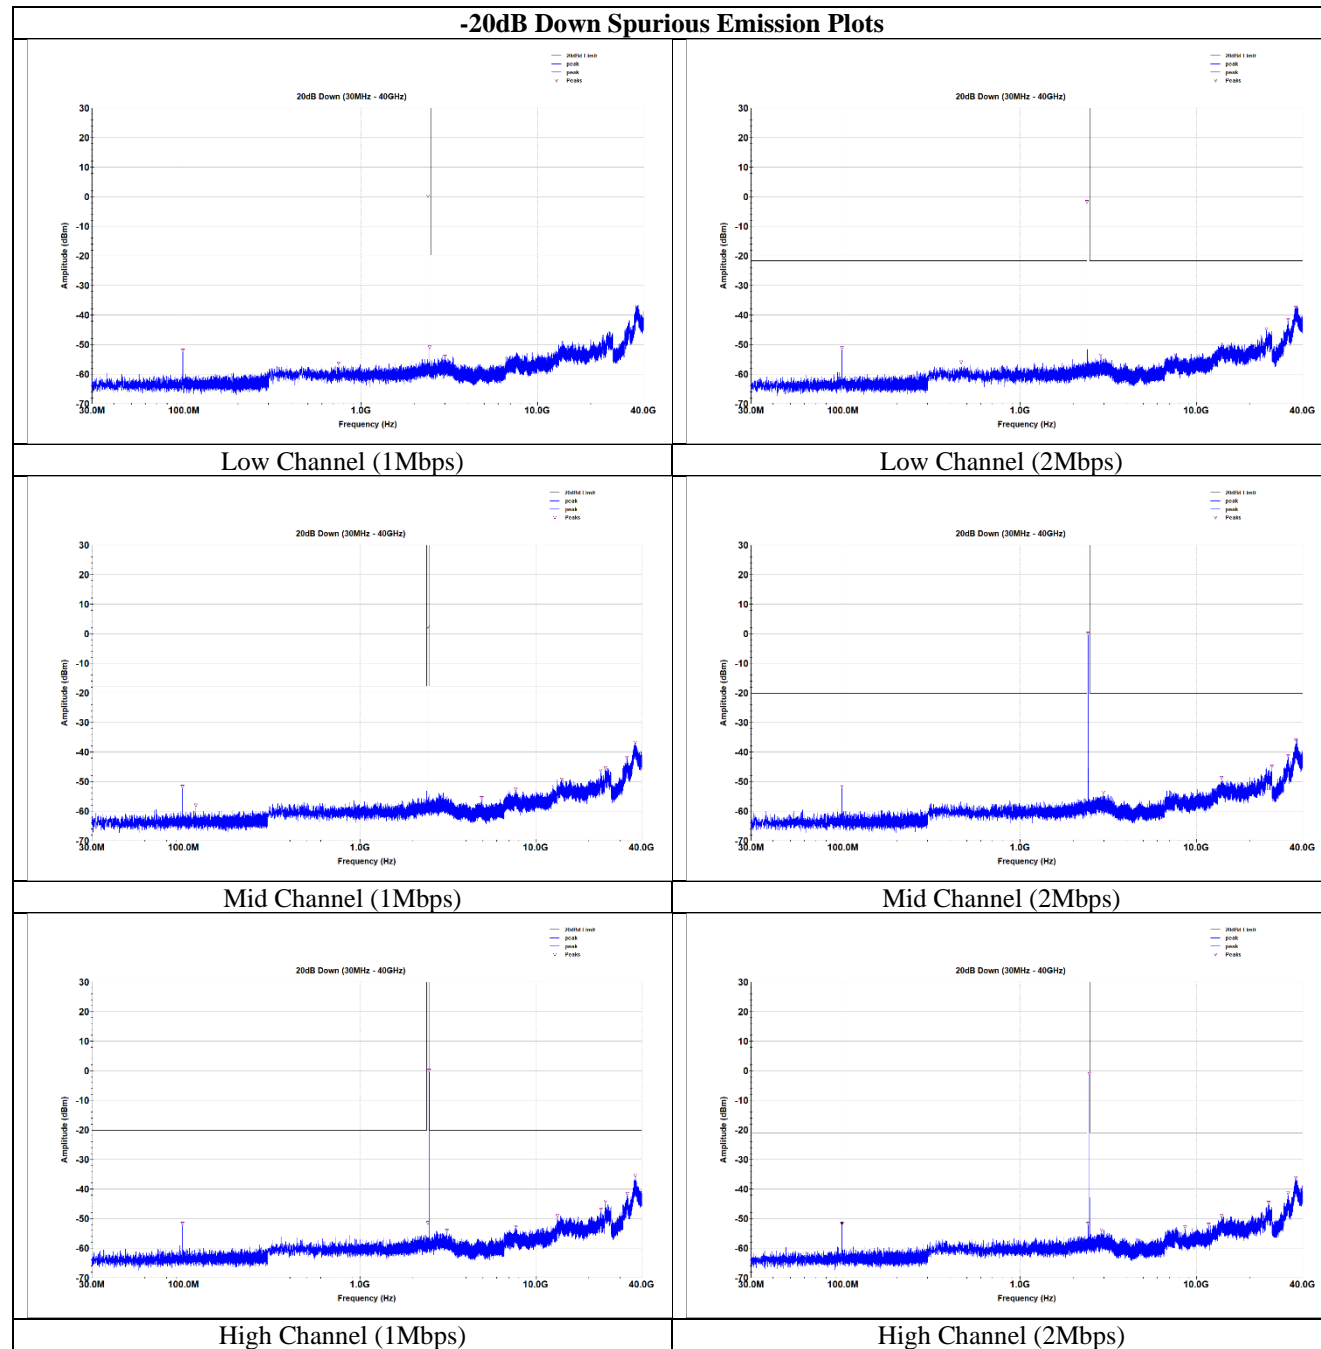

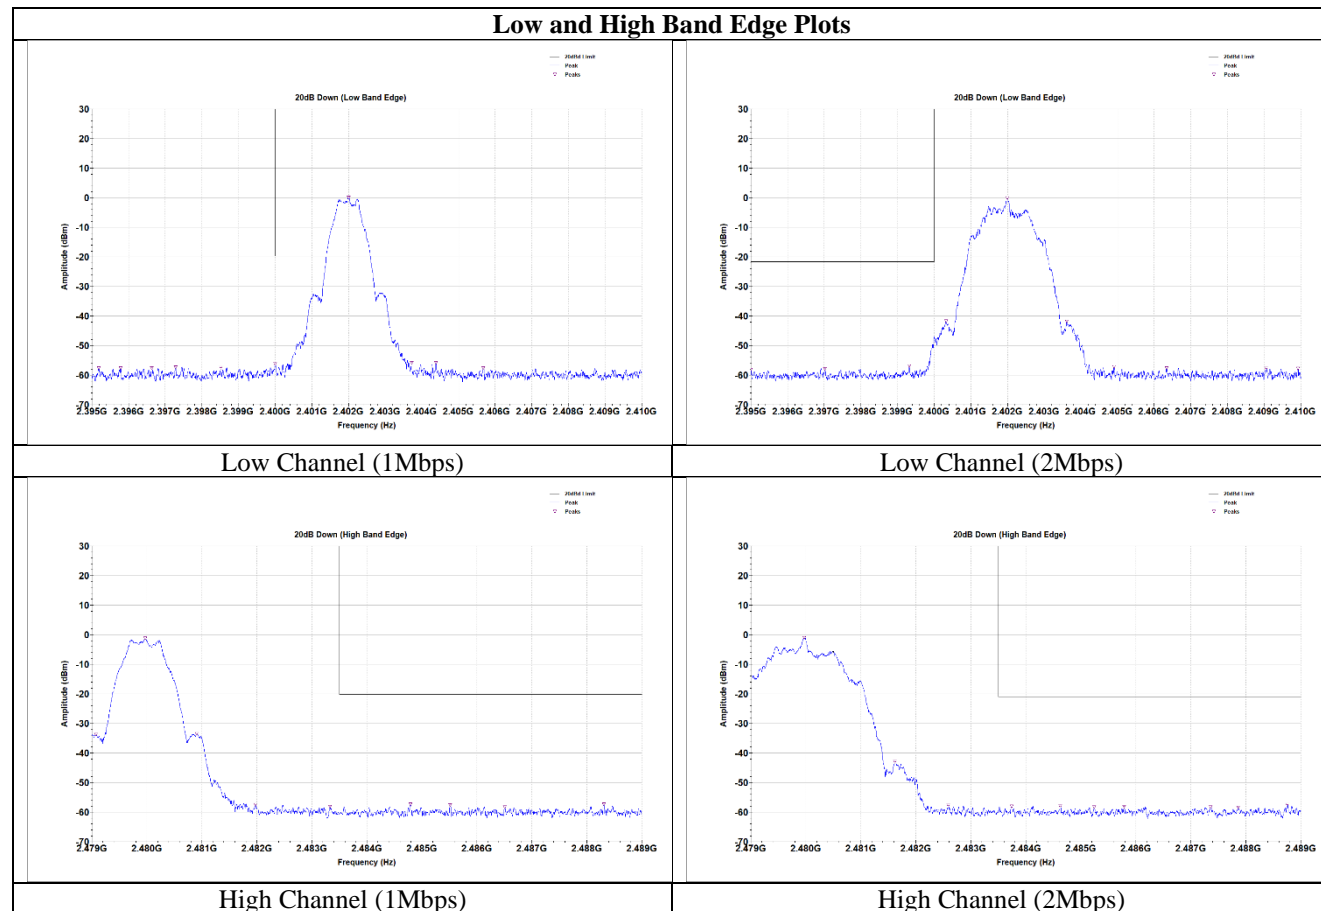

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358 36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 15. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 16.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBµV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

**Table 16. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedures:** The radiated methodology referenced in ANSI C63.10: 2013 Section 11.12.1 was utilized in order to assess the unwanted emissions in the restricted bands.

A radiated scan was performed with the antenna of proper impedance installed. The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes if multiple mounting orientations are supported. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.


Radiated measurements below 30MHz were performed in a semi-anechoic chamber that has been correlated to an open area site.


**Test Software:** TILE Version 7.4.2.5 (Manufactured by ETS Lindgren) and ELEKTRA Version 4.61 (Manufactured by Rohde & Schwarz) was utilized to perform these measurements.


**Test Results:** The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).

**Test Engineer(s):** Bryan Taylor, Sergio Gutierrez

**Test Date(s):** 08/29/2024 – 09/28/2024

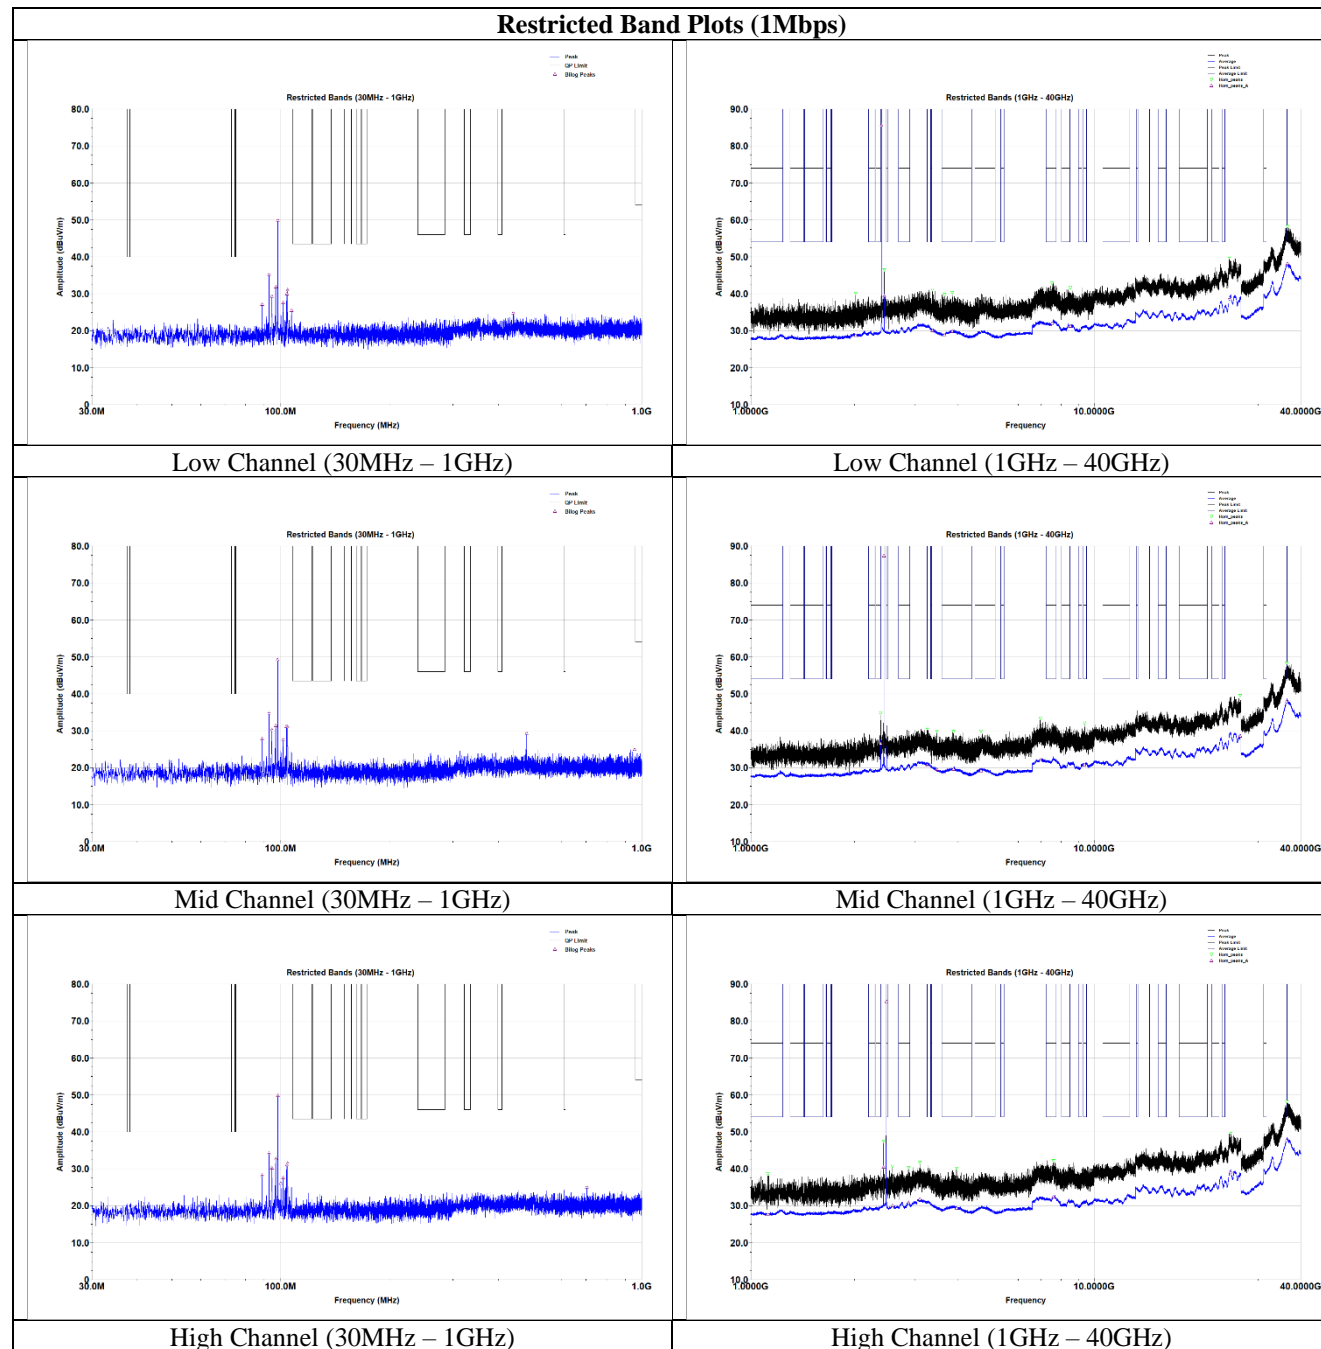

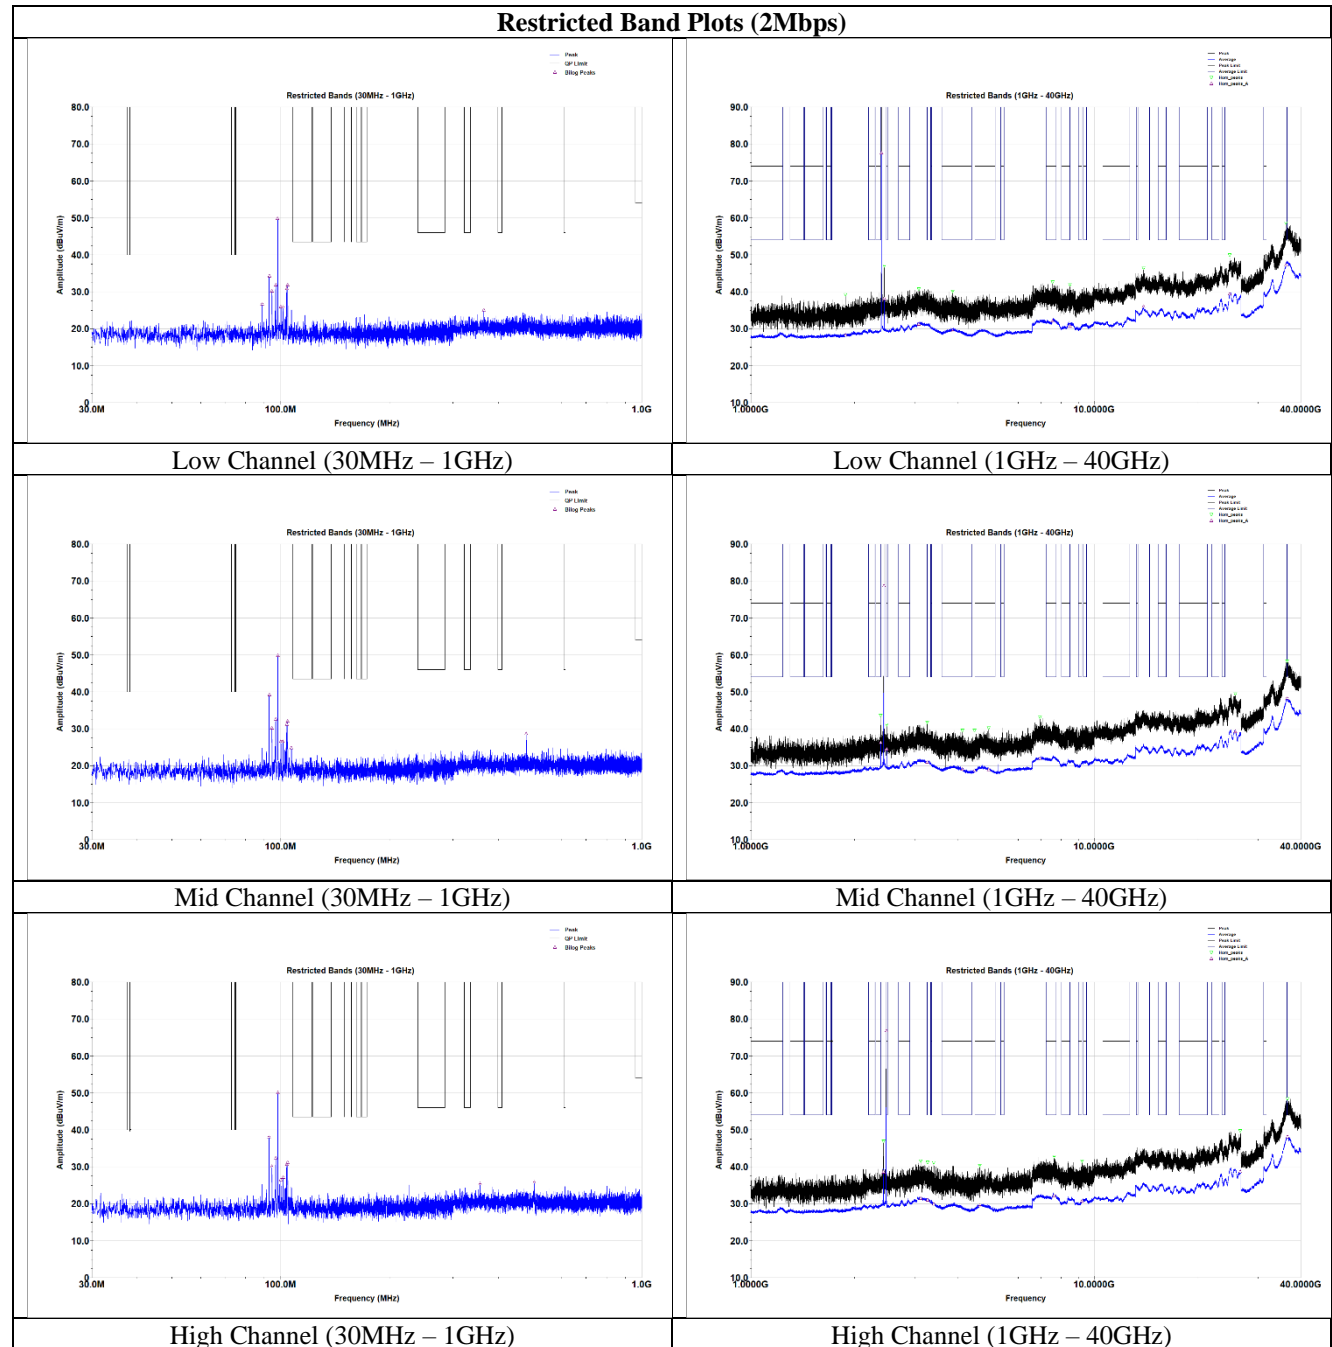

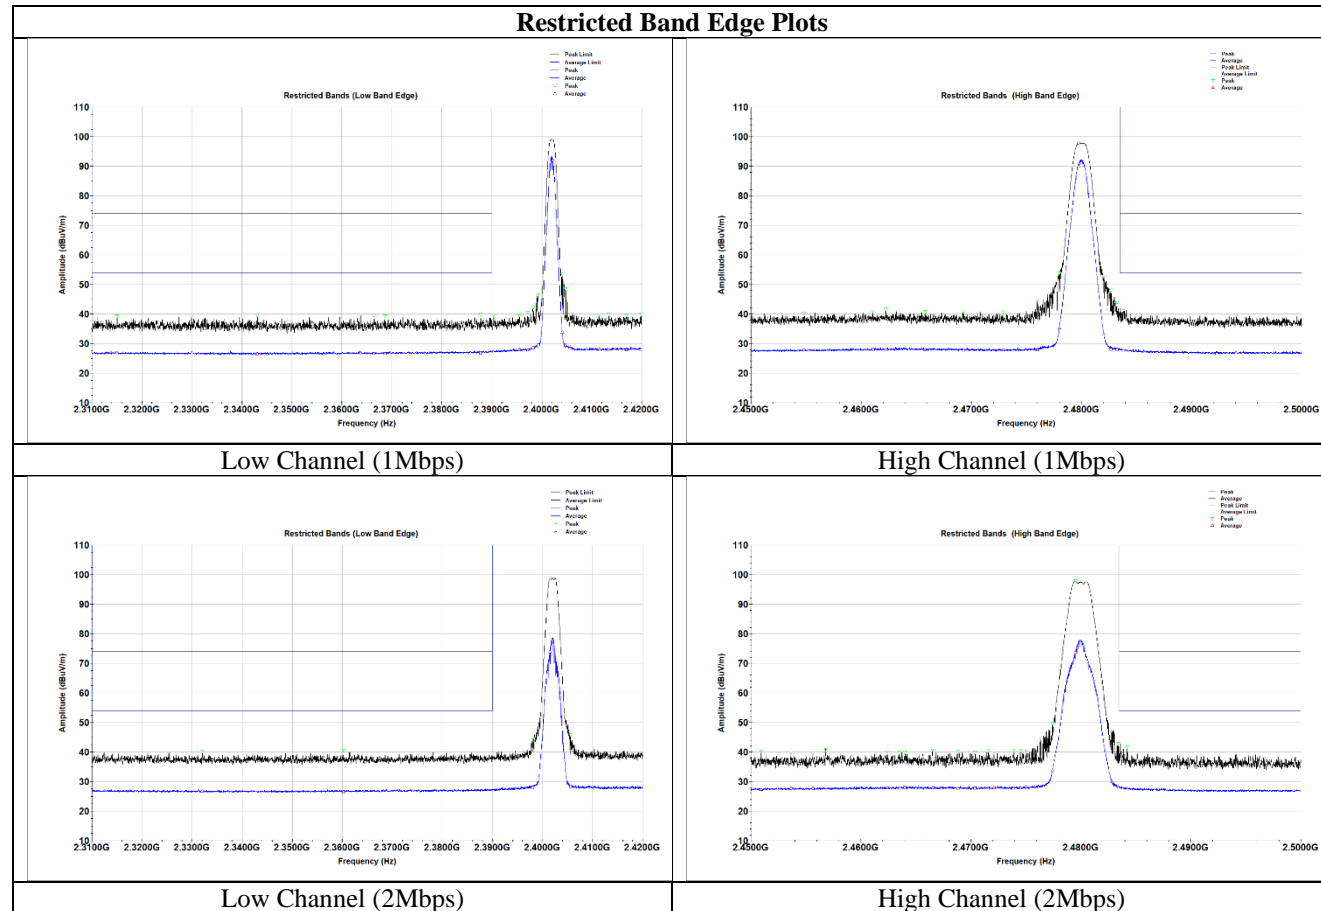



Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2315.046	39.35	74.00	34.65	26.99	54.00	27.01	Pass
2329.951	39.12	74.00	34.88	26.91	54.00	27.09	Pass
2343.11	39.39	74.00	34.61	26.54	54.00	27.46	Pass
2363.749	39.78	74.00	34.22	27.02	54.00	26.98	Pass
2366.375	39.5	74.00	34.5	26.69	54.00	27.31	Pass
2368.644	39.27	74.00	34.73	26.64	54.00	27.36	Pass
2387.729	39.8	74.00	34.2	26.84	54.00	27.16	Pass

Figure 14. Restricted Band Edge Spurious Emissions (Low Band Edge, 1Mbps)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2332.014	40.19	74.00	33.81	26.87	54.00	27.13	Pass
2360.229	40.51	74.00	33.49	26.62	54.00	27.38	Pass

Figure 15. Restricted Band Edge Spurious Emissions (Low Band Edge, 2Mbps)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2483.813	41.45	74.00	32.55	27.84	54.00	26.16	Pass
2494.063	39.48	74.00	34.52	26.95	54.00	27.05	Pass

Figure 16. Restricted Band Edge Spurious Emissions (High Band Edge, 1Mbps)

Frequency	Peak Reading (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Avg Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dBuV/m)	Result
2484.206	41.68	74.00	32.32	27.54	54.00	26.46	Pass

Figure 17. Restricted Band Edge Spurious Emissions (High Band Edge, 2Mbps)

### Worst Case Cabinet Spurious Emissions

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.095	39.42	108.10	68.68	11.53	108.9	1	0.200	108.9	Pass
0.100	39.87	107.65	67.78	11.29	78	1	0.200	78	Pass
0.106	42.87	107.07	64.19	11.34	239.8	1	0.200	239.8	Pass
0.108	38.25	106.96	68.71	11.35	195.2	1	0.200	195.2	Pass

Figure 18. Worst Case Cabinet Radiation, 9kHz - 30MHz (1Mbps)

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.091	40.23	108.45	68.22	11.72	59.7	1	0.200	59.7	Pass
0.097	40.26	107.89	67.63	11.43	105.1	1	0.200	105.1	Pass
0.501	46.89	73.69	26.80	11.27	39.7	1	9.000	39.7	Pass
0.510	45.47	73.54	28.07	11.35	266	1	9.000	266	Pass

Figure 19. Worst Case Cabinet Radiation, 9kHz - 30MHz (2Mbps)

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
75.120	22.78	40.00	17.22	-12.23	V	134.1	1.81	120.000	Pass
120.000	29.27	43.52	14.25	-6.77	V	248.2	1.02	120.000	Pass
120.030	20.74	43.52	22.78	-6.37	H	284.3	3.75	120.000	Pass
127.980	12.86	43.52	30.66	-6.74	V	185.2	0.99	120.000	Pass
248.040	17.60	46.02	28.42	-7.48	V	88.5	1.04	120.000	Pass
332.400	17.25	46.02	28.77	-4.70	H	22	1.81	120.000	Pass

Figure 20. Worst Case Cabinet Radiation, 30MHz - 1GHz (1Mbps)

Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
111.570	13.40	43.52	30.12	-7.68	V	221.8	2.56	120.000	Pass
120.000	29.54	43.52	13.98	-6.77	V	263.2	1.07	120.000	Pass
120.030	20.68	43.52	22.84	-6.37	H	249.7	3.97	120.000	Pass
126.930	12.17	43.52	31.35	-6.54	V	159.3	1.5	120.000	Pass
248.580	18.17	46.02	27.85	-7.48	V	92.4	1.15	120.000	Pass
268.500	12.85	46.02	33.17	-6.11	H	19.4	2.1	120.000	Pass


Figure 21. Worst Case Cabinet Radiation, 30MHz - 1GHz (2Mbps)


Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
4,879.500	42.79	74.00	31.21	29.61	54.00	24.39	-3.35	H	182.6	1.36	Pass
4,880.500	42.65	74.00	31.35	29.50	54.00	24.50	-3.34	V	59.7	2.19	Pass
7,315.500	44.18	74.00	29.82	31.04	54.00	22.96	-2.81	H	247.9	1.35	Pass
7,320.000	43.35	74.00	30.65	30.76	54.00	23.24	-2.79	V	249.6	1.06	Pass
12,215.000	43.48	74.00	30.52	30.99	54.00	23.01	-1.94	H	195.4	2.59	Pass
12,218.500	43.58	74.00	30.42	31.02	54.00	22.98	-1.95	V	219.5	3.42	Pass
19,782.000	52.96	74.00	21.04	41.44	54.00	12.56	12.40	V	16.4	3.89	Pass
20,859.313	51.94	74.00	22.06	40.94	54.00	13.06	12.46	H	174.6	3.99	Pass
20,859.313	53.45	74.00	20.55	43.76	54.00	10.24	12.46	V	59	3.01	Pass
23,766.750	50.82	74.00	23.18	39.26	54.00	14.74	14.53	V	211.7	3.99	Pass

Figure 22. Worst Case Cabinet Radiation, Above 1GHz (1Mbps)

Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
4,873.500	41.41	74.00	32.59	28.56	54.00	25.44	-3.45	H	92.3	1.26	Pass
4,879.500	41.59	74.00	32.41	28.77	54.00	25.23	-3.35	V	269.9	2.97	Pass
7,340.500	45.32	74.00	28.68	32.36	54.00	21.64	-2.69	H	321.6	1.82	Pass
7,345.500	45.46	74.00	28.54	32.76	54.00	21.24	-2.67	V	54.1	2.5	Pass
12,218.000	44.48	74.00	29.52	30.98	54.00	23.02	-1.95	H	125.6	1.01	Pass
12,218.000	43.65	74.00	30.35	30.99	54.00	23.01	-1.95	V	254.9	3.32	Pass
19,746.938	52.41	74.00	21.59	40.67	54.00	13.33	12.42	V	53.8	1.89	Pass
20,859.313	51.65	74.00	22.35	40.29	54.00	13.71	12.46	H	176.6	3.99	Pass
20,859.313	53.06	74.00	20.94	41.68	54.00	12.32	12.46	V	285.1	3.44	Pass
23,834.813	51.38	74.00	22.62	39.71	54.00	14.29	14.49	V	37.6	1.79	Pass

Figure 23. Worst Case Cabinet Radiation, Above 1GHz (2Mbps)

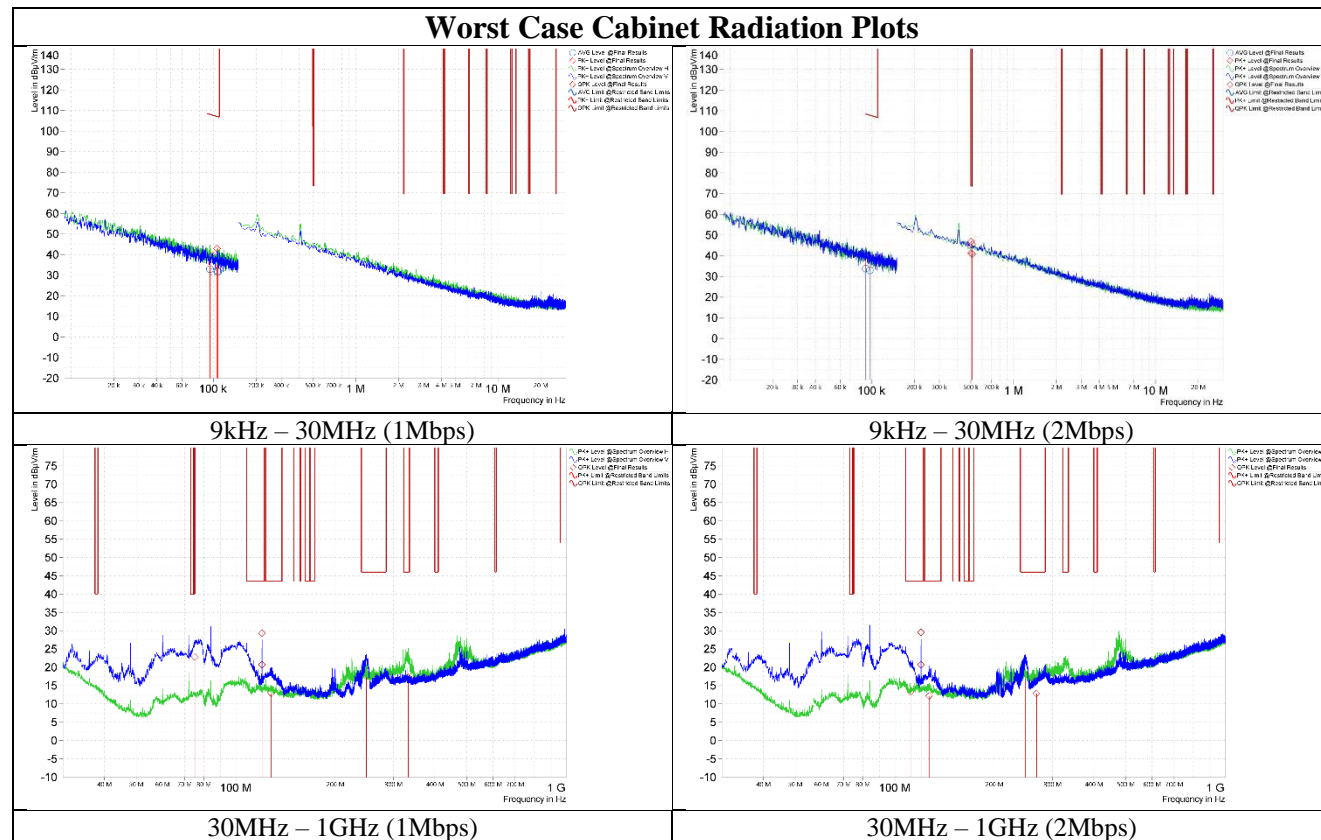

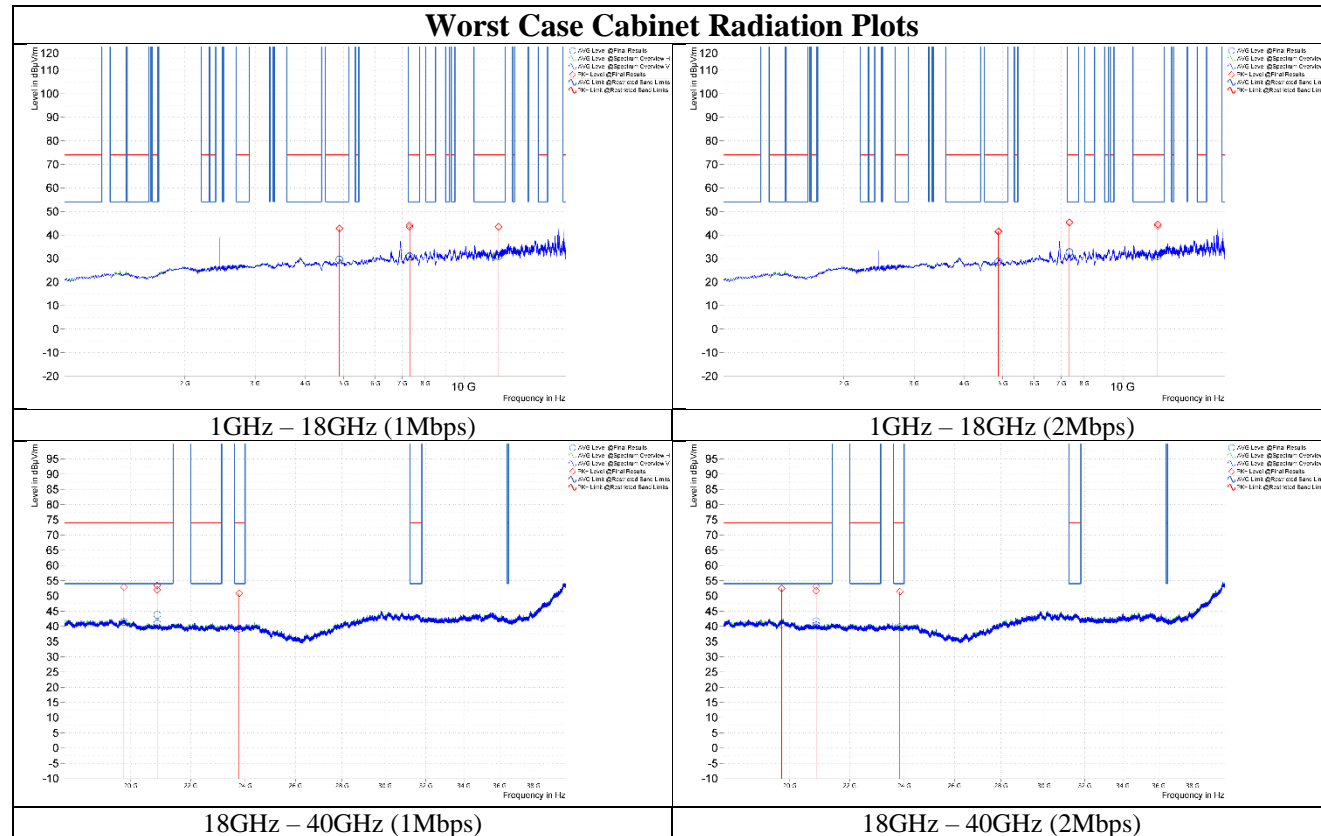

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET Asset #	Description	Manufacturer	Model	Last Cal Date	Cal Due Date
MY46180897	Spectrum Analyzer	Keysight	E4448A	08/28/2024	08/28/2025
1A1065	Receiver	Rohde & Schwarz	ESCI	08/20/2024	08/20/2025
1A1250	Receiver	Rohde & Schwarz	ESW44	04/08/2024	04/08/2025
1A1176	Active Loop Antenna (9KHz-30MHz)	ETS-Lindgren	6502	08/22/2024	08/22/2026
1A1147	Bi-Log Antenna	Suno Sciences Corp	JB3	04/06/2023	04/06/2025
1A1047	Horn Antenna	ETS - Lindgren	3117	06/26/2024	06/26/2025
1A1161	Horn Antenna (18GHz – 40GHz)	ETS Lindgren	3116C	08/01/2024	08/01/2026
1A1177	Pulse Limiter	Rohde & Schwarz	ESH3Z2	12/14/2023	12/14/2024
1A1122	LISN	TESEQ	NNB 51	09/21/2023	09/21/2024
1A1149	DC Milliohm Meter	GW Instek	GOM-802	09/24/2023	09/24/2024
1A1099	Generator	Com-Power	CGO-51000	See Note	
1A1088	Preamplifier	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	Com-Power	CG-520	See Note	
1A1073	Multi Device Controller	ETS	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi-Device	ETS	2090	See Note	
1A1180	Preamplifier	Miteq	AMF-7D- 01001800-22- 10P	See Note	

**Table 17. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

**End of Report**