



EMC TEST REPORT FCC 47 CFR Part 15B Industry Canada ICES-003 Electromagnetic compatibility - Unintentional radiators	
Report Reference No.	G0M-1507-4951-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A</p>
Applicant's name	Polycom Inc.
Address	6001 America Center Drive 95002 San Jose USA
Test specification:	
Standard.....	47 CFR Part 15 Subpart B ICES-003, Issue 5:2012 ANSI C63.4:2014
Equipment under test (EUT):	
Product description	Desktop VoIP Bluetooth Telephone
Model No.	VVX601
Additional Models	None
Hardware version	2201-48600-001
Firmware / Software version	5.4.0.xxxx
IDs	FCC-ID: M72-VVX601 IC: 1849C-VVX601
Test result	Passed

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2015-08-03

Date (s) of performance of tests: 2015-08-14 – 2015-09-09

Compiled by: Marcus Klein

Tested by (+ signature).....: Marco Belz *i.v. Marco Belz*

Approved by (+ signature): Marcus Klein *M. Klein*

Head of Lab

Date of issue: 2015-09-29

Total number of pages: 34

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2015-09-29	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	8
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	12
1.5	Input / Output Ports	12
1.6	Operating Modes and Configurations	13
1.7	Test Equipment Used During Testing	14
1.8	Sample emission level calculation	15
2	RESULT SUMMARY	16
3	TEST CONDITIONS AND RESULTS	17
3.1	Test Conditions and Results – Radiated emissions	17
3.2	Test Conditions and Results – AC power line conducted emissions	31

1 Equipment (Test item) Description

Description	Desktop VoIP Bluetooth Telephone	
Model	VVX601	
Additional Models	None	
Serial number	None	
Hardware version	2201-48600-001	
Software / Firmware version	5.4.0.xxxx	
FCC-ID	M72-VVX601	
IC-ID	1849C-VVX601	
Power supply	100 – 240 VAC 50/60 Hz	
Dedicated AC/DC-Adaptor	Model : FSP025-DINANS Manufacturer : Polycom Input : 100-240VAC / 50-60Hz Output : 48VDC / 0.52A	
PoE Adapter	Model : FS116P Manufacturer : Netgear Input : 100-240VAC / 50-60Hz Output : 48VDC	
Radio module	Type	Bluetooth Module
	Model	CC2564
	Manufacturer	Murata
Manufacturer	Polycom Inc. 6001 America Center Drive 95002 San Jose USA	
Highest emission frequency	Fmax [MHz] = 2400	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	RJ11 Headset	Sundely	-	-
AE	USB Stick	maxell	-	-
AE	USB Stick	sandisk	cruzer	-
AE	Telephone	Polycom	Soundpoint IP321	-
AE	Switch	Netgear	FS116P	-

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	AC Mains	AC	>3m	No	
2	Ethernet	TP	1.82m	No	2x, Cat.5
3	USB	I/O	-	-	2x, USB Stick connected
4	RJ 11	I/O	<3m	No	Headset

***Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	EUT AC powered from AC/DC Adapter, continuous call established, LAN ping, Bluetooth scanning.
2	EUT powered from Power over Ethernet Adapter, continuous call established, LAN ping, Bluetooth scanning.

Configuration #	EUT Configuration
1	Fully configured with wired Headset, 2 USB Sticks and Ethernet connection

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2015-01	2016-01

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
AMN	R&S	ESH3-Z5	EF00036	2014-12	2016-12
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		24°C		
Relative Humidity		30 to 60 %		35%		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		Fmax [MHz] = 2400				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 15 GHz				
Operating mode		1 / 2				
Configuration		1				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.

The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycom Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 1

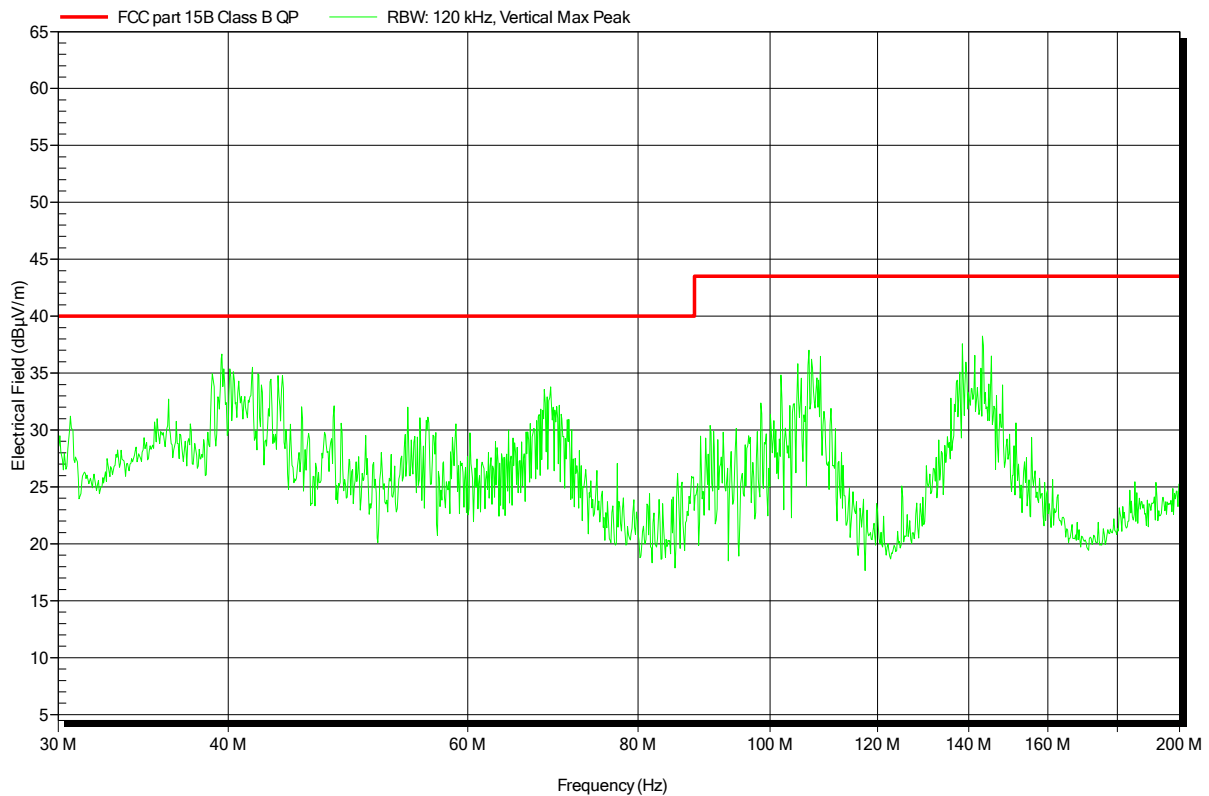


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 2

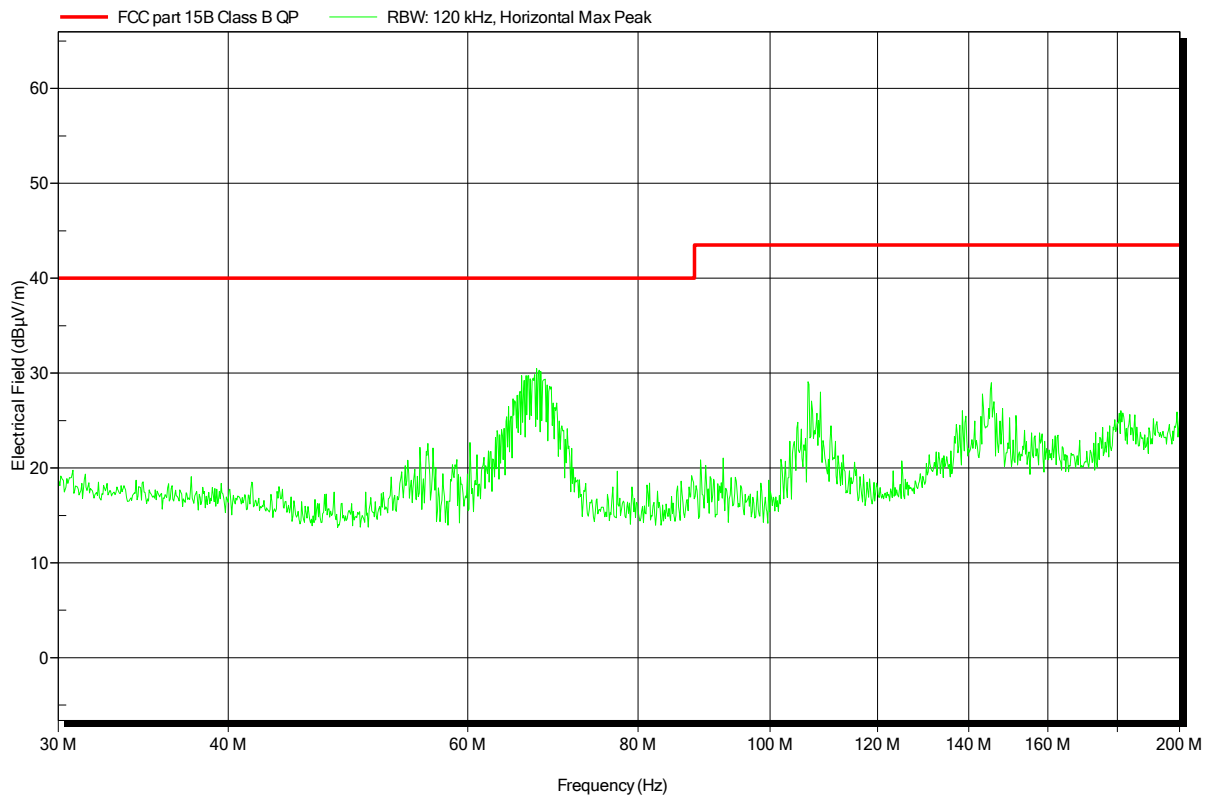


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	PoE; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 4

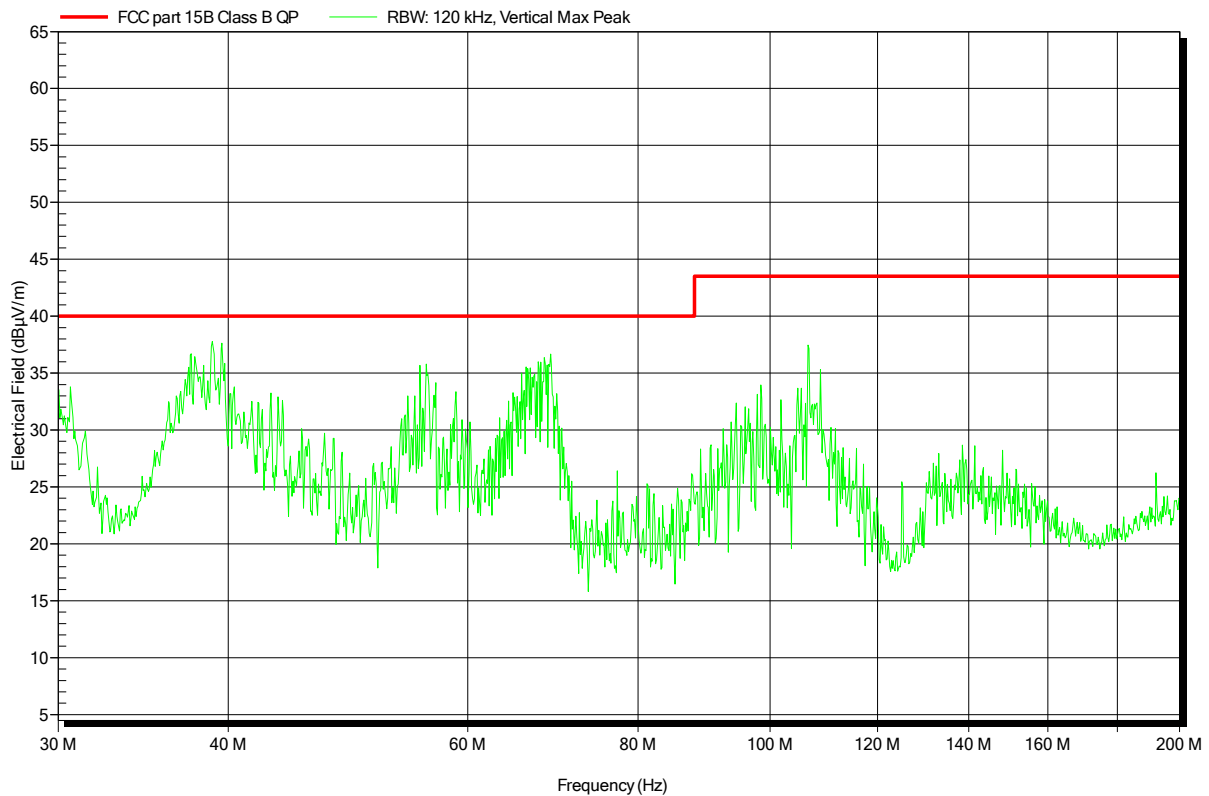


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	PoE; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 3

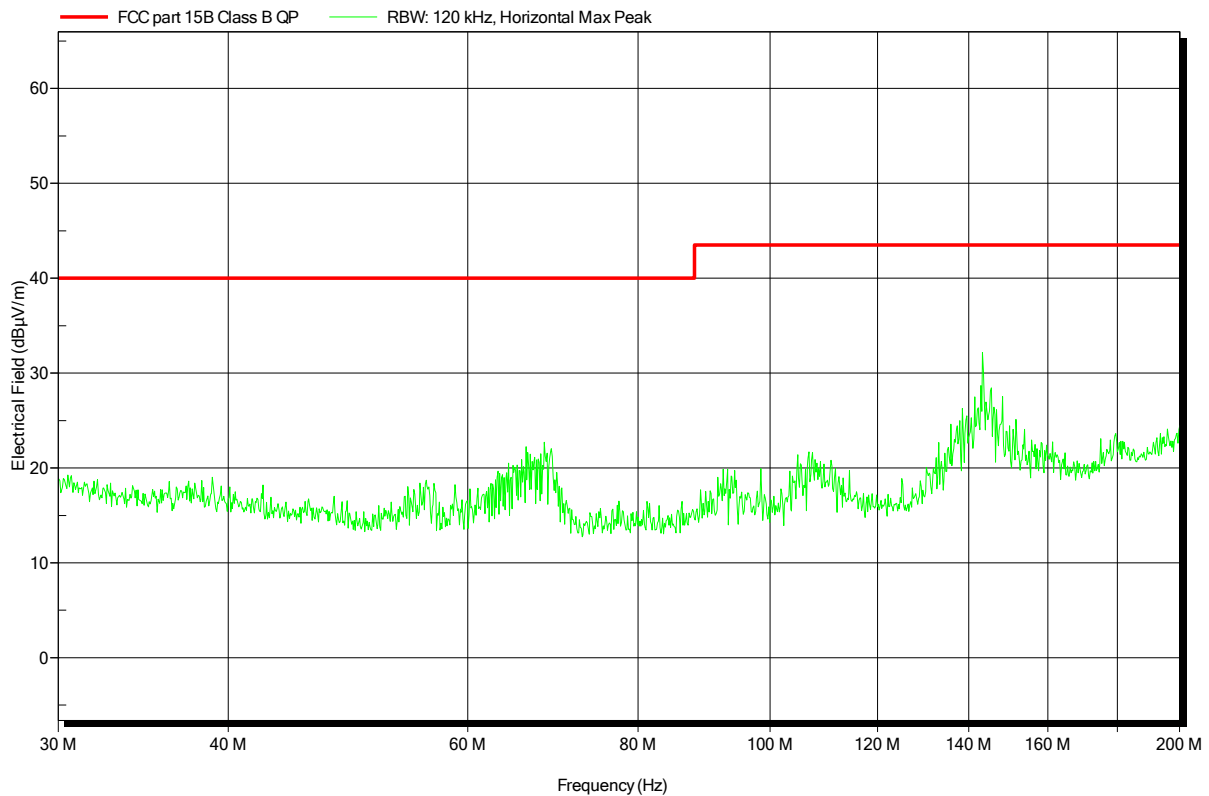

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 8



Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant: Polycm Inc.
 EUT Name: Desktop VoIP Bluetooth Telephone
 Model: VVX601
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: 120 VAC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: AC/DC; Call-Con. (continuous); LAN ping; BT active;
 Test Date: 2015-09-07
 Note:

Index 7



Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
375.015 MHz	42.59 dBµV/m	46 dBµV/m	-3.41 dB	Pass

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	PoE; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 5




Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant: Polycm Inc.
 EUT Name: Desktop VoIP Bluetooth Telephone
 Model: VVX601
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: 120 VAC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: PoE; Call-Con. (continuous); LAN ping; BT active;
 Test Date: 2015-09-07
 Note:

Index 6

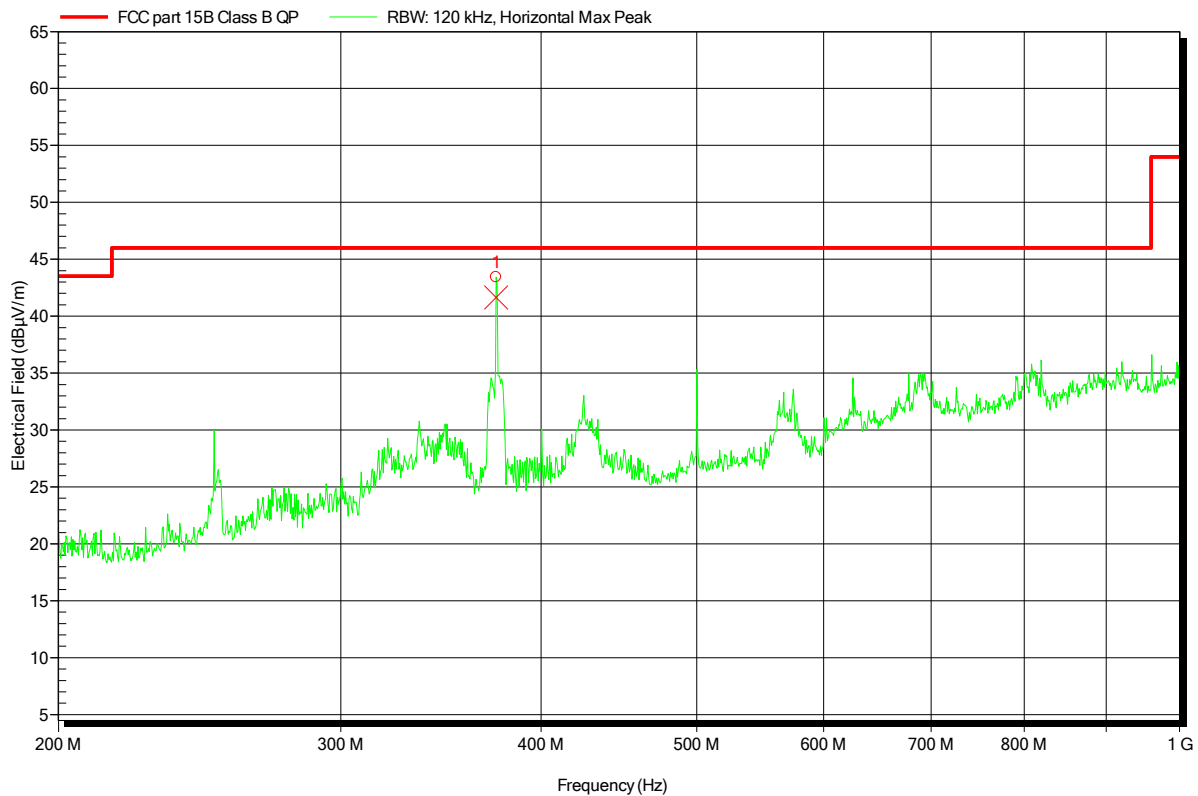

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
375.01 MHz	41.65 dBµV/m	46 dBµV/m	-4.35 dB	Pass

 Test Report No.: G0M-1507-4951-EF0115B-V01


 Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	BT Link

Index 9

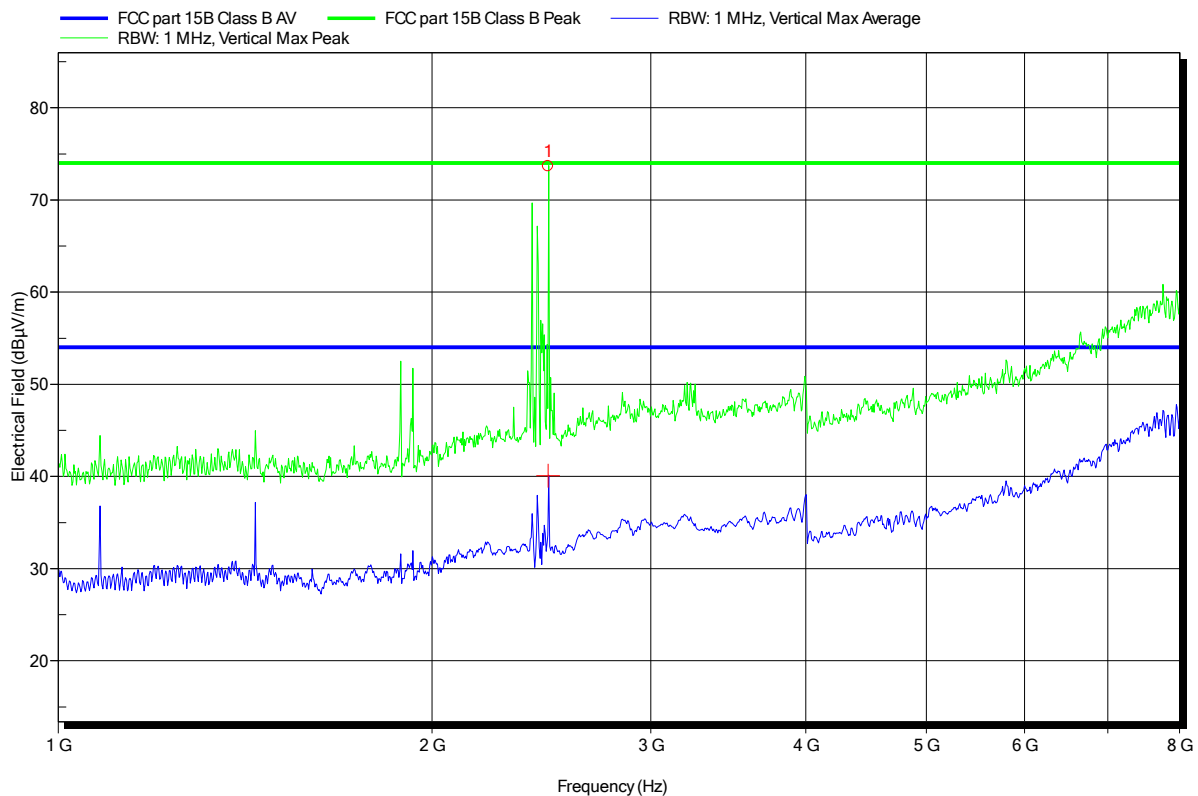
 Frequency
2.48 GHz


BT Carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	BT Link

Index 10

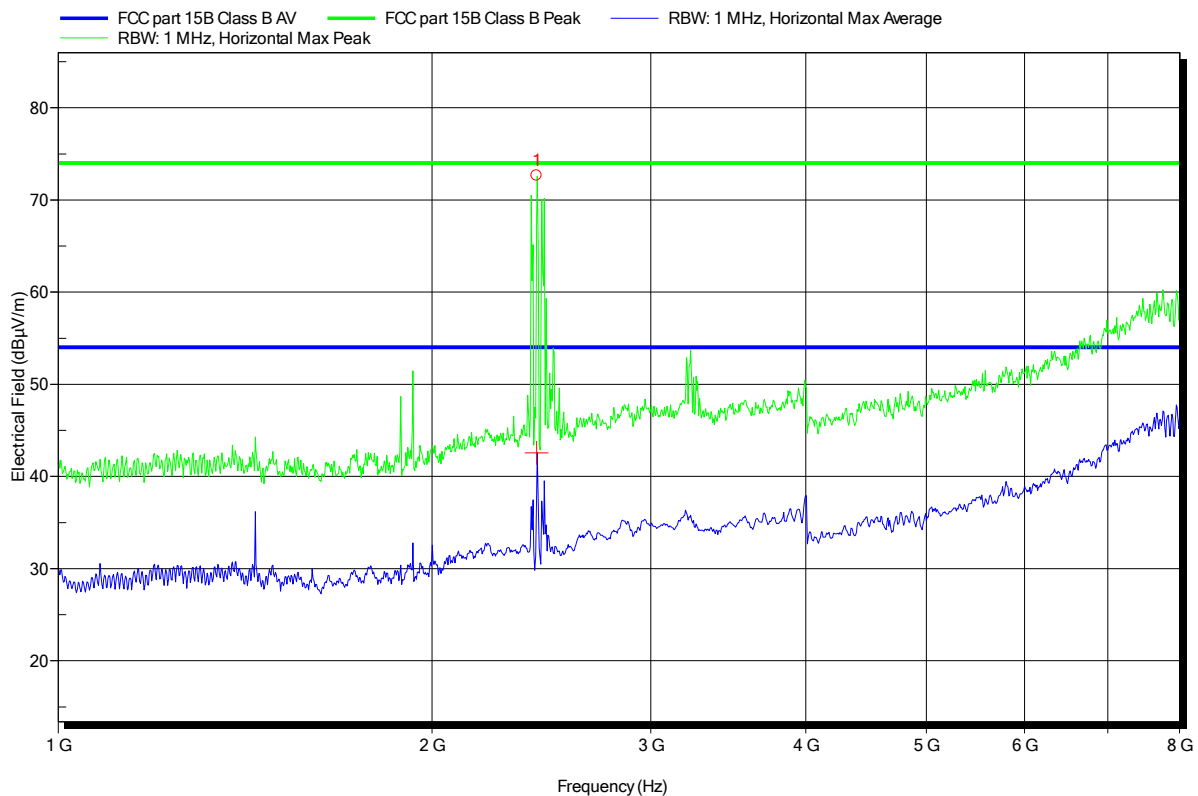
 Frequency
2.428 GHz


BT Carrier

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 11

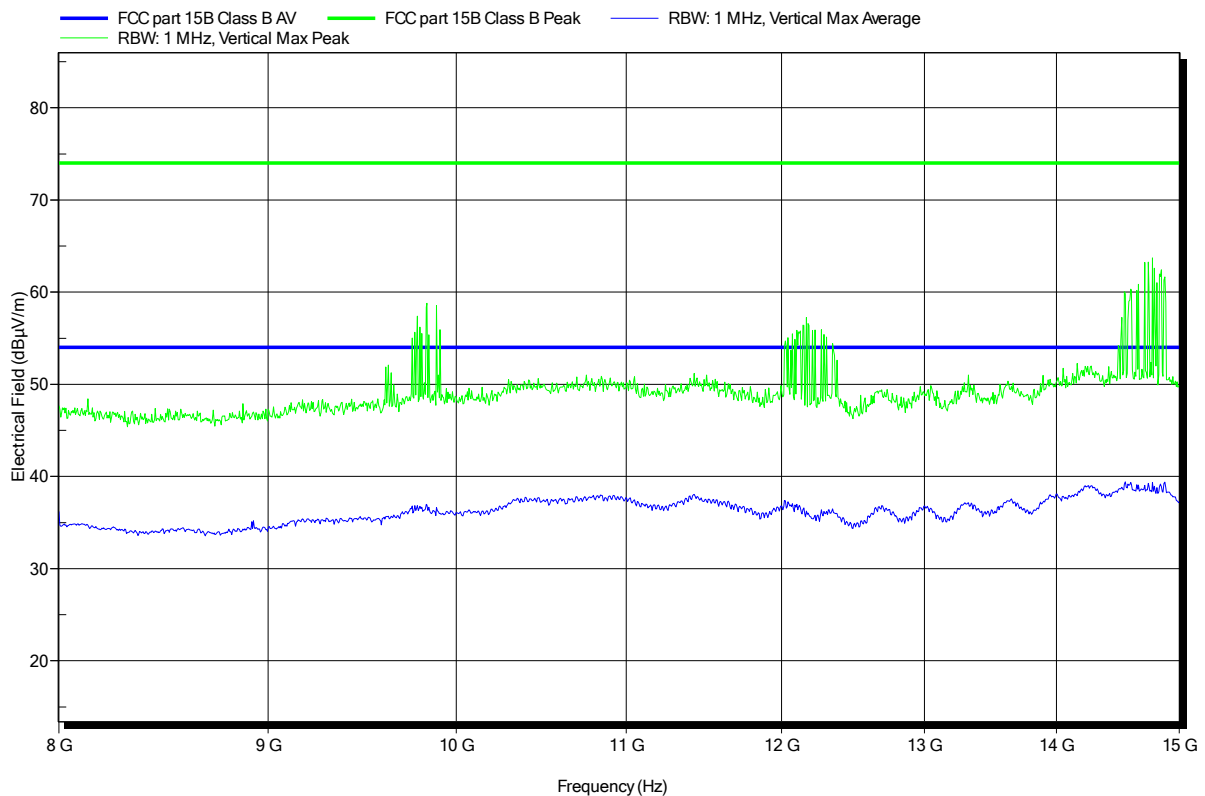


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-07
Note:	

Index 12

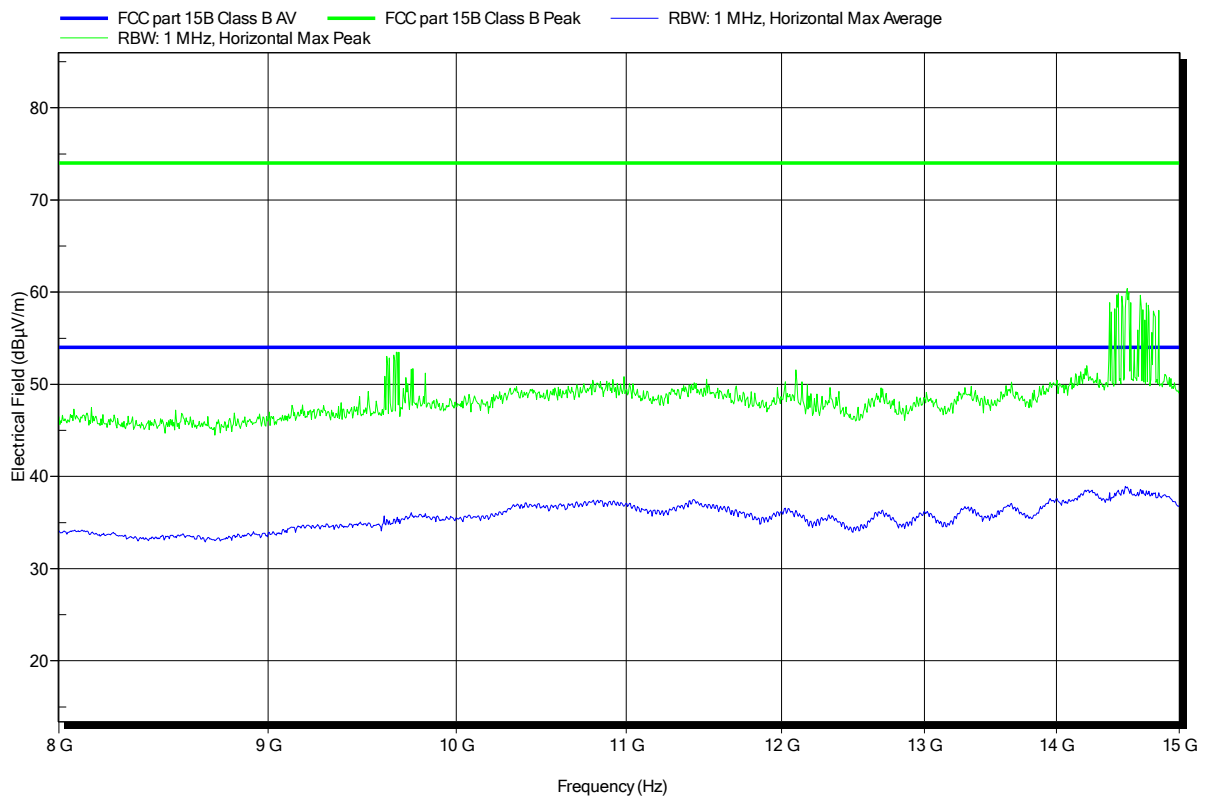

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003			Verdict: PASS	
Laboratory Parameters:	Required prior to the test		During the test	
Ambient Temperature	15 to 35 °C		24°C	
Relative Humidity	30 to 60 %		35%	
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode	1			
Configuration	1			
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:


- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycom Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
LISN:	ESH2-Z5 N
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-09
Note:	

Index 13

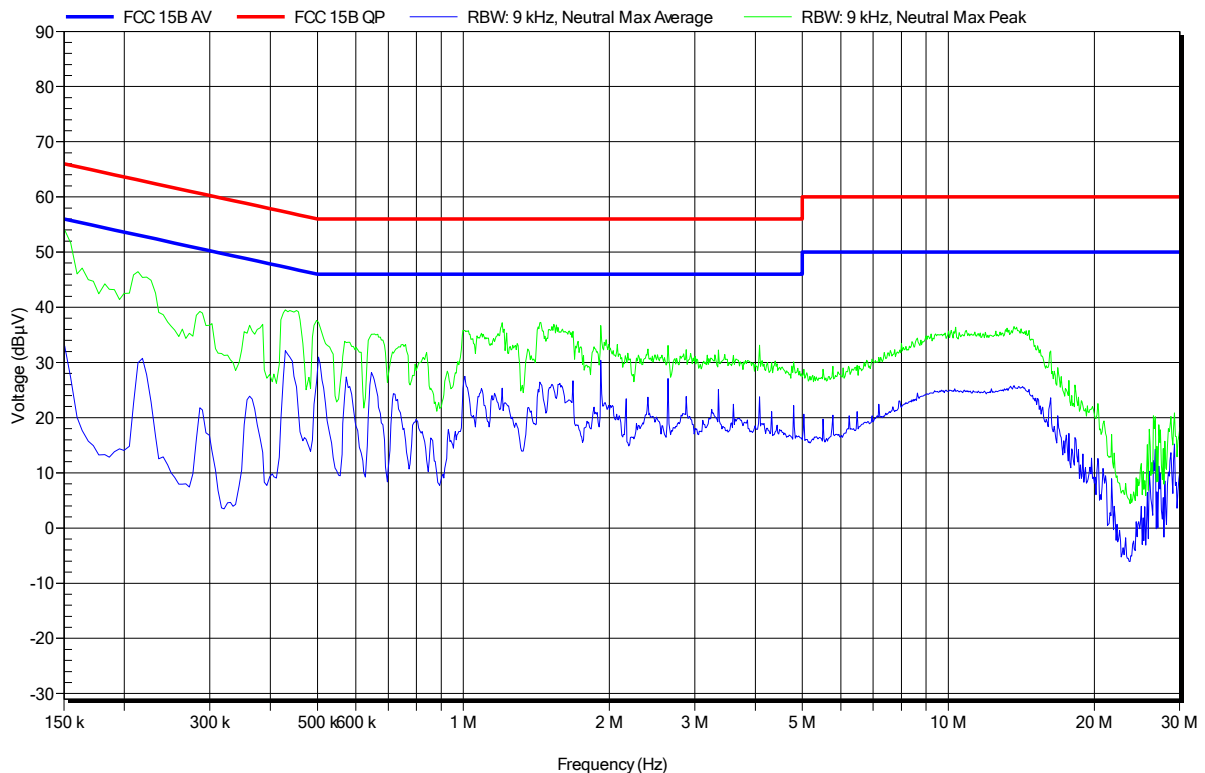

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1507-4951

Applicant:	Polycm Inc.
EUT Name:	Desktop VoIP Bluetooth Telephone
Model:	VVX601
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: 120 VAC
LISN:	ESH2-Z5 L
Mode:	AC/DC; Call-Con. (continuous); LAN ping; BT active;
Test Date:	2015-09-09
Note:	

Index 14

