



HYPER CORP

“Wireless that Works”SM

1279 Quarry Lane • Suite B, Pleasanton, CA 94566-8499 USA
Phone: +1.925.462.9105 Fax: +1.925.280.7751

EMC Test Report

Report No.: 703-0207005-BTMOD

Product Name: Polycom Bluetooth Radio Module

Issued Date: November 17, 2002

Applicant:

Polycom[®], Inc.
78A Monnow Street
Monmouth
NP25 3EQ
United Kingdom
Phone: +44 (0) 1600-716950
Fax: +44 (0) 1600-715799



Bluetooth is a Trademark owned by Bluetooth SIG, Inc. and licensed to Hyper Corp.

Hyper Corp is a BLUETOOTH Qualification Test Facility (BQTF) for RF Conformance Testing and an Associate Member of the SIG



Certificate Number 1708-1

Hyper Corp is an Accredited Laboratory by The American Association For Laboratory Accreditation (A2LA) to ISO/IEC 17025-for the scope of BLUETOOTH Testing.

**This document may not be reproduced without written consent from Hyper Corporation.
Extracts are never permitted. After written consent from Hyper Corporation, the document
must be reproduced in its entirety.**



Bluetooth is a Trademark owned by Bluetooth SIG, Inc. and licensed to Hyper Corp.

Hyper Corp is a BLUETOOTH Qualification Test Facility (BQTF) for RF Conformance Testing and an Associate Member of the SIG



Certificate Number 1708-1

Hyper Corp is an Accredited Laboratory by The American Association For Laboratory Accreditation (A2LA) to ISO/IEC 17025-for the scope of BLUETOOTH Testing.

Signature Page

The below listed Hyper Corporation Personnel takes responsibility
for the contents of this Test Report.

Signatures

Test Engineer(s):

Original signed

11.17.02

Munir Chhibber

Date

Reviewed by
Technical
Manager:

Original signed

11.17.02

Kevin Marquess

Date

1. List of Revisions

Version	Date	Author(s)	Description
001	November 17, 2002	William Elliott	Initial Version

TABLE OF CONTENTS

1.	List of Revisions.....	4
2.	Disclaimer Notice.....	6
3.	Reproduction Clause	6
4.	General Information	7
4.1	IDENTIFICATION OF THE EUT	7
4.2	ANTENNA DESCRIPTION	7
5.	Test Summary	8
5.1	SUMMARY OF TEST RESULTS	8
5.2	TEST SPECIFICATIONS	8
5.3	OPERATION MODE.....	8
5.4	DOCUMENTATION OF TEST DEVICE	9
5.5	GENERAL AND SPECIAL CONDITIONS.....	9
5.6	EQUIPMENT AND CABLE CONFIGURATIONS	9
6.	Test Setup	10
6.1	CARRIER FREQUENCY SEPARATION.....	10
6.1.1	Operation Environment	10
6.1.2	Test procedure	10
6.1.3	Measured data	10
6.2	NUMBER OF HOPPING FREQUENCIES	11
6.2.1	Operation Environment	11
6.2.2	Test procedure	11
6.3	TIME OF OCCUPANCY (DWELL TIME).....	13
6.3.1	Operation Environment	13
6.3.2	Test procedure	13
6.4	20 DB BANDWIDTH.....	16
6.4.1	Operation Environment	16
6.4.2	Test procedure	16
6.4.3	Measured data	16
6.5	PEAK OUTPUT POWER.....	18
6.5.1	Operation Environment	18
6.5.2	Test procedure	18
6.6	BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS	20
6.6.1	Operation Environment	20
6.6.2	Test procedure	20
6.7	SPURIOUS RF CONDUCTED EMISSIONS	23
6.7.1	Operation Environment	23
6.7.2	Test procedure	23

2. Disclaimer Notice

This test report applies only to the EUT (Equipment Under Test) and the results of the specifications called out in this report.

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

This Report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government.

3. Reproduction Clause

This document may not be reproduced without written consent from Hyper Corporation. Extracts are never permitted. After written consent from Hyper Corporation, the document must be reproduced in its entirety.

4. General Information

4.1 Identification of the EUT

Manufacturer: Polycom® Inc.

Model No.: Polycom Bluetooth Radio Module

Hardware Version: Rev 1.0

Software Version: Rev 1.0

FCC ID: M72BTMOD01

Frequency Range: 2402 MHz ~ 2480 MHz

Channel Number: 79

Frequency of Each Channel: 2402 + k (MHz), k=0~78

Type of Modulation: GFSK

Sample Received Date: September 20, 2002

Test Dates: November 14, 2002 – November 17, 2002

Test Facility: Hyper Corporation
1279 Quarry Lane, Suite B
Pleasanton, CA 94566, USA

4.2 Antenna Description

Antenna Gain: Peak Gain: 0 dBi

Rangestar Wireless Bluetooth Antenna p/n 100902

5. Test Summary

This test report is prepared for the project of Polycom[®], Inc. Polycom Bluetooth Radio Module

5.1 Summary of Test Results

Test	Reference	Results
Carrier Frequency Separation	FCC 15.247(a)(1) IC RSS210 6.2.2(o)(a1)	Compliant
Number of Hopping Frequencies	FCC 15.247(a)(1)(ii) IC RSS210 6.2.2(o)(a3)	Compliant
Time of Occupancy (Dwell Time)	FCC 15.247(a)(1)(ii) IC RSS210 6.2.2(o)(a3)	Compliant
20 dB Bandwidth	FCC 15.247(a)(1)(ii) IC RSS210 6.2.2(o)(a1)	Compliant
Peak Output Power	FCC 15.247(b)(1) IC RSS210 6.2.2(o)(a3)	Compliant
Band-edge Compliance of RF Conducted Emissions	FCC 15.247(c) IC RSS210 6.2.2(o)(d1)	Compliant
Spurious RF Conducted Emissions	FCC 15.247(c) IC RSS210 6.2.2(o)(e1)	Compliant

5.2 Test Specifications

The EUT was performed according to the procedures in FCC Part 15 Subpart C section 15.247 and ANSI C63.4/1992, and also to demonstrate compliance with Industry Canada RSS-210 6.2.2 (O).

5.3 Operation Mode

The EUT was connected to a PC using a 1m null modem cable. The EUT was operated in a continuous transmit mode at maximum power using CSR Bluetest software to control the operation of the Bluetooth module.

5.4 Documentation of test device

Documentation of the tested device has been reviewed by Hyper Corporation Engineers and found to be in compliance with applicable test specifications. All documentation is kept at Hyper Corporation's Quality Department in the Polycom® Bluetooth Radio Module EMC Test Folder.

5.5 General and Special Conditions

The EUT was powered using a 5V AC adaptor plugged into the ac mains. All testing was done in an indoor controlled environment with an average temperature of 24° C and relative humidity of 40%.

5.6 Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration as required in Public Notice DA 00-1407. As a stand-alone device the only cabling considerations are the data and power cables. The data cable is a 1m null modem cable.

Manufacturer	Description	Model Number	Serial Number	CAL Due Date
Agilent Technology	PSA Series Spec. Analyzer	E4440A	US40420768	04/23/03
Agilent Technology	E1852B Bluetooth Test Set	E1852B	DK42050128	01/02/03
Agilent Technology	ESA E Series Spec. Analyzer	44078	US41192572	04/23/03
Dell	PC	Precision	N/A	N/A

6. Test Setup

6.1 Carrier Frequency Separation

6.1.1 Operation Environment

Temperature: 25.8°C

Relative Humidity: 45%


6.1.2 Test procedure

The carrier frequency separation per FCC 15.247(a)(1)/ IC RSS210 6.2.2(o)(a1) was measured using a spectrum analyzer with the resolution (or IF) bandwidth (RBW) $\geq 1\%$ of the span, the span should be wide enough to capture the peaks of two adjacent channels, and the video (or average) bandwidth (VBW) should be \geq RBW. The carrier frequency separation result is described as below:

6.1.3 Measured data

Channel	Frequency (MHz)	Measurement Frequency Separation (MHz)
1	2439.990	.995
2	2440.985	-----
3	2441.975	.990

Figure 6.1-1: Carrier Frequency Separation

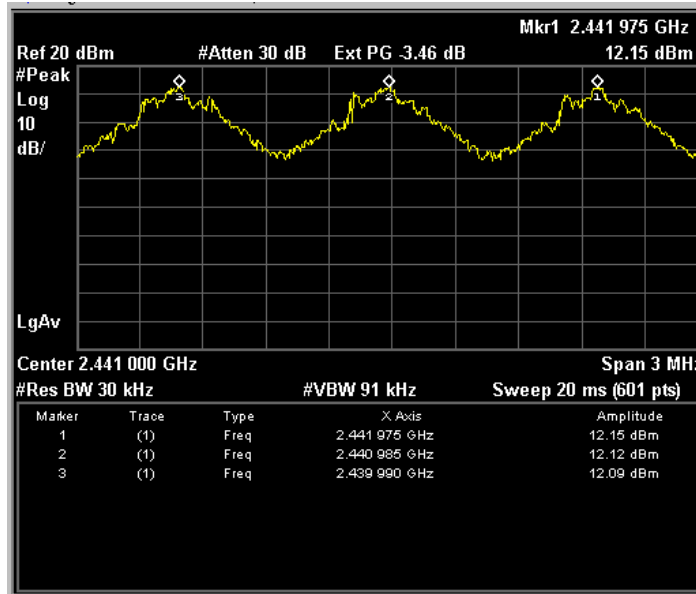

6.2 Number of Hopping Frequencies

6.2.1 Operation Environment

Temperature: 25.8°C

Relative Humidity: 45%

6.2.2 Test procedure

The carrier frequency separation per FCC 15.247(a)(1)(ii)/ IC RSS210 6.2.2(o)(a3) was measured using a spectrum analyzer with $RBW \geq 1\%$ of the span. The VBW is $\geq RBW$ and the span shall be equal to the frequency band of operation. The number of hopping frequencies measured data is shown below.

6.2.3 Measured data of test results

Frequency Range (GHz)	Number of hopping frequencies	Total hopping channels
2.400 ~ 2.440	38.5	79
2.440 ~ 2.4835	40.5	

Figure 6.2-1 Channels in the Frequency range 2.400-2.440GHz


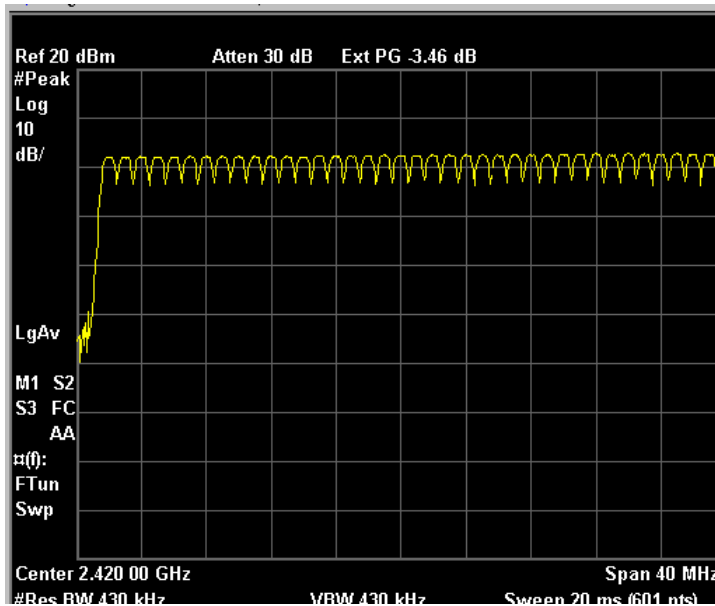


Figure 6.2-2 Channels in the Frequency range 2.440-2.4835GHz

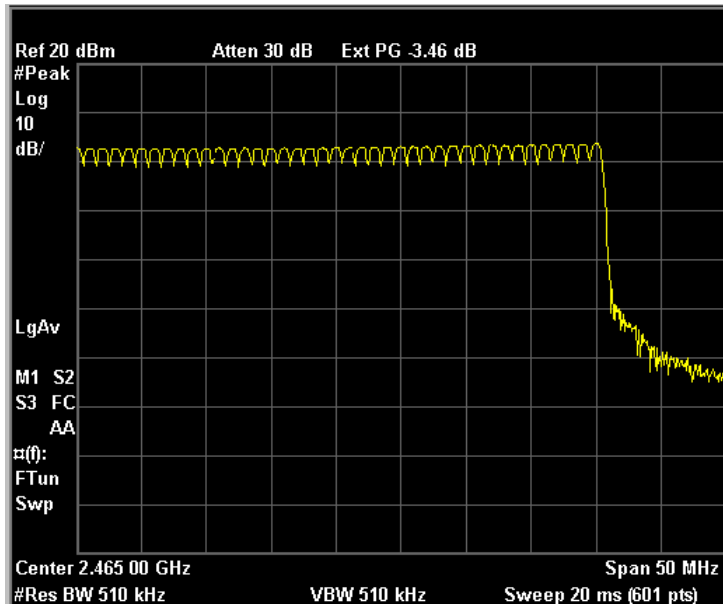

6.3 Time of Occupancy (Dwell Time)

6.3.1 Operation Environment

Temperature: 25.8°C


Relative Humidity: 46%

6.3.2 Test procedure

The Time of Occupancy test case per FCC 15.247(a)(1)(ii)/ IC RSS210 6.2.2(o)(a3) was measured using a spectrum analyzer with RBW = 1 MHz. The VBW \geq RBW and the zero span function of spectrum analyzer were enabled.


The worst case time of occupancy (Dwell Time) is (DH5 packet) (4 X 2.952 ms) (dwell time in 1 sec) X 30 seconds= 354.24ms = 0.35424sec < 0.4s in 30 sec. - Compliant

Figure 6.3-1: DH1 Mode Dwell Time

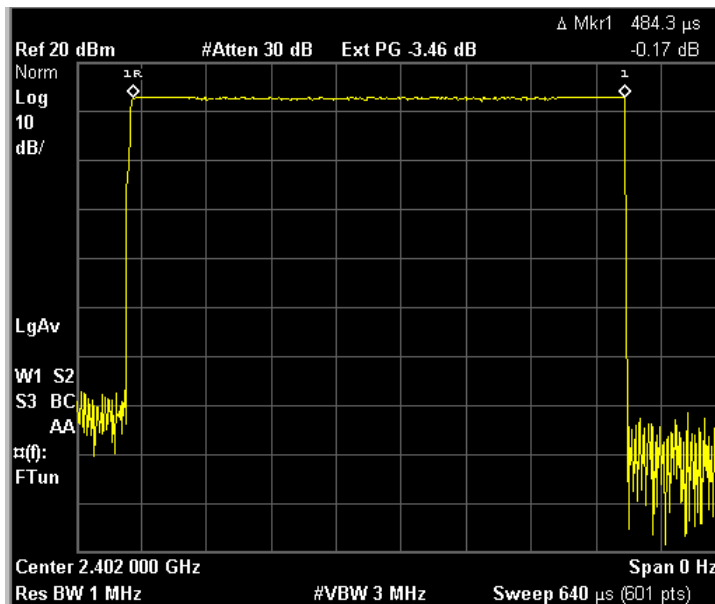


DH1 Data Packet – Dwell Time = 484.3 μsec

Figure 6.3-2: DH3 Mode Dwell Time

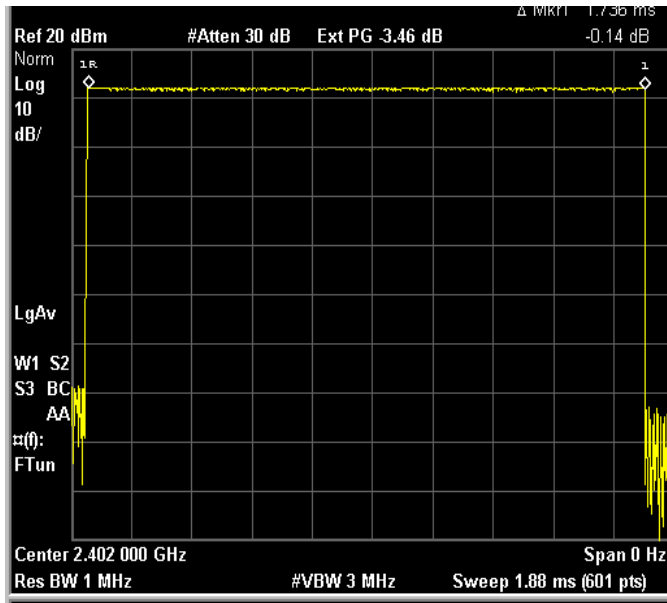


DH3 Data Packet – Dwell Time = 1.736 msec

Figure 6.3-3: DH5 Mode Dwell Time

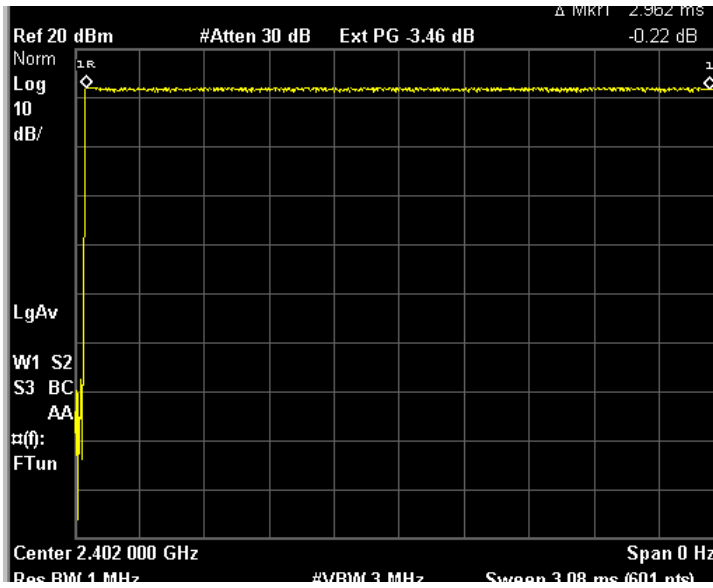

DH5 Data Packet – Dwell Time = 2.952 msec

Figure 6.3-4: Plot showing numbers of pulses in 1 second in DH5 Mode

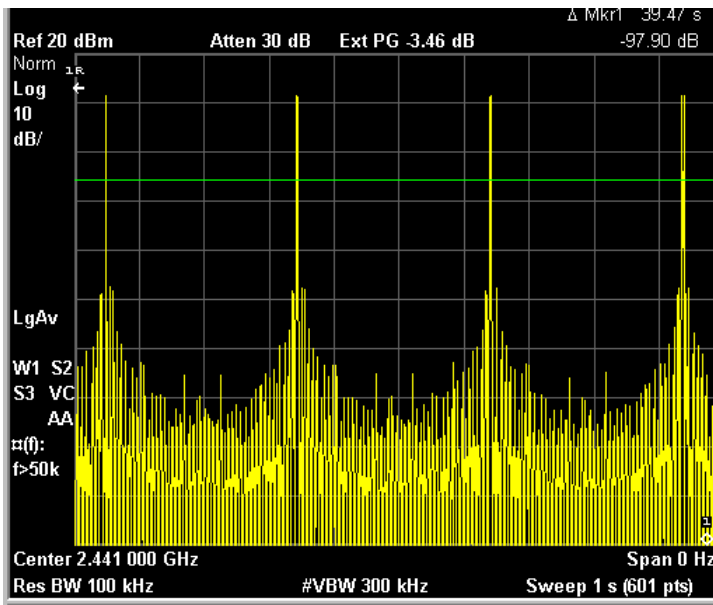

4 occurrences of DH5 packets in 1 second

6.4 20 dB Bandwidth

6.4.1 Operation Environment

Temperature: 26°C

Relative Humidity: 40%

6.4.2 Test procedure

The 20dB bandwidth per FCC 15.247(a)(1)(ii)/ IC RSS210 6.2.2(o)(a1) was measured using spectrum analyzer with the resolution bandwidth > 1% of the 20 dB bandwidth. The VBW shall be \geq RBW, and the span shall equal to approximately 2 to 3 times the 20 dB bandwidth. This test was performed at 3 different channels (low, mid and high), and the maximum 20dB modulation bandwidth is listed below:

6.4.3 Measured data

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2402	0.850
Middle	2441	0.795
High	2480	0.795

Figure 6.4-1: Bandwidth of the 2402 MHz channel

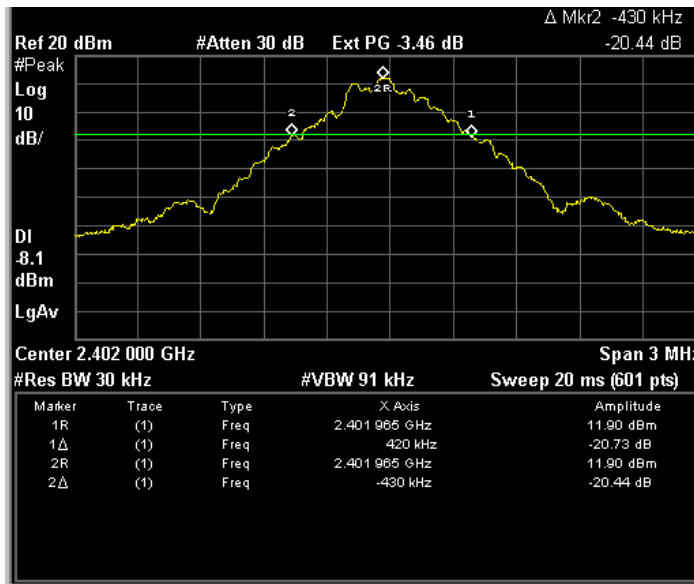


Figure 6.4-2: Bandwidth of the 2441 MHz channel


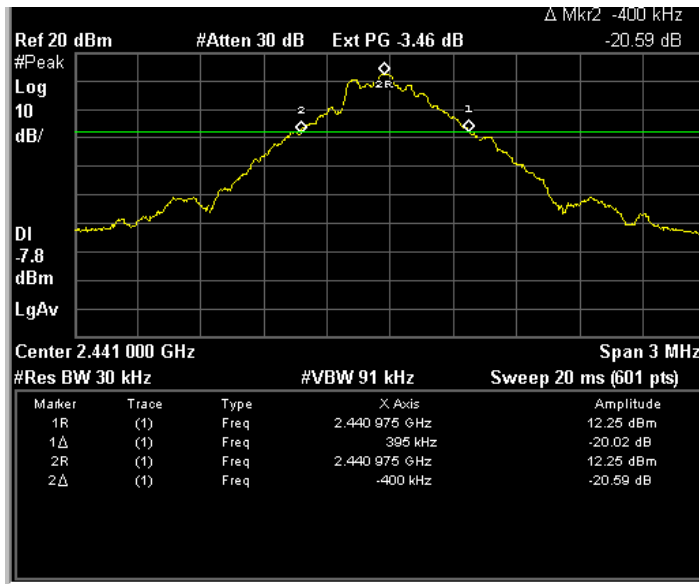


Figure 6.4-1: Bandwidth of the 2480 MHz channel

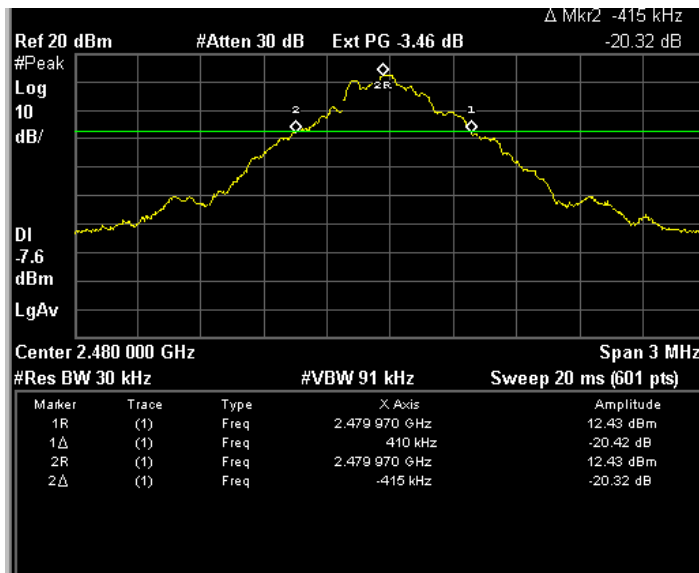

6.5 Peak Output Power

6.5.1 Operation Environment

Temperature: 26°C

Relative Humidity: 46%

6.5.2 Test procedure

The Peak Output Power per FCC 15.247(b)(1)/ IC RSS210 6.2.2(o)(a3) was measured on the EUT using a 50-Ohm SMA cable connected to the spectrum analyzer.

6.5.3 Measured data of test results

Channel	Frequency (MHz)	Transmitter Peak Output Power (dBm)
Low	2402	2.67
Middle	2441	3.19
High	2480	4.16

Figure 6.5-1: Power Output on 2402 MHz

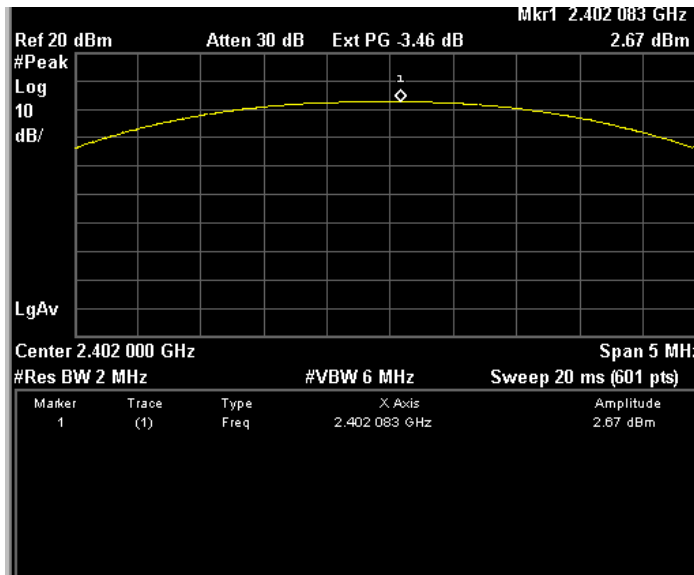


Figure 6.5-1: Power Output on 2441 MHz


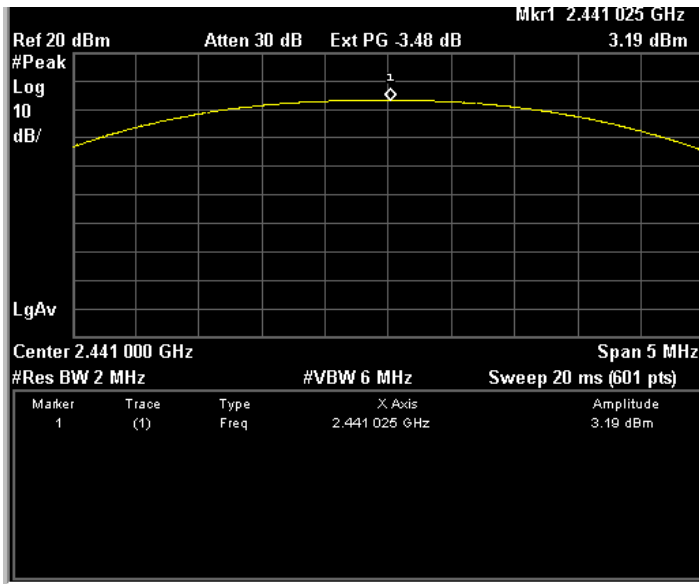


Figure 6.5-1: Power Output on 2480 MHz

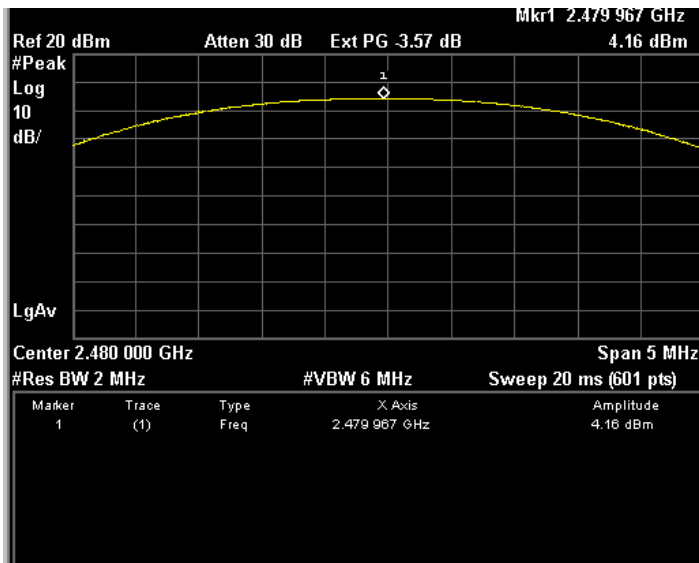

6.6 Band-edge Compliance of RF Conducted Emissions

6.6.1 Operation Environment

Temperature: 26°C

Relative Humidity: 46%

6.6.2 Test procedure

The band-edge compliance of RF conducted emissions of the EUT was measured per FCC 15.247(c)/IC RSS210 6.2.2(o)(d1). The EUT was set to operate on the lowest operating frequency and the level at the lower band-edge was measured. The upper band-edge level was then measured with the EUT operating on the highest operating frequency.

6.6.3 Measured data of test results

Band-edge Frequency (MHz)	Attenuation (dB) Relative to Peak Carrier Power
2400	44.5 (hopping off) 46.1 (hopping on)
2483.5	50.09 (hopping off) 47.26 (hopping on)

Figure 6.6-1: Lower Band-edge measurement

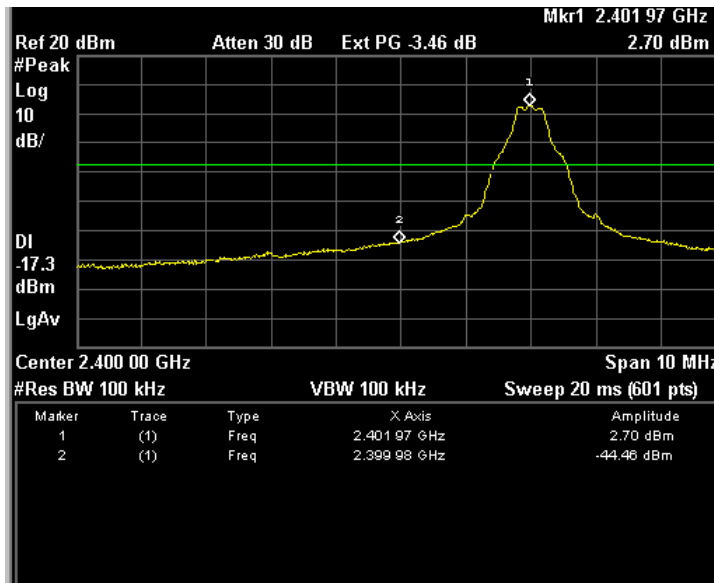


Figure 6.6-2: Plot of Hopping function enabled

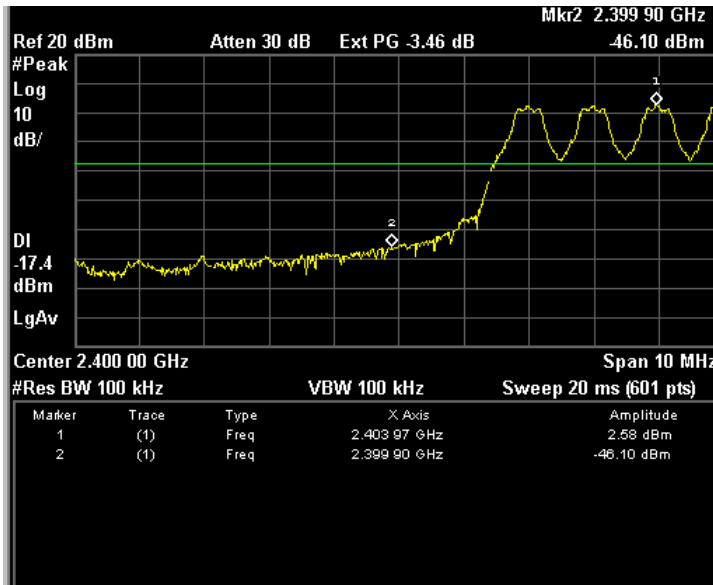


Figure 6.6-3: Upper Band-edge measurement


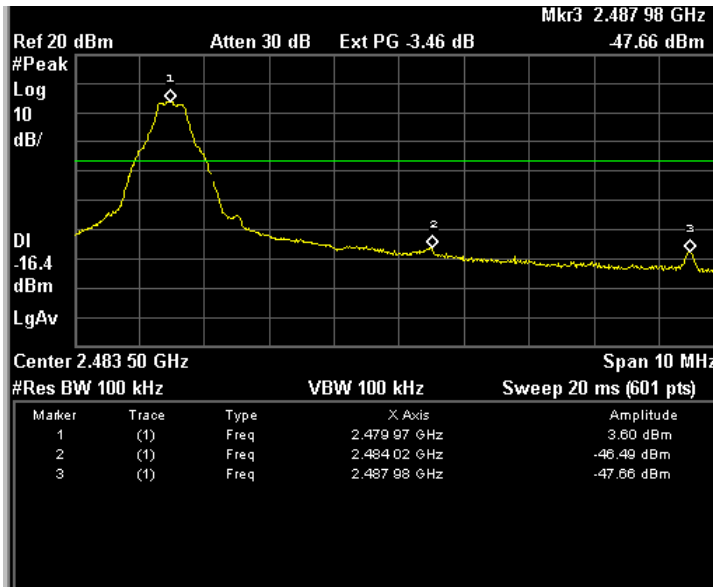


Figure 6.6-4: Plot of Hopping function enabled

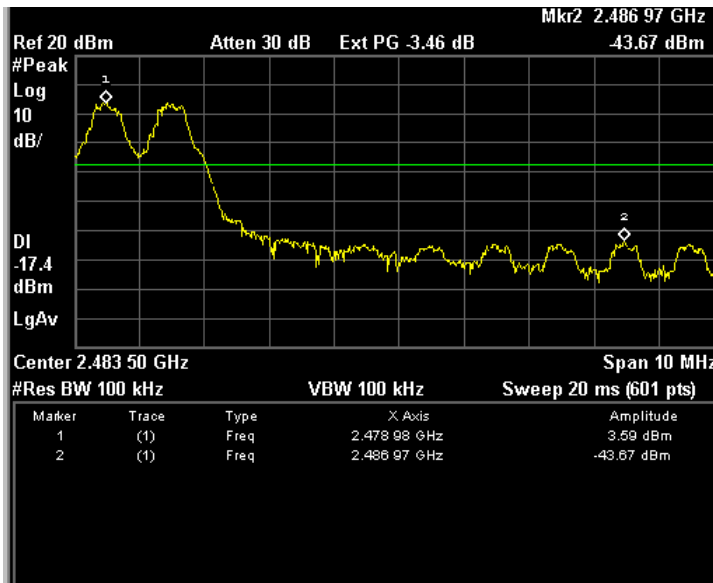

6.7 Spurious RF Conducted Emissions

6.7.1 Operation Environment

Temperature: 25.8°C
Relative Humidity: 46%

6.7.2 Test procedure

The spurious RF conducted emissions were measured with the EUT set to low, middle, and high transmit frequencies per FCC 15.247(c) IC RSS210 6.2.2(o)(e1). The EUT was transmitting at its maximum data rate with the maximum channel occupancy time. At each frequency the spectrum was scanned from 0 MHz to 26.5 GHz.

Spectrum plots with transmitter operating on 2.402GHz non-hopping:

Figure 6.7-1: 0 - 3.0GHz Spectrum

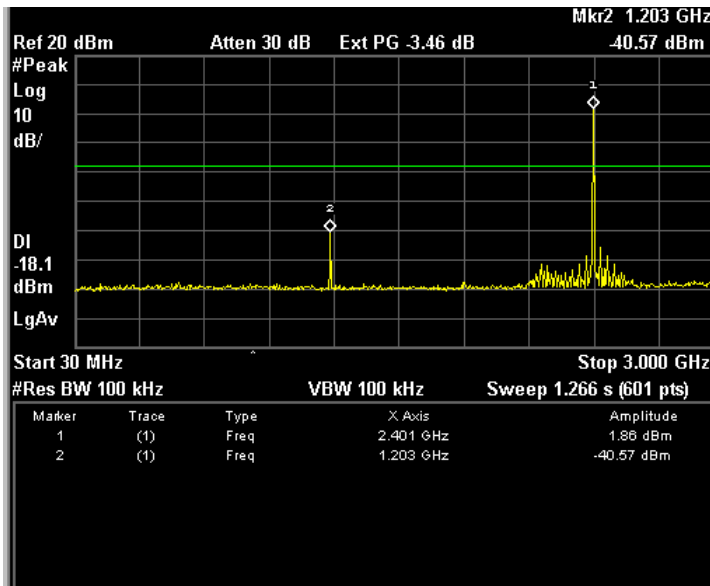


Figure 6.7-2: 3.0 – 10.0GHz Spectrum


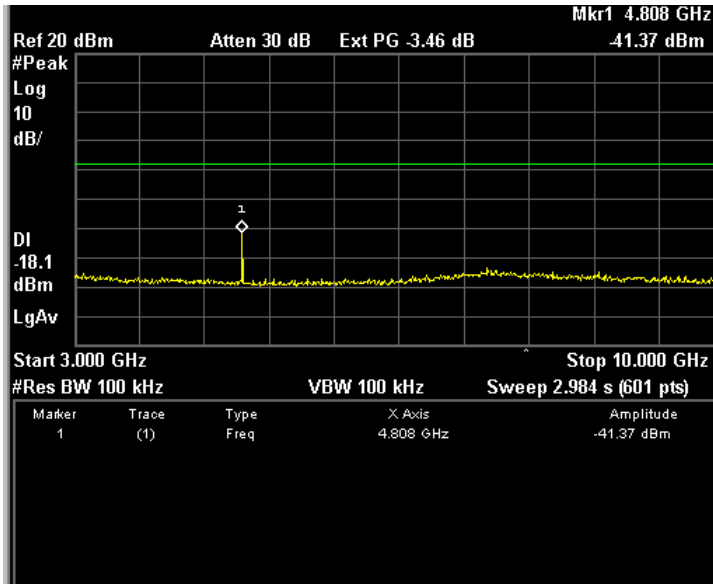


Figure 6.7-3: 10.0 – 26.5 GHz Spectrum

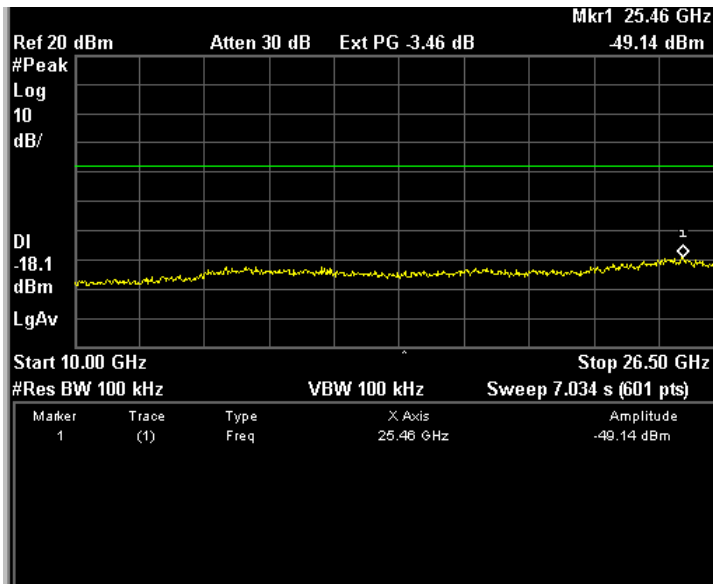

Spectrum plots with transmitter operating on 2.440GHz non-hopping:

Figure 6.7-4: 0 - 3.0GHz Spectrum

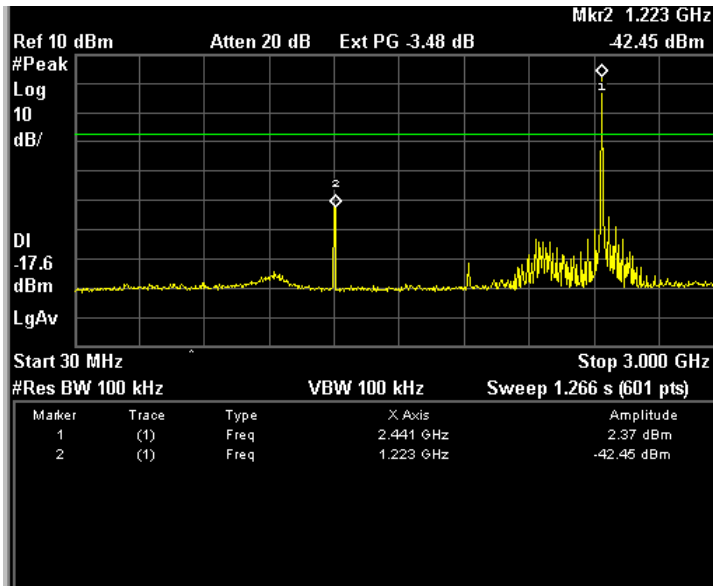


Figure 6.7-5: 3.0 – 10 GHz Spectrum


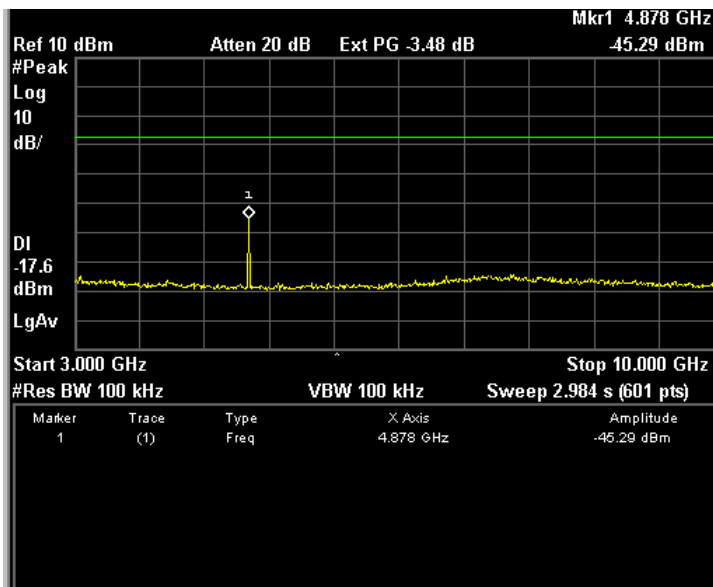


Figure 6.7-6: 10 – 26.5 GHz Spectrum

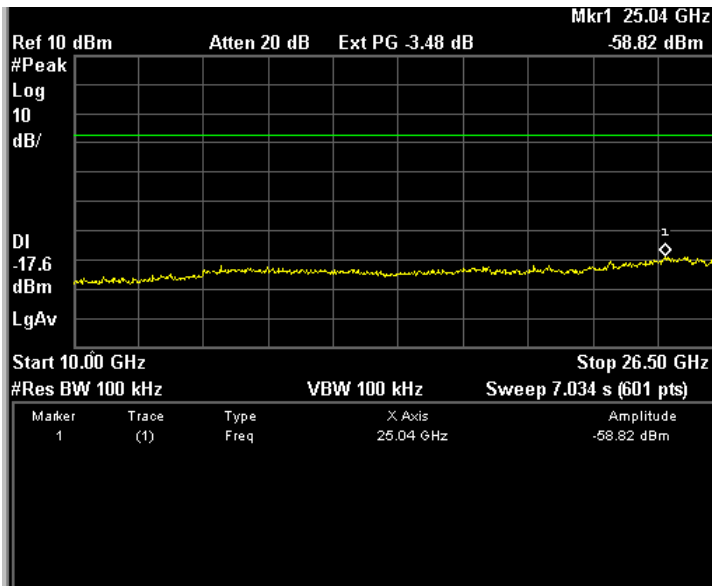

Spectrum plots with transmitter operating on 2.480GHz non-hopping:

Figure 6.7-9: 0 - 3.0GHz Spectrum

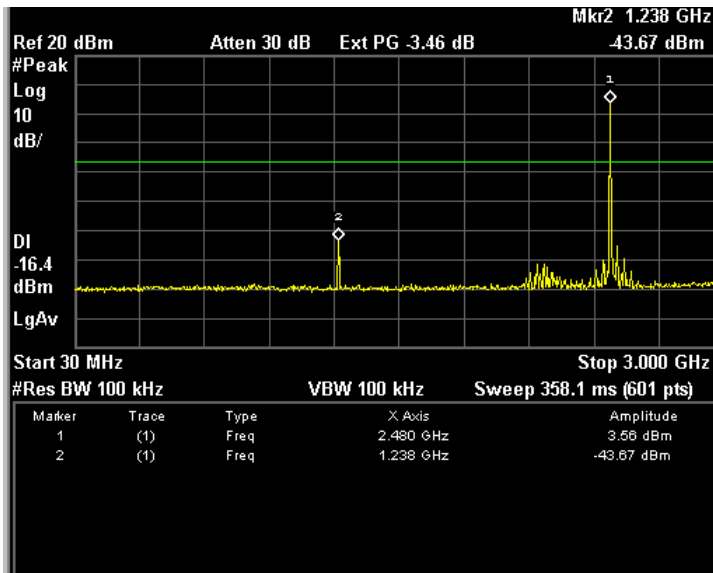


Figure 6.7-10: 3.0 – 10.0GHz Spectrum


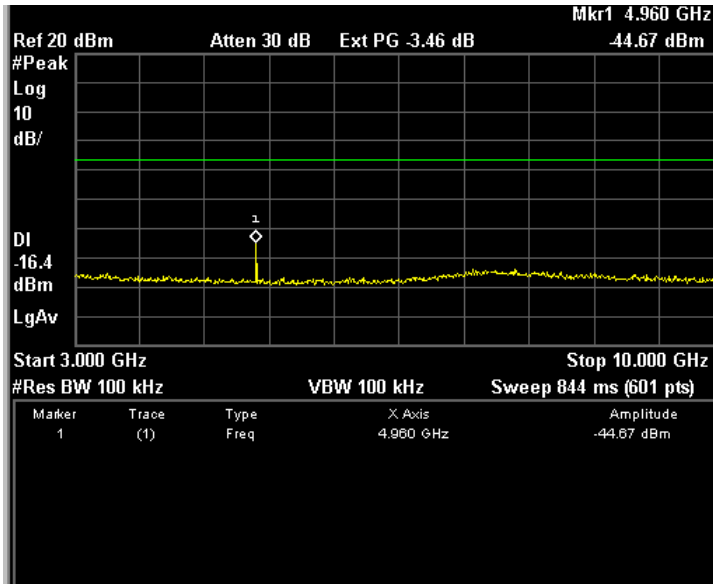


Figure 6.7-11: 10 – 26.0 GHz Spectrum

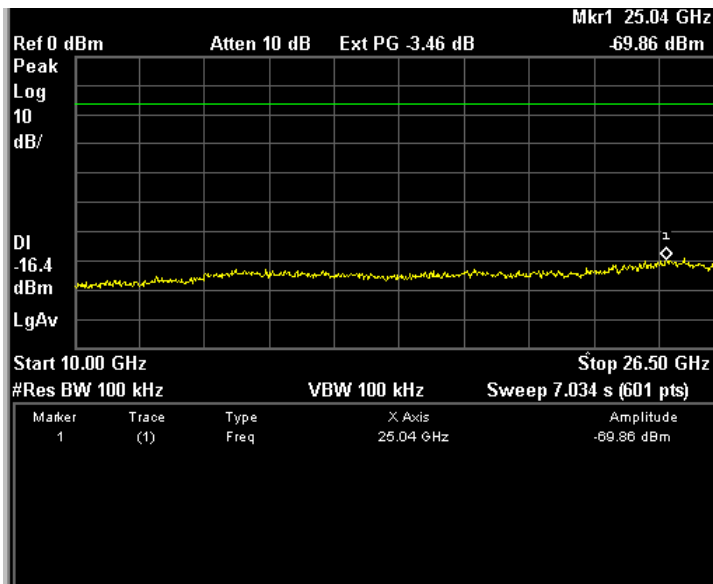

EMC Test Report
Report No:

Hyper Corp.
November 17, 2002 Rev 001