

## FCC TEST REPORT

For

Hena Digital Technology (Shenzhen) Co., Ltd.

Tablet PC with DVD player

Model No.: MD93

Additional Model No.: MD-93, MD92, MD-92, MD91, MD-91, PDT9000

Prepared for : Hena Digital Technology (Shenzhen) Co., Ltd.  
Address : 3F, South Tower, Jiuzhou Electric Building, Southern No, 12Rd,  
High-tech Industrial Park, Nanshan District, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an  
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 09, 2017  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : March 09, 2017~March 24, 2017  
Date of Report : March 24, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 E(15.407): 2016

Report Reference No. : LCS1703243377E

Date of Issue : March 24, 2017

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name : Hena Digital Technology (Shenzhen) Co., Ltd.

Address : 3F, South Tower, Jiuzhou Electric Building, Southern No, 12Rd, High-tech Industrial Park, Nanshan District, Shenzhen, China

Test Specification

Standard : FCC CFR 47 PART 15 E(15.407): 2016

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : Tablet PC with DVD player

Trade Mark : HENA, Polaroid

Model/ Type reference : MD93

Ratings : DC 3.7V by Lithium ion polymer battery (4000mAh)
Recharge Voltage: DC 5V/2A

Result : Positive

Compiled by:

Aking Jim

Aking Jin/ File administrators

Supervised by:

Glin Lu

Glin Lu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

### FCC -- TEST REPORT

|   |  |
|---|--|
| <b>Test Report No. :</b> LCS1703243377E | <u>March 24, 2017</u><br>Date of issue |
|---|--|

|                          |  |
|--------------------------|--|
| EUT.....                 | : Tablet PC with DVD player  |
| Type / Model.....        | : MD93   |
| <b>Applicant.....</b>    | <b>: Hena Digital Technology (Shenzhen) Co., Ltd.</b>  |
| Address.....             | : 3F, South Tower, Jiuzhou Electric Building, Southern No, 12Rd,<br>High-tech Industrial Park, Nanshan District, Shenzhen, China |
| Telephone.....           | : /  |
| Fax.....                 | : /  |
| <b>Manufacturer.....</b> | <b>: Hena Digital Technology (Shenzhen) Co., Ltd.</b>  |
| Address.....             | : 3F, South Tower, Jiuzhou Electric Building, Southern No, 12Rd,<br>High-tech Industrial Park, Nanshan District, Shenzhen, China |
| Telephone.....           | : /  |
| Fax.....                 | : /  |
| <b>Factory.....</b>      | <b>: Hena Digital Technology (Shenzhen) Co., Ltd.</b>  |
| Address.....             | : 3F, South Tower, Jiuzhou Electric Building, Southern No, 12Rd,<br>High-tech Industrial Park, Nanshan District, Shenzhen, China |
| Telephone.....           | : /  |
| Fax.....                 | : /  |

|                     |                 |
|---------------------|-----------------|
| <b>Test Result:</b> | <b>Positive</b> |
|---------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**Revision History**

| Revision | Issue Date     | Revisions     | Revised By  |
|----------|----------------|---------------|-------------|
| 00       | March 24, 2017 | Initial Issue | Gavin Liang |
|          |                |               |             |
|          |                |               |             |

# TABLE OF CONTENTS

- 1. GENERAL INFORMATION ..... 6**
  - 1.1. DESCRIPTION OF DEVICE (EUT) ..... 6
  - 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS ..... 6
  - 1.3. EXTERNAL I/O PORT ..... 7
  - 1.4. DESCRIPTION OF TEST FACILITY ..... 7
  - 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY ..... 7
  - 1.6. MEASUREMENT UNCERTAINTY ..... 7
  - 1.7. DESCRIPTION OF TEST MODES ..... 8
  - 1.8. FREQUENCY OF CHANNELS ..... 8
- 2. TEST METHODOLOGY ..... 9**
  - 2.1. EUT CONFIGURATION ..... 9
  - 2.2. EUT EXERCISE ..... 9
  - 2.3. GENERAL TEST PROCEDURES ..... 9
- 3. SYSTEM TEST CONFIGURATION ..... 10**
  - 3.1. JUSTIFICATION ..... 10
  - 3.2. EUT EXERCISE SOFTWARE ..... 10
  - 3.3. SPECIAL ACCESSORIES ..... 10
  - 3.4. BLOCK DIAGRAM/SCHEMATICS ..... 10
  - 3.5. EQUIPMENT MODIFICATIONS ..... 10
  - 3.6. TEST SETUP ..... 10
- 4. SUMMARY OF TEST RESULTS ..... 11**
- 5. TEST RESULT ..... 12**
  - 5.1. ON TIME AND DUTY CYCLE ..... 12
  - 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT ..... 14
  - 5.3. POWER SPECTRAL DENSITY MEASUREMENT ..... 16
  - 5.4. 6DB OCCUPIED BANDWIDTH MEASUREMENT ..... 20
  - 5.5. RADIATED EMISSIONS MEASUREMENT ..... 24
  - 5.6. POWER LINE CONDUCTED EMISSIONS ..... 34
  - 5.7 UNDESIRABLE EMISSIONS MEASUREMENT ..... 37
  - 5.8. ANTENNA REQUIREMENTS ..... 40
- 6. LIST OF MEASURING EQUIPMENTS ..... 41**
- 7. TEST SETUP PHOTOGRAPHS OF EUT ..... 42**
- 8. EXTERIOR PHOTOGRAPHS OF THE EUT ..... 42**
- 9. INTERIOR PHOTOGRAPHS OF THE EUT ..... 42**

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|                         |   |
|-------------------------|---|
| EUT                     | : Tablet PC with DVD player   |
| Model Number            | : MD93, MD-93, MD92, MD-92, MD91, MD-91, PDT9000  |
| Model Declaration       | : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.  |
| Test Model              | : MD93  |
| Hardware version        | : 7500-MD7100-03R   |
| Software version        | : Ver.Wed Mar 15 11:56:56 CST 2017  |
| Power Supply            | : DC 3.7V by Lithium ion polymer battery (4000mAh)<br>Recharge Voltage: DC 5V/2A  |
| Bluetooth               | : Supported BT 4.0  |
| Operation frequency     | : 2402MHz-2480MHz   |
| Channel Spacing         | : 1MHz for Bluetooth 4.0(DSS); 2MHz for Bluetooth 4.0(DTS);   |
| Modulation Type         | : GFSK,π/4DQPSK, 8DPSK for Bluetooth 4.0(DSS);<br>GFSK for Bluetooth 4.0(DTS)   |
| Bluetooth Version       | : 4.0   |
| Channel Number          | : 79 Channels for Bluetooth 4.0(DSS);40 Channels for Bluetooth 4.0(DTS)   |
| WLAN                    | : Supported 802.11b/802.11g/802.11n/802.11a   |
| Operation frequency     | : IEEE 802.11b:2412-2462MHz<br>IEEE 802.11g:2412-2462MHz<br>IEEE 802.11n HT20:2412-2462MHz/5150-5250MHz/5745-5850MHz<br>IEEE 802.11n HT40:2422-2452MHz/5150-5250MHz/5745-5850MHz<br>IEEE 802.11a:5150-5250MHz/5745-5850MHz  |
| Modulation Type         | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)<br>IEEE 802.11a: OFDM (64QAM, 16QAM,QPSK,BPSK)   |
| Channel Number          | : 11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20)<br>7 Channels for WIFI 40MHz Bandwidth(802.11n-HT40)<br>4 Channels for 5180.00-5240.00MHz(802.11a/n-HT20)<br>5 Channels for 5745.00-5825.00MHz(802.11a/n-HT20)<br>2 Channels for 5190.00-5230.00MHz(802.11n-HT40)<br>2 Channels for 5755.00-5795.00MHz(802.11n-HT40) |
| Antenna Type            | : PIFA Antenna  |
| Antenna Gain            | : 2.0dBi (Max.) For WIFI/BT   |
| Extreme temp. Tolerance | : -15°C to +45°C  |
| Extreme vol. Limits     | : 3.30VDC to 4.20VDC (nominal: 3.70VDC)   |
| GPS Function            | : Supported and only RX   |

### 1.2. Host System Configuration List and Details

| Manufacturer                  | Description | Model              | Serial Number | Certificate |
|-------------------------------|-------------|--------------------|---------------|-------------|
| Mass Power Electronic Limited | AC Adapter  | NBS12E05020<br>0HU | --            | CE          |

### 1.3. External I/O Port

| I/O Port Description | Quantity | Cable            |
|----------------------|----------|------------------|
| Micro USB Port       | 1        | 1.2m, unshielded |
| TF Card Slot         | 1        | N/A              |
| Earphone Jack        | 1        | N/A              |

### 1.4. Description of Test Facility

CNAS Registration Number. is L4595.  
 FCC Registration Number. is 899208.  
 Industry Canada Registration Number. is 9642A-1.  
 ESMD Registration Number. is ARCB0108.  
 UL Registration Number. is 100571-492.  
 TUV SUD Registration Number. is SCN1081.  
 TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### 1.6. Measurement Uncertainty

| Test Item              | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty  | 9KHz~30MHz      | ±3.10dB     | (1)  |
|                        | 30MHz~200MHz    | ±2.96dB     | (1)  |
|                        | 200MHz~1000MHz  | ±3.10dB     | (1)  |
|                        | 1GHz~26.5GHz    | ±3.80dB     | (1)  |
|                        | 26.5GHz~40GHz   | ±3.90dB     | (1)  |
| Conduction Uncertainty | 150kHz~30MHz    | ±1.63dB     | (1)  |
| Power disturbance      | 30MHz~300MHz    | ±1.60dB     | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11a Mode: 6 Mbps, OFDM.

IEEE 802.11n-HT20 Mode: MCS0, OFDM.

IEEE 802.11n-HT40 Mode: MCS0, OFDM.

### Antenna & Bandwidth

| Antenna<br>Bandwidth Mode | Single (Port.1)                     |                                     |                          | Two (Port.1 + Port.2)    |                          |                          |
|---------------------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|                           | 20MHz                               | 40MHz                               | 80MHz                    | 20MHz                    | 40MHz                    | 80MHz                    |
| 802.11a                   | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 802.11n                   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

## 1.8. Frequency of Channels

IEEE 802.11a/n-HT20

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 5745~5850MHz   | 149         | 5745           | 161         | 5805           |
|                | 153         | 5765           | 165         | 5825           |
|                | 157         | 5785           | ---         | ---            |

IEEE 802.11n-HT40

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 5745~5850MHz   | 151         | 5755           | 159         | 5795           |

The test configuration of the test software shows as below:

| Test mode            | Channel No. | Frequency(MHz) | Software setting value |
|----------------------|-------------|----------------|------------------------|
| IEEE 802.11a         | 149         | 5745           | 4                      |
|                      | 157         | 5785           | 4                      |
|                      | 165         | 5825           | 4                      |
| IEEE<br>802.11n-HT20 | 149         | 5745           | 4                      |
|                      | 157         | 5785           | 4                      |
|                      | 165         | 5825           | 4                      |
| IEEE<br>802.11n-HT40 | 151         | 5755           | 4                      |
|                      | 159         | 5795           | 4                      |



## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v01r03 and KDB 662911 are required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmit condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (Installed in the tablet PC) provided by application.

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

#### 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart E |                                |           |
|---|--------------------------------|-----------|
| FCC Rules                               | Description of Test            | Result    |
| §15.407(a)                              | Maximum Conducted Output Power | Compliant |
| §15.407(a)                              | Power Spectral Density         | Compliant |
| §15.407(e)                              | 6dB Bandwidth                  | Compliant |
| §15.407(b)                              | Radiated Emissions             | Compliant |
| §15.407(b)                              | Band edge Emissions            | Compliant |
| §15.407(g)                              | Frequency Stability            | Note      |
| §15.207(a)                              | Line Conducted Emissions       | Compliant |
| §15.203                                 | Antenna Requirements           | Compliant |
| §2.1093                                 | RF Exposure                    | Compliant |

Note: The customer declared frequency stability is better than 20ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.

## 5. TEST RESULT

### 5.1. On Time and Duty Cycle

#### 5.1.1. Standard Applicable

None; for reporting purpose only.


#### 5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyse.

#### 5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyse to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

#### 5.1.4. Test Setup Layout

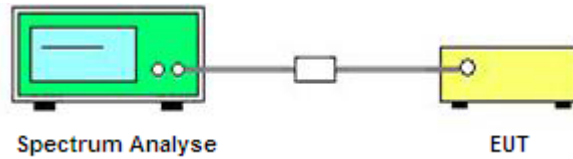

#### 5.1.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 5.1.6. Test result


| Mode              | On Time B (ms) | Period (ms) | Duty Cycle x (Linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/B Minimum VBW(KHz) |
|-------------------|----------------|-------------|-----------------------|----------------|-----------------------------------|----------------------|
| IEEE 802.11a      | /              | 0.0         | 1                     | 100            | 0.000                             | 0.010                |
| IEEE 802.11n-HT20 | /              | 0.0         | 1                     | 100            | 0.000                             | 0.010                |
| IEEE 802.11n-HT40 | /              | 0.0         | 1                     | 100            | 0.000                             | 0.010                |

Note: Duty Cycle Correction Factor=10log(1/Duty cycle)


Test plot of On Time and Duty Cycle

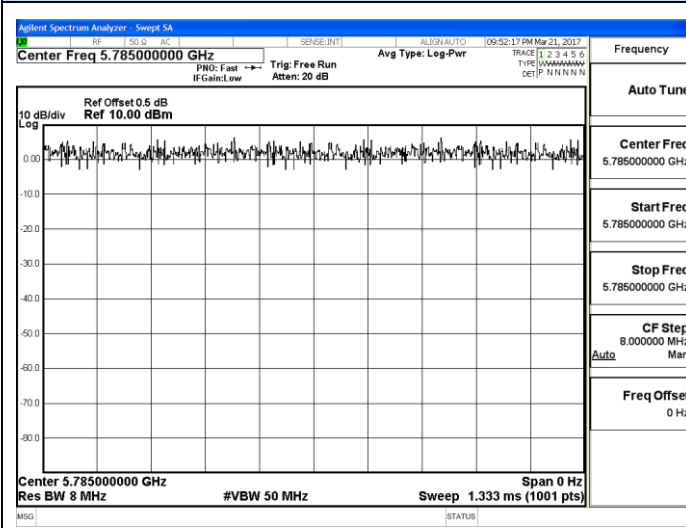


IEEE 802.11a

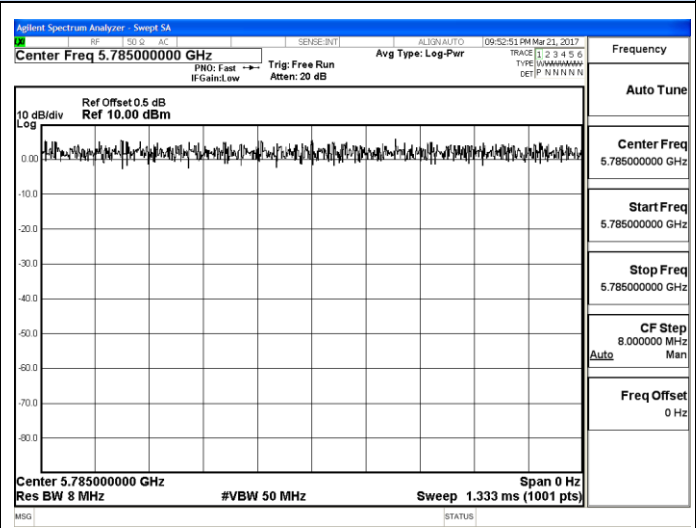

IEEE 802.11n-HT20

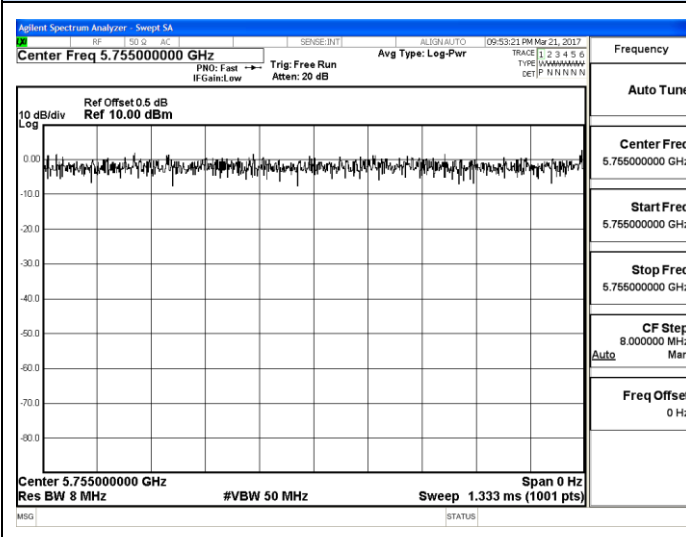

IEEE 802.11n-HT40



/

## 5.2. Maximum Conducted Output Power Measurement

### 5.2.1. Standard Applicable

#### For 5725~5850MHz

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the power meter.


### 5.2.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

According to KDB 789033 D02 Section 3 (a) Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
  - The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
  - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
  - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

### 5.2.4. Test Setup Layout

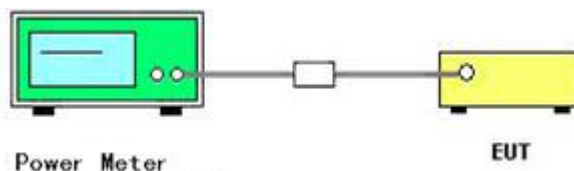

### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.2.6. Test Result of Maximum Conducted Output Power

|               |             |                |                |
|---------------|-------------|----------------|----------------|
| Temperature   | 25°C        | Humidity       | 60%            |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11a/n |

| Test Mode    | Channel | Frequency (MHz) | AVG Conducted Power (dBm) | Duty Cycle Factor (dB) | Sum Power (dBm) | Max. Limit (dBm) | Result   |
|--------------|---------|-----------------|---------------------------|------------------------|-----------------|------------------|----------|
| IEEE 802.11a | 149     | 5745            | 7.31                      | 0.000                  | 7.31            | 30               | Complies |
|              | 157     | 5785            | 7.26                      | 0.000                  | 7.26            | 30               | Complies |
|              | 165     | 5825            | 7.33                      | 0.000                  | 7.33            | 30               | Complies |

| Test Mode         | Channel | Frequency (MHz) | AVG Conducted Power (dBm) | Duty Cycle Factor (dB) | Sum Power (dBm) | Max. Limit (dBm) | Result   |
|-------------------|---------|-----------------|---------------------------|------------------------|-----------------|------------------|----------|
| IEEE 802.11n-HT20 | 149     | 5745            | 7.07                      | 0.000                  | 7.07            | 30               | Complies |
|                   | 157     | 5785            | 7.11                      | 0.000                  | 7.11            | 30               | Complies |
|                   | 165     | 5825            | 7.04                      | 0.000                  | 7.04            | 30               | Complies |

| Test Mode         | Channel | Frequency (MHz) | AVG Conducted Power (dBm) | Duty Cycle Factor (dB) | Sum Power (dBm) | Max. Limit (dBm) | Result   |
|-------------------|---------|-----------------|---------------------------|------------------------|-----------------|------------------|----------|
| IEEE 802.11n-HT40 | 151     | 5755            | 6.85                      | 0.000                  | 6.85            | 30               | Complies |
|                   | 159     | 5795            | 6.91                      | 0.000                  | 6.91            | 30               | Complies |

*Remark:*

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40;
4. Report conducted power = Measured conducted average power + Duty Cycle factor;

### 5.3. Power Spectral Density Measurement

#### 5.3.1. Standard Applicable

##### **For 5725~5850MHz**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


#### 5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

#### 5.3.3. Test Procedures

- 1). The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2). The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3). Set the RBW = 300kHz
- 4). Set the VBW  $\geq 3 \times$  RBW
- 5). Span=Encompass the entire emissions bandwidth (EBW) of the signal
- 6). Detector = RMS.
- 7). Sweep time = auto couple.
- 8). Trace mode = max hold.
- 9). Allow trace to fully stabilize.
- 10). If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log (500 \text{ kHz}/\text{RBW})$  to the measured result, whereas RBW ( $< 500 \text{ kHz}$ ) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- 11). If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log (1\text{MHz}/\text{RBW})$  to the measured result, whereas RBW ( $< 1 \text{ MHz}$ ) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- 12). Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

#### 5.3.4. Test Setup Layout

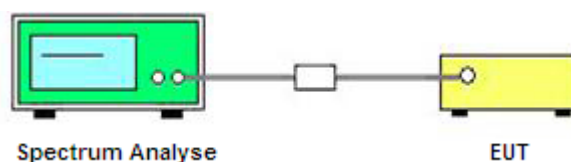



## 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.3.6. Test Result of Power Spectral Density

|               |             |                |                |
|---------------|-------------|----------------|----------------|
| Temperature   | 25°C        | Humidity       | 60%            |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11a/n |

| Test Mode    | Channel | Frequency (MHz) | Power Density (dBm/300kHz) | 10log(500kHz/RBW) Factor (dB) | Duty cycle factor (dB) | Sum PSD (dBm/500kHz) | Max. Limit (dBm/500kHz) | Result   |
|--------------|---------|-----------------|----------------------------|-------------------------------|------------------------|----------------------|-------------------------|----------|
| IEEE 802.11a | 149     | 5745            | -8.331                     | 2.22                          | 0.000                  | -6.111               | 30                      | Complies |
|              | 157     | 5785            | -8.950                     | 2.22                          | 0.000                  | -6.730               | 30                      | Complies |
|              | 165     | 5825            | -8.267                     | 2.22                          | 0.000                  | -6.047               | 30                      | Complies |



| Test Mode         | Channel | Frequency (MHz) | Power Density (dBm/300kHz) | 10log(500kHz/RBW) Factor (dB) | Duty cycle factor (dB) | Sum PSD (dBm/500kHz) | Max. Limit (dBm/500kHz) | Result   |
|-------------------|---------|-----------------|----------------------------|-------------------------------|------------------------|----------------------|-------------------------|----------|
| IEEE 802.11n-HT20 | 149     | 5745            | -10.308                    | 2.22                          | 0.000                  | -8.088               | 30                      | Complies |
|                   | 157     | 5785            | -9.235                     | 2.22                          | 0.000                  | -7.015               | 30                      | Complies |
|                   | 165     | 5825            | -8.505                     | 2.22                          | 0.000                  | -6.285               | 30                      | Complies |

| Test Mode         | Channel | Frequency (MHz) | Power Density (dBm/300kHz) | 10log(500kHz/RBW) Factor (dB) | Duty cycle factor (dB) | Sum PSD (dBm/500kHz) | Max. Limit (dBm/500kHz) | Result   |
|-------------------|---------|-----------------|----------------------------|-------------------------------|------------------------|----------------------|-------------------------|----------|
| IEEE 802.11n-HT40 | 151     | 5755            | -12.475                    | 2.22                          | 0.000                  | -10.255              | 30                      | Complies |
|                   | 159     | 5795            | -11.760                    | 2.22                          | 0.000                  | -9.540               | 30                      | Complies |

**Remark:**



1. Measured power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40;
4. Report conducted PSD = measured conducted PSD + Duty Cycle factor + RBW factor;
5.  $RBW\ factor = 10\ log\ (500\ KHz / 300\ KHz) = 2.22\ dB$ ;
6. Please refer to following test plots;

Test plot of Power Spectral Density

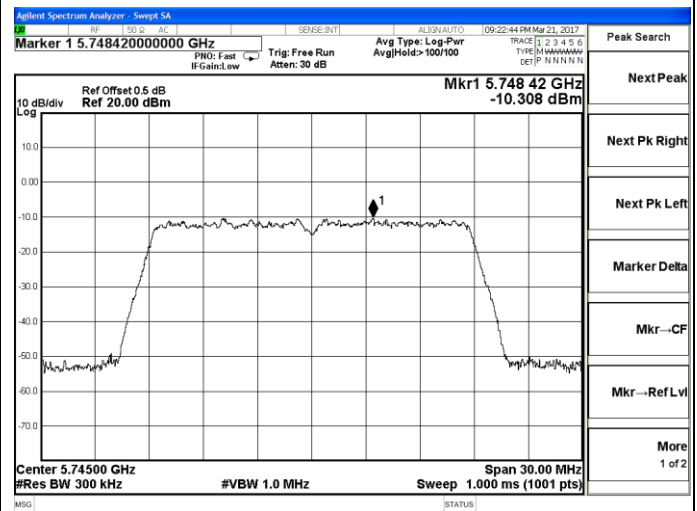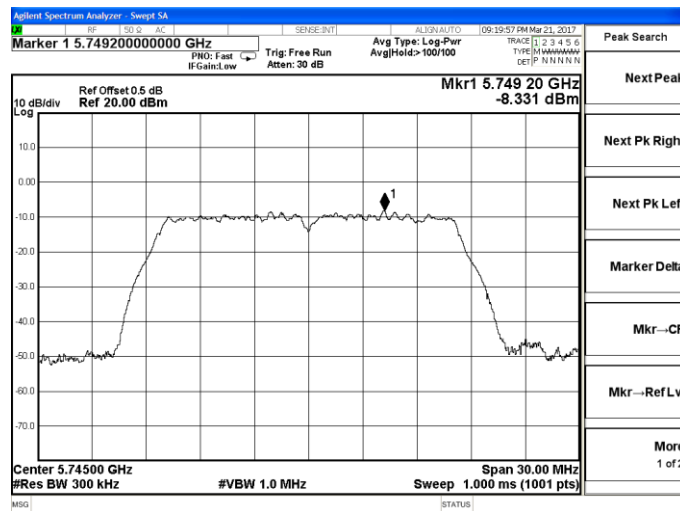



IEEE 802.11a-5745MHz

IEEE 802.11n-HT20-5745MHz

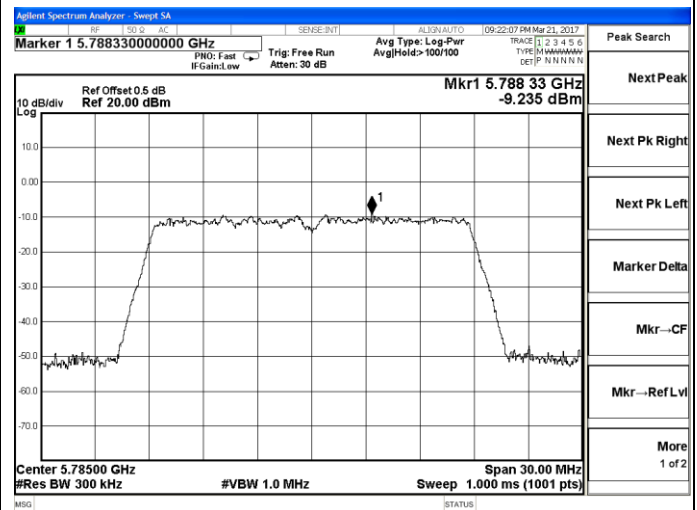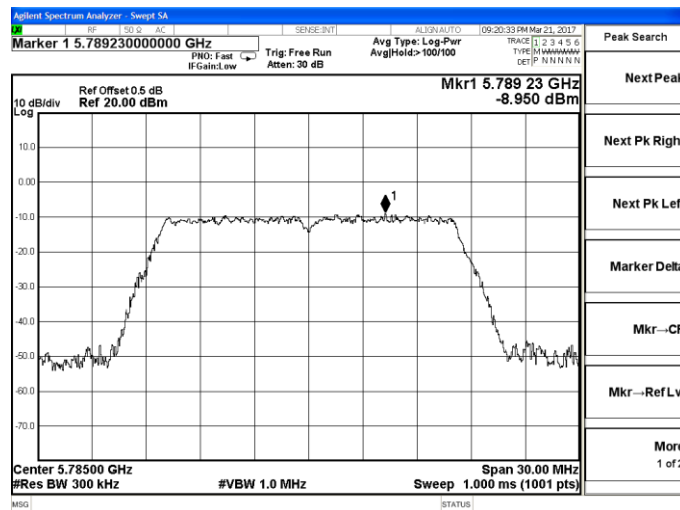

IEEE 802.11a-5785MHz


IEEE 802.11n-HT20-5785MHz

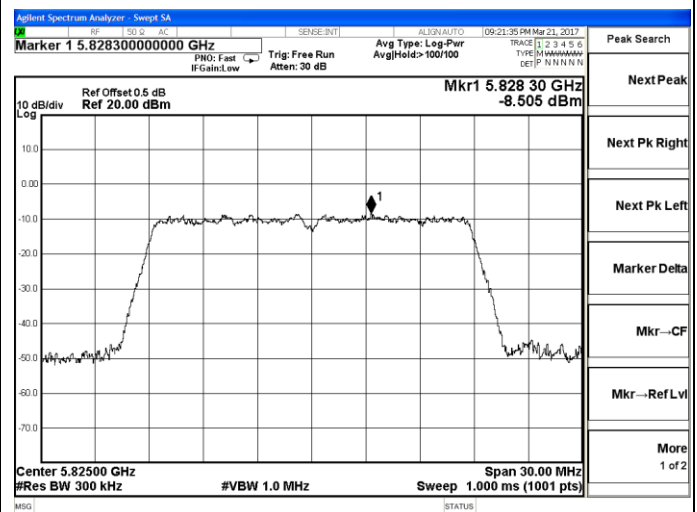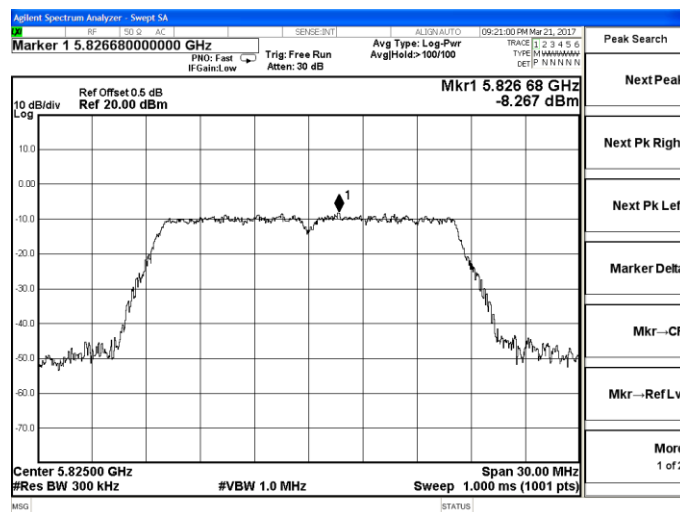

IEEE 802.11a-5825MHz


IEEE 802.11n-HT20-5825MHz

Test plot of Power Spectral Density

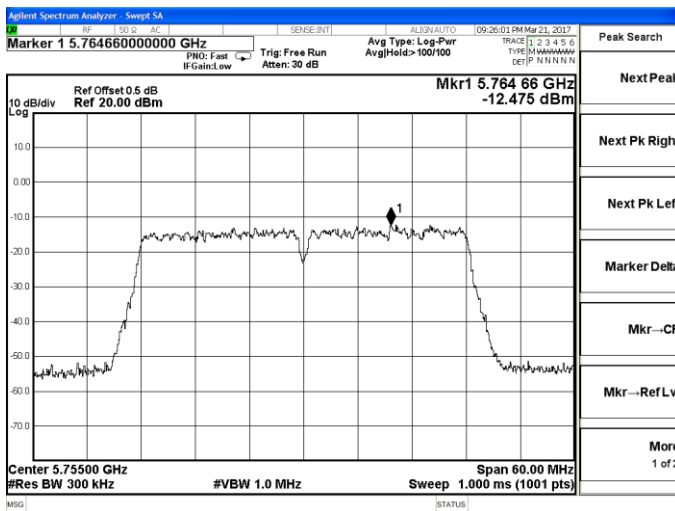

IEEE 802.11n-HT40-5755MHz

/

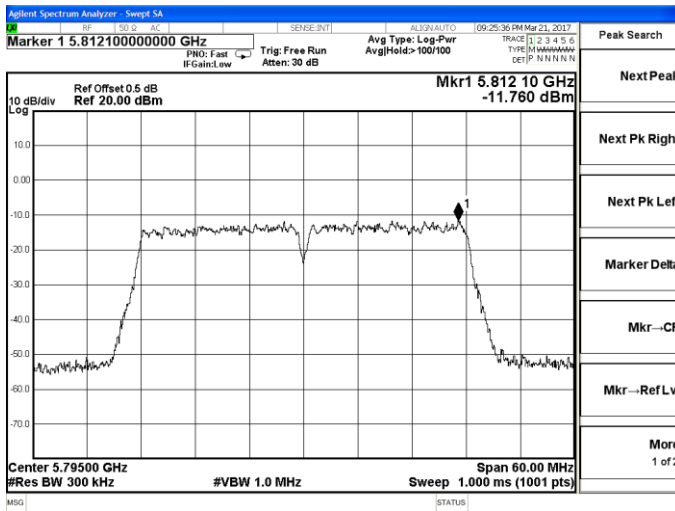

IEEE 802.11n-HT40-5795MHz

/

### 5.4. 6dB Occupied Bandwidth Measurement

#### 5.4.1. Standard Applicable

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### 5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameter | Setting          |
|--------------------|------------------|
| Attenuation        | Auto             |
| Span               | > 26dB Bandwidth |
| Detector           | Peak             |
| Trace              | Max Hold         |
| Sweep Time         | Auto             |

#### 5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 5.4.4. Test Setup Layout

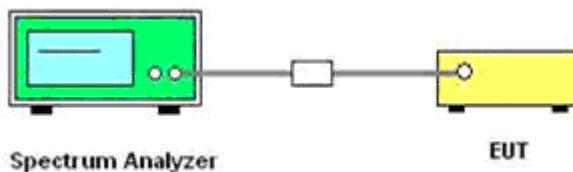

#### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 6dB Occupied Bandwidth



|               |             |                |                |
|---------------|-------------|----------------|----------------|
| Temperature   | 25°C        | Humidity       | 60%            |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11a/n |

| Test Mode         | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|-------------------|---------|-----------------|---------------------|---------------------|
| IEEE 802.11a      | 149     | 5745            | 16.58               | 16.514              |
|                   | 157     | 5785            | 16.61               | 16.532              |
|                   | 163     | 5825            | 16.60               | 16.506              |
| IEEE 802.11n-HT20 | 149     | 5745            | 17.84               | 17.659              |
|                   | 157     | 5785            | 17.84               | 17.673              |
|                   | 163     | 5825            | 17.81               | 17.670              |
| IEEE 802.11n-HT40 | 151     | 5755            | 36.50               | 36.119              |
|                   | 159     | 5795            | 36.54               | 36.129              |

Remark:



1. Measured 6dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40;
4. Please refer to following test plots;

Test plot of 6dB and 99% Occupied Bandwidth

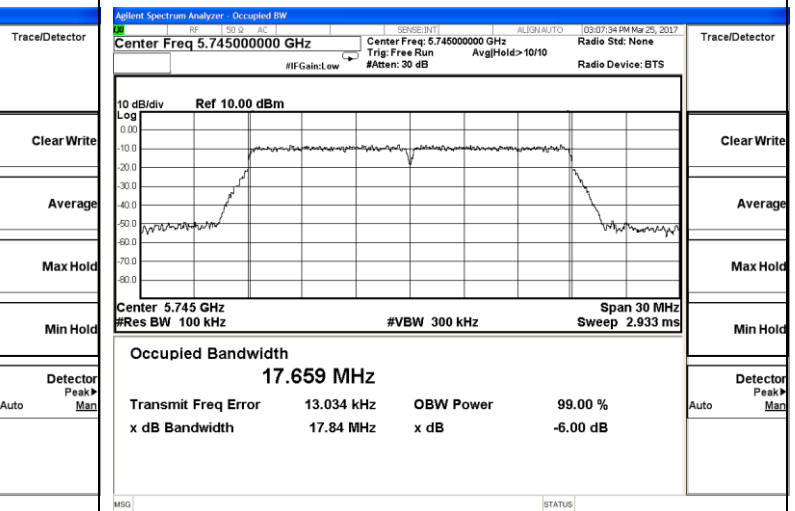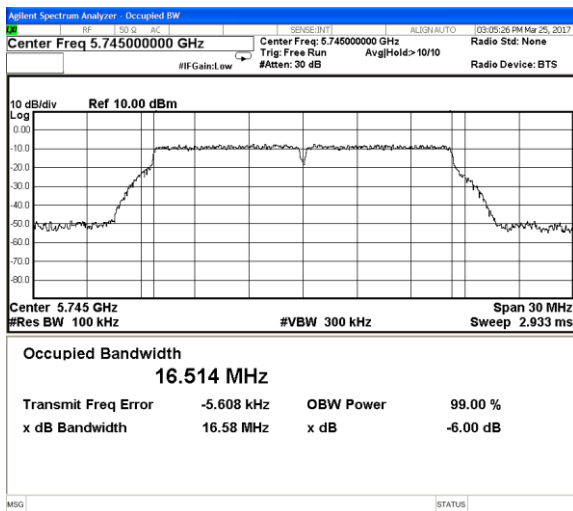



IEEE 802.11a-5745MHz

IEEE 802.11n-HT20-5745MHz

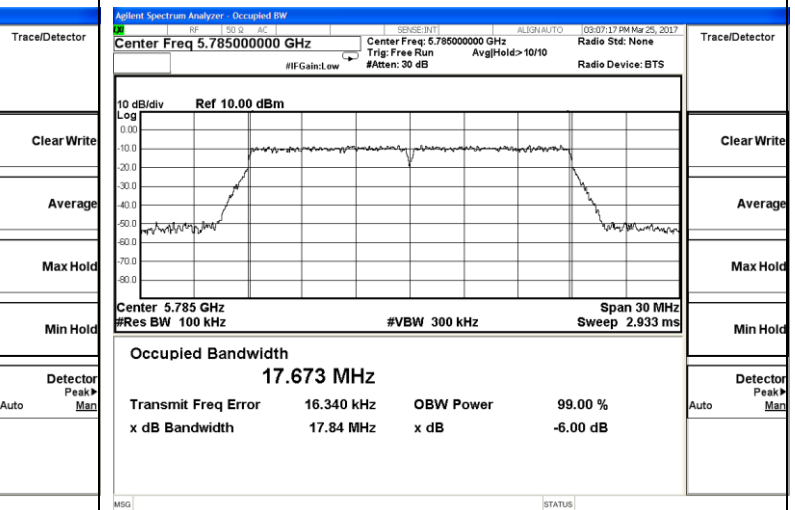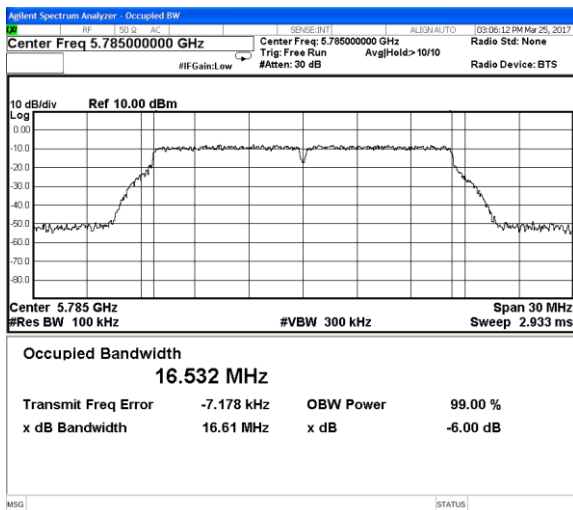

IEEE 802.11a-5785MHz


IEEE 802.11n-HT20-5785MHz

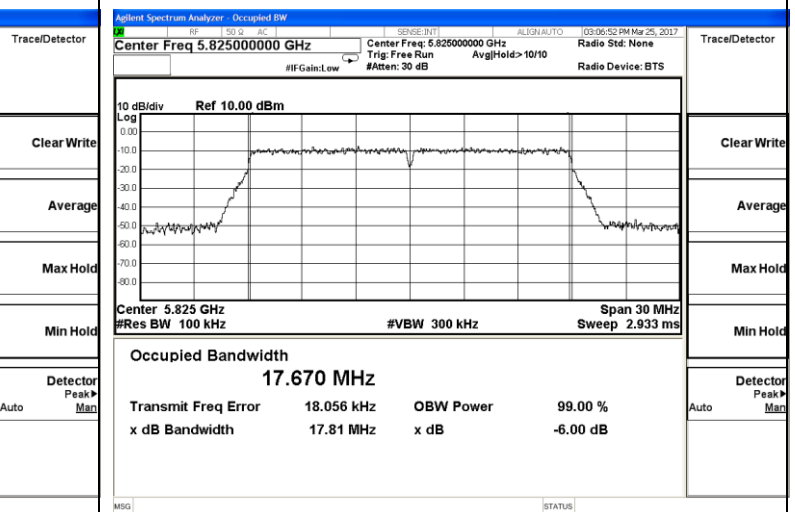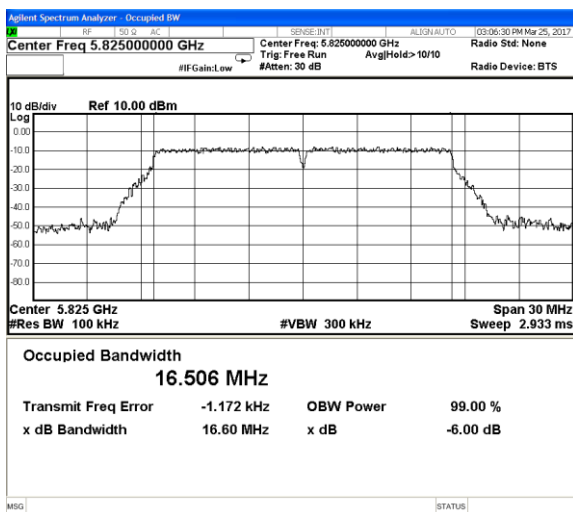

IEEE 802.11a-5825MHz

IEEE 802.11n-HT20-5825MHz

Test plot of 6dB Occupied Bandwidth

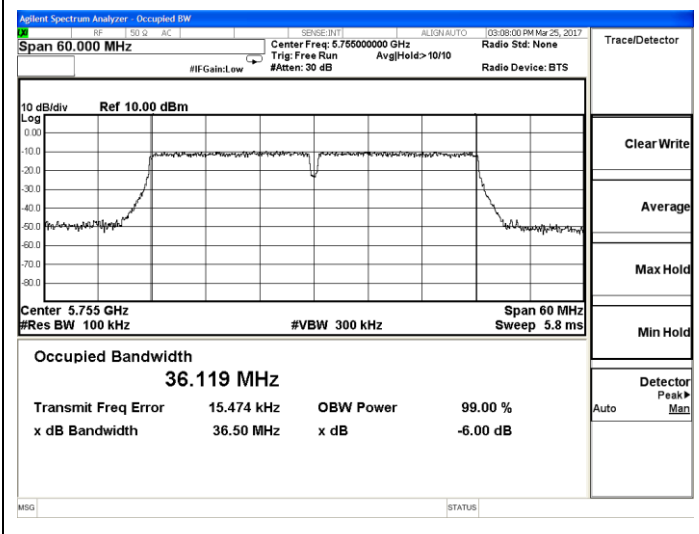

Trace/Detector

Clear Write

Average


Max Hold

Min Hold

Detector Peak

Auto Man

IEEE 802.11n-HT40-5755MHz

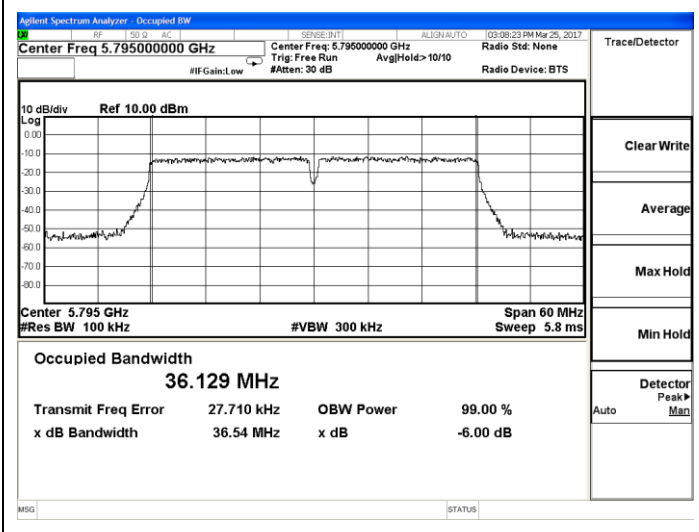

Trace/Detector

Clear Write

Average

Max Hold

Min Hold

Detector Peak

Auto Man

IEEE 802.11n-HT40-5795MHz

### 5.5. Radiated Emissions Measurement

#### 5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505   | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (\2\)       |
| 13.36-13.41       |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz(68.2dBuV/m at 3m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz(105.2dBuV/m at 3m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6(110.8dBuV/m at 3m) dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz(122.2dBuV/m at 3m) at the band edge.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

#### 5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting   |
|---|---|
| Attenuation                               | Auto  |
| Start Frequency                           | 1000 MHz  |
| Stop Frequency                            | 10 <sup>th</sup> carrier harmonic                 |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |



| Receiver Parameter     | Setting                                    |
|------------------------|--|
| Attenuation            | Auto                                       |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG  |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP   |

### 5.5.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### Premeasurement:


- The antenna is moved spherical over the EUT in different polarisations of the antenna.

##### Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.5.4. Test Setup Layout


For radiated emissions below 30MHz

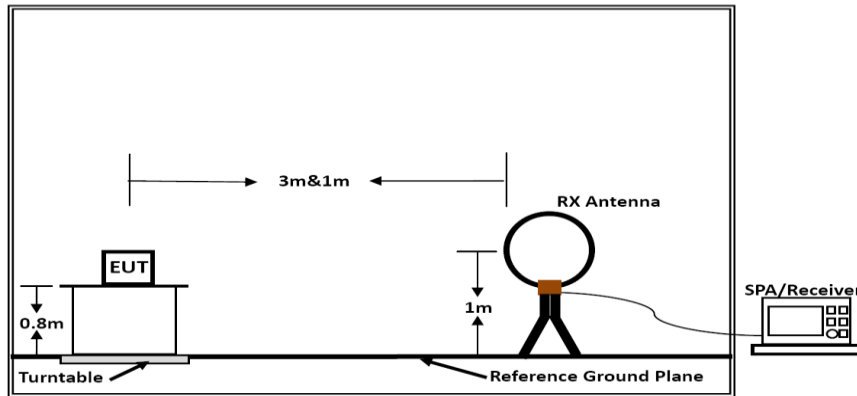

Below 30MHz

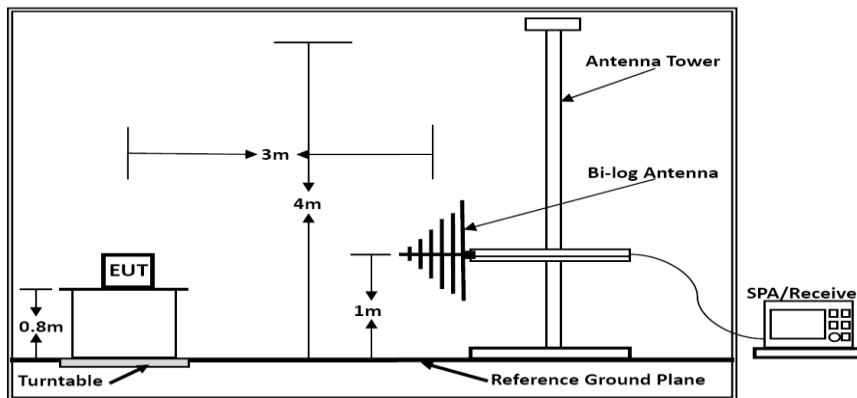

Below 1GHz

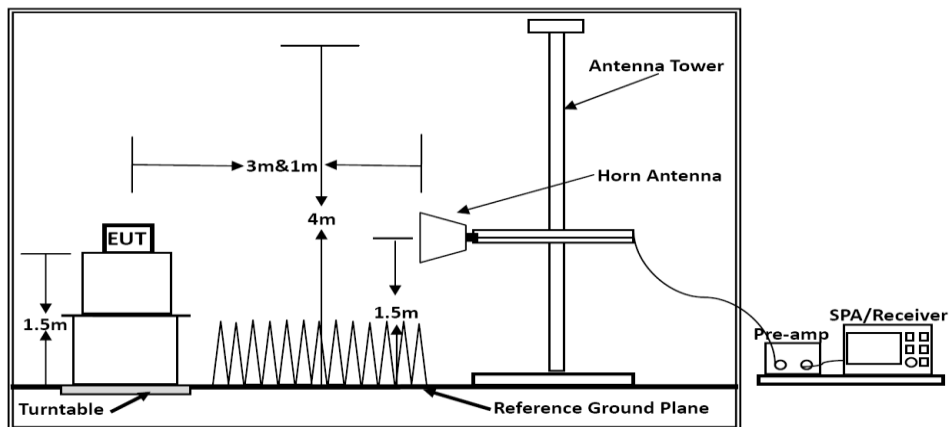

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9kHz~30MHz)

|               |             |                |                |
|---------------|-------------|----------------|----------------|
| Temperature   | 25°C        | Humidity       | 60%            |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11a/n |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark   |
|-------------|--------------|-----------------|-------------------|----------|
| -           | -            | -               | -                 | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)

|               |             |                |                       |
|---------------|-------------|----------------|-----------------------|
| Temperature   | 25°C        | Humidity       | 60%                   |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11a, 5825MHz |


Test result for IEEE 802.11a-5825MHz

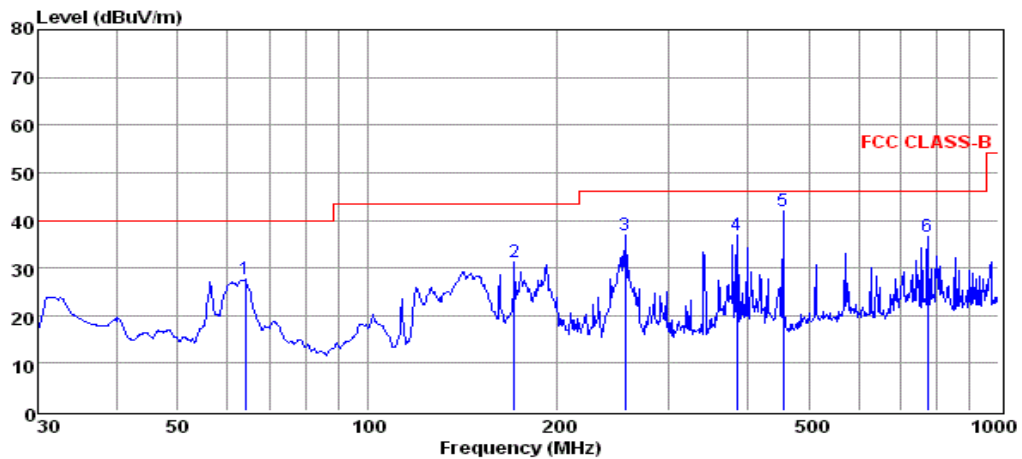

pol: HORIZONTAL

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 63.98  | 15.93   | 0.48   | 11.11  | 27.52    | 40.00  | -12.48 | QP     |
| 2 | 170.79 | 21.37   | 0.80   | 9.03   | 31.20    | 43.50  | -12.30 | QP     |
| 3 | 255.62 | 23.73   | 1.02   | 12.06  | 36.81    | 46.00  | -9.19  | QP     |
| 4 | 385.28 | 20.84   | 1.32   | 14.71  | 36.87    | 46.00  | -9.13  | QP     |
| 5 | 455.91 | 24.90   | 1.39   | 15.58  | 41.87    | 46.00  | -4.13  | QP     |
| 6 | 771.45 | 15.27   | 1.63   | 19.70  | 36.60    | 46.00  | -9.40  | QP     |

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

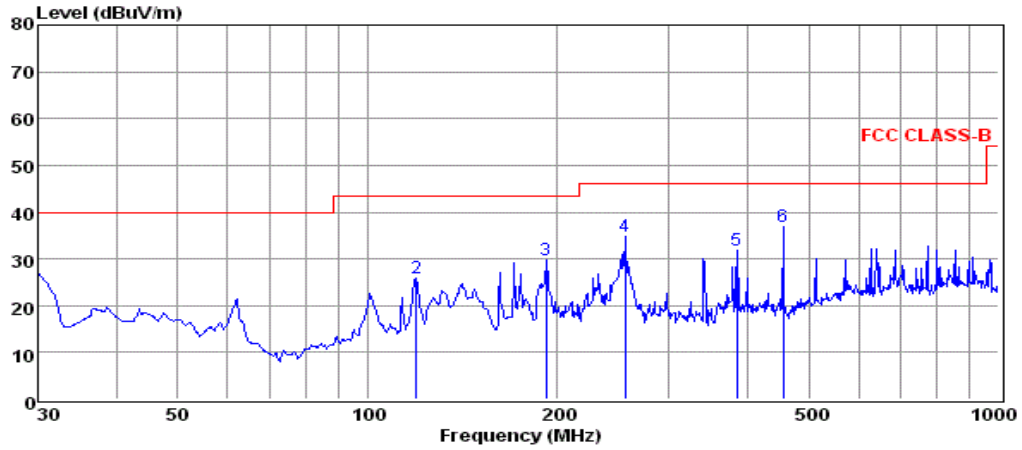

pol: VERTICAL

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 30.00  | 14.28   | 0.39   | 12.33  | 27.00    | 40.00  | -13.00 | QP     |
| 2 | 119.44 | 14.59   | 0.64   | 10.58  | 25.81    | 43.50  | -17.69 | QP     |
| 3 | 191.75 | 18.21   | 0.86   | 10.56  | 29.63    | 43.50  | -13.87 | QP     |
| 4 | 255.62 | 21.63   | 1.02   | 12.06  | 34.71    | 46.00  | -11.29 | QP     |
| 5 | 385.28 | 15.84   | 1.32   | 14.71  | 31.87    | 46.00  | -14.13 | QP     |
| 6 | 455.91 | 19.77   | 1.39   | 15.58  | 36.74    | 46.00  | -9.26  | QP     |

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Note:

Pre-scan all mode and recorded the worst case results in this report (802.11a-5825MHz).  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.5.8. Results for Radiated Emissions (Above 1GHz)

IEEE 802.11a

Channel 149

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.235   | 44.83           | 40.11         | 35.05       | 11.00      | 60.89               | 68.2              | -7.31         | Peak    | Horizontal |
| 17.235   | 29.94           | 40.11         | 35.05       | 11.00      | 46.00               | 54.0              | -8.00         | Average | Horizontal |
| 17.235   | 44.32           | 40.03         | 35.05       | 11.00      | 60.30               | 68.2              | -7.90         | Peak    | Vertical   |
| 17.235   | 30.41           | 40.03         | 35.05       | 11.00      | 46.39               | 54.0              | -7.61         | Average | Vertical   |

Channel 157

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.355   | 45.39           | 40.11         | 35.05       | 11.00      | 61.45               | 68.2              | -6.75         | Peak    | Horizontal |
| 17.355   | 29.20           | 40.11         | 35.05       | 11.00      | 45.26               | 54.0              | -8.74         | Average | Horizontal |
| 17.355   | 44.75           | 39.97         | 35.05       | 11.00      | 60.67               | 68.2              | -7.53         | Peak    | Vertical   |
| 17.355   | 29.32           | 39.97         | 35.05       | 11.00      | 45.24               | 54.0              | -8.76         | Average | Vertical   |

Channel 163

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.475   | 45.01           | 40.11         | 35.05       | 11.00      | 61.07               | 68.2              | -7.13         | Peak    | Horizontal |
| 17.475   | 29.30           | 40.11         | 35.05       | 11.00      | 45.36               | 54.0              | -8.64         | Average | Horizontal |
| 17.475   | 45.25           | 40.08         | 35.05       | 11.00      | 61.28               | 68.2              | -6.92         | Peak    | Vertical   |
| 17.475   | 30.86           | 40.08         | 35.05       | 11.00      | 46.89               | 54.0              | -7.11         | Average | Vertical   |

IEEE 802.11n-HT20

Channel 149

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.235   | 44.63           | 40.11         | 35.05       | 11.00      | 60.69               | 68.2              | -7.51         | Peak    | Horizontal |
| 17.235   | 29.52           | 40.11         | 35.05       | 11.00      | 45.58               | 54.0              | -8.42         | Average | Horizontal |
| 17.235   | 44.49           | 40.03         | 35.05       | 11.00      | 60.47               | 68.2              | -7.73         | Peak    | Vertical   |
| 17.235   | 29.00           | 40.03         | 35.05       | 11.00      | 44.98               | 54.0              | -9.02         | Average | Vertical   |

Channel 157

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.355   | 44.12           | 40.11         | 35.05       | 11.00      | 60.33               | 68.2              | -7.87         | Peak    | Horizontal |
| 17.355   | 30.20           | 40.11         | 35.05       | 11.00      | 46.42               | 54.0              | -7.58         | Average | Horizontal |
| 17.355   | 45.21           | 39.97         | 35.05       | 11.00      | 61.64               | 68.2              | -6.56         | Peak    | Vertical   |
| 17.355   | 29.82           | 39.97         | 35.05       | 11.00      | 46.45               | 54.0              | -7.55         | Average | Vertical   |

Channel 163

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.475   | 45.97           | 40.11         | 35.05       | 11.00      | 62.03               | 68.2              | -6.17         | Peak    | Horizontal |
| 17.475   | 30.77           | 40.11         | 35.05       | 11.00      | 46.83               | 54.0              | -7.17         | Average | Horizontal |
| 17.475   | 45.45           | 40.08         | 35.05       | 11.00      | 61.48               | 68.2              | -6.72         | Peak    | Vertical   |
| 17.475   | 29.72           | 40.08         | 35.05       | 11.00      | 45.75               | 54.0              | -8.25         | Average | Vertical   |



IEEE 802.11n-HT40

Channel 151

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.265   | 45.94           | 40.11         | 35.05       | 11.00      | 62.00               | 68.2              | -6.20         | Peak    | Horizontal |
| 17.265   | 29.30           | 40.11         | 35.05       | 11.00      | 45.36               | 54.0              | -8.64         | Average | Horizontal |
| 17.265   | 44.30           | 40.03         | 35.05       | 11.00      | 60.28               | 68.2              | -7.92         | Peak    | Vertical   |
| 17.265   | 30.13           | 40.03         | 35.05       | 11.00      | 46.11               | 54.0              | -7.89         | Average | Vertical   |

Channel 159

| Freq GHz | Read Level dBuV | Ant. Fac dB/m | Pre. Fac dB | Cab.Los dB | Measured Level dBuV | Limit Line dBuV/m | Over limit dB | Remark  | Pol/Phase  |
|----------|-----------------|---------------|-------------|------------|---------------------|-------------------|---------------|---------|------------|
| 17.385   | 44.16           | 40.11         | 35.05       | 11.00      | 60.22               | 68.2              | -7.98         | Peak    | Horizontal |
| 17.385   | 30.07           | 40.11         | 35.05       | 11.00      | 46.13               | 54.0              | -7.87         | Average | Horizontal |
| 17.385   | 44.28           | 39.97         | 35.05       | 11.00      | 60.20               | 68.2              | -8.00         | Peak    | Vertical   |
| 17.385   | 29.34           | 39.97         | 35.05       | 11.00      | 45.26               | 54.0              | -8.74         | Average | Vertical   |

Notes:

- 1). Measuring frequencies from 9k~40GHz, No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9k~40GHz were made with an instrument using Peak detector mode.
- 3). 18~40GHz at least have 20dB margin. No recording in the test report.
- 4). Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40;

### 5.6. Power line conducted emissions


#### 5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dBµV) |           |
|-----------------------|---------------|-----------|
|                       | Quasi-peak    | Average   |
| 0.15 to 0.50          | 66 to 56*     | 56 to 46* |
| 0.50 to 5             | 56            | 46        |
| 5 to 30               | 60            | 50        |

\* Decreasing linearly with the logarithm of the frequency

#### 5.6.2 Block Diagram of Test Setup

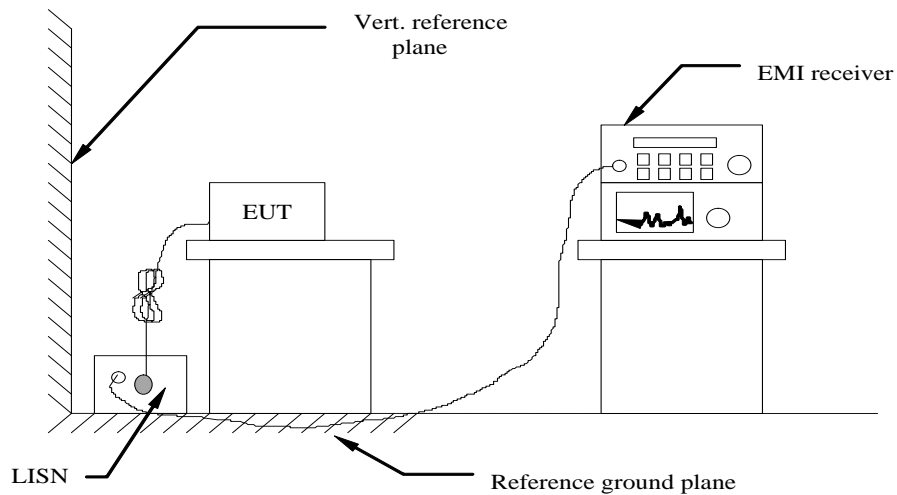


#### 5.6.3 Test Results

**PASS.**


The test data please refer to following page.

**AC Conducted Emission of power by adapter @ AC 120V/60Hz @ IEEE 802.11a (worst case)**

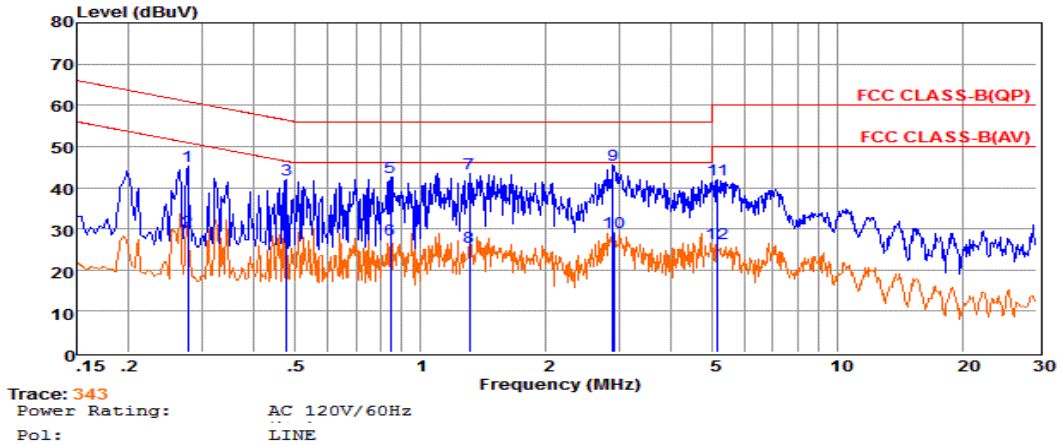

|    | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz  | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.28 | 25.41   | 9.63    | 0.03   | 10.00   | 45.07    | 60.90 | -15.83 | QP      |
| 2  | 0.28 | 9.73    | 9.63    | 0.03   | 10.00   | 29.39    | 50.89 | -21.50 | Average |
| 3  | 0.48 | 22.34   | 9.62    | 0.04   | 10.00   | 42.00    | 56.36 | -14.36 | QP      |
| 4  | 0.48 | 9.81    | 9.62    | 0.04   | 10.00   | 29.47    | 46.36 | -16.89 | Average |
| 5  | 0.85 | 23.01   | 9.63    | 0.04   | 10.00   | 42.68    | 56.00 | -13.32 | QP      |
| 6  | 0.85 | 7.68    | 9.63    | 0.04   | 10.00   | 27.35    | 46.00 | -18.65 | Average |
| 7  | 1.31 | 23.80   | 9.63    | 0.05   | 10.00   | 43.48    | 56.00 | -12.52 | QP      |
| 8  | 1.31 | 5.93    | 9.63    | 0.05   | 10.00   | 25.61    | 46.00 | -20.39 | Average |
| 9  | 2.90 | 25.68   | 9.64    | 0.06   | 10.00   | 45.38    | 56.00 | -10.62 | QP      |
| 10 | 2.90 | 9.55    | 9.64    | 0.06   | 10.00   | 29.25    | 46.00 | -16.75 | Average |
| 11 | 5.17 | 22.15   | 9.65    | 0.06   | 10.00   | 41.86    | 60.00 | -18.14 | QP      |
| 12 | 5.17 | 6.61    | 9.65    | 0.06   | 10.00   | 26.32    | 50.00 | -23.68 | Average |


Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

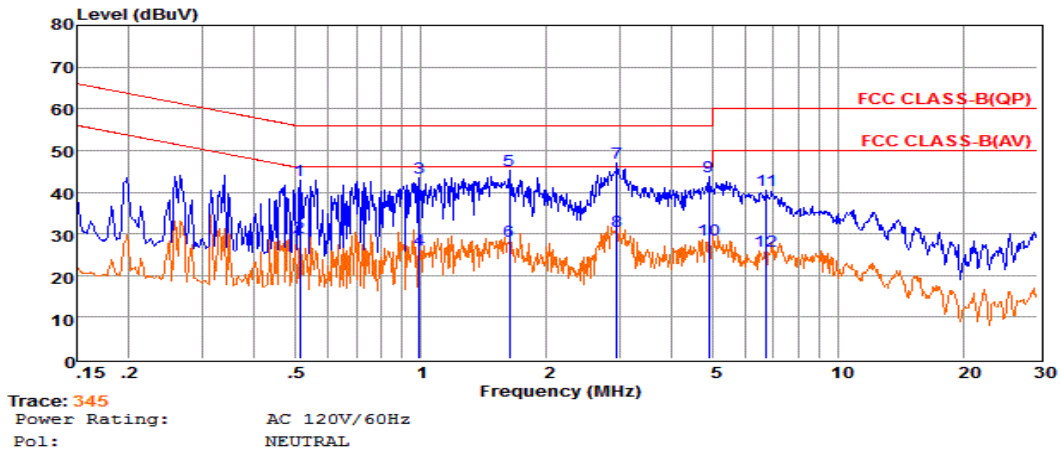

|    | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz  | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.51 | 23.26   | 9.62    | 0.04   | 10.00   | 42.92    | 56.00 | -13.08 | QP      |
| 2  | 0.51 | 9.39    | 9.62    | 0.04   | 10.00   | 29.05    | 46.00 | -16.95 | Average |
| 3  | 0.99 | 23.87   | 9.63    | 0.05   | 10.00   | 43.55    | 56.00 | -12.45 | QP      |
| 4  | 0.99 | 6.59    | 9.63    | 0.05   | 10.00   | 26.27    | 46.00 | -19.73 | Average |
| 5  | 1.63 | 25.62   | 9.63    | 0.05   | 10.00   | 45.30    | 56.00 | -10.70 | QP      |
| 6  | 1.63 | 8.43    | 9.63    | 0.05   | 10.00   | 28.11    | 46.00 | -17.89 | Average |
| 7  | 2.95 | 27.33   | 9.64    | 0.06   | 10.00   | 47.03    | 56.00 | -8.97  | QP      |
| 8  | 2.95 | 10.90   | 9.64    | 0.06   | 10.00   | 30.60    | 46.00 | -15.40 | Average |
| 9  | 4.90 | 24.08   | 9.66    | 0.06   | 10.00   | 43.80    | 56.00 | -12.20 | QP      |
| 10 | 4.90 | 8.89    | 9.66    | 0.06   | 10.00   | 28.61    | 46.00 | -17.39 | Average |
| 11 | 6.73 | 20.61   | 9.69    | 0.07   | 10.00   | 40.37    | 60.00 | -19.63 | QP      |
| 12 | 6.73 | 6.21    | 9.69    | 0.07   | 10.00   | 25.97    | 50.00 | -24.03 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.


**AC Conducted Emission of power by adapter @ AC 240V/60Hz @ IEEE 802.11a (worst case)**

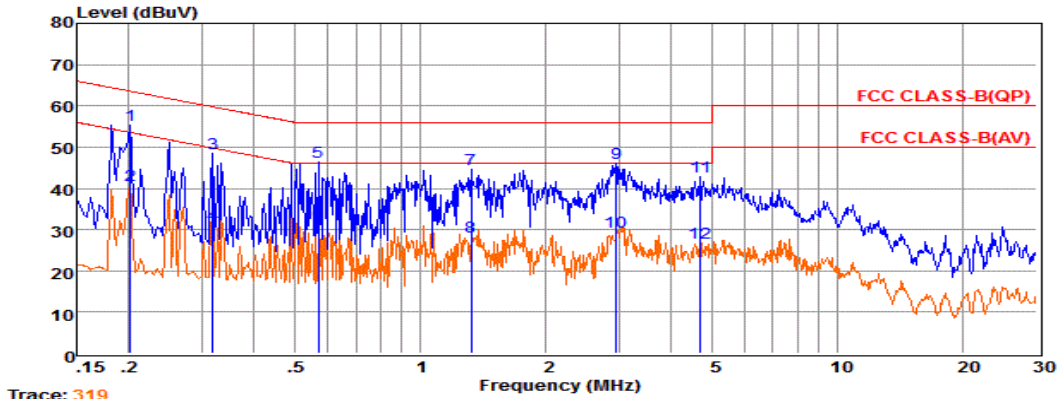

Trace: 319  
 Power Rating: AC 240V/60Hz  
 Pol: LINE

|    | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz  | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.20 | 35.74   | 9.63    | 0.02   | 10.00   | 55.39    | 63.54 | -8.15  | QP      |
| 2  | 0.20 | 21.22   | 9.63    | 0.02   | 10.00   | 40.87    | 53.53 | -12.66 | Average |
| 3  | 0.32 | 28.71   | 9.62    | 0.03   | 10.00   | 48.36    | 59.75 | -11.39 | QP      |
| 4  | 0.32 | 11.67   | 9.62    | 0.03   | 10.00   | 31.32    | 49.75 | -18.43 | Average |
| 5  | 0.57 | 26.84   | 9.63    | 0.04   | 10.00   | 46.51    | 56.00 | -9.49  | QP      |
| 6  | 0.57 | 11.88   | 9.63    | 0.04   | 10.00   | 31.55    | 46.00 | -14.45 | Average |
| 7  | 1.32 | 25.03   | 9.63    | 0.05   | 10.00   | 44.71    | 56.00 | -11.29 | QP      |
| 8  | 1.32 | 8.52    | 9.63    | 0.05   | 10.00   | 28.20    | 46.00 | -17.80 | Average |
| 9  | 2.95 | 26.27   | 9.64    | 0.06   | 10.00   | 45.97    | 56.00 | -10.03 | QP      |
| 10 | 2.95 | 9.77    | 9.64    | 0.06   | 10.00   | 29.47    | 46.00 | -16.53 | Average |
| 11 | 4.70 | 23.21   | 9.65    | 0.06   | 10.00   | 42.92    | 56.00 | -13.08 | QP      |
| 12 | 4.70 | 7.06    | 9.65    | 0.06   | 10.00   | 26.77    | 46.00 | -19.23 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

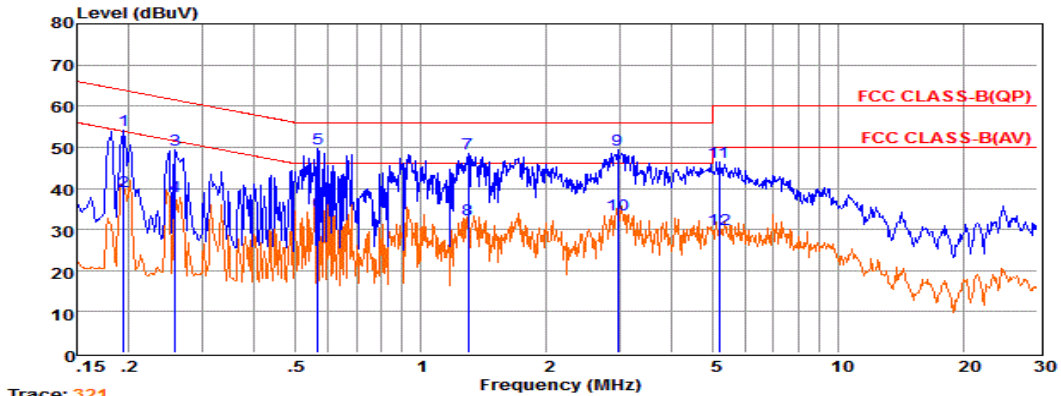

Trace: 321  
 Power Rating: AC 240V/60Hz  
 Pol: NEUTRAL

|    | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over   | Remark  |
|----|------|---------|---------|--------|---------|----------|-------|--------|---------|
|    | MHz  | dBuV    | dB      | dB     | dB      | dB       | dBuV  | dBuV   | dB      |
| 1  | 0.19 | 34.52   | 9.60    | 0.02   | 10.00   | 54.14    | 63.84 | -9.70  | QP      |
| 2  | 0.19 | 19.55   | 9.60    | 0.02   | 10.00   | 39.17    | 53.84 | -14.67 | Average |
| 3  | 0.26 | 29.59   | 9.60    | 0.03   | 10.00   | 49.22    | 61.51 | -12.29 | QP      |
| 4  | 0.26 | 18.41   | 9.60    | 0.03   | 10.00   | 38.04    | 51.51 | -13.47 | Average |
| 5  | 0.57 | 29.99   | 9.62    | 0.04   | 10.00   | 49.65    | 56.00 | -6.35  | QP      |
| 6  | 0.57 | 14.69   | 9.62    | 0.04   | 10.00   | 34.35    | 46.00 | -11.65 | Average |
| 7  | 1.30 | 28.68   | 9.63    | 0.05   | 10.00   | 48.36    | 56.00 | -7.64  | QP      |
| 8  | 1.30 | 12.63   | 9.63    | 0.05   | 10.00   | 32.31    | 46.00 | -13.69 | Average |
| 9  | 2.96 | 29.56   | 9.64    | 0.06   | 10.00   | 49.26    | 56.00 | -6.74  | QP      |
| 10 | 2.96 | 13.94   | 9.64    | 0.06   | 10.00   | 33.64    | 46.00 | -12.36 | Average |
| 11 | 5.19 | 26.73   | 9.66    | 0.06   | 10.00   | 46.45    | 60.00 | -13.55 | QP      |
| 12 | 5.19 | 10.34   | 9.66    | 0.06   | 10.00   | 30.06    | 50.00 | -19.94 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

\*\*\*Note: Pre-scan all mode and recorded the worst case results in this report (802.11a).


## 5.7 Undesirable Emissions Measurement

### 5.7.1 Limit

According to §15.407 (b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (e) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (f) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (g) The provisions of §15.205 apply to intentional radiators operating under this section.
- (h) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

### 5.7.2 Test Configuration

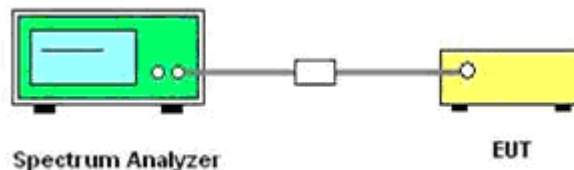

### 5.7.3 Test Procedure

1. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
2. Set the RBW = 1MHz.
3. Set the VBW  $\geq$  3MHz
4. Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
5. Manually set sweep time  $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$ .
6. Set detector = power averaging (rms).
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.

## 5.7.4 Test Results

| IEEE 802.11a    |                       |                    |                 |          |                  |               |         |
|-----------------|-----------------------|--------------------|-----------------|----------|------------------|---------------|---------|
| Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/1MHz) | Detector | Limit (dBm/1MHz) | Over limit dB | Verdict |
| 5650.000        | -49.576               | 2.000              | -47.576         | Peak     | -27.000          | -20.576       | PASS    |
| 5700.000        | -47.905               | 2.000              | -45.905         | Peak     | 10.000           | -55.905       | PASS    |
| 5720.000        | -45.915               | 2.000              | -43.915         | Peak     | 15.600           | -59.515       | PASS    |
| 5725.000        | -40.356               | 2.000              | -38.356         | Peak     | 27.000           | -65.356       | PASS    |
| 5730.000        | -37.351               | 2.000              | -35.351         | Peak     | 27.000           | -62.351       | PASS    |
| 5840.000        | -32.214               | 2.000              | -30.214         | Peak     | 27.000           | -57.214       | PASS    |
| 5850.000        | -47.592               | 2.000              | -45.592         | Peak     | 27.000           | -72.592       | PASS    |
| 5855.000        | -47.176               | 2.000              | -45.176         | Peak     | 15.600           | -60.776       | PASS    |
| 5875.000        | -48.686               | 2.000              | -46.686         | Peak     | 10.000           | -56.686       | PASS    |
| 5925.000        | -49.411               | 2.000              | -47.411         | Peak     | -27.000          | -20.411       | PASS    |

| IEEE 802.11n HT20 |                       |                    |                 |          |                  |               |         |
|-------------------|-----------------------|--------------------|-----------------|----------|------------------|---------------|---------|
| Frequency (MHz)   | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/1MHz) | Detector | Limit (dBm/1MHz) | Over limit dB | Verdict |
| 5650.000          | -50.598               | 2.000              | -48.598         | Peak     | -27.000          | -21.598       | PASS    |
| 5700.000          | -49.937               | 2.000              | -47.937         | Peak     | 10.000           | -57.937       | PASS    |
| 5720.000          | -47.017               | 2.000              | -45.017         | Peak     | 15.600           | -60.617       | PASS    |
| 5725.000          | -44.076               | 2.000              | -42.076         | Peak     | 27.000           | -69.076       | PASS    |
| 5730.000          | -39.755               | 2.000              | -37.755         | Peak     | 27.000           | -64.755       | PASS    |
| 5840.000          | -32.895               | 2.000              | -30.895         | Peak     | 27.000           | -57.895       | PASS    |
| 5850.000          | -43.767               | 2.000              | -41.767         | Peak     | 27.000           | -68.767       | PASS    |
| 5855.000          | -48.043               | 2.000              | -46.043         | Peak     | 15.600           | -61.643       | PASS    |
| 5875.000          | -48.093               | 2.000              | -46.093         | Peak     | 10.000           | -56.093       | PASS    |
| 5925.000          | -49.582               | 2.000              | -47.582         | Peak     | -27.000          | -20.582       | PASS    |



| IEEE 802.11ac VHT20 |                       |                    |                 |          |                  |               |         |
|---------------------|-----------------------|--------------------|-----------------|----------|------------------|---------------|---------|
| Frequency (MHz)     | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/1MHz) | Detector | Limit (dBm/1MHz) | Over limit dB | Verdict |
| 5650.000            | -50.696               | 2.000              | -48.696         | Peak     | -27.000          | -21.696       | PASS    |
| 5700.000            | -48.735               | 2.000              | -46.735         | Peak     | 10.000           | -56.735       | PASS    |
| 5720.000            | -42.133               | 2.000              | -40.133         | Peak     | 15.600           | -55.733       | PASS    |
| 5725.000            | -41.981               | 2.000              | -39.981         | Peak     | 27.000           | -66.981       | PASS    |
| 5730.000            | -40.074               | 2.000              | -38.074         | Peak     | 27.000           | -65.074       | PASS    |
| 5820.000            | -34.030               | 2.000              | -32.030         | Peak     | 27.000           | -59.030       | PASS    |
| 5850.000            | -46.804               | 2.000              | -44.804         | Peak     | 27.000           | -71.804       | PASS    |
| 5855.000            | -47.499               | 2.000              | -45.499         | Peak     | 15.600           | -61.099       | PASS    |
| 5875.000            | -48.198               | 2.000              | -46.198         | Peak     | 10.000           | -56.198       | PASS    |
| 5925.000            | -49.738               | 2.000              | -47.738         | Peak     | -27.000          | -20.738       | PASS    |

## Remark:

1. Measured unwanted emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40;
4. E.I.R.P = Conducted power + Directional Gain
5. Please refer to following test plots;





Test plot of Unwanted emission

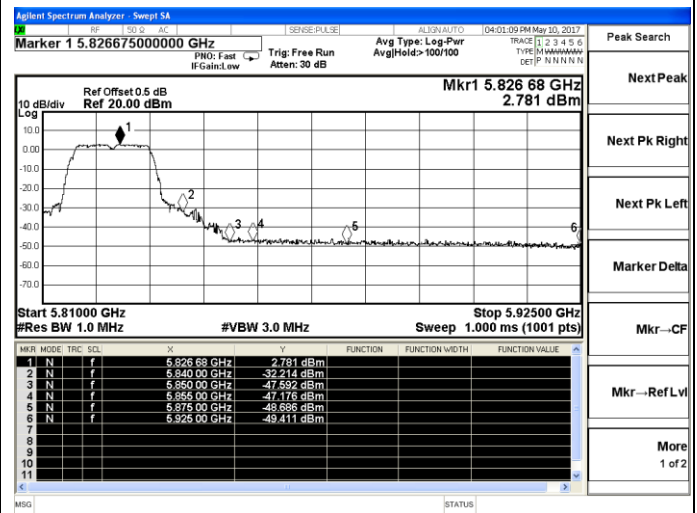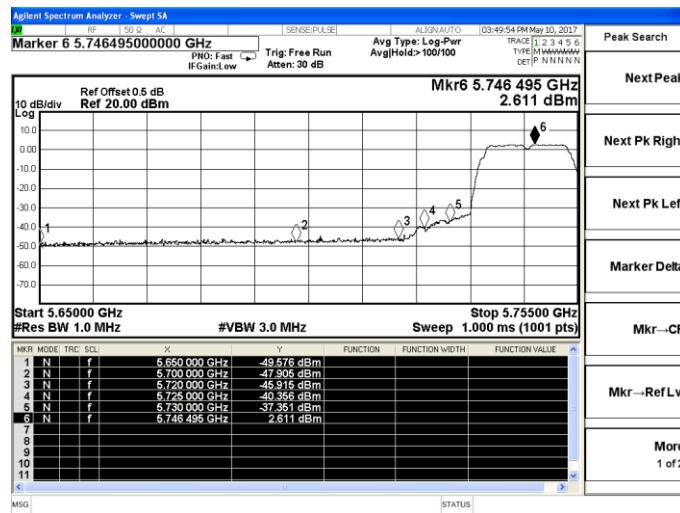



IEEE 802.11a-Low channel(Peak)

IEEE 802.11a-High channel(Peak)

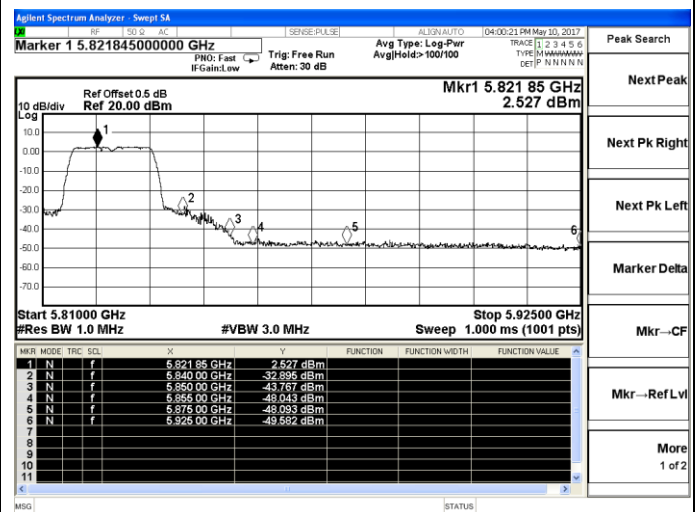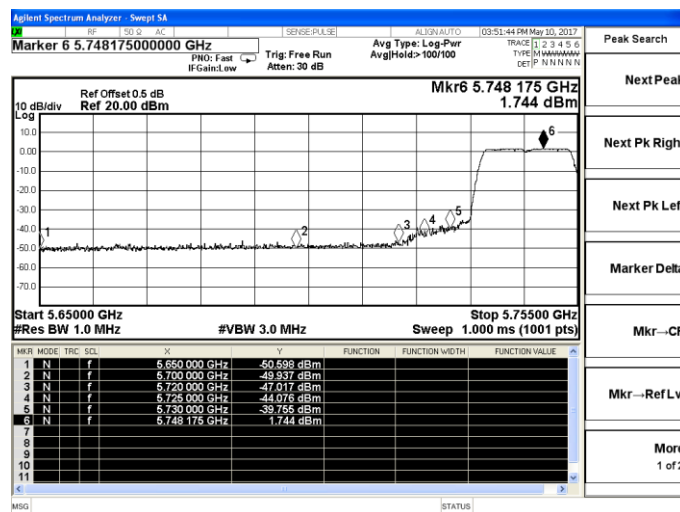

IEEE 802.11n-HT20-Low channel(Peak)

IEEE 802.11n-HT20-High channel(Peak)

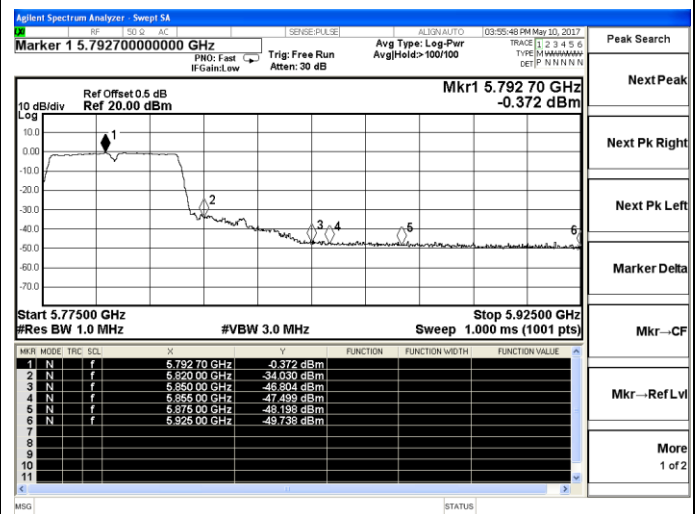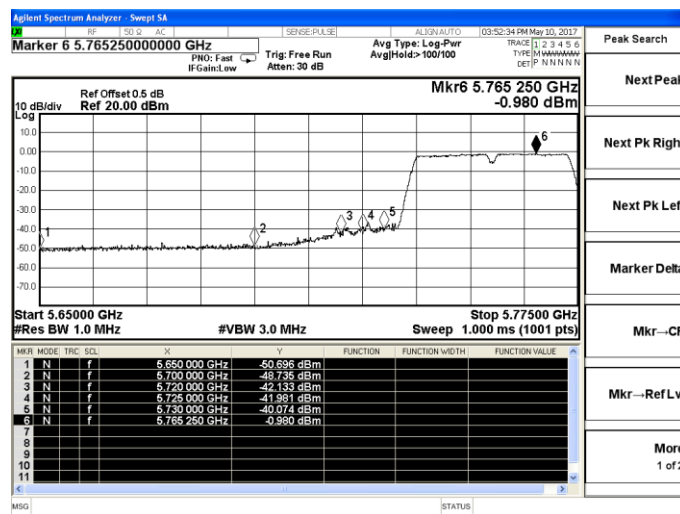

IEEE 802.11n-HT40-Low channel(Peak)

IEEE 802.11n-HT40-High channel(Peak)

## 5.8. Antenna Requirements

### 5.8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 5.8.2 Antenna Connected Construction

#### 5.8.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 5.8.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.0dBi, and the antenna is a PIFA antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

The WLAN and Bluetooth share same antenna.

#### 5.8.2.3. Results: Compliance.



## 6. LIST OF MEASURING EQUIPMENTS

| Instrument               | Manufacturer   | Model No.                        | Serial No.  | Characteristics | Cal Date         | Due Date         |
|--------------------------|----------------|----------------------------------|-------------|-----------------|------------------|------------------|
| EMC Receiver             | R&S            | ESCS 30                          | 100174      | 9kHz – 2.75GHz  | June 18, 2016    | June 17, 2017    |
| Signal analyzer          | Agilent        | E4448A(External mixers to 40GHz) | US44300469  | 9kHz~40GHz      | July 16, 2016    | July 15, 2017    |
| Signal analyzer          | Agilent        | N9020A                           | MY50510140  | 9kHz~26.5GHz    | October 27, 2016 | October 27, 2017 |
| LISN                     | MESS Tec       | NNB-2/16Z                        | 99079       | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| LISN (Support Unit)      | EMCO           | 3819/2NM                         | 9703-1839   | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| RF Cable-CON             | UTIFLEX        | 3102-26886-4                     | CB049       | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| ISN                      | SCHAFFNER      | ISN ST08                         | 21653       | 9KHz-30MHz      | June 18, 2016    | June 17, 2017    |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M                           | 03CH03-HY   | 30M-18GHz 3m    | June 18, 2016    | June 17, 2017    |
| Amplifier                | SCHAFFNER      | COA9231A                         | 18667       | 9kHz-2GHz       | June 18, 2016    | June 17, 2017    |
| Amplifier                | Agilent        | 8449B                            | 3008A02120  | 1GHz-26.5GHz    | July 16, 2016    | July 15, 2017    |
| Amplifier                | MITEQ          | AMF-6F-260400                    | 9121372     | 26.5GHz-40GHz   | July 16, 2016    | July 15, 2017    |
| Loop Antenna             | R&S            | HFH2-Z2                          | 860004/001  | 9k-30MHz        | June 18, 2016    | June 17, 2017    |
| By-log Antenna           | SCHWARZBECK    | VULB9163                         | 9163-470    | 30MHz-1GHz      | June 10, 2016    | June 09, 2017    |
| Horn Antenna             | EMCO           | 3115                             | 6741        | 1GHz-18GHz      | June 10, 2016    | June 09, 2017    |
| Horn Antenna             | SCHWARZBECK    | BBHA9170                         | BBHA9170154 | 15GHz-40GHz     | June 10, 2016    | June 09, 2017    |
| RF Cable-R03m            | Jye Bao        | RG142                            | CB021       | 30MHz-1GHz      | June 18, 2016    | June 17, 2017    |
| RF Cable-HIGH            | SUHNER         | SUCOFLEX 106                     | 03CH03-HY   | 1GHz-40GHz      | June 18, 2016    | June 17, 2017    |
| Power Meter              | R&S            | NRVS                             | 100444      | DC-40GHz        | June 18, 2016    | June 17, 2017    |
| Power Sensor             | R&S            | NRV-Z51                          | 100458      | DC-30GHz        | June 18, 2016    | June 17, 2017    |
| Power Sensor             | R&S            | NRV-Z32                          | 10057       | 30MHz-6GHz      | June 18, 2016    | June 17, 2017    |
| AC Power Source          | HPC            | HPA-500E                         | HPA-9100024 | AC 0~300V       | June 18, 2016    | June 17, 2017    |
| DC power Source          | GW             | GPC-6030D                        | C671845     | DC 1V-60V       | June 18, 2016    | June 17, 2017    |
| Temp. and Humidity       | Giant Force    | GTH-225-20-S                     | MAB0103-00  | N/A             | June 18, 2016    | June 17, 2017    |
| RF CABLE-1m              | JYE Bao        | RG142                            | CB034-1m    | 20MHz-7GHz      | June 18, 2016    | June 17, 2017    |
| RF CABLE-2m              | JYE Bao        | RG142                            | CB)35-2m    | 20MHz-1GHz      | June 18, 2016    | June 17, 2017    |

Note: All equipment through GRGT EST calibration

## **7. TEST SETUP PHOTOGRAPHS OF EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **8. EXTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for External Photos of the EUT.

## **9. INTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----