


EXHIBIT 3
FCC ID LABEL and LABEL LOCATION

GENERAL SPECIFICATIONS

FREQUENCY RANGE:	450-490 MHz
OPERATING MODE:	FM
MODEL #:	UHF 450-70
OUTPUT POWER:	70 WATTS
OPERATING TEMPERATURE RANGE:	-20 to +50 Deg. C
OPERATING VOLTAGE:	+13.6 VDC / 14 amps
DUTY CYCLE:	100%
HARMONIC ATTENUATION:	Meets FCC Type Acceptance
OPTIONS:	EMR Amplifiers are available with several mechanical mounting options and in various configurations. (Specified at time of order.)
FCC TYPE ACCEPTANCE LABEL	3/4" H - 3" W

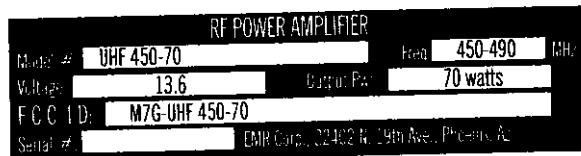


For placement see: PRODUCT SPECIFICATIONS

PRODUCT DESCRIPTION

The UHF 450-70 Series of EMR amplifiers are intended for use in commercial communications systems. Applications include land mobile repeaters, trunking and data systems. They will cover the frequency range extending from 450 MHz to 490 MHz.

For operator convenience, views of the top, front, and side of the amplifier are presented here.

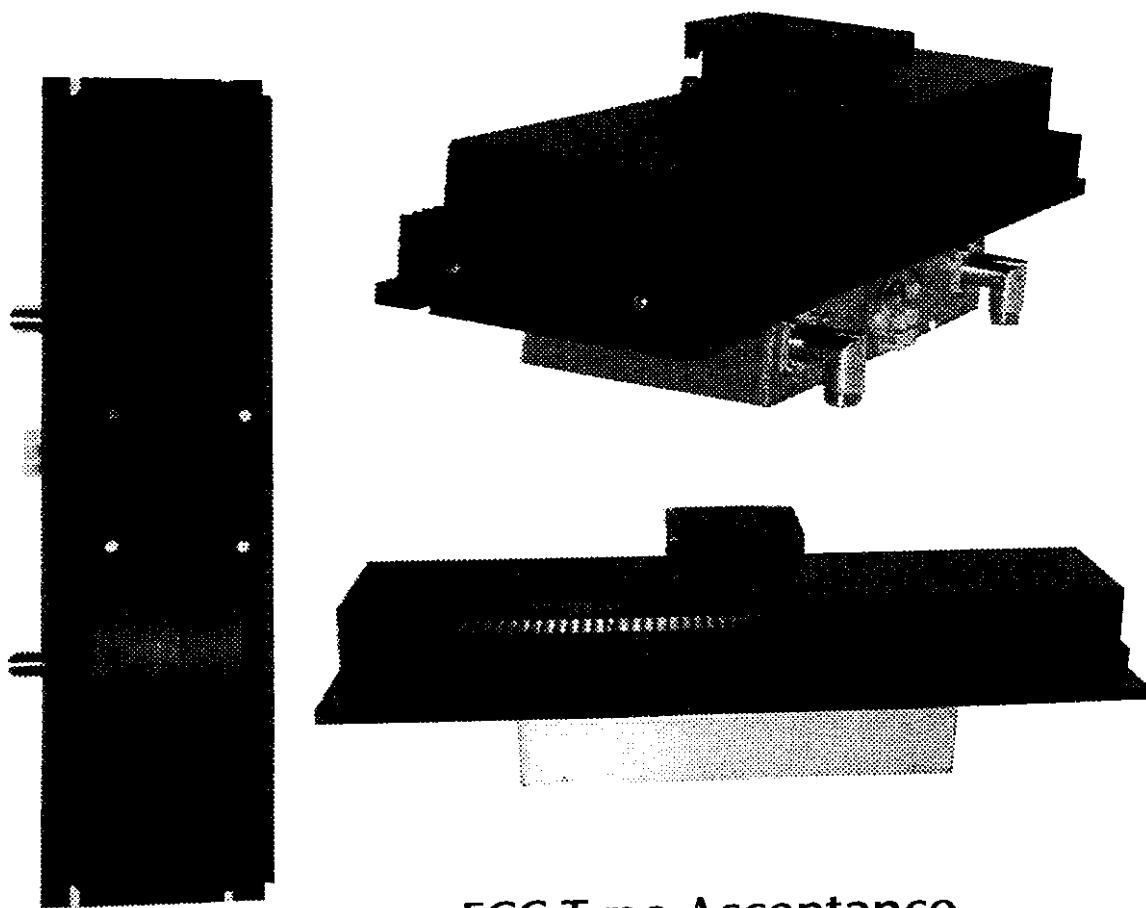

FCC Type Acceptance Label Placement

