

FCC PART 15.247  
EMI MEASUREMENT AND TEST REPORT  
For

**BRK Brands Inc**

3901 Liberty Street Road Aurora Illinois United States 60504-8122

**FCC ID: M7UDWIP-720**

May 16, 2013

|                                          |                                                                                                                                                                                                                   |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| This Report Concerns:<br>Original Report | Equipment Type:<br>Camera                                                                                                                                                                                         |
| Test Engineer:                           | Anna Lv <i>Anna Lv</i>                                                                                                                                                                                            |
| Report No.:                              | BST201304180002R                                                                                                                                                                                                  |
| Receive EUT<br>Date/Test Date:           | May 13, 2013 / May 14, 2013 -<br>May 16, 2013                                                                                                                                                                     |
| Reviewed By:                             | Mike Moo <i>Mike Moo</i>                                                                                                                                                                                          |
| Prepared By:                             | <b>Shenzhen BST Technology Co.,Ltd.</b><br>3F,Weames Technology Building,<br>No. 10 Kefa Road, Science Park,<br>Nanshan District,Shenzhen,Guangdong,China<br>Tel: 0755-26747751-3<br>Fax: 0755-26747751-3 ext.826 |

**Note:** The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Shenzhen BST Technology Co.,Ltd. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

## 2 Contents

|                                           | Page |
|-------------------------------------------|------|
| 1 COVER PAGE .....                        | 1    |
| 2 CONTENTS .....                          | 2    |
| 3 TEST SUMMARY .....                      | 3    |
| 4 GENERAL INFORMATION .....               | 4    |
| 4.1 CLIENT INFORMATION .....              | 4    |
| 4.2 GENERAL DESCRIPTION OF EUT .....      | 4    |
| 4.3 TEST MODE .....                       | 5    |
| 4.4 DESCRIPTION OF SUPPORT UNITS .....    | 5    |
| 4.5 TEST FACILITY .....                   | 6    |
| 4.6 TEST LOCATION .....                   | 6    |
| 5 TEST INSTRUMENTS LIST .....             | 7    |
| 6 TEST RESULTS AND MEASUREMENT DATA ..... | 8    |
| 6.1 ANTENNA REQUIREMENT: .....            | 8    |
| 6.2 CONDUCTED EMISSIONS .....             | 9    |
| 6.3 CONDUCTED PEAK OUTPUT POWER .....     | 12   |
| 6.4 CHANNEL BANDWIDTH .....               | 17   |
| 6.5 POWER SPECTRAL DENSITY .....          | 22   |
| 6.6 BAND EDGES .....                      | 27   |
| 6.6.1 Conducted Emission Method .....     | 27   |
| 6.6.2 Radiated Emission Method .....      | 30   |
| 6.7 SPURIOUS EMISSION .....               | 35   |
| 6.7.1 Conducted Emission Method .....     | 35   |
| 6.7.2 Radiated Emission Method .....      | 40   |

### 3 Test Summary

| Test Item                        | Section in CFR 47 | Result |
|----------------------------------|-------------------|--------|
| Antenna requirement              | 15.203/15.247 (c) | Pass   |
| AC Power Line Conducted Emission | 15.207            | Pass   |
| Conducted Peak Output Power      | 15.247 (b)(3)     | Pass   |
| Channel Bandwidth                | 15.247 (a)(2)     | Pass   |
| Power Spectral Density           | 15.247 (e)        | Pass   |
| Band Edge                        | 15.247(d)         | Pass   |
| Spurious Emission                | 15.205/15.209     | Pass   |

*Pass: The EUT complies with the essential requirements in the standard.*

## 4 General Information

### 4.1 Client Information

|                          |                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------|
| Applicant:               | BRK Brands Inc                                                                        |
| Address of Applicant:    | 3901 Liberty Street Road Aurora Illinois United States 60504-8122                     |
| Manufacturer:            | DIT DIGITAL CO., LTD.                                                                 |
| Address of Manufacturer: | B1101 Seat, Tsinghua Science Park, NO. 101, University Road, Tangjiawan, zhuhai China |

### 4.2 General Description of EUT

|                        |                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:          | Camera                                                                                                                                     |
| Model No.:             | DWIP-720                                                                                                                                   |
| Operation Frequency:   | 802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz<br>802.11n(HT40): 2422MHz~2452MHz                                                           |
| Channel numbers:       | 802.11b/802.11g /802.11n(HT20): 11<br>802.11(HT40): 7                                                                                      |
| Channel separation:    | 5MHz                                                                                                                                       |
| Modulation technology: | 802.11b: Direct Sequence Spread Spectrum (DSSS)<br>802.11g/802.11n(H20)/802.11n(H40):<br>Orthogonal Frequency Division Multiplexing (OFDM) |
| Antenna Type:          | Dedicade Antenna(Reverse SMA connector)                                                                                                    |
| Antenna gain:          | 2dBi (declare by Applicant)                                                                                                                |
| Power supply:          | Adapter:<br>Model No.:HND 050200U<br>Adapter Input: AC 100~240V~50/60Hz<br>Output: 5.0V 2.0A                                               |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                   | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                   | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   | X       |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Test channel    | Frequency (MHz)               |               |
|-----------------|-------------------------------|---------------|
|                 | 802.11b/802.11g/802.11n(HT20) | 802.11n(HT40) |
| Lowest channel  | 2412MHz                       | 2422MHz       |
| Middle channel  | 2437MHz                       | 2437MHz       |
| Highest channel | 2462MHz                       | 2452MHz       |

#### 4.3 Test mode

|                                                                                                                                                                                                                                              |                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                            | Keep the EUT in continuously transmitting mode |
| <i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i> |                                                |

|                                                                                                                                                                                                              |         |         |               |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------|---------------|---------------|
| We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows: |         |         |               |               |
| Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.                                                                                                         |         |         |               |               |
| Mode                                                                                                                                                                                                         | 802.11b | 802.11g | 802.11n(HT20) | 802.11n(HT40) |
| Data rate                                                                                                                                                                                                    | 1Mbps   | 6Mbps   | 6.5Mbps       | 13Mbps        |

#### 4.4 Description of Support Units

| Manufacturer | Description | Model | Serial Number | FCC approval |
|--------------|-------------|-------|---------------|--------------|
| IBM Thinkpad | Notebook PC | 2374  | L3-G0686      | FCC Doc      |

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

#### 4.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

## 5 Test Instruments list

| Radiated Emission: |                               |                                |                             |               |                     |                         |
|--------------------|-------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber     | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | Mar. 29 2013        | Mar. 28 2014            |
| 2                  | Control Room                  | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | Spectrum Analyzer             | Agilent                        | E4440A                      | GTS533        | Dec. 6, 2012        | Dec. 5, 2013            |
| 4                  | EMI Test Receiver             | Rohde & Schwarz                | ESU26                       | GTS203        | Jul. 03 2012        | Jul. 02 2013            |
| 5                  | BiConiLog Antenna             | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | Feb. 24 2013        | Feb. 23 2014            |
| 6                  | Double -ridged waveguide horn | SCHWARZBECK<br>MESS-ELEKTRONIK | 9120D-829                   | GTS208        | June 29 2012        | June 28 2013            |
| 7                  | Horn Antenna                  | ETS-LINDGREN                   | 3160                        | GTS217        | Mar. 29 2013        | Mar. 28 2014            |
| 8                  | EMI Test Software             | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 9                  | Coaxial Cable                 | GTS                            | N/A                         | GTS213        | Mar. 30 2013        | Mar. 29 2014            |
| 10                 | Coaxial Cable                 | GTS                            | N/A                         | GTS211        | Mar. 30 2013        | Mar. 29 2014            |
| 11                 | Coaxial cable                 | GTS                            | N/A                         | GTS210        | Mar. 30 2013        | Mar. 29 2014            |
| 12                 | Coaxial Cable                 | GTS                            | N/A                         | GTS212        | Mar. 30 2013        | Mar. 29 2014            |
| 13                 | Amplifier(100kHz-3GHz)        | HP                             | 8347A                       | GTS204        | Jul. 03 2012        | Jul. 02 2013            |
| 14                 | Amplifier(2GHz-20GHz)         | HP                             | 8349B                       | GTS206        | Jul. 03 2012        | Jul. 02 2013            |
| 15                 | Amplifier (18-26GHz)          | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June 29 2012        | June 28 2013            |
| 16                 | Band filter                   | Amindeon                       | 82346                       | GTS219        | Mar. 30 2013        | Mar. 29 2014            |

| Conducted Emission: |                   |                                |                      |               |                     |                         |
|---------------------|-------------------|--------------------------------|----------------------|---------------|---------------------|-------------------------|
| Item                | Test Equipment    | Manufacturer                   | Model No.            | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                   | Shielding Room    | ZhongYu Electron               | 7.0(L)x3.0(W)x3.0(H) | GTS264        | Sep. 08 2011        | Sep. 07 2013            |
| 2                   | EMI Test Receiver | Rohde & Schwarz                | ESCS30               | GTS223        | Jul. 03 2012        | Jul. 02 2013            |
| 3                   | 10dB Pulse Limita | Rohde & Schwarz                | N/A                  | GTS224        | Jul. 03 2012        | Jul. 02 2013            |
| 4                   | Coaxial Switch    | ANRITSU CORP                   | MP59B                | GTS225        | Jul. 03 2012        | Jul. 02 2013            |
| 5                   | LISN              | SCHWARZBECK<br>MESS-ELEKTRONIK | NSLK 8127            | GTS226        | Jul. 03 2012        | Jul. 02 2013            |
| 6                   | Coaxial Cable     | GTS                            | N/A                  | GTS227        | Jul. 03 2012        | Jul. 02 2013            |
| 7                   | EMI Test Software | AUDIX                          | E3                   | N/A           | N/A                 | N/A                     |

| General used equipment: |                |              |           |               |                     |                         |
|-------------------------|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item                    | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                       | Barometer      | ChangChun    | DYM3      | GTS257        | July 10 2012        | July 09 2013            |


6 Test results and Measurement Data

6.1 Antenna requirement:

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | FCC Part15 C Section 15.203 /247(c) |
| <p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> |                                     |
| <p><b>E.U.T Antenna:</b></p> <p><i>The antenna is Dedicade antenna, the best case gain of the antenna is 2dBi</i></p> <div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |




## 6.2 Conducted Emissions
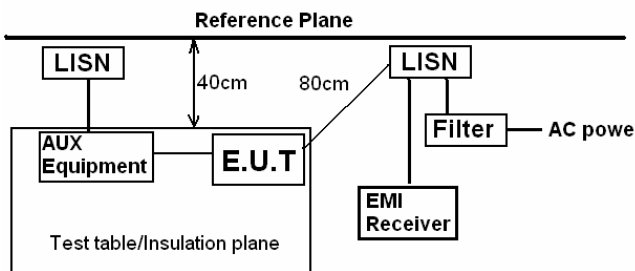
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | FCC Part15 C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |           |
| Test Method:                                     | ANSI C63.4:2003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
| Test Frequency Range:                            | 150KHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
| Class / Severity:                                | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |           |
| Receiver setup:                                  | RBW=9KHz, VBW=30KHz, Sweep time=auto                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |              |           |
| Test setup:                                      |  <p>Remark:<br/> E.U.T: Equipment Under Test<br/> LISN: Line Impedance Stabilization Network<br/> Test table height=0.8m</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |              |           |
| Test procedure:                                  | <ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol> |              |           |
| Test Instruments:                                | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |           |
| Test mode:                                       | Refer to section 4.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |              |           |
| Test results:                                    | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |              |           |

**Measurement data**

Line:

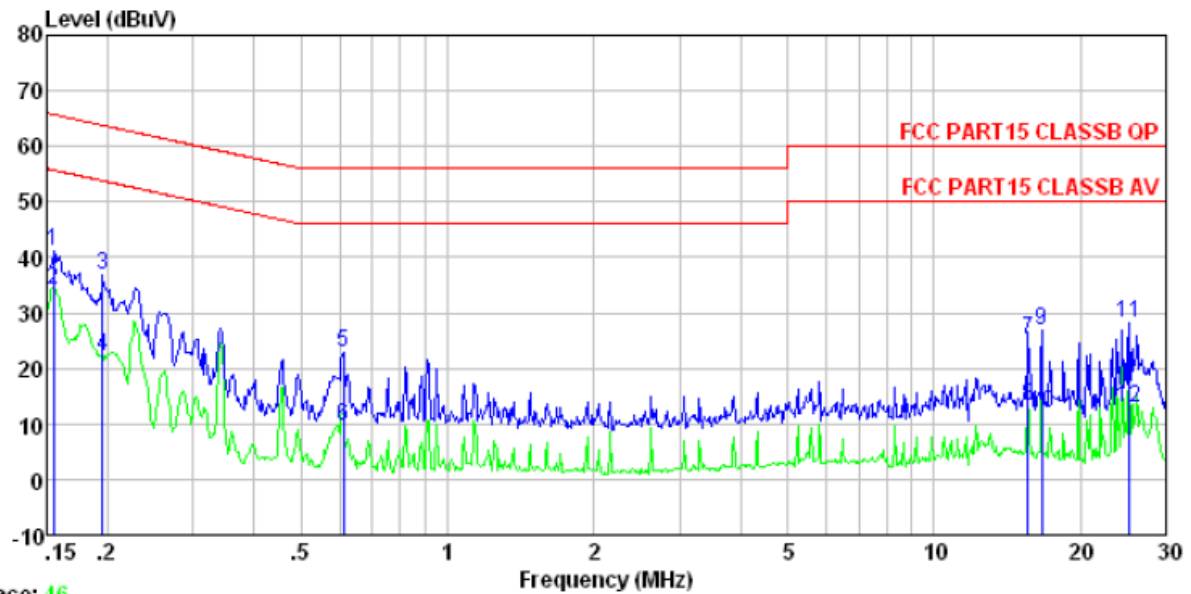

Trace: 46

Condition : FCC PART15 CLASSB QP LISN-2012 LINE


Job No. : 652RF

Test mode : WIFI mode

Test Engineer: Sam

|    | Freq   | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB          | dB         | dBuV  | dBuV       | dB         |         |
| 1  | 0.155  | 41.33      | -0.26       | 0.10       | 41.17 | 65.74      | -24.57     | QP      |
| 2  | 0.155  | 34.46      | -0.26       | 0.10       | 34.30 | 55.74      | -21.44     | Average |
| 3  | 0.195  | 36.80      | -0.23       | 0.10       | 36.67 | 63.80      | -27.13     | QP      |
| 4  | 0.195  | 22.48      | -0.23       | 0.10       | 22.35 | 53.80      | -31.45     | Average |
| 5  | 0.611  | 22.84      | -0.20       | 0.10       | 22.74 | 56.00      | -33.26     | QP      |
| 6  | 0.611  | 9.76       | -0.20       | 0.10       | 9.66  | 46.00      | -36.34     | Average |
| 7  | 15.635 | 25.70      | -0.53       | 0.20       | 25.37 | 60.00      | -34.63     | QP      |
| 8  | 15.635 | 13.47      | -0.53       | 0.20       | 13.14 | 50.00      | -36.86     | Average |
| 9  | 16.661 | 27.25      | -0.54       | 0.20       | 26.91 | 60.00      | -33.09     | QP      |
| 10 | 16.661 | 12.14      | -0.54       | 0.20       | 11.80 | 50.00      | -38.20     | Average |
| 11 | 25.188 | 28.97      | -0.84       | 0.21       | 28.34 | 60.00      | -31.66     | QP      |
| 12 | 25.188 | 13.46      | -0.84       | 0.21       | 12.83 | 50.00      | -37.17     | Average |

Neutral:

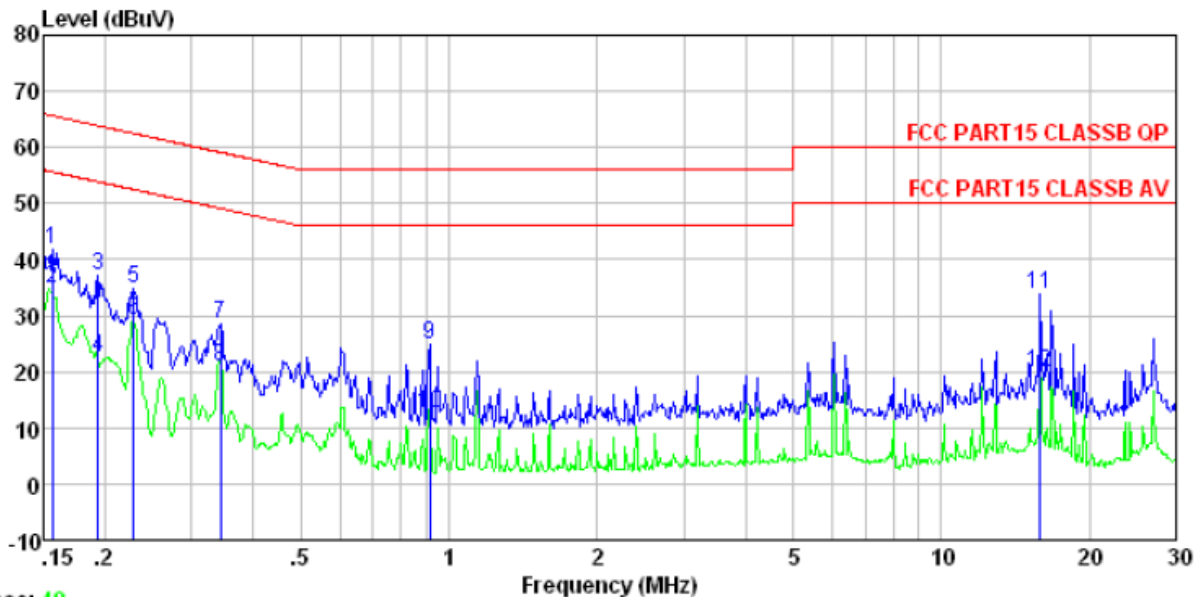


Condition : FCC PART15 CLASSB QP LISN-2012 NEUTRAL  
 Job No. : 652RF  
 Test mode : WIFI mode  
 Test Engineer: Sam

|    | Freq   | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark  |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
|    | MHz    | dBuV       | dB          | dB         | dBuV  | dBuV       | dB         |         |
| 1  | 0.156  | 41.82      | -0.13       | 0.10       | 41.79 | 65.65      | -23.86     | QP      |
| 2  | 0.156  | 35.01      | -0.13       | 0.10       | 34.98 | 55.65      | -20.67     | Average |
| 3  | 0.193  | 37.20      | -0.09       | 0.10       | 37.21 | 63.89      | -26.68     | QP      |
| 4  | 0.193  | 22.46      | -0.09       | 0.10       | 22.47 | 53.89      | -31.42     | Average |
| 5  | 0.229  | 34.68      | -0.09       | 0.10       | 34.69 | 62.48      | -27.79     | QP      |
| 6  | 0.229  | 29.15      | -0.09       | 0.10       | 29.16 | 52.48      | -23.32     | Average |
| 7  | 0.343  | 28.58      | -0.09       | 0.10       | 28.59 | 59.13      | -30.54     | QP      |
| 8  | 0.343  | 20.79      | -0.09       | 0.10       | 20.80 | 49.13      | -28.33     | Average |
| 9  | 0.914  | 24.93      | -0.09       | 0.10       | 24.94 | 56.00      | -31.06     | QP      |
| 10 | 0.914  | 12.54      | -0.09       | 0.10       | 12.55 | 46.00      | -33.45     | Average |
| 11 | 15.885 | 34.18      | -0.42       | 0.20       | 33.96 | 60.00      | -26.04     | QP      |
| 12 | 15.885 | 20.13      | -0.42       | 0.20       | 19.91 | 50.00      | -30.09     | Average |

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

### 6.3 Conducted Peak Output Power

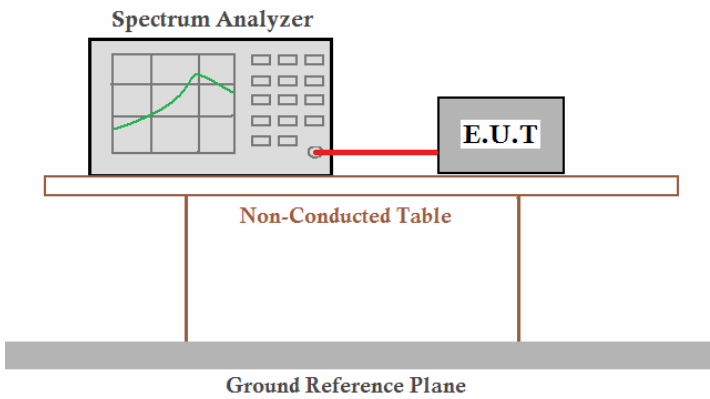
|                   |                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3)                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V02                                                                                                                                                                                                                                                                                                    |
| Limit:            | 30dBm                                                                                                                                                                                                                                                                                                                                                      |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                           |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                           |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                       |

#### Measurement Data


| Test CH | Peak Output Power (dBm) |         |               |               | Limit(dBm) | Result |
|---------|-------------------------|---------|---------------|---------------|------------|--------|
|         | 802.11b                 | 802.11g | 802.11n(HT20) | 802.11n(HT40) |            |        |
| Lowest  | 15.04                   | 13.96   | 13.77         | 13.89         | 30.00      | Pass   |
| Middle  | 15.23                   | 14.42   | 14.19         | 14.26         |            |        |
| Highest | 15.56                   | 14.86   | 14.53         | 14.65         |            |        |

Test plot as follows:


|            |         |
|------------|---------|
| Test mode: | 802.11b |
|------------|---------|

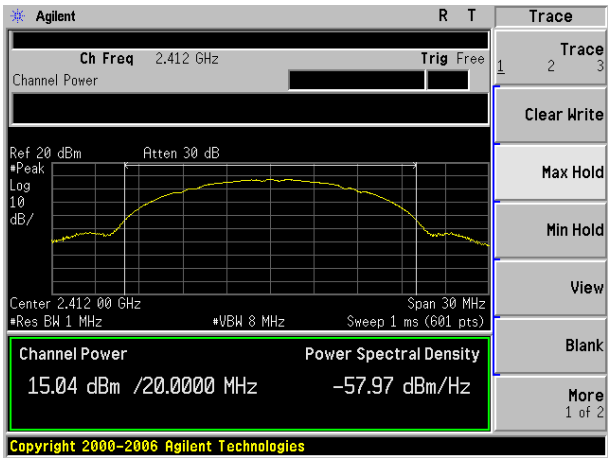

Lowest channel

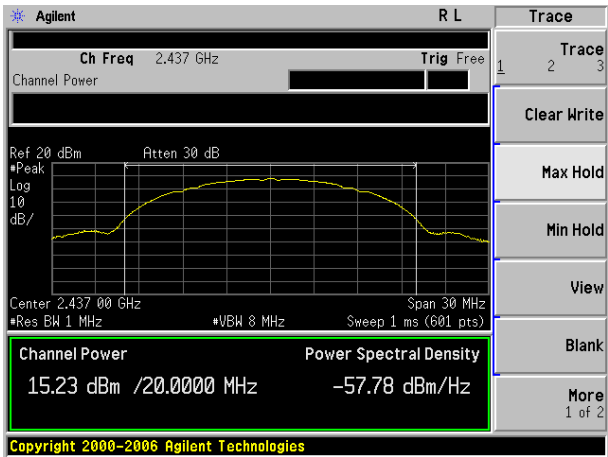


Middle channel

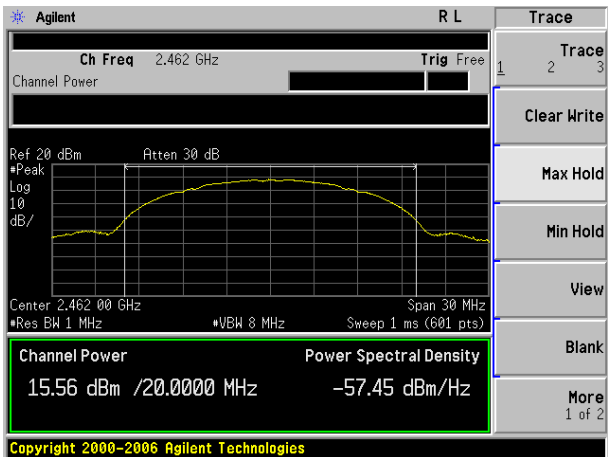


Highest channel


|            |         |
|------------|---------|
| Test mode: | 802.11g |
|------------|---------|

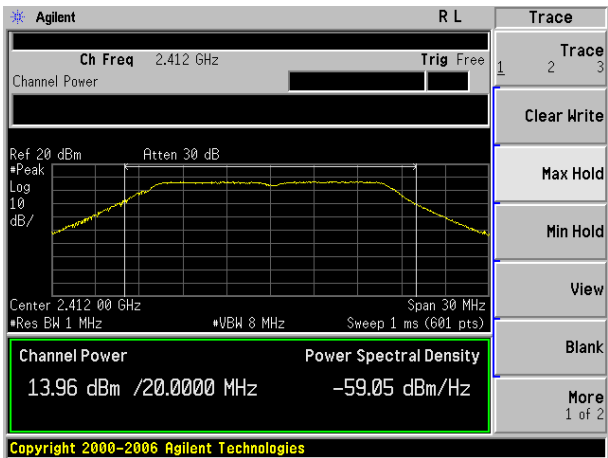

Lowest channel

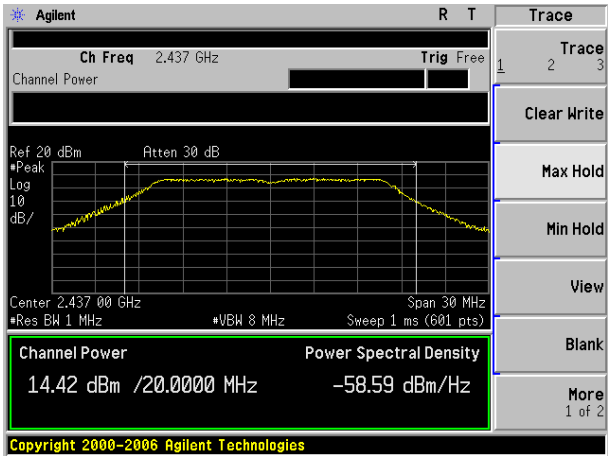


Middle channel

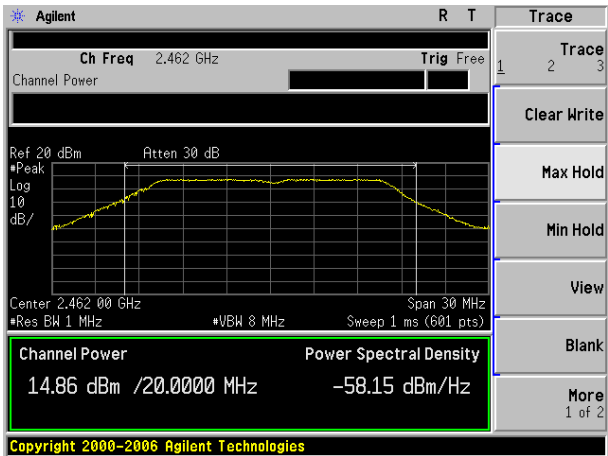


Highest channel


|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT20) |
|------------|---------------|

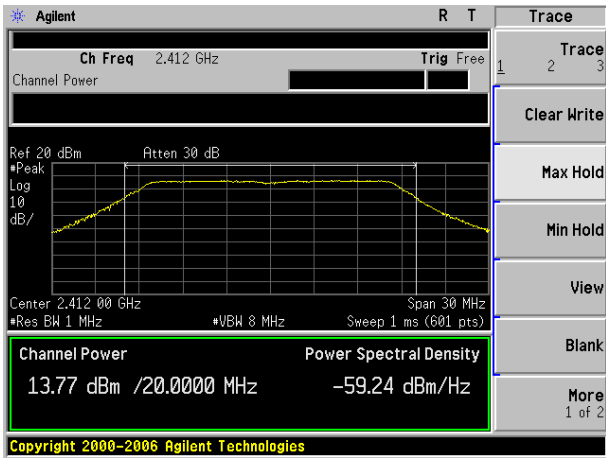

Lowest channel

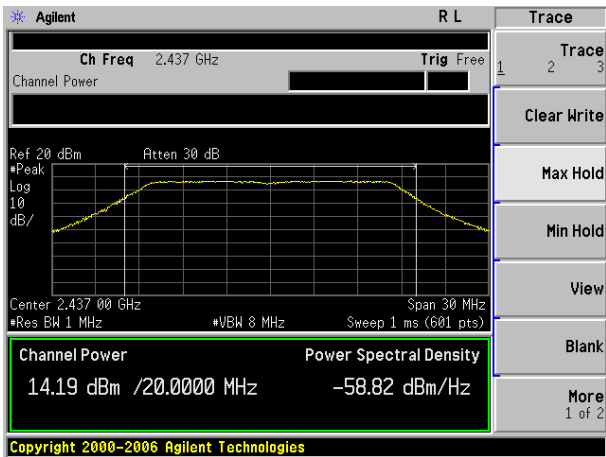


Middle channel

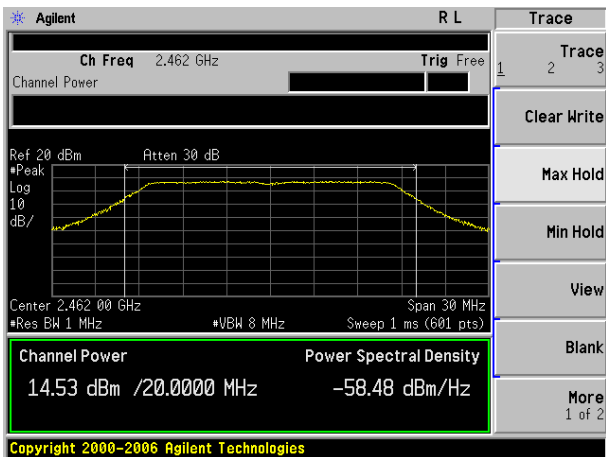


Highest channel


|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT40) |
|------------|---------------|

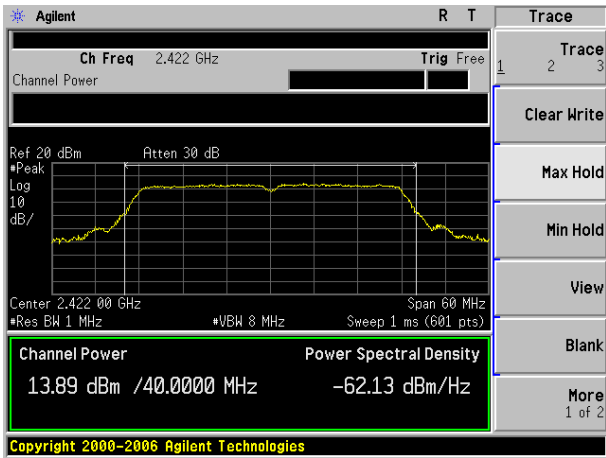

Lowest channel

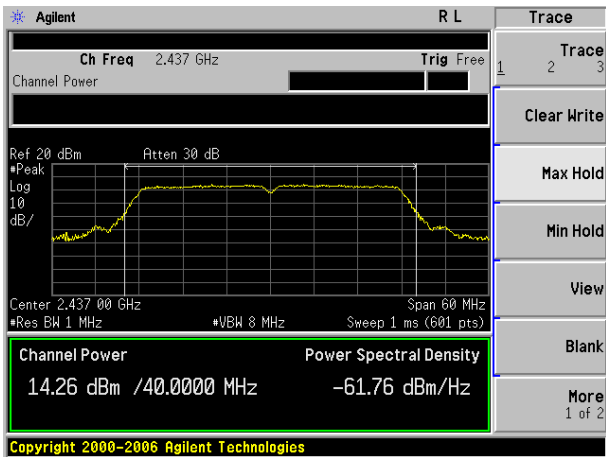


Middle channel

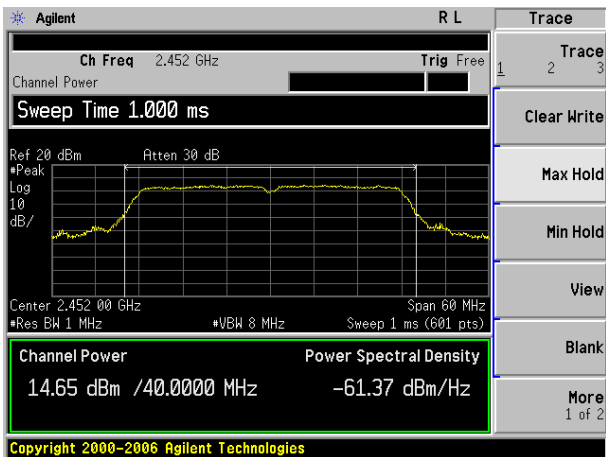

Highest channel



## 6.4 Channel Bandwidth

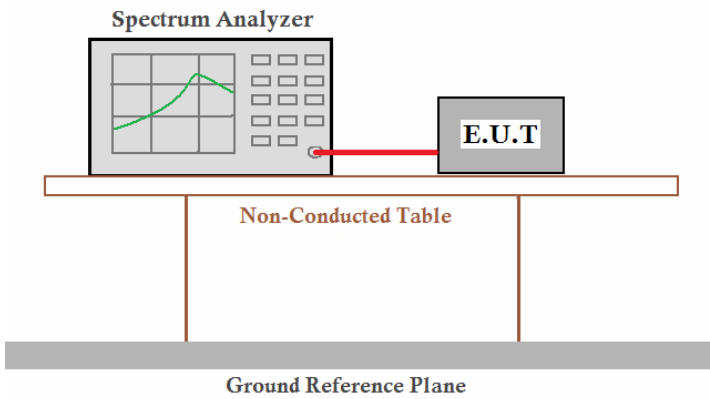
|                   |                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(2)                                                                                                                                                                                                                                                                                                                       |
| Test Method:      | ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V02                                                                                                                                                                                                                                                                                                  |
| Limit:            | >500KHz                                                                                                                                                                                                                                                                                                                                                  |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                     |

### Measurement Data


| Test CH | Channel Bandwidth (MHz) |         |               |               | Limit(KHz) | Result |
|---------|-------------------------|---------|---------------|---------------|------------|--------|
|         | 802.11b                 | 802.11g | 802.11n(HT20) | 802.11n(HT40) |            |        |
| Lowest  | 9.991                   | 16.619  | 17.839        | 36.471        | >500       | Pass   |
| Middle  | 10.055                  | 16.606  | 17.851        | 36.456        |            |        |
| Highest | 10.098                  | 16.606  | 17.814        | 36.420        |            |        |

Test plot as follows:


|            |         |
|------------|---------|
| Test mode: | 802.11b |
|------------|---------|

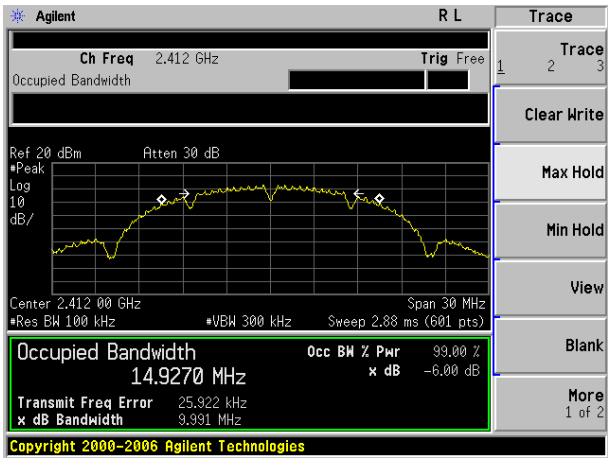

Lowest channel

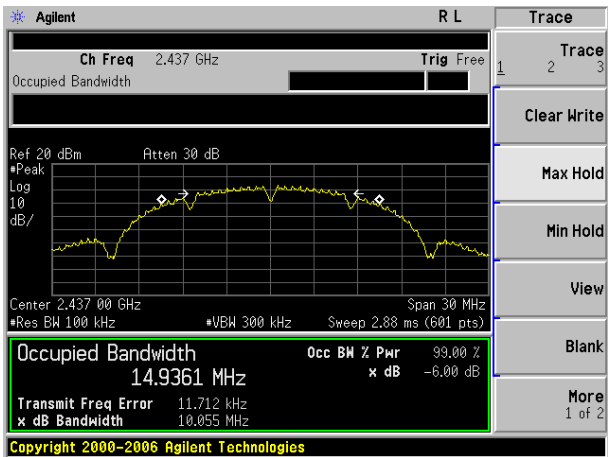


Middle channel

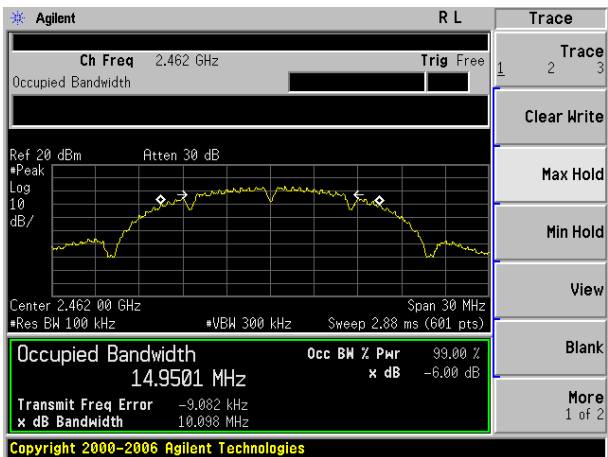


Highest channel


|            |         |
|------------|---------|
| Test mode: | 802.11g |
|------------|---------|

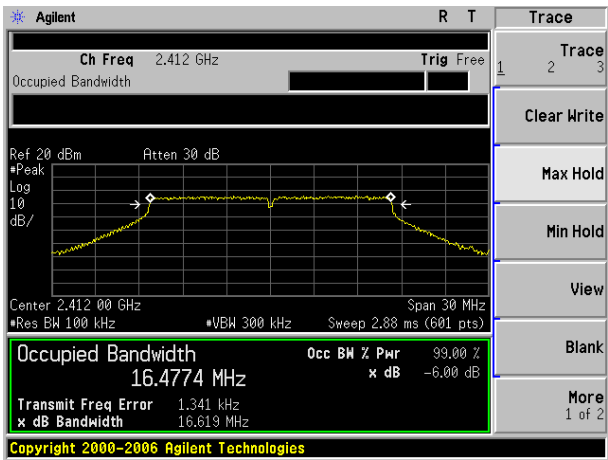

Lowest channel

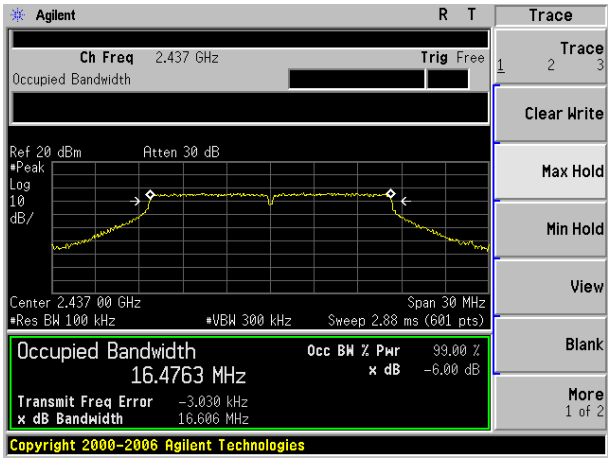


Middle channel

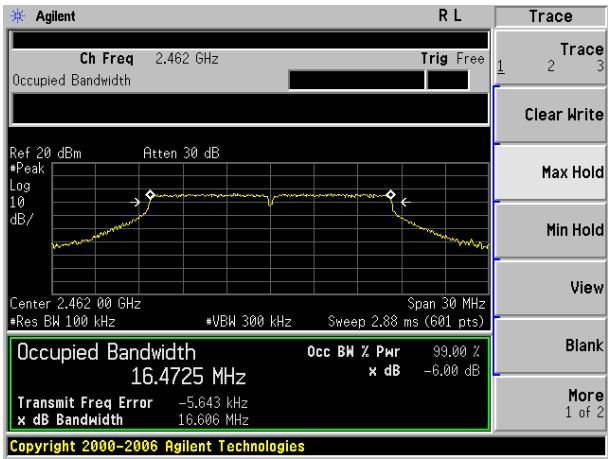


Highest channel


|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT20) |
|------------|---------------|

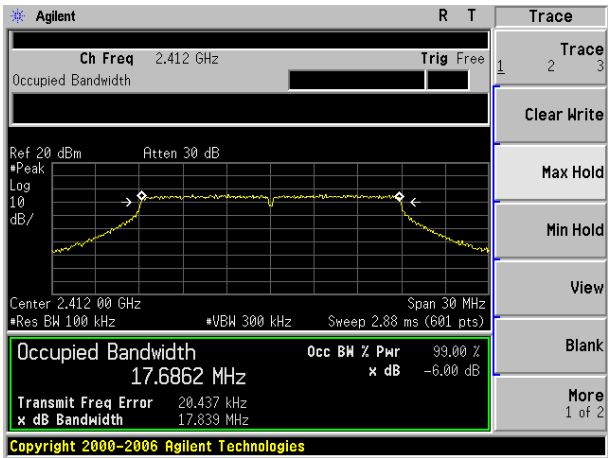

Lowest channel

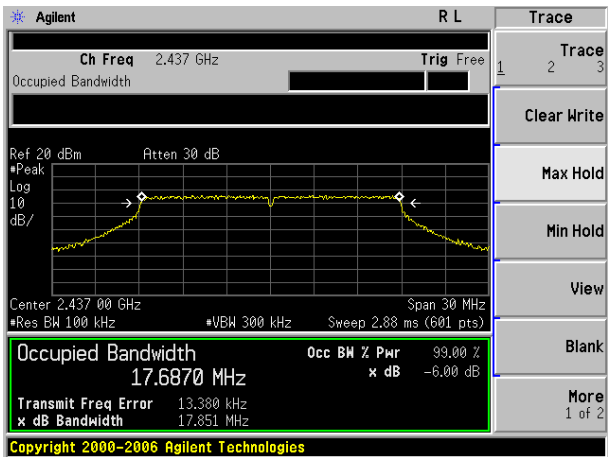


Middle channel

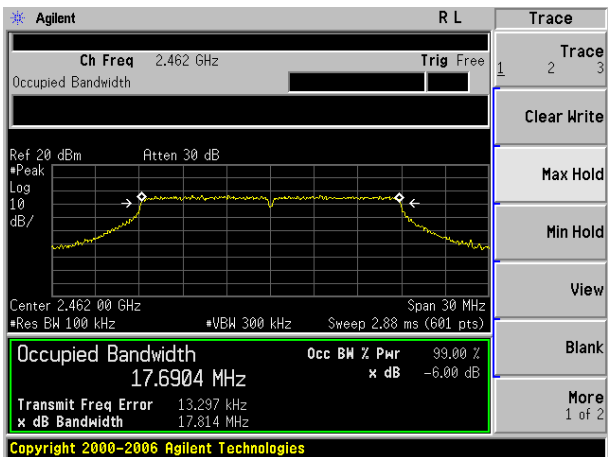


Highest channel


|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT40) |
|------------|---------------|

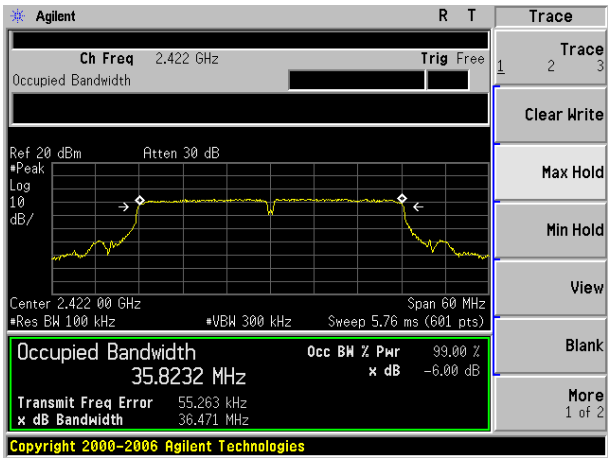

Lowest channel

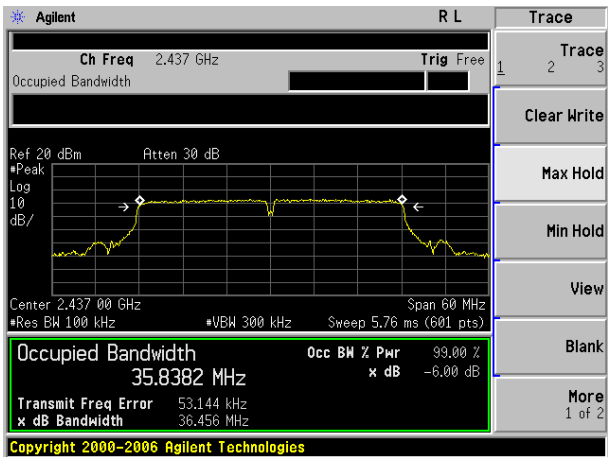


Middle channel

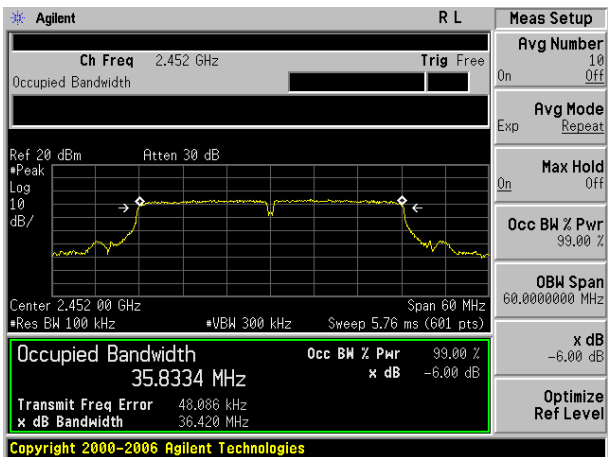

Highest channel

## 6.5 Power Spectral Density

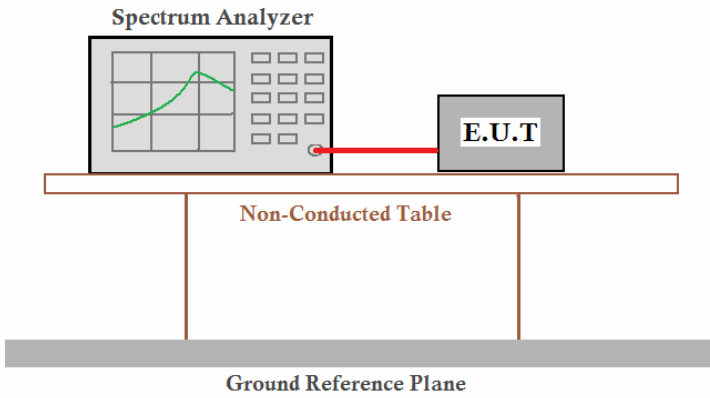
|                   |                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (e)                                                                                                                                                                                                                                                                                                                            |
| Test Method:      | ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V02                                                                                                                                                                                                                                                                                                    |
| Limit:            | 8dBm                                                                                                                                                                                                                                                                                                                                                       |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                           |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                           |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                       |

### Measurement Data


| Test CH | Power Spectral Density (dBm) |         |               |               | Limit(dBm/3kHz) | Result |
|---------|------------------------------|---------|---------------|---------------|-----------------|--------|
|         | 802.11b                      | 802.11g | 802.11n(HT20) | 802.11n(HT40) |                 |        |
| Lowest  | 2.55                         | -3.06   | -4.17         | -6.89         | 8.00            | Pass   |
| Middle  | 2.95                         | -3.11   | -3.39         | -6.49         |                 |        |
| Highest | 3.39                         | -2.88   | -3.14         | -6.27         |                 |        |

Test plot as follows:


|            |         |
|------------|---------|
| Test mode: | 802.11b |
|------------|---------|

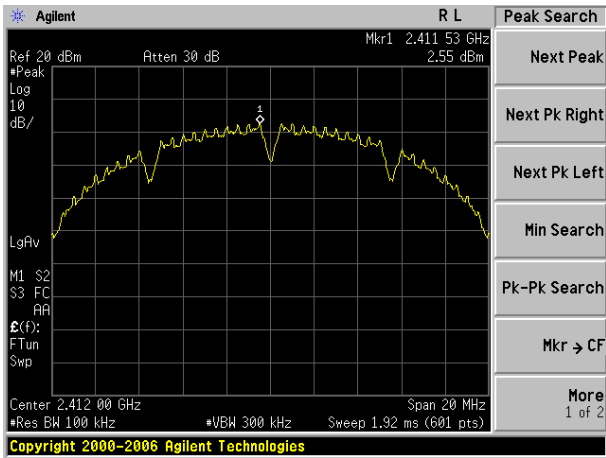

Lowest channel

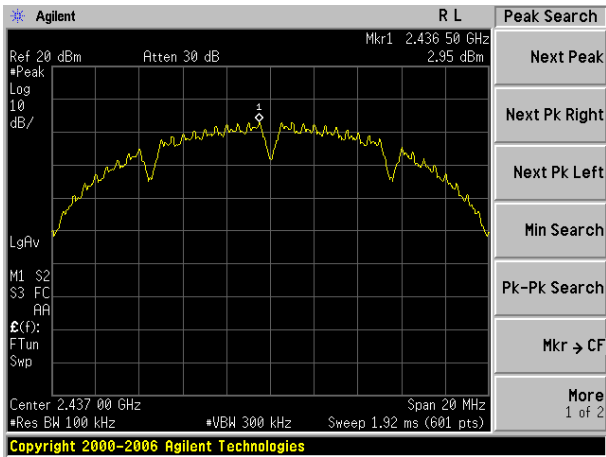


Middle channel

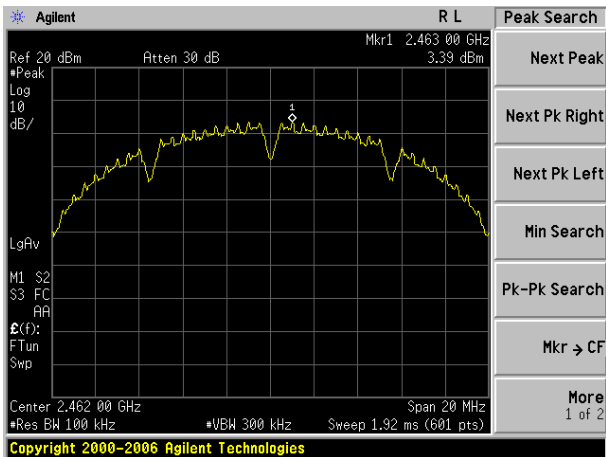


Highest channel


|            |         |
|------------|---------|
| Test mode: | 802.11g |
|------------|---------|

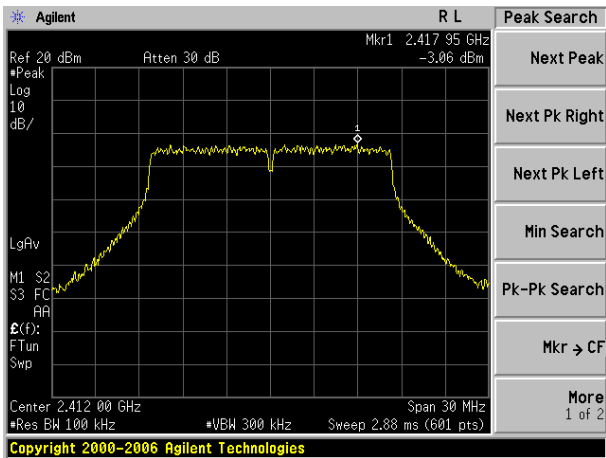

Lowest channel

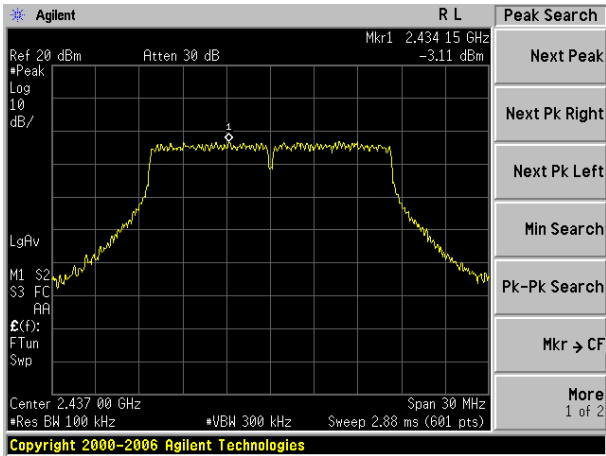


Middle channel

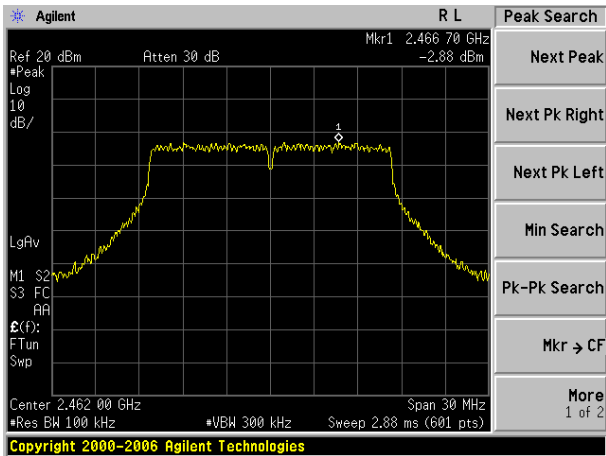


Highest channel




|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT20) |
|------------|---------------|

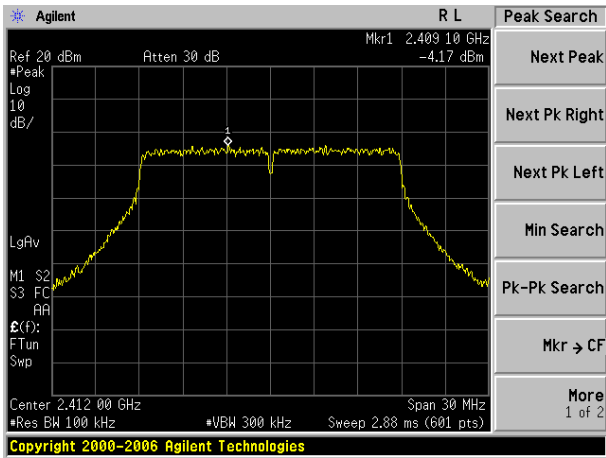

Lowest channel

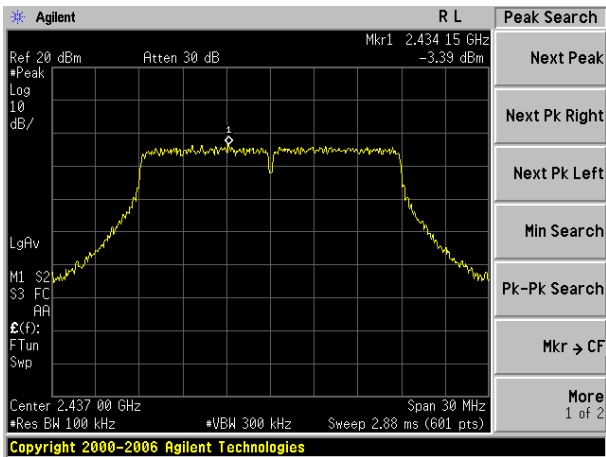


Middle channel

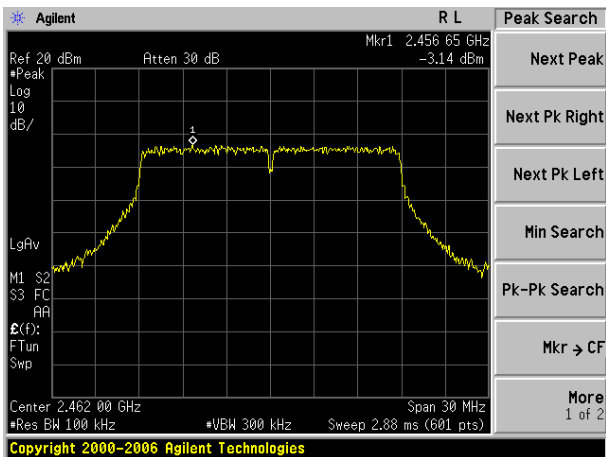


Highest channel


|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT40) |
|------------|---------------|

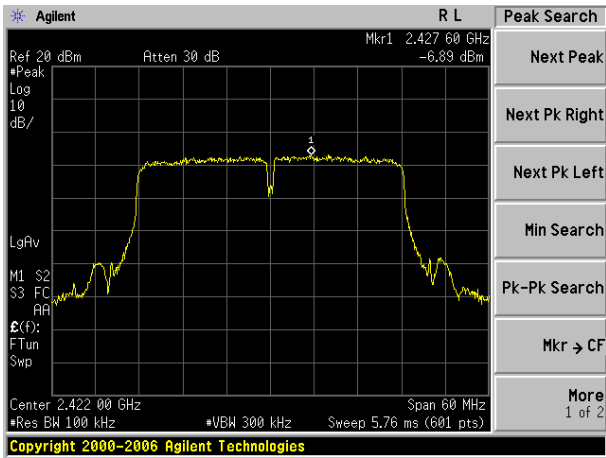

Lowest channel

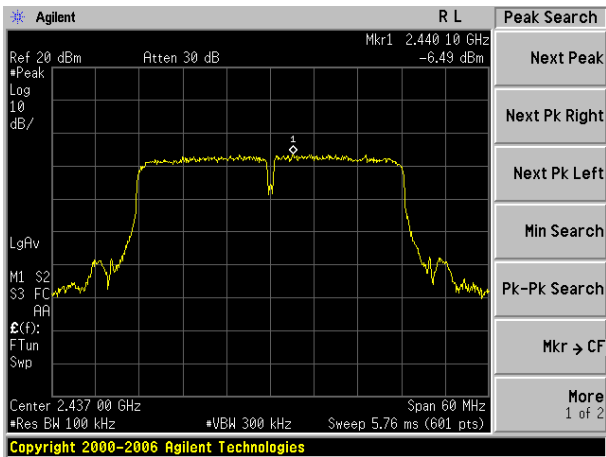


Middle channel

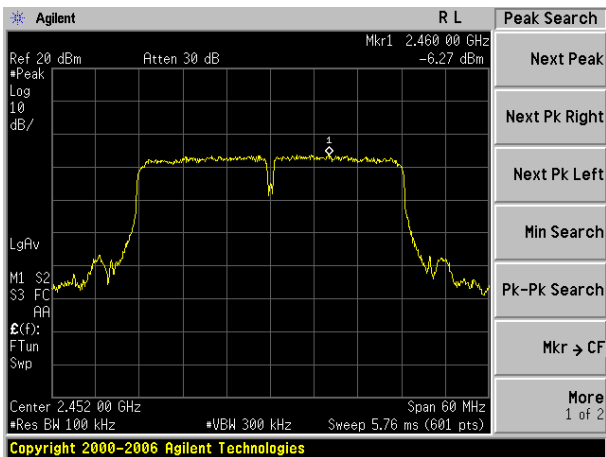


Highest channel

6.6 Band edges

6.6.1 Conducted Emission Method

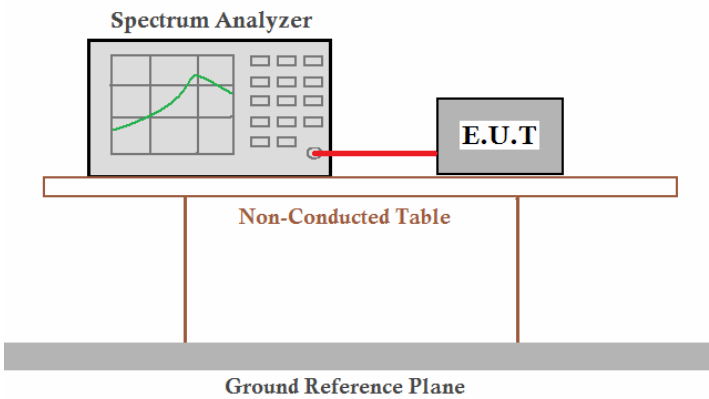
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V02                                                                                                                                                                                                                                                                                                                                 |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup:       | <div><p>The diagram illustrates the test setup for conducted emission measurement. It shows a Spectrum Analyzer and an Equipment Under Test (E.U.T.) connected by a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p></div>                   |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                        |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

Test plot as follows:

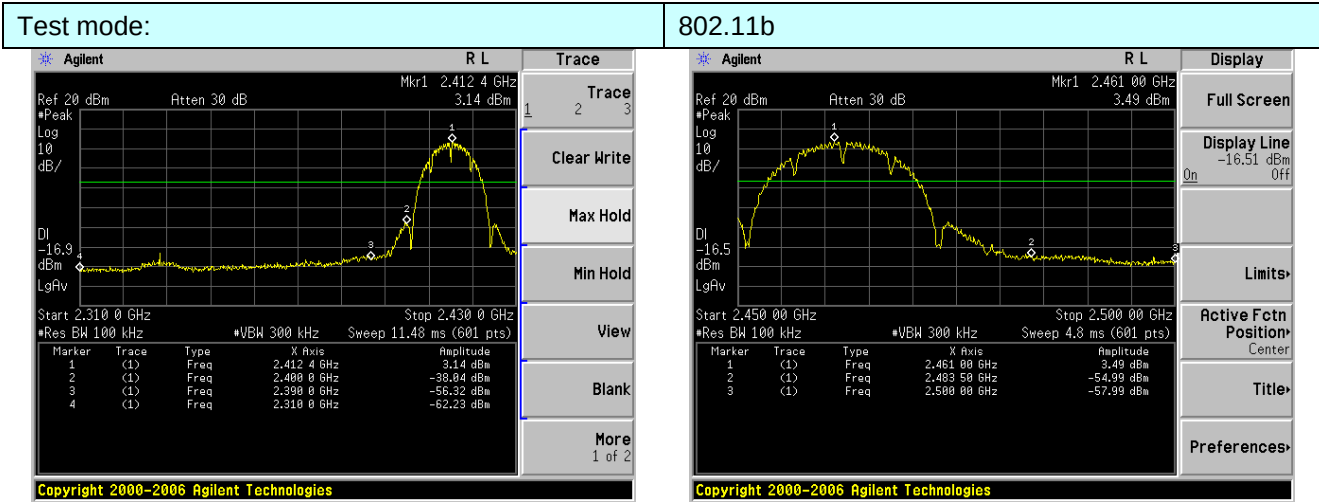



Lowest channel

Highest channel

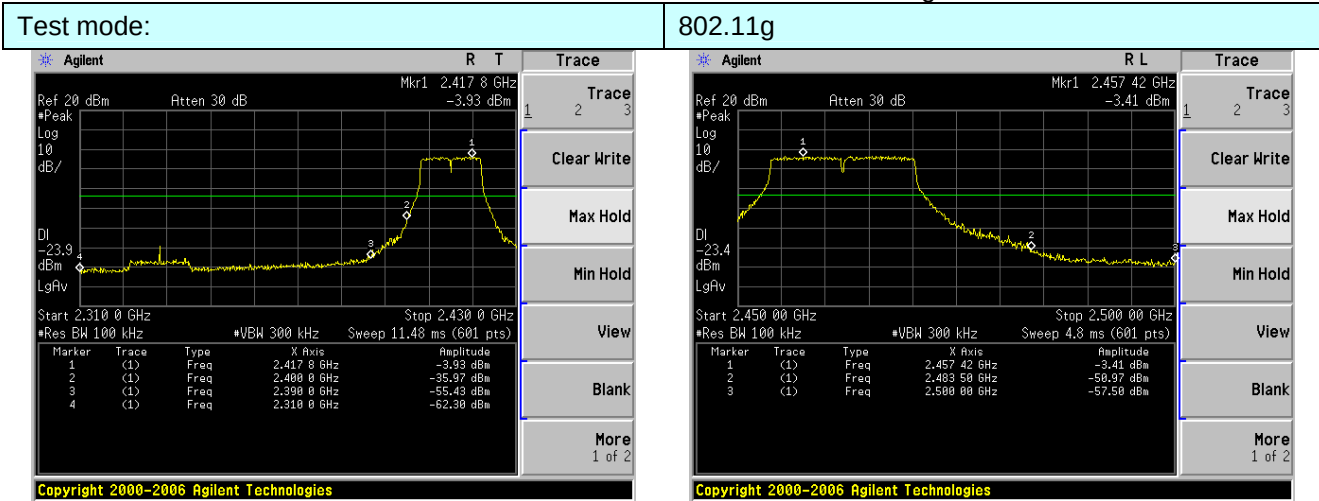


Lowest channel

Highest channel

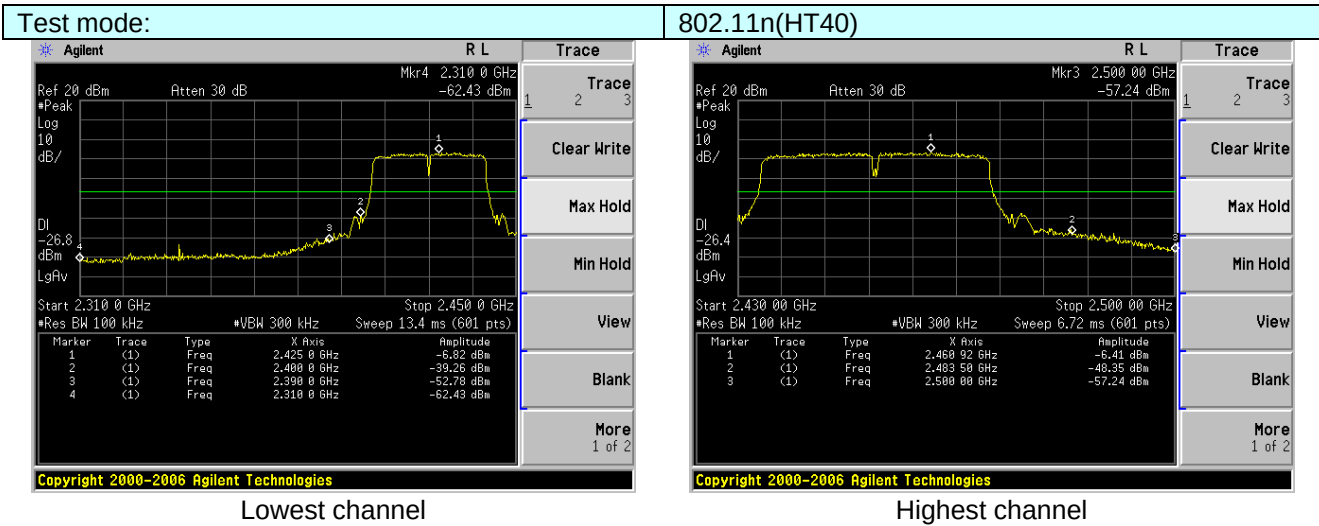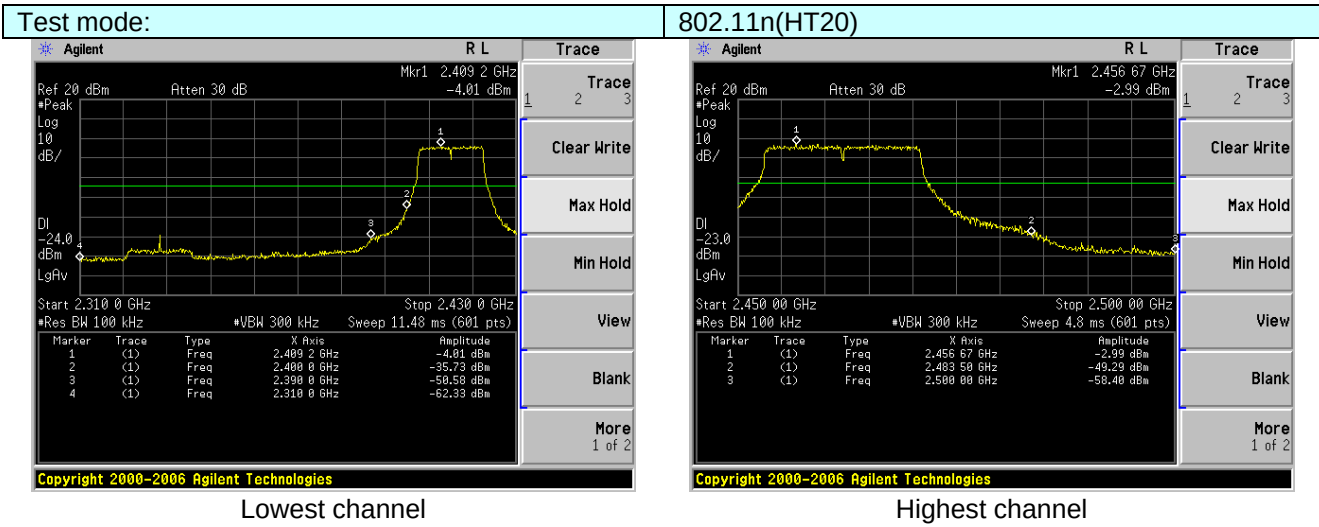

### 6.6.2 Radiated Emission Method
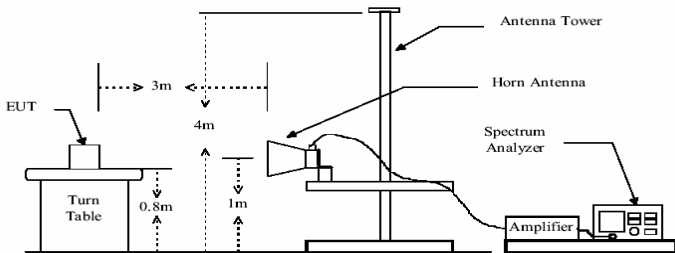
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          |                    |      |         |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------|------|---------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |                    |      |         |
| Test Method:          | ANSI C63.4: 2003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |                    |      |         |
| Test Frequency Range: | All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |          |                    |      |         |
| Test site:            | Measurement Distance: 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |          |                    |      |         |
| Receiver setup:       | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Detector | RBW                | VBW  | Value   |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Peak     | 1MHz               | 3MHz | Peak    |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Peak     | 1MHz               | 10Hz | Average |
| Limit:                | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          | Limit (dBuV/m @3m) |      | Value   |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |          | 54.00              |      | Average |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          | 74.00              |      | Peak    |
| Test setup:           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |          |                    |      |         |
| Test Procedure:       | <div>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</div> <div>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</div> <div>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</div> <div>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</div> <div>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</div> <div>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</div> <div>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</div> |          |                    |      |         |
| Test Instruments:     | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |                    |      |         |
| Test mode:            | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |                    |      |         |
| Test results:         | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |                    |      |         |

Measurement data:

*Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.*

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11b | Test channel: | Lowest |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 51.57             | 27.38                 | 3.91            | 34.83                    | 48.03          | 74.00               | -25.97          | Horizontal   |
| 2400.00         | 55.14             | 27.38                 | 3.93            | 34.83                    | 51.62          | 74.00               | -22.38          | Horizontal   |
| 2390.00         | 53.33             | 27.38                 | 3.91            | 34.83                    | 49.79          | 74.00               | -24.21          | Vertical     |
| 2400.00         | 55.91             | 27.38                 | 3.93            | 34.83                    | 52.39          | 74.00               | -21.61          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 38.72             | 27.38                 | 3.91            | 34.83                    | 35.18          | 54.00               | -18.82          | 2390.00      |
| 2400.00         | 41.16             | 27.38                 | 3.93            | 34.83                    | 37.64          | 54.00               | -16.36          | 2400.00      |
| 2390.00         | 39.63             | 27.38                 | 3.91            | 34.83                    | 36.09          | 54.00               | -17.91          | 2390.00      |
| 2400.00         | 42.81             | 27.38                 | 3.93            | 34.83                    | 39.29          | 54.00               | -14.71          | 2400.00      |

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11b | Test channel: | Highest |
|------------|---------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 53.80             | 27.32                 | 3.99            | 34.86                    | 50.25          | 74.00               | -23.75          | Horizontal   |
| 2500.00         | 50.86             | 27.35                 | 4.00            | 34.87                    | 47.34          | 74.00               | -26.66          | Horizontal   |
| 2483.50         | 54.64             | 27.32                 | 3.99            | 34.86                    | 51.09          | 74.00               | -22.91          | Vertical     |
| 2500.00         | 52.62             | 27.35                 | 4.00            | 34.87                    | 49.10          | 74.00               | -24.90          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 41.89             | 27.32                 | 3.99            | 34.86                    | 38.34          | 54.00               | -15.66          | Horizontal   |
| 2500.00         | 37.29             | 27.35                 | 4.00            | 34.87                    | 33.77          | 54.00               | -20.23          | Horizontal   |
| 2483.50         | 43.51             | 27.32                 | 3.99            | 34.86                    | 39.96          | 54.00               | -14.04          | Vertical     |
| 2500.00         | 39.10             | 27.35                 | 4.00            | 34.87                    | 35.58          | 54.00               | -18.42          | Vertical     |

*Remark:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11g | Test channel: | Lowest |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 50.35             | 27.38                 | 3.91            | 34.83                    | 46.81          | 74.00               | -27.19          | Horizontal   |
| 2400.00         | 52.92             | 27.38                 | 3.93            | 34.83                    | 49.40          | 74.00               | -24.60          | Horizontal   |
| 2390.00         | 52.23             | 27.38                 | 3.91            | 34.83                    | 48.69          | 74.00               | -25.31          | Vertical     |
| 2400.00         | 54.44             | 27.38                 | 3.93            | 34.83                    | 50.92          | 74.00               | -23.08          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 37.25             | 27.38                 | 3.91            | 34.83                    | 33.71          | 54.00               | -20.29          | Horizontal   |
| 2400.00         | 39.21             | 27.38                 | 3.93            | 34.83                    | 35.69          | 54.00               | -18.31          | Horizontal   |
| 2390.00         | 36.83             | 27.38                 | 3.91            | 34.83                    | 33.29          | 54.00               | -20.71          | Vertical     |
| 2400.00         | 38.55             | 27.38                 | 3.93            | 34.83                    | 35.03          | 54.00               | -18.97          | Vertical     |

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11g | Test channel: | Highest |
|------------|---------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 51.10             | 27.32                 | 3.99            | 34.86                    | 47.55          | 74.00               | -26.45          | Horizontal   |
| 2500.00         | 47.26             | 27.35                 | 4.00            | 34.87                    | 43.74          | 74.00               | -30.26          | Horizontal   |
| 2483.50         | 52.95             | 27.32                 | 3.99            | 34.86                    | 49.40          | 74.00               | -24.60          | Vertical     |
| 2500.00         | 50.19             | 27.35                 | 4.00            | 34.87                    | 46.67          | 74.00               | -27.33          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 39.86             | 27.32                 | 3.99            | 34.86                    | 36.31          | 54.00               | -17.69          | Horizontal   |
| 2500.00         | 36.96             | 27.35                 | 4.00            | 34.87                    | 33.44          | 54.00               | -20.56          | Horizontal   |
| 2483.50         | 41.40             | 27.32                 | 3.99            | 34.86                    | 37.85          | 54.00               | -16.15          | Vertical     |
| 2500.00         | 39.10             | 27.35                 | 4.00            | 34.87                    | 35.58          | 54.00               | -18.42          | Vertical     |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT20) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 50.30             | 27.38                 | 3.91            | 34.83                    | 46.76          | 74.00               | -27.24          | Horizontal   |
| 2400.00         | 52.45             | 27.38                 | 3.93            | 34.83                    | 48.93          | 74.00               | -25.07          | Horizontal   |
| 2390.00         | 46.36             | 27.38                 | 3.91            | 34.83                    | 42.82          | 74.00               | -31.18          | Vertical     |
| 2400.00         | 48.78             | 27.38                 | 3.93            | 34.83                    | 45.26          | 74.00               | -28.74          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 37.55             | 27.38                 | 3.91            | 34.83                    | 34.01          | 54.00               | -19.99          | Horizontal   |
| 2400.00         | 39.69             | 27.38                 | 3.93            | 34.83                    | 36.17          | 54.00               | -17.83          | Horizontal   |
| 2390.00         | 37.40             | 27.38                 | 3.91            | 34.83                    | 33.86          | 54.00               | -20.14          | Vertical     |
| 2400.00         | 38.98             | 27.38                 | 3.93            | 34.83                    | 35.46          | 54.00               | -18.54          | Vertical     |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT20) | Test channel: | Highest |
|------------|---------------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 49.60             | 27.32                 | 3.99            | 34.86                    | 46.05          | 74.00               | -27.95          | Horizontal   |
| 2500.00         | 47.33             | 27.35                 | 4.00            | 34.87                    | 43.81          | 74.00               | -30.19          | Horizontal   |
| 2483.50         | 51.84             | 27.32                 | 3.99            | 34.86                    | 48.29          | 74.00               | -25.71          | Vertical     |
| 2500.00         | 48.35             | 27.35                 | 4.00            | 34.87                    | 44.83          | 74.00               | -29.17          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 39.39             | 27.32                 | 3.99            | 34.86                    | 35.84          | 54.00               | -18.16          | Horizontal   |
| 2500.00         | 36.36             | 27.35                 | 4.00            | 34.87                    | 32.84          | 54.00               | -21.16          | Horizontal   |
| 2483.50         | 39.95             | 27.32                 | 3.99            | 34.86                    | 36.40          | 54.00               | -17.60          | Vertical     |
| 2500.00         | 37.94             | 27.35                 | 4.00            | 34.87                    | 34.42          | 54.00               | -19.58          | Vertical     |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT40) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 51.49             | 27.38                 | 3.91            | 34.83                    | 47.95          | 74.00               | -26.05          | Horizontal   |
| 2400.00         | 52.75             | 27.38                 | 3.93            | 34.83                    | 49.23          | 74.00               | -24.77          | Horizontal   |
| 2390.00         | 52.56             | 27.38                 | 3.91            | 34.83                    | 49.02          | 74.00               | -24.98          | Vertical     |
| 2400.00         | 56.54             | 27.38                 | 3.93            | 34.83                    | 53.02          | 74.00               | -20.98          | Vertical     |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2390.00         | 36.65             | 27.38                 | 3.91            | 34.83                    | 33.11          | 54.00               | -20.89          | Horizontal   |
| 2400.00         | 39.69             | 27.38                 | 3.93            | 34.83                    | 36.17          | 54.00               | -17.83          | Horizontal   |
| 2390.00         | 36.83             | 27.38                 | 3.91            | 34.83                    | 33.29          | 54.00               | -20.71          | Vertical     |
| 2400.00         | 39.41             | 27.38                 | 3.93            | 34.83                    | 35.89          | 54.00               | -18.11          | Vertical     |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT40) | Test channel: | Highest |
|------------|---------------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 54.18             | 27.32                 | 3.99            | 34.86                    | 50.63          | 74.00               | -23.37          | Horizontal   |
| 2500.00         | 50.03             | 27.35                 | 4.00            | 34.87                    | 46.51          | 74.00               | -27.49          | Horizontal   |
| 2483.50         | 54.04             | 27.32                 | 3.99            | 34.86                    | 50.49          | 74.00               | -23.51          | Vertical     |
| 2500.00         | 50.39             | 27.35                 | 4.00            | 34.87                    | 46.87          | 74.00               | -27.13          | Vertical     |

**Average value:**


| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 2483.50         | 41.59             | 27.32                 | 3.99            | 34.86                    | 38.04          | 54.00               | -15.96          | Horizontal   |
| 2500.00         | 39.37             | 27.35                 | 4.00            | 34.87                    | 35.85          | 54.00               | -18.15          | Horizontal   |
| 2483.50         | 41.45             | 27.32                 | 3.99            | 34.86                    | 37.90          | 54.00               | -16.10          | Vertical     |
| 2500.00         | 39.48             | 27.35                 | 4.00            | 34.87                    | 35.96          | 54.00               | -18.04          | Vertical     |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 6.7 Spurious Emission


### 6.7.1 Conducted Emission Method
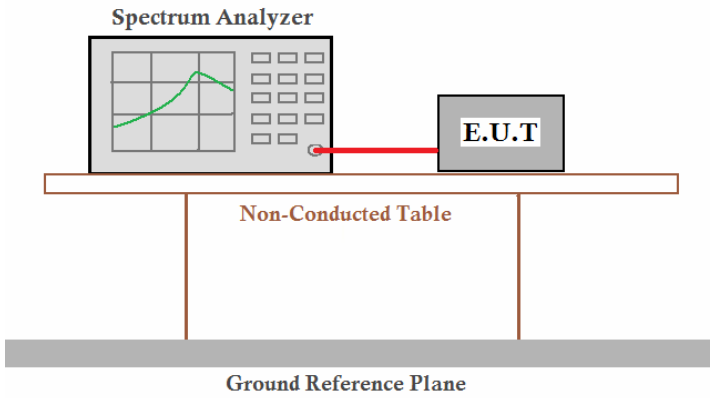
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test Method:      | ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V02                                                                                                                                                                                                                                                                                                                                                                                                                |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.                                                                                |
| Test setup:       |  <p>The diagram illustrates the test setup for conducted emissions. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an Equipment Under Test (E.U.T.) by a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. This table is supported by two vertical legs and sits on a thick, grey Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |


Test plot as follows:

|            |         |
|------------|---------|
| Test mode: | 802.11b |
|------------|---------|

Lowest channel

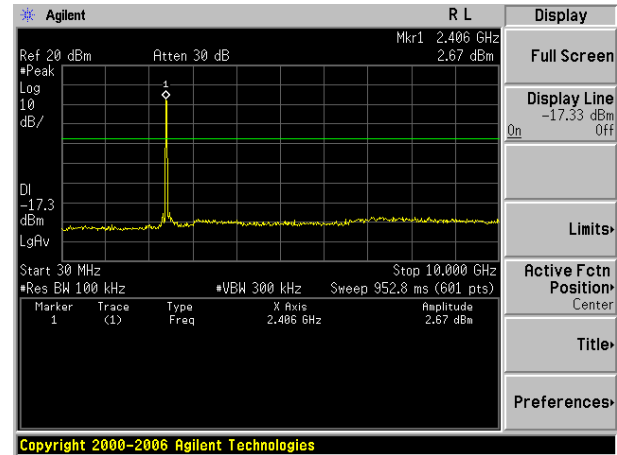


30MHz~10GHz

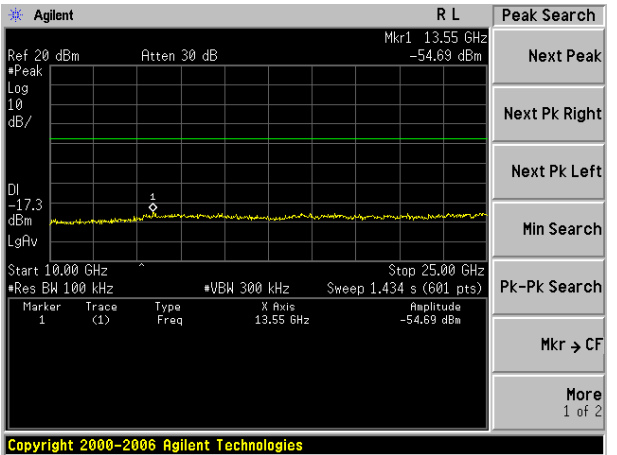


10GHz~25GHz

Middle channel

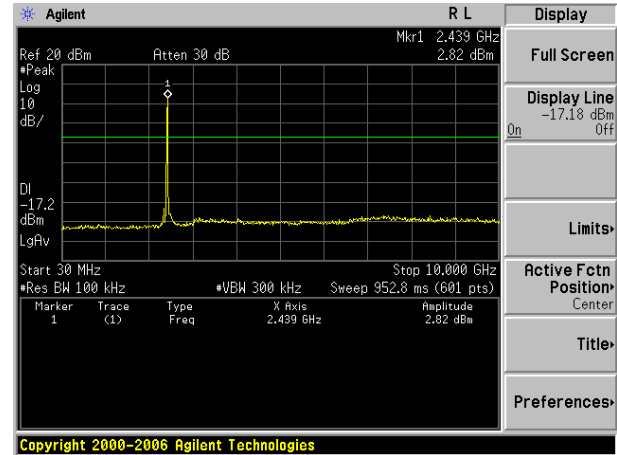


30MHz~10GHz

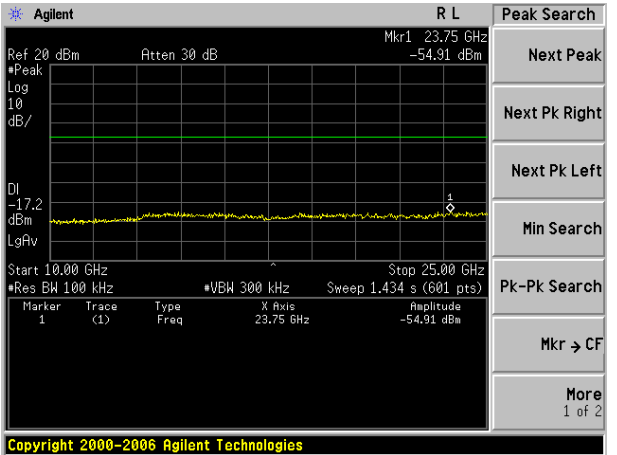


10GHz~25GHz

Highest channel

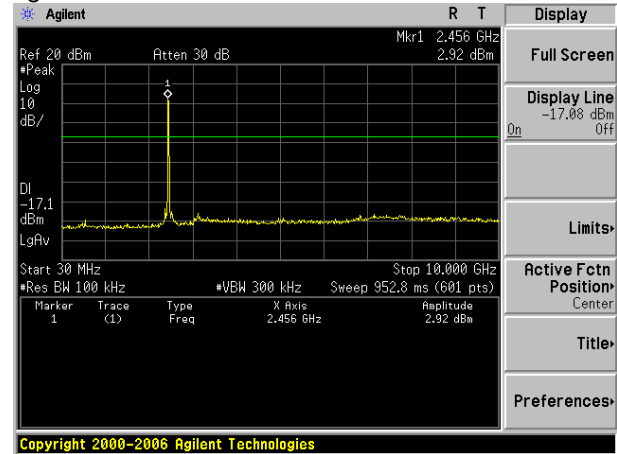


30MHz~10GHz

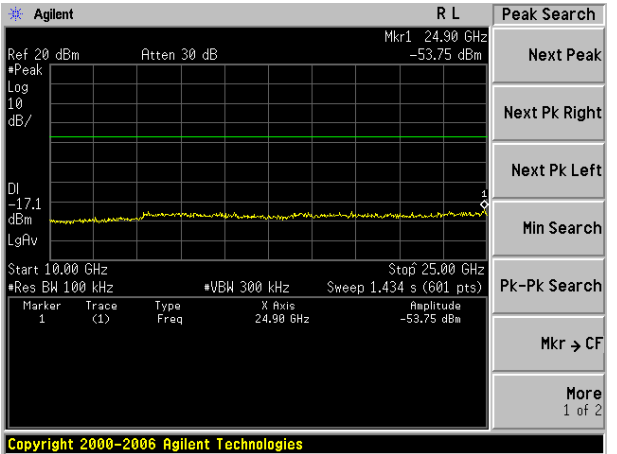


10GHz~25GHz

|            |         |
|------------|---------|
| Test mode: | 802.11g |
|------------|---------|

Lowest channel

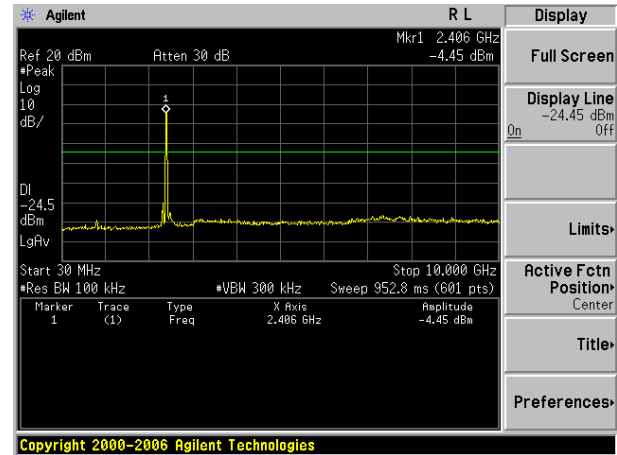


30MHz~10GHz

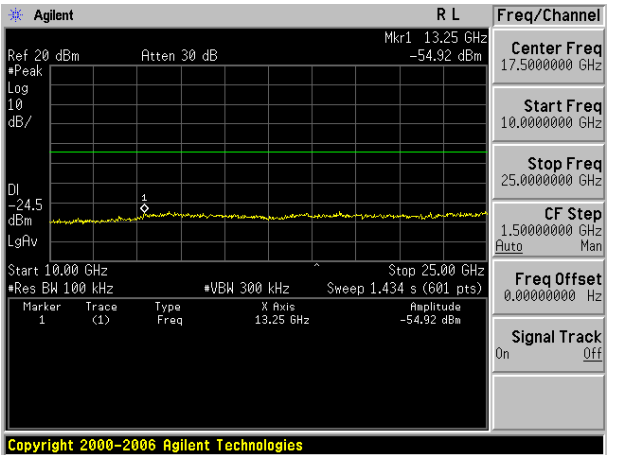


10GHz~25GHz

Middle channel

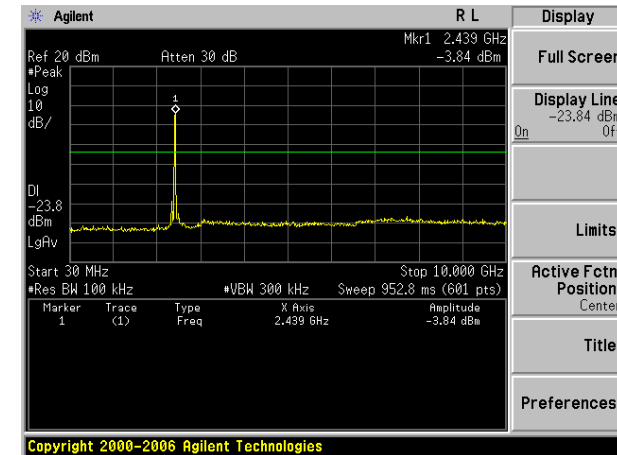


30MHz~10GHz

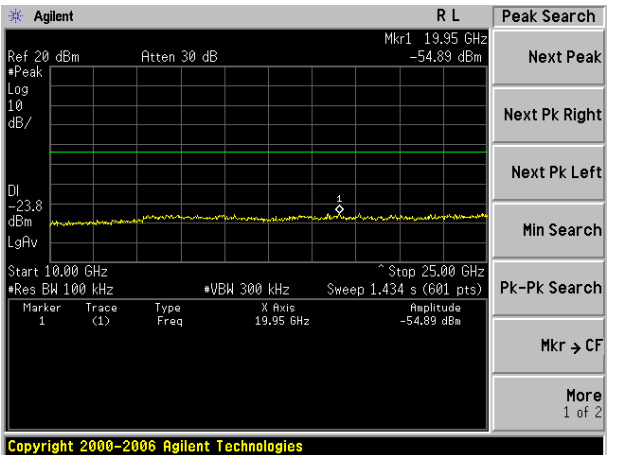


10GHz~25GHz

Highest channel

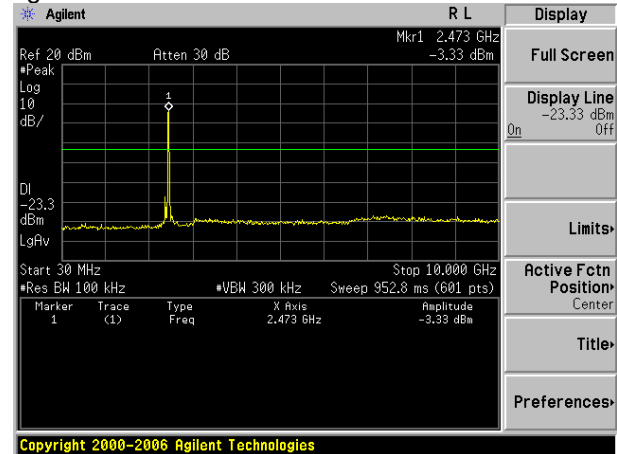


30MHz~10GHz

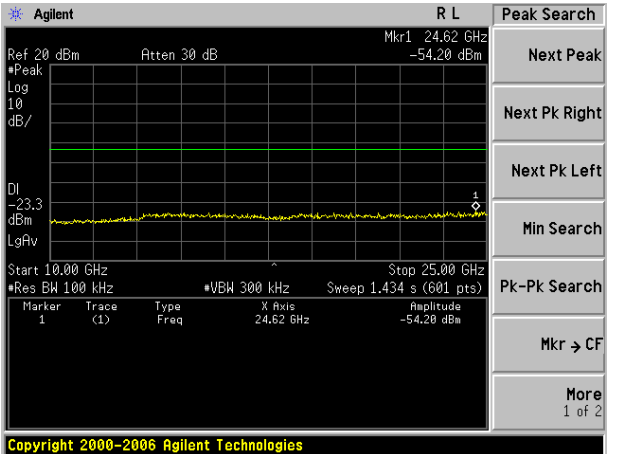


10GHz~25GHz

|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT20) |
|------------|---------------|

Lowest channel

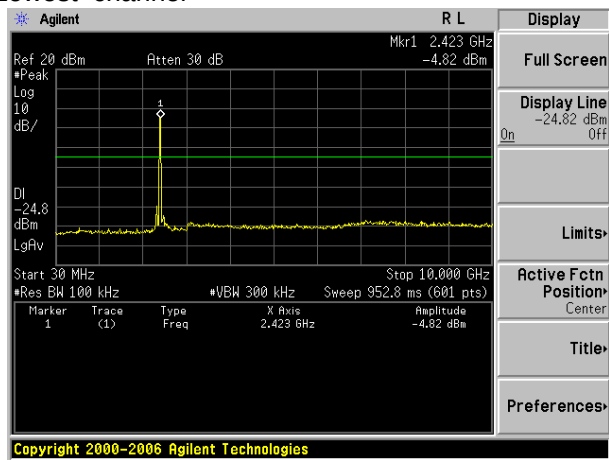


30MHz~10GHz

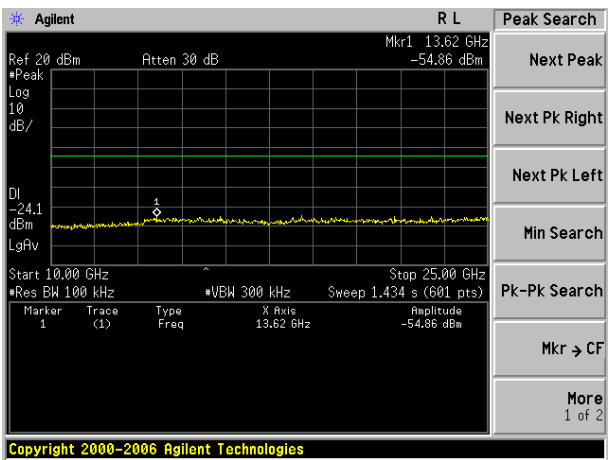


10GHz~25GHz

Middle channel

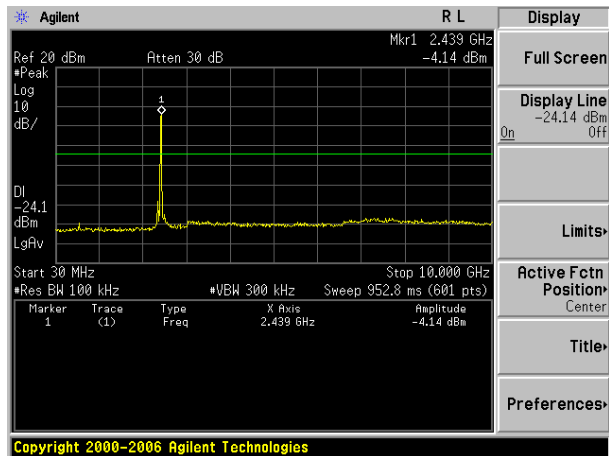


30MHz~10GHz

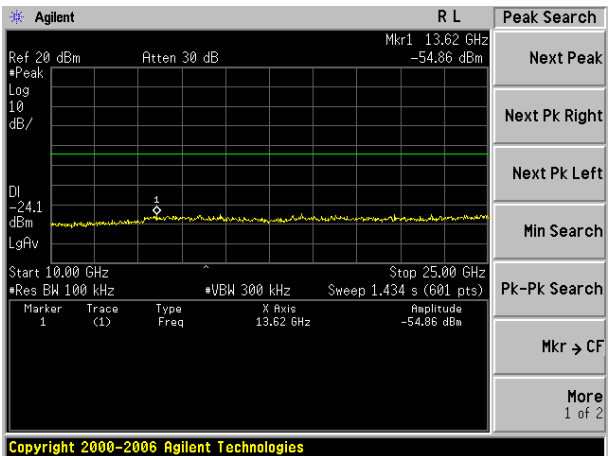


10GHz~25GHz

Highest channel

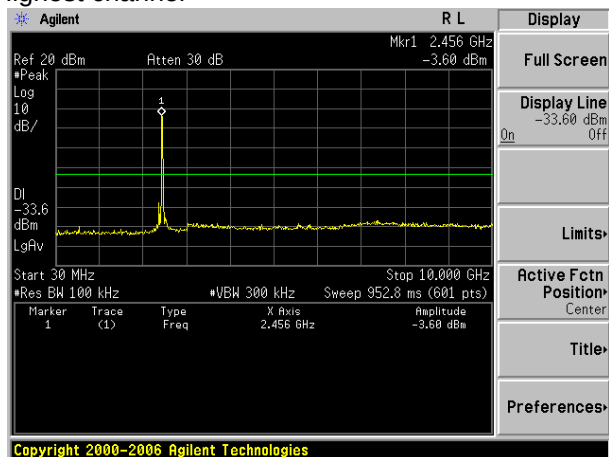


30MHz~10GHz

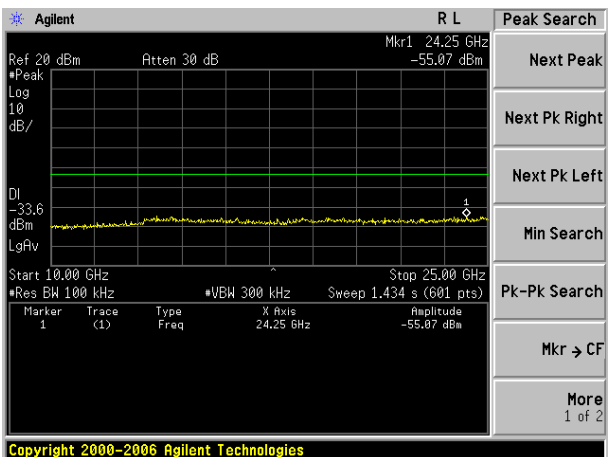


10GHz~25GHz

|            |               |
|------------|---------------|
| Test mode: | 802.11n(HT40) |
|------------|---------------|

Lowest channel

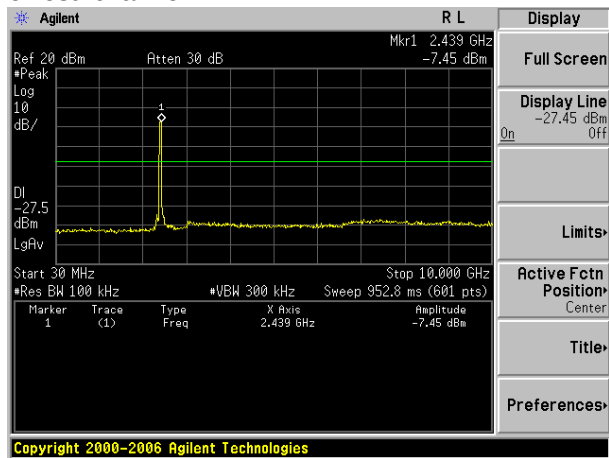


30MHz~10GHz

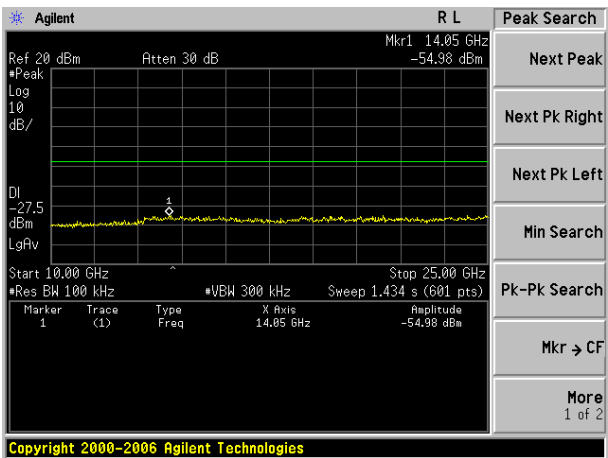


10GHz~25GHz

Middle channel

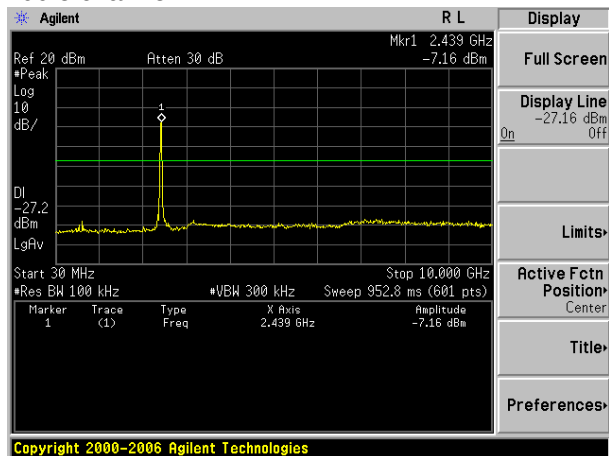


30MHz~10GHz

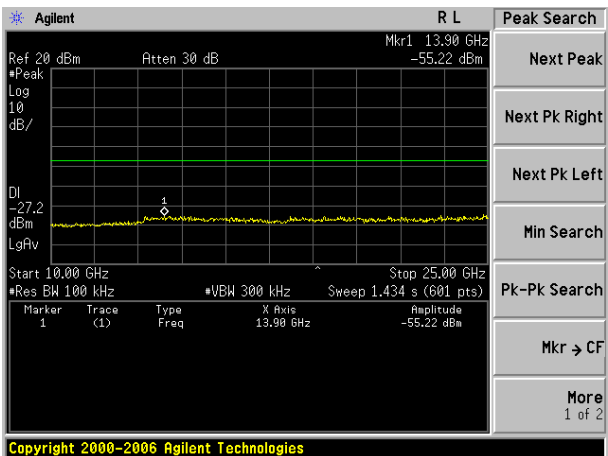


10GHz~25GHz

Highest channel


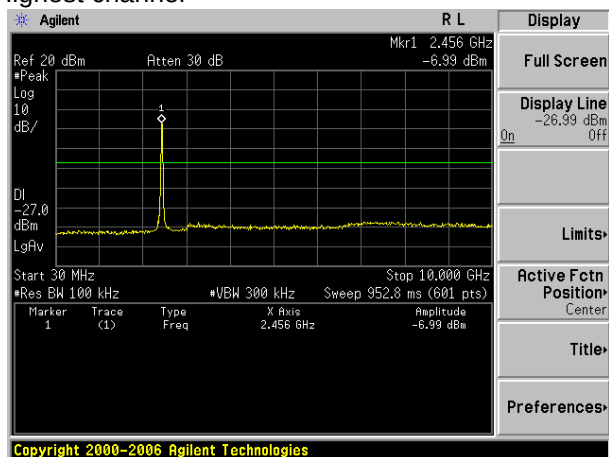


30MHz~10GHz

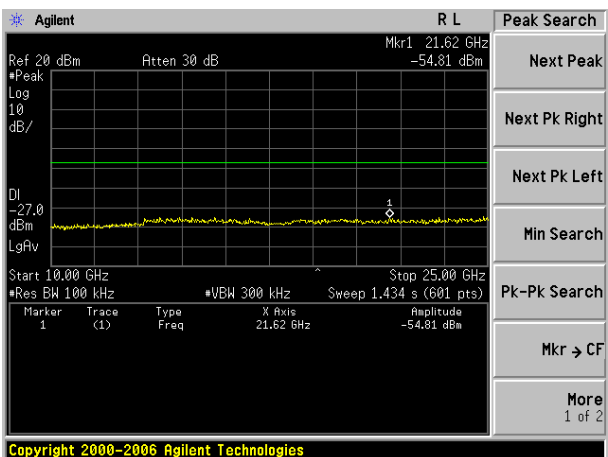

10GHz~25GHz

### 6.7.2 Radiated Emission Method
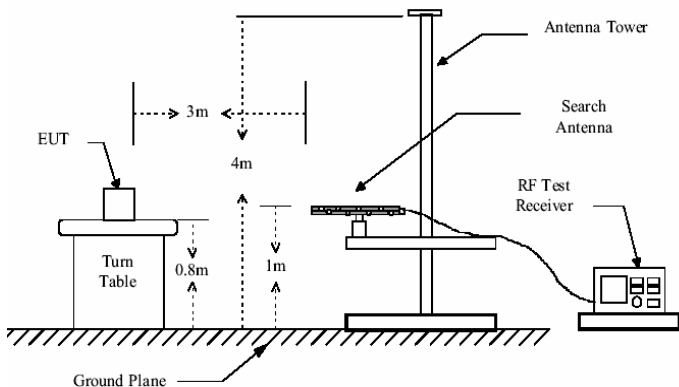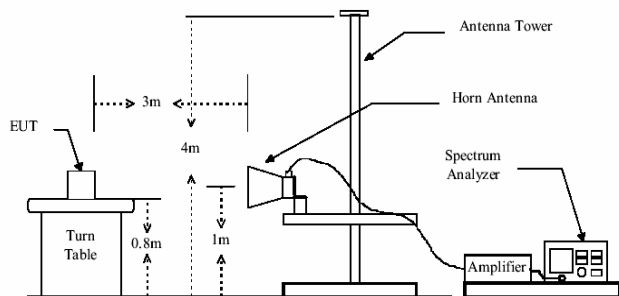
|                       |                                                                                                                                                                                                                                                                                                                                                       |            |                    |        |            |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------|--------|------------|
| Test Requirement:     | FCC Part15 C Section 15.209                                                                                                                                                                                                                                                                                                                           |            |                    |        |            |
| Test Method:          | ANSI C63.4: 2003                                                                                                                                                                                                                                                                                                                                      |            |                    |        |            |
| Test Frequency Range: | 30MHz to 25GHz                                                                                                                                                                                                                                                                                                                                        |            |                    |        |            |
| Test site:            | Measurement Distance: 3m                                                                                                                                                                                                                                                                                                                              |            |                    |        |            |
| Receiver setup:       | Frequency                                                                                                                                                                                                                                                                                                                                             | Detector   | RBW                | VBW    | Value      |
|                       | 30MHz-1GHz                                                                                                                                                                                                                                                                                                                                            | Quasi-peak | 120KHz             | 300KHz | Quasi-peak |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                            | Peak       | 1MHz               | 3MHz   | Peak       |
|                       |                                                                                                                                                                                                                                                                                                                                                       | Peak       | 1MHz               | 10Hz   | Average    |
| Limit:                | Frequency                                                                                                                                                                                                                                                                                                                                             |            | Limit (dBuV/m @3m) |        | Value      |
|                       | 30MHz-88MHz                                                                                                                                                                                                                                                                                                                                           |            | 40.00              |        | Quasi-peak |
|                       | 88MHz-216MHz                                                                                                                                                                                                                                                                                                                                          |            | 43.50              |        | Quasi-peak |
|                       | 216MHz-960MHz                                                                                                                                                                                                                                                                                                                                         |            | 46.00              |        | Quasi-peak |
|                       | 960MHz-1GHz                                                                                                                                                                                                                                                                                                                                           |            | 54.00              |        | Quasi-peak |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                            |            | 54.00              |        | Average    |
|                       |                                                                                                                                                                                                                                                                                                                                                       |            | 74.00              |        | Peak       |
| Test setup:           | Below 1GHz                                                                                                                                                                                                                                                                                                                                            |            |                    |        |            |
|                       |                                                                                                                                                                                                                                                                   |            |                    |        |            |
| Test setup:           | Above 1GHz                                                                                                                                                                                                                                                                                                                                            |            |                    |        |            |
|                       |                                                                                                                                                                                                                                                                   |            |                    |        |            |
| Test Procedure:       | <div>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</div> <div>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna</div> |            |                    |        |            |



|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | <p>tower.</p> <ol style="list-style-type: none"> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

*Remark:*

*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.*

**Measurement Data****■ Below 1GHz**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 39.58           | 36.41             | 16.58                 | 0.66            | 32.06              | 21.59          | 40.00               | -18.41          | Vertical     |
| 68.87           | 38.95             | 13.22                 | 0.93            | 31.89              | 21.21          | 40.00               | -18.79          | Vertical     |
| 99.18           | 36.41             | 16.13                 | 1.18            | 31.76              | 21.96          | 43.50               | -21.54          | Vertical     |
| 364.26          | 38.46             | 16.46                 | 2.69            | 31.99              | 25.62          | 46.00               | -20.38          | Vertical     |
| 747.48          | 37.48             | 22.43                 | 4.27            | 31.25              | 32.93          | 46.00               | -13.07          | Vertical     |
| 830.40          | 37.68             | 23.37                 | 4.58            | 31.27              | 34.36          | 46.00               | -11.64          | Vertical     |
| 39.58           | 36.41             | 16.58                 | 0.66            | 32.06              | 21.59          | 40.00               | -18.41          | Horizontal   |
| 68.87           | 38.95             | 13.22                 | 0.93            | 31.89              | 21.21          | 40.00               | -18.79          | Horizontal   |
| 185.79          | 38.06             | 13.30                 | 1.77            | 32.10              | 21.03          | 43.50               | -22.47          | Horizontal   |
| 364.26          | 38.46             | 16.46                 | 2.69            | 31.99              | 25.62          | 46.00               | -20.38          | Horizontal   |
| 721.73          | 37.02             | 22.10                 | 4.17            | 31.22              | 32.07          | 46.00               | -13.93          | Horizontal   |
| 830.40          | 37.68             | 23.37                 | 4.58            | 31.27              | 34.36          | 46.00               | -11.64          | Horizontal   |

■ Above 1GHz

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11b | Test channel: | Lowest |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 31.10             | 31.28                 | 8.62            | 24.17              | 46.83          | 74.00               | -27.17          | Vertical     |
| 7236.00         | 32.75             | 35.36                 | 11.68           | 26.52              | 53.27          | 74.00               | -20.73          | Vertical     |
| 9648.00         | 31.72             | 37.44                 | 14.16           | 25.44              | 57.88          | 74.00               | -16.12          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4824.00         | 32.43             | 31.28                 | 8.62            | 24.17              | 48.16          | 74.00               | -25.84          | Horizontal   |
| 7236.00         | 34.00             | 35.36                 | 11.68           | 26.52              | 54.52          | 74.00               | -19.48          | Horizontal   |
| 9648.00         | 30.32             | 37.44                 | 14.16           | 25.44              | 56.48          | 74.00               | -17.52          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 18.04             | 31.28                 | 8.62            | 24.17              | 33.77          | 54.00               | -20.23          | Vertical     |
| 7236.00         | 19.06             | 35.36                 | 11.68           | 26.52              | 39.58          | 54.00               | -14.42          | Vertical     |
| 9648.00         | 18.27             | 37.44                 | 14.16           | 25.44              | 44.43          | 54.00               | -9.57           | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4824.00         | 19.22             | 31.28                 | 8.62            | 24.17              | 34.95          | 54.00               | -19.05          | Horizontal   |
| 7236.00         | 20.48             | 35.36                 | 11.68           | 26.52              | 41.00          | 54.00               | -13.00          | Horizontal   |
| 9648.00         | 17.10             | 37.44                 | 14.16           | 25.44              | 43.26          | 54.00               | -10.74          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is too weak instrument of signal is unable to test.

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11b | Test channel: | Middle |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 31.53             | 32.02                 | 8.66            | 24.12              | 48.09          | 74.00               | -25.91          | Vertical     |
| 7311.00         | 32.67             | 36.64                 | 11.71           | 26.71              | 54.31          | 74.00               | -19.69          | Vertical     |
| 9748.00         | 28.93             | 38.54                 | 14.25           | 25.38              | 56.34          | 74.00               | -17.66          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4874.00         | 32.39             | 32.02                 | 8.66            | 24.12              | 48.95          | 74.00               | -25.05          | Horizontal   |
| 7311.00         | 32.82             | 36.64                 | 11.71           | 26.71              | 54.46          | 74.00               | -19.54          | Horizontal   |
| 9748.00         | 28.88             | 38.54                 | 14.25           | 25.38              | 56.29          | 74.00               | -17.71          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 18.47             | 32.02                 | 8.66            | 24.12              | 35.03          | 54.00               | -18.97          | Vertical     |
| 7311.00         | 18.98             | 36.64                 | 11.71           | 26.71              | 40.62          | 54.00               | -13.38          | Vertical     |
| 9748.00         | 15.48             | 38.54                 | 14.25           | 25.38              | 42.89          | 54.00               | -11.11          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4874.00         | 19.18             | 32.02                 | 8.66            | 24.12              | 35.74          | 54.00               | -18.26          | Horizontal   |
| 7311.00         | 19.30             | 36.64                 | 11.71           | 26.71              | 40.94          | 54.00               | -13.06          | Horizontal   |
| 9748.00         | 15.66             | 38.54                 | 14.25           | 25.38              | 43.07          | 54.00               | -10.93          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“\*”*, means this data is the too weak instrument of signal is unable to test.

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11b | Test channel: | Highest |
|------------|---------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 32.03             | 32.14                 | 8.70            | 24.05                    | 48.82          | 74.00               | -25.18          | Vertical     |
| 7386.00         | 34.56             | 36.75                 | 11.76           | 26.90                    | 56.17          | 74.00               | -17.83          | Vertical     |
| 9848.00         | 28.49             | 38.79                 | 14.31           | 25.30                    | 56.29          | 74.00               | -17.71          | Vertical     |
| 12310.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4924.00         | 33.20             | 32.14                 | 8.70            | 24.05                    | 49.99          | 74.00               | -24.01          | Horizontal   |
| 7386.00         | 34.84             | 36.75                 | 11.76           | 26.90                    | 56.45          | 74.00               | -17.55          | Horizontal   |
| 9848.00         | 29.09             | 38.79                 | 14.31           | 25.30                    | 56.89          | 74.00               | -17.11          | Horizontal   |
| 12310.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 18.97             | 32.14                 | 8.70            | 24.05                    | 35.76          | 54.00               | -18.24          | Vertical     |
| 7386.00         | 20.87             | 36.75                 | 11.76           | 26.90                    | 42.48          | 54.00               | -11.52          | Vertical     |
| 9848.00         | 15.04             | 38.79                 | 14.31           | 25.30                    | 42.84          | 54.00               | -11.16          | Vertical     |
| 12310.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4924.00         | 19.99             | 32.14                 | 8.70            | 24.05                    | 36.78          | 54.00               | -17.22          | Horizontal   |
| 7386.00         | 21.32             | 36.75                 | 11.76           | 26.90                    | 42.93          | 54.00               | -11.07          | Horizontal   |
| 9848.00         | 15.87             | 38.79                 | 14.31           | 25.30                    | 43.67          | 54.00               | -10.33          | Horizontal   |
| 12310.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“\*”, means this data is the too weak instrument of signal is unable to test.*

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11g | Test channel: | lowest |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 31.64             | 31.28                 | 8.62            | 24.17              | 47.37          | 74.00               | -26.63          | Vertical     |
| 7236.00         | 33.38             | 35.36                 | 11.68           | 26.52              | 53.90          | 74.00               | -20.10          | Vertical     |
| 9648.00         | 32.44             | 37.44                 | 14.16           | 25.44              | 58.60          | 74.00               | -15.40          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4824.00         | 33.17             | 31.28                 | 8.62            | 24.17              | 48.90          | 74.00               | -25.10          | Horizontal   |
| 7236.00         | 34.69             | 35.36                 | 11.68           | 26.52              | 55.21          | 74.00               | -18.79          | Horizontal   |
| 9648.00         | 30.90             | 37.44                 | 14.16           | 25.44              | 57.06          | 74.00               | -16.94          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 18.58             | 31.28                 | 8.62            | 24.17              | 34.31          | 54.00               | -19.69          | Vertical     |
| 7236.00         | 19.69             | 35.36                 | 11.68           | 26.52              | 40.21          | 54.00               | -13.79          | Vertical     |
| 9648.00         | 18.99             | 37.44                 | 14.16           | 25.44              | 45.15          | 54.00               | -8.85           | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4824.00         | 19.96             | 31.28                 | 8.62            | 24.17              | 35.69          | 54.00               | -18.31          | Horizontal   |
| 7236.00         | 21.17             | 35.36                 | 11.68           | 26.52              | 41.69          | 54.00               | -12.31          | Horizontal   |
| 9648.00         | 17.68             | 37.44                 | 14.16           | 25.44              | 43.84          | 54.00               | -10.16          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

|            |         |               |        |
|------------|---------|---------------|--------|
| Test mode: | 802.11g | Test channel: | Middle |
|------------|---------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 32.00             | 32.02                 | 8.66            | 24.12              | 48.56          | 74.00               | -25.44          | Vertical     |
| 7311.00         | 33.29             | 36.64                 | 11.71           | 26.71              | 54.93          | 74.00               | -19.07          | Vertical     |
| 9748.00         | 29.32             | 38.54                 | 14.25           | 25.38              | 56.73          | 74.00               | -17.27          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4874.00         | 33.00             | 32.02                 | 8.66            | 24.12              | 49.56          | 74.00               | -24.44          | Horizontal   |
| 7311.00         | 33.57             | 36.64                 | 11.71           | 26.71              | 55.21          | 74.00               | -18.79          | Horizontal   |
| 9748.00         | 29.22             | 38.54                 | 14.25           | 25.38              | 56.63          | 74.00               | -17.37          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 18.94             | 32.02                 | 8.66            | 24.12              | 35.50          | 54.00               | -18.50          | Vertical     |
| 7311.00         | 19.60             | 36.64                 | 11.71           | 26.71              | 41.24          | 54.00               | -12.76          | Vertical     |
| 9748.00         | 15.87             | 38.54                 | 14.25           | 25.38              | 43.28          | 54.00               | -10.72          | Vertical     |
| 12185.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4874.00         | 19.79             | 32.02                 | 8.66            | 24.12              | 36.35          | 54.00               | -17.65          | Horizontal   |
| 7311.00         | 20.05             | 36.64                 | 11.71           | 26.71              | 41.69          | 54.00               | -12.31          | Horizontal   |
| 9748.00         | 16.00             | 38.54                 | 14.25           | 25.38              | 43.41          | 54.00               | -10.59          | Horizontal   |
| 12185.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

|            |         |               |         |
|------------|---------|---------------|---------|
| Test mode: | 802.11g | Test channel: | Highest |
|------------|---------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 32.87             | 32.14                 | 8.70            | 24.05              | 49.66          | 74.00               | -24.34          | Vertical     |
| 7386.00         | 35.28             | 36.75                 | 11.76           | 26.90              | 56.89          | 74.00               | -17.11          | Vertical     |
| 9848.00         | 29.15             | 38.79                 | 14.31           | 25.30              | 56.95          | 74.00               | -17.05          | Vertical     |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4924.00         | 33.77             | 32.14                 | 8.70            | 24.05              | 50.56          | 74.00               | -23.44          | Horizontal   |
| 7386.00         | 35.32             | 36.75                 | 11.76           | 26.90              | 56.93          | 74.00               | -17.07          | Horizontal   |
| 9848.00         | 29.72             | 38.79                 | 14.31           | 25.30              | 57.52          | 74.00               | -16.48          | Horizontal   |
| 12310.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 19.81             | 32.14                 | 8.70            | 24.05              | 36.60          | 54.00               | -17.40          | Vertical     |
| 7386.00         | 21.59             | 36.75                 | 11.76           | 26.90              | 43.20          | 54.00               | -10.80          | Vertical     |
| 9848.00         | 15.70             | 38.79                 | 14.31           | 25.30              | 43.50          | 54.00               | -10.50          | Vertical     |
| 12310.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4924.00         | 20.56             | 32.14                 | 8.70            | 24.05              | 37.35          | 54.00               | -16.65          | Horizontal   |
| 7386.00         | 21.80             | 36.75                 | 11.76           | 26.90              | 43.41          | 54.00               | -10.59          | Horizontal   |
| 9848.00         | 16.50             | 38.79                 | 14.31           | 25.30              | 44.30          | 54.00               | -9.70           | Horizontal   |
| 12310.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.



|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT20) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 30.84             | 31.28                 | 8.62            | 24.17                    | 46.57          | 74.00               | -27.43          | Vertical     |
| 7236.00         | 32.38             | 35.36                 | 11.68           | 26.52                    | 52.90          | 74.00               | -21.10          | Vertical     |
| 9648.00         | 31.28             | 37.44                 | 14.16           | 25.44                    | 57.44          | 74.00               | -16.56          | Vertical     |
| 12060.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4824.00         | 32.10             | 31.28                 | 8.62            | 24.17                    | 47.83          | 74.00               | -26.17          | Horizontal   |
| 7236.00         | 33.81             | 35.36                 | 11.68           | 26.52                    | 54.33          | 74.00               | -19.67          | Horizontal   |
| 9648.00         | 30.07             | 37.44                 | 14.16           | 25.44                    | 56.23          | 74.00               | -17.77          | Horizontal   |
| 12060.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4824.00         | 17.78             | 31.28                 | 8.62            | 24.17                    | 33.51          | 54.00               | -20.49          | Vertical     |
| 7236.00         | 18.69             | 35.36                 | 11.68           | 26.52                    | 39.21          | 54.00               | -14.79          | Vertical     |
| 9648.00         | 17.83             | 37.44                 | 14.16           | 25.44                    | 43.99          | 54.00               | -10.01          | Vertical     |
| 12060.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4824.00         | 18.89             | 31.28                 | 8.62            | 24.17                    | 34.62          | 54.00               | -19.38          | Horizontal   |
| 7236.00         | 20.29             | 35.36                 | 11.68           | 26.52                    | 40.81          | 54.00               | -13.19          | Horizontal   |
| 9648.00         | 16.85             | 37.44                 | 14.16           | 25.44                    | 43.01          | 54.00               | -10.99          | Horizontal   |
| 12060.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“\*”, means this data is the too weak instrument of signal is unable to test.*

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT20) | Test channel: | Middle |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 31.12             | 32.02                 | 8.66            | 24.12                    | 47.68          | 74.00               | -26.32          | Vertical     |
| 7311.00         | 32.31             | 36.64                 | 11.71           | 26.71                    | 53.95          | 74.00               | -20.05          | Vertical     |
| 9748.00         | 28.62             | 38.54                 | 14.25           | 25.38                    | 56.03          | 74.00               | -17.97          | Vertical     |
| 12185.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4874.00         | 31.88             | 32.02                 | 8.66            | 24.12                    | 48.44          | 74.00               | -25.56          | Horizontal   |
| 7311.00         | 32.44             | 36.64                 | 11.71           | 26.71                    | 54.08          | 74.00               | -19.92          | Horizontal   |
| 9748.00         | 28.59             | 38.54                 | 14.25           | 25.38                    | 56.00          | 74.00               | -18.00          | Horizontal   |
| 12185.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 18.06             | 32.02                 | 8.66            | 24.12                    | 34.62          | 54.00               | -19.38          | Vertical     |
| 7311.00         | 18.62             | 36.64                 | 11.71           | 26.71                    | 40.26          | 54.00               | -13.74          | Vertical     |
| 9748.00         | 15.17             | 38.54                 | 14.25           | 25.38                    | 42.58          | 54.00               | -11.42          | Vertical     |
| 12185.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4874.00         | 18.67             | 32.02                 | 8.66            | 24.12                    | 35.23          | 54.00               | -18.77          | Horizontal   |
| 7311.00         | 18.92             | 36.64                 | 11.71           | 26.71                    | 40.56          | 54.00               | -13.44          | Horizontal   |
| 9748.00         | 15.37             | 38.54                 | 14.25           | 25.38                    | 42.78          | 54.00               | -11.22          | Horizontal   |
| 12185.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

**Remark:**

1. *Final Level* = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT20) | Test channel: | Highest |
|------------|---------------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 31.58             | 32.14                 | 8.70            | 24.05                    | 48.37          | 74.00               | -25.63          | 4924.00      |
| 7386.00         | 34.00             | 36.75                 | 11.76           | 26.90                    | 55.61          | 74.00               | -18.39          | 7386.00      |
| 9848.00         | 28.19             | 38.79                 | 14.31           | 25.30                    | 55.99          | 74.00               | -18.01          | 9848.00      |
| 12310.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4924.00         | 32.49             | 32.14                 | 8.70            | 24.05                    | 49.28          | 74.00               | -24.72          | Horizontal   |
| 7386.00         | 34.02             | 36.75                 | 11.76           | 26.90                    | 55.63          | 74.00               | -18.37          | Horizontal   |
| 9848.00         | 28.41             | 38.79                 | 14.31           | 25.30                    | 56.21          | 74.00               | -17.79          | Horizontal   |
| 12310.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4924.00         | 18.52             | 32.14                 | 8.70            | 24.05                    | 35.31          | 54.00               | -18.69          | Vertical     |
| 7386.00         | 20.31             | 36.75                 | 11.76           | 26.90                    | 41.92          | 54.00               | -12.08          | Vertical     |
| 9848.00         | 14.74             | 38.79                 | 14.31           | 25.30                    | 42.54          | 54.00               | -11.46          | Vertical     |
| 12310.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4924.00         | 19.28             | 32.14                 | 8.70            | 24.05                    | 36.07          | 54.00               | -17.93          | Horizontal   |
| 7386.00         | 20.50             | 36.75                 | 11.76           | 26.90                    | 42.11          | 54.00               | -11.89          | Horizontal   |
| 9848.00         | 15.19             | 38.79                 | 14.31           | 25.30                    | 42.99          | 54.00               | -11.01          | Horizontal   |
| 12310.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

**Remark:**

- 1 Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “\*”, means this data is the too weak instrument of signal is unable to test.

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT40) | Test channel: | Lowest |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4844.00         | 31.95             | 31.40                 | 8.63            | 24.04              | 47.94          | 74.00               | -26.06          | Vertical     |
| 7266.00         | 33.51             | 35.96                 | 11.69           | 26.47              | 54.69          | 74.00               | -19.31          | Vertical     |
| 9688.00         | 32.39             | 37.71                 | 14.21           | 25.30              | 59.01          | 74.00               | -14.99          | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Vertical     |
| 4844.00         | 33.20             | 31.40                 | 8.63            | 24.04              | 49.19          | 74.00               | -24.81          | Horizontal   |
| 7266.00         | 34.54             | 35.96                 | 11.69           | 26.47              | 55.72          | 74.00               | -18.28          | Horizontal   |
| 9688.00         | 31.15             | 37.71                 | 14.21           | 25.30              | 57.77          | 74.00               | -16.23          | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4844.00         | 18.89             | 31.40                 | 8.63            | 24.04              | 34.88          | 54.00               | -19.12          | Vertical     |
| 7266.00         | 19.82             | 35.96                 | 11.69           | 26.47              | 41.00          | 54.00               | -13.00          | Vertical     |
| 9688.00         | 18.94             | 37.71                 | 14.21           | 25.30              | 45.56          | 54.00               | -8.44           | Vertical     |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Vertical     |
| 4844.00         | 19.99             | 31.40                 | 8.63            | 24.04              | 35.98          | 54.00               | -18.02          | Horizontal   |
| 7266.00         | 21.02             | 35.96                 | 11.69           | 26.47              | 42.20          | 54.00               | -11.80          | Horizontal   |
| 9688.00         | 17.93             | 37.71                 | 14.21           | 25.30              | 44.55          | 54.00               | -9.45           | Horizontal   |
| 12060.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 14472.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |
| 16884.00        | *                 |                       |                 |                    |                | 54.00               |                 | Horizontal   |

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“\*” , means this data is the too weak instrument of signal is unable to test.*

|            |               |               |        |
|------------|---------------|---------------|--------|
| Test mode: | 802.11n(HT40) | Test channel: | Middle |
|------------|---------------|---------------|--------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 32.65             | 32.02                 | 8.66            | 24.12                    | 49.21          | 74.00               | -24.79          | Vertical     |
| 7311.00         | 33.71             | 36.64                 | 11.71           | 26.71                    | 55.35          | 74.00               | -18.65          | Vertical     |
| 9748.00         | 30.18             | 38.54                 | 14.25           | 25.38                    | 57.59          | 74.00               | -16.41          | Vertical     |
| 12185.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4874.00         | 33.47             | 32.02                 | 8.66            | 24.12                    | 50.03          | 74.00               | -23.97          | Horizontal   |
| 7311.00         | 34.04             | 36.64                 | 11.71           | 26.71                    | 55.68          | 74.00               | -18.32          | Horizontal   |
| 9748.00         | 30.04             | 38.54                 | 14.25           | 25.38                    | 57.45          | 74.00               | -16.55          | Horizontal   |
| 12185.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4874.00         | 19.59             | 32.02                 | 8.66            | 24.12                    | 36.15          | 54.00               | -17.85          | Vertical     |
| 7311.00         | 20.02             | 36.64                 | 11.71           | 26.71                    | 41.66          | 54.00               | -12.34          | Vertical     |
| 9748.00         | 16.73             | 38.54                 | 14.25           | 25.38                    | 44.14          | 54.00               | -9.86           | Vertical     |
| 12185.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14622.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 17059.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4874.00         | 20.26             | 32.02                 | 8.66            | 24.12                    | 36.82          | 54.00               | -17.18          | Horizontal   |
| 7311.00         | 20.52             | 36.64                 | 11.71           | 26.71                    | 42.16          | 54.00               | -11.84          | Horizontal   |
| 9748.00         | 16.82             | 38.54                 | 14.25           | 25.38                    | 44.23          | 54.00               | -9.77           | Horizontal   |
| 12185.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14622.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 17059.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“\*” , means this data is the too weak instrument of signal is unable to test.*

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test mode: | 802.11n(HT40) | Test channel: | Highest |
|------------|---------------|---------------|---------|

**Peak value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4904.00         | 33.58             | 32.08                 | 8.68            | 23.97                    | 50.37          | 74.00               | -23.63          | Vertical     |
| 7356.00         | 36.30             | 36.69                 | 11.74           | 26.73                    | 58.00          | 74.00               | -16.00          | Vertical     |
| 9808.00         | 30.47             | 38.60                 | 14.29           | 25.22                    | 58.14          | 74.00               | -15.86          | Vertical     |
| 12310.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                          |                | 74.00               |                 | Vertical     |
| 4904.00         | 34.56             | 32.08                 | 8.68            | 23.97                    | 51.35          | 74.00               | -22.65          | Horizontal   |
| 7356.00         | 36.11             | 36.69                 | 11.74           | 26.73                    | 57.81          | 74.00               | -16.19          | Horizontal   |
| 9808.00         | 30.96             | 38.60                 | 14.29           | 25.22                    | 58.63          | 74.00               | -15.37          | Horizontal   |
| 12310.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                          |                | 74.00               |                 | Horizontal   |

**Average value:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 4904.00         | 20.52             | 32.08                 | 8.68            | 23.97                    | 37.31          | 54.00               | -16.69          | Vertical     |
| 7356.00         | 22.61             | 36.69                 | 11.74           | 26.73                    | 44.31          | 54.00               | -9.69           | Vertical     |
| 9808.00         | 17.02             | 38.60                 | 14.29           | 25.22                    | 44.69          | 54.00               | -9.31           | Vertical     |
| 12310.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 14772.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 17234.00        | *                 |                       |                 |                          |                | 54.00               |                 | Vertical     |
| 4904.00         | 21.35             | 32.08                 | 8.68            | 23.97                    | 38.14          | 54.00               | -15.86          | Horizontal   |
| 7356.00         | 22.59             | 36.69                 | 11.74           | 26.73                    | 44.29          | 54.00               | -9.71           | Horizontal   |
| 9808.00         | 17.74             | 38.60                 | 14.29           | 25.22                    | 45.41          | 54.00               | -8.59           | Horizontal   |
| 12310.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 14772.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |
| 17234.00        | *                 |                       |                 |                          |                | 54.00               |                 | Horizontal   |

**Remark:**

- 1 Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “\*”, means this data is the too weak instrument of signal is unable to test.

-----end-----