

P02 WCDMA II_RMC12.2k_Ch9538_Right Side_0.9cm_Sensor off

DUT: Tablet Computer;

Communication System: UID 0, UMTS-FDD (WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1


Medium parameters used: $f = 1908$ MHz; $\sigma = 1.564$ S/m; $\epsilon_r = 51.783$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 21.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.16, 8.16, 8.16); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.394 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 14.95 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.488 W/kg
SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.194 W/kg
Maximum value of SAR (measured) = 0.403 W/kg

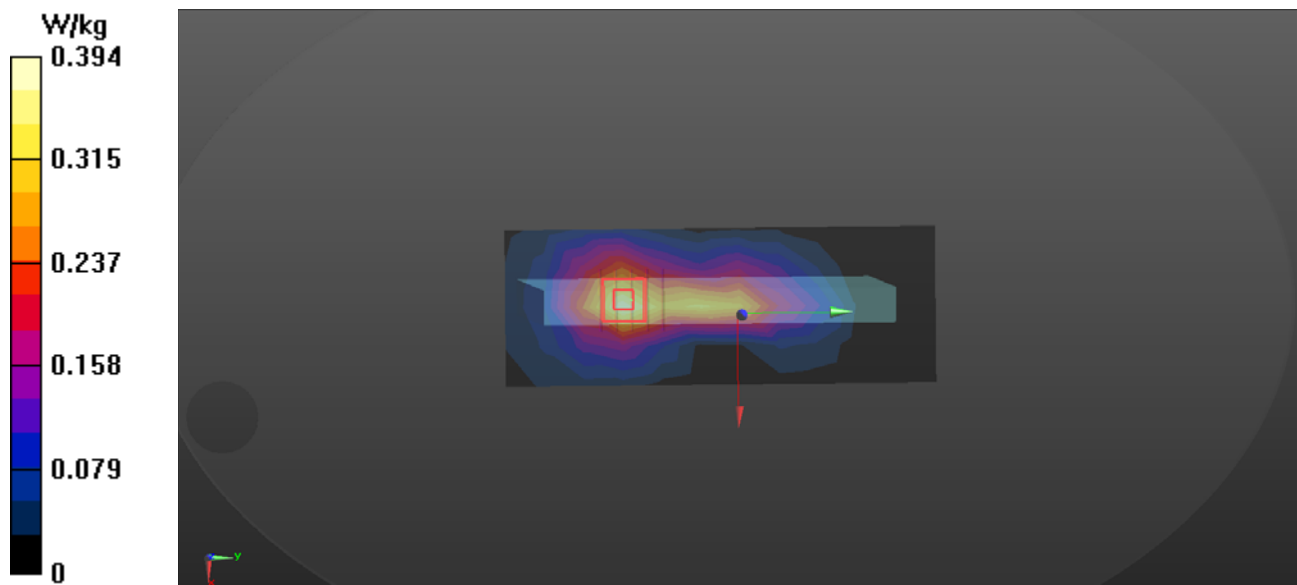

P11 WCDMA IV_RMC12.2k_Ch1513_Right Side_0.9cm_Sensor off

DUT: Tablet Computer;

Communication System: UID 0, UMTS-FDD (WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1


Medium parameters used: $f = 1753$ MHz; $\sigma = 1.504$ S/m; $\epsilon_r = 52.388$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.45, 8.45, 8.45); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.265 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 10.50 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.372 W/kg
SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.156 W/kg
Maximum value of SAR (measured) = 0.315 W/kg

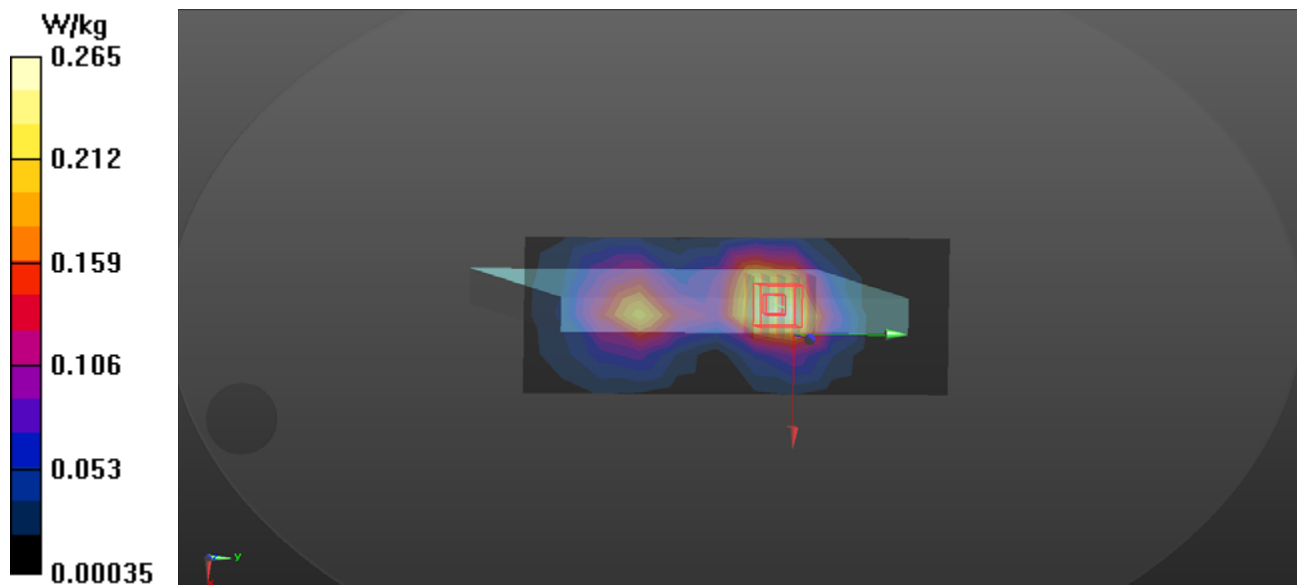

P19 WCDMA V_RMC12.2k_Ch4233_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;

Communication System: UID 0, UMTS-FDD (WCDMA) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1


Medium parameters used: $f = 847$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 55.092$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.116 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0.7210 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.157 W/kg
SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.067 W/kg
Maximum value of SAR (measured) = 0.134 W/kg

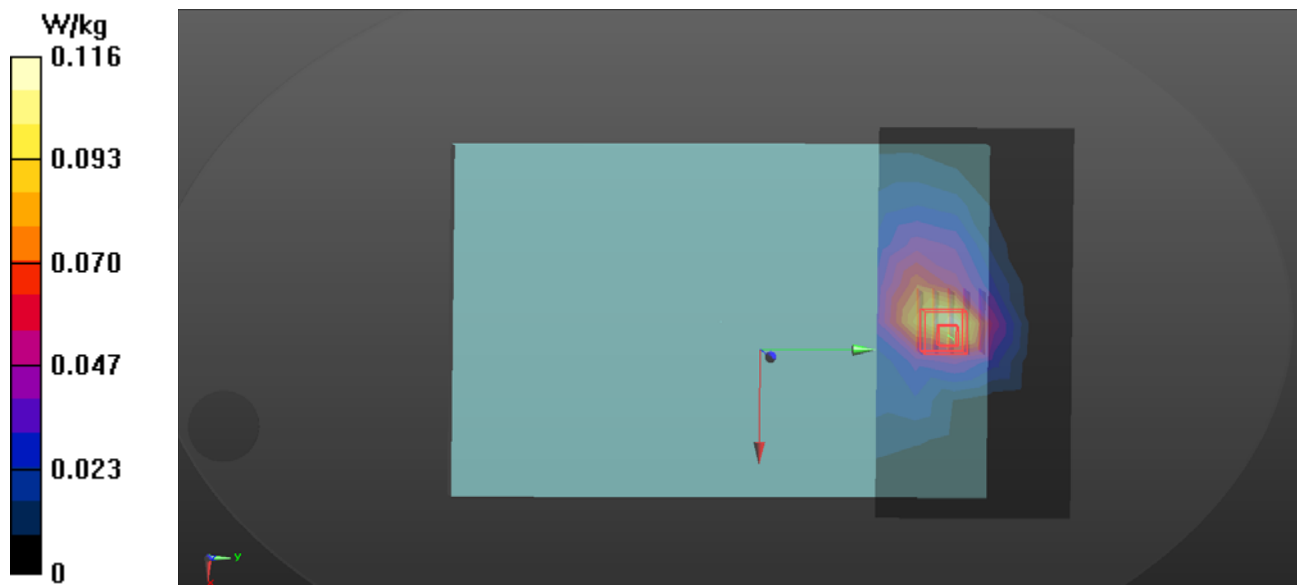

P200 LTE 4_QPSK20M_Ch20050_1RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 52.58$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.45, 8.45, 8.45); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.667 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0.3620 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.366 W/kg
Maximum value of SAR (measured) = 0.863 W/kg

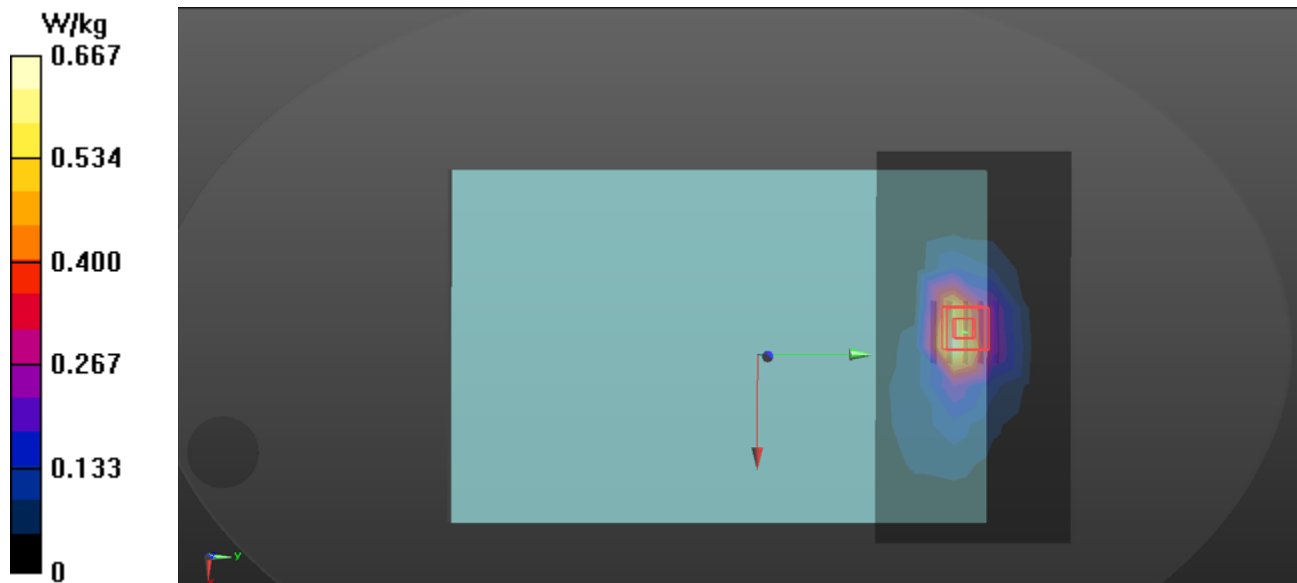

P204 LTE 4_QPSK20M_Ch20050_50RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 52.58$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.45, 8.45, 8.45); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.450 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0.6190 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.723 W/kg
SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.255 W/kg
Maximum value of SAR (measured) = 0.592 W/kg

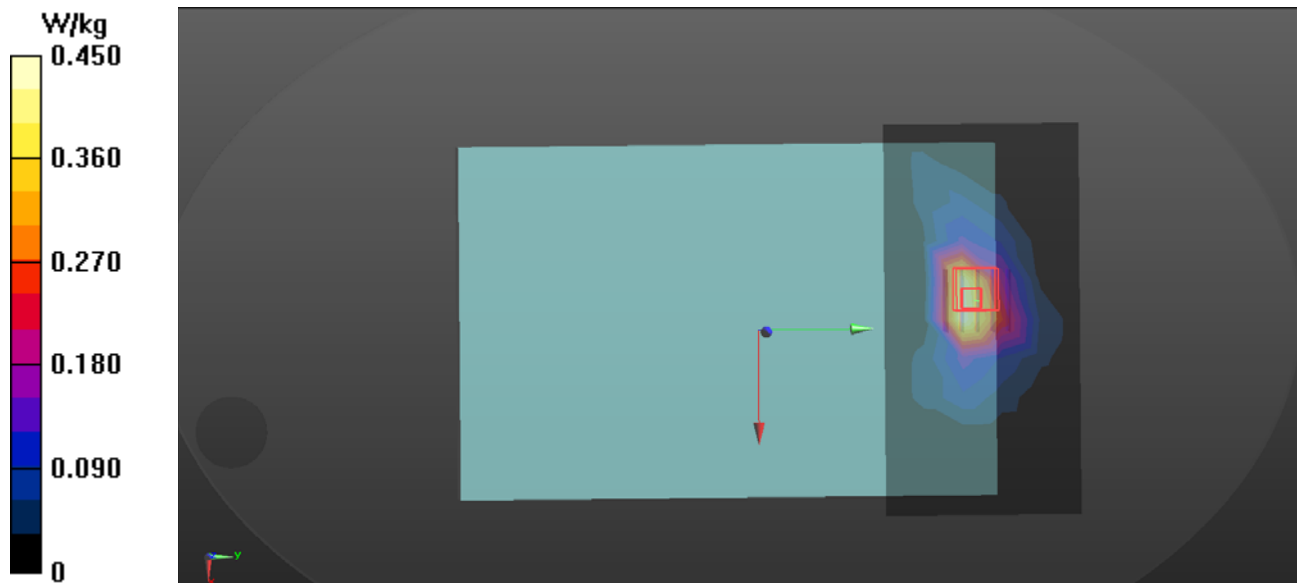

P352 LTE 5_QPSK10M_Ch20525_1RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;

Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 54.41$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.0 °C; Liquid Temperature : 21.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.103 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.184 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

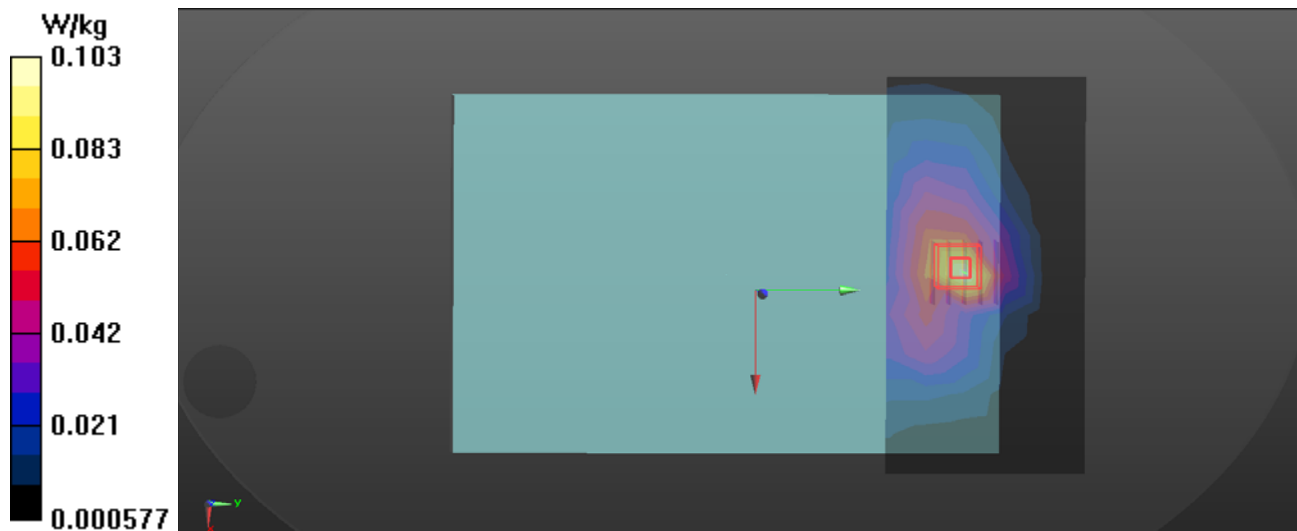

P356 LTE 5_QPSK10M_Ch20525_25RB Offset 12_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 54.41$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.0 °C; Liquid Temperature : 21.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0876 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 1.223 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.103 W/kg
SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.043 W/kg
Maximum value of SAR (measured) = 0.0864 W/kg

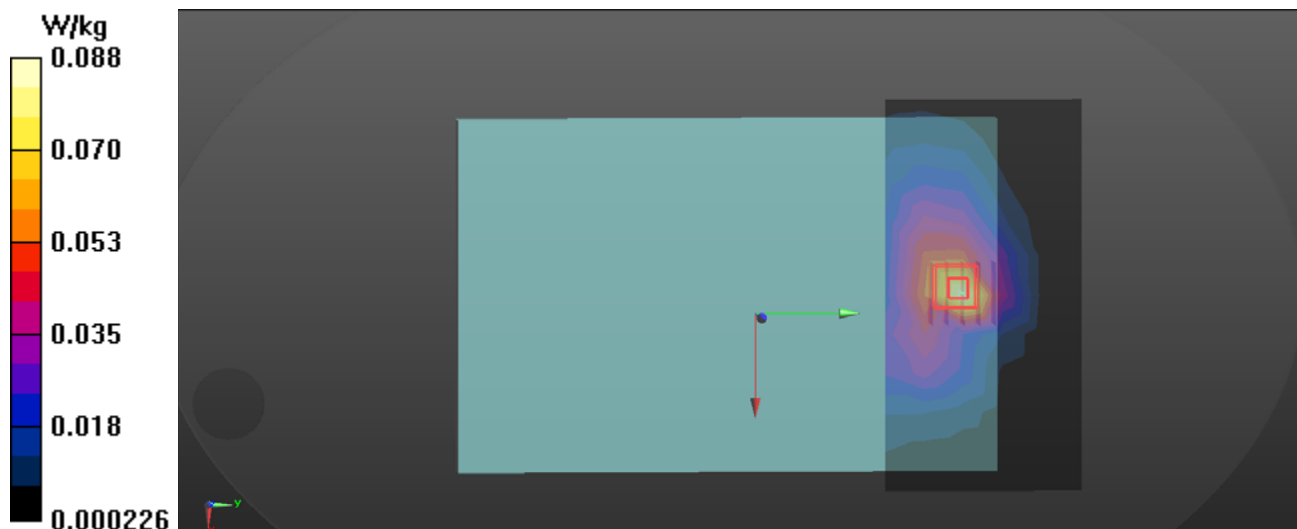

P216 LTE 7_QPSK20M_Ch21100_1RB Offset 50_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.118$ S/m; $\epsilon_r = 52.488$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.507 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 2.142 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.263 W/kg
Maximum value of SAR (measured) = 0.911 W/kg

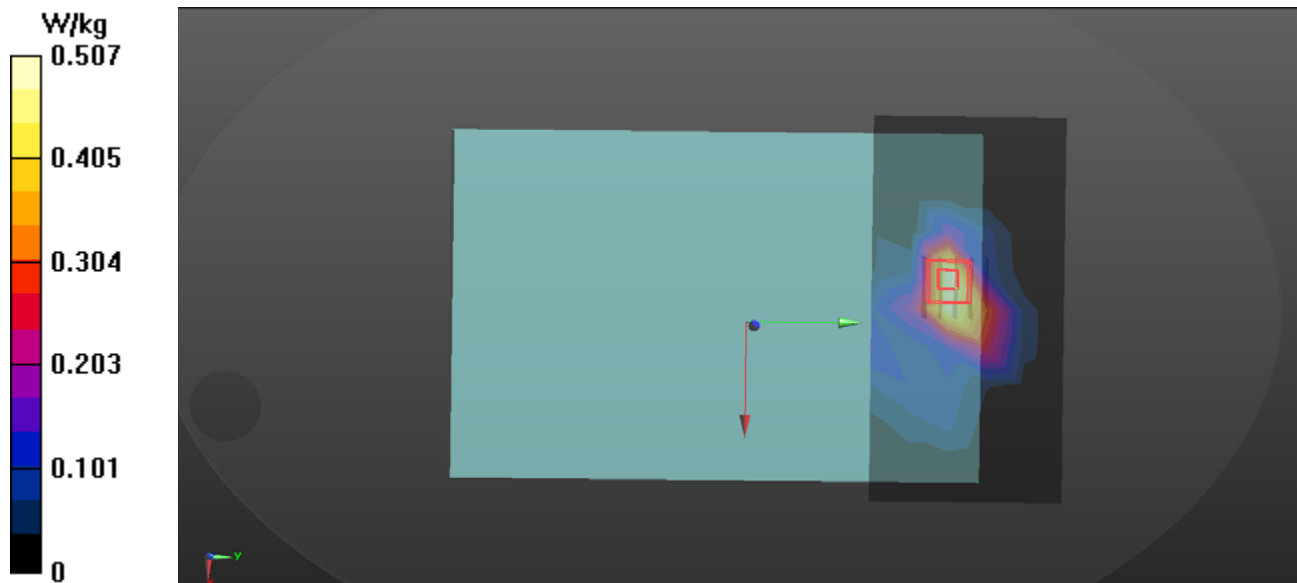

P224 LTE 7_QPSK20M_Ch21100_50RB Offset 25_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 2.118$ S/m; $\epsilon_r = 52.488$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.796 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 1.038 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.228 W/kg
Maximum value of SAR (measured) = 0.684 W/kg

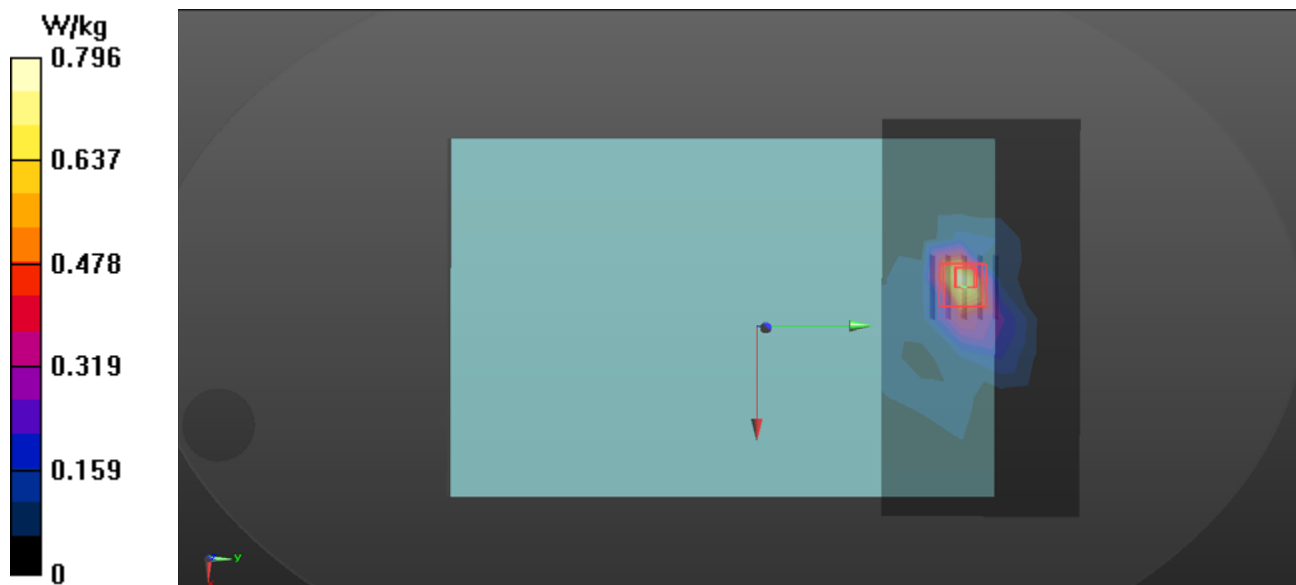

P232 LTE 12_QPSK10M_Ch23060_1RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 704$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 56.273$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.121 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 3.122 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.155 W/kg
SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.075 W/kg
Maximum value of SAR (measured) = 0.133 W/kg

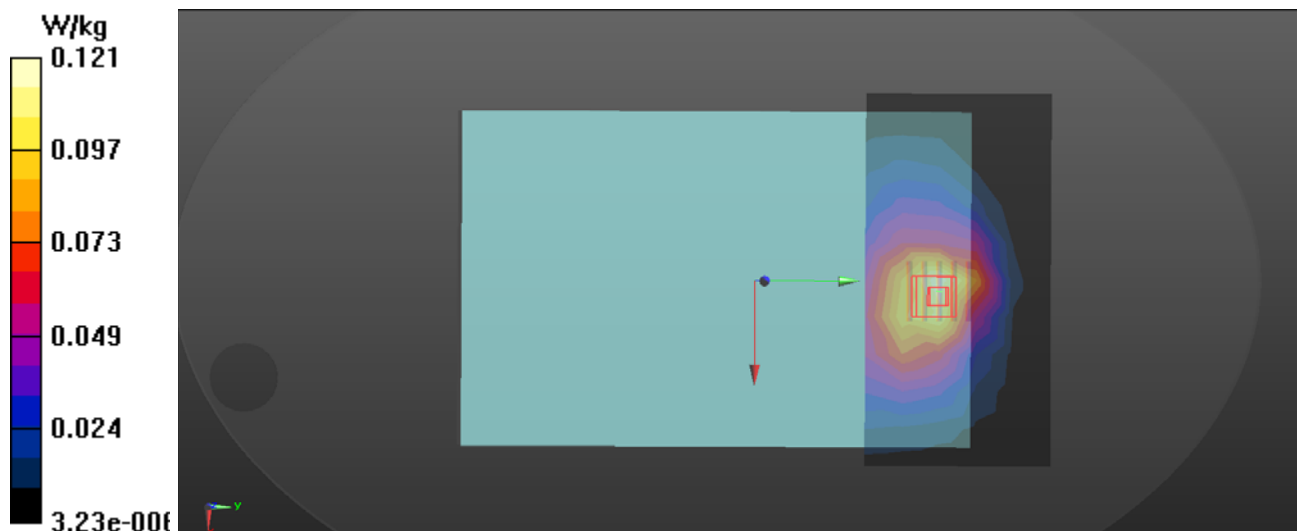

P240 LTE 12_QPSK10M_Ch23060_25RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 704$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 56.273$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.112 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 2.828 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.142 W/kg
SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.069 W/kg
Maximum value of SAR (measured) = 0.121 W/kg

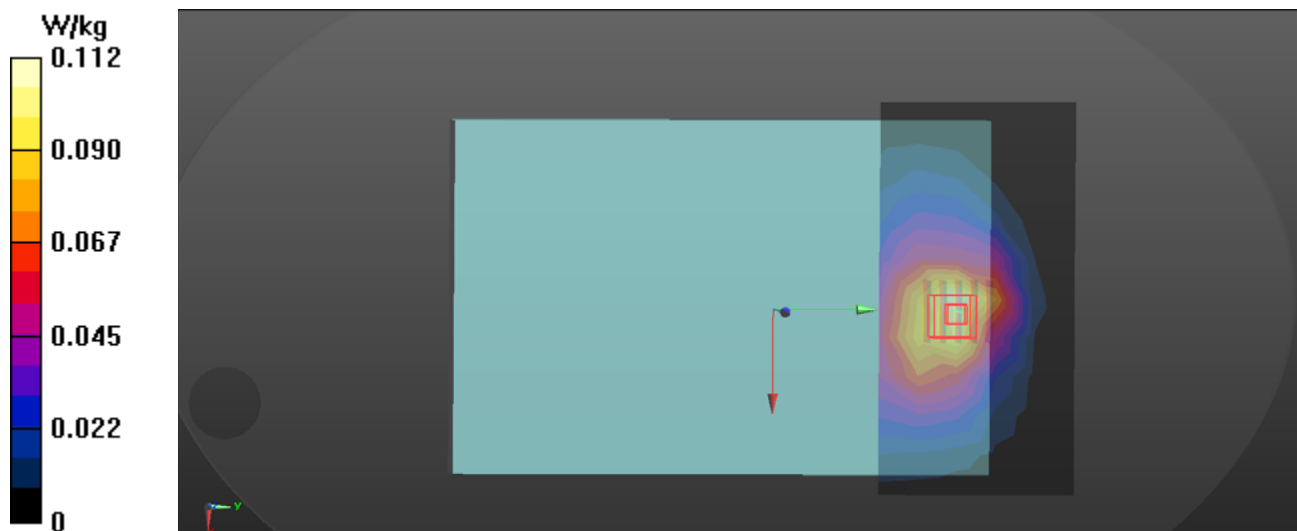

P254 LTE 13_QPSK10M_Ch23230_1RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782$ MHz; $\sigma = 0.998$ S/m; $\epsilon_r = 55.594$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.0505 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0.9090 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.0880 W/kg
SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.038 W/kg
Maximum value of SAR (measured) = 0.0757 W/kg

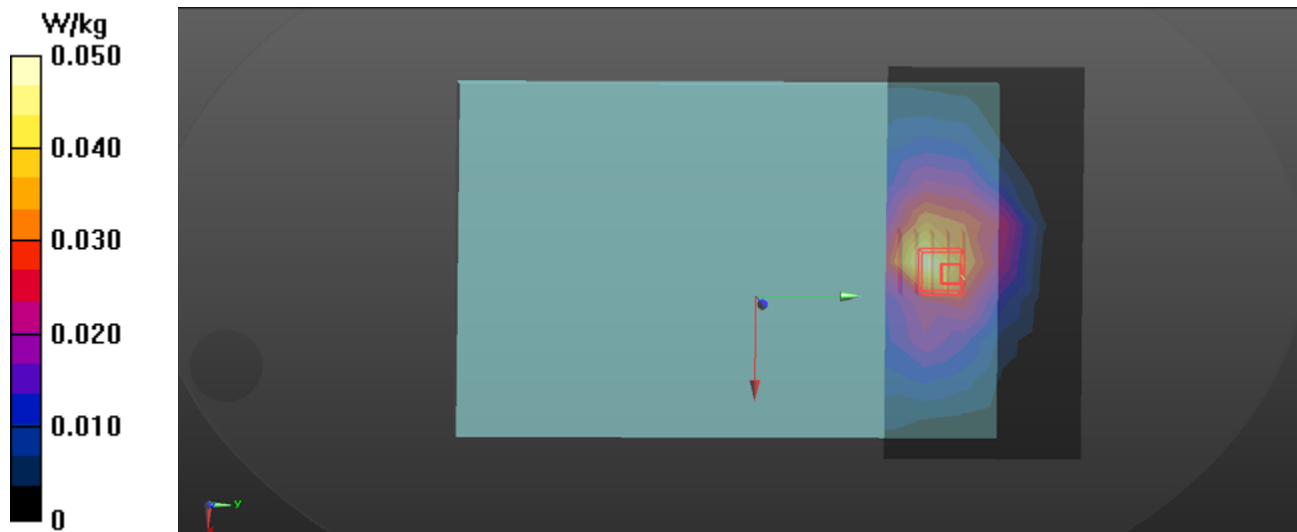

P262 LTE 13_QPSK10M_Ch23230_25RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.998 \text{ S/m}$; $\epsilon_r = 55.594$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $21.9 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.0330 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.025 V/m ; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.0660 W/kg
SAR(1 g) = 0.045 W/kg ; SAR(10 g) = 0.030 W/kg
Maximum value of SAR (measured) = 0.0557 W/kg

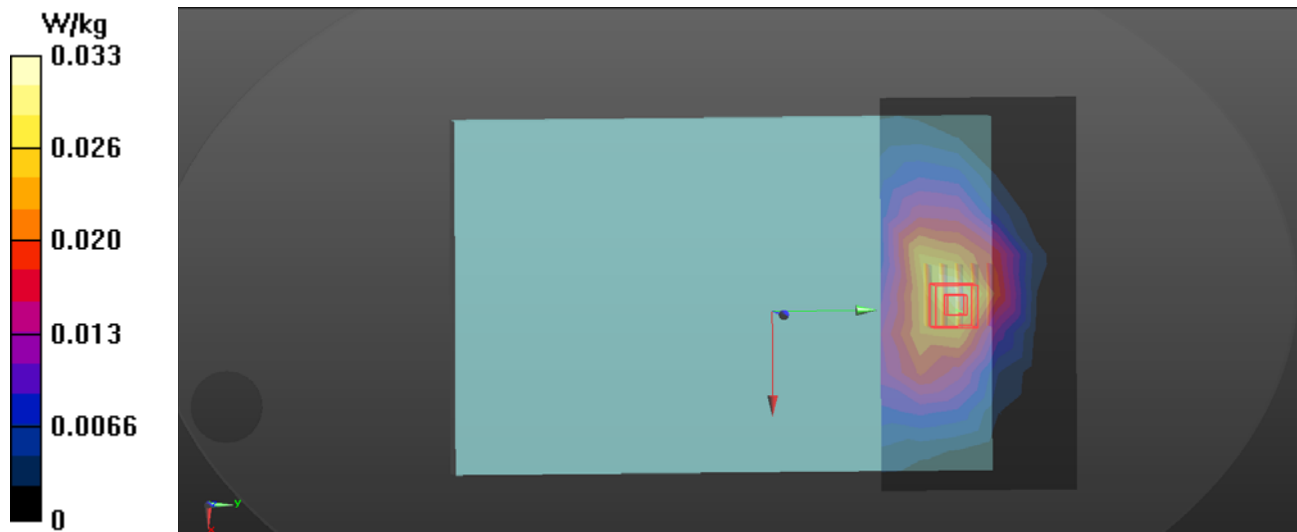

P298 LTE 25_QPSK20M_Ch26140_1RB Offset 50_Right Side_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 1850 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1850$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 51.972$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 21.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.16, 8.16, 8.16); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.187 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 9.983 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.540 W/kg
SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.153 W/kg
Maximum value of SAR (measured) = 0.387 W/kg

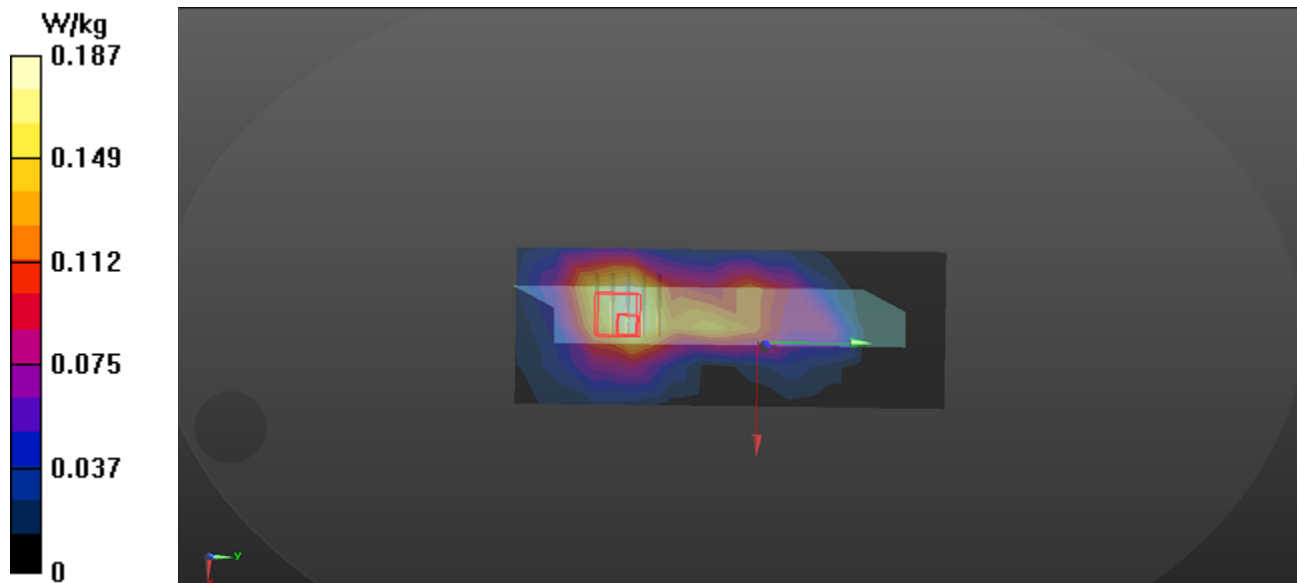

P306 LTE 25_QPSK20M_Ch26140_50RB Offset 0_Right Side_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 1850 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1850$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 51.972$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 21.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.16, 8.16, 8.16); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.318 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 15.31 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.464 W/kg
SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.157 W/kg
Maximum value of SAR (measured) = 0.382 W/kg

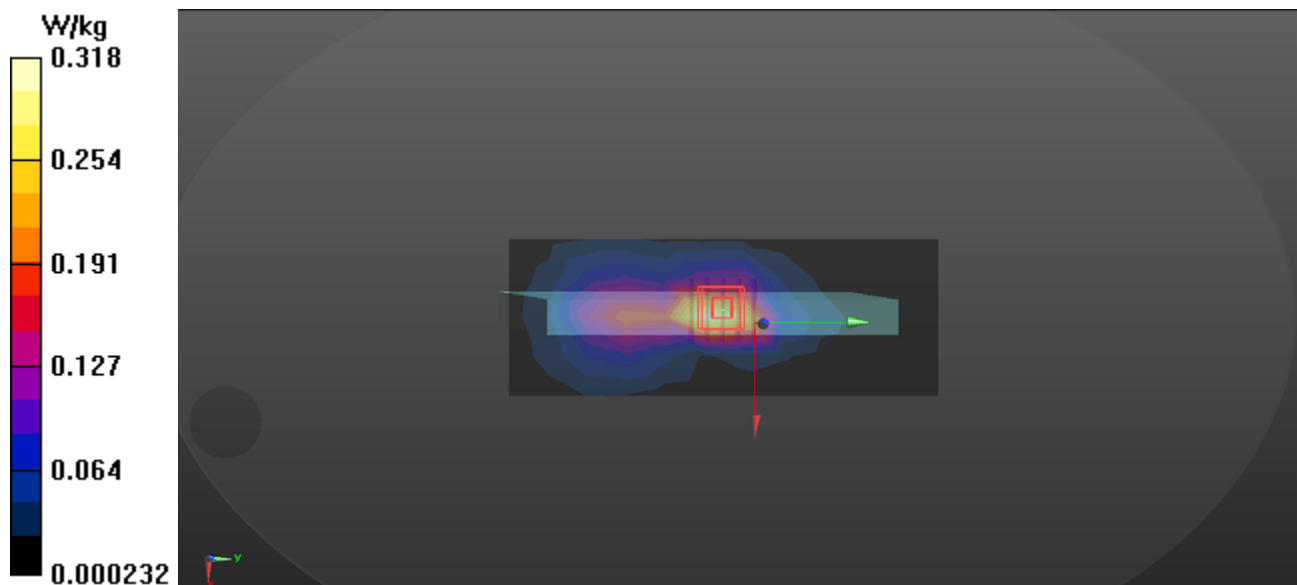

P342 LTE 30_QPSK10M_Ch27710_1RB Offset 0_Right Side_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 52.614$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.89, 7.89, 7.89); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (8x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.228 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 7.716 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.371 W/kg
SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.129 W/kg
Maximum value of SAR (measured) = 0.300 W/kg

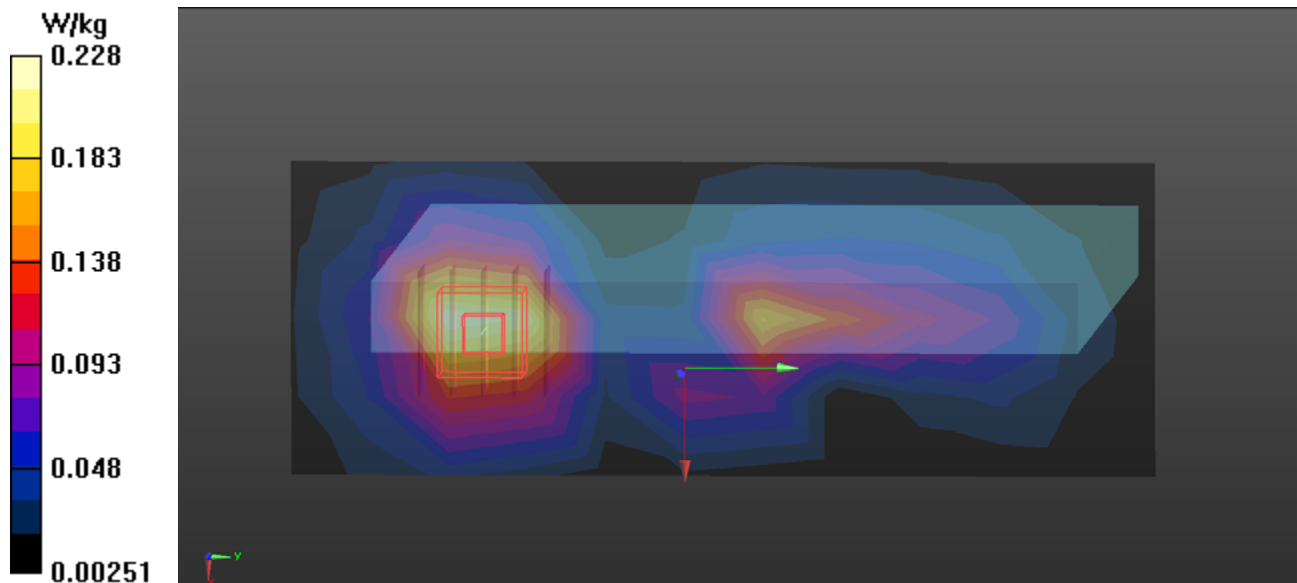

P345 LTE 30_QPSK10M_Ch27710_25RB Offset 0_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 52.614$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.89, 7.89, 7.89); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.170 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 1.738 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.269 W/kg
SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.081 W/kg
Maximum value of SAR (measured) = 0.210 W/kg

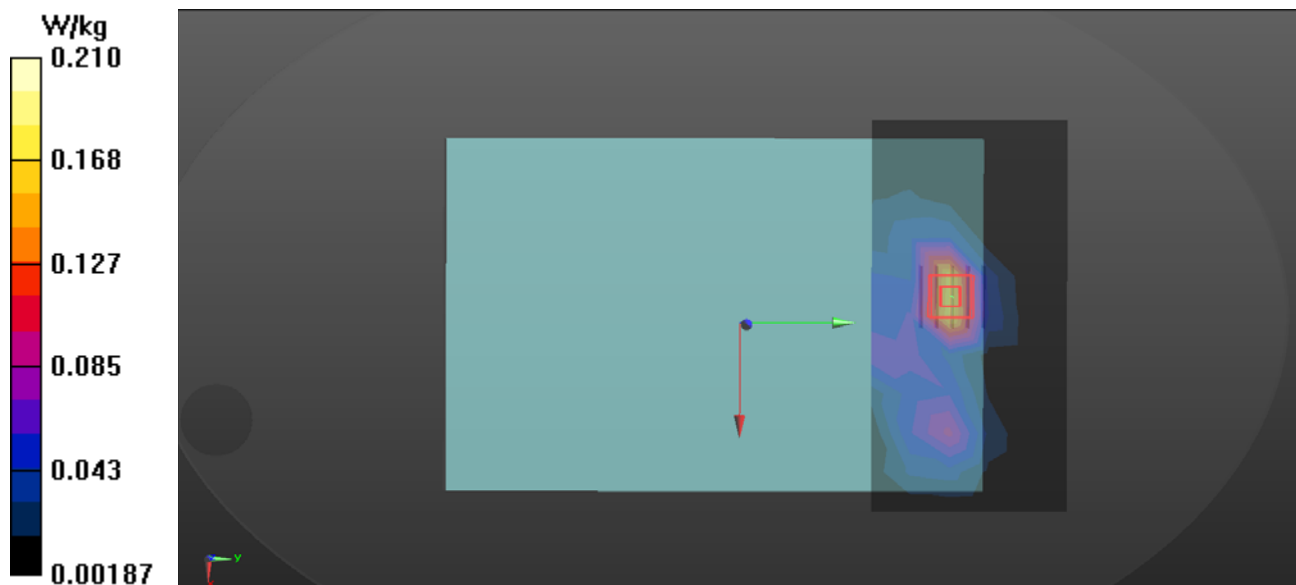

P329 LTE 41_QPSK20M_Ch39750_1RB Offset 50_Rear Face_0.9cm_Sensor off

DUT: Tablet Computer;

Communication System: UID 0, Generic LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2506$ MHz; $\sigma = 2.082$ S/m; $\epsilon_r = 52.592$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.333 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.093 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

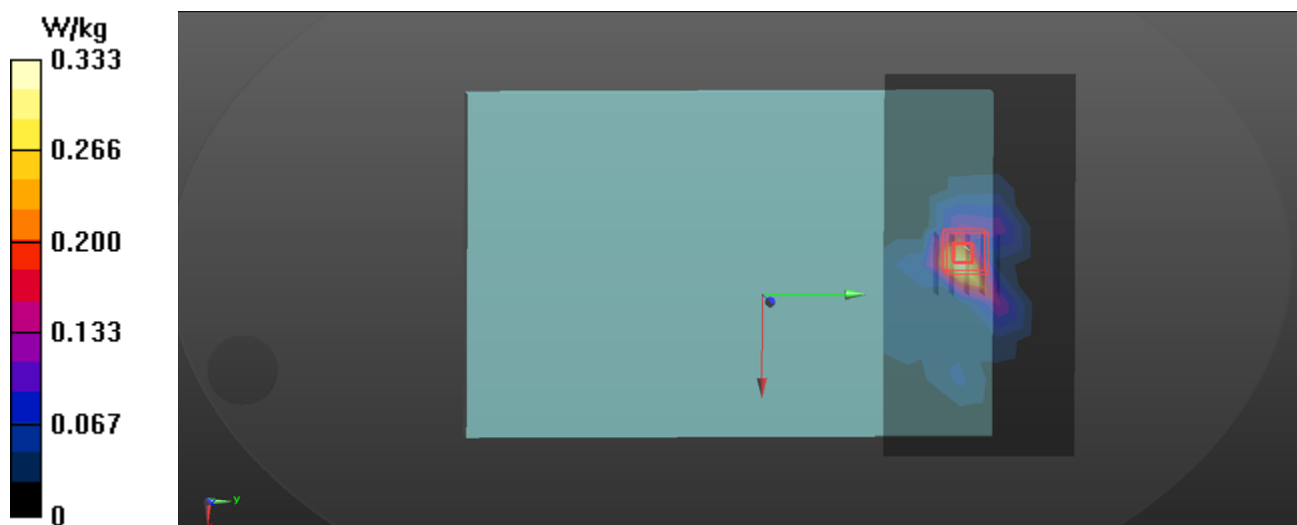

P338 LTE 41_QPSK20M_Ch40620_50RB Offset 25_Right Side_0.9cm_Sensor off

DUT: Tablet Computer;

Communication System: UID 0, Generic LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
Medium parameters used: $f = 2593$ MHz; $\sigma = 2.197$ S/m; $\epsilon_r = 52.311$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (8x19x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (measured) = 0.171 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.495 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.304 W/kg

