


Appendix A. Test Result of AC Power Line Conducted Emission

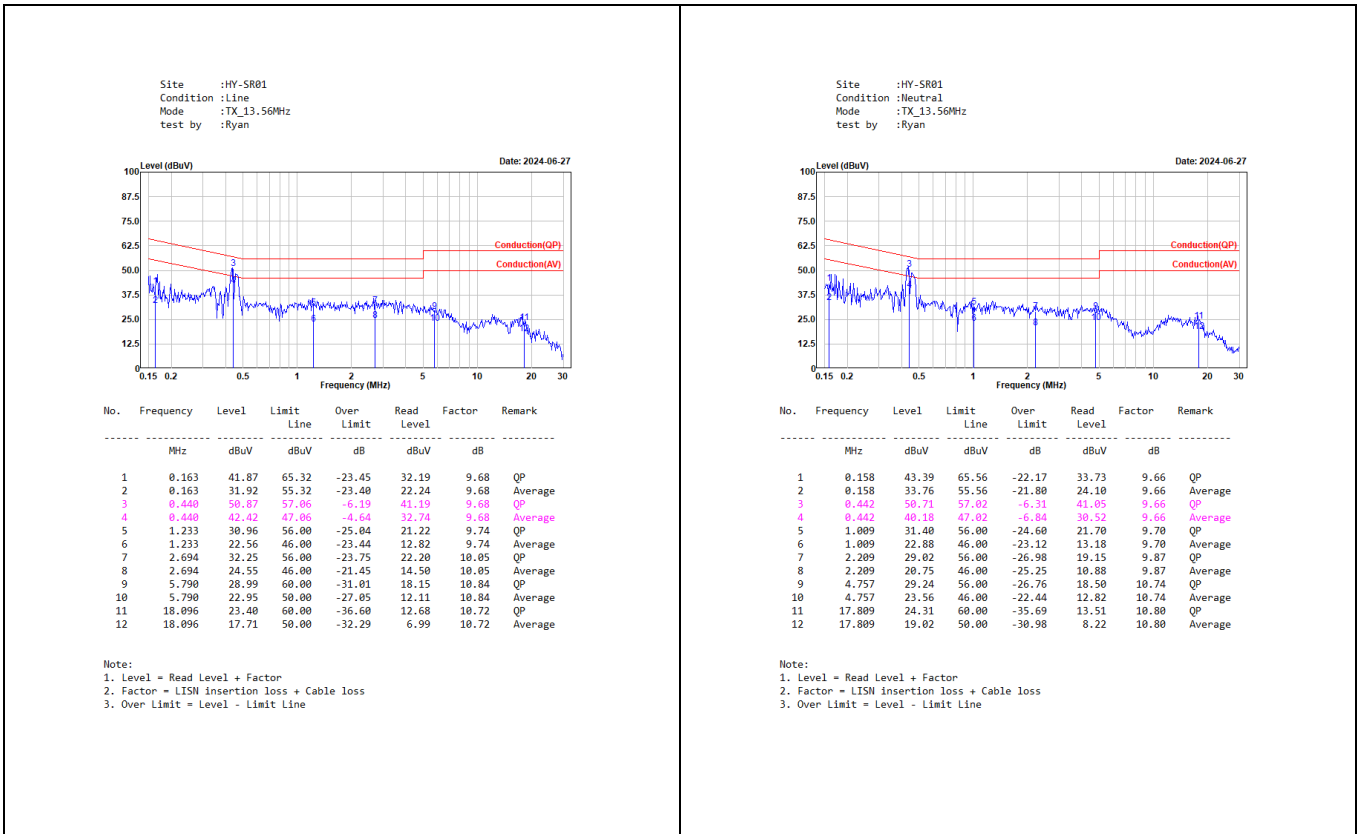

Appendix B. Test Result of Frequency Stability


Temperature (°C)	Voltage (V)	Observe Time	Declared Frequency (MHz)	Read Frequency (MHz)	Tolerance (%)	Limit (%)
20	120	start	13.56	13.55996	-0.000272	± 0.01 %
		2mins	13.56	13.55996	-0.000270	
		5mins	13.56	13.55996	-0.000273	
		10mins	13.56	13.55996	-0.000264	
20	138	start	13.56	13.55996	-0.000265	± 0.01 %
		2mins	13.56	13.55996	-0.000262	
		5mins	13.56	13.55996	-0.000260	
		10mins	13.56	13.55997	-0.000257	
20	102	start	13.56	13.55996	-0.000320	± 0.01 %
		2mins	13.56	13.55996	-0.000324	
		5mins	13.56	13.55996	-0.000317	
		10mins	13.56	13.55996	-0.000322	
50	120	start	13.56	13.55993	-0.000486	± 0.01 %
		2mins	13.56	13.55991	-0.000633	
		5mins	13.56	13.55993	-0.000552	
		10mins	13.56	13.55993	-0.000482	
40	120	start	13.56	13.55993	-0.000487	± 0.01 %
		2mins	13.56	13.55994	-0.000473	
		5mins	13.56	13.55994	-0.000475	
		10mins	13.56	13.55993	-0.000480	
30	120	start	13.56	13.55995	-0.000339	± 0.01 %
		2mins	13.56	13.55996	-0.000332	
		5mins	13.56	13.55995	-0.000334	
		10mins	13.56	13.55995	-0.000340	

10	120	start	13.56	13.55997	-0.000192	± 0.01 %
		2mins	13.56	13.55997	-0.000199	
		5mins	13.56	13.55998	-0.000170	
		10mins	13.56	13.55996	-0.000265	
0	120	start	13.56	13.55999	-0.000111	± 0.01 %
		2mins	13.56	13.55998	-0.000133	
		5mins	13.56	13.55998	-0.000155	
		10mins	13.56	13.55999	-0.000103	
-10	120	start	13.56	13.56002	0.000162	± 0.01 %
		2mins	13.56	13.56002	0.000155	
		5mins	13.56	13.56002	0.000170	
		10mins	13.56	13.56003	0.000229	
-20	120	start	13.56	13.56007	0.000483	± 0.01 %
		2mins	13.56	13.56007	0.000480	
		5mins	13.56	13.56007	0.000482	
		10mins	13.56	13.56007	0.000485	

Appendix C. Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_13.56MHz_X Test BY :Ashton</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>12.720</td><td>36.34</td><td>69.50</td><td>-33.16</td><td>13.99</td><td>22.35</td><td>QP</td></tr> <tr><td>2</td><td>13.158</td><td>35.57</td><td>80.50</td><td>-44.93</td><td>13.27</td><td>22.30</td><td>QP</td></tr> <tr><td>3</td><td>13.553</td><td>47.26</td><td>90.47</td><td>-43.21</td><td>24.96</td><td>22.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>51.72</td><td>124.00</td><td>-72.28</td><td>29.42</td><td>22.30</td><td>QP</td></tr> <tr><td>5</td><td>13.567</td><td>47.17</td><td>90.47</td><td>-43.30</td><td>24.87</td><td>22.30</td><td>QP</td></tr> <tr><td>6</td><td>13.870</td><td>36.06</td><td>80.50</td><td>-44.44</td><td>13.76</td><td>22.30</td><td>QP</td></tr> <tr><td>7</td><td>14.018</td><td>36.16</td><td>69.50</td><td>-33.34</td><td>13.86</td><td>22.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	12.720	36.34	69.50	-33.16	13.99	22.35	QP	2	13.158	35.57	80.50	-44.93	13.27	22.30	QP	3	13.553	47.26	90.47	-43.21	24.96	22.30	QP	4	13.560	51.72	124.00	-72.28	29.42	22.30	QP	5	13.567	47.17	90.47	-43.30	24.87	22.30	QP	6	13.870	36.06	80.50	-44.44	13.76	22.30	QP	7	14.018	36.16	69.50	-33.34	13.86	22.30	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_13.56MHz_X Test BY :Ashton</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>12.826</td><td>36.43</td><td>69.50</td><td>-33.07</td><td>14.10</td><td>22.33</td><td>QP</td></tr> <tr><td>2</td><td>13.164</td><td>36.90</td><td>80.50</td><td>-43.60</td><td>14.60</td><td>22.30</td><td>QP</td></tr> <tr><td>3</td><td>13.553</td><td>40.46</td><td>90.47</td><td>-50.01</td><td>18.16</td><td>22.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>44.30</td><td>124.00</td><td>-79.70</td><td>22.00</td><td>22.30</td><td>QP</td></tr> <tr><td>5</td><td>13.567</td><td>40.68</td><td>90.47</td><td>-49.79</td><td>18.38</td><td>22.30</td><td>QP</td></tr> <tr><td>6</td><td>13.834</td><td>36.02</td><td>80.50</td><td>-44.48</td><td>13.72</td><td>22.30</td><td>QP</td></tr> <tr><td>7</td><td>14.442</td><td>37.62</td><td>69.50</td><td>-31.88</td><td>15.32</td><td>22.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	12.826	36.43	69.50	-33.07	14.10	22.33	QP	2	13.164	36.90	80.50	-43.60	14.60	22.30	QP	3	13.553	40.46	90.47	-50.01	18.16	22.30	QP	4	13.560	44.30	124.00	-79.70	22.00	22.30	QP	5	13.567	40.68	90.47	-49.79	18.38	22.30	QP	6	13.834	36.02	80.50	-44.48	13.72	22.30	QP	7	14.442	37.62	69.50	-31.88	15.32	22.30	QP
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																											
1	12.720	36.34	69.50	-33.16	13.99	22.35	QP																																																																																																																																										
2	13.158	35.57	80.50	-44.93	13.27	22.30	QP																																																																																																																																										
3	13.553	47.26	90.47	-43.21	24.96	22.30	QP																																																																																																																																										
4	13.560	51.72	124.00	-72.28	29.42	22.30	QP																																																																																																																																										
5	13.567	47.17	90.47	-43.30	24.87	22.30	QP																																																																																																																																										
6	13.870	36.06	80.50	-44.44	13.76	22.30	QP																																																																																																																																										
7	14.018	36.16	69.50	-33.34	13.86	22.30	QP																																																																																																																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																											
1	12.826	36.43	69.50	-33.07	14.10	22.33	QP																																																																																																																																										
2	13.164	36.90	80.50	-43.60	14.60	22.30	QP																																																																																																																																										
3	13.553	40.46	90.47	-50.01	18.16	22.30	QP																																																																																																																																										
4	13.560	44.30	124.00	-79.70	22.00	22.30	QP																																																																																																																																										
5	13.567	40.68	90.47	-49.79	18.38	22.30	QP																																																																																																																																										
6	13.834	36.02	80.50	-44.48	13.72	22.30	QP																																																																																																																																										
7	14.442	37.62	69.50	-31.88	15.32	22.30	QP																																																																																																																																										
<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_13.56MHz_Y Test BY :Ashton</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>12.710</td><td>36.96</td><td>69.50</td><td>-32.54</td><td>14.60</td><td>22.36</td><td>QP</td></tr> <tr><td>2</td><td>13.346</td><td>43.25</td><td>80.50</td><td>-37.25</td><td>20.95</td><td>22.30</td><td>QP</td></tr> <tr><td>3</td><td>13.553</td><td>55.70</td><td>90.47</td><td>-34.77</td><td>33.40</td><td>22.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>60.54</td><td>124.00</td><td>-63.46</td><td>38.24</td><td>22.30</td><td>QP</td></tr> <tr><td>5</td><td>13.567</td><td>55.39</td><td>90.47</td><td>-35.08</td><td>33.09</td><td>22.30</td><td>QP</td></tr> <tr><td>6</td><td>13.770</td><td>42.87</td><td>80.50</td><td>-37.63</td><td>20.57</td><td>22.30</td><td>QP</td></tr> <tr><td>7</td><td>14.162</td><td>36.34</td><td>69.50</td><td>-33.16</td><td>14.04</td><td>22.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	12.710	36.96	69.50	-32.54	14.60	22.36	QP	2	13.346	43.25	80.50	-37.25	20.95	22.30	QP	3	13.553	55.70	90.47	-34.77	33.40	22.30	QP	4	13.560	60.54	124.00	-63.46	38.24	22.30	QP	5	13.567	55.39	90.47	-35.08	33.09	22.30	QP	6	13.770	42.87	80.50	-37.63	20.57	22.30	QP	7	14.162	36.34	69.50	-33.16	14.04	22.30	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_13.56MHz_Y Test BY :Ashton</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit Line</th> <th>Over Limit</th> <th>Read Level</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>12.896</td><td>36.52</td><td>69.50</td><td>-32.98</td><td>14.20</td><td>22.32</td><td>QP</td></tr> <tr><td>2</td><td>13.346</td><td>39.45</td><td>80.50</td><td>-41.05</td><td>17.15</td><td>22.30</td><td>QP</td></tr> <tr><td>3</td><td>13.553</td><td>52.12</td><td>90.47</td><td>-38.35</td><td>29.82</td><td>22.30</td><td>QP</td></tr> <tr><td>4</td><td>13.560</td><td>56.98</td><td>124.00</td><td>-67.02</td><td>34.68</td><td>22.30</td><td>QP</td></tr> <tr><td>5</td><td>13.567</td><td>52.21</td><td>90.47</td><td>-38.26</td><td>29.91</td><td>22.30</td><td>QP</td></tr> <tr><td>6</td><td>13.770</td><td>40.61</td><td>80.50</td><td>-39.89</td><td>18.31</td><td>22.30</td><td>QP</td></tr> <tr><td>7</td><td>14.300</td><td>38.05</td><td>69.50</td><td>-31.45</td><td>15.75</td><td>22.30</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	12.896	36.52	69.50	-32.98	14.20	22.32	QP	2	13.346	39.45	80.50	-41.05	17.15	22.30	QP	3	13.553	52.12	90.47	-38.35	29.82	22.30	QP	4	13.560	56.98	124.00	-67.02	34.68	22.30	QP	5	13.567	52.21	90.47	-38.26	29.91	22.30	QP	6	13.770	40.61	80.50	-39.89	18.31	22.30	QP	7	14.300	38.05	69.50	-31.45	15.75	22.30	QP
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																											
1	12.710	36.96	69.50	-32.54	14.60	22.36	QP																																																																																																																																										
2	13.346	43.25	80.50	-37.25	20.95	22.30	QP																																																																																																																																										
3	13.553	55.70	90.47	-34.77	33.40	22.30	QP																																																																																																																																										
4	13.560	60.54	124.00	-63.46	38.24	22.30	QP																																																																																																																																										
5	13.567	55.39	90.47	-35.08	33.09	22.30	QP																																																																																																																																										
6	13.770	42.87	80.50	-37.63	20.57	22.30	QP																																																																																																																																										
7	14.162	36.34	69.50	-33.16	14.04	22.30	QP																																																																																																																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																											
1	12.896	36.52	69.50	-32.98	14.20	22.32	QP																																																																																																																																										
2	13.346	39.45	80.50	-41.05	17.15	22.30	QP																																																																																																																																										
3	13.553	52.12	90.47	-38.35	29.82	22.30	QP																																																																																																																																										
4	13.560	56.98	124.00	-67.02	34.68	22.30	QP																																																																																																																																										
5	13.567	52.21	90.47	-38.26	29.91	22.30	QP																																																																																																																																										
6	13.770	40.61	80.50	-39.89	18.31	22.30	QP																																																																																																																																										
7	14.300	38.05	69.50	-31.45	15.75	22.30	QP																																																																																																																																										


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_13.56MHz_Z
 Test BY :Ashton

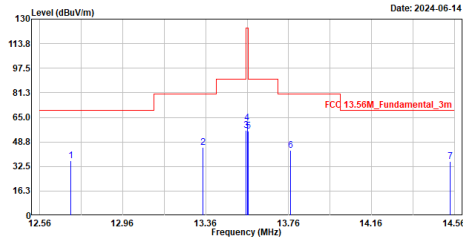

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	12.710	36.40	69.50	-33.02	14.12	22.36	QP
2	13.346	45.07	80.50	-35.43	22.77	22.30	QP
3	13.553	56.23	90.47	-34.24	33.93	22.30	QP
4	13.560	61.16	124.00	-62.84	38.86	22.30	QP
5	13.567	55.94	90.47	-34.53	33.64	22.30	QP
6	13.770	43.39	80.50	-37.11	21.09	22.30	QP
7	14.540	35.92	69.50	-33.58	13.62	22.30	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_13.56MHz_Z
 Test BY :Ashton

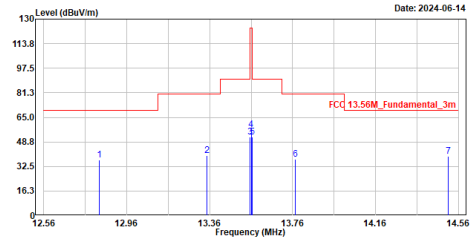

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	12.028	36.61	69.50	-32.89	14.28	22.33	QP
2	13.346	39.96	80.50	-40.54	17.66	22.30	QP
3	13.553	52.24	90.47	-38.23	29.94	22.30	QP
4	13.560	57.04	124.00	-66.96	34.74	22.30	QP
5	13.567	52.16	90.47	-38.31	29.86	22.30	QP
6	13.772	37.47	80.50	-43.03	15.17	22.30	QP
7	14.512	39.22	69.50	-30.28	16.92	22.30	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line

Appendix D. Test Result of Radiated Emission

<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_13.56MHz Test BY :Ashton</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>2.653</td><td>31.67</td><td>69.50</td><td>-37.83</td><td>11.77</td><td>19.90</td><td>QP</td></tr> <tr><td>2</td><td>3.980</td><td>31.70</td><td>69.50</td><td>-37.80</td><td>11.41</td><td>20.29</td><td>QP</td></tr> <tr><td>3</td><td>6.168</td><td>33.25</td><td>69.50</td><td>-36.25</td><td>11.55</td><td>21.70</td><td>QP</td></tr> <tr><td>4</td><td>8.743</td><td>33.06</td><td>69.50</td><td>-36.44</td><td>11.36</td><td>21.70</td><td>QP</td></tr> <tr><td>5</td><td>19.676</td><td>34.37</td><td>69.50</td><td>-35.13</td><td>11.14</td><td>23.23</td><td>QP</td></tr> <tr><td>6</td><td>26.136</td><td>34.24</td><td>69.50</td><td>-35.26</td><td>11.23</td><td>23.01</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2.653	31.67	69.50	-37.83	11.77	19.90	QP	2	3.980	31.70	69.50	-37.80	11.41	20.29	QP	3	6.168	33.25	69.50	-36.25	11.55	21.70	QP	4	8.743	33.06	69.50	-36.44	11.36	21.70	QP	5	19.676	34.37	69.50	-35.13	11.14	23.23	QP	6	26.136	34.24	69.50	-35.26	11.23	23.01	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_13.56MHz Test BY :Ashton</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>2.131</td><td>30.41</td><td>69.50</td><td>-39.09</td><td>10.51</td><td>19.90</td><td>QP</td></tr> <tr><td>2</td><td>3.250</td><td>30.88</td><td>69.50</td><td>-38.62</td><td>10.88</td><td>20.00</td><td>QP</td></tr> <tr><td>3</td><td>4.387</td><td>30.49</td><td>69.50</td><td>-39.01</td><td>10.11</td><td>20.38</td><td>QP</td></tr> <tr><td>4</td><td>6.582</td><td>32.63</td><td>69.50</td><td>-36.87</td><td>10.93</td><td>21.70</td><td>QP</td></tr> <tr><td>5</td><td>9.794</td><td>32.42</td><td>69.50</td><td>-37.08</td><td>10.40</td><td>22.02</td><td>QP</td></tr> <tr><td>6</td><td>18.741</td><td>34.23</td><td>69.50</td><td>-35.27</td><td>10.98</td><td>23.25</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2.131	30.41	69.50	-39.09	10.51	19.90	QP	2	3.250	30.88	69.50	-38.62	10.88	20.00	QP	3	4.387	30.49	69.50	-39.01	10.11	20.38	QP	4	6.582	32.63	69.50	-36.87	10.93	21.70	QP	5	9.794	32.42	69.50	-37.08	10.40	22.02	QP	6	18.741	34.23	69.50	-35.27	10.98	23.25	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	2.653	31.67	69.50	-37.83	11.77	19.90	QP																																																																																																																										
2	3.980	31.70	69.50	-37.80	11.41	20.29	QP																																																																																																																										
3	6.168	33.25	69.50	-36.25	11.55	21.70	QP																																																																																																																										
4	8.743	33.06	69.50	-36.44	11.36	21.70	QP																																																																																																																										
5	19.676	34.37	69.50	-35.13	11.14	23.23	QP																																																																																																																										
6	26.136	34.24	69.50	-35.26	11.23	23.01	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	2.131	30.41	69.50	-39.09	10.51	19.90	QP																																																																																																																										
2	3.250	30.88	69.50	-38.62	10.88	20.00	QP																																																																																																																										
3	4.387	30.49	69.50	-39.01	10.11	20.38	QP																																																																																																																										
4	6.582	32.63	69.50	-36.87	10.93	21.70	QP																																																																																																																										
5	9.794	32.42	69.50	-37.08	10.40	22.02	QP																																																																																																																										
6	18.741	34.23	69.50	-35.27	10.98	23.25	QP																																																																																																																										
<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_30M-1G Test BY :Bob</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>171.620</td><td>25.14</td><td>43.50</td><td>-18.36</td><td>49.52</td><td>-24.38</td><td>QP</td></tr> <tr><td>2</td><td>216.240</td><td>30.35</td><td>46.00</td><td>-15.65</td><td>56.54</td><td>-26.19</td><td>QP</td></tr> <tr><td>3</td><td>319.060</td><td>29.89</td><td>46.00</td><td>-16.11</td><td>52.19</td><td>-22.30</td><td>QP</td></tr> <tr><td>4</td><td>442.250</td><td>24.79</td><td>46.00</td><td>-21.21</td><td>43.69</td><td>-18.90</td><td>QP</td></tr> <tr><td>5</td><td>608.120</td><td>23.70</td><td>46.00</td><td>-22.30</td><td>38.96</td><td>-15.26</td><td>QP</td></tr> <tr><td>6</td><td>696.390</td><td>26.22</td><td>46.00</td><td>-19.78</td><td>40.12</td><td>-13.90</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	171.620	25.14	43.50	-18.36	49.52	-24.38	QP	2	216.240	30.35	46.00	-15.65	56.54	-26.19	QP	3	319.060	29.89	46.00	-16.11	52.19	-22.30	QP	4	442.250	24.79	46.00	-21.21	43.69	-18.90	QP	5	608.120	23.70	46.00	-22.30	38.96	-15.26	QP	6	696.390	26.22	46.00	-19.78	40.12	-13.90	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_30M-1G Test BY :Bob</p> <p>Date: 2024-06-14</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>30.000</td><td>28.20</td><td>40.00</td><td>-11.80</td><td>53.15</td><td>-24.95</td><td>QP</td></tr> <tr><td>2</td><td>127.000</td><td>29.35</td><td>43.50</td><td>-14.15</td><td>54.89</td><td>-25.54</td><td>QP</td></tr> <tr><td>3</td><td>331.670</td><td>25.70</td><td>46.00</td><td>-20.30</td><td>47.54</td><td>-21.84</td><td>QP</td></tr> <tr><td>4</td><td>455.830</td><td>27.88</td><td>46.00</td><td>-18.12</td><td>46.45</td><td>-18.57</td><td>QP</td></tr> <tr><td>5</td><td>504.330</td><td>28.87</td><td>46.00</td><td>-17.13</td><td>46.64</td><td>-17.77</td><td>QP</td></tr> <tr><td>6</td><td>697.360</td><td>25.33</td><td>46.00</td><td>-20.67</td><td>39.22</td><td>-13.89</td><td>QP</td></tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	30.000	28.20	40.00	-11.80	53.15	-24.95	QP	2	127.000	29.35	43.50	-14.15	54.89	-25.54	QP	3	331.670	25.70	46.00	-20.30	47.54	-21.84	QP	4	455.830	27.88	46.00	-18.12	46.45	-18.57	QP	5	504.330	28.87	46.00	-17.13	46.64	-17.77	QP	6	697.360	25.33	46.00	-20.67	39.22	-13.89	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	171.620	25.14	43.50	-18.36	49.52	-24.38	QP																																																																																																																										
2	216.240	30.35	46.00	-15.65	56.54	-26.19	QP																																																																																																																										
3	319.060	29.89	46.00	-16.11	52.19	-22.30	QP																																																																																																																										
4	442.250	24.79	46.00	-21.21	43.69	-18.90	QP																																																																																																																										
5	608.120	23.70	46.00	-22.30	38.96	-15.26	QP																																																																																																																										
6	696.390	26.22	46.00	-19.78	40.12	-13.90	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	30.000	28.20	40.00	-11.80	53.15	-24.95	QP																																																																																																																										
2	127.000	29.35	43.50	-14.15	54.89	-25.54	QP																																																																																																																										
3	331.670	25.70	46.00	-20.30	47.54	-21.84	QP																																																																																																																										
4	455.830	27.88	46.00	-18.12	46.45	-18.57	QP																																																																																																																										
5	504.330	28.87	46.00	-17.13	46.64	-17.77	QP																																																																																																																										
6	697.360	25.33	46.00	-20.67	39.22	-13.89	QP																																																																																																																										