



FCC ID: M82-AIM75L
Report No.: T201102D09-RP13

Page: 1 / 98
Rev.: 00

FCC 47 CFR PART 22 SUBPART H

TEST REPORT

For

Tablet PC

Model No.:

AIM-75S-6; AIM-75H-6; AIM-75S-6XXXXXXXXXXXXXXXXXX;
AIM-75H-6XXXXXXXXXXXXXXXXXX; AIM75S-6XXXXXXXXXXXXXXXXXX;
AIM75H-6XXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric
character, "-" or blank)

Trade Name: ADVANTECH

Issued to

Advantech Co., Ltd.

**No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan,
R.O.C.**

Issued by

Compliance Certification Services Inc.

Wugu Laboratory

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)**

Issued Date: September 7, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T201102D09-RP13

Page: 2 / 98

Rev.: 00

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 7, 2021	Initial Issue	ALL	Doris Chu



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	6
3. TEST METHODOLOGY.....	9
3.1 EUT CONFIGURATION	9
3.2 DESCRIPTION OF TEST MODES	9
4. TEST SUMMERY.....	11
5. INSTRUMENT CALIBRATION.....	12
5.1 MEASURING INSTRUMENT CALIBRATION	12
5.2 MEASUREMENT EQUIPMENT USED	12
5.3 MEASUREMENT UNCERTAINTY	14
6. FACILITIES AND ACCREDITATIONS.....	15
6.1 FACILITIES.....	15
6.2 EQUIPMENT.....	15
6.3 LABORATORY ACCREDITATIONS AND LISTING	15
7. SETUP OF EQUIPMENT UNDER TEST.....	16
7.1 SETUP CONFIGURATION OF EUT	16
7.2 SUPPORT EQUIPMENT	16
8. FCC PART 22 REQUIREMENTS.....	17
8.1 ERP MEASUREMENT	17
8.2 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	23
8.3 OCCUPIED BANDWIDTH MEASUREMENT	25
8.4 PEAK TO AVERAGE POWER RATIO	58
8.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS	70
8.6 SPURIOUS RADIATION MEASUREMENT	91
9. APPENDIX A PHOTOGRAPHS OF TEST SETUP	A-1
APPENDIX 1 - PHOTOGRAPHS OF EUT	



Report No.: T201102D09-RP13

Page: 4 / 98

Rev.: 00

1. TEST RESULT CERTIFICATION

Applicant: Advantech Co., Ltd.
No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.

Manufacturer: Advantech Co., Ltd.
No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.

Equipment Under Test: Tablet PC

Trade Name: ADVANTECH

Model No.: AIM-75S-6; AIM-75H-6; AIM-75S-6XXXXXXXXXXXXXXXXXX;
AIM-75H-6XXXXXXXXXXXXXXXXXX;
AIM75S-6XXXXXXXXXXXXXXXXXX;
AIM75H-6XXXXXXXXXXXXXXXXXX (where "X" may be any
alphanumeric character, "-" or blank)

Date of Test: December 14, 2020 ~ August 26, 2021



Report No.: T201102D09-RP13

Page: 5 / 98

Rev.: 00

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR PART 22 SUBPART H	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA -603-E and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rule FCC PART 22 Subpart H.

Approved by:

Kevin Tsai
Deputy Manager
Compliance Certification Services Inc.



Report No.: T201102D09-RP13

Page: 6 / 98

Rev.: 00

2. EUT DESCRIPTION

Product	Tablet PC	
Model No.	AIM-75S-6; AIM-75H-6; AIM-75S-6XXXXXXXXXXXXXXXXXX; AIM-75H-6XXXXXXXXXXXXXXXXXX; AIM75S-6XXXXXXXXXXXXXXXXXX; AIM75H-6XXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric character, "-" or blank)	
Model Discrepancy	Please see remark as below.	
Trade	ADVANTECH	
Received Date	November 2, 2020	
Power Supply	1. EUT Power by Adapter. (1) FSP / FSP045-A1BR I/P: 100-240Vac, 50-60Hz, 1.2A O/P: 5Vdc, 3.0A, 15.0W; 9.0Vdc, 3.0A, 27.0W; 12.0Vdc, 3.0A, 36.0W; 15.0Vdc, 3.0A, 45.0W; 20.0Vdc, 2.25A, 45.0W (2) GlobTek, Inc / GTM96605-GEN2-A1-T2 I/P: 100-240Vac, 50-60Hz, 1.5A O/P: 5Vdc, 4.6A; 5.8Vdc, 4.6A; 9Vdc, 4.4A; 12Vdc, 4A; 15Vdc, 3.6A; 20Vdc, 3A (3) DELTA / MEA-045AA2C I/P: 100-240V~1.0A Max. 50-60Hz O/P: 5VDC, 3A; 9VDC, 3A; 10VDC, 3A; 12VDC, 3A; 15VDC, 3A; 20VDC, 2.25A 2. EUT Power by Rechargeable Li-ion Battery. ADVANTECH / AIM-BAT-8 Rating: 3.8Vdc, 4900mAh, 18.62Wh	
Frequency Range	LTE Band 26 Channel Bandwidth: 1.4MHz	824.7MHz ~ 848.3MHz
	LTE Band 26 Channel Bandwidth: 3MHz	825.5MHz ~ 847.5MHz
	LTE Band 26 Channel Bandwidth: 5MHz	826.5MHz ~ 846.5MHz
	LTE Band 26 Channel Bandwidth: 10MHz	829MHz ~ 844MHz
	LTE Band 26 Channel Bandwidth: 15MHz	831.5MHz ~ 841.5MHz
Modulation Technique	LTE Band 26	QPSK, 16QAM, 64QAM

Transmit Power (ERP Power)	LTE Band 26 Channel Bandwidth: 1.4MHz	QPSK: 19.72 dBm 16QAM: 18.83 dBm 64QAM: 18.74 dBm
	LTE Band 26 Channel Bandwidth: 3MHz	QPSK: 19.74 dBm 16QAM: 19.03 dBm 64QAM: 18.87 dBm
	LTE Band 26 Channel Bandwidth: 5MHz	QPSK: 19.87 dBm 16QAM: 18.97 dBm 64QAM: 18.87 dBm
	LTE Band 26 Channel Bandwidth: 10MHz	QPSK: 19.82 dBm 16QAM: 19.11 dBm 64QAM: 18.69 dBm
	LTE Band 26 Channel Bandwidth: 15MHz	QPSK: 19.69 dBm 16QAM: 19.06 dBm 64QAM: 18.84 dBm
Antenna Specification	Antenna type: PIFA 1. YAGEO / 6036B0281601 / Main (TX) Band 26: -0.97 dBi 2. YAGEO / 6036B0281701 / Aux Band 26: 0.38 dBi	
HW Version	AX2	
SW Version	0.3.6.9_20201021.021551	
EUT Serial #	200CT32E00162	
Module	Quectel / EM06-A	



Report No.: T201102D09-RP13

Page: 8 / 98

Rev.: 00

Remark:

1. For more details, refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.
3. Disclaimer: Variant information between/among model numbers / trademarks are provided by the applicant, test results of this report are applicable to the sample EUT received of main test model name.
4. Model Discrepancy:

Model	Adapter	Tablet color
AIM-75H-6	1. GlobTek, Inc / GTM96605-GEN2-A1-T2 I/P: 100-240VAC, 50-60Hz, 1.5A O/P: 5VDC, 4.6A; 5.8VDC, 4.6A; 9VDC, 4.4A; 12VDC, 4A; 15VDC, 3.6A; 20VDC, 3A 2. DELTA / MEA-045AA2C IP: 100-240V~1.0A Max. 50-60Hz O/P: 5VDC, 3A; 9VDC, 3A; 10VDC, 3A; 12VDC, 3A; 15VDC, 3A; 20VDC, 2.25A	White
AIM-75S-6	1. FSP / FSP045-A1BR I/P: 100-240VAC, 50-60Hz, 1.2A O/P: 5.0VDC, 3.0A 15.0W; 9.0VDC, 3.0A 27.0W; 12.0VDC, 3.0A 36.0W; 15.0VDC, 3.0A 45.0W; 20.0VDC, 2.25A 45.0W	Black
AIM-75S-6XXXXXXXXXXXXXXXXXX; AIM-75H-6XXXXXXXXXXXXXXXXXX; AIM75S-6XXXXXXXXXXXXXXXXXX; AIM75H-6XXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric character, "-" or blank)	All the above models are identical except for the designation of model numbers. The suffix of (where "X" may be any alphanumeric character, "-" or blank) on model number is just for marketing purpose only.	

3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures document on FCC CFR 47, Part 2 and Part 22 Subpart H, KDB 971168 D01 Power Meas License Digital Systems.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 DESCRIPTION OF TEST MODES

The EUT (Model: AIM-75S-6) had been tested under operating condition.
The EUT be set in maximum power transmission via call box during testing.

LTE Band 26: 824 MHz ~ 849 MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	1.4MHz		3MHz		5MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low channel (L)	26797	824.7	26805	825.5	26815	826.5
Middle channel (M)	26915	836.5	26915	836.5	26915	836.5
High channel (H)	27033	848.3	27025	847.5	27015	846.5
Channel Bandwidth	10MHz		15MHz			
	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
Low channel (L)	26840	829	26865	831.5		
Middle channel (M)	26915	836.5	26915	836.5		
High channel (H)	26990	844	26965	841.5		

3.2.1 The worst mode of measurement

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Adapter. (GlobTek) Mode 2: EUT power by Adapter. (FSP) Mode 3: EUT power by Adapter. (DELTA) Mode 4: EUT power by Battery
Worst Mode	☐ Mode 1 ☒ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☒ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Adapter. (GlobTek) Mode 2: EUT power by Adapter. (FSP) Mode 3: EUT power by Adapter. (DELTA) Mode 4: EUT power by Battery
Worst Mode	☐ Mode 1 ☒ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X, Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report



Report No.: T201102D09-RP13

Page: 11 / 98

Rev.: 00

4. TEST SUMMERY

FCC Standard Sec.	Report Section	Test Item	Result
-	2	Antenna Requirement	Pass
22.913(a)	8.1	ERP Measurement	Pass
22.355	8.2	Frequency Stability v.s. temperature measurement	Pass
2.1049	8.3	Occupied Bandwidth Measurement	Pass
22.913(d)	8.4	Peak to Average Ratio	Pass
22.917(a)	8.5	Out of Band Emission at Antenna Terminals	Pass
22.917(a)	8.7	Spurious Radiation Measurement	Pass

5. INSTRUMENT CALIBRATION

5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC003	06/29/2020	06/28/2021
Power Divider	Solvang Technology	STI08-0015	008	08/05/2020	08/04/2021
Radio Communication Analyzer	Anritsu	MT-8820C	6201240043	07/17/2020	07/16/2021
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	09/24/2020	09/23/2021
EXA Signal Analyzer	KEYSIGHT	N9010B	MY55460167	09/07/2020	09/06/2021
Software	N/A				

Test date for August 26, 2021

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC003	06/28/2021	06/27/2022
Coaxial Cable	Woken	WC12	CC001	06/28/2021	06/27/2022
Power Divider	Solvang Technology	STI08-0015	008	07/26/2021	07/25/2022
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	09/24/2020	09/23/2021
EXA Signal Analyzer	KEYSIGHT	N9010B	MY55460167	09/07/2020	09/06/2021
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/06/2021	07/05/2022
Software	E3 6.11-20180413 & Radio Test Software Ver.21 & LTE Measurement_Power-Ver. 21				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/25/2020	02/24/2021
Bilog Antenna	Sunol Sciences	JB3	A030105	07/24/2020	07/23/2021
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/25/2020	02/24/2021
Coaxial Cable	EMCI	EMC105	190914+327109/4	09/19/2020	09/18/2021
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/15/2020	01/14/2021
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	09/30/2020	09/29/2021
Loop Ant	COM-POWER	AL-130	121051	03/27/2020	03/26/2021
Pre-Amplifier	EMEC	EM330	060609	02/25/2020	02/24/2021
Pre-Amplifier	EMEC	EM01G26G	060570	06/29/2020	06/28/2021
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	07/24/2020	07/23/2021
S.G.	Agilent	E8257C	US42340383	07/21/2020	07/20/2021
Bilog Antenna	Sunol Sciences	JB1	A052609	07/24/2020	07/23/2021
Horn Antenna	ETS LINDGREN	3117	00055165	07/22/2020	07/21/2021
Horn Antenna	EMCO	3116	2487	05/11/2020	05/10/2021
Horn Antenna	ETS LINDGREN	3116	00026370	12/11/2020	12/10/2021
K Type Cable	Huber+Suhner	SUCOFLEX 102	29406/2	12/09/2020	12/08/2021
K Type Cable	Huber+Suhner	SUCOFLEX 102	22470/2	12/09/2020	12/08/2021
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Report No.: T201102D09-RP13

Page: 15 / 98

Rev.: 00

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

Canada Regisreation number: 2324G

The lab has been recognized as the FCC accredited lad under the KDB 974614 D01 and is listed in the FCC pubic Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.



Report No.: T201102D09-RP13

Page: 16 / 98

Rev.: 00

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

7.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	IC
1	NB(J)	TOSHIBA	PT345T-00L002	N/A	PD97260H	1000M-7260H

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



Report No.: T201102D09-RP13

Page: 17 / 98

Rev.: 00

8. FCC PART 22 REQUIREMENTS

8.1 ERP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 22.913(b):

The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.

TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:

1. The transmitter output power was connected to the call box.
2. Set EUT at maximum output power via call box.
3. Set Call box at lowest, middle and highest channels for each band and modulation.

TEST RESULTS

No non-compliance noted.

Temperature: 25°C

Humidity: 57% RH

Tested by: Jerry Chang

Test Date: May 25, 2021

LTE Band 26

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	Conducted power(dBm)								
			QPSK			16QAM			64QAM		
			CH-Low 26797	CH-Mid 26915	CH-High 27033	CH-Low 26797	CH-Mid 26915	CH-High 27033	CH-Low 26797	CH-Mid 26915	CH-High 27033
			824.7 MHz	836.5 MHz	848.3 MHz	824.7 MHz	836.5 MHz	848.3 MHz	824.7 MHz	836.5 MHz	848.3 MHz
1.4	1	0	22.42	22.8	22.46	21.9	21.83	21.68	21.83	21.55	21.73
	1	5	22.42	22.84	22.37	21.95	21.81	21.57	21.73	21.7	21.69
	3	2	22.64	22.83	22.58	21.68	21.89	21.55	21.79	21.86	21.35
	6	0	21.61	21.83	21.62	20.7	20.84	20.67	20.79	20.86	20.57

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	ERP (dBm)								
			QPSK			16QAM			64QAM		
			CH-Low 26797	CH-Mid 26915	CH-High 27033	CH-Low 26797	CH-Mid 26915	CH-High 27033	CH-Low 26797	CH-Mid 26915	CH-High 27033
			824.7 MHz	836.5 MHz	848.3 MHz	824.7 MHz	836.5 MHz	848.3 MHz	824.7 MHz	836.5 MHz	848.3 MHz
1.4	1	0	19.3	19.68	19.34	18.78	18.71	18.56	18.71	18.43	18.61
	1	5	19.3	19.72	19.25	18.83	18.69	18.45	18.61	18.58	18.57
	3	2	19.52	19.71	19.46	18.56	18.77	18.43	18.67	18.74	18.23
	6	0	18.49	18.71	18.5	17.58	17.72	17.55	17.67	17.74	17.45

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	Conducted power(dBm)								
			QPSK			16QAM			64QAM		
			CH-Low 26805	CH-Mid 26915	CH-High 27025	CH-Low 26805	CH-Mid 26915	CH-High 27025	CH-Low 26805	CH-Mid 26915	CH-High 27025
			825.5 MHz	836.5 MHz	847.5 MHz	825.5 MHz	836.5 MHz	847.5 MHz	825.5 MHz	836.5 MHz	847.5 MHz
3	1	0	22.6	22.86	22.65	22.15	22.02	22	21.99	21.84	21.68
	1	14	22.56	22.84	22.69	21.97	22.05	21.83	21.88	21.83	21.42
	8	4	21.84	22.05	21.73	20.91	20.96	20.85	20.93	20.98	20.72
	15	0	21.79	21.89	21.67	20.88	20.86	20.7	20.76	20.89	20.74

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	ERP (dBm)								
			QPSK			16QAM			64QAM		
			CH-Low 26805	CH-Mid 26915	CH-High 27025	CH-Low 26805	CH-Mid 26915	CH-High 27025	CH-Low 26805	CH-Mid 26915	CH-High 27025
			825.5 MHz	836.5 MHz	847.5 MHz	825.5 MHz	836.5 MHz	847.5 MHz	825.5 MHz	836.5 MHz	847.5 MHz
3	1	0	19.48	19.74	19.53	19.03	18.9	18.88	18.87	18.72	18.56
	1	14	19.44	19.72	19.57	18.85	18.93	18.71	18.76	18.71	18.3
	8	4	18.72	18.93	18.61	17.79	17.84	17.73	17.81	17.86	17.6
	15	0	18.67	18.77	18.55	17.76	17.74	17.58	17.64	17.77	17.62

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	Conducted power(dBm)								
			QPSK			16QAM			64QAM		
			CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High
			26815	26915	27015	26815	26915	27015	26815	26915	27015
			826.5 MHz	836.5 MHz	846.5 MHz	826.5 MHz	836.5 MHz	846.5 MHz	826.5 MHz	836.5 MHz	846.5 MHz
5	1	0	22.68	22.99	22.94	21.68	22.09	22.08	21.9	21.99	21.7
	1	24	22.76	22.94	22.82	21.72	22.02	21.92	21.93	21.98	21.71
	12	6	21.93	21.95	21.85	20.97	20.98	20.8	20.66	20.95	20.64
	25	0	21.76	21.89	21.73	20.8	20.82	20.72	20.79	20.91	20.79

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	ERP (dBm)								
			QPSK			16QAM			64QAM		
			CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High
			26815	26915	27015	26815	26915	27015	26815	26915	27015
			826.5 MHz	836.5 MHz	846.5 MHz	826.5 MHz	836.5 MHz	846.5 MHz	826.5 MHz	836.5 MHz	846.5 MHz
5	1	0	19.56	19.87	19.82	18.56	18.97	18.96	18.78	18.87	18.58
	1	24	19.64	19.82	19.7	18.6	18.9	18.8	18.81	18.86	18.59
	12	6	18.81	18.83	18.73	17.85	17.86	17.68	17.54	17.83	17.52
	25	0	18.64	18.77	18.61	17.68	17.7	17.6	17.67	17.79	17.67

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	Conducted power(dBm)								
			QPSK			16QAM			64QAM		
			CH-Low 26840	CH-Mid 26915	CH-High 26990	CH-Low 26840	CH-Mid 26915	CH-High 26990	CH-Low 26840	CH-Mid 26915	CH-High 26990
			829 MHz	836.5 MHz	844 MHz	829 MHz	836.5 MHz	844 MHz	829 MHz	836.5 MHz	844 MHz
10	1	0	22.75	22.8	22.94	21.99	21.18	22.05	21.81	21.79	21.57
	1	49	22.82	22.74	22.72	21.97	22.23	21.85	21.66	21.67	21.29
	25	12	21.82	21.87	21.98	20.91	20.96	20.97	20.92	20.73	20.93
	50	0	21.92	21.98	21.97	20.94	20.95	20.94	20.94	20.95	19.84

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	ERP (dBm)								
			QPSK			16QAM			64QAM		
			CH-Low 26840	CH-Mid 26915	CH-High 26990	CH-Low 26840	CH-Mid 26915	CH-High 26990	CH-Low 26840	CH-Mid 26915	CH-High 26990
			829 MHz	836.5 MHz	844 MHz	829 MHz	836.5 MHz	844 MHz	829 MHz	836.5 MHz	844 MHz
10	1	0	19.63	19.68	19.82	18.87	18.06	18.93	18.69	18.67	18.45
	1	49	19.7	19.62	19.6	18.85	19.11	18.73	18.54	18.55	18.17
	25	12	18.7	18.75	18.86	17.79	17.84	17.85	17.8	17.61	17.81
	50	0	18.8	18.86	18.85	17.82	17.83	17.82	17.82	17.83	16.72

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	Conducted power(dBm)								
			QPSK			16QAM			64QAM		
			CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High
			26865	26915	26965	26865	26915	26965	26865	26915	26965
			831.5 MHz	836.5 MHz	841.5 MHz	831.5 MHz	836.5 MHz	841.5 MHz	831.5 MHz	836.5 MHz	841.5 MHz
15	1	0	22.78	22.69	22.81	21.97	22.18	21.86	21.8	21.83	21.07
	1	74	22.67	22.63	22.65	21.96	21.73	21.53	21.78	21.96	20.45
	36	19	21.92	21.85	21.86	20.91	20.88	20.86	20.87	20.91	20.89
	75	0	21.91	21.8	21.78	20.89	20.85	20.69	20.86	20.85	20.75

LTE Band 26_Uplink frequency band : 824 to 849 MHz											
BW (MHz)	RB Size	RB Offset	ERP (dBm)								
			QPSK			16QAM			64QAM		
			CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High	CH-Low	CH-Mid	CH-High
			26865	26915	26965	26865	26915	26965	26865	26915	26965
			831.5 MHz	836.5 MHz	841.5 MHz	831.5 MHz	836.5 MHz	841.5 MHz	831.5 MHz	836.5 MHz	841.5 MHz
15	1	0	19.66	19.57	19.69	18.85	19.06	18.74	18.68	18.71	17.95
	1	74	19.55	19.51	19.53	18.84	18.61	18.41	18.66	18.84	17.33
	36	19	18.8	18.73	18.74	17.79	17.76	17.74	17.75	17.79	17.77
	75	0	18.79	18.68	18.66	17.77	17.73	17.57	17.74	17.73	17.63



Report No.: T201102D09-RP13

Page: 23 / 98

Rev.: 00

8.2 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

LIMIT

According to FCC §2.1055, FCC §22.355.

Frequency Tolerance: +/- 2.5ppm

TEST PROCEDURE

Use Anritsu 8820 with frequency Error measurement capability.

Temp = -30°C to +50°C

Voltage= 85% to 115% of the nominal value for AC powered equipment.

***NOTE:** The frequency error was recorded frequency error from the communication simulator.*

TEST RESULTS

No non-compliance noted.

Test Results

Temperature: 25°C

Humidity: 57% RH

Tested by: Jerry Chang

Test Date: May 25, 2021



Report No.: T201102D09-RP13

Page: 24 / 98

Rev.: 00

FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT:

LTE Band 26

Reference Freq.:		LTE B26 Mid Channel		836.5 MHz	15M QPSK CH 26915
Power Supply Vdc	Temp. (°C)	Freq. (MHz)	Delta (Hz)	Limit = +/- 2.5 ppm (Hz)	
Freq. ERROR vs. VOLTAGE					
5.5	25	836.500021	21	2091	
5	25	836.500023	23	2091	
4.75	25	836.499979	-21	2091	
3.7 (End Point)	25	836.499976	-24	2091	
Freq. ERROR vs. Temp.					
5	-30	836.499971	-29	2091	
5	-20	836.500018	18	2091	
5	-10	836.500036	36	2091	
5	0	836.500068	68	2091	
5	10	836.499942	-58	2091	
5	20	836.499975	-25	2091	
5	30	836.499952	-48	2091	
5	40	836.500055	55	2091	
5	50	836.499989	-11	2091	



Report No.: T201102D09-RP13

Page: 25 / 98

Rev.: 00

8.3 OCCUPIED BANDWIDTH MEASUREMENT

Limits

For Reporting purposes only.

TEST PROCEDURES

KDB 971168 D01

1. The occupied bandwidth was measured with the spectrum analyzer at the lowest, middle and highest channels in each band and different modulation. The 99% and -26dB bandwidth was measured and recorded.
2. RBW = 1-5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max. hold



Report No.: T201102D09-RP13

Page: 26 / 98

Rev.: 00

Temperature: 23.1°C

Humidity: 53.2% RH

Tested by: Jerry Chang

Test Date: March 24, 2021

Temperature: 25.2°C

Humidity: 55.6% RH

Tested by: Jerry Chang

Test Date: May 24, 2021

LTE Band 26

LTE BAND 26 Channel bandwidth: 1.4MHz							
Freq. (MHz)	CH	99% BW (MHz)			26 dB BW (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
824.7	26797	1.0864	1.0871	1.0828	1.235	1.224	1.218
836.5	26915	1.0868	1.0872	1.0840	1.235	1.229	1.218
848.3	27033	1.0864	1.0876	1.0848	1.233	1.232	1.218

LTE BAND 26 Channel bandwidth: 3MHz							
Freq. (MHz)	CH	99% BW (MHz)			26 dB BW (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
825.5	26805	2.6871	2.6888	2.6988	2.929	2.970	2.984
836.5	26915	2.6897	2.6944	2.6918	2.965	2.959	2.959
847.5	27025	2.6933	2.6900	2.7008	2.956	2.961	2.955

LTE BAND 26 Channel bandwidth: 5MHz							
Freq. (MHz)	CH	99% BW (MHz)			26 dB BW (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
826.5	26815	4.4942	4.4845	4.4650	4.885	4.911	4.817
836.5	26915	4.4865	4.4787	4.4886	4.936	4.925	4.902
846.5	27015	4.4890	4.4939	4.4863	4.860	4.907	4.931

LTE BAND 26 Channel bandwidth: 10MHz							
Freq. (MHz)	CH	99% BW (MHz)			26 dB BW (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
829.0	26840	8.9286	8.9337	8.9457	9.613	9.664	9.680
836.5	26915	8.9796	8.9643	8.9852	9.713	9.681	9.702
844.0	26990	8.9515	8.9155	8.9341	9.635	9.716	9.791



Report No.: T201102D09-RP13

Page: 27 / 98


Rev.: 00

LTE BAND 26 Channel bandwidth: 15MHz							
Freq. (MHz)	CH	99% BW (MHz)			26 dB BW (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
831.5	26865	13.441	13.414	13.408	14.58	14.46	14.44
836.5	26915	13.468	13.474	13.471	14.63	14.60	14.38
841.5	26965	13.421	13.404	13.450	14.50	14.56	14.53


LTE Band 26

CHANNEL BANDWIDTH: 1.4MHz / QPSK / RB =6, RB Offset = 0

CH Low

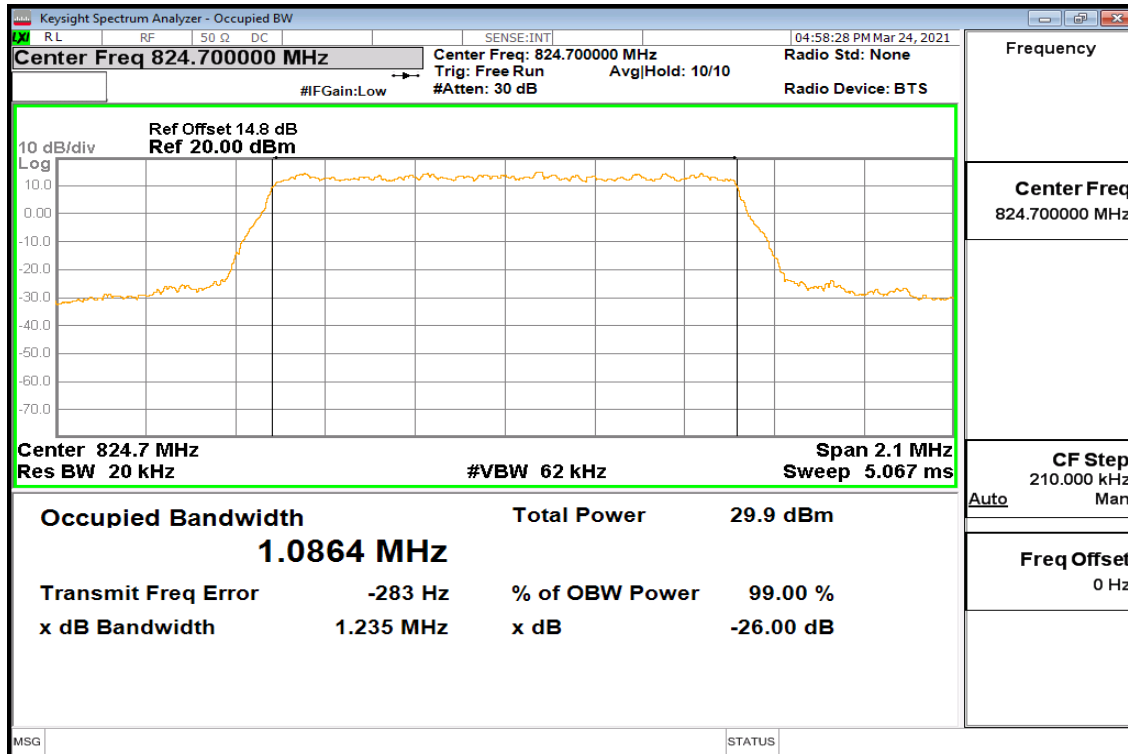

CH Mid

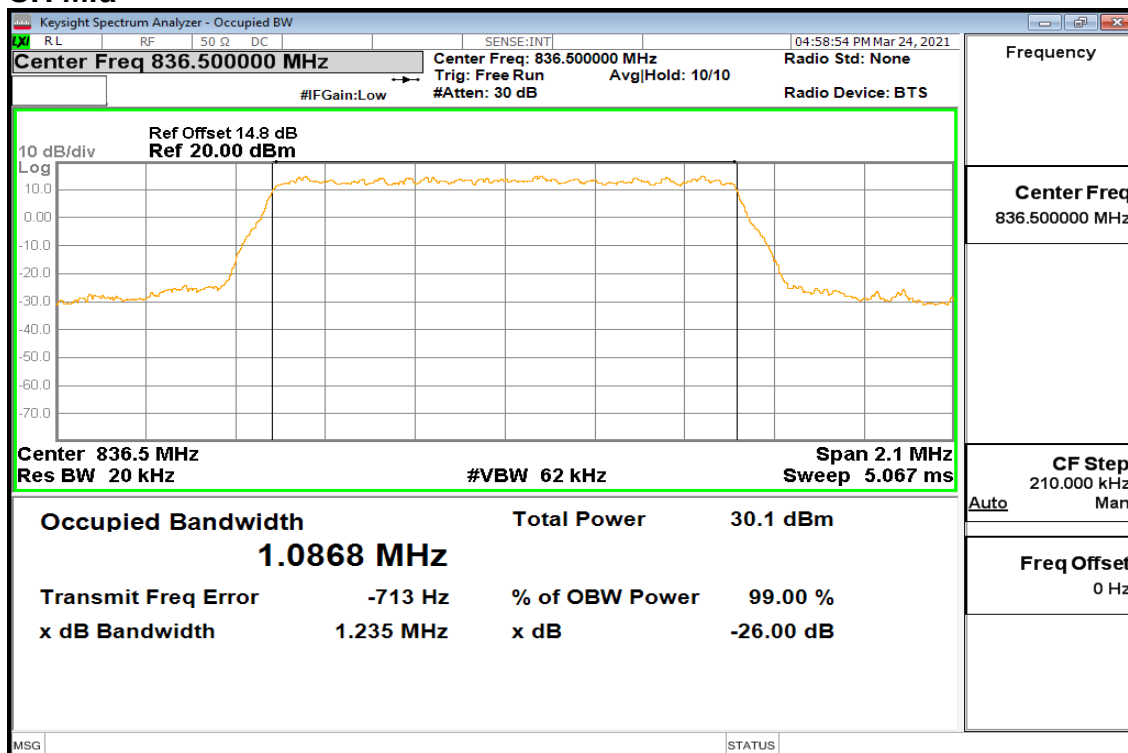




Report No.: T201102D09-RP13


Page: 29 / 98

Rev.: 00


CH High

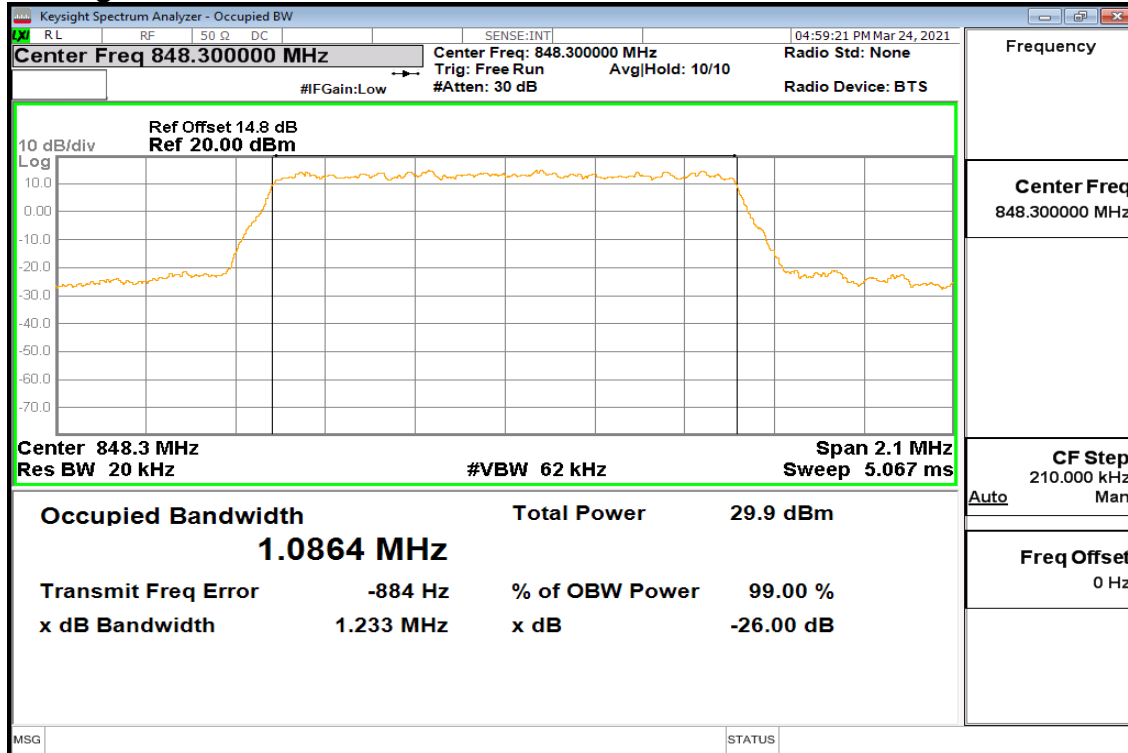

CHANNEL BANDWIDTH: 1.4MHz / 16QAM / RB =6, RB Offset = 0 CH Low

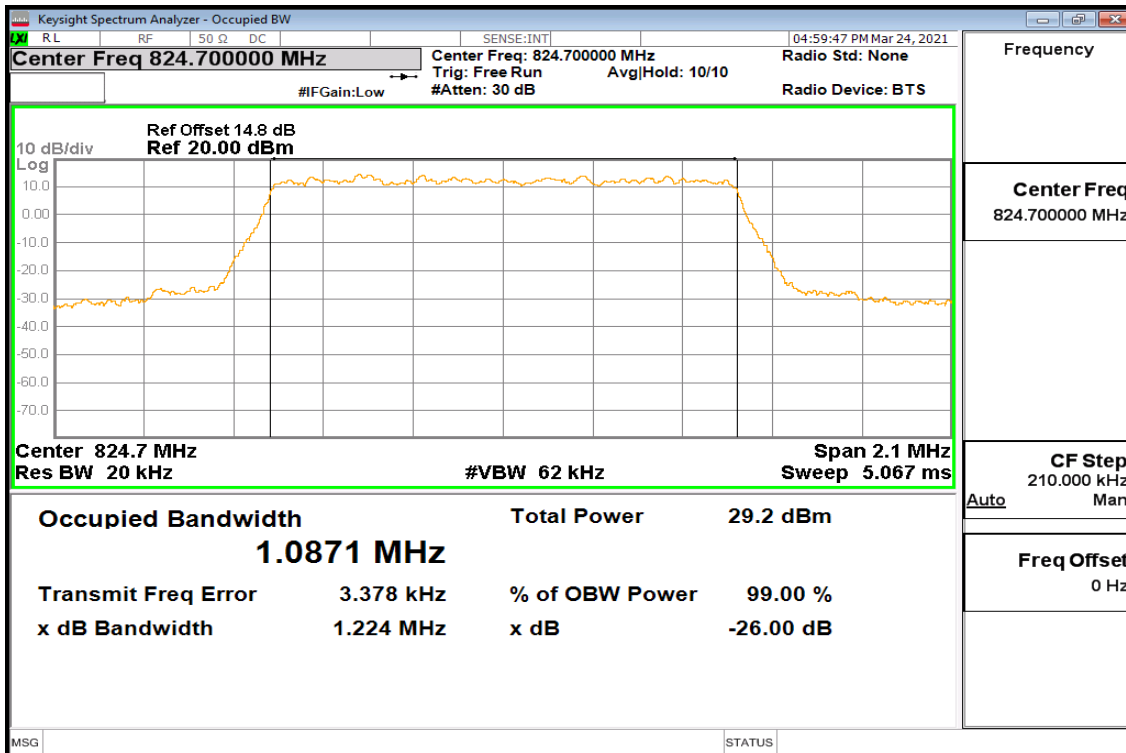

CH Mid

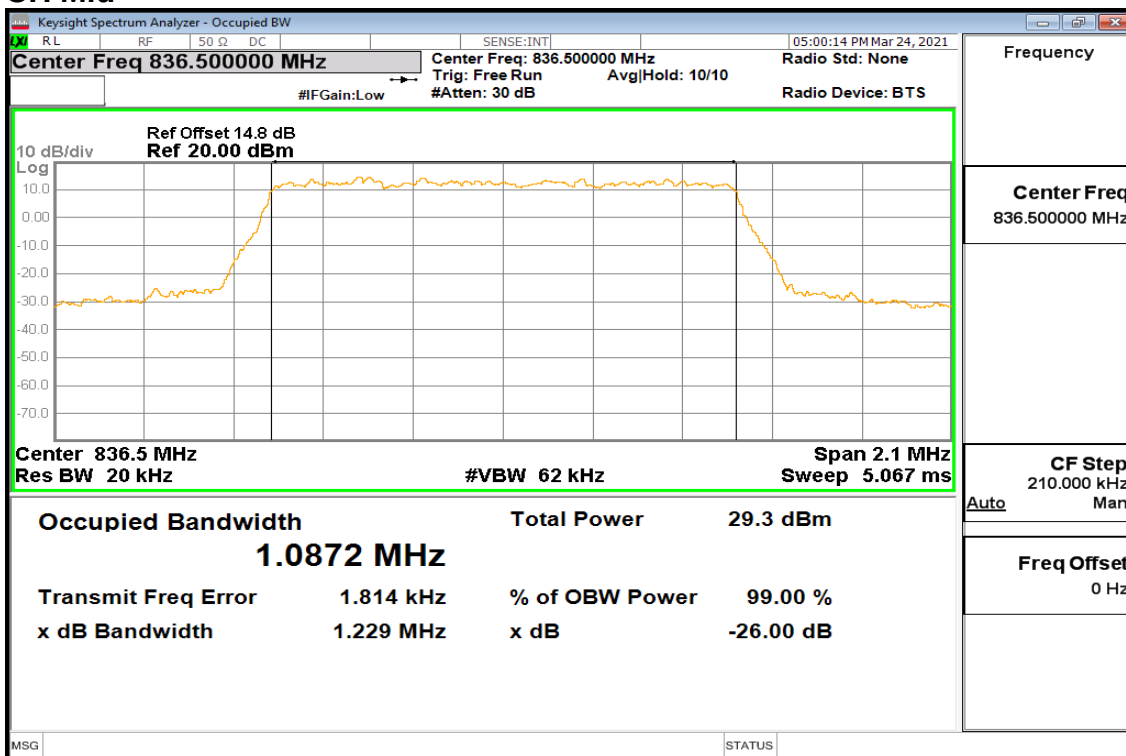




Report No.: T201102D09-RP13


Page: 31 / 98

Rev.: 00


CH High

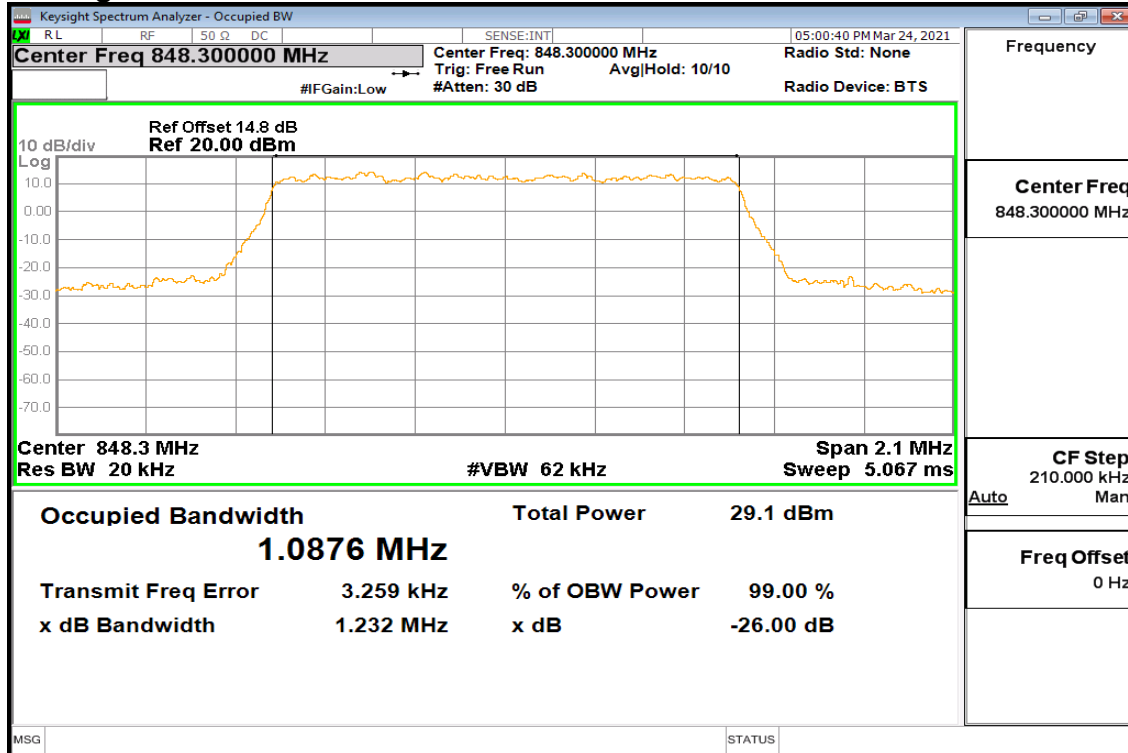

CHANNEL BANDWIDTH: 1.4MHz / 64QAM / RB =6, RB Offset = 0 CH Low

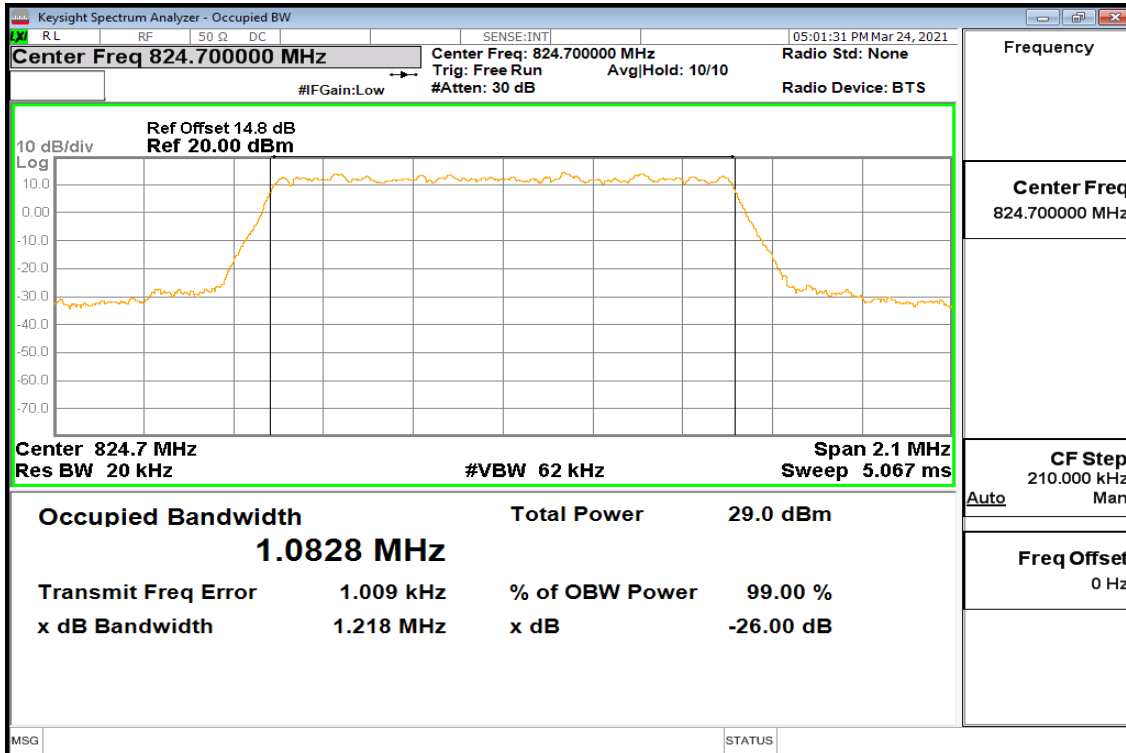

CH Mid

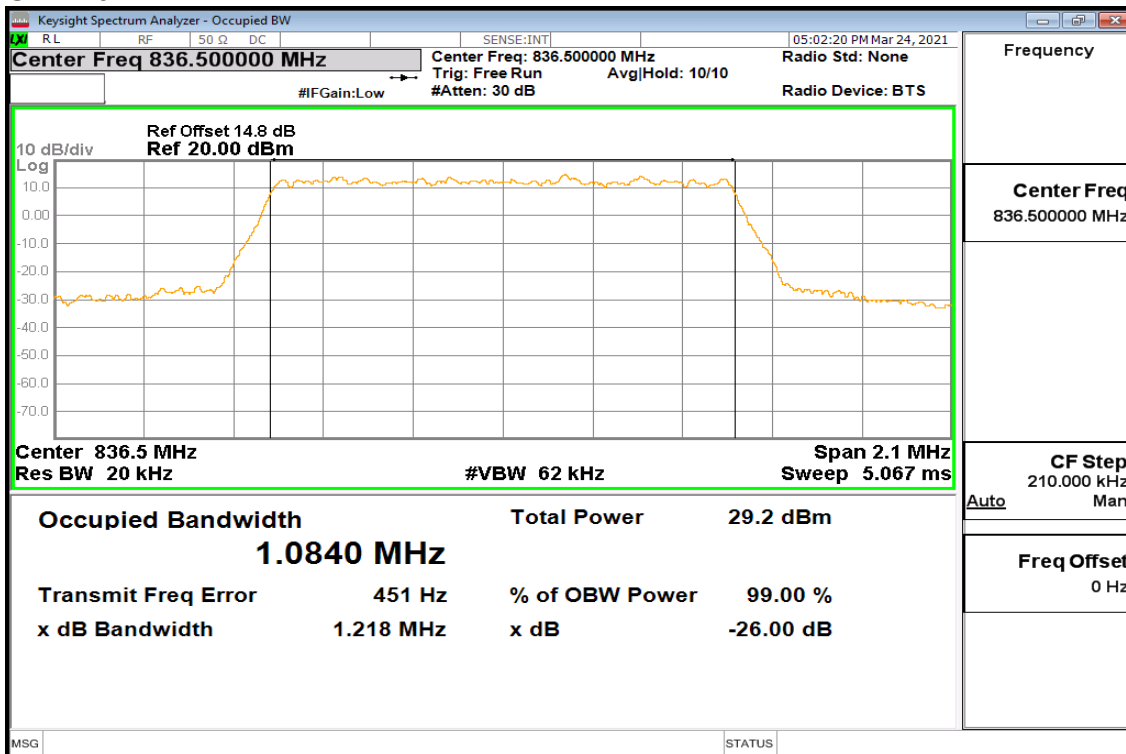






Report No.: T201102D09-RP13

Page: 33 / 98

Rev.: 00

CH High

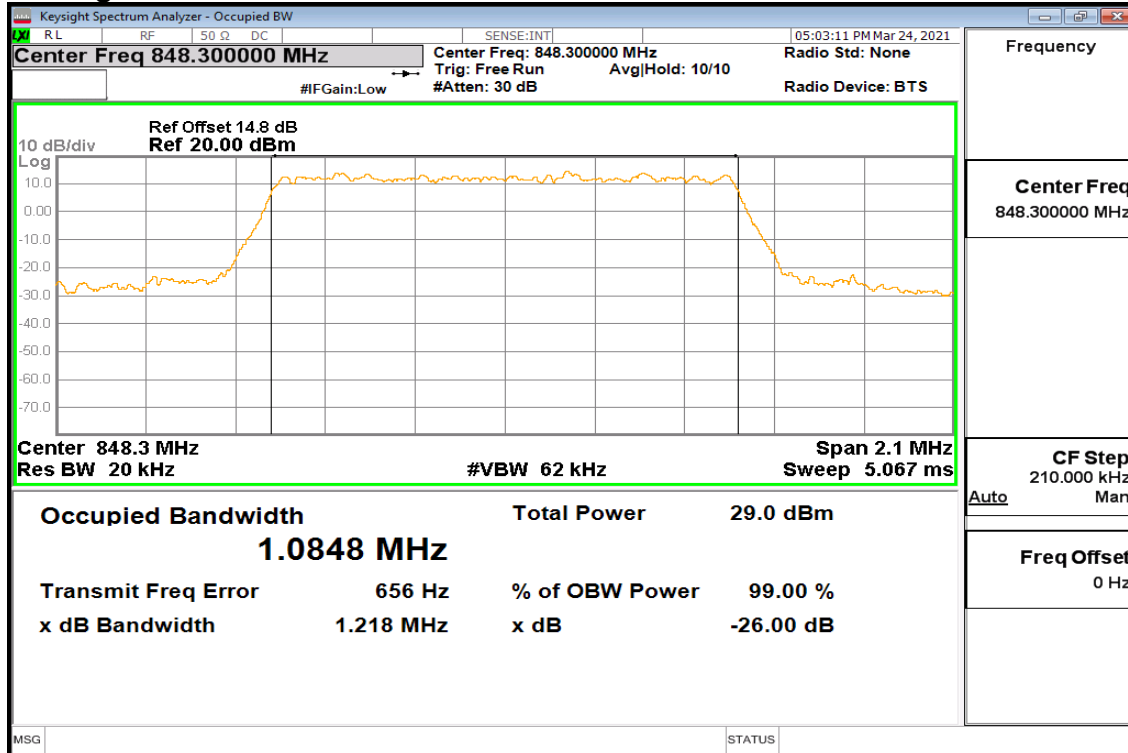

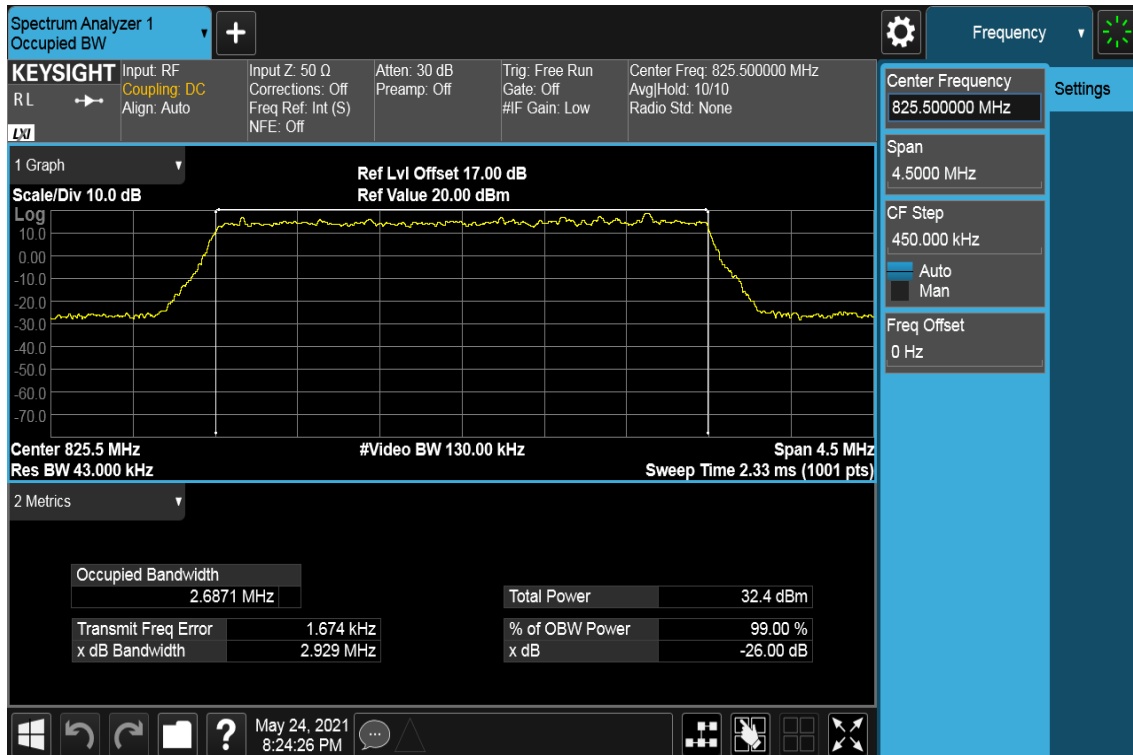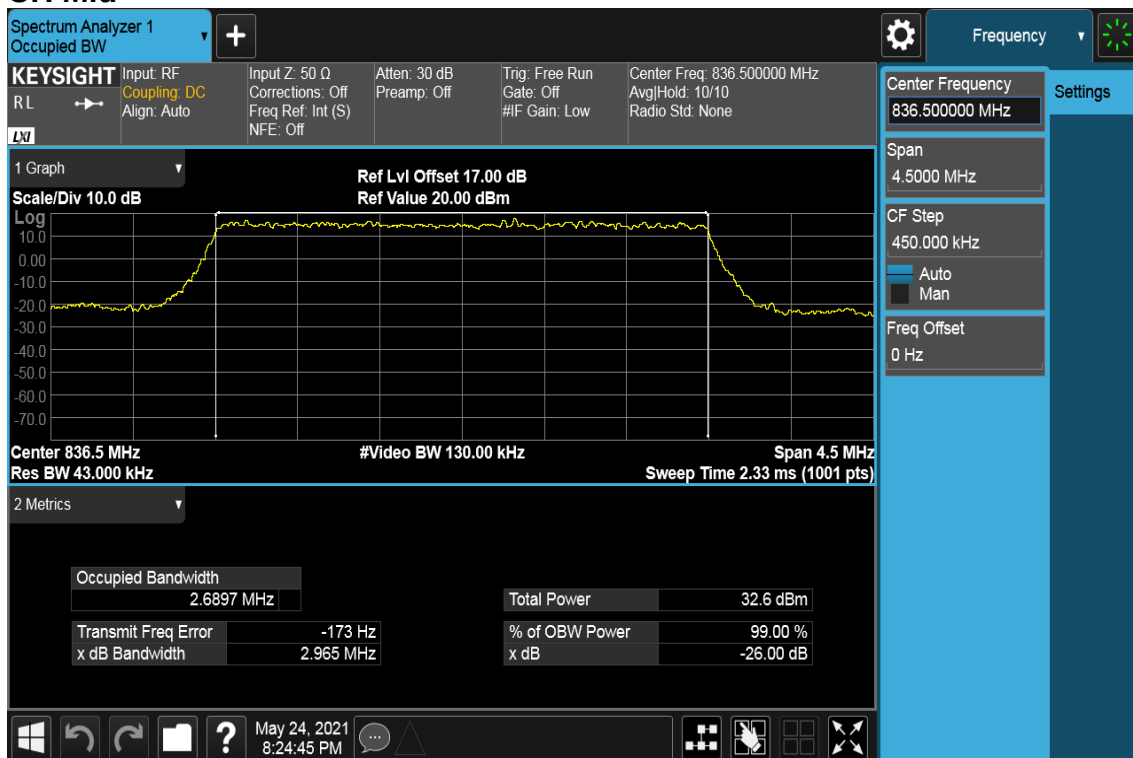CHANNEL BANDWIDTH: 3MHz / QPSK / RB =15, RB Offset = 0
CH Low**CH Mid**




Report No.: T201102D09-RP13

Page: 35 / 98

Rev.: 00


CH High

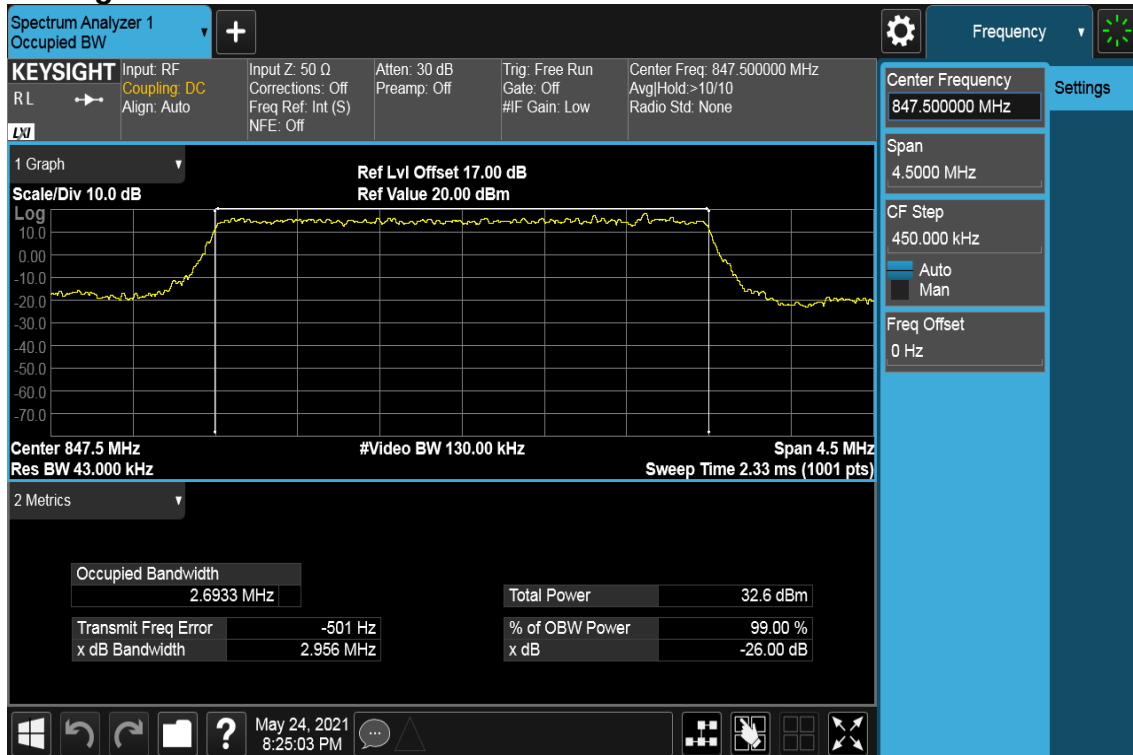


Report No.: T201102D09-RP13

CHANNEL BANDWIDTH: 3MHz / 16QAM / RB =15, RB Offset = 0

CH Low

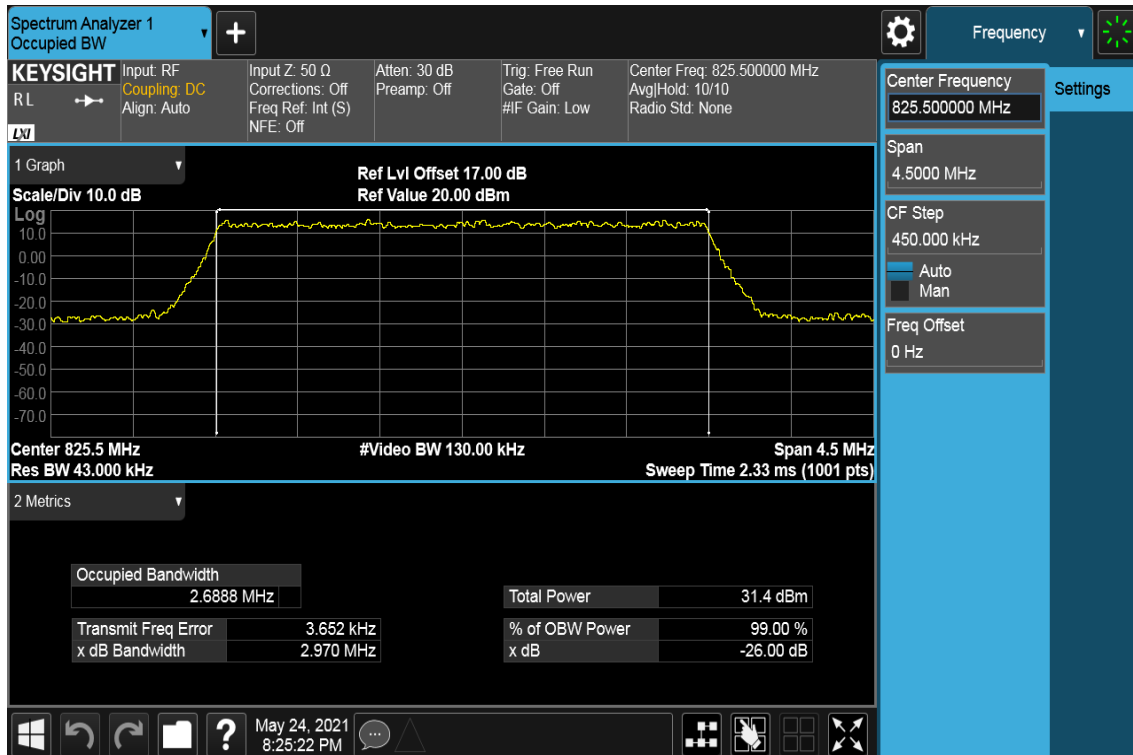

CH Mid

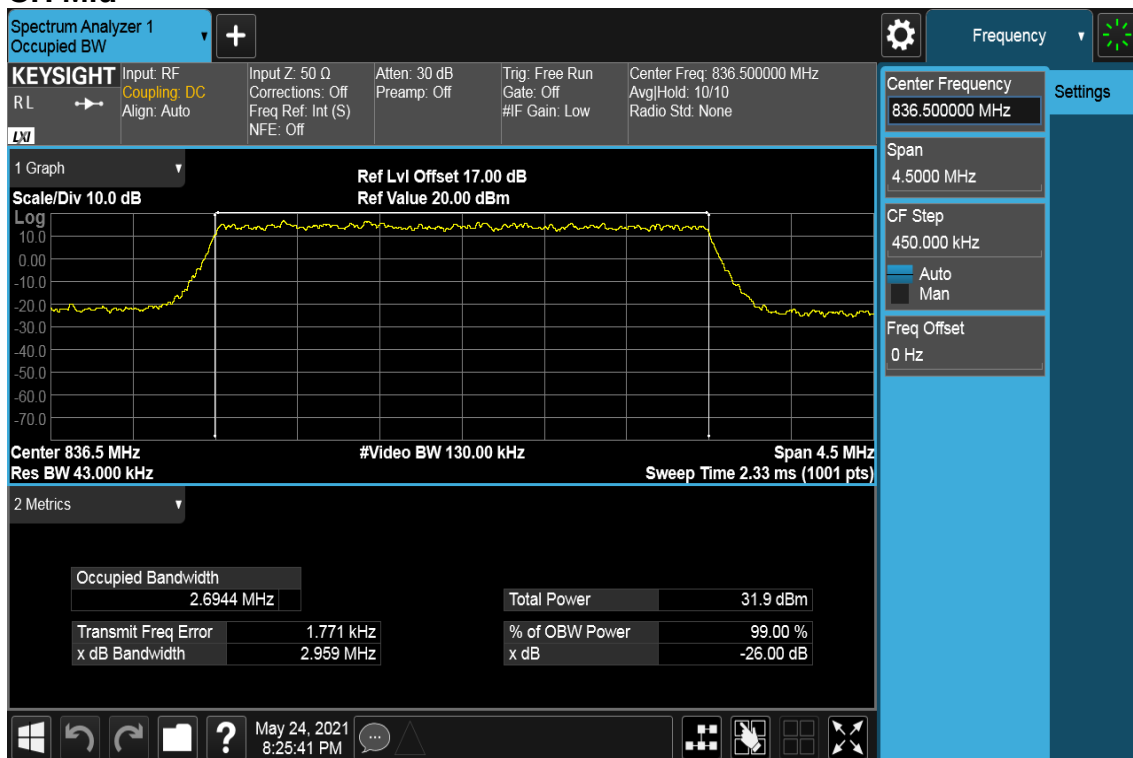






Report No.: T201102D09-RP13

Page: 37 / 98

Rev.: 00

CH High

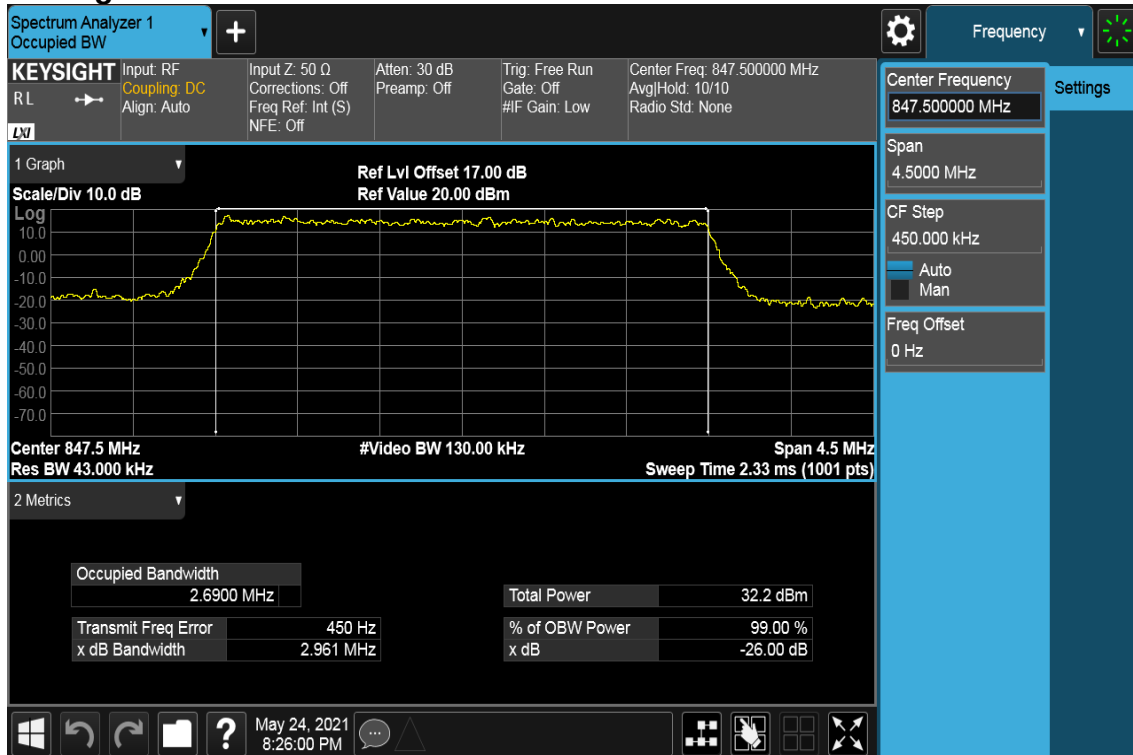

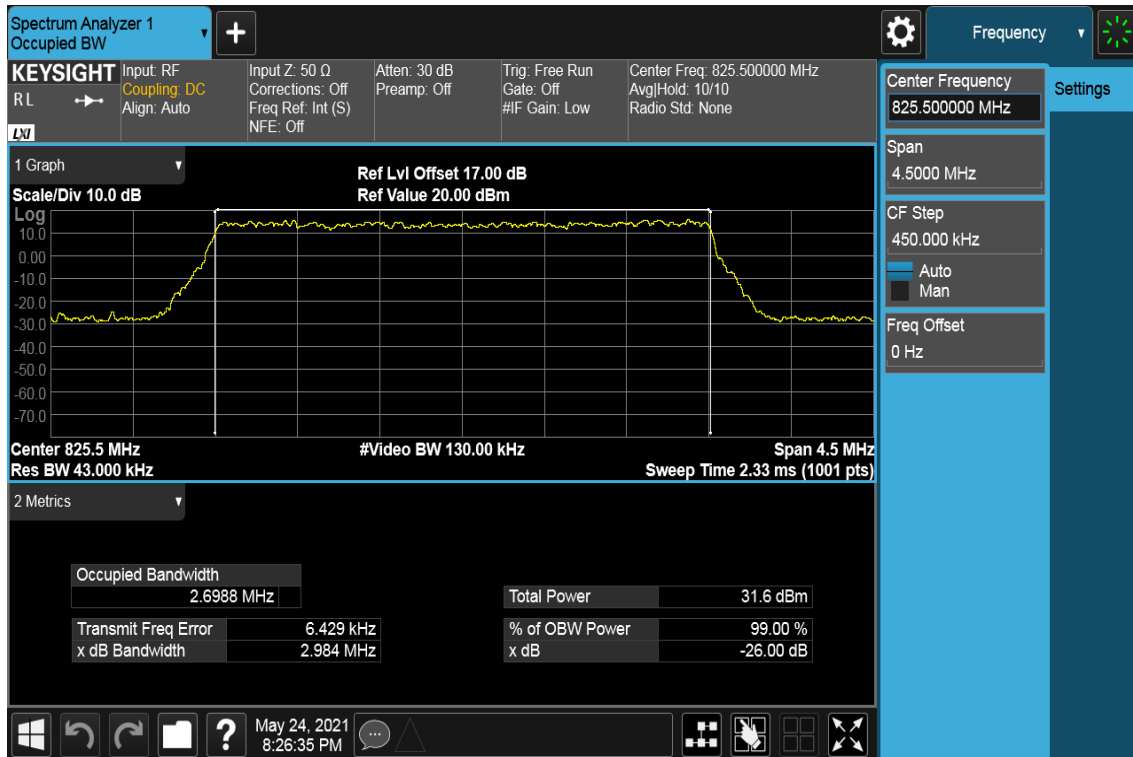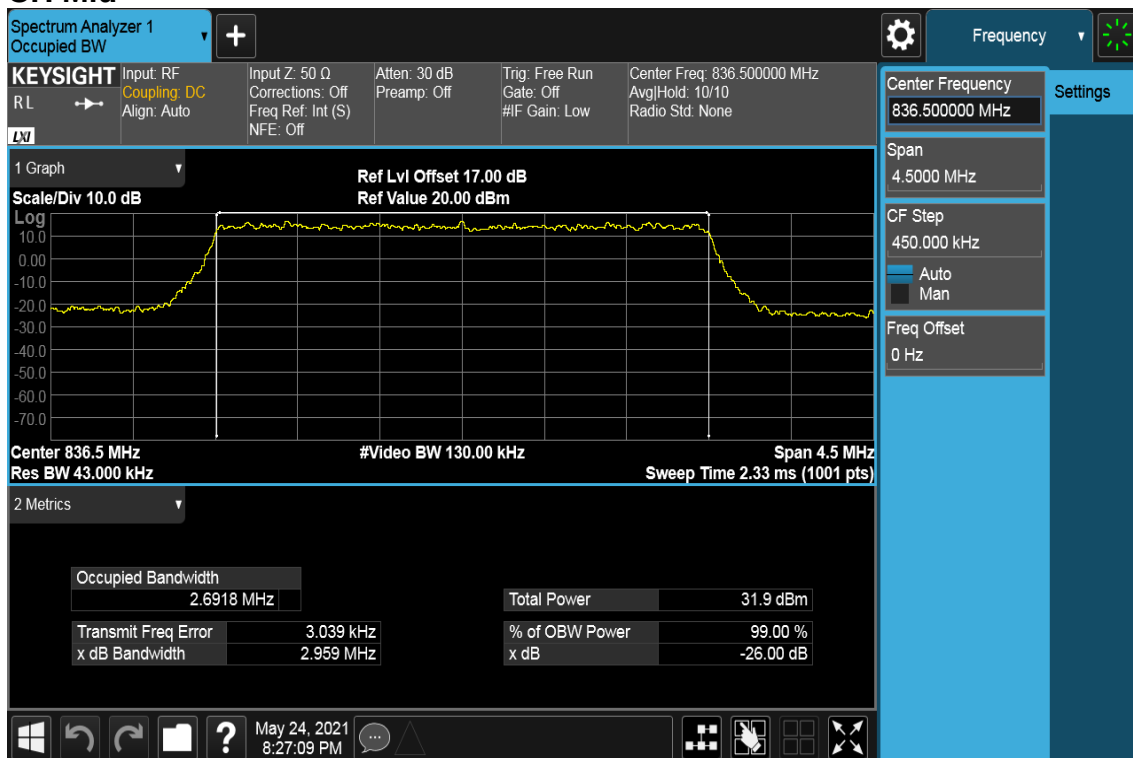CHANNEL BANDWIDTH: 3MHz / 64QAM / RB =15, RB Offset = 0
CH Low**CH Mid**






Report No.: T201102D09-RP13

Page: 39 / 98

Rev.: 00

CH High

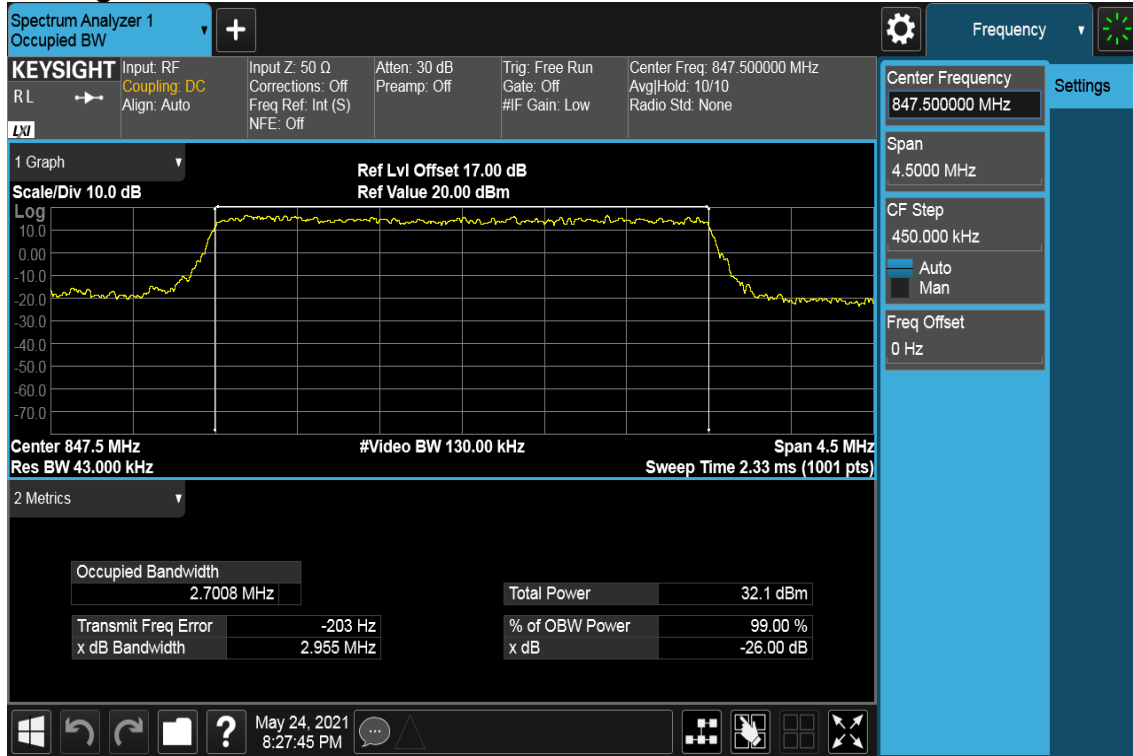

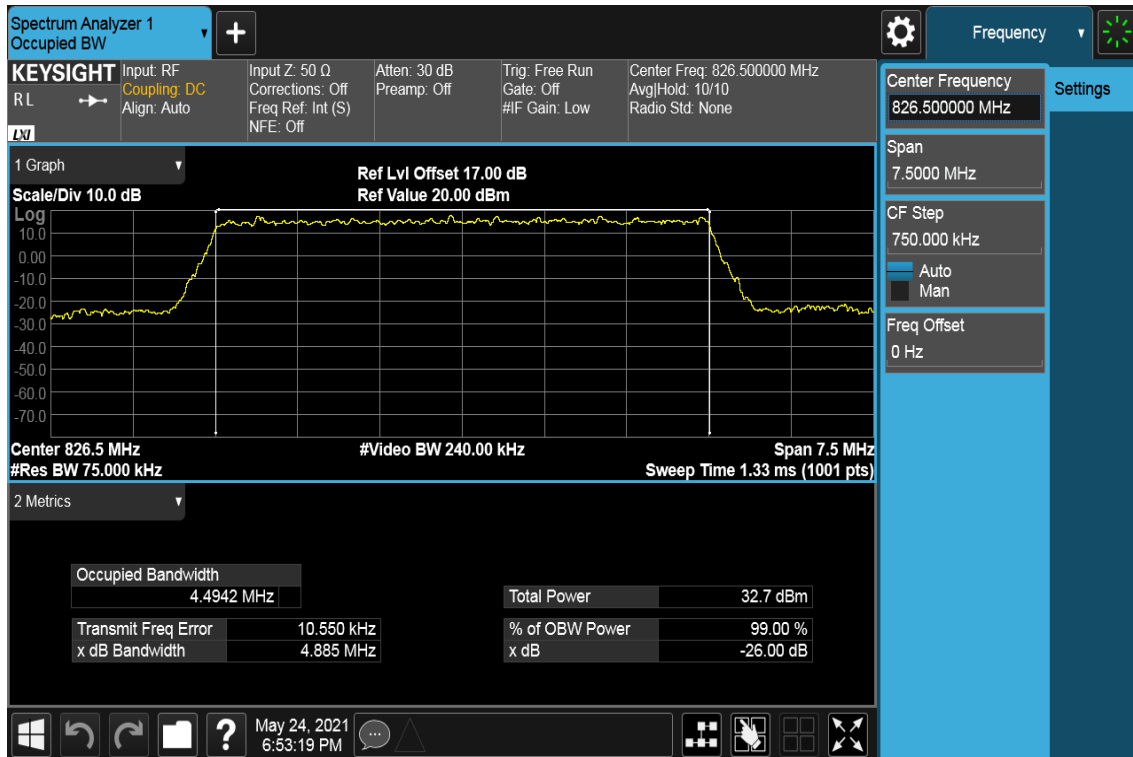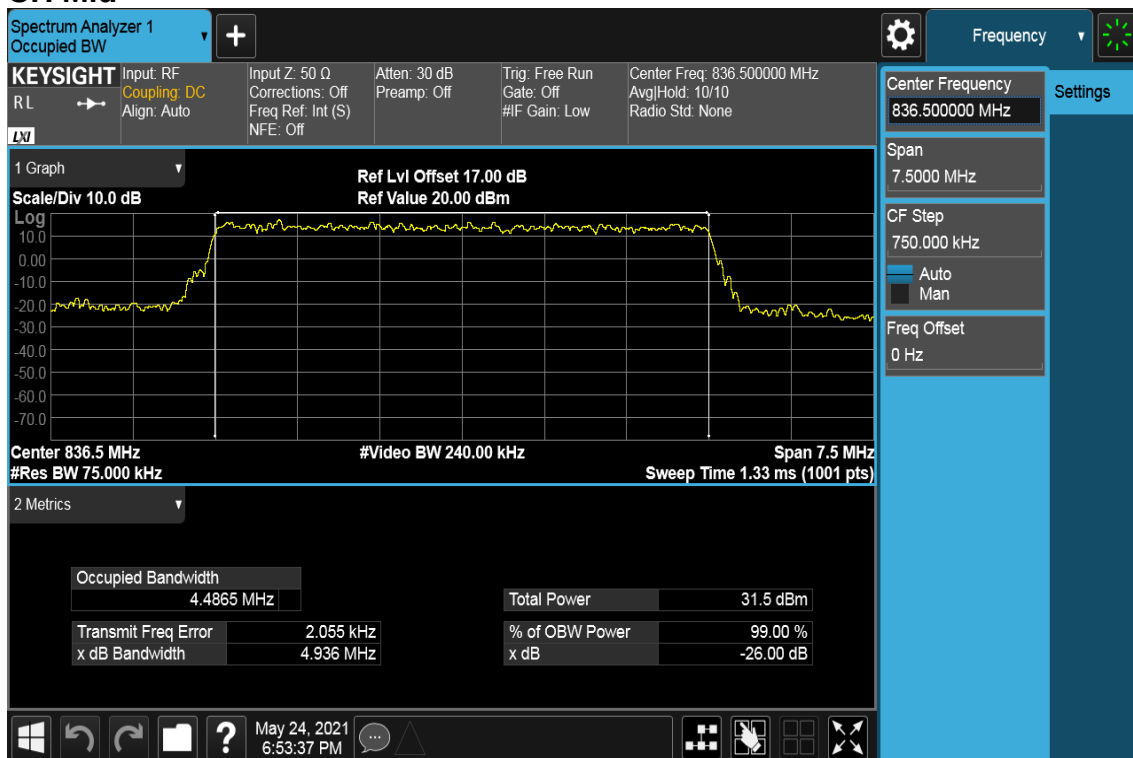CHANNEL BANDWIDTH: 5MHz / QPSK / RB =25, RB Offset = 0
CH Low**CH Mid**






Report No.: T201102D09-RP13

Page: 41 / 98

Rev.: 00

CH High

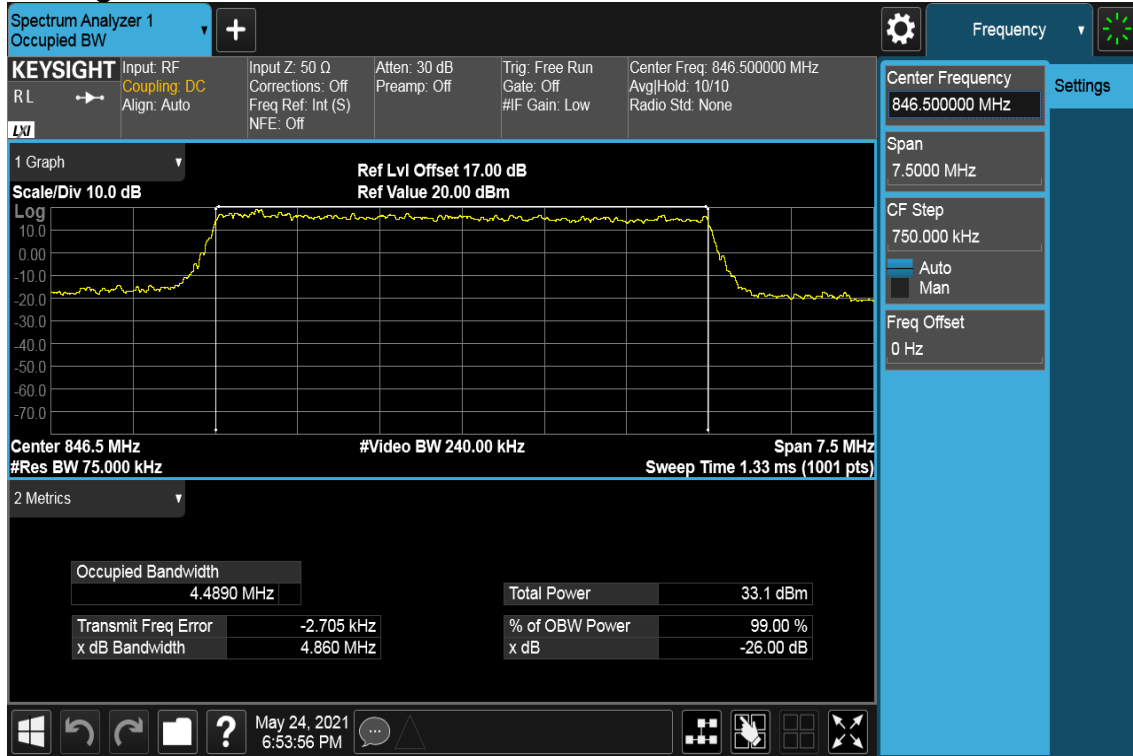

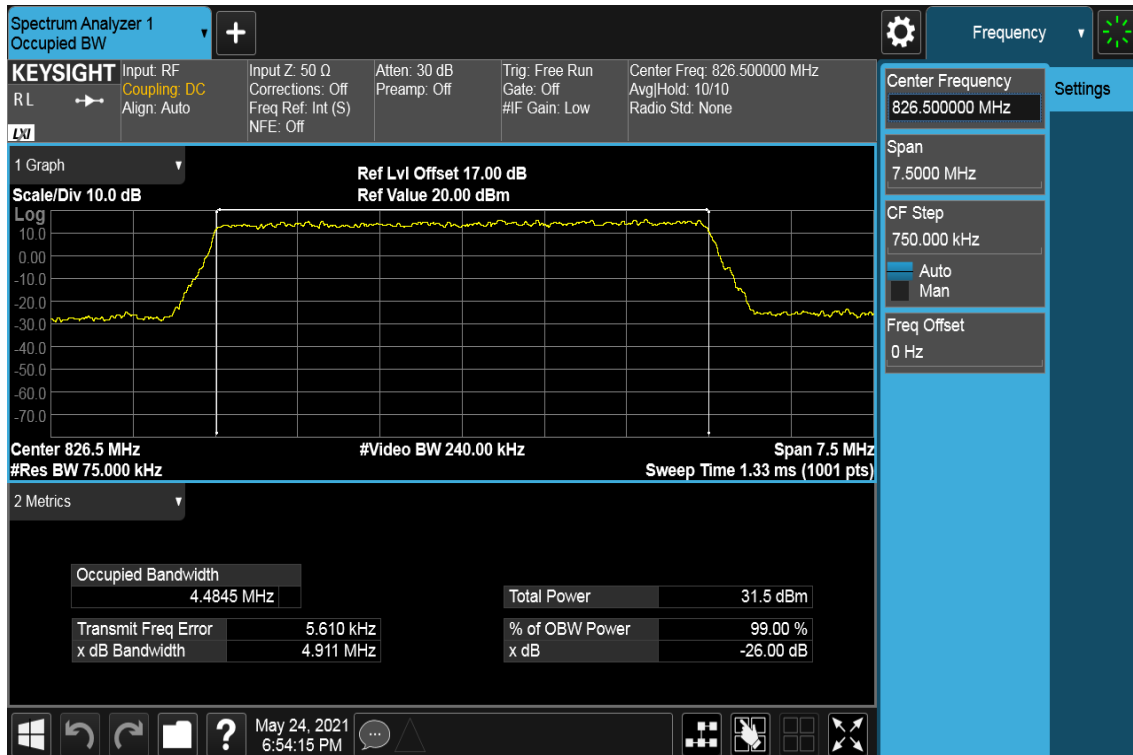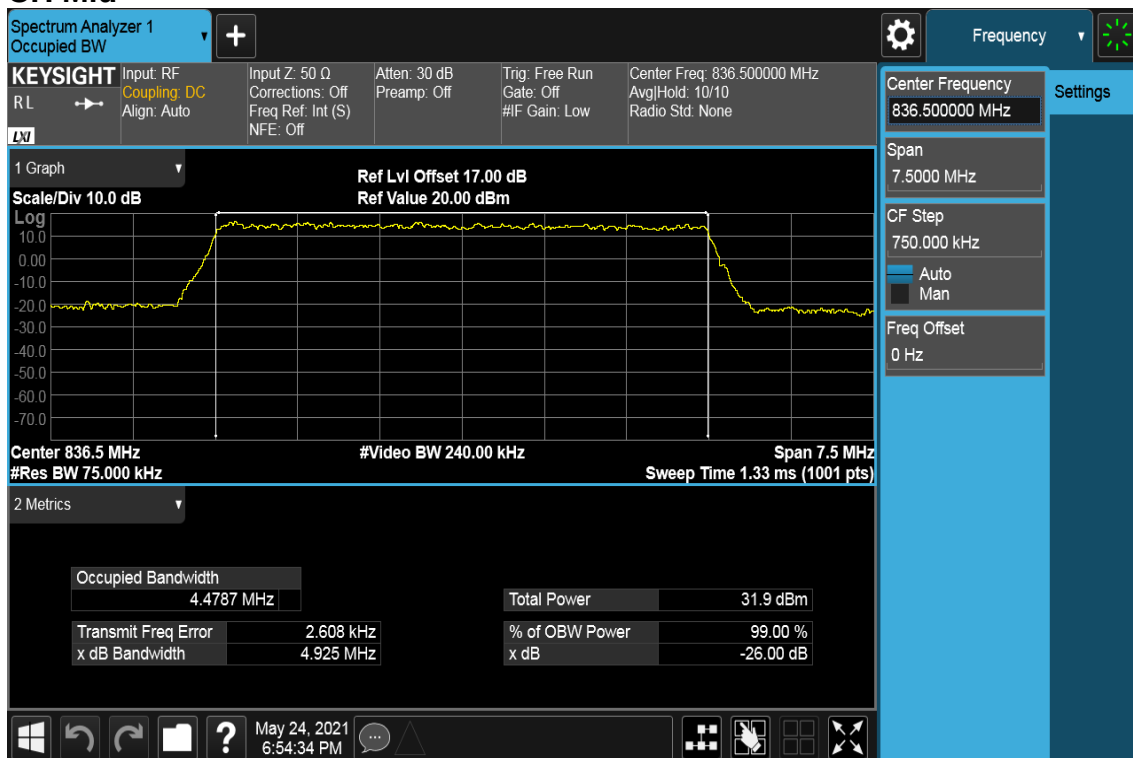CHANNEL BANDWIDTH: 5MHz / 16QAM / RB =25, RB Offset = 0
CH Low**CH Mid**






Report No.: T201102D09-RP13

Page: 43 / 98

Rev.: 00

CH High

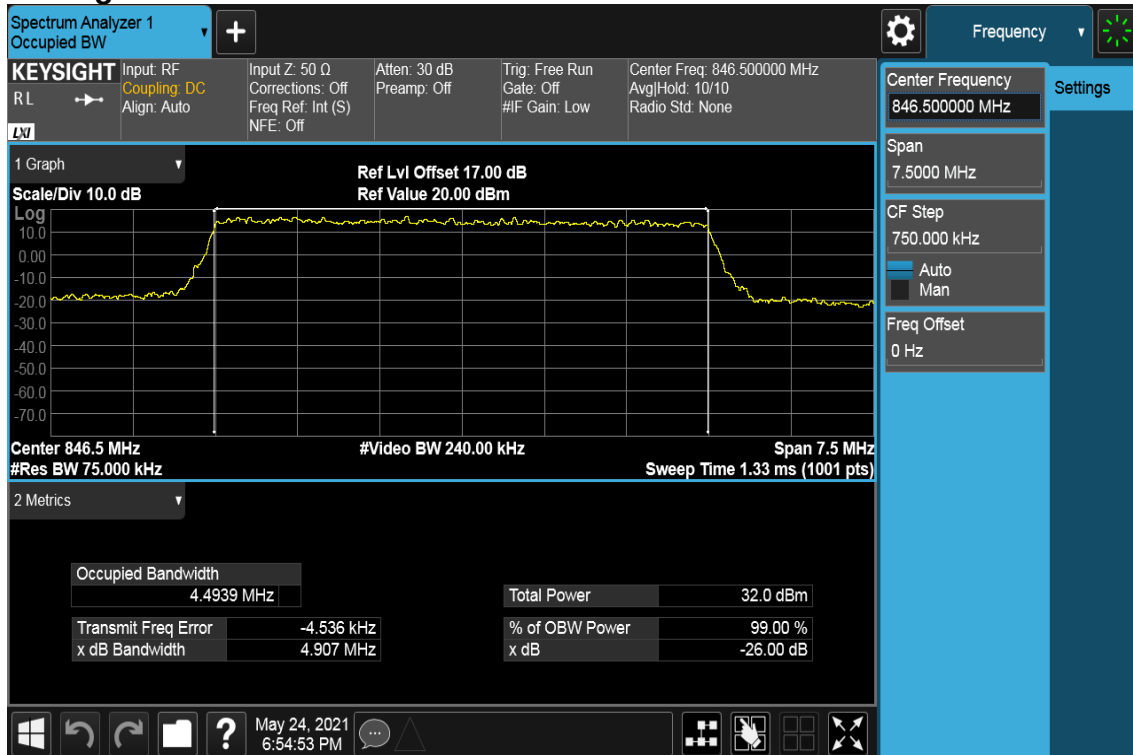

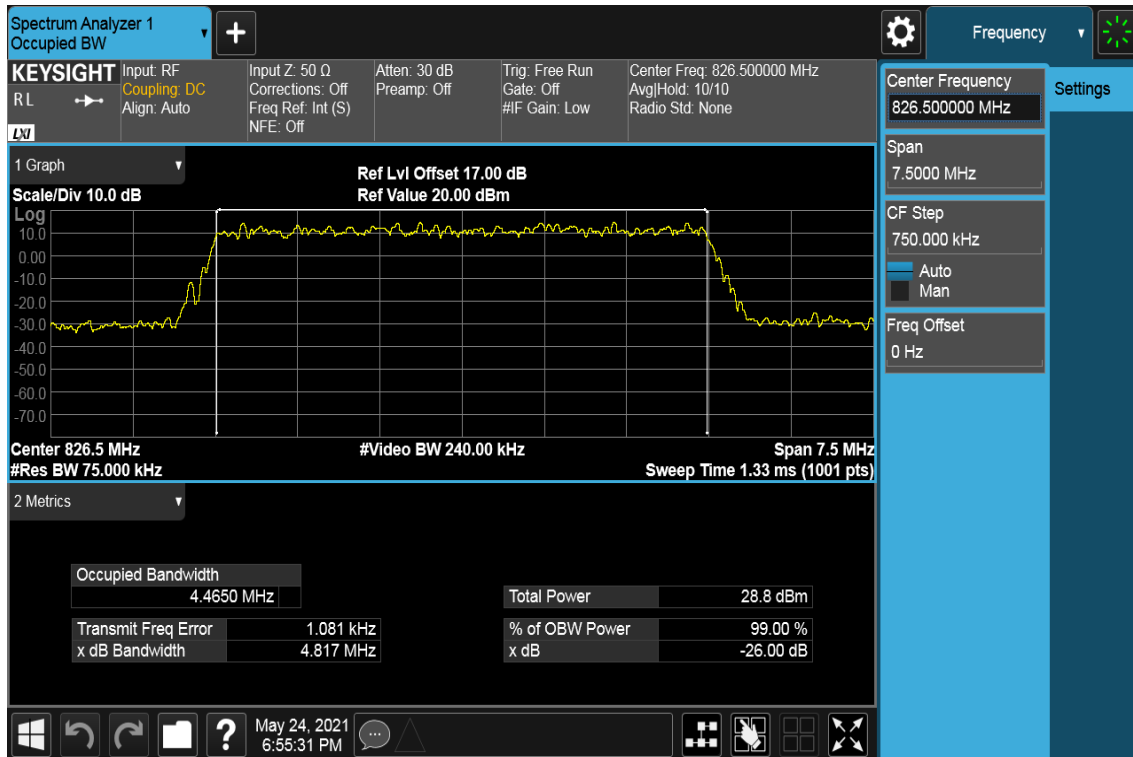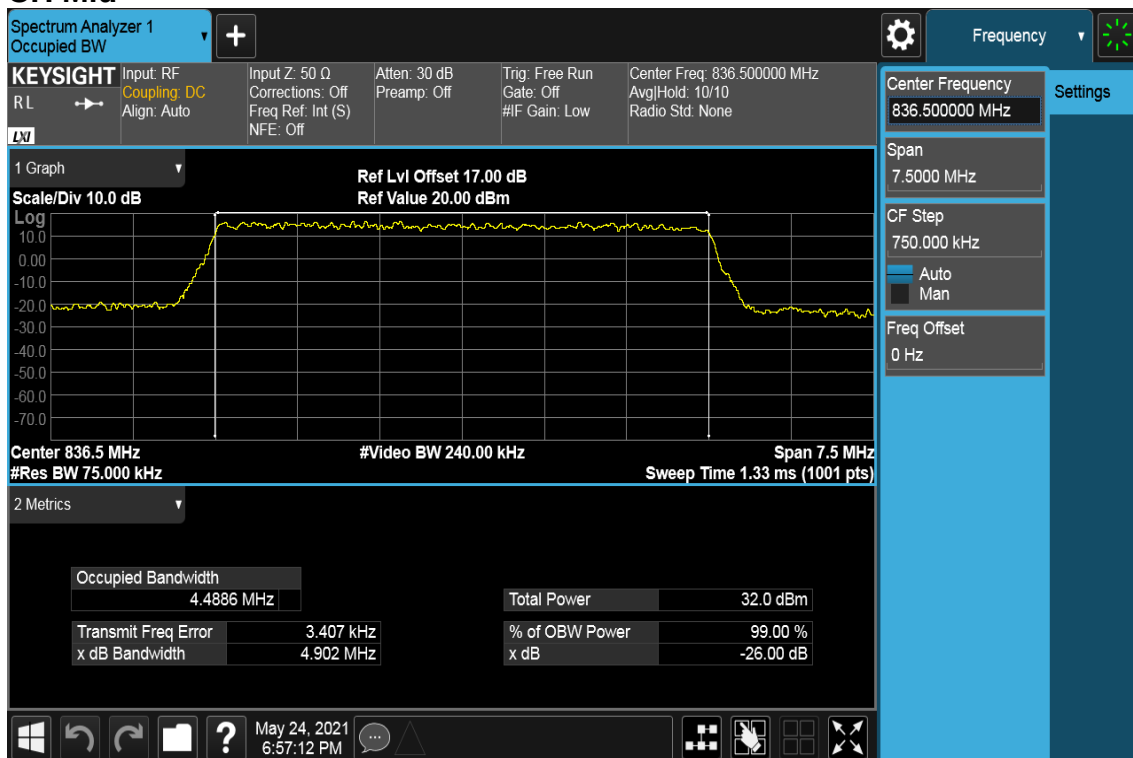CHANNEL BANDWIDTH: 5MHz / 64QAM / RB =25, RB Offset = 0
CH Low**CH Mid**






Report No.: T201102D09-RP13

Page: 45 / 98

Rev.: 00

CH High

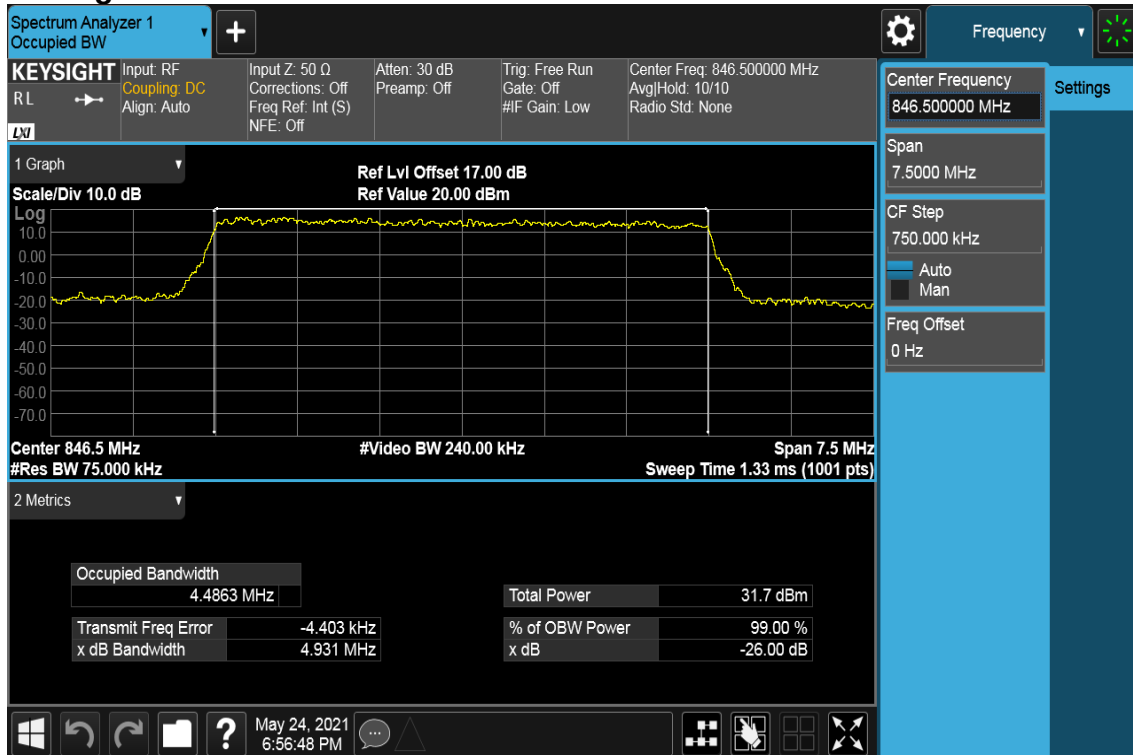

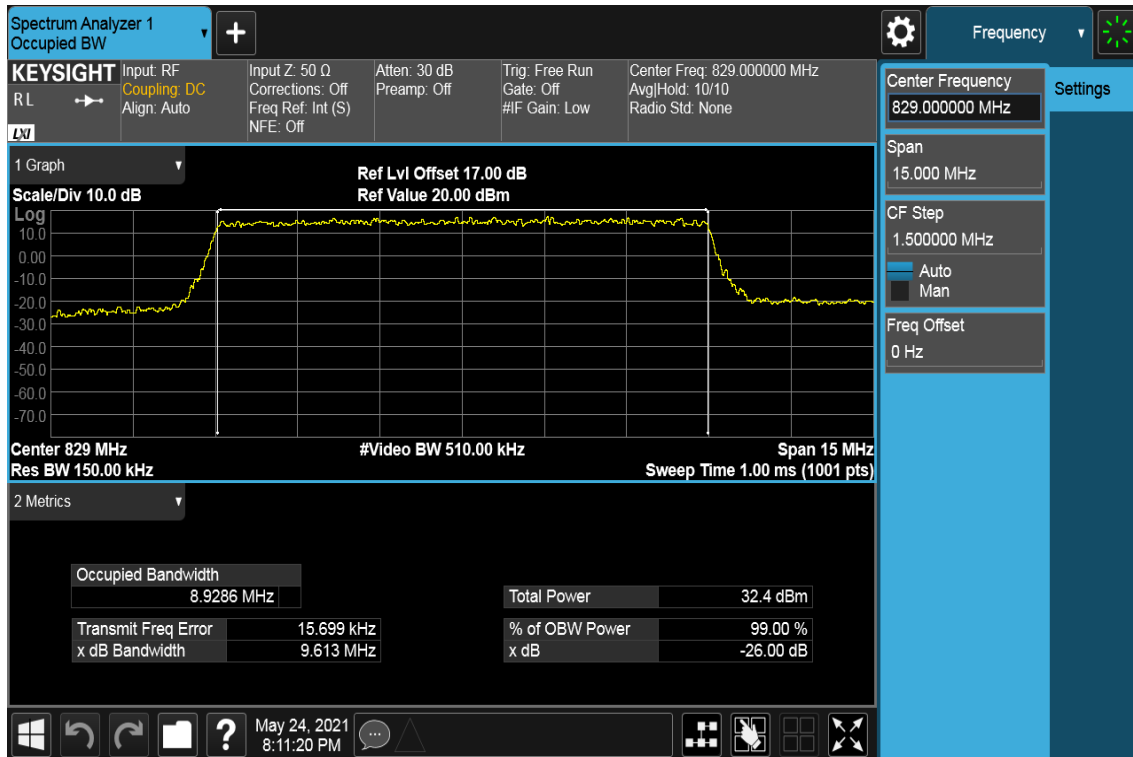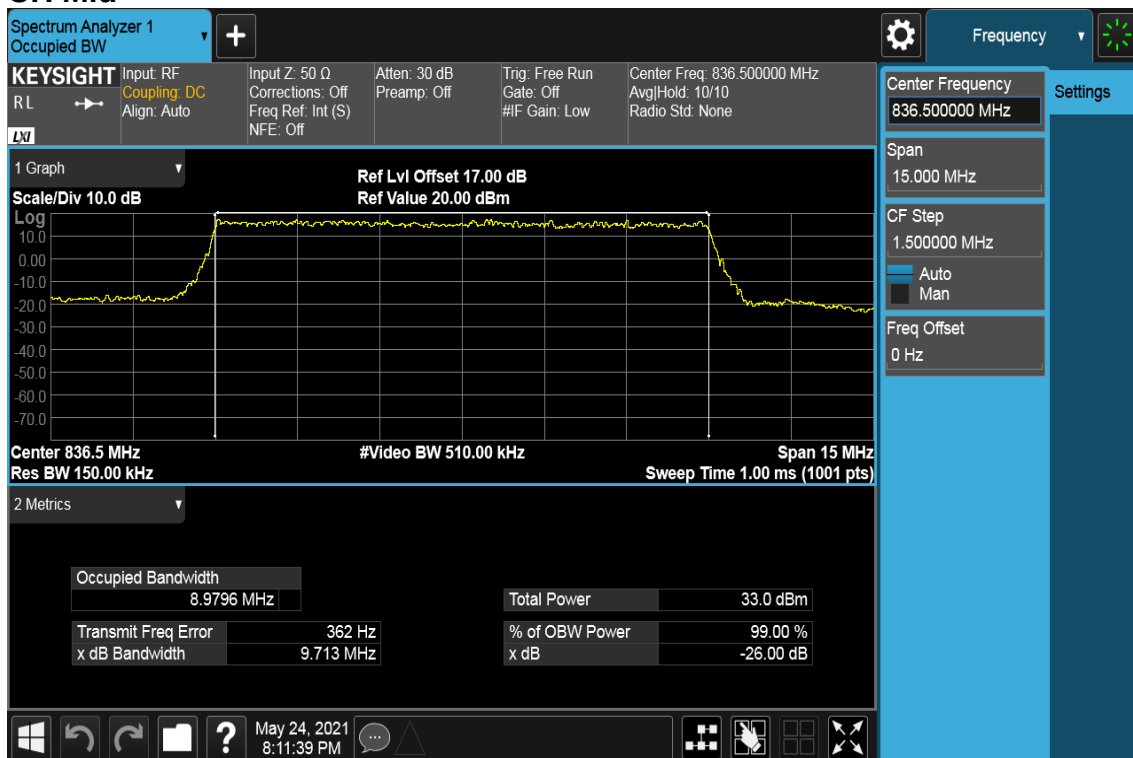CHANNEL BANDWIDTH: 10MHz / QPSK / RB =50, RB Offset = 0
CH Low**CH Mid**




Report No.: T201102D09-RP13


Page: 47 / 98

Rev.: 00


CH High

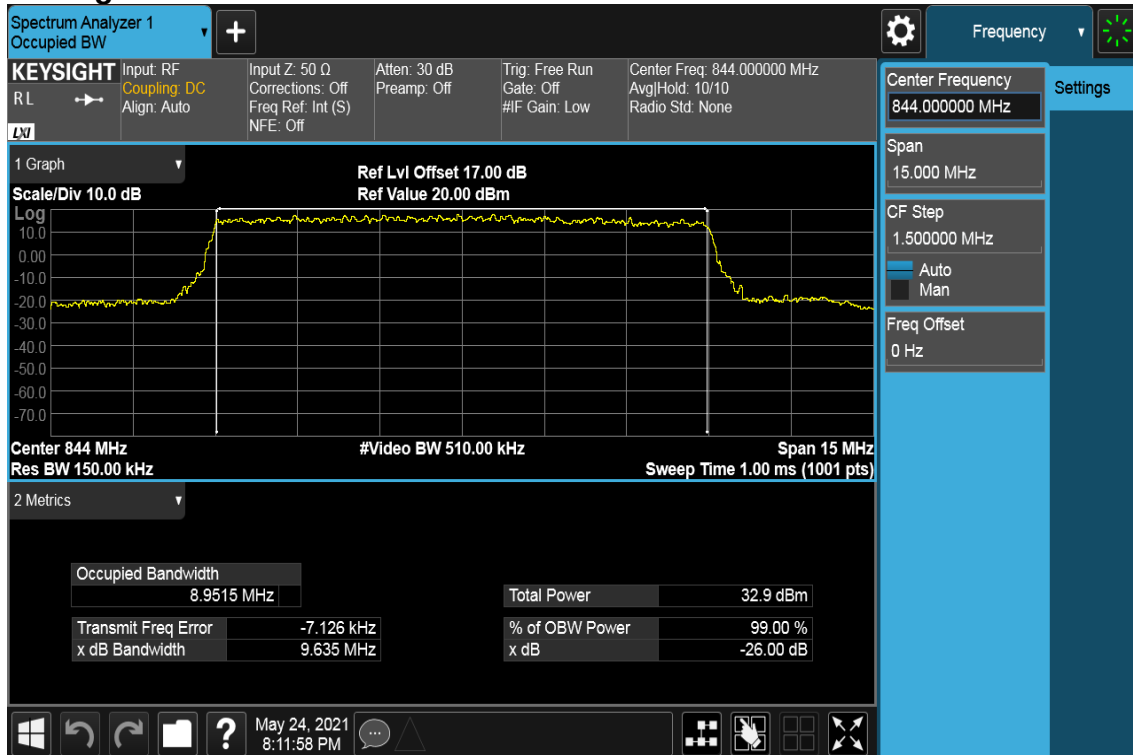

CHANNEL BANDWIDTH: 10MHz / 16QAM / RB =50, RB Offset = 0 CH Low

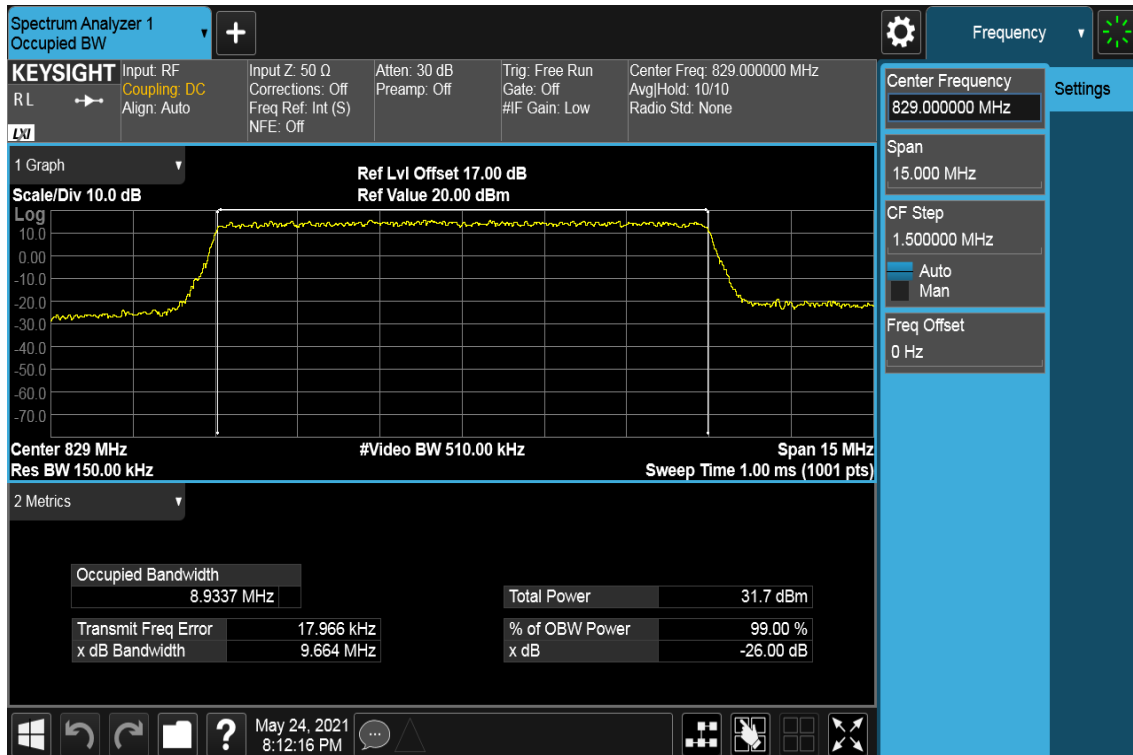

CH Mid

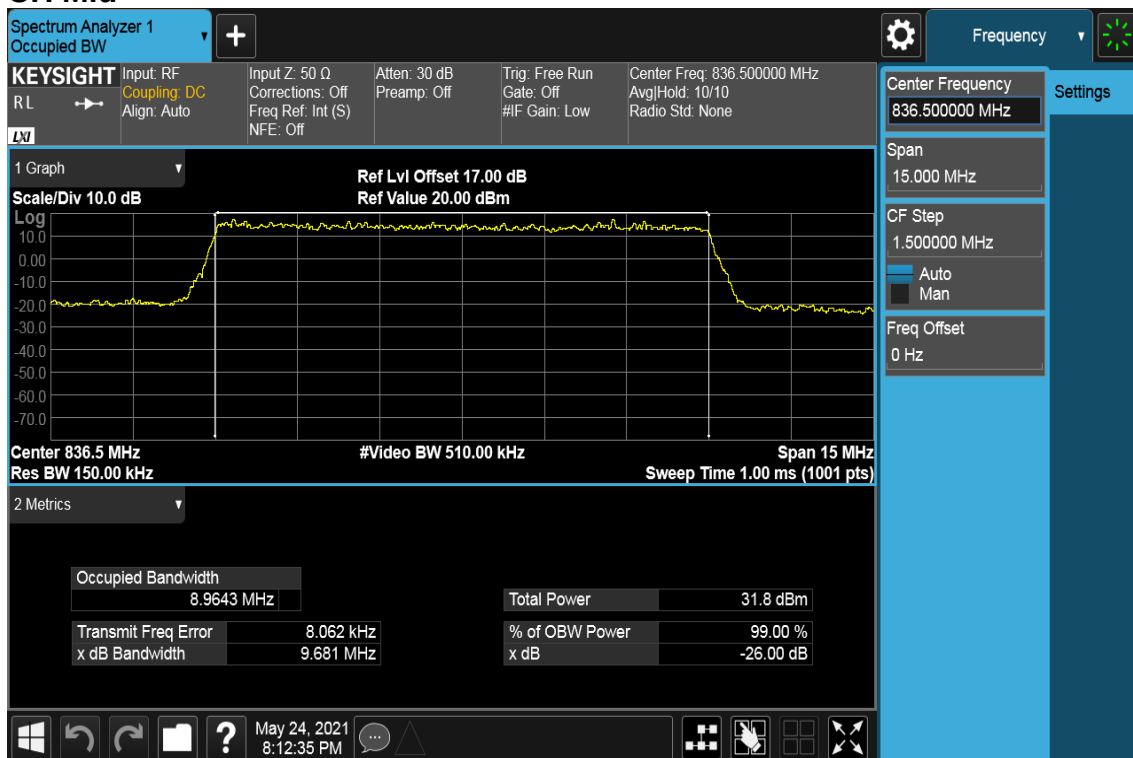






Report No.: T201102D09-RP13

Page: 49 / 98

Rev.: 00

CH High

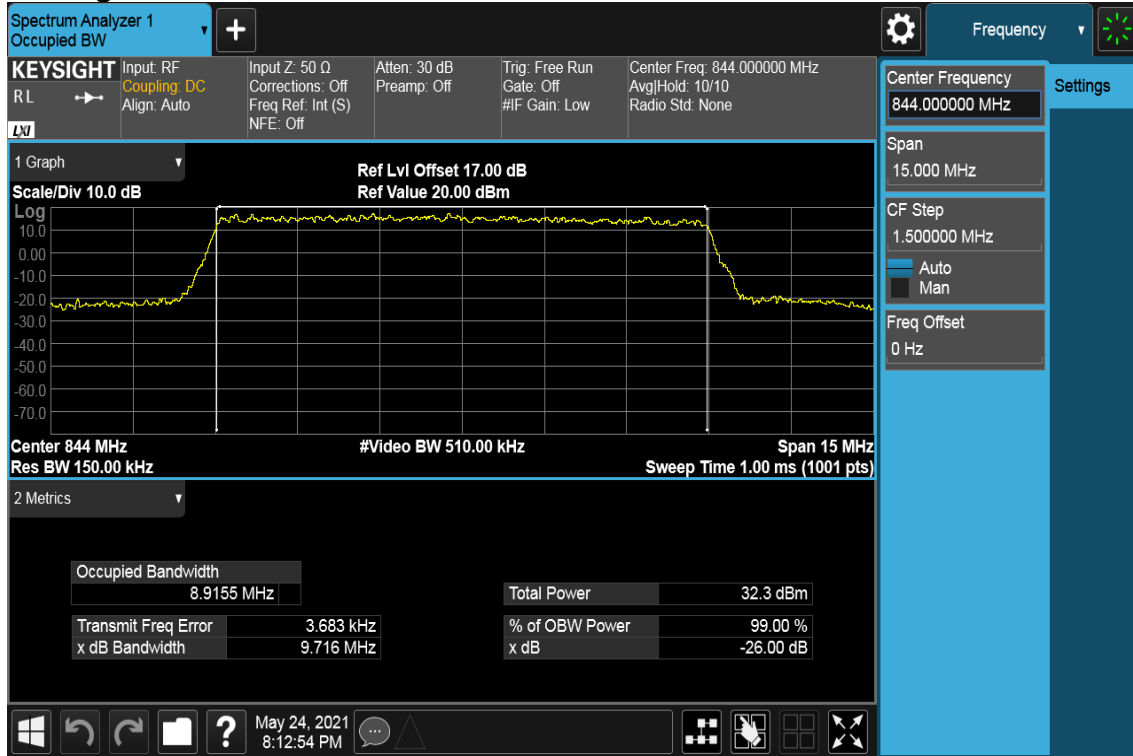

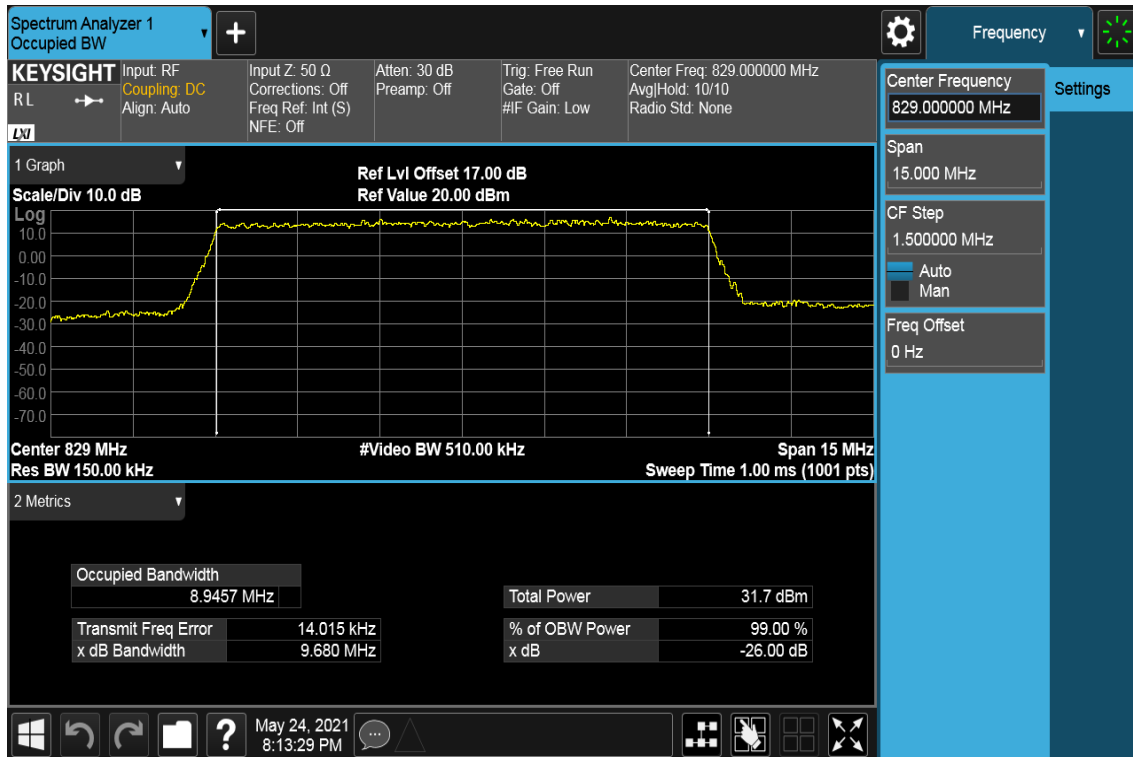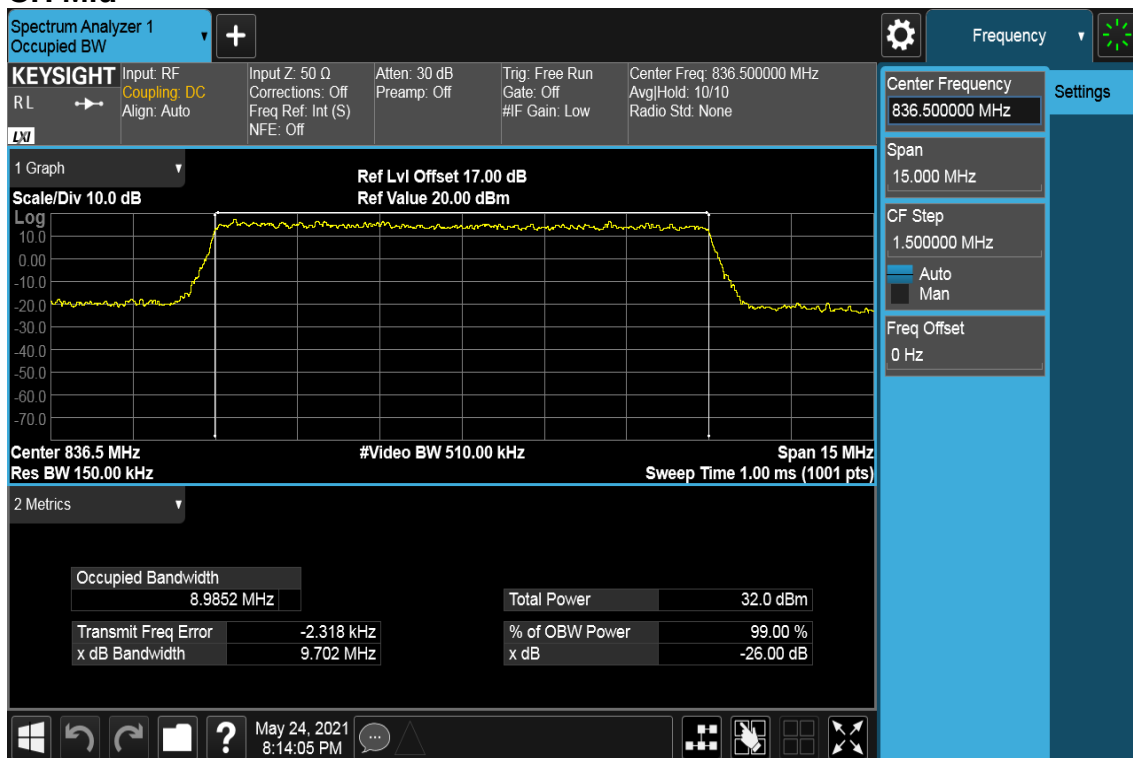CHANNEL BANDWIDTH: 10MHz / 64QAM / RB =50, RB Offset = 0
CH Low**CH Mid**




Report No.: T201102D09-RP13

Page: 51 / 98

Rev.: 00


CH High

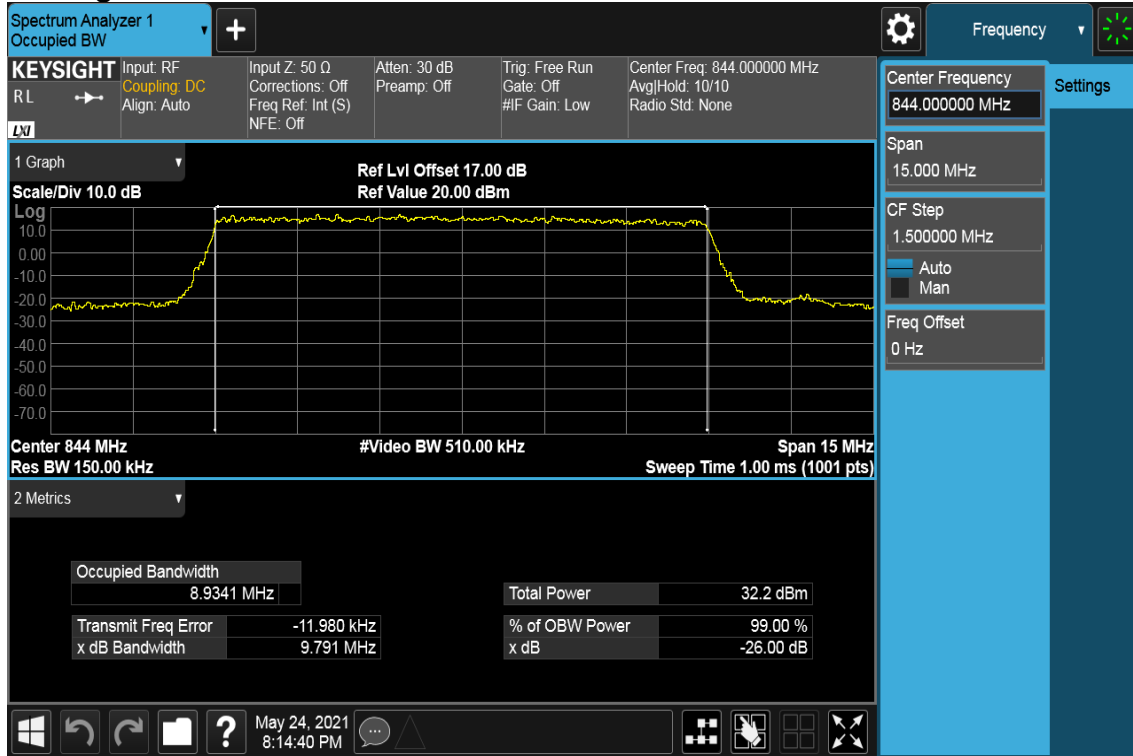


Report No.: T201102D09-RP13

CHANNEL BANDWIDTH: 15MHz / QPSK / RB =75, RB Offset = 0

CH Low

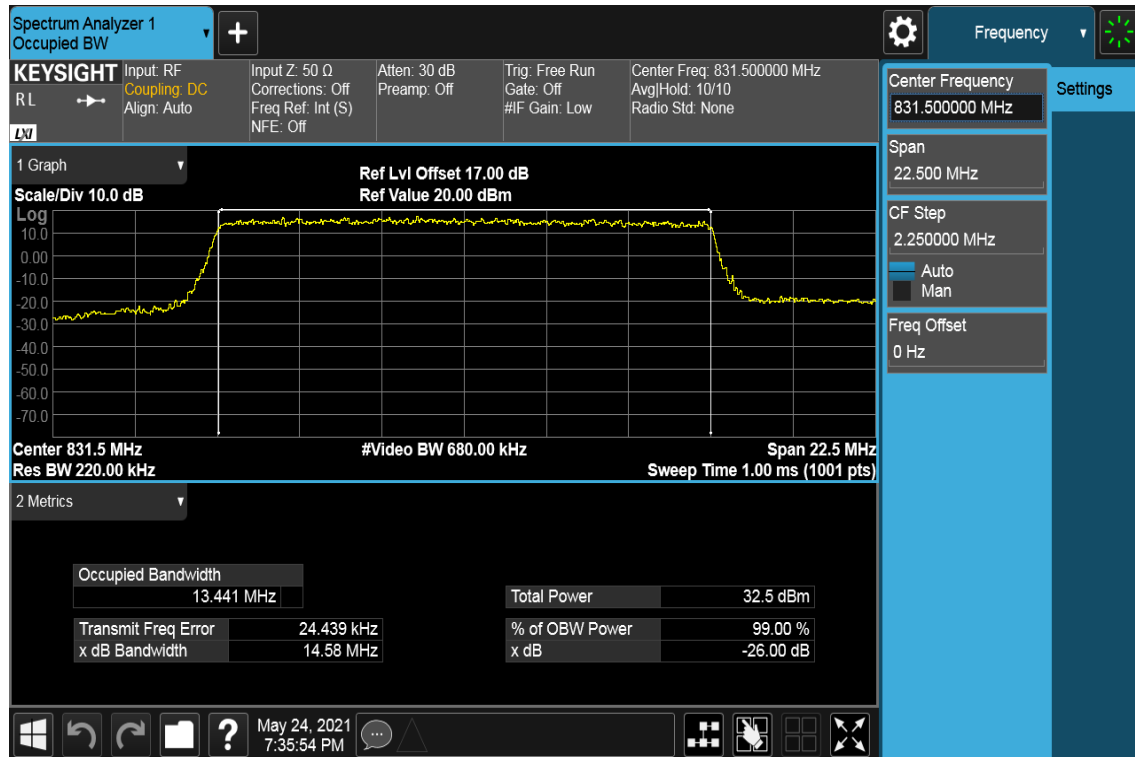

CH Mid

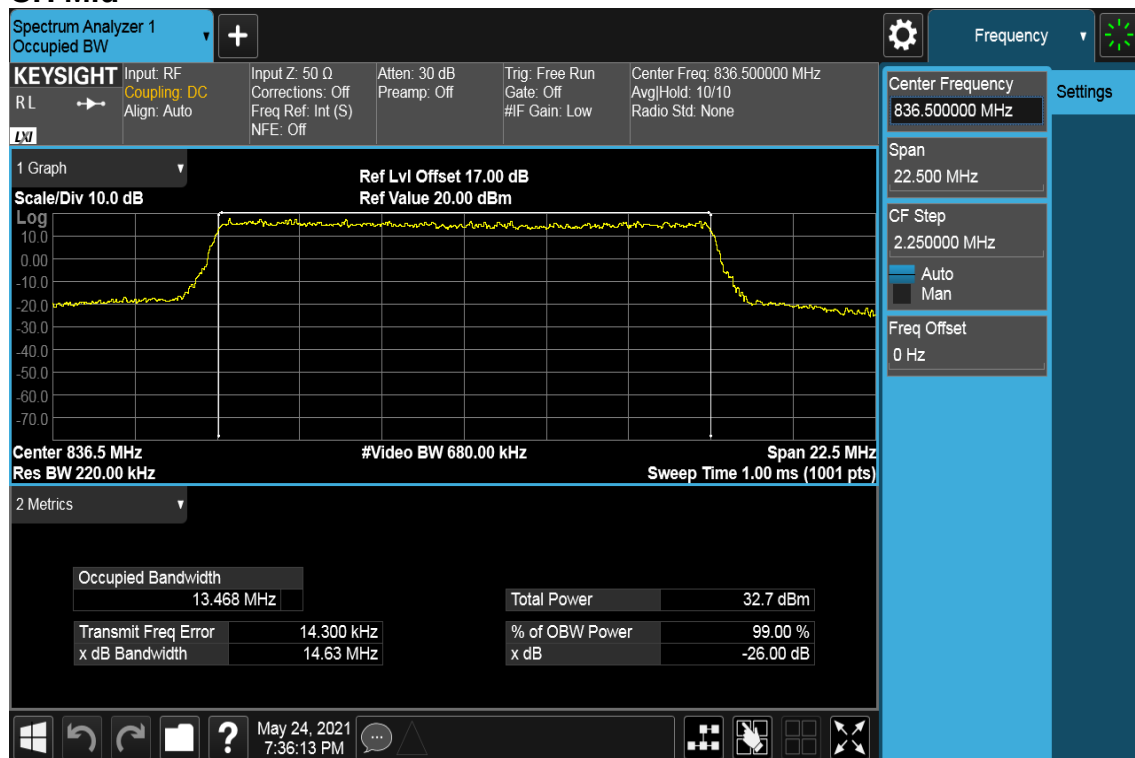




Report No.: T201102D09-RP13



Page: 53 / 98

Rev.: 00

CH High

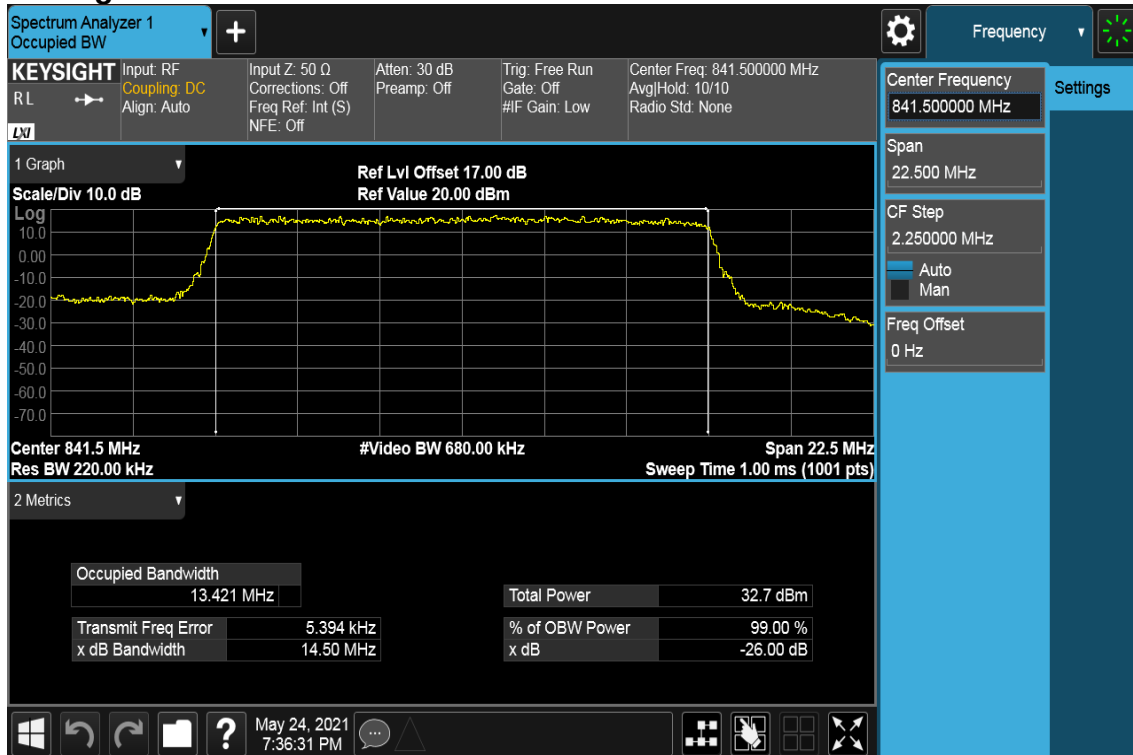

Report No.: T201102D09-RP13

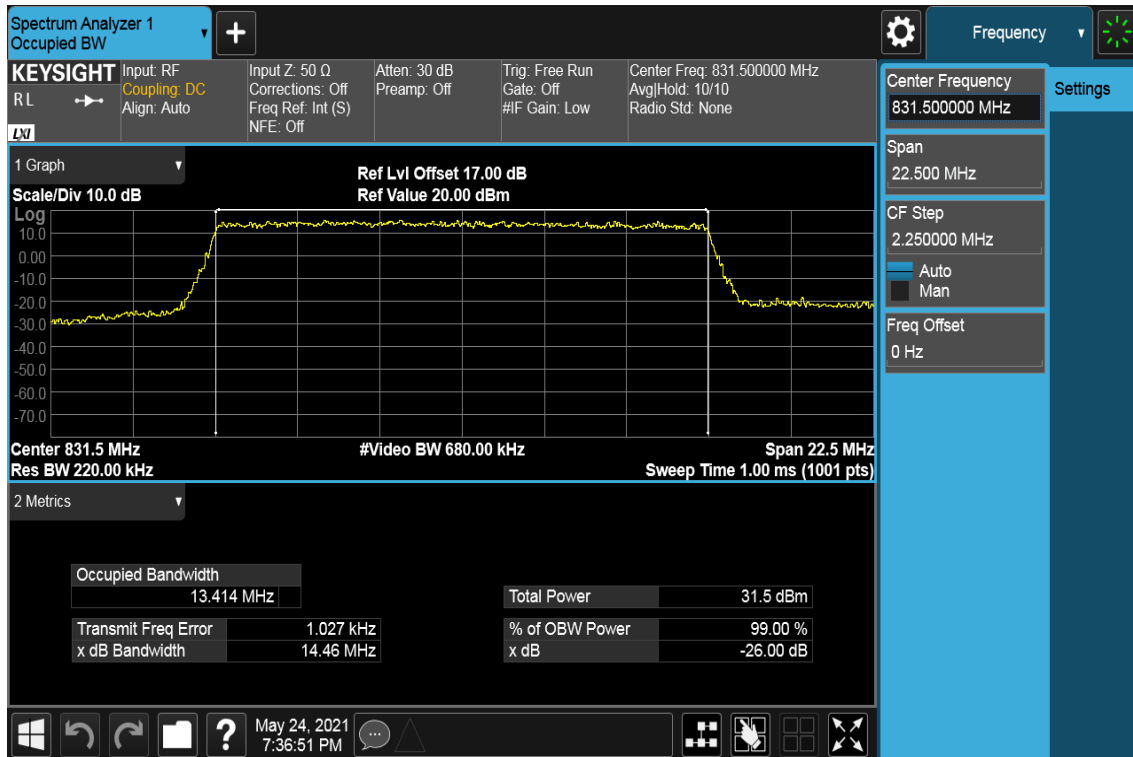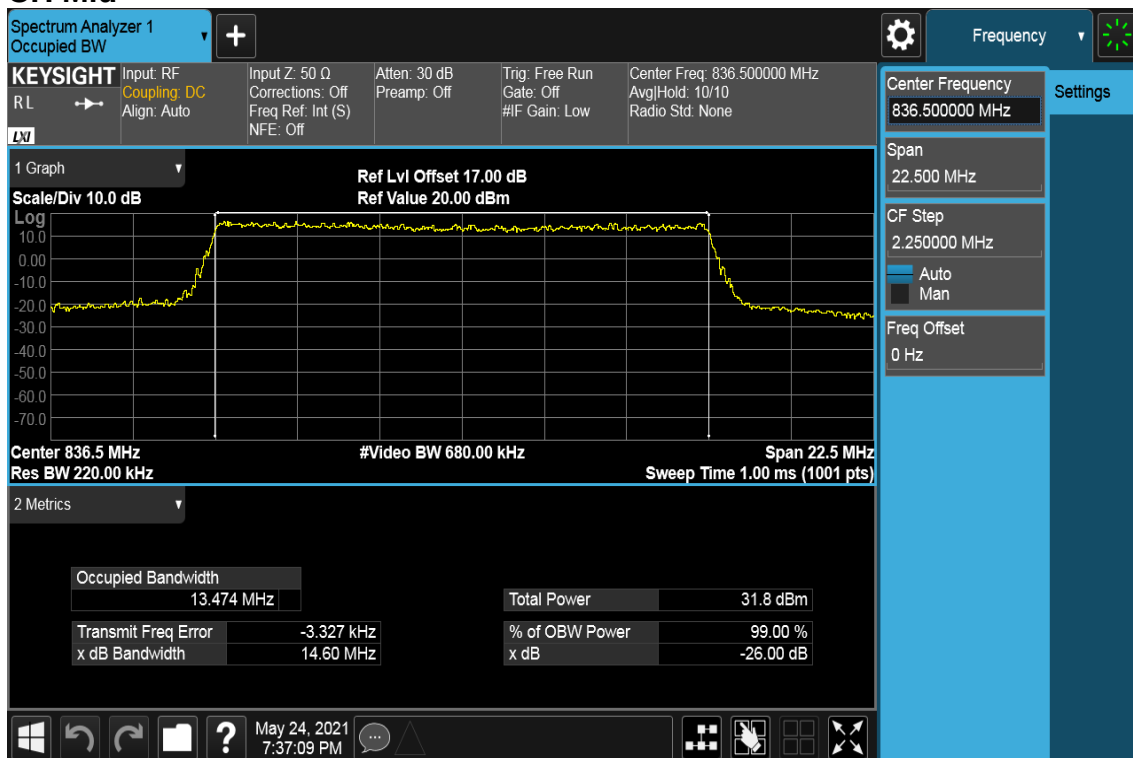CHANNEL BANDWIDTH: 15MHz / 16QAM / RB =75, RB Offset = 0
CH Low**CH Mid**






Report No.: T201102D09-RP13

Page: 55 / 98

Rev.: 00

CH High

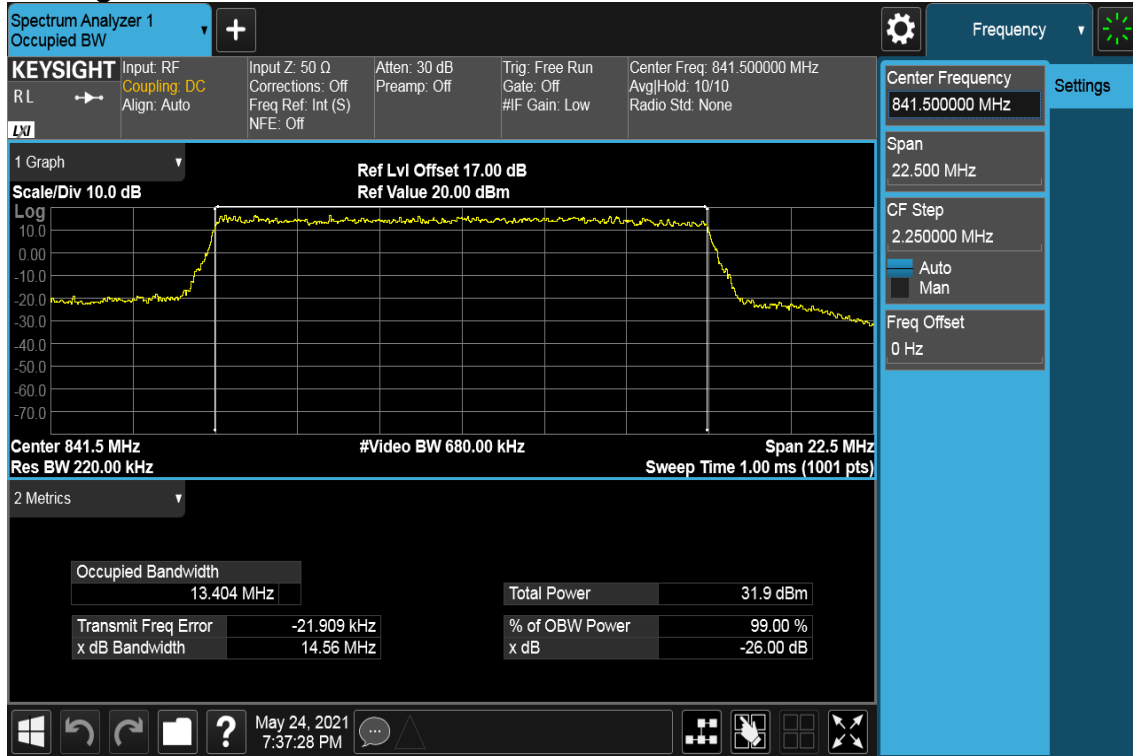

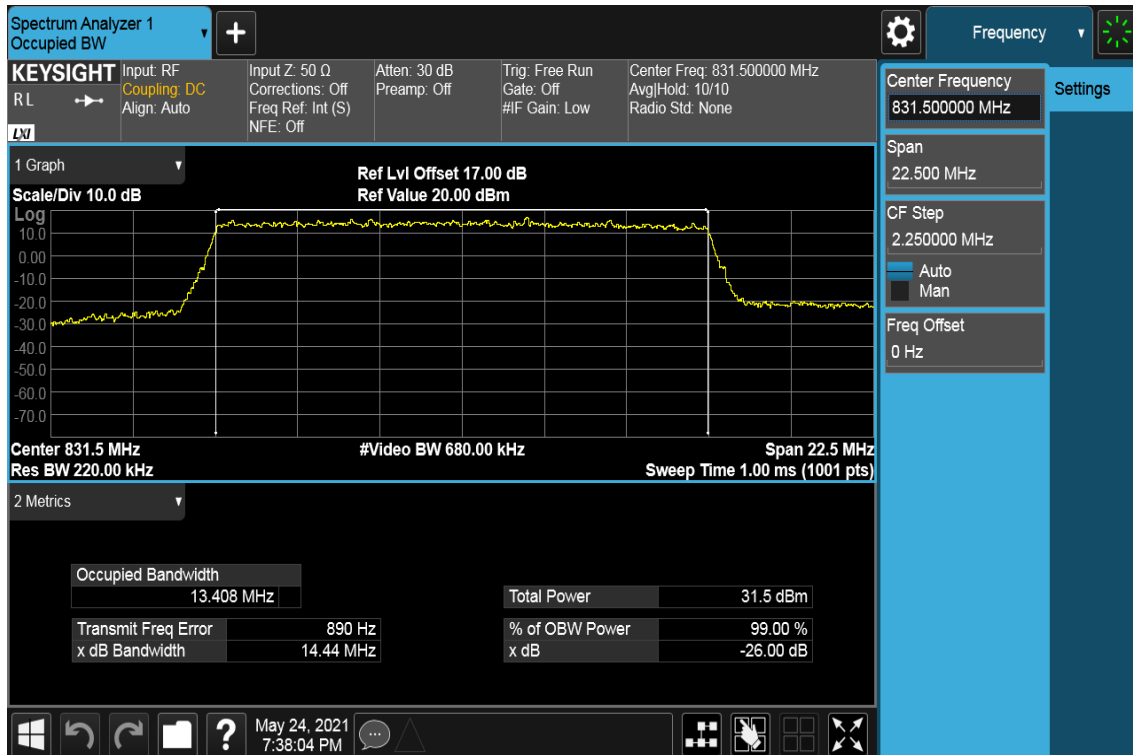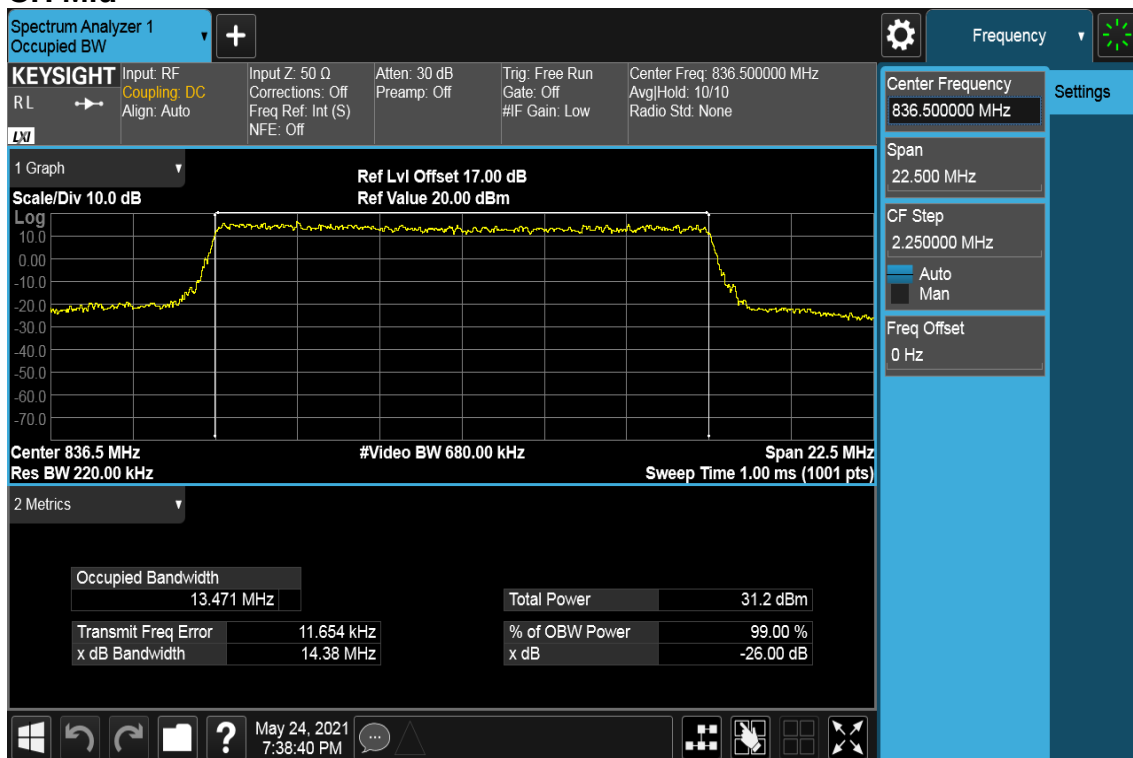CHANNEL BANDWIDTH: 15MHz / 64QAM / RB =75, RB Offset = 0
CH Low**CH Mid**




Report No.: T201102D09-RP13

Page: 57 / 98

Rev.: 00

CH High

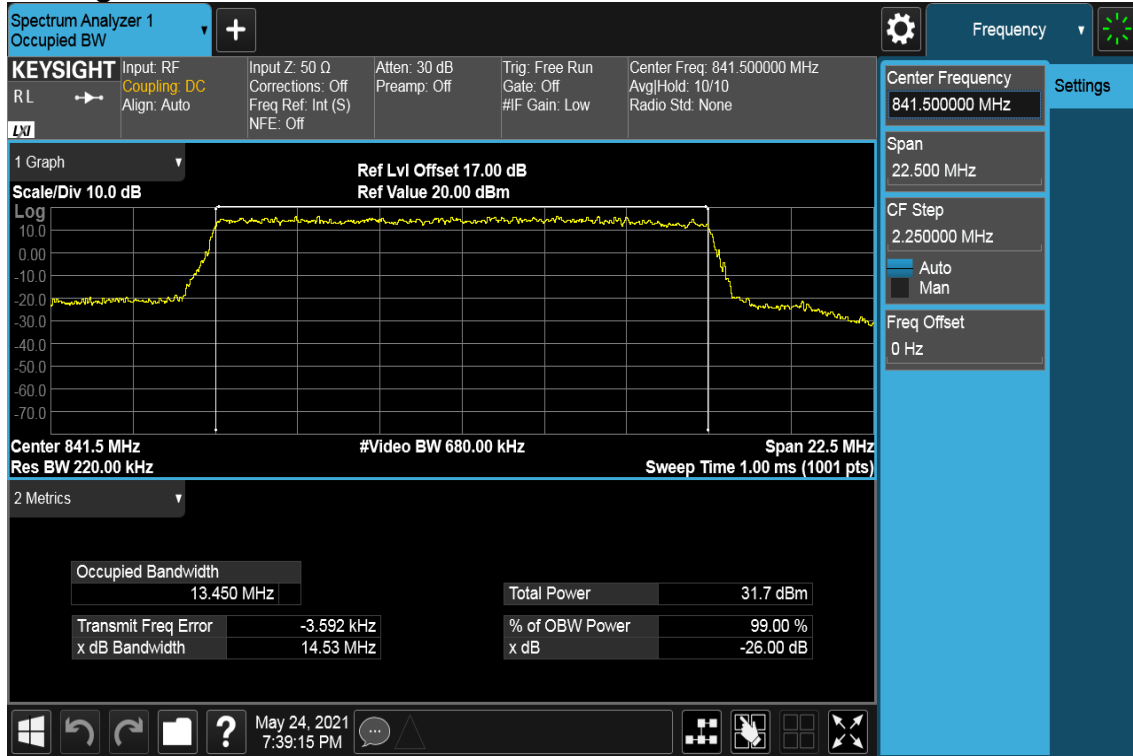



Report No.: T201102D09-RP13

Page: 58 / 98

Rev.: 00

8.4 PEAK TO AVERAGE POWER RATIO

Limit

In measuring transmissions in this band using an average power technique, the peak to average power ratio (PAPR) of the transmission may not exceed 13 dB.

Test Procedures

1. According to KDB 971168 D01,
2. The EUT was connect to spectrum analyzer and call box.
3. Set the CCDF function in spectrum analyzer.
4. The highest RF output power were measured and recorded the maximum PAPR level associated with a probability of 0.1%.
5. Record the Peak to Average Power Ratio.

Note: We selected worst case to performed test in middle channel, the results can be meet other channel.

Test Results

Temperature:	23.1°C	Humidity:	53.2% RH
Tested by:	Jerry Chang	Test Date:	March 24, 2021
Temperature:	25.2°C	Humidity:	55.6% RH
Tested by:	Jerry Chang	Test Date:	May 24, 2021
Temperature:	25.8°C	Humidity:	57.4% RH
Tested by:	Jerry Chang	Test Date:	August 26, 2021



LTE Band 26

LTE BAND 26							
Channel bandwidth: 1.4MHz				Channel bandwidth: 3MHz			
Freq. (MHz)	CH	PAPR (dB)		Freq. (MHz)	CH	PAPR (dB)	
		64QAM	Limit			64QAM	Limit
824.7	26797	5.62	13	825.5	26805	5.81	13
836.5	26915	5.76	13	836.5	26915	5.72	13
848.3	27033	5.43	13	847.5	27025	5.55	13

LTE BAND 26							
Channel bandwidth: 5MHz				Channel bandwidth: 10MHz			
Freq. (MHz)	CH	PAPR (dB)		Freq. (MHz)	CH	PAPR (dB)	
		64QAM	Limit			64QAM	Limit
826.5	26815	5.77	13	829.0	26840	5.38	13
836.5	26915	5.64	13	836.5	26915	5.53	13
846.5	27015	5.48	13	844.0	26990	5.48	13

LTE BAND 26			
Channel bandwidth: 15MHz			
Freq. (MHz)	CH	PAPR (dB)	
		64QAM	Limit
831.5	26865	5.44	13
836.5	26915	5.60	13
841.5	26965	5.44	13

Note: We selected worst case to performed test in middle channel, the results can be meet other channel.

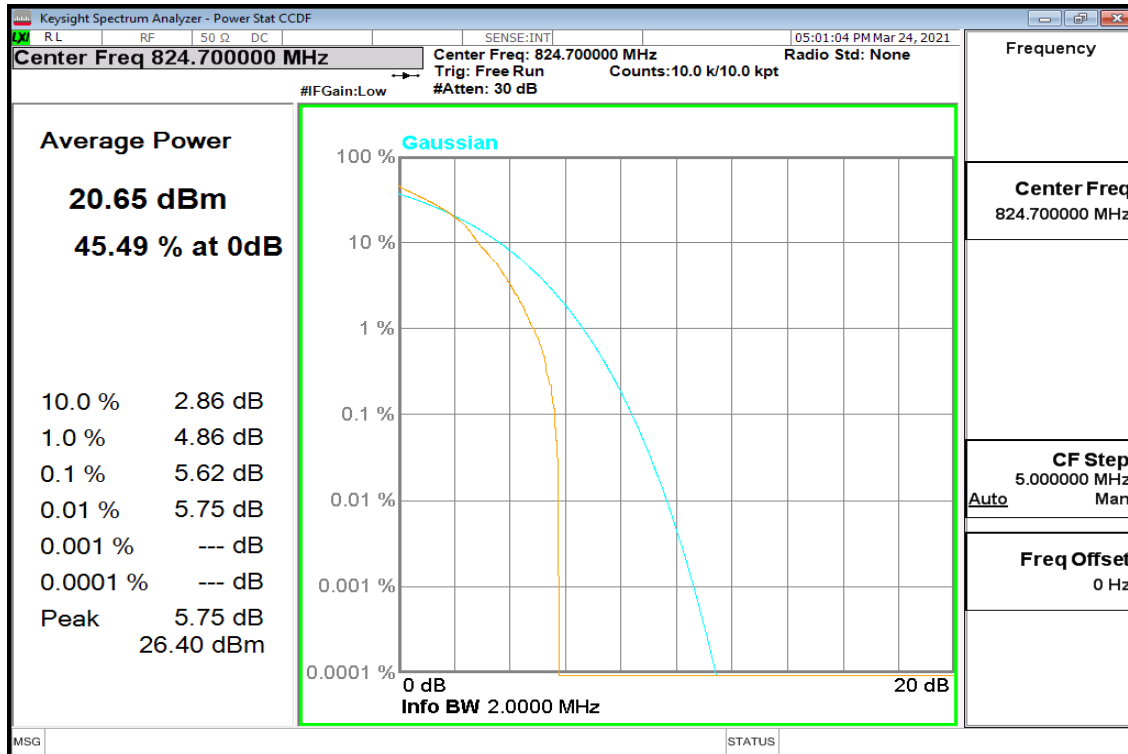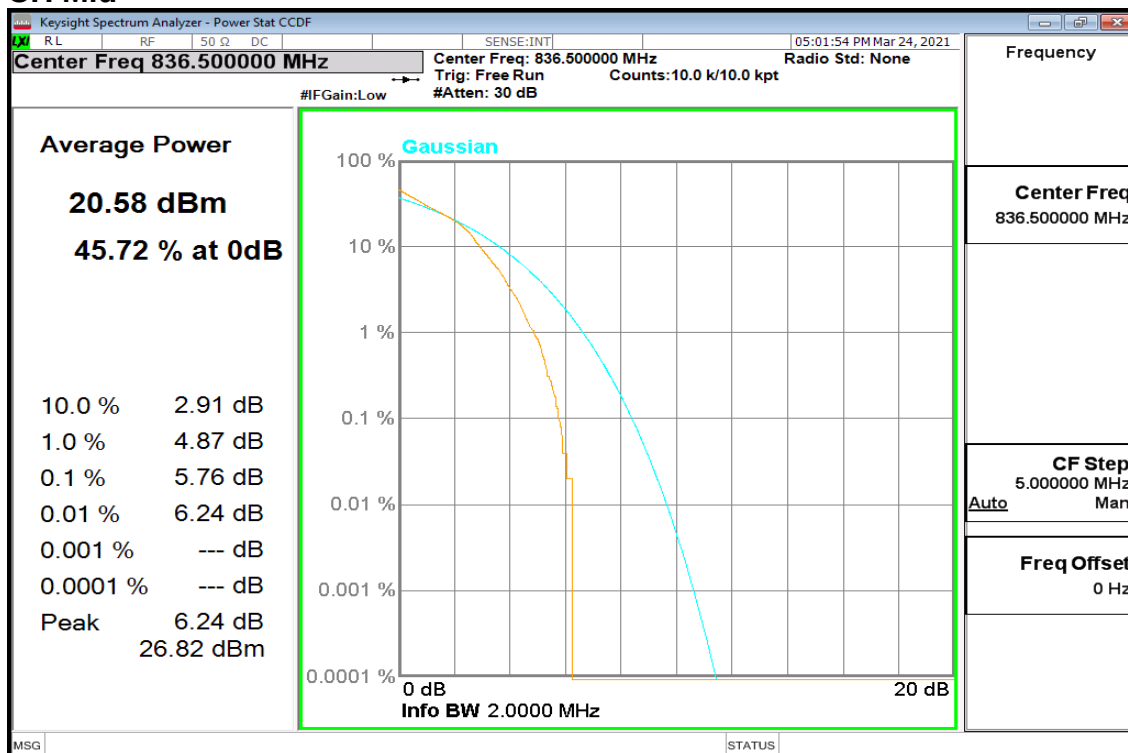LTE Band 26**CHANNEL BANDWIDTH: 1.4MHz / 64QAM / RB =6, RB Offset = 0****CH Low****CH Mid**




Report No.: T201102D09-RP13

Page: 61 / 98

Rev.: 00

CH High

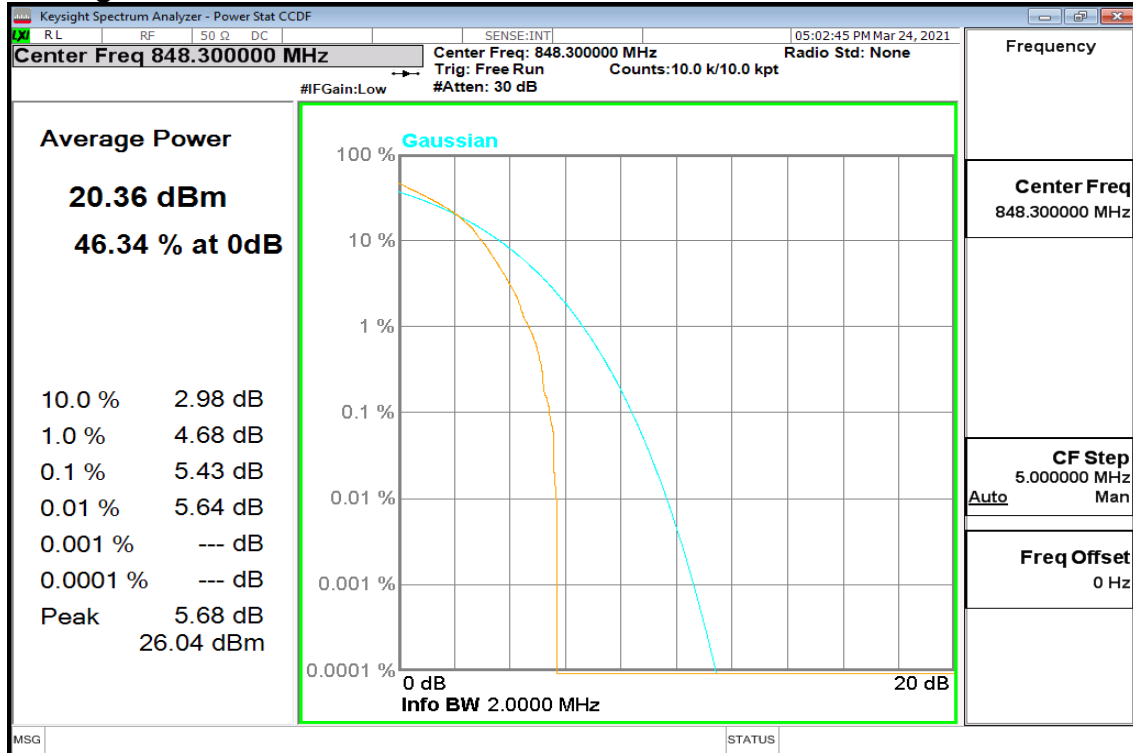


Report No.: T201102D09-RP13

CHANNEL BANDWIDTH: 3MHz / 64QAM / RB =15, RB Offset = 0

CH Low



CH Mid

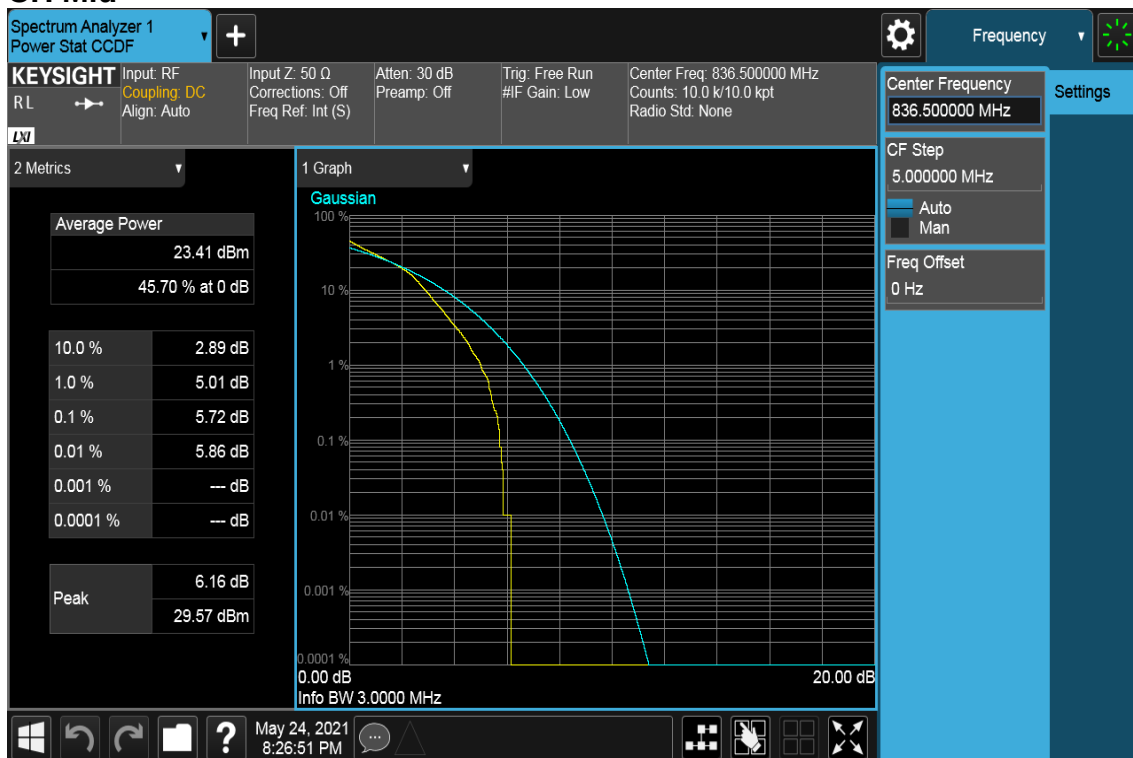



Report No.: T201102D09-RP13

Page: 63 / 98

Rev.: 00

CH High




Report No.: T201102D09-RP13

CHANNEL BANDWIDTH: 5MHz / 64QAM / RB =25, RB Offset = 0

CH Low



CH Mid

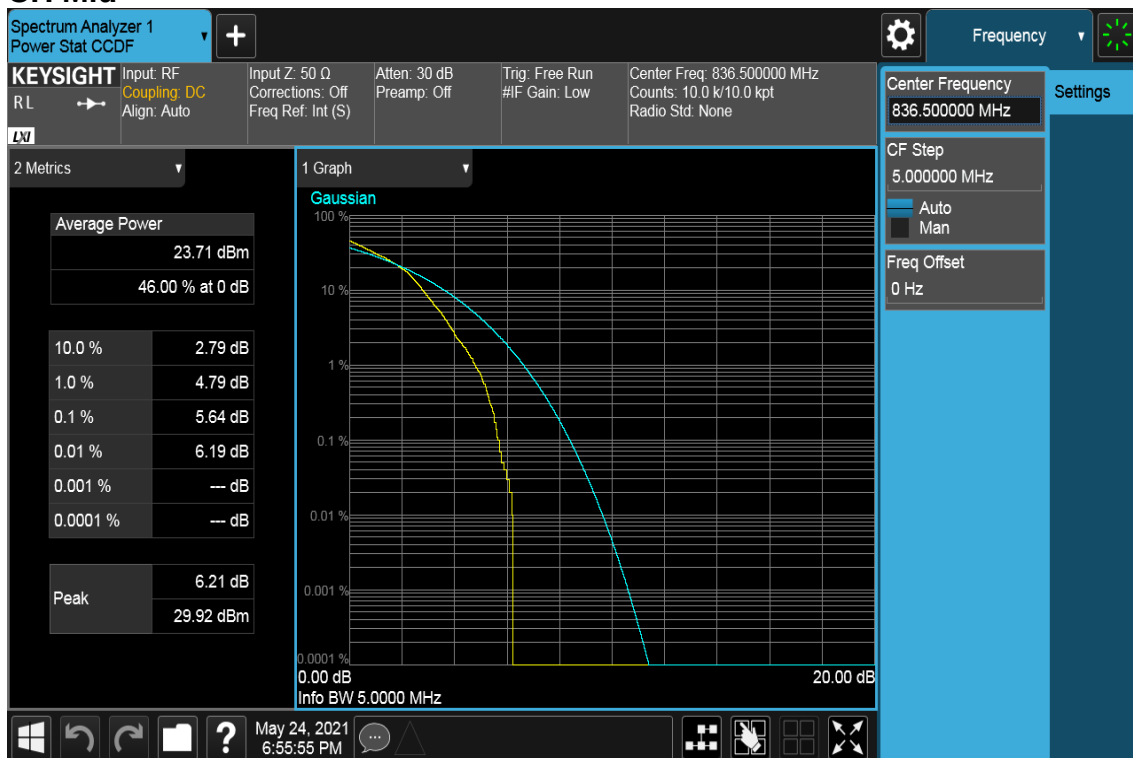




Report No.: T201102D09-RP13

Page: 65 / 98

Rev.: 00


CH High

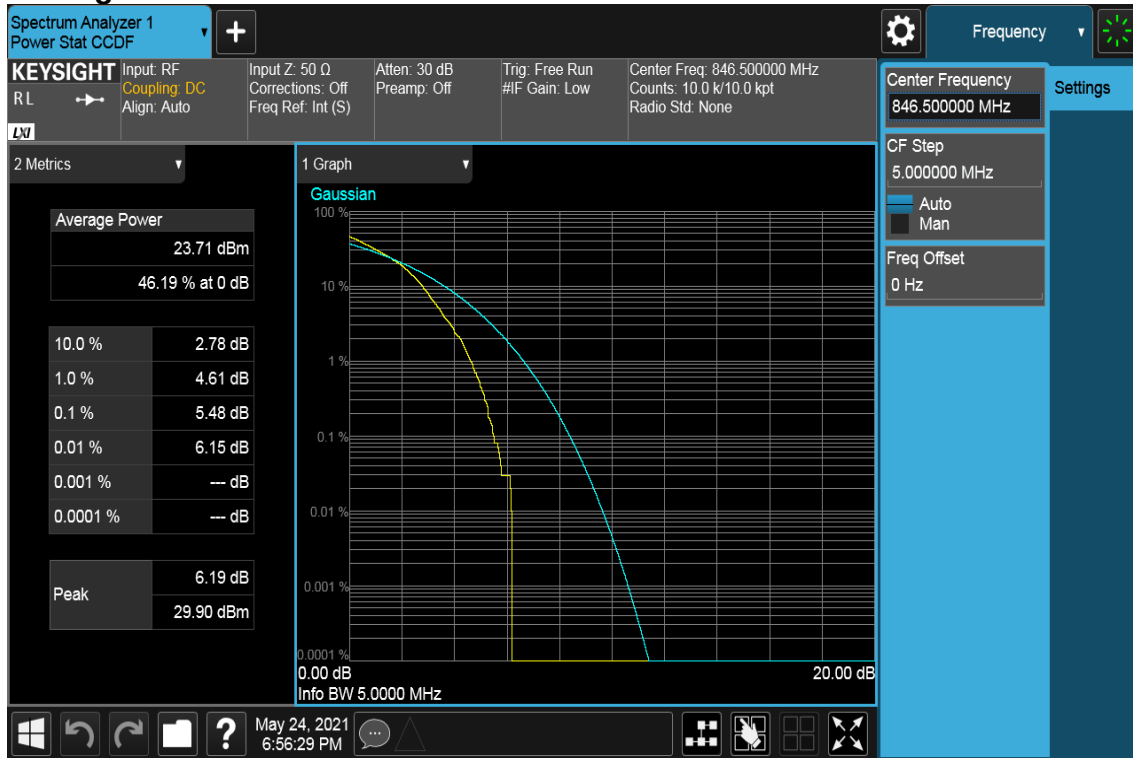


Report No.: T201102D09-RP13

CHANNEL BANDWIDTH: 10MHz / 64QAM /RB =50, RB Offset = 0

CH Low

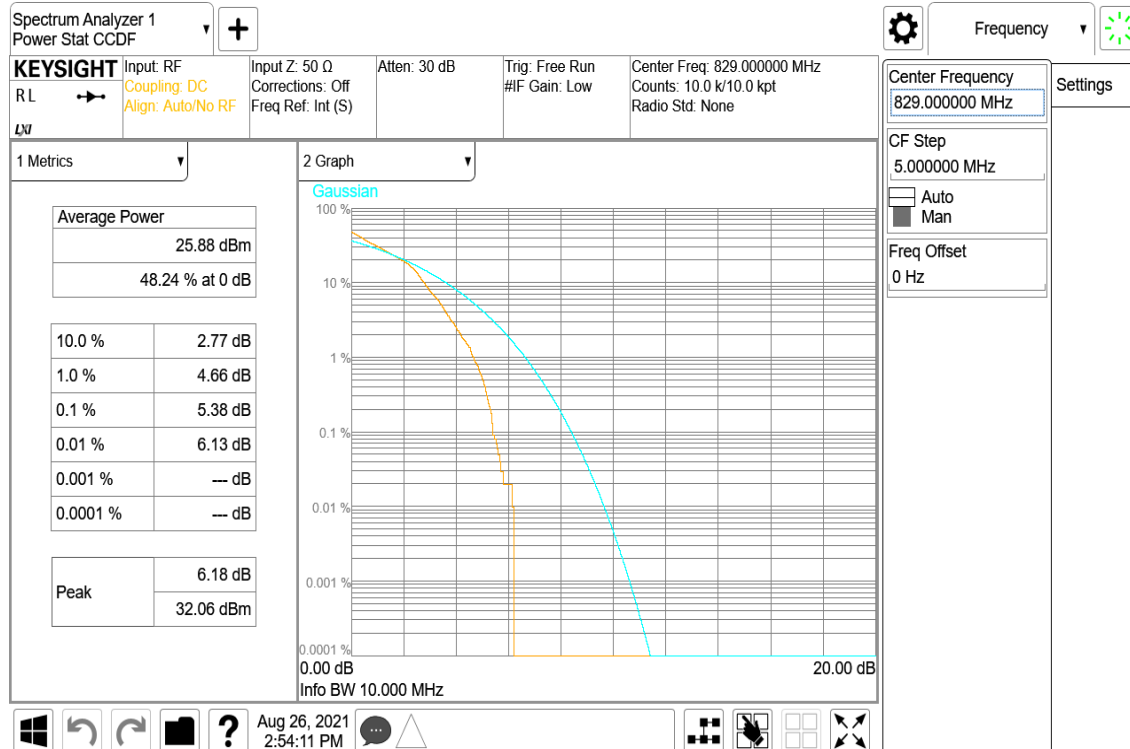

CH Mid

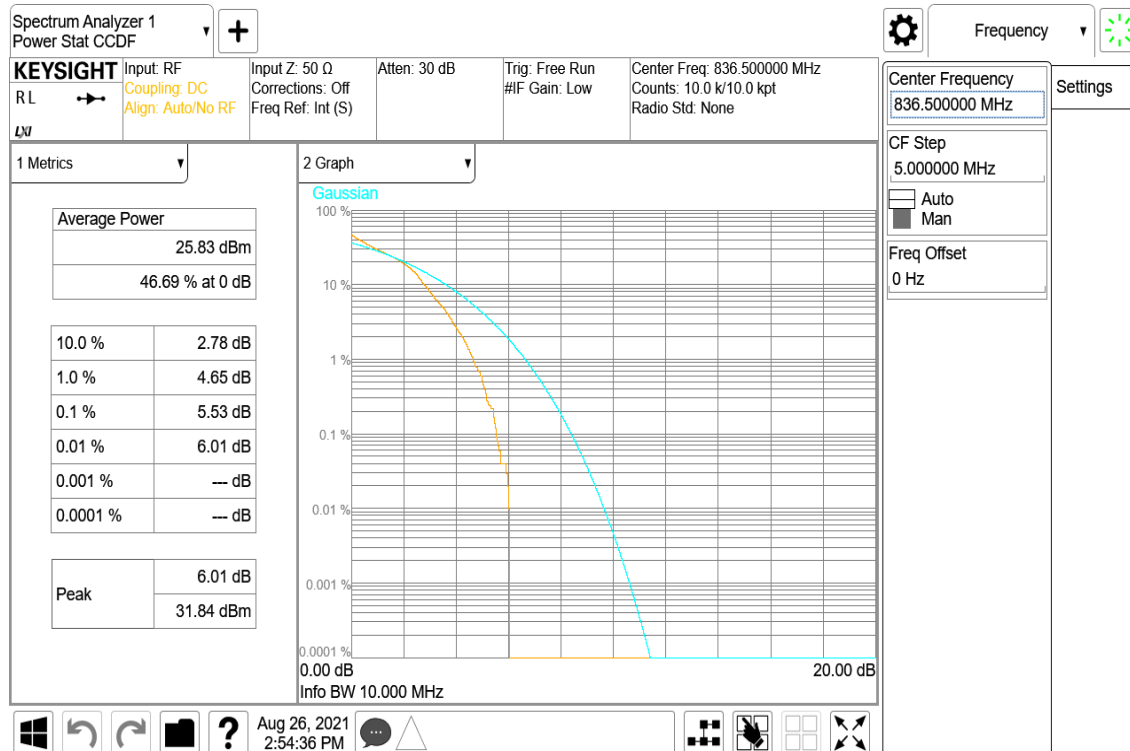




Report No.: T201102D09-RP13

Page: 67 / 98



Rev.: 00

CH High

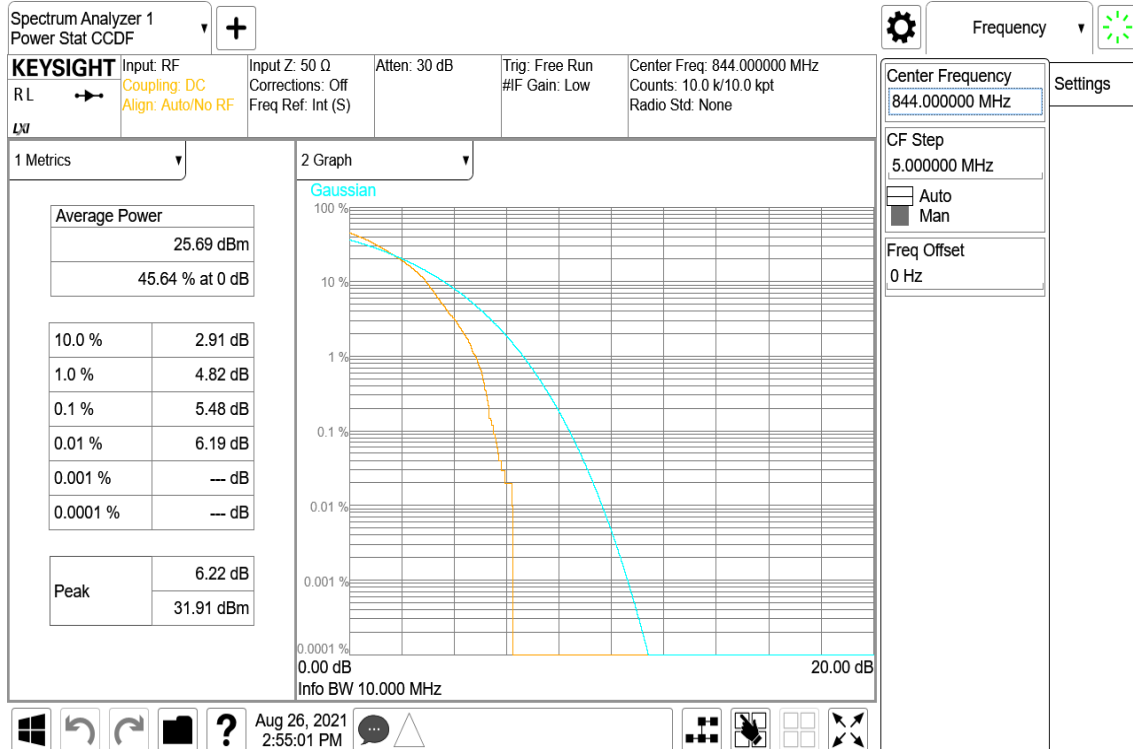



Report No.: T201102D09-RP13

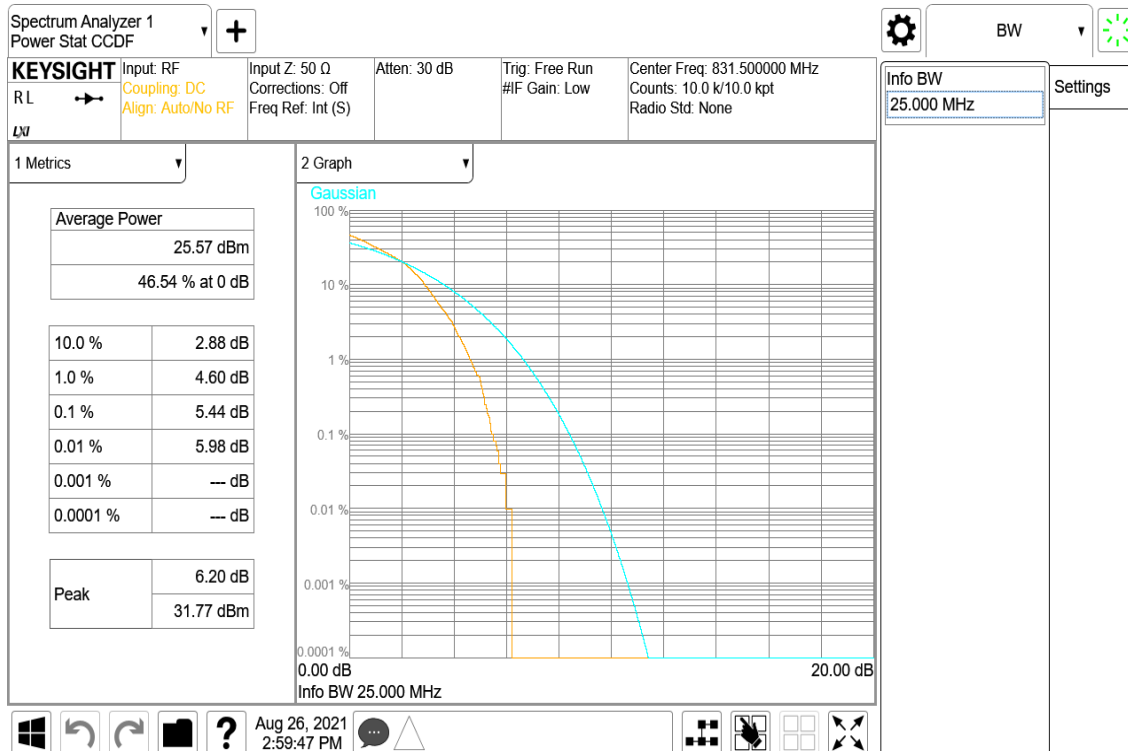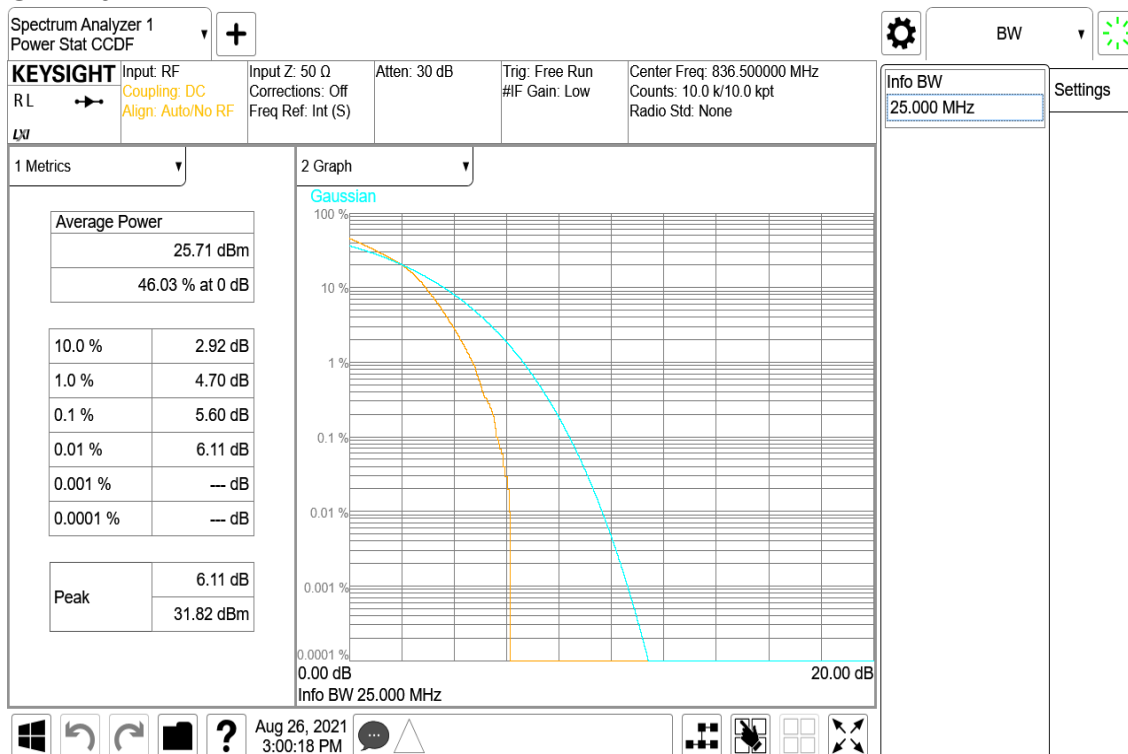CHANNEL BANDWIDTH: 15MHz / 64QAM /RB =75, RB Offset = 0
CH Low**CH Mid**




Report No.: T201102D09-RP13

Page: 69 / 98

Rev.: 00

CH High

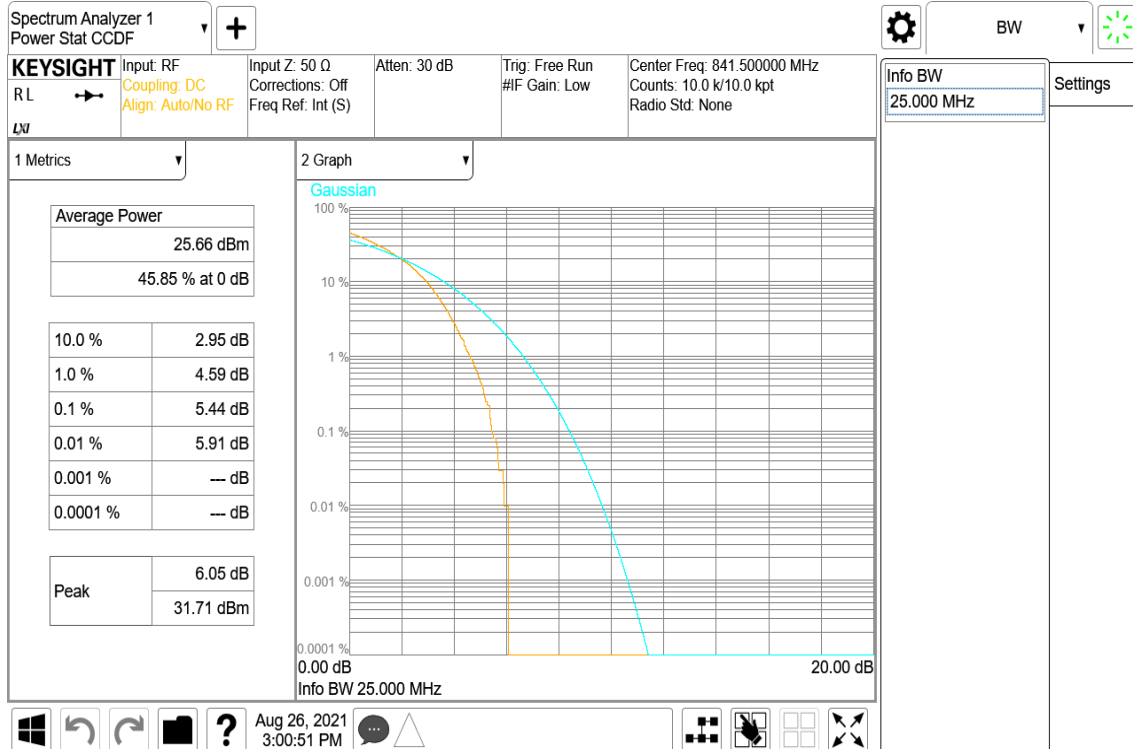



Report No.: T201102D09-RP13

Page: 70 / 98

Rev.: 00

8.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS

Limit

FCC §22.917(a), Band 26

For operations in the 824-849 MHz band ,Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedures

KDB 971168 D01,

1. RBW $\geq$ 1% of the emission bandwidth
2. VBW $\geq$ 3 x RBW
3. Span was set large enough so as to capture all out of emissions near the band edge.

Test Results:

Temperature: 23.1°C

Humidity: 53.2% RH

Tested by: Jerry Chang

Test Date: March 24, 2021

Temperature: 25.2°C

Humidity: 55.6% RH

Tested by: Jerry Chang


Test Date: May 24, 2021

Band Edge


LTE Band 26

CHANNEL BANDWIDTH: 1.4MHz / QPSK / RB =6, RB Offset = 0

LOWER BAND EDGE


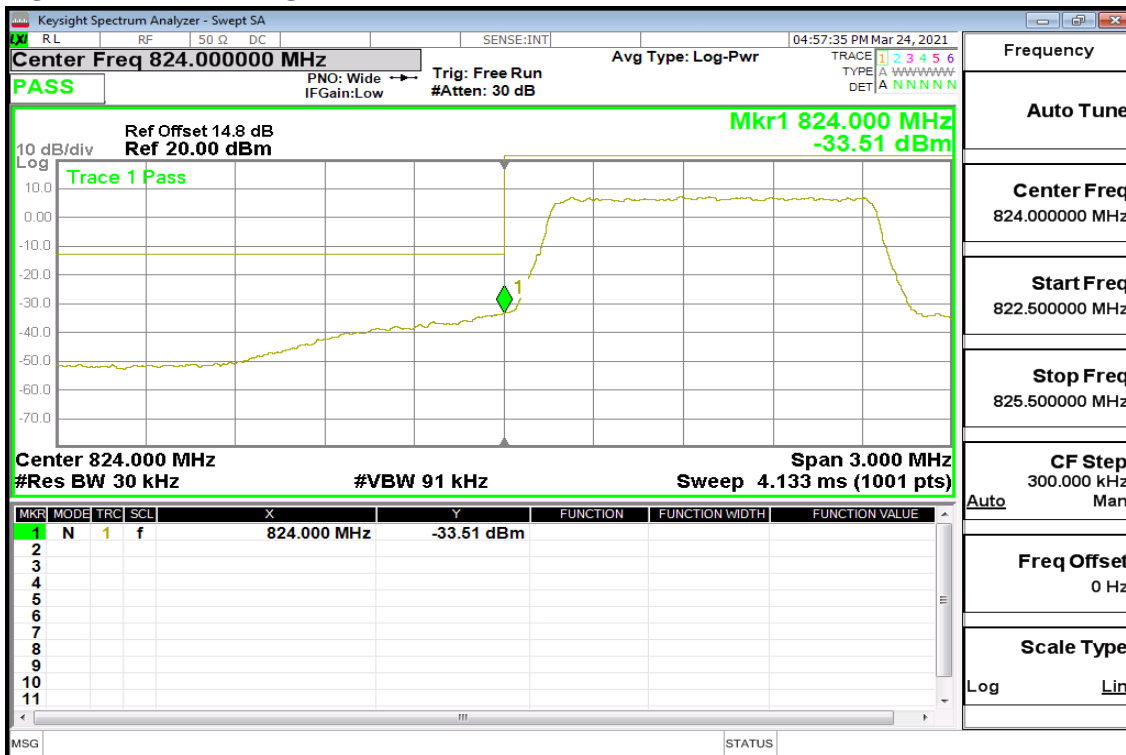


HIGHER BAND EDGE


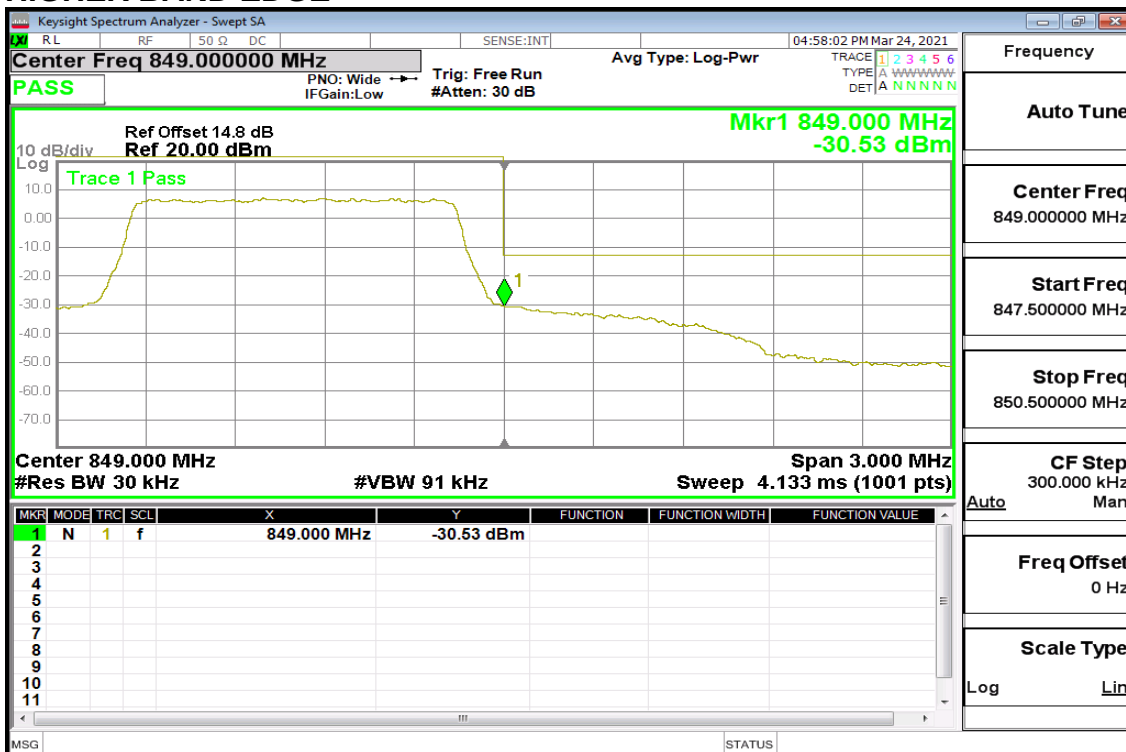




Report No.: T201102D09-RP13

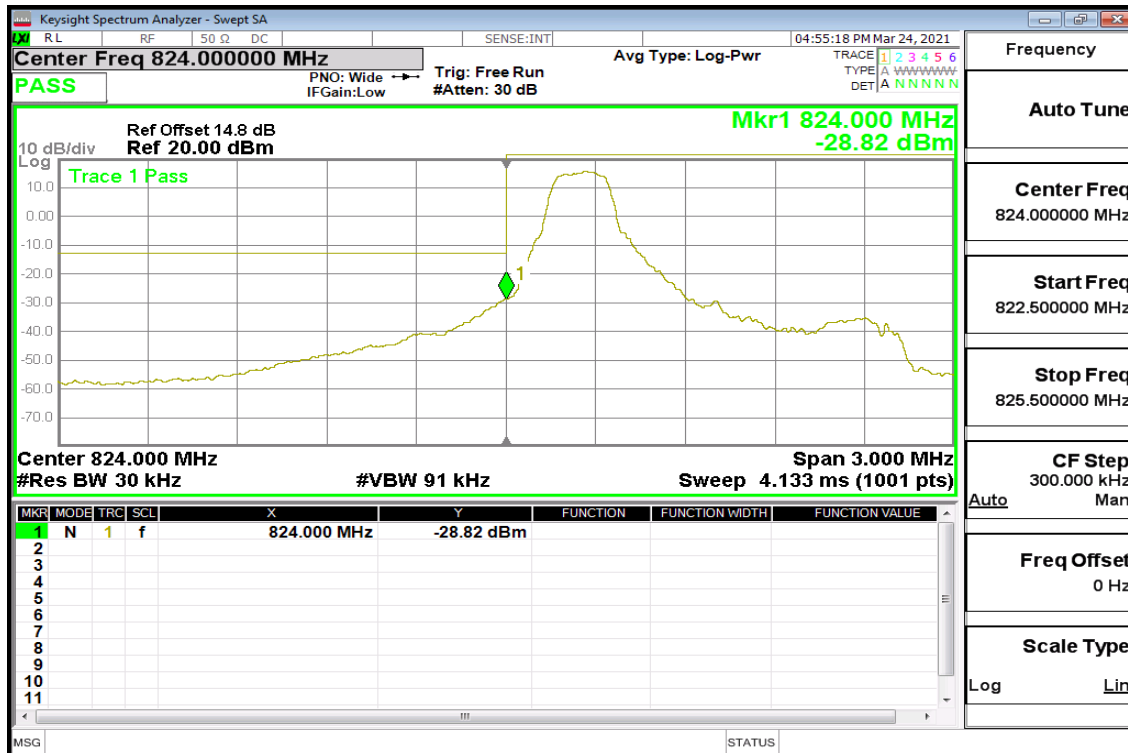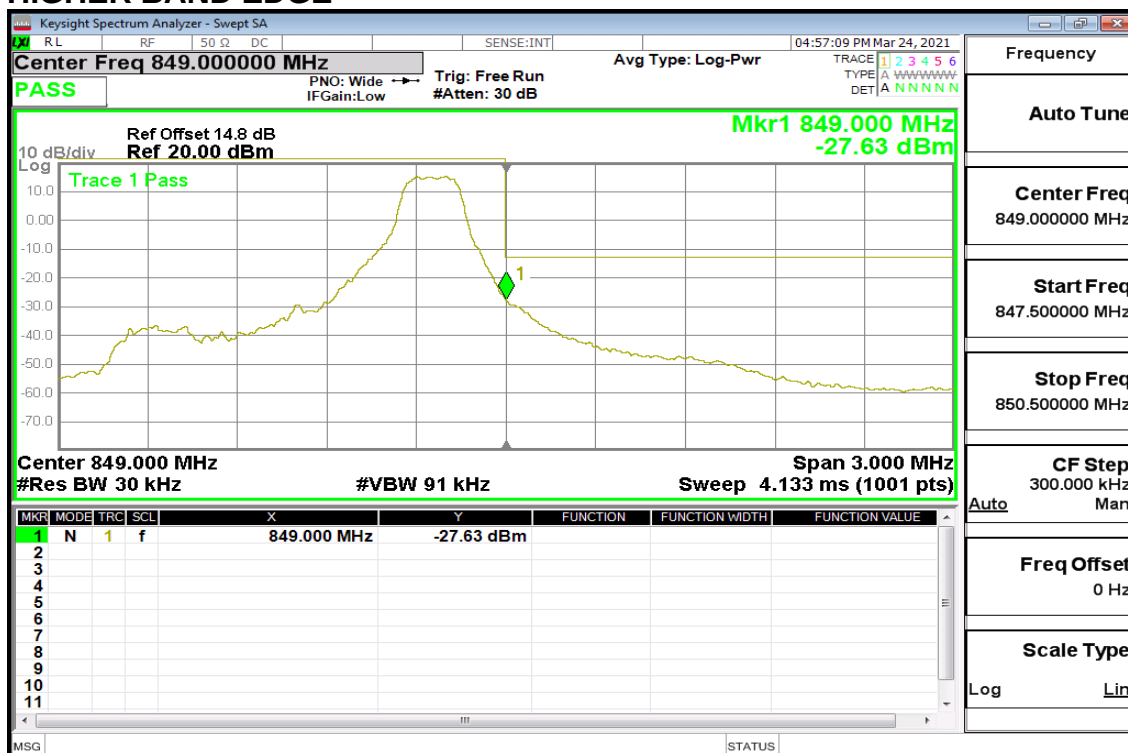
**CHANNEL BANDWIDTH: 1.4MHz / QPSK / RB =1, RB Offset = 0
LOWER BAND EDGE****CHANNEL BANDWIDTH: 1.4MHz / QPSK / RB =1, RB Offset = 5
HIGHER BAND EDGE**

Report No.: T201102D09-RP13

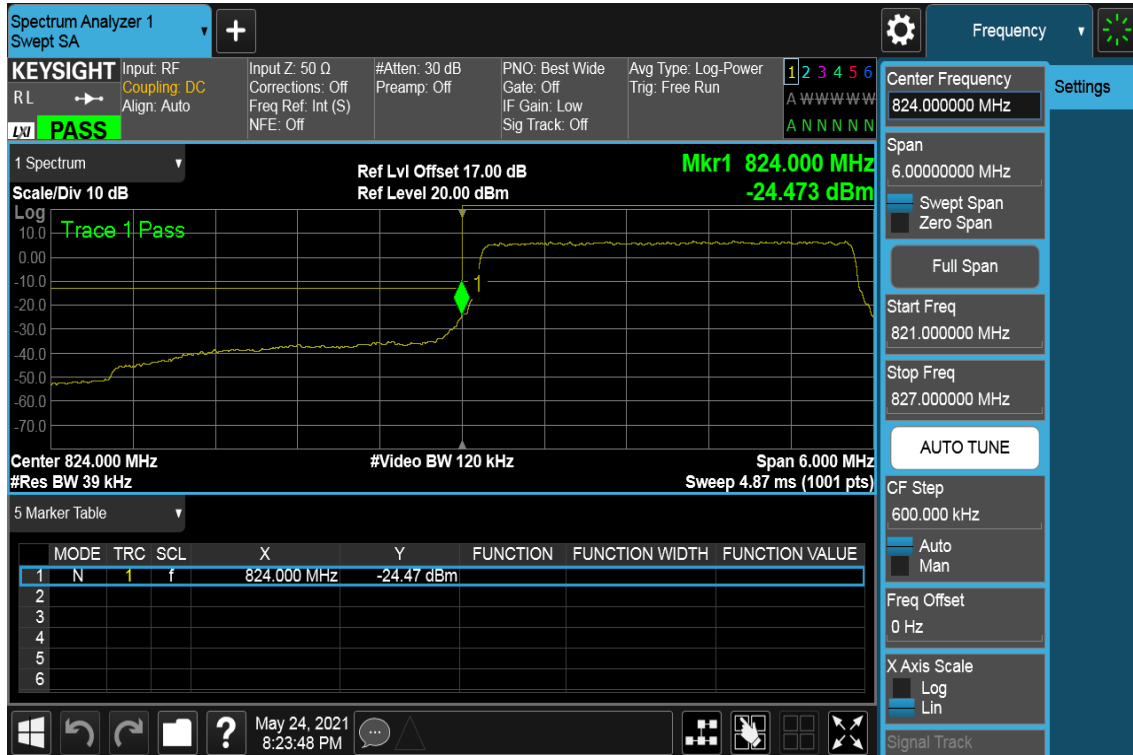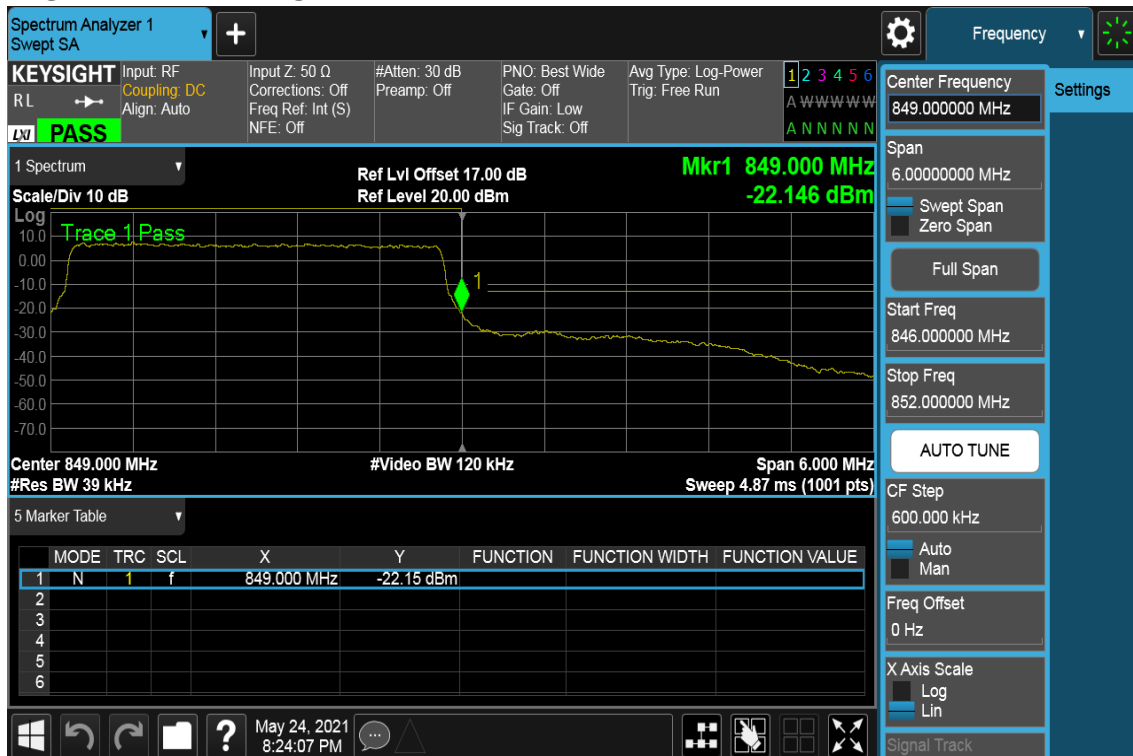
CHANNEL BANDWIDTH: 3MHz / QPSK / RB =15, RB Offset = 0
LOWER BAND EDGE**HIGHER BAND EDGE**



Report No.: T201102D09-RP13

CHANNEL BANDWIDTH: 3MHz / QPSK / RB =1, RB Offset = 0 LOWER BAND EDGE

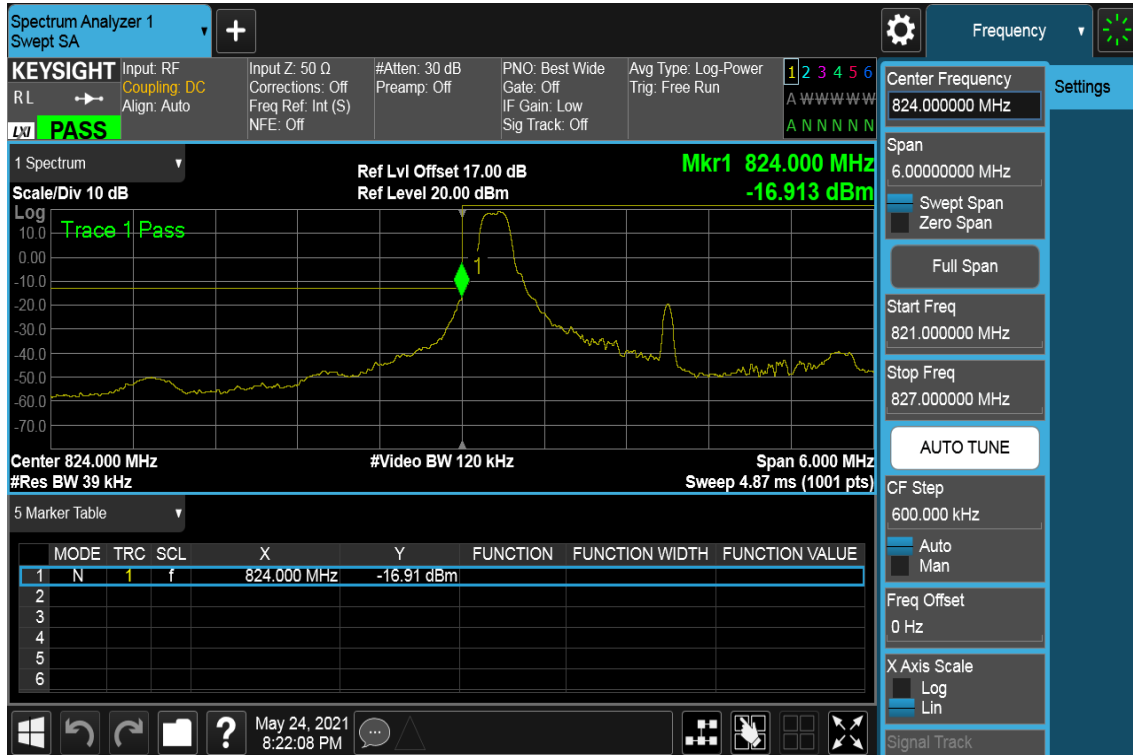


CHANNEL BANDWIDTH: 3MHz / QPSK / RB =1, RB Offset = 14 HIGHER BAND EDGE

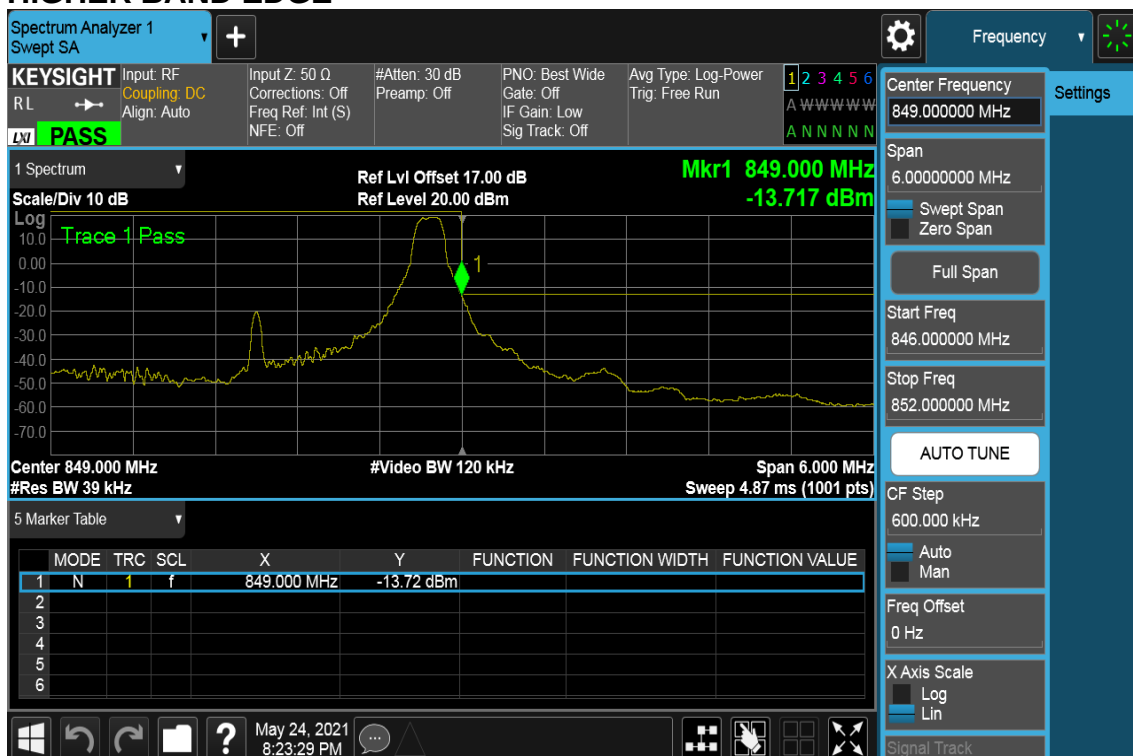

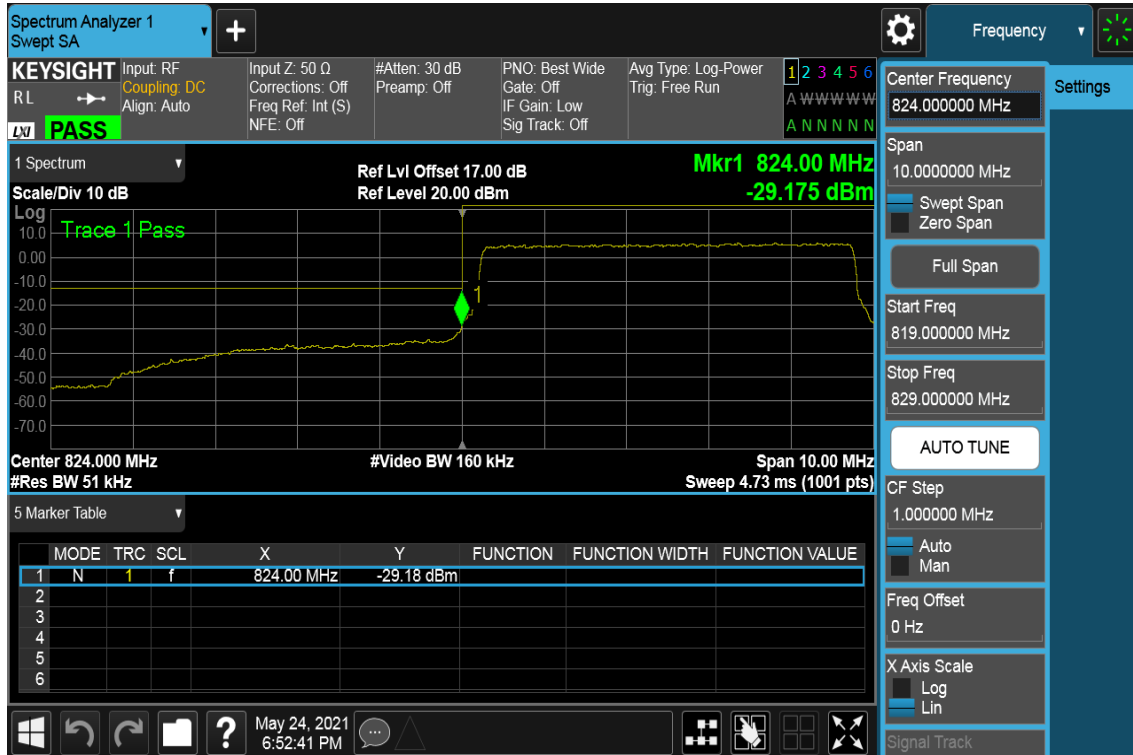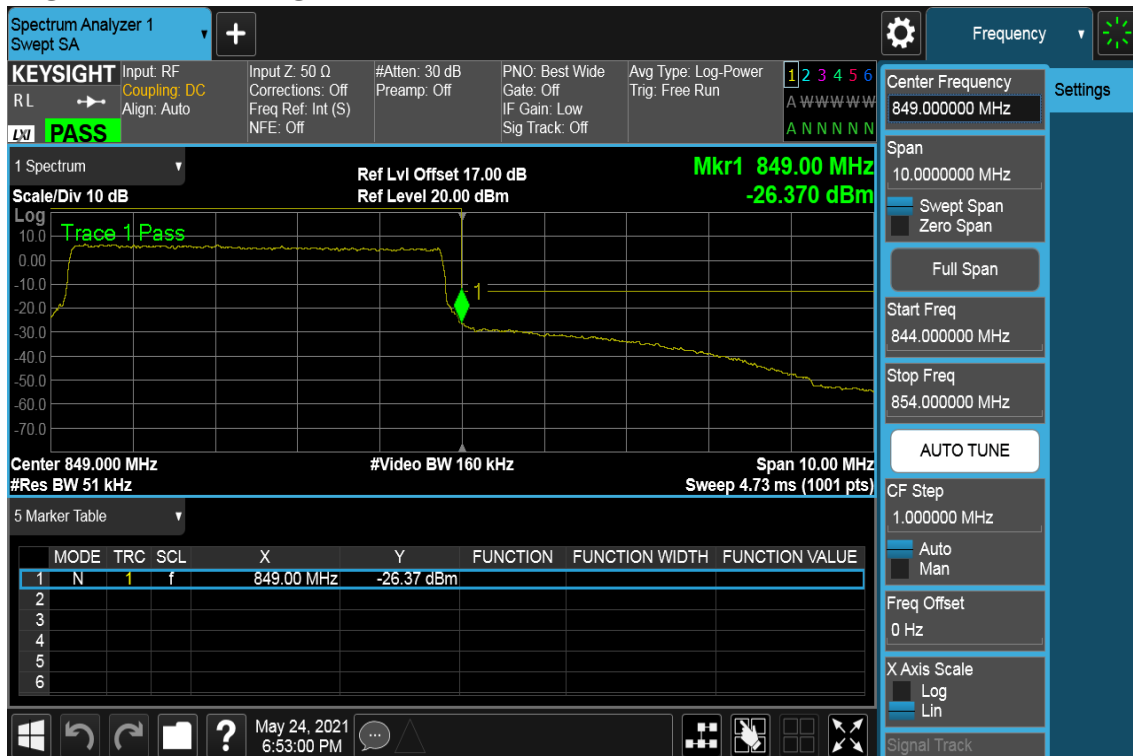CHANNEL BANDWIDTH: 5MHz / QPSK / RB =25, RB Offset = 0
LOWER BAND EDGE**HIGHER BAND EDGE**


CHANNEL BANDWIDTH: 5MHz / QPSK / RB =1, RB Offset = 0 LOWER BAND EDGE

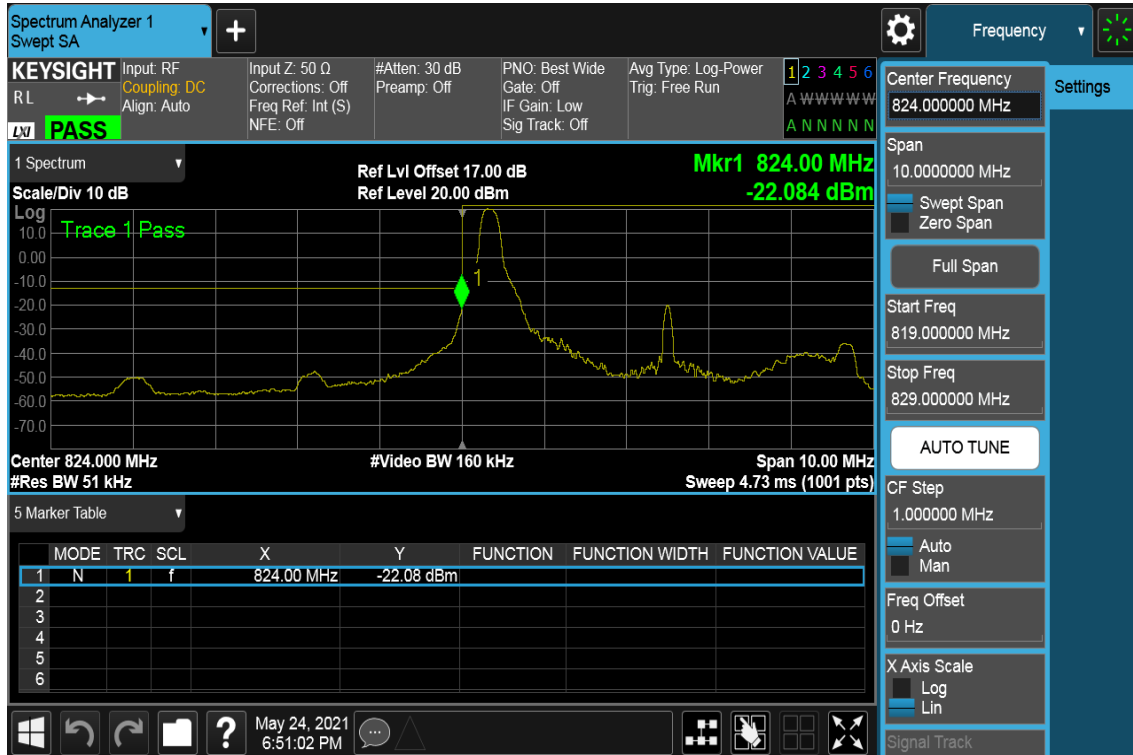

CHANNEL BANDWIDTH: 5MHz / QPSK / RB =1, RB Offset = 24 HIGHER BAND EDGE



Report No.: T201102D09-RP13

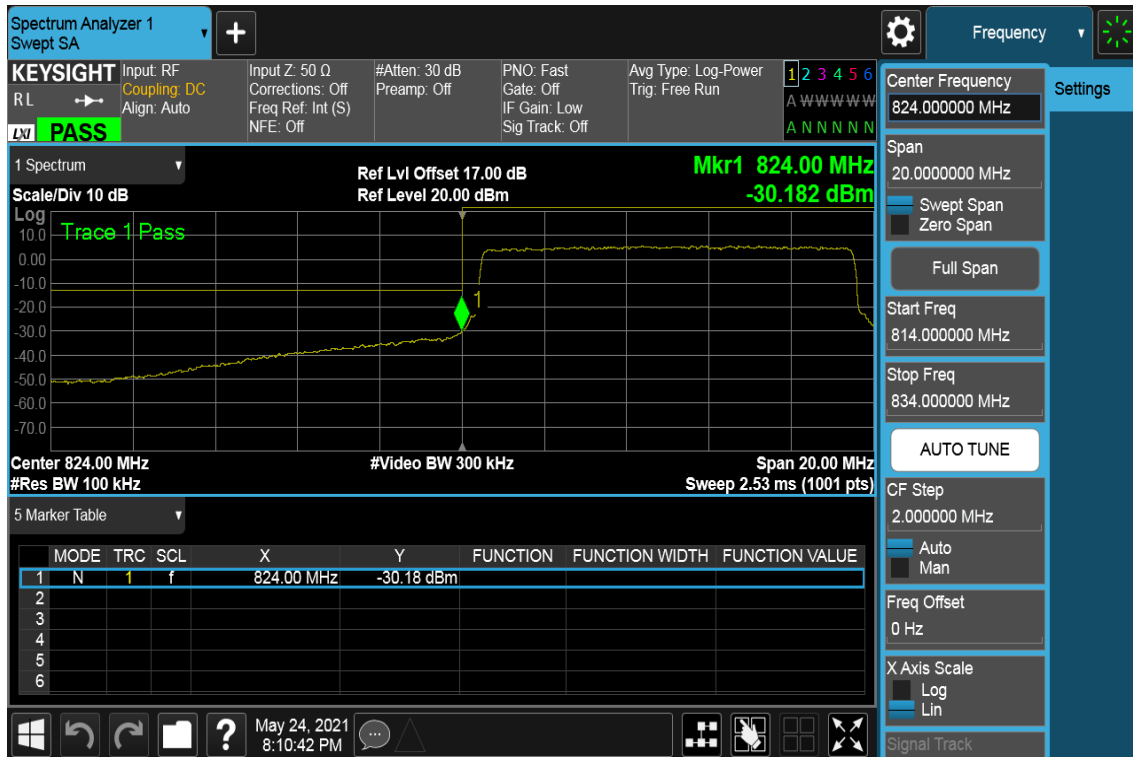CHANNEL BANDWIDTH: 10MHz / QPSK / RB =50, RB Offset = 0
LOWER BAND EDGE**HIGHER BAND EDGE**