

Report No.: T200522D10-RP3



### 5.5.4 Test Result


#### Test Data


Temperature: 22.3°C      Humidity: 58.1% RH  
Tested by: Rick Lee      Test date: December 08, 2020

Temperature: 23.5°C      Humidity: 58.5% RH  
Tested by: Rick Lee      Test date: December 09, 2020

#### Chain 0:

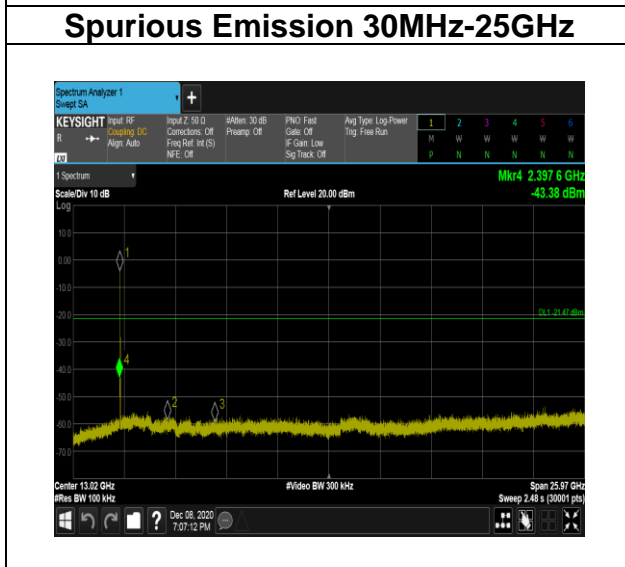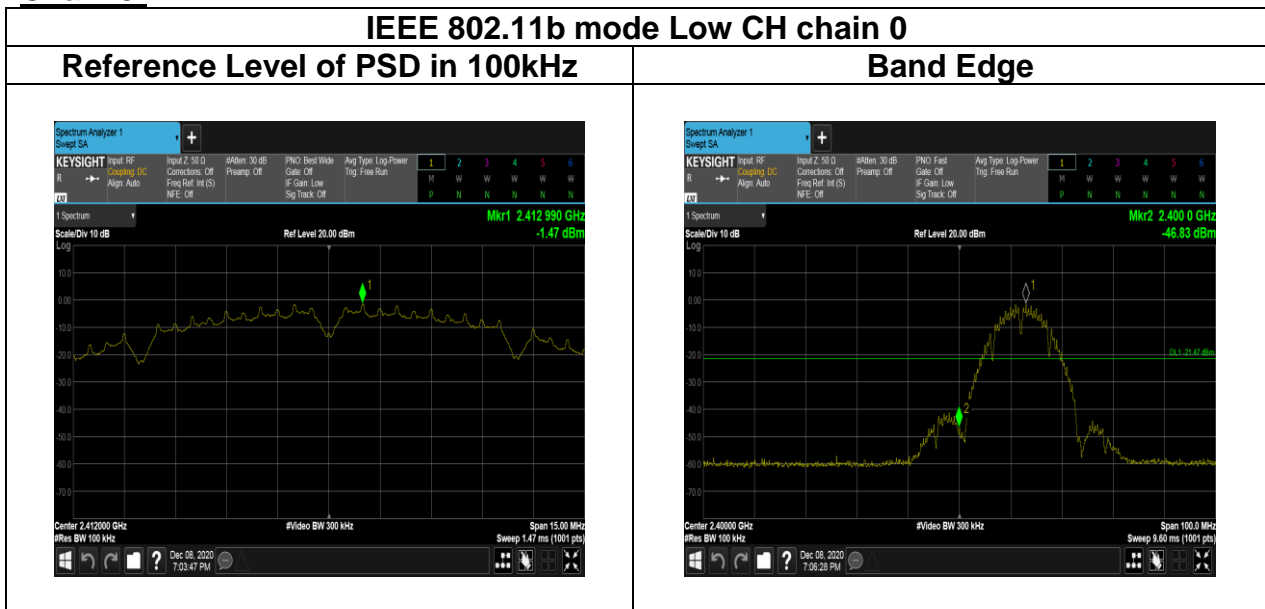


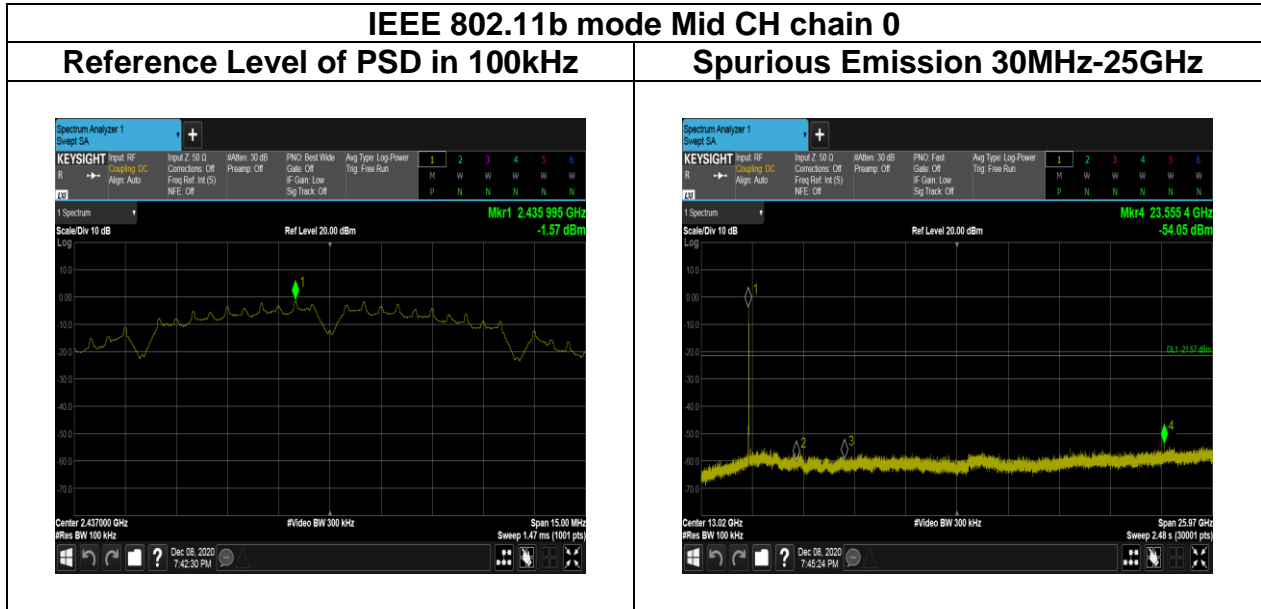

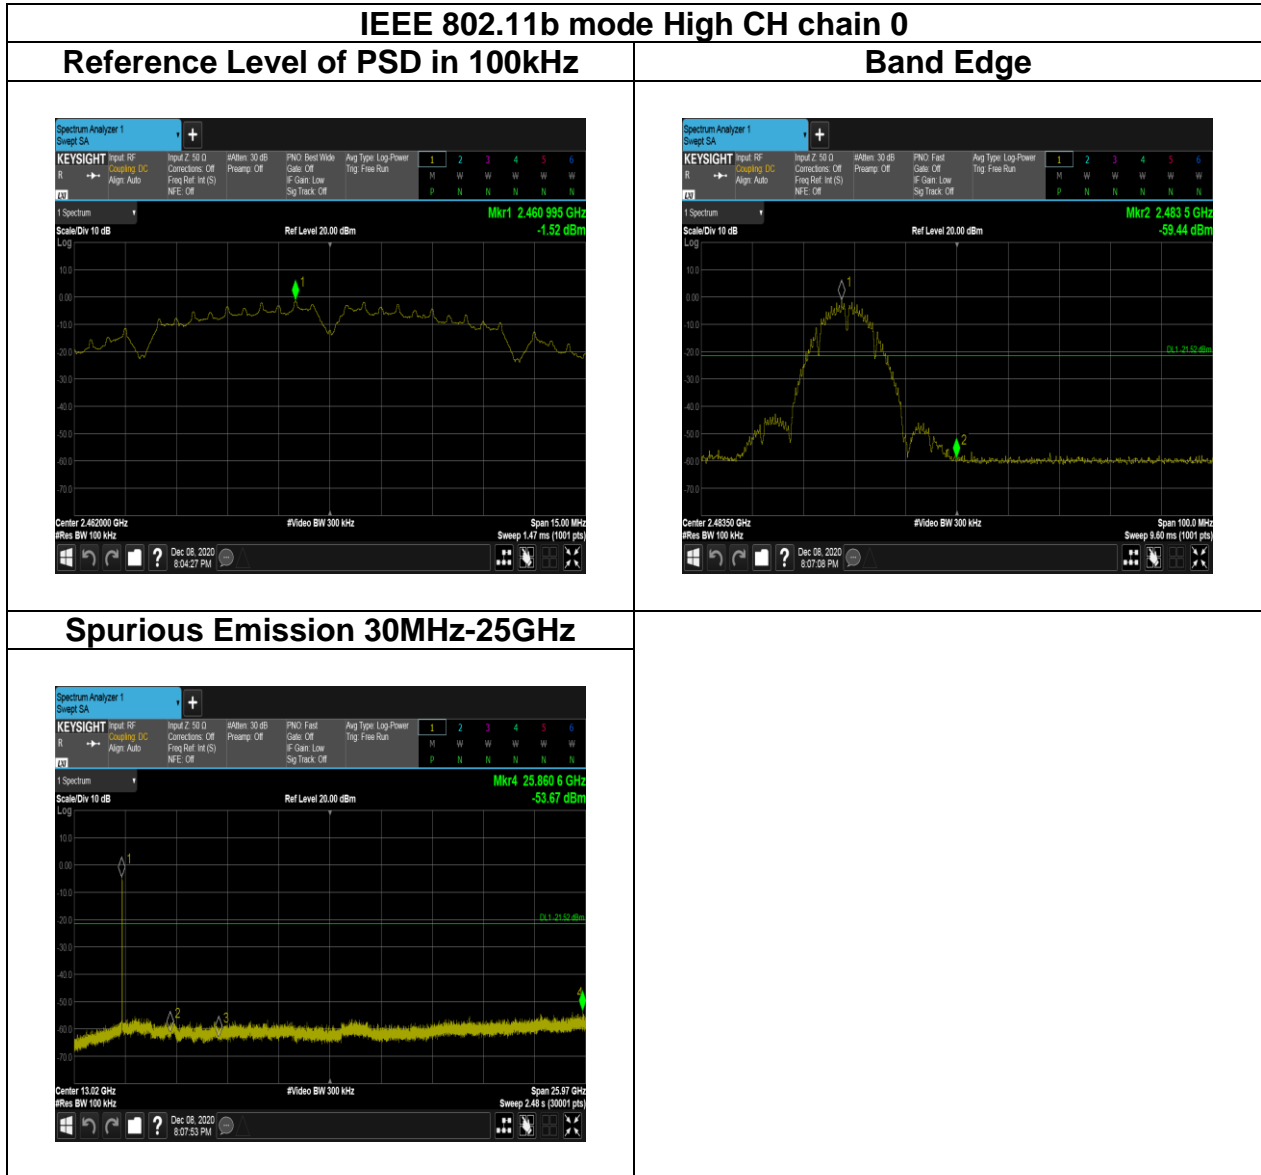


**IEEE 802.11g mode Low CH chain 0**


**Reference Level of PSD in 100kHz**

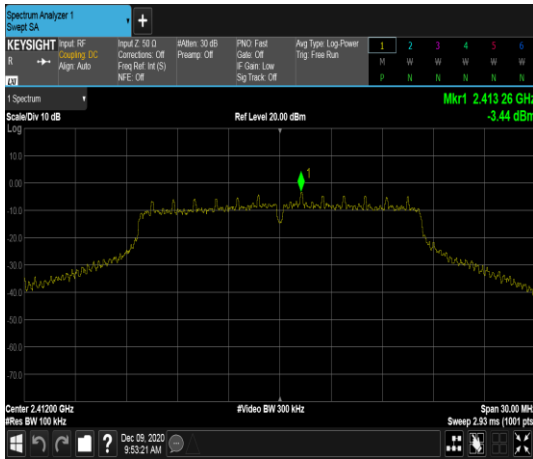



**Band Edge**

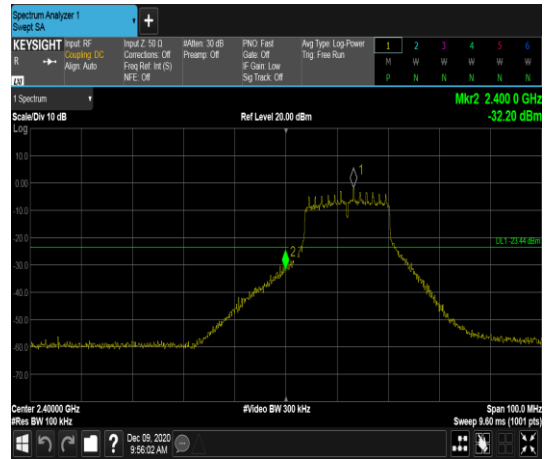

**Spurious Emission 30MHz-25GHz**

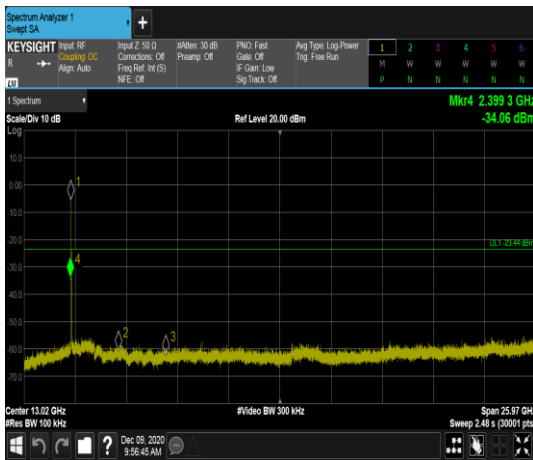


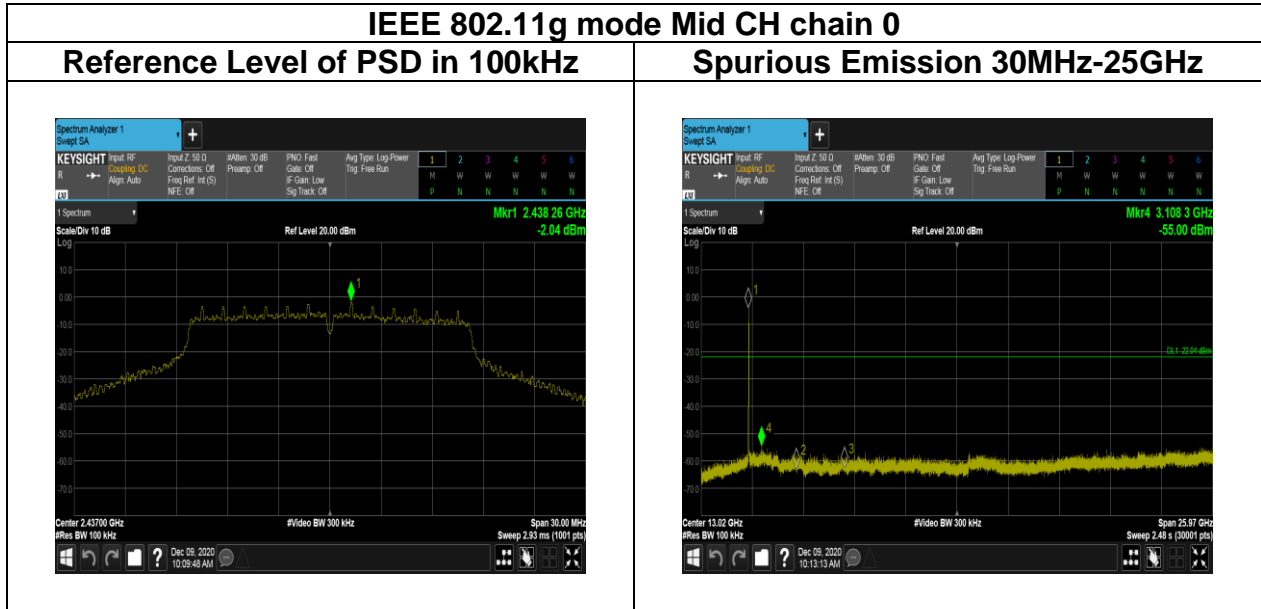

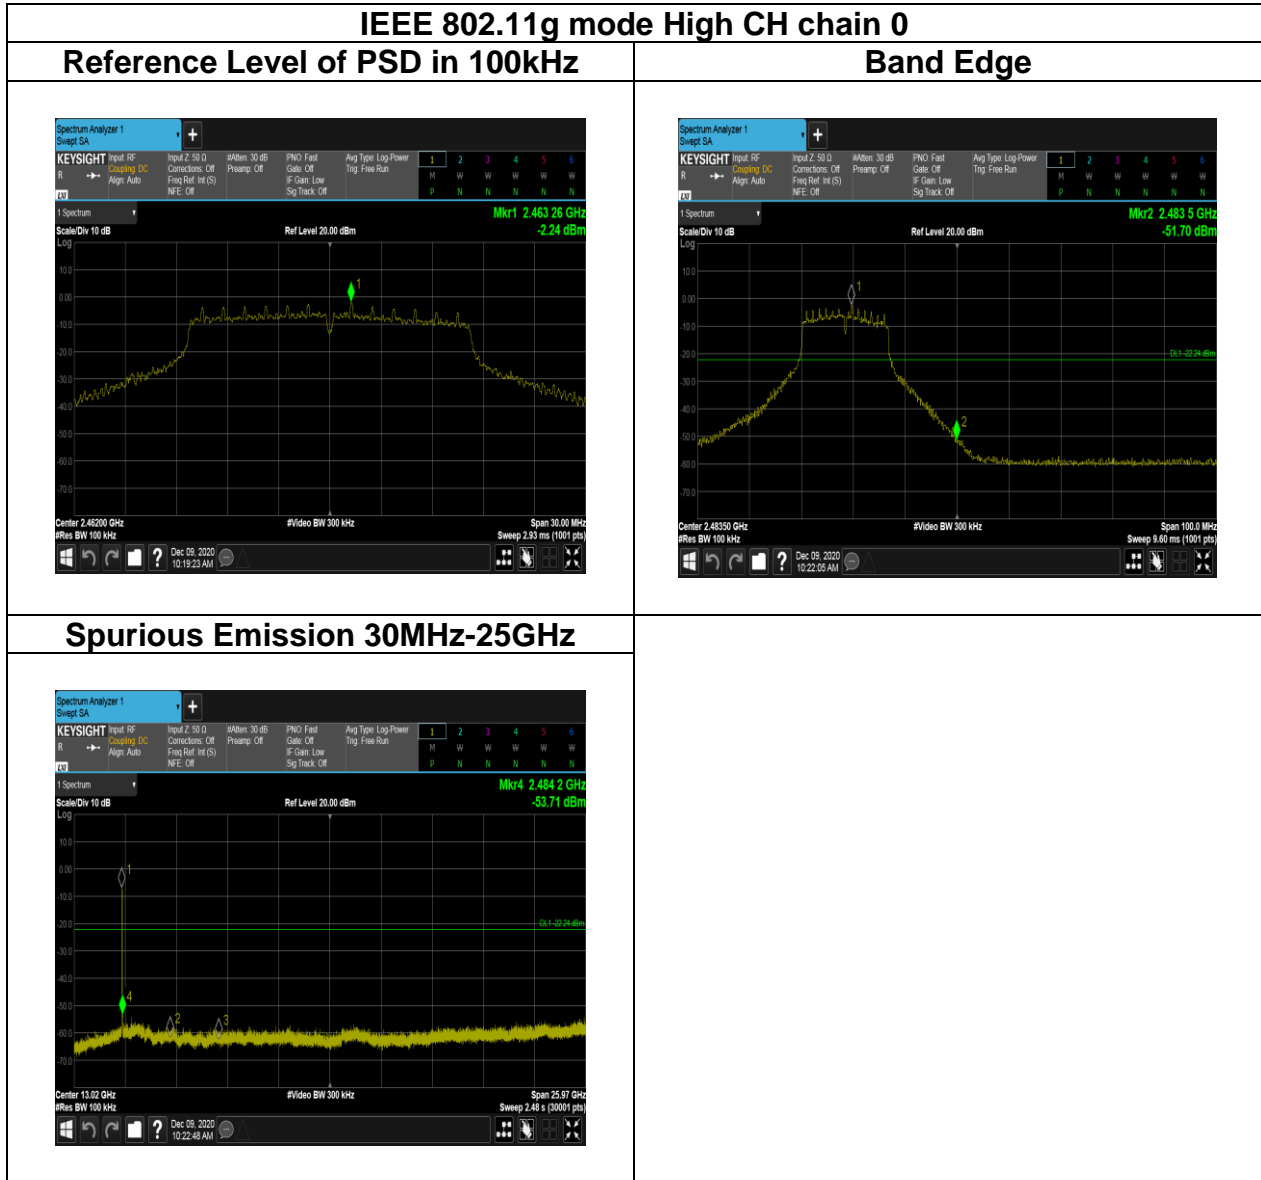


**IEEE 802.11 n HT20 mode Low CH chain 0**


**Reference Level of PSD in 100kHz**

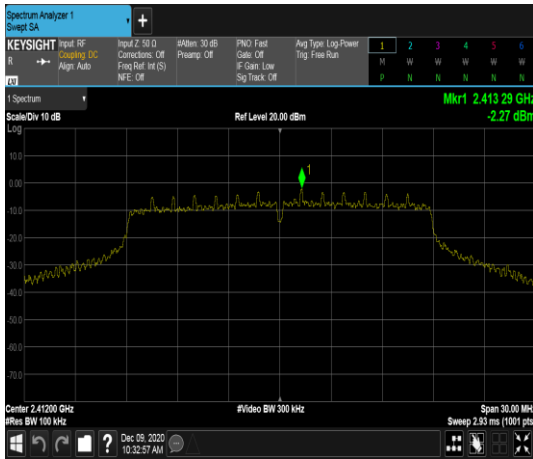


**Band Edge**

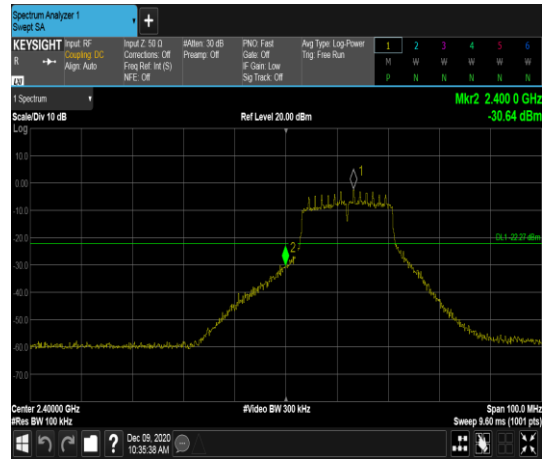


**Spurious Emission 30MHz-25GHz**

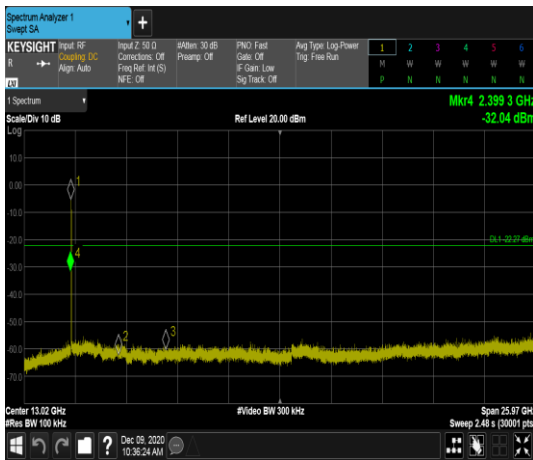

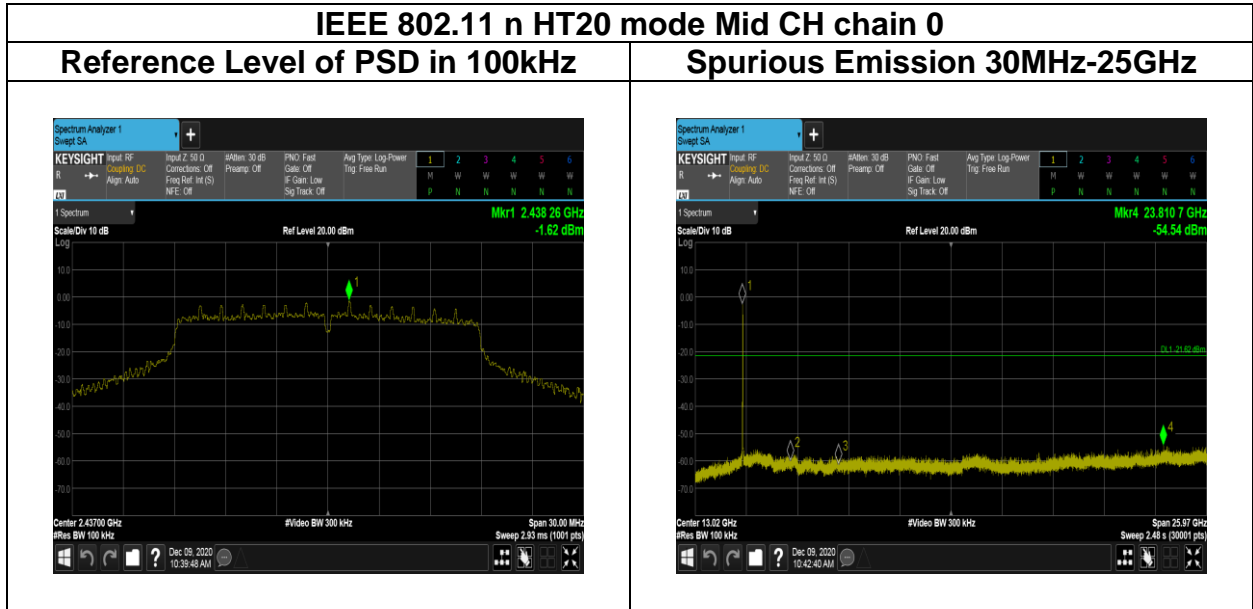





Report No.: T200522D10-RP3

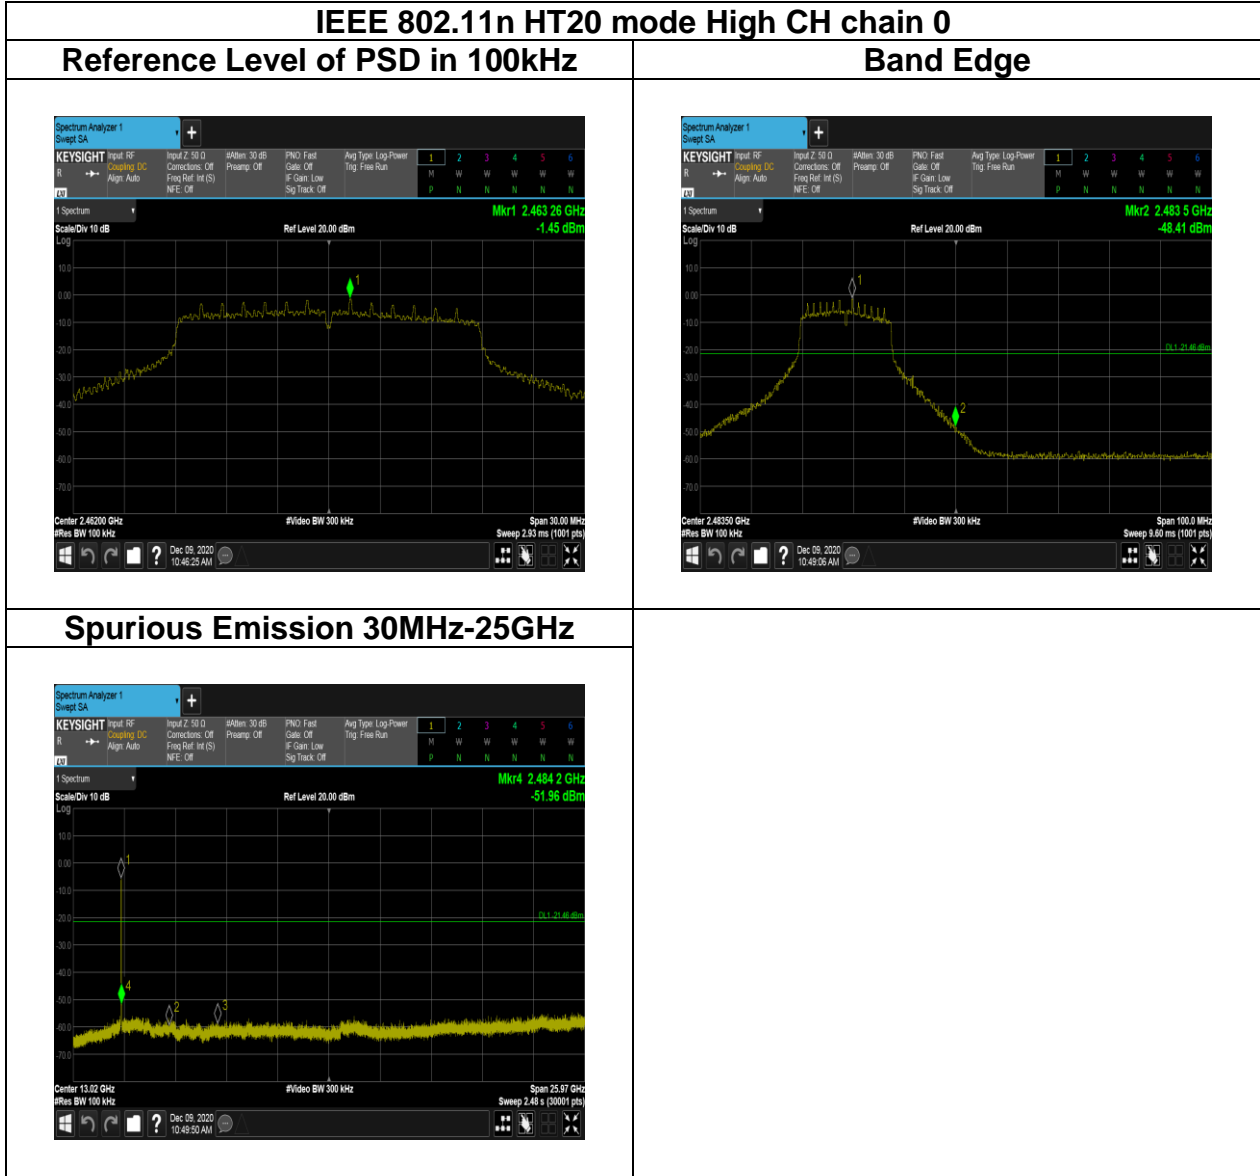


Report No.: T200522D10-RP3

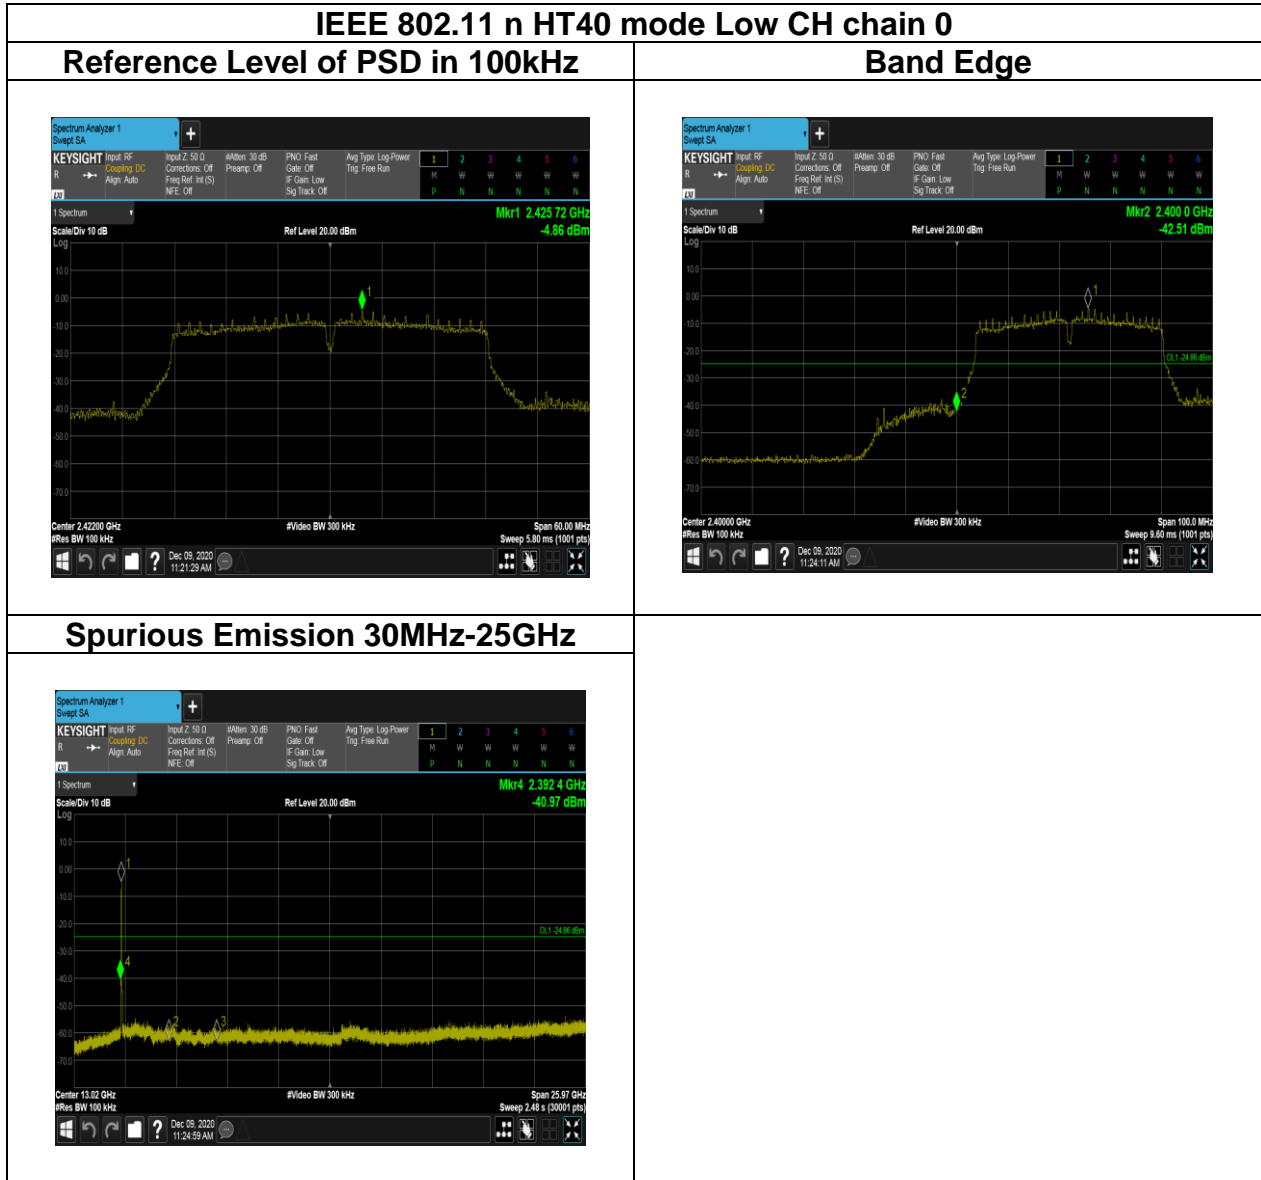

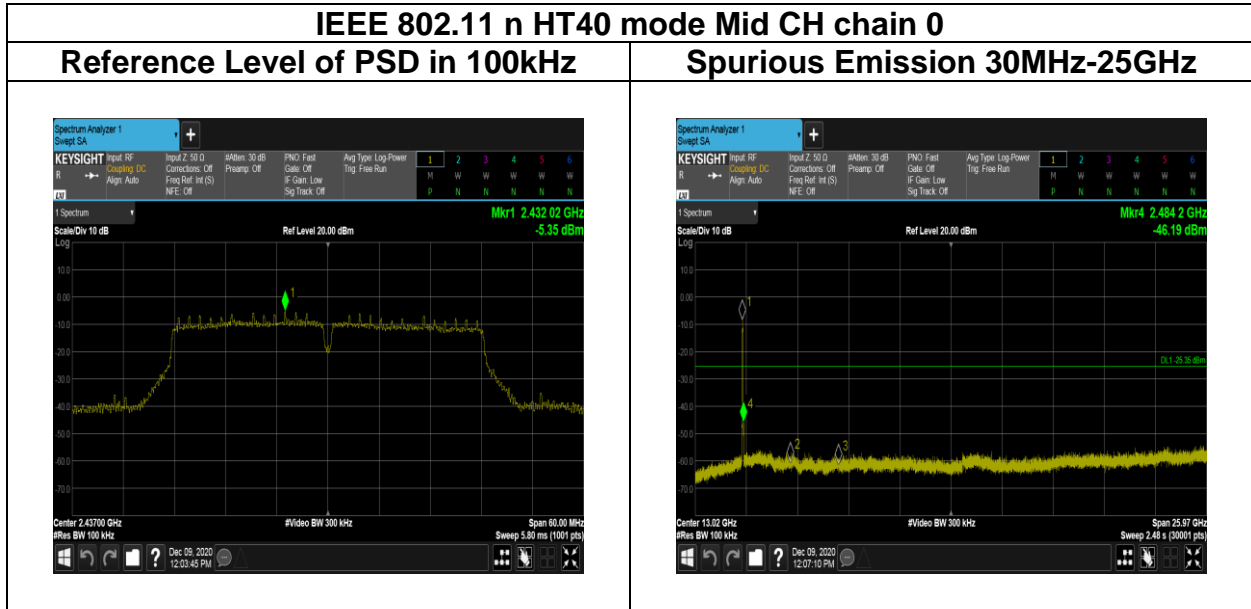


**IEEE 802.11n HT40 mode High CH chain 0**


**Reference Level of PSD in 100kHz**

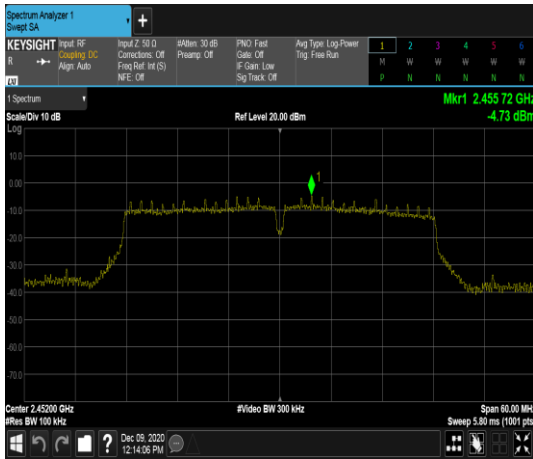

**Band Edge**

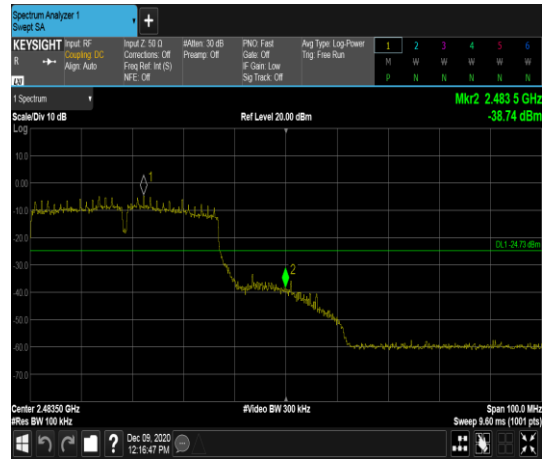



**Spurious Emission 30MHz-25GHz**

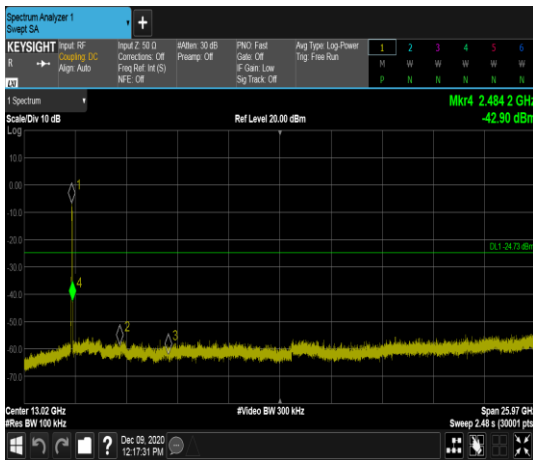


Report No.: T200522D10-RP3


**Chain 1:**

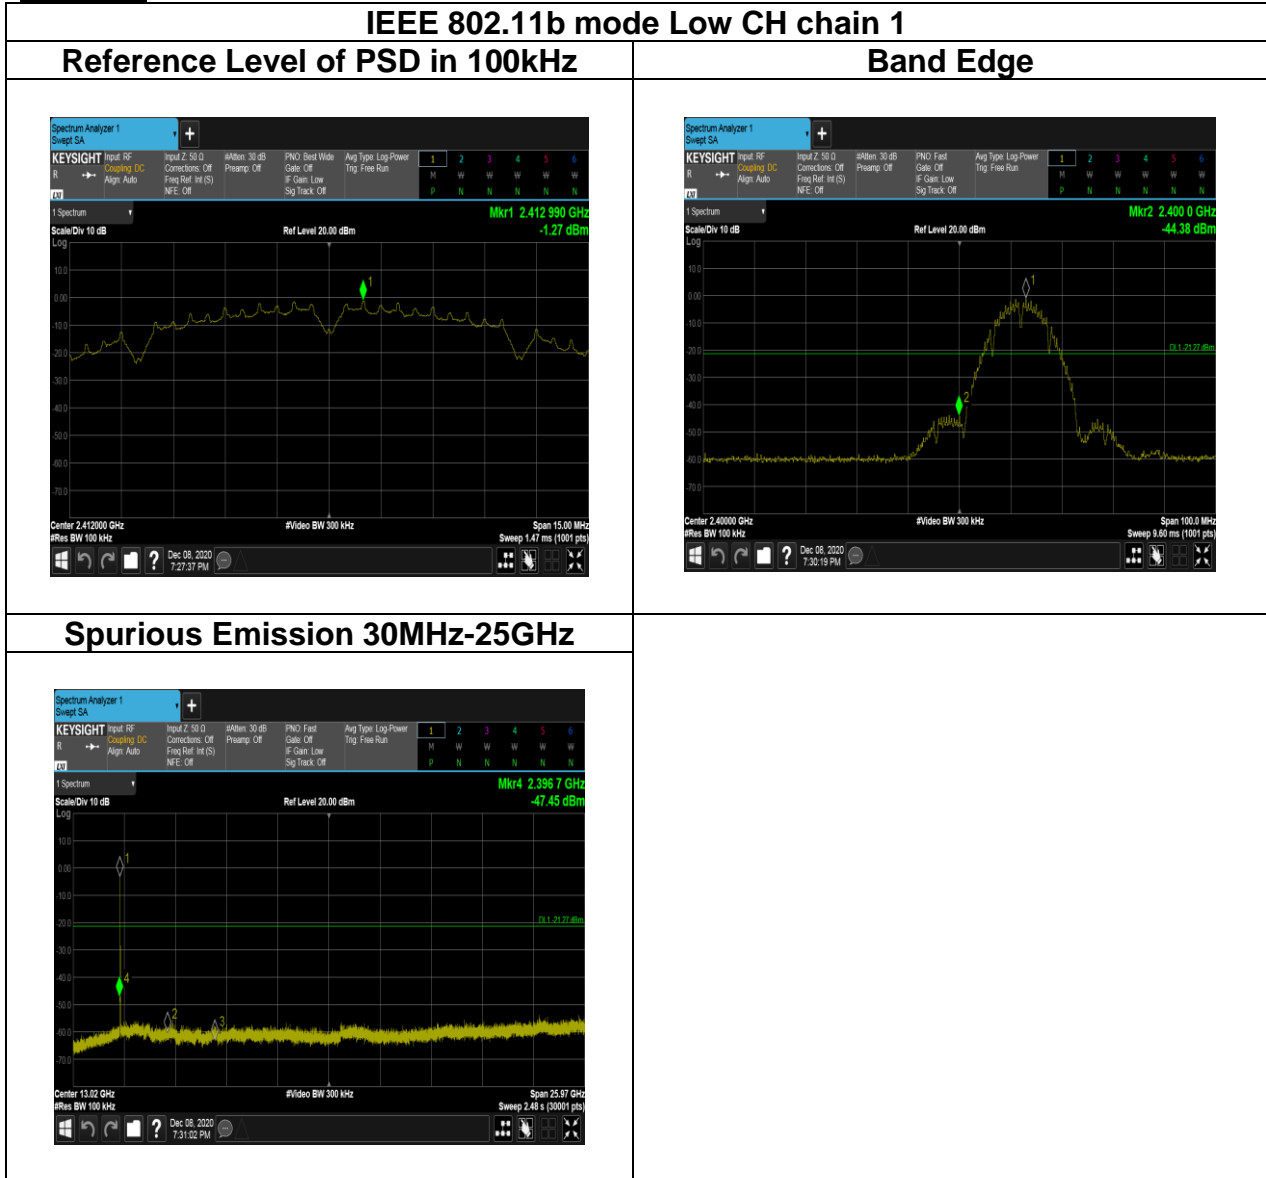

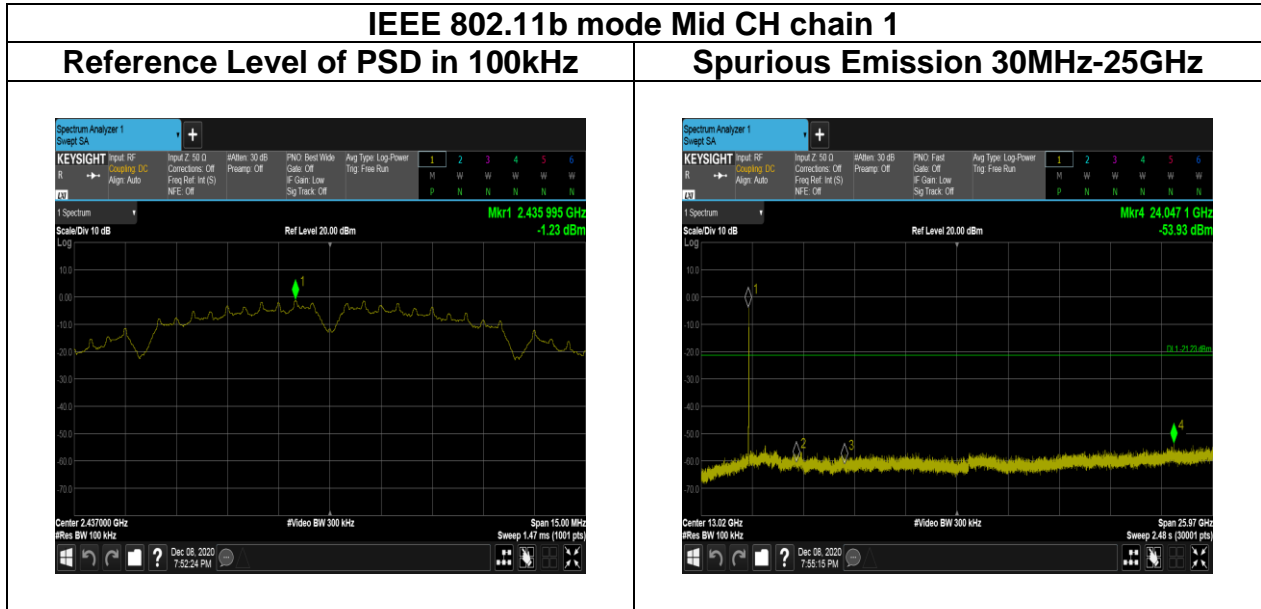



Report No.: T200522D10-RP3

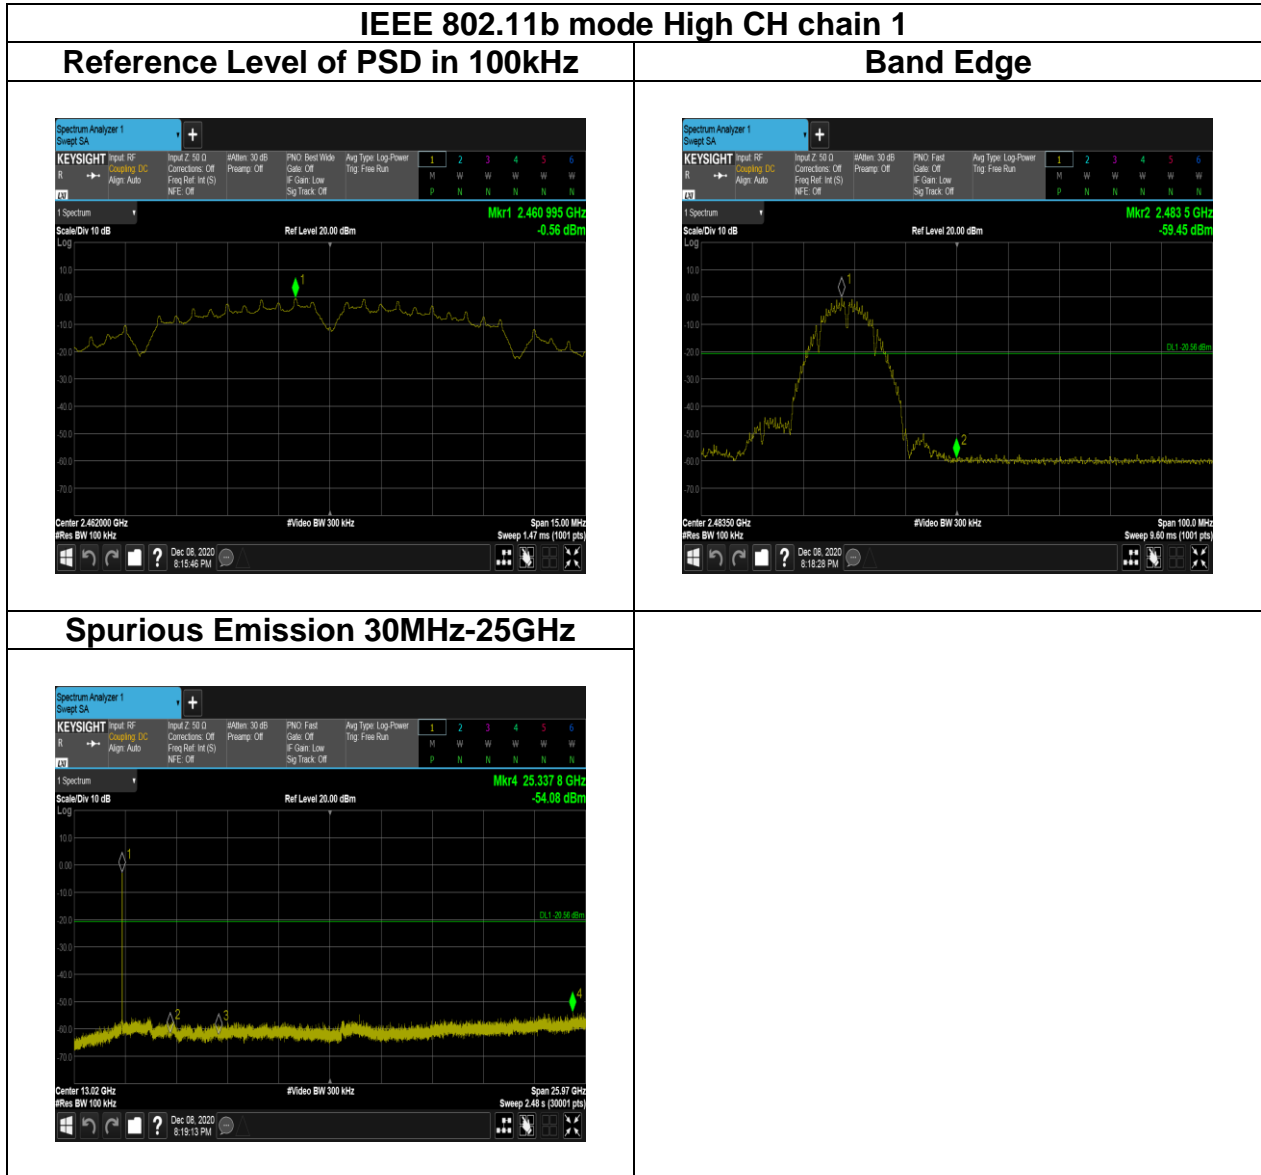

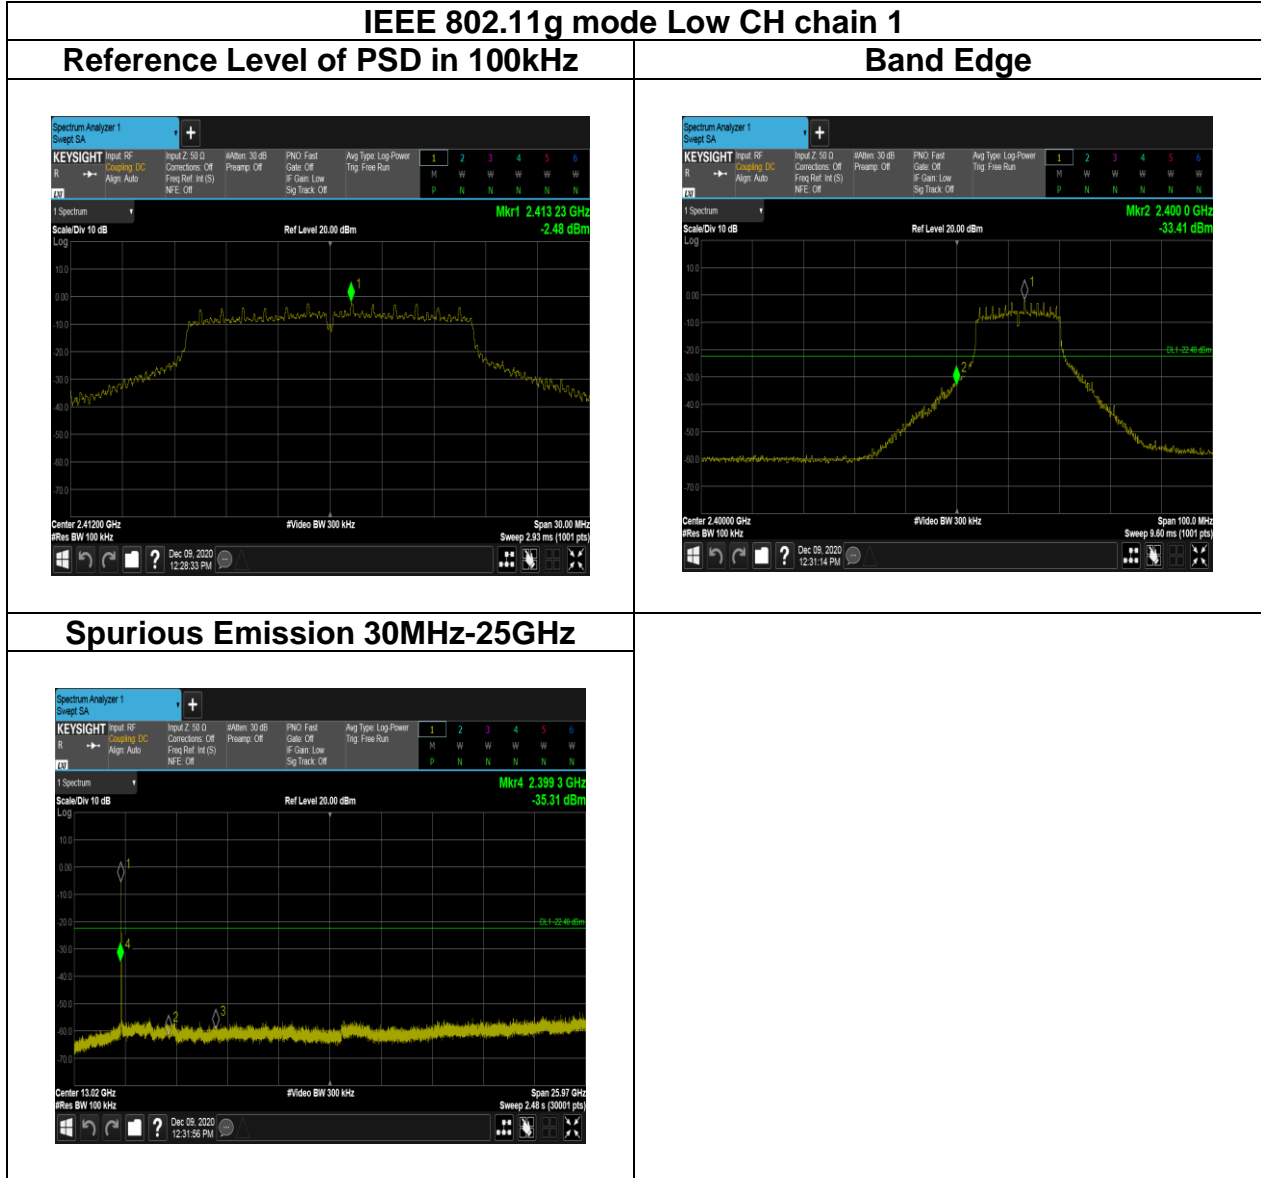




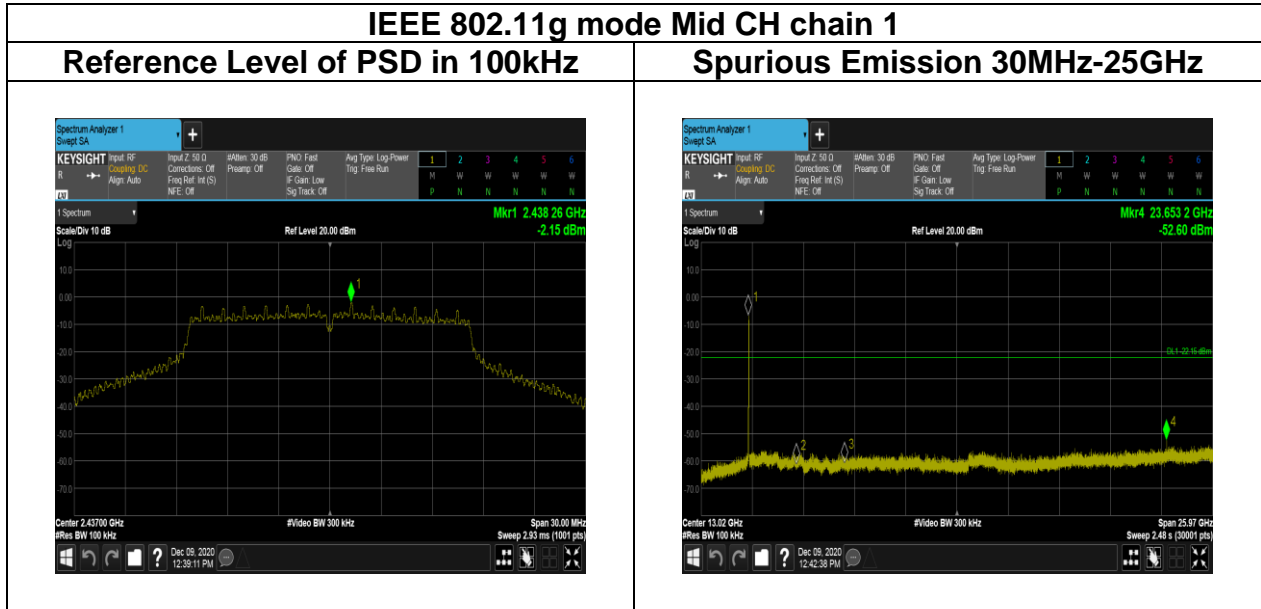

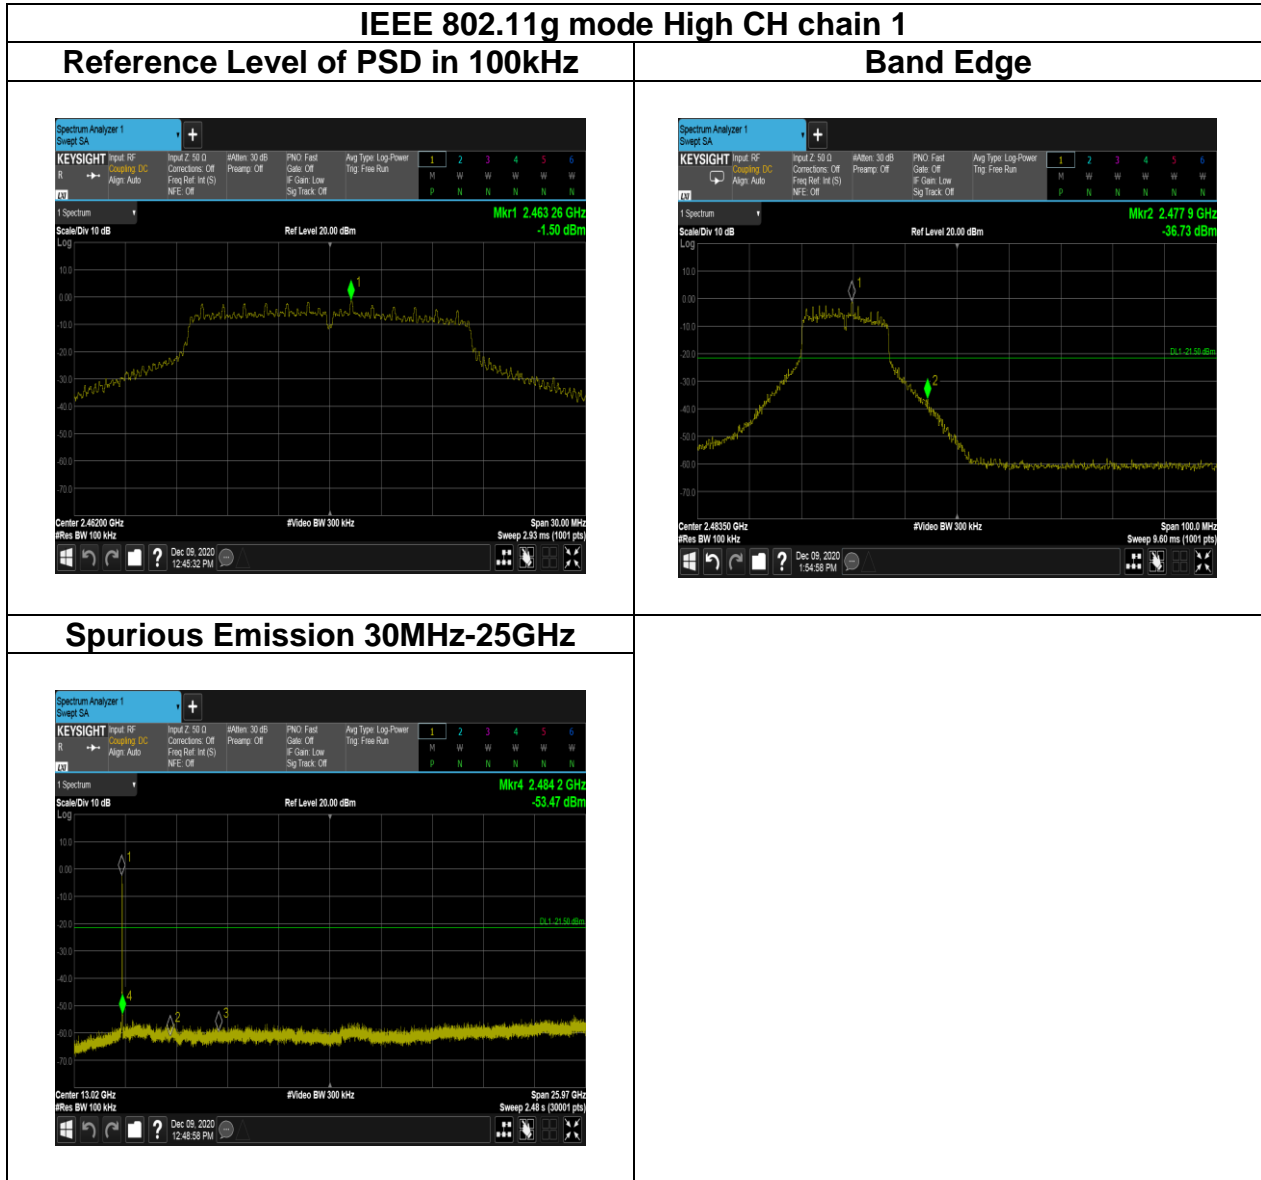


**IEEE 802.11 n HT20 mode Low CH chain 1**


**Reference Level of PSD in 100kHz**

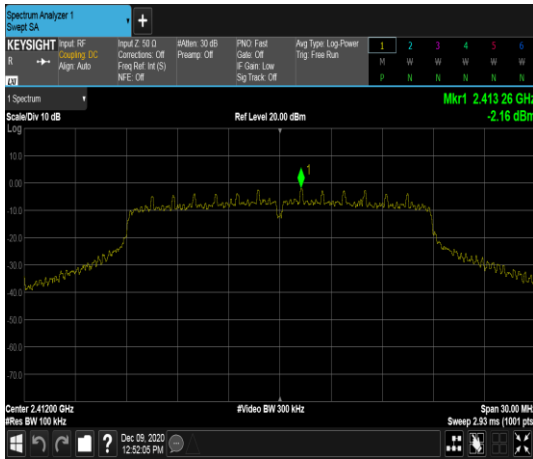



**Band Edge**

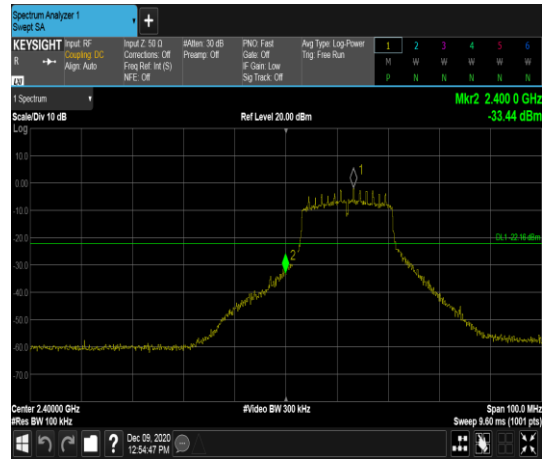


**Spurious Emission 30MHz-25GHz**

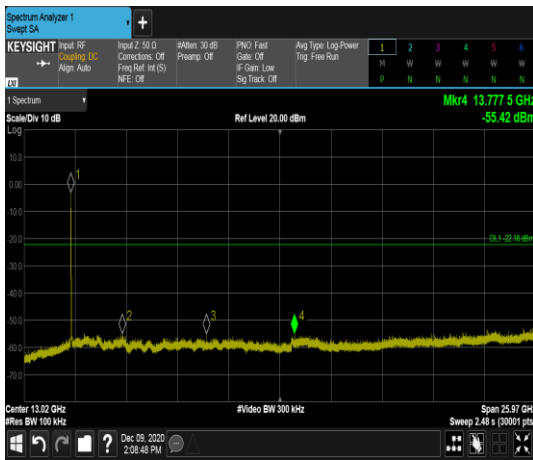


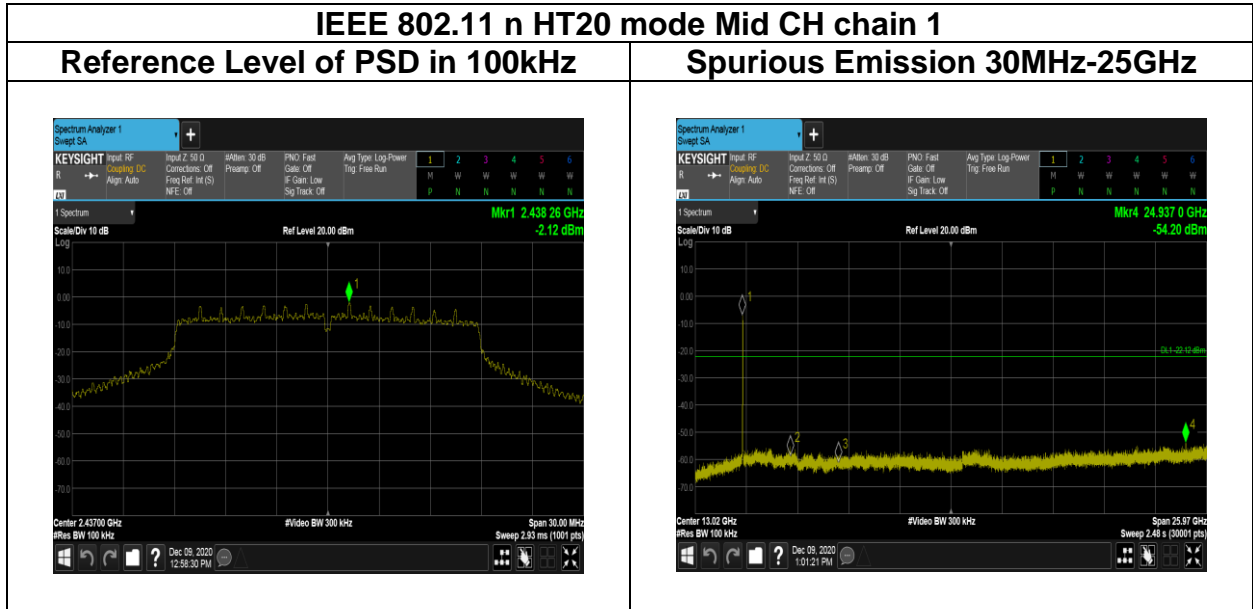

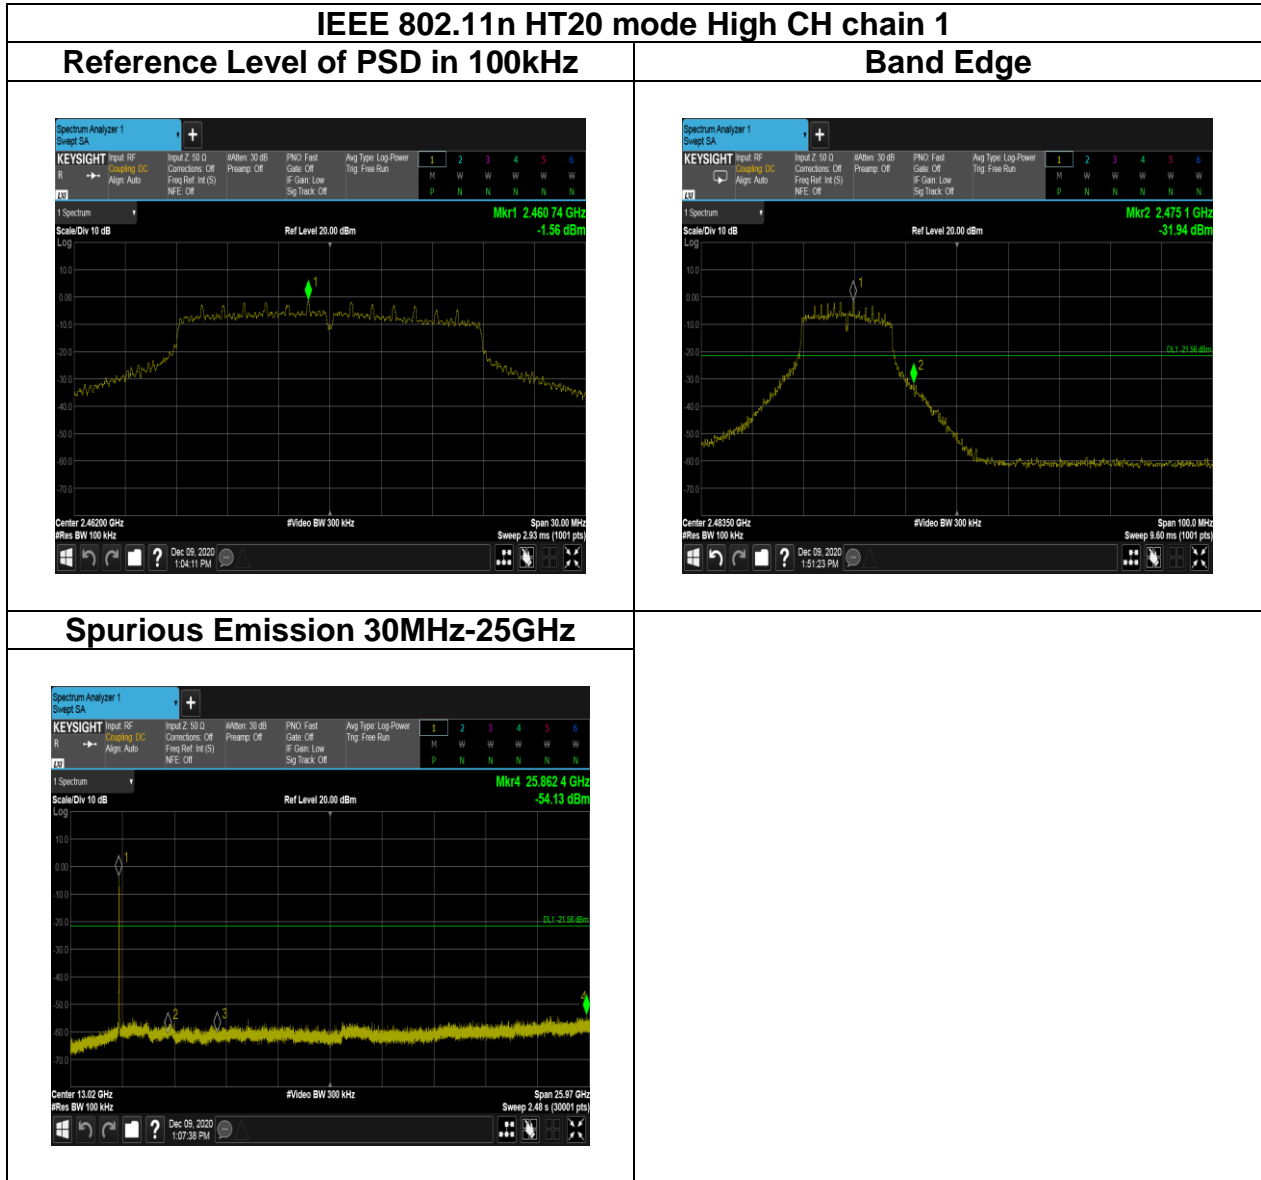


Report No.: T200522D10-RP3

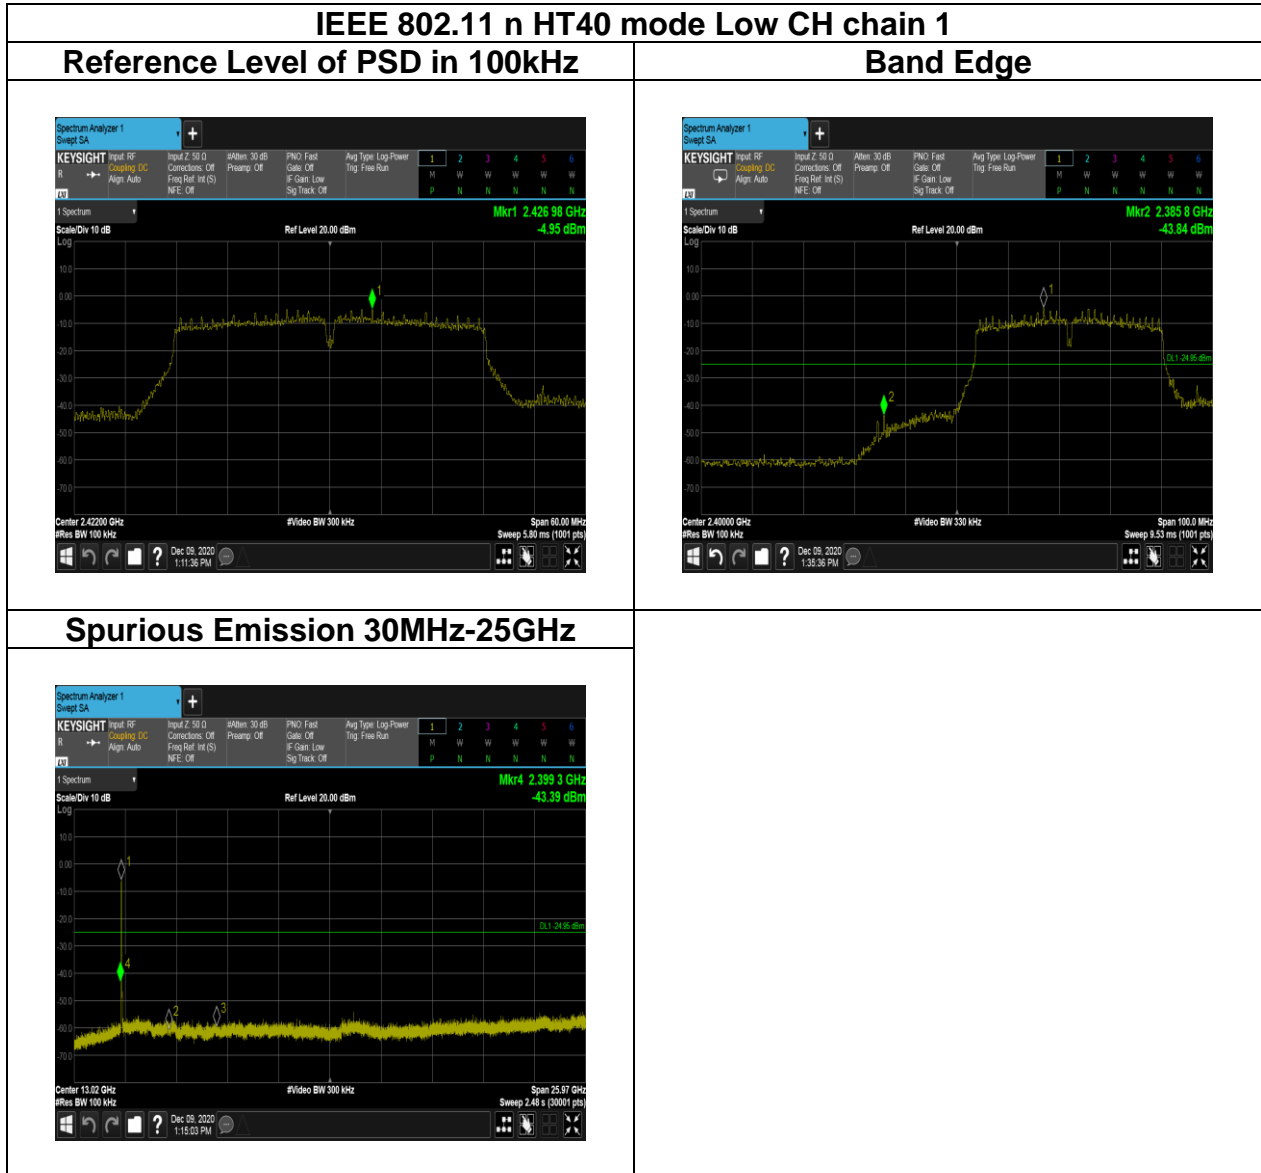

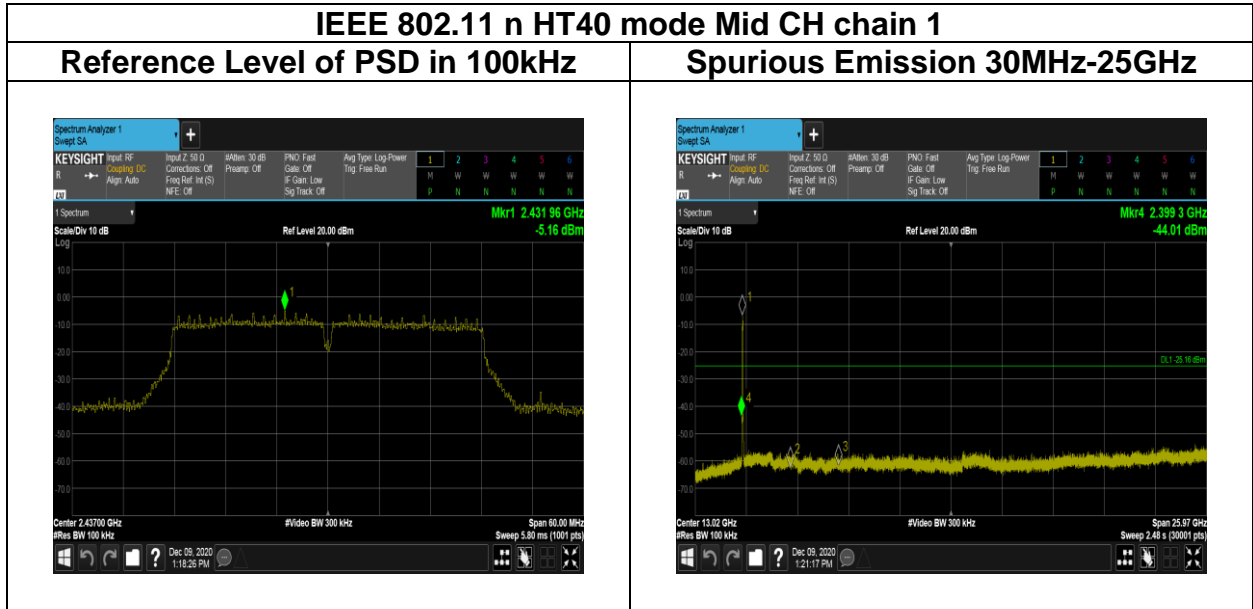

Report No.: T200522D10-RP3

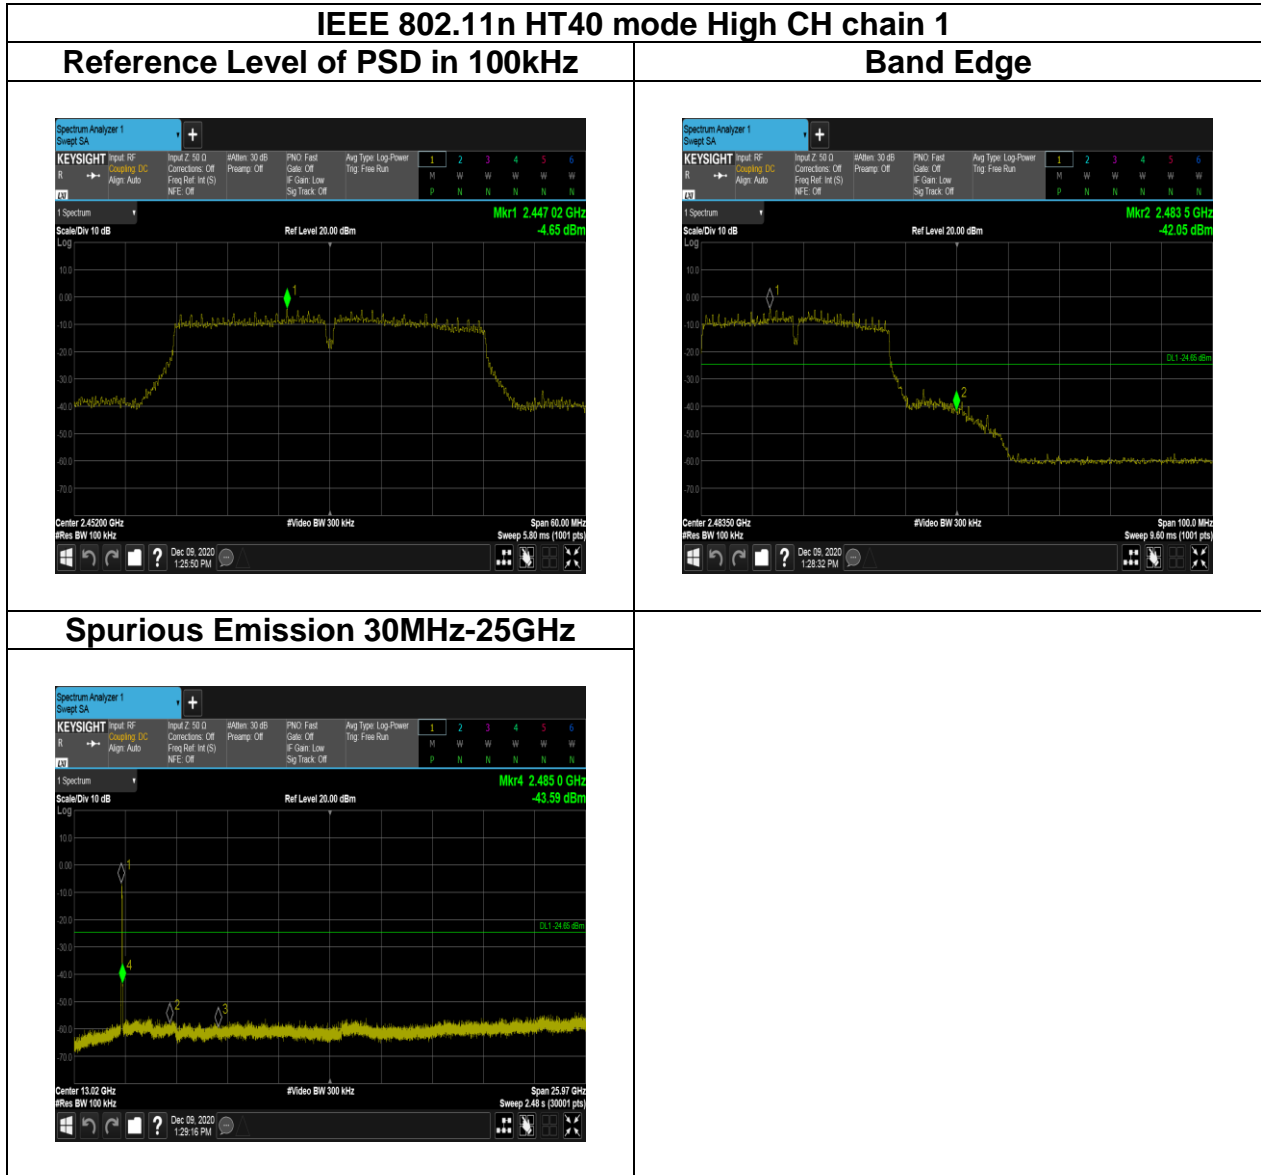



Report No.: T200522D10-RP3

## 5.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

### 5.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

#### Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

#### Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Remark:**

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Report No.: T200522D10-RP3

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

**RSS-Gen Table 3 and Table 5 – General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz** (Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

**Note:** Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with Section 6.6.

**RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)**

Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement Distance (m)
9-490 kHz <sup>Note</sup>	6.37/F (F in kHz)	300
490-1,705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

**Note:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Report No.: T200522D10-RP3

## 5.6.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Note: No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4. The SA setting following :

(1) Below 1G : RBW = 100kHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2) Above 1G :

(2.1) For Peak measurement : RBW = 1MHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2.2) For Average measurement : RBW = 1MHz, VBW


·If Duty Cycle  $\geq$  98%, VBW=10Hz.

·If Duty Cycle < 98%, VBW=1/T.


Report No.: T200522D10-RP3

## 5.6.3 Test Setup

### 9kHz ~ 30MHz

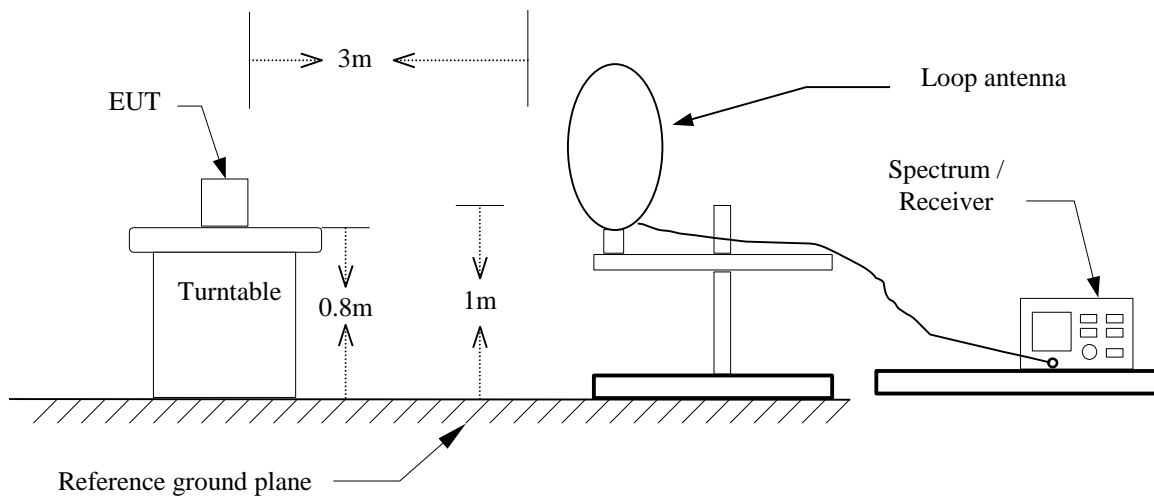


### 30MHz ~ 1GHz

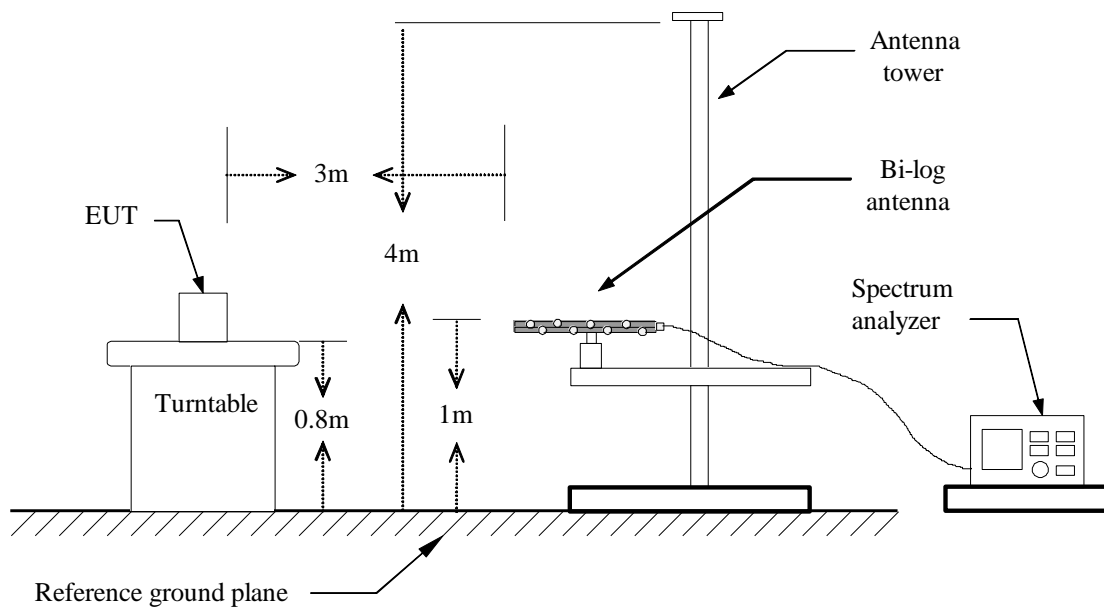

Report No.: T200522D10-RP3

**Above 1 GHz**

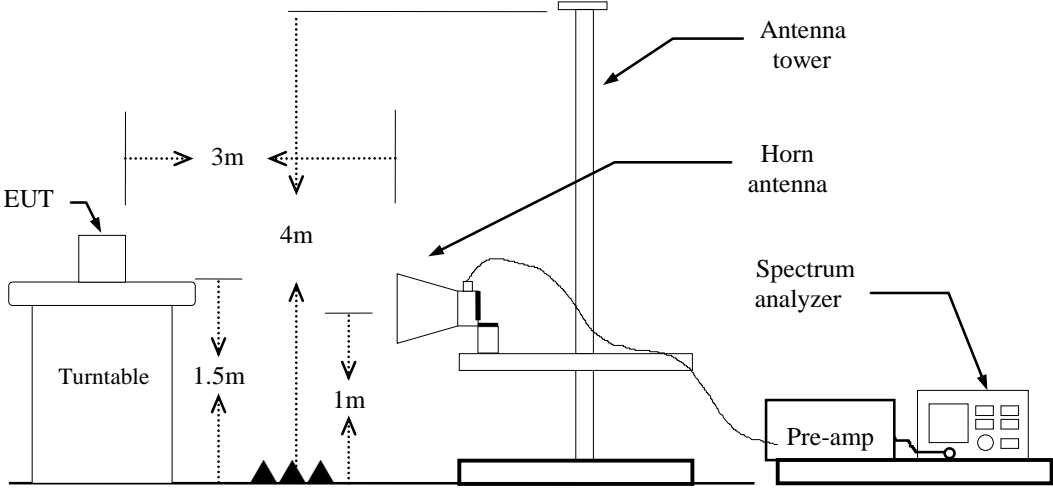


Report No.: T200522D10-RP3

### 5.6.4 Test Result

#### Band Edge Test Data

Test Mode	IEEE 802.11b Low CH 2412MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

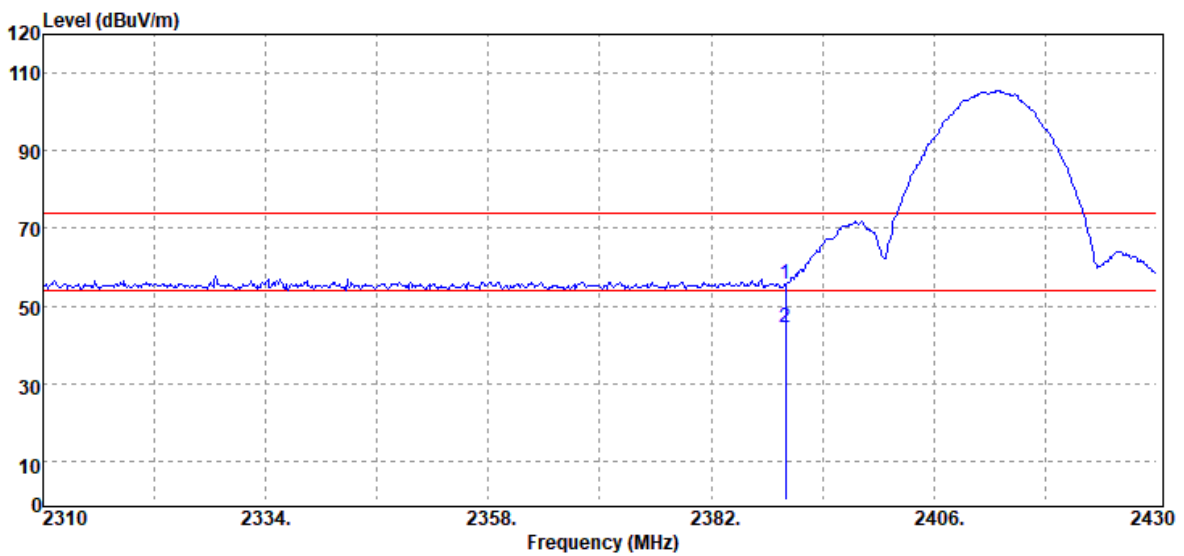


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2390.00	Peak	72.81	-17.18	55.63	74.00	-18.37
2390.00	Average	61.61	-17.18	44.43	54.00	-9.57



Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b Low CH 2412MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

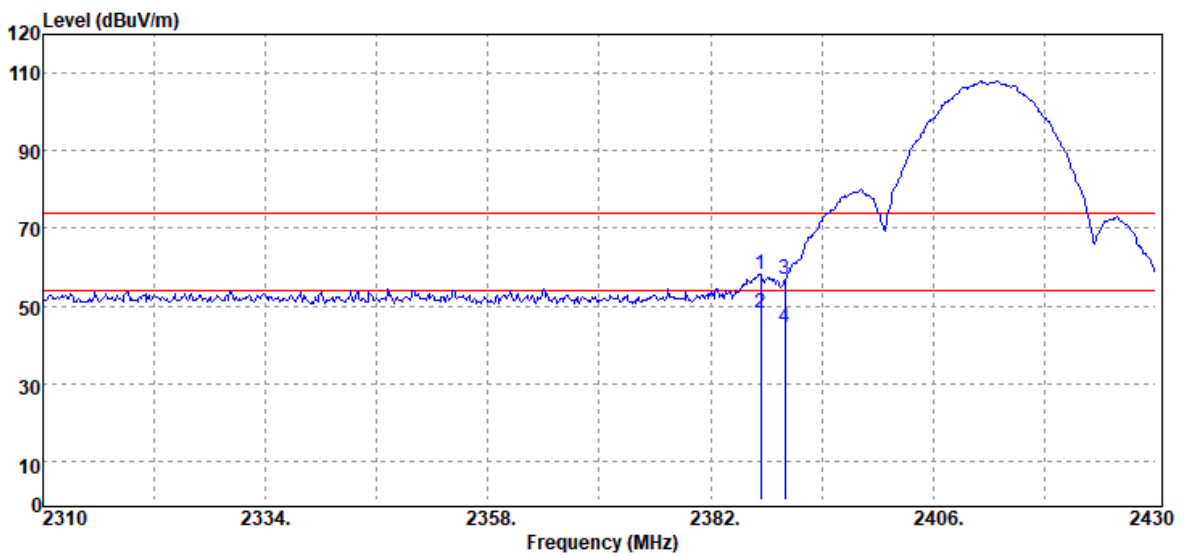


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2387.40	Peak	75.37	-17.19	58.18	74.00	-15.82
2387.40	Average	65.21	-17.19	48.02	54.00	-5.98
2390.00	Peak	74.03	-17.18	56.85	74.00	-17.15
2390.00	Average	61.77	-17.18	44.59	54.00	-9.41



Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b High CH 2462MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

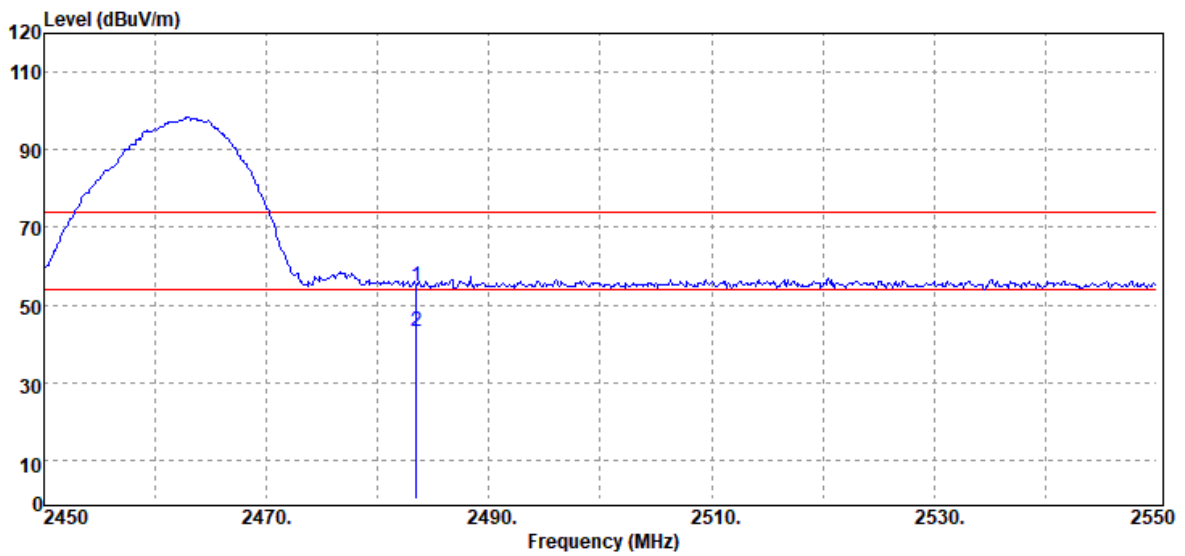


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
2483.50	Peak	71.60	-16.98	54.62	74.00	-19.38
2483.50	Average	59.96	-16.98	42.98	54.00	-11.02



Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b High CH 2462MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

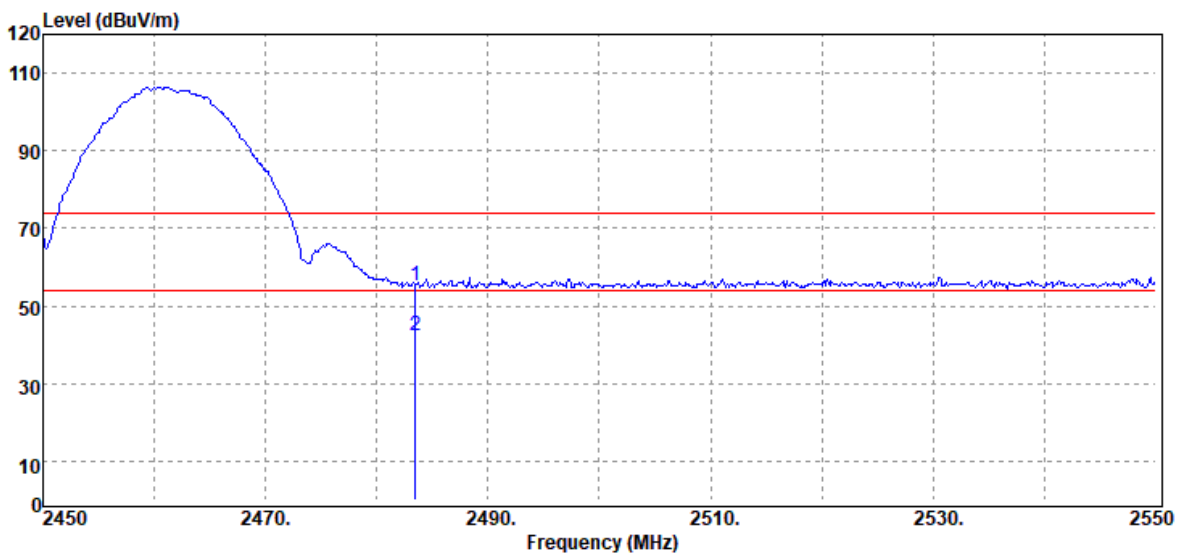


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2483.50	Peak	72.11	-16.98	55.13	74.00	-18.87
2483.50	Average	59.49	-16.98	42.51	54.00	-11.49



Report No.: T200522D10-RP3

Test Mode	IEEE 802.11g Low CH 2412MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

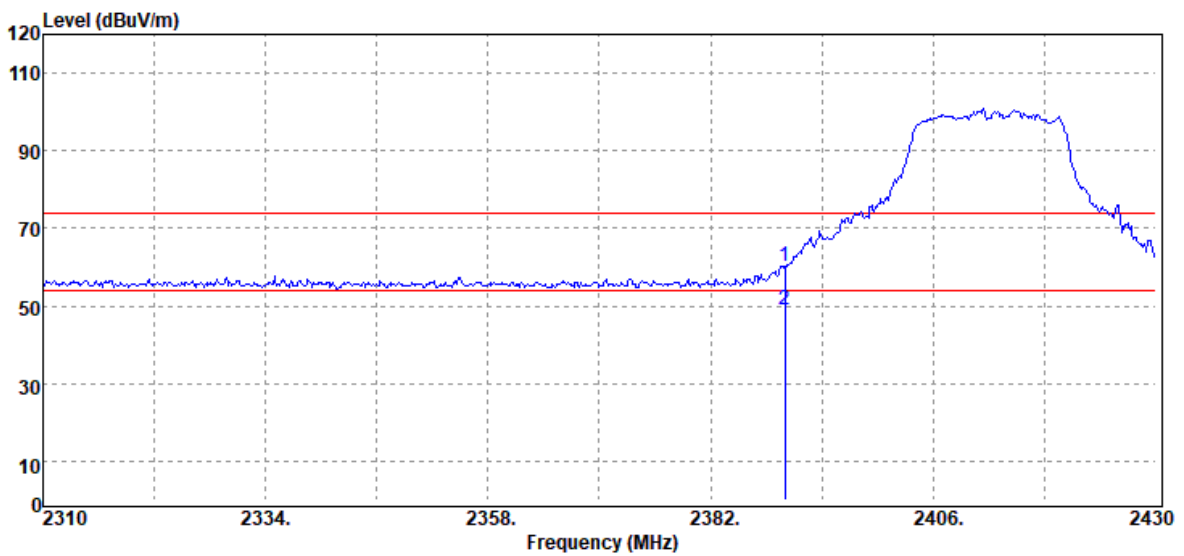


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2390.00	Peak	77.40	-17.18	60.22	74.00	-13.78
2390.00	Average	66.12	-17.18	48.94	54.00	-5.06



Report No.: T200522D10-RP3


Test Mode	IEEE 802.11g Low CH 2412MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

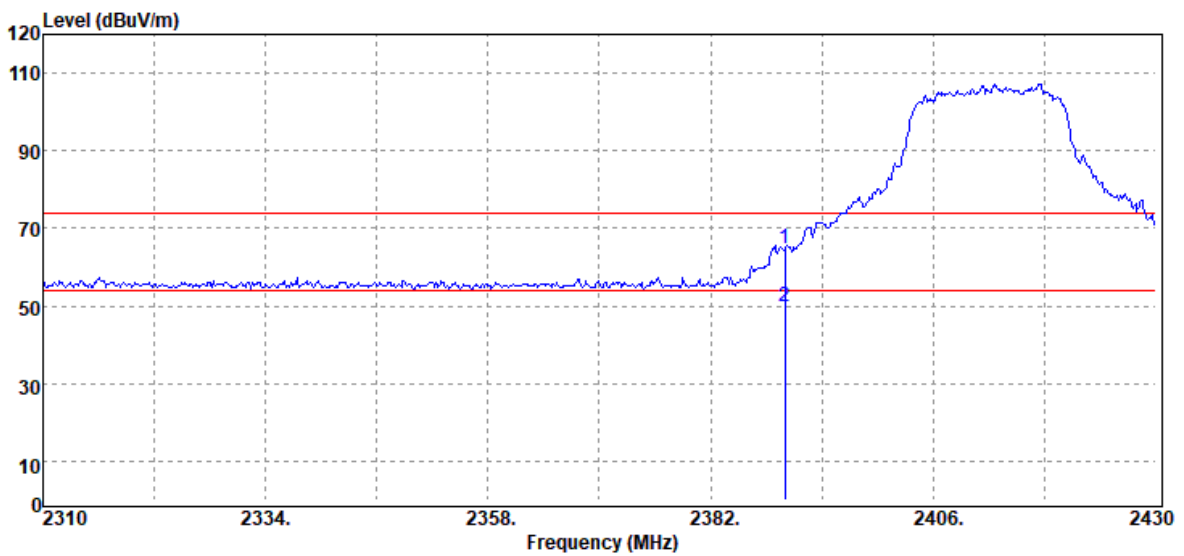

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2390.00	Peak	82.07	-17.18	64.89	74.00	-9.11
2390.00	Average	67.06	-17.18	49.88	54.00	-4.12

Report No.: T200522D10-RP3


Test Mode	IEEE 802.11g High CH 2462MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

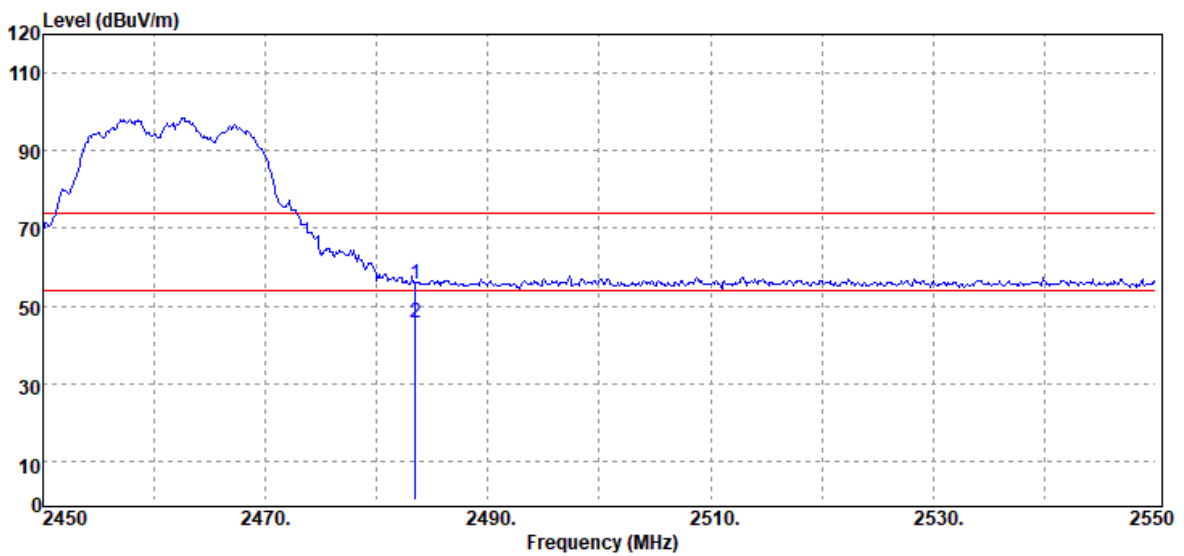

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2483.50	Peak	72.71	-16.98	55.73	74.00	-18.27
2483.50	Average	62.58	-16.98	45.60	54.00	-8.40

Report No.: T200522D10-RP3


Test Mode	IEEE 802.11g High CH 2462MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

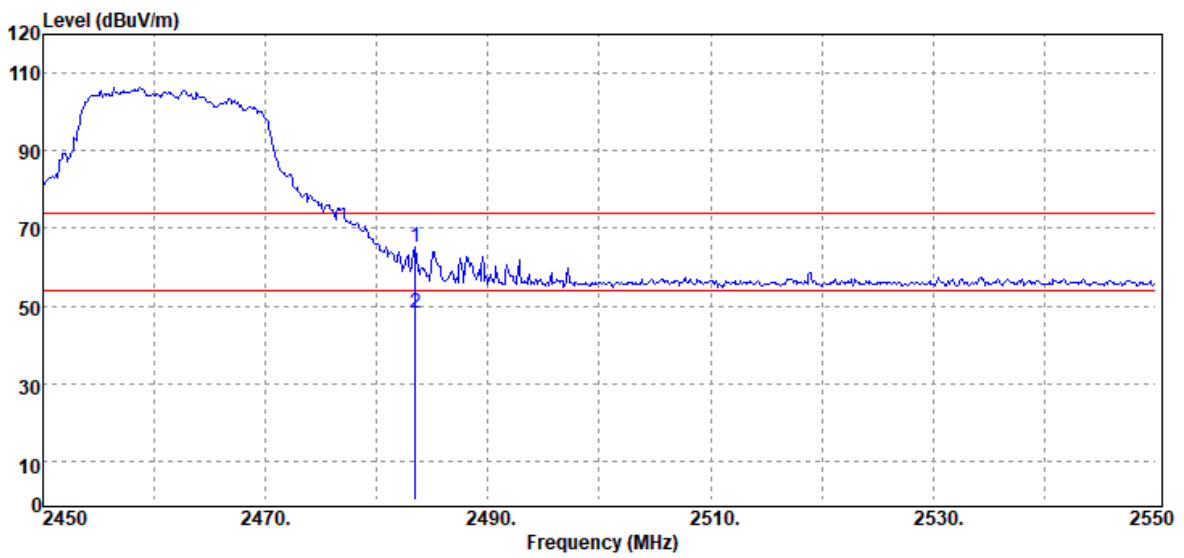

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2483.50	Peak	82.28	-16.98	65.30	74.00	-8.70
2483.50	Average	65.04	-16.98	48.06	54.00	-5.94

Report No.: T200522D10-RP3


Test Mode	IEEE 802.11n HT20 Low CH 2412MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

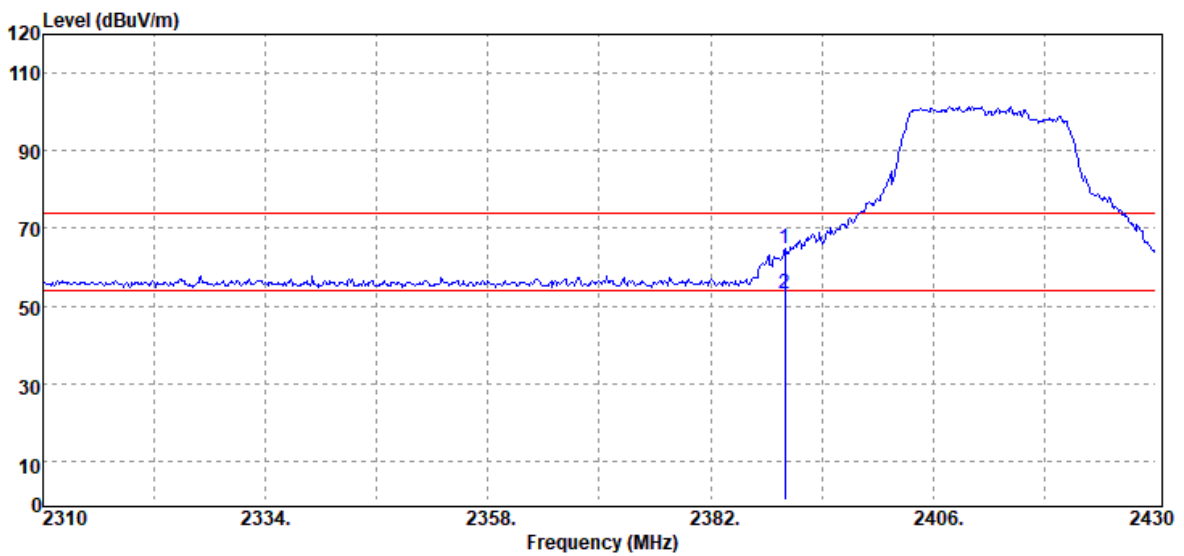

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2390.00	Peak	81.98	-17.18	64.80	74.00	-9.20
2390.00	Average	70.14	-17.18	52.96	54.00	-1.04

Report No.: T200522D10-RP3


Test Mode	IEEE 802.11 n20 Low CH 2412MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

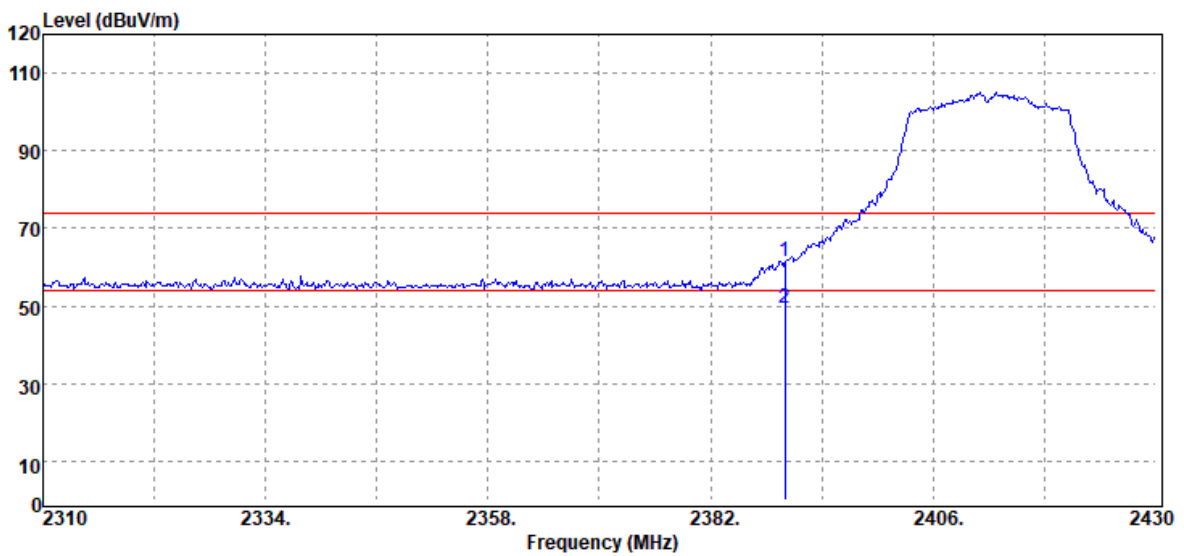

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2390.00	Peak	78.81	-17.18	61.63	74.00	-12.37
2390.00	Average	66.46	-17.18	49.28	54.00	-4.72

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT20 High CH 2462MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

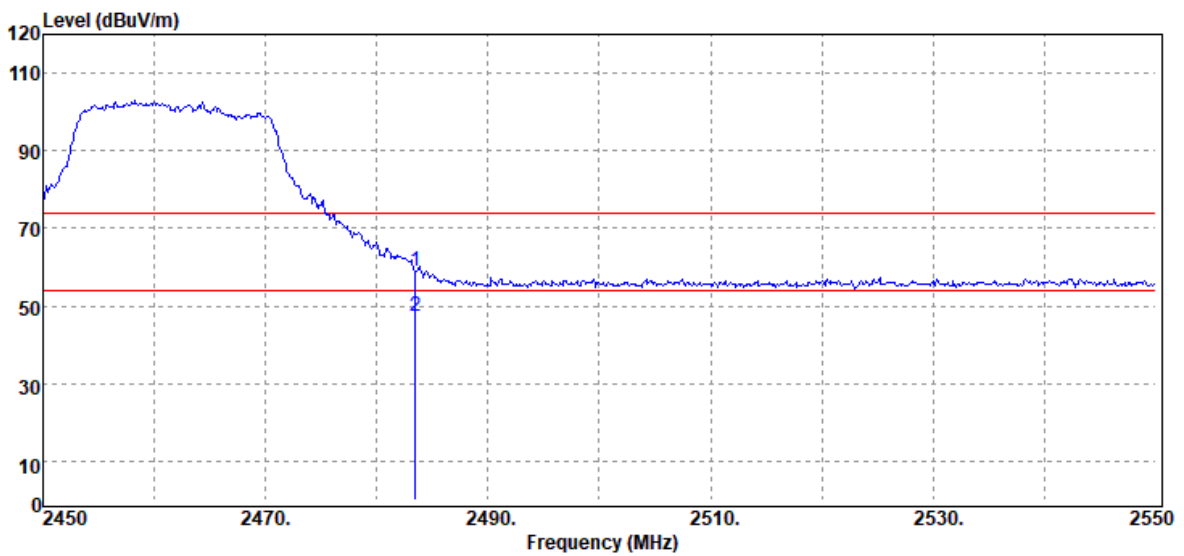


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2483.50	Peak	75.91	-16.98	58.93	74.00	-15.07
2483.50	Average	64.23	-16.98	47.25	54.00	-6.75



Report No.: T200522D10-RP3


Test Mode	IEEE 802.11n20 High CH 2462MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

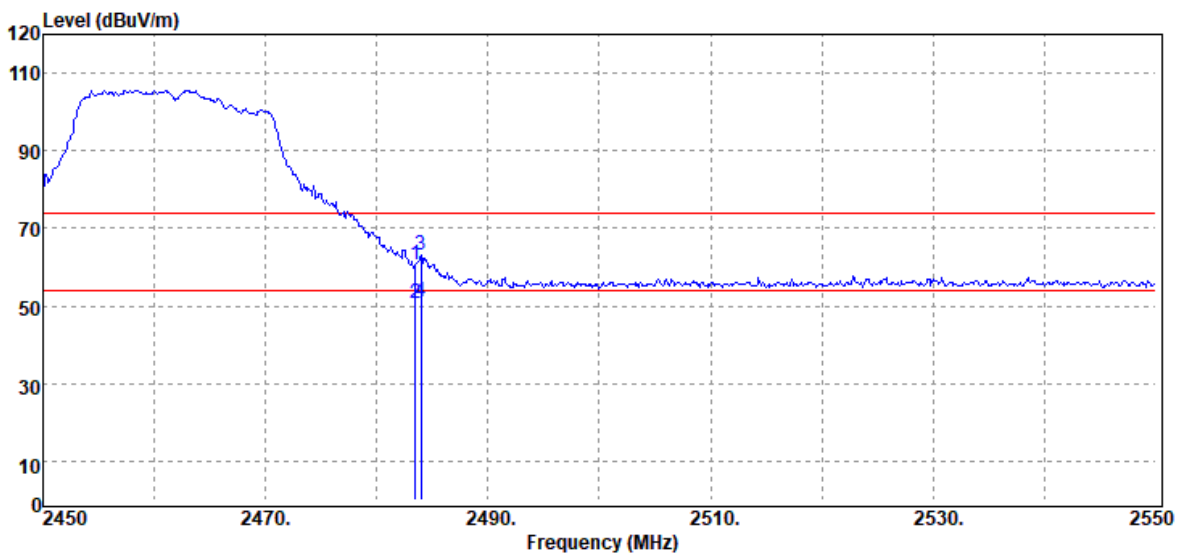

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2483.50	Peak	77.62	-16.98	60.64	74.00	-13.36
2483.50	Average	67.64	-16.98	50.66	54.00	-3.34
2484.00	Peak	79.90	-16.97	62.93	74.00	-11.07
2484.00	Average	67.90	-16.97	50.93	54.00	-3.07

Report No.: T200522D10-RP3


Test Mode	IEEE 802.11n HT40 Low CH 2422MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

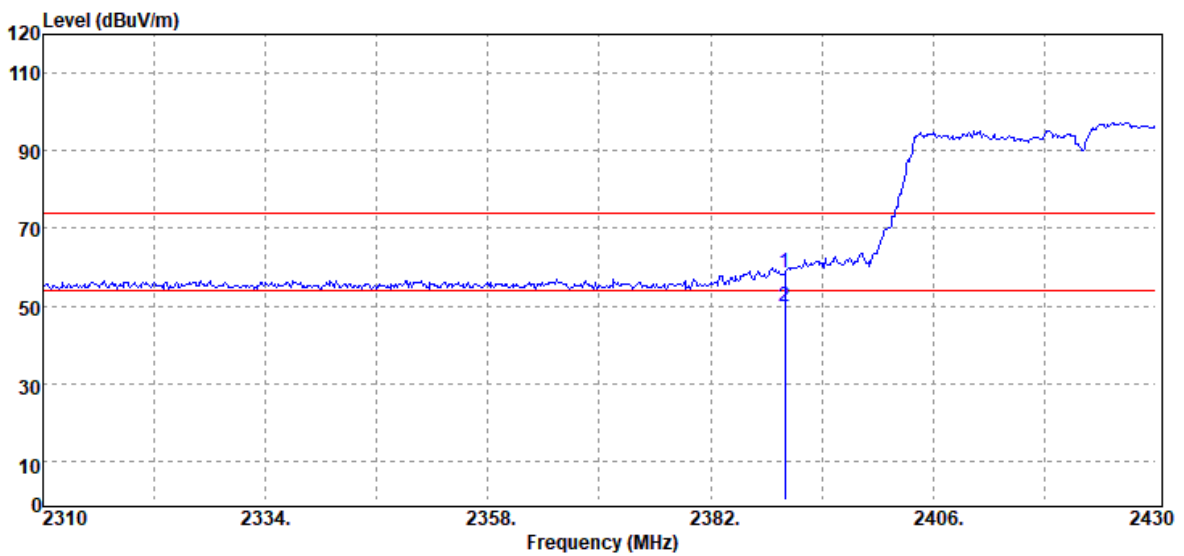

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2390.00	Peak	75.56	-17.18	58.38	74.00	-15.62
2390.00	Average	66.89	-17.18	49.71	54.00	-4.29

Report No.: T200522D10-RP3


Test Mode	IEEE 802.11 n40 Low CH 2422MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

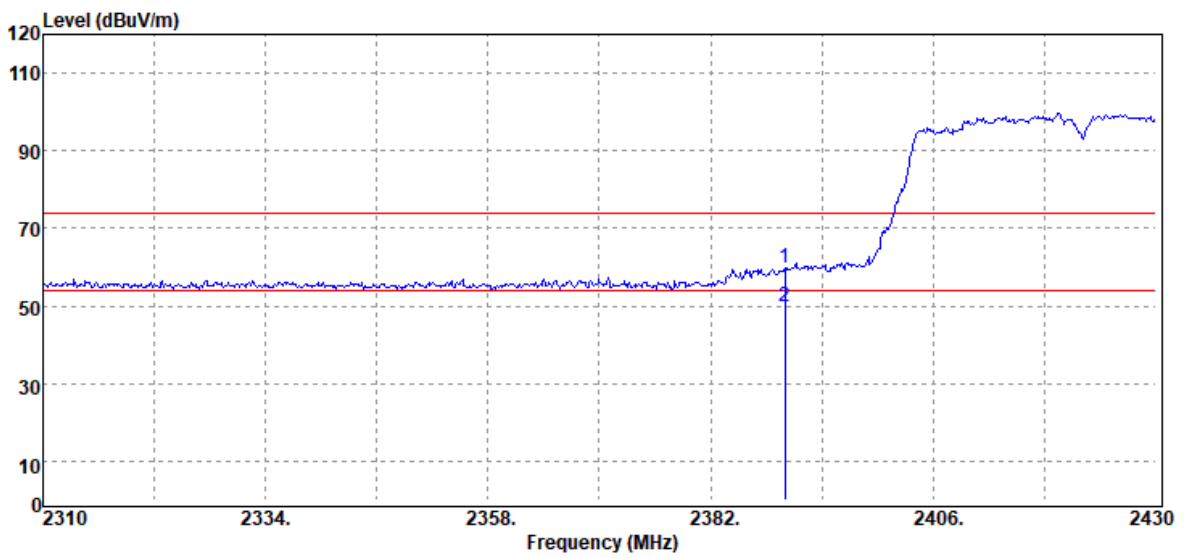

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2390.00	Peak	77.00	-17.18	59.82	74.00	-14.18
2390.00	Average	67.10	-17.18	49.92	54.00	-4.08

Report No.: T200522D10-RP3


Test Mode	IEEE 802.11n HT40 High CH 2452MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

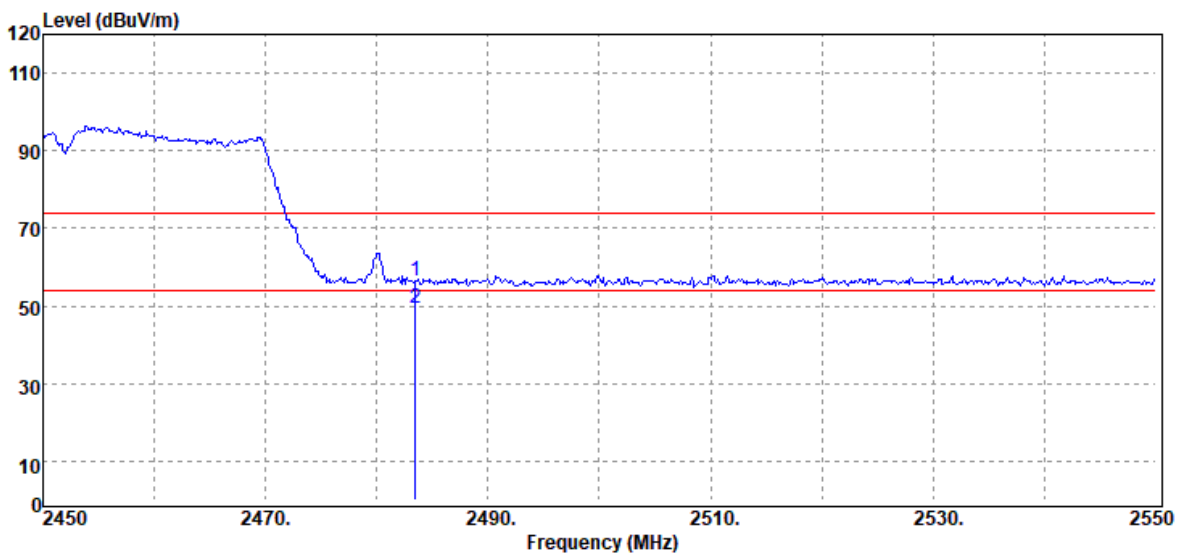

Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2483.50	Peak	73.47	-16.98	56.49	74.00	-17.51
2483.50	Average	66.35	-16.98	49.37	54.00	-4.63

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n40 High CH 2452MHz	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Band Edge	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

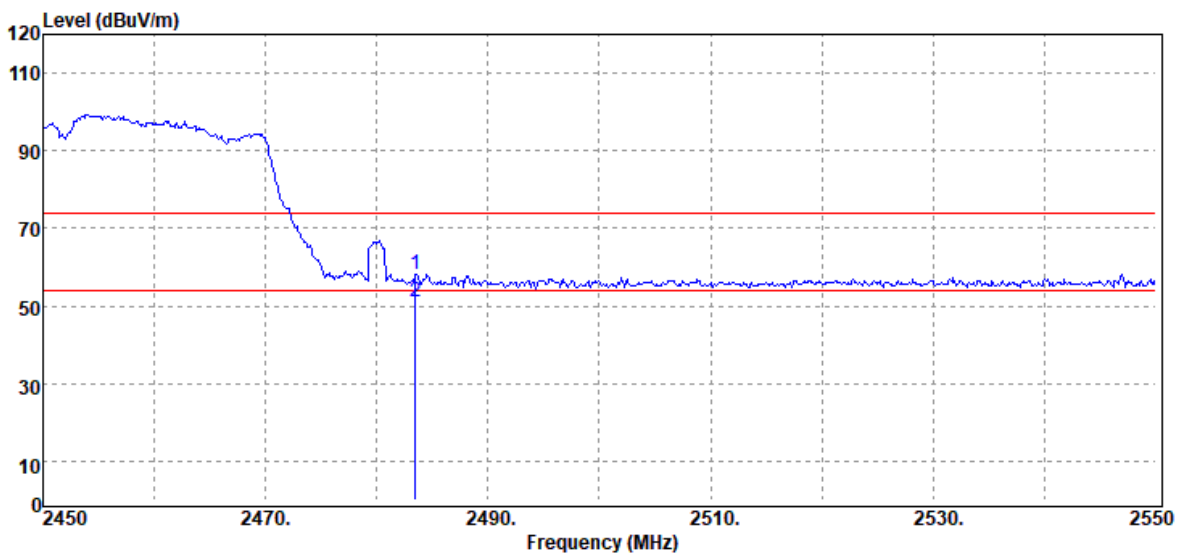


Frequency (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
2483.50	Peak	75.02	-16.98	58.04	74.00	-15.96
2483.50	Average	67.97	-16.98	50.99	54.00	-3.01

Report No.: T200522D10-RP3

**Below 1G Test Data**

Test Mode	Mode 2	Temp/Hum	22.1(°C)/ 51%RH
Test Item	30MHz-1GHz	Test Date	April 22, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak	Test Voltage	

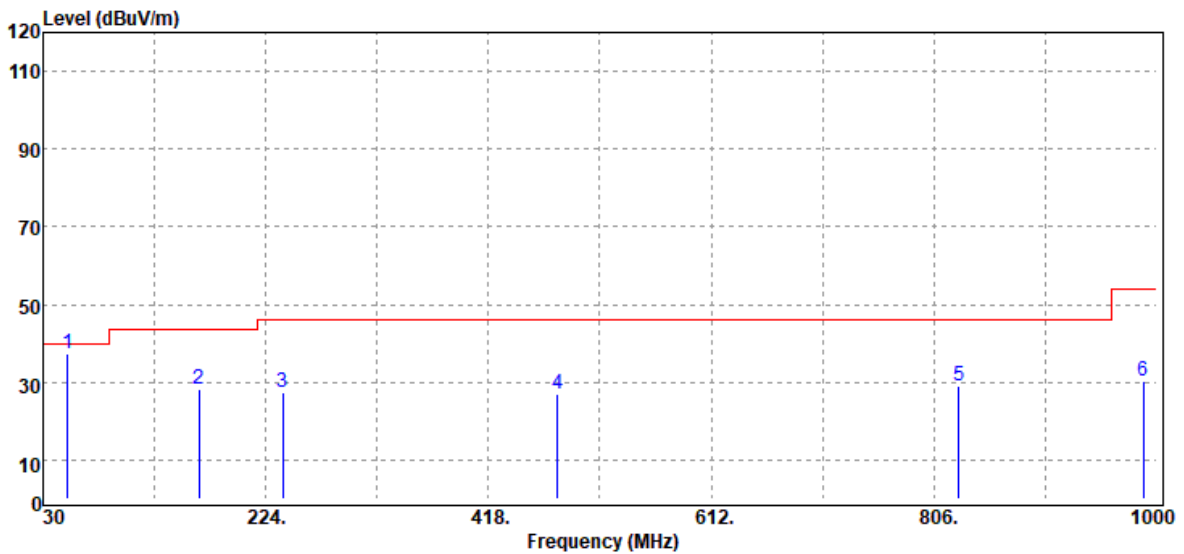


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
51.34	Peak	52.78	-15.37	37.41	40.00	-2.59
165.80	Peak	38.54	-10.24	28.30	43.50	-15.20
238.55	Peak	37.87	-10.35	27.52	46.00	-18.48
478.14	Peak	29.81	-2.90	26.91	46.00	-19.09
827.34	Peak	25.89	3.21	29.10	46.00	-16.90
988.36	Peak	25.05	5.43	30.48	54.00	-23.52

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: T200522D10-RP3

Test Mode	Mode 2	Temp/Hum	22.1(°C)/ 51%RH
Test Item	30MHz-1GHz	Test Date	April 22, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak	Test Voltage	

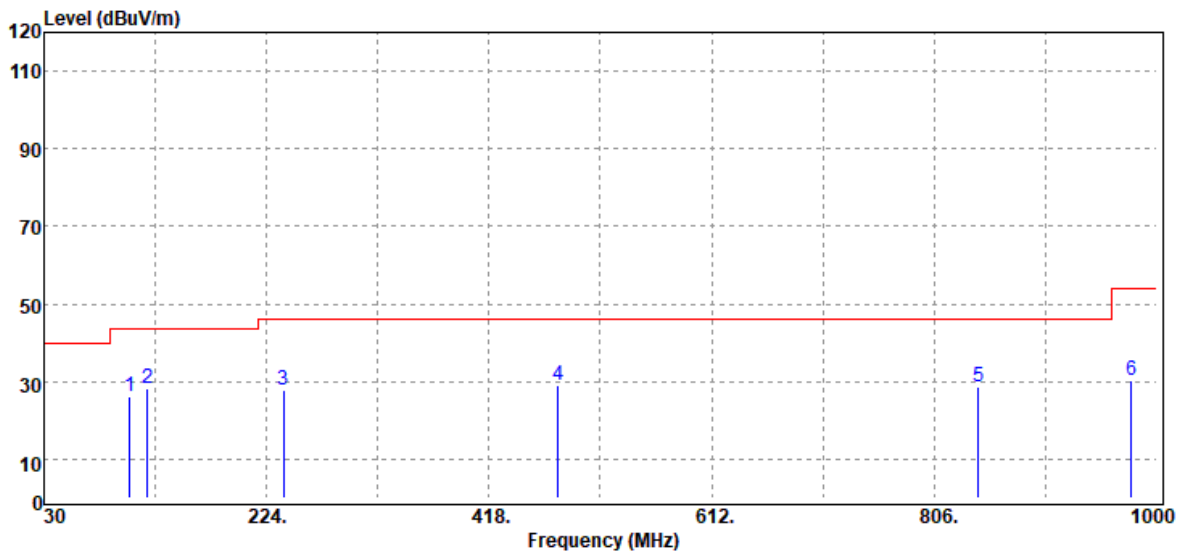


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
104.69	Peak	37.41	-11.05	26.36	43.50	-17.14
120.21	Peak	37.32	-8.98	28.34	43.50	-15.16
238.55	Peak	38.34	-10.35	27.99	46.00	-18.01
478.14	Peak	31.88	-2.90	28.98	46.00	-17.02
844.80	Peak	25.53	3.12	28.65	46.00	-17.35
977.69	Peak	24.68	5.49	30.17	54.00	-23.83

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: T200522D10-RP3

**Above 1G Test Data**

Test Mode	IEEE 802.11b Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

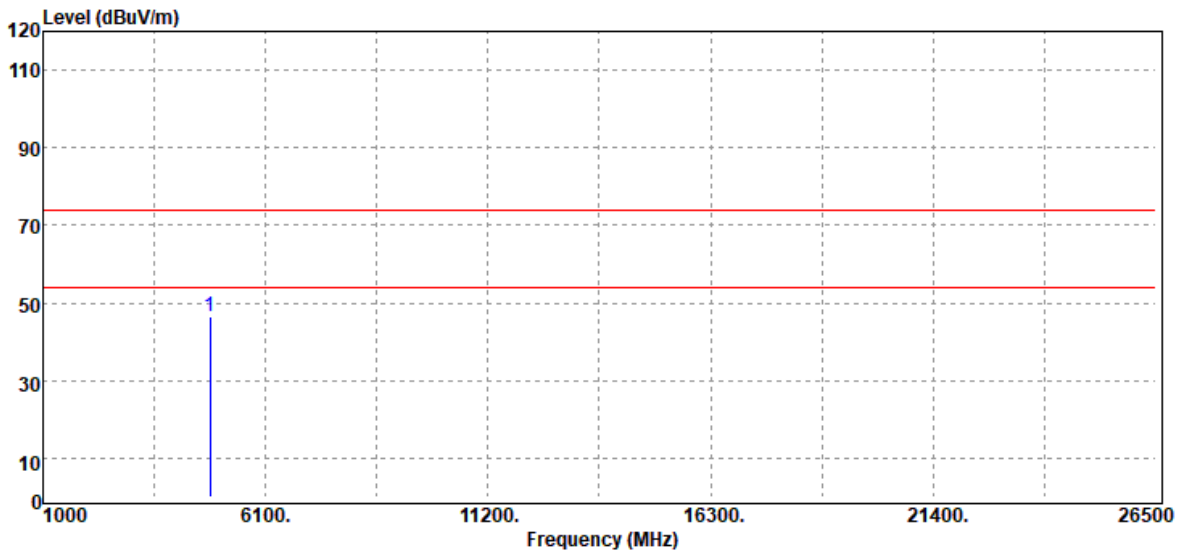

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.00	Peak	57.76	-11.39	46.37	74.00	-27.63
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

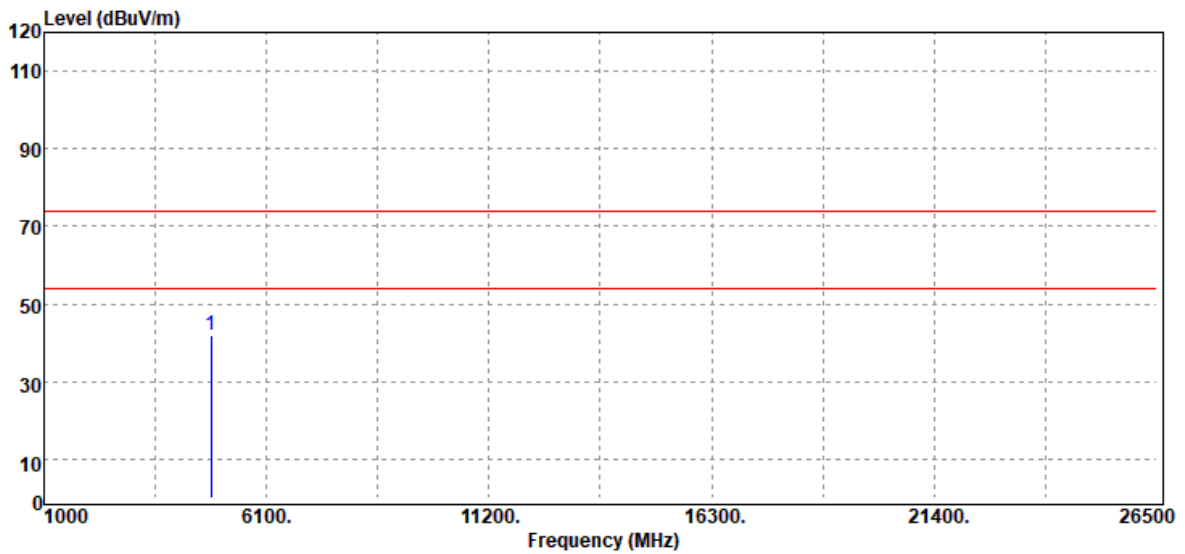


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	53.15	-11.39	41.76	74.00	-32.24
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

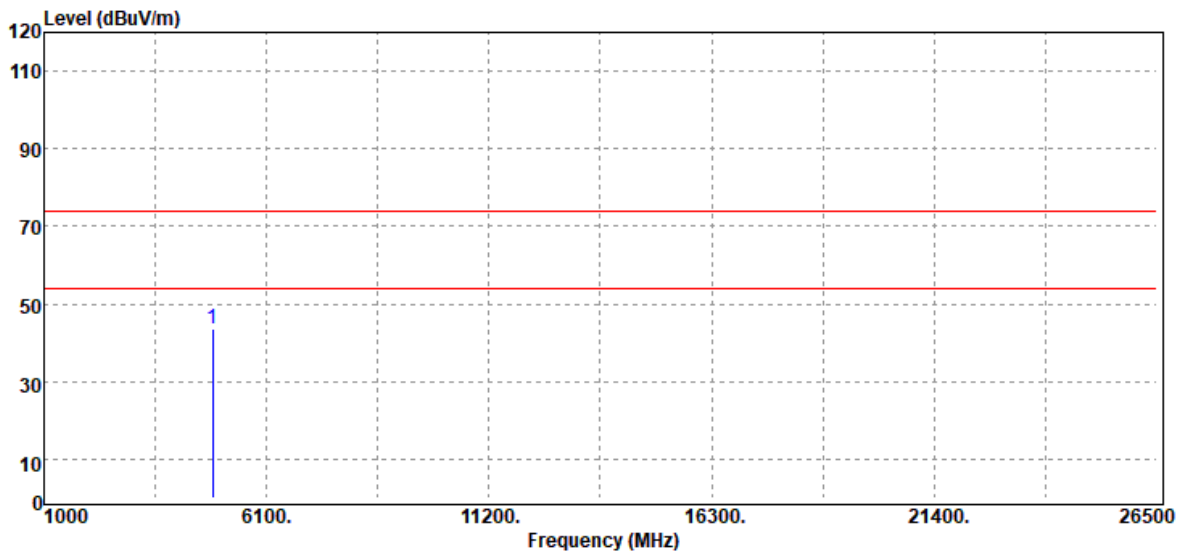


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	54.63	-11.12	43.51	74.00	-30.49
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

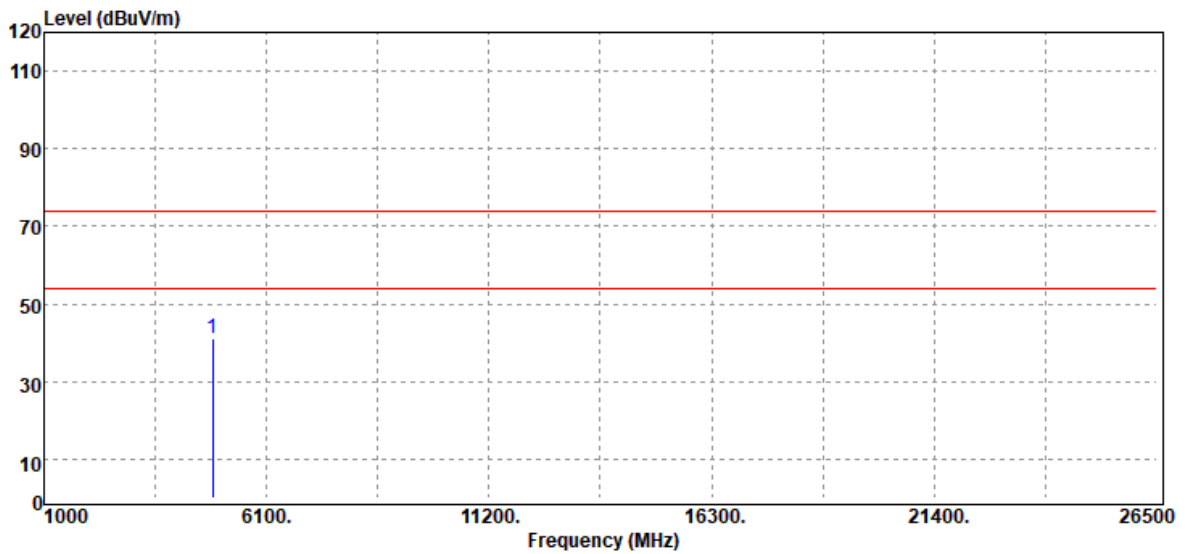


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	52.19	-11.12	41.07	74.00	-32.93
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

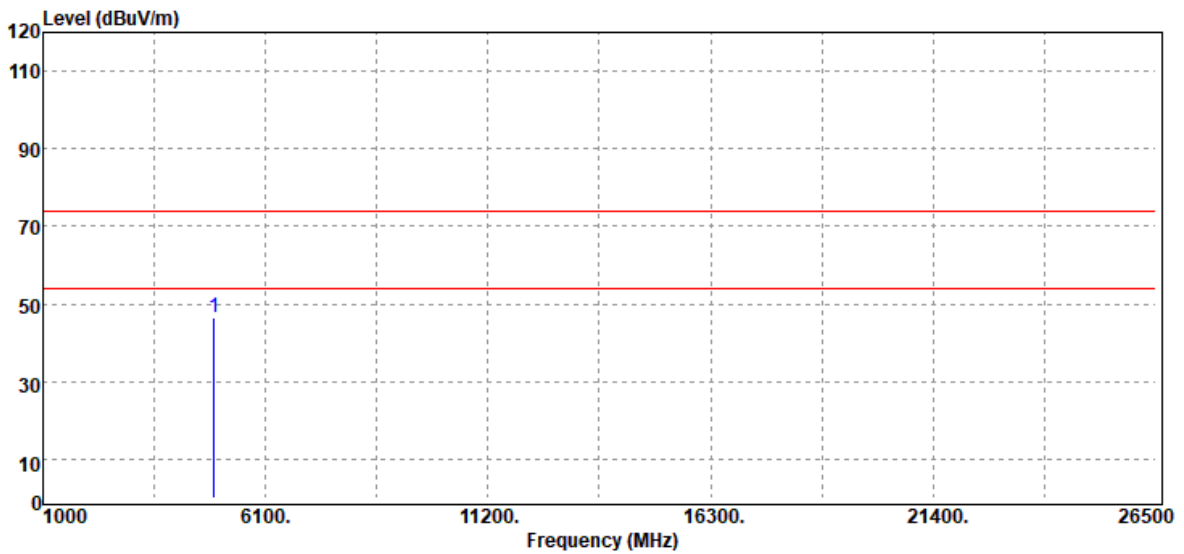


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	57.34	-10.77	46.57	74.00	-27.43
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11b High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

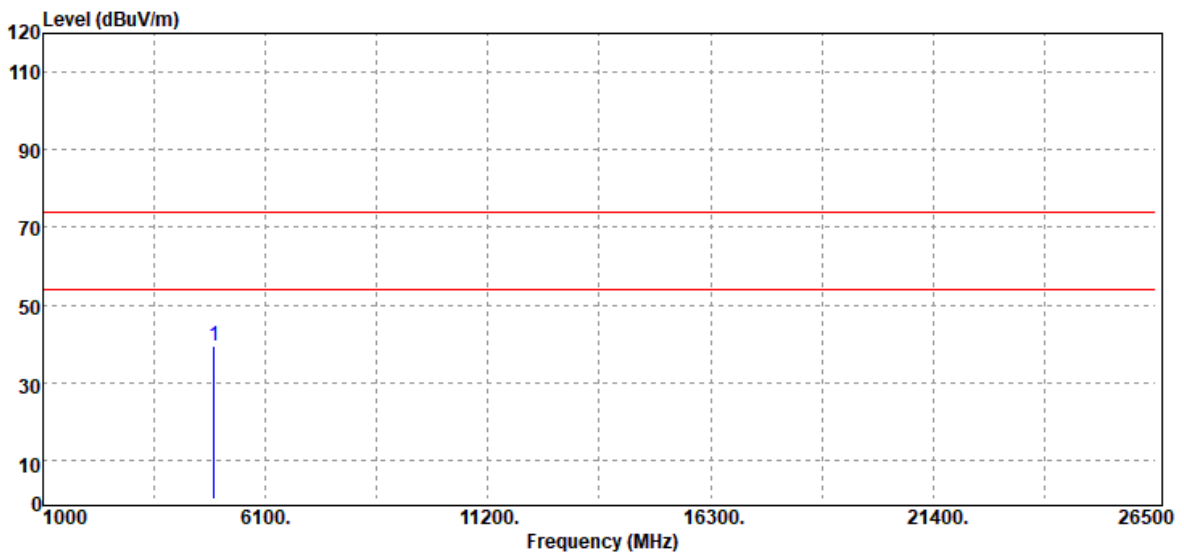


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	50.34	-10.77	39.57	74.00	-34.43
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11g Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

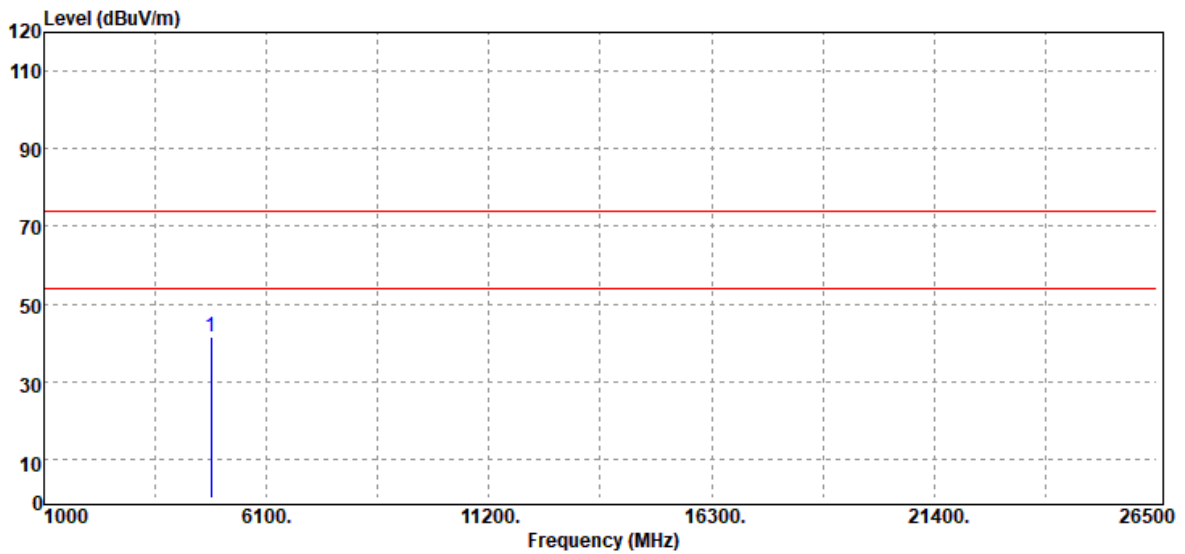


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.00	Peak	52.88	-11.39	41.49	74.00	-32.51
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11g Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

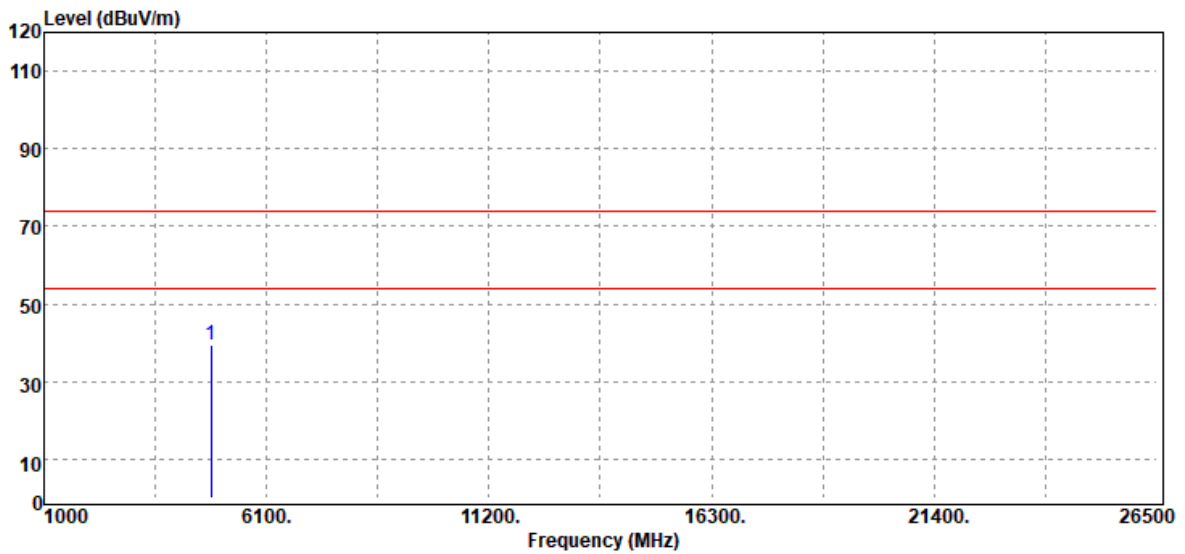


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	50.66	-11.39	39.27	74.00	-34.73
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

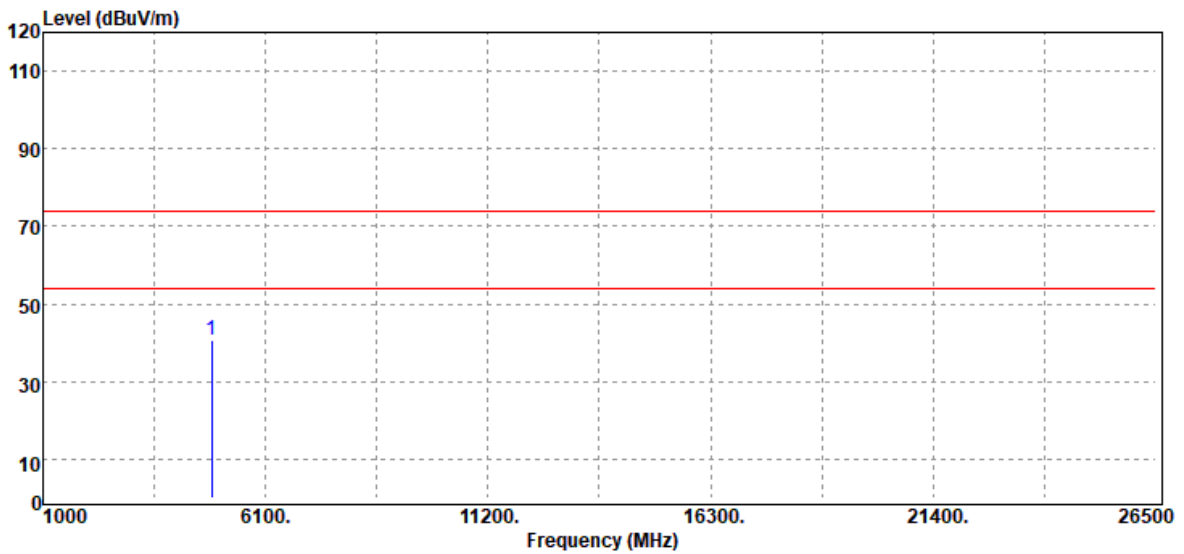

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	51.66	-11.12	40.54	74.00	-33.46
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T200522D10-RP3

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

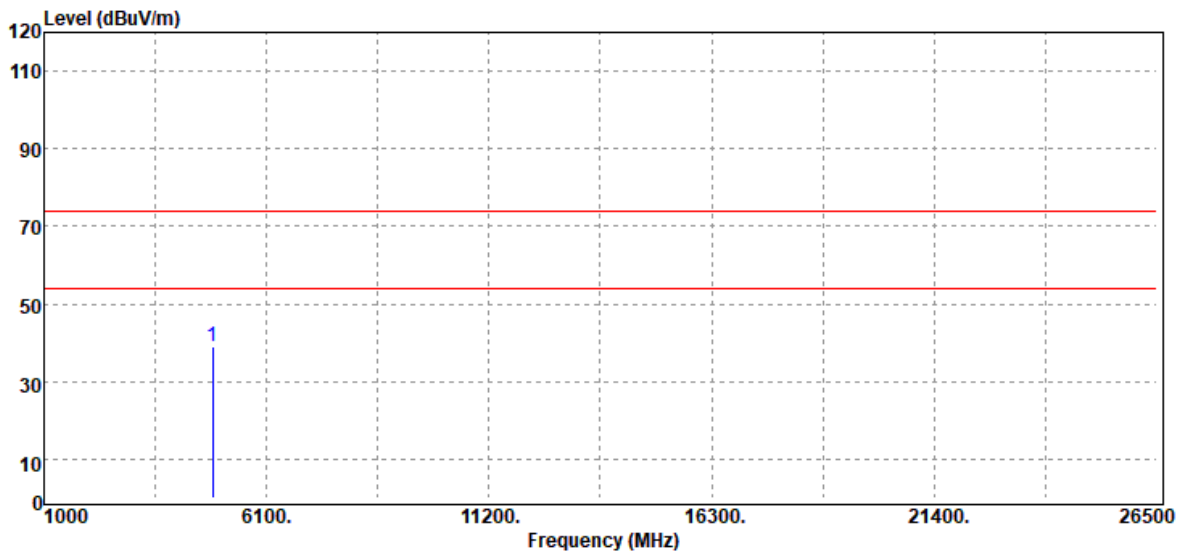


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	50.26	-11.12	39.14	74.00	-34.86
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11g High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

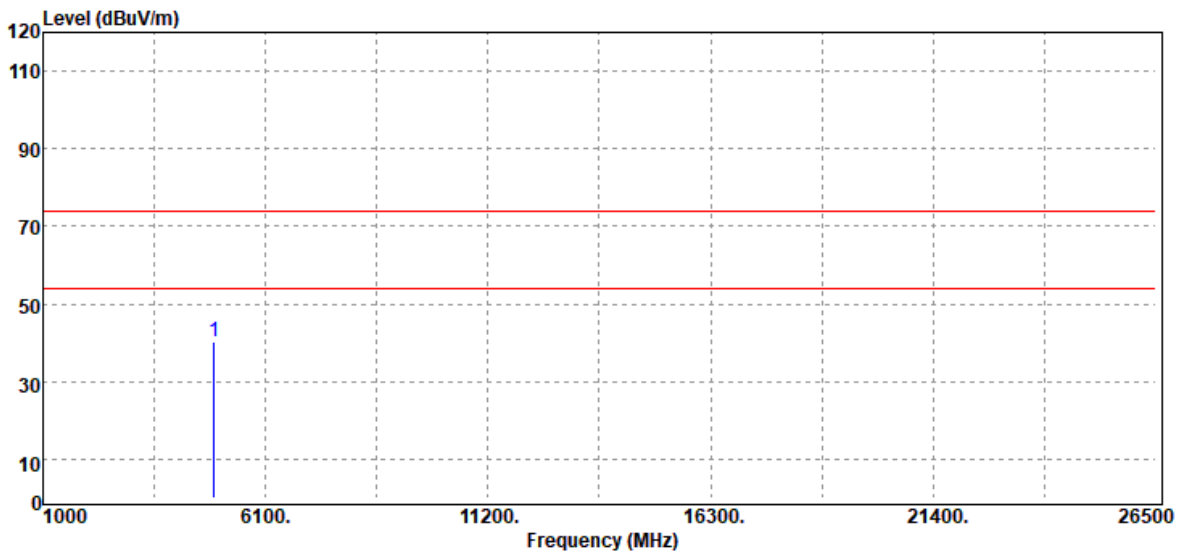


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	51.10	-10.77	40.33	74.00	-33.67
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11g High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

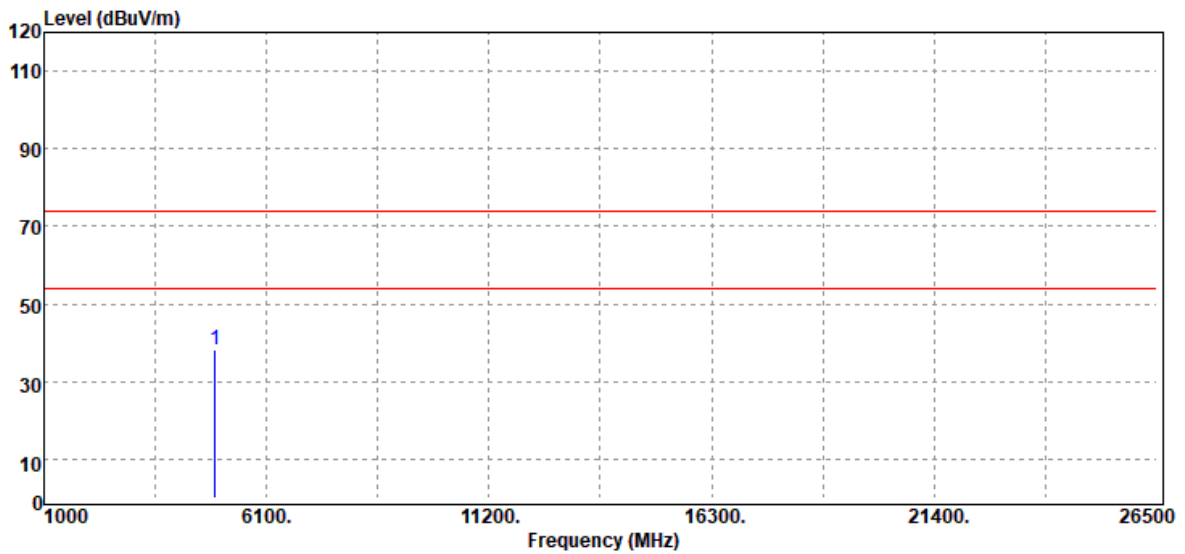


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	49.13	-10.77	38.36	74.00	-35.64
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

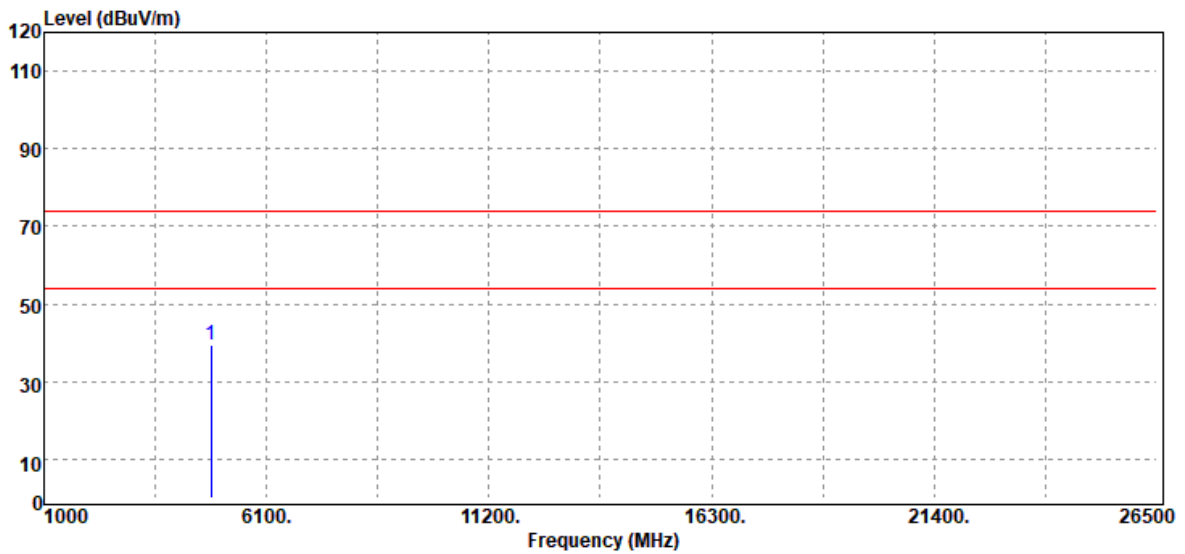


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4824.00	Peak	50.76	-11.39	39.37	74.00	-34.63
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

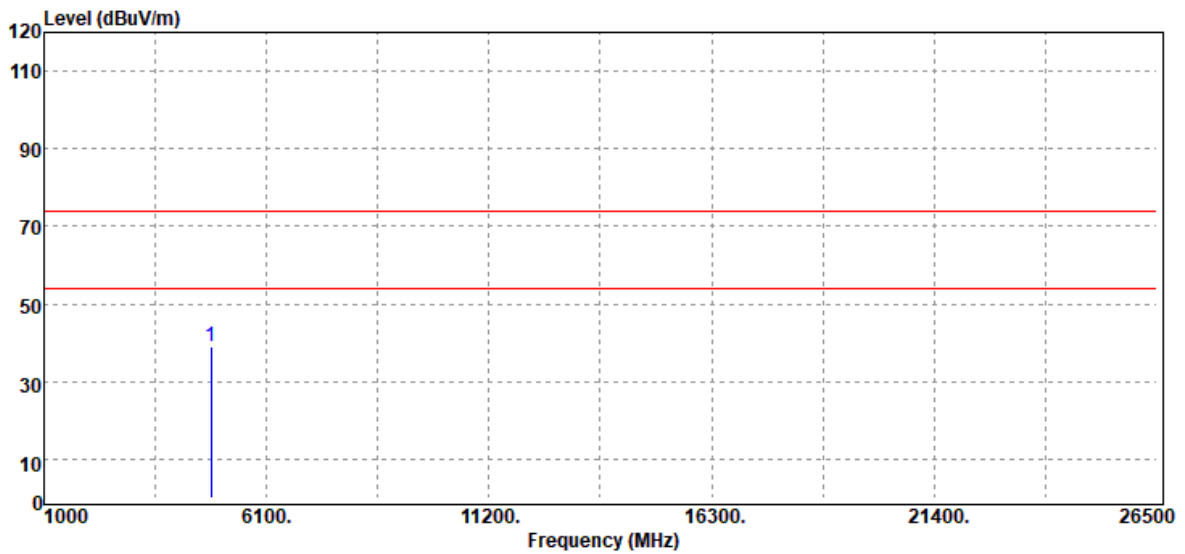


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	50.31	-11.39	38.92	74.00	-35.08
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

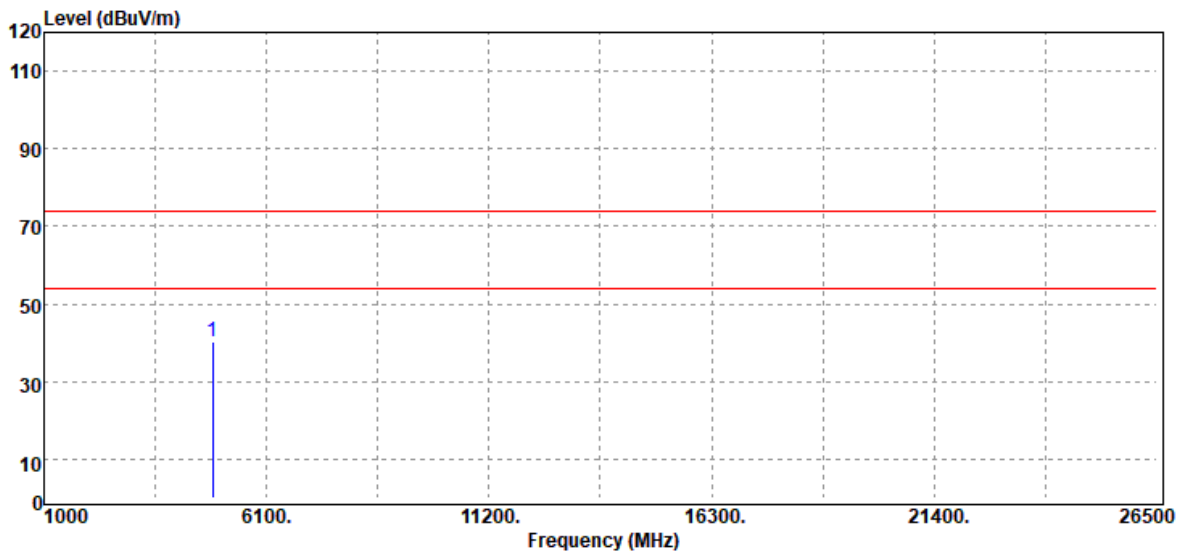


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	51.58	-11.12	40.46	74.00	-33.54
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

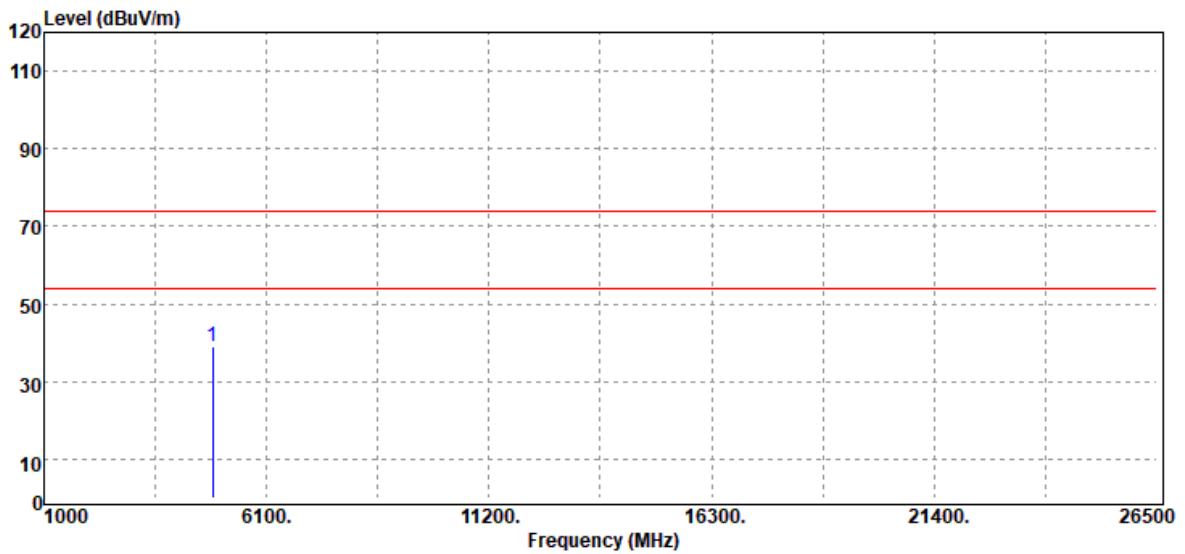


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	50.27	-11.12	39.15	74.00	-34.85
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

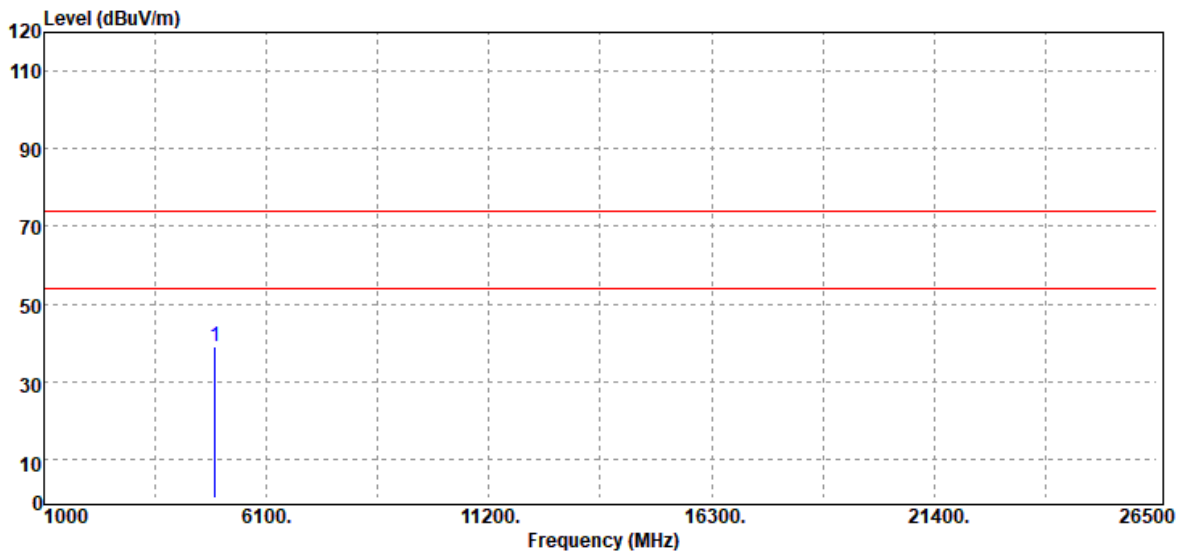

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	49.97	-10.77	39.20	74.00	-34.80
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

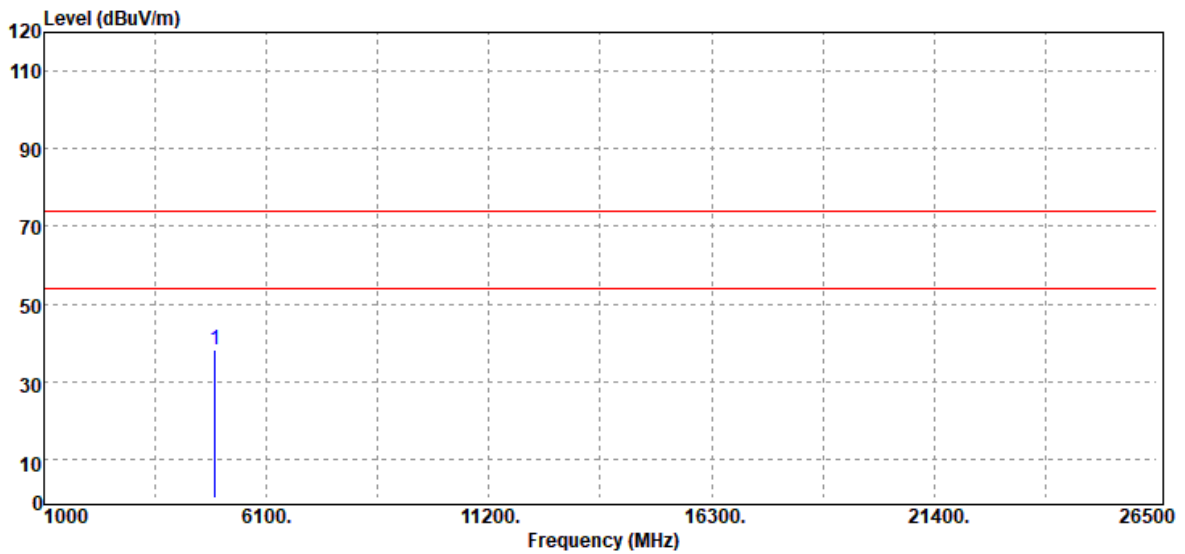


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4924.00	Peak	49.05	-10.77	38.28	74.00	-35.72
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

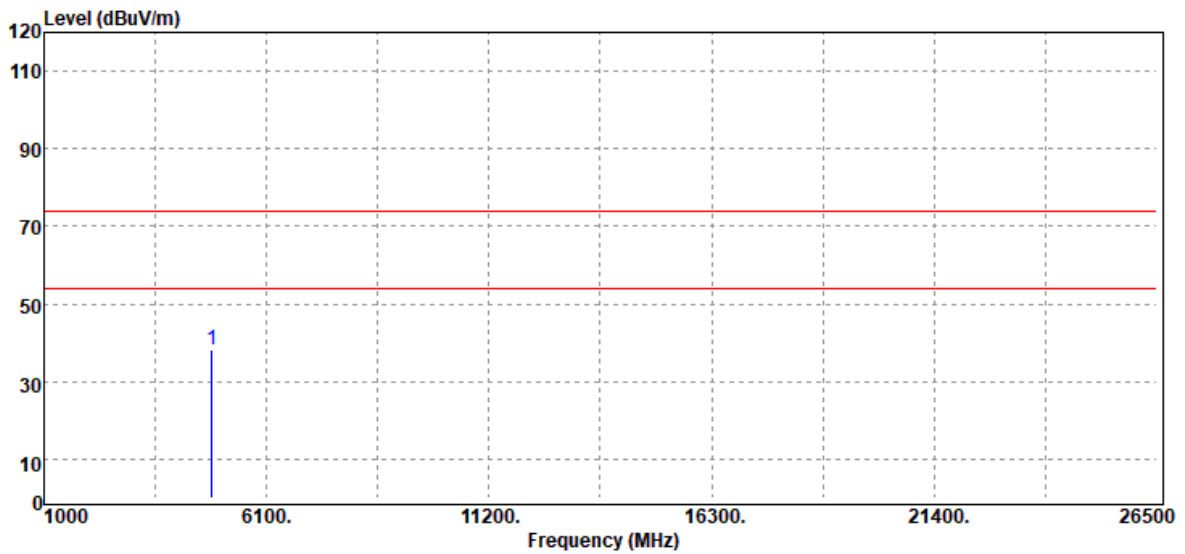


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.00	Peak	49.54	-11.33	38.21	74.00	-35.79
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

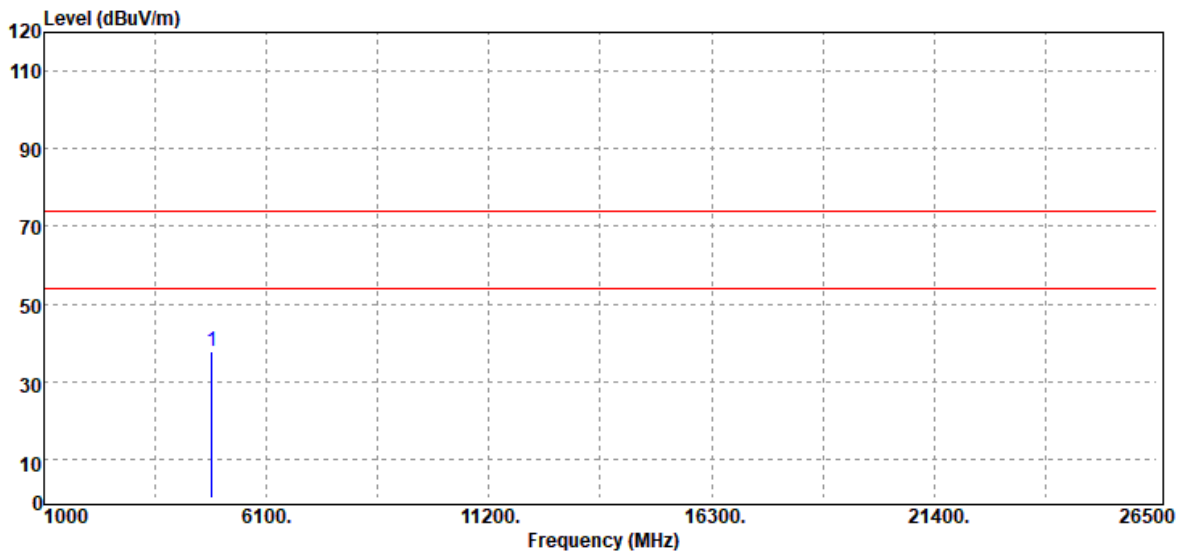


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.00	Peak	49.25	-11.33	37.92	74.00	-36.08
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

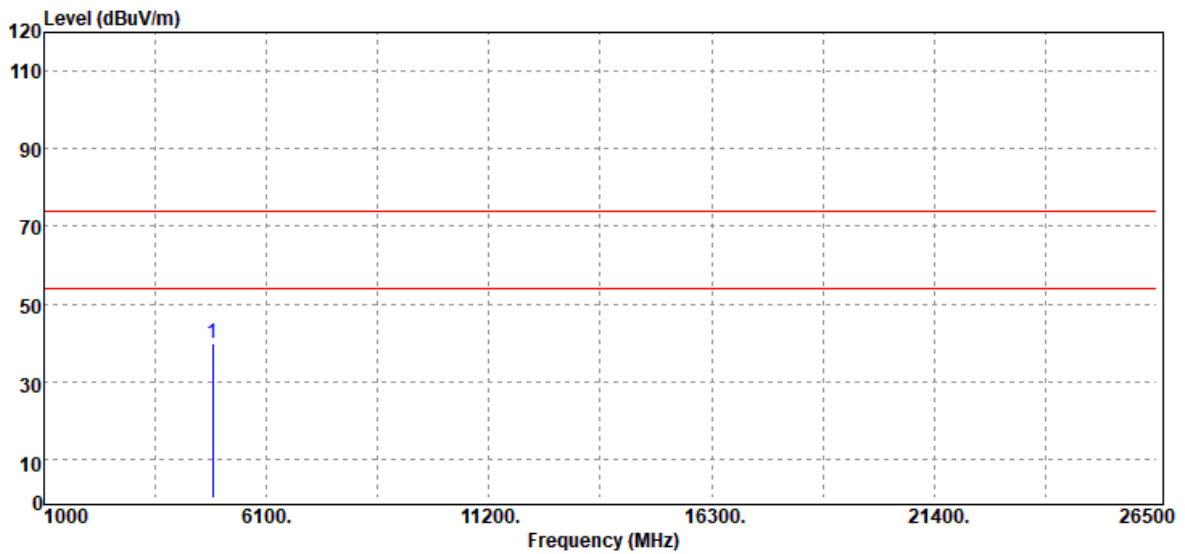


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4874.00	Peak	51.02	-11.12	39.90	74.00	-34.10
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

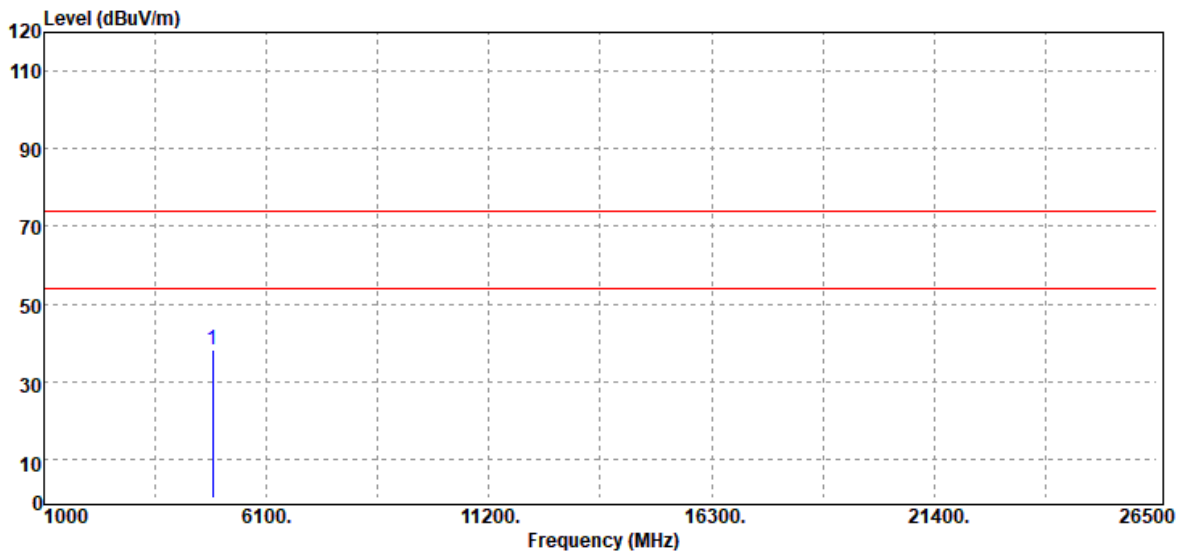


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	49.34	-11.12	38.22	74.00	-35.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

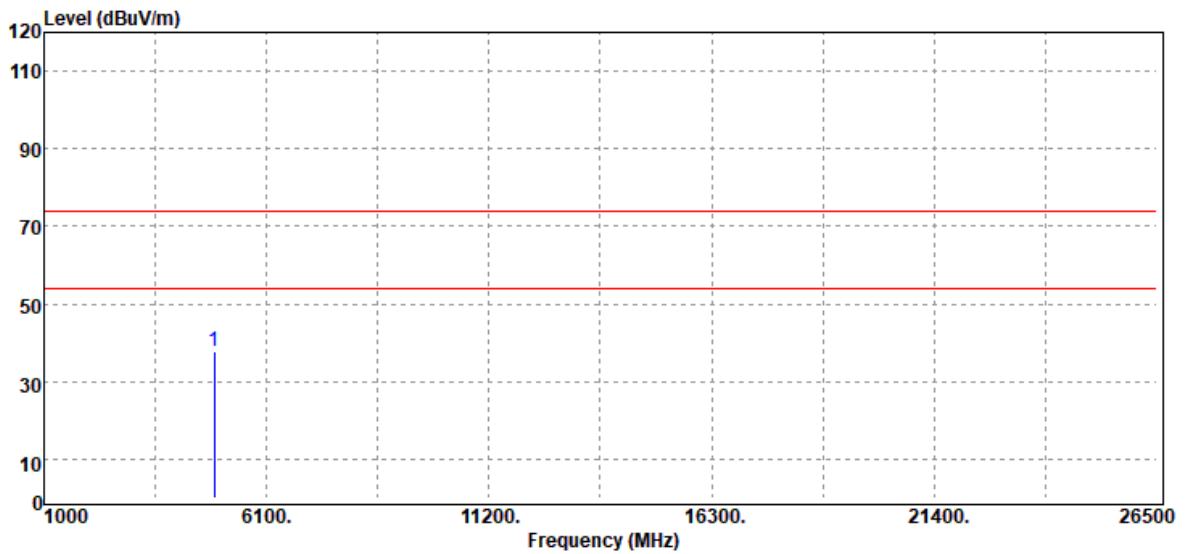


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.00	Peak	48.58	-10.87	37.71	74.00	-36.29
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP3

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	20.4(°C)/ 68%RH
Test Item	Harmonic	Test Date	December 10, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

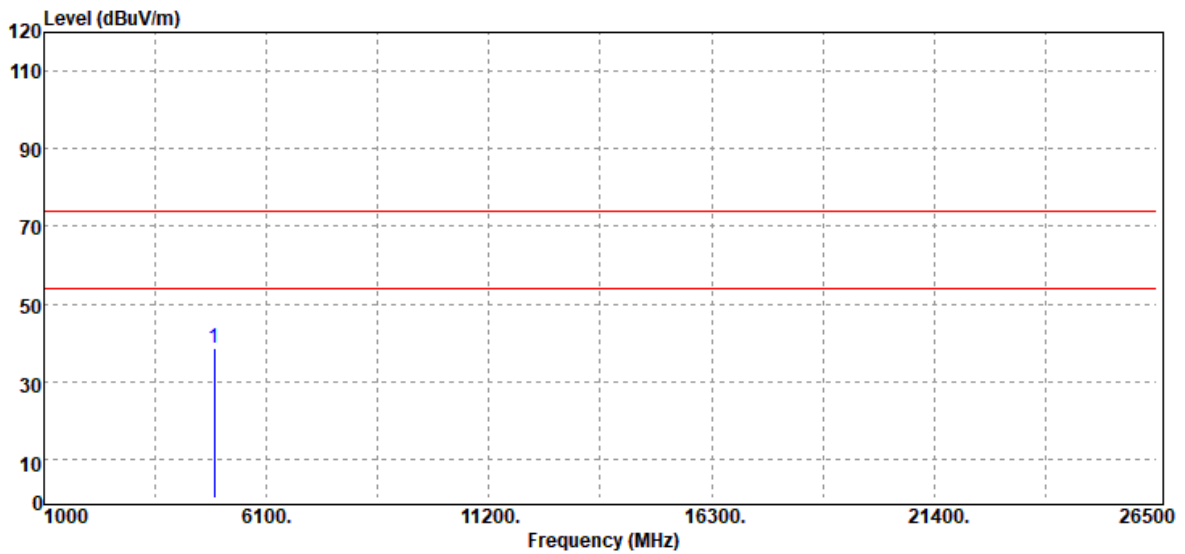

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBµV)	Factor (dB)	Actual FS (dBµV/m)	Limit @3m (dBµV/m)	Margin (dB)
4904.00	Peak	49.30	-10.87	38.43	74.00	-35.57
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

**- End of Test Report -**