


Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	20.8(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

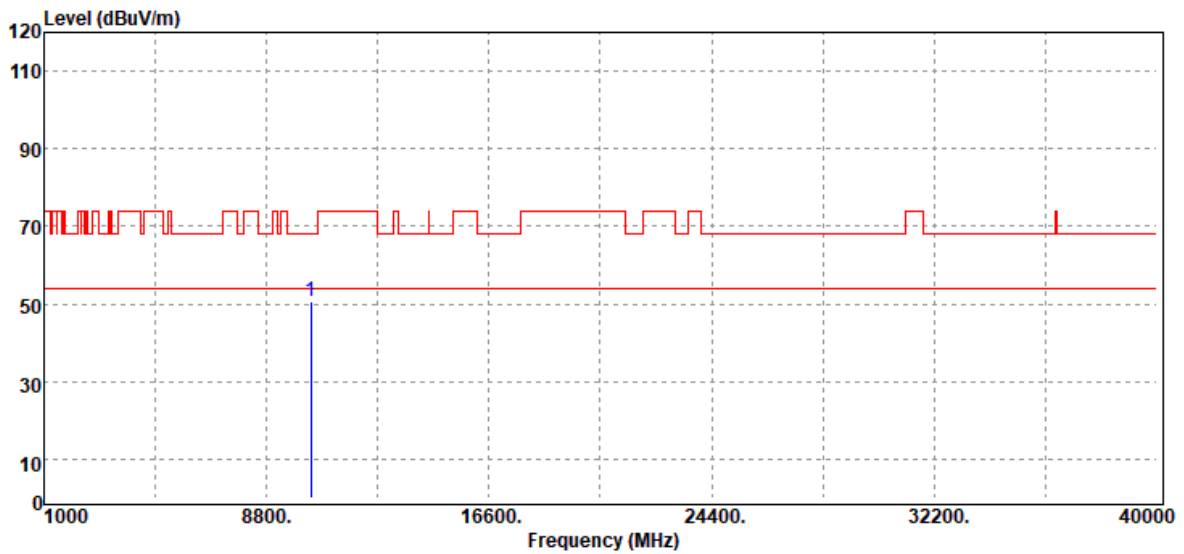


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10360.00	Peak	48.59	2.13	50.72	68.20	-17.48
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	20.8(°C)/ 71%RH
Test Item	Harmonics	Test Date	December 14, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

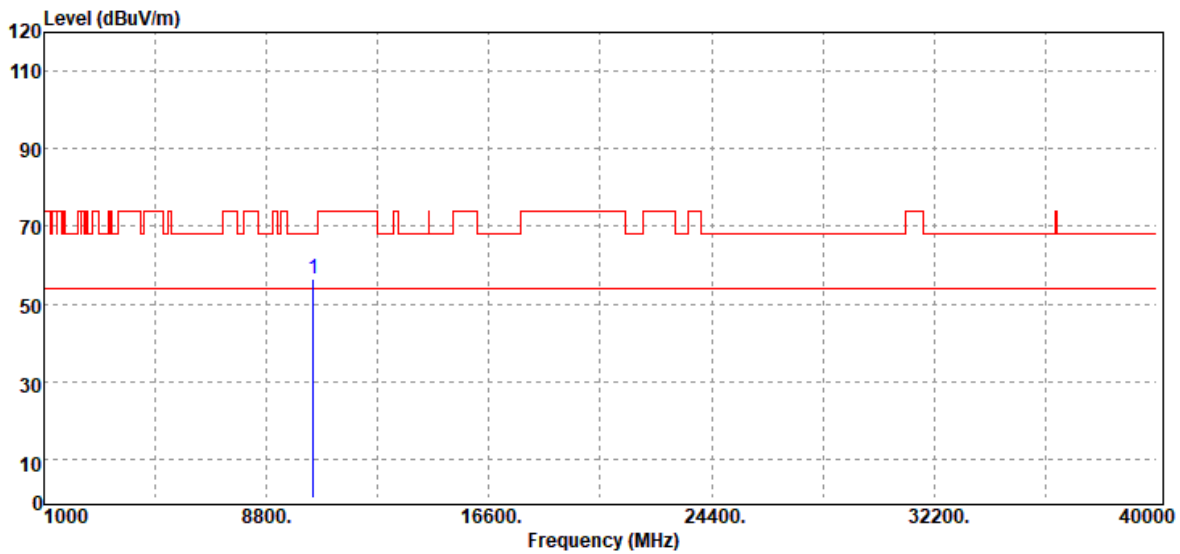


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10440.00	Peak	54.31	2.14	56.45	68.20	-11.75
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	20.8(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

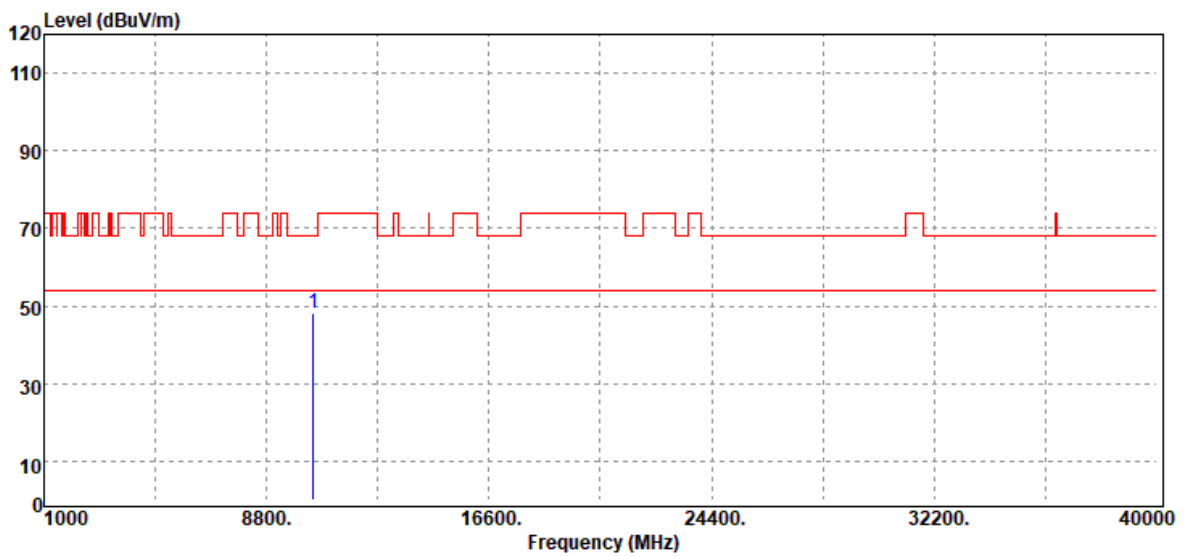


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10440.00	Peak	45.82	2.14	47.96	68.20	-20.24
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	20.8(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

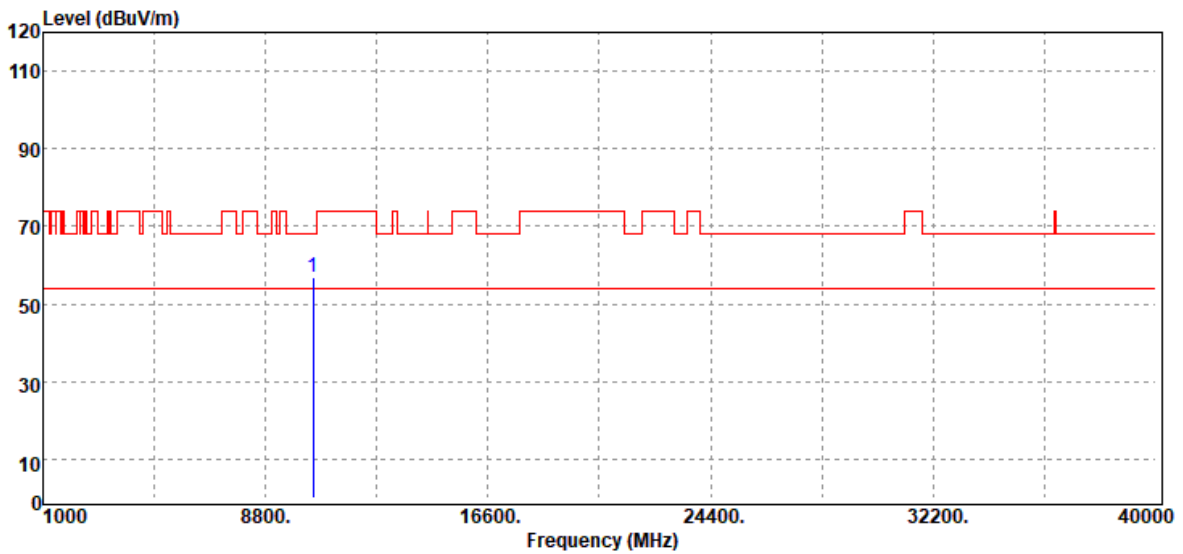

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
10480.00	Peak	54.91	2.11	57.02	68.20	-11.18
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	20.8(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10480.00	Peak	42.33	2.11	44.44	68.20	-23.76
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5180MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

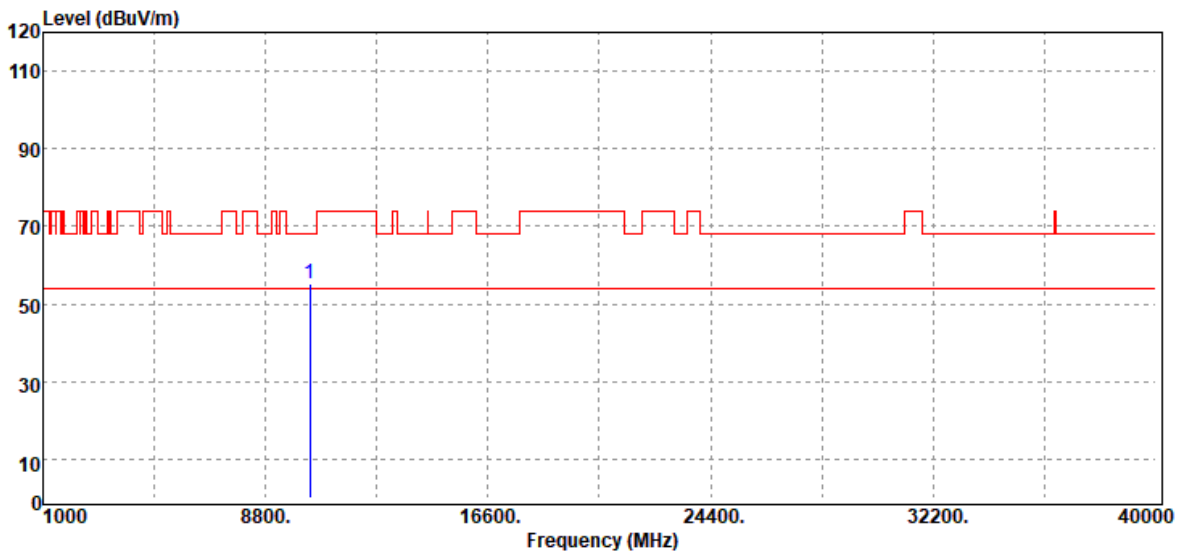


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10360.00	Peak	53.29	2.13	55.42	68.20	-12.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5180MHZ	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

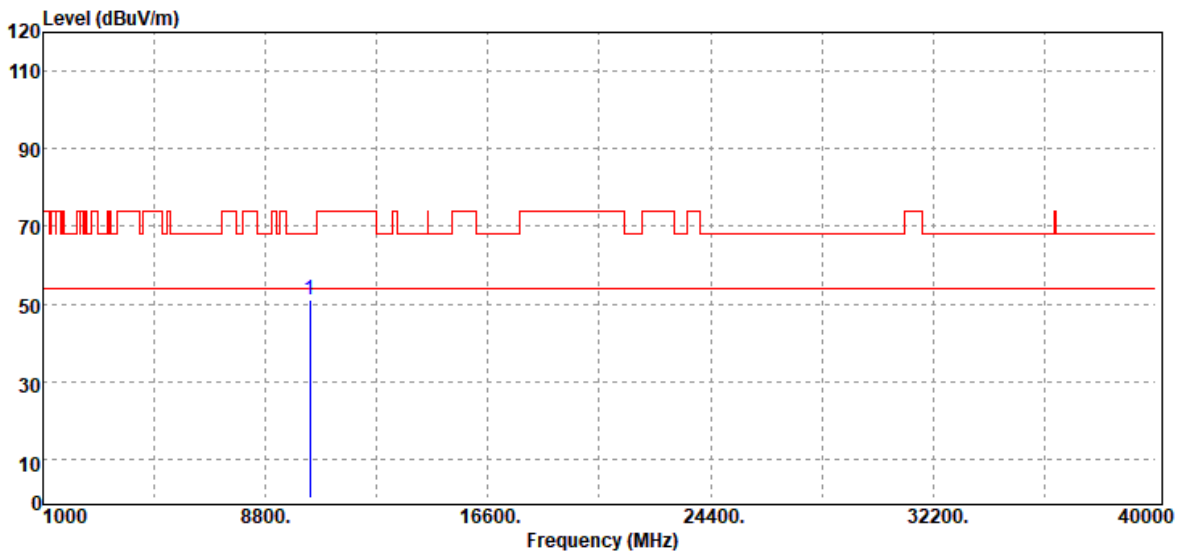


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10360.00	Peak	49.11	2.13	51.24	68.20	-16.96
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

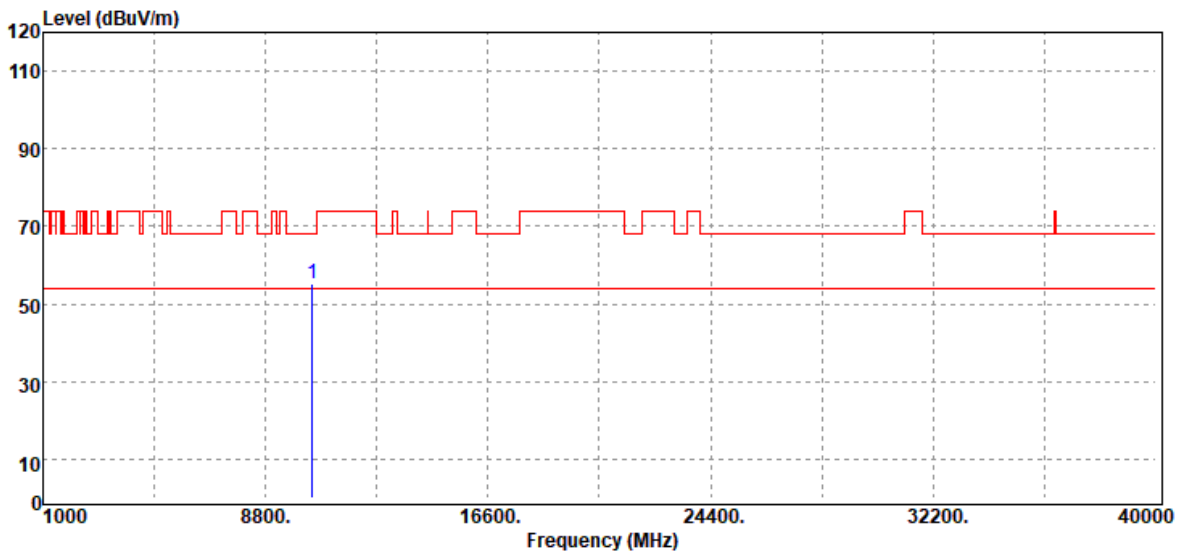

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10440.00	Peak	53.08	2.14	55.22	68.20	-12.98
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5220MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

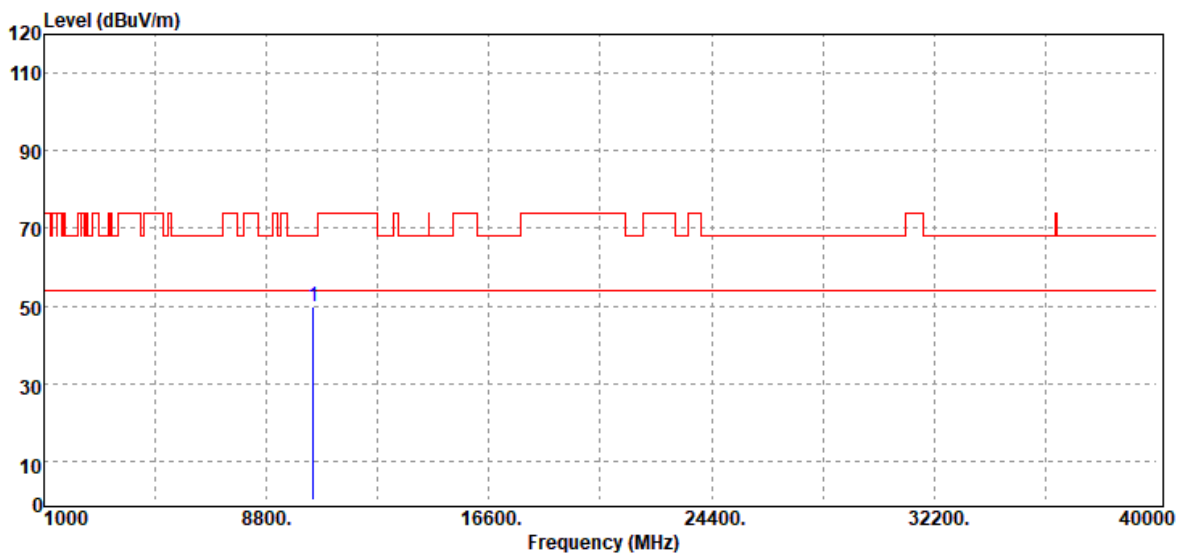


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10440.00	Peak	47.63	2.14	49.77	68.20	-18.43
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5240MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

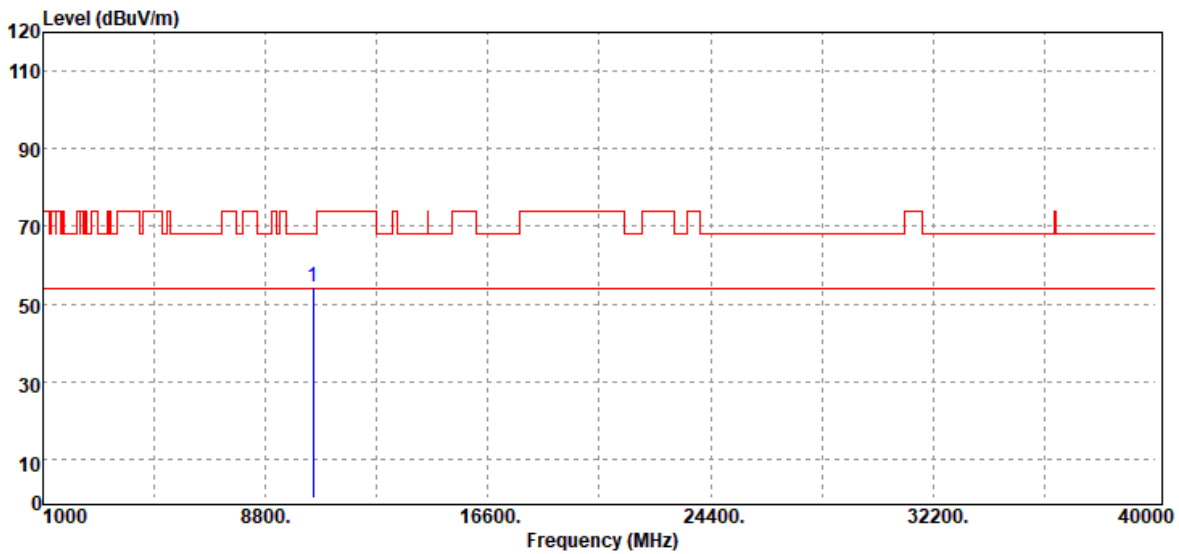


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10480.00	Peak	52.38	2.11	54.49	68.20	-13.71
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

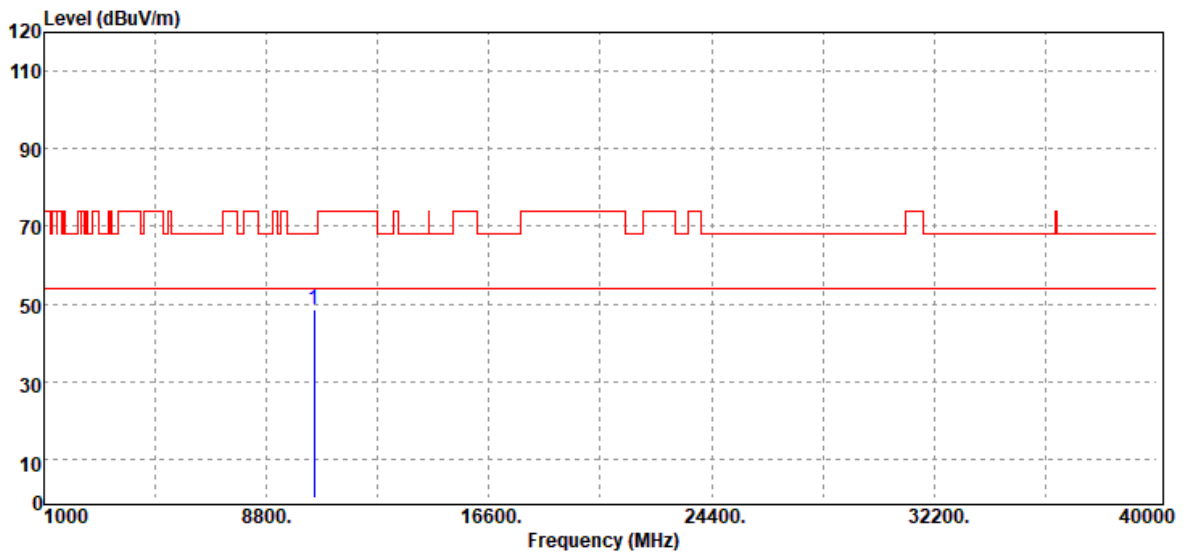


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10480.00	Peak	46.37	2.11	48.48	68.20	-19.72
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

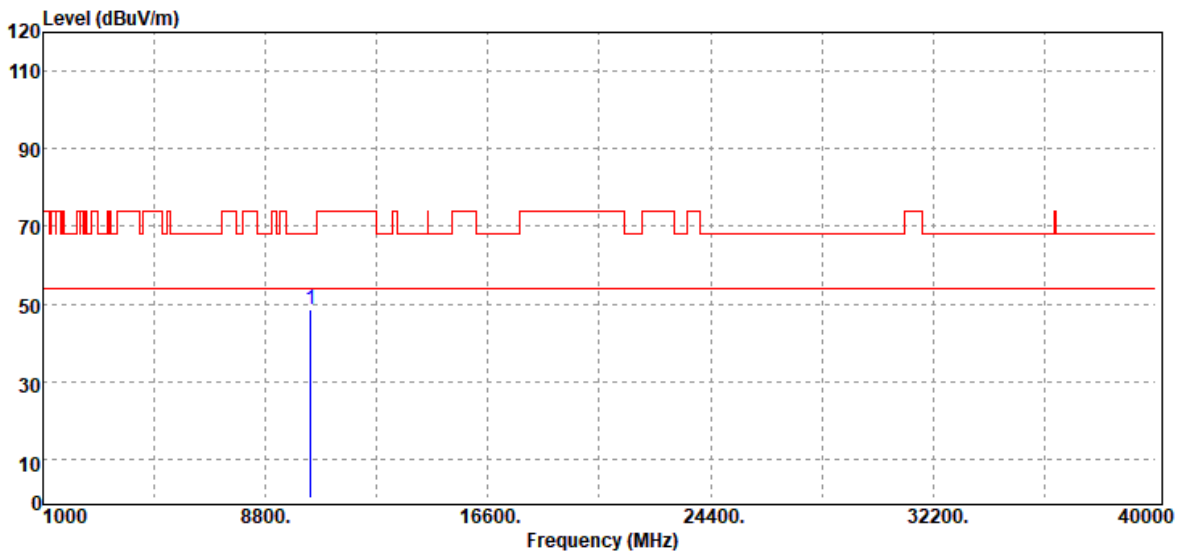


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10380.00	Peak	46.26	2.13	48.39	68.20	-19.81
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5190MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

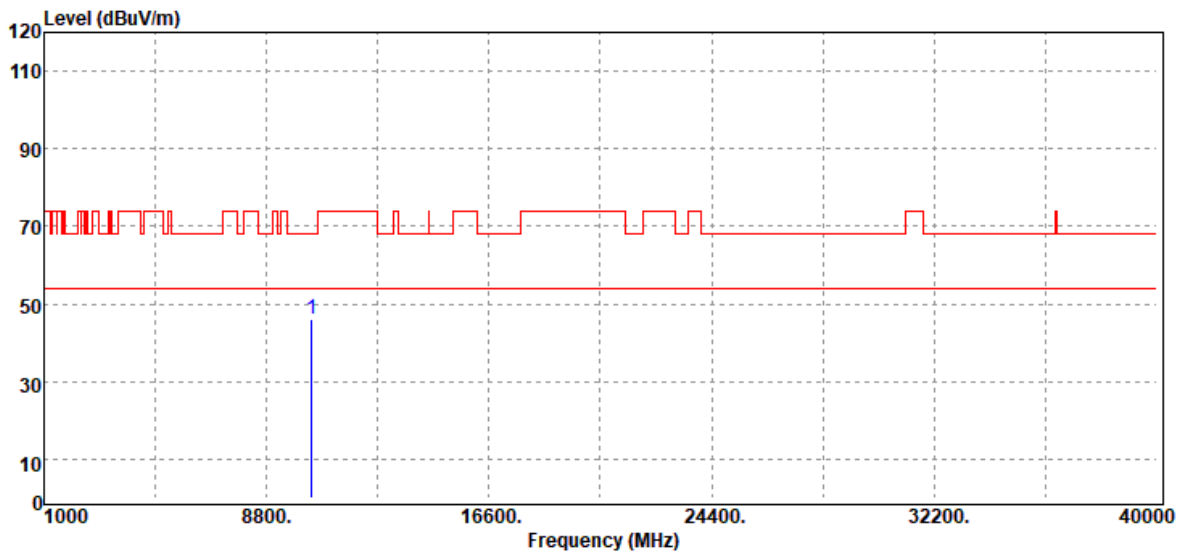


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10380.00	Peak	43.87	2.13	46.00	68.20	-22.20
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5230MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

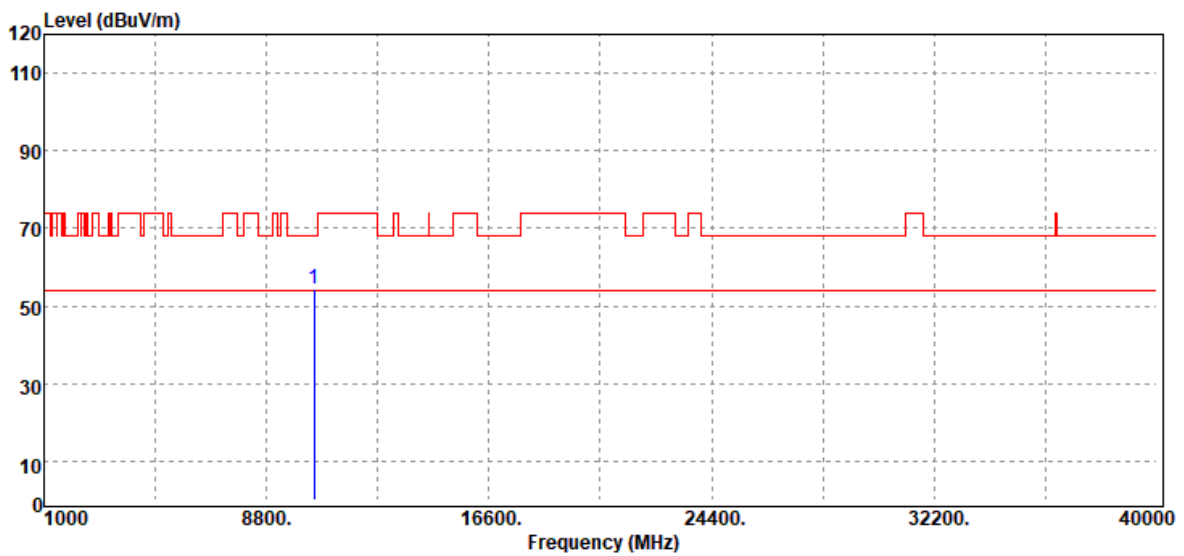

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
10460.00	Peak	52.27	2.13	54.40	68.20	-13.80
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10460.00	Peak	47.72	2.13	49.85	68.20	-18.35
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

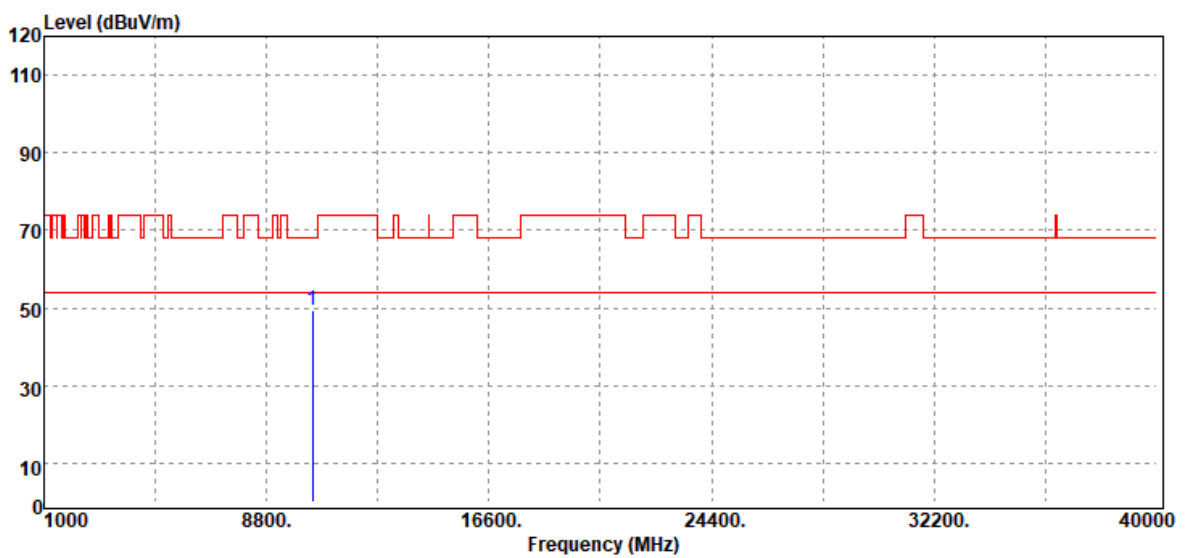

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10420.00	Peak	47.20	2.13	49.33	68.20	-18.87
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5210MHZ	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

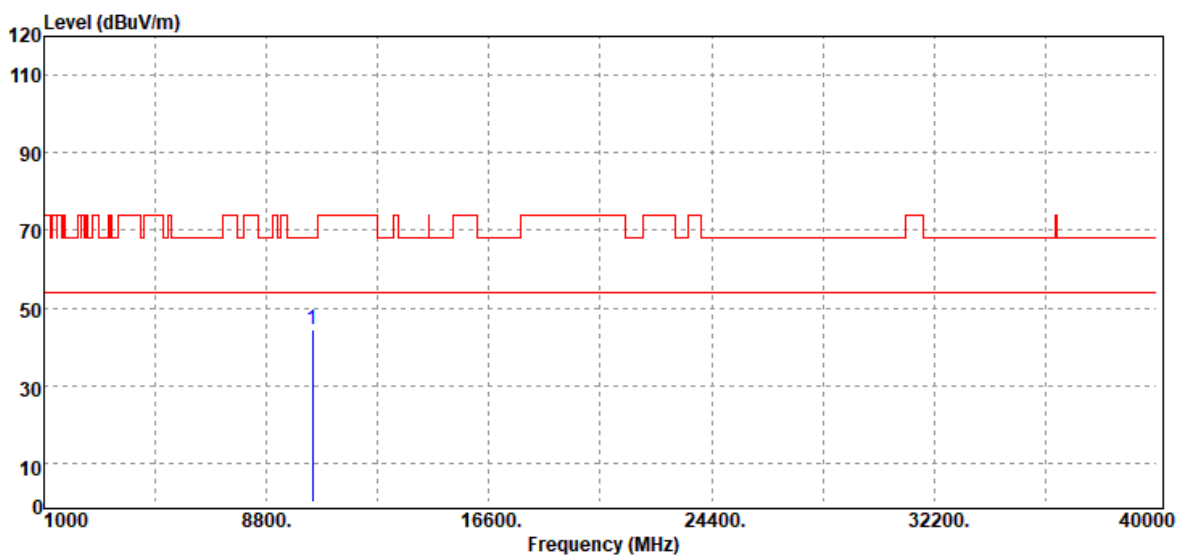

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
10420.00	Peak	42.38	2.13	44.51	68.20	-23.69
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

### Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

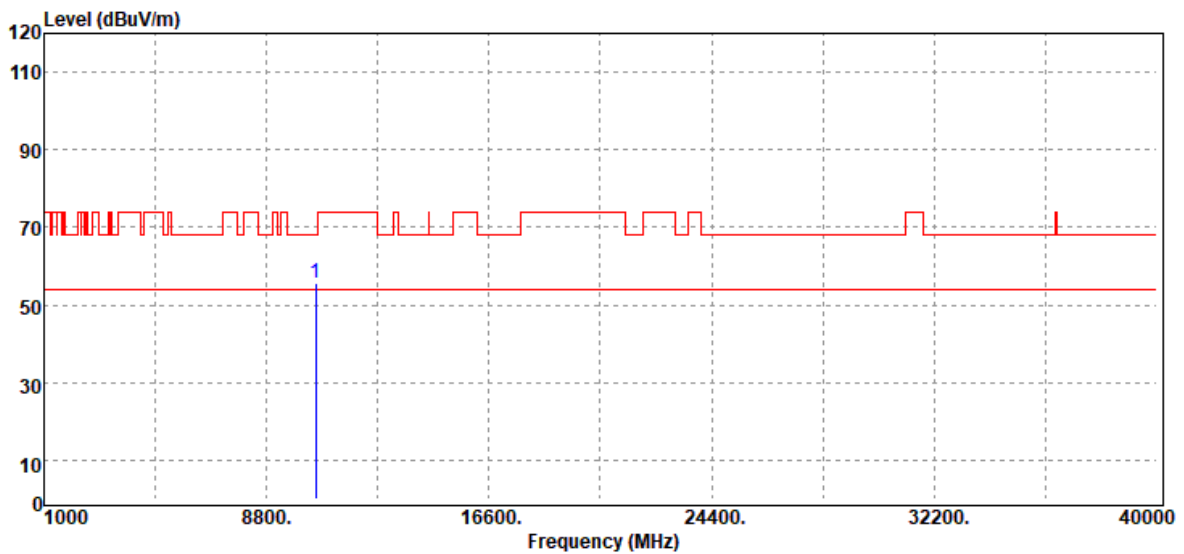


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10520.00	Peak	53.43	2.11	55.54	68.20	-12.66
N/A						

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

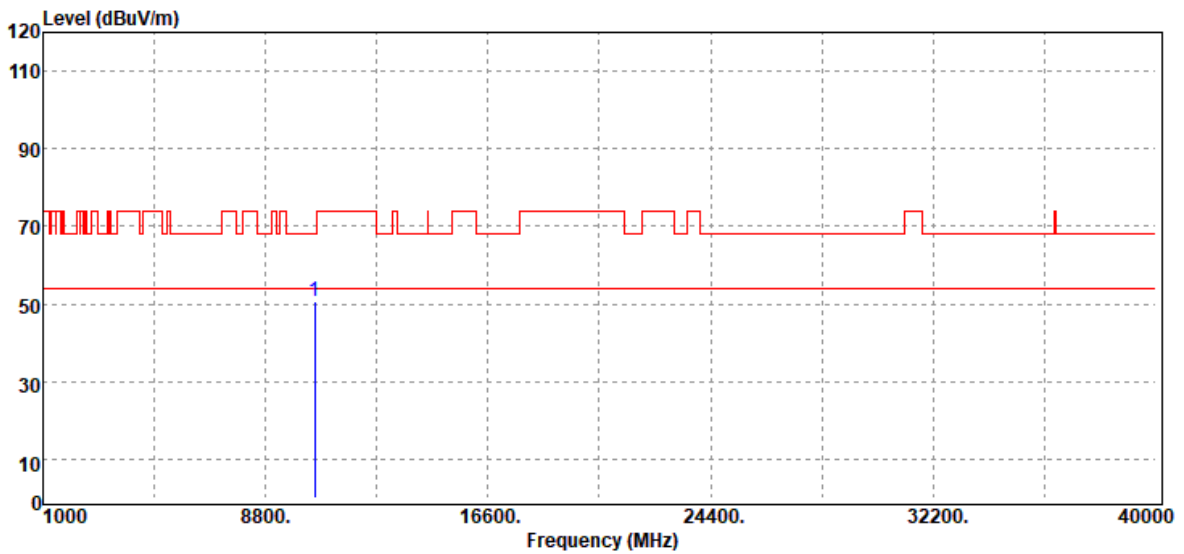

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10520.00	Peak	48.61	2.11	50.72	68.20	-17.48
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10560.00	Peak	54.51	2.15	56.66	68.20	-11.54
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

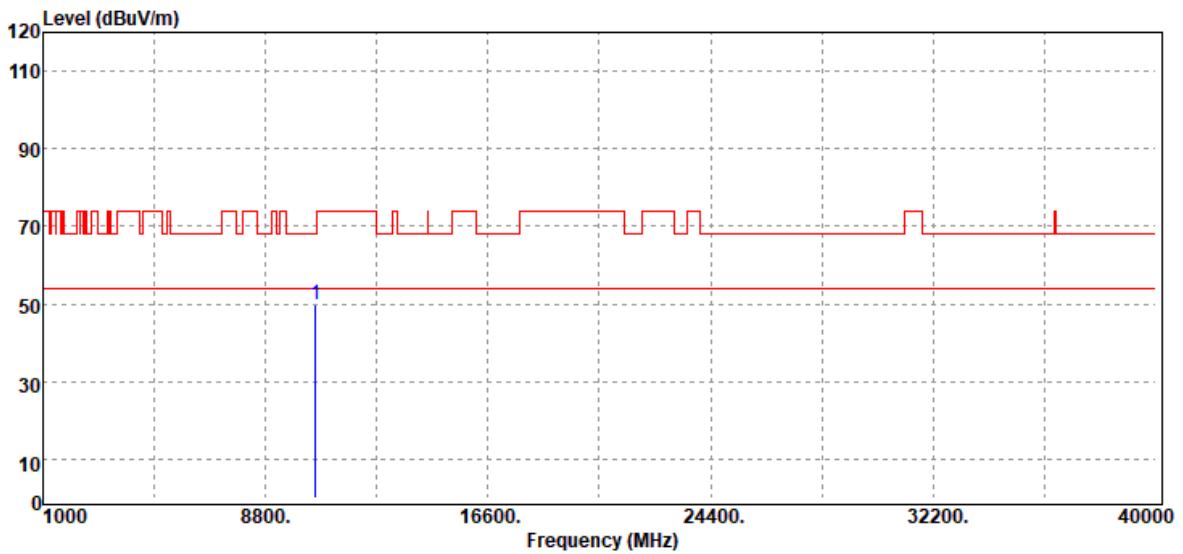


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10560.00	Peak	47.84	2.15	49.99	68.20	-18.21
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

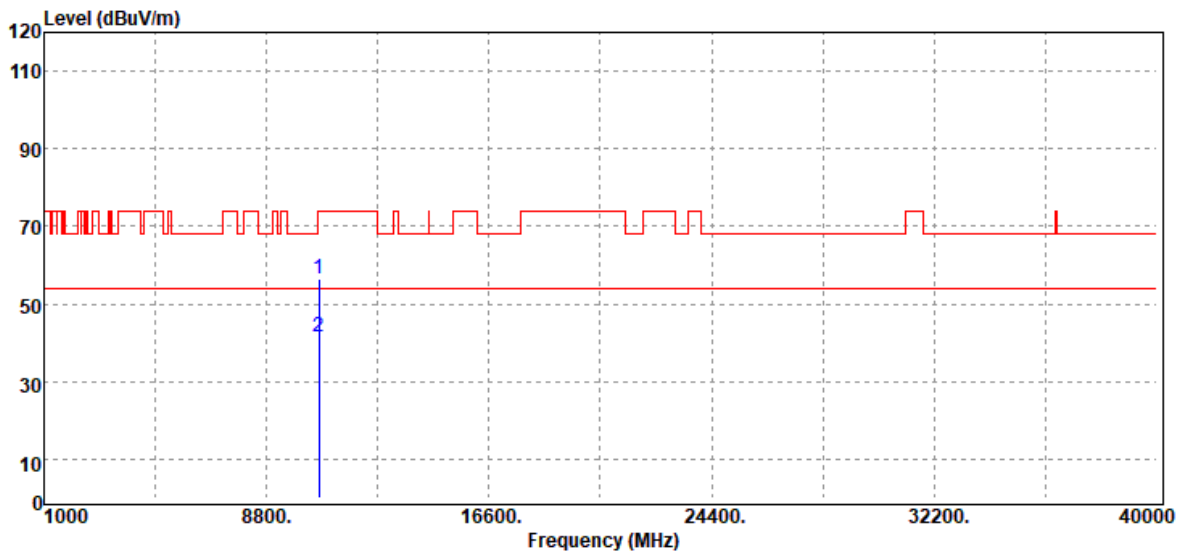


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10640.00	Peak	54.31	2.30	56.61	74.00	-17.39
10640.00	Average	39.21	2.30	41.51	54.00	-12.49
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

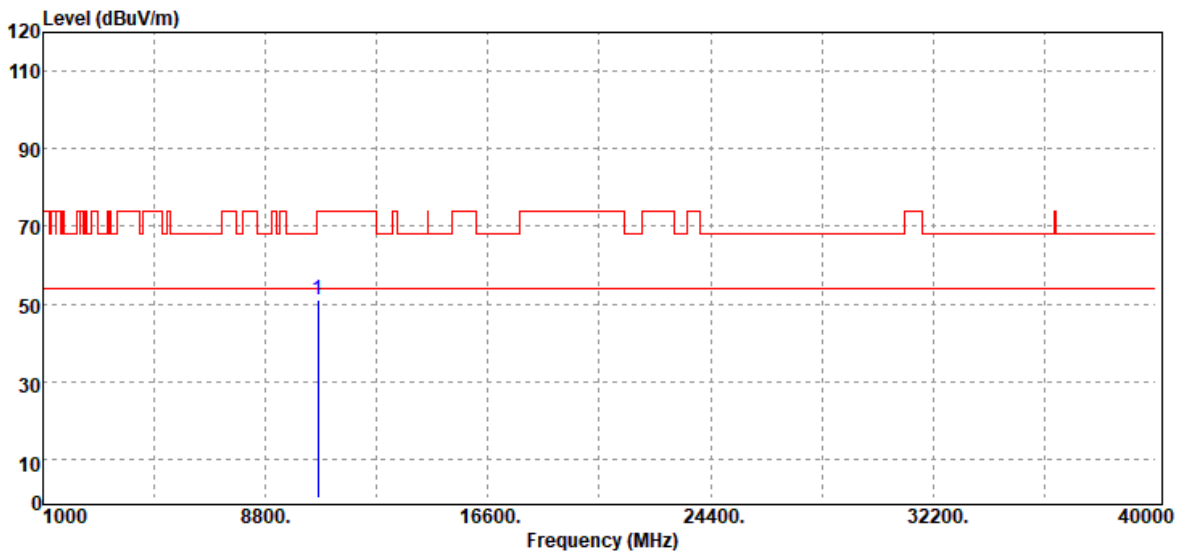

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10640.00	Peak	48.68	2.30	50.98	74.00	-23.02
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10520.00	Peak	51.36	2.11	53.47	68.20	-14.73
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

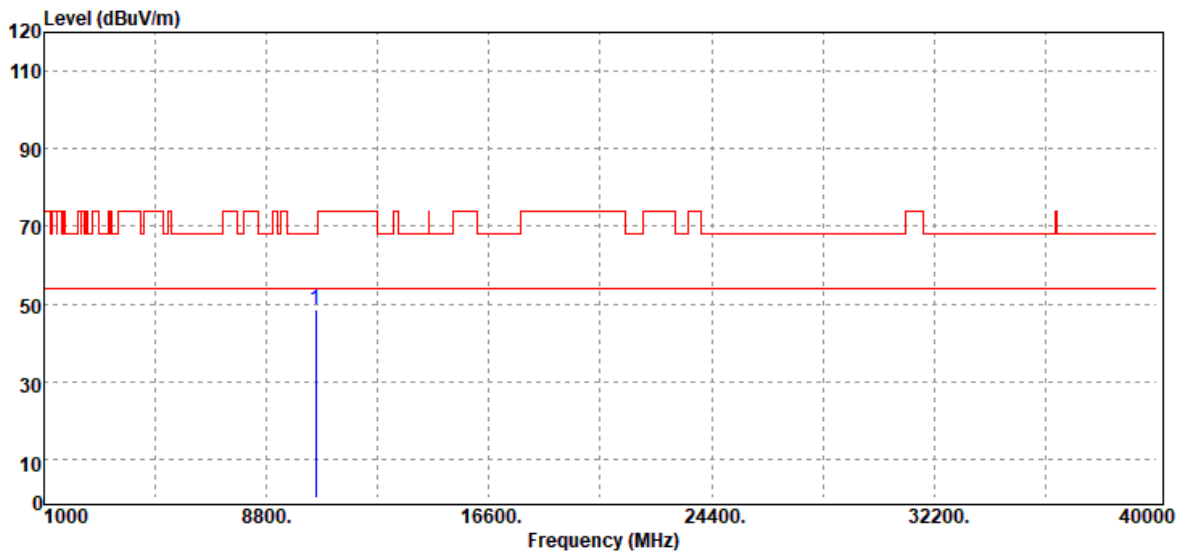


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10520.00	Peak	46.31	2.11	48.42	68.20	-19.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

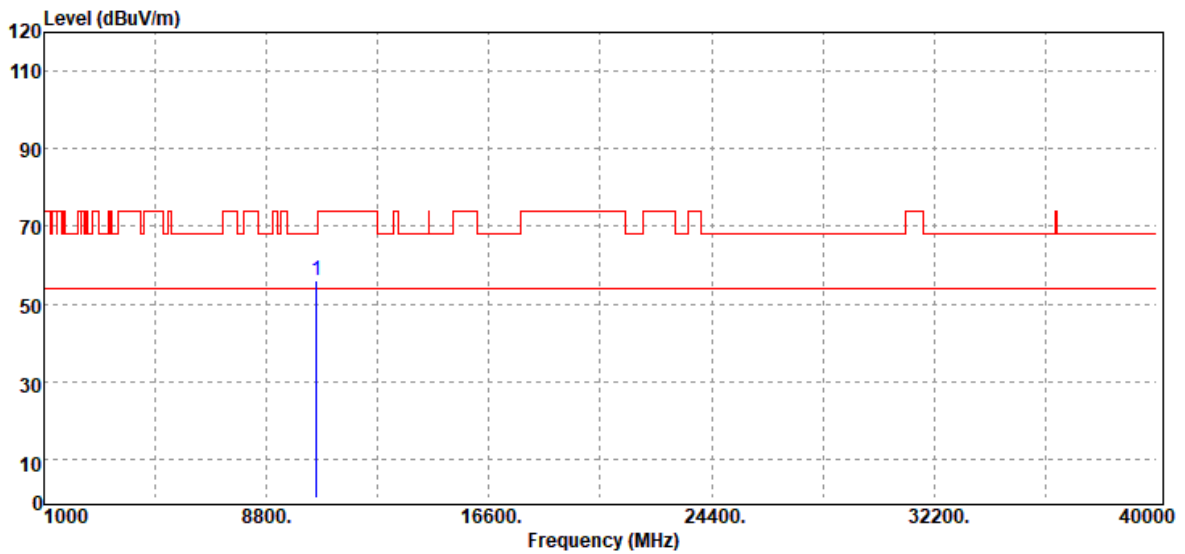


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10560.00	Peak	53.96	2.15	56.11	68.20	-12.09
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

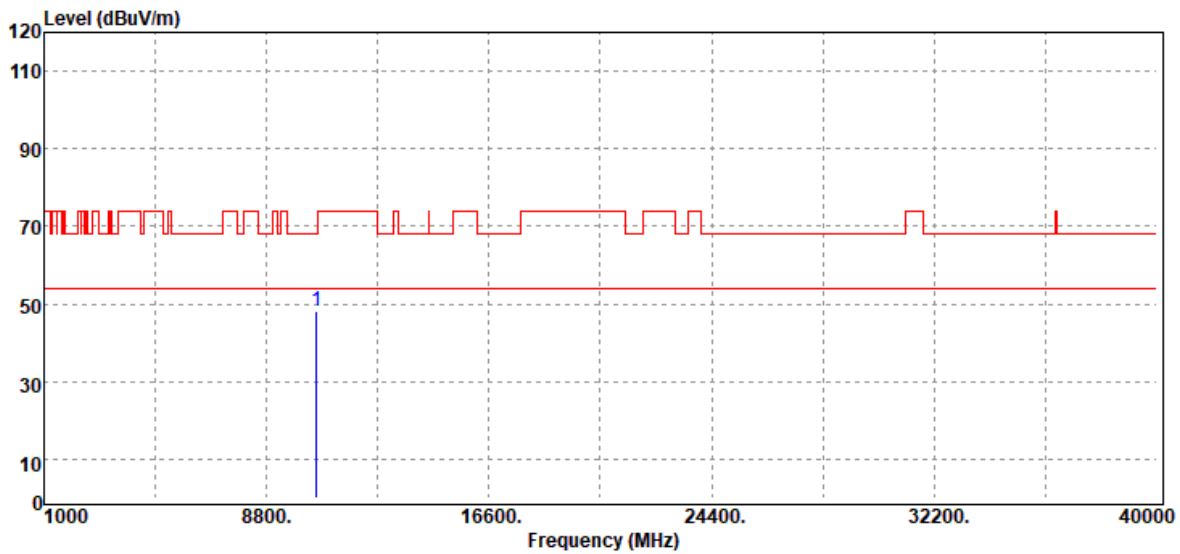


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10560.00	Peak	46.10	2.15	48.25	68.20	-19.95
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

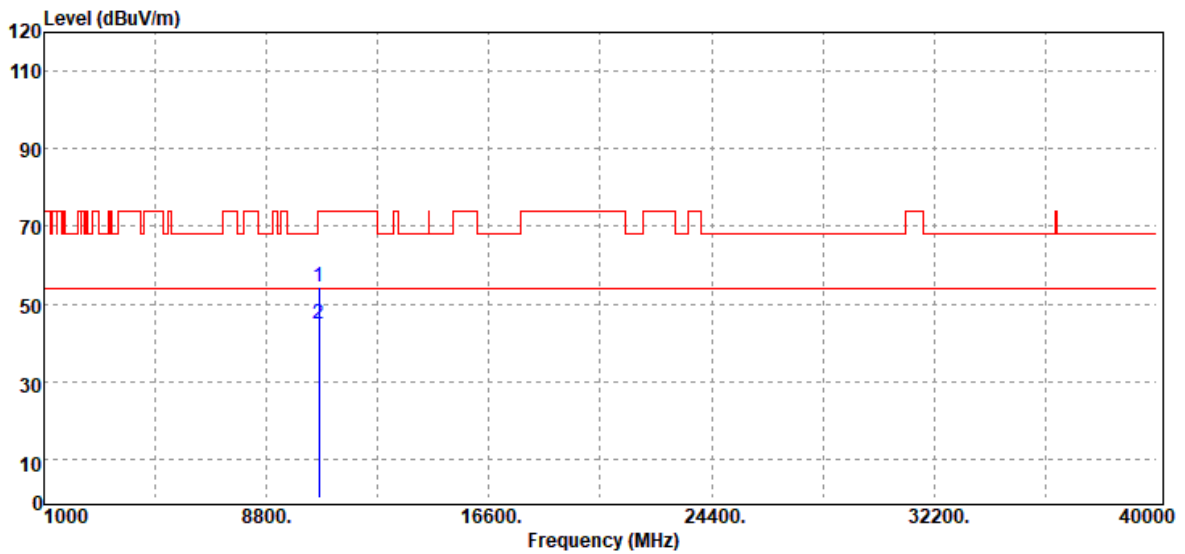


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10640.00	Peak	52.30	2.30	54.60	74.00	-19.40
10640.00	Average	42.34	2.30	44.64	54.00	-9.36
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

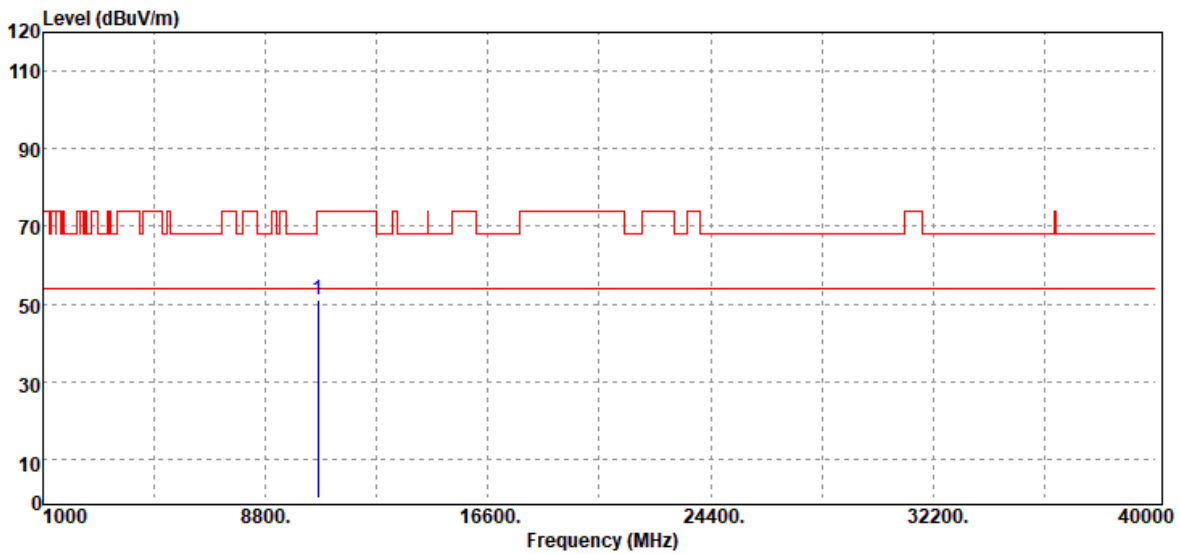


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10640.00	Peak	48.75	2.30	51.05	74.00	-22.95
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

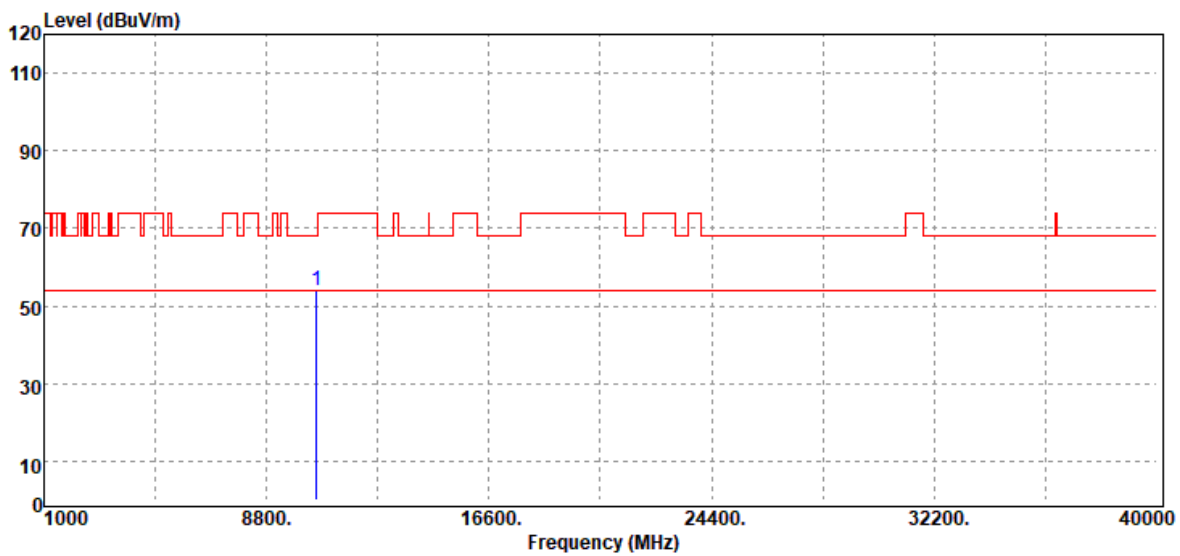


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10540.00	Peak	51.71	2.14	53.85	68.20	-14.35
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

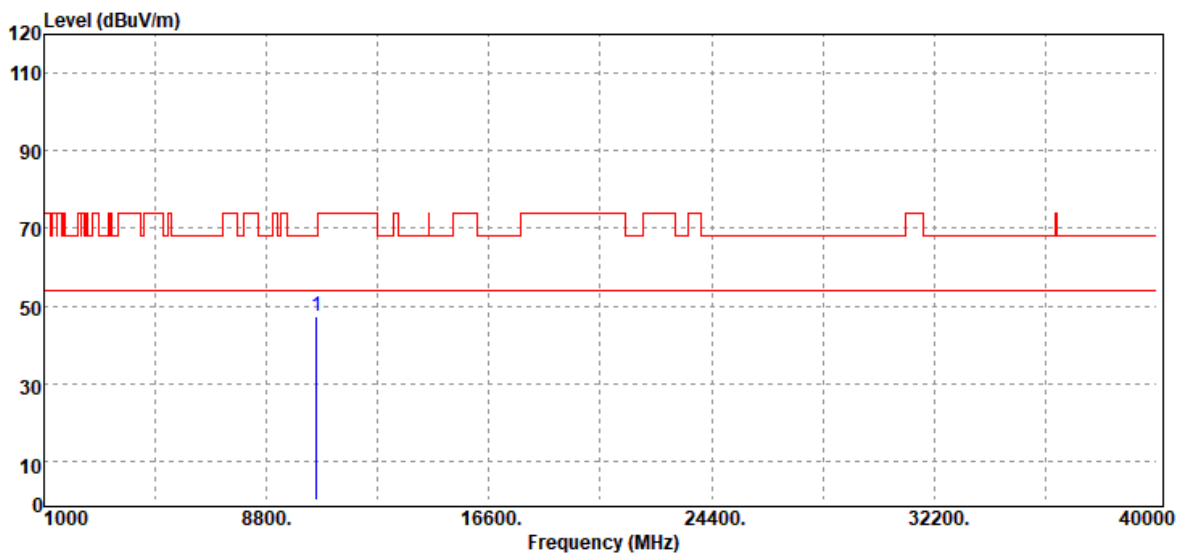

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10540.00	Peak	45.28	2.14	47.42	68.20	-20.78
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10620.00	Peak	44.26	2.24	46.50	74.00	-27.50
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

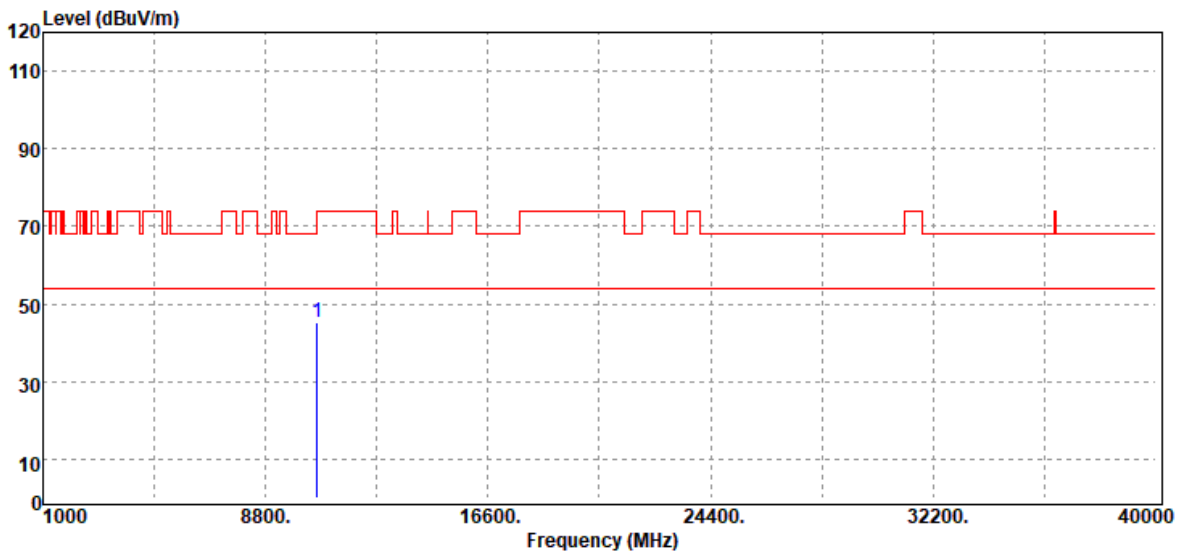


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10620.00	Peak	42.89	2.24	45.13	74.00	-28.87
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

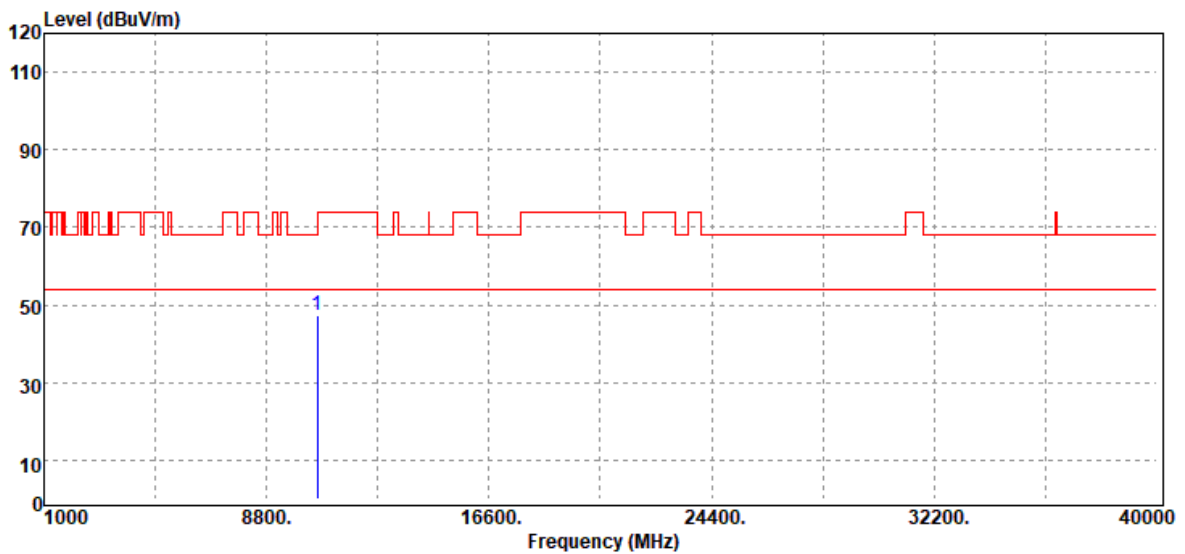


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10580.00	Peak	45.04	2.17	47.21	68.20	-20.99
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

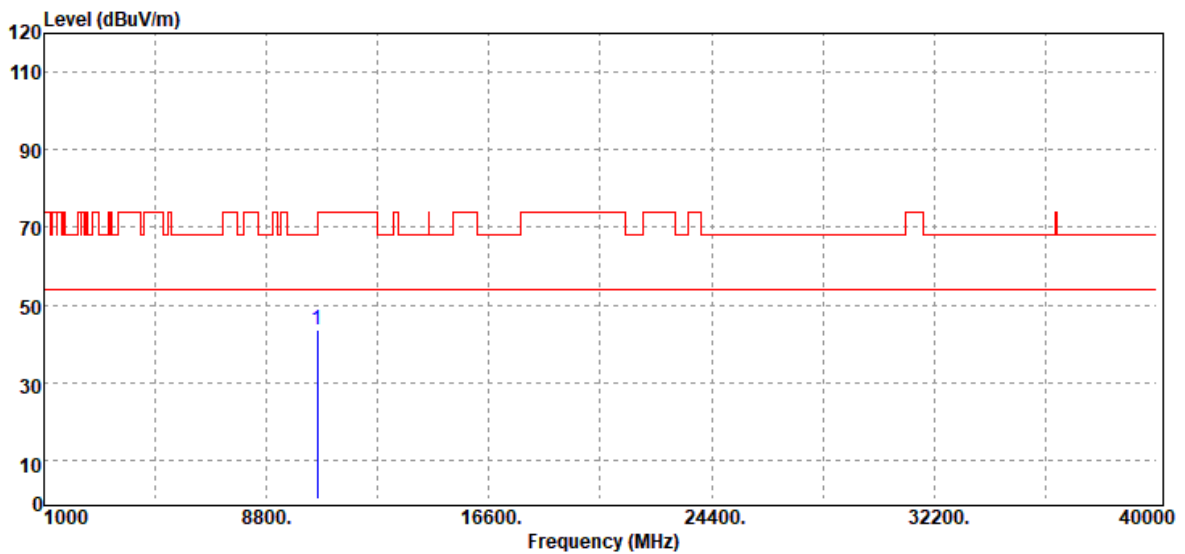

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
10580.00	Peak	41.60	2.17	43.77	68.20	-24.43
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

### Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

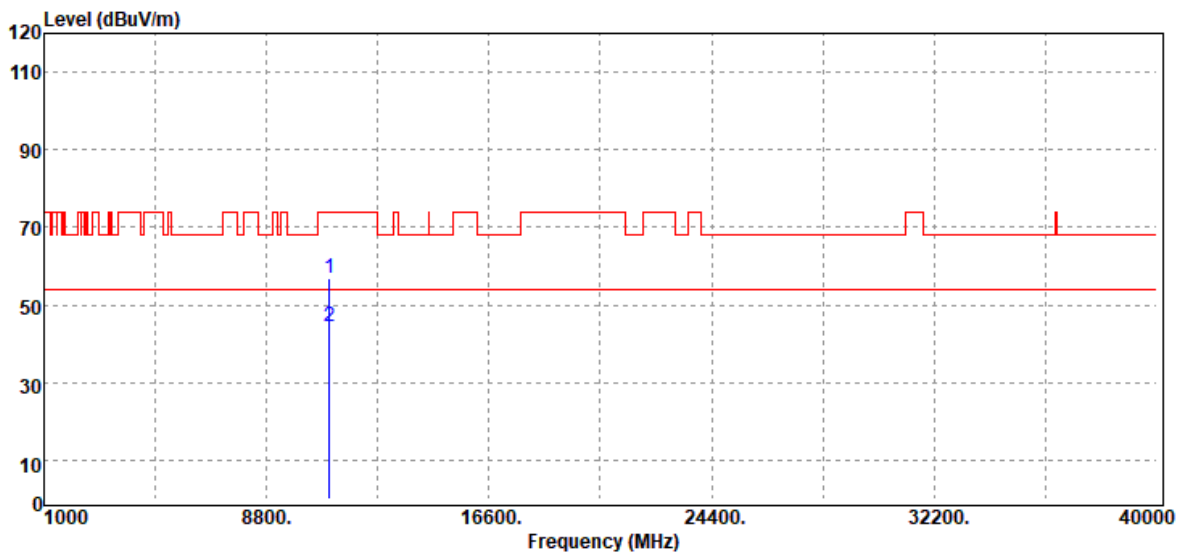


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11000.00	Peak	53.79	3.22	57.01	74.00	-16.99
11000.00	Average	41.07	3.22	44.29	54.00	-9.71
N/A						

#### Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

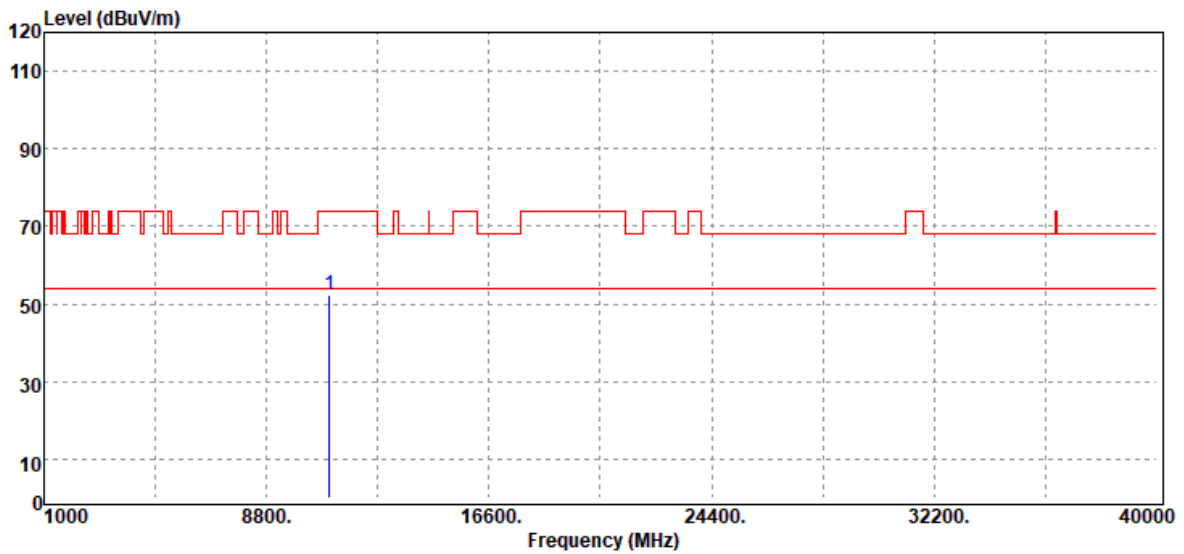


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11000.00	Peak	49.21	3.22	52.43	74.00	-21.57
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

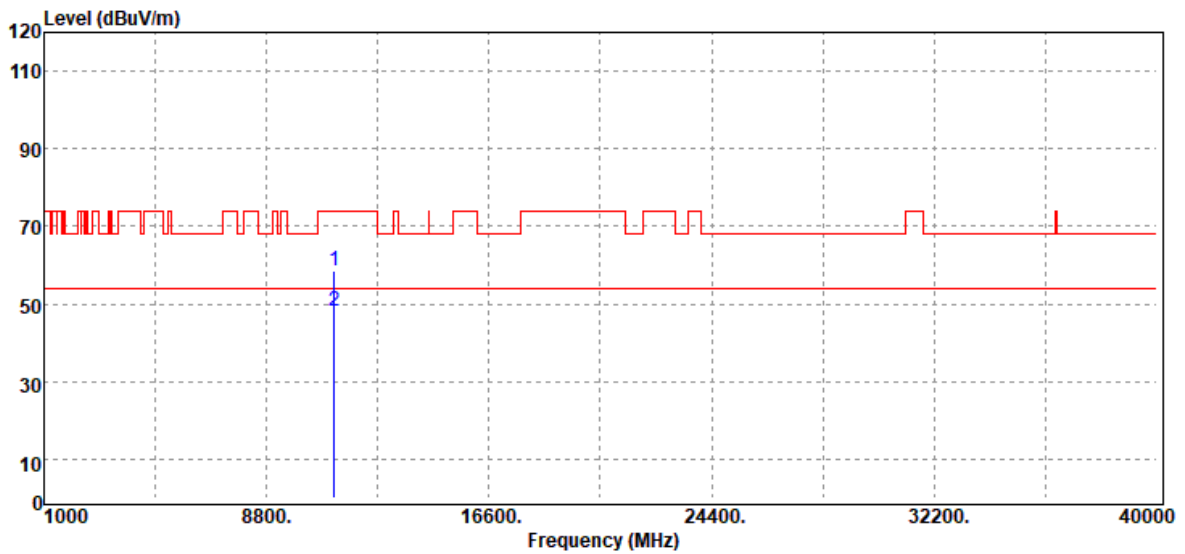


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11160.00	Peak	55.37	3.36	58.73	74.00	-15.27
11160.00	Average	44.88	3.36	48.24	54.00	-5.76
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

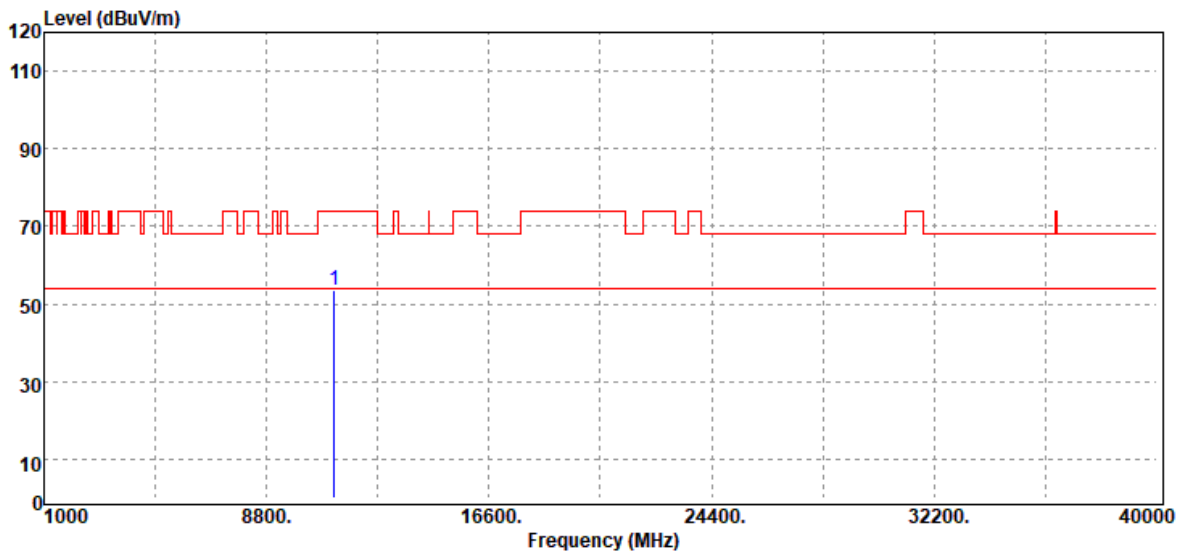


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11160.00	Peak	50.00	3.36	53.36	74.00	-20.64
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

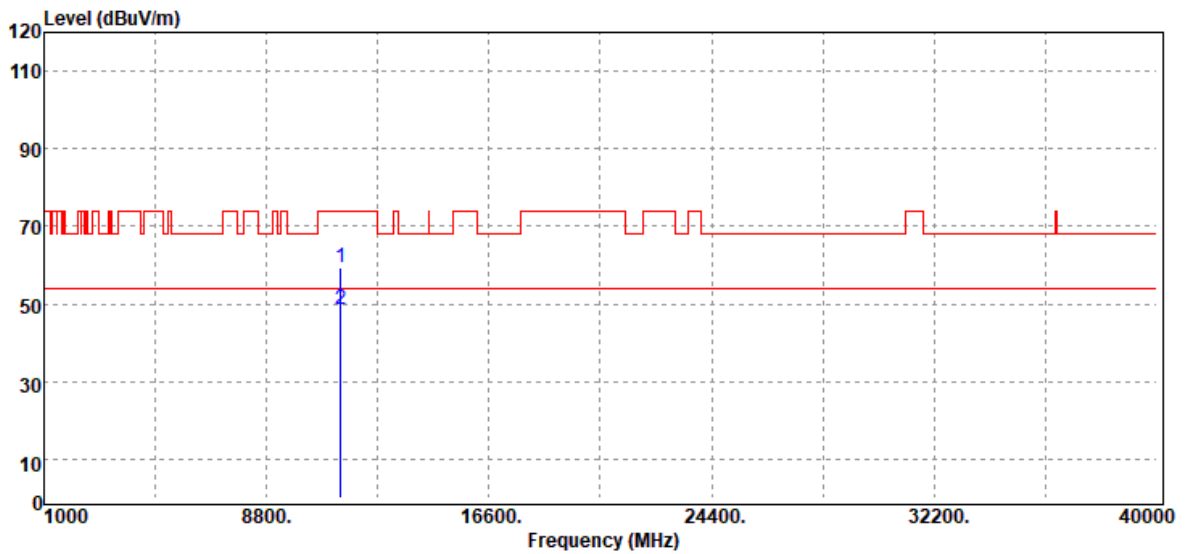

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11400.00	Peak	56.69	2.82	59.51	74.00	-14.49
11400.00	Average	45.70	2.82	48.52	54.00	-5.48
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

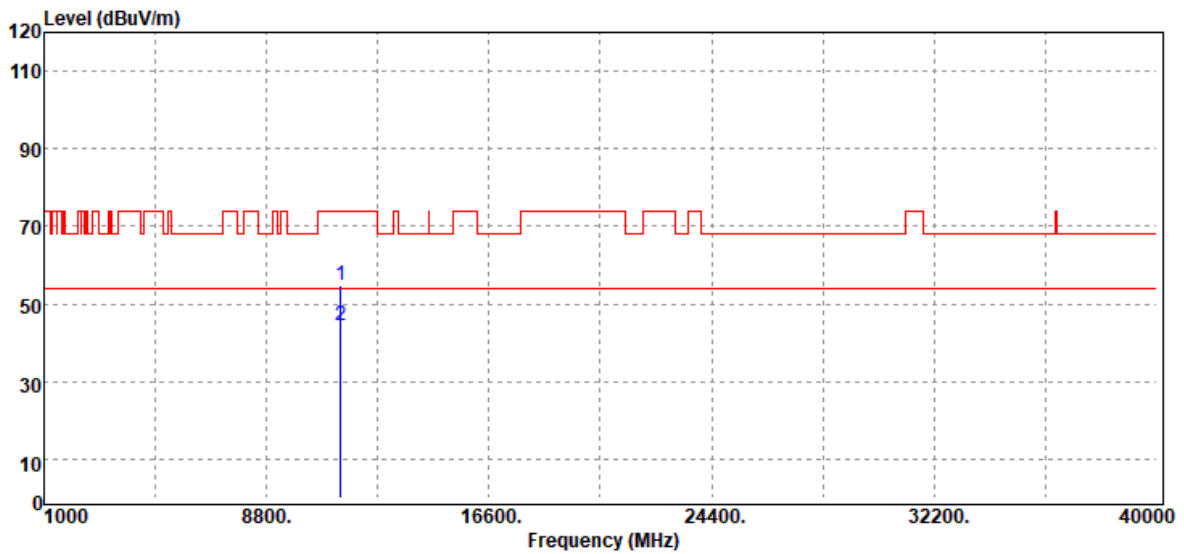


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11400.00	Peak	51.99	2.82	54.81	74.00	-19.19
11400.00	Average	41.78	2.82	44.60	54.00	-9.40
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

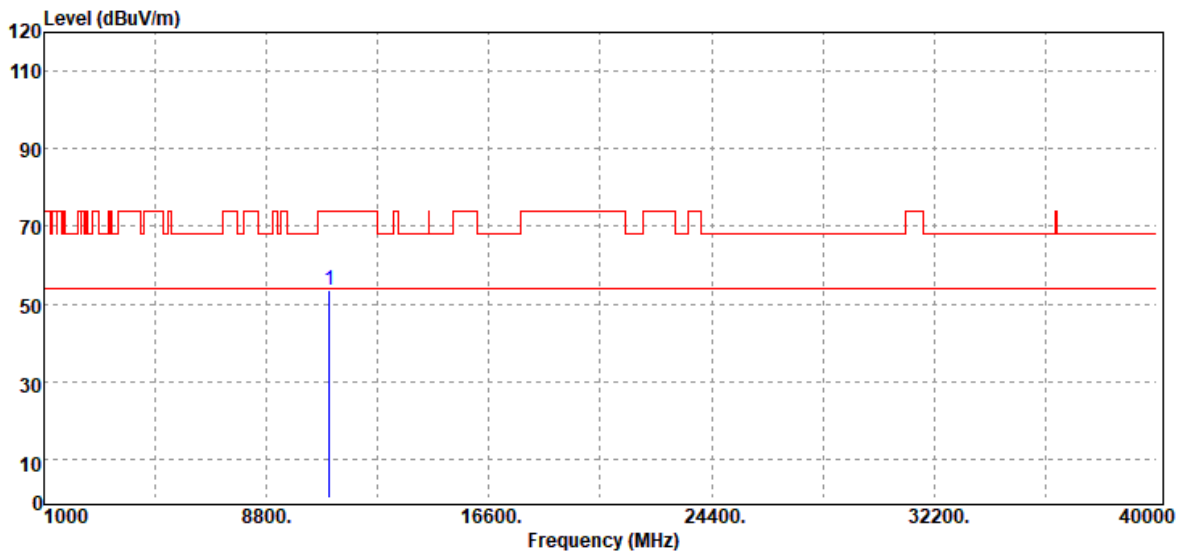


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11000.00	Peak	50.17	3.22	53.39	74.00	-20.61
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

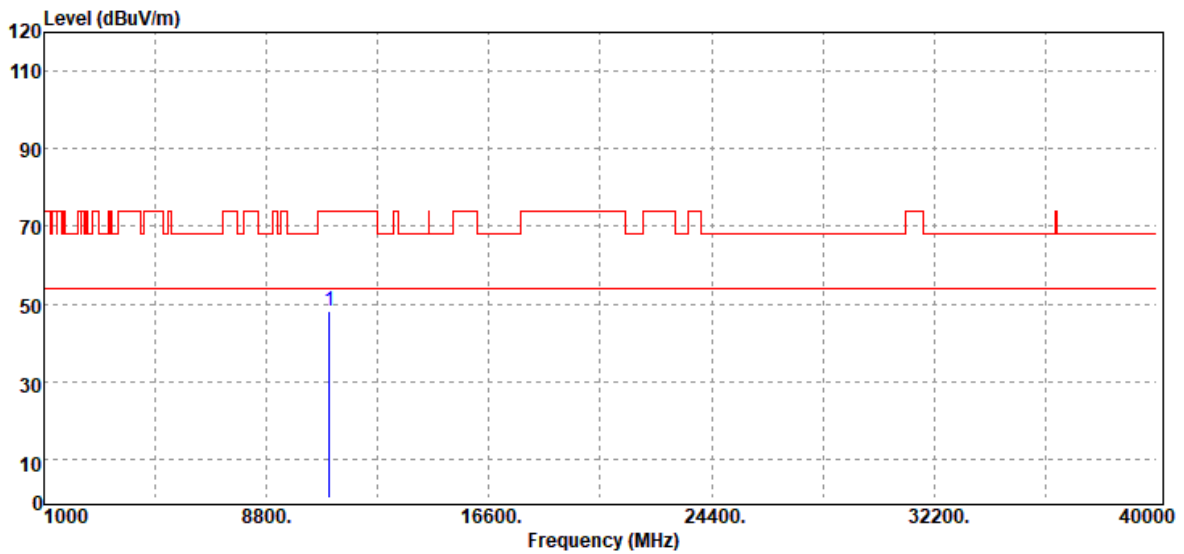


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11000.00	Peak	45.04	3.22	48.26	74.00	-25.74
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

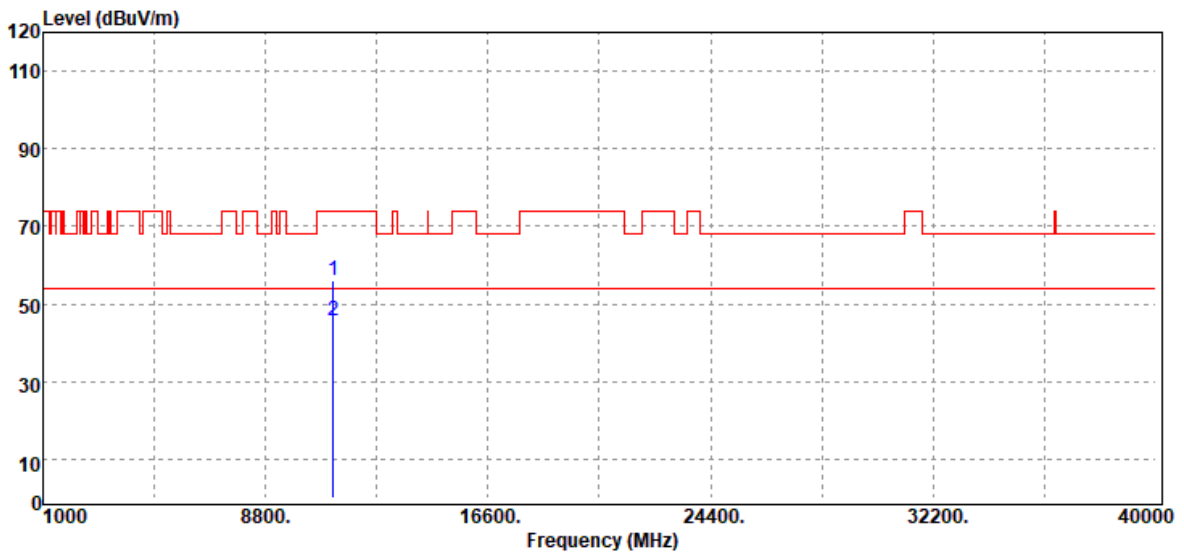


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11160.00	Peak	52.82	3.36	56.18	74.00	-17.82
11160.00	Average	42.46	3.36	45.82	54.00	-8.18
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

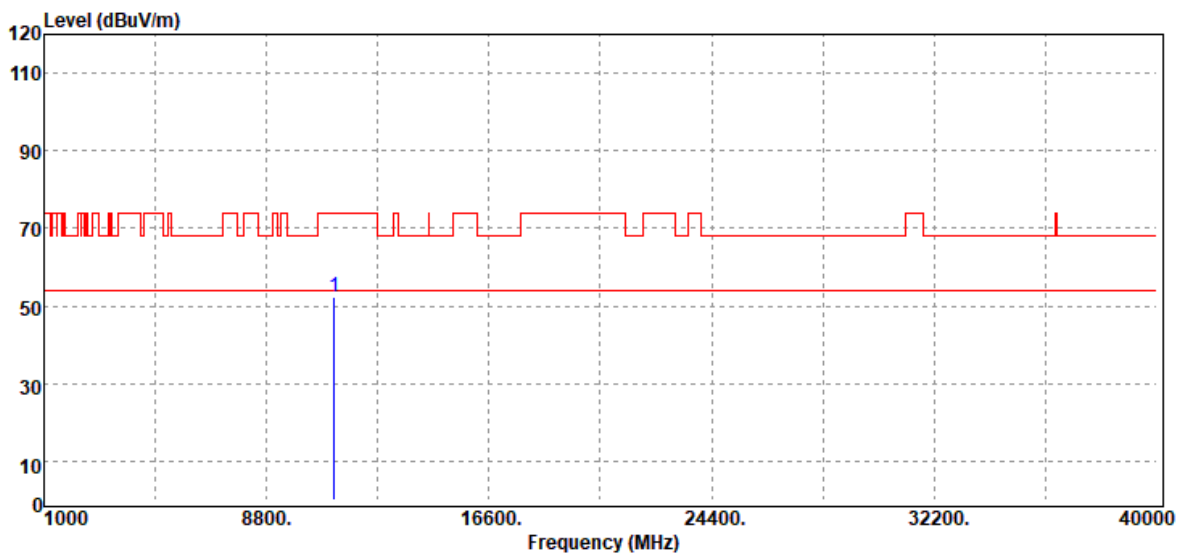


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11160.00	Peak	48.82	3.36	52.18	74.00	-21.82
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

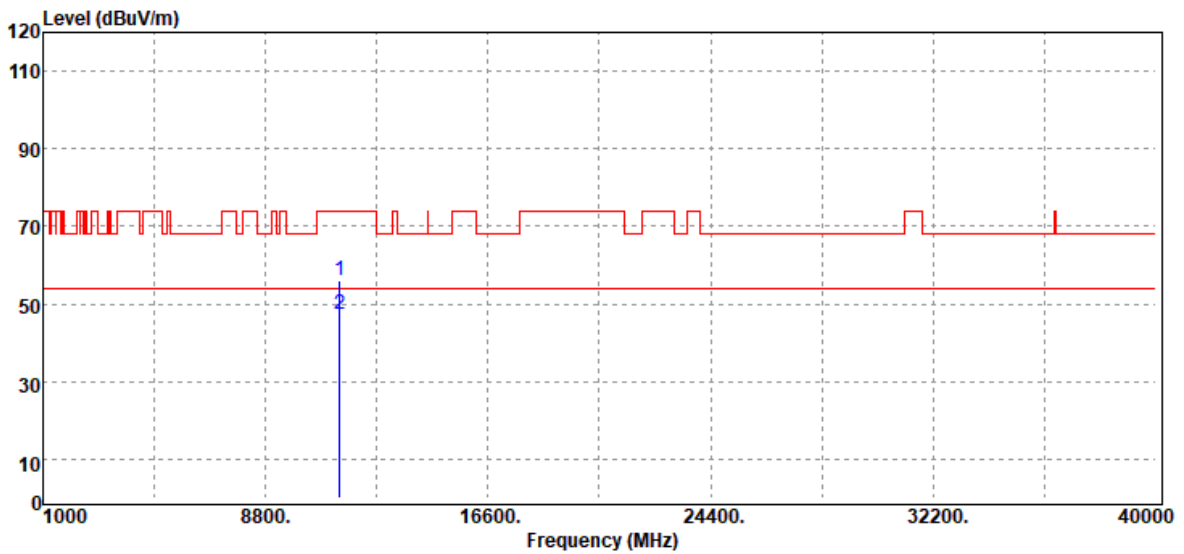


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11400.00	Peak	53.35	2.82	56.17	74.00	-17.83
11400.00	Average	44.45	2.82	47.27	54.00	-6.73
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

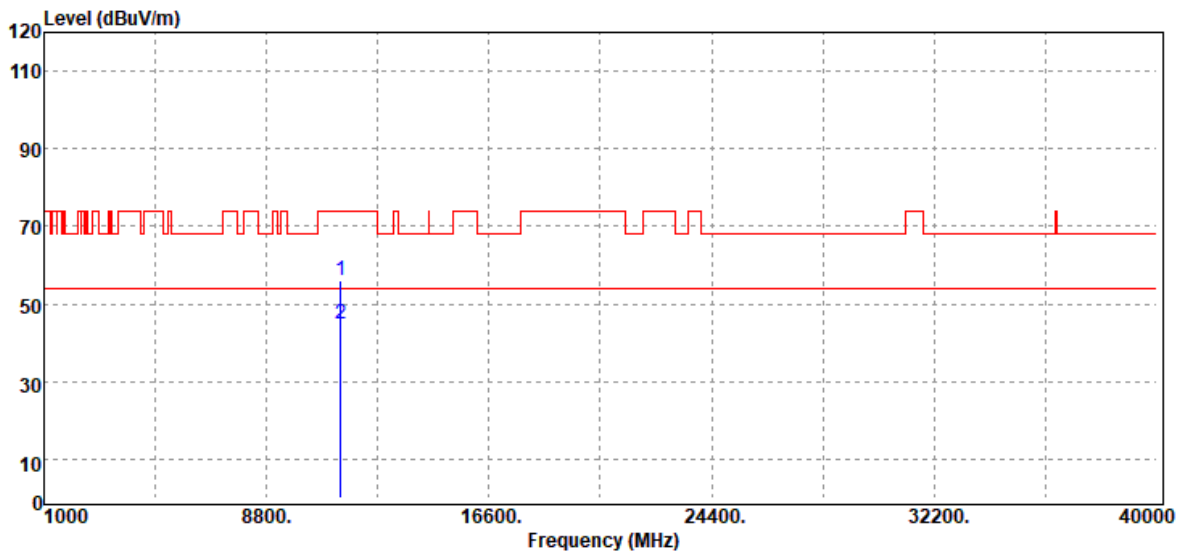

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11400.00	Peak	53.35	2.82	56.17	74.00	-17.83
11400.00	Average	42.10	2.82	44.92	54.00	-9.08
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11020.00	Peak	46.88	3.13	50.01	74.00	-23.99
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

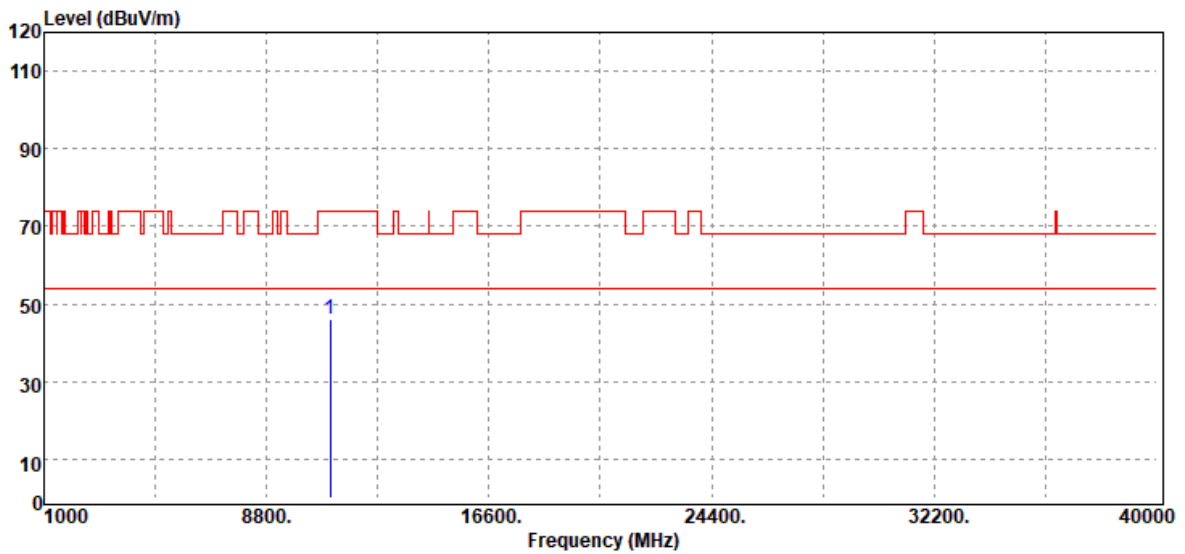


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11020.00	Peak	42.87	3.13	46.00	74.00	-28.00
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

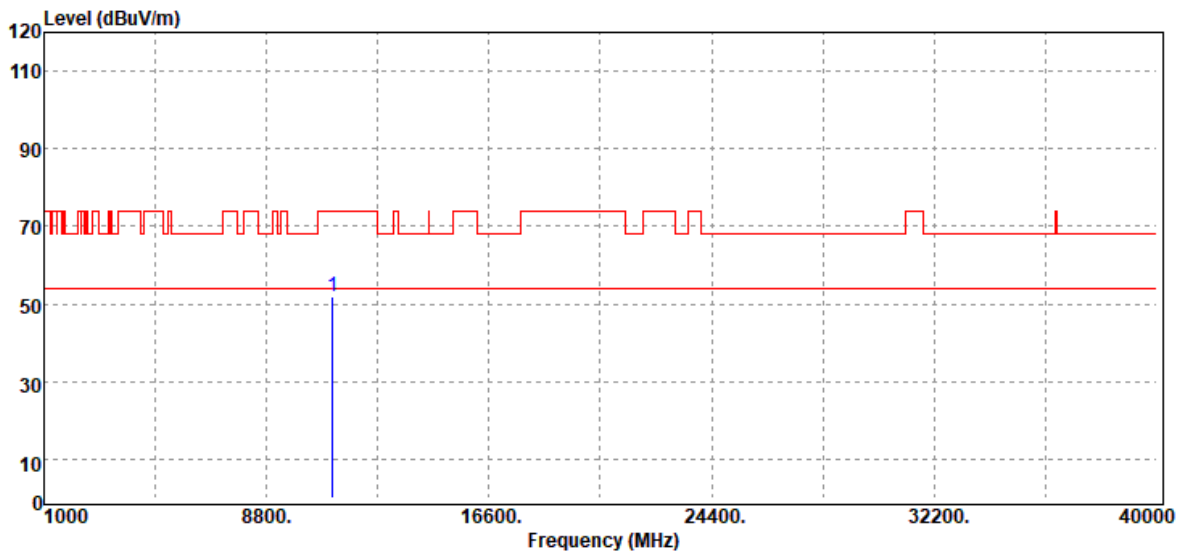


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11110.00	Peak	48.62	3.44	52.06	74.00	-21.94
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

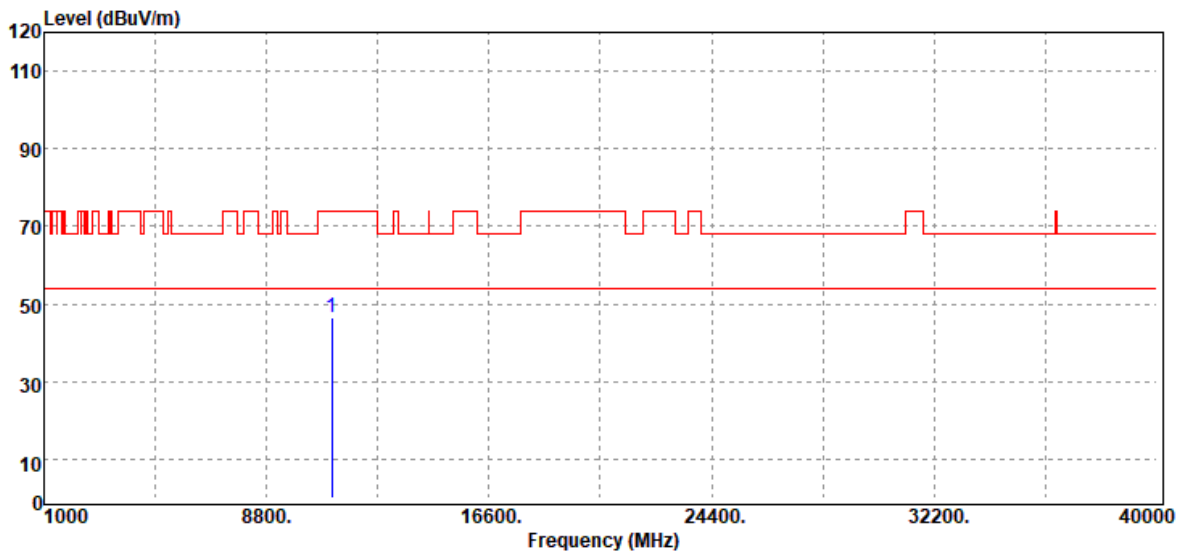


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11100.00	Peak	43.12	3.44	46.56	74.00	-27.44
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

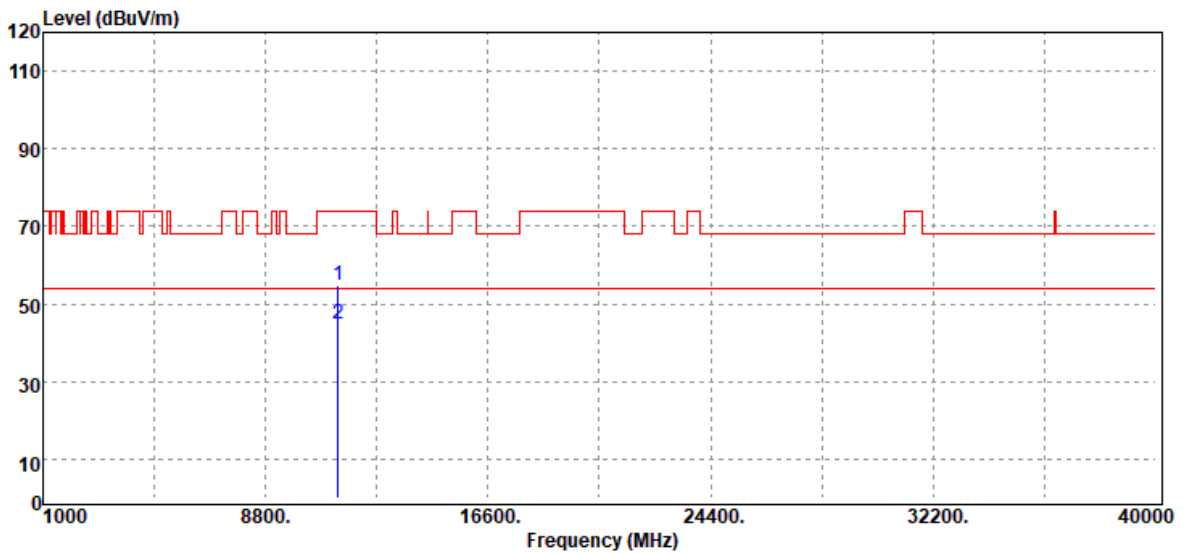


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11340.00	Peak	51.90	2.92	54.82	74.00	-19.18
11340.00	Average	41.78	2.92	44.70	54.00	-9.30
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

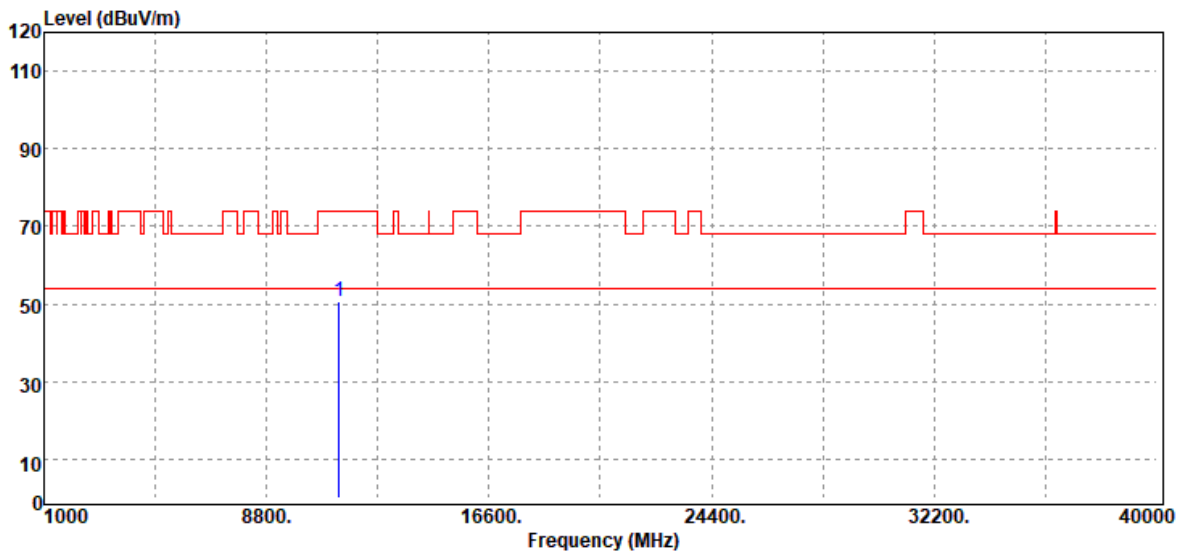


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11340.00	Peak	47.88	2.92	50.80	74.00	-23.20
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

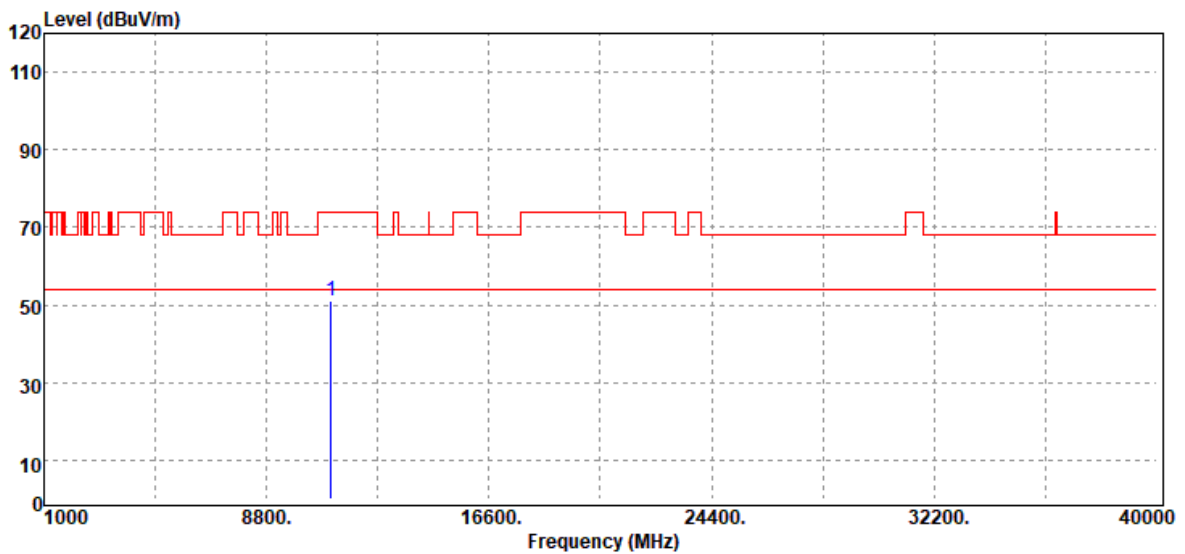


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11060.00	Peak	48.18	3.09	51.27	74.00	-22.73
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

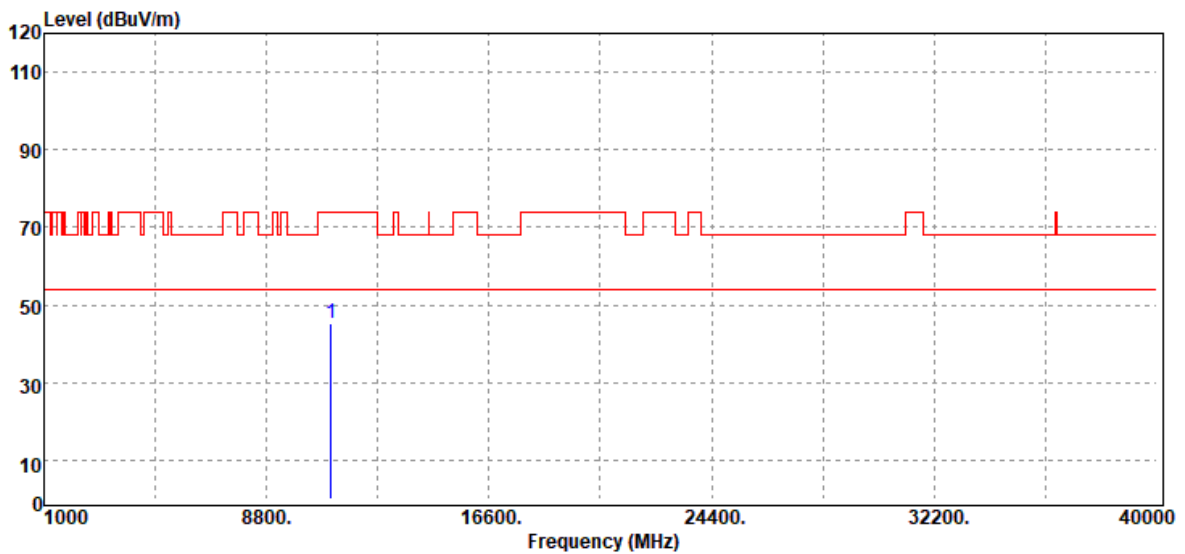


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11060.00	Peak	42.05	3.09	45.14	74.00	-28.86
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

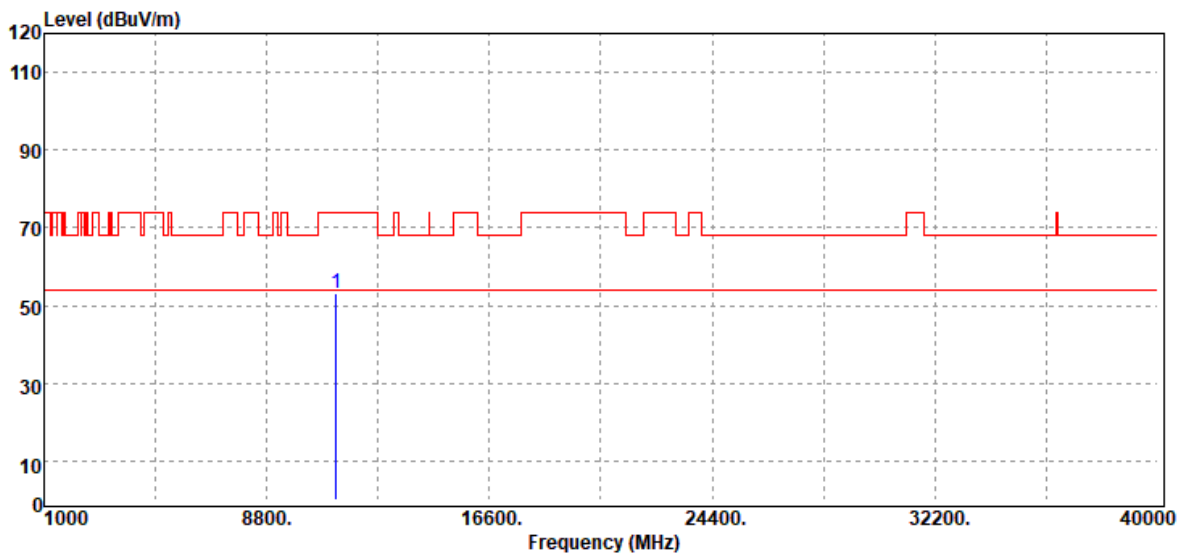

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11220.00	Peak	33.67	19.45	53.12	74.00	-20.88
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80 / 5610 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

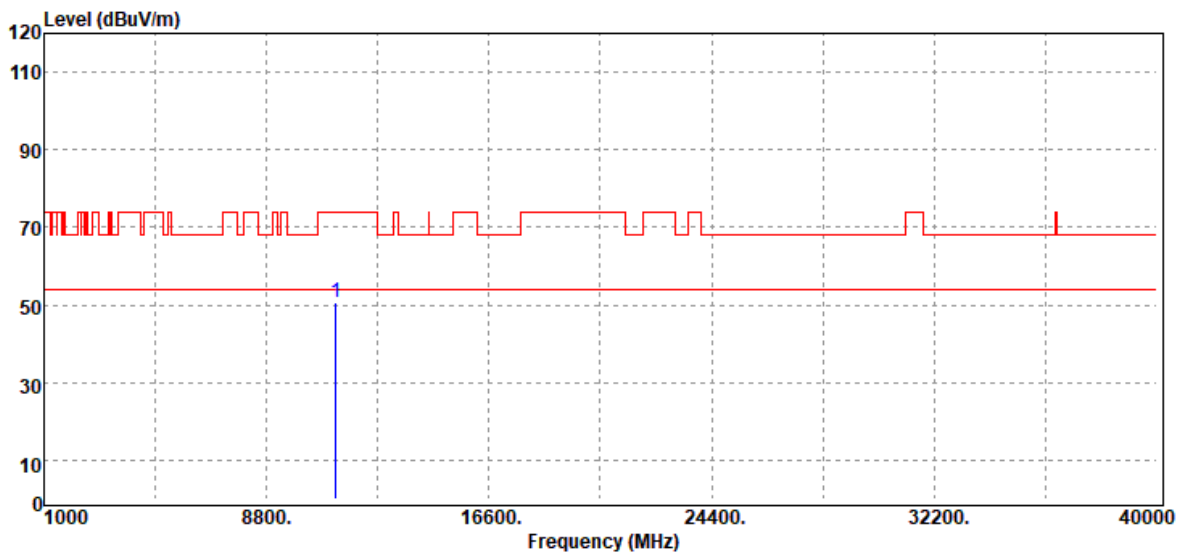

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11220.00	Peak	31.10	19.45	50.55	74.00	-23.45
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

**Test Data for UNII-3**

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

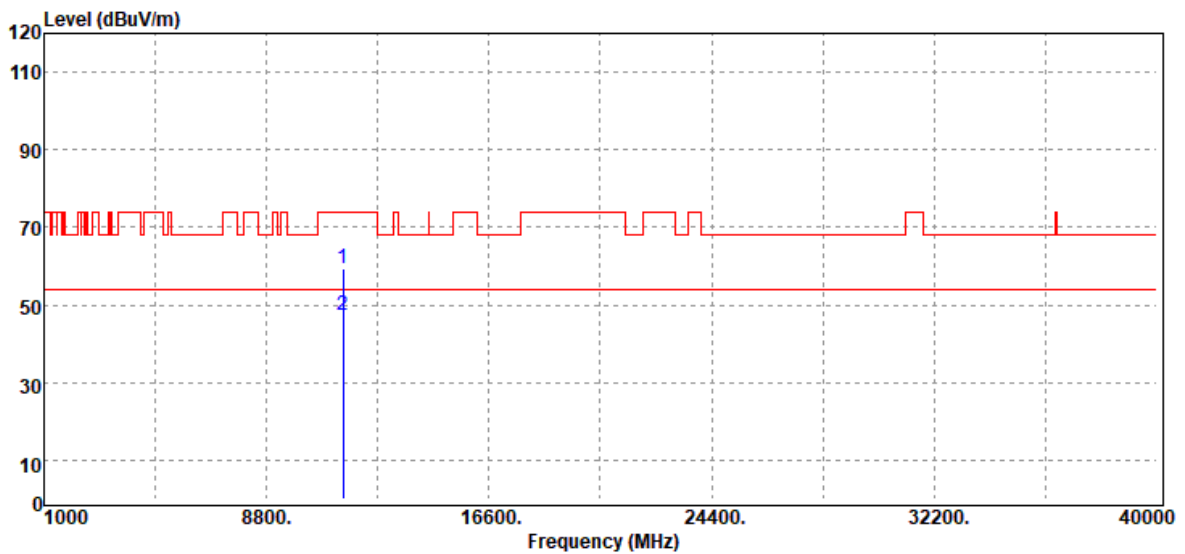


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	56.27	2.96	59.23	74.00	-14.77
11490.00	Average	44.41	2.96	47.37	54.00	-6.63
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

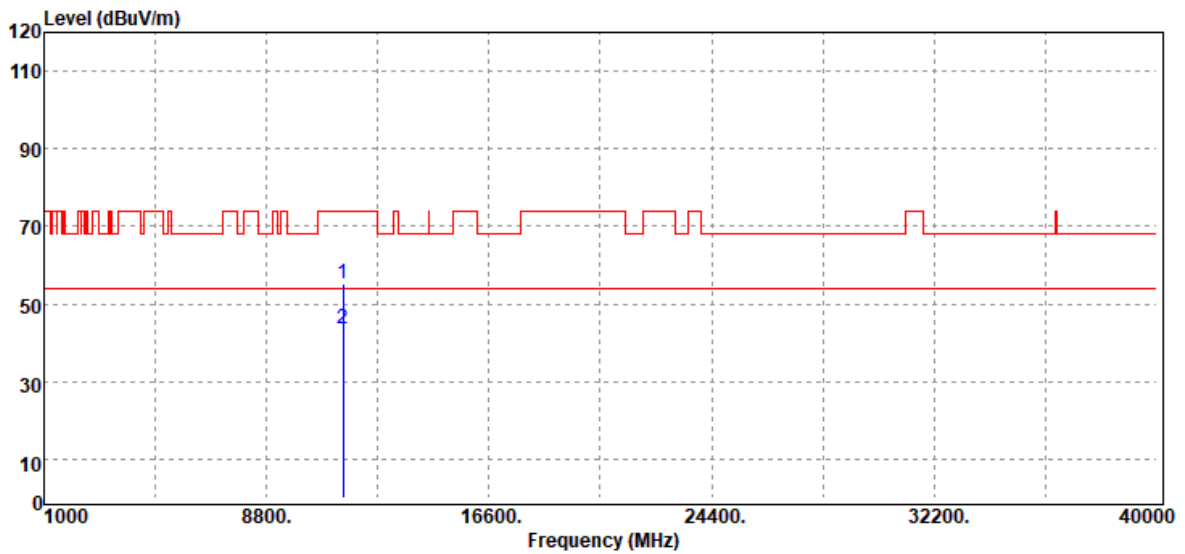


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	52.11	2.96	55.07	74.00	-18.93
11490.00	Average	40.75	2.96	43.71	54.00	-10.29
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

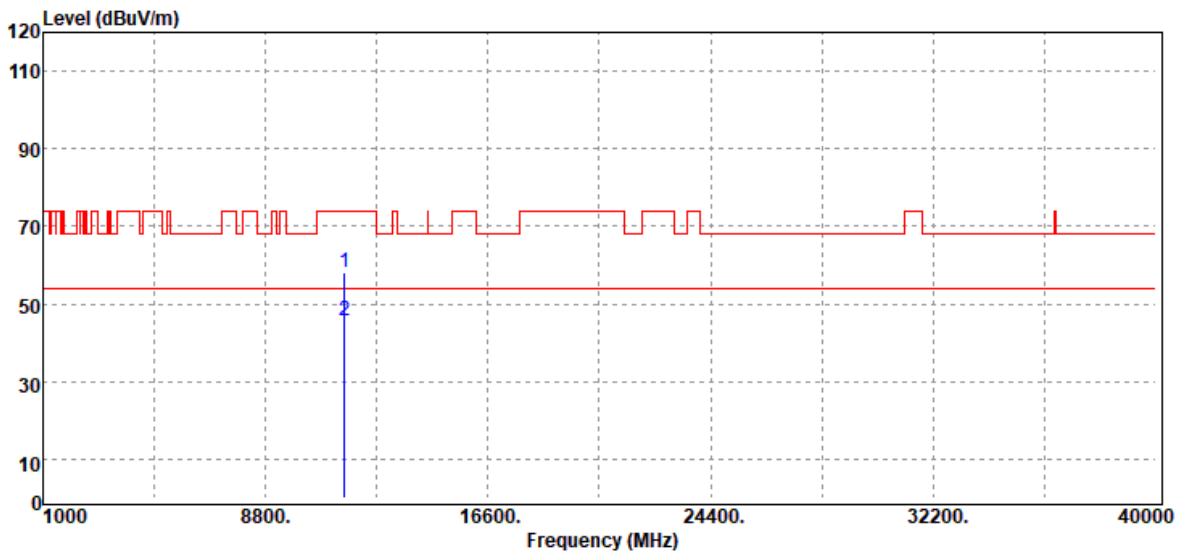


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11570.00	Peak	55.28	2.76	58.04	74.00	-15.96
11570.00	Average	42.81	2.76	45.57	54.00	-8.43
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5785 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

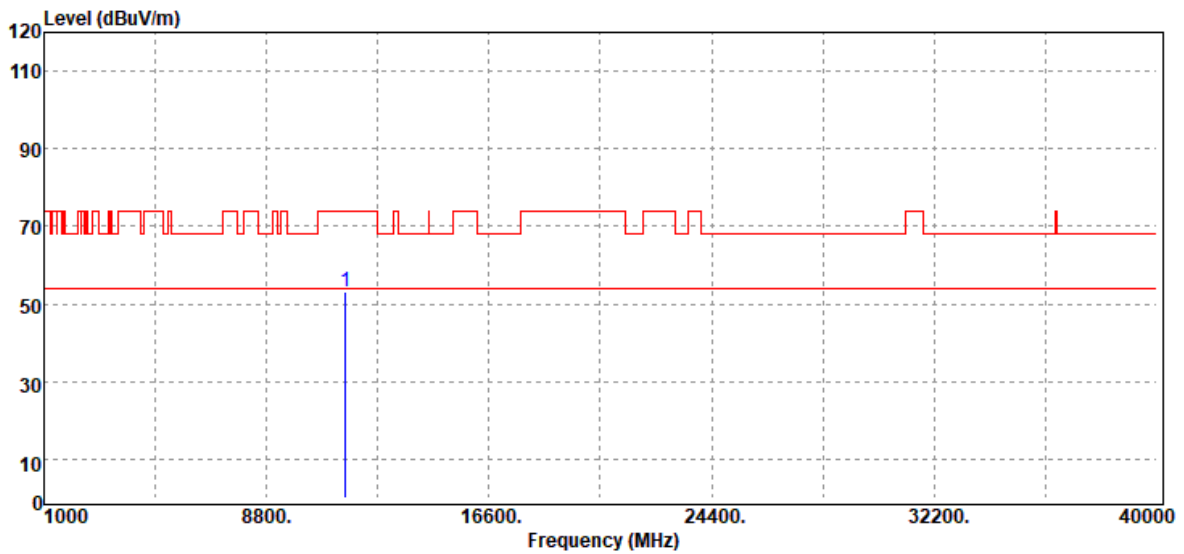


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11570.00	Peak	50.37	2.76	53.13	74.00	-20.87
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

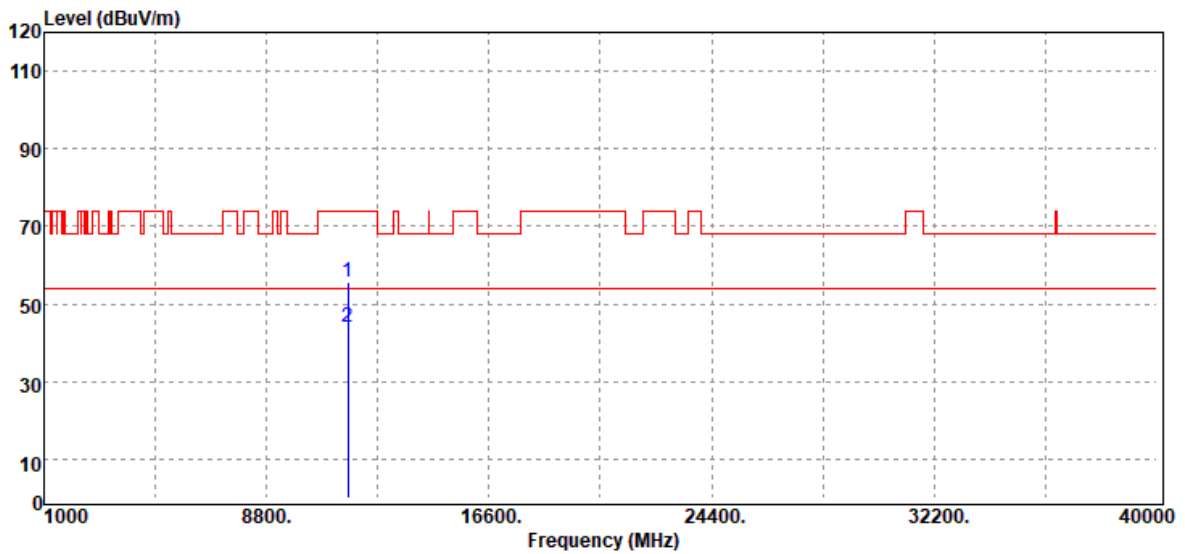


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11650.00	Peak	52.72	2.83	55.55	74.00	-18.45
11650.00	Average	41.22	2.83	44.05	54.00	-9.95
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

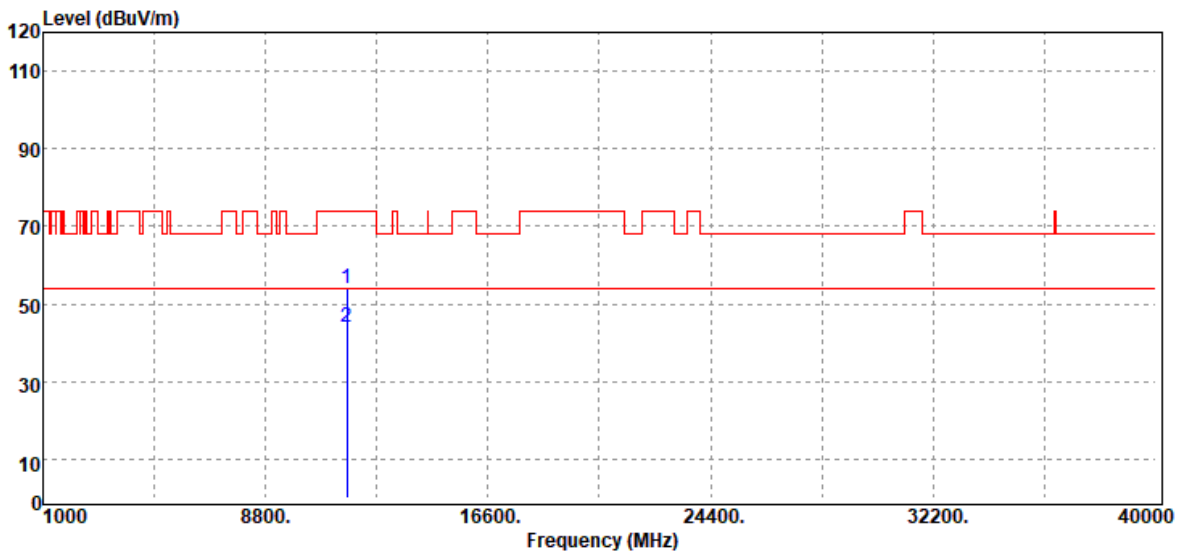


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11650.00	Peak	51.18	2.83	54.01	74.00	-19.99
11650.00	Average	40.98	2.83	43.81	54.00	-10.19
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

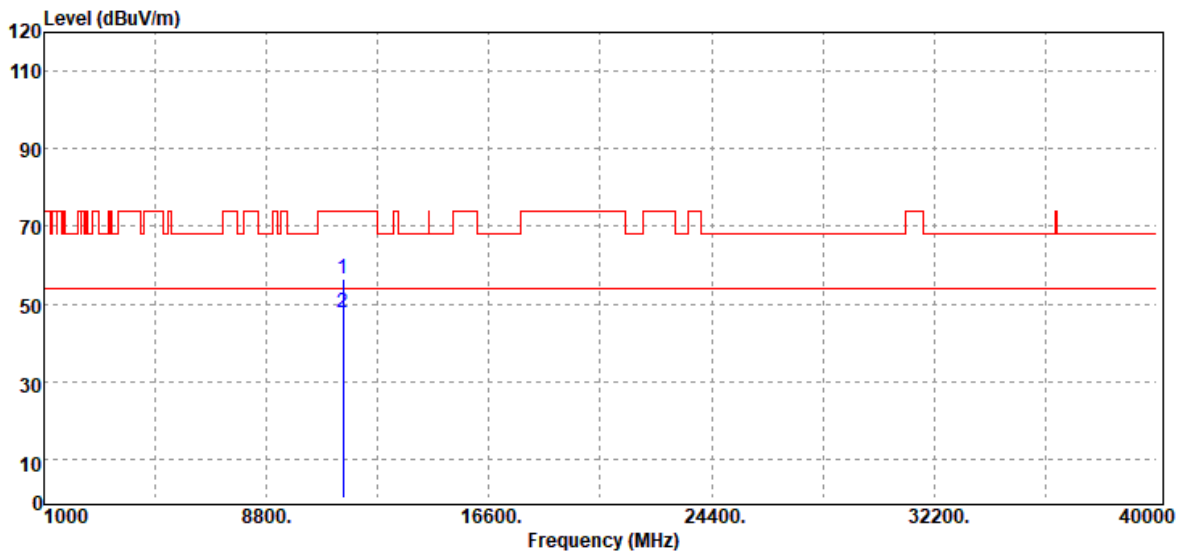

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11490.00	Peak	53.44	2.96	56.40	74.00	-17.60
11490.00	Average	44.65	2.96	47.61	54.00	-6.39
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

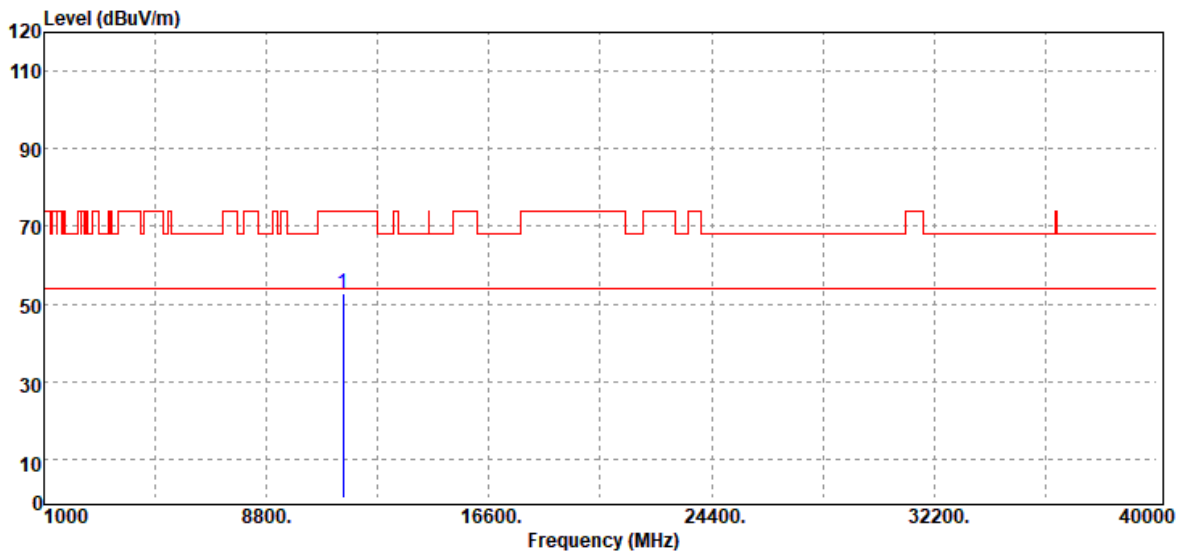


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11490.00	Peak	49.90	2.96	52.86	74.00	-21.14
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

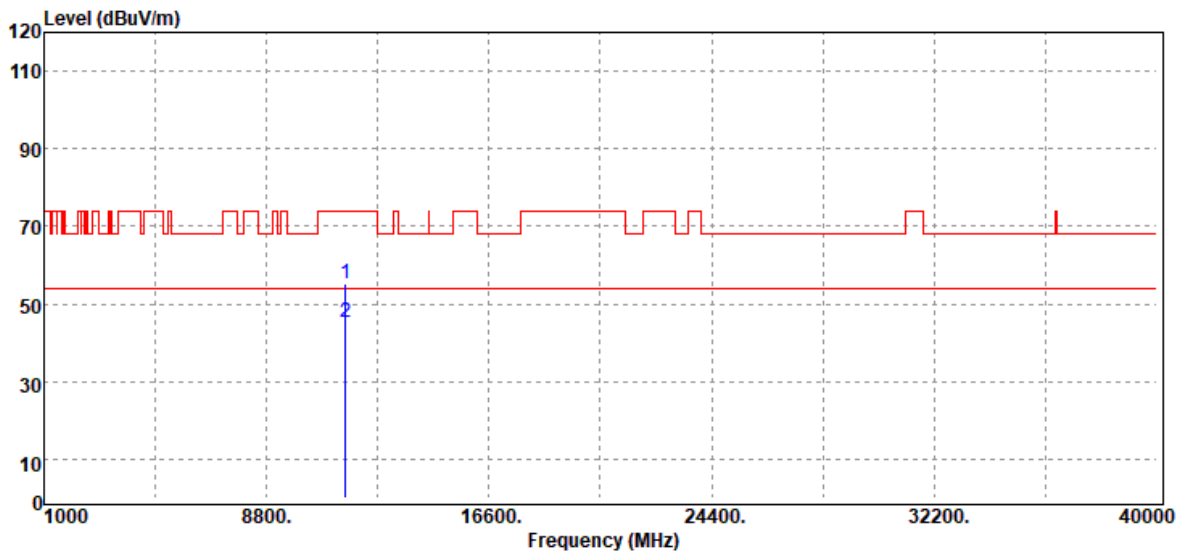

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11570.00	Peak	52.49	2.76	55.25	74.00	-18.75
11570.00	Average	42.42	2.76	45.18	54.00	-8.82
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5785 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11570.00	Peak	48.05	2.76	50.81	74.00	-23.19
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

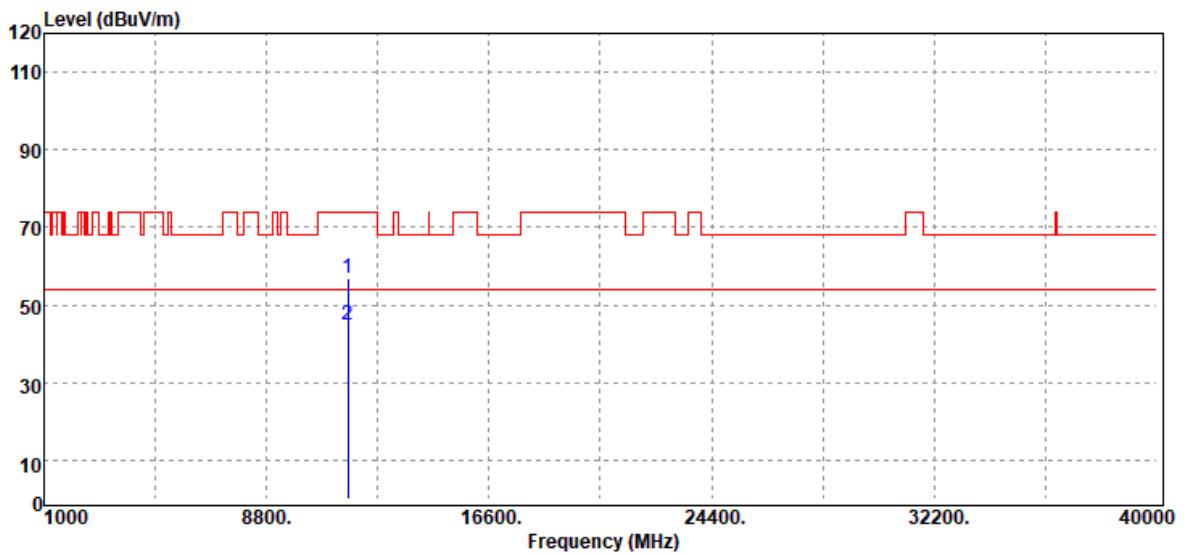


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11650.00	Peak	53.88	2.83	56.71	74.00	-17.29
11650.00	Average	42.04	2.83	44.87	54.00	-9.13
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 20 MHz/ 5825 MHz	Temp/Hum	20.6(°C)/ 70%RH
Test Item	Harmonic	Test Date	December 11, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

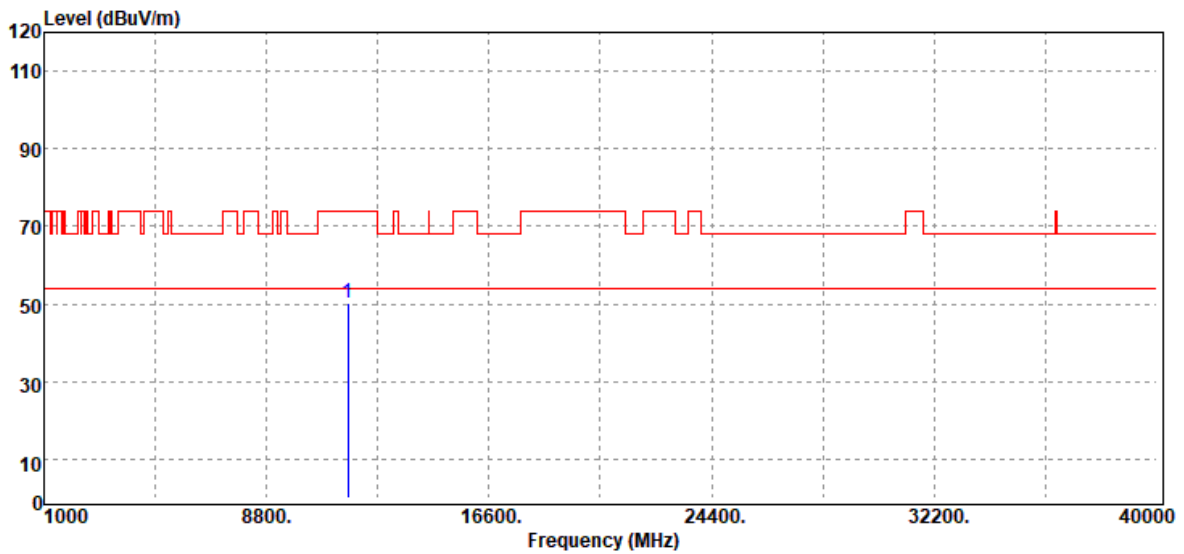


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11650.00	Peak	47.40	2.83	50.23	74.00	-23.77
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

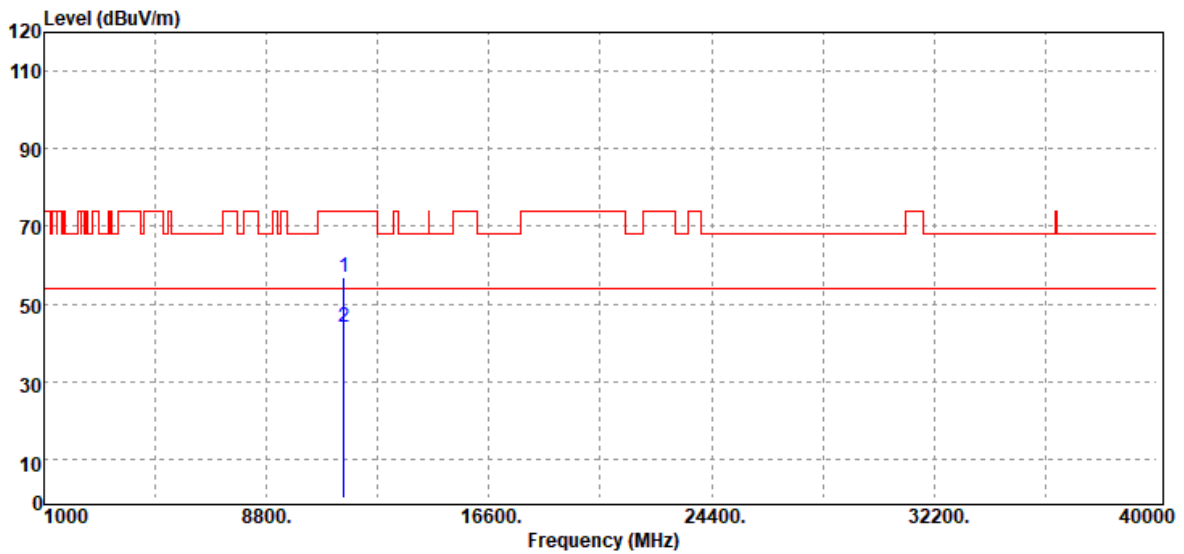


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11510.00	Peak	53.85	2.91	56.76	74.00	-17.24
11510.00	Average	41.08	2.91	43.99	54.00	-10.01
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

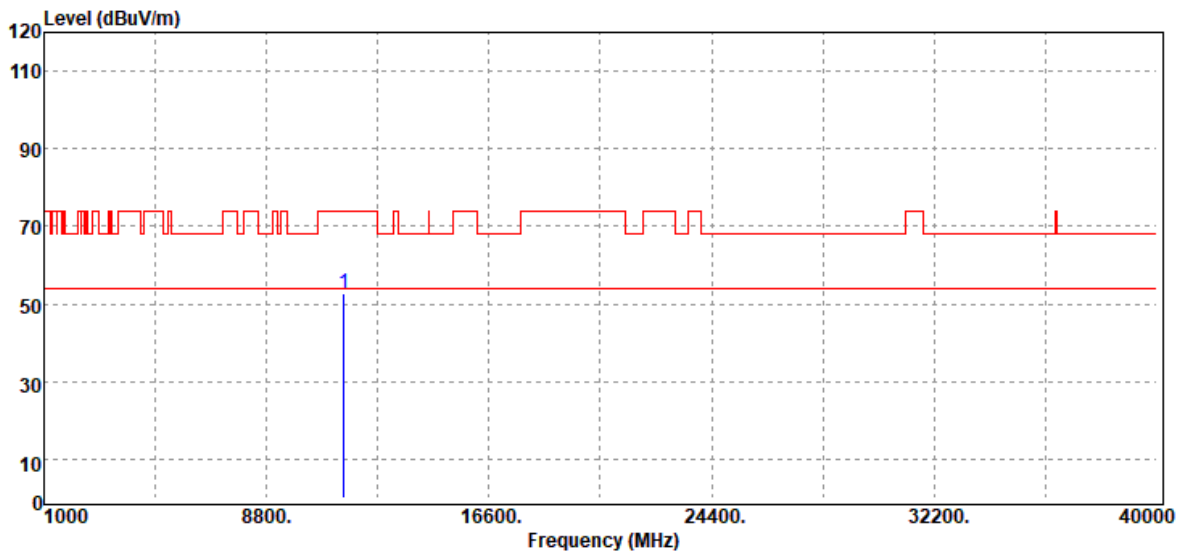


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11510.00	Peak	49.86	2.91	52.77	74.00	-21.23
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

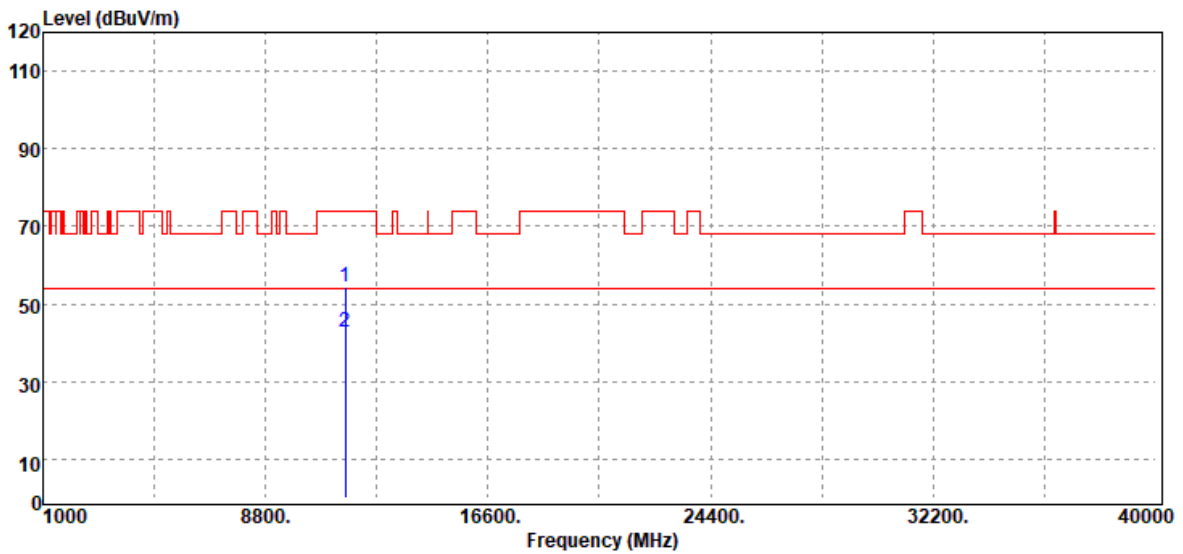

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11590.00	Peak	51.47	2.79	54.26	74.00	-19.74
11590.00	Average	40.02	2.79	42.81	54.00	-11.19
N/A						


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T200522D10-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

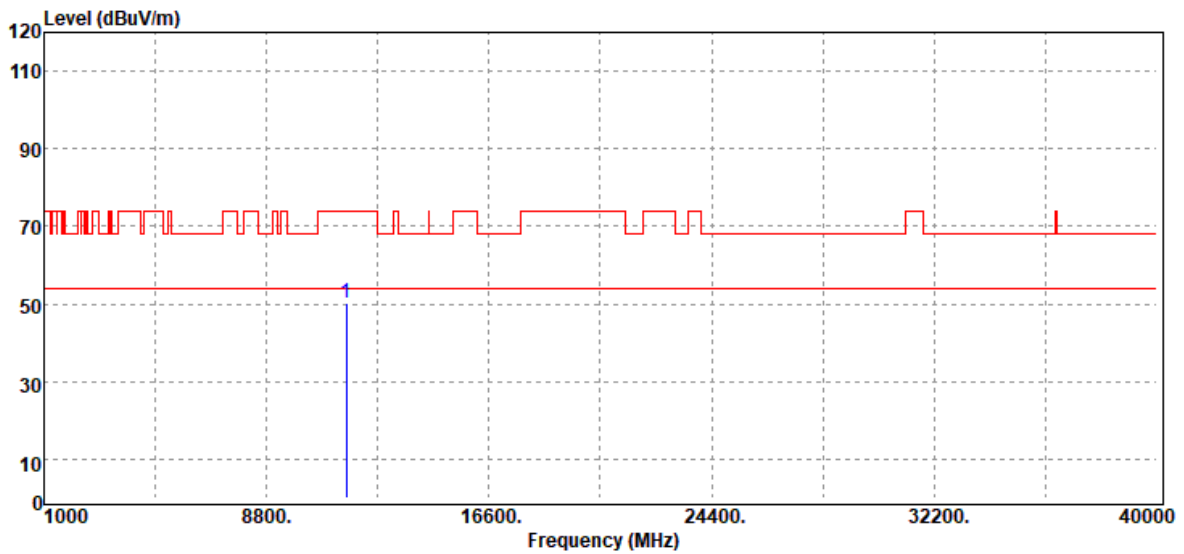


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11590.00	Peak	47.32	2.79	50.11	74.00	-23.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

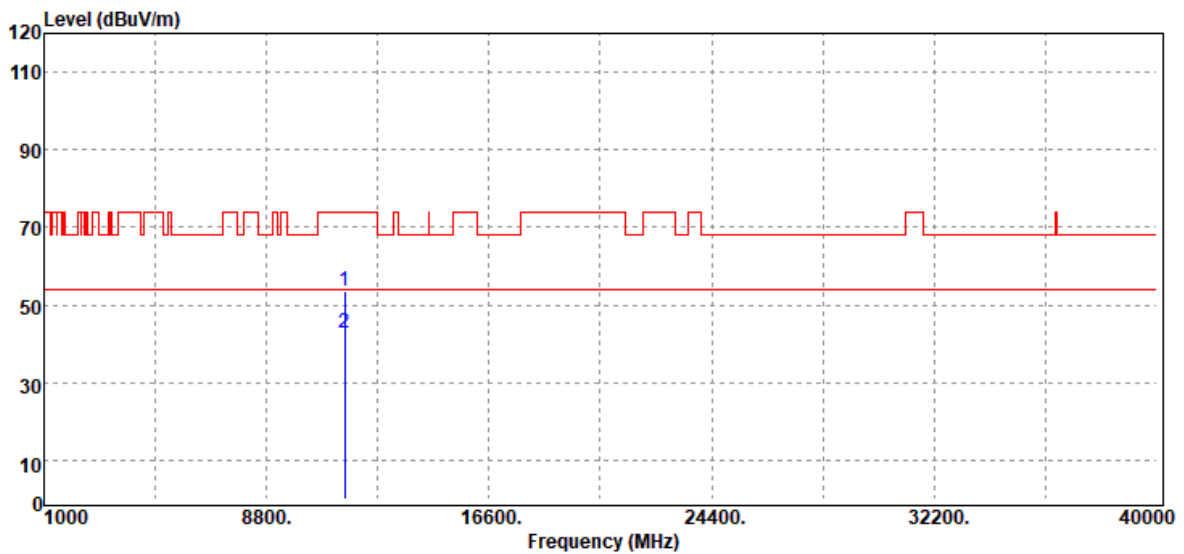


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB $\mu$ V	Factor dB	Actual FS dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB
11550.00	Peak	50.97	2.72	53.69	74.00	-20.31
11550.00	Average	40.09	2.72	42.81	54.00	-11.19
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T200522D10-RP4

Test Mode	IEEE 802.11ac VHT80/ 5775 MHz	Temp/Hum	20.9(°C)/ 71%RH
Test Item	Harmonic	Test Date	December 12, 2020
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

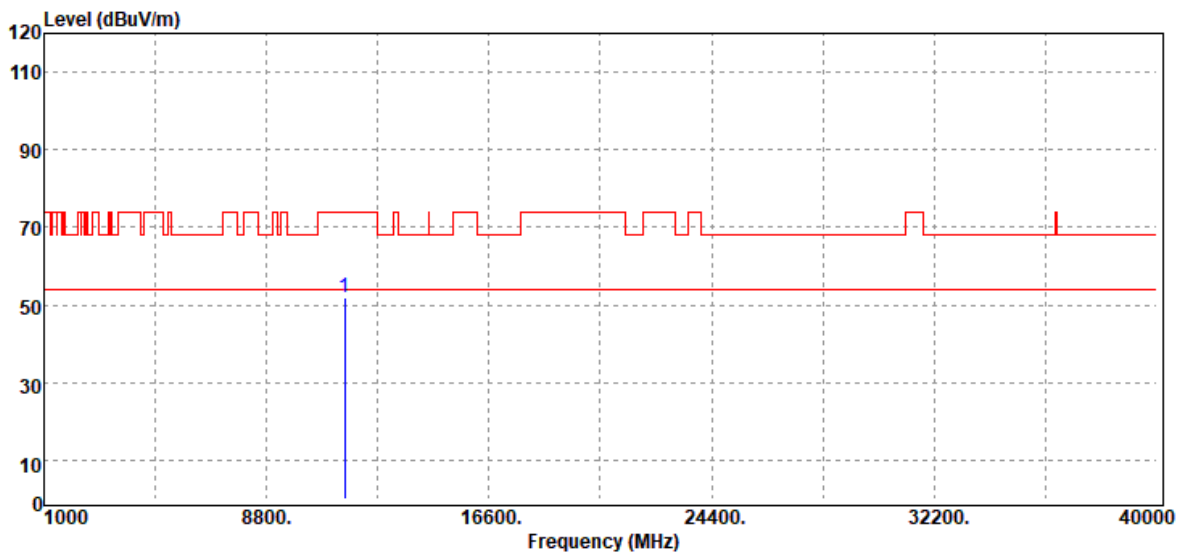

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB
11550.00	Peak	49.05	2.72	51.77	74.00	-22.23
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

- End of Test Report -