

## FCC Test Report

**Report No.:** RFBEAD-WTW-P21031019-2 R1

**FCC ID:** M82-AIM78S2

**Test Model:** AIM-78S-2

**Series Model:** AIM-78H-2, AIM-78H-2XXXXXXXXXXXXXXXXXX,  
AIM-78S-2XXXXXXXXXXXXXXXXXX (X: maybe 0-9, A-Z or blank) (refer to  
item 3.1 for more details)

**Received Date:** Apr. 01, 2021

**Test Date:** May 24 ~ Jul. 15, 2021

**Issued Date:** Jan. 10, 2022

**Applicant:** ADVANTECH CO., LTD

**Address:** No.1, Alley 20, Lane 26, Rueiguang Rd, Neihu District, Taipei, Taiwan 114

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	11
3.4 Description of Support Units.....	12
3.4.1 Configuration of System under Test.....	12
3.5 General Description of Applied Standards and References.....	14
<b>4 Test Types and Results</b> .....	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results.....	20
4.2 Conducted Emission Measurement.....	34
4.2.1 Limits of Conducted Emission Measurement.....	34
4.2.2 Test Instruments.....	34
4.2.3 Test Procedures.....	35
4.2.4 Deviation from Test Standard.....	35
4.2.5 Test Setup.....	35
4.2.6 EUT Operating Conditions.....	35
4.2.7 Test Results.....	36
4.3 Number of Hopping Frequency Used.....	44
4.3.1 Limits of Hopping Frequency Used Measurement.....	44
4.3.2 Test Setup.....	44
4.3.3 Test Instruments.....	44
4.3.4 Test Procedure.....	44
4.3.5 Deviation from Test Standard.....	44
4.3.6 Test Results.....	45
4.4 Dwell Time on Each Channel.....	46
4.4.1 Limits of Dwell Time on Each Channel Measurement.....	46
4.4.2 Test Setup.....	46
4.4.3 Test Instruments.....	46
4.4.4 Test Procedures.....	46
4.4.5 Deviation from Test Standard.....	46
4.4.6 Test Results.....	47
4.5 Channel Bandwidth.....	49
4.5.1 Limits of Channel Bandwidth Measurement.....	49
4.5.2 Test Setup.....	49
4.5.3 Test Instruments.....	49
4.5.4 Test Procedure.....	49
4.5.5 Deviation from Test Standard.....	49
4.5.6 EUT Operating Condition.....	49
4.5.7 Test Results.....	50
4.6 Hopping Channel Separation.....	51

4.6.1	Limits of Hopping Channel Separation Measurement.....	51
4.6.2	Test Setup.....	51
4.6.3	Test Instruments .....	51
4.6.4	Test Procedure .....	51
4.6.5	Deviation from Test Standard .....	51
4.6.6	Test Results .....	52
4.7	Maximum Output Power.....	53
4.7.1	Limits of Maximum Output Power Measurement .....	53
4.7.2	Test Setup.....	53
4.7.3	Test Instruments .....	53
4.7.4	Test Procedure .....	53
4.7.5	Deviation from Test Standard .....	53
4.7.6	EUT Operating Condition .....	53
4.7.7	Test Results .....	54
4.8	Conducted Out of Band Emission Measurement.....	55
4.8.1	Limits Of Conducted Out Of Band Emission Measurement.....	55
4.8.2	Test Instruments .....	55
4.8.3	Test Procedure .....	55
4.8.4	Deviation from Test Standard .....	55
4.8.5	EUT Operating Condition .....	55
4.8.6	Test Results .....	55
<b>Annex A- Band Edge Measurement.....</b>		<b>58</b>
<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>59</b>
<b>Appendix – Information of the Testing Laboratories .....</b>		<b>60</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBEAD-WTW-P21031019-2	Original release	Dec. 17, 2021
RFBEAD-WTW-P21031019-2 R1	Revised accessory devices of EUT.	Jan. 10, 2022

## 1 Certificate of Conformity

**Product:** 10.1" Tablet PC

**Brand:** ADVANTECH

**Test Model:** AIM-78S-2

**Series Model:** AIM-78H-2, AIM-78H-2XXXXXXXXXXXXXXXXXX, AIM-78S-2XXXXXXXXXXXXXXXXXX  
(X: maybe 0-9, A-Z or blank) (refer to item 3.1 for more details)

**Sample Status:** Engineering sample

**Applicant:** ADVANTECH CO., LTD

**Test Date:** May 24 ~ Jul. 15, 2021

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Jan. 10, 2022  
Polly Chien / Specialist

**Approved by :**  , **Date:** Jan. 10, 2022  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -2.92dB at 0.57000MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -5.06dB at 2390.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX_IV not a standard connector.

Note:

1. If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	10.1" Tablet PC
Brand	ADVANTECH
Test Model	AIM-78S-2
Series Model	AIM-78H-2, AIM-78H-2XXXXXXXXXXXXXXXXXX, AIM-78S-2XXXXXXXXXXXXXXXXXX (X: maybe 0-9, A-Z or blank)
Model Difference	For marketing purpose
Sample Status	Engineering sample
Power Supply Rating	10.8Vdc (Battery) 19Vdc (from adapter)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1/2/3Mbps
Operating Frequency	2402~2480MHz
Number of Channel	79
Output Power	15.311mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	Refer to note

Note:

1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Tamura	XEW1934N	Input: 100-240Vac~1.5A , 50/60Hz Output: 19Vdc / 3.42A Power Line: AC: 1.5m cable without core DC: 1.2m cable without core
Adapter 2 (option)	FSP	FSP065-DBC1	Input: 100-240Vac~ 2.0-1.0A, 50-60Hz Output: 19Vdc / 3.43A Power Line: AC: 1.5m cable without core DC: 1.5m cable with 1 core
Battery	ADVANTECH	AIM-BAT-10	Rating: 10.8Vdc, 24.84Wh, 2300mAh
Docking Station (option)	ADVANTECH	AIM-DOC-0001	Rating: 19Vdc, 3.42A (VESA Dock)
Docking Station (option)	ADVANTECH	AIM-VED0	Rating: 9 ~ 32Vdc (Vehicle Dock)
Docking Station (option)	ADVANTECH	AIM-OFD-0000	Rating: 19Vdc (Office Dock)
Extension Modules-Barcode scanner (20° ) (option)	ADVANTECH	AIM-EXT0-0040 (20 degree)	Sensor: 640 x 480 CMOS sensor
Extension Modules-Barcode scanner (70° ) (option)	ADVANTECH	AIM-EXT0-0041 (70 degree)	Sensor: 640 x 480 CMOS sensor
WLAN module	USI	MS-01	-

2. The EUT uses the following antennas.

Ant. Type	PIFA										
Ant. Connector	I-PEX_IV										
WiFi/BT_Main											
Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	3.36	3.36	3.15	3.16	3.06	3.25	3.22	3.23	3.32	3.01	3.12
WiFi_Aux											
Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	4.19	4.09	4.25	4.12	4.07	3.95	3.86	3.86	3.71	3.46	3.43

\* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3. The device WLAN 2.4GHz, BT and NFC can transmit simultaneously.

The device WLAN 5GHz, BT and NFC can transmit simultaneously.



### 3.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
A	√	√	√	√	EUT + Adapter
B	-	√	√	-	EUT + VESA Dock
C	-	√	√	-	EUT + Vehicle Dock
D	-	√	√	-	EUT + Office Dock

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE $<$ 1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X plane**.
- For radiated emission (below 1GHz) and power line conducted emission test items chosen the worst maximum fundamental emission level channel.
- "-": Means no effect.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A, B, C, D	0 to 78	0	FHSS	8DPSK	3DH5

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A, B, C, D	0 to 78	0	FHSS	8DPSK	3DH5

#### **Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

**Test Condition:**

Applicable to	Environmental Conditions	Input Power	Tested by
RE≥1G	23 deg. C, 67% RH	120Vac, 60Hz	Adair Peng
RE<1G	23 deg. C, 67% RH 23 deg. C, 66% RH	120Vac, 60Hz	Adair Peng, Titan Hsu
PLC	23 deg. C, 67% RH 25 deg. C, 75% RH	120Vac, 60Hz	Adair Peng, Edison Lee
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Ivan Tseng

**3.3 Duty Cycle of Test Signal**

Duty cycle =  $2.91 \times 1 / 100 = 0.021$ , Duty factor =  $20 \times \log(0.021) = -30.72$

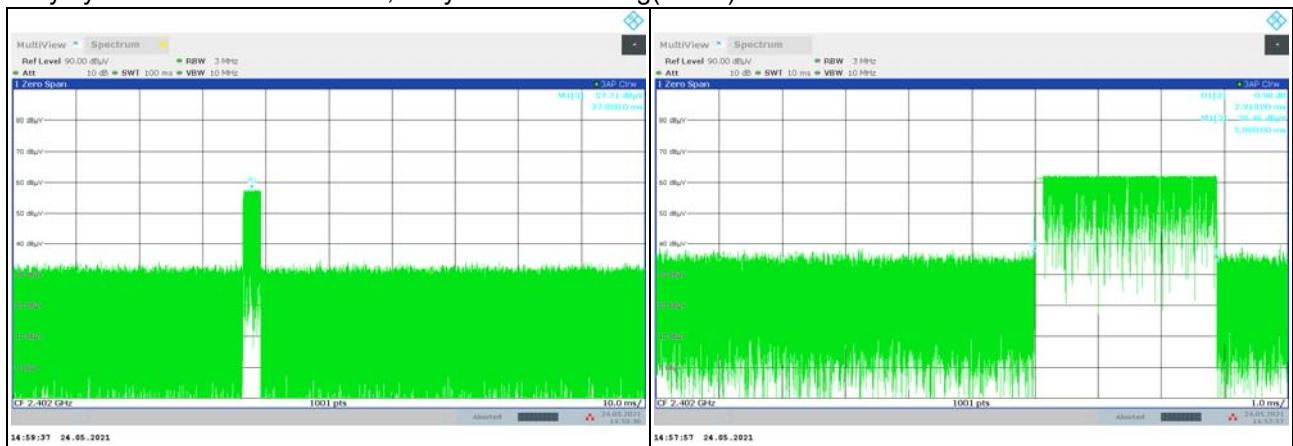

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	Lenovo	20J4 MD A003TW	PF-11H9AK	FCC DoC Approved	-
B.	Flash	HP	v250W	05	NA	Type-A
C.	Flash	HP	v250W	03	NA	Type-A
D.	Earphone	APPLE	NA	NA	NA	-
E.	Load	NA	NA	NA	NA	-
F.	Power Supply	TOPWARD	6306D	809760	NA	-
G.	GPS Antenna	Connectec	SP070809-001	3-6004-031R0 00	NA	Provided by client
H.	Monitor	DELL	SE2416Hc	CN-OWJKMC- 64180-66D-01 3B-A00	NA	-
I.	Docking Station	ADVANTECH	AIM-DOC-0001	NA	NA	Provided by client
J.	Docking Station	ADVANTECH	AIM-VED0	NA	NA	Provided by client
K.	Docking Station	ADVANTECH	AIM-OFD-0000	NA	NA	Provided by client
L.	Adapter	FSP	FSP065-DBCM1	NA	NA	Provided by client

Note:


1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Type C cable	1	1	Y	0	-
2.	Audio cable	1	1.2	N	0	-
3.	RS232 cable	1	1.5	N	0	-
4.	LAN cable	1	7	N	0	RJ45, Cat.5e
5.	Antenna cable	1	5	N	0	Provided by client
6.	Power cable	1	1	N	0	Provided by client
7.	HDMI cable	1	2.0	Y	0	Provided by Lab. (Brand: Amber, Model: HDMI-AA120)
8.	DC Power cable	1	1.5	N	1	Provided by client
9.	AC Power cable	1	1.5	N	0	Provided by client


Note: The core(s) is(are) originally attached to the cable(s).

#### 3.4.1 Configuration of System under Test


Mode A

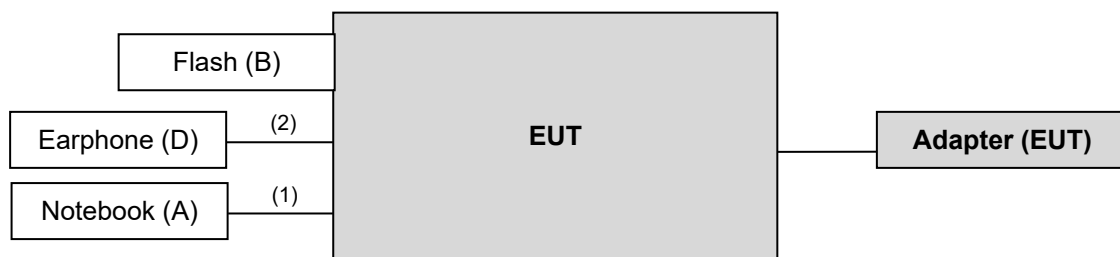


Mode B

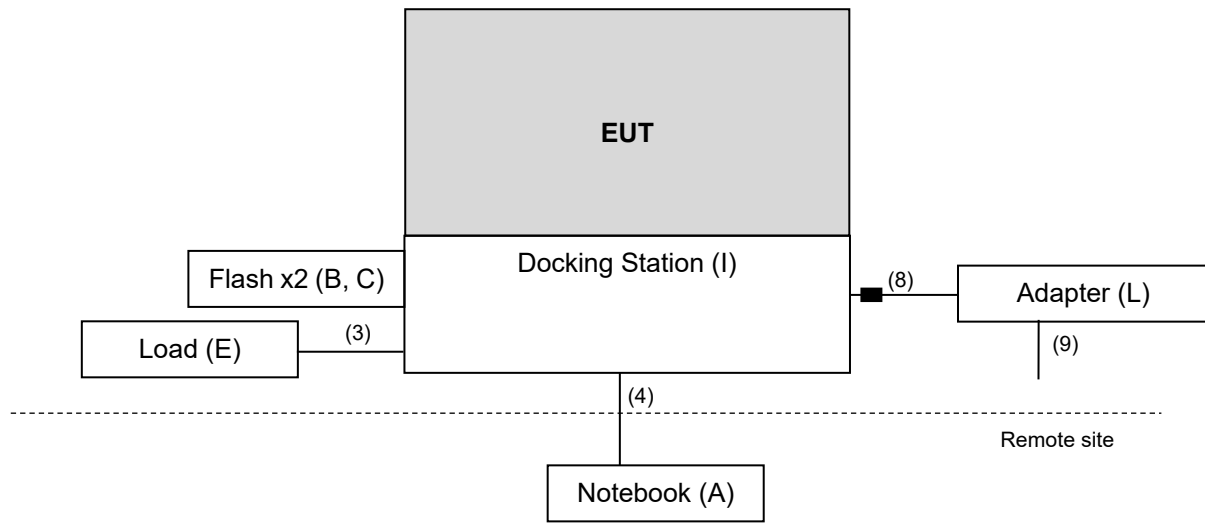

Mode C

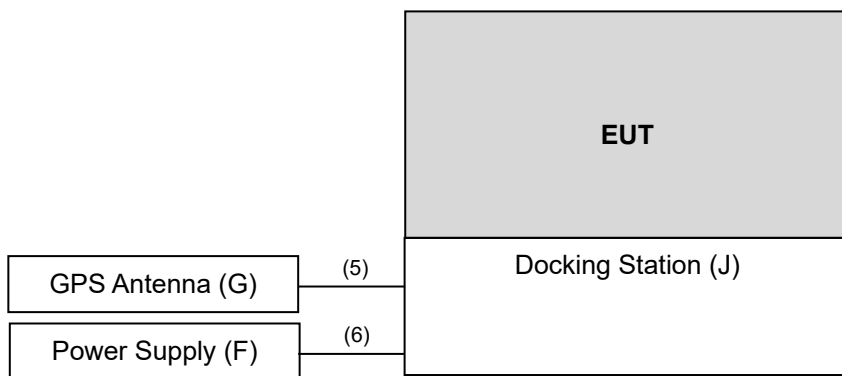

Mode D

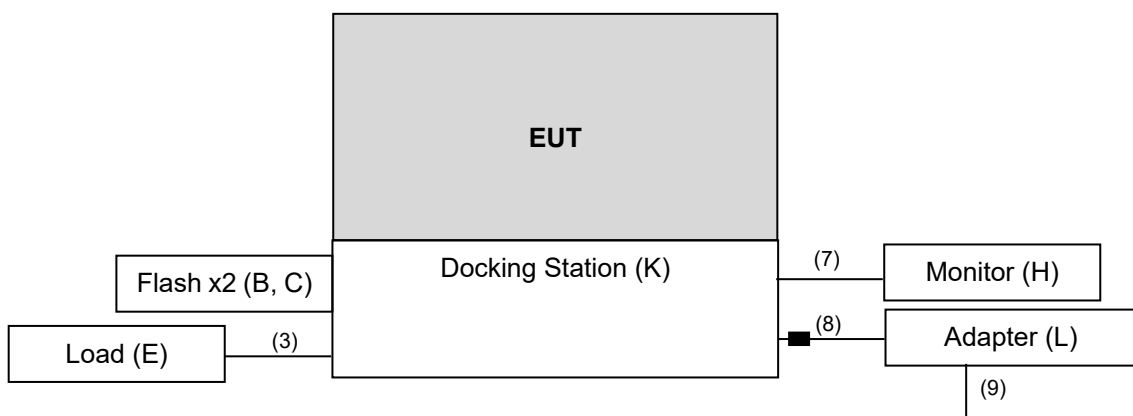

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 31, 2020	Dec. 30, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 09, 2020	Jun. 08, 2021
			Jun. 07, 2021	Jun. 06, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 04, 2020	Nov. 03, 2021
HORN Antenna SCHWARZBECK	9120D	209	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 16, 2020	Aug. 15, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 22, 2021	Mar. 21, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM -SM-8000	Cable-CH3-03 (309224+170907)	Aug. 16, 2020	Aug. 15, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/ MY55190007/MY55210005	Jul. 13, 2020	Jul. 12, 2021
			Jul. 12, 2021	Jul. 11, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 3.



### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz. According to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. The duty cycle correction factor refer to Chapter 3.3 of this report.
3. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

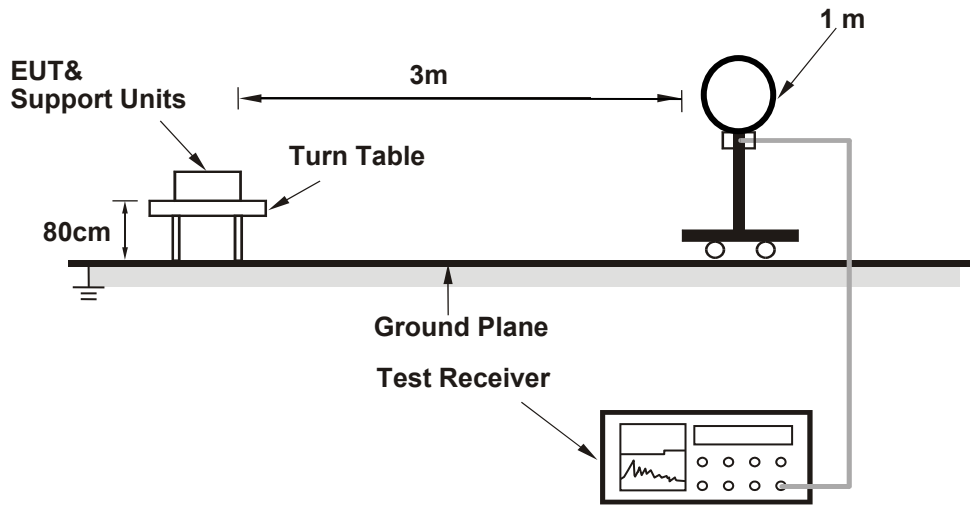

##### For Radiated emission 30MHz to 1GHz

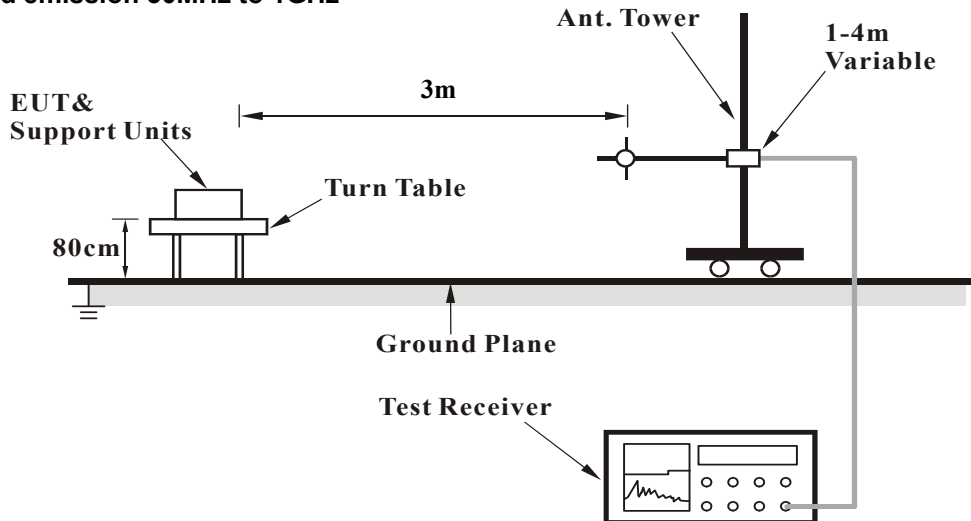

### For Radiated emission above 1GHz

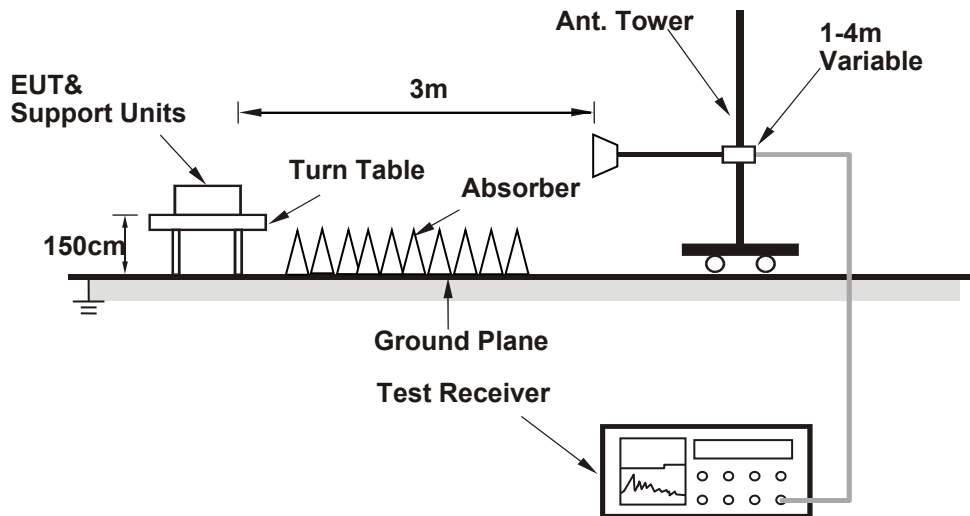

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

##### Mode A

- The EUT powered by adapter.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via USB cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

##### Mode B

- The EUT powered by cradle.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via LAN cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

##### Mode C

- The EUT powered by cradle.
- The EUT under transmission condition continuously at specific channel frequency.

##### Mode D

- The EUT powered by cradle.
- The EUT communicated with monitor via HDMI cables and transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

Above 1GHz data:

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.16 PK	74.00	-14.84	1.78 H	339	24.80	34.36
2	2390.00	48.76 AV	54.00	-5.24	1.78 H	339	14.40	34.36
3	*2402.00	104.24 PK			1.78 H	339	69.90	34.34
4	*2402.00	73.52 AV			1.78 H	339	39.18	34.34
5	4804.00	49.52 PK	74.00	-24.48	1.07 H	13	43.00	6.52
6	4804.00	18.80 AV	54.00	-35.20	1.07 H	13	12.28	6.52
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.96 PK	74.00	-14.04	3.05 V	208	25.60	34.36
2	2390.00	48.36 AV	54.00	-5.64	3.05 V	208	14.00	34.36
3	*2402.00	100.34 PK			3.05 V	208	66.00	34.34
4	*2402.00	69.62 AV			3.05 V	208	35.28	34.34
5	4804.00	48.82 PK	74.00	-25.18	2.13 V	47	42.30	6.52
6	4804.00	18.10 AV	54.00	-35.90	2.13 V	47	11.58	6.52

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.
- for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \cdot 1/100) = -30.72\text{dB}$  please refer to the plotted duty  
(see section 3.3)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	102.69 PK			1.74 H	337	68.30	34.39
2	*2441.00	71.97 AV			1.74 H	337	37.58	34.39
3	4882.00	47.78 PK	74.00	-26.22	1.08 H	14	42.10	5.68
4	4882.00	17.06 AV	54.00	-36.94	1.08 H	14	11.38	5.68

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	99.69 PK			3.54 V	219	65.30	34.39
2	*2441.00	68.97 AV			3.54 V	219	34.58	34.39
3	4882.00	47.48 PK	74.00	-26.52	1.97 V	52	41.80	5.68
4	4882.00	16.76 AV	54.00	-37.24	1.97 V	52	11.08	5.68

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
 The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
 where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \cdot 1/100) = -30.72\text{dB}$  please refer to the plotted duty (see section 3.3)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	104.97 PK			1.69 H	339	70.60	34.37
2	*2480.00	74.25 AV			1.69 H	339	39.88	34.37
3	2483.50	50.59 PK	74.00	-23.41	1.69 H	339	52.80	-2.21
4	2483.50	19.87 AV	54.00	-34.13	1.69 H	339	22.08	-2.21
5	4960.00	48.69 PK	74.00	-25.31	1.06 H	15	42.40	6.29
6	4960.00	17.97 AV	54.00	-36.03	1.06 H	15	11.68	6.29

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	100.67 PK			3.51 V	199	66.30	34.37
2	*2480.00	69.95 AV			3.51 V	199	35.58	34.37
3	2483.50	44.29 PK	74.00	-29.71	3.51 V	199	46.50	-2.21
4	2483.50	13.57 AV	54.00	-40.43	3.51 V	199	15.78	-2.21
5	4960.00	48.39 PK	74.00	-25.61	2.02 V	41	42.10	6.29
6	4960.00	17.67 AV	54.00	-36.33	2.02 V	41	11.38	6.29

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
 The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
 where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \cdot 1/100) = -30.72\text{dB}$  please refer to the plotted duty  
 (see section 3.3)

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.76 PK	74.00	-14.24	1.77 H	340	25.40	34.36
<b>2</b>	<b>2390.00</b>	<b>48.94 AV</b>	<b>54.00</b>	<b>-5.06</b>	<b>1.77 H</b>	<b>340</b>	<b>14.58</b>	<b>34.36</b>
3	*2402.00	108.04 PK			1.77 H	340	73.70	34.34
4	*2402.00	77.32 AV			1.77 H	340	42.98	34.34
5	4804.00	49.02 PK	74.00	-24.98	1.08 H	14	42.50	6.52
6	4804.00	18.30 AV	54.00	-35.70	1.08 H	14	11.78	6.52

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.46 PK	74.00	-14.54	3.34 V	196	25.10	34.36
2	2390.00	48.56 AV	54.00	-5.44	3.34 V	196	14.20	34.36
3	*2402.00	104.84 PK			3.34 V	196	70.50	34.34
4	*2402.00	74.12 AV			3.34 V	196	39.78	34.34
5	4804.00	48.82 PK	74.00	-25.18	2.17 V	52	42.30	6.52
6	4804.00	18.10 AV	54.00	-35.90	2.17 V	52	11.58	6.52

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* " : Fundamental frequency.
- for Fundamental frequency and bandedge & harmonic:  
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \times 1/100) = -30.72\text{dB}$  please refer to the plotted duty (see section 3.3)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	107.19 PK			1.95 H	339	72.80	34.39
2	*2441.00	76.47 AV			1.95 H	339	42.08	34.39
3	4882.00	48.38 PK	74.00	-25.62	1.05 H	11	42.70	5.68
4	4882.00	17.66 AV	54.00	-36.34	1.05 H	11	11.98	5.68

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	103.79 PK			3.22 V	194	69.40	34.39
2	*2441.00	73.07 AV			3.22 V	194	38.68	34.39
3	4882.00	48.18 PK	74.00	-25.82	2.19 V	49	42.50	5.68
4	4882.00	17.46 AV	54.00	-36.54	2.19 V	49	11.78	5.68

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
 The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
 where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \cdot 1/100) = -30.72\text{dB}$  please refer to the plotted duty  
 (see section 3.3)



CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	106.47 PK			1.47 H	339	72.10	34.37
2	*2480.00	75.75 AV			1.47 H	339	41.38	34.37
3	2483.50	53.79 PK	74.00	-20.21	1.47 H	339	56.00	-2.21
4	2483.50	23.07 AV	54.00	-30.93	1.47 H	339	25.28	-2.21
5	4960.00	48.89 PK	74.00	-25.11	1.11 H	15	42.60	6.29
6	4960.00	18.17 AV	54.00	-35.83	1.11 H	15	11.88	6.29

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	103.17 PK			3.50 V	222	68.80	34.37
2	*2480.00	72.45 AV			3.50 V	222	38.08	34.37
3	2483.50	48.59 PK	74.00	-25.41	3.50 V	222	50.80	-2.21
4	2483.50	17.87 AV	54.00	-36.13	3.50 V	222	20.08	-2.21
5	4960.00	48.59 PK	74.00	-25.41	2.08 V	55	42.30	6.29
6	4960.00	17.87 AV	54.00	-36.13	2.08 V	55	11.58	6.29

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:  
 The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)  
 where the duty factor is calculated from following formula:  
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.91\text{ms} \cdot 1/100) = -30.72\text{dB}$  please refer to the plotted duty  
 (see section 3.3)

Below 1GHz worst-case data:


8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.62	30.90 QP	40.00	-9.10	1.50 H	250	41.20	-10.30
2	49.68	31.70 QP	40.00	-8.30	1.00 H	14	40.80	-9.10
3	65.14	29.40 QP	40.00	-10.60	2.00 H	16	39.60	-10.20
4	132.62	31.00 QP	43.50	-12.50	1.00 H	16	40.70	-9.70
5	268.99	29.20 QP	46.00	-16.80	2.00 H	293	36.70	-7.50
6	350.52	26.50 QP	46.00	-19.50	1.00 H	219	32.10	-5.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

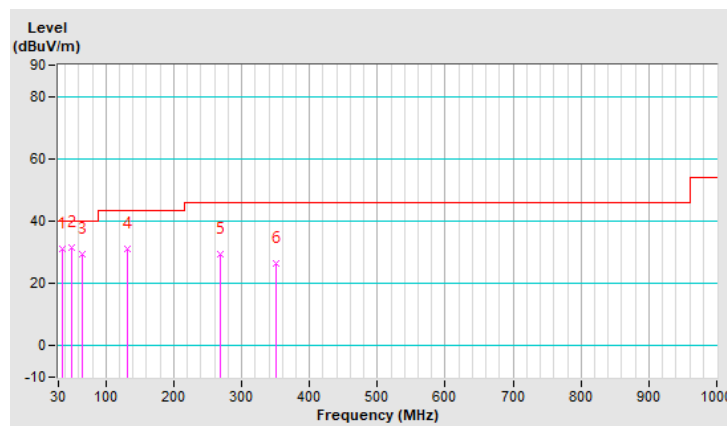


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.68	32.20 QP	40.00	-7.80	1.50 V	184	41.30	-9.10
2	60.93	34.90 QP	40.00	-5.10	1.00 V	13	44.70	-9.80
3	132.62	30.10 QP	43.50	-13.40	2.00 V	177	39.80	-9.70
4	268.99	26.90 QP	46.00	-19.10	1.00 V	303	34.40	-7.50
5	297.10	26.50 QP	46.00	-19.50	2.00 V	64	33.10	-6.60
6	446.12	27.50 QP	46.00	-18.50	1.00 V	122	30.90	-3.40

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

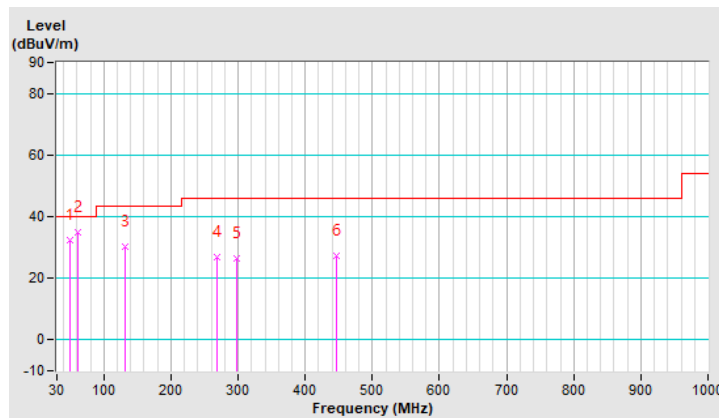


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	24.4 QP	40.0	-15.6	1.00 H	267	35.0	-10.6
2	82.38	27.0 QP	40.0	-13.0	1.50 H	257	40.8	-13.8
3	113.42	25.3 QP	43.5	-18.2	1.00 H	212	37.0	-11.7
4	185.20	24.0 QP	43.5	-19.5	1.50 H	263	34.4	-10.4
5	255.04	23.3 QP	46.0	-22.7	2.00 H	289	31.5	-8.2
6	282.20	25.3 QP	46.0	-20.7	1.00 H	79	32.2	-6.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

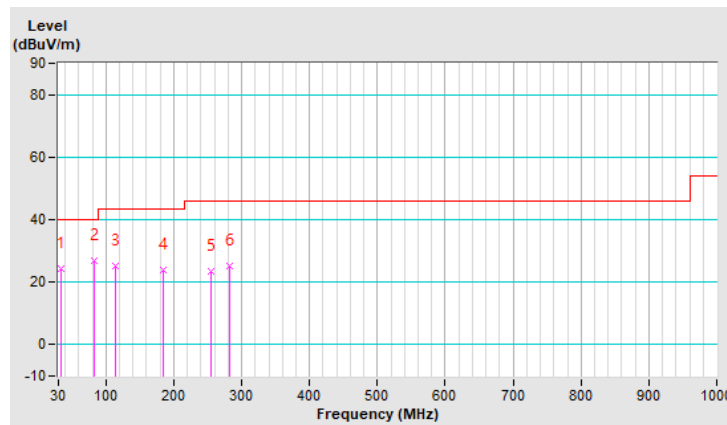


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	28.9 QP	40.0	-11.1	1.00 V	20	39.8	-10.9
2	59.10	24.5 QP	40.0	-15.5	1.50 V	357	33.9	-9.4
3	82.38	32.5 QP	40.0	-7.5	1.00 V	170	46.3	-13.8
4	105.66	22.4 QP	43.5	-21.1	1.50 V	98	34.8	-12.4
5	165.80	25.2 QP	43.5	-18.3	2.00 V	177	33.8	-8.6
6	270.56	22.5 QP	46.0	-23.5	1.00 V	57	29.9	-7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

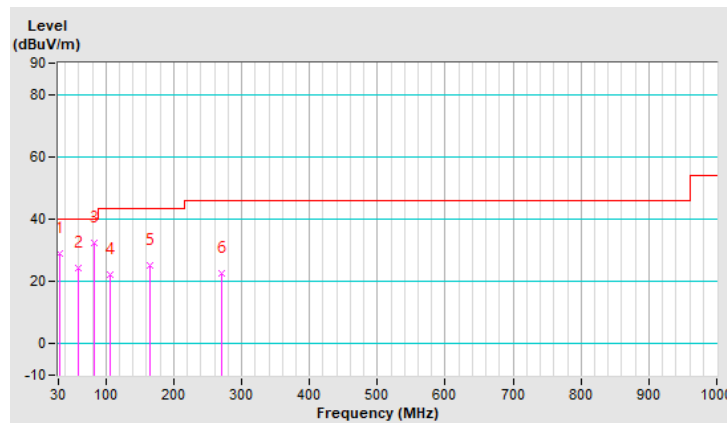


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.74	33.5 QP	40.0	-6.5	1.00 H	90	44.6	-11.1
2	132.82	33.7 QP	43.5	-9.8	1.50 H	63	43.3	-9.6
3	154.16	29.5 QP	43.5	-14.0	1.00 H	8	37.8	-8.3
4	187.14	31.8 QP	43.5	-11.7	1.50 H	101	42.5	-10.7
5	231.76	33.4 QP	46.0	-12.6	2.00 H	258	43.6	-10.2
6	313.24	30.0 QP	46.0	-16.0	1.00 H	204	36.2	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

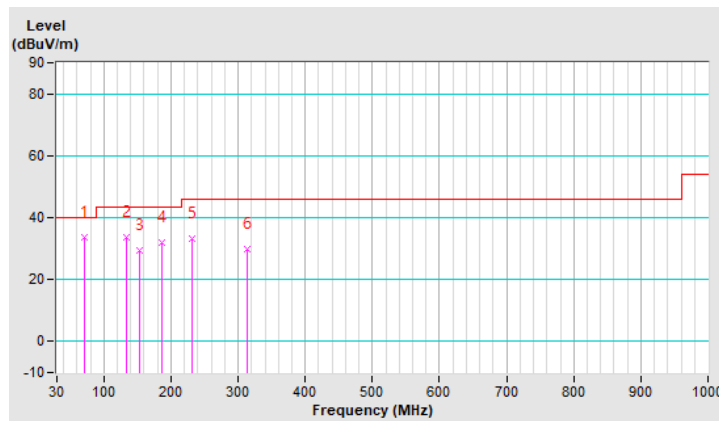


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	26.4 QP	40.0	-13.6	1.00 V	64	37.3	-10.9
2	68.80	34.3 QP	40.0	-5.7	1.50 V	4	45.2	-10.9
3	152.22	23.1 QP	43.5	-20.4	1.00 V	137	31.7	-8.6
4	185.20	25.7 QP	43.5	-17.8	1.00 V	84	36.1	-10.4
5	224.00	28.6 QP	46.0	-17.4	1.50 V	275	39.2	-10.6
6	377.26	27.7 QP	46.0	-18.3	2.00 V	335	32.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

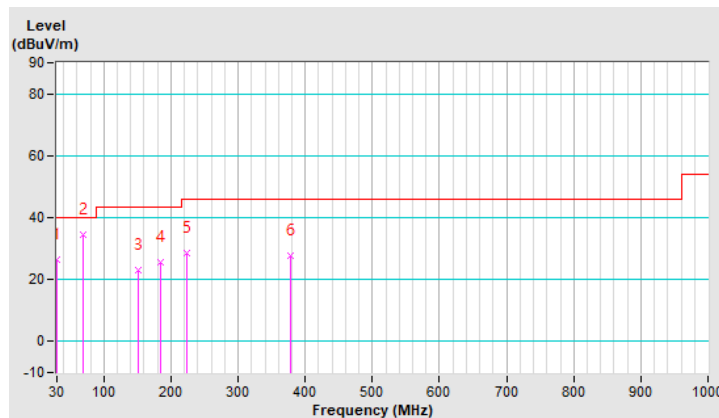


CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	24.7 QP	40.0	-15.3	1.00 H	7	35.6	-10.9
2	82.38	26.2 QP	40.0	-13.8	1.50 H	231	40.0	-13.8
3	111.48	36.4 QP	43.5	-7.1	2.00 H	73	48.2	-11.8
4	169.68	24.5 QP	43.5	-19.0	1.50 H	243	33.3	-8.8
5	185.20	24.2 QP	43.5	-19.3	2.00 H	276	34.6	-10.4
6	260.86	26.9 QP	46.0	-19.1	1.00 H	7	34.9	-8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

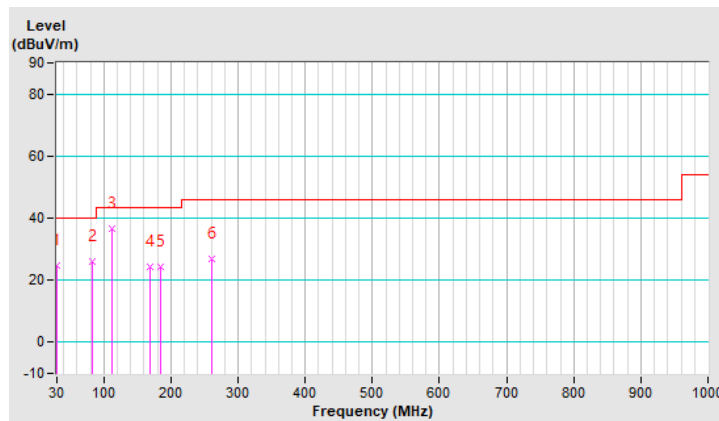




CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.46	31.8 QP	40.0	-8.2	1.00 V	21	41.0	-9.2
2	59.10	25.3 QP	40.0	-14.7	1.00 V	36	34.7	-9.4
3	82.38	33.4 QP	40.0	-6.6	1.00 V	192	47.2	-13.8
4	113.42	38.3 QP	43.5	-5.2	1.00 V	242	50.0	-11.7
5	159.98	27.8 QP	43.5	-15.7	1.00 V	168	36.2	-8.4
6	293.84	26.1 QP	46.0	-19.9	1.00 V	299	32.8	-6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

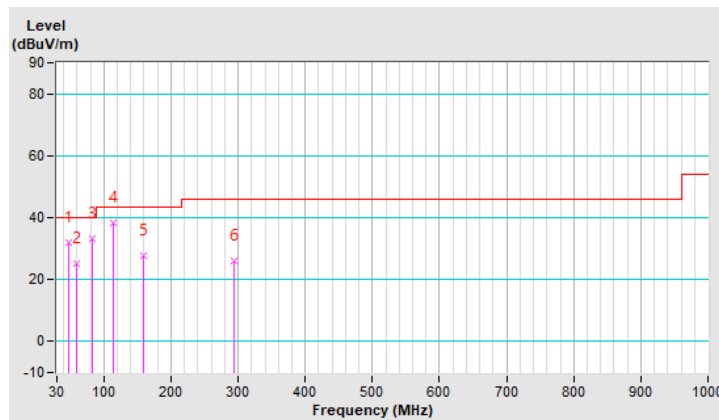

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

### 4.2.2 Test Instruments

Tested date: May 24 ~ Jul. 15, 2021

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 04, 2020	Dec. 03, 2021
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 16, 2021	Jan. 15, 2022
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 25, 2021	Feb. 24, 2022
V-LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).  
 3. The VCCI Site Registration No. is C-12040.

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

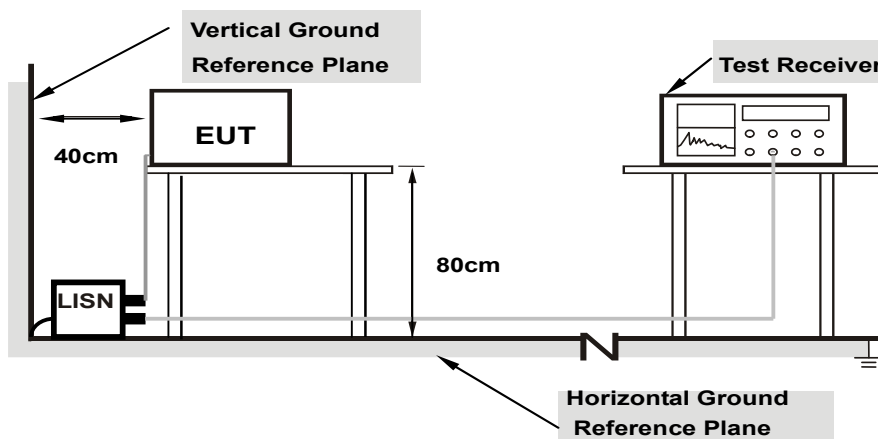

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

### 4.2.7 Test Results

Worst-case data:


8DPSK

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.71	34.71	17.65	44.42	27.36	65.57	55.57	-21.15	-28.21
2	0.18200	9.71	41.34	37.15	51.05	46.86	64.39	54.39	-13.34	-7.53
3	0.55800	9.74	34.97	31.10	44.71	40.84	56.00	46.00	-11.29	-5.16
4	0.61000	9.74	31.74	25.09	41.48	34.83	56.00	46.00	-14.52	-11.17
5	0.67400	9.74	20.33	14.32	30.07	24.06	56.00	46.00	-25.93	-21.94
6	4.21000	9.79	17.96	10.93	27.75	20.72	56.00	46.00	-28.25	-25.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

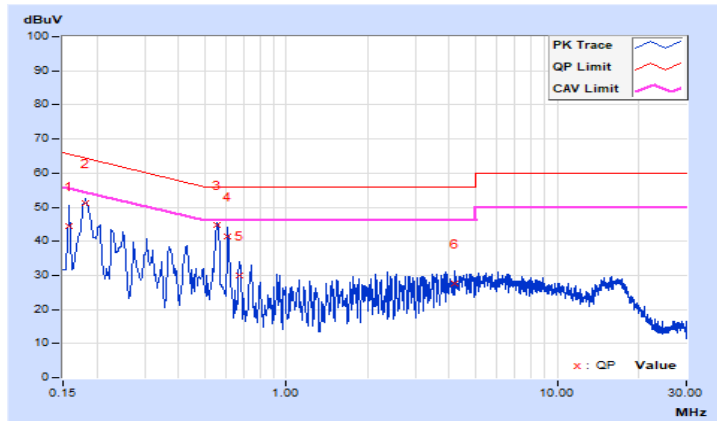


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17000	9.77	41.28	39.90	51.05	49.67	64.96
2	0.22600	9.77	35.23	32.62	45.00	42.39	62.60	52.60	-17.60	-10.21
3	0.28600	9.78	31.92	26.94	41.70	36.72	60.64	50.64	-18.94	-13.92
4	0.45356	9.79	28.65	26.31	38.44	36.10	56.81	46.81	-18.37	-10.71
<b>5</b>	<b>0.57000</b>	<b>9.80</b>	<b>35.61</b>	<b>33.28</b>	<b>45.41</b>	<b>43.08</b>	<b>56.00</b>	<b>46.00</b>	<b>-10.59</b>	<b>-2.92</b>
6	0.62600	9.80	30.34	28.55	40.14	38.35	56.00	46.00	-15.86	-7.65

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

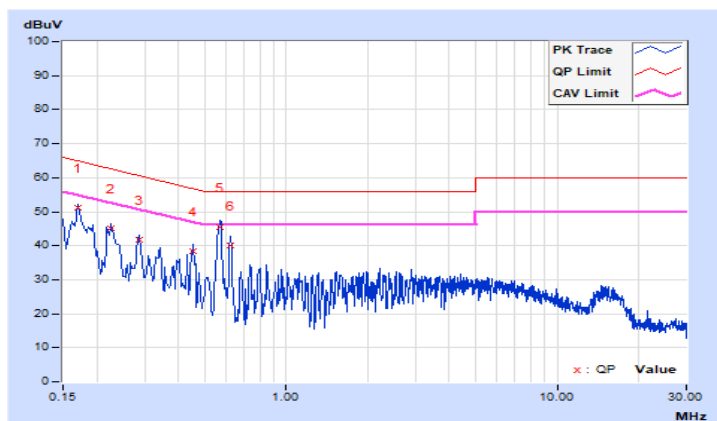


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.71	30.81	14.35	40.52	24.06	66.00
2	0.21800	9.71	26.69	7.60	36.40	17.31	62.89	52.89	-26.49	-35.58
3	0.39758	9.73	31.21	23.59	40.94	33.32	57.90	47.90	-16.96	-14.58
4	0.94200	9.76	17.80	5.57	27.56	15.33	56.00	46.00	-28.44	-30.67
5	9.35400	9.85	16.40	11.52	26.25	21.37	60.00	50.00	-33.75	-28.63
6	19.09400	9.82	14.18	8.98	24.00	18.80	60.00	50.00	-36.00	-31.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

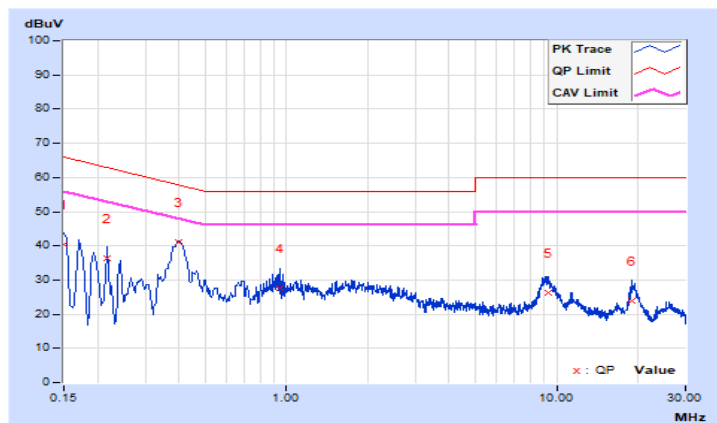


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15800	9.77	30.25	18.09	40.02	27.86	65.57
2	0.22200	9.77	26.43	9.12	36.20	18.89	62.74	52.74	-26.54	-33.85
3	0.40179	9.79	30.64	23.03	40.43	32.82	57.82	47.82	-17.39	-15.00
4	0.54200	9.80	18.29	9.40	28.09	19.20	56.00	46.00	-27.91	-26.80
5	8.83800	9.91	19.49	14.17	29.40	24.08	60.00	50.00	-30.60	-25.92
6	19.20600	9.98	11.95	7.32	21.93	17.30	60.00	50.00	-38.07	-32.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

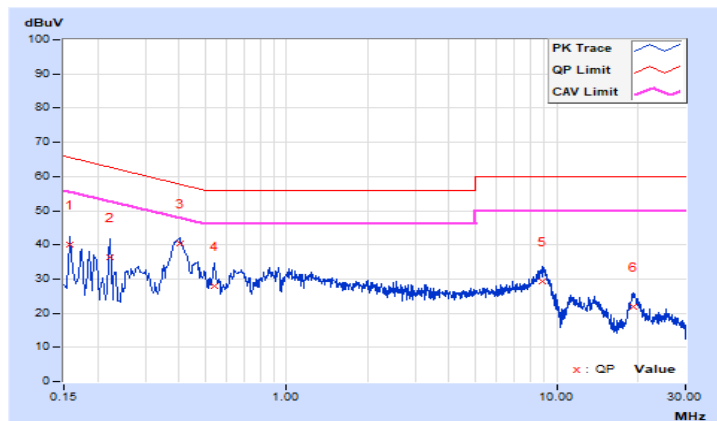


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16105	9.71	31.29	17.65	41.00	27.36	65.41
2	0.28200	9.72	26.46	8.69	36.18	18.41	60.76	50.76	-24.58	-32.35
3	0.40498	9.73	30.20	22.14	39.93	31.87	57.75	47.75	-17.82	-15.88
4	0.97800	9.76	17.08	7.46	26.84	17.22	56.00	46.00	-29.16	-28.78
5	8.90200	9.85	18.09	13.03	27.94	22.88	60.00	50.00	-32.06	-27.12
6	18.39000	9.82	11.61	6.94	21.43	16.76	60.00	50.00	-38.57	-33.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

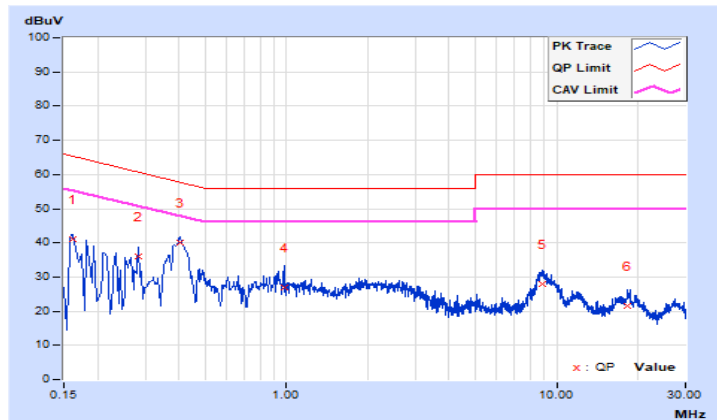




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.77	31.10	18.13	40.87	27.90	65.78
2	0.20200	9.77	31.93	14.81	41.70	24.58	63.53	53.53	-21.83	-28.95
3	0.38725	9.79	31.83	24.17	41.62	33.96	58.12	48.12	-16.50	-14.16
4	0.90200	9.82	19.14	11.54	28.96	21.36	56.00	46.00	-27.04	-24.64
5	2.10600	9.83	14.72	8.76	24.55	18.59	56.00	46.00	-31.45	-27.41
6	8.58600	9.91	20.29	15.25	30.20	25.16	60.00	50.00	-29.80	-24.84

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

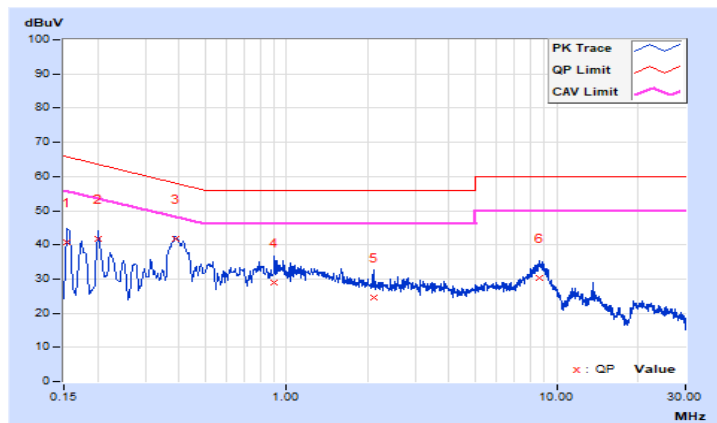


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.71	30.40	18.36	40.11	28.07	65.78
2	0.40179	9.73	38.08	30.36	47.81	40.09	57.82	47.82	-10.01	-7.73
3	0.68592	9.74	28.18	17.78	37.92	27.52	56.00	46.00	-18.08	-18.48
4	8.91000	9.85	17.90	12.10	27.75	21.95	60.00	50.00	-32.25	-28.05
5	14.80200	9.83	9.99	4.83	19.82	14.66	60.00	50.00	-40.18	-35.34
6	19.25800	9.82	13.82	8.86	23.64	18.68	60.00	50.00	-36.36	-31.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

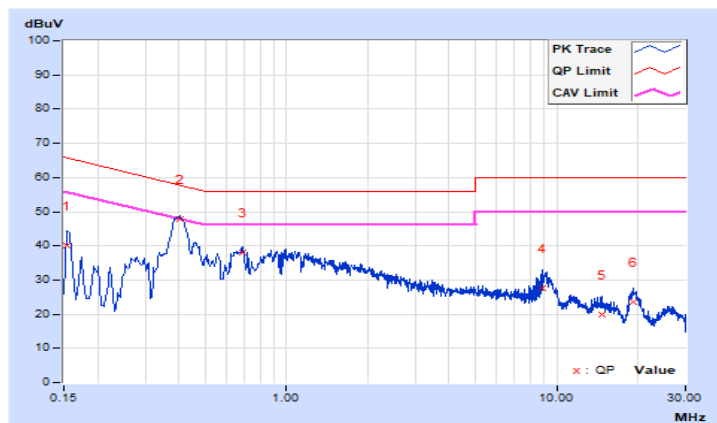


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.77	30.02	19.55	39.79	29.32	65.78
2	0.29800	9.78	27.84	17.91	37.62	27.69	60.30	50.30	-22.68	-22.61
3	0.39758	9.79	39.05	31.24	48.84	41.03	57.90	47.90	-9.06	-6.87
4	1.23800	9.82	24.98	19.67	34.80	29.49	56.00	46.00	-21.20	-16.51
5	8.70200	9.91	22.15	16.96	32.06	26.87	60.00	50.00	-27.94	-23.13
6	19.01800	9.98	10.75	5.98	20.73	15.96	60.00	50.00	-39.27	-34.04

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

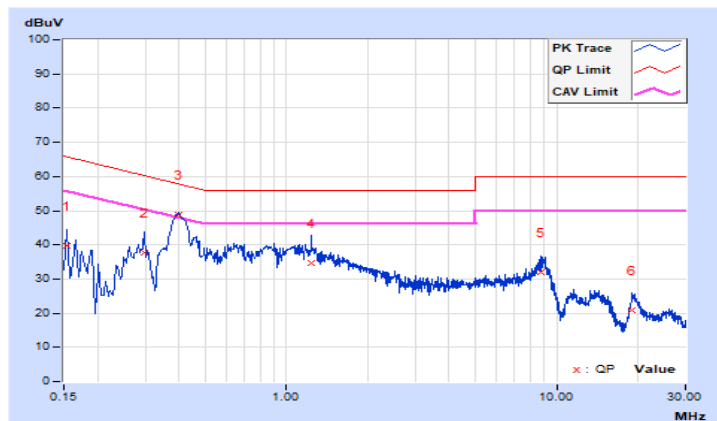

### 4.3 Number of Hopping Frequency Used

#### 4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

#### 4.3.5 Deviation from Test Standard

No deviation.

### 4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

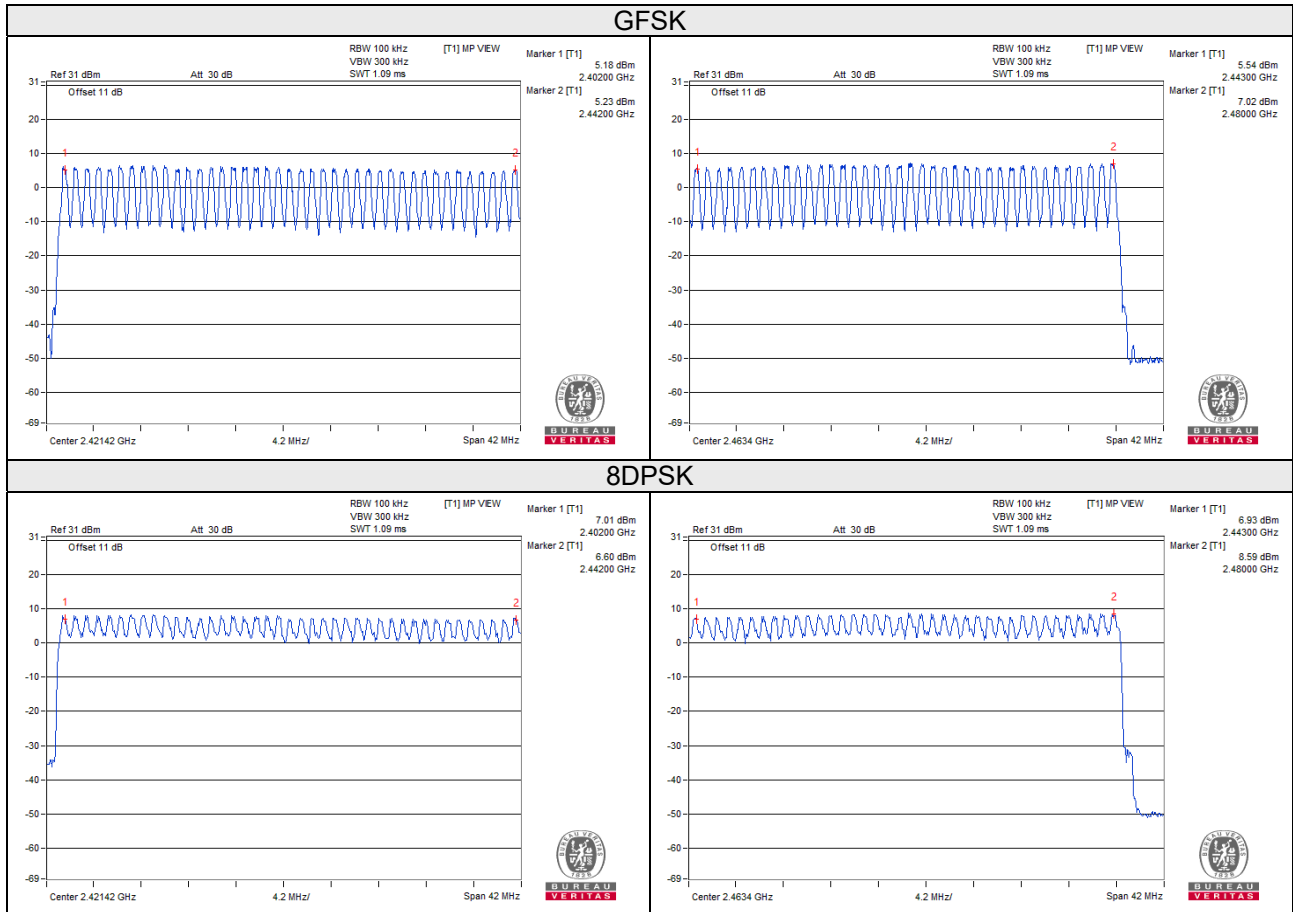

#### 4.4 Dwell Time on Each Channel

##### 4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### 4.4.2 Test Setup



##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

##### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 Test Results

#### GFSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 323 times	0.500	161.500	400
DH3	27 (times / 5 sec) * 6.32 = 171 times	1.720	294.120	400
DH5	17 (times / 5 sec) * 6.32 = 108 times	2.960	319.680	400

Note: Test plots of the transmitting time slot are shown as below.



### 8DPSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.470	148.520	400
3DH3	25 (times / 5 sec) * 6.32 = 158 times	1.700	268.600	400
3DH5	18 (times / 5 sec) * 6.32 = 114 times	2.960	337.440	400

Note: Test plots of the transmitting time slot are shown as below.





## 4.5 Channel Bandwidth

### 4.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.5.5 Deviation from Test Standard


No deviation.

### 4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.94	1.29
39	2441	0.94	1.30
78	2480	0.94	1.30

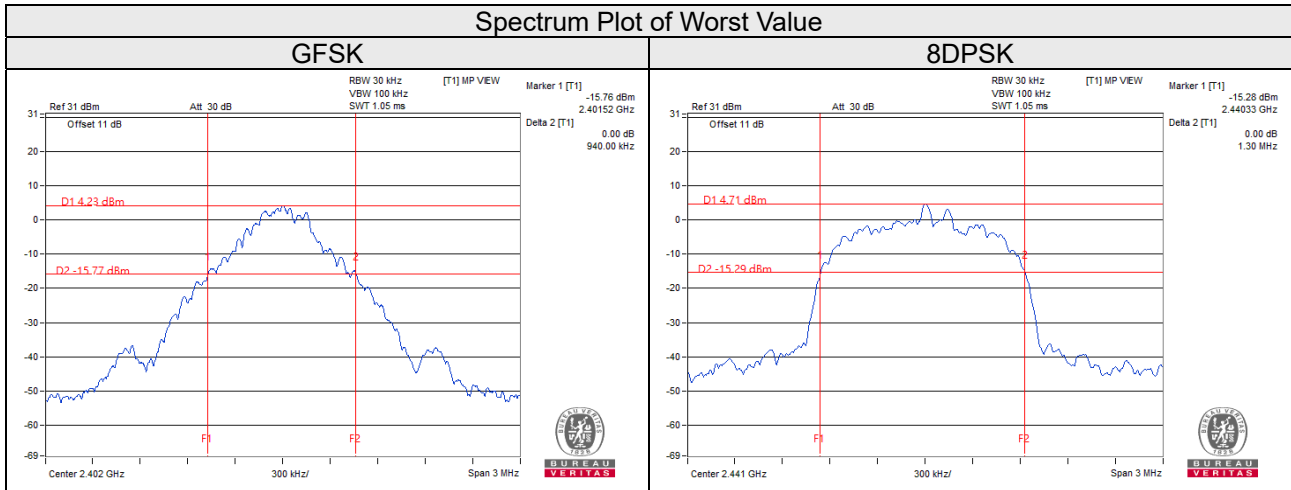

## 4.6 Hopping Channel Separation

### 4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

Measurement Procedure REF

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


### 4.6.5 Deviation from Test Standard

No deviation.

#### 4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.94	1.29	0.63	0.86	Pass
39	2441	1.00	1.00	0.94	1.30	0.63	0.87	Pass
78	2480	1.00	1.00	0.94	1.30	0.63	0.87	Pass

Note: The minimum limit is two-third 20dB bandwidth.

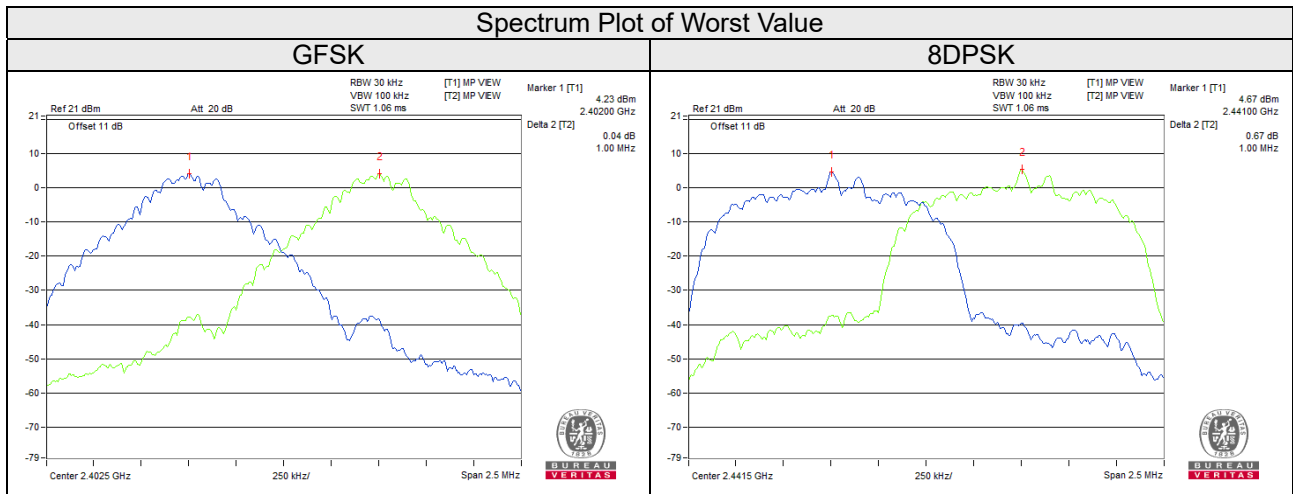


## 4.7 Maximum Output Power

### 4.7.1 Limits of Maximum Output Power Measurement

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 4.7.2 Test Setup

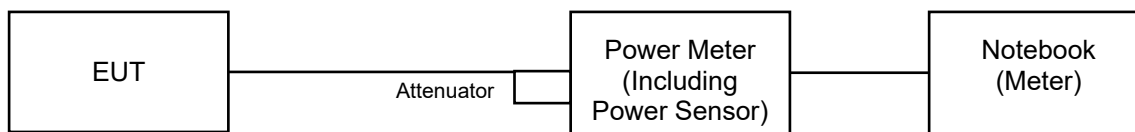

### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.7.4 Test Procedure

For Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

For Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.7.5 Deviation from Test Standard

No deviation.

### 4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.7.7 Test Results

##### For Peak Power

Channel	Frequency (MHz)	Peak Power (mW)		Peak Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	4.875	<b>15.311</b>	6.88	11.85	125 / 1000 <sup>Note</sup>	Pass
39	2441	3.837	11.940	5.84	10.77	125 / 1000 <sup>Note</sup>	Pass
78	2480	5.888	14.191	7.70	11.52	125 / 1000 <sup>Note</sup>	Pass

Note: RF Output Power limit depends on the operating channel numbers, please refer to section 3.2 of the results.

##### For Average Power

Channel	Frequency (MHz)	Average Power (mW)		Average Power (dBm)	
		GFSK	8DPSK	GFSK	8DPSK
0	2402	4.764	9.750	6.78	9.89
39	2441	3.724	7.278	5.71	8.62
78	2480	5.728	9.419	7.58	9.74

## **4.8 Conducted Out of Band Emission Measurement**

### **4.8.1 Limits Of Conducted Out Of Band Emission Measurement**

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

### **4.8.2 Test Instruments**

Refer to section 4.1.2 to get information of above instrument.

### **4.8.3 Test Procedure**

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### **4.8.4 Deviation from Test Standard**

No deviation.

### **4.8.5 EUT Operating Condition**



The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### **4.8.6 Test Results**



The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK



Hopping disabled Low Channel

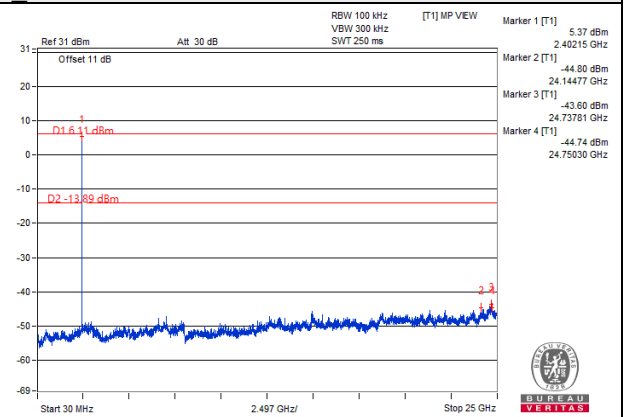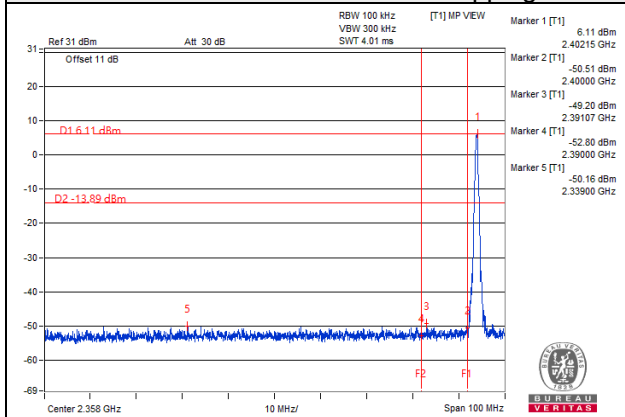



Hopping disabled High Channel

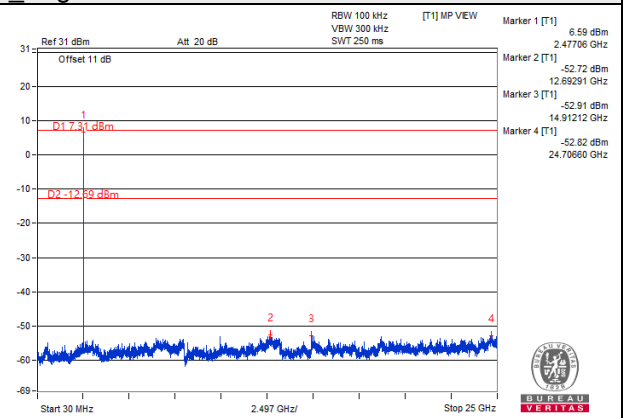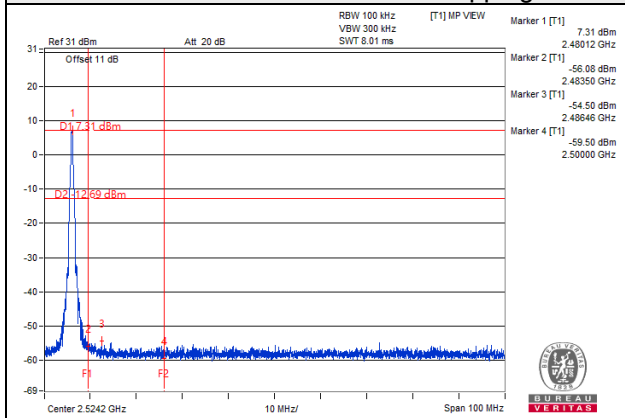

Hopping enabled Low Channel

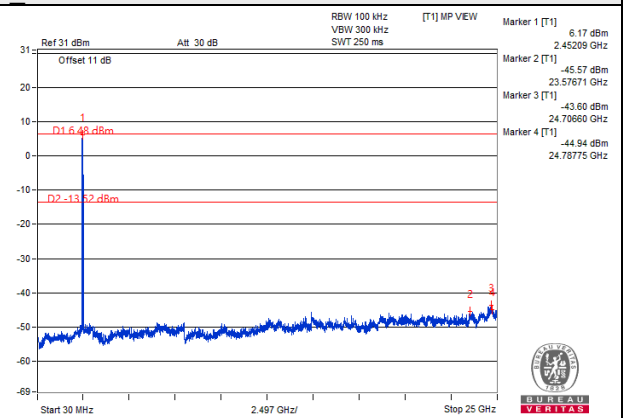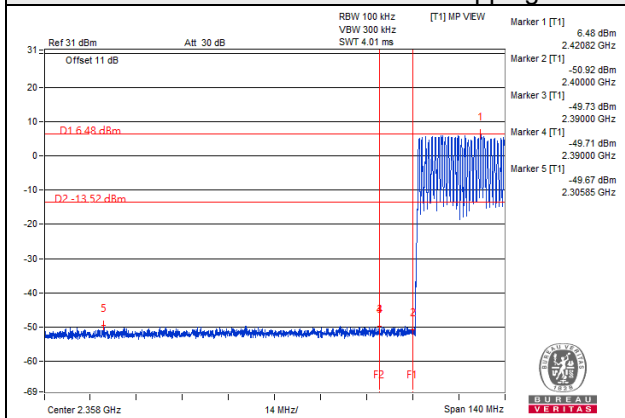


Hopping enabled High Channel

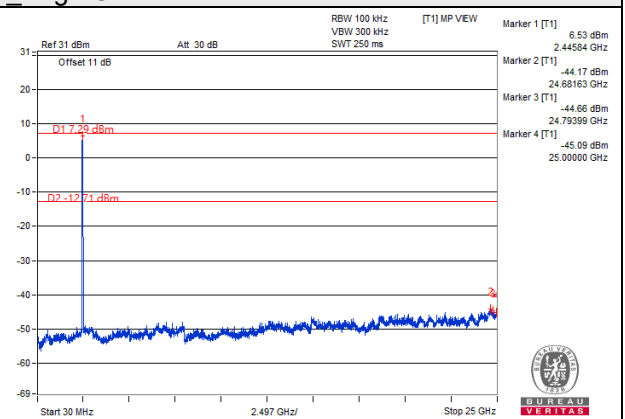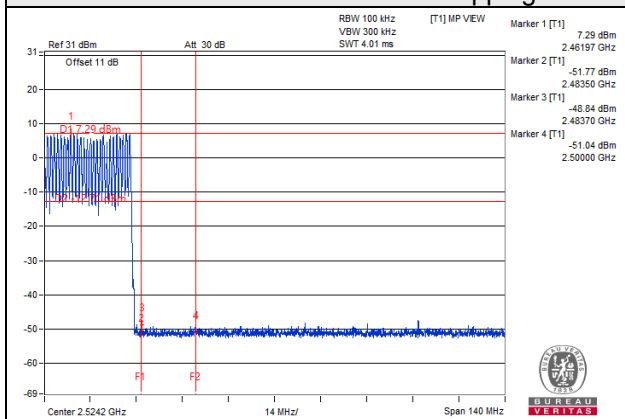




# 8DPSK


## Hopping disabled Low Channel

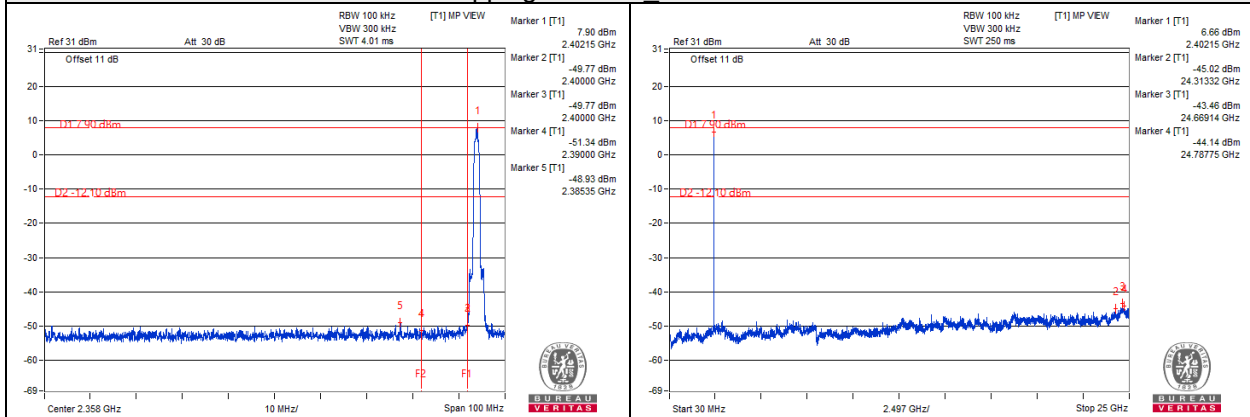


## Hopping disabled High Channel

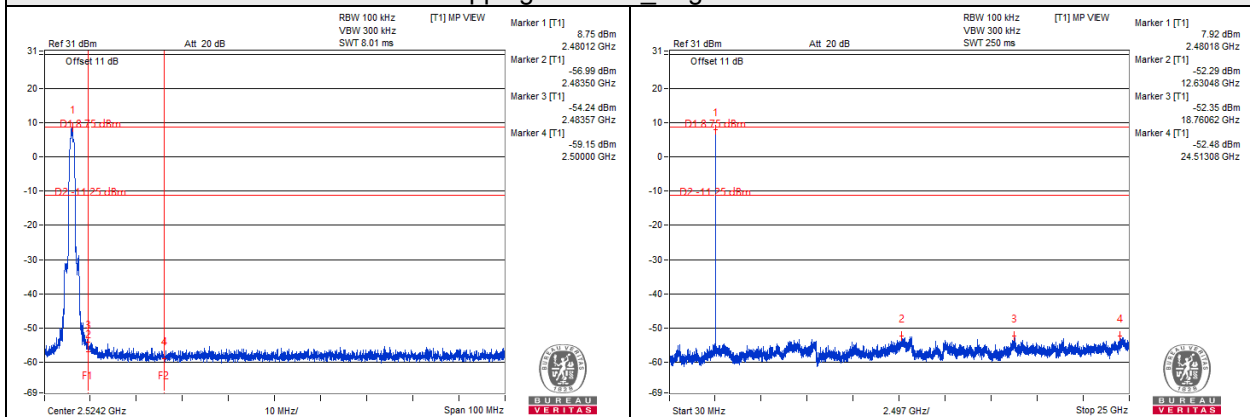


## Hopping enabled Low Channel

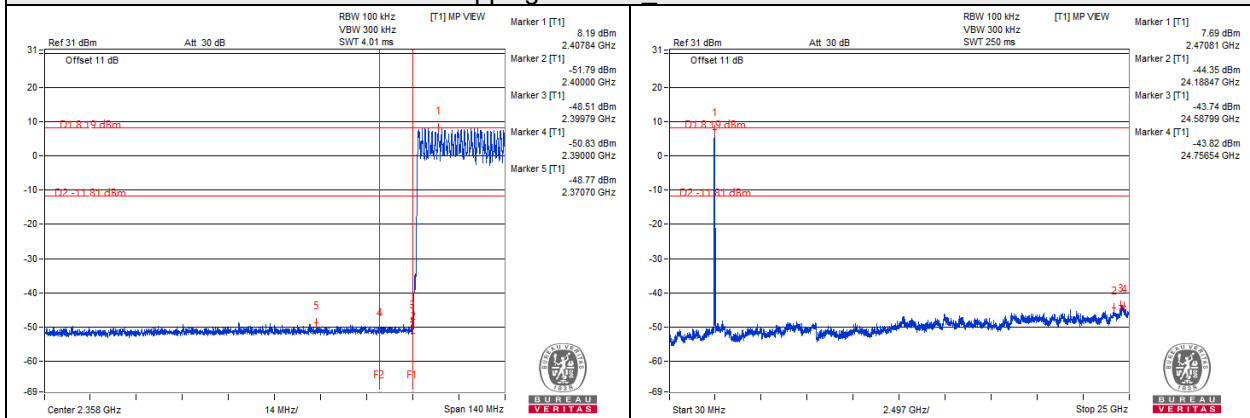

## Hopping enabled High Channel

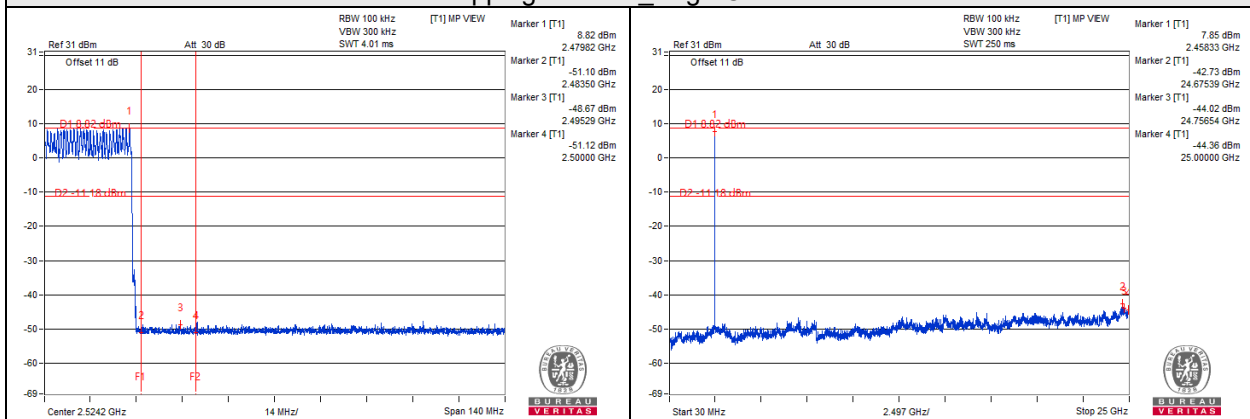

## Annex A- Band Edge Measurement

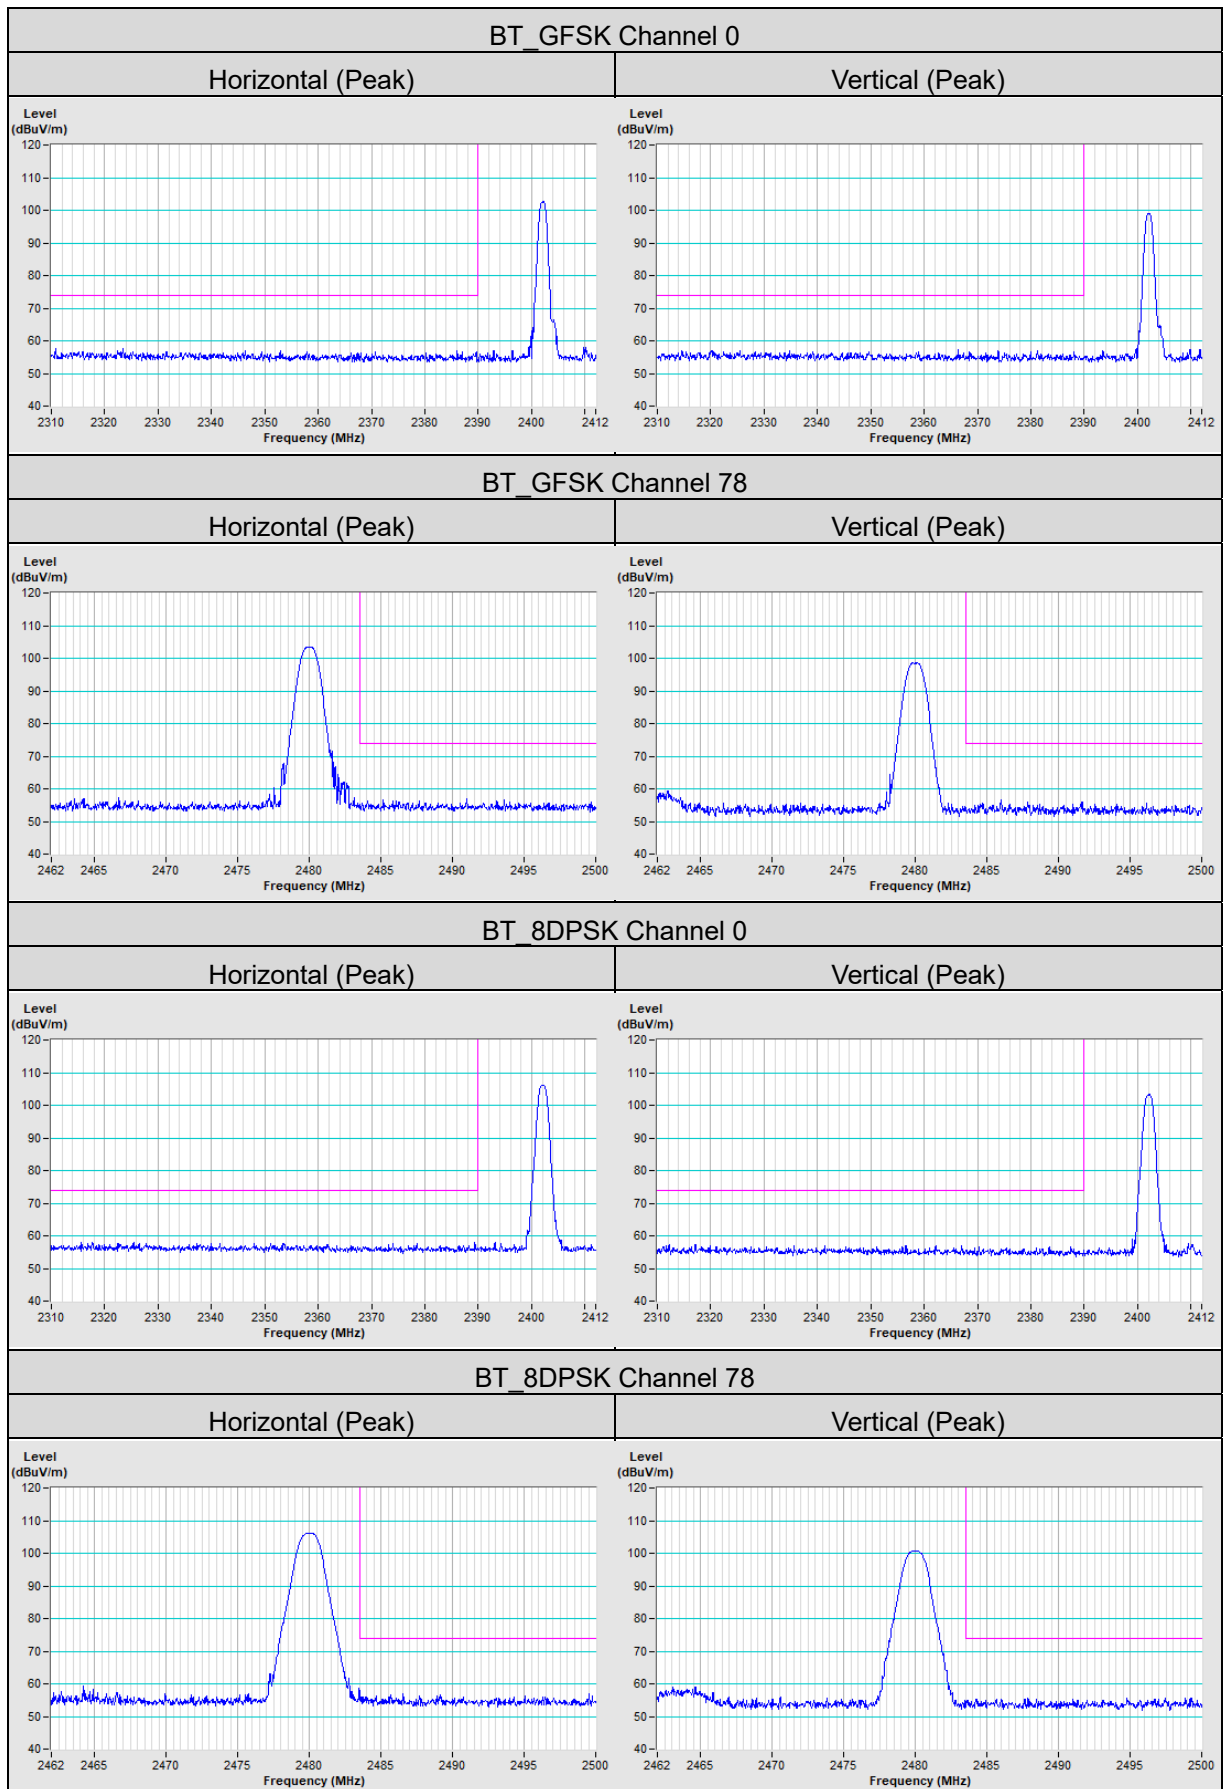

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---