


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Vertical

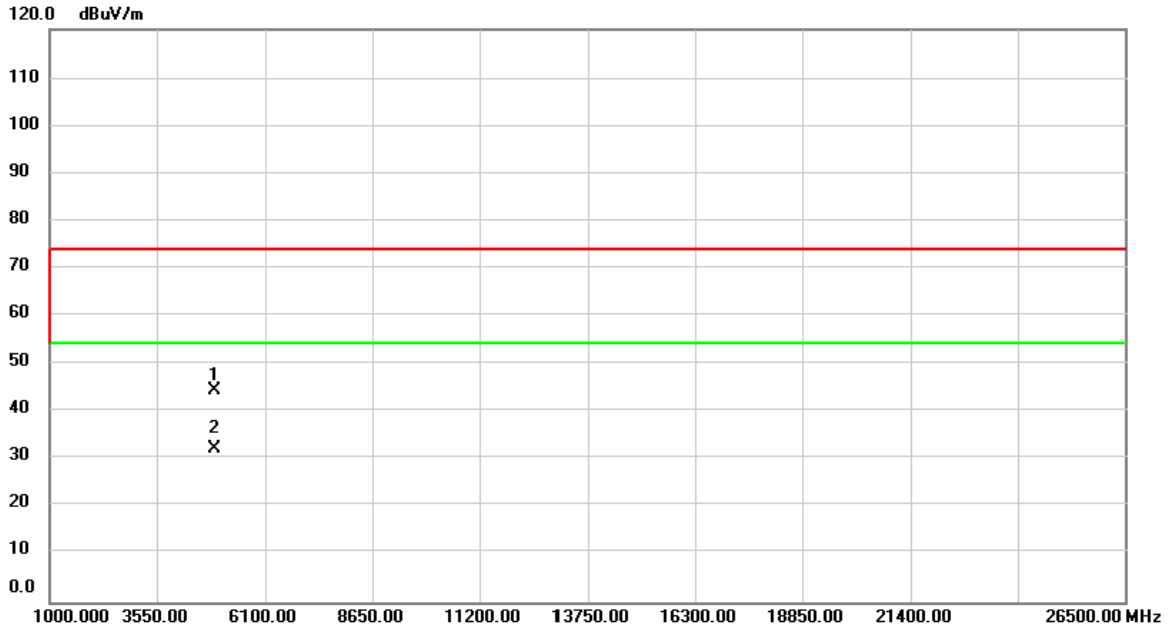

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	54.74	-10.32	44.42	74.00	-29.58	peak	
2	*	4924.000	42.65	-10.32	32.33	54.00	-21.67	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

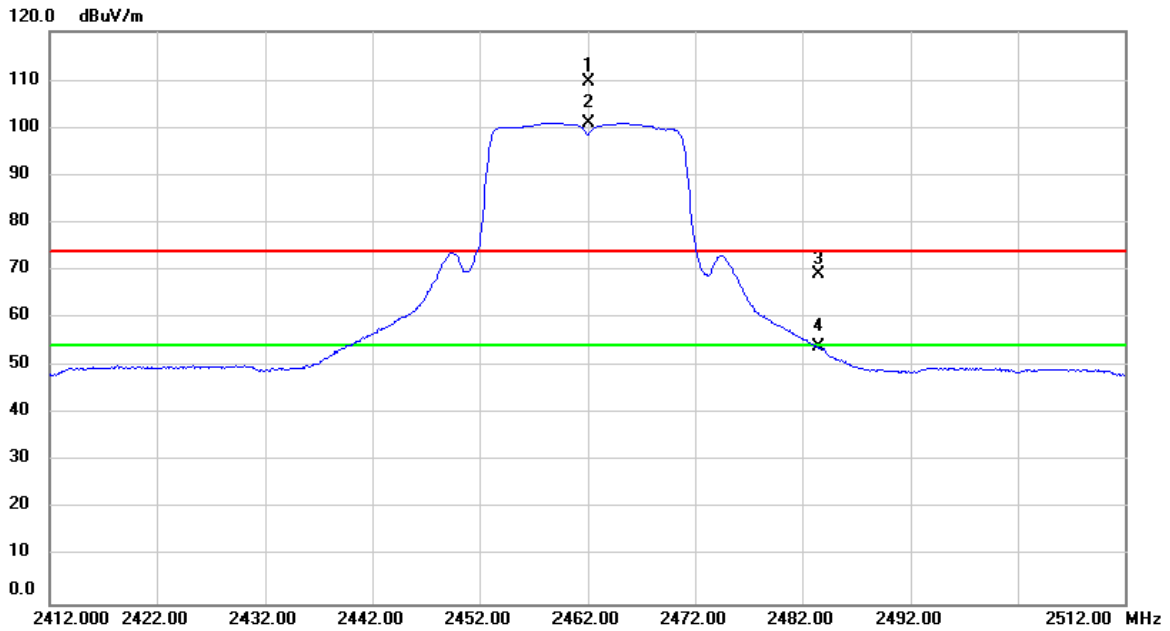

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	77.68	31.98	109.66	74.00	35.66	peak	No Limit
2	*	2462.000	69.05	31.98	101.03	54.00	47.03	AVG	No Limit
3		2483.500	36.99	32.06	69.05	74.00	-4.95	peak	
4		2483.500	21.81	32.06	53.87	54.00	-0.13	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

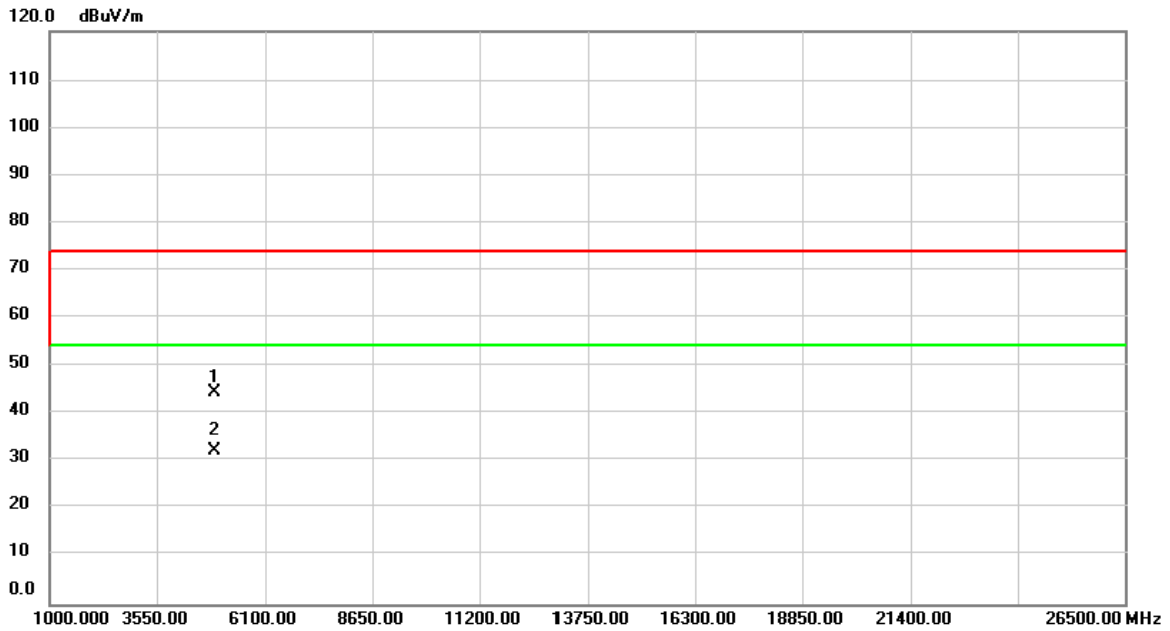

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	54.81	-10.32	44.49	74.00	-29.51	peak	
2	*	4924.000	42.68	-10.32	32.36	54.00	-21.64	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Vertical

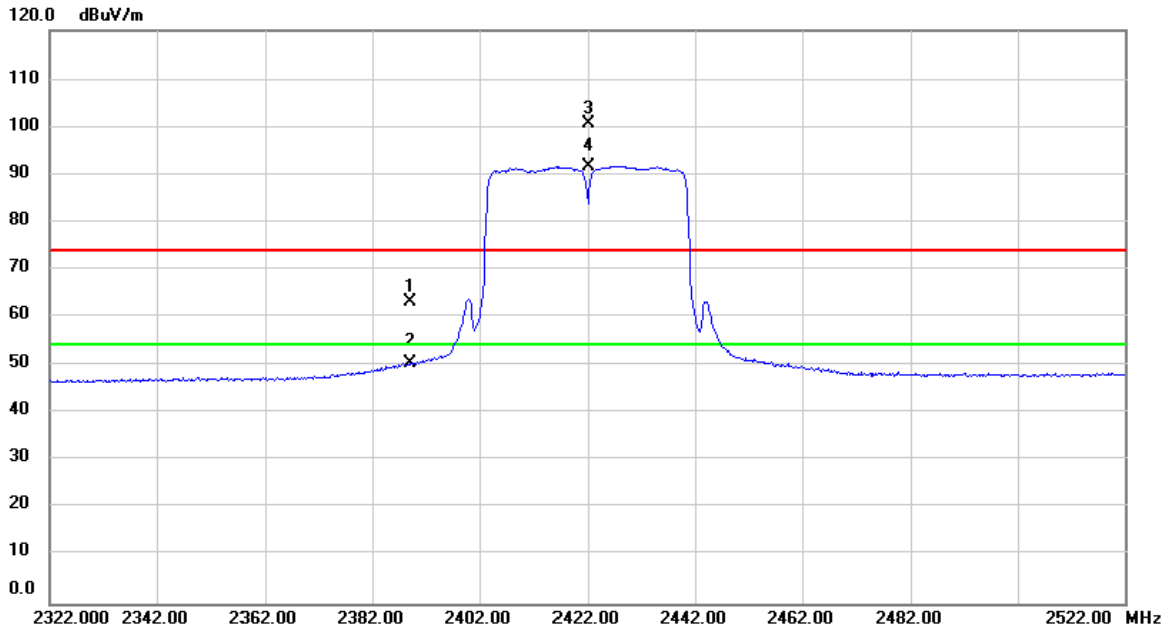

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.200	31.46	31.70	63.16	74.00	-10.84	peak	
2		2389.200	18.91	31.70	50.61	54.00	-3.39	AVG	
3	X	2422.000	68.82	31.83	100.65	74.00	26.65	peak	No Limit
4	*	2422.000	59.86	31.83	91.69	54.00	37.69	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Vertical

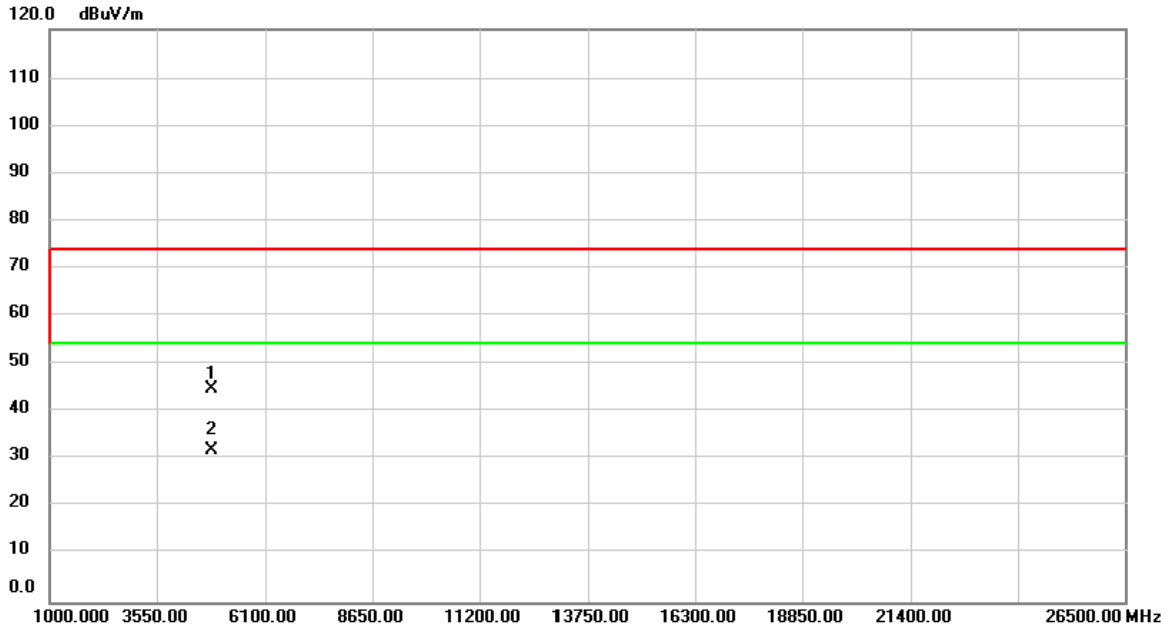

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4844.000	55.45	-10.45	45.00	74.00	-29.00	peak	
2	*	4844.000	42.41	-10.45	31.96	54.00	-22.04	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

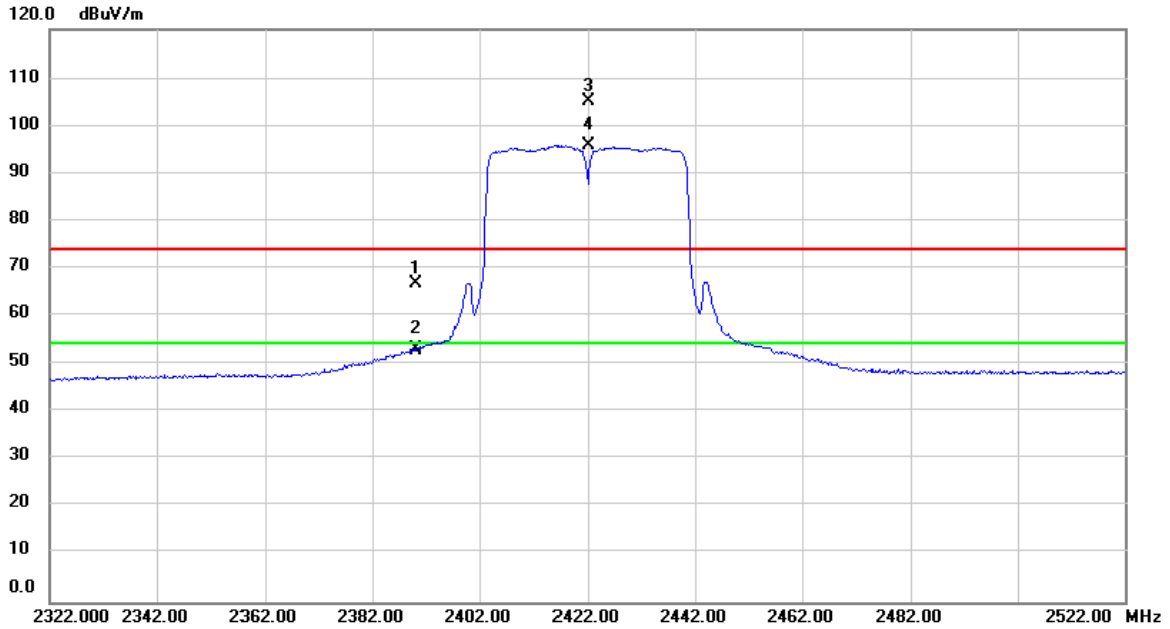

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	35.17	31.70	66.87	74.00	-7.13	peak	
2		2390.000	21.35	31.70	53.05	54.00	-0.95	AVG	
3	X	2422.000	73.37	31.83	105.20	74.00	31.20	peak	No Limit
4	*	2422.000	64.00	31.83	95.83	54.00	41.83	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

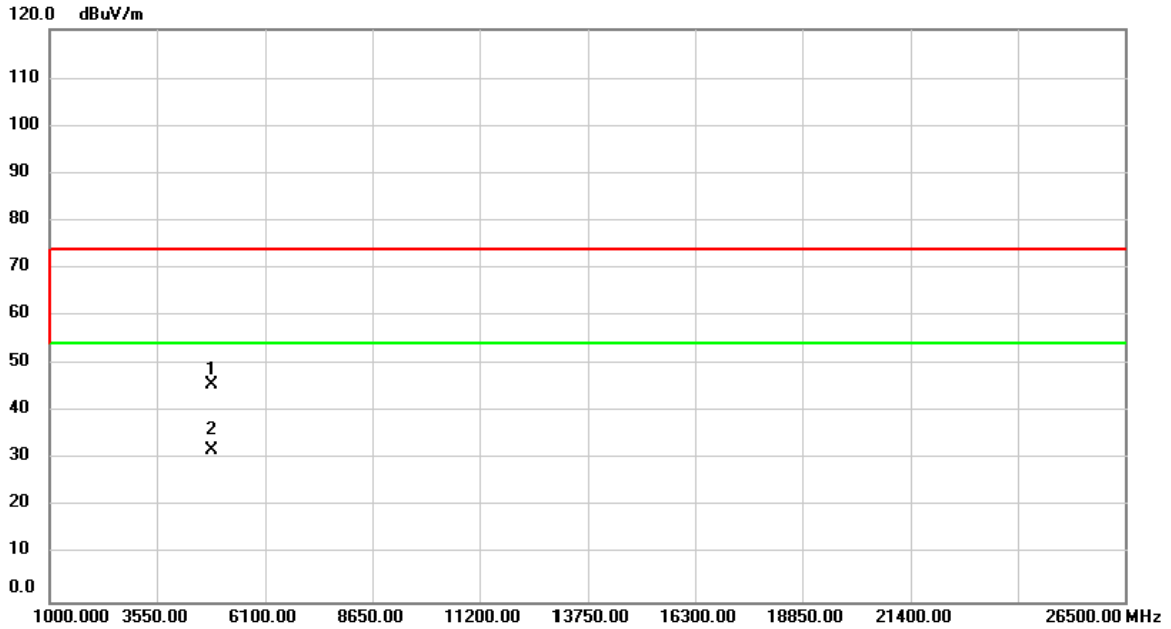

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4844.000	56.27	-10.45	45.82	74.00	-28.18	peak	
2	*	4844.000	42.35	-10.45	31.90	54.00	-22.10	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Vertical

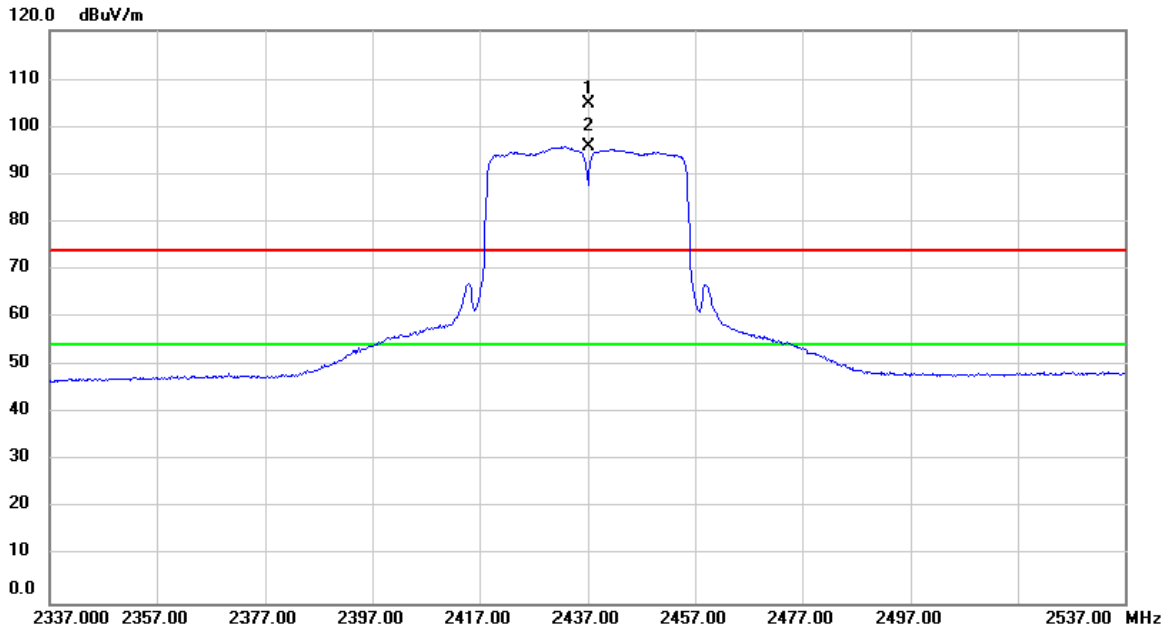

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	72.92	31.88	104.80	74.00	30.80	peak	No Limit
2	*	2437.000	63.89	31.88	95.77	54.00	41.77	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Vertical

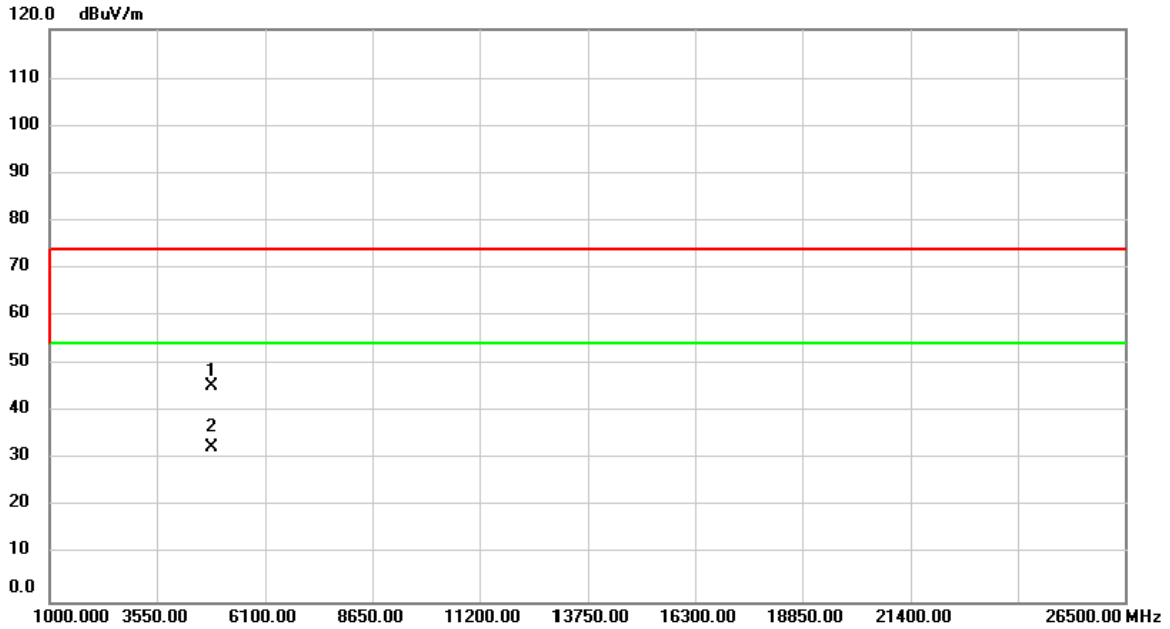

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	55.98	-10.40	45.58	74.00	-28.42	peak	
2	*	4874.000	42.82	-10.40	32.42	54.00	-21.58	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

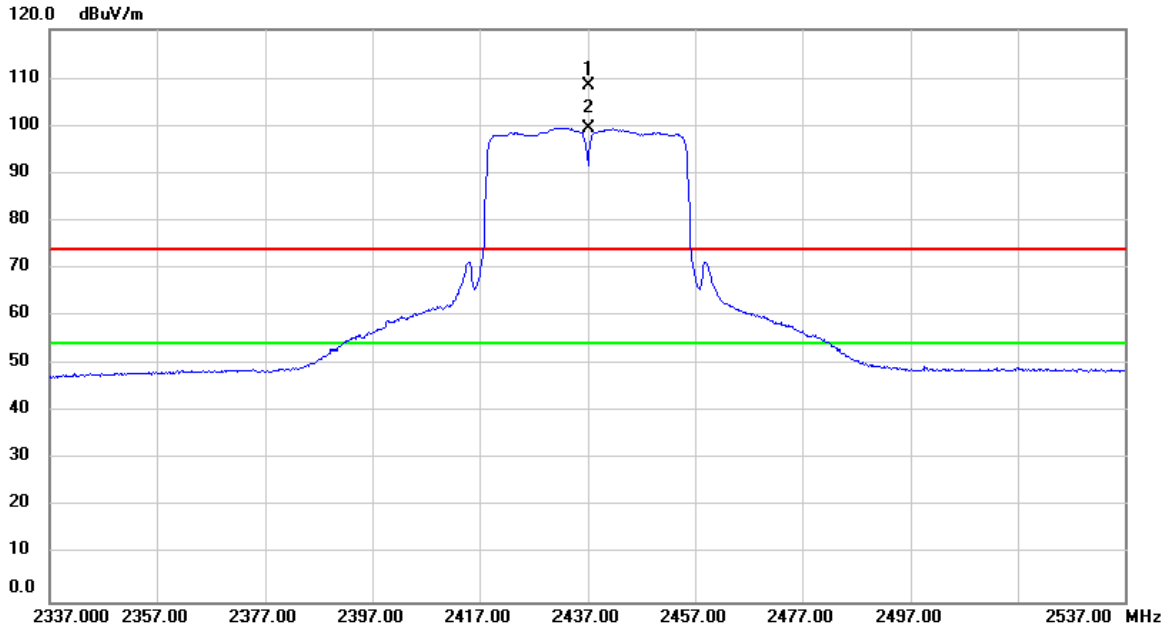

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	76.70	31.88	108.58	74.00	34.58	peak	No Limit
2	*	2437.000	67.70	31.88	99.58	54.00	45.58	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

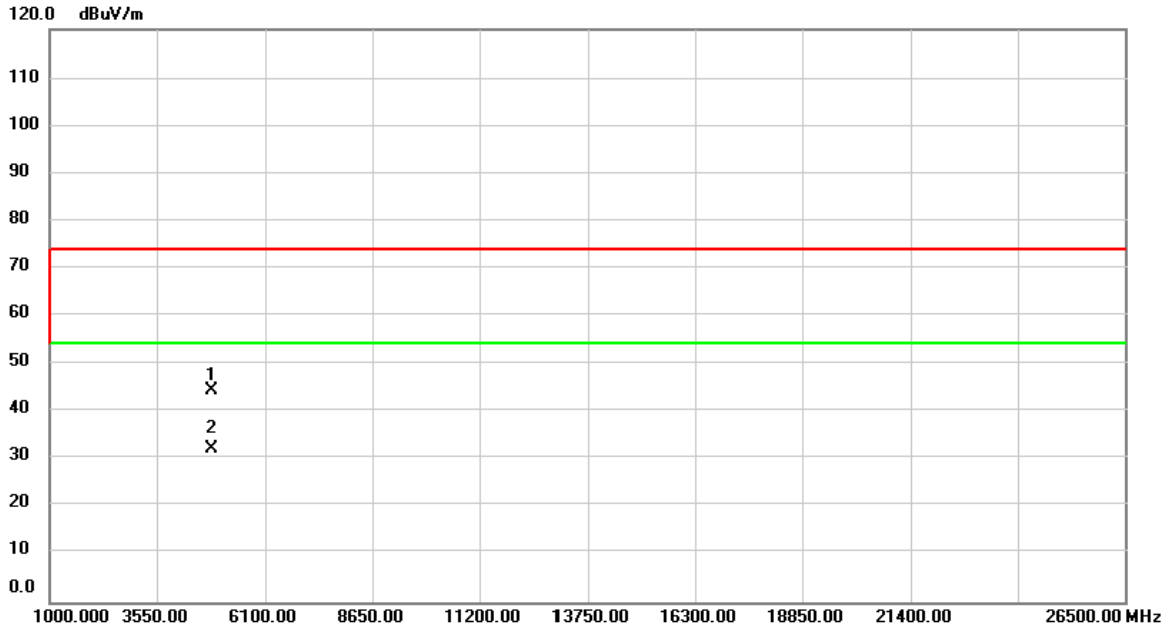

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	55.06	-10.40	44.66	74.00	-29.34	peak	
2	*	4874.000	42.53	-10.40	32.13	54.00	-21.87	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Vertical

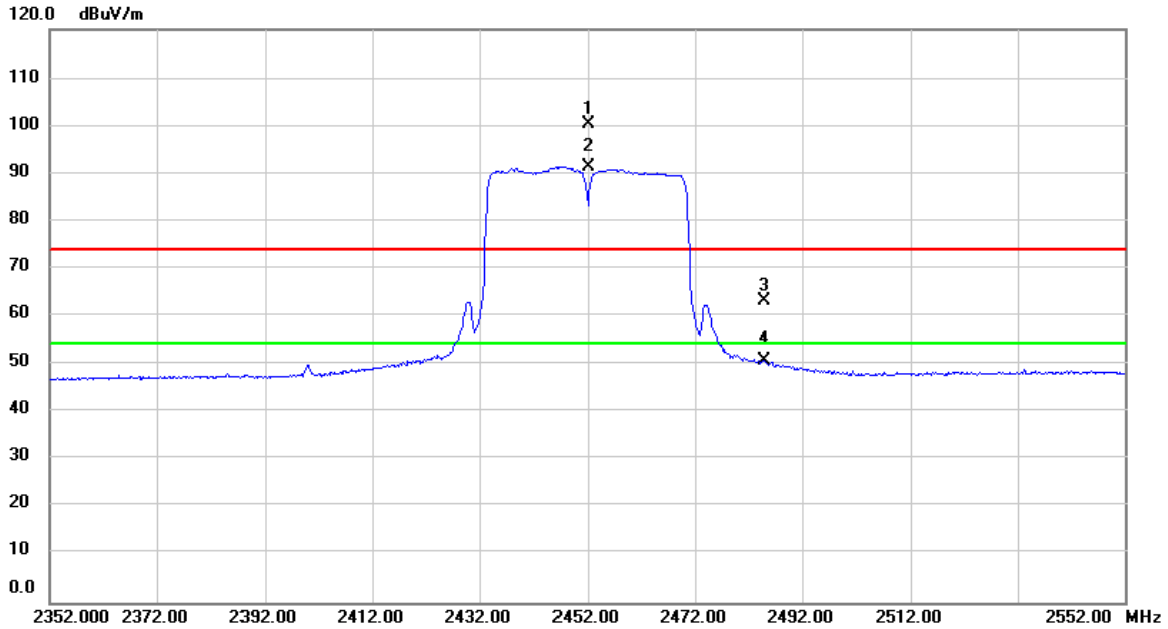

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2452.000	68.33	31.95	100.28	74.00	26.28	peak	No Limit
2	*	2452.000	59.39	31.95	91.34	54.00	37.34	AVG	No Limit
3		2485.000	31.06	32.07	63.13	74.00	-10.87	peak	
4		2485.000	18.79	32.07	50.86	54.00	-3.14	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Vertical

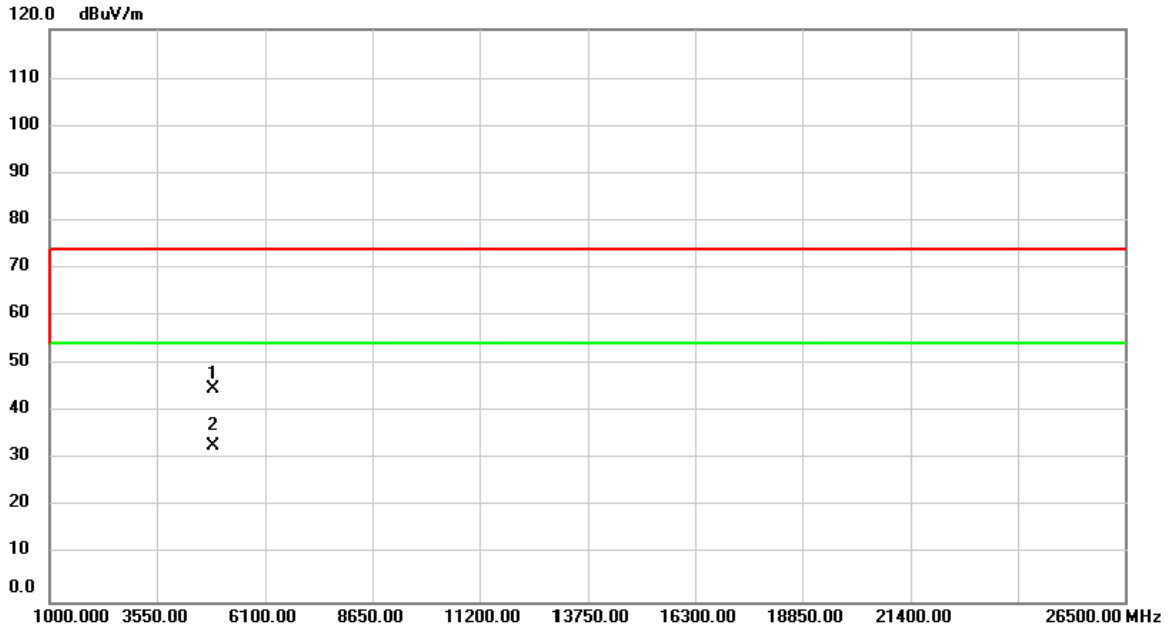

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4904.000	55.06	-10.35	44.71	74.00	-29.29	peak	
2	*	4904.000	43.09	-10.35	32.74	54.00	-21.26	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

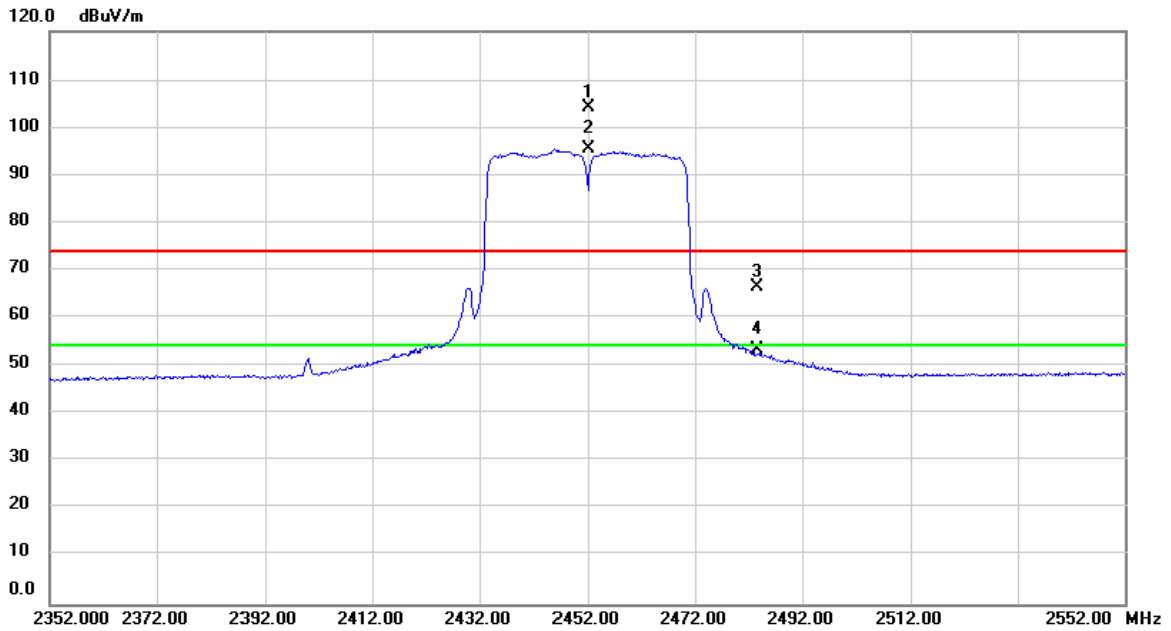

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2452.000	72.24	31.95	104.19	74.00	30.19	peak	No Limit
2	*	2452.000	63.49	31.95	95.44	54.00	41.44	AVG	No Limit
3		2483.599	34.51	32.06	66.57	74.00	-7.43	peak	
4		2483.599	21.19	32.06	53.25	54.00	-0.75	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_Stand-alone (Battery_DLT-M8110L+Adapter)


Horizontal

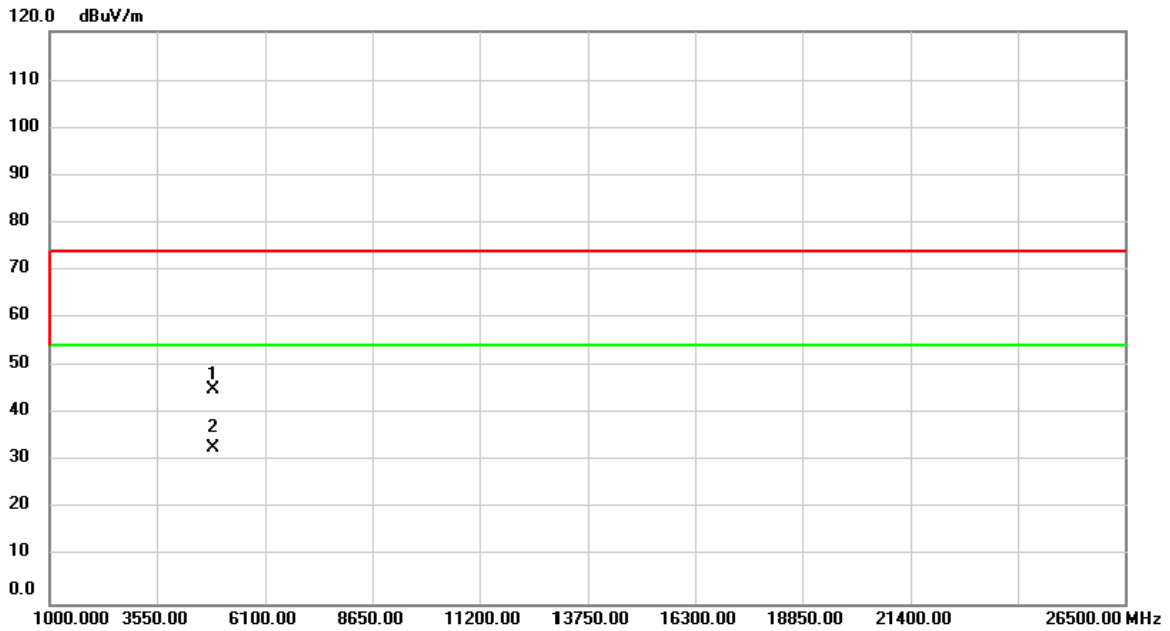

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4904.000	55.40	-10.35	45.05	74.00	-28.95	peak	
2	*	4904.000	43.07	-10.35	32.72	54.00	-21.28	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

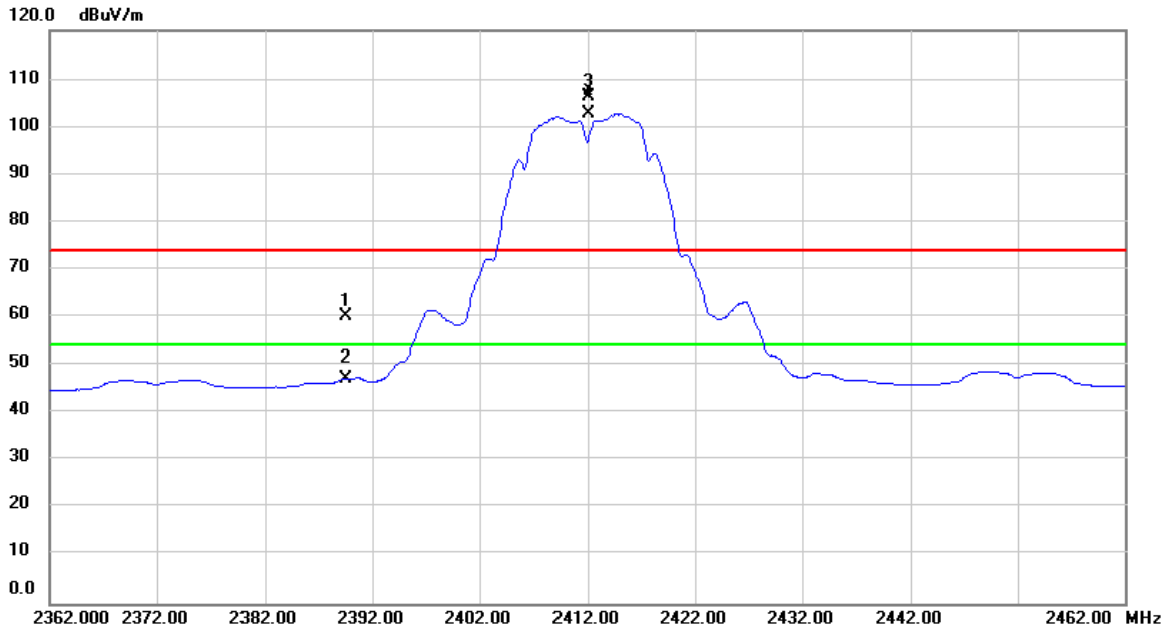

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.500	28.55	31.70	60.25	74.00	-13.75	peak	
2		2389.500	15.51	31.70	47.21	54.00	-6.79	AVG	
3	X	2412.000	74.65	31.79	106.44	74.00	32.44	peak	No Limit
4	*	2412.000	71.02	31.79	102.81	54.00	48.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

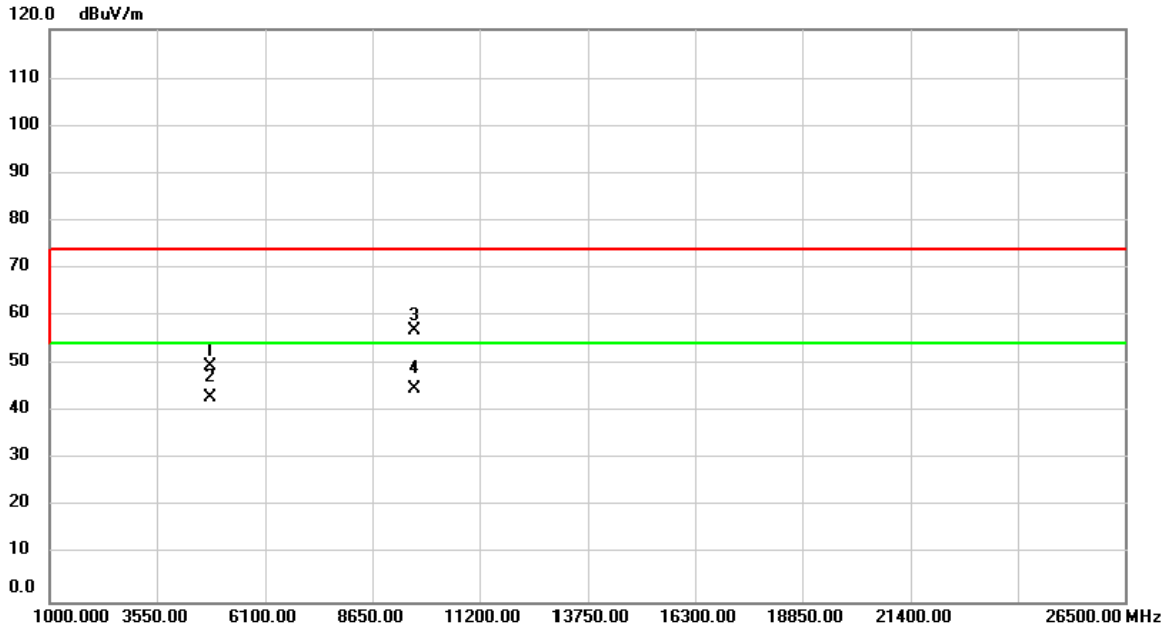

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	60.14	-10.48	49.66	74.00	-24.34	peak	
2		4824.000	53.44	-10.48	42.96	54.00	-11.04	AVG	
3		9648.000	54.71	2.16	56.87	74.00	-17.13	peak	
4	*	9648.000	42.61	2.16	44.77	54.00	-9.23	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

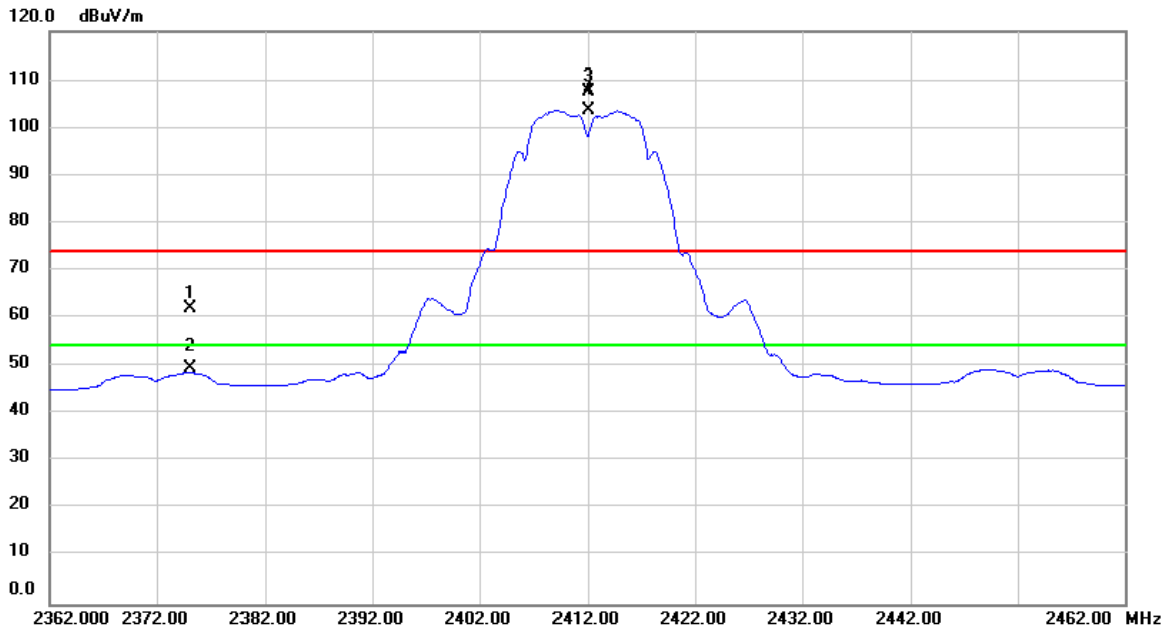

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2375.100	30.20	31.65	61.85	74.00	-12.15	peak	
2		2375.100	18.14	31.65	49.79	54.00	-4.21	AVG	
3	X	2412.000	75.69	31.79	107.48	74.00	33.48	peak	No Limit
4	*	2412.000	72.01	31.79	103.80	54.00	49.80	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

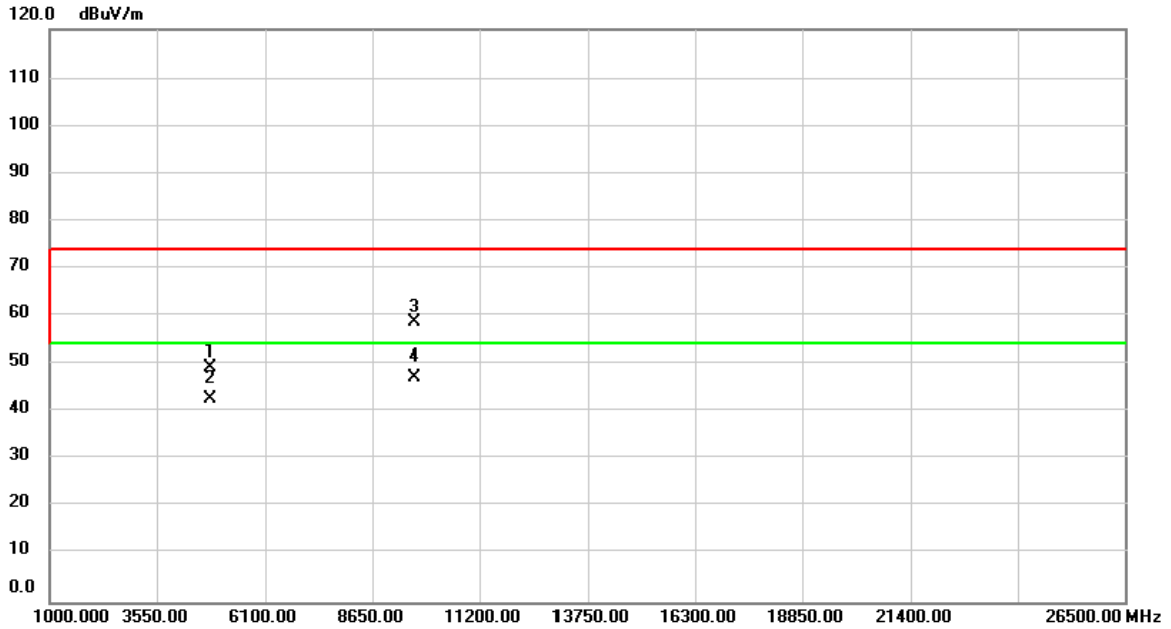

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	59.68	-10.48	49.20	74.00	-24.80	peak	
2		4824.000	53.35	-10.48	42.87	54.00	-11.13	AVG	
3		9648.000	56.36	2.16	58.52	74.00	-15.48	peak	
4	*	9648.000	45.20	2.16	47.36	54.00	-6.64	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

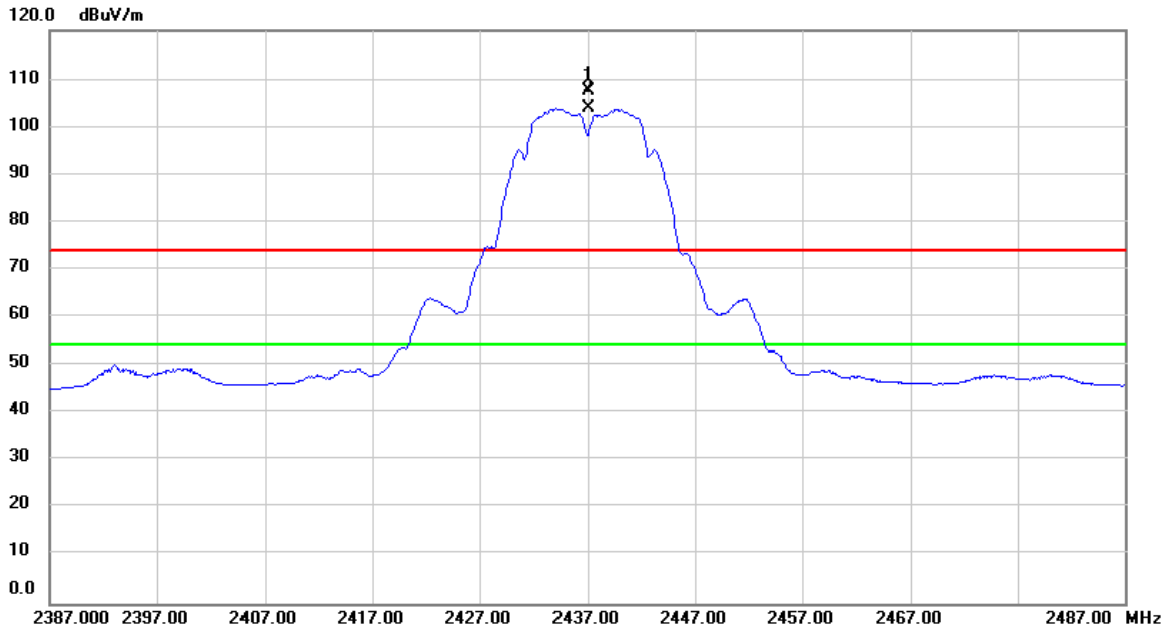

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	75.62	31.88	107.50	74.00	33.50	peak	No Limit
2	*	2437.000	71.99	31.88	103.87	54.00	49.87	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

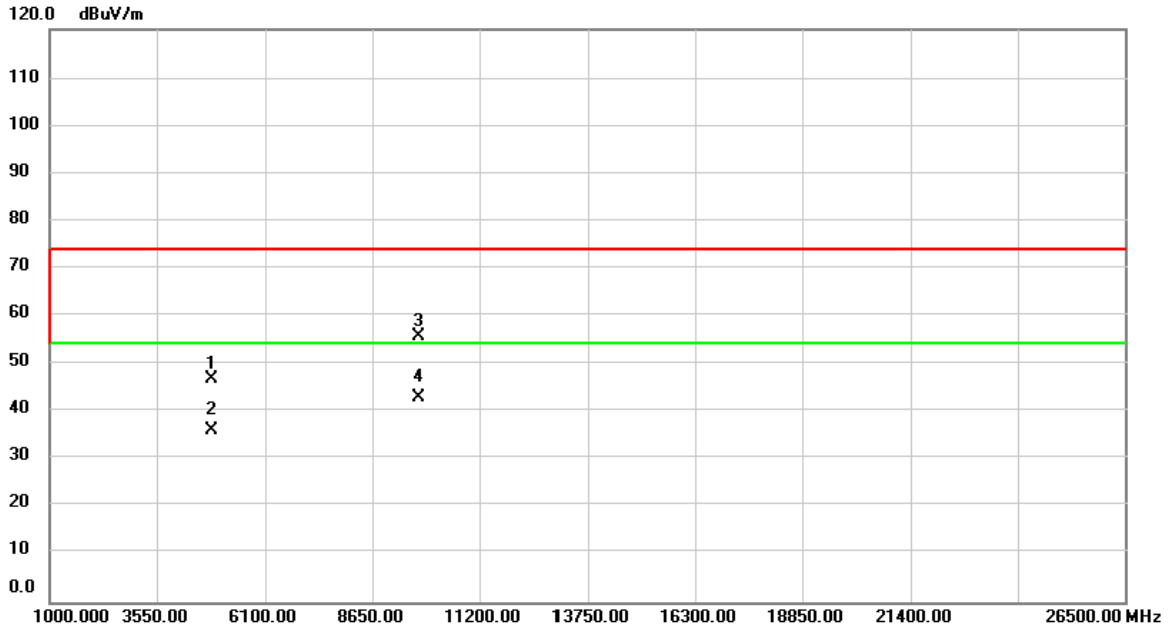

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	57.45	-10.40	47.05	74.00	-26.95	peak	
2		4874.000	46.64	-10.40	36.24	54.00	-17.76	AVG	
3		9748.000	53.26	2.47	55.73	74.00	-18.27	peak	
4	*	9748.000	40.70	2.47	43.17	54.00	-10.83	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

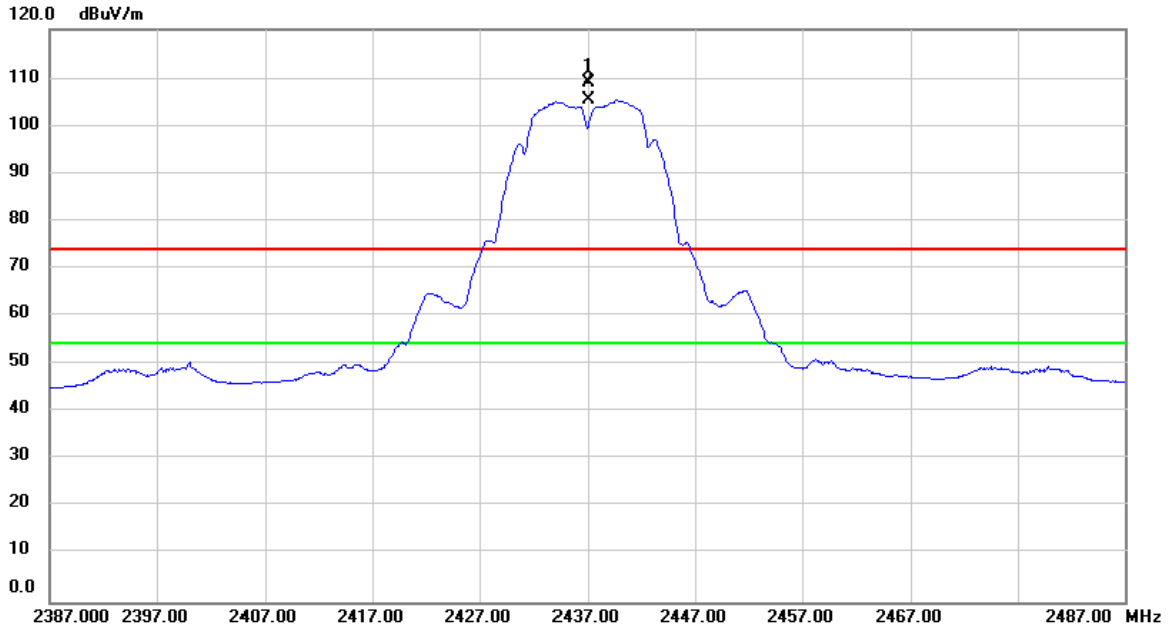

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	77.15	31.88	109.03	74.00	35.03	peak	No Limit
2	*	2437.000	73.50	31.88	105.38	54.00	51.38	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX B MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Horizontal

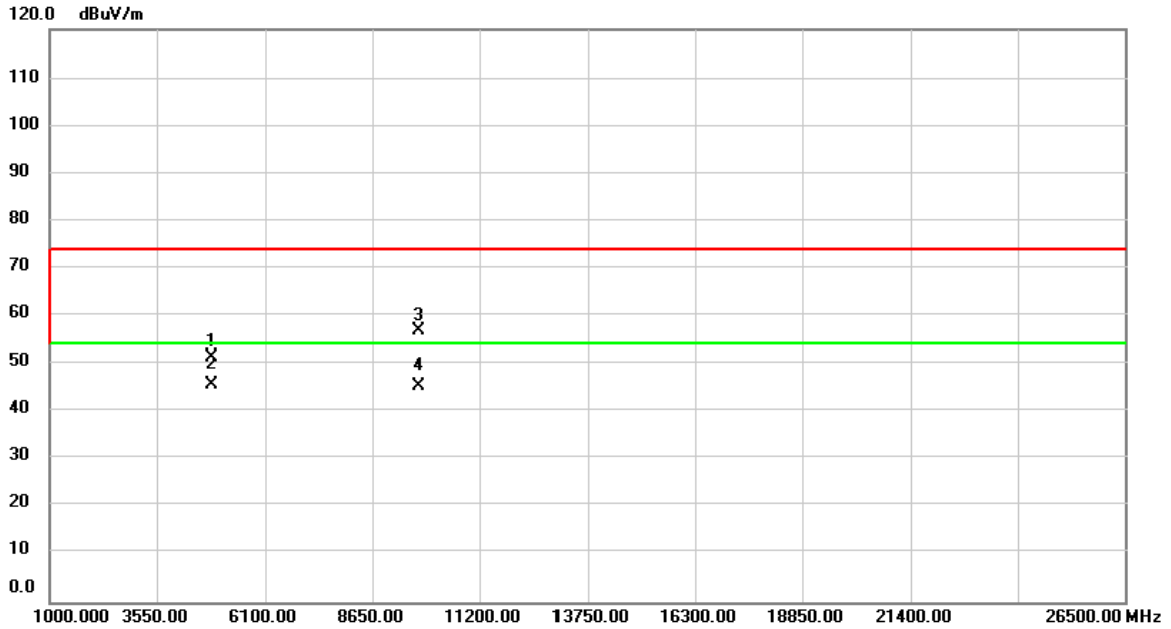

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	61.86	-10.40	51.46	74.00	-22.54	peak	
2	*	4874.000	56.29	-10.40	45.89	54.00	-8.11	AVG	
3		9748.000	54.45	2.47	56.92	74.00	-17.08	peak	
4		9748.000	43.04	2.47	45.51	54.00	-8.49	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

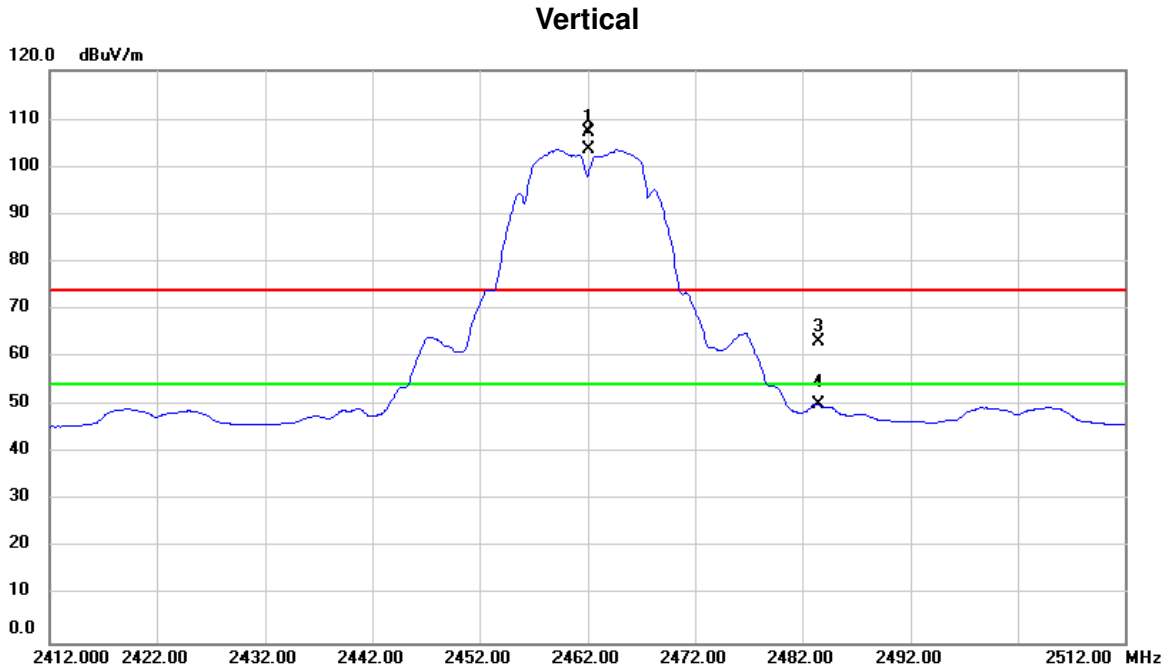

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	75.22	31.98	107.20	74.00	33.20	peak	No Limit
2	*	2462.000	71.61	31.98	103.59	54.00	49.59	AVG	No Limit
3		2483.500	31.22	32.06	63.28	74.00	-10.72	peak	
4		2483.500	18.27	32.06	50.33	54.00	-3.67	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

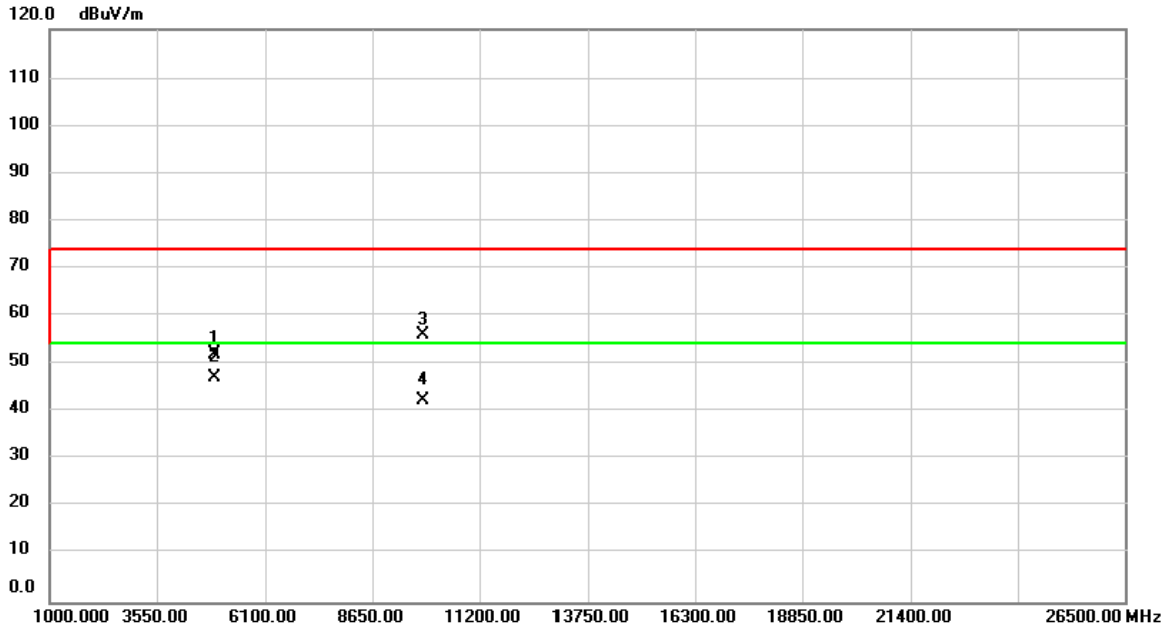

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4924.000	62.33	-10.32	52.01	74.00	-21.99	peak	
2	*	4924.000	57.51	-10.32	47.19	54.00	-6.81	AVG	
3		9848.000	53.27	2.77	56.04	74.00	-17.96	peak	
4		9848.000	39.61	2.77	42.38	54.00	-11.62	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

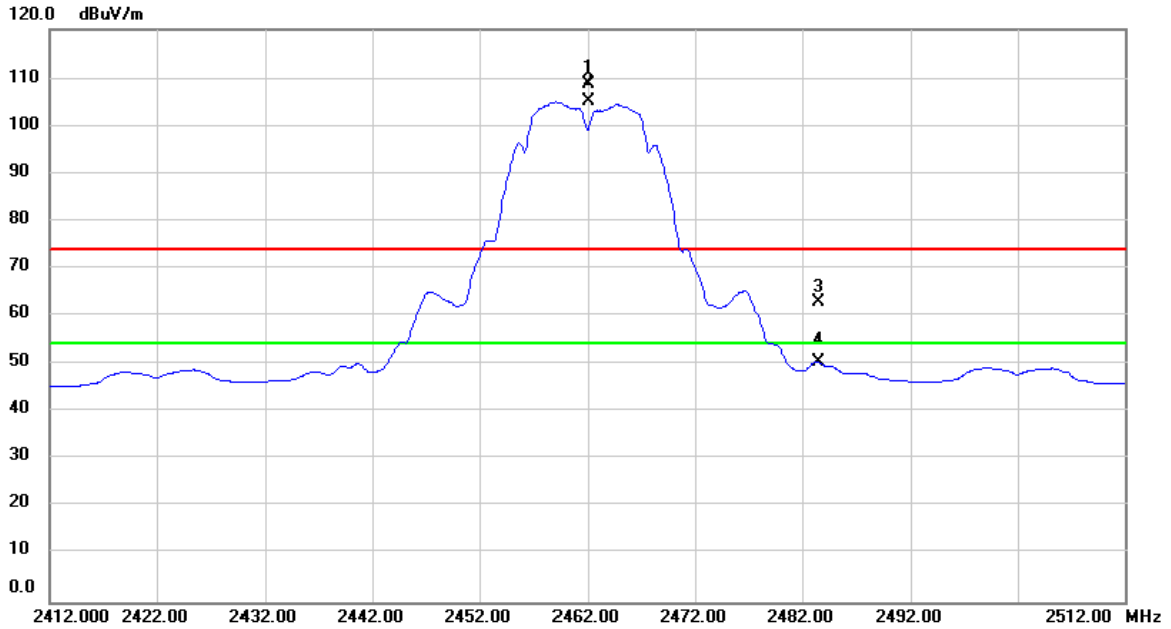

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	76.90	31.98	108.88	74.00	34.88	peak	No Limit
2	*	2462.000	73.14	31.98	105.12	54.00	51.12	AVG	No Limit
3		2483.500	30.66	32.06	62.72	74.00	-11.28	peak	
4		2483.500	18.42	32.06	50.48	54.00	-3.52	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

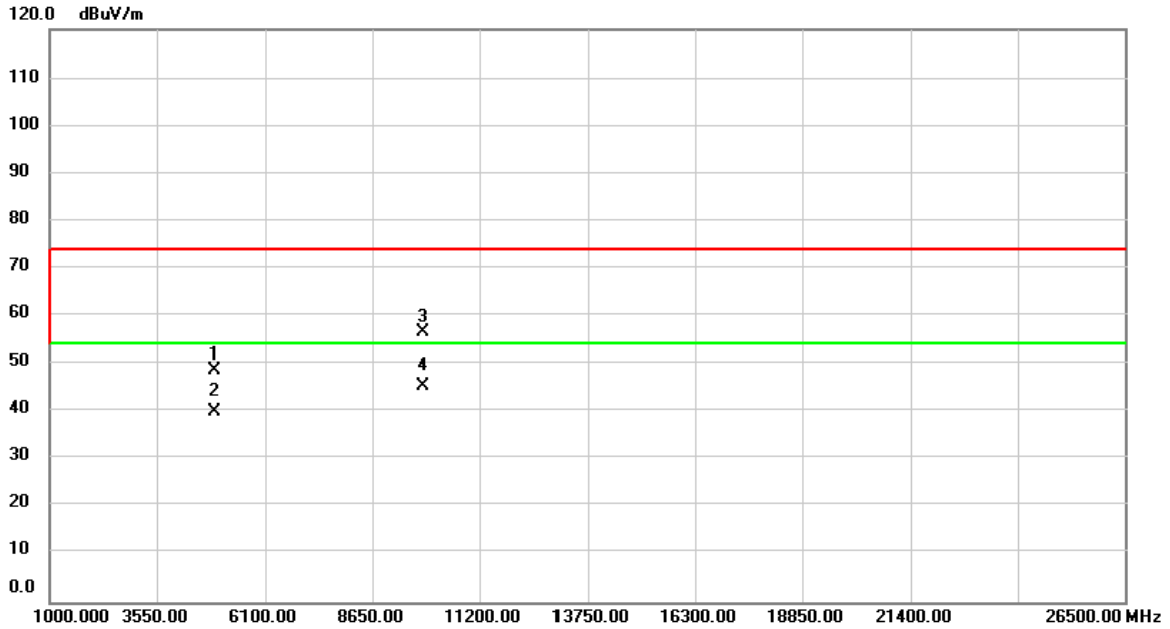

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	59.17	-10.32	48.85	74.00	-25.15	peak	
2		4924.000	50.40	-10.32	40.08	54.00	-13.92	AVG	
3		9848.000	53.71	2.77	56.48	74.00	-17.52	peak	
4	*	9848.000	42.54	2.77	45.31	54.00	-8.69	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

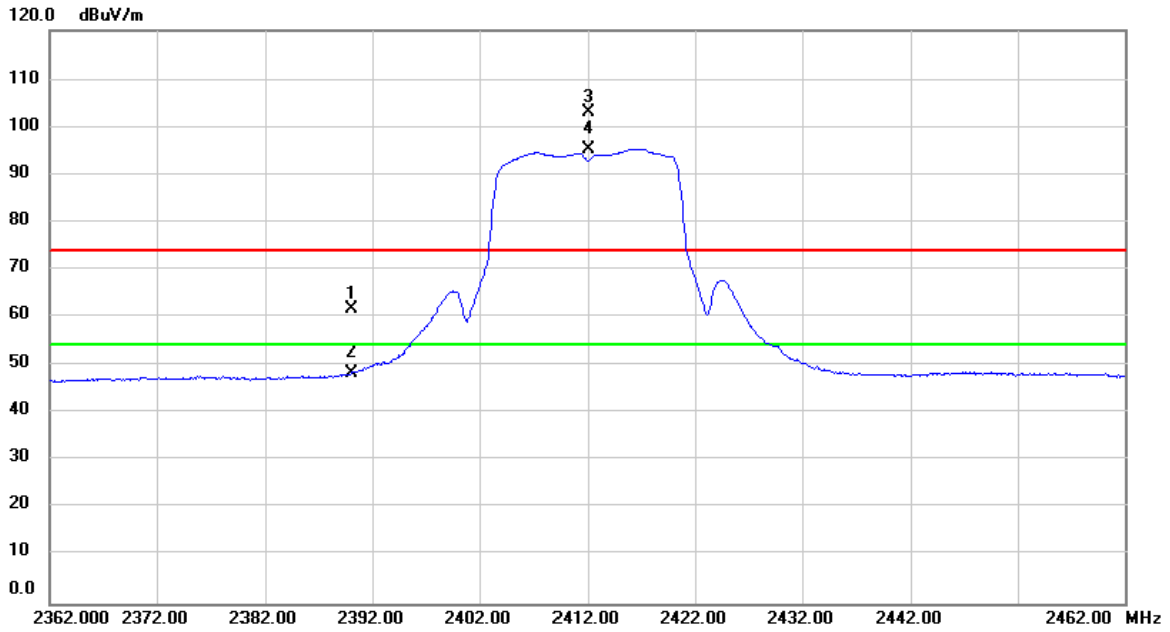

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	29.87	31.70	61.57	74.00	-12.43	peak	
2		2390.000	16.61	31.70	48.31	54.00	-5.69	AVG	
3	X	2412.000	71.12	31.79	102.91	74.00	28.91	peak	No Limit
4	*	2412.000	63.48	31.79	95.27	54.00	41.27	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

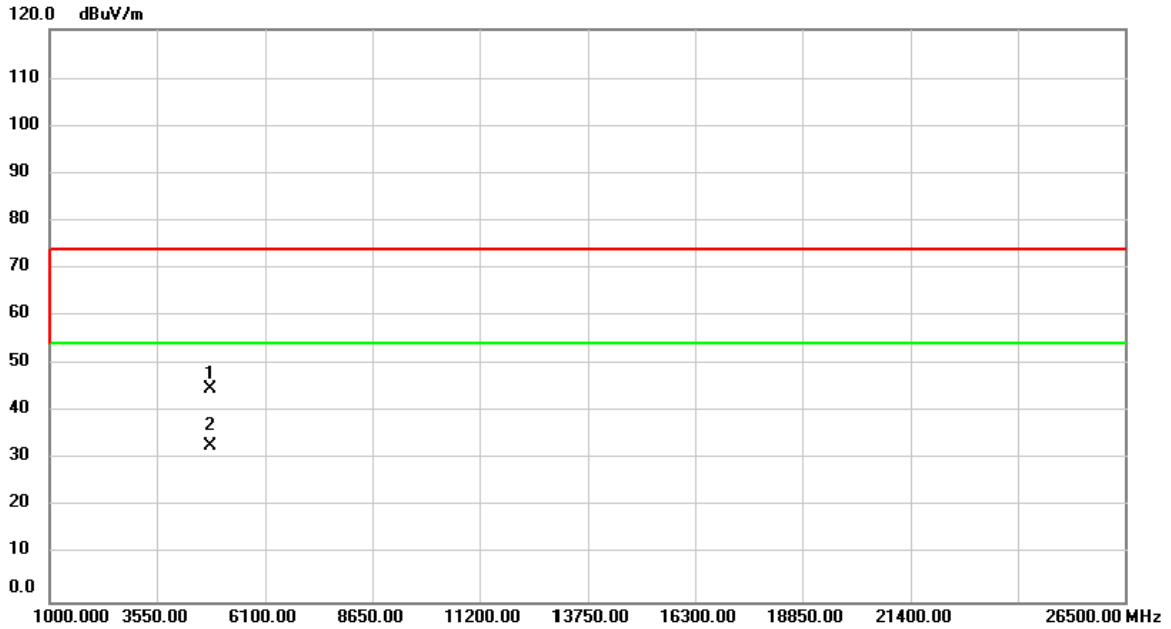

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	55.33	-10.48	44.85	74.00	-29.15	peak	
2	*	4824.000	43.45	-10.48	32.97	54.00	-21.03	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

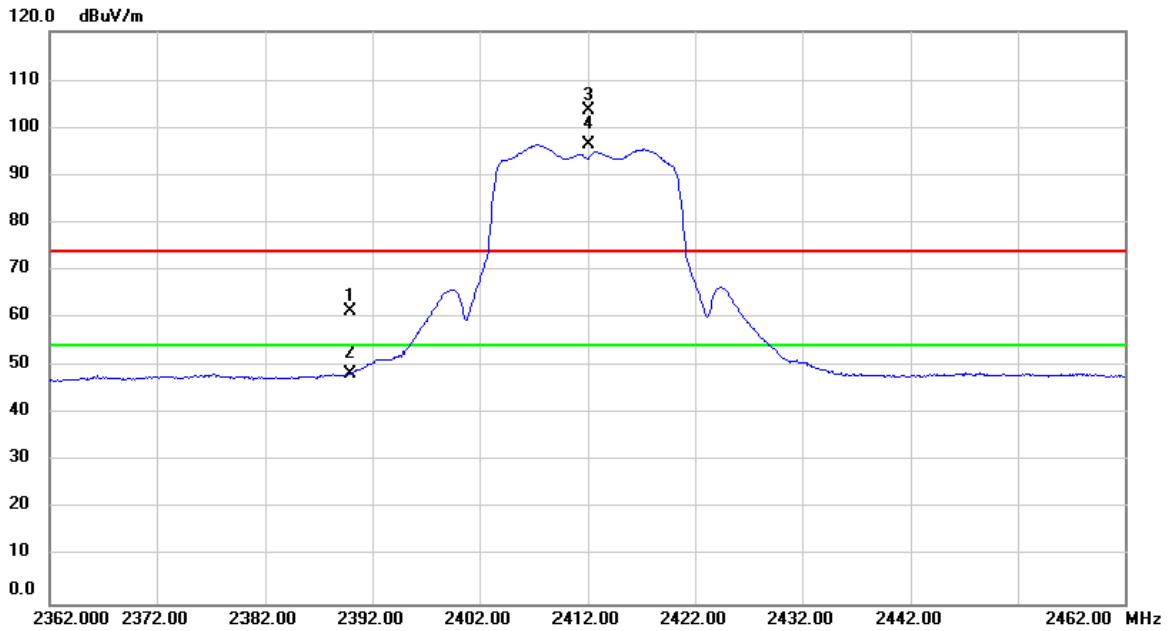

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.900	29.52	31.70	61.22	74.00	-12.78	peak	
2		2389.900	16.84	31.70	48.54	54.00	-5.46	AVG	
3	X	2412.000	71.87	31.79	103.66	74.00	29.66	peak	No Limit
4	*	2412.000	64.64	31.79	96.43	54.00	42.43	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

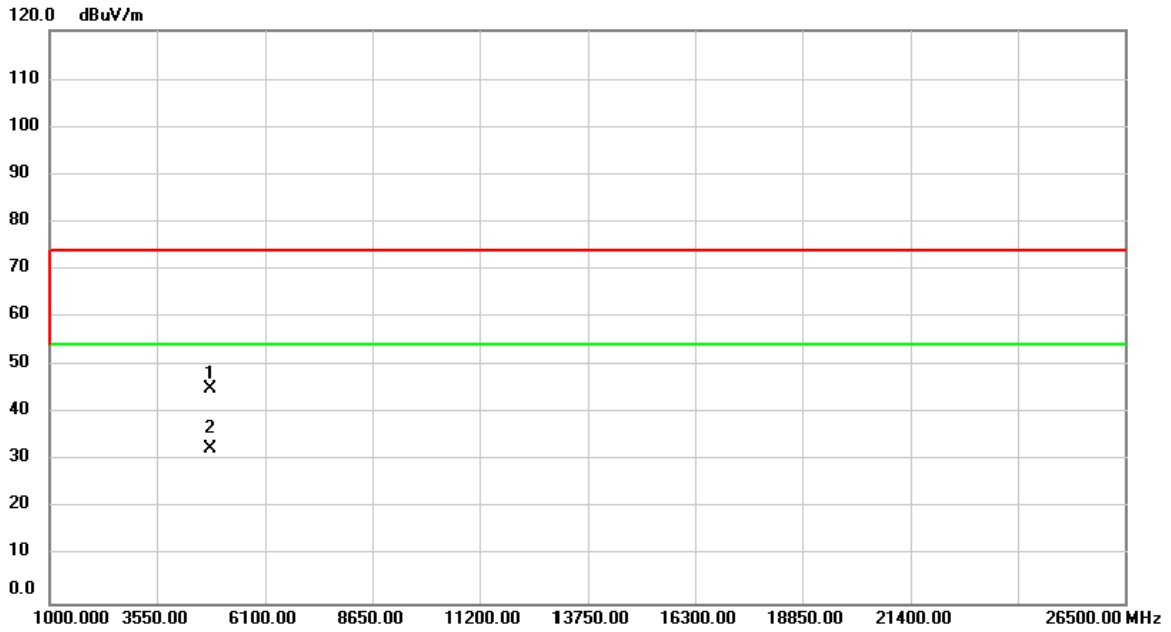

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	55.56	-10.48	45.08	74.00	-28.92	peak	
2	*	4824.000	43.09	-10.48	32.61	54.00	-21.39	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

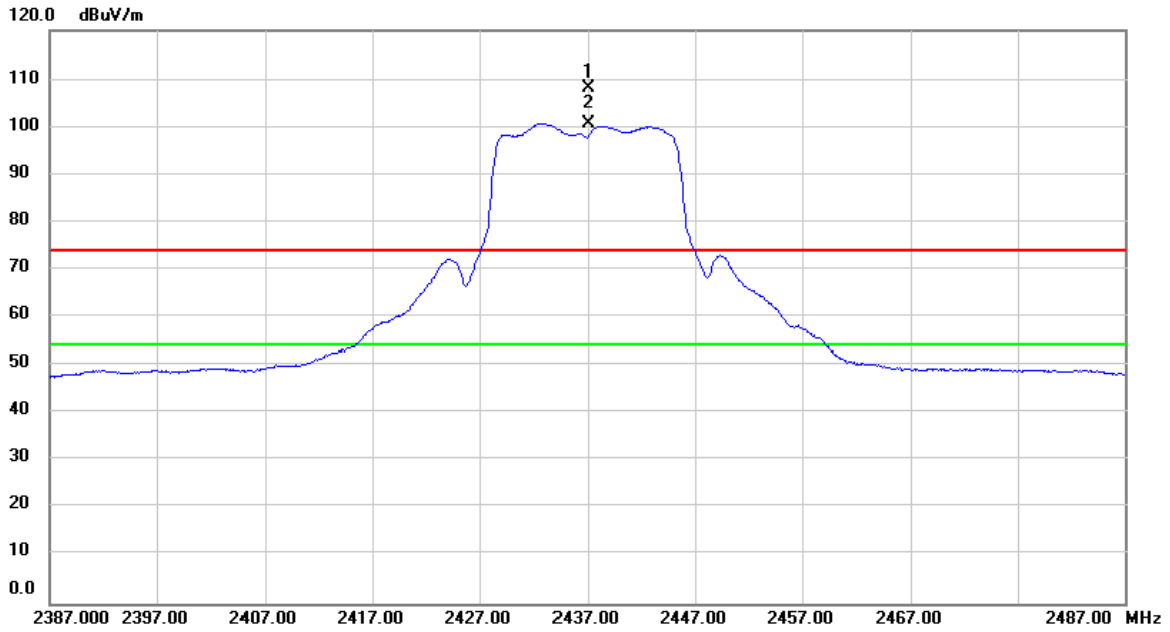

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	76.38	31.88	108.26	74.00	34.26	peak	No Limit
2	*	2437.000	68.71	31.88	100.59	54.00	46.59	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

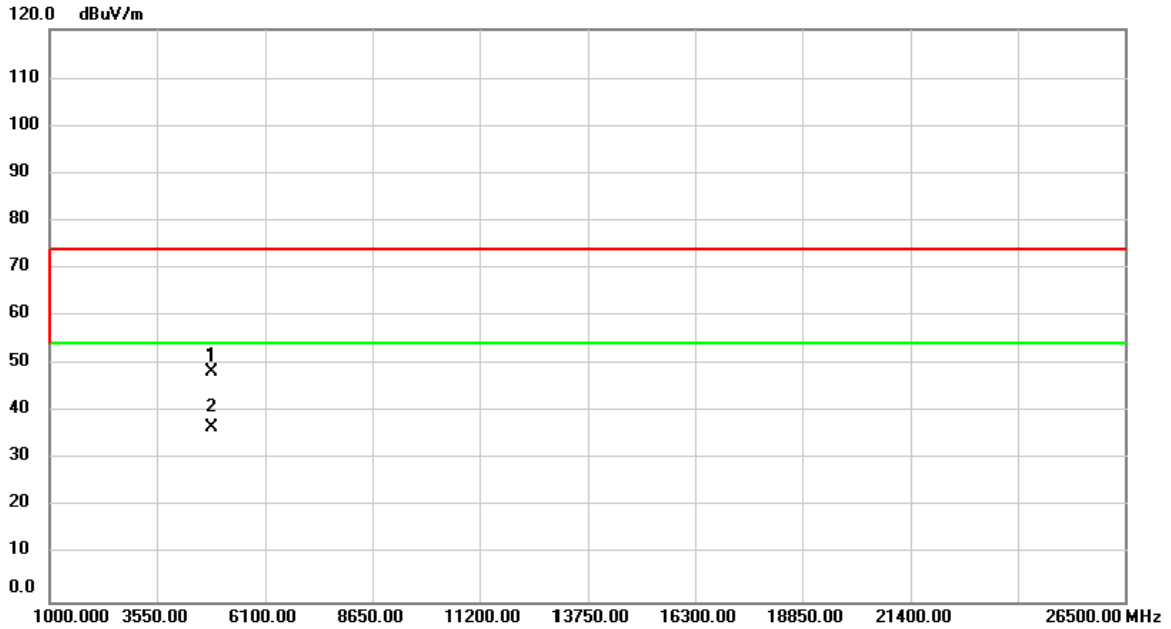

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	58.91	-10.40	48.51	74.00	-25.49	peak	
2	*	4874.000	47.27	-10.40	36.87	54.00	-17.13	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

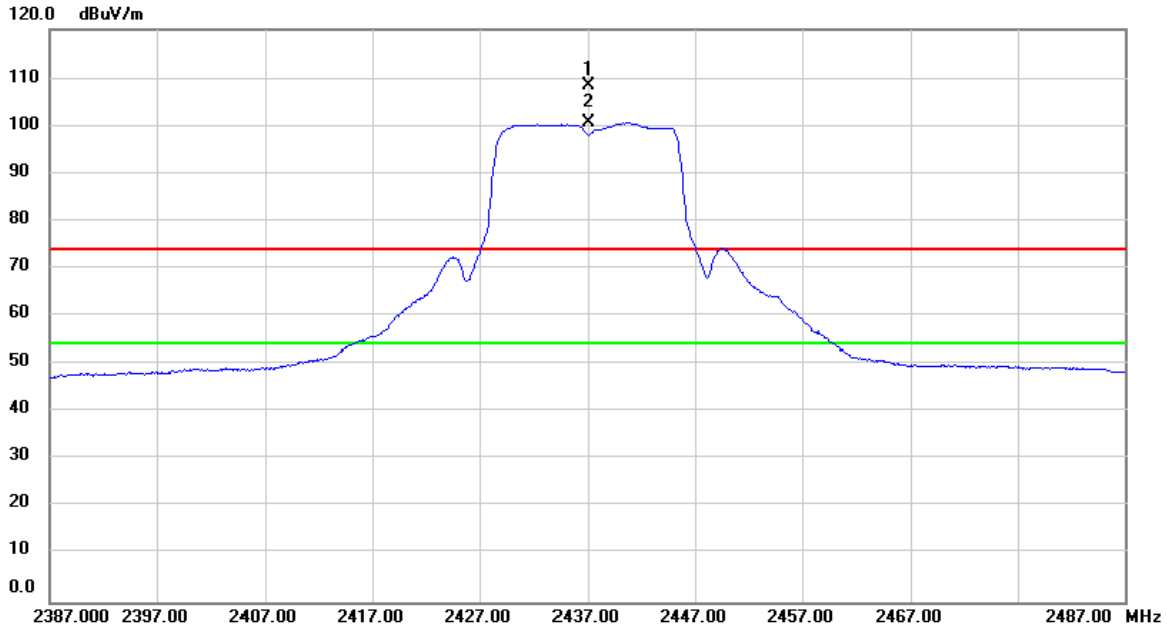

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.000	76.60	31.88	108.48	74.00	34.48	peak	No Limit
2	*	2437.000	68.66	31.88	100.54	54.00	46.54	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

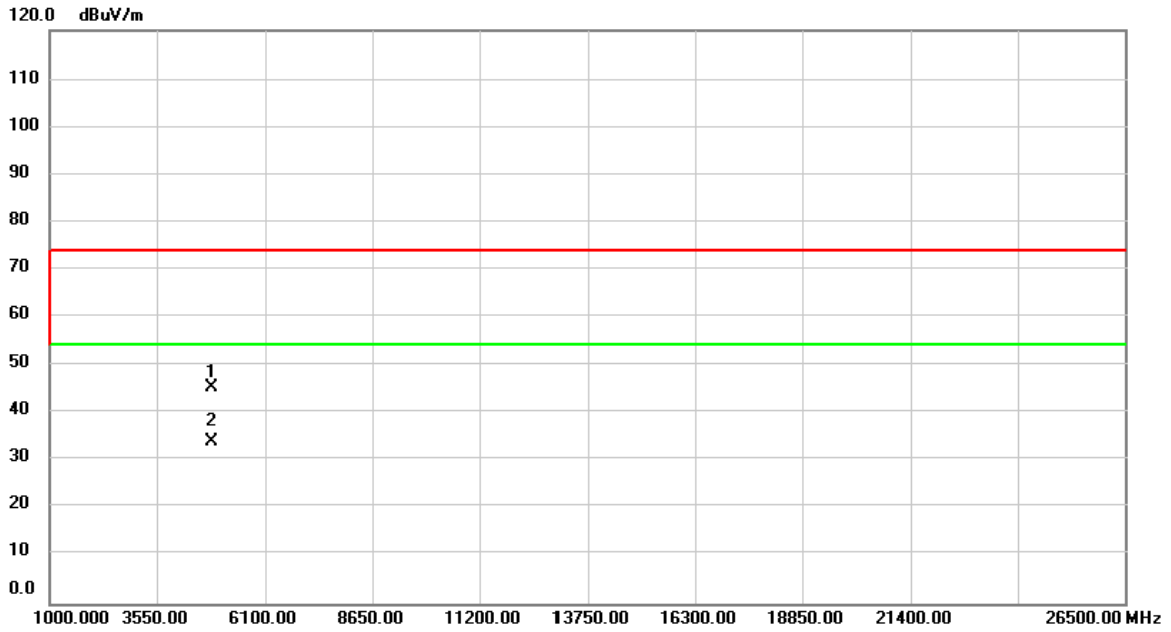

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	55.87	-10.40	45.47	74.00	-28.53	peak	
2	*	4874.000	44.46	-10.40	34.06	54.00	-19.94	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

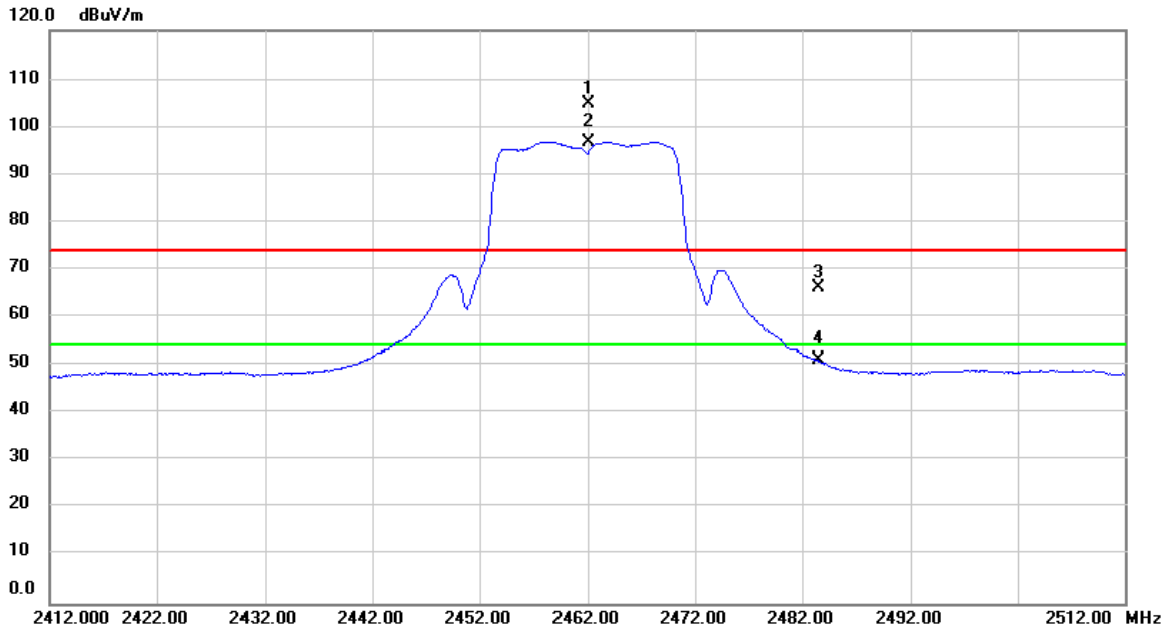

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	72.96	31.98	104.94	74.00	30.94	peak	No Limit
2	*	2462.000	64.80	31.98	96.78	54.00	42.78	AVG	No Limit
3		2483.500	34.24	32.06	66.30	74.00	-7.70	peak	
4		2483.500	18.97	32.06	51.03	54.00	-2.97	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

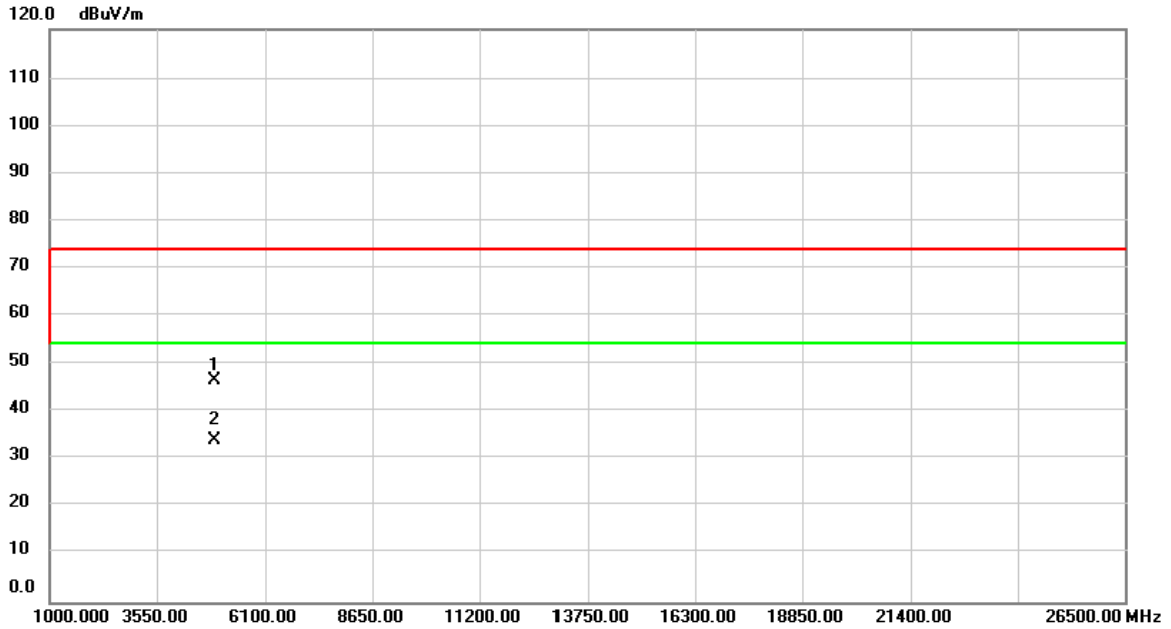

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	56.97	-10.32	46.65	74.00	-27.35	peak	
2	*	4924.000	44.31	-10.32	33.99	54.00	-20.01	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

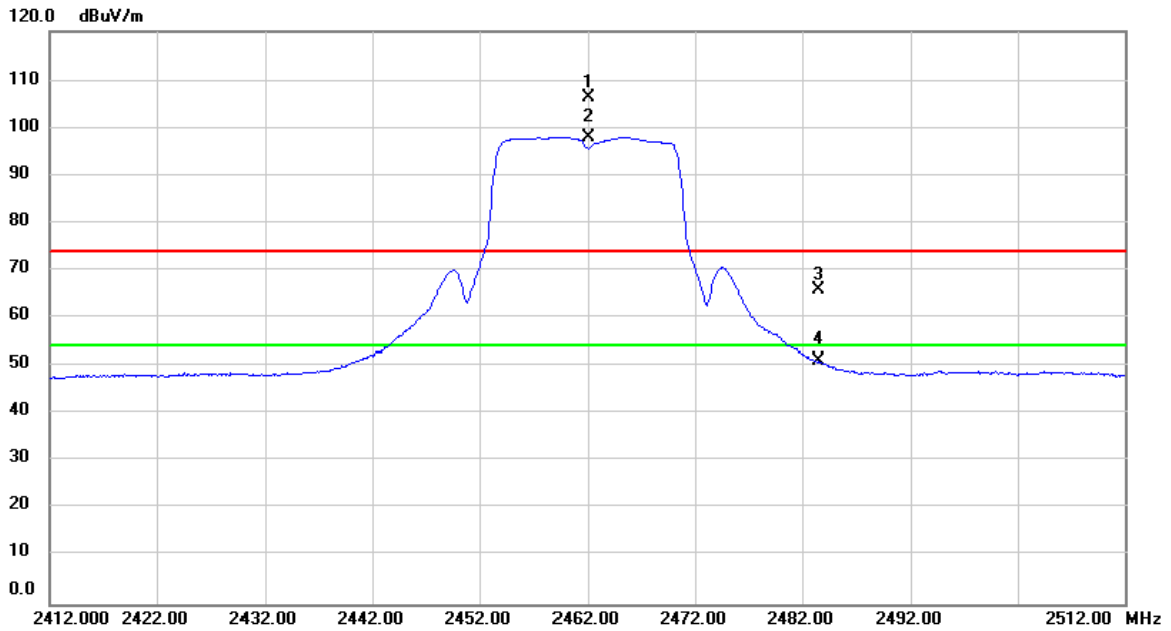

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	74.33	31.98	106.31	74.00	32.31	peak	No Limit
2	*	2462.000	66.02	31.98	98.00	54.00	44.00	AVG	No Limit
3		2483.500	33.80	32.06	65.86	74.00	-8.14	peak	
4		2483.500	19.01	32.06	51.07	54.00	-2.93	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

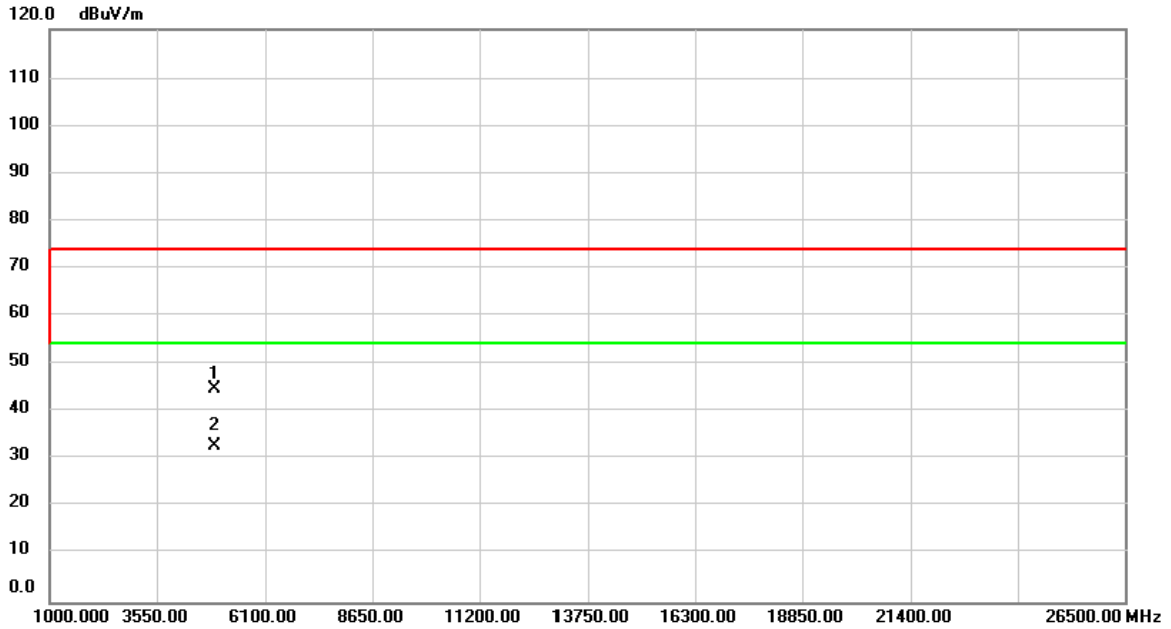

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	55.31	-10.32	44.99	74.00	-29.01	peak	
2	*	4924.000	43.02	-10.32	32.70	54.00	-21.30	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

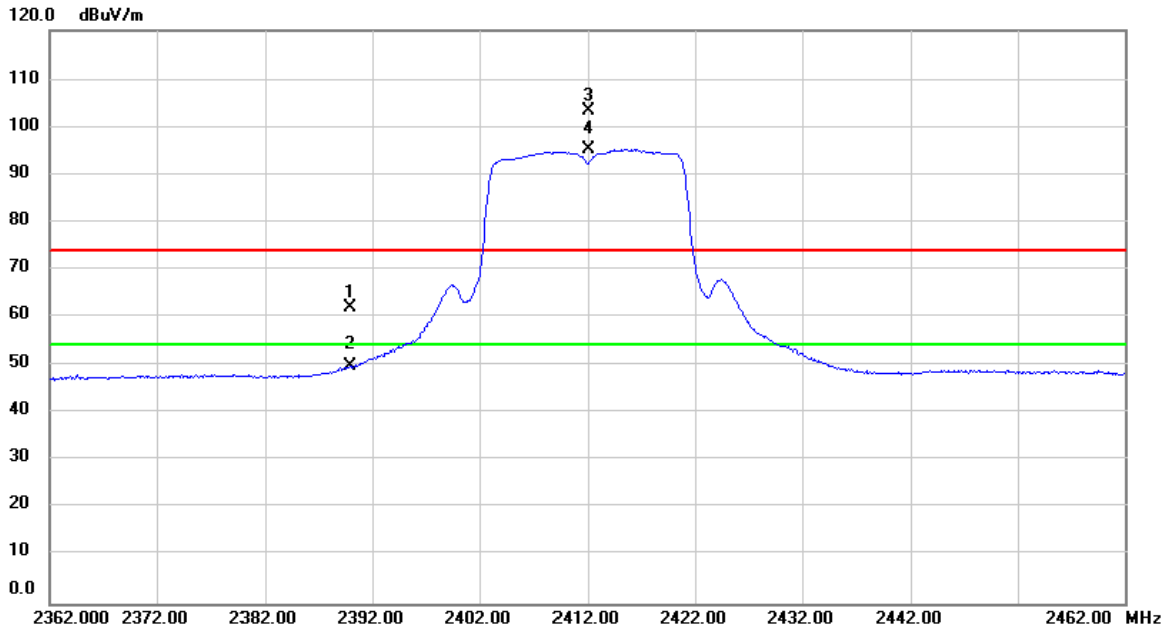

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.900	30.30	31.70	62.00	74.00	-12.00	peak	
2		2389.900	18.24	31.70	49.94	54.00	-4.06	AVG	
3	X	2412.000	71.43	31.79	103.22	74.00	29.22	peak	No Limit
4	*	2412.000	63.39	31.79	95.18	54.00	41.18	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Vertical

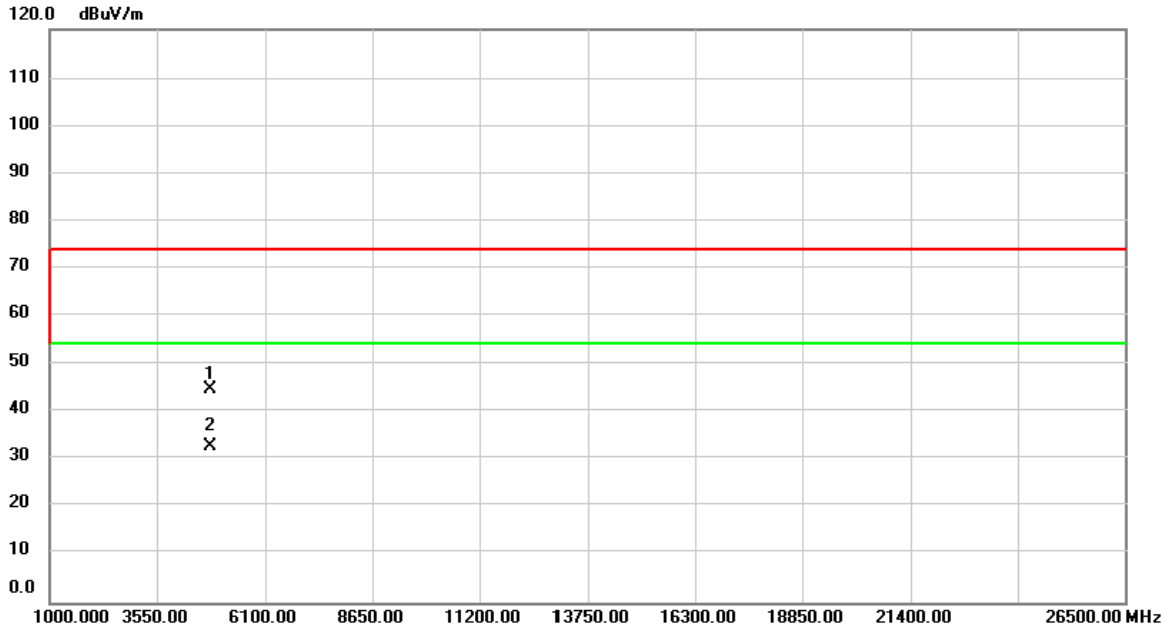

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	55.21	-10.48	44.73	74.00	-29.27	peak	
2	*	4824.000	43.44	-10.48	32.96	54.00	-21.04	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

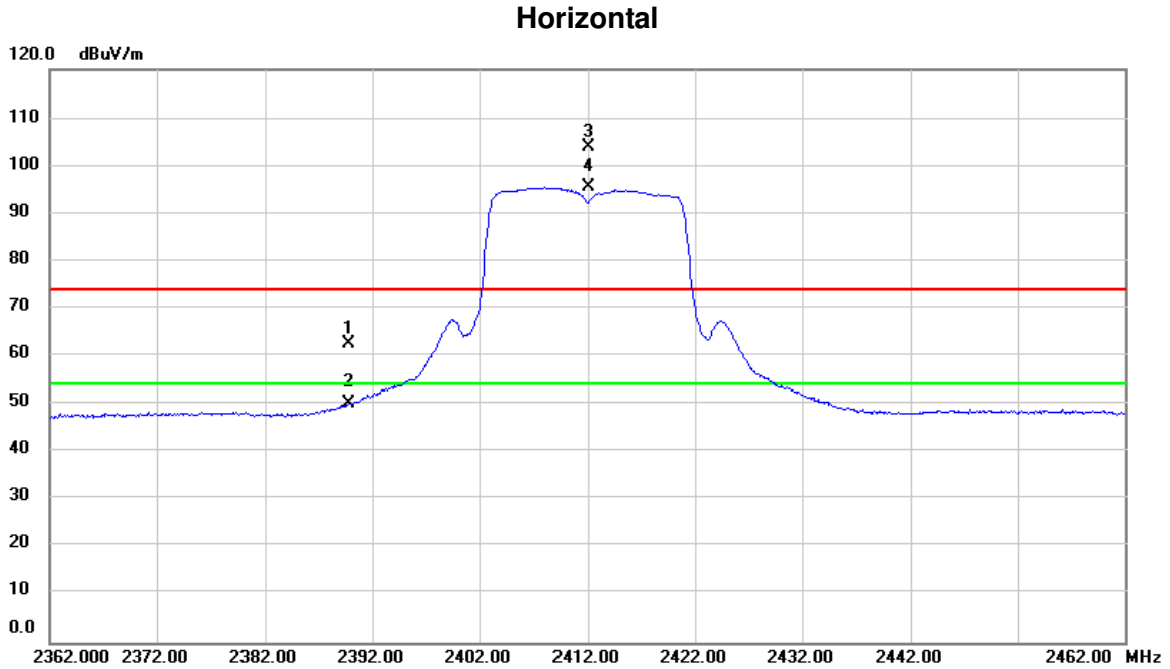

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.800	30.76	31.70	62.46	74.00	-11.54	peak	
2		2389.800	18.69	31.70	50.39	54.00	-3.61	AVG	
3	X	2412.000	72.31	31.79	104.10	74.00	30.10	peak	No Limit
4	*	2412.000	63.63	31.79	95.42	54.00	41.42	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Horizontal

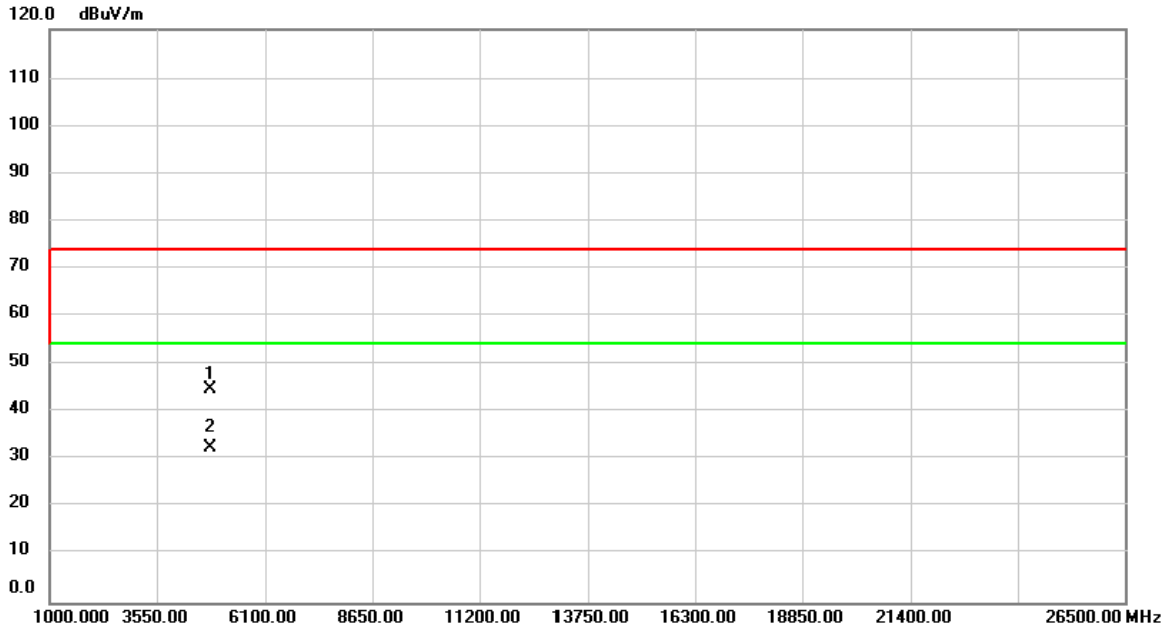

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4824.000	55.43	-10.48	44.95	74.00	-29.05	peak	
2	*	4824.000	43.14	-10.48	32.66	54.00	-21.34	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

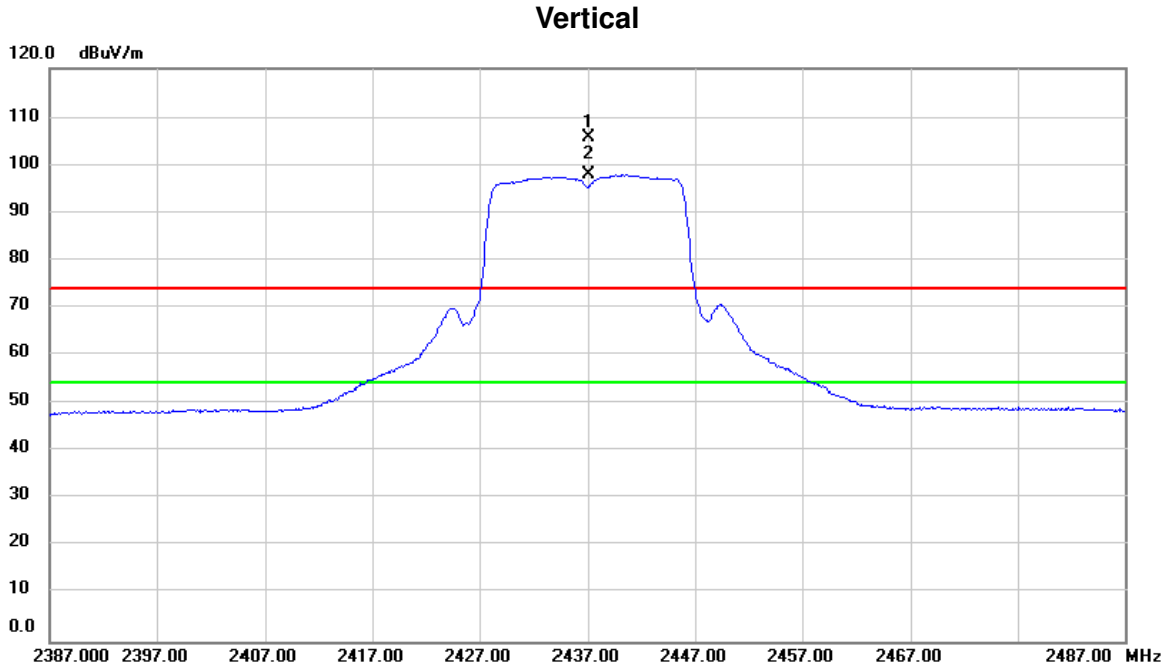

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	73.96	31.88	105.84	74.00	31.84	peak	No Limit
2	*	2437.000	65.96	31.88	97.84	54.00	43.84	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Vertical

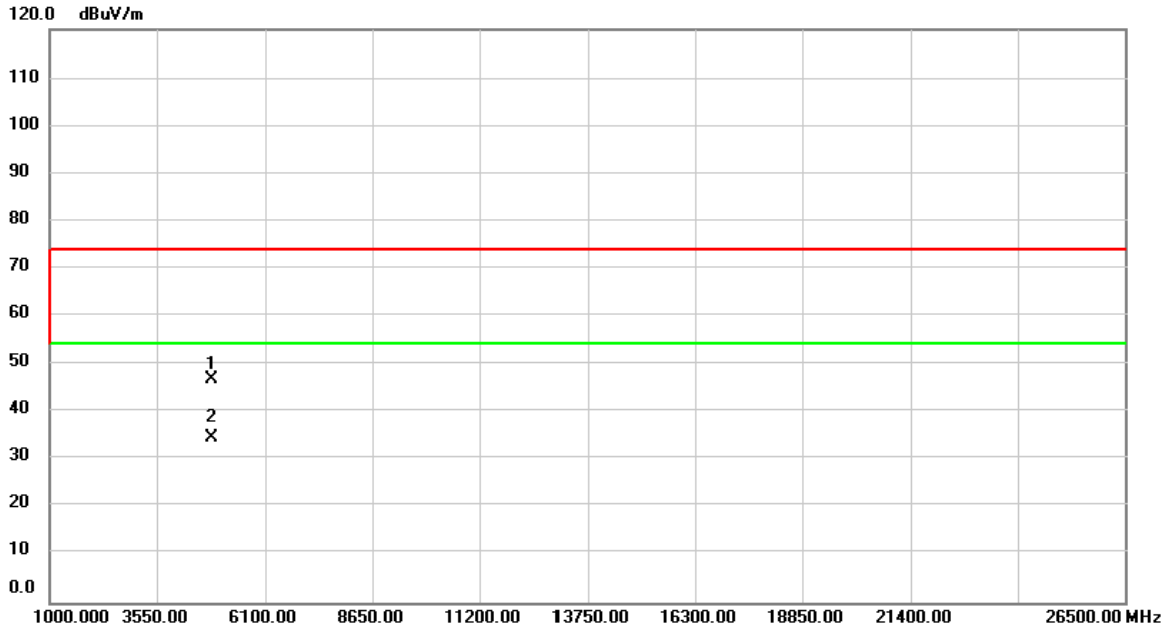

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	57.45	-10.40	47.05	74.00	-26.95	peak	
2	*	4874.000	44.99	-10.40	34.59	54.00	-19.41	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

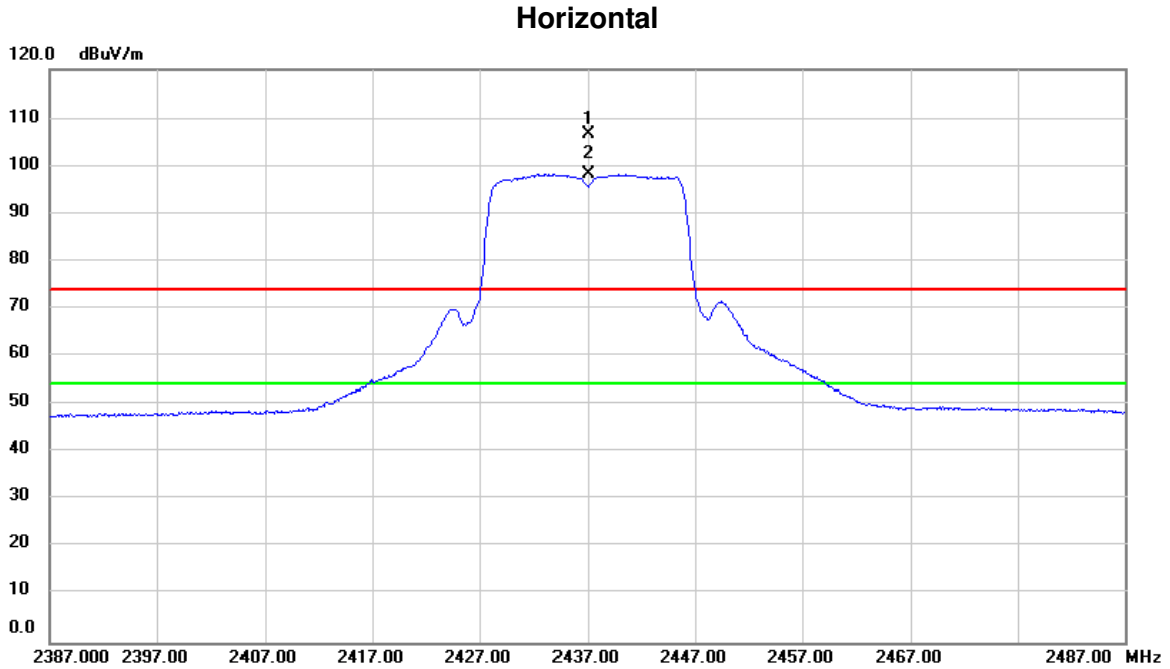

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	74.74	31.88	106.62	74.00	32.62	peak	
2	*	2437.000	66.37	31.88	98.25	54.00	44.25	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

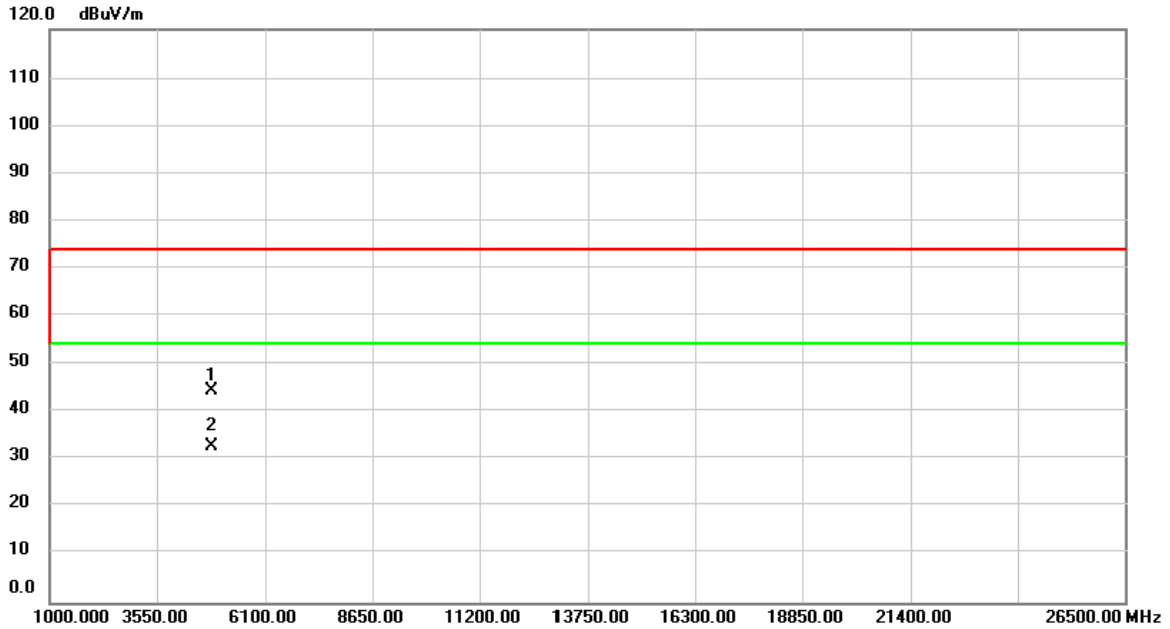

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	54.97	-10.40	44.57	74.00	-29.43	peak	
2	*	4874.000	43.36	-10.40	32.96	54.00	-21.04	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

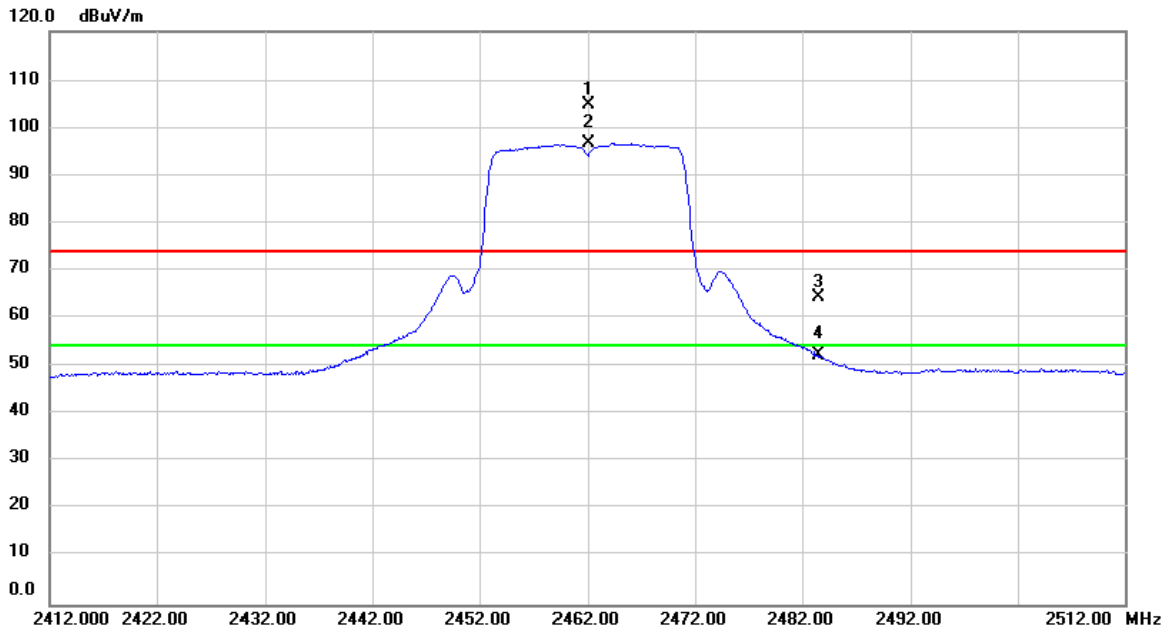

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	72.85	31.98	104.83	74.00	30.83	peak	No Limit
2	*	2462.000	64.75	31.98	96.73	54.00	42.73	AVG	No Limit
3		2483.500	32.28	32.06	64.34	74.00	-9.66	peak	
4		2483.500	20.40	32.06	52.46	54.00	-1.54	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Vertical

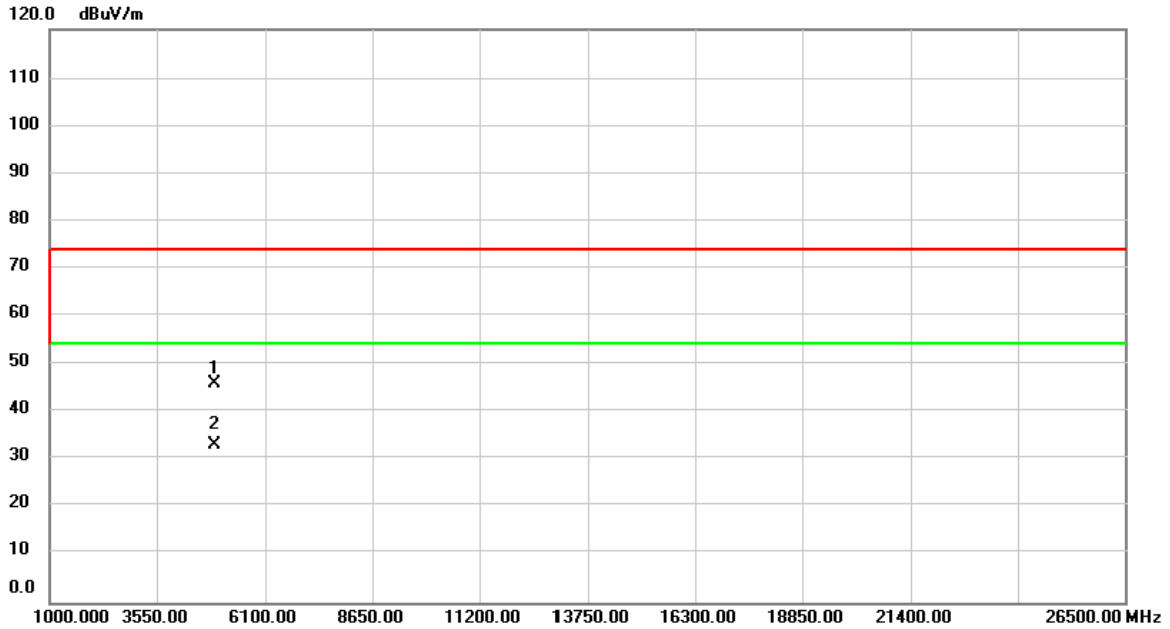

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4924.000	56.34	-10.32	46.02	74.00	-27.98	peak	
2	*	4924.000	43.43	-10.32	33.11	54.00	-20.89	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

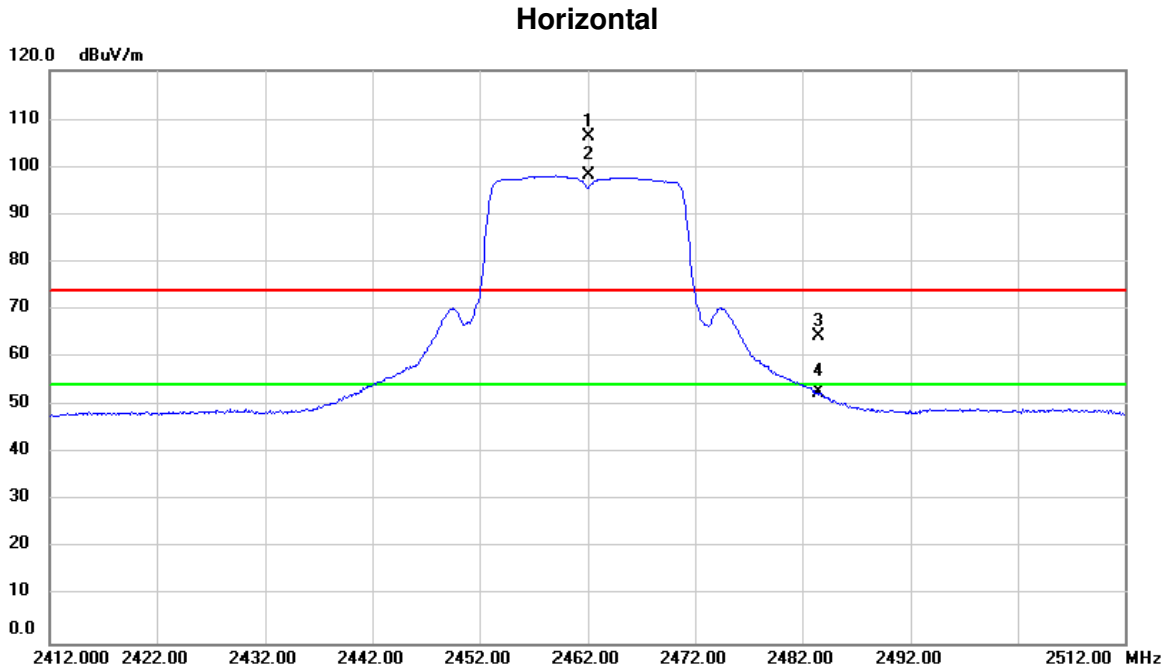

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2462.000	74.34	31.98	106.32	74.00	32.32	peak	No Limit
2	*	2462.000	66.18	31.98	98.16	54.00	44.16	AVG	No Limit
3		2483.500	32.39	32.06	64.45	74.00	-9.55	peak	
4		2483.500	20.64	32.06	52.70	54.00	-1.30	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

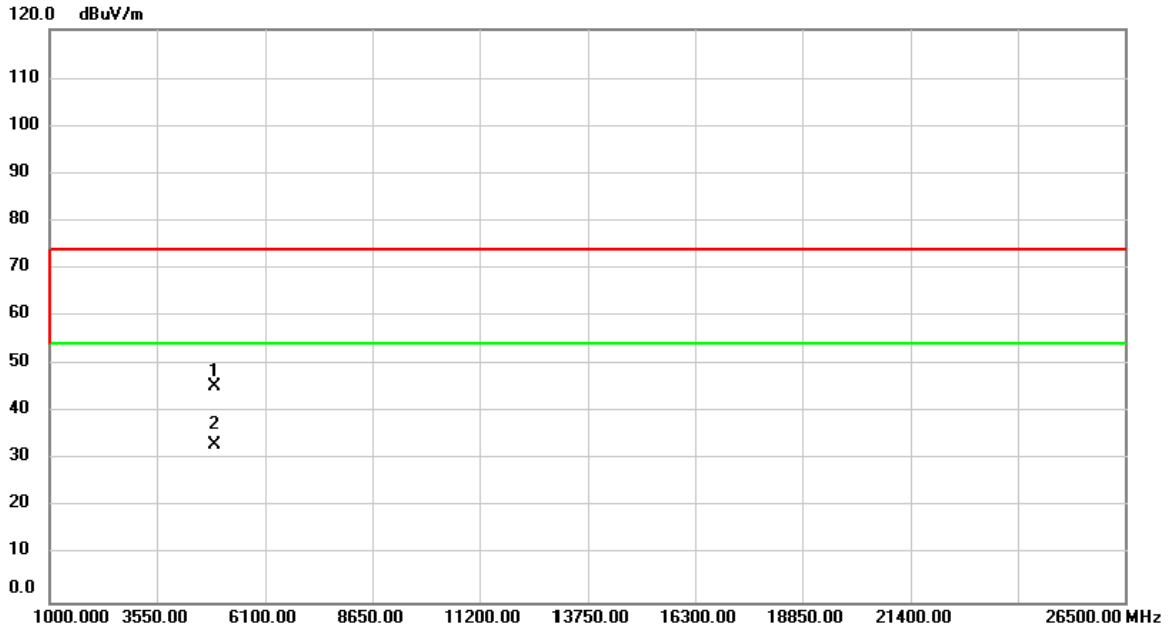

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	55.70	-10.32	45.38	74.00	-28.62	peak	
2	*	4924.000	43.37	-10.32	33.05	54.00	-20.95	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

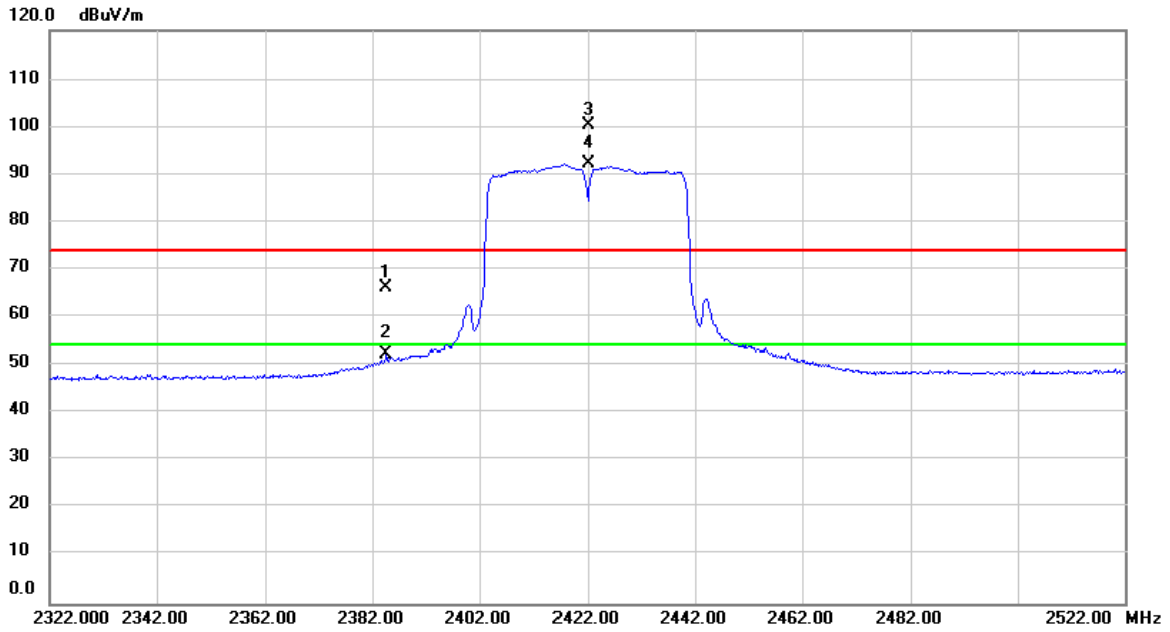

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2384.600	34.39	31.69	66.08	74.00	-7.92	peak	
2		2384.600	20.61	31.69	52.30	54.00	-1.70	AVG	
3	X	2422.000	68.56	31.83	100.39	74.00	26.39	peak	No Limit
4	*	2422.000	60.32	31.83	92.15	54.00	38.15	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

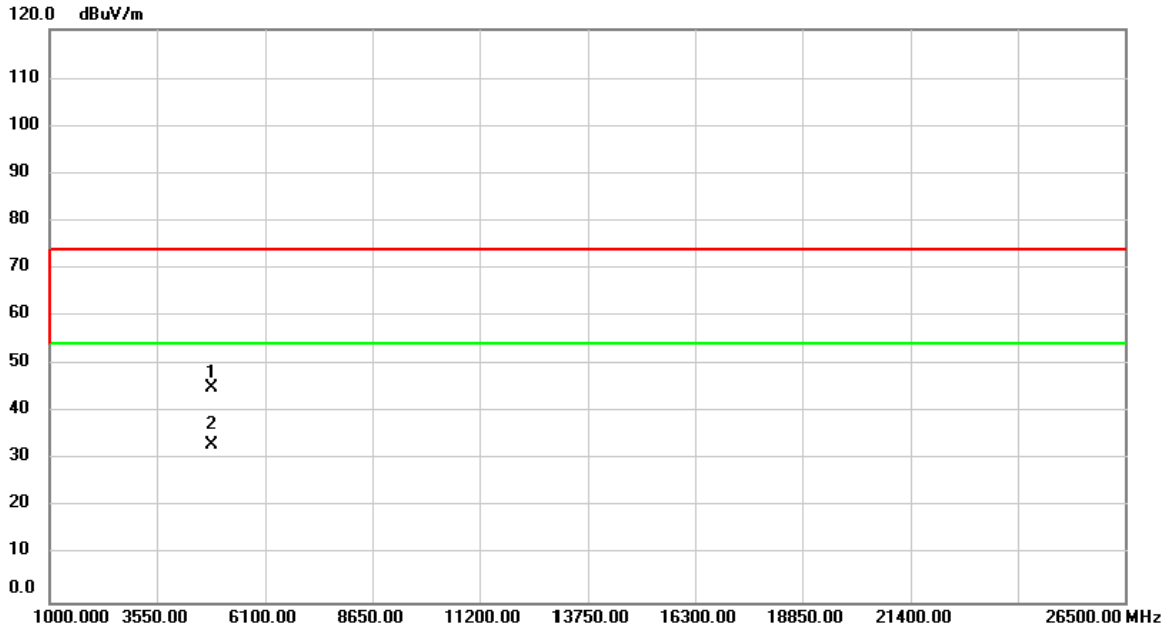

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4844.000	55.56	-10.45	45.11	74.00	-28.89	peak	
2	*	4844.000	43.62	-10.45	33.17	54.00	-20.83	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

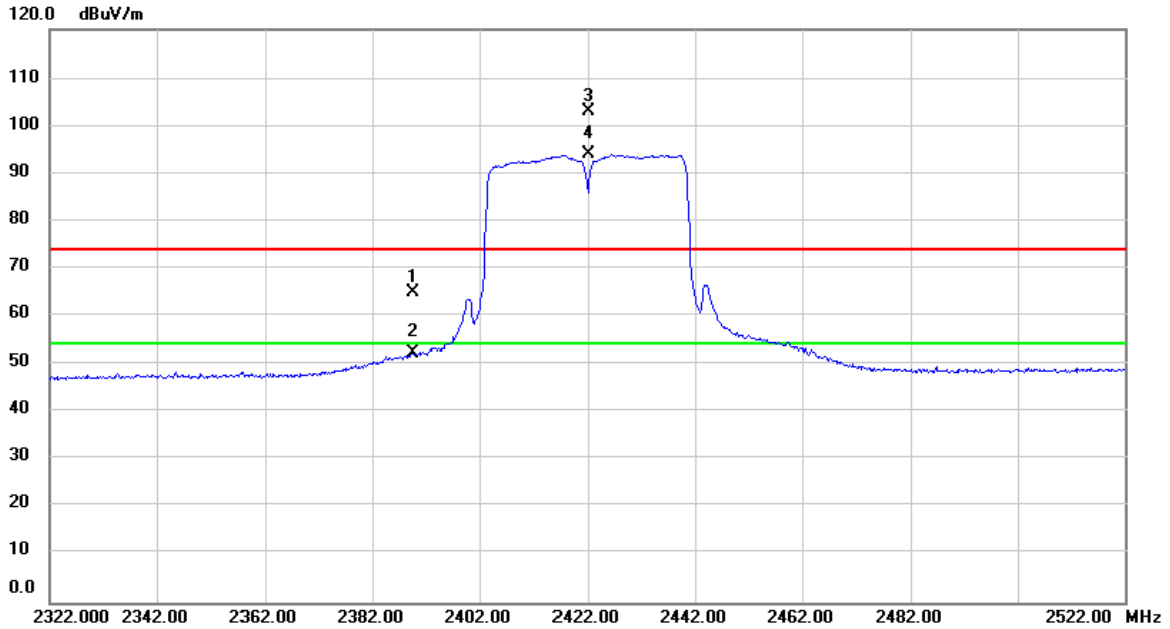

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.600	33.13	31.70	64.83	74.00	-9.17	peak	
2		2389.600	20.60	31.70	52.30	54.00	-1.70	AVG	
3	X	2422.000	71.09	31.83	102.92	74.00	28.92	peak	No Limit
4	*	2422.000	62.08	31.83	93.91	54.00	39.91	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Horizontal

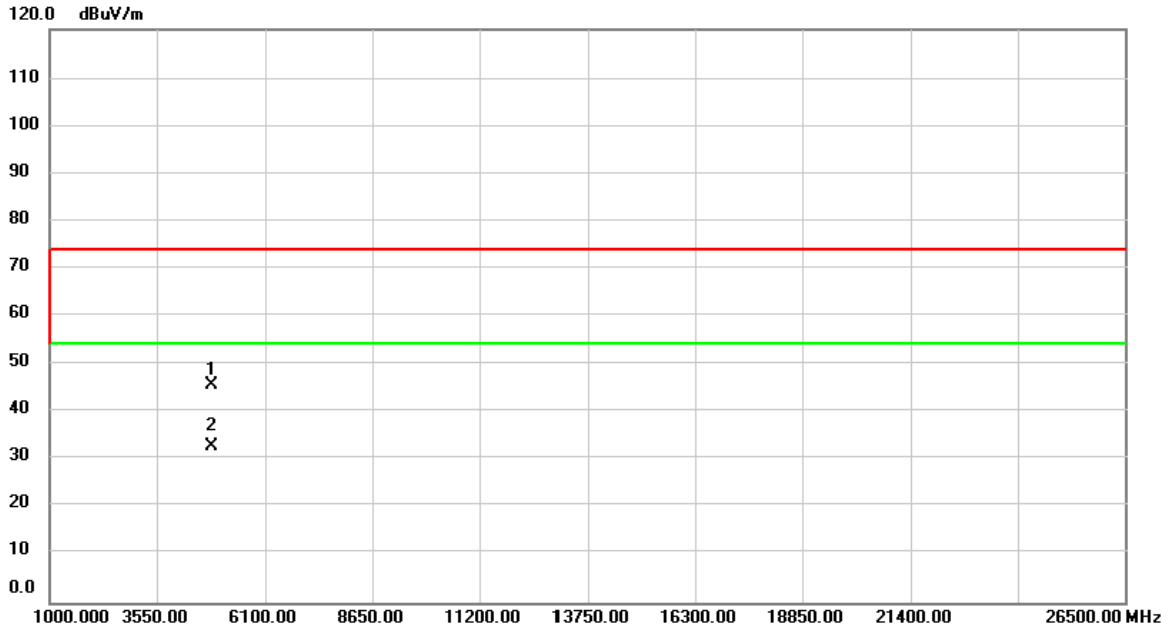

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4844.000	56.18	-10.45	45.73	74.00	-28.27	peak	
2	*	4844.000	43.29	-10.45	32.84	54.00	-21.16	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

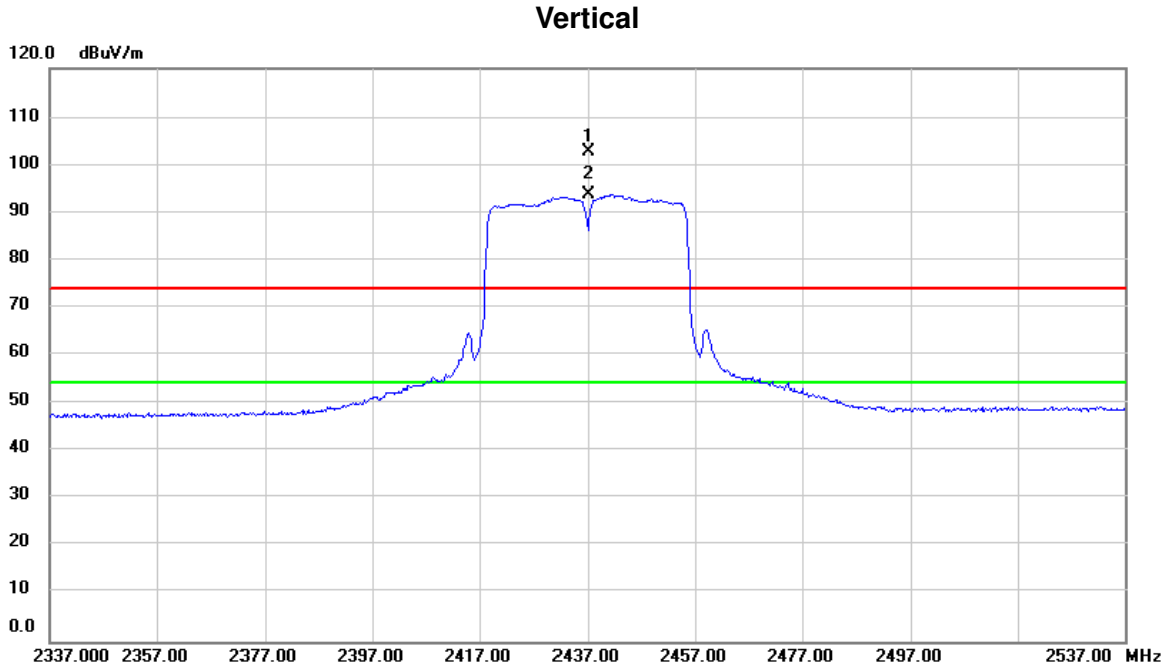

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	70.87	31.88	102.75	74.00	28.75	peak	No Limit
2	*	2437.000	61.88	31.88	93.76	54.00	39.76	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Vertical

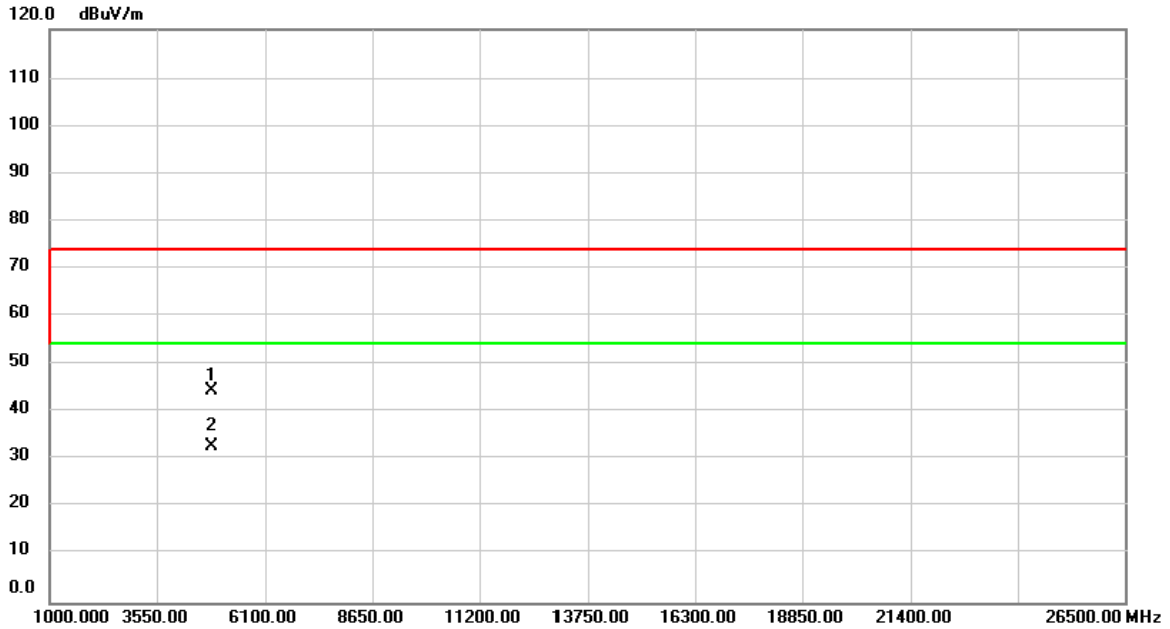

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	55.00	-10.40	44.60	74.00	-29.40	peak	
2	*	4874.000	43.33	-10.40	32.93	54.00	-21.07	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

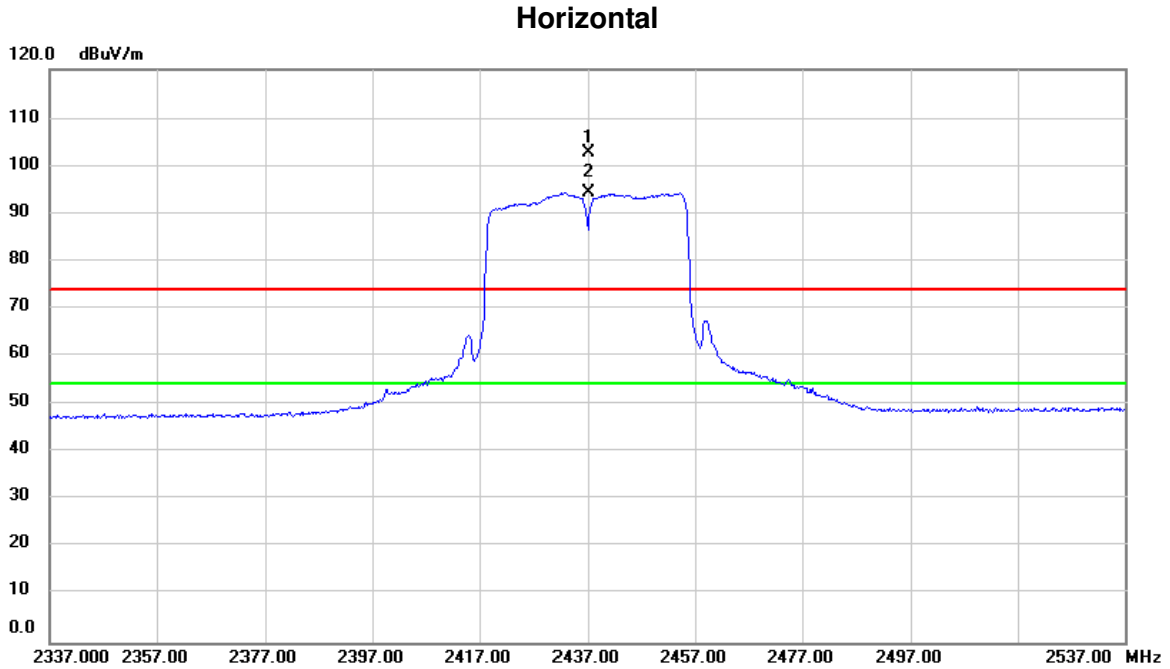

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	70.86	31.88	102.74	74.00	28.74	peak	No Limit
2	*	2437.000	62.49	31.88	94.37	54.00	40.37	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Horizontal

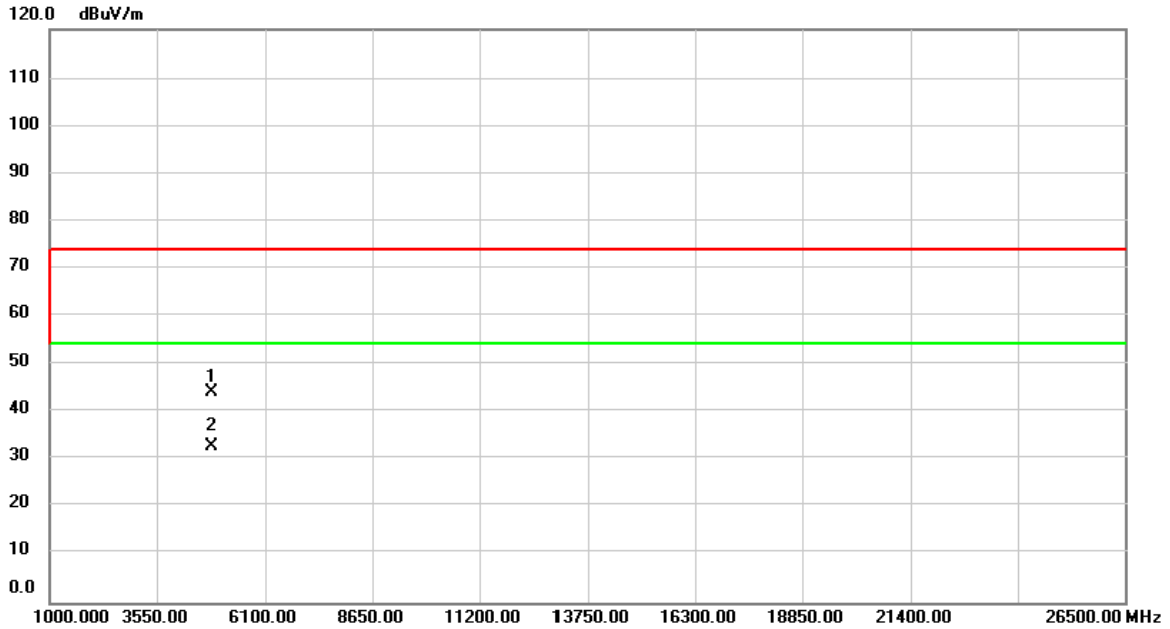

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4874.000	54.77	-10.40	44.37	74.00	-29.63	peak	
2	*	4874.000	43.34	-10.40	32.94	54.00	-21.06	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)


Vertical

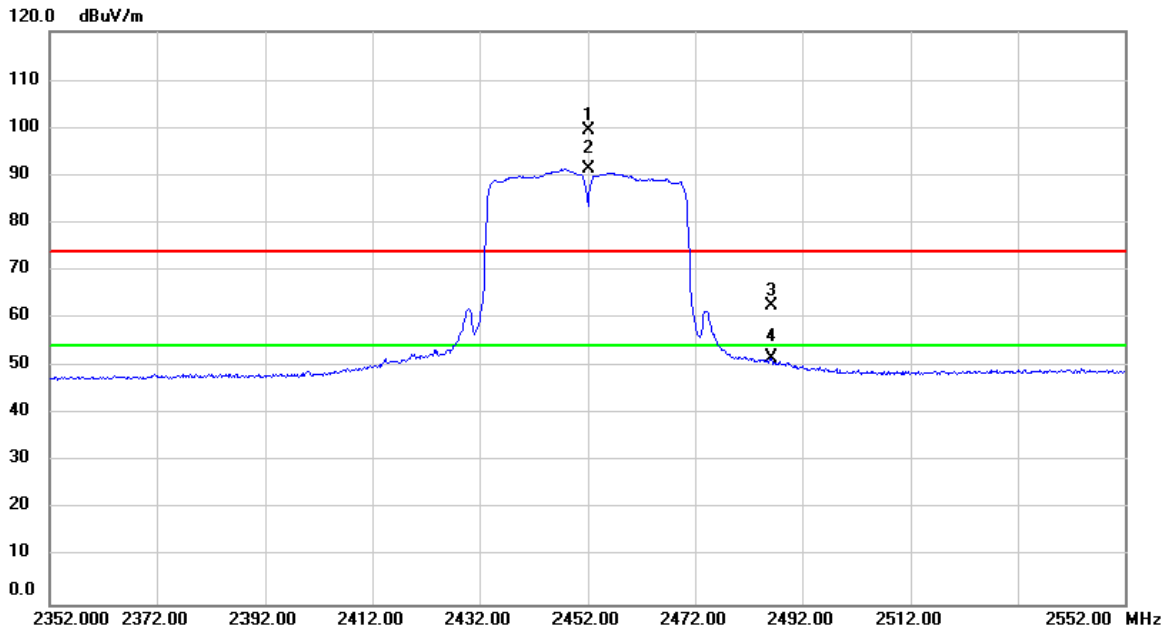

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2452.000	67.46	31.95	99.41	74.00	25.41	peak	No Limit
2	*	2452.000	59.36	31.95	91.31	54.00	37.31	AVG	No Limit
3		2486.200	30.49	32.08	62.57	74.00	-11.43	peak	
4		2486.200	19.81	32.08	51.89	54.00	-2.11	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Vertical

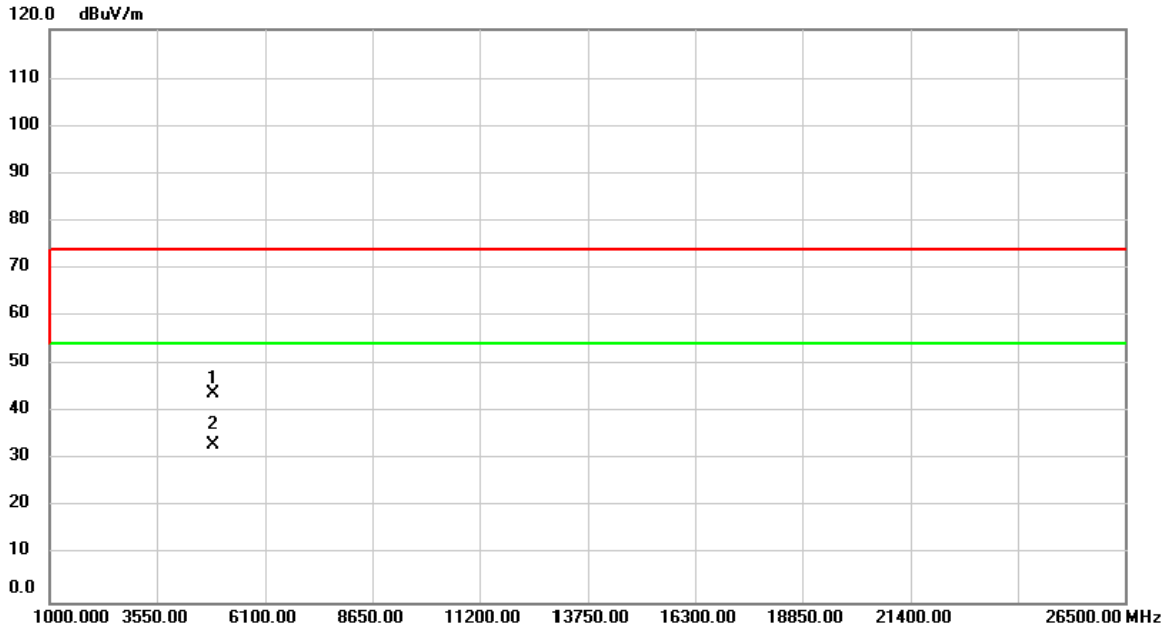

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4904.000	54.40	-10.35	44.05	74.00	-29.95	peak	
2	*	4904.000	43.45	-10.35	33.10	54.00	-20.90	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

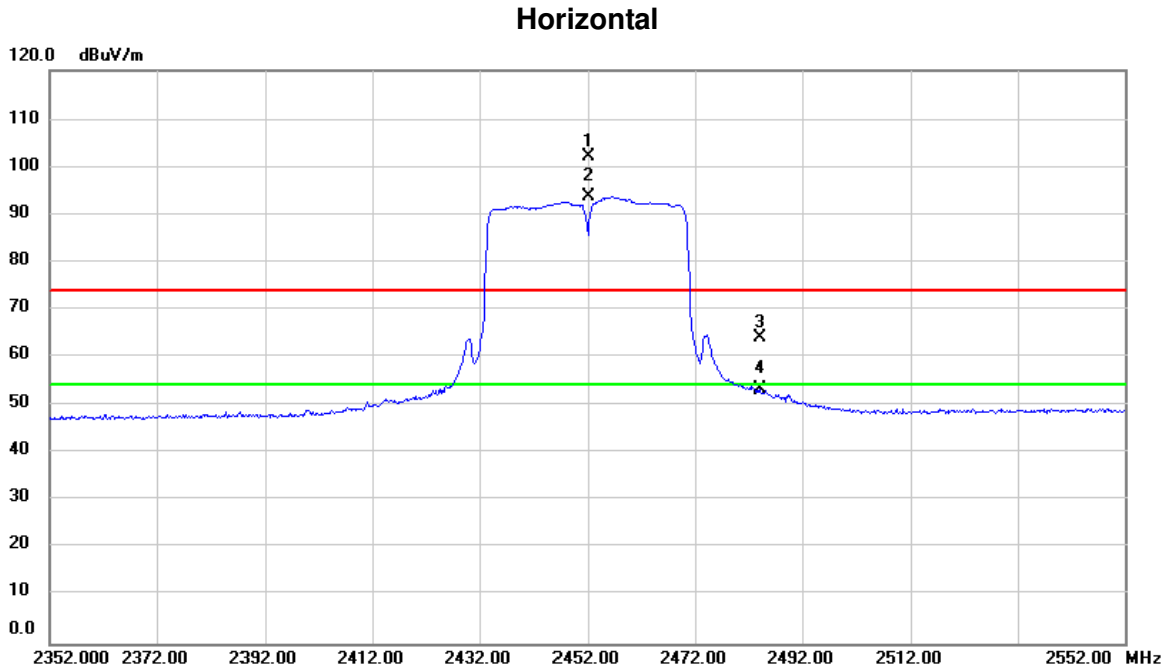

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2452.000	70.33	31.95	102.28	74.00	28.28	peak	No Limit
2	*	2452.000	61.83	31.95	93.78	54.00	39.78	AVG	No Limit
3		2484.200	31.94	32.07	64.01	74.00	-9.99	peak	
4		2484.200	21.20	32.07	53.27	54.00	-0.73	AVG	


Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452 MHz_With DLT-M8110 Desk Docking (Battery_DLT-M8110L)

Horizontal

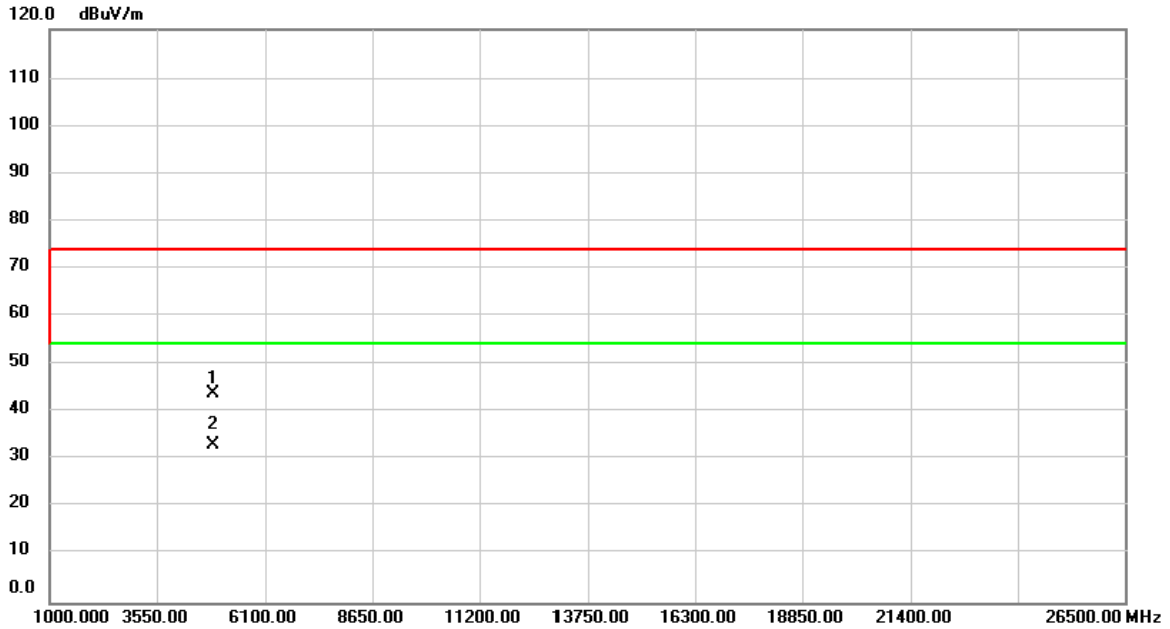

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4904.000	54.19	-10.35	43.84	74.00	-30.16	peak	
2	*	4904.000	43.56	-10.35	33.21	54.00	-20.79	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Vehicle Docking (Battery_DLT-M8110L)

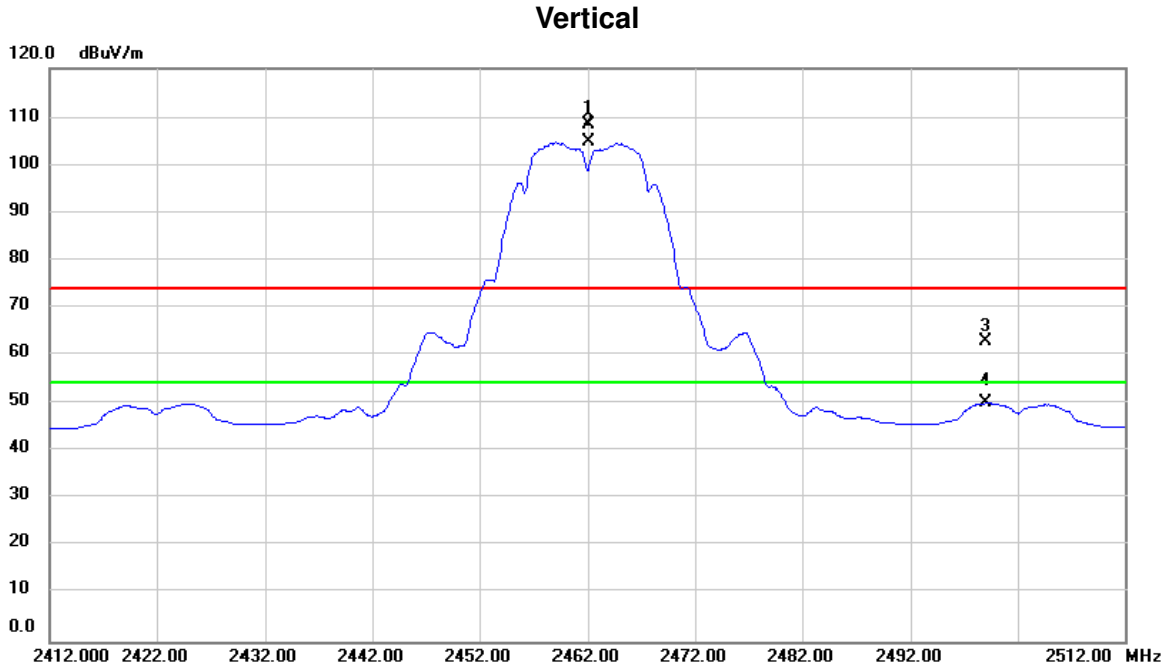

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2462.000	76.53	31.98	108.51	74.00	34.51	peak	No Limit
2	*	2462.000	72.75	31.98	104.73	54.00	50.73	AVG	No Limit
3		2499.000	30.83	32.13	62.96	74.00	-11.04	peak	
4		2499.000	18.07	32.13	50.20	54.00	-3.80	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Vehicle Docking (Battery_DLT-M8110L)

Vertical

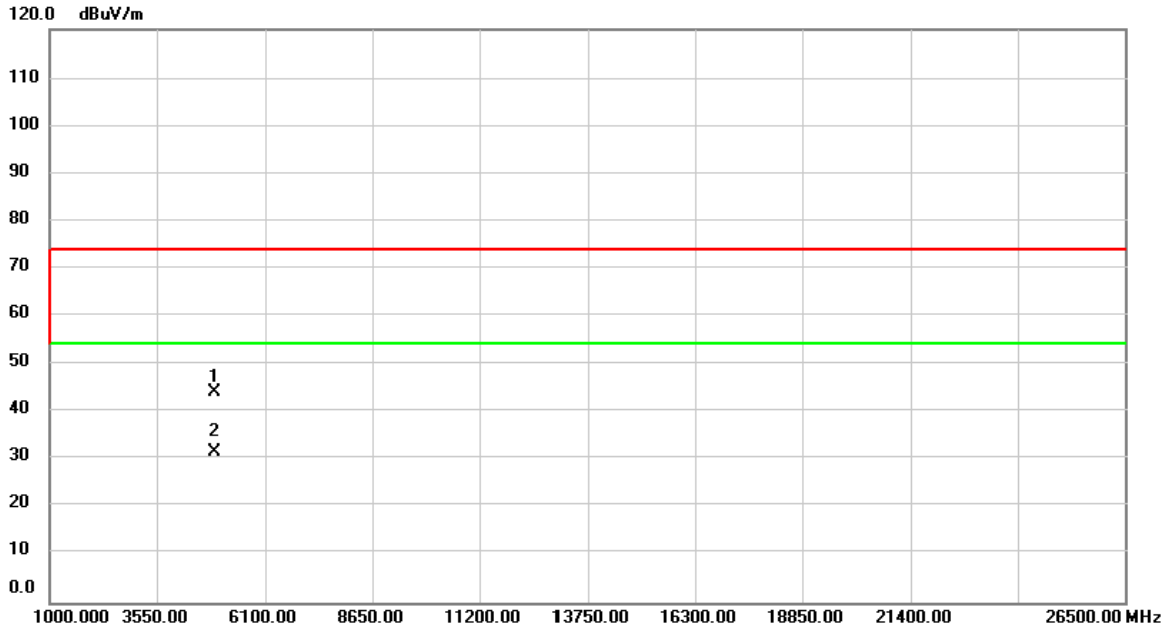

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	54.58	-10.32	44.26	74.00	-29.74	peak	
2	*	4924.000	41.99	-10.32	31.67	54.00	-22.33	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Vehicle Docking (Battery_DLT-M8110L)

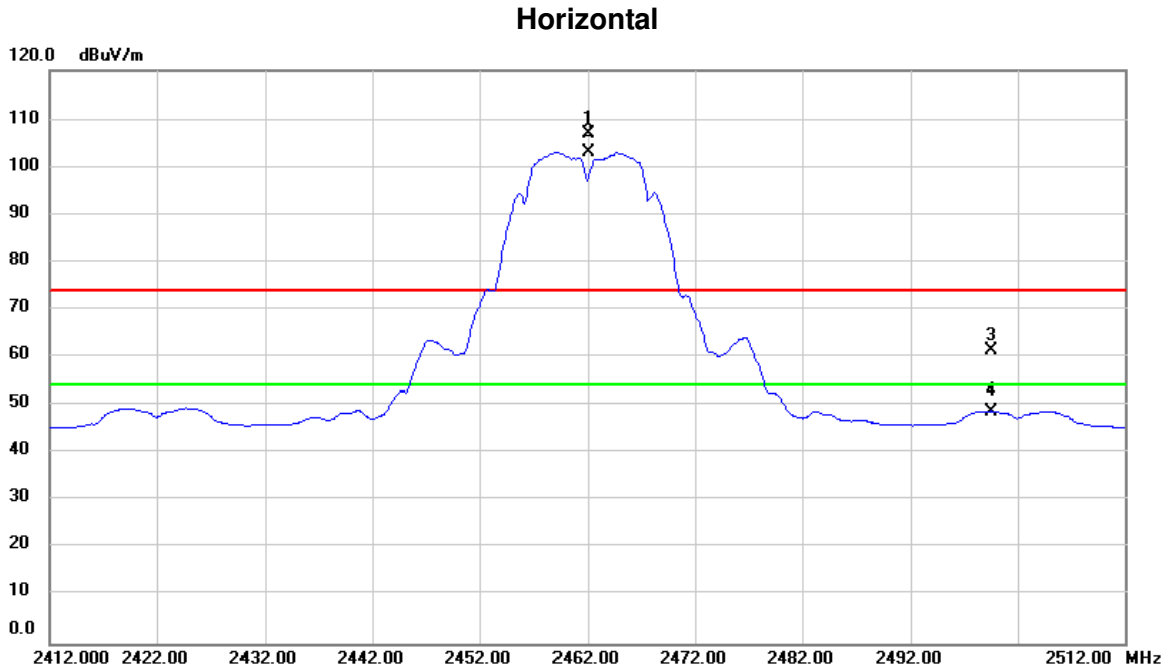

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2462.000	74.86	31.98	106.84	74.00	32.84	peak	No Limit
2	*	2462.000	71.16	31.98	103.14	54.00	49.14	AVG	No Limit
3		2499.500	29.11	32.13	61.24	74.00	-12.76	peak	
4		2499.500	16.77	32.13	48.90	54.00	-5.10	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412 MHz_With DLT-M8110 Vehicle Docking (Battery_DLT-M8110L)

Horizontal

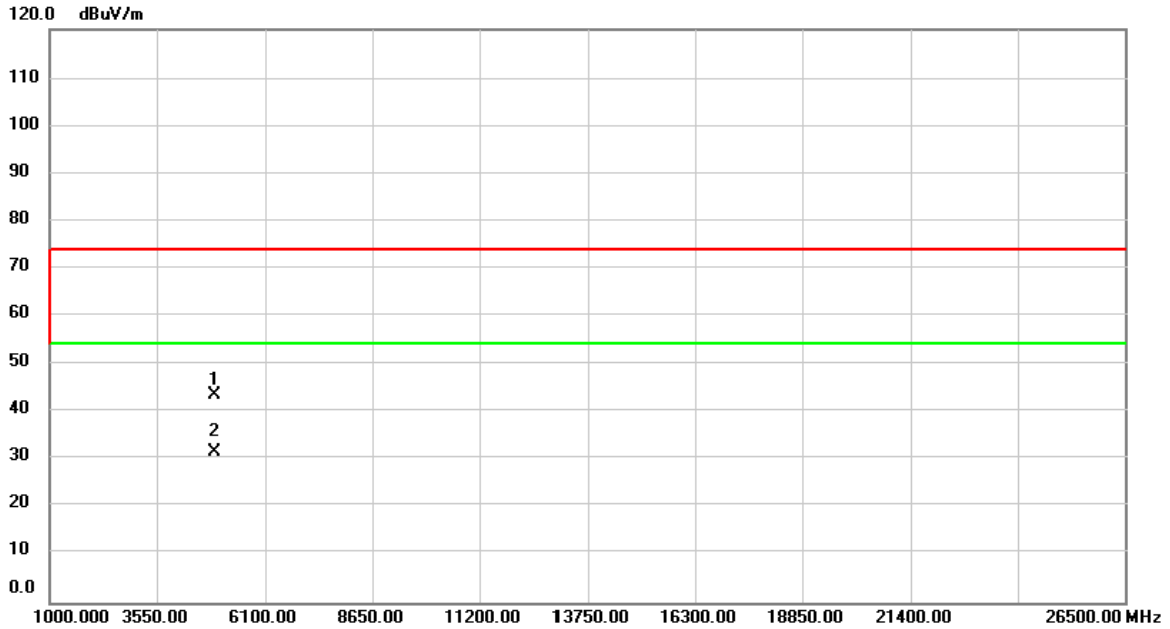


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4924.000	54.02	-10.32	43.70	74.00	-30.30	peak	
2	*	4924.000	41.97	-10.32	31.65	54.00	-22.35	AVG	

ATTACHMENT E - BANDWIDTH


Test Mode : TX B Mode_CH01/06/11_ANT 1

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.13	13.16	500	Complies
2437	10.18	13.12	500	Complies
2462	10.20	13.16	500	Complies

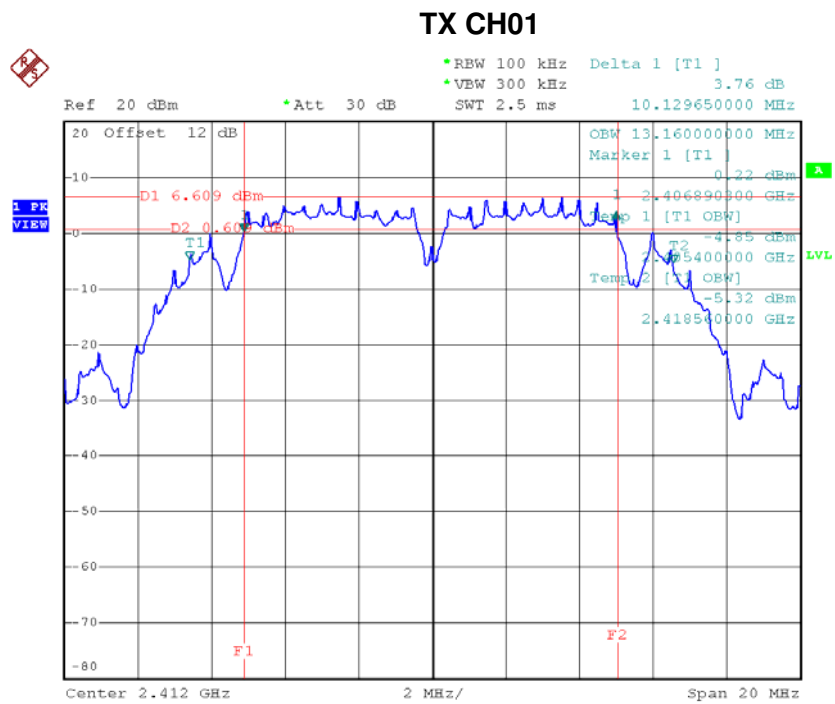


Date: 29.MAY.2016 14:46:36

TX CH06

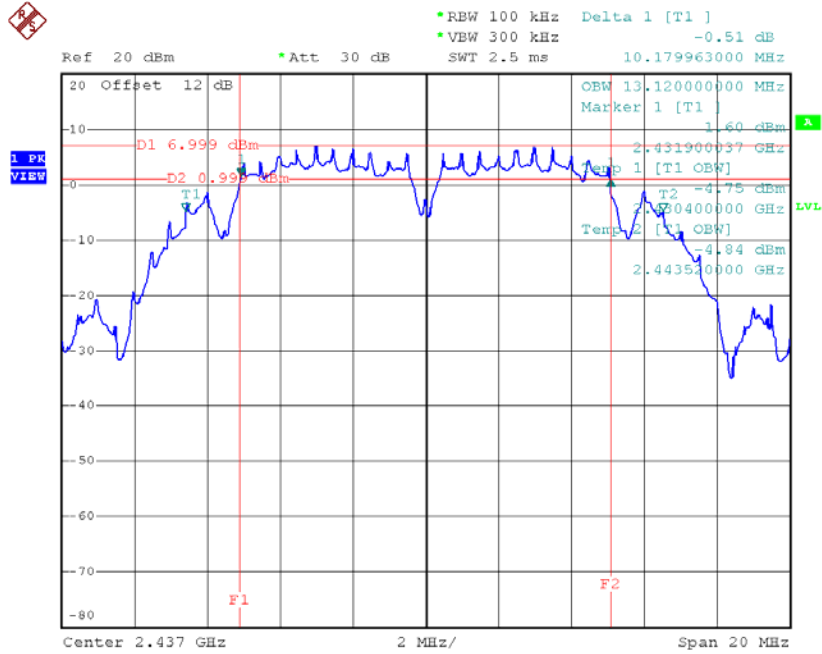

Date: 29.MAY.2016 14:51:11


TX CH11

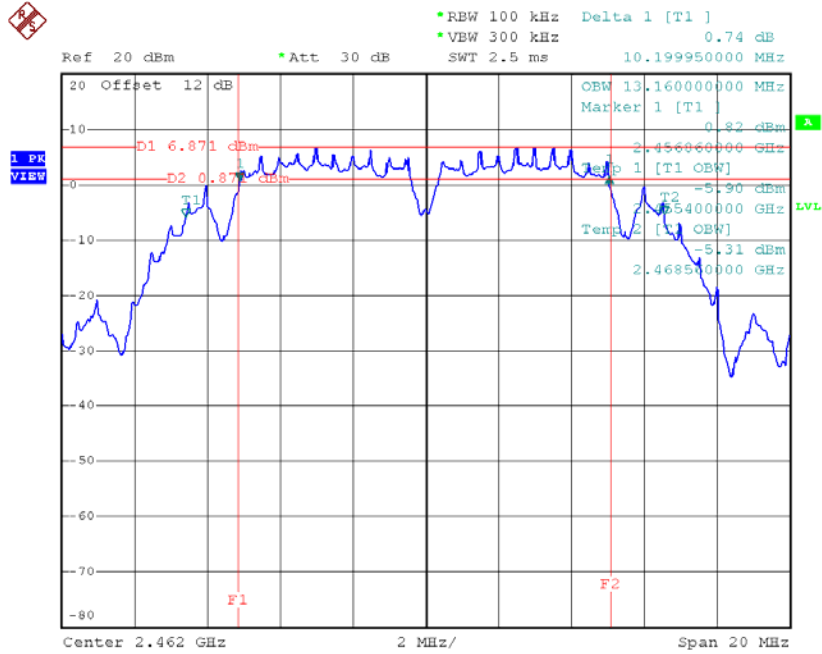

Date: 29.MAY.2016 14:52:30


Test Mode : TX B Mode_CH01/06/11_ANT 2

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	10.10	13.16	500	Complies
2437	10.18	13.16	500	Complies
2462	10.18	13.12	500	Complies

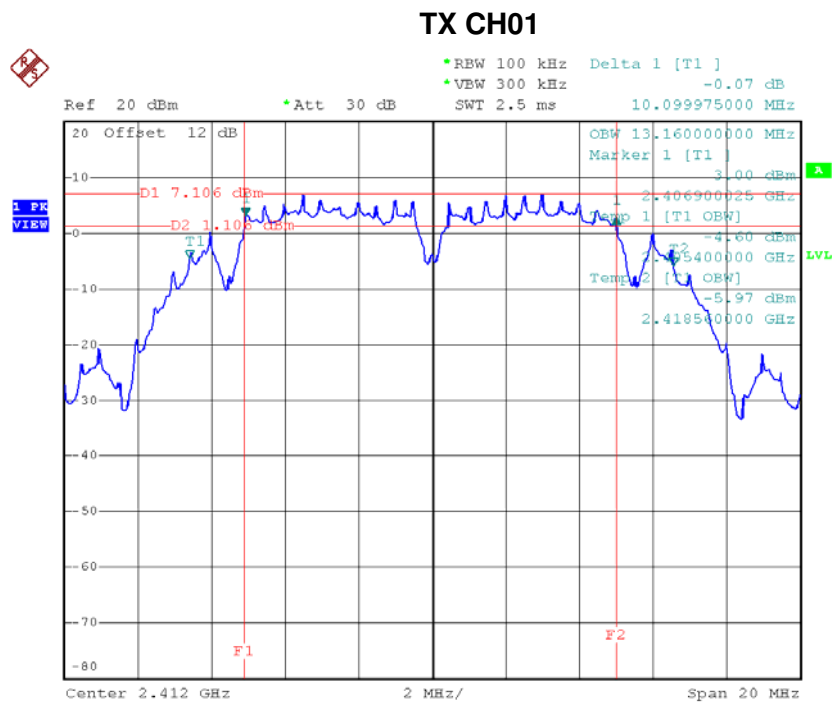


Date: 29.MAY.2016 14:48:57

TX CH06

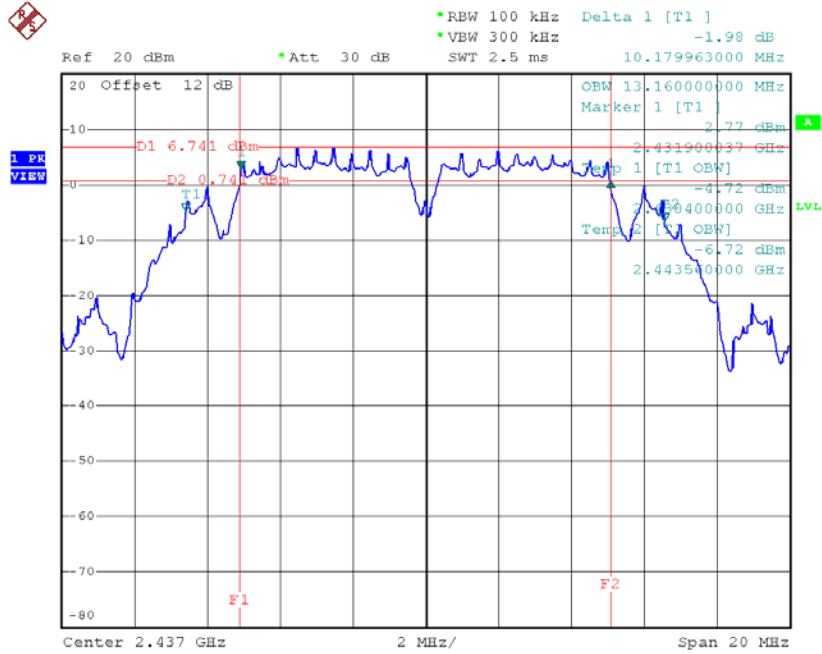

Date: 29.MAY.2016 14:50:23

TX CH11

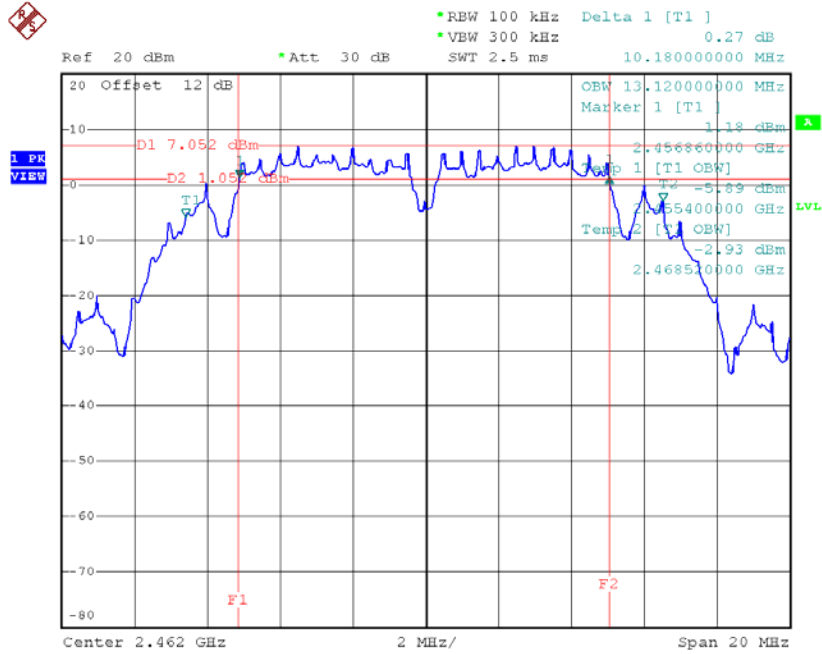


Date: 29.MAY.2016 14:53:52

Test Mode: TX G Mode_CH01/06/11_ANT 1


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.39	16.52	500	Complies
2437	16.38	16.48	500	Complies
2462	16.46	16.48	500	Complies

TX CH01

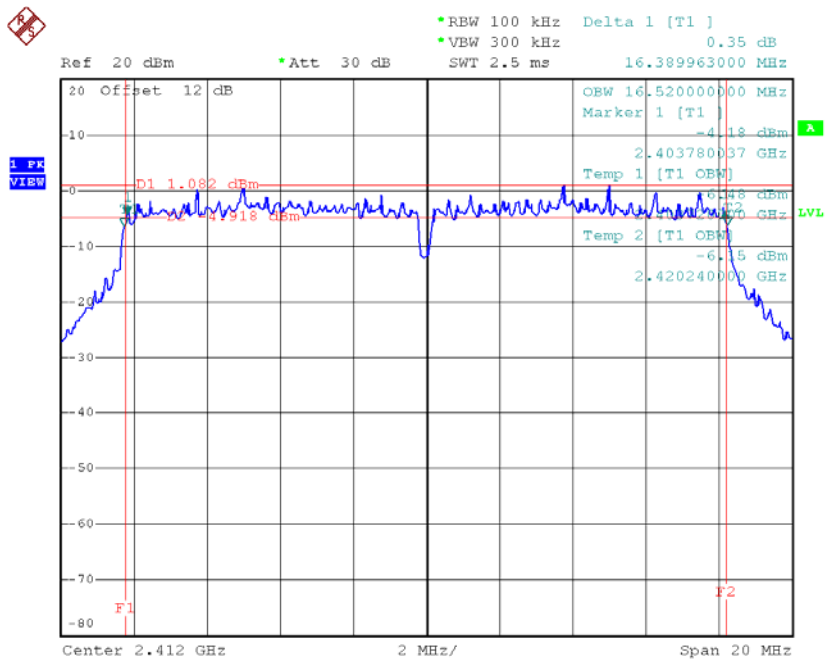


Date: 29.MAY.2016 15:14:05

TX CH06

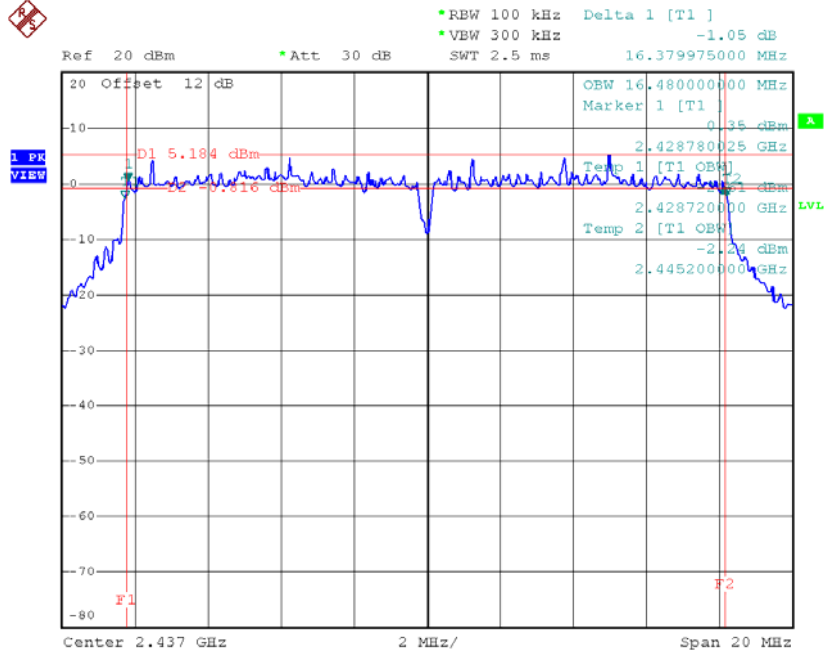

Date: 29.MAY.2016 15:20:47

TX CH11

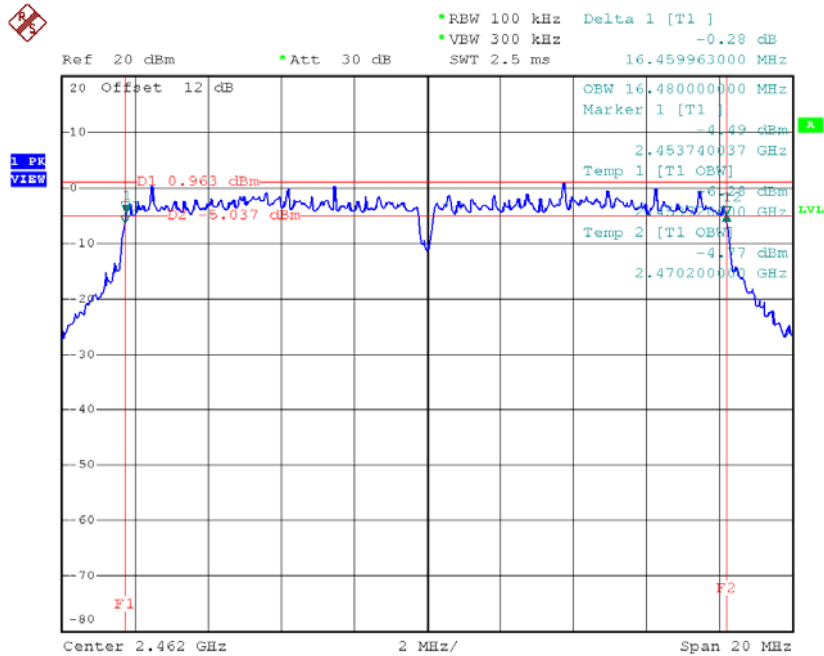


Date: 29.MAY.2016 15:22:16

Test Mode: TX G Mode_CH01/06/11_ANT 2


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	16.42	16.52	500	Complies
2437	16.43	16.52	500	Complies
2462	16.46	16.52	500	Complies

TX CH01

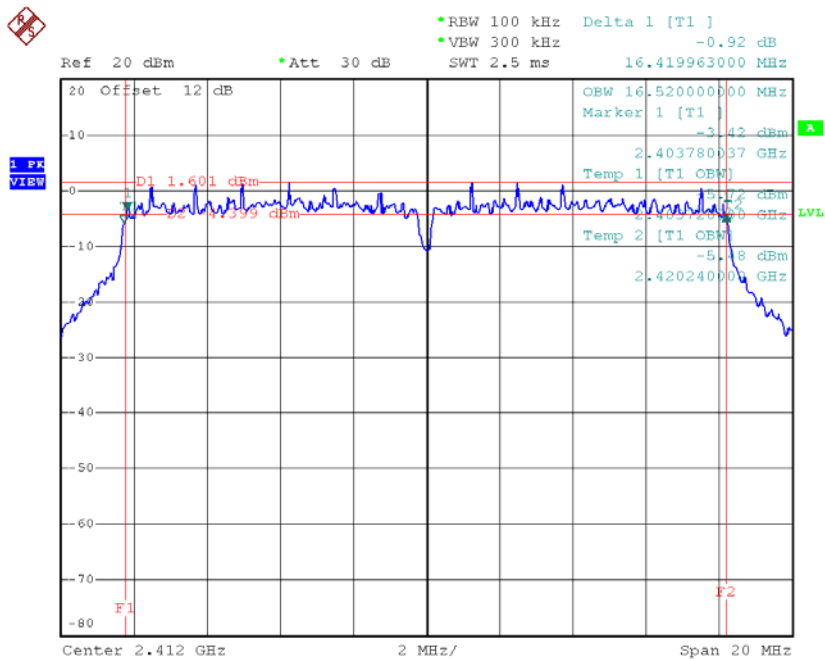


Date: 29.MAY.2016 15:15:08

TX CH06

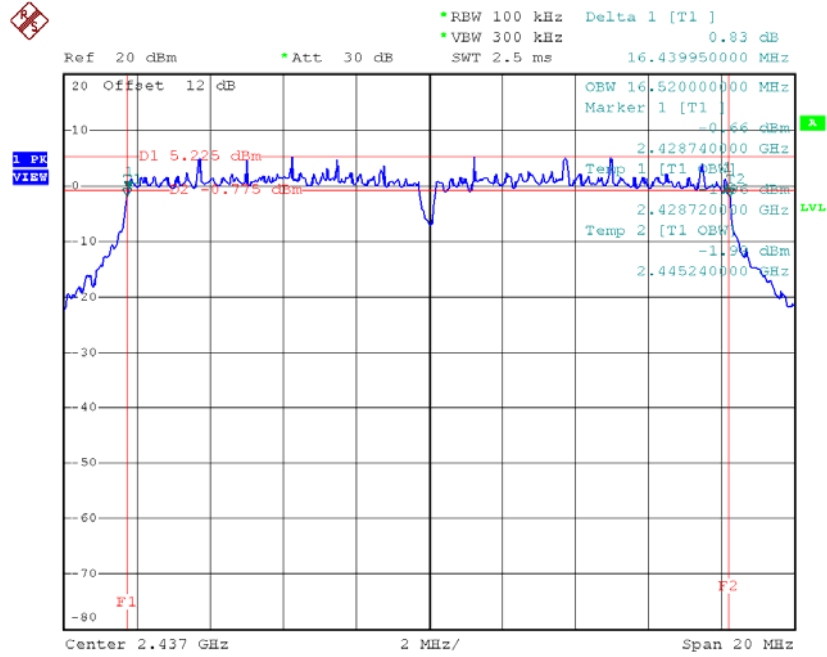

Date: 29.MAY.2016 15:21:18

TX CH11

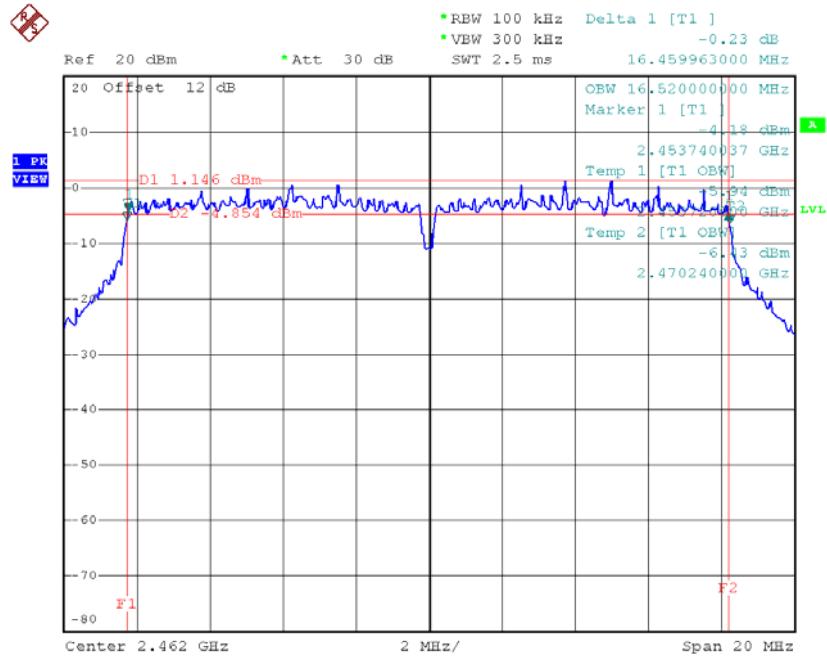


Date: 29.MAY.2016 15:23:59

Test Mode : TX N-20MHz Mode_CH01/06/11_ANT 1


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.65	17.64	500	Complies
2437	17.68	17.64	500	Complies
2462	17.66	17.64	500	Complies

TX CH01

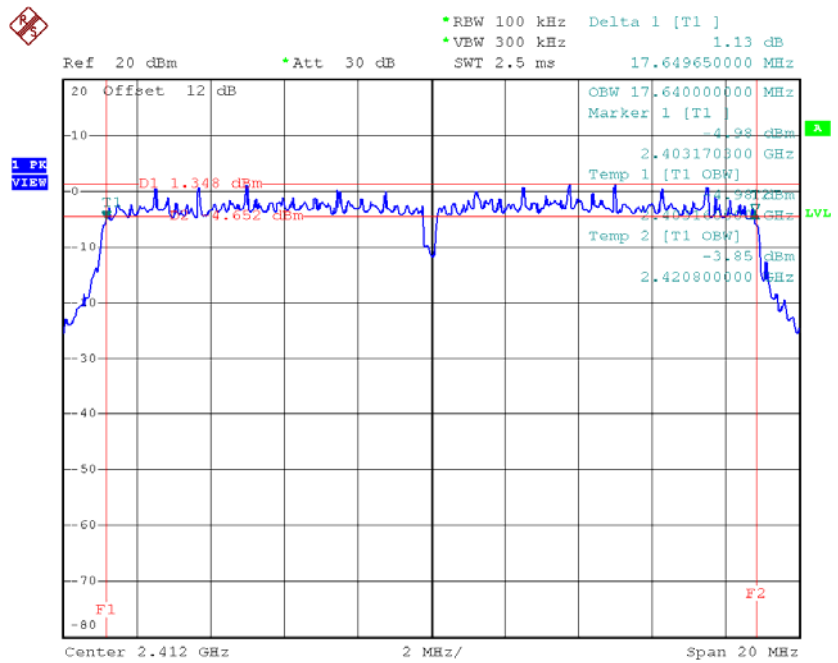


Date: 29.MAY.2016 15:28:53

TX CH06

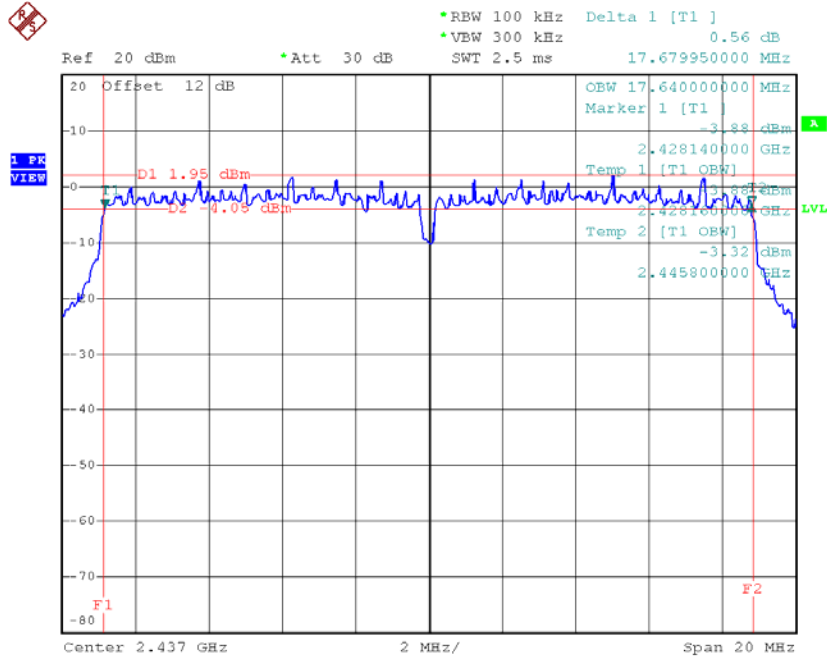

Date: 29.MAY.2016 15:40:37

TX CH11

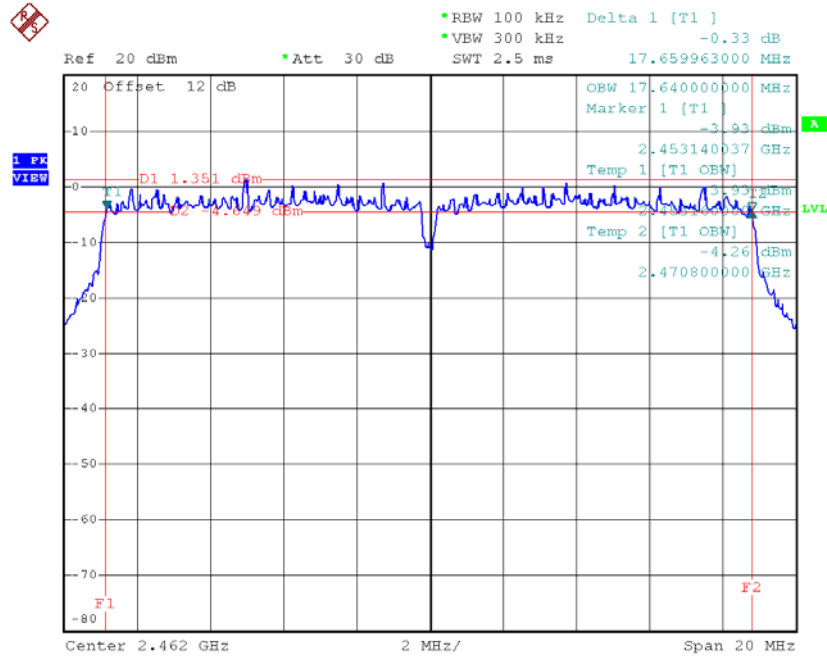


Date: 29.MAY.2016 15:31:04

Test Mode : TX N-20MHz Mode_CH01/06/11_ANT 2


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2412	17.60	17.64	500	Complies
2437	17.66	17.64	500	Complies
2462	17.66	17.64	500	Complies

TX CH01

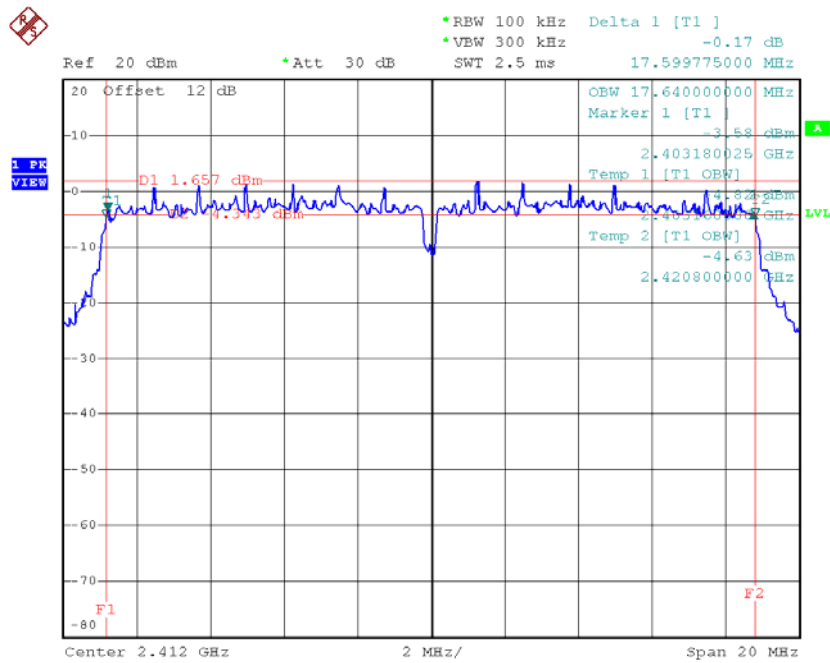


Date: 29.MAY.2016 15:30:00

TX CH06

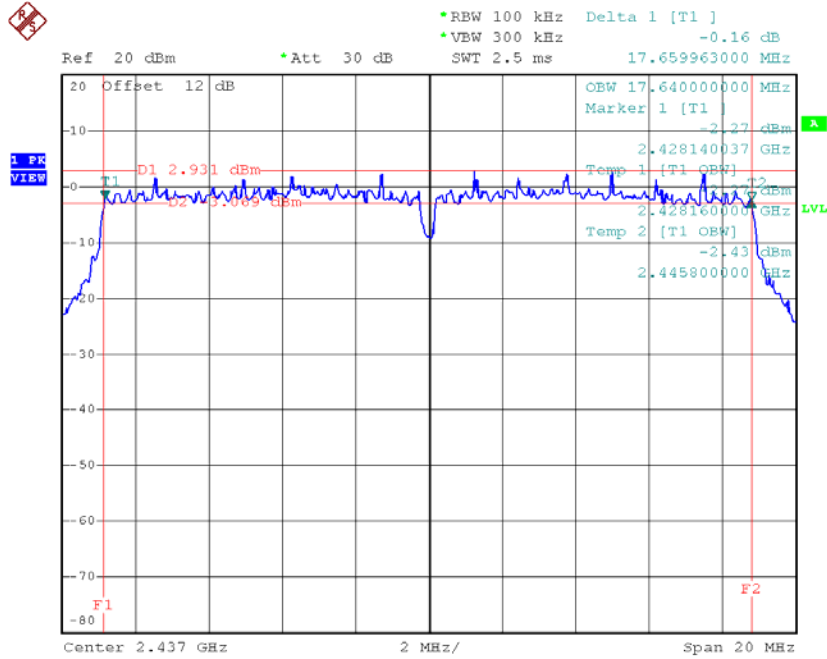


Date: 29.MAY.2016 15:40:58

TX CH11

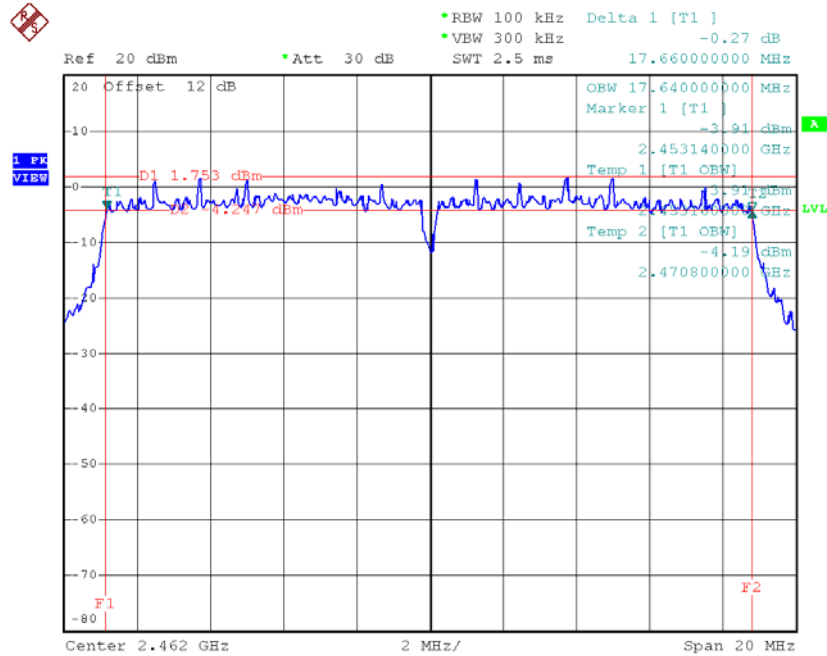


Date: 29.MAY.2016 15:32:00

TX CH06

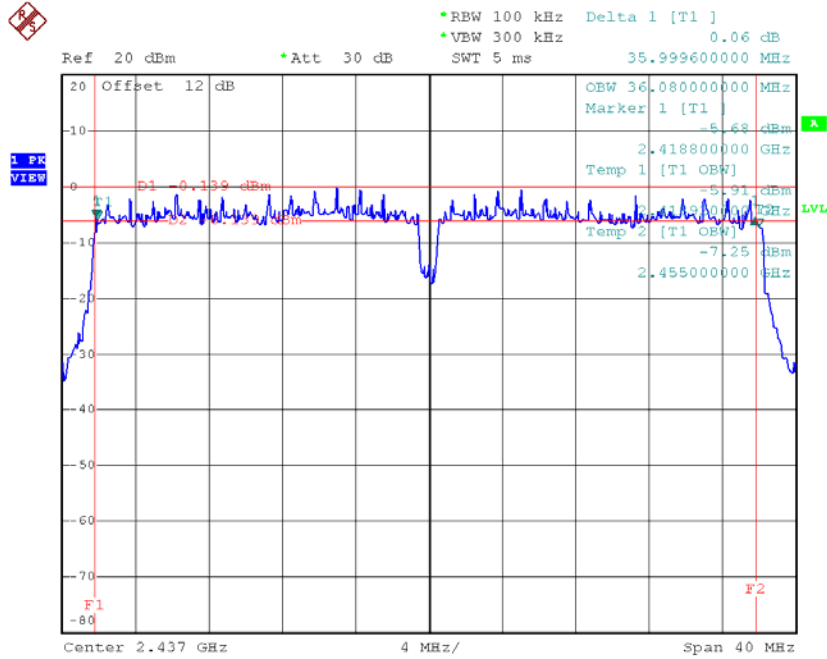

Date: 29.MAY.2016 15:35:28

TX CH09

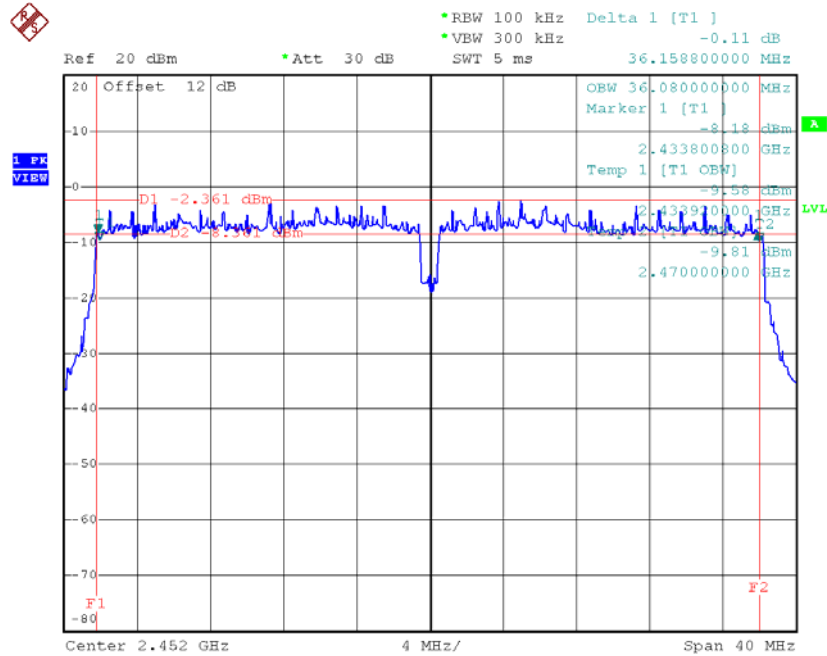


Date: 29.MAY.2016 15:37:07

Test Mode : TX N-40MHz Mode_CH01/06/11_ANT 2


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2422	35.91	36.00	500	Complies
2437	36.12	36.08	500	Complies
2452	36.20	36.08	500	Complies

TX CH03

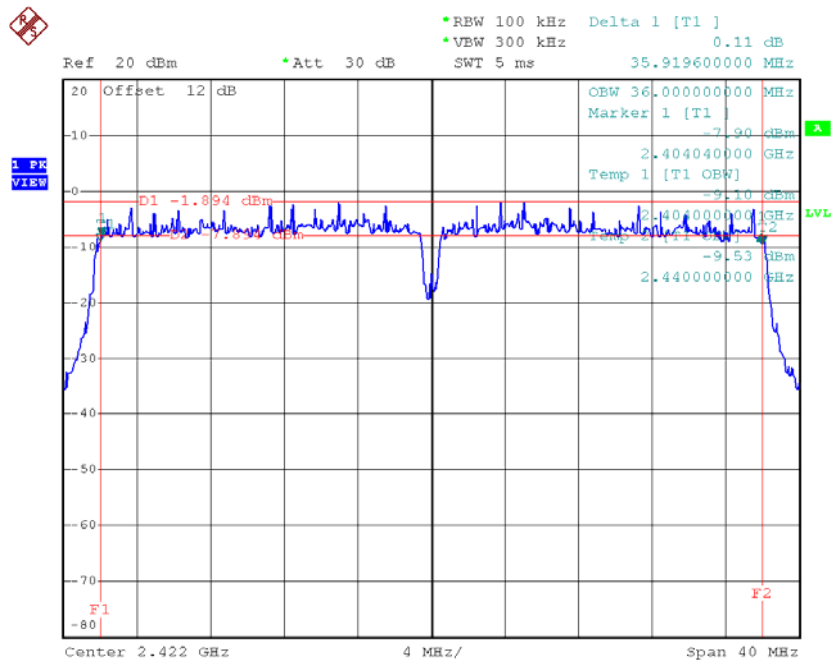


Date: 29.MAY.2016 15:33:59

TX CH06

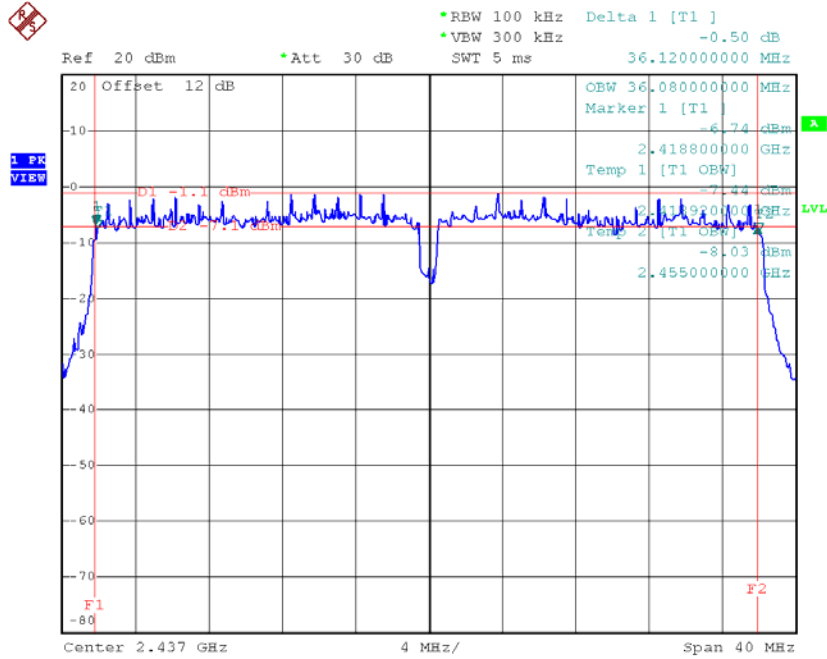

Date: 29.MAY.2016 15:35:58

TX CH09

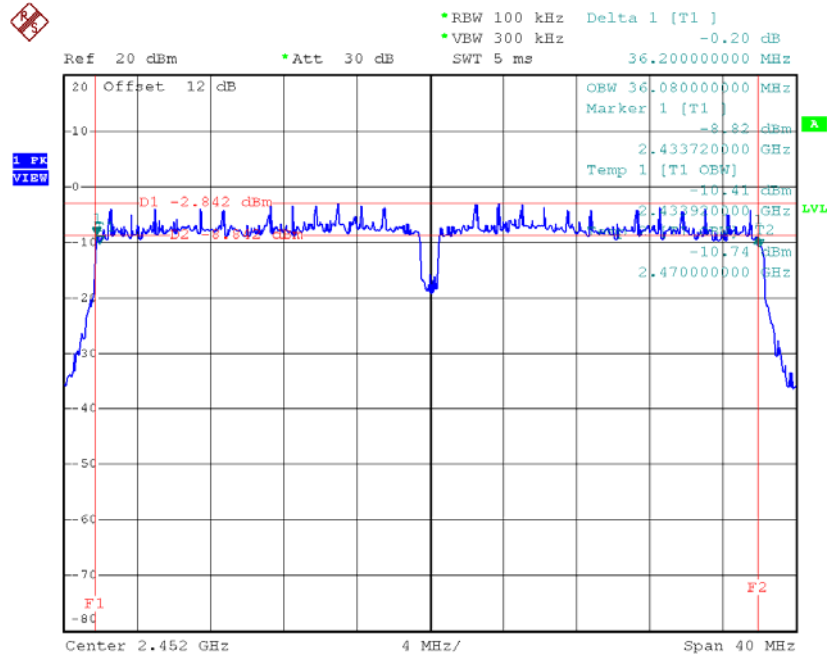

Date: 29.MAY.2016 15:37:59

ATTACHMENT F – MAXIMUM PEAK CONDUCTED OUTPUT POWER

For Peak Power

Test Mode :TX B Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	20.17	0.1040	28.22	0.66	Complies
2437	20.25	0.1059	28.22	0.66	Complies
2462	20.40	0.1096	28.22	0.66	Complies

Test Mode :TX B Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	20.38	0.1091	28.22	0.66	Complies
2437	20.47	0.1114	28.22	0.66	Complies
2462	20.46	0.1112	28.22	0.66	Complies

Test Mode :TX B Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	23.29	0.2131	28.22	0.66	Complies
2437	23.37	0.2174	28.22	0.66	Complies
2462	23.44	0.2208	28.22	0.66	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	22.19	0.1656	28.22	0.66	Complies
2437	24.96	0.3133	28.22	0.66	Complies
2462	22.24	0.1675	28.22	0.66	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	22.80	0.1905	28.22	0.66	Complies
2437	25.43	0.3491	28.22	0.66	Complies
2462	22.73	0.1875	28.22	0.66	Complies

Test Mode :TX G Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	25.52	0.3561	28.22	0.66	Complies
2437	28.21	0.6625	28.22	0.66	Complies
2462	25.50	0.3550	28.22	0.66	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	21.33	0.1358	28.22	0.66	Complies
2437	22.84	0.1923	28.22	0.66	Complies
2462	21.30	0.1349	28.22	0.66	Complies

Test Mode :TX N20 Mode_CH01/06/11_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	21.83	0.1524	28.22	0.66	Complies
2437	23.00	0.1995	28.22	0.66	Complies
2462	20.20	0.1047	28.22	0.66	Complies

Test Mode :TX N20 Mode_CH01/06/11_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2412	24.60	0.2882	28.22	0.66	Complies
2437	25.93	0.3918	28.22	0.66	Complies
2462	23.80	0.2396	28.22	0.66	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 1					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	21.20	0.1318	28.22	0.66	Complies
2437	22.09	0.1618	28.22	0.66	Complies
2452	20.03	0.1007	28.22	0.66	Complies

Test Mode :TX N40 Mode_CH03/06/09_ANT 2					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	21.50	0.1413	28.22	0.66	Complies
2437	22.24	0.1675	28.22	0.66	Complies
2452	19.11	0.0815	28.22	0.66	Complies

Test Mode :TX N40 Mode_CH03/06/09_Total					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2422	24.36	0.2731	28.22	0.66	Complies
2437	25.18	0.3293	28.22	0.66	Complies
2452	22.60	0.1822	28.22	0.66	Complies

For Average Power

Test Mode :TX B Mode_CH01/06/11_ANT 1		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	16.60	0.0457
2437	16.71	0.0469
2462	16.74	0.0472

Test Mode :TX B Mode_CH01/06/11_ANT 2		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	16.89	0.0489
2437	16.51	0.0448
2462	16.47	0.0444

Test Mode :TX B Mode_CH01/06/11_Total		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	19.76	0.0946
2437	19.62	0.0916
2462	19.62	0.0916

Test Mode :TX G Mode_CH01/06/11_ANT 1		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	12.74	0.0188
2437	16.59	0.0456
2462	12.91	0.0195

Test Mode :TX G Mode_CH01/06/11_ANT 2		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	13.00	0.0200
2437	16.87	0.0486
2462	12.87	0.0194

Test Mode :TX G Mode_CH01/06/11_Total		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	15.88	0.0387
2437	19.74	0.0942
2462	15.90	0.0389

Test Mode :TX N20 Mode_CH01/06/11_ANT 1		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	12.98	0.0199
2437	13.94	0.0248
2462	12.12	0.0163

Test Mode :TX N20 Mode_CH01/06/11_ANT 2		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	13.30	0.0214
2437	14.54	0.0284
2462	12.12	0.0163

Test Mode :TX N20 Mode_CH01/06/11_Total		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2412	16.15	0.0412
2437	17.26	0.0532
2462	15.13	0.0326

Test Mode :TX N40 Mode_CH03/06/09_ANT 1		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2422	12.41	0.1040
2437	13.72	0.1059
2452	11.40	0.1096


Test Mode :TX N40 Mode_CH03/06/09_ANT 2		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2422	12.18	0.1040
2437	13.77	0.1059
2452	10.33	0.1096

Test Mode :TX N40 Mode_CH03/06/09_Total		
Frequency (MHz)	Conducted Average Power (dBm)	Conducted Average Power (W)
2422	15.31	0.1040
2437	16.75	0.1059
2452	13.91	0.1096

**ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS
EMISSION**

Test Mode : TX B Mode_ANT 1

TX B mode CH01

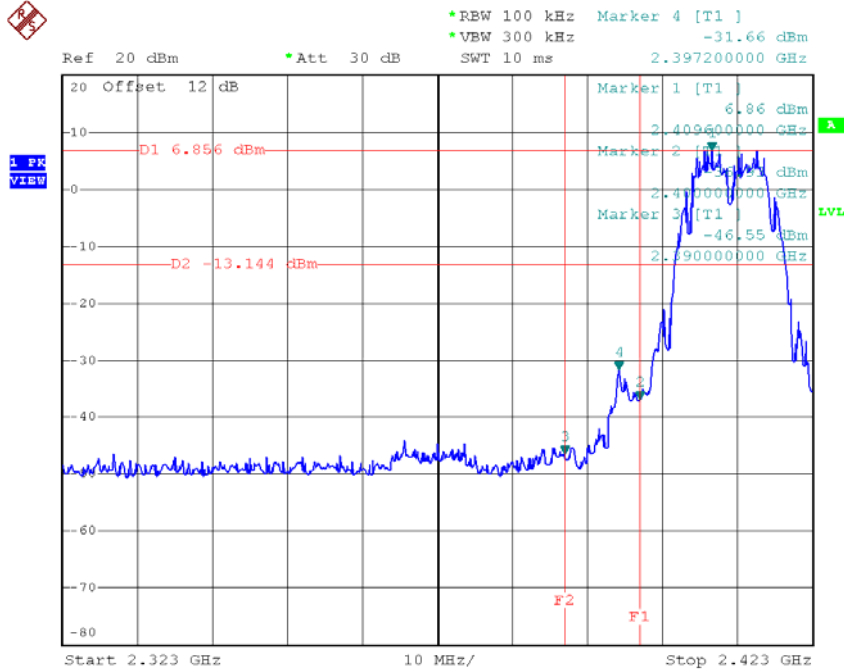


Date: 29.MAY.2016 14:48:18

TX B mode CH11




Date: 29.MAY.2016 14:53:02

TX B mode CH01 (10 Harmonic of the frequency)

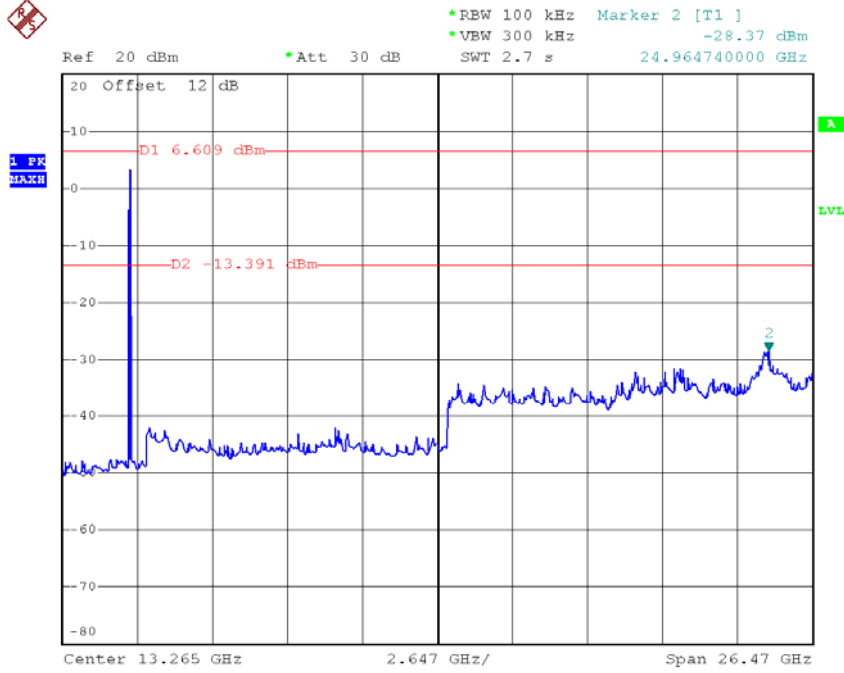


Date: 29.MAY.2016 15:11:15

TX B mode CH06 (10 Harmonic of the frequency)

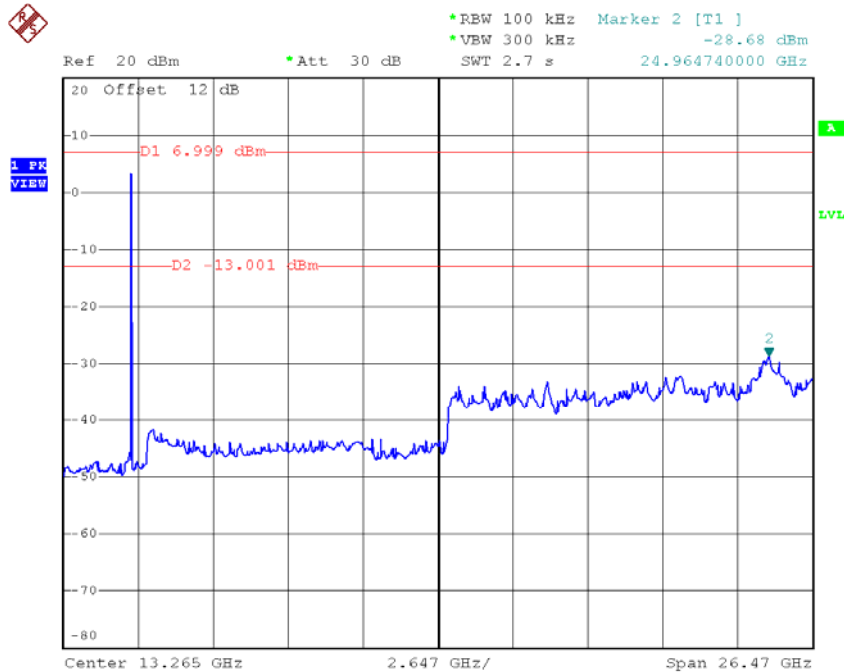

Date: 29.MAY.2016 15:05:45


TX B mode CH11 (10 Harmonic of the frequency)

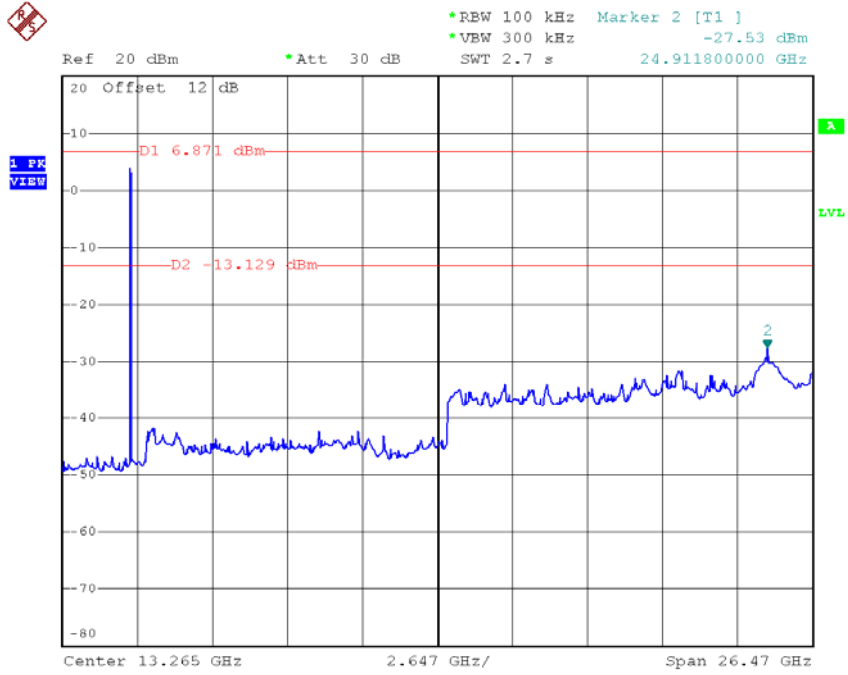

Date: 29.MAY.2016 15:03:48


Test Mode : TX B Mode_ANT 2

TX B mode CH01

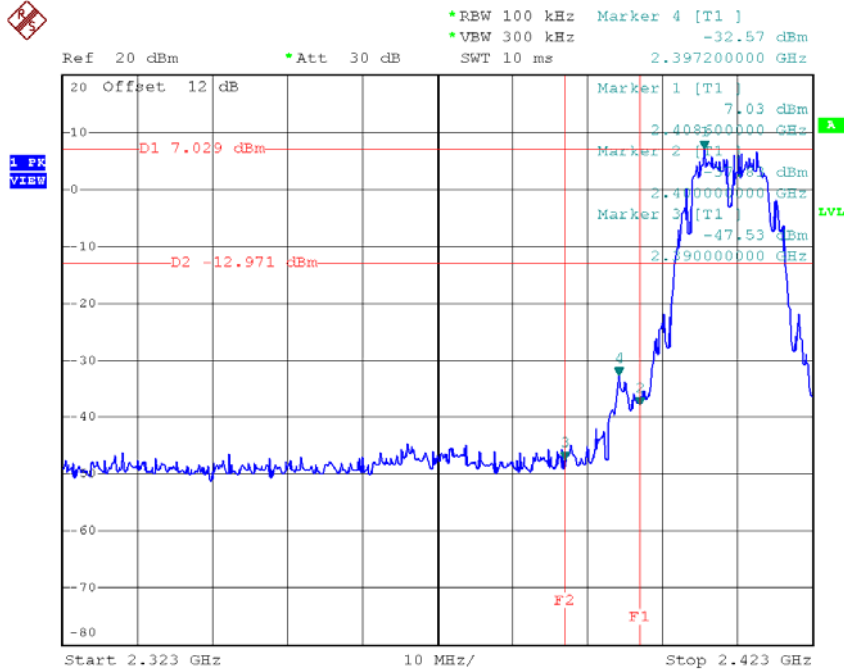


Date: 29.MAY.2016 14:49:29

TX B mode CH11

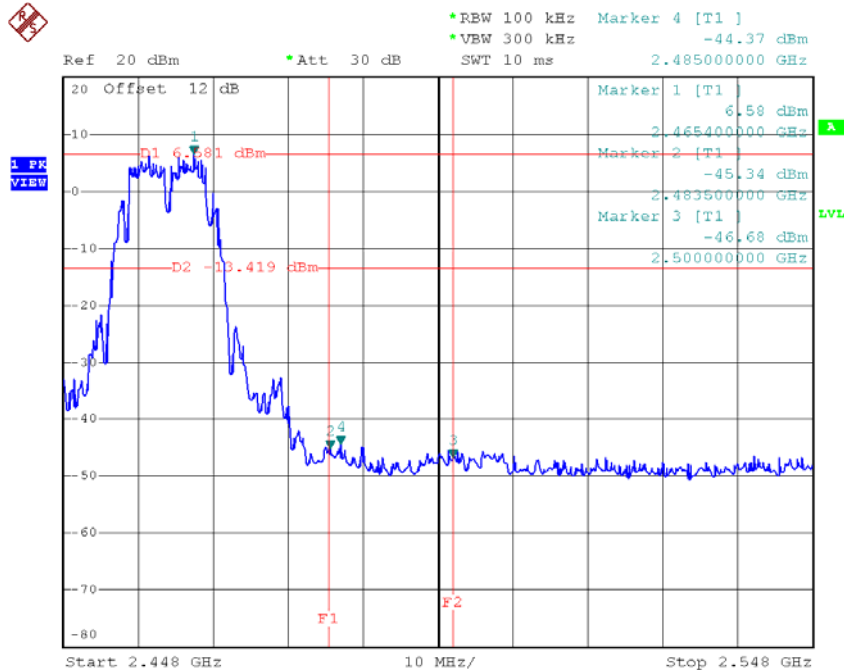


Date: 29.MAY.2016 14:54:33

TX B mode CH01 (10 Harmonic of the frequency)

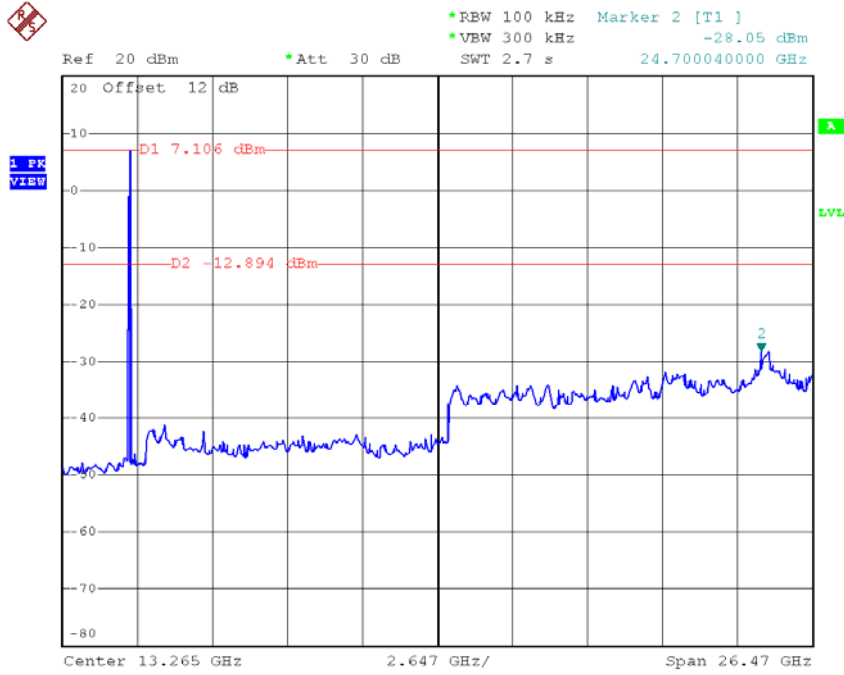


Date: 29.MAY.2016 15:10:21

TX B mode CH06 (10 Harmonic of the frequency)

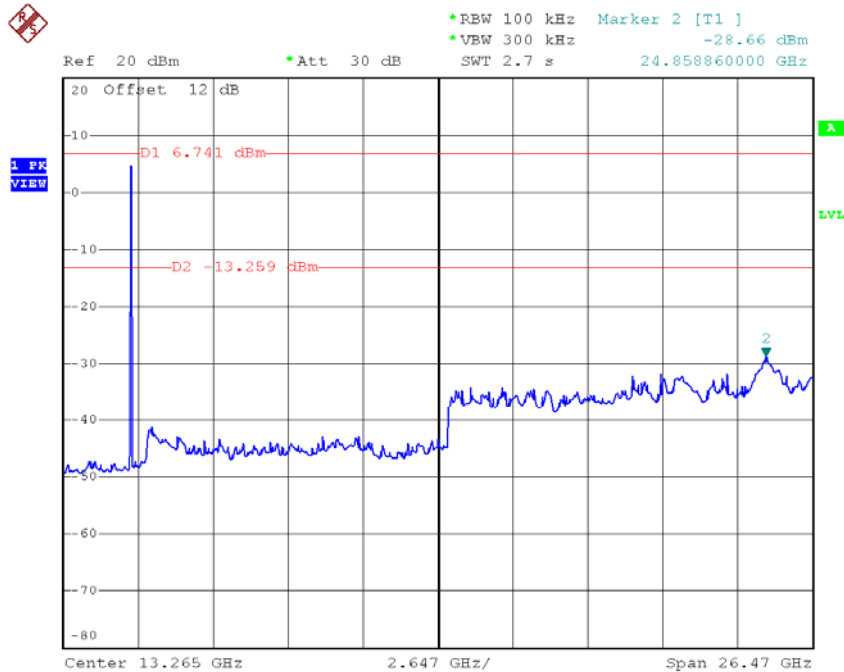

Date: 29.MAY.2016 15:08:38


TX B mode CH11 (10 Harmonic of the frequency)

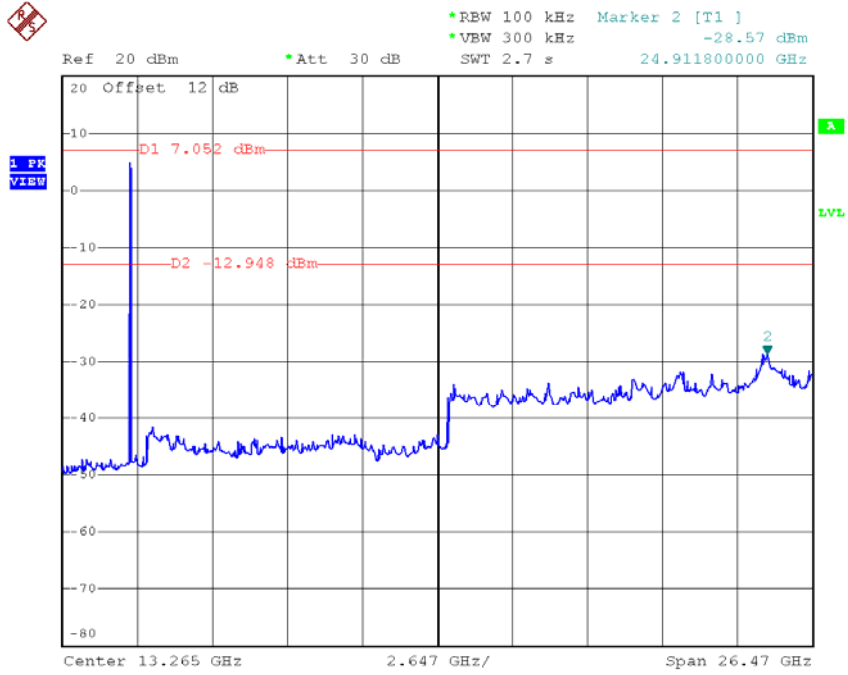

Date: 29.MAY.2016 14:57:53


Test Mode : TX G Mode_ANT 1

TX G mode CH01

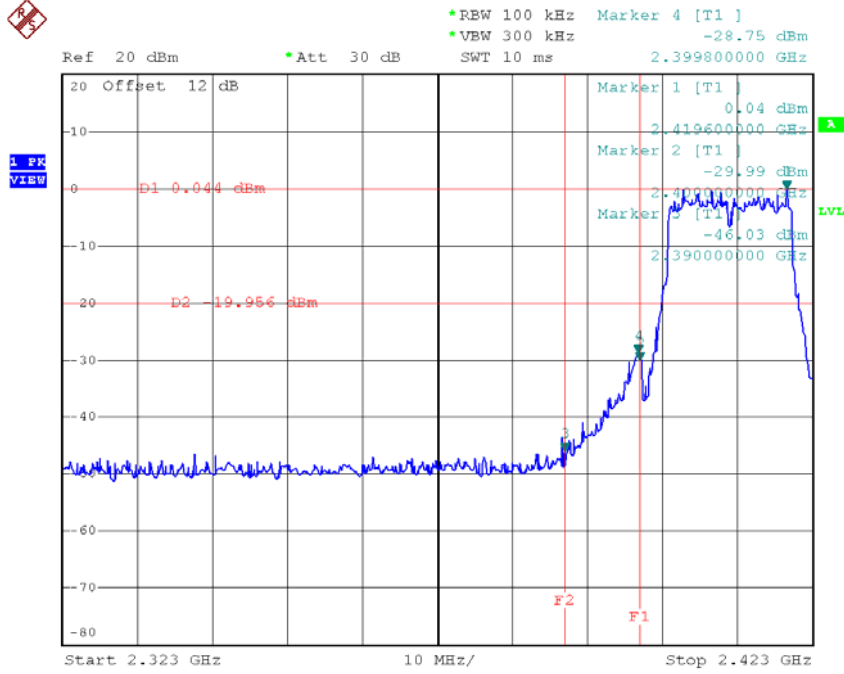


Date: 29.MAY.2016 15:14:24

TX G mode CH11

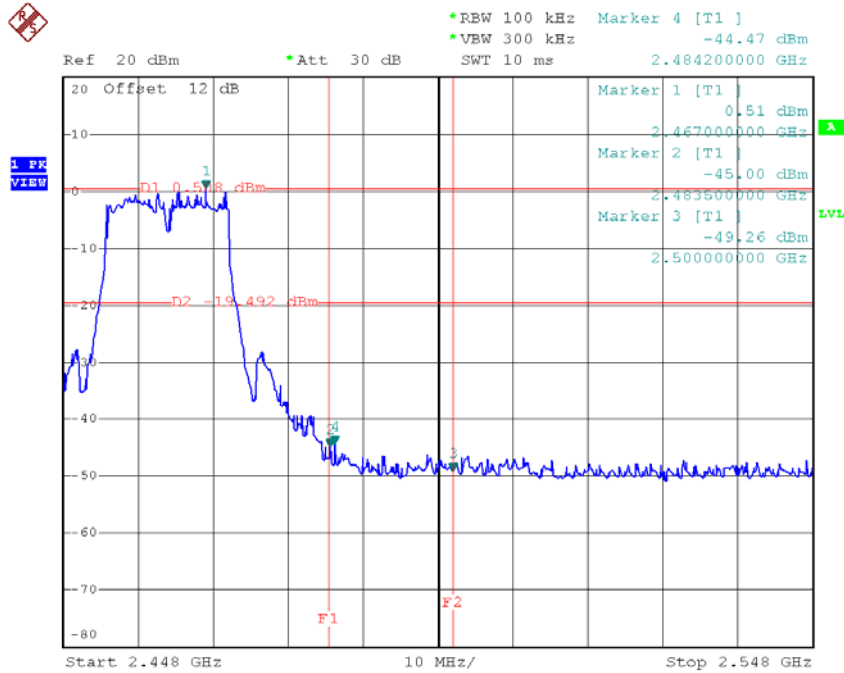


Date: 29.MAY.2016 15:22:39

TX G mode CH01 (10 Harmonic of the frequency)

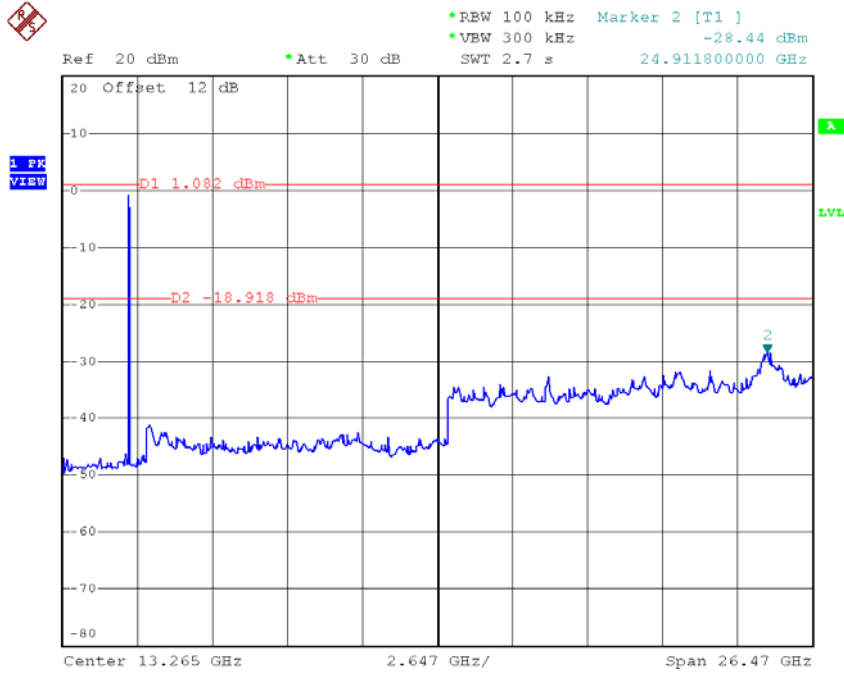


Date: 29.MAY.2016 15:51:51

TX G mode CH06 (10 Harmonic of the frequency)

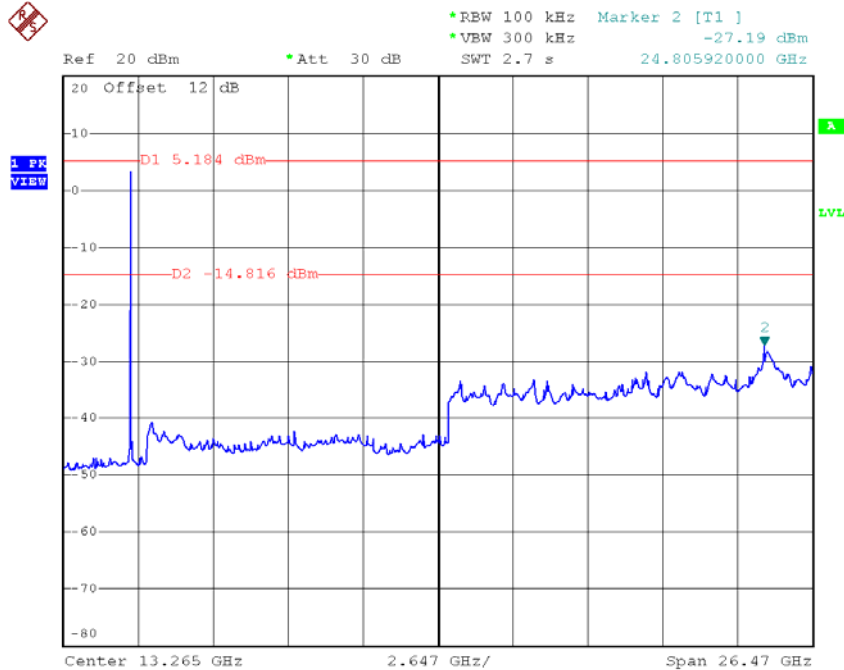

Date: 29.MAY.2016 15:53:04


TX G mode CH11 (10 Harmonic of the frequency)

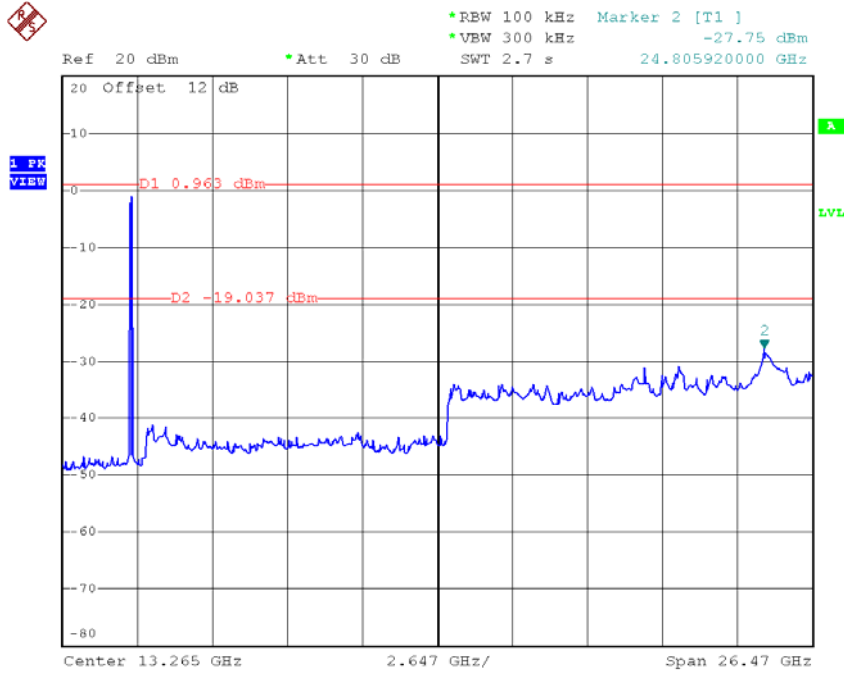

Date: 29.MAY.2016 15:55:33


Test Mode : TX G Mode_ANT 2

TX G mode CH01

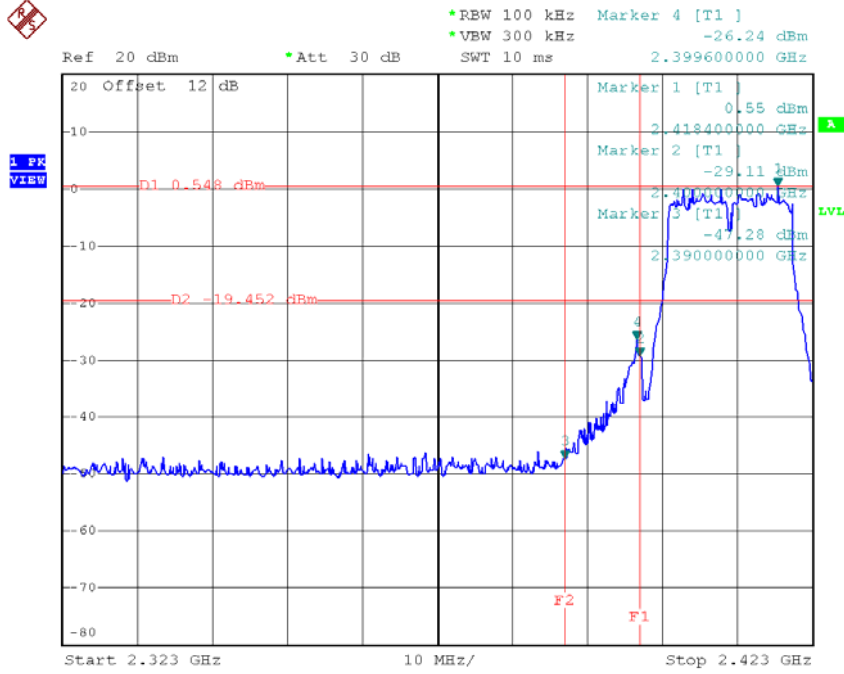


Date: 29.MAY.2016 15:17:04

TX G mode CH11

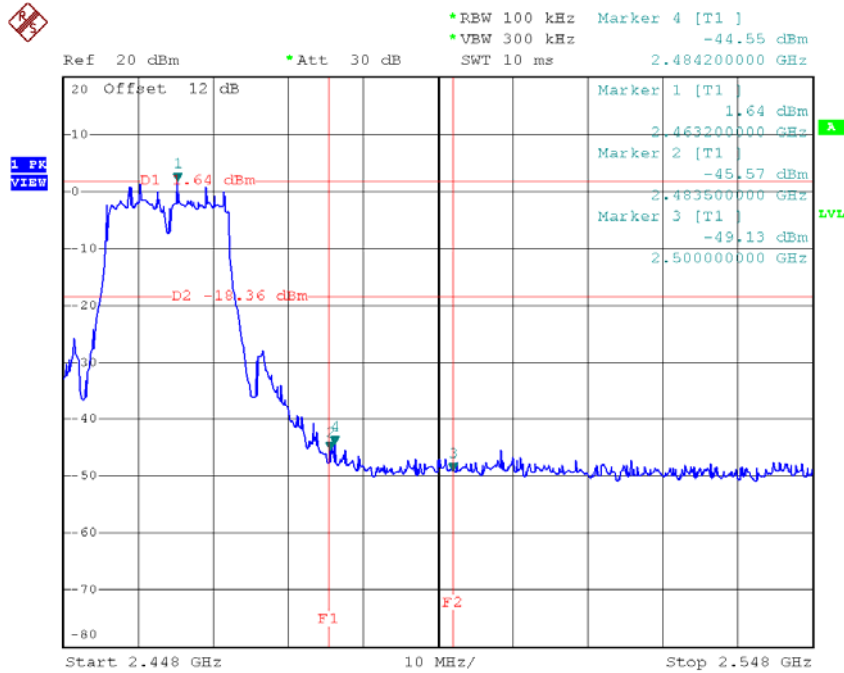


Date: 29.MAY.2016 15:24:22

TX G mode CH01 (10 Harmonic of the frequency)

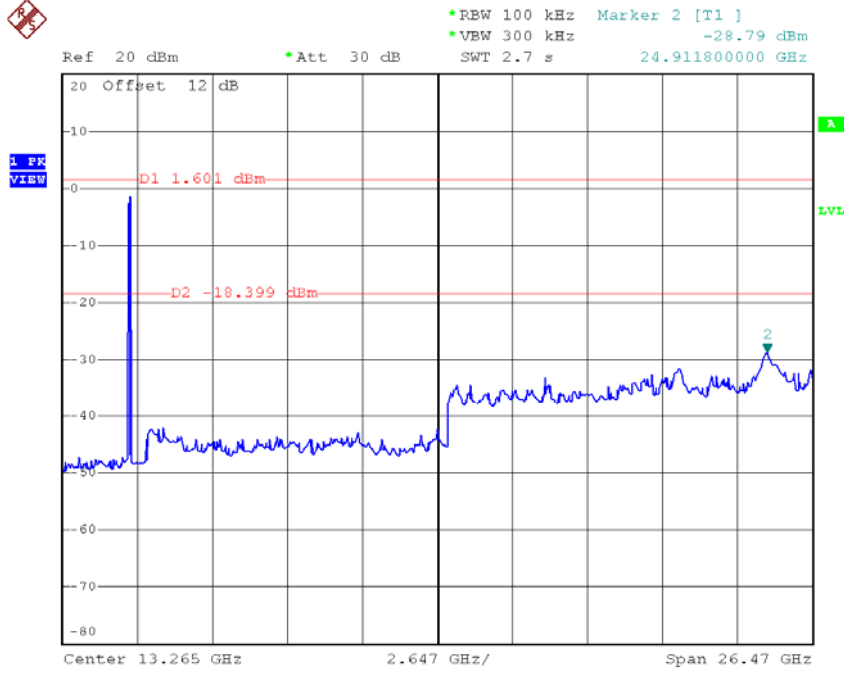


Date: 29.MAY.2016 15:50:21

TX G mode CH06 (10 Harmonic of the frequency)

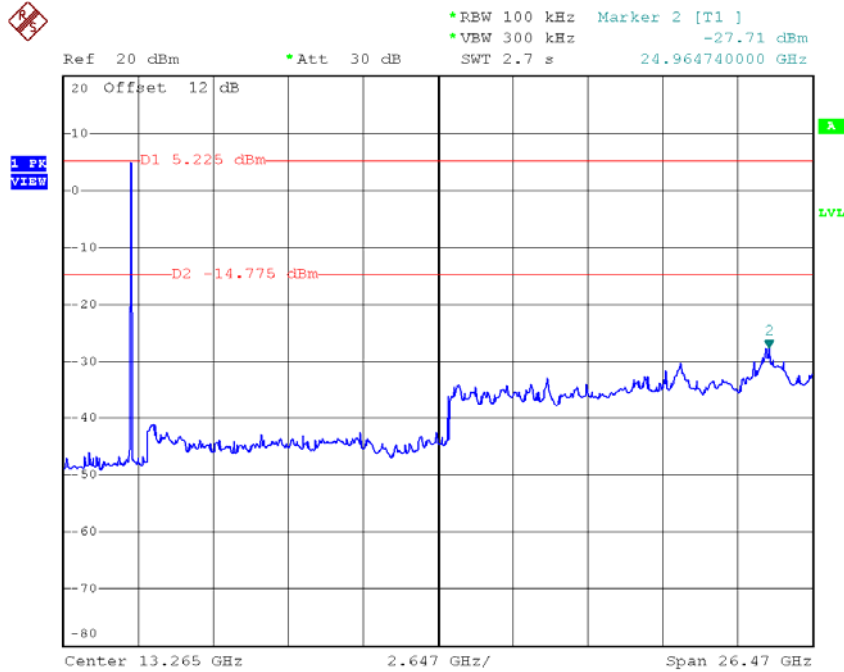

Date: 29.MAY.2016 15:53:58


TX G mode CH11 (10 Harmonic of the frequency)

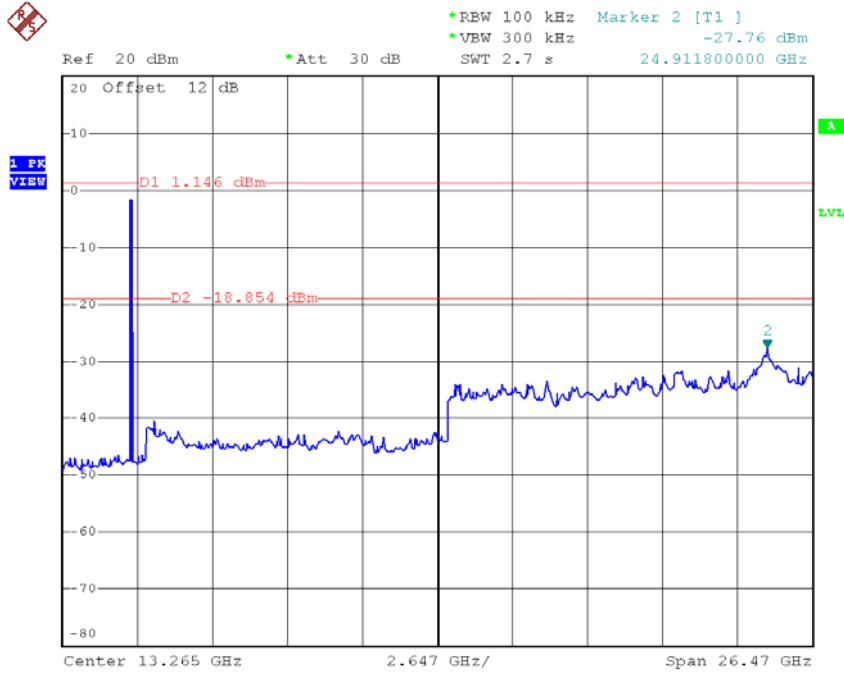

Date: 29.MAY.2016 15:56:32


Test Mode : TX N-20M Mode_ANT 1

TX HT20 mode CH01

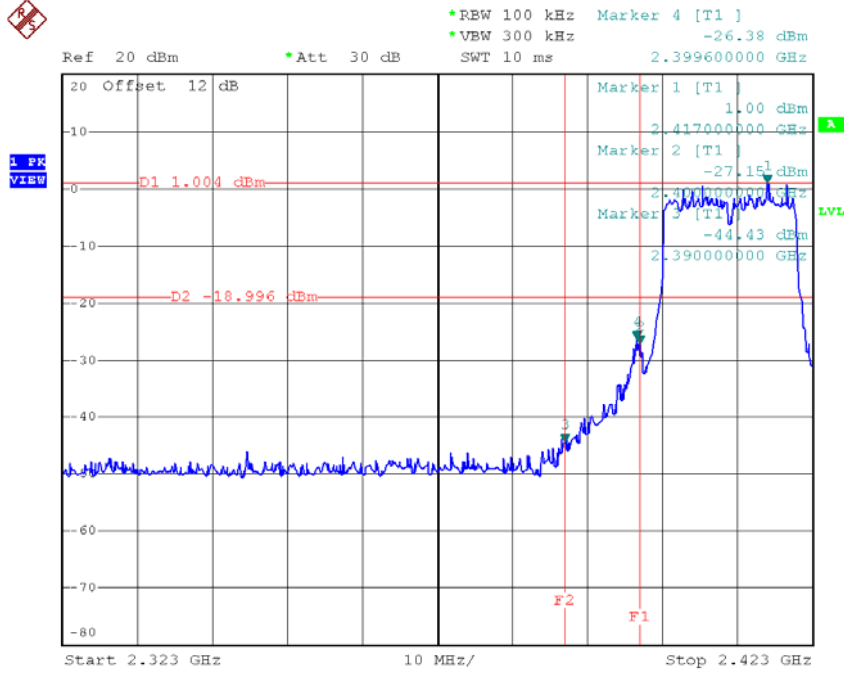


Date: 29.MAY.2016 15:29:17

TX HT20 mode CH11

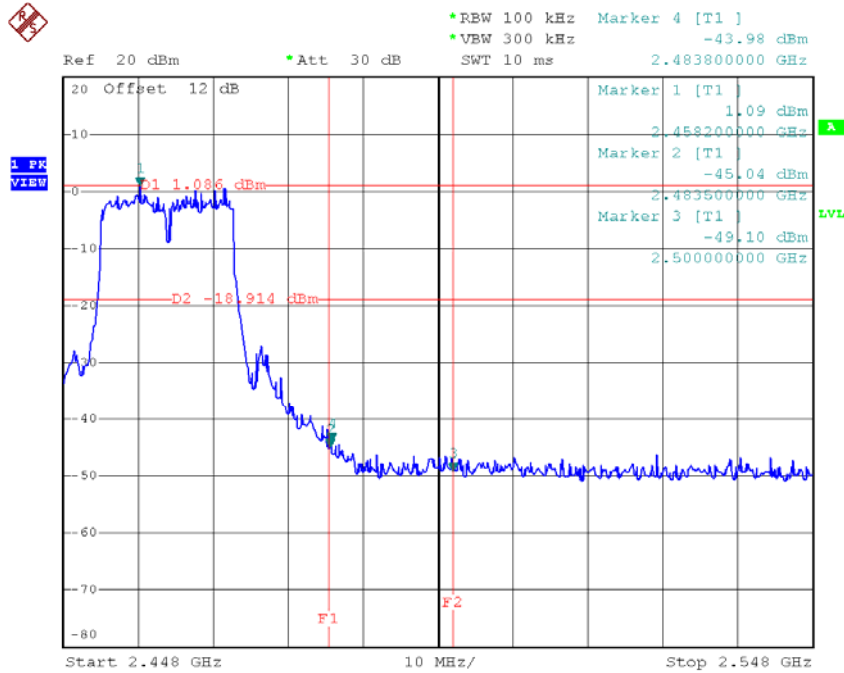


Date: 29.MAY.2016 15:31:28

TX HT20 mode CH01 (10 Harmonic of the frequency)

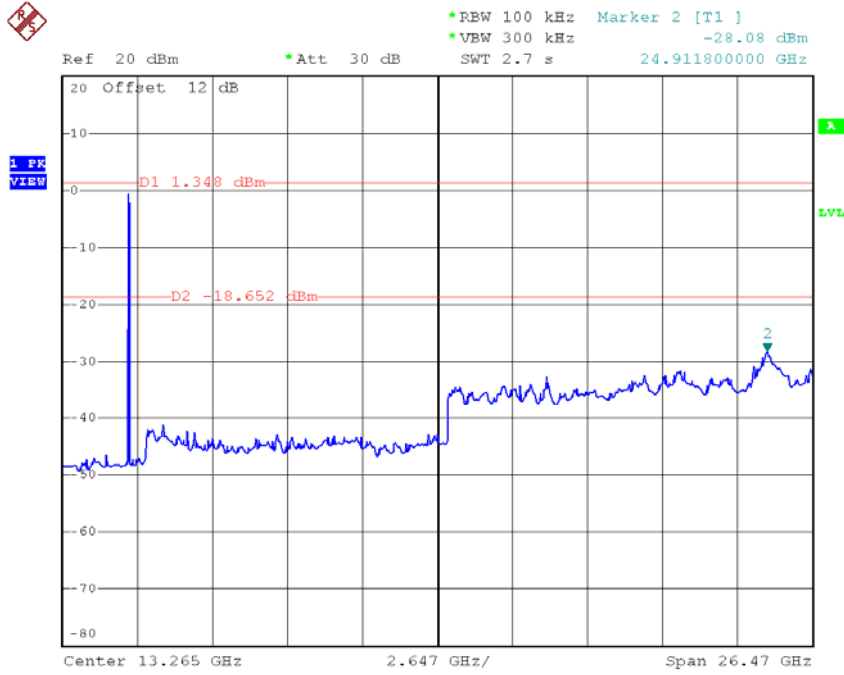


Date: 29.MAY.2016 15:59:30

TX HT20 mode CH06 (10 Harmonic of the frequency)

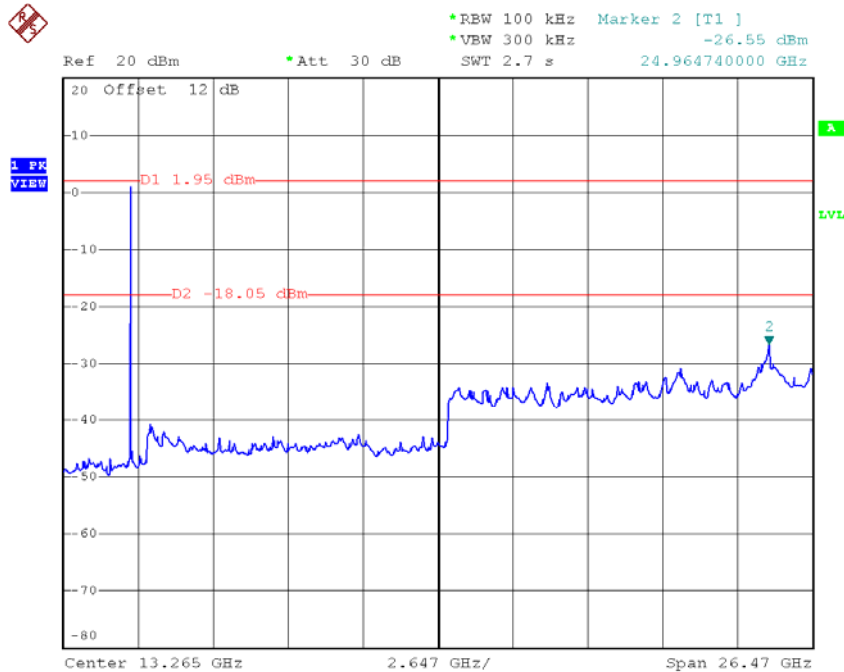

Date: 29.MAY.2016 16:10:17


TX HT20 mode CH11 (10 Harmonic of the frequency)

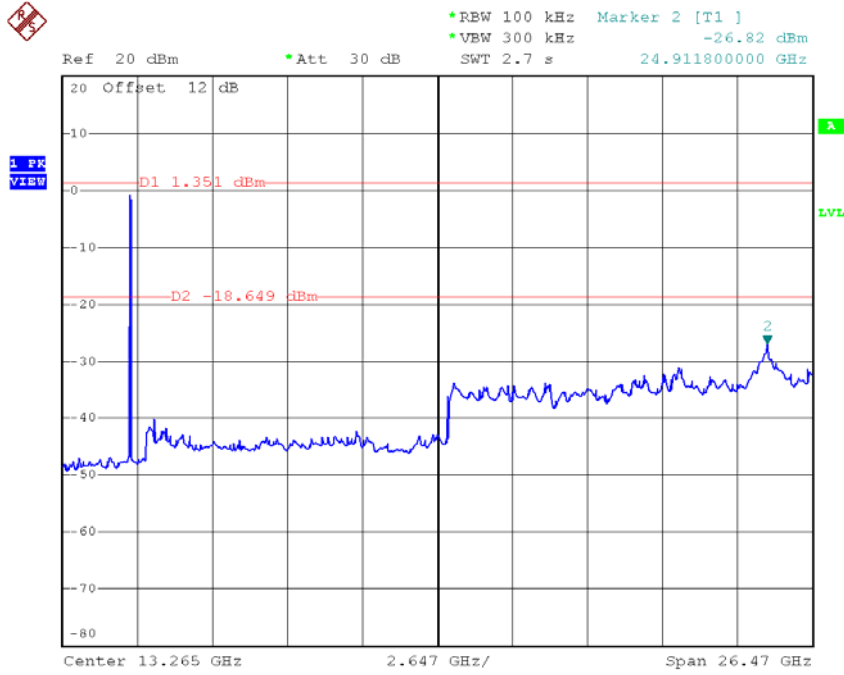

Date: 29.MAY.2016 16:01:37


Test Mode : TX N-20M Mode_ANT 2

TX HT20 mode CH01

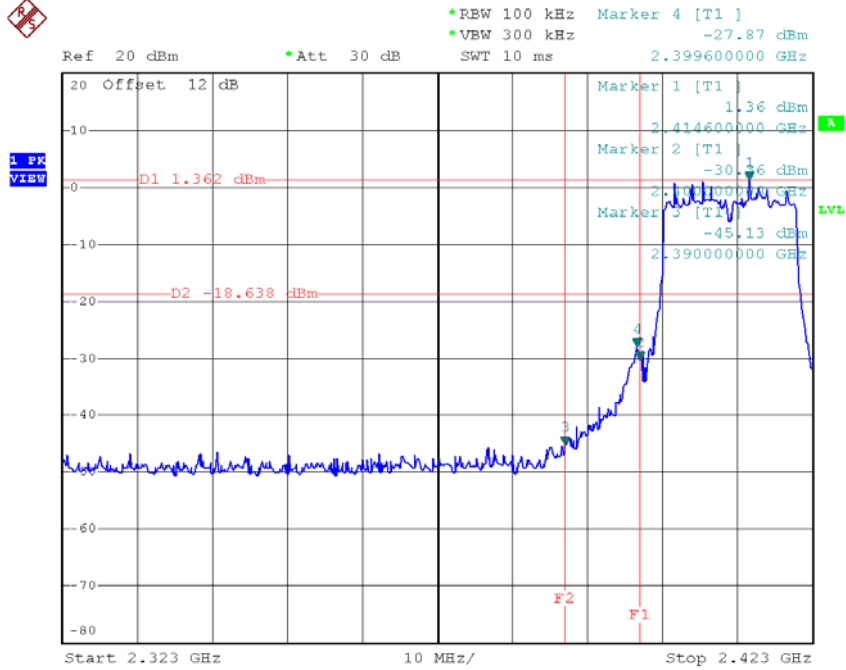


Date: 29.MAY.2016 15:30:23

TX HT20 mode CH11

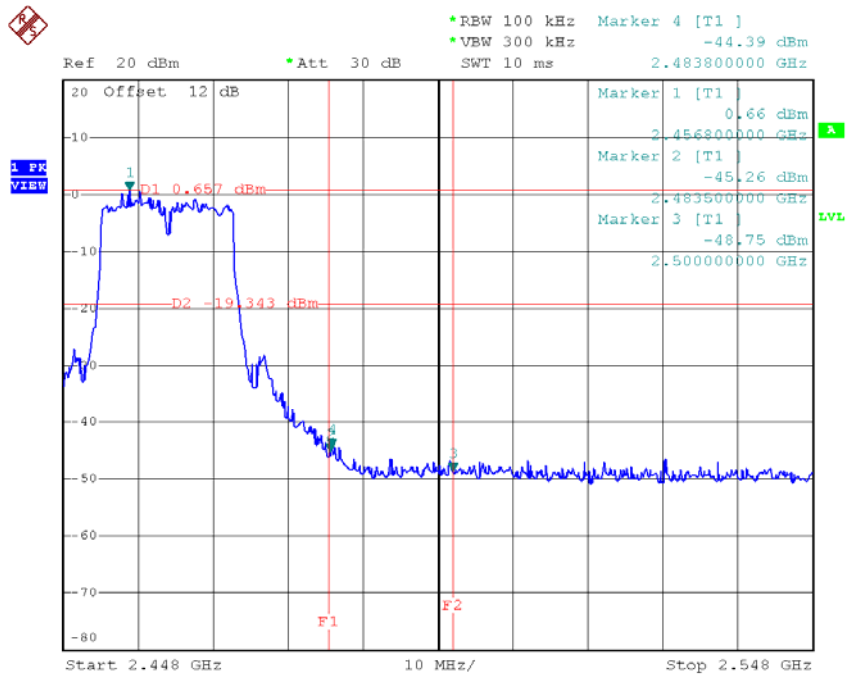


Date: 29.MAY.2016 15:32:24

TX HT20 mode CH01 (10 Harmonic of the frequency)

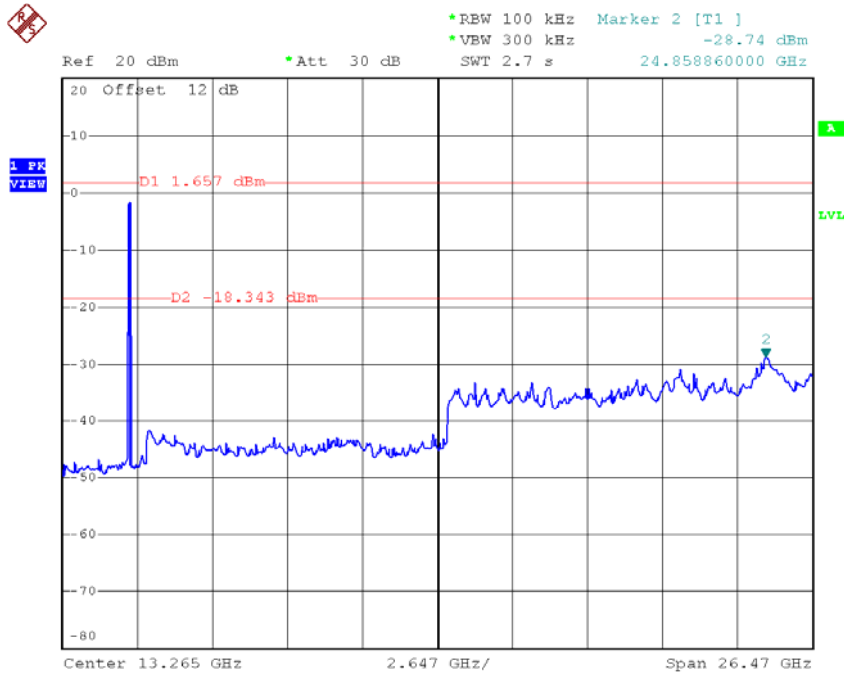


Date: 29.MAY.2016 16:00:18

TX HT20 mode CH06 (10 Harmonic of the frequency)

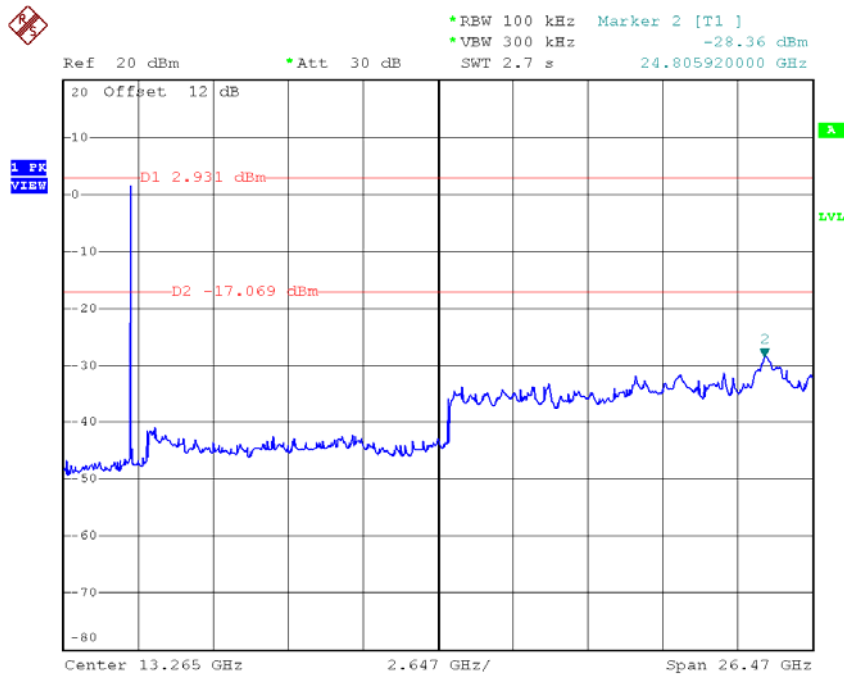

Date: 29.MAY.2016 16:11:26


TX HT20 mode CH11 (10 Harmonic of the frequency)

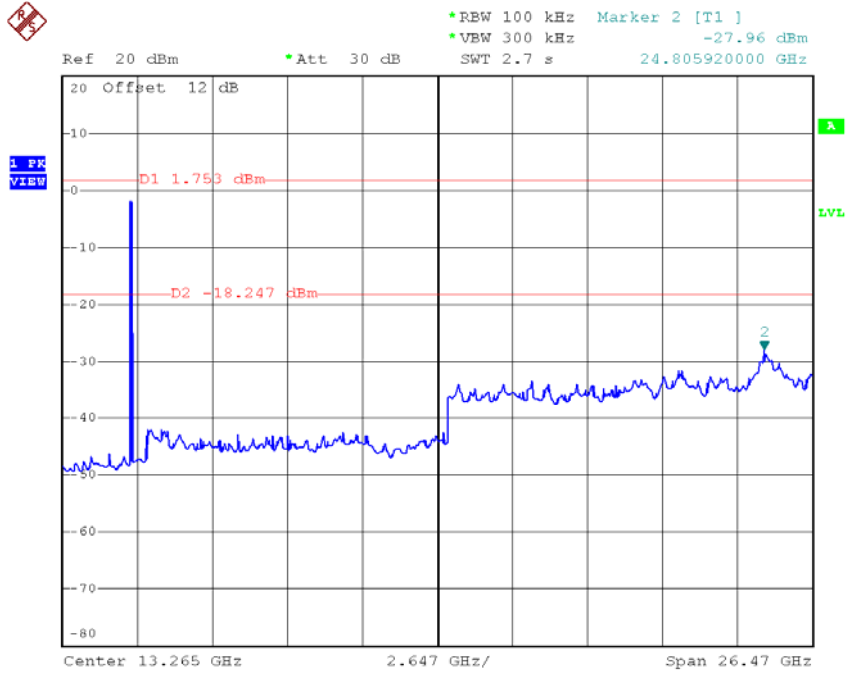

Date: 29.MAY.2016 16:02:36


Test Mode : TX N-40M Mode_ANT 1

TX HT40 mode CH03

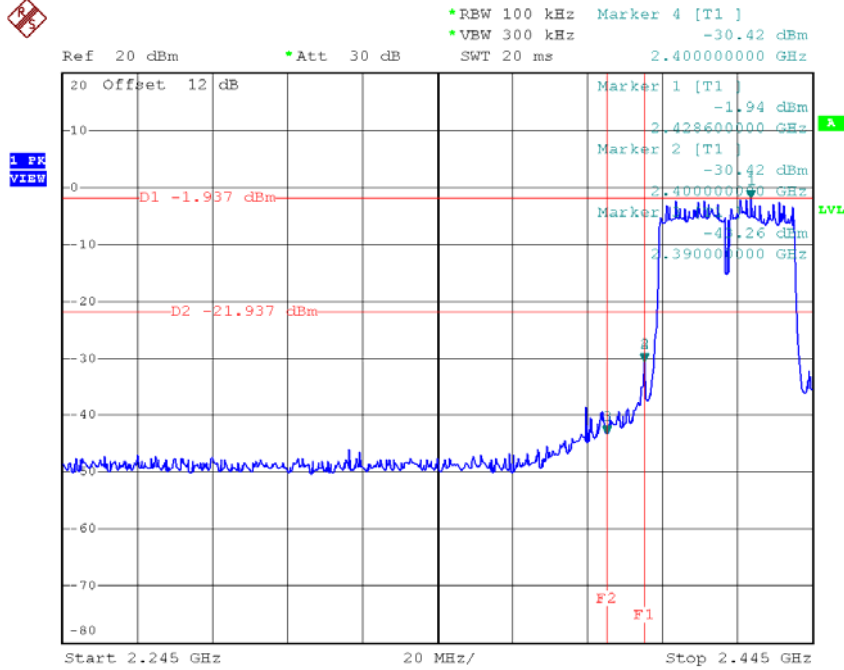


Date: 29.MAY.2016 15:33:30

TX HT40 mode CH09

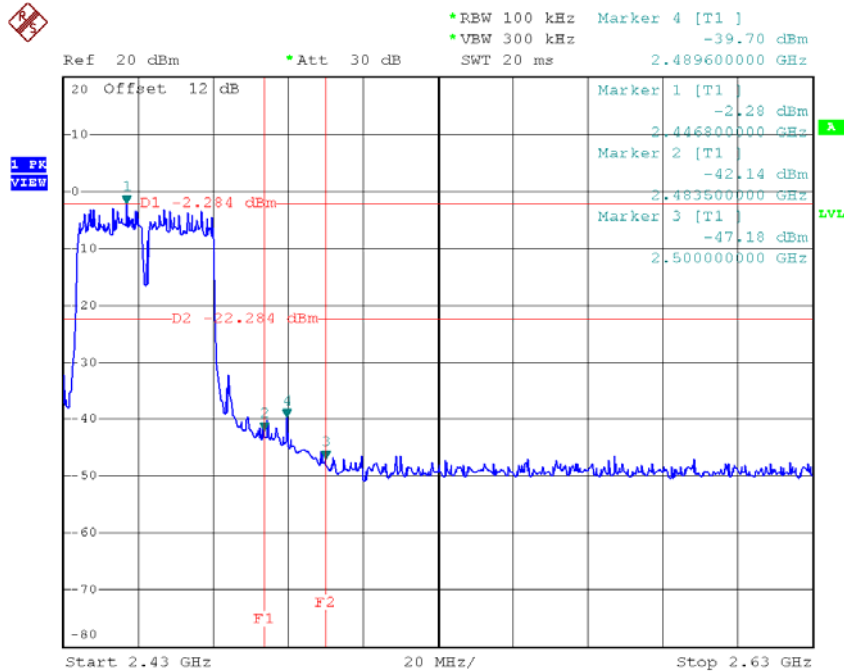


Date: 29.MAY.2016 15:37:30

TX HT40 mode CH03 (10 Harmonic of the frequency)

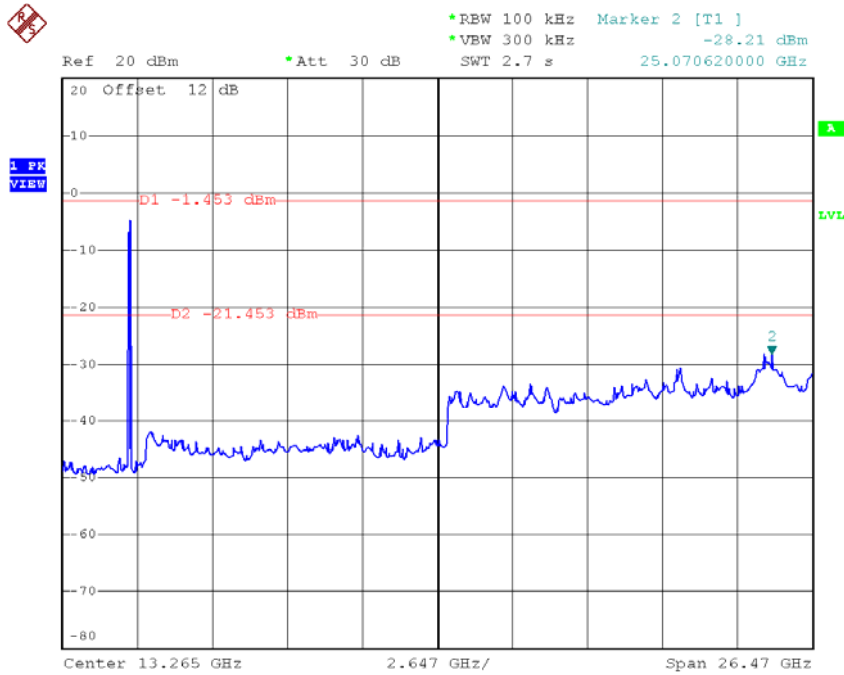


Date: 29.MAY.2016 16:04:01

TX HT40 mode CH06 (10 Harmonic of the frequency)

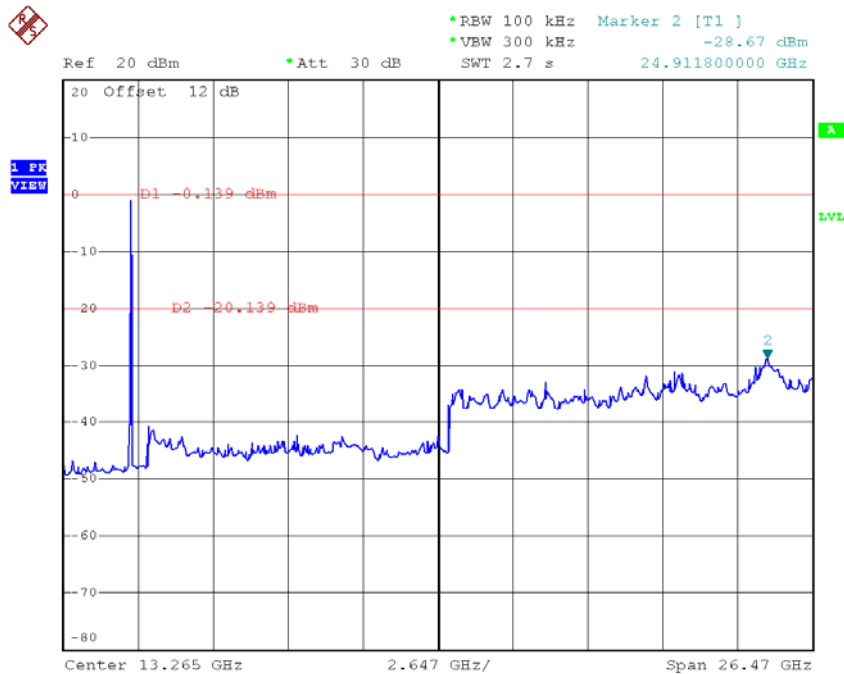

Date: 29.MAY.2016 16:06:06


TX HT40 mode CH09 (10 Harmonic of the frequency)

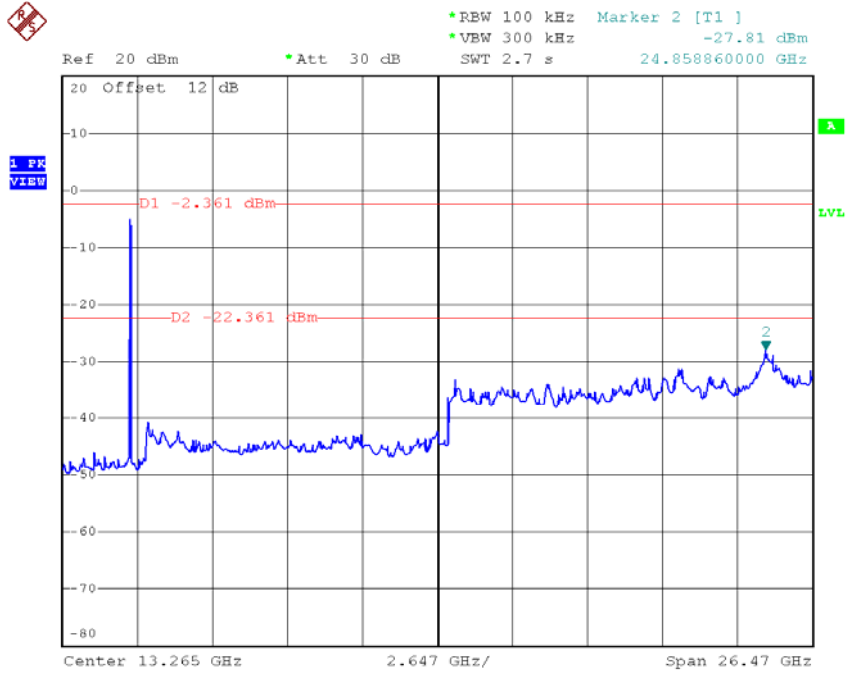

Date: 29.MAY.2016 16:07:39


Test Mode : TX N-40M Mode_ANT 2

TX HT40 mode CH03

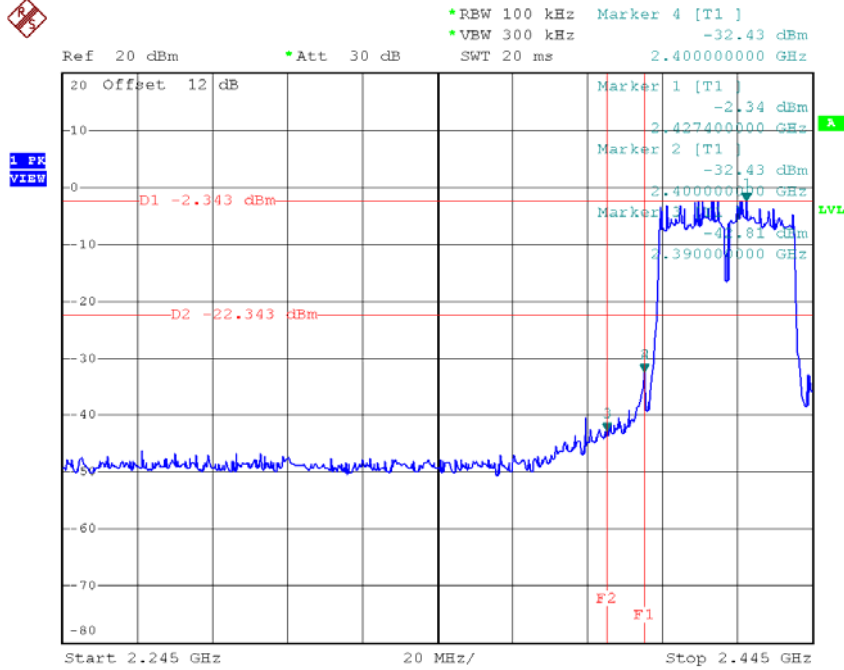


Date: 29.MAY.2016 15:34:23

TX HT40 mode CH09

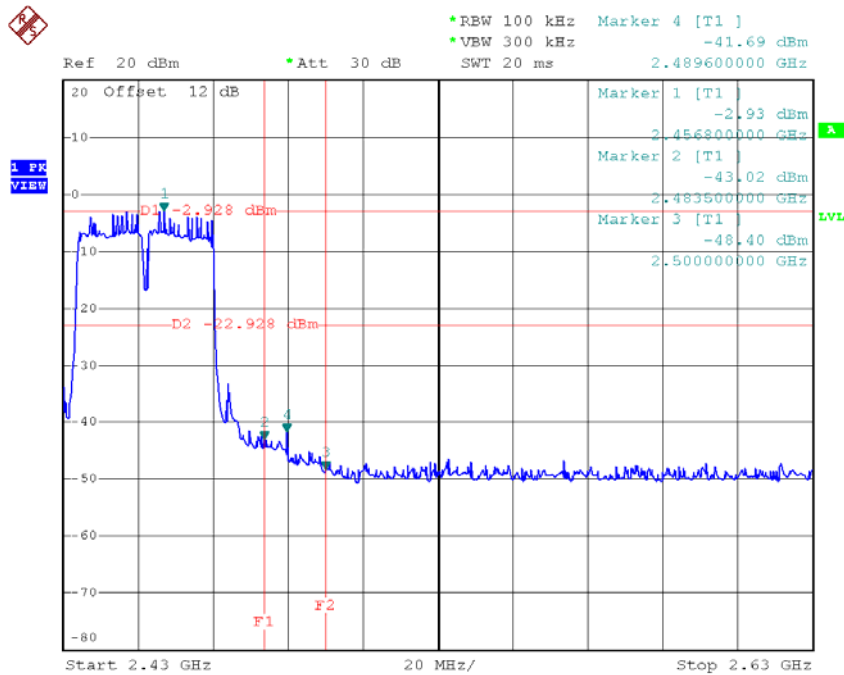


Date: 29.MAY.2016 15:38:23

TX HT40 mode CH03 (10 Harmonic of the frequency)

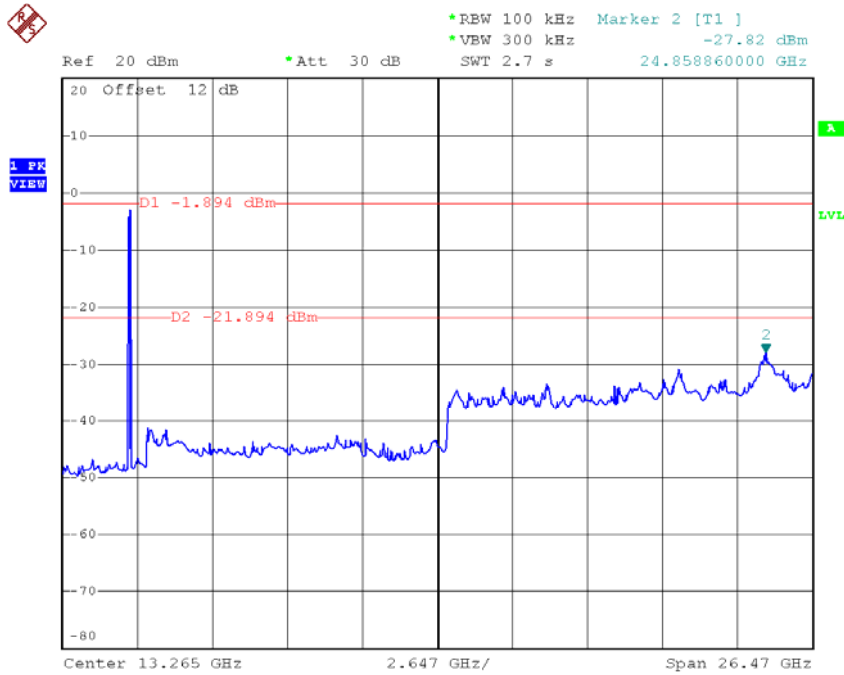


Date: 29.MAY.2016 16:04:48

TX HT40 mode CH06 (10 Harmonic of the frequency)

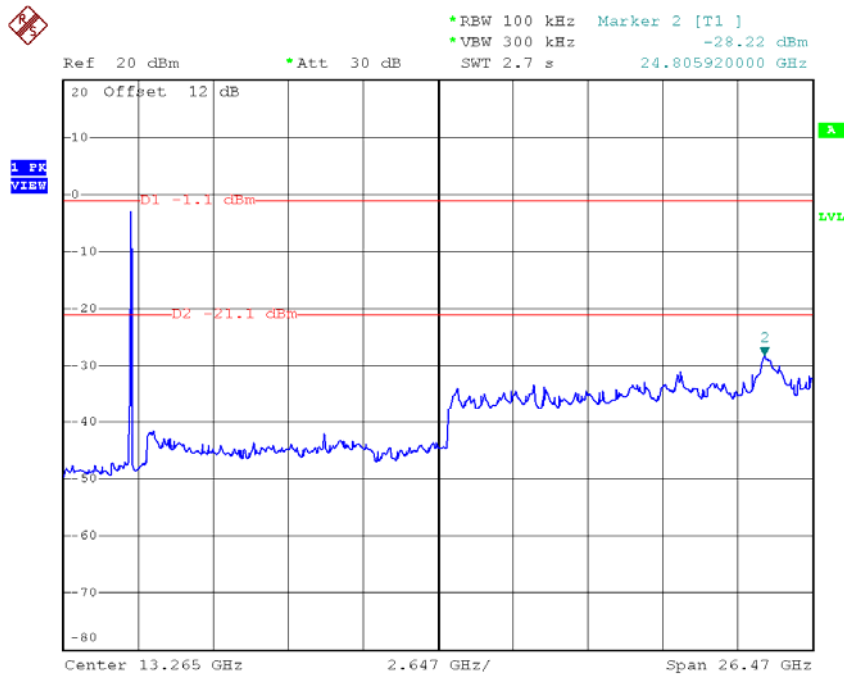

Date: 29.MAY.2016 16:06:51

TX HT40 mode CH09 (10 Harmonic of the frequency)

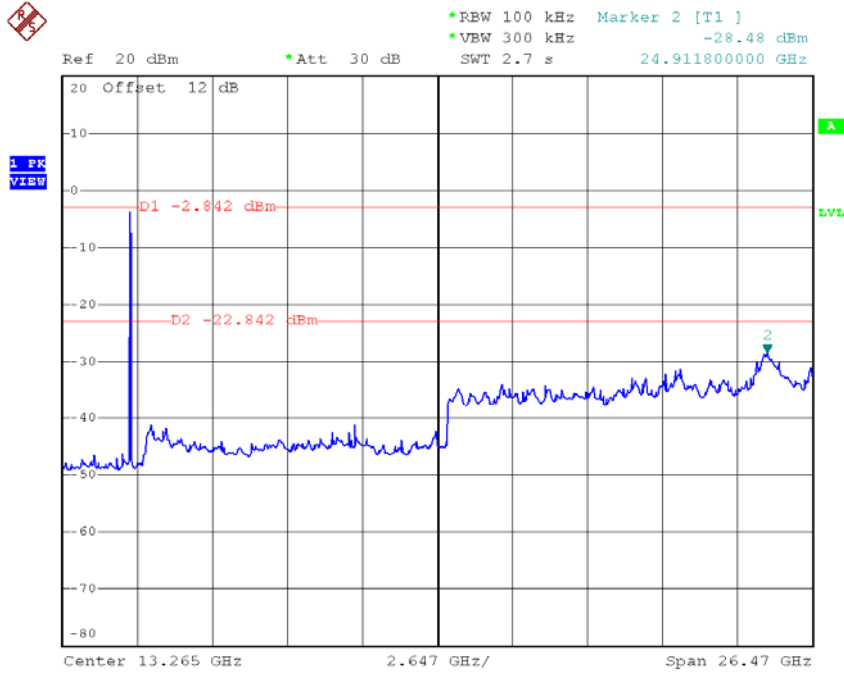


Date: 29.MAY.2016 16:08:26

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode :TX B Mode_CH01/06/11_ANT 1

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-7.91	0.16	6.22	Complies
2437	-2.11	0.62	6.22	Complies
2462	-10.00	0.10	6.22	Complies

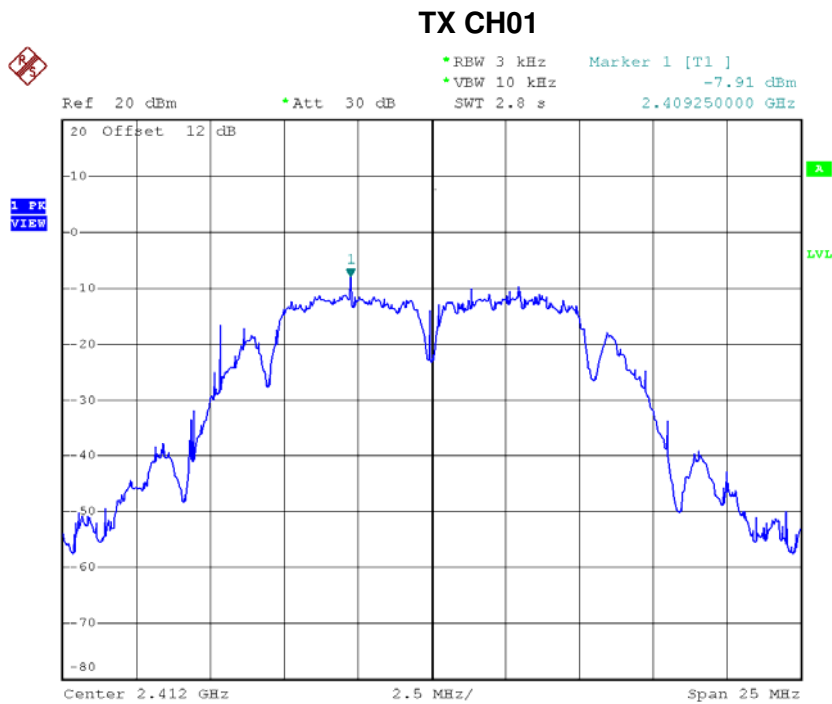


Date: 29.MAY.2016 14:47:55

TX CH06

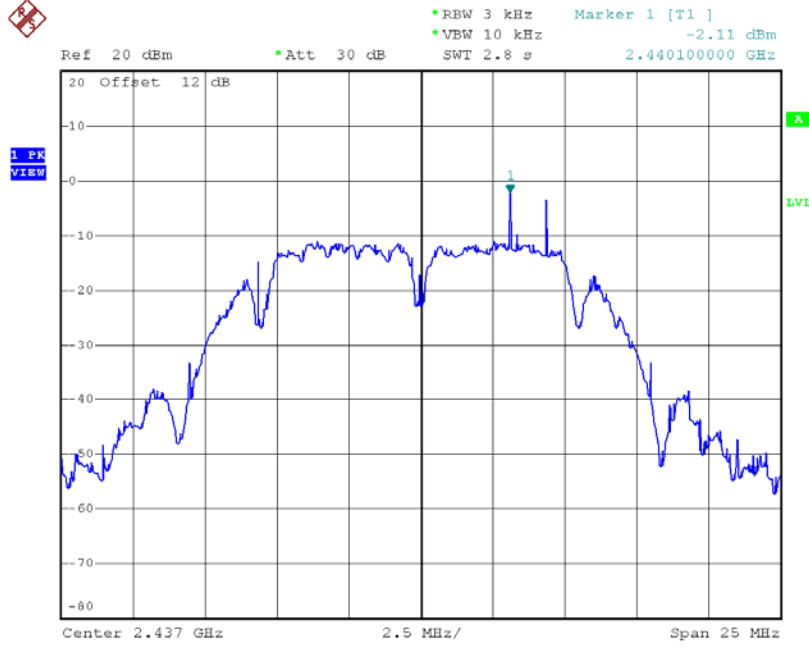

Date: 29.MAY.2016 14:51:19


TX CH11

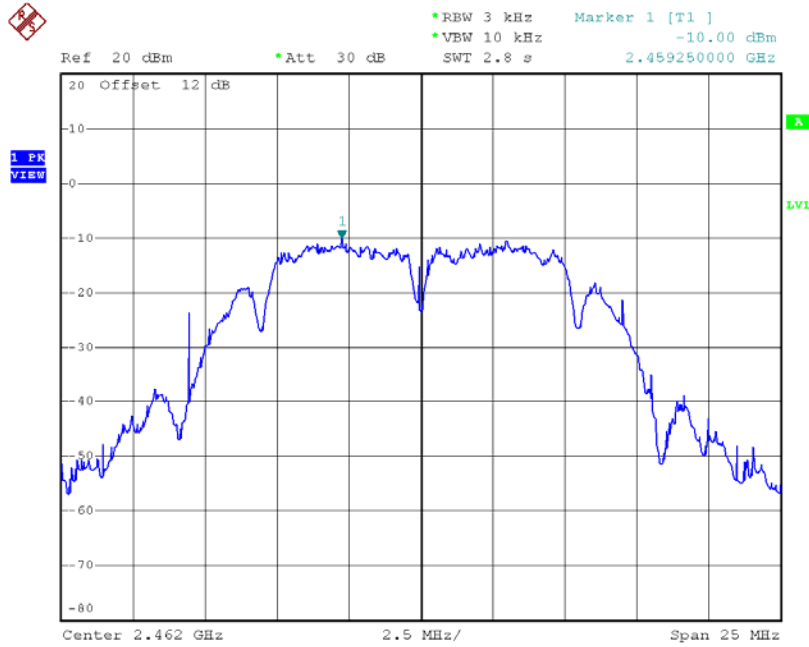

Date: 29.MAY.2016 14:52:38


Test Mode :TX B Mode_CH01/06/11_ANT 2

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-2.18	0.61	6.22	Complies
2437	-2.84	0.52	6.22	Complies
2462	-8.59	0.14	6.22	Complies

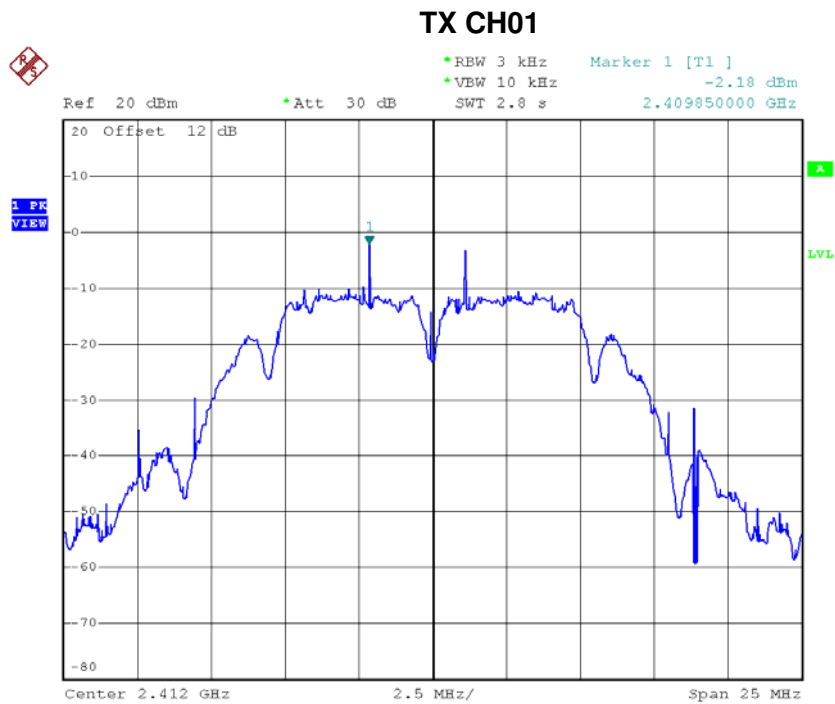


Date: 29.MAY.2016 14:49:23

TX CH06

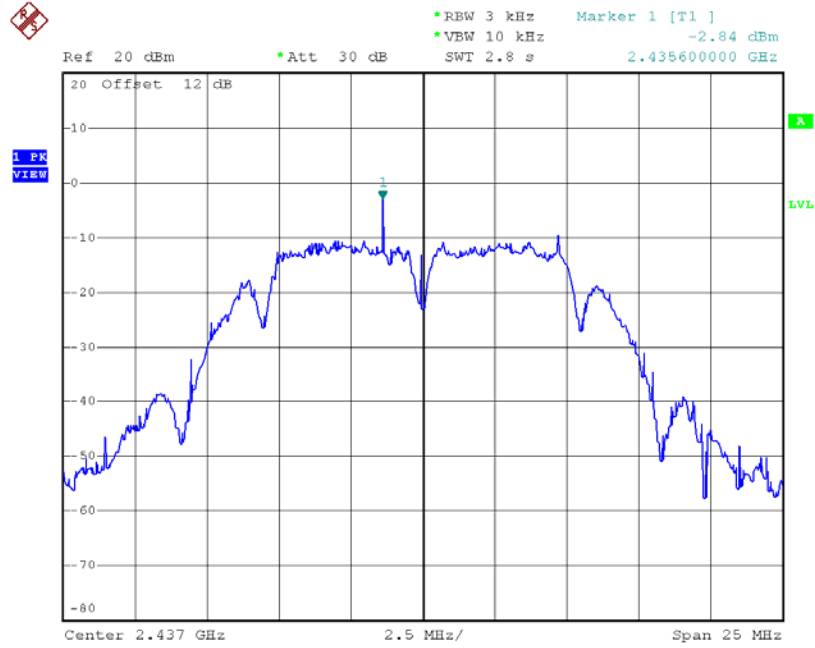

Date: 29.MAY.2016 14:50:31

TX CH11

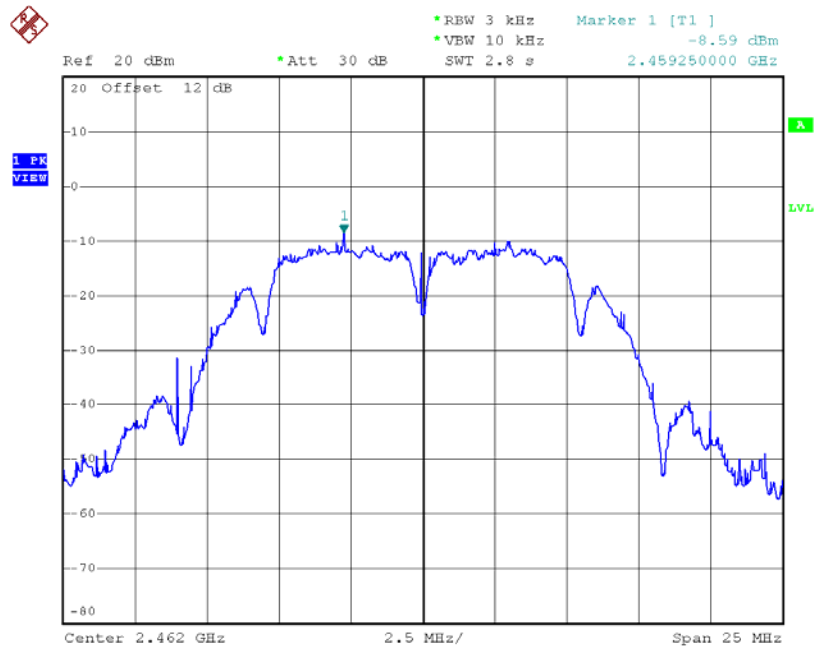

Date: 29.MAY.2016 14:55:06


Test Mode :TX B Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-1.15	0.77	6.22	Complies
2437	0.55	1.14	6.22	Complies
2462	-6.23	0.24	6.22	Complies

Test Mode :TX G Mode_CH01/06/11_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-16.11	0.02	6.22	Complies
2437	-12.08	0.06	6.22	Complies
2462	-14.26	0.04	6.22	Complies

TX CH01

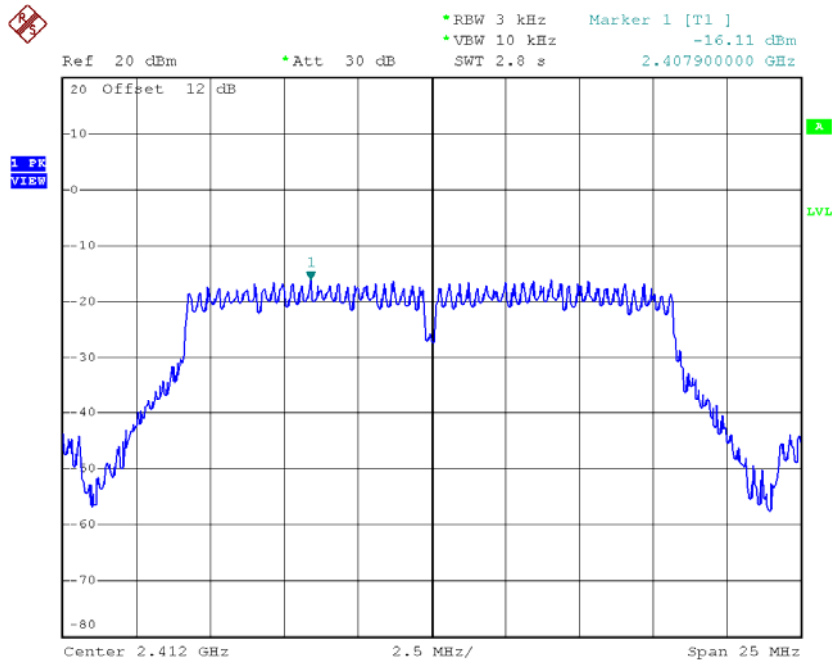


Date: 29.MAY.2016 15:14:45

TX CH06

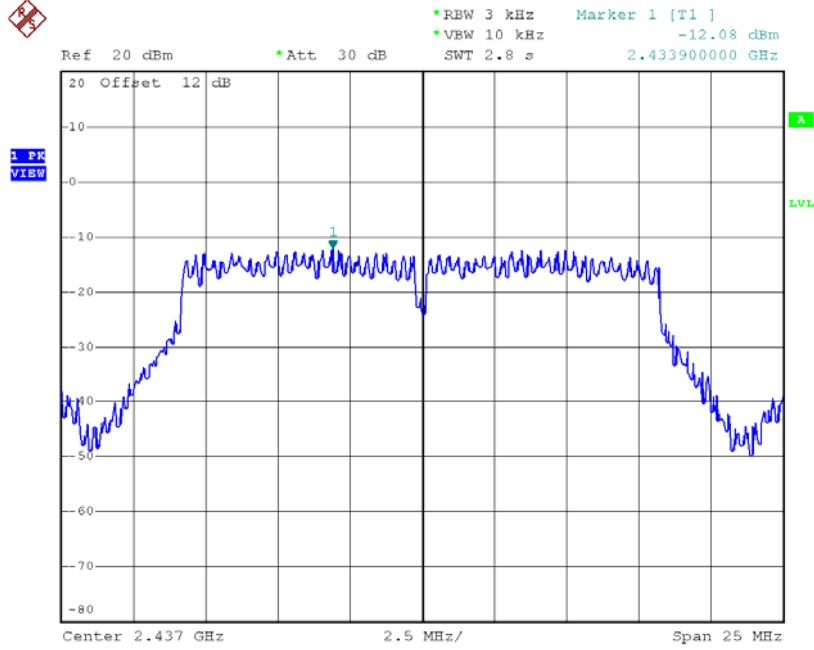

Date: 29.MAY.2016 15:20:55

TX CH11

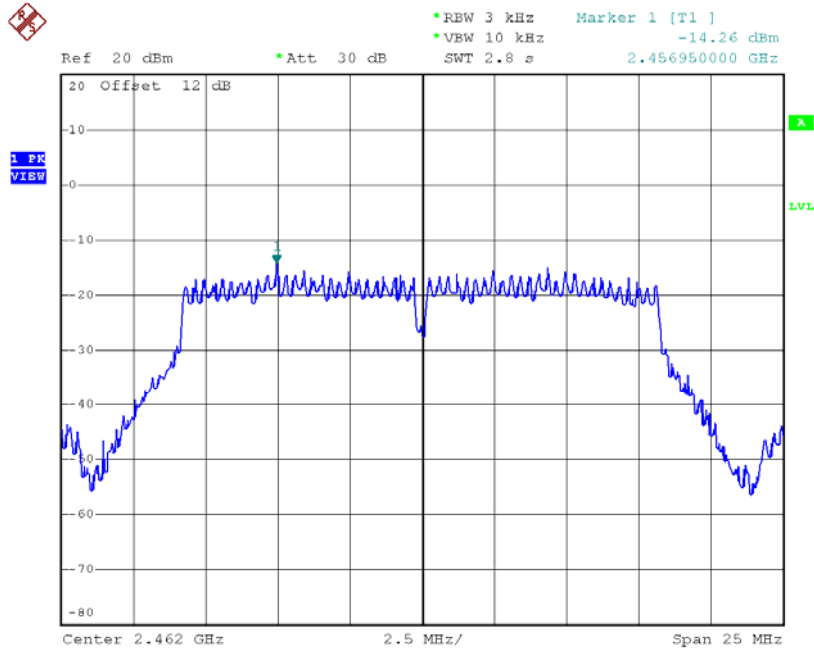


Date: 29.MAY.2016 15:22:47

Test Mode :TX G Mode_CH01/06/11_ANT 2


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-14.38	0.04	6.22	Complies
2437	-10.29	0.09	6.22	Complies
2462	-15.20	0.03	6.22	Complies

TX CH01

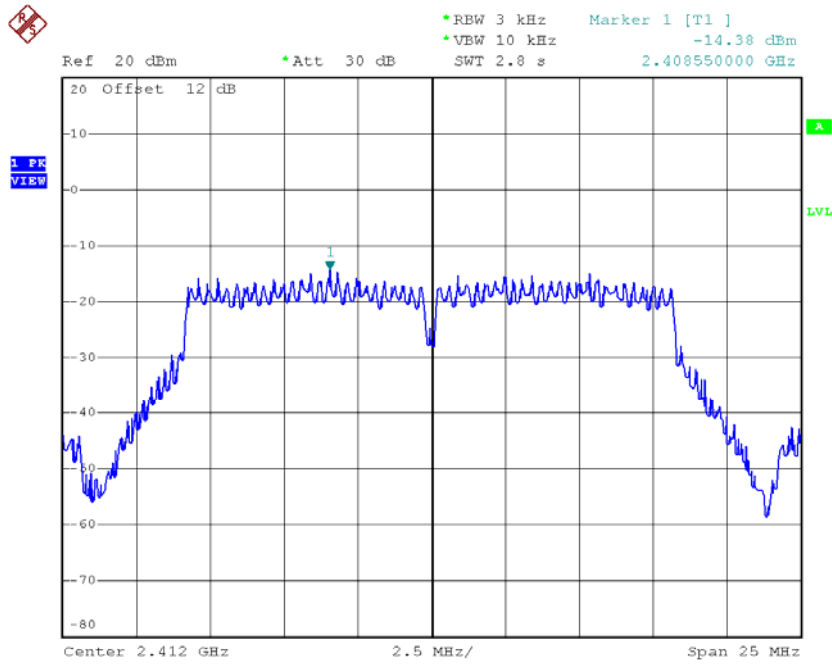


Date: 29.MAY.2016 15:17:42

TX CH06

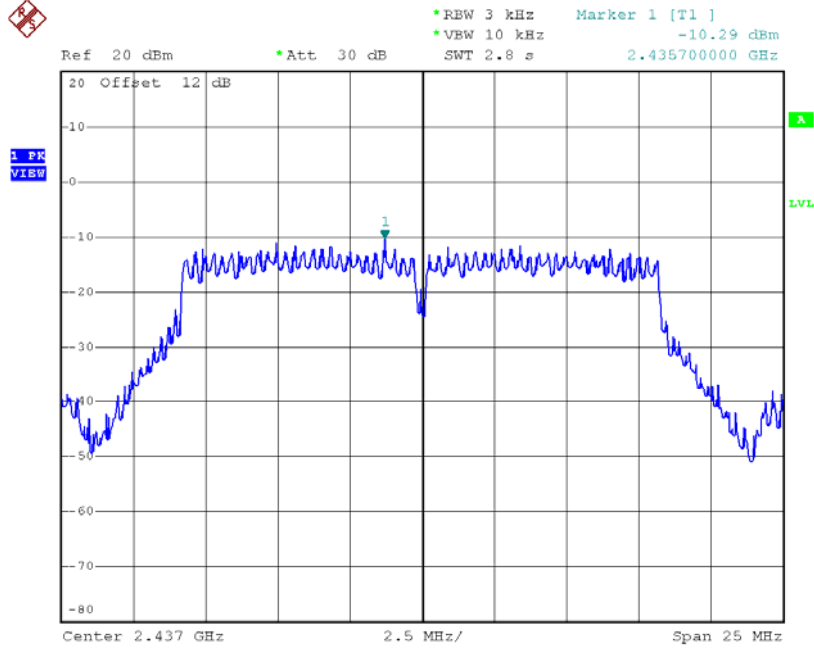

Date: 29.MAY.2016 15:21:26

TX CH11

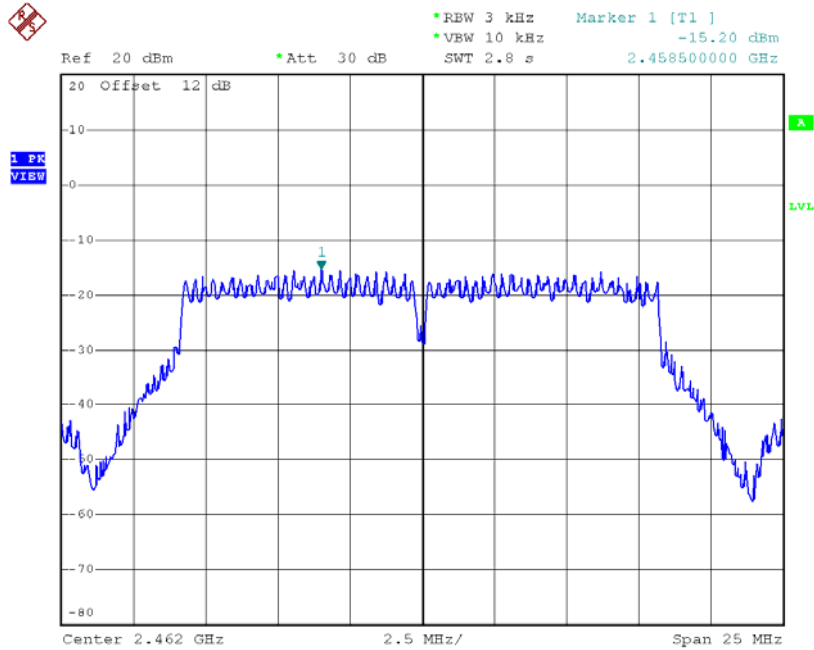

Date: 29.MAY.2016 15:24:30


Test Mode :TX G Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-9.95	0.10	6.22	Complies
2437	-10.21	0.10	6.22	Complies
2462	-11.22	0.08	6.22	Complies

Test Mode : TX N-20M Mode_CH01/06/11_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-15.20	0.03	6.22	Complies
2437	-13.68	0.04	6.22	Complies
2462	-14.54	0.04	6.22	Complies

TX CH01

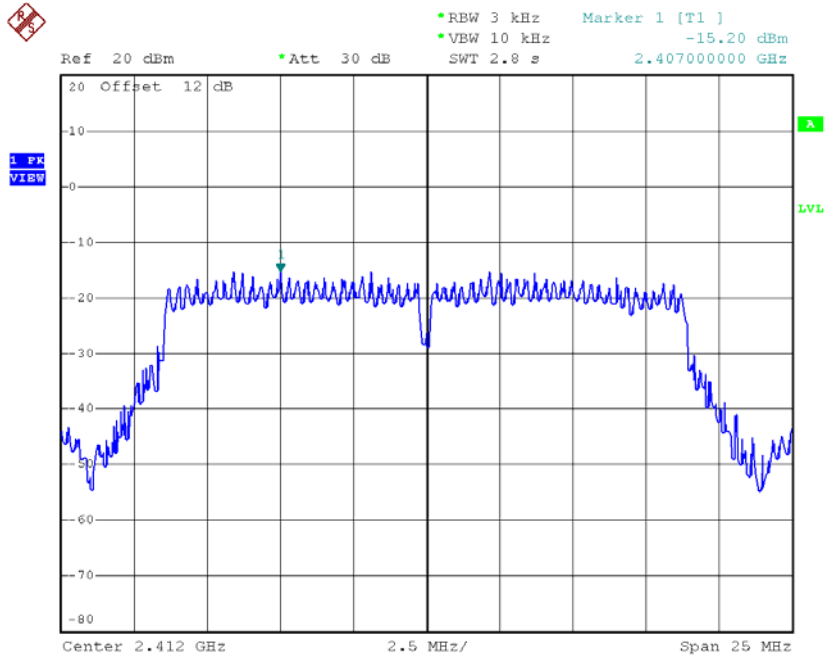


Date: 29.MAY.2016 15:29:25

TX CH06

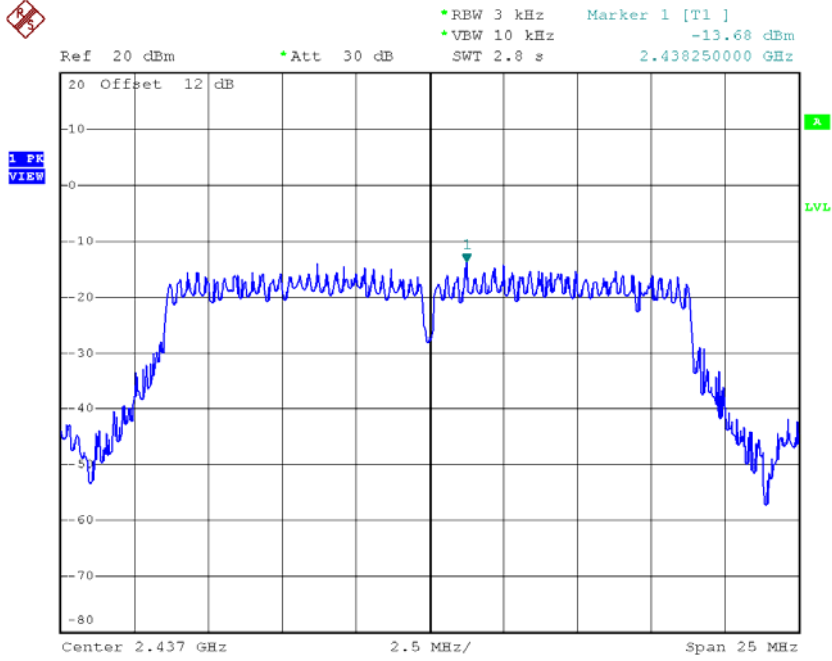


Date: 29.MAY.2016 15:40:25

TX CH11

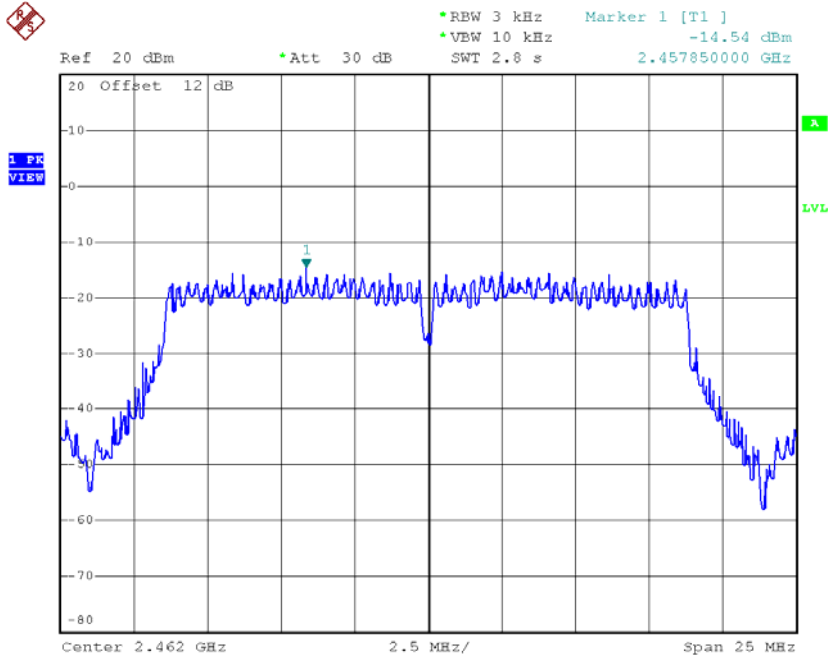


Date: 29.MAY.2016 15:31:36

TX CH06

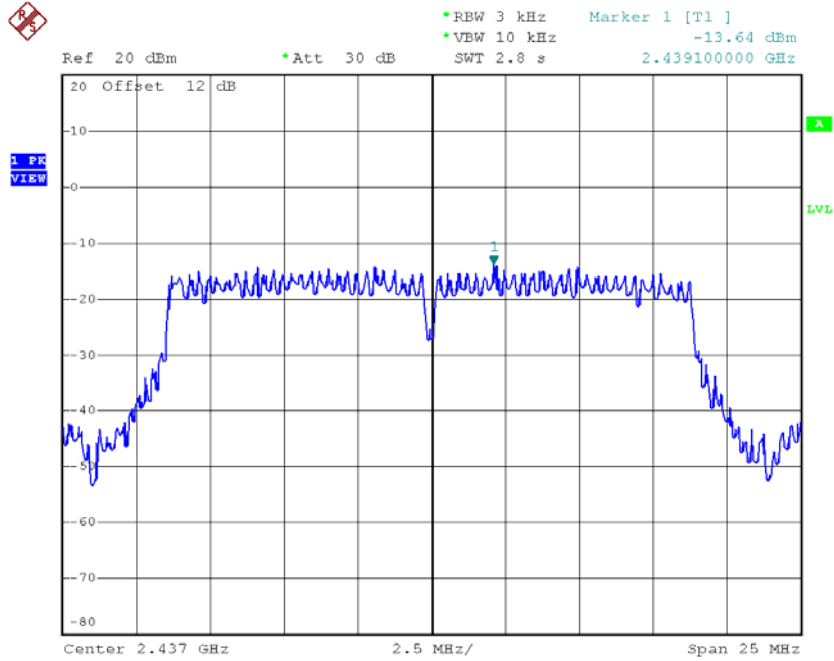

Date: 29.MAY.2016 15:41:06

TX CH11

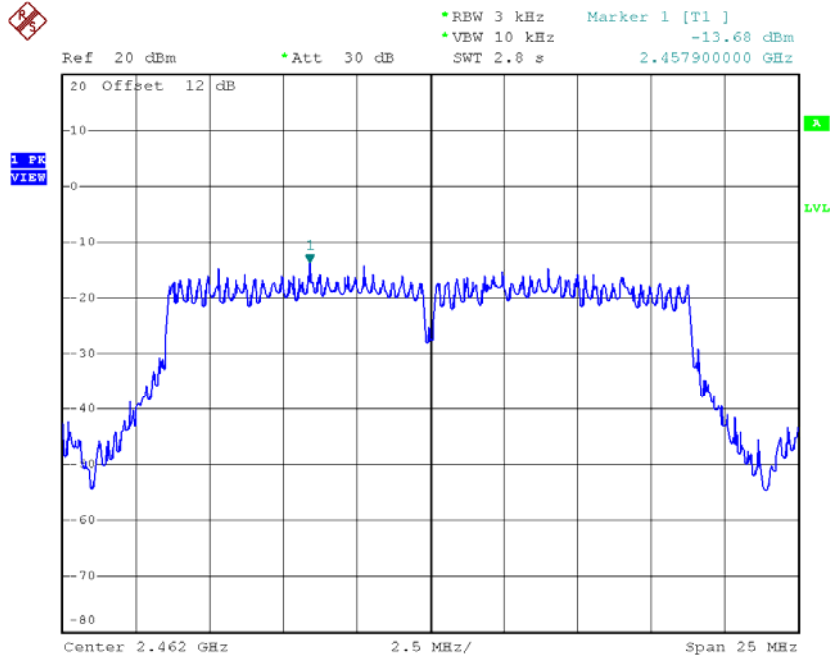

Date: 29.MAY.2016 15:32:32


Test Mode : TX N-20M Mode_CH01/06/11_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2412	-11.78	0.07	6.22	Complies
2437	-10.65	0.09	6.22	Complies
2462	-11.08	0.08	6.22	Complies

Test Mode : TX N-40M Mode_CH03/06/09_ANT 1


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-16.79	0.02	6.22	Complies
2437	-16.36	0.02	6.22	Complies
2452	-18.46	0.01	6.22	Complies

TX CH03

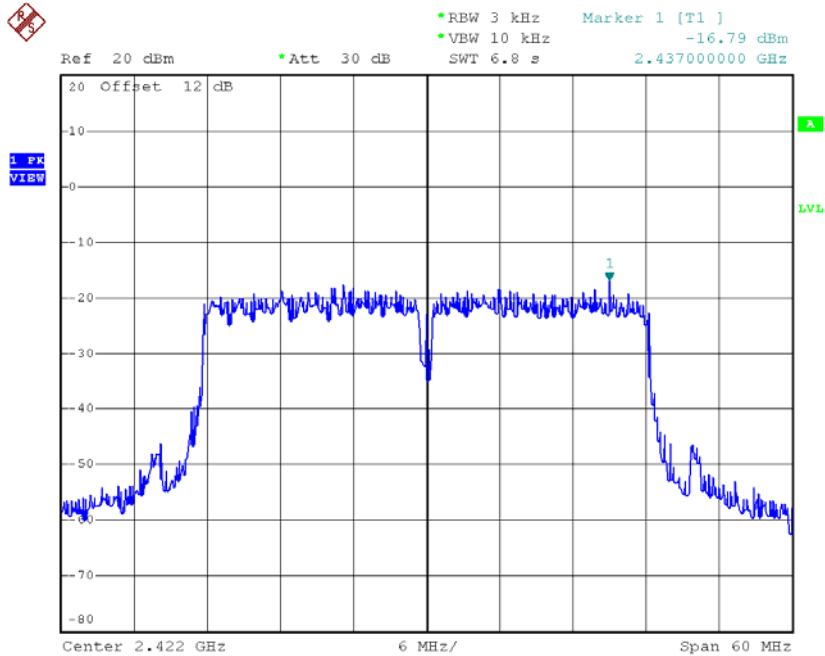


Date: 29.MAY.2016 15:33:41

TX CH06

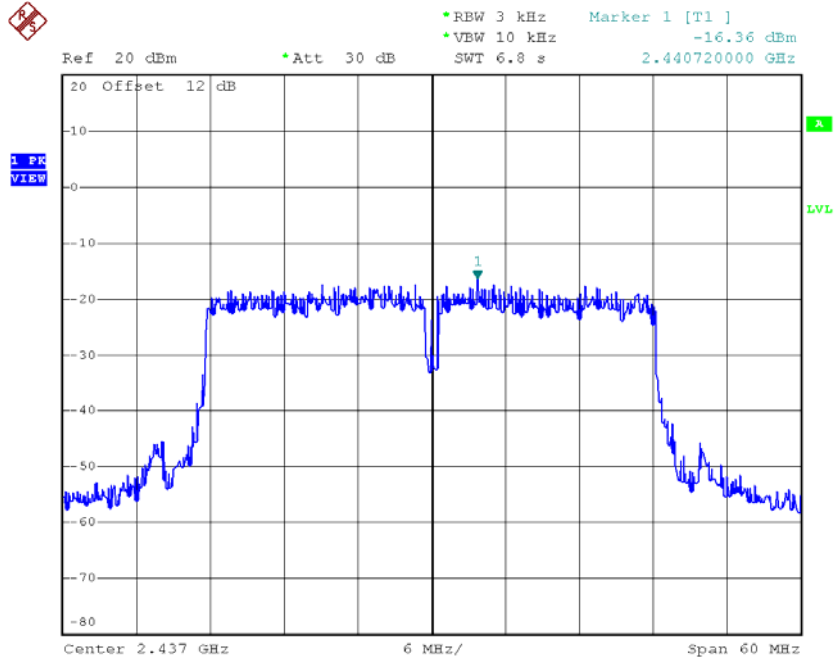


Date: 29.MAY.2016 15:35:39

TX CH09

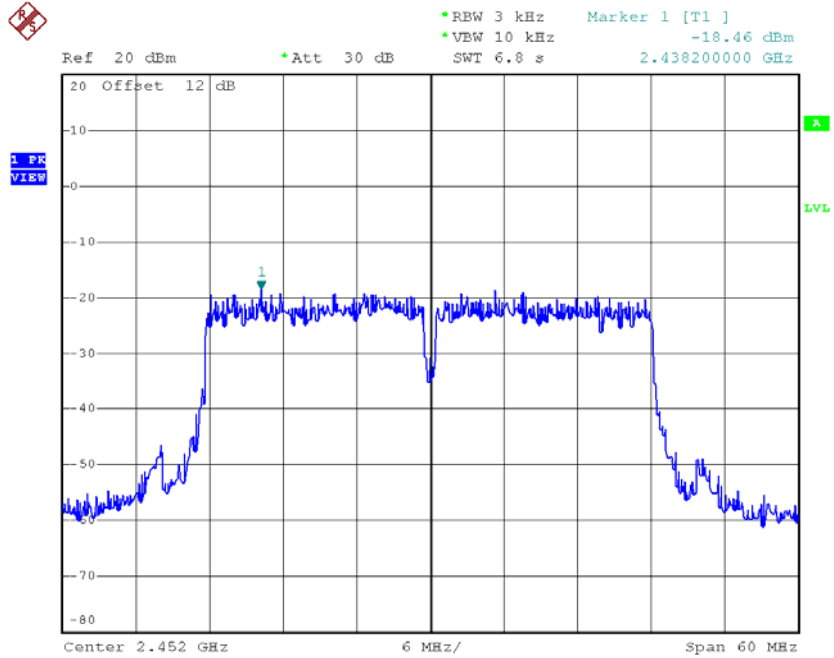


Date: 29.MAY.2016 15:37:41

TX CH06

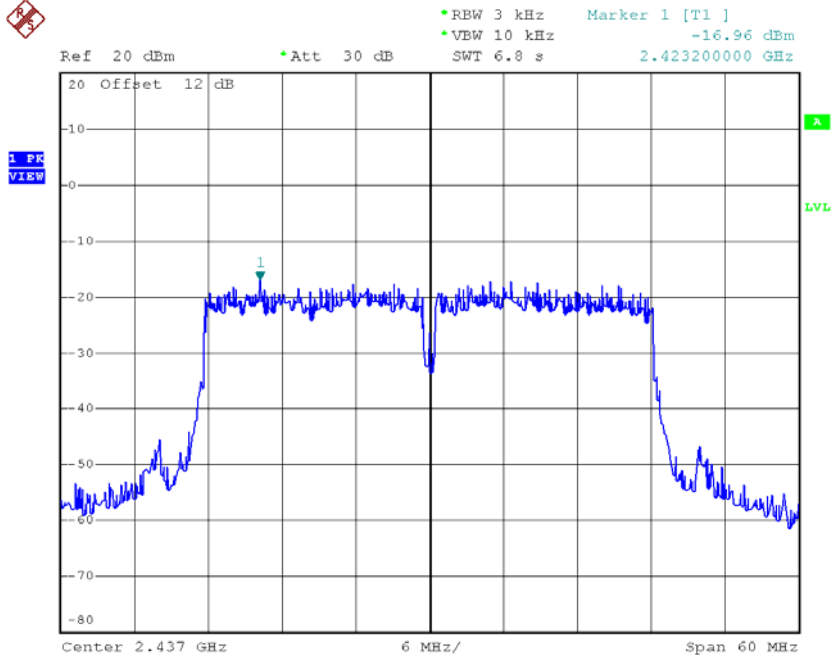

Date: 29.MAY.2016 15:36:09

TX CH09

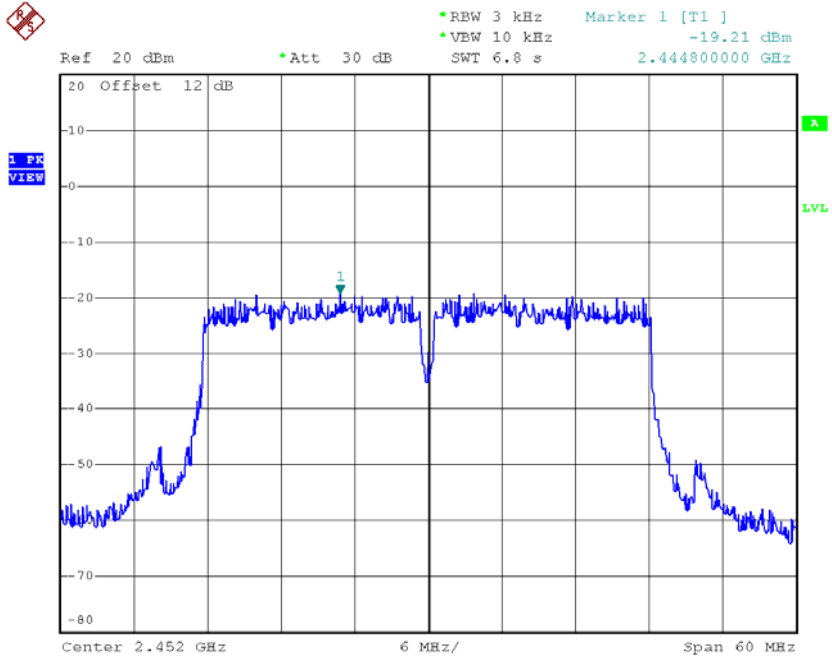

Date: 29.MAY.2016 15:38:34

Test Mode : TX N-40M Mode_CH03/06/09_Total

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2422	-14.10	0.04	6.22	Complies
2437	-13.51	0.04	6.22	Complies
2452	-15.81	0.03	6.22	Complies