

FCC/ISED

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
Computer

ISSUED TO  
Advantech Co., Ltd.

NO.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114,  
Taiwan



Tested by: Heng Aiping  
(Engineer)

Date: Nov 12, 2019

Approved by: Wei Yanquan  
(Chief Engineer)

Date: Nov 12, 2019

Report No.: BL-EC1980077-602  
EUT Name: Computer  
Model Name: DLT-V7212P+ (refer section 2.4)  
Brand Name: ADVANTECH DLOG  
Test Standard: 47 CFR Part 15 Subpart C  
RSS-Gen (Issue 5, March 2019)  
RSS-247 (Issue 2, February 2017)  
FCC ID: M82-DLTV72INT  
ISED Number: 9404A-DLTV72INT  
Test Conclusion: Pass  
Test Date: Aug. 08, 2019 ~ Sep. 12, 2019  
Date of Issue: Nov. 12, 2019

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*

### Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Oct. 29, 2019</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Nov. 12, 2019</u>	<u>Updated the FCC ID, ISED Number and standard version</u>

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Laboratory Condition .....	5
1.4	Announce .....	5
2	PRODUCT INFORMATION .....	6
2.1	Applicant Information .....	6
2.2	Manufacturer Information .....	6
2.3	Factory Information .....	6
2.4	General Description for Equipment under Test (EUT) .....	6
2.5	Technical Information .....	7
3	SUMMARY OF TEST RESULTS .....	9
3.1	Test Standards .....	9
3.2	Verdict .....	10
4	GENERAL TEST CONFIGURATIONS .....	11
4.1	Test Environments .....	11
4.2	Test Equipment List .....	11
4.3	Measurement Uncertainty .....	12
4.4	Description of Test Setup .....	13
4.4.1	For Antenna Port Test .....	13
4.4.2	For AC Power Supply Port Test .....	13
4.4.3	For Radiated Test (Below 30 MHz) .....	14
4.4.4	For Radiated Test (30 MHz-1 GHz) .....	14
4.4.5	For Radiated Test (Above 1 GHz) .....	15
4.5	Measurement Results Explanation Example .....	16

4.5.1	For conducted test items: .....	16
4.5.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards.....	17
5.1.2	Antenna Anti-Replacement Construction .....	17
5.1.3	Antenna Gain .....	17
5.2	Output Power .....	18
5.2.1	Test Limit.....	18
5.2.2	Test Setup.....	18
5.2.3	Test Procedure.....	18
5.2.4	Test Result .....	19
5.3	6dB Bandwidth .....	20
5.3.1	Limit.....	20
5.3.2	Test Setup.....	20
5.3.3	Test Procedure.....	20
5.3.4	Test Result .....	20
5.4	Conducted Spurious Emission .....	21
5.4.1	Limit.....	21
5.4.2	Test Setup.....	21
5.4.3	Test Procedure.....	21
5.4.4	Test Result .....	22
5.5	Band Edge (Authorized-band band-edge).....	23
5.5.1	Limit.....	23
5.5.2	Test Setup.....	23
5.5.3	Test Procedure.....	23
5.5.4	Test Result .....	24
5.6	Conducted Emission .....	25
5.6.1	Limit.....	25
5.6.2	Test Setup.....	25
5.6.3	Test Procedure.....	25
5.6.4	Test Result .....	25

5.7	Radiated Spurious Emission .....	26
5.7.1	Limit.....	26
5.7.2	Test Setup .....	26
5.7.3	Test Procedure .....	26
5.7.4	Test Result .....	29
5.8	Band Edge (Restricted-band band-edge).....	30
5.8.1	Limit.....	30
5.8.2	Test Setup .....	30
5.8.3	Test Procedure .....	30
5.8.4	Test Result .....	30
5.9	Power Spectral density (PSD).....	31
5.9.1	Limit.....	31
5.9.2	Test Setup .....	31
5.9.3	Test Procedure .....	31
5.9.4	Test Result .....	31
ANNEX A	TEST RESULT .....	32
A.1	Output Power .....	32
A.2	Bandwidth.....	32
A.3	Conducted Spurious Emissions .....	32
A.4	Band Edge (Authorized-band band-edge).....	32
A.5	Conducted Emissions.....	33
A.6	Radiated Emission .....	35
A.7	Band Edge (Restricted-band band-edge).....	97
A.8	Power Spectral Density (PSD) .....	104
ANNEX B	TEST SETUP PHOTOS .....	105
ANNEX C	EUT EXTERNAL PHOTOS .....	105
ANNEX D	EUT INTERNAL PHOTOS .....	105

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Advantech Co., Ltd.
Address	NO.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan

### 2.2 Manufacturer Information

Manufacturer	Advantech Co., Ltd.
Address	NO.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan

### 2.3 Factory Information

Factory	N/A
Address	N/A

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	Computer
Model Name Under Test	DLT-V7212P+
Series Model Name	DLT-V7210XXXXXXXXXX, DLT-V7212XXXXXXXXXX (X can be 0-9, A-Z, a-z, any symbol, blank or nothing)
Description of Model name differentiation	The difference between the two series models is a different screen size, All models have two internal antennas and one external antenna.
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 900/1800 MHz 3G Network WCDMA/HSDPA/HSUPA Band 1/2/5/8 4G Network FDD LTE Band 1/2/3/4/5/7/8/12/20 TDD LTE Band 38/40/41 Bluetooth 4.0 BLE WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40) and 802.11ac GPS, GLONASS
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.		
Modulation Type	DSSS, OFDM		
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location		
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11n Basic methodology with $N_{ANT}$ transmit antennas, each with the same directional gain $G_{ANT}$ dBi for 802.11b/g		
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated		
Antenna Type	Internal Antenna 1	ANT 0	PIFA Antenna
		ANT 1	
	Internal Antenna 2	ANT 0	PIFA Antenna
		ANT 1	
External Antenna		Dipole Antenna	
Antenna Gain	Internal Antenna 1	ANT 0	2.40 dBi
		ANT 1	2.80 dBi
	Internal Antenna 2	ANT 0	3.44 dBi
		ANT 1	3.33 dBi
	External Antenna		3.50 dBi
About the Product		Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.	

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n-40MHz)	BPSK	13.5
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
4	RSS-Gen (Issue 5, Mar. 2019)	General Requirements for Compliance of Radio Apparatus
5	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
6	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

### 3.2 Verdict

No.	Description	FCC PART No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	RSS-247, 5.4 (6)	N/A	Pass <sup>Note 1</sup>
2	Output Power	15.247(b)	RSS-247, 5.4 (4)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	RSS-GEN, 6.6; RSS-247, 5.2 (1)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.209; 15.247(d)	RSS-GEN, 8.9; RSS-247, 5.5	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	RSS-247, 5.5	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247(d)	RSS-247, 5.5	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (2)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	RSS-Gen, 7.1.2	N/A	N/A <sup>Note 2</sup>

Note 1: Please refer to section 5.1.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note 3: Because the RF module installed in the EUT is electronically and mechanically identical to the original certified module in the test report No. 170524-01.TR04 (FCC ID: PD99260NG) (ISED ID: 1000M-9260NG) (which issued by Intel Mobile Communications France S.A.S – WRF Lab on Jul. 17, 2017), so just Conducted Emission & Radiated Spurious Emission & Band Edge(Restricted-band band-edge) were retested in this report. Other test items please refer to the No. 170524-01.TR04 (FCC ID: PD99260NG) (ISED ID: 1000M-9260NG) (which issued by Intel Mobile Communications France S.A.S – WRF Lab on Jul. 17, 2017).

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	24 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2019.06.13	2020.06.12
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2019.06.13	2020.06.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2019.06.13	2020.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2019.06.13	2020.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2019.06.15	2020.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2019.06.15	2020.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2019.06.14	2020.06.13
Temperature Chamber	AHK	SP20	1412	2019.06.24	2020.06.23
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2018.08.22	2020.08.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.05	2021.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.07.19	2020.07.18
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2019.08.23	2020.08.22
Power Amplifier	OPHIR RF	5225F	1037	2019.02.28	2020.02.27
Power Amplifier	OPHIR RF	5273F	1016	2019.02.28	2020.02.27
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Mouth Simulator	B&K	4227	2423931	2018.11.15	2019.11.14
Sound Calibrator	B&K	4231	2430337	2018.11.15	2019.11.14

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Sound Level Meter	B&K	NL-20	00844023	2018.11.15	2019.11.14
Ear Simulator	B&K	4185	2409449	2018.11.15	2019.11.14
Ear Simulator	B&K	4195	2418189	2018.11.15	2019.11.14
Audio analyzer	B&K	UPL 16	100129	2018.11.15	2019.11.14
RF Cable 1	ROHDE&SCHWARZ	JUNFLON	APR0914004	2018.07.10	2019.10.09
RF Cable 2	Huber&suhner	RG_400_/U	N/A	2018.07.10	2019.10.09
RF Cable 3	Huber&suhner	RG_400_/U	N/A	2018.07.10	2019.10.09
RF Cable 4	Huber&suhner	SX_04172_ B-60	N/A	2018.07.10	2019.10.09
RF Cable 5	COM-MW	RFJA360- 2.92mm- J/J3M	N/A	2018.07.10	2019.10.09

Note: The calibration period on the Cable is three month.

### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	$\pm 1.4$ dB
Power Spectral Density, conducted	$\pm 2.5$ dB
Unwanted Emissions, conducted	$\pm 2.8$ dB
All emissions, radiated	$\pm 5.4$ dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 4\%$


### 4.4 Description of Test Setup

#### 4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

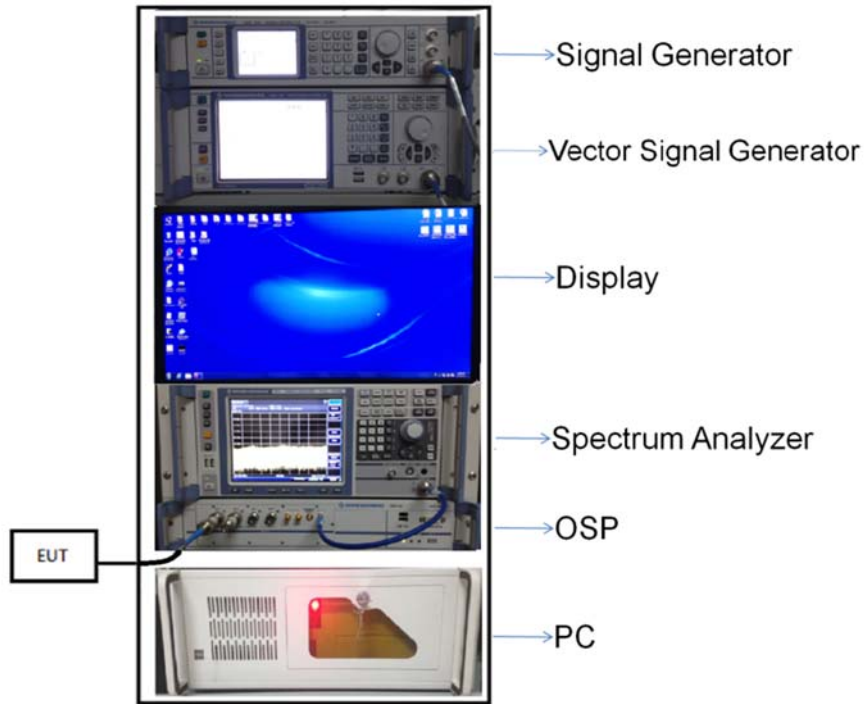


(Diagram 1)

#### 4.4.2 For AC Power Supply Port Test

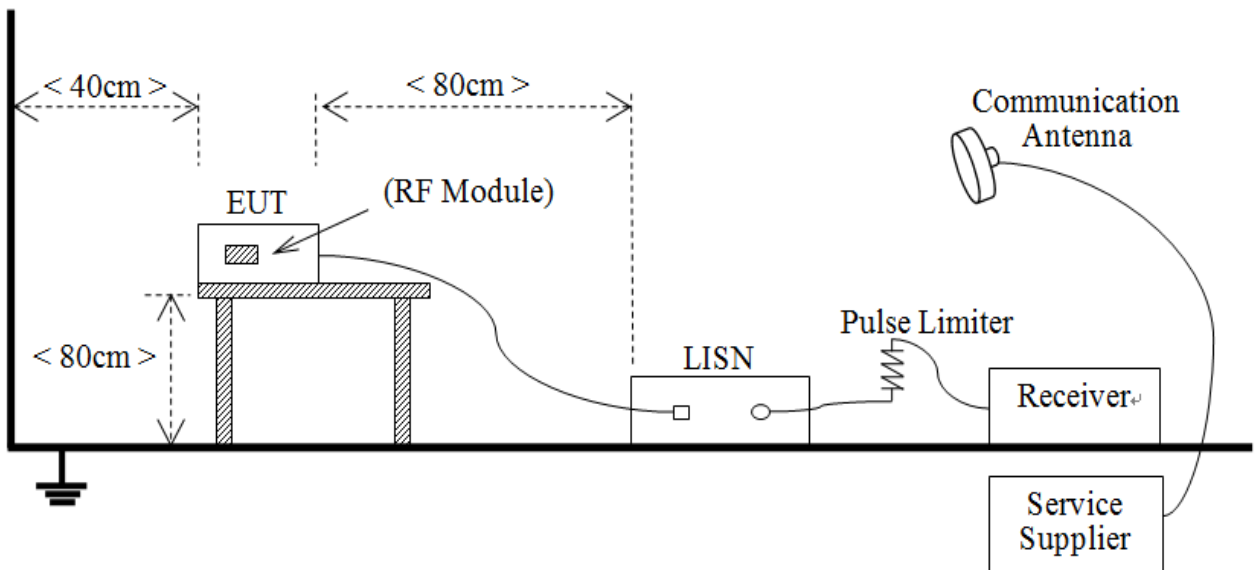


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

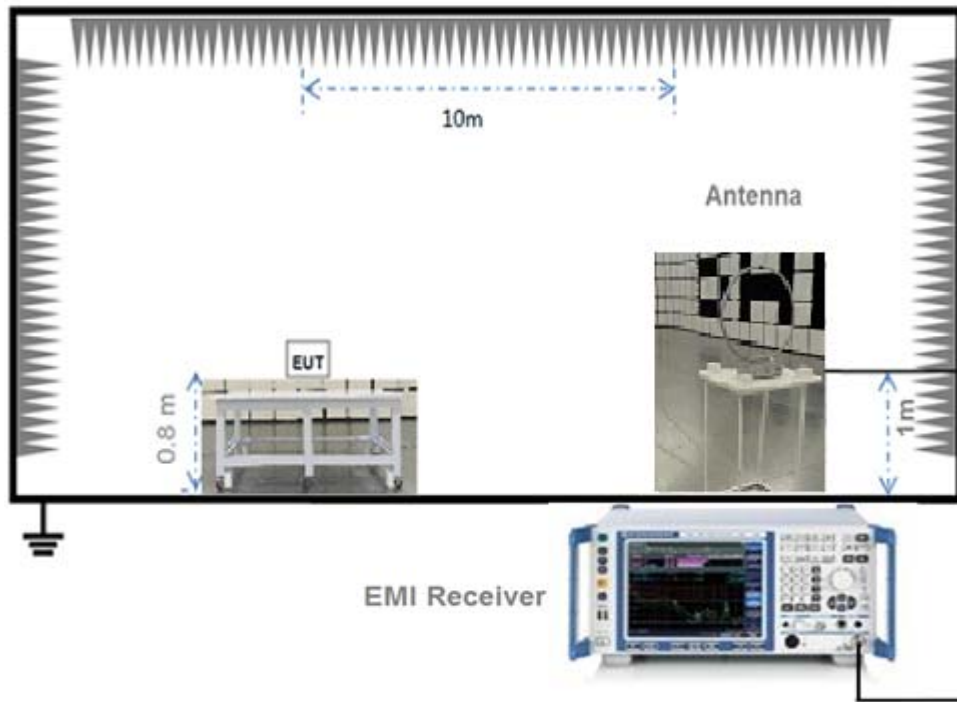


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

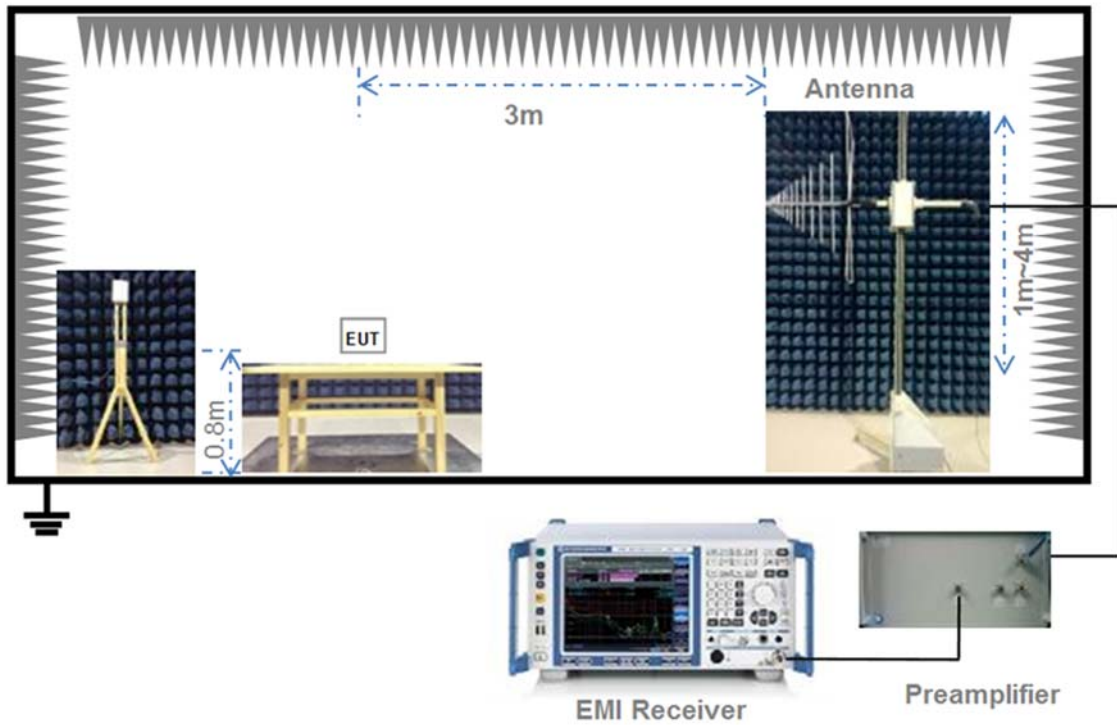

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

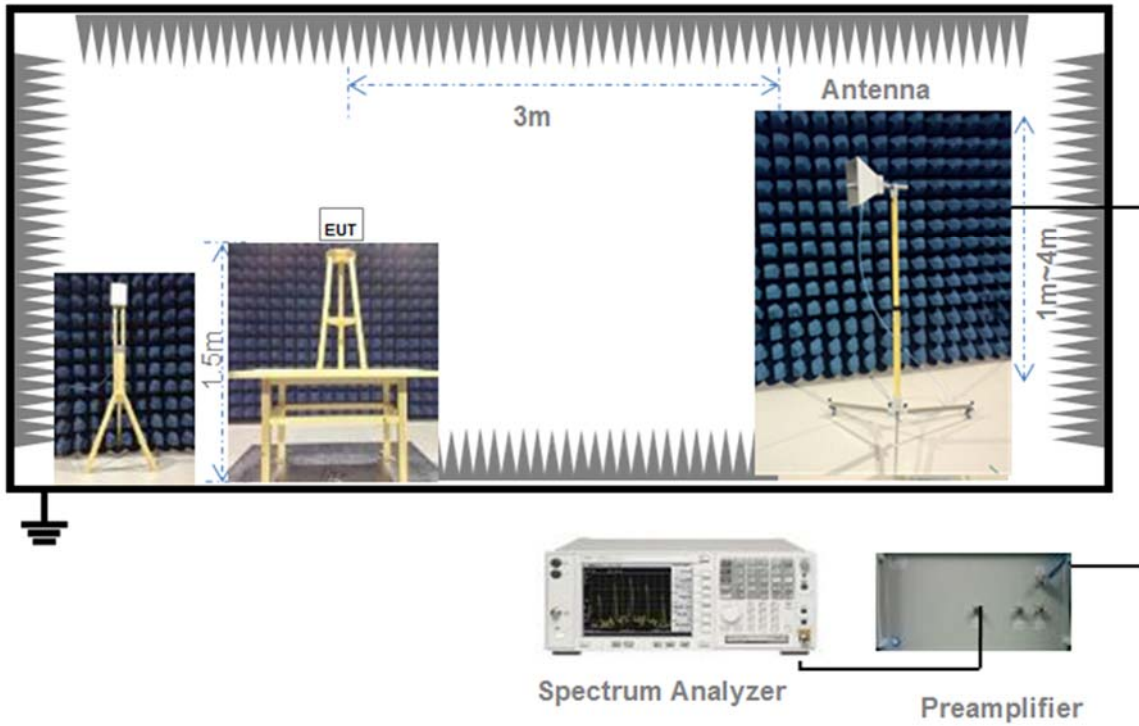

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)



## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (4)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
  - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
  - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding  $10\log(1/x)$ , where x is the duty cycle to the measurement result.

#### Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.

Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 6dB Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq$  3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

#### Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

### Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission)  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission  $\pm 0.5$  MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

#### 5.5.4 Test Result

Please refer to ANNEX A.4.



## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

#### General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dBμV/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW ≥ 3 x RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

#### Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle  $\geq 98$  percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

#### Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

#### Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

### 5.8.4 Test Result

Please refer to ANNEX A.7.

## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(d); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.8.

## ANNEX A TEST RESULT

### A.1 Output Power

Note: The Output Power please refer to the Report No. 170524-01.TR04 (FCC ID: PD99260NG) (ISED ID: 1000M-9260NG) (which issued by Intel Mobile Communications France S.A.S – WRF Lab on Jul. 17, 2017), **Section B.2.2 Maximum Output Power and antenna gain & B.3.3 Maximum Output Power and antenna gain.**

### A.2 Bandwidth

Note: The Bandwidth please refer to the Report No. 170524-01.TR04 (FCC ID: PD99260NG) (ISED ID: 1000M-9260NG) (which issued by Intel Mobile Communications France S.A.S – WRF Lab on Jul. 17, 2017), **Section B.2.1 6dB & 99% Bandwidth & B.3.1 6dB Bandwidth & B.3.2 99% Bandwidth.**

### A.3 Conducted Spurious Emissions

Note: The Conducted Spurious Emissions please refer to the Report No. 170524-01.TR04 (FCC ID: PD99260NG) (ISED ID: 1000M-9260NG) (which issued by Intel Mobile Communications France S.A.S – WRF Lab on Jul. 17, 2017), **Section B.2.4 Out-of-band emission (Conducted) & B.3.5 Out of band emission – band–edge low (Conducted) & B.3.6 Out of band emission – band–edge high (Conducted).**

### A.4 Band Edge (Authorized-band band-edge)

Note: The Output Power please refer to the Report No. 170524-01.TR04 (FCC ID: PD99260NG) (ISED ID: 1000M-9260NG) (which issued by Intel Mobile Communications France S.A.S – WRF Lab on Jul. 17, 2017), **Section B.2.4 Out-of-band emission (Conducted) & B.3.5 Out of band emission – band–edge low (Conducted) & B.3.6 Out of band emission – band–edge high (Conducted).**




## A.5 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.

### Test Data and Plots

#### PHASE L


CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

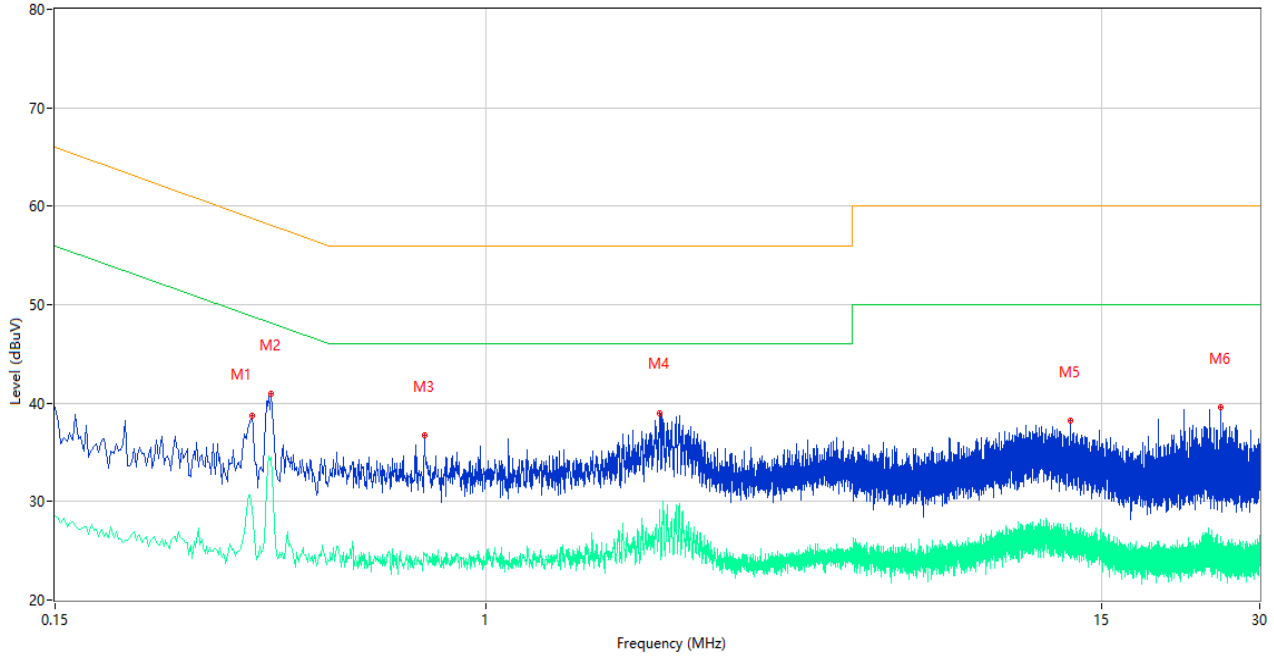

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.356	38.67	10.31	58.82	-20.15	Peak	L	Pass
1**	0.356	29.29	10.31	48.82	-19.53	AV	L	Pass
2	0.388	40.90	10.30	58.11	-17.21	Peak	L	Pass
2**	0.388	34.51	10.30	48.11	-13.60	AV	L	Pass
3	0.762	36.74	10.26	56.00	-19.26	Peak	L	Pass
3**	0.762	24.72	10.26	46.00	-21.28	AV	L	Pass
4	2.140	38.93	10.26	56.00	-17.07	Peak	L	Pass
4**	2.140	28.73	10.26	46.00	-17.27	AV	L	Pass
5	13.020	38.18	10.39	60.00	-21.82	Peak	L	Pass
5**	13.020	26.67	10.39	50.00	-23.33	AV	L	Pass
6	25.252	39.59	10.66	60.00	-20.41	Peak	L	Pass
6**	25.252	25.28	10.66	50.00	-24.72	AV	L	Pass

PHASE N

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

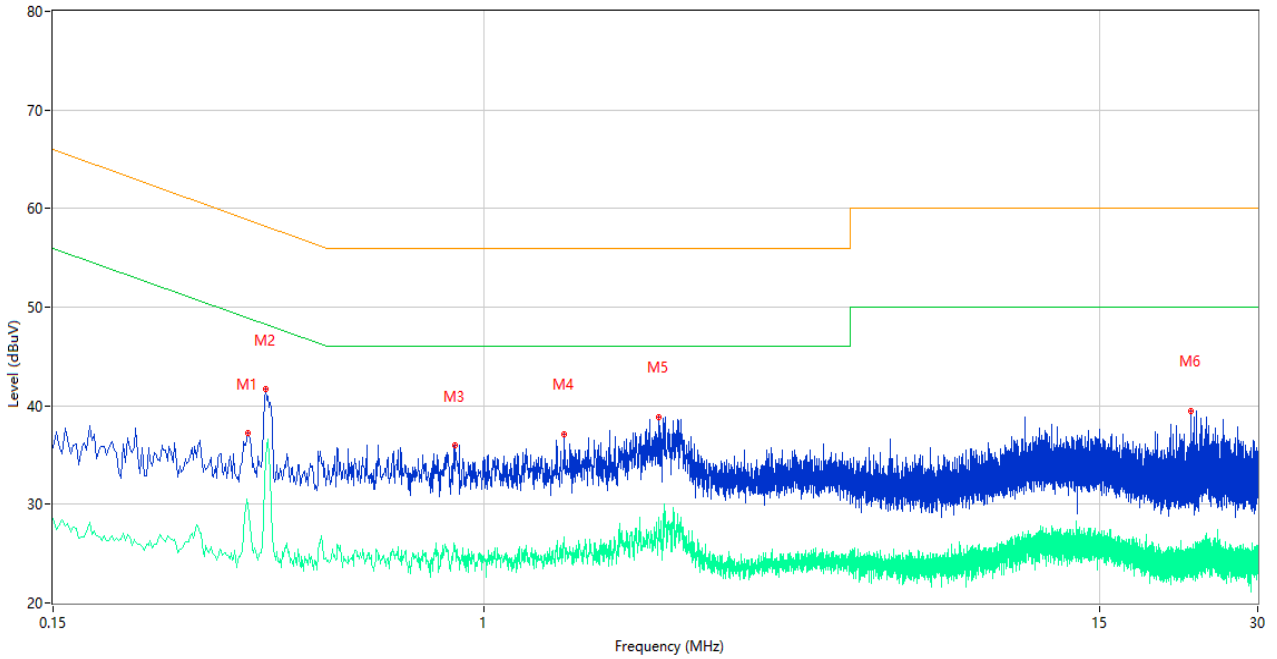

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.354	37.21	10.31	58.87	-21.66	Peak	N	Pass
1**	0.354	30.04	10.31	48.87	-18.83	AV	N	Pass
2	0.382	41.66	10.30	58.24	-16.58	Peak	N	Pass
2**	0.382	34.55	10.30	48.24	-13.69	AV	N	Pass
3	0.880	35.95	10.25	56.00	-20.05	Peak	N	Pass
3**	0.880	25.78	10.25	46.00	-20.22	AV	N	Pass
4	1.422	37.05	10.25	56.00	-18.95	Peak	N	Pass
4**	1.422	26.10	10.25	46.00	-19.90	AV	N	Pass
5	2.148	38.90	10.26	56.00	-17.10	Peak	N	Pass
5**	2.148	26.85	10.26	46.00	-19.15	AV	N	Pass
6	22.310	39.46	10.60	60.00	-20.54	Peak	N	Pass
6**	22.310	24.54	10.60	50.00	-25.46	AV	N	Pass

## A.6 Radiated Emission

Note<sup>1</sup>: The symbol of “--” in the table which means not application.

Note<sup>2</sup>: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note<sup>3</sup>: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note<sup>4</sup>: The EUT is working in the Normal link mode below 1 GHz.


Note<sup>5</sup>: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Note<sup>6</sup>: The EUT contains both internal antenna and external antenna, there are two groups of internal antenna, only the worst antenna test results are presented in this report.

### Test Data and Plots

#### 30 MHz to 1 GHz, ANT V


RE Test case\_FCC\_Part 15B\_FCC Part 15B Class B 30MHz-1GHz

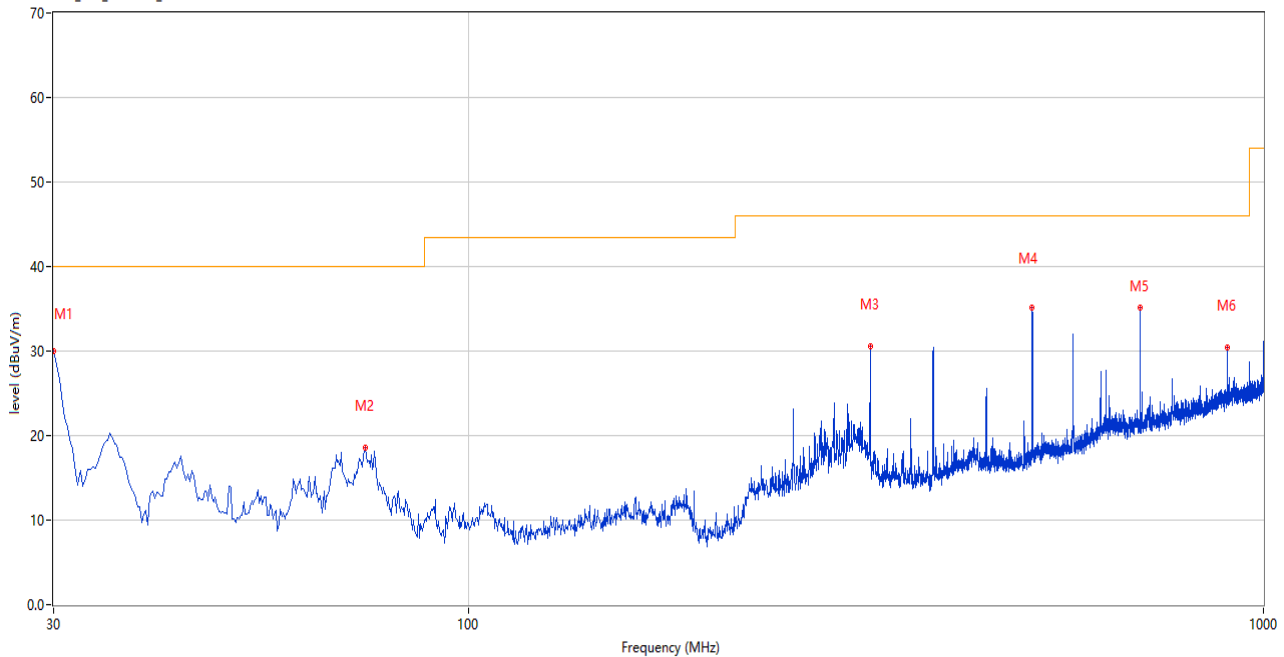

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	30.000	29.93	-26.92	40.0	-10.07	Peak	0.00	200	Vertical	Pass
2	74.135	18.60	-29.04	40.0	-21.40	Peak	51.00	100	Vertical	Pass
3	320.030	30.64	-23.05	46.0	-15.36	Peak	342.00	100	Vertical	Pass
4	511.847	35.11	-17.79	46.0	-10.89	Peak	218.00	200	Vertical	Pass
5	700.028	35.11	-12.87	46.0	-10.89	Peak	183.00	200	Vertical	Pass
6	900.090	30.37	-7.46	46.0	-15.63	Peak	0.00	200	Vertical	Pass

30 MHz to 1 GHz, ANT H

RE Test case\_FCC\_Part 15B\_FCC Part 15B Class B 30MHz-1GHz

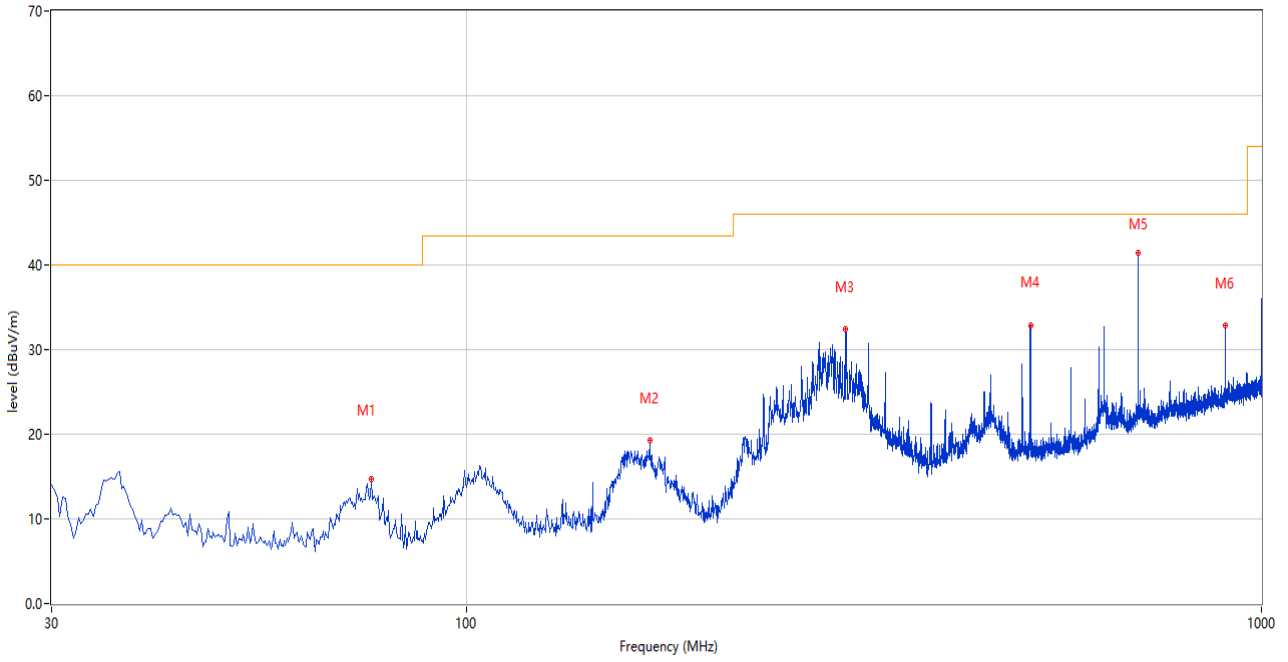


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	75.832	14.73	-29.22	40.0	-25.27	Peak	166.00	100	Horizontal	Pass
2	169.922	19.24	-24.92	43.5	-24.26	Peak	360.00	200	Horizontal	Pass
3	299.902	32.47	-23.81	46.0	-13.53	Peak	263.00	100	Horizontal	Pass
4	512.090	32.90	-17.80	46.0	-13.10	Peak	146.00	200	Horizontal	Pass
5	700.028	41.41	-12.87	46.0	-4.59	Peak	318.00	100	Horizontal	Pass
6	900.090	32.80	-7.46	46.0	-13.20	Peak	217.00	100	Horizontal	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

**ANT0**


1 GHz to 18 GHz, ANT V 802.11b Low Channel

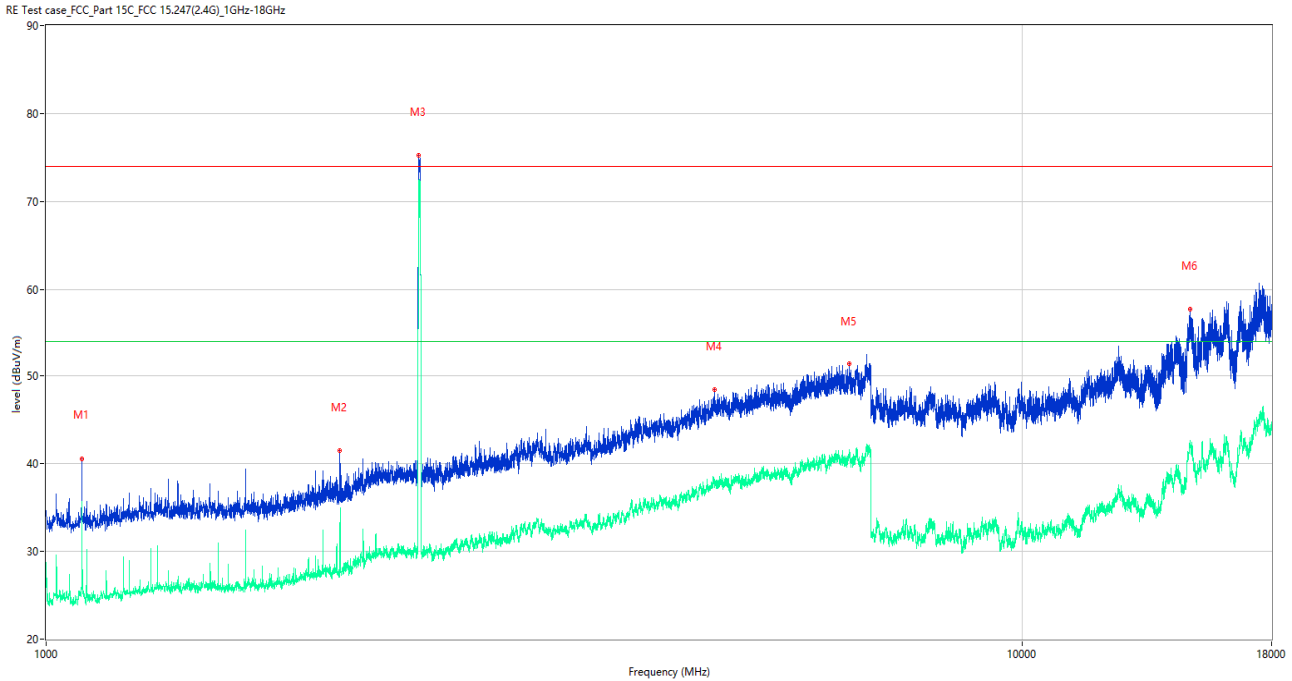

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	32.11	-15.16	54.0	-21.89	AV	284.00	150	Vertical	Pass
1	1088.000	40.57	-15.16	74.0	-33.43	Peak	284.00	150	Vertical	Pass
2**	1999.500	27.41	-13.44	54.0	-26.59	AV	199.00	150	Vertical	Pass
2	1999.500	41.48	-13.44	74.0	-32.52	Peak	199.00	150	Vertical	Pass
3**	2409.500	72.41	-10.57	54.0	18.41	AV	64.00	150	Vertical	N/A
3	2409.500	75.24	-10.57	74.0	1.24	Peak	64.00	150	Vertical	N/A
4**	4835.000	37.97	-1.61	54.0	-16.03	AV	332.00	150	Vertical	Pass
4	4835.000	48.46	-1.61	74.0	-25.54	Peak	332.00	150	Vertical	Pass
5**	6645.000	41.65	4.27	54.0	-12.35	AV	218.00	150	Vertical	Pass
5	6645.000	51.42	4.27	74.0	-22.58	Peak	218.00	150	Vertical	Pass
6**	14867.063	41.99	26.91	54.0	-12.01	AV	68.00	150	Vertical	Pass
6	14867.063	57.72	26.91	74.0	-16.28	Peak	68.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

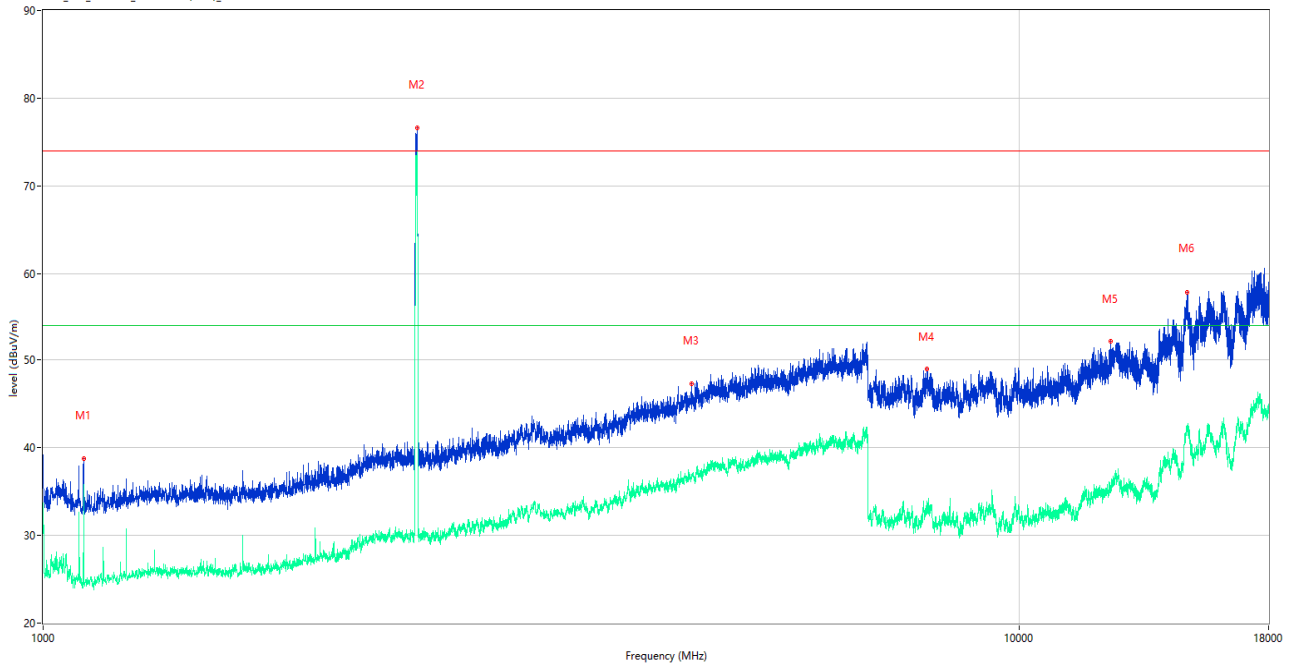

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	31.81	-15.33	54.0	-22.19	AV	140.00	150	Horizontal	Pass
1	1100.000	38.81	-15.33	74.0	-35.19	Peak	140.00	150	Horizontal	Pass
2**	2415.000	73.71	-10.36	54.0	19.71	AV	136.00	150	Horizontal	N/A
2	2415.000	76.61	-10.36	74.0	2.61	Peak	136.00	150	Horizontal	N/A
3**	4614.000	36.57	-2.86	54.0	-17.43	AV	56.00	150	Horizontal	Pass
3	4614.000	47.28	-2.86	74.0	-26.72	Peak	56.00	150	Horizontal	Pass
4**	8037.875	33.29	18.13	54.0	-20.71	AV	204.00	150	Horizontal	Pass
4	8037.875	48.95	18.13	74.0	-25.05	Peak	204.00	150	Horizontal	Pass
5**	12389.188	35.07	21.07	54.0	-18.93	AV	213.00	150	Horizontal	Pass
5	12389.188	52.14	21.07	74.0	-21.86	Peak	213.00	150	Horizontal	Pass
6**	14856.563	42.25	27.09	54.0	-11.75	AV	10.00	150	Horizontal	Pass
6	14856.563	57.86	27.09	74.0	-16.14	Peak	10.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

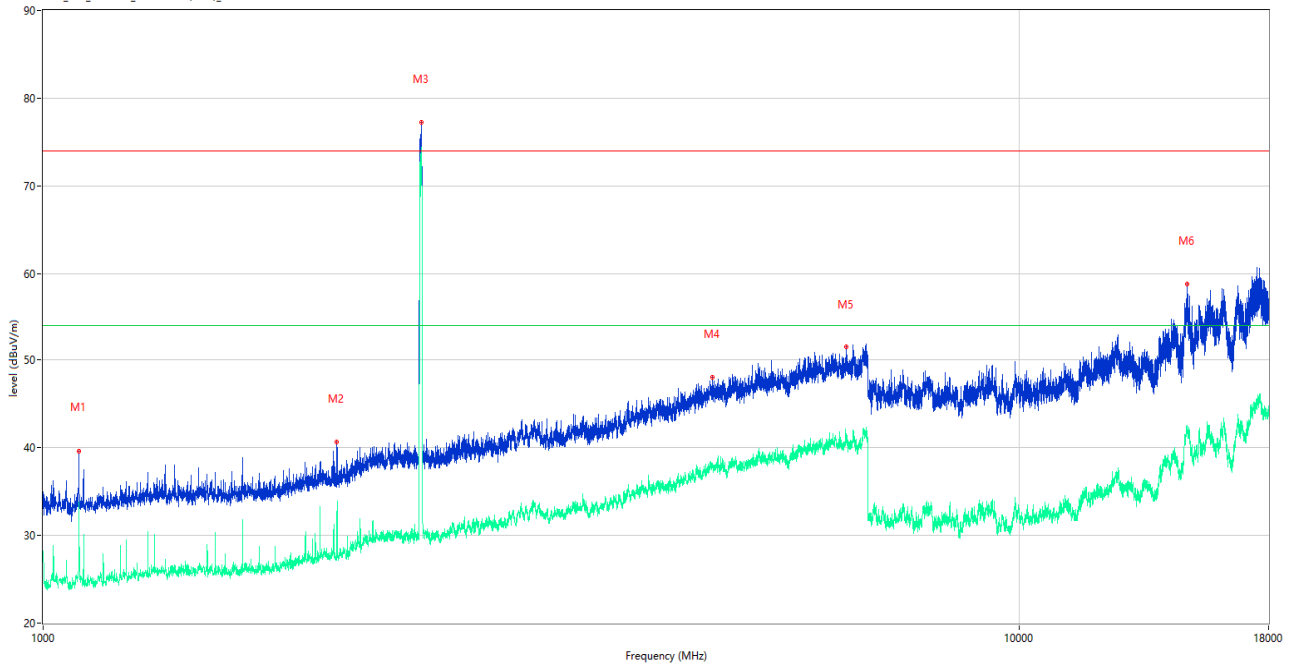

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	31.80	-15.16	54.0	-22.20	AV	169.00	150	Vertical	Pass
1	1088.000	39.66	-15.16	74.0	-34.34	Peak	169.00	150	Vertical	Pass
2**	2000.000	31.57	-13.40	54.0	-22.43	AV	184.00	150	Vertical	Pass
2	2000.000	40.65	-13.40	74.0	-33.35	Peak	184.00	150	Vertical	Pass
3**	2440.000	73.80	-10.83	54.0	19.80	AV	69.00	150	Vertical	N/A
3	2440.000	77.21	-10.83	74.0	3.21	Peak	69.00	150	Vertical	N/A
4**	4848.000	38.19	-1.70	54.0	-15.81	AV	0.00	150	Vertical	Pass
4	4848.000	47.99	-1.70	74.0	-26.01	Peak	0.00	150	Vertical	Pass
5**	6648.000	41.31	4.35	54.0	-12.69	AV	146.00	150	Vertical	Pass
5	6648.000	51.48	4.35	74.0	-22.52	Peak	146.00	150	Vertical	Pass
6**	14867.063	42.06	26.91	54.0	-11.94	AV	330.00	150	Vertical	Pass
6	14867.063	58.79	26.91	74.0	-15.21	Peak	330.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

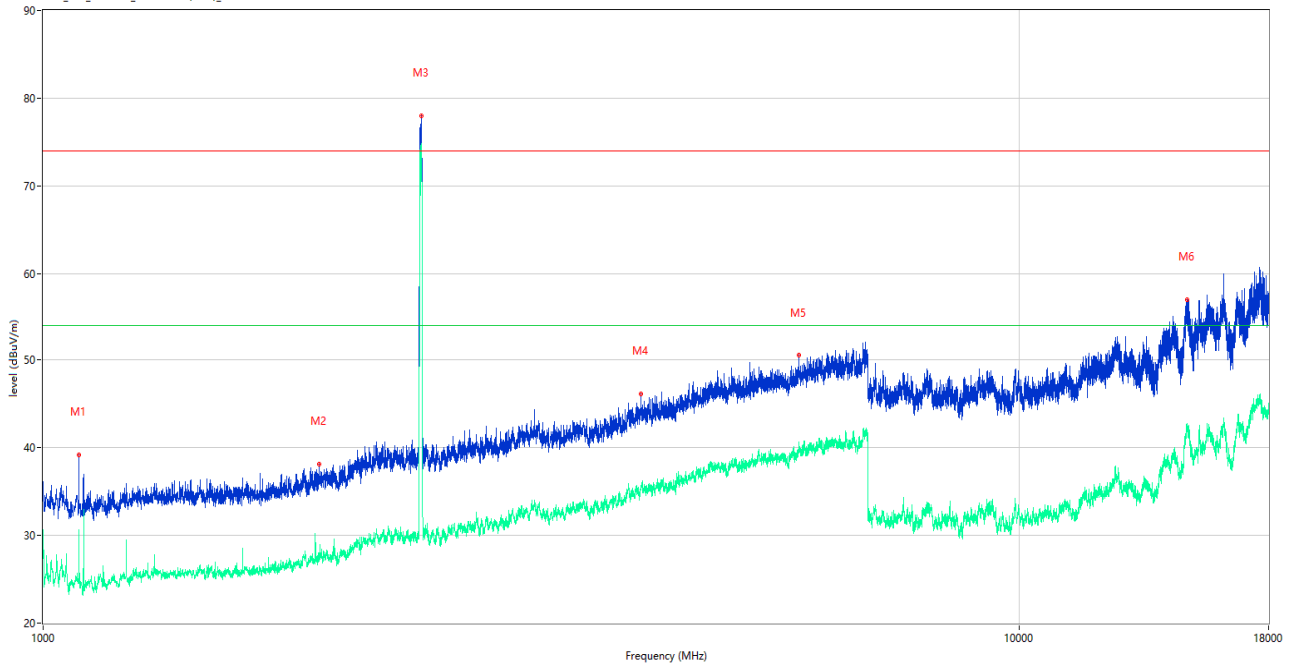


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	28.51	-15.16	54.0	-25.49	AV	333.00	150	Horizontal	Pass
1	1088.000	39.19	-15.16	74.0	-34.81	Peak	333.00	150	Horizontal	Pass
2**	1916.500	27.10	-13.87	54.0	-26.90	AV	164.00	150	Horizontal	Pass
2	1916.500	38.14	-13.87	74.0	-35.86	Peak	164.00	150	Horizontal	Pass
3**	2440.000	74.34	-10.83	54.0	20.34	AV	143.00	150	Horizontal	N/A
3	2440.000	77.97	-10.83	74.0	3.97	Peak	143.00	150	Horizontal	N/A
4**	4097.000	35.69	-4.22	54.0	-18.31	AV	245.00	150	Horizontal	Pass
4	4097.000	46.10	-4.22	74.0	-27.90	Peak	245.00	150	Horizontal	Pass
5**	5941.000	39.64	1.61	54.0	-14.36	AV	281.00	150	Horizontal	Pass
5	5941.000	50.55	1.61	74.0	-23.45	Peak	281.00	150	Horizontal	Pass
6**	14853.937	42.77	27.05	54.0	-11.23	AV	182.00	150	Horizontal	Pass
6	14853.937	57.00	27.05	74.0	-17.00	Peak	182.00	150	Horizontal	Pass



1 GHz to 18 GHz, ANT V 802.11b High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

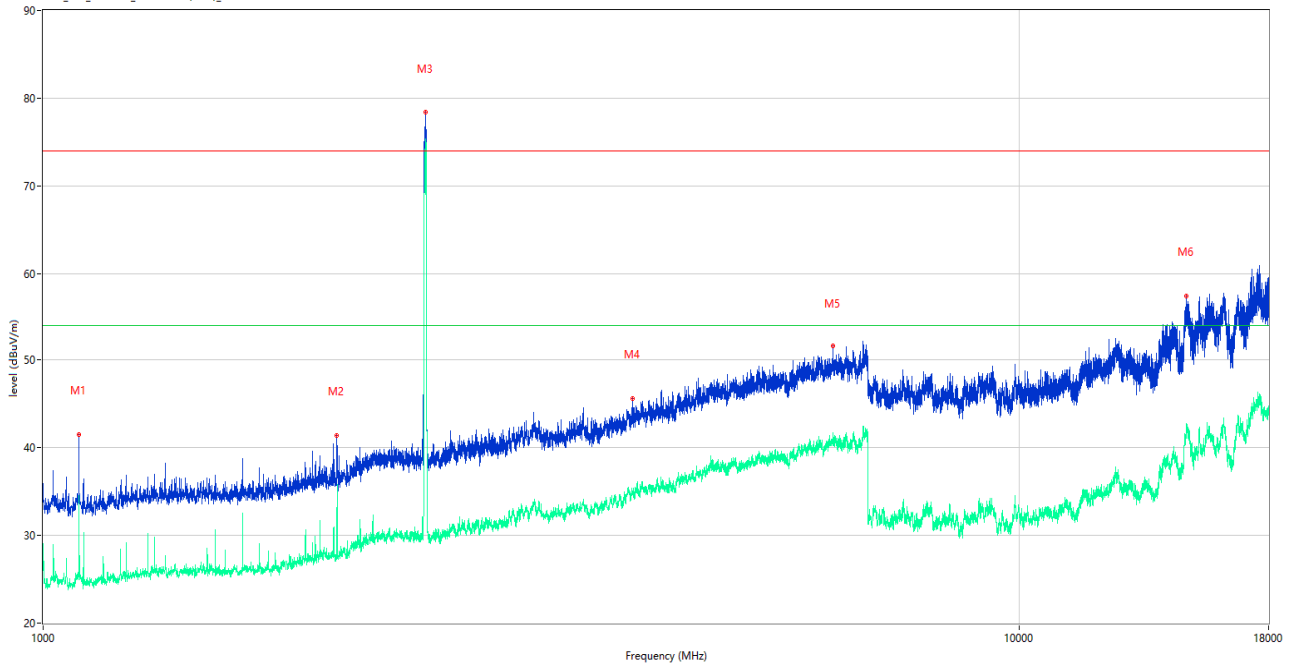

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1087.500	27.05	-15.17	54.0	-26.95	AV	289.00	150	Vertical	Pass
1	1087.500	41.55	-15.17	74.0	-32.45	Peak	289.00	150	Vertical	Pass
2**	2000.000	30.58	-13.40	54.0	-23.42	AV	199.00	150	Vertical	Pass
2	2000.000	41.45	-13.40	74.0	-32.55	Peak	199.00	150	Vertical	Pass
3**	2465.000	74.78	-10.12	54.0	20.78	AV	65.00	150	Vertical	N/A
3	2465.000	78.40	-10.12	74.0	4.40	Peak	65.00	150	Vertical	N/A
4**	4017.000	34.82	-4.48	54.0	-19.18	AV	94.00	150	Vertical	Pass
4	4017.000	45.67	-4.48	74.0	-28.33	Peak	94.00	150	Vertical	Pass
5**	6437.000	40.78	3.33	54.0	-13.22	AV	336.00	150	Vertical	Pass
5	6437.000	51.63	3.33	74.0	-22.37	Peak	336.00	150	Vertical	Pass
6**	14832.938	41.70	26.80	54.0	-12.30	AV	358.00	150	Vertical	Pass
6	14832.938	57.38	26.80	74.0	-16.62	Peak	358.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

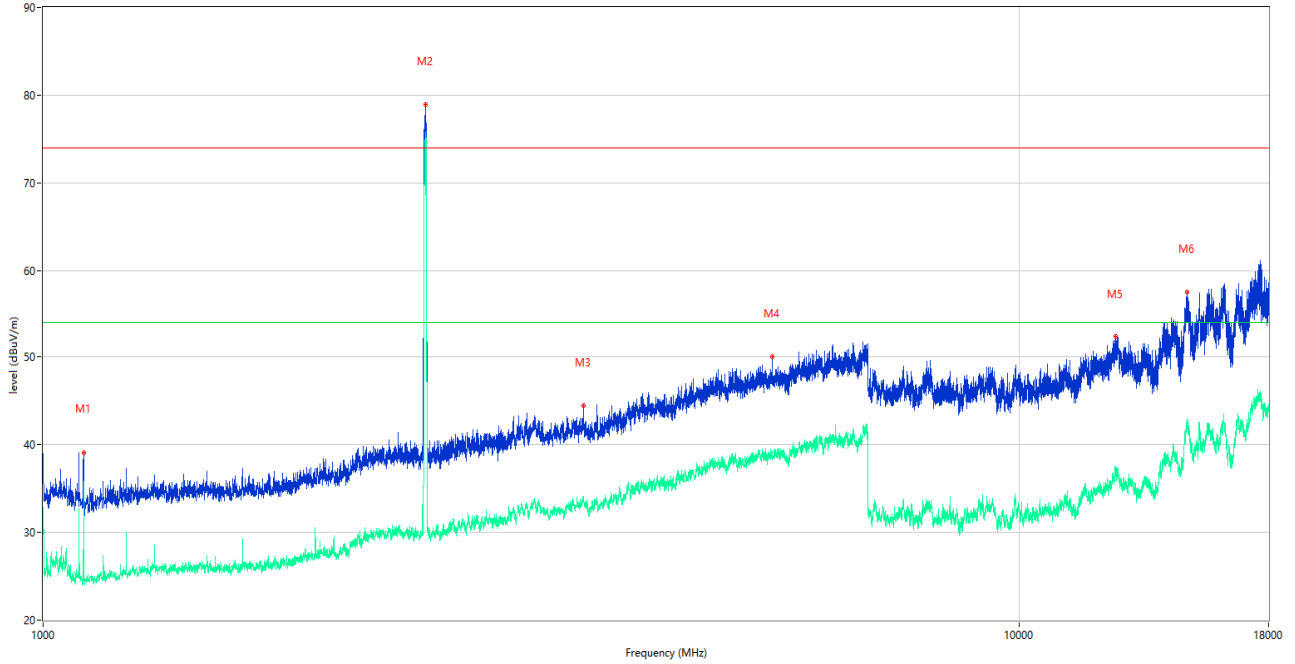

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	31.70	-15.33	54.0	-22.30	AV	145.00	150	Horizontal	Pass
1	1100.000	39.08	-15.33	74.0	-34.92	Peak	145.00	150	Horizontal	Pass
2**	2465.000	74.94	-10.12	54.0	20.94	AV	130.00	150	Horizontal	N/A
2	2465.000	78.90	-10.12	74.0	4.90	Peak	130.00	150	Horizontal	N/A
3**	3577.000	33.92	-5.90	54.0	-20.08	AV	140.00	150	Horizontal	Pass
3	3577.000	44.44	-5.90	74.0	-29.56	Peak	140.00	150	Horizontal	Pass
4**	5580.000	39.30	-0.15	54.0	-14.70	AV	291.00	150	Horizontal	Pass
4	5580.000	50.07	-0.15	74.0	-23.93	Peak	291.00	150	Horizontal	Pass
5**	12555.938	37.39	21.85	54.0	-16.61	AV	164.00	150	Horizontal	Pass
5	12555.938	52.34	21.85	74.0	-21.66	Peak	164.00	150	Horizontal	Pass
6**	14856.563	41.84	27.09	54.0	-12.16	AV	87.00	150	Horizontal	Pass
6	14856.563	57.48	27.09	74.0	-16.52	Peak	87.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

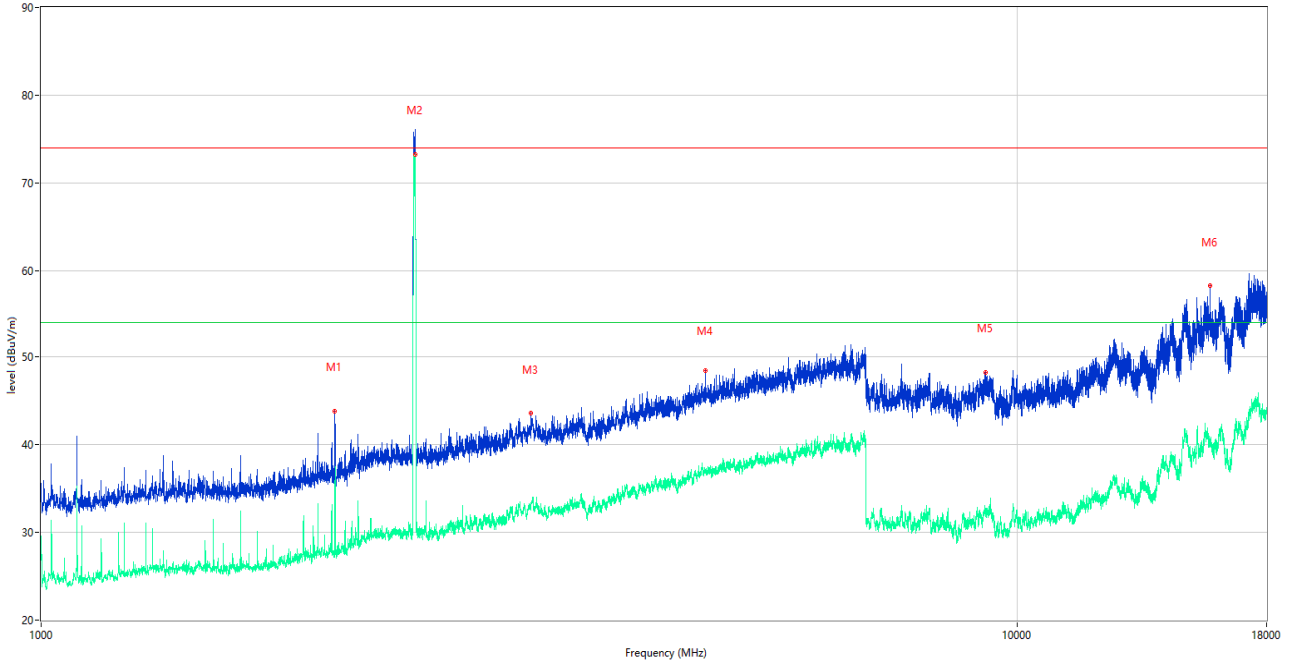

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2000.000	34.31	-13.40	54.0	-19.69	AV	205.00	150	Vertical	Pass
1	2000.000	43.87	-13.40	74.0	-30.13	Peak	205.00	150	Vertical	Pass
2**	2415.500	73.21	-10.27	54.0	19.21	AV	50.00	150	Vertical	N/A
2	2415.500	75.24	-10.27	74.0	1.24	Peak	50.00	150	Vertical	N/A
3**	3175.000	33.00	-6.08	54.0	-21.00	AV	213.00	150	Vertical	Pass
3	3175.000	43.60	-6.08	74.0	-30.40	Peak	213.00	150	Vertical	Pass
4**	4790.000	36.94	-2.40	54.0	-17.06	AV	153.00	150	Vertical	Pass
4	4790.000	48.49	-2.40	74.0	-25.51	Peak	153.00	150	Vertical	Pass
5**	9271.250	32.59	18.08	54.0	-21.41	AV	185.00	150	Vertical	Pass
5	9271.250	48.29	18.08	74.0	-25.71	Peak	185.00	150	Vertical	Pass
6**	15739.875	40.12	25.27	54.0	-13.88	AV	76.00	150	Vertical	Pass
6	15739.875	58.23	25.27	74.0	-15.77	Peak	76.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

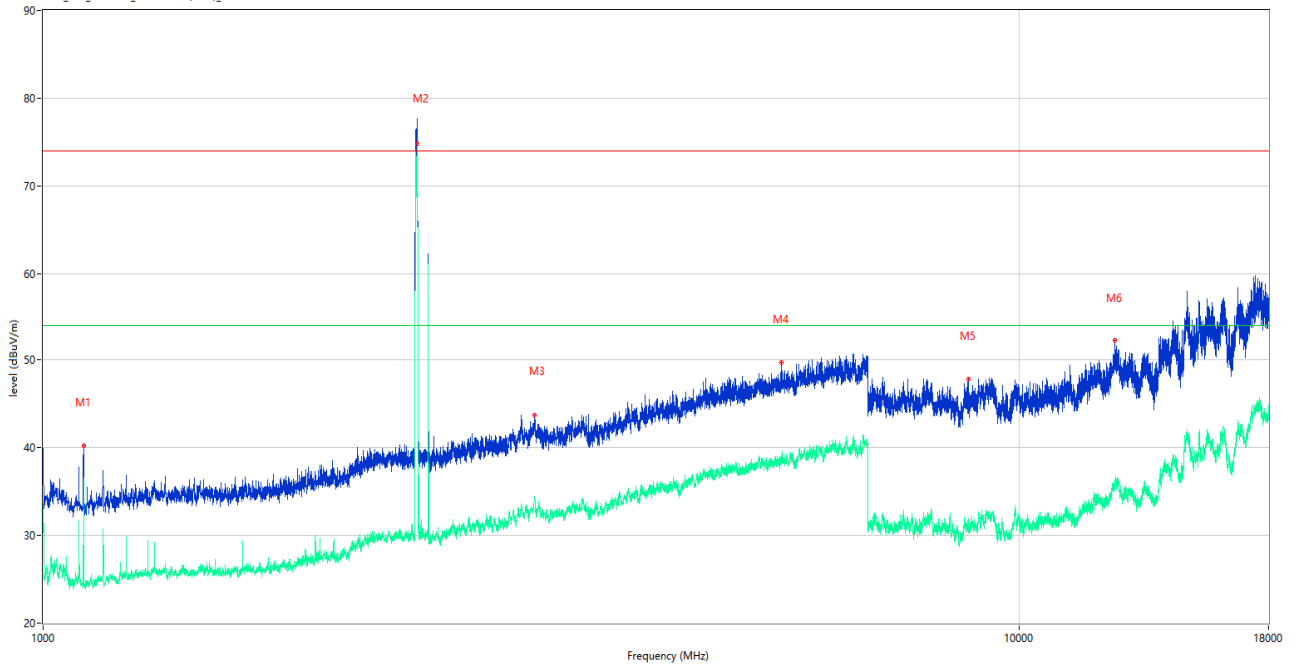

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	32.46	-15.33	54.0	-21.54	AV	136.00	150	Horizontal	Pass
1	1100.000	40.25	-15.33	74.0	-33.75	Peak	136.00	150	Horizontal	Pass
2**	2416.000	74.82	-10.18	54.0	20.82	AV	136.00	150	Horizontal	N/A
2	2416.000	77.21	-10.18	74.0	3.21	Peak	136.00	150	Horizontal	N/A
3**	3189.000	34.43	-5.85	54.0	-19.57	AV	92.00	150	Horizontal	Pass
3	3189.000	43.73	-5.85	74.0	-30.27	Peak	92.00	150	Horizontal	Pass
4**	5710.000	38.48	-0.71	54.0	-15.52	AV	360.00	150	Horizontal	Pass
4	5710.000	49.76	-0.71	74.0	-24.24	Peak	360.00	150	Horizontal	Pass
5**	8874.500	30.40	16.80	54.0	-23.60	AV	307.00	150	Horizontal	Pass
5	8874.500	47.80	16.80	74.0	-26.20	Peak	307.00	150	Horizontal	Pass
6**	12528.625	36.37	21.32	54.0	-17.63	AV	235.00	150	Horizontal	Pass
6	12528.625	52.24	21.32	74.0	-21.76	Peak	235.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

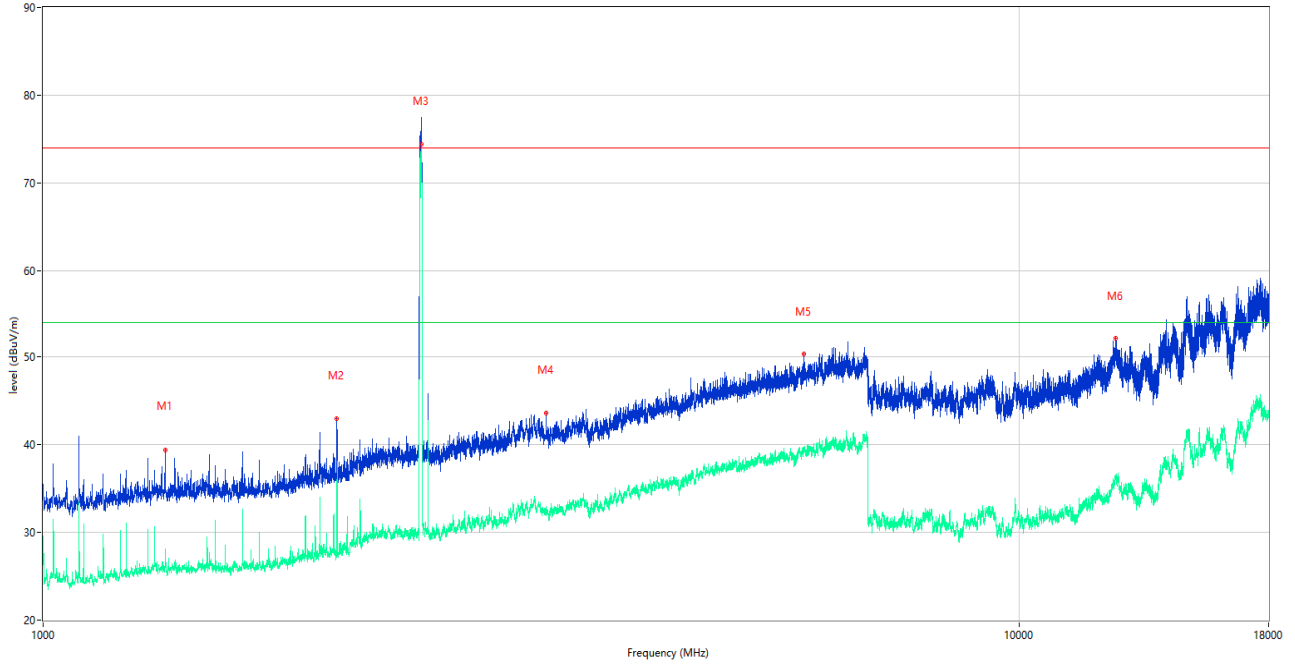

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1333.500	28.10	-14.76	54.0	-25.90	AV	195.00	150	Vertical	Pass
1	1333.500	39.40	-14.76	74.0	-34.60	Peak	195.00	150	Vertical	Pass
2**	2000.000	33.90	-13.40	54.0	-20.10	AV	195.00	150	Vertical	Pass
2	2000.000	43.03	-13.40	74.0	-30.97	Peak	195.00	150	Vertical	Pass
3**	2441.500	74.38	-10.74	54.0	20.38	AV	50.00	150	Vertical	N/A
3	2441.500	76.48	-10.74	74.0	2.48	Peak	50.00	150	Vertical	N/A
4**	3276.000	32.99	-7.46	54.0	-21.01	AV	289.00	150	Vertical	Pass
4	3276.000	43.61	-7.46	74.0	-30.39	Peak	289.00	150	Vertical	Pass
5**	6017.000	39.51	2.19	54.0	-14.49	AV	113.00	150	Vertical	Pass
5	6017.000	50.34	2.19	74.0	-23.66	Peak	113.00	150	Vertical	Pass
6**	12550.187	36.34	21.77	54.0	-17.66	AV	0.00	150	Vertical	Pass
6	12550.187	52.13	21.77	74.0	-21.87	Peak	0.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

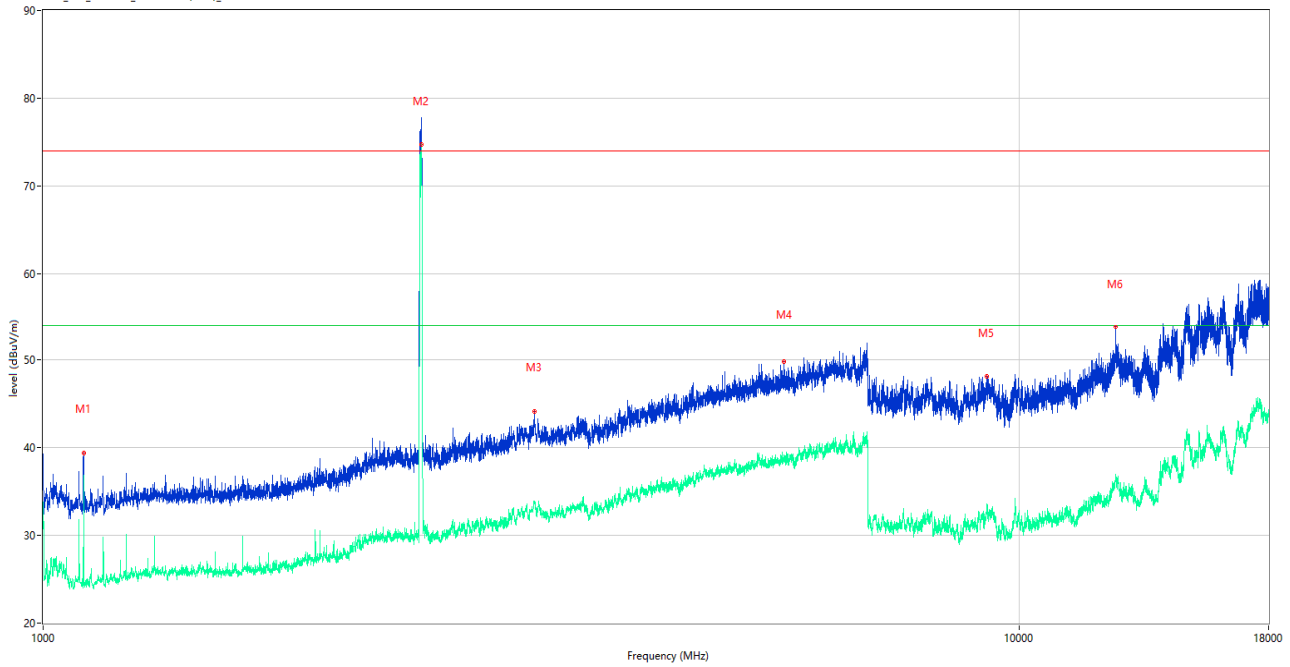

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	32.62	-15.33	54.0	-21.38	AV	122.00	150	Horizontal	Pass
1	1100.000	39.43	-15.33	74.0	-34.57	Peak	122.00	150	Horizontal	Pass
2**	2441.000	74.74	-10.77	54.0	20.74	AV	122.00	150	Horizontal	N/A
2	2441.000	77.76	-10.77	74.0	3.76	Peak	122.00	150	Horizontal	N/A
3**	3187.000	33.71	-5.71	54.0	-20.29	AV	3.00	150	Horizontal	Pass
3	3187.000	44.17	-5.71	74.0	-29.83	Peak	3.00	150	Horizontal	Pass
4**	5741.000	39.19	0.29	54.0	-14.81	AV	241.00	150	Horizontal	Pass
4	5741.000	49.82	0.29	74.0	-24.18	Peak	241.00	150	Horizontal	Pass
5**	9259.750	33.07	18.24	54.0	-20.93	AV	85.00	150	Horizontal	Pass
5	9259.750	48.12	18.24	74.0	-25.88	Peak	85.00	150	Horizontal	Pass
6**	12547.313	36.42	21.75	54.0	-17.58	AV	0.00	150	Horizontal	Pass
6	12547.313	53.79	21.75	74.0	-20.21	Peak	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel


RE Test case\_FCC\_Part\_15C\_FCC 15.247(2.4G)\_1GHz-18GHz

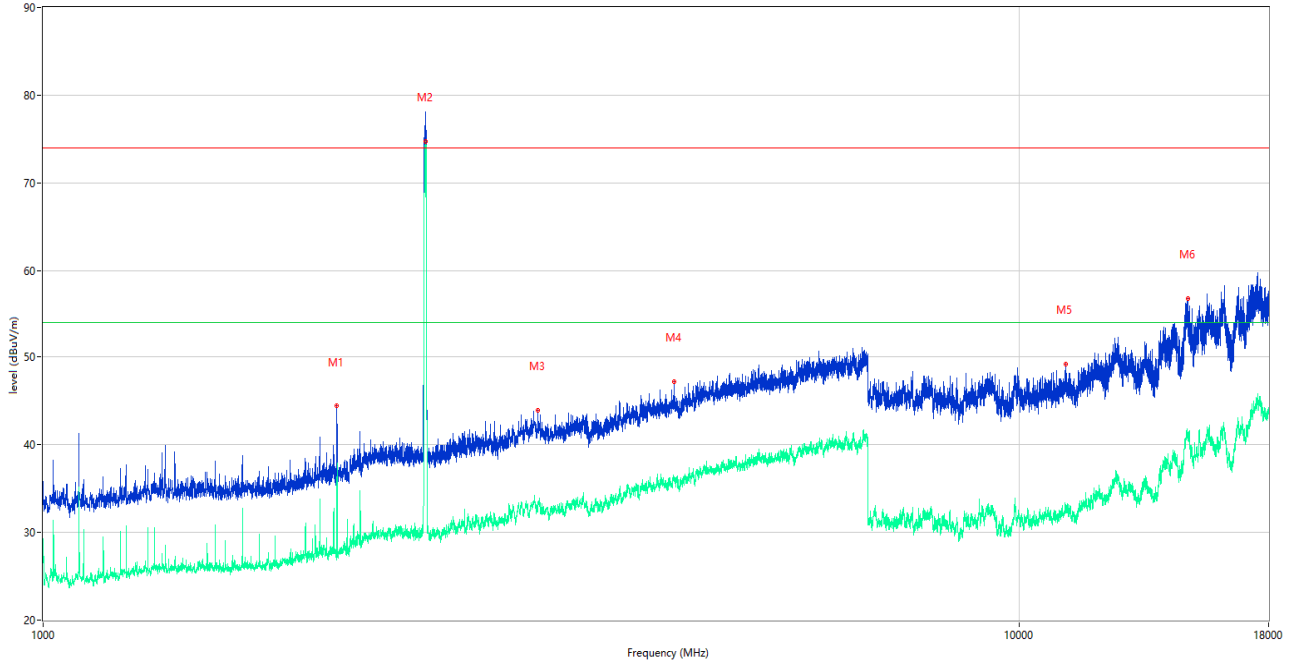

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2000.000	34.75	-13.40	54.0	-19.25	AV	197.00	150	Vertical	Pass
1	2000.000	44.46	-13.40	74.0	-29.54	Peak	197.00	150	Vertical	Pass
2**	2466.500	74.67	-10.21	54.0	20.67	AV	52.00	150	Vertical	N/A
2	2466.500	76.73	-10.21	74.0	2.73	Peak	52.00	150	Vertical	N/A
3**	3212.000	33.01	-6.96	54.0	-20.99	AV	61.00	150	Vertical	Pass
3	3212.000	43.96	-6.96	74.0	-30.04	Peak	61.00	150	Vertical	Pass
4**	4429.000	35.90	-3.18	54.0	-18.10	AV	314.00	150	Vertical	Pass
4	4429.000	47.21	-3.18	74.0	-26.79	Peak	314.00	150	Vertical	Pass
5**	11150.063	33.19	18.75	54.0	-20.81	AV	195.00	150	Vertical	Pass
5	11150.063	49.24	18.75	74.0	-24.76	Peak	195.00	150	Vertical	Pass
6**	14872.313	40.97	26.74	54.0	-13.03	AV	358.00	150	Vertical	Pass
6	14872.313	56.81	26.74	74.0	-17.19	Peak	358.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

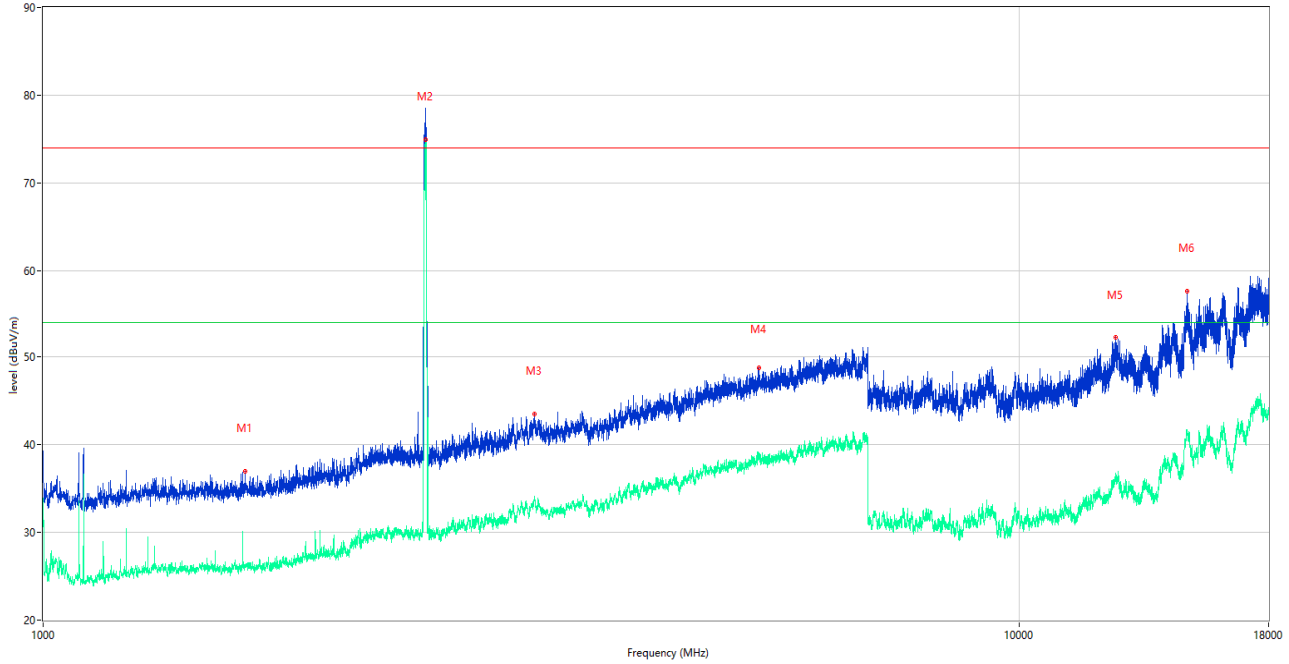


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1610.000	26.03	-15.26	54.0	-27.97	AV	257.00	150	Horizontal	Pass
1	1610.000	36.98	-15.26	74.0	-37.02	Peak	257.00	150	Horizontal	Pass
2**	2465.500	74.90	-10.14	54.0	20.90	AV	131.00	150	Horizontal	N/A
2	2465.500	77.70	-10.14	74.0	3.70	Peak	131.00	150	Horizontal	N/A
3**	3186.000	34.02	-5.65	54.0	-19.98	AV	146.00	150	Horizontal	Pass
3	3186.000	43.50	-5.65	74.0	-30.50	Peak	146.00	150	Horizontal	Pass
4**	5414.000	38.60	0.30	54.0	-15.40	AV	39.00	150	Horizontal	Pass
4	5414.000	48.79	0.30	74.0	-25.21	Peak	39.00	150	Horizontal	Pass
5**	12548.750	36.62	21.76	54.0	-17.38	AV	88.00	150	Horizontal	Pass
5	12548.750	52.22	21.76	74.0	-21.78	Peak	88.00	150	Horizontal	Pass
6**	14844.750	41.44	26.88	54.0	-12.56	AV	216.00	150	Horizontal	Pass
6	14844.750	57.61	26.88	74.0	-16.39	Peak	216.00	150	Horizontal	Pass



1 GHz to 18 GHz, ANT V 802.11n20 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

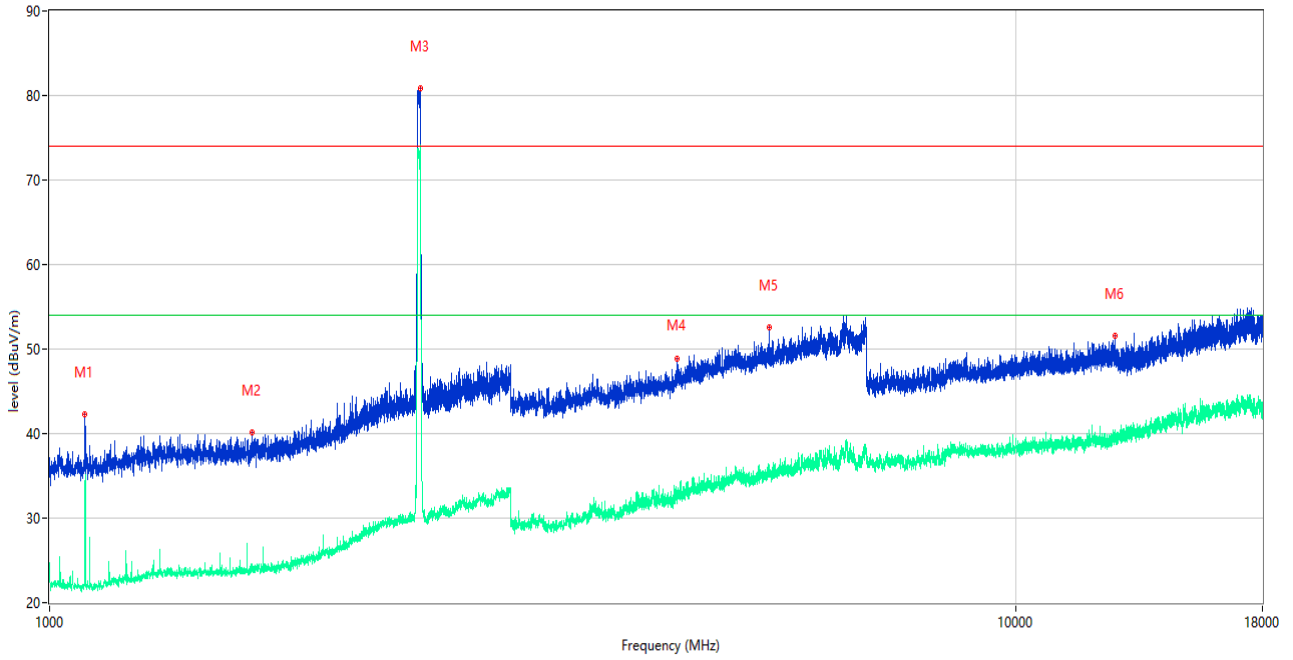

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	33.73	-18.14	54.0	-20.27	AV	290.00	150	Vertical	Pass
1	1088.000	42.30	-18.14	74.0	-31.70	Peak	290.00	150	Vertical	Pass
2**	1620.500	23.92	-17.27	54.0	-30.08	AV	78.00	150	Vertical	Pass
2	1620.500	40.15	-17.27	74.0	-33.85	Peak	78.00	150	Vertical	Pass
3**	2418.000	73.27	-12.42	54.0	19.27	AV	43.00	150	Vertical	Pass
3	2418.000	80.86	-12.42	74.0	6.86	Peak	43.00	150	Vertical	N/A
4**	4466.000	32.28	-3.83	54.0	-21.72	AV	287.00	150	Vertical	Pass
4	4466.000	48.86	-3.83	74.0	-25.14	Peak	287.00	150	Vertical	Pass
5**	5551.000	35.23	-2.20	54.0	-18.77	AV	3.00	150	Vertical	Pass
5	5551.000	52.61	-2.20	74.0	-21.39	Peak	3.00	150	Vertical	Pass
6**	12656.562	39.60	1.38	54.0	-14.40	AV	234.00	150	Vertical	Pass
6	12656.562	51.57	1.38	74.0	-22.43	Peak	234.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

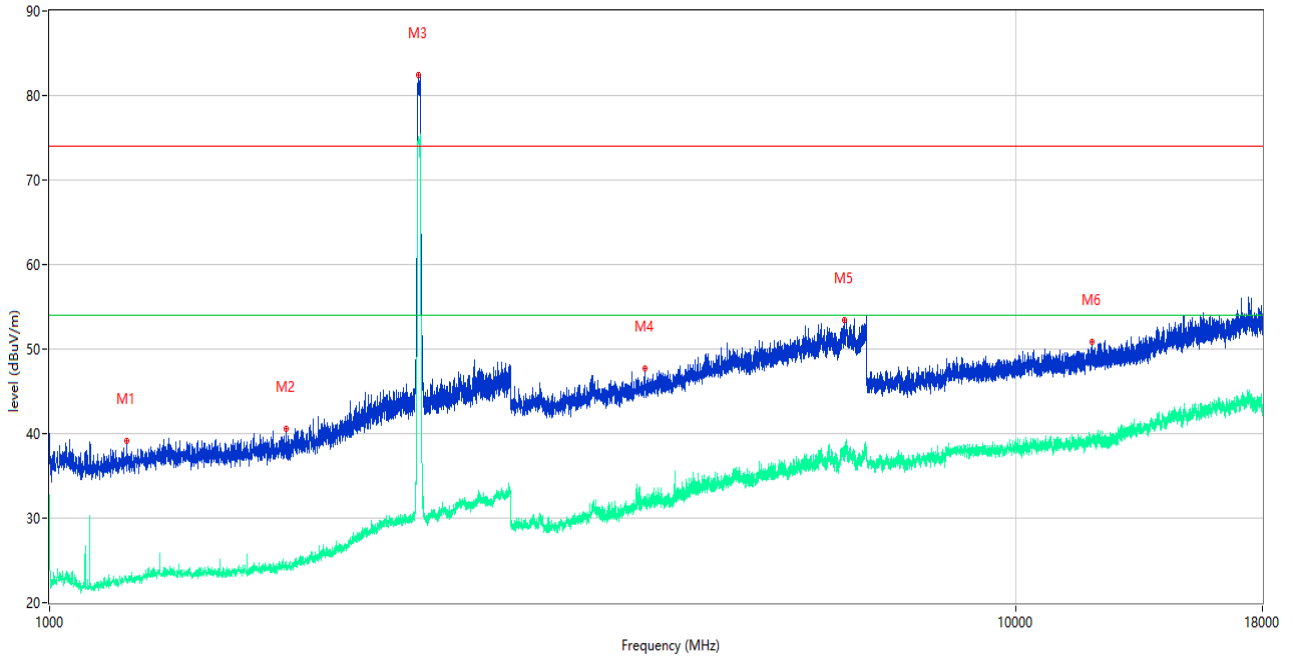

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1201.500	22.70	-17.65	54.0	-31.30	AV	255.00	150	Horizontal	Pass
1	1201.500	39.07	-17.65	74.0	-34.93	Peak	255.00	150	Horizontal	Pass
2**	1757.000	24.88	-16.87	54.0	-29.12	AV	59.00	150	Horizontal	Pass
2	1757.000	40.55	-16.87	74.0	-33.45	Peak	59.00	150	Horizontal	Pass
3**	2407.500	75.16	-11.83	54.0	21.16	AV	59.00	150	Horizontal	N/A
3	2407.500	82.36	-11.83	74.0	8.36	Peak	59.00	150	Horizontal	N/A
4**	4135.000	31.47	-4.89	54.0	-22.53	AV	275.00	150	Horizontal	Pass
4	4135.000	47.67	-4.89	74.0	-26.33	Peak	275.00	150	Horizontal	Pass
5**	6645.000	37.43	-0.52	54.0	-16.57	AV	46.00	150	Horizontal	Pass
5	6645.000	53.42	-0.52	74.0	-20.58	Peak	46.00	150	Horizontal	Pass
6**	12002.500	39.43	1.48	54.0	-14.57	AV	11.00	150	Horizontal	Pass
6	12002.500	50.82	1.48	74.0	-23.18	Peak	11.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

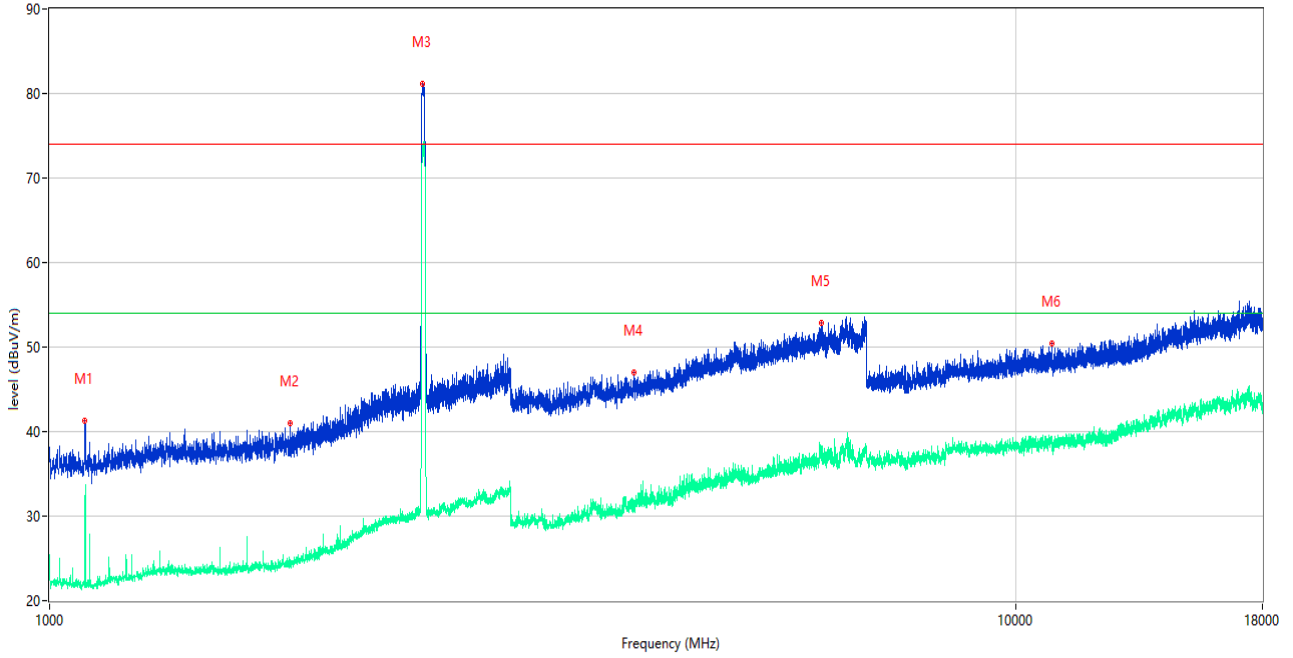

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	31.10	-18.14	54.0	-22.90	AV	329.00	150	Vertical	Pass
1	1088.000	41.32	-18.14	74.0	-32.68	Peak	329.00	150	Vertical	Pass
2**	1774.500	24.32	-16.78	54.0	-29.68	AV	19.00	150	Vertical	Pass
2	1774.500	40.99	-16.78	74.0	-33.01	Peak	19.00	150	Vertical	Pass
3**	2431.500	73.91	-12.73	54.0	19.91	AV	27.00	150	Vertical	N/A
3	2431.500	81.10	-12.73	74.0	7.10	Peak	27.00	150	Vertical	N/A
4**	4023.000	31.34	-5.12	54.0	-22.66	AV	299.00	150	Vertical	Pass
4	4023.000	46.97	-5.12	74.0	-27.03	Peak	299.00	150	Vertical	Pass
5**	6289.000	37.44	0.30	54.0	-16.56	AV	180.00	150	Vertical	Pass
5	6289.000	52.90	0.30	74.0	-21.10	Peak	180.00	150	Vertical	Pass
6**	10904.250	38.62	0.41	54.0	-15.38	AV	72.00	150	Vertical	Pass
6	10904.250	50.38	0.41	74.0	-23.62	Peak	72.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

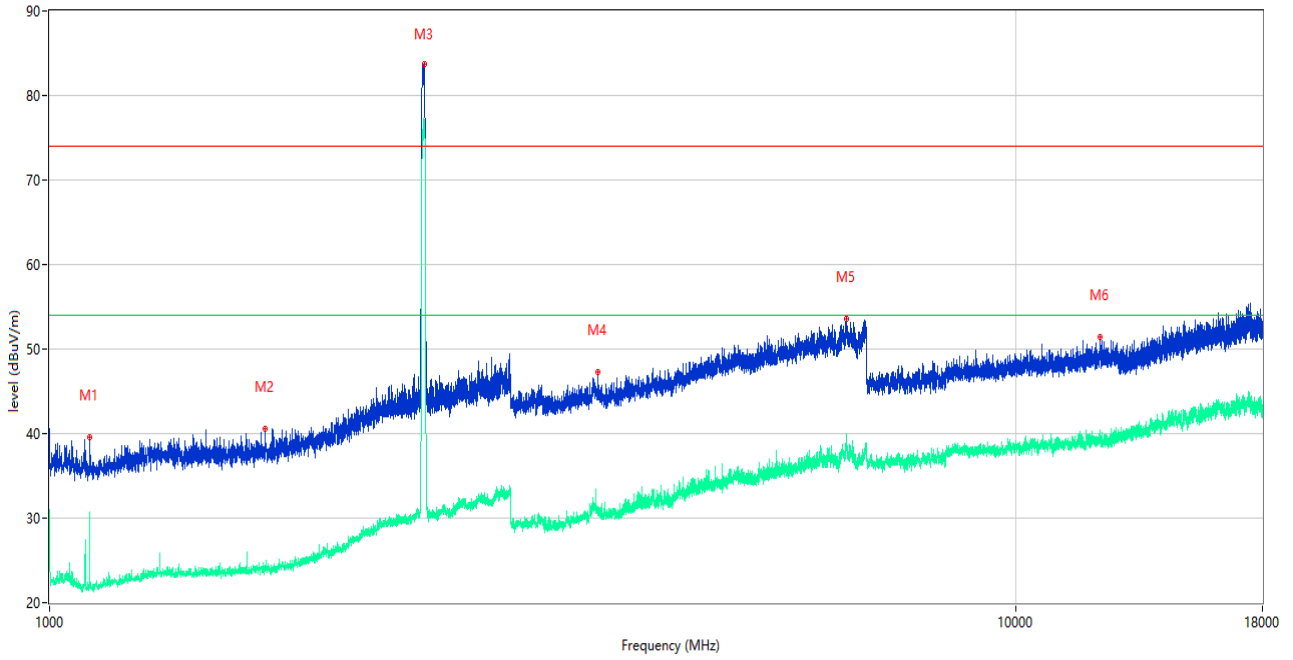

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.83	-18.36	54.0	-29.17	AV	360.00	150	Horizontal	Pass
1	1100.000	39.62	-18.36	74.0	-34.38	Peak	360.00	150	Horizontal	Pass
2**	1671.500	24.23	-17.01	54.0	-29.77	AV	327.00	150	Horizontal	Pass
2	1671.500	40.56	-17.01	74.0	-33.44	Peak	327.00	150	Horizontal	Pass
3**	2445.000	77.10	-12.65	54.0	23.10	AV	109.00	150	Horizontal	N/A
3	2445.000	83.71	-12.65	74.0	9.71	Peak	109.00	150	Horizontal	N/A
4**	3697.000	30.73	-6.05	54.0	-23.27	AV	293.00	150	Horizontal	Pass
4	3697.000	47.29	-6.05	74.0	-26.71	Peak	293.00	150	Horizontal	Pass
5**	6676.000	38.19	0.41	54.0	-15.81	AV	339.00	150	Horizontal	Pass
5	6676.000	53.51	0.41	74.0	-20.49	Peak	339.00	150	Horizontal	Pass
6**	12225.313	40.49	1.71	54.0	-13.51	AV	61.00	150	Horizontal	Pass
6	12225.313	51.46	1.71	74.0	-22.54	Peak	61.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

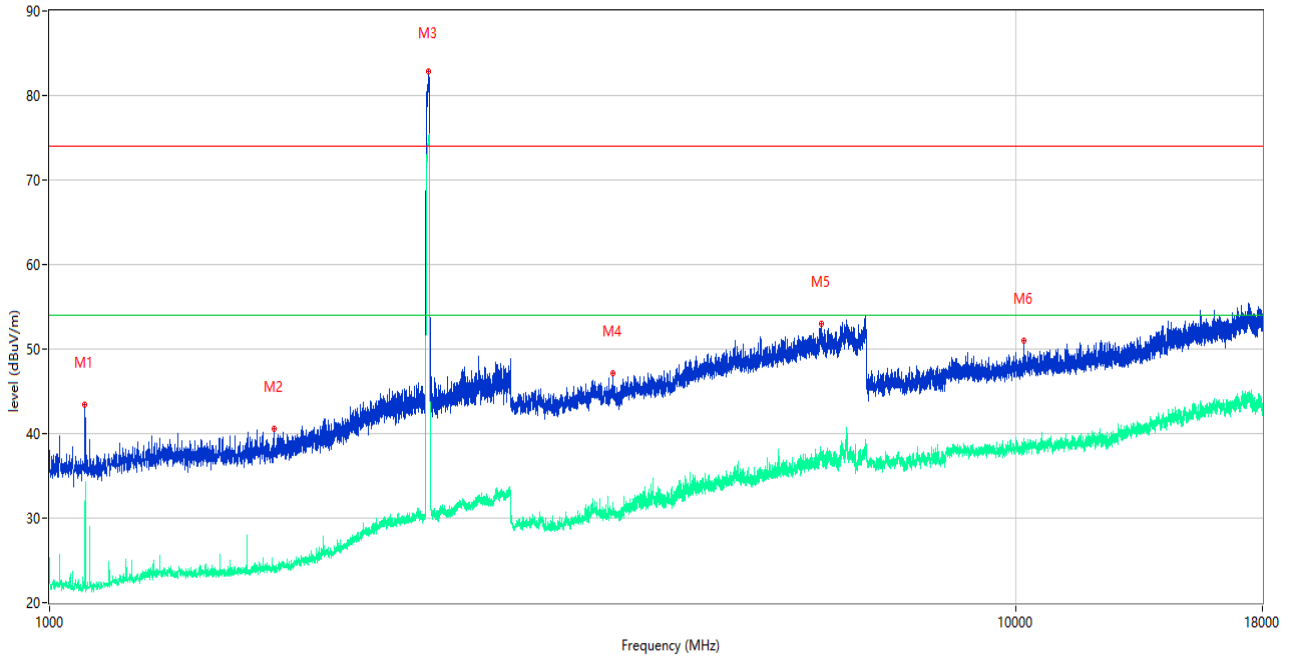

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	29.73	-18.14	54.0	-24.27	AV	277.00	150	Vertical	Pass
1	1088.000	43.46	-18.14	74.0	-30.54	Peak	277.00	150	Vertical	Pass
2**	1706.000	24.08	-17.16	54.0	-29.92	AV	75.00	150	Vertical	Pass
2	1706.000	40.59	-17.16	74.0	-33.41	Peak	75.00	150	Vertical	Pass
3**	2469.500	75.18	-12.13	54.0	21.18	AV	200.00	150	Vertical	N/A
3	2469.500	82.85	-12.13	74.0	8.85	Peak	200.00	150	Vertical	N/A
4**	3825.000	30.67	-5.43	54.0	-23.33	AV	315.00	150	Vertical	Pass
4	3825.000	47.08	-5.43	74.0	-26.92	Peak	315.00	150	Vertical	Pass
5**	6290.000	37.44	0.20	54.0	-16.56	AV	26.00	150	Vertical	Pass
5	6290.000	52.96	0.20	74.0	-21.04	Peak	26.00	150	Vertical	Pass
6**	10202.750	39.04	0.81	54.0	-14.96	AV	139.00	150	Vertical	Pass
6	10202.750	51.01	0.81	74.0	-22.99	Peak	139.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

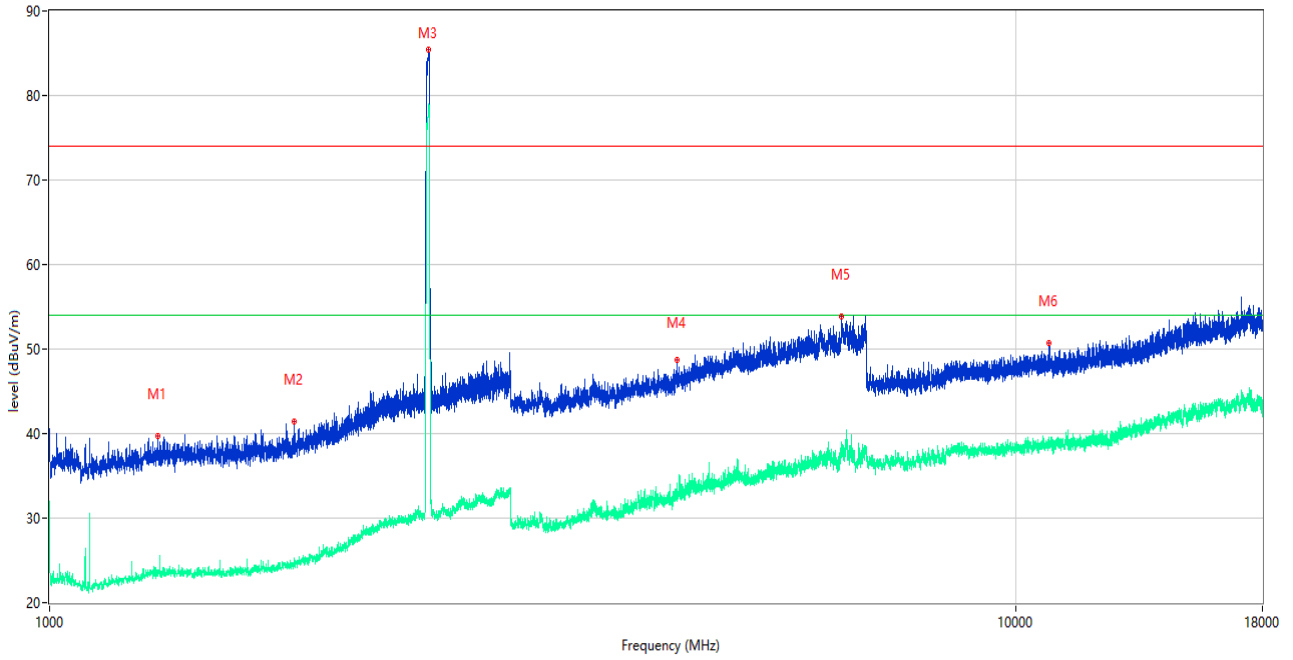

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1293.000	23.75	-17.17	54.0	-30.25	AV	324.00	150	Horizontal	Pass
1	1293.000	39.72	-17.17	74.0	-34.28	Peak	324.00	150	Horizontal	Pass
2**	1790.000	24.66	-16.75	54.0	-29.34	AV	338.00	150	Horizontal	Pass
2	1790.000	41.37	-16.75	74.0	-32.63	Peak	338.00	150	Horizontal	Pass
3**	2469.500	78.49	-12.13	54.0	24.49	AV	107.00	150	Horizontal	N/A
3	2469.500	85.44	-12.13	74.0	11.44	Peak	107.00	150	Horizontal	N/A
4**	4460.000	32.59	-3.82	54.0	-21.41	AV	99.00	150	Horizontal	Pass
4	4460.000	48.65	-3.82	74.0	-25.35	Peak	99.00	150	Horizontal	Pass
5**	6597.000	37.33	-0.41	54.0	-16.67	AV	107.00	150	Horizontal	Pass
5	6597.000	53.85	-0.41	74.0	-20.15	Peak	107.00	150	Horizontal	Pass
6**	10809.375	38.23	0.57	54.0	-15.77	AV	0.00	150	Horizontal	Pass
6	10809.375	50.65	0.57	74.0	-23.35	Peak	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

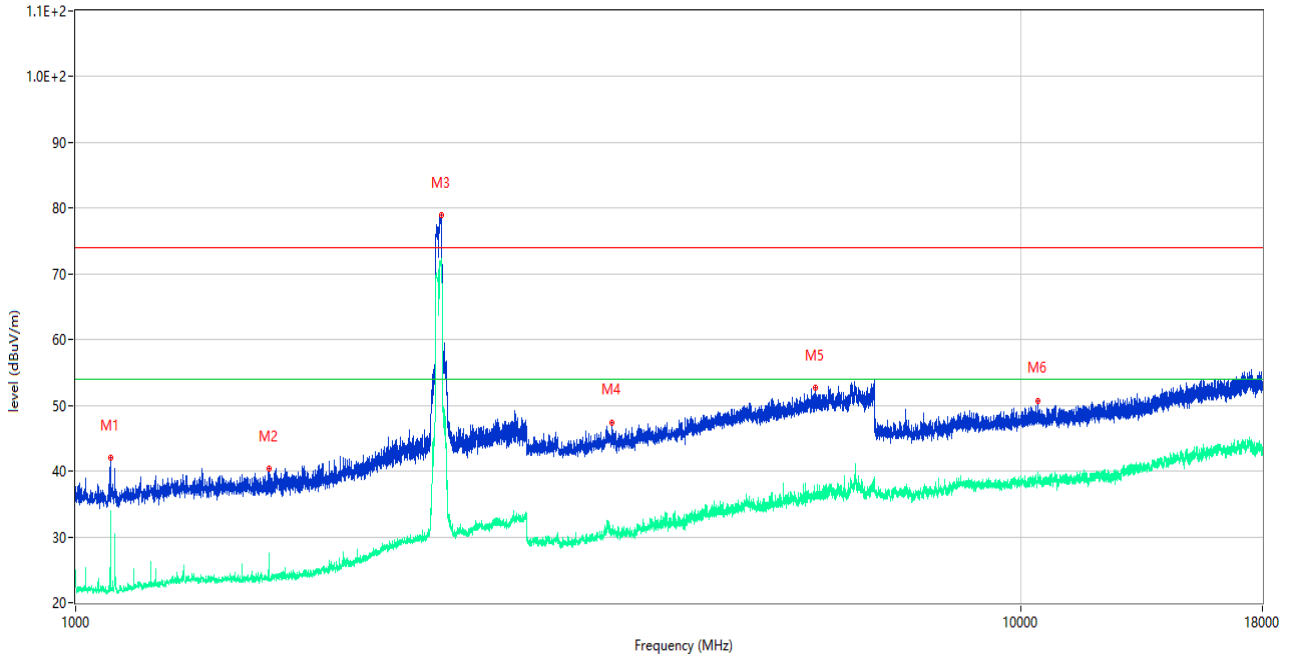

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	28.05	-18.14	54.0	-25.95	AV	287.00	150	Vertical	Pass
1	1088.000	42.06	-18.14	74.0	-31.94	Peak	287.00	150	Vertical	Pass
2**	1600.000	26.36	-17.30	54.0	-27.64	AV	148.00	150	Vertical	Pass
2	1600.000	40.47	-17.30	74.0	-33.53	Peak	148.00	150	Vertical	Pass
3**	2437.500	72.36	-12.53	54.0	18.36	AV	25.00	150	Vertical	N/A
3	2437.500	79.01	-12.53	74.0	5.01	Peak	25.00	150	Vertical	N/A
4**	3692.000	30.69	-6.05	54.0	-23.31	AV	205.00	150	Vertical	Pass
4	3692.000	47.35	-6.05	74.0	-26.65	Peak	205.00	150	Vertical	Pass
5**	6052.000	36.68	-1.77	54.0	-17.32	AV	283.00	150	Vertical	Pass
5	6052.000	52.63	-1.77	74.0	-21.37	Peak	283.00	150	Vertical	Pass
6**	10421.250	39.17	0.64	54.0	-14.83	AV	52.00	150	Vertical	Pass
6	10421.250	50.74	0.64	74.0	-23.26	Peak	52.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

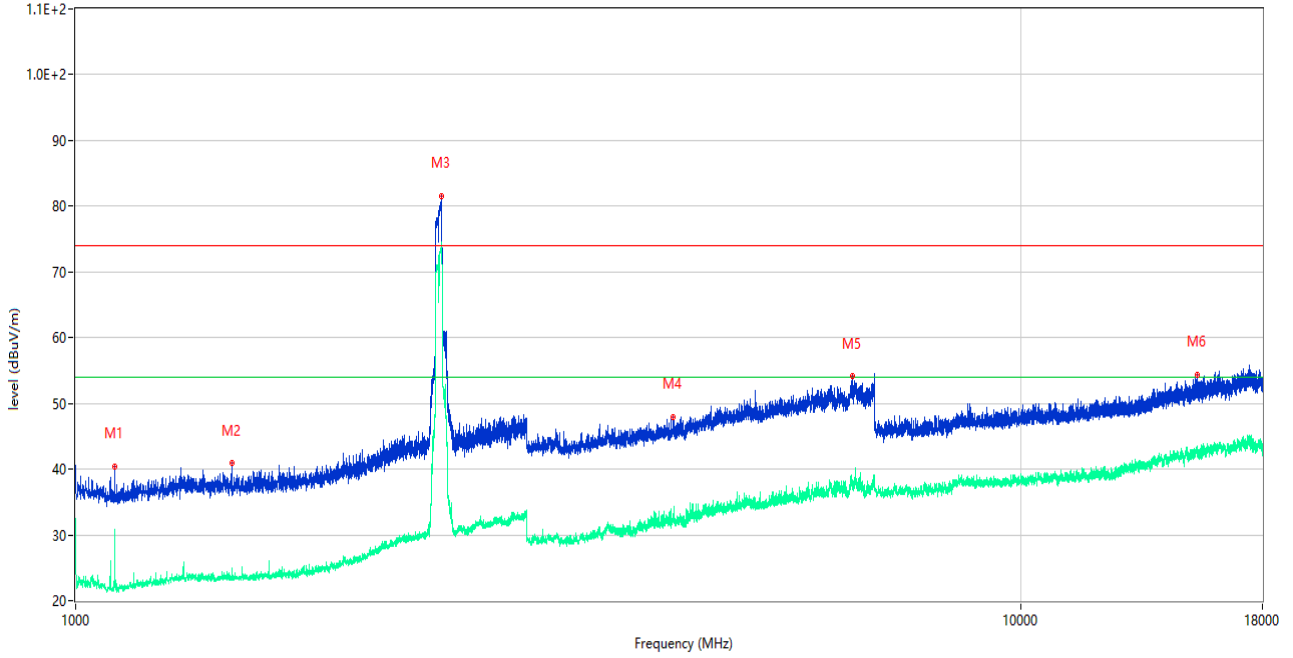


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.44	-18.36	54.0	-29.56	AV	48.00	150	Horizontal	Pass
1	1100.000	40.46	-18.36	74.0	-33.54	Peak	48.00	150	Horizontal	Pass
2**	1462.000	23.28	-17.30	54.0	-30.72	AV	213.00	150	Horizontal	Pass
2	1462.000	40.97	-17.30	74.0	-33.03	Peak	213.00	150	Horizontal	Pass
3**	2438.000	74.35	-12.51	54.0	20.35	AV	98.00	150	Horizontal	N/A
3	2438.000	81.58	-12.51	74.0	7.58	Peak	98.00	150	Horizontal	N/A
4**	4286.000	33.19	-4.82	54.0	-20.81	AV	0.00	150	Horizontal	Pass
4	4286.000	47.92	-4.82	74.0	-26.08	Peak	0.00	150	Horizontal	Pass
5**	6629.000	37.04	0.20	54.0	-16.96	AV	140.00	150	Horizontal	Pass
5	6629.000	54.07	0.20	74.0	-19.93	Peak	140.00	150	Horizontal	Pass
6**	15352.688	43.12	1.64	54.0	-10.88	AV	76.00	150	Horizontal	Pass
6	15352.688	54.39	1.64	74.0	-19.61	Peak	76.00	150	Horizontal	Pass



1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

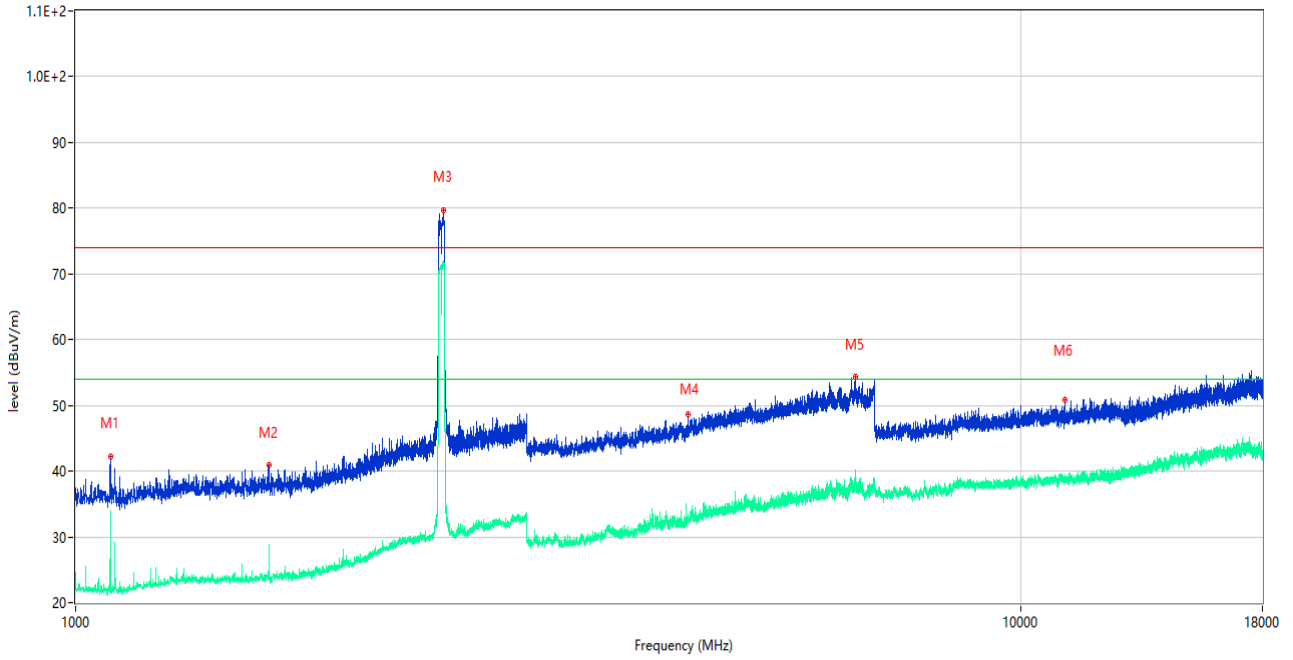

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	30.79	-18.14	54.0	-23.21	AV	307.00	150	Vertical	Pass
1	1088.000	42.30	-18.14	74.0	-31.70	Peak	307.00	150	Vertical	Pass
2**	1600.000	26.01	-17.30	54.0	-27.99	AV	161.00	150	Vertical	Pass
2	1600.000	40.93	-17.30	74.0	-33.07	Peak	161.00	150	Vertical	Pass
3**	2447.500	71.17	-12.78	54.0	17.17	AV	23.00	150	Vertical	N/A
3	2447.500	79.77	-12.78	74.0	5.77	Peak	23.00	150	Vertical	N/A
4**	4439.000	32.71	-4.10	54.0	-21.29	AV	119.00	150	Vertical	Pass
4	4439.000	48.73	-4.10	74.0	-25.27	Peak	119.00	150	Vertical	Pass
5**	6677.000	39.18	0.46	54.0	-14.82	AV	263.00	150	Vertical	Pass
5	6677.000	54.26	0.46	74.0	-19.74	Peak	263.00	150	Vertical	Pass
6**	11122.750	38.48	-0.39	54.0	-15.52	AV	96.00	150	Vertical	Pass
6	11122.750	50.93	-0.39	74.0	-23.07	Peak	96.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

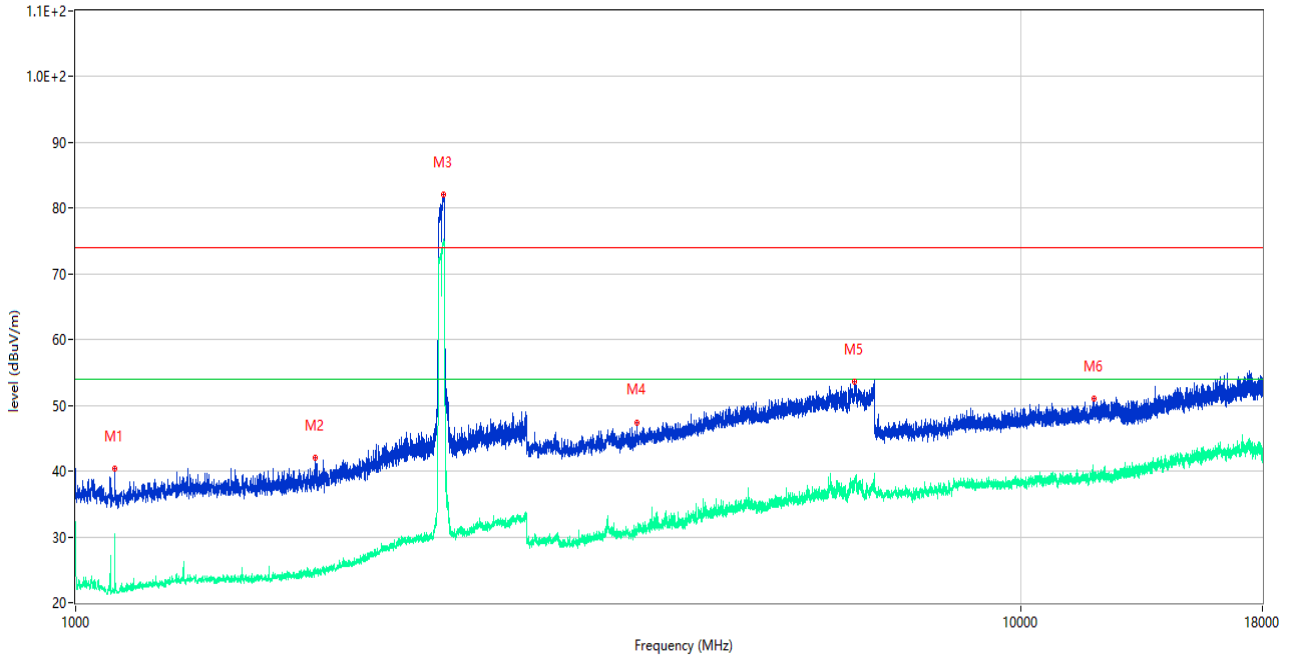

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.49	-18.36	54.0	-29.51	AV	11.00	150	Horizontal	Pass
1	1100.000	40.34	-18.36	74.0	-33.66	Peak	11.00	150	Horizontal	Pass
2**	1790.500	24.52	-16.67	54.0	-29.48	AV	360.00	150	Horizontal	Pass
2	1790.500	42.06	-16.67	74.0	-31.94	Peak	360.00	150	Horizontal	Pass
3**	2450.000	74.99	-12.66	54.0	20.99	AV	113.00	150	Horizontal	N/A
3	2450.000	82.04	-12.66	74.0	8.04	Peak	113.00	150	Horizontal	N/A
4**	3922.000	30.89	-5.64	54.0	-23.11	AV	254.00	150	Horizontal	Pass
4	3922.000	47.32	-5.64	74.0	-26.68	Peak	254.00	150	Horizontal	Pass
5**	6671.000	38.35	0.03	54.0	-15.65	AV	242.00	150	Horizontal	Pass
5	6671.000	53.59	0.03	74.0	-20.41	Peak	242.00	150	Horizontal	Pass
6**	11949.312	39.72	1.54	54.0	-14.28	AV	305.00	150	Horizontal	Pass
6	11949.312	51.13	1.54	74.0	-22.87	Peak	305.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

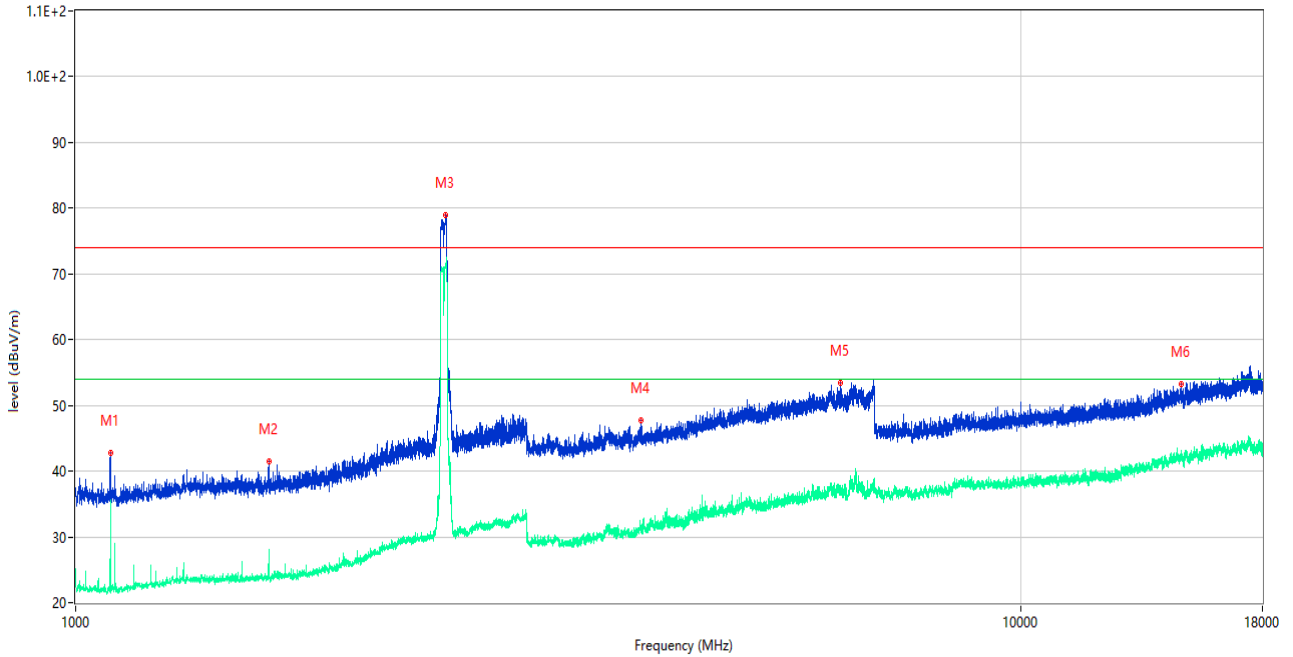

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	30.82	-18.14	54.0	-23.18	AV	296.00	150	Vertical	Pass
1	1088.000	42.69	-18.14	74.0	-31.31	Peak	296.00	150	Vertical	Pass
2**	1600.000	28.07	-17.30	54.0	-25.93	AV	166.00	150	Vertical	Pass
2	1600.000	41.46	-17.30	74.0	-32.54	Peak	166.00	150	Vertical	Pass
3**	2460.500	71.46	-12.68	54.0	17.46	AV	190.00	150	Vertical	N/A
3	2460.500	78.94	-12.68	74.0	4.94	Peak	190.00	150	Vertical	N/A
4**	3960.000	30.63	-4.86	54.0	-23.37	AV	341.00	150	Vertical	Pass
4	3960.000	47.65	-4.86	74.0	-26.35	Peak	341.00	150	Vertical	Pass
5**	6448.000	36.93	-0.29	54.0	-17.07	AV	10.00	150	Vertical	Pass
5	6448.000	53.43	-0.29	74.0	-20.57	Peak	10.00	150	Vertical	Pass
6**	14781.750	42.48	1.35	54.0	-11.52	AV	74.00	150	Vertical	Pass
6	14781.750	53.16	1.35	74.0	-20.84	Peak	74.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

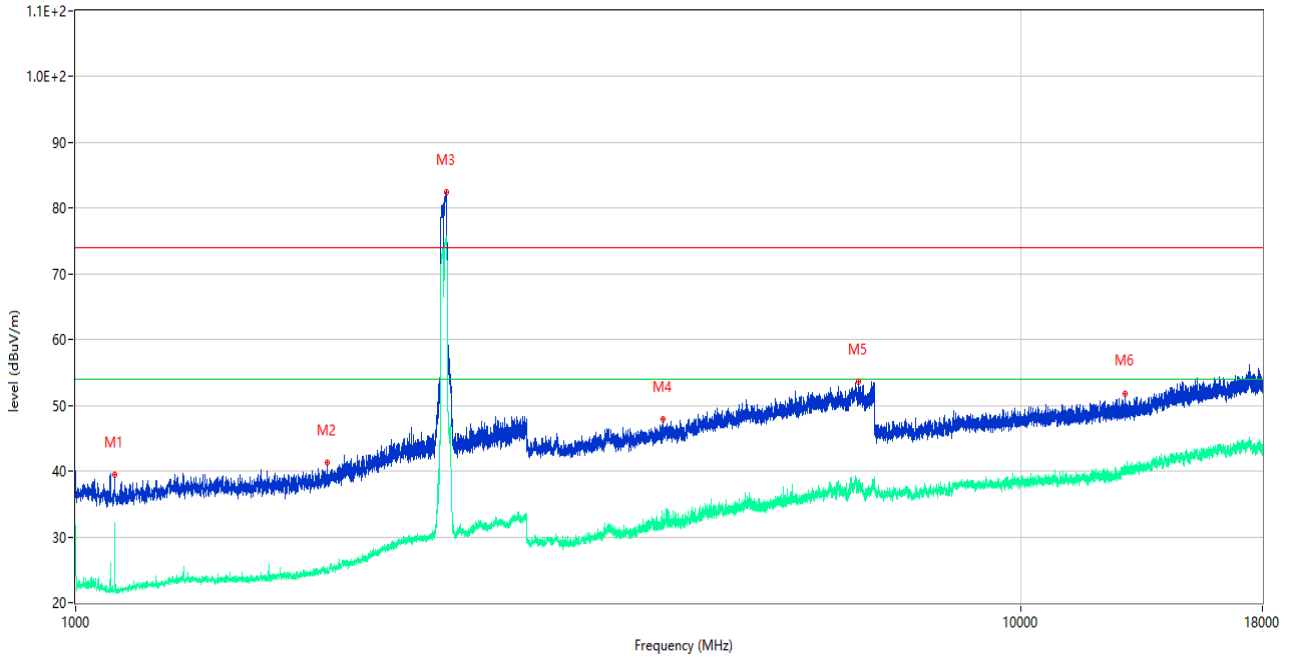


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.58	-18.36	54.0	-29.42	AV	123.00	150	Horizontal	Pass
1	1100.000	39.38	-18.36	74.0	-34.62	Peak	123.00	150	Horizontal	Pass
2**	1843.500	24.47	-16.28	54.0	-29.53	AV	135.00	150	Horizontal	Pass
2	1843.500	41.32	-16.28	74.0	-32.68	Peak	135.00	150	Horizontal	Pass
3**	2468.000	75.16	-12.46	54.0	21.16	AV	111.00	150	Horizontal	N/A
3	2468.000	82.36	-12.46	74.0	8.36	Peak	111.00	150	Horizontal	N/A
4**	4183.000	31.40	-5.05	54.0	-22.60	AV	329.00	150	Horizontal	Pass
4	4183.000	47.84	-5.05	74.0	-26.16	Peak	329.00	150	Horizontal	Pass
5**	6735.000	37.95	0.21	54.0	-16.05	AV	105.00	150	Horizontal	Pass
5	6735.000	53.54	0.21	74.0	-20.46	Peak	105.00	150	Horizontal	Pass
6**	12881.250	40.52	1.94	54.0	-13.48	AV	193.00	150	Horizontal	Pass
6	12881.250	51.73	1.94	74.0	-22.27	Peak	193.00	150	Horizontal	Pass

ANT1

1 GHz to 18 GHz, ANT V 802.11b Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

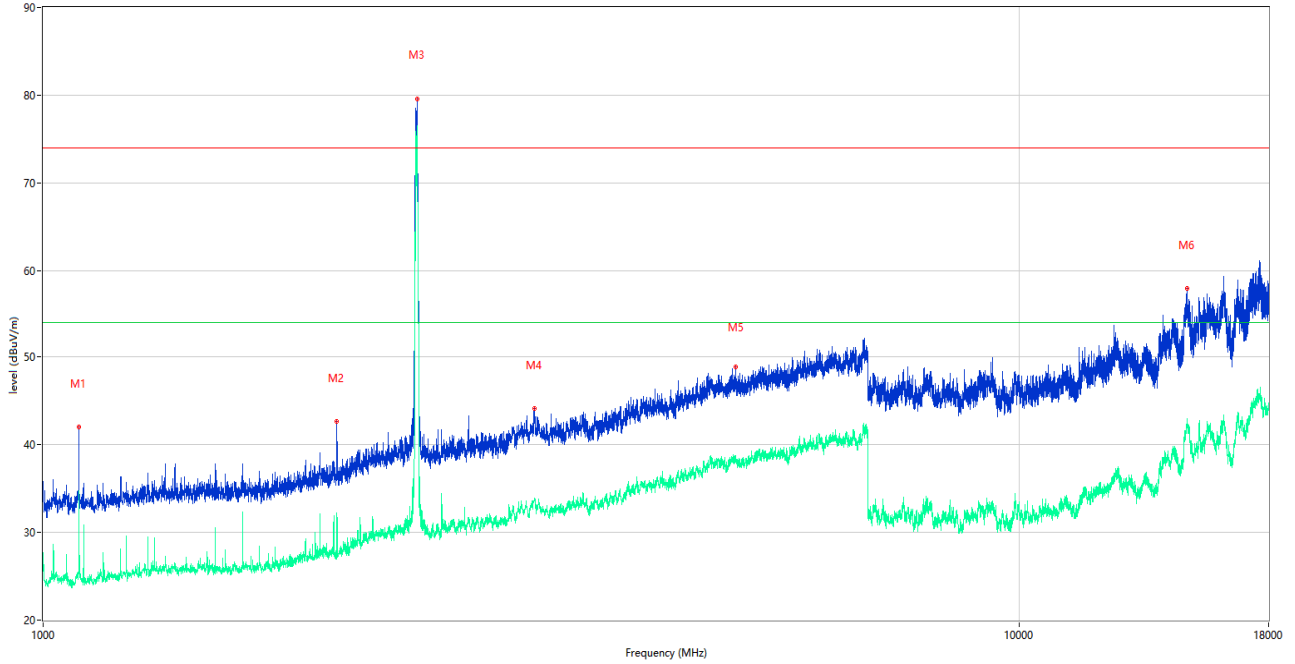

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	31.84	-15.16	54.0	-22.16	AV	281.00	150	Vertical	Pass
1	1088.000	42.01	-15.16	74.0	-31.99	Peak	281.00	150	Vertical	Pass
2**	2000.000	32.23	-13.40	54.0	-21.77	AV	190.00	150	Vertical	Pass
2	2000.000	42.62	-13.40	74.0	-31.38	Peak	190.00	150	Vertical	Pass
3**	2416.000	76.23	-10.18	54.0	22.23	AV	72.00	150	Vertical	N/A
3	2416.000	79.60	-10.18	74.0	5.60	Peak	72.00	150	Vertical	N/A
4**	3185.000	33.82	-5.68	54.0	-20.18	AV	60.00	150	Vertical	Pass
4	3185.000	44.11	-5.68	74.0	-29.89	Peak	60.00	150	Vertical	Pass
5**	5119.000	38.29	-0.74	54.0	-15.71	AV	187.00	150	Vertical	Pass
5	5119.000	48.85	-0.74	74.0	-25.15	Peak	187.00	150	Vertical	Pass
6**	14864.437	42.66	27.00	54.0	-11.34	AV	208.00	150	Vertical	Pass
6	14864.437	57.94	27.00	74.0	-16.06	Peak	208.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

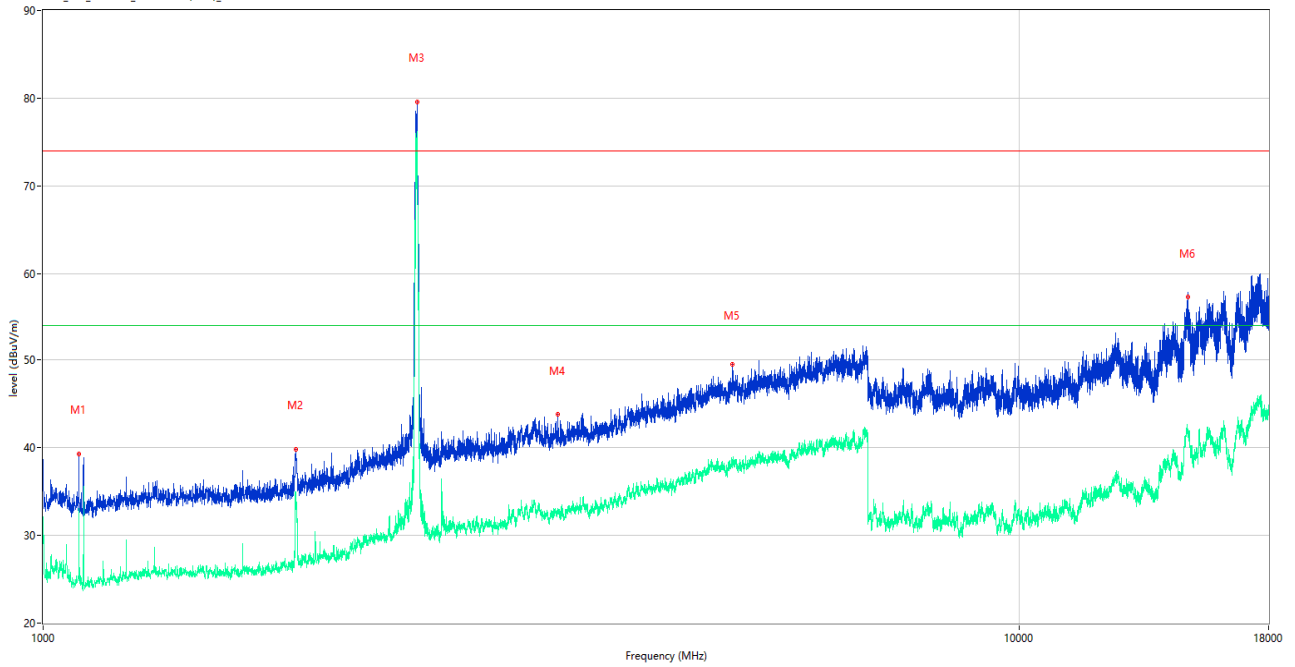

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	29.90	-15.16	54.0	-24.10	AV	337.00	150	Horizontal	Pass
1	1088.000	39.32	-15.16	74.0	-34.68	Peak	337.00	150	Horizontal	Pass
2**	1815.500	33.00	-14.80	54.0	-21.00	AV	234.00	150	Horizontal	Pass
2	1815.500	39.87	-14.80	74.0	-34.13	Peak	234.00	150	Horizontal	Pass
3**	2416.000	76.22	-10.18	54.0	22.22	AV	22.00	150	Horizontal	N/A
3	2416.000	79.59	-10.18	74.0	5.59	Peak	22.00	150	Horizontal	N/A
4**	3364.000	32.63	-7.55	54.0	-21.37	AV	279.00	150	Horizontal	Pass
4	3364.000	43.80	-7.55	74.0	-30.20	Peak	279.00	150	Horizontal	Pass
5**	5081.000	38.71	-0.63	54.0	-15.29	AV	143.00	150	Horizontal	Pass
5	5081.000	49.56	-0.63	74.0	-24.44	Peak	143.00	150	Horizontal	Pass
6**	14872.313	41.82	26.74	54.0	-12.18	AV	1.00	150	Horizontal	Pass
6	14872.313	57.29	26.74	74.0	-16.71	Peak	1.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

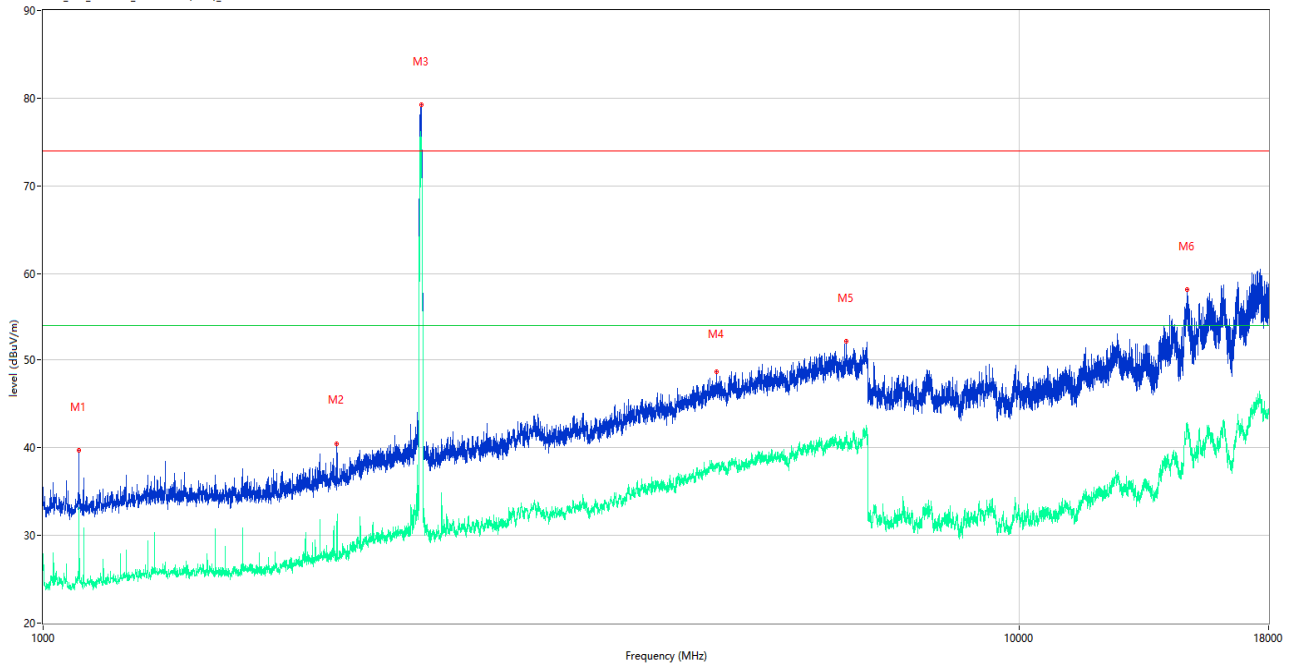

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	31.47	-15.16	54.0	-22.53	AV	151.00	150	Vertical	Pass
1	1088.000	39.70	-15.16	74.0	-34.30	Peak	151.00	150	Vertical	Pass
2**	1999.500	27.40	-13.44	54.0	-26.60	AV	211.00	150	Vertical	Pass
2	1999.500	40.47	-13.44	74.0	-33.53	Peak	211.00	150	Vertical	Pass
3**	2441.000	75.50	-10.77	54.0	21.50	AV	151.00	150	Vertical	N/A
3	2441.000	79.20	-10.77	74.0	5.20	Peak	151.00	150	Vertical	N/A
4**	4894.000	38.02	-1.40	54.0	-15.98	AV	234.00	150	Vertical	Pass
4	4894.000	48.64	-1.40	74.0	-25.36	Peak	234.00	150	Vertical	Pass
5**	6647.000	41.15	4.40	54.0	-12.85	AV	264.00	150	Vertical	Pass
5	6647.000	52.20	4.40	74.0	-21.80	Peak	264.00	150	Vertical	Pass
6**	14857.875	42.84	27.11	54.0	-11.16	AV	144.00	150	Vertical	Pass
6	14857.875	58.14	27.11	74.0	-15.86	Peak	144.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

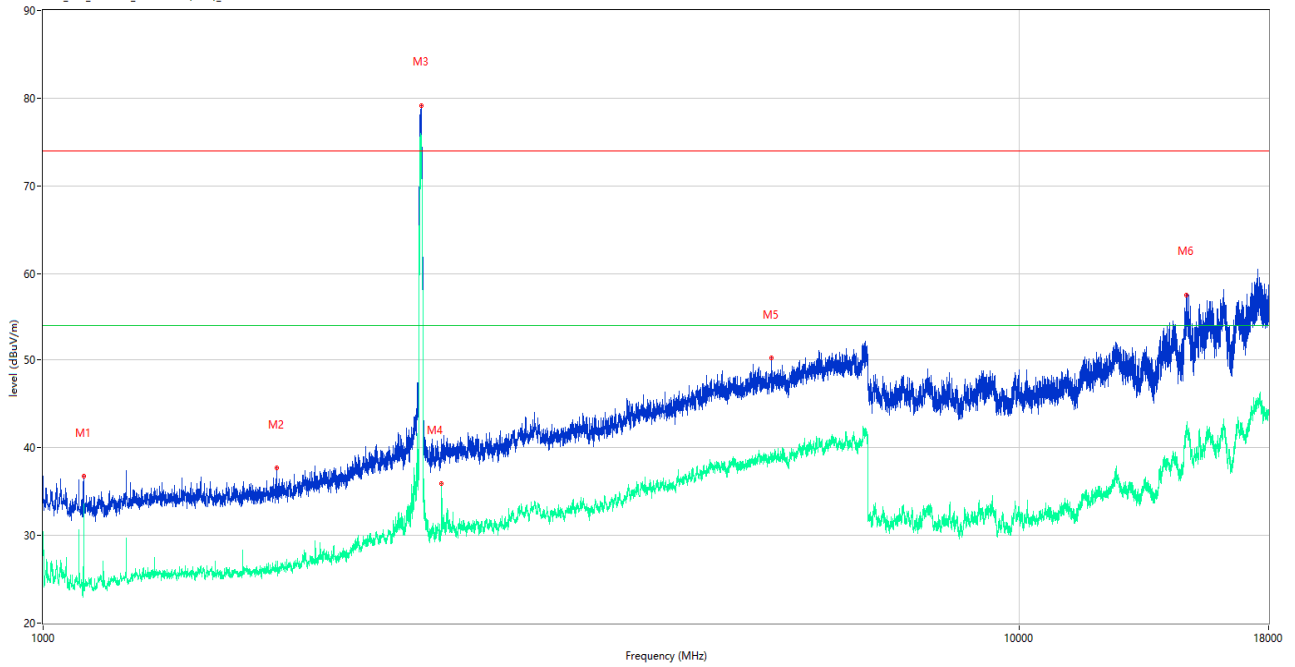


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.500	33.57	-15.30	54.0	-20.43	AV	142.00	150	Horizontal	Pass
1	1100.500	36.75	-15.30	74.0	-37.25	Peak	142.00	150	Horizontal	Pass
2**	1733.500	26.30	-15.01	54.0	-27.70	AV	185.00	150	Horizontal	Pass
2	1733.500	37.67	-15.01	74.0	-36.33	Peak	185.00	150	Horizontal	Pass
3**	2441.000	75.47	-10.77	54.0	21.47	AV	79.00	150	Horizontal	N/A
3	2441.000	79.19	-10.77	74.0	5.19	Peak	79.00	150	Horizontal	N/A
4**	2560.500	35.88	-10.30	54.0	-18.12	AV	142.00	150	Horizontal	Pass
4	2560.500	40.40	-10.30	74.0	-33.60	Peak	142.00	150	Horizontal	Pass
5**	5572.000	38.39	-0.06	54.0	-15.61	AV	57.00	150	Horizontal	Pass
5	5572.000	50.28	-0.06	74.0	-23.72	Peak	57.00	150	Horizontal	Pass
6**	14823.750	41.53	26.82	54.0	-12.47	AV	1.00	150	Horizontal	Pass
6	14823.750	57.54	26.82	74.0	-16.46	Peak	1.00	150	Horizontal	Pass



1 GHz to 18 GHz, ANT V 802.11b High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

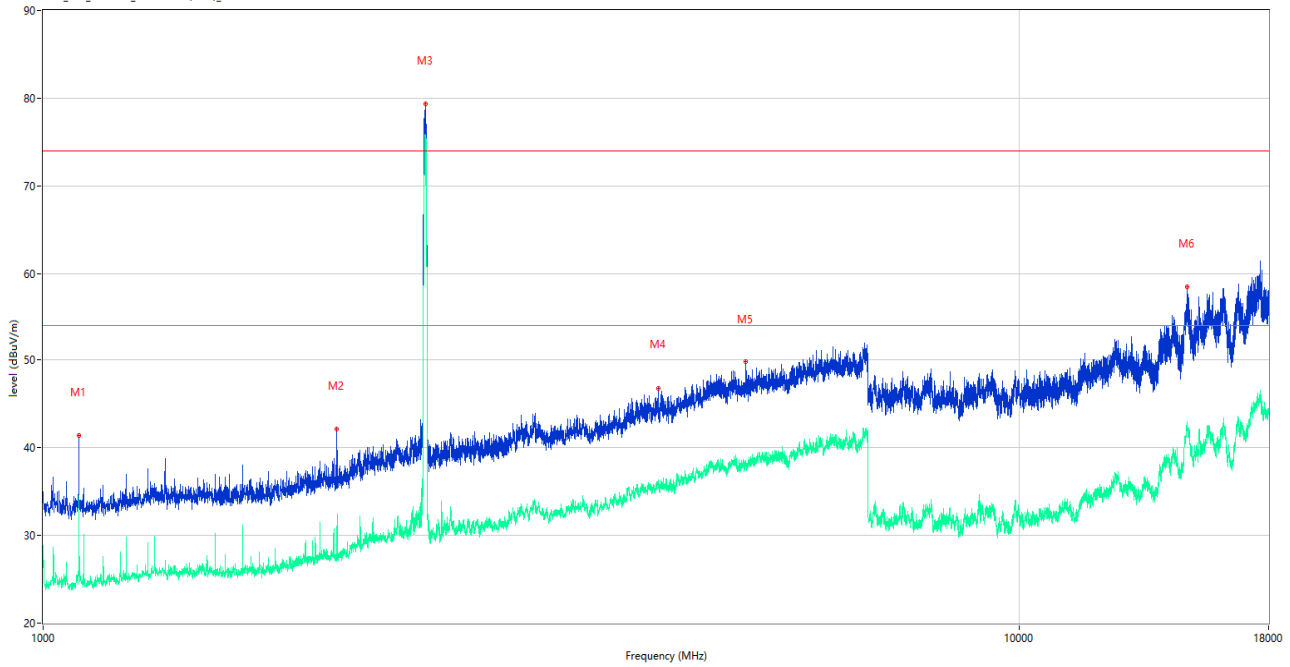

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	31.45	-15.16	54.0	-22.55	AV	294.00	150	Vertical	Pass
1	1088.000	41.37	-15.16	74.0	-32.63	Peak	294.00	150	Vertical	Pass
2**	2000.000	29.67	-13.40	54.0	-24.33	AV	195.00	150	Vertical	Pass
2	2000.000	42.11	-13.40	74.0	-31.89	Peak	195.00	150	Vertical	Pass
3**	2465.000	75.06	-10.12	54.0	21.06	AV	320.00	150	Vertical	N/A
3	2465.000	79.33	-10.12	74.0	5.33	Peak	320.00	150	Vertical	N/A
4**	4265.000	36.32	-3.38	54.0	-17.68	AV	81.00	150	Vertical	Pass
4	4265.000	46.82	-3.38	74.0	-27.18	Peak	81.00	150	Vertical	Pass
5**	5247.000	38.00	-1.17	54.0	-16.00	AV	206.00	150	Vertical	Pass
5	5247.000	49.82	-1.17	74.0	-24.18	Peak	206.00	150	Vertical	Pass
6**	14851.313	41.90	27.01	54.0	-12.10	AV	96.00	150	Vertical	Pass
6	14851.313	58.53	27.01	74.0	-15.47	Peak	96.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

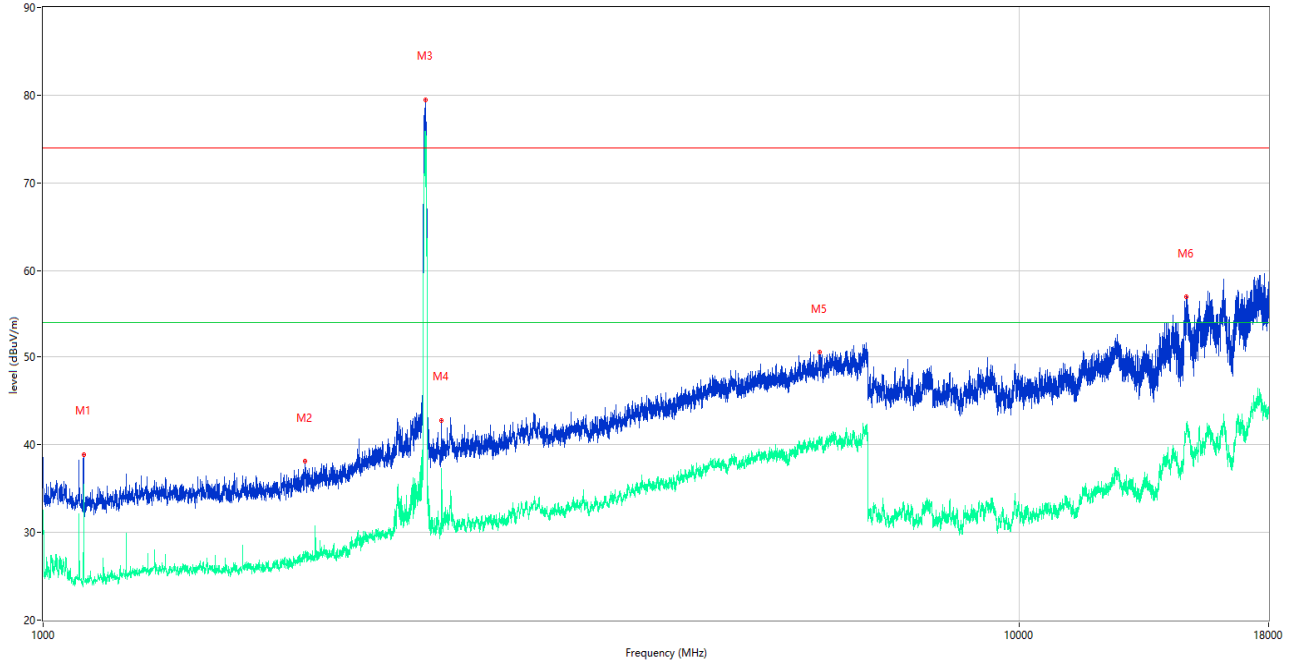

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	31.55	-15.33	54.0	-22.45	AV	136.00	150	Horizontal	Pass
1	1100.000	38.92	-15.33	74.0	-35.08	Peak	136.00	150	Horizontal	Pass
2**	1856.000	27.67	-13.71	54.0	-26.33	AV	164.00	150	Horizontal	Pass
2	1856.000	38.09	-13.71	74.0	-35.91	Peak	164.00	150	Horizontal	Pass
3**	2465.000	75.13	-10.12	54.0	21.13	AV	77.00	150	Horizontal	N/A
3	2465.000	79.49	-10.12	74.0	5.49	Peak	77.00	150	Horizontal	N/A
4**	2560.000	33.63	-10.30	54.0	-20.37	AV	237.00	150	Horizontal	Pass
4	2560.000	42.75	-10.30	74.0	-31.25	Peak	237.00	150	Horizontal	Pass
5**	6241.000	40.48	2.50	54.0	-13.52	AV	1.00	150	Horizontal	Pass
5	6241.000	50.55	2.50	74.0	-23.45	Peak	1.00	150	Horizontal	Pass
6**	14857.875	42.30	27.11	54.0	-11.70	AV	91.00	150	Horizontal	Pass
6	14857.875	57.01	27.11	74.0	-16.99	Peak	91.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

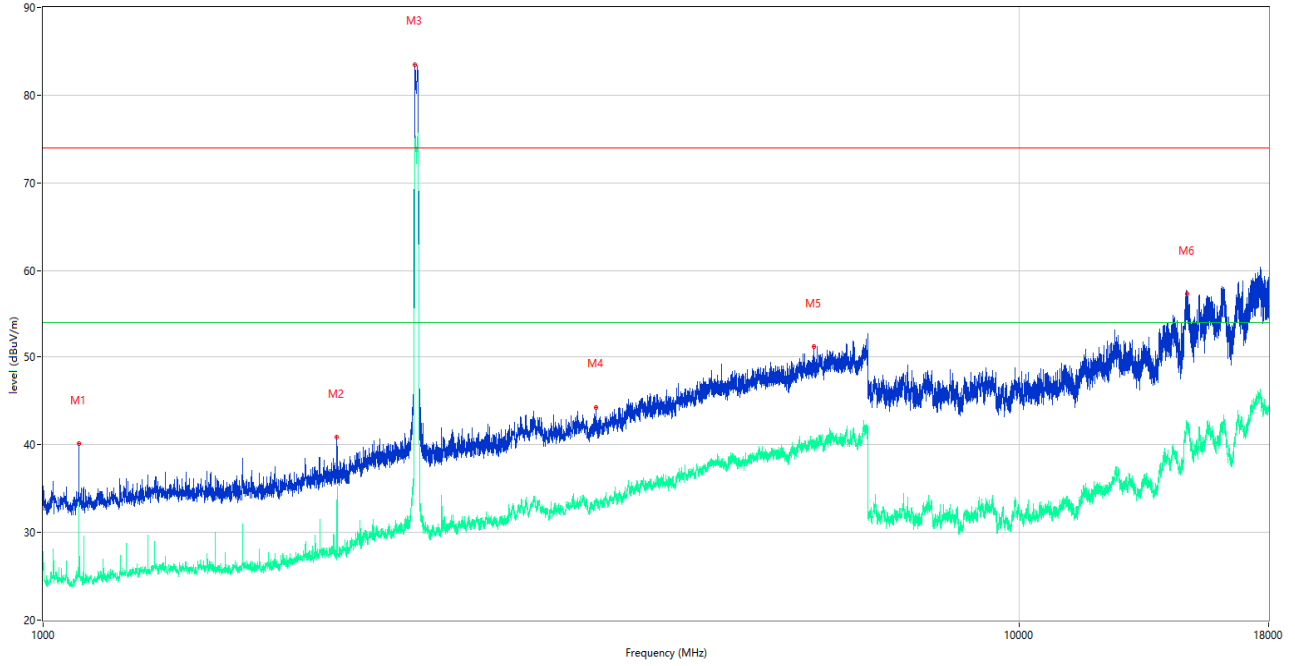

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	30.77	-15.16	54.0	-23.23	AV	271.00	150	Vertical	Pass
1	1088.000	40.09	-15.16	74.0	-33.91	Peak	271.00	150	Vertical	Pass
2**	2000.000	32.29	-13.40	54.0	-21.71	AV	194.00	150	Vertical	Pass
2	2000.000	40.83	-13.40	74.0	-33.17	Peak	194.00	150	Vertical	Pass
3**	2404.500	74.83	-10.40	54.0	20.83	AV	232.00	150	Vertical	N/A
3	2404.500	83.48	-10.40	74.0	9.48	Peak	232.00	150	Vertical	N/A
4**	3685.000	33.78	-5.72	54.0	-20.22	AV	269.00	150	Vertical	Pass
4	3685.000	44.29	-5.72	74.0	-29.71	Peak	269.00	150	Vertical	Pass
5**	6164.000	39.56	2.44	54.0	-14.44	AV	201.00	150	Vertical	Pass
5	6164.000	51.25	2.44	74.0	-22.75	Peak	201.00	150	Vertical	Pass
6**	14856.563	42.22	27.09	54.0	-11.78	AV	183.00	150	Vertical	Pass
6	14856.563	57.29	27.09	74.0	-16.71	Peak	183.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

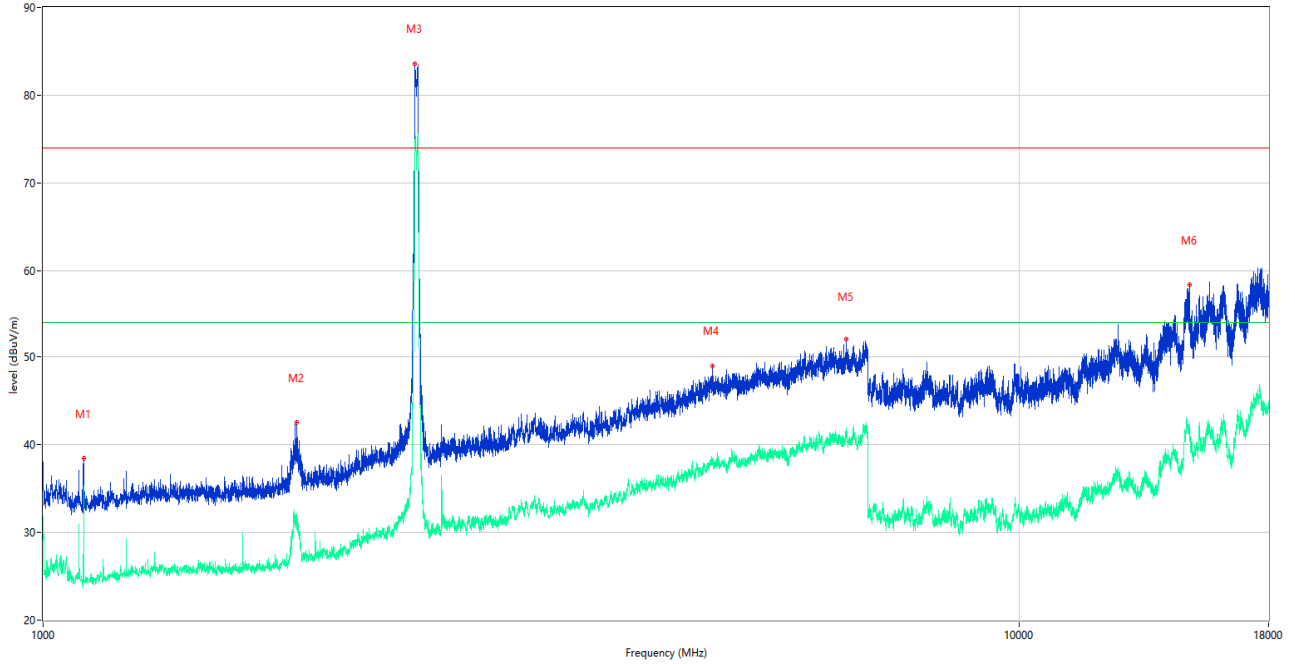

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	31.05	-15.33	54.0	-22.95	AV	145.00	150	Horizontal	Pass
1	1100.000	38.49	-15.33	74.0	-35.51	Peak	145.00	150	Horizontal	Pass
2**	1817.000	31.49	-14.83	54.0	-22.51	AV	244.00	150	Horizontal	Pass
2	1817.000	42.57	-14.83	74.0	-31.43	Peak	244.00	150	Horizontal	Pass
3**	2404.500	74.59	-10.40	54.0	20.59	AV	145.00	150	Horizontal	N/A
3	2404.500	83.58	-10.40	74.0	9.58	Peak	145.00	150	Horizontal	N/A
4**	4850.000	38.26	-1.63	54.0	-15.74	AV	78.00	150	Horizontal	Pass
4	4850.000	49.02	-1.63	74.0	-24.98	Peak	78.00	150	Horizontal	Pass
5**	6644.000	41.10	4.09	54.0	-12.90	AV	1.00	150	Horizontal	Pass
5	6644.000	52.02	4.09	74.0	-21.98	Peak	1.00	150	Horizontal	Pass
6**	14936.625	41.32	26.64	54.0	-12.68	AV	212.00	150	Horizontal	Pass
6	14936.625	58.41	26.64	74.0	-15.59	Peak	212.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

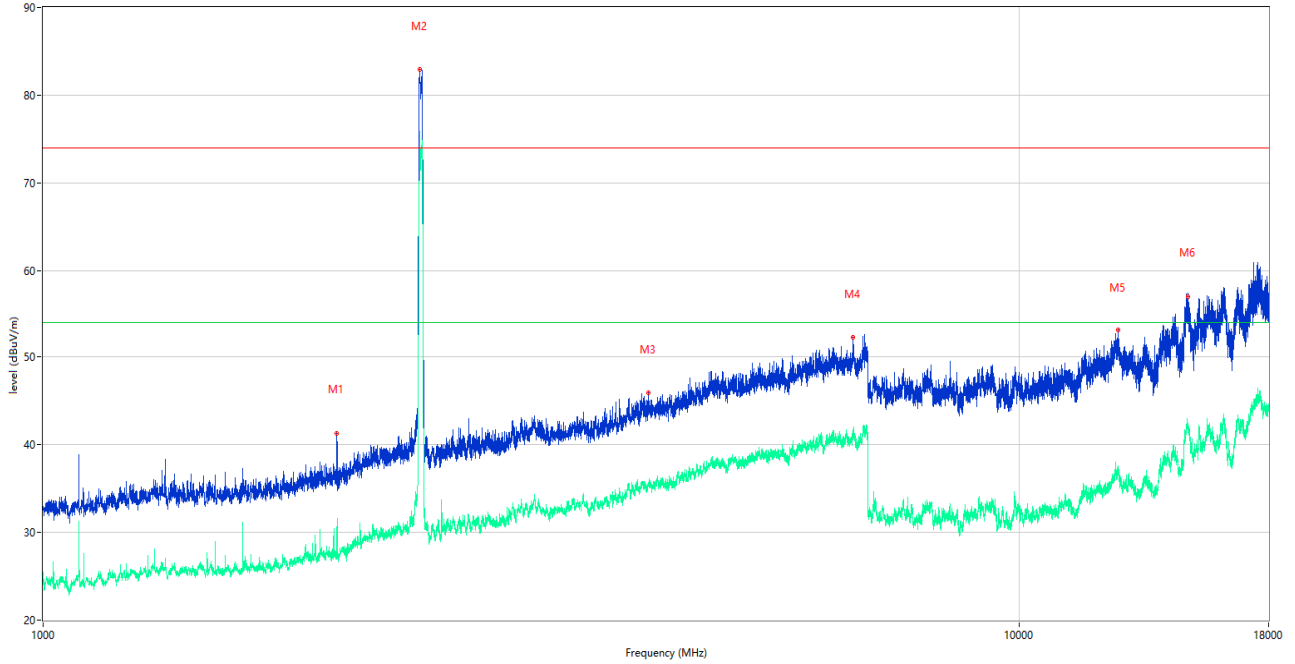

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2000.000	29.79	-13.40	54.0	-24.21	AV	199.00	150	Vertical	Pass
1	2000.000	41.32	-13.40	74.0	-32.68	Peak	199.00	150	Vertical	Pass
2**	2429.000	71.81	-10.38	54.0	17.81	AV	78.00	150	Vertical	N/A
2	2429.000	82.91	-10.38	74.0	8.91	Peak	78.00	150	Vertical	N/A
3**	4166.000	35.33	-3.13	54.0	-18.67	AV	184.00	150	Vertical	Pass
3	4166.000	45.90	-3.13	74.0	-28.10	Peak	184.00	150	Vertical	Pass
4**	6756.000	41.46	5.00	54.0	-12.54	AV	184.00	150	Vertical	Pass
4	6756.000	52.30	5.00	74.0	-21.70	Peak	184.00	150	Vertical	Pass
5**	12613.437	36.74	22.20	54.0	-17.26	AV	202.00	150	Vertical	Pass
5	12613.437	53.05	22.20	74.0	-20.95	Peak	202.00	150	Vertical	Pass
6**	14888.063	41.49	26.59	54.0	-12.51	AV	253.00	150	Vertical	Pass
6	14888.063	57.05	26.59	74.0	-16.95	Peak	253.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

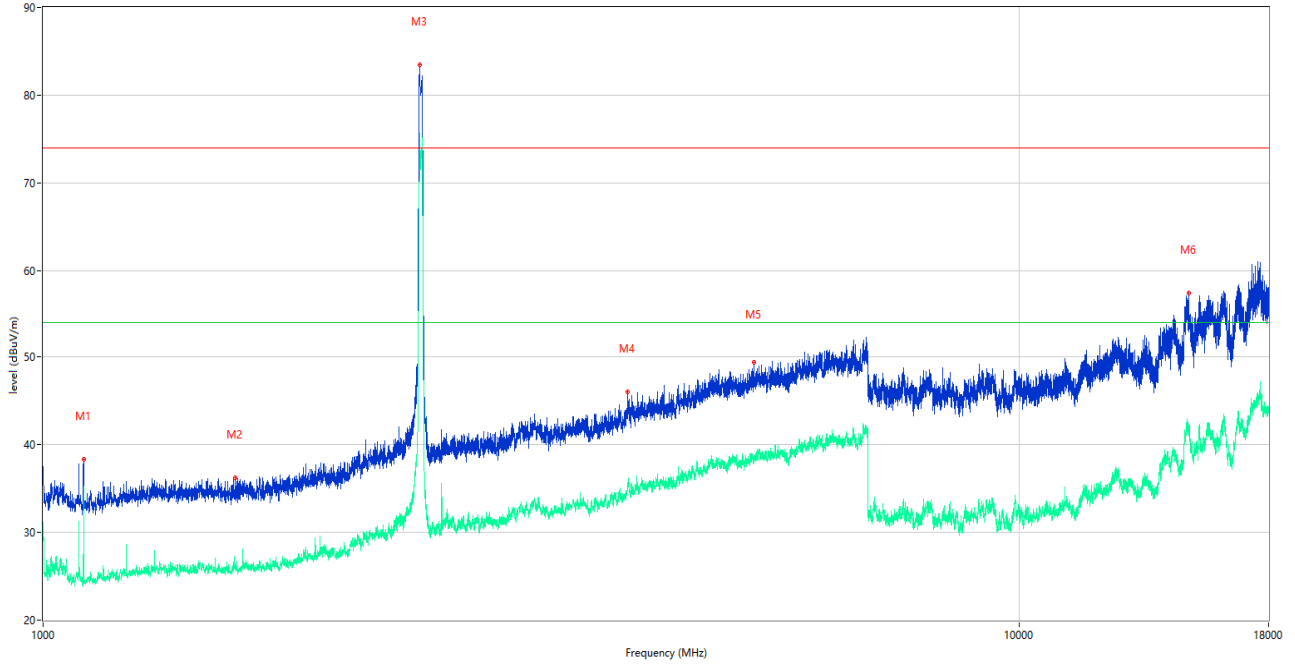

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	30.77	-15.33	54.0	-23.23	AV	138.00	150	Horizontal	Pass
1	1100.000	38.30	-15.33	74.0	-35.70	Peak	138.00	150	Horizontal	Pass
2**	1573.000	26.12	-15.05	54.0	-27.88	AV	313.00	150	Horizontal	Pass
2	1573.000	36.22	-15.05	74.0	-37.78	Peak	313.00	150	Horizontal	Pass
3**	2429.000	71.72	-10.38	54.0	17.72	AV	241.00	150	Horizontal	N/A
3	2429.000	83.42	-10.38	74.0	9.42	Peak	241.00	150	Horizontal	N/A
4**	3972.000	35.74	-4.88	54.0	-18.26	AV	62.00	150	Horizontal	Pass
4	3972.000	46.04	-4.88	74.0	-27.96	Peak	62.00	150	Horizontal	Pass
5**	5346.000	38.32	-0.32	54.0	-15.68	AV	338.00	150	Horizontal	Pass
5	5346.000	49.37	-0.32	74.0	-24.63	Peak	338.00	150	Horizontal	Pass
6**	14914.312	41.50	27.44	54.0	-12.50	AV	360.00	150	Horizontal	Pass
6	14914.312	57.42	27.44	74.0	-16.58	Peak	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel


RE Test case\_FCC\_Part\_15C\_FCC\_15.247(2.4G)\_1GHz-18GHz

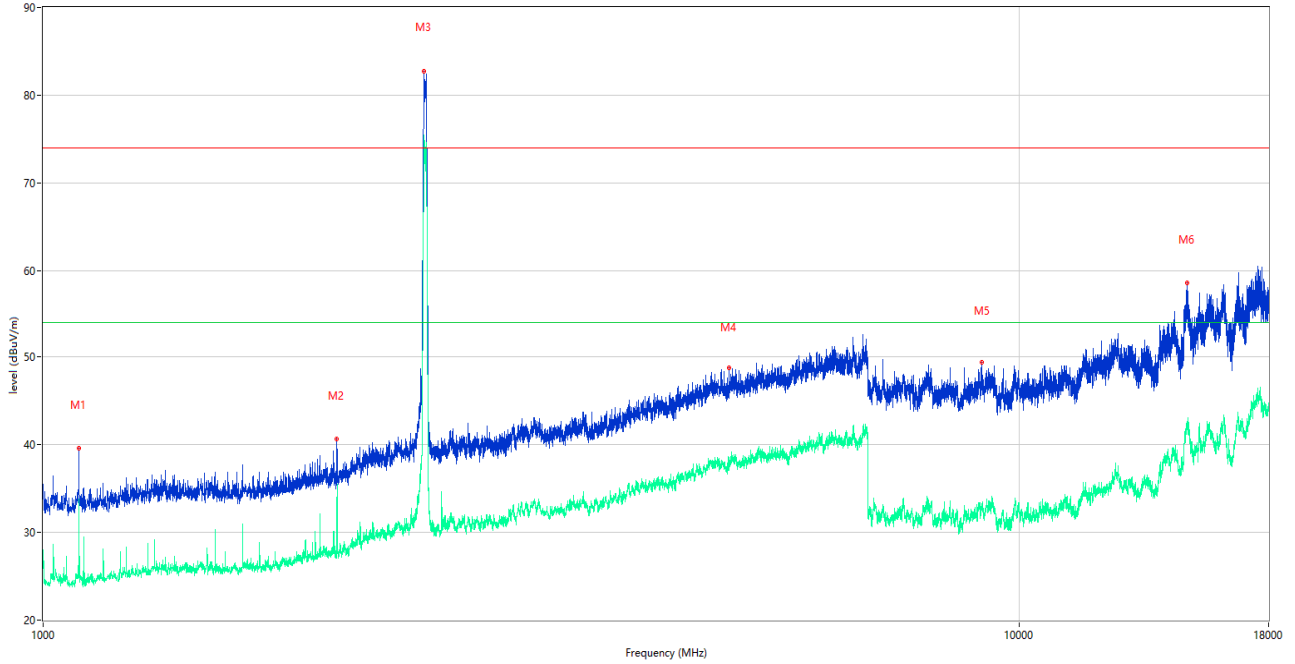

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	31.63	-15.16	54.0	-22.37	AV	186.00	150	Vertical	Pass
1	1088.000	39.57	-15.16	74.0	-34.43	Peak	186.00	150	Vertical	Pass
2**	2000.000	32.59	-13.40	54.0	-21.41	AV	211.00	150	Vertical	Pass
2	2000.000	40.66	-13.40	74.0	-33.34	Peak	211.00	150	Vertical	Pass
3**	2454.500	75.30	-10.05	54.0	21.30	AV	250.00	150	Vertical	N/A
3	2454.500	82.77	-10.05	74.0	8.77	Peak	250.00	150	Vertical	N/A
4**	5045.000	37.99	-0.83	54.0	-16.01	AV	203.00	150	Vertical	Pass
4	5045.000	48.80	-0.83	74.0	-25.20	Peak	203.00	150	Vertical	Pass
5**	9147.625	32.90	18.36	54.0	-21.10	AV	0.00	150	Vertical	Pass
5	9147.625	49.44	18.36	74.0	-24.56	Peak	0.00	150	Vertical	Pass
6**	14856.563	42.20	27.09	54.0	-11.80	AV	318.00	150	Vertical	Pass
6	14856.563	58.55	27.09	74.0	-15.45	Peak	318.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

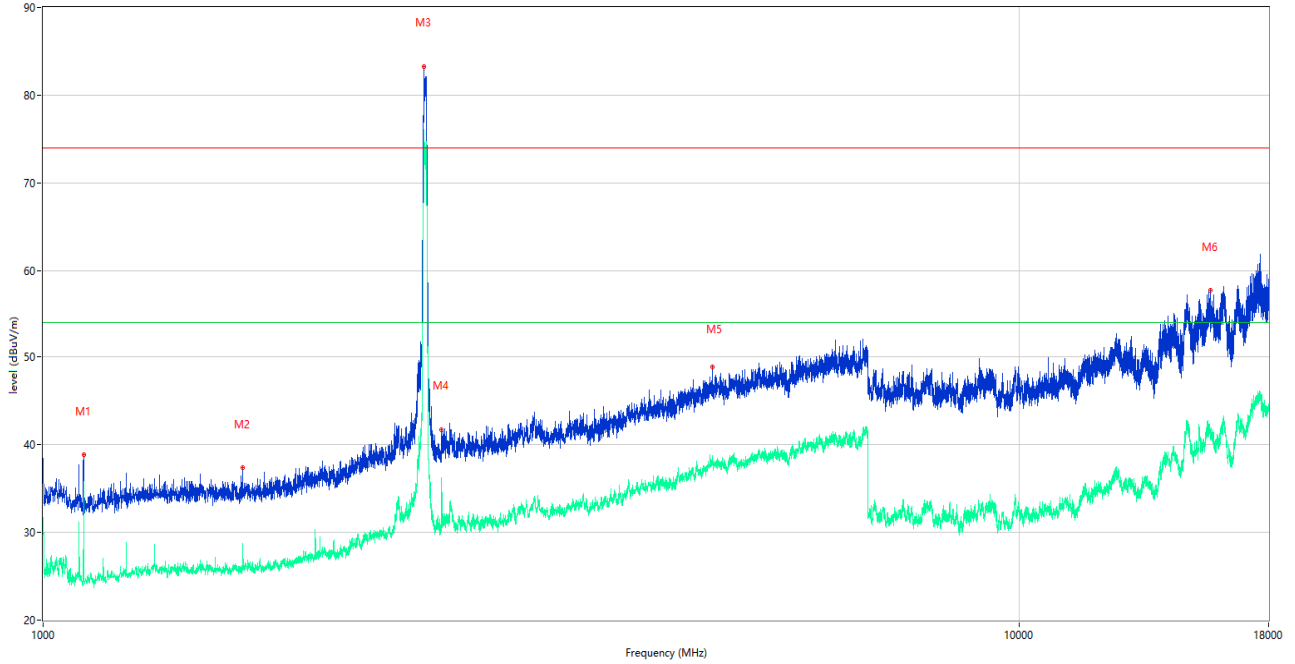


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	31.72	-15.33	54.0	-22.28	AV	135.00	150	Horizontal	Pass
1	1100.000	38.84	-15.33	74.0	-35.16	Peak	135.00	150	Horizontal	Pass
2**	1599.500	25.70	-15.34	54.0	-28.30	AV	135.00	150	Horizontal	Pass
2	1599.500	37.39	-15.34	74.0	-36.61	Peak	135.00	150	Horizontal	Pass
3**	2456.000	75.03	-10.09	54.0	21.03	AV	74.00	150	Horizontal	N/A
3	2456.000	83.28	-10.09	74.0	9.28	Peak	74.00	150	Horizontal	N/A
4**	2560.000	32.52	-10.30	54.0	-21.48	AV	240.00	150	Horizontal	Pass
4	2560.000	41.75	-10.30	74.0	-32.25	Peak	240.00	150	Horizontal	Pass
5**	4848.000	37.78	-1.70	54.0	-16.22	AV	326.00	150	Horizontal	Pass
5	4848.000	48.92	-1.70	74.0	-25.08	Peak	326.00	150	Horizontal	Pass
6**	15678.188	41.18	25.82	54.0	-12.82	AV	359.00	150	Horizontal	Pass
6	15678.188	57.70	25.82	74.0	-16.30	Peak	359.00	150	Horizontal	Pass



1 GHz to 18 GHz, ANT V 802.11n20 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

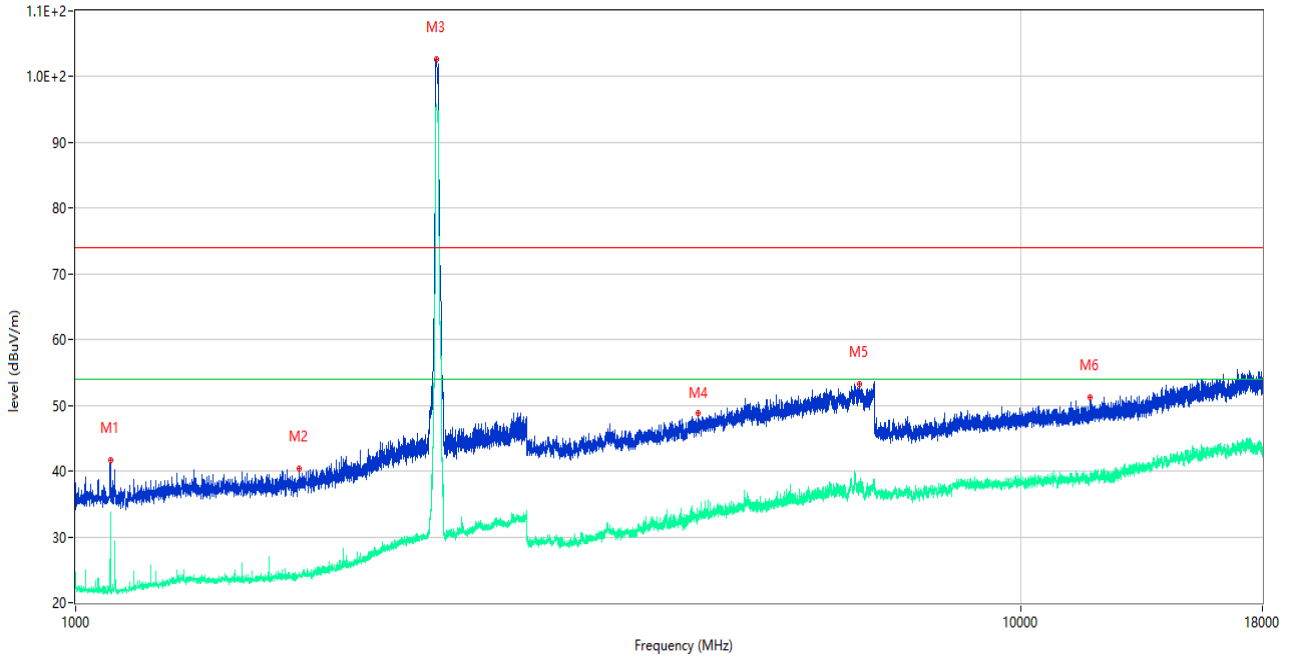

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	30.25	-18.14	54.0	-23.75	AV	325.00	150	Vertical	Pass
1	1088.000	41.72	-18.14	74.0	-32.28	Peak	325.00	150	Vertical	Pass
2**	1723.500	24.23	-16.87	54.0	-29.77	AV	125.00	150	Vertical	Pass
2	1723.500	40.31	-16.87	74.0	-33.69	Peak	125.00	150	Vertical	Pass
3**	2407.500	95.71	-11.83	54.0	41.71	AV	276.00	150	Vertical	N/A
3	2407.500	102.58	-11.83	74.0	28.58	Peak	276.00	150	Vertical	N/A
4**	4550.000	33.17	-3.92	54.0	-20.83	AV	152.00	150	Vertical	Pass
4	4550.000	48.93	-3.92	74.0	-25.07	Peak	152.00	150	Vertical	Pass
5**	6739.000	38.46	0.30	54.0	-15.54	AV	114.00	150	Vertical	Pass
5	6739.000	53.25	0.30	74.0	-20.75	Peak	114.00	150	Vertical	Pass
6**	11831.437	39.19	1.41	54.0	-14.81	AV	57.00	150	Vertical	Pass
6	11831.437	51.17	1.41	74.0	-22.83	Peak	57.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

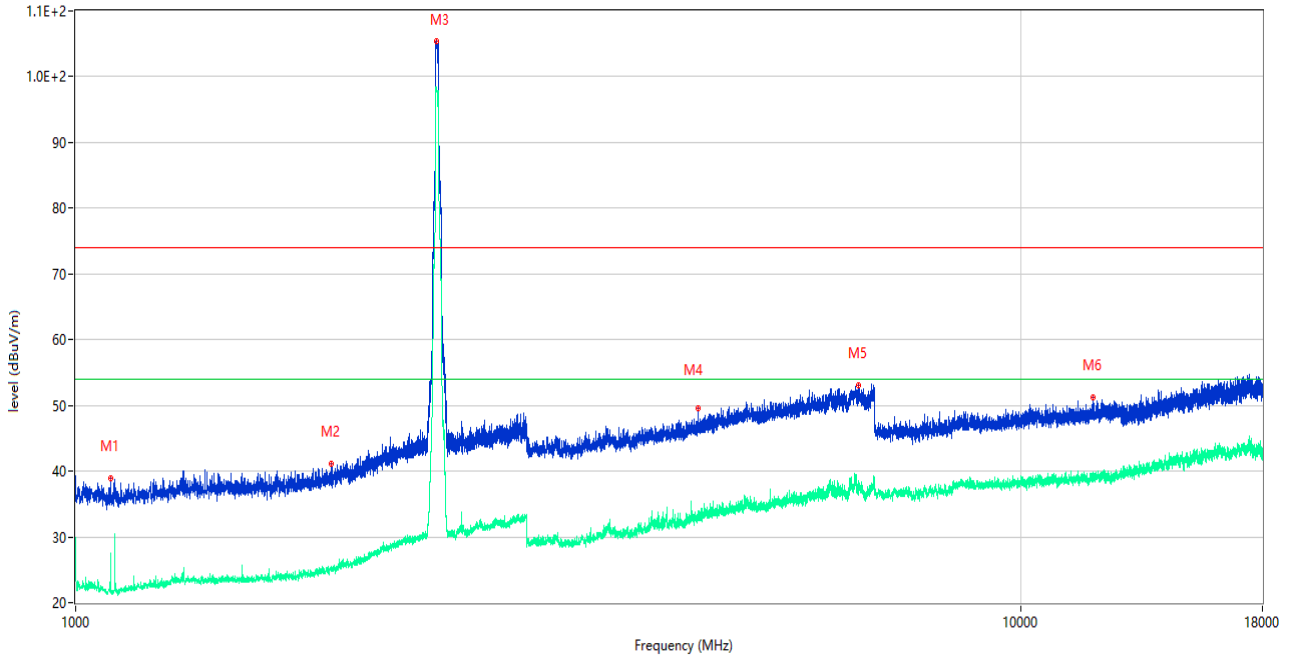

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.500	27.58	-18.13	54.0	-26.42	AV	300.00	150	Horizontal	Pass
1	1088.500	38.87	-18.13	74.0	-35.13	Peak	300.00	150	Horizontal	Pass
2**	1864.500	25.15	-16.06	54.0	-28.85	AV	76.00	150	Horizontal	Pass
2	1864.500	41.16	-16.06	74.0	-32.84	Peak	76.00	150	Horizontal	Pass
3**	2408.000	97.86	-11.85	54.0	43.86	AV	242.00	150	Horizontal	N/A
3	2408.000	105.39	-11.85	74.0	31.39	Peak	242.00	150	Horizontal	N/A
4**	4549.000	33.51	-4.11	54.0	-20.49	AV	57.00	150	Horizontal	Pass
4	4549.000	49.64	-4.11	74.0	-24.36	Peak	57.00	150	Horizontal	Pass
5**	6727.000	37.16	-0.49	54.0	-16.84	AV	314.00	150	Horizontal	Pass
5	6727.000	53.15	-0.49	74.0	-20.85	Peak	314.00	150	Horizontal	Pass
6**	11909.063	39.12	1.92	54.0	-14.88	AV	108.00	150	Horizontal	Pass
6	11909.063	51.16	1.92	74.0	-22.84	Peak	108.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

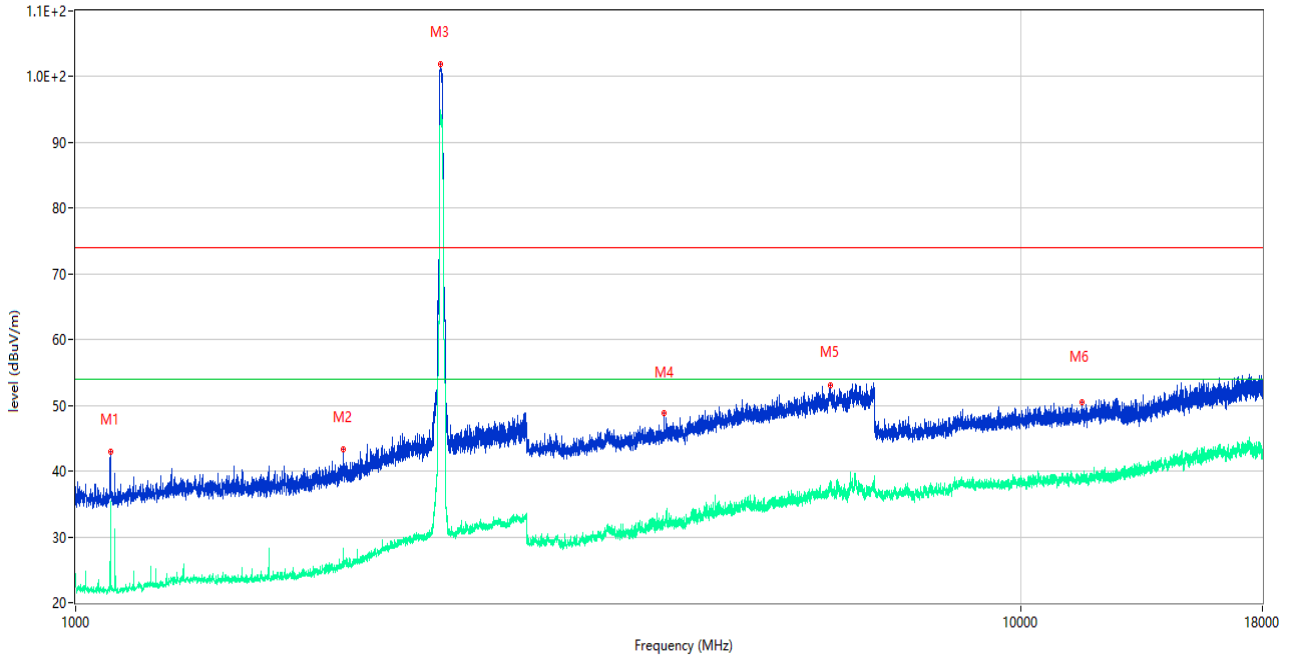

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	30.13	-18.14	54.0	-23.87	AV	282.00	150	Vertical	Pass
1	1088.000	42.91	-18.14	74.0	-31.09	Peak	282.00	150	Vertical	Pass
2**	1920.000	27.53	-15.60	54.0	-26.47	AV	189.00	150	Vertical	Pass
2	1920.000	43.31	-15.60	74.0	-30.69	Peak	189.00	150	Vertical	Pass
3**	2430.000	94.66	-12.66	54.0	40.66	AV	272.00	150	Vertical	N/A
3	2430.000	101.97	-12.66	74.0	27.97	Peak	272.00	150	Vertical	N/A
4**	4194.000	32.18	-4.87	54.0	-21.82	AV	121.00	150	Vertical	Pass
4	4194.000	48.92	-4.87	74.0	-25.08	Peak	121.00	150	Vertical	Pass
5**	6284.000	37.48	0.41	54.0	-16.52	AV	17.00	150	Vertical	Pass
5	6284.000	53.00	0.41	74.0	-21.00	Peak	17.00	150	Vertical	Pass
6**	11608.625	38.97	0.37	54.0	-15.03	AV	228.00	150	Vertical	Pass
6	11608.625	50.55	0.37	74.0	-23.45	Peak	228.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

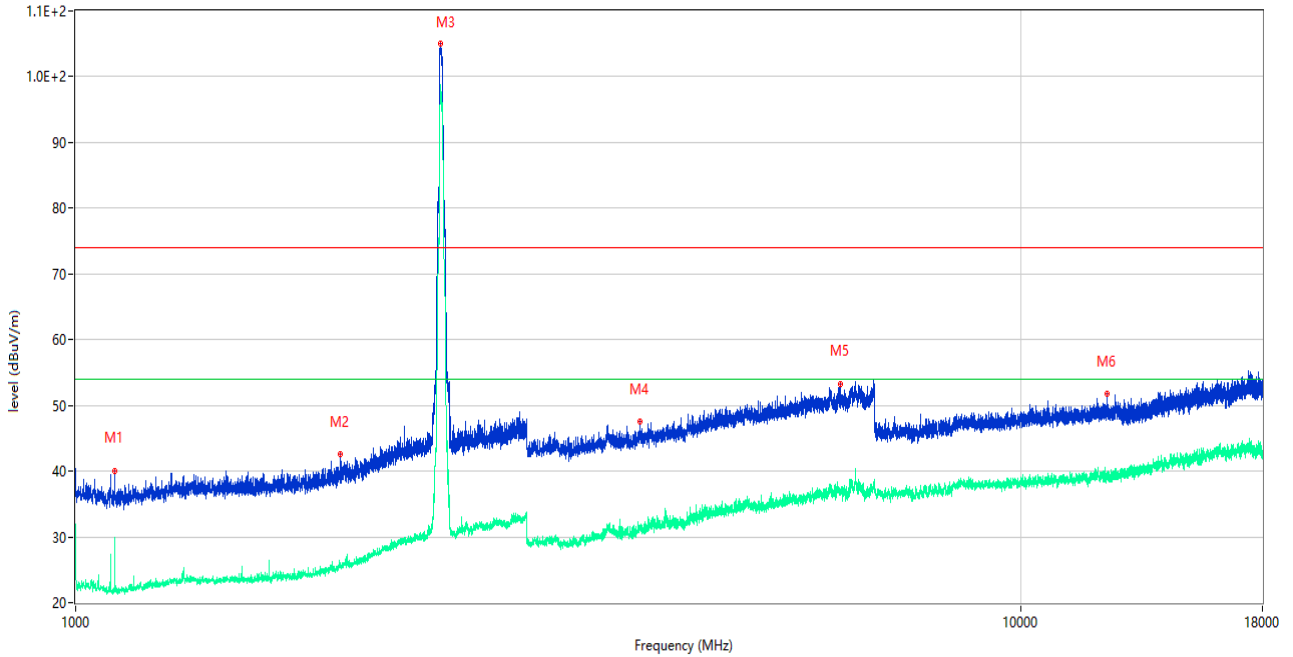

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	25.33	-18.36	54.0	-28.67	AV	15.00	150	Horizontal	Pass
1	1100.000	40.09	-18.36	74.0	-33.91	Peak	15.00	150	Horizontal	Pass
2**	1904.500	25.52	-16.04	54.0	-28.48	AV	149.00	150	Horizontal	Pass
2	1904.500	42.62	-16.04	74.0	-31.38	Peak	149.00	150	Horizontal	Pass
3**	2430.000	97.62	-12.66	54.0	43.62	AV	230.00	150	Horizontal	N/A
3	2430.000	104.97	-12.66	74.0	30.97	Peak	230.00	150	Horizontal	N/A
4**	3950.000	31.54	-4.75	54.0	-22.46	AV	100.00	150	Horizontal	Pass
4	3950.000	47.57	-4.75	74.0	-26.43	Peak	100.00	150	Horizontal	Pass
5**	6434.000	36.55	-0.74	54.0	-17.45	AV	9.00	150	Horizontal	Pass
5	6434.000	53.23	-0.74	74.0	-20.77	Peak	9.00	150	Horizontal	Pass
6**	12337.438	39.27	1.92	54.0	-14.73	AV	191.00	150	Horizontal	Pass
6	12337.438	51.85	1.92	74.0	-22.15	Peak	191.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

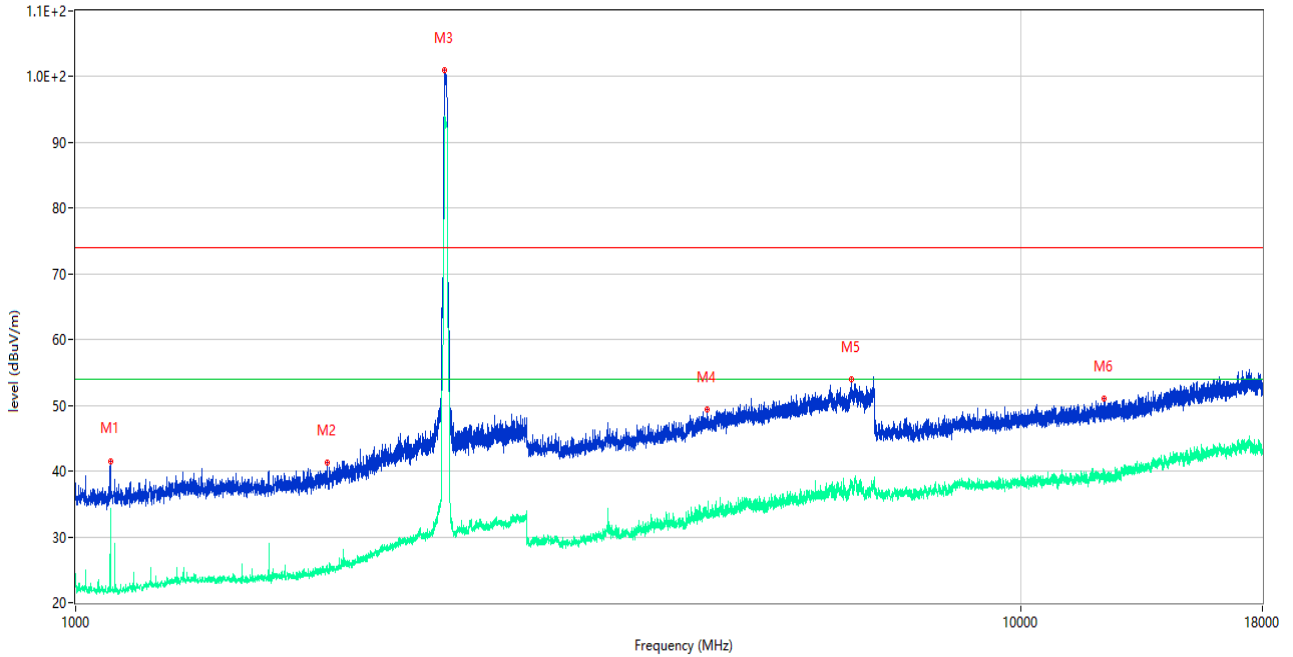

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	32.19	-18.14	54.0	-21.81	AV	360.00	150	Vertical	Pass
1	1088.000	41.58	-18.14	74.0	-32.42	Peak	360.00	150	Vertical	Pass
2**	1844.500	24.83	-16.41	54.0	-29.17	AV	290.00	150	Vertical	Pass
2	1844.500	41.23	-16.41	74.0	-32.77	Peak	290.00	150	Vertical	Pass
3**	2456.000	94.02	-12.71	54.0	40.02	AV	279.00	150	Vertical	N/A
3	2456.000	100.97	-12.71	74.0	26.97	Peak	279.00	150	Vertical	N/A
4**	4659.000	33.30	-3.69	54.0	-20.70	AV	54.00	150	Vertical	Pass
4	4659.000	49.44	-3.69	74.0	-24.56	Peak	54.00	150	Vertical	Pass
5**	6618.000	38.08	0.51	54.0	-15.92	AV	46.00	150	Vertical	Pass
5	6618.000	54.04	0.51	74.0	-19.96	Peak	46.00	150	Vertical	Pass
6**	12231.063	39.72	1.65	54.0	-14.28	AV	360.00	150	Vertical	Pass
6	12231.063	50.96	1.65	74.0	-23.04	Peak	360.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

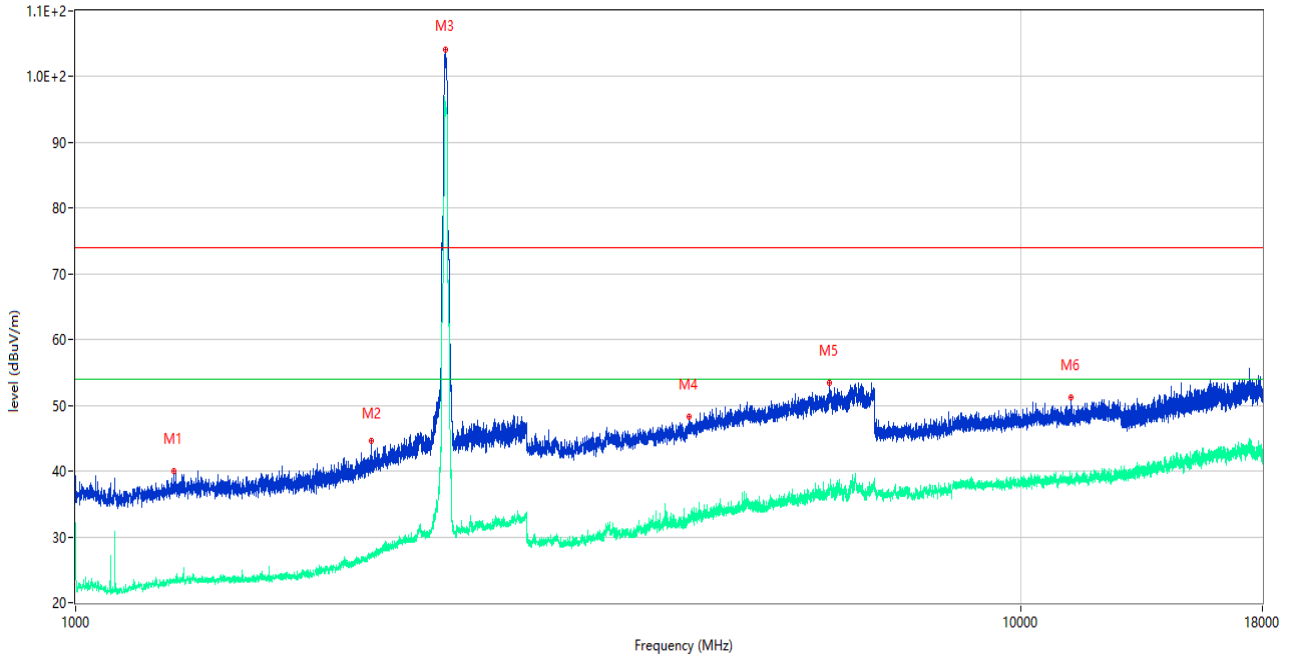

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1271.000	23.57	-17.26	54.0	-30.43	AV	301.00	150	Horizontal	Pass
1	1271.000	39.99	-17.26	74.0	-34.01	Peak	301.00	150	Horizontal	Pass
2**	2055.000	27.50	-14.63	54.0	-26.50	AV	162.00	150	Horizontal	Pass
2	2055.000	44.69	-14.63	74.0	-29.31	Peak	162.00	150	Horizontal	Pass
3**	2459.500	95.99	-12.81	54.0	41.99	AV	241.00	150	Horizontal	N/A
3	2459.500	104.13	-12.81	74.0	30.13	Peak	241.00	150	Horizontal	N/A
4**	4452.000	33.46	-3.92	54.0	-20.54	AV	301.00	150	Horizontal	Pass
4	4452.000	48.23	-3.92	74.0	-25.77	Peak	301.00	150	Horizontal	Pass
5**	6271.000	36.62	-0.40	54.0	-17.38	AV	188.00	150	Horizontal	Pass
5	6271.000	53.43	-0.40	74.0	-20.57	Peak	188.00	150	Horizontal	Pass
6**	11305.312	38.88	0.67	54.0	-15.12	AV	-1.00	150	Horizontal	Pass
6	11305.312	51.30	0.67	74.0	-22.70	Peak	-1.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

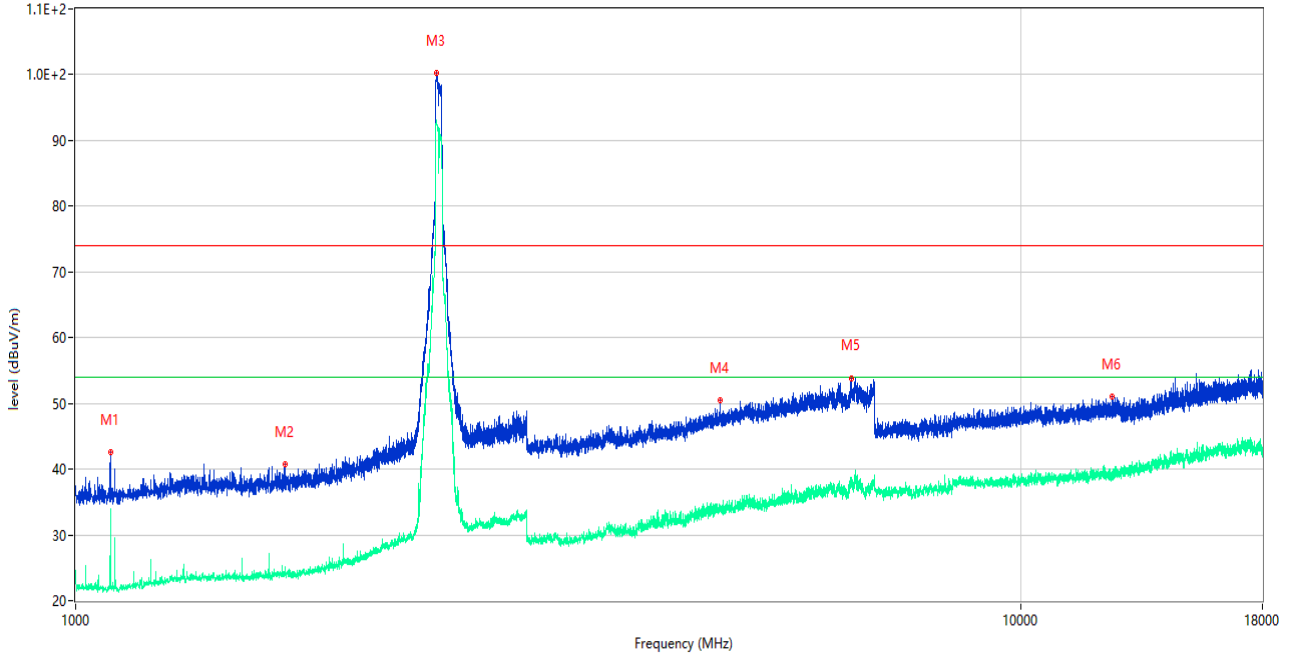

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	30.06	-18.14	54.0	-23.94	AV	299.00	150	Vertical	Pass
1	1088.000	42.60	-18.14	74.0	-31.40	Peak	299.00	150	Vertical	Pass
2**	1664.000	25.05	-16.96	54.0	-28.95	AV	163.00	150	Vertical	Pass
2	1664.000	40.69	-16.96	74.0	-33.31	Peak	163.00	150	Vertical	Pass
3**	2407.000	92.94	-11.86	54.0	38.94	AV	279.00	150	Vertical	N/A
3	2407.000	100.19	-11.86	74.0	26.19	Peak	279.00	150	Vertical	N/A
4**	4808.000	33.90	-2.89	54.0	-20.10	AV	360.00	150	Vertical	Pass
4	4808.000	50.50	-2.89	74.0	-23.50	Peak	360.00	150	Vertical	Pass
5**	6618.000	37.96	0.51	54.0	-16.04	AV	74.00	150	Vertical	Pass
5	6618.000	53.88	0.51	74.0	-20.12	Peak	74.00	150	Vertical	Pass
6**	12488.375	39.23	1.88	54.0	-14.77	AV	237.00	150	Vertical	Pass
6	12488.375	51.10	1.88	74.0	-22.90	Peak	237.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

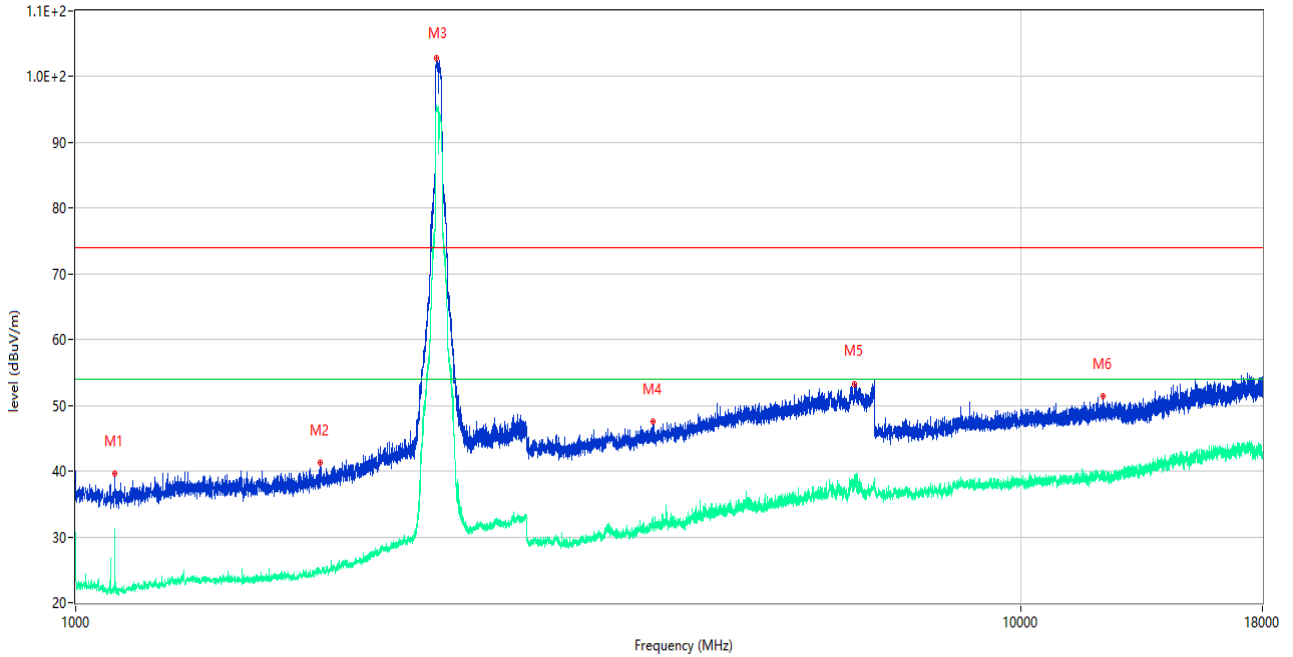


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.51	-18.36	54.0	-29.49	AV	59.00	150	Horizontal	Pass
1	1100.000	39.63	-18.36	74.0	-34.37	Peak	59.00	150	Horizontal	Pass
2**	1815.000	24.71	-16.36	54.0	-29.29	AV	7.00	150	Horizontal	Pass
2	1815.000	41.23	-16.36	74.0	-32.77	Peak	7.00	150	Horizontal	Pass
3**	2407.000	95.06	-11.86	54.0	41.06	AV	228.00	150	Horizontal	N/A
3	2407.000	102.88	-11.86	74.0	28.88	Peak	228.00	150	Horizontal	N/A
4**	4083.000	31.54	-5.72	54.0	-22.46	AV	141.00	150	Horizontal	Pass
4	4083.000	47.46	-5.72	74.0	-26.54	Peak	141.00	150	Horizontal	Pass
5**	6669.000	37.92	0.04	54.0	-16.08	AV	321.00	150	Horizontal	Pass
5	6669.000	53.32	0.04	74.0	-20.68	Peak	321.00	150	Horizontal	Pass
6**	12216.688	40.12	1.60	54.0	-13.88	AV	272.00	150	Horizontal	Pass
6	12216.688	51.34	1.60	74.0	-22.66	Peak	272.00	150	Horizontal	Pass



1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

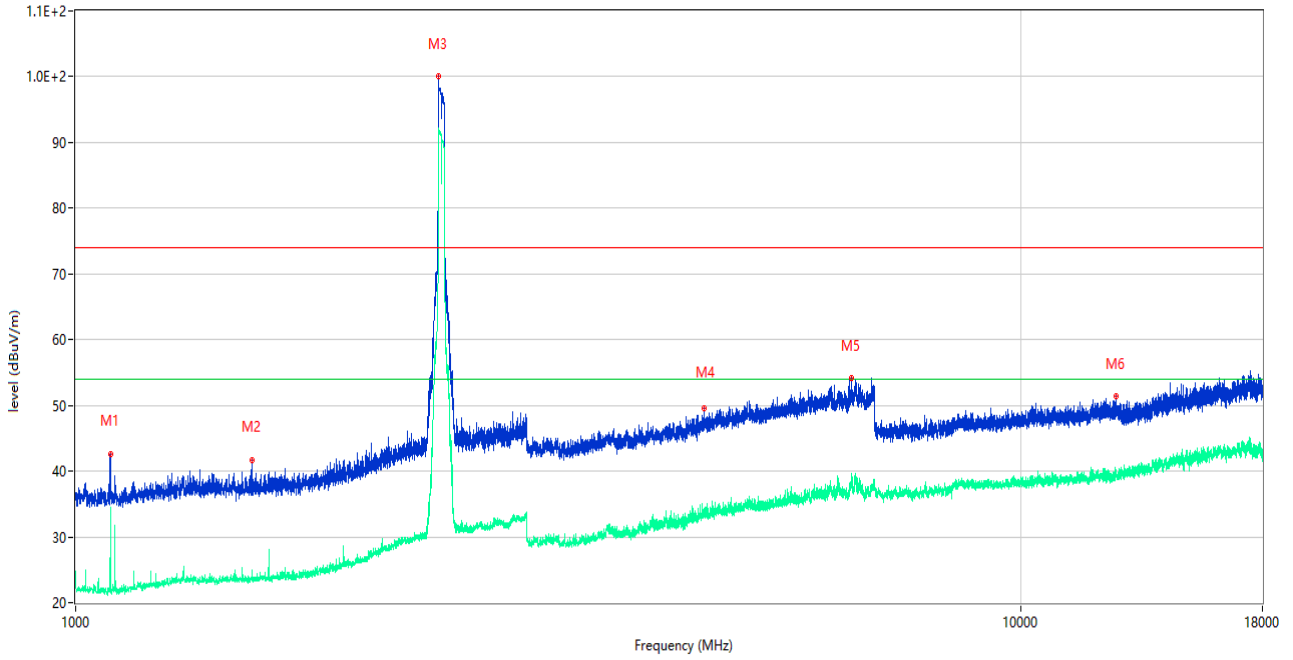

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	31.66	-18.14	54.0	-22.34	AV	267.00	150	Vertical	Pass
1	1088.000	42.66	-18.14	74.0	-31.34	Peak	267.00	150	Vertical	Pass
2**	1536.000	25.02	-17.35	54.0	-28.98	AV	203.00	150	Vertical	Pass
2	1536.000	41.76	-17.35	74.0	-32.24	Peak	203.00	150	Vertical	Pass
3**	2421.500	92.19	-12.18	54.0	38.19	AV	282.00	150	Vertical	N/A
3	2421.500	100.03	-12.18	74.0	26.03	Peak	282.00	150	Vertical	N/A
4**	4619.000	33.16	-4.29	54.0	-20.84	AV	50.00	150	Vertical	Pass
4	4619.000	49.56	-4.29	74.0	-24.44	Peak	50.00	150	Vertical	Pass
5**	6615.000	37.90	0.56	54.0	-16.10	AV	113.00	150	Vertical	Pass
5	6615.000	54.18	0.56	74.0	-19.82	Peak	113.00	150	Vertical	Pass
6**	12600.500	39.83	2.11	54.0	-14.17	AV	158.00	150	Vertical	Pass
6	12600.500	51.38	2.11	74.0	-22.62	Peak	158.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

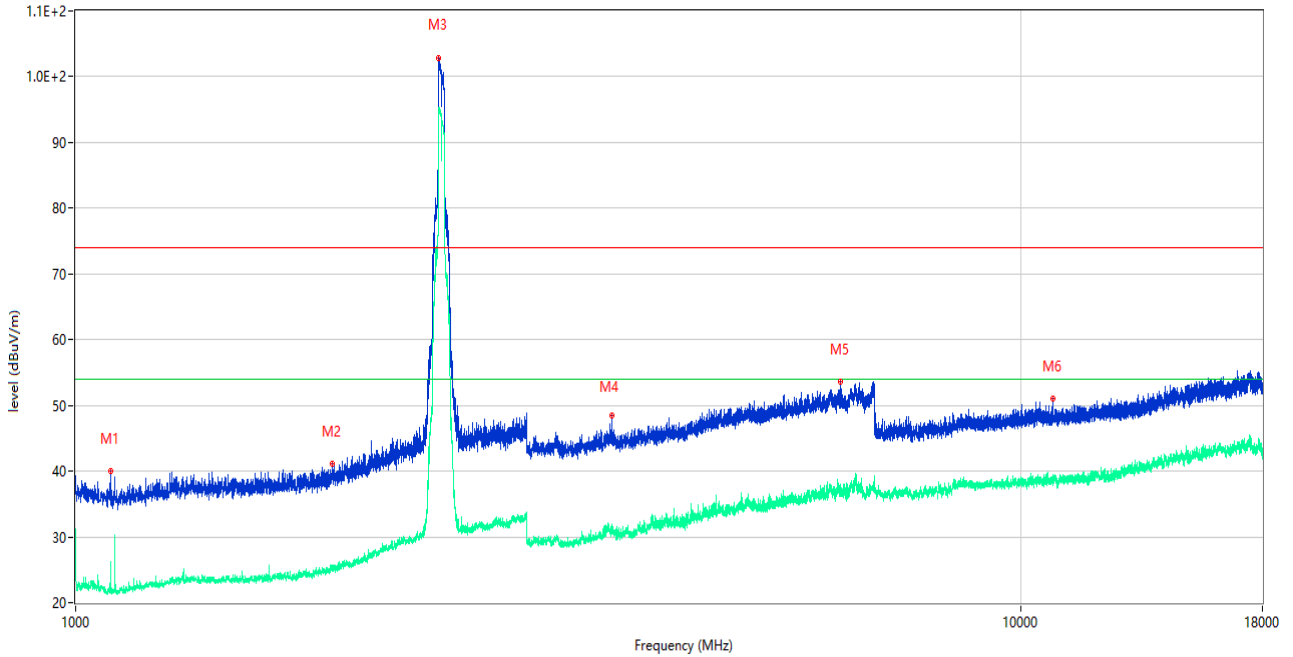

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.500	26.19	-18.13	54.0	-27.81	AV	314.00	150	Horizontal	Pass
1	1088.500	40.01	-18.13	74.0	-33.99	Peak	314.00	150	Horizontal	Pass
2**	1869.500	25.21	-16.30	54.0	-28.79	AV	214.00	150	Horizontal	Pass
2	1869.500	41.19	-16.30	74.0	-32.81	Peak	214.00	150	Horizontal	Pass
3**	2422.000	95.35	-12.17	54.0	41.35	AV	236.00	150	Horizontal	N/A
3	2422.000	102.90	-12.17	74.0	28.90	Peak	236.00	150	Horizontal	N/A
4**	3693.000	30.72	-6.05	54.0	-23.28	AV	257.00	150	Horizontal	Pass
4	3693.000	48.40	-6.05	74.0	-25.60	Peak	257.00	150	Horizontal	Pass
5**	6447.000	36.81	-0.32	54.0	-17.19	AV	128.00	150	Horizontal	Pass
5	6447.000	53.60	-0.32	74.0	-20.40	Peak	128.00	150	Horizontal	Pass
6**	10818.000	39.39	0.88	54.0	-14.61	AV	106.00	150	Horizontal	Pass
6	10818.000	51.06	0.88	74.0	-22.94	Peak	106.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

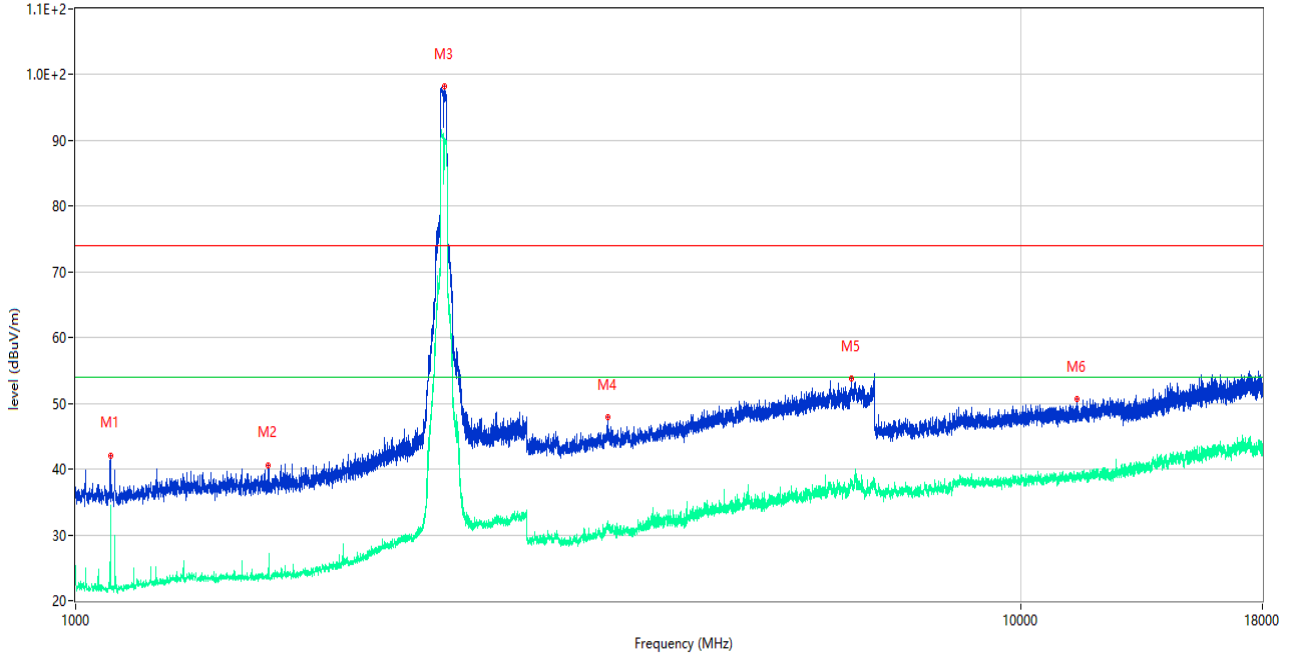

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	29.56	-18.14	54.0	-24.44	AV	281.00	150	Vertical	Pass
1	1088.000	42.10	-18.14	74.0	-31.90	Peak	281.00	150	Vertical	Pass
2**	1599.500	23.66	-17.34	54.0	-30.34	AV	148.00	150	Vertical	Pass
2	1599.500	40.65	-17.34	74.0	-33.35	Peak	148.00	150	Vertical	Pass
3**	2455.500	89.92	-12.72	54.0	35.92	AV	148.00	150	Vertical	N/A
3	2455.500	98.27	-12.72	74.0	24.27	Peak	148.00	150	Vertical	N/A
4**	3653.000	31.44	-6.31	54.0	-22.56	AV	52.00	150	Vertical	Pass
4	3653.000	47.91	-6.31	74.0	-26.09	Peak	52.00	150	Vertical	Pass
5**	6609.000	37.90	0.49	54.0	-16.10	AV	210.00	150	Vertical	Pass
5	6609.000	53.78	0.49	74.0	-20.22	Peak	210.00	150	Vertical	Pass
6**	11459.125	38.68	0.21	54.0	-15.32	AV	341.00	150	Vertical	Pass
6	11459.125	50.61	0.21	74.0	-23.39	Peak	341.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

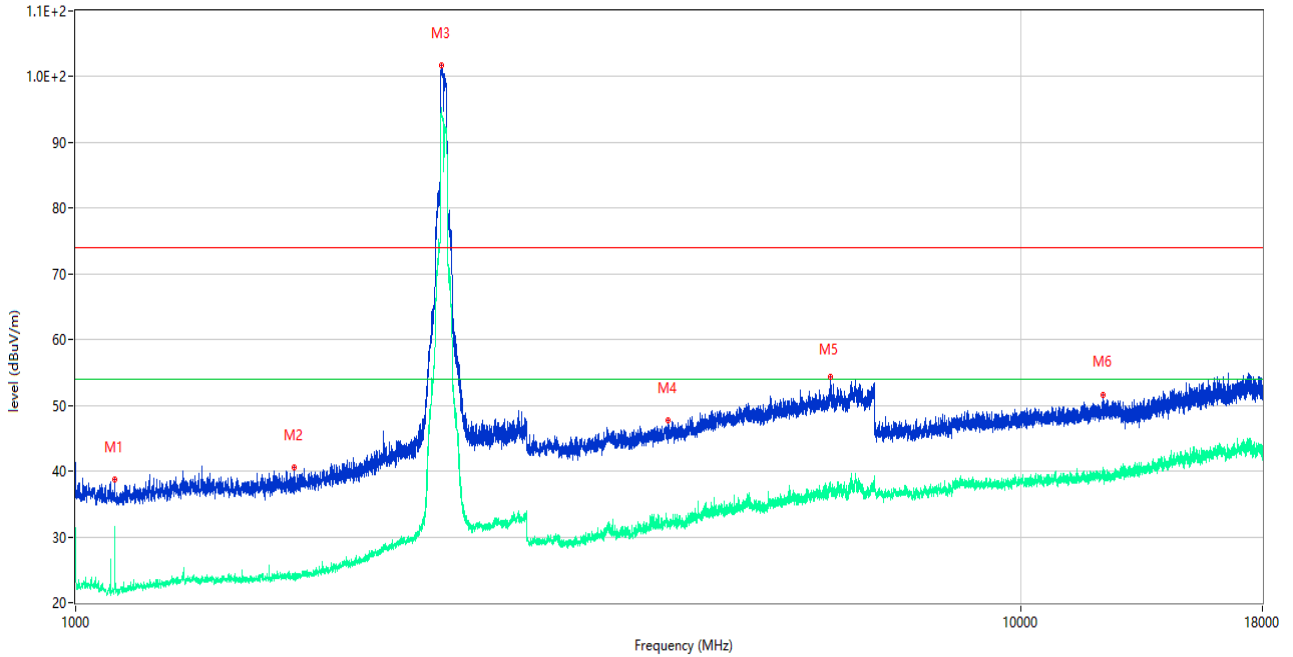


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.49	-18.36	54.0	-29.51	AV	117.00	150	Horizontal	Pass
1	1100.000	38.75	-18.36	74.0	-35.25	Peak	117.00	150	Horizontal	Pass
2**	1704.000	24.05	-16.99	54.0	-29.95	AV	153.00	150	Horizontal	Pass
2	1704.000	40.60	-16.99	74.0	-33.40	Peak	153.00	150	Horizontal	Pass
3**	2439.000	94.03	-12.49	54.0	40.03	AV	226.00	150	Horizontal	N/A
3	2439.000	101.78	-12.49	74.0	27.78	Peak	226.00	150	Horizontal	N/A
4**	4232.000	31.57	-4.99	54.0	-22.43	AV	253.00	150	Horizontal	Pass
4	4232.000	47.78	-4.99	74.0	-26.22	Peak	253.00	150	Horizontal	Pass
5**	6289.000	37.24	0.30	54.0	-16.76	AV	187.00	150	Horizontal	Pass
5	6289.000	54.40	0.30	74.0	-19.60	Peak	187.00	150	Horizontal	Pass
6**	12223.875	39.70	1.69	54.0	-14.30	AV	29.00	150	Horizontal	Pass
6	12223.875	51.62	1.69	74.0	-22.38	Peak	29.00	150	Horizontal	Pass

MIMO

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

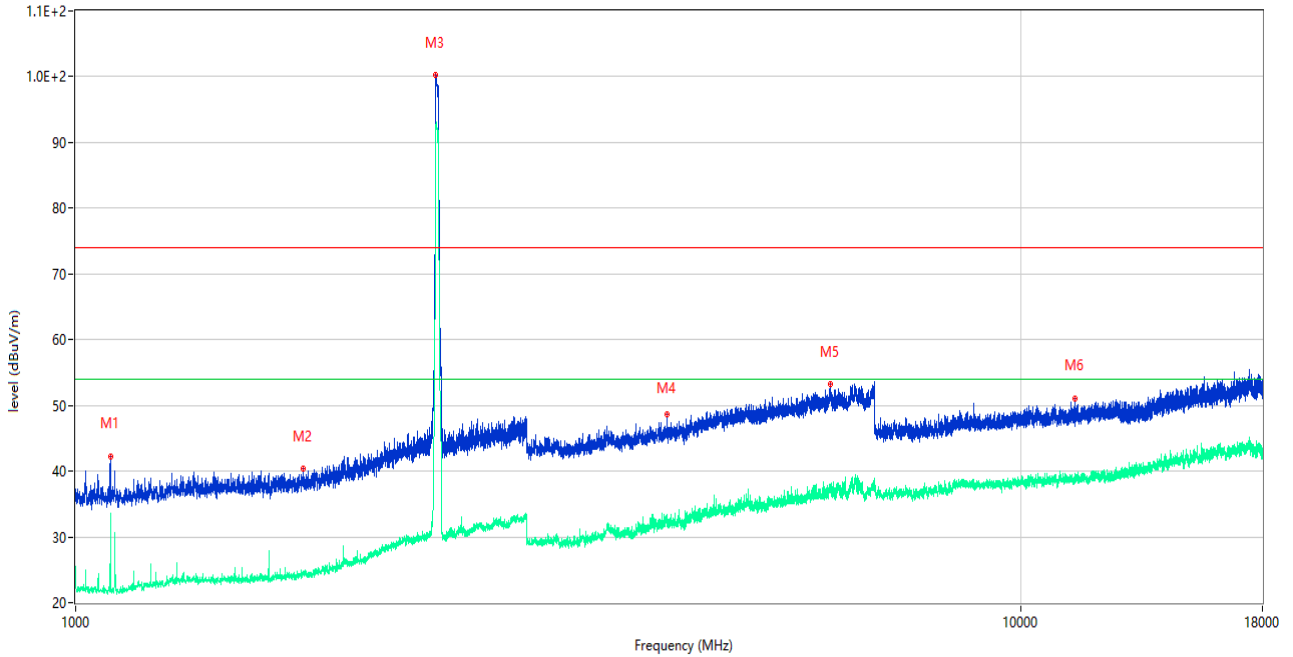

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.500	33.59	-18.13	54.0	-20.41	AV	287.00	150	Vertical	Pass
1	1088.500	42.28	-18.13	74.0	-31.72	Peak	287.00	150	Vertical	Pass
2**	1738.500	24.51	-16.74	54.0	-29.49	AV	97.00	150	Vertical	Pass
2	1738.500	40.47	-16.74	74.0	-33.53	Peak	97.00	150	Vertical	Pass
3**	2405.000	92.77	-11.89	54.0	38.77	AV	304.00	150	Vertical	N/A
3	2405.000	100.22	-11.89	74.0	26.22	Peak	304.00	150	Vertical	N/A
4**	4218.000	32.62	-4.87	54.0	-21.38	AV	64.00	150	Vertical	Pass
4	4218.000	48.68	-4.87	74.0	-25.32	Peak	64.00	150	Vertical	Pass
5**	6291.000	36.77	0.15	54.0	-17.23	AV	196.00	150	Vertical	Pass
5	6291.000	53.28	0.15	74.0	-20.72	Peak	196.00	150	Vertical	Pass
6**	11397.313	38.67	0.02	54.0	-15.33	AV	174.00	150	Vertical	Pass
6	11397.313	50.97	0.02	74.0	-23.03	Peak	174.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

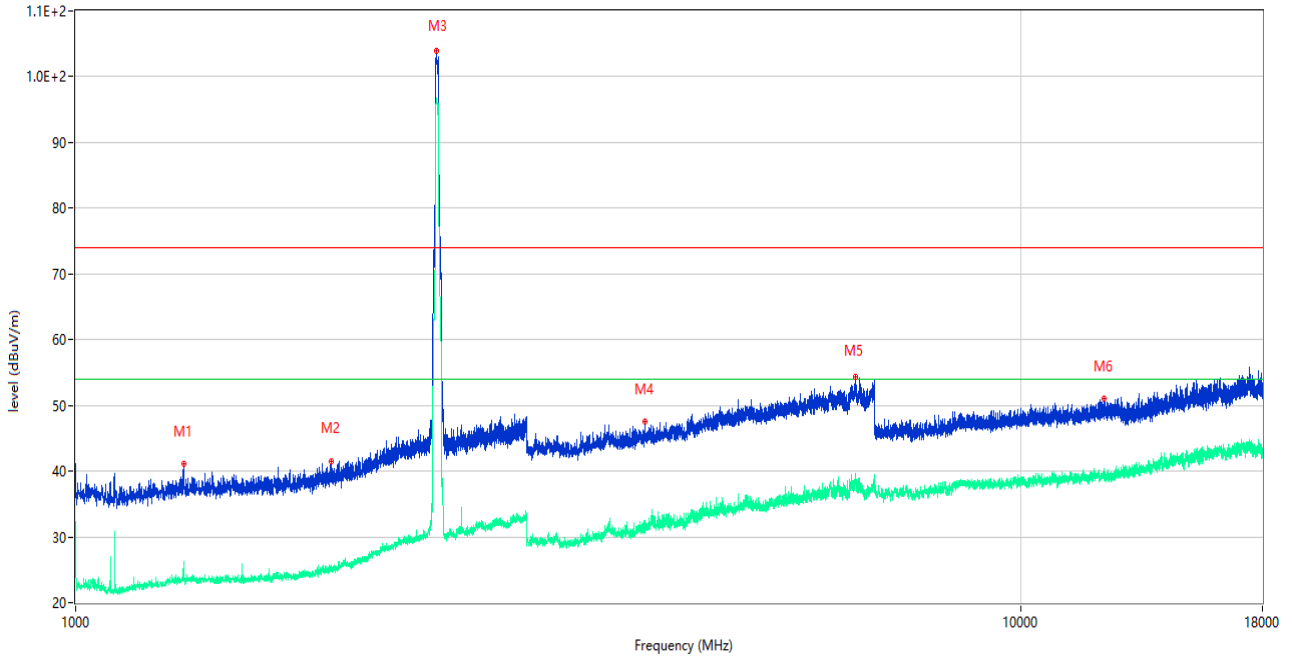

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1300.500	26.19	-17.03	54.0	-27.81	AV	197.00	150	Horizontal	Pass
1	1300.500	41.03	-17.03	74.0	-32.97	Peak	197.00	150	Horizontal	Pass
2**	1865.500	25.37	-15.99	54.0	-28.63	AV	25.00	150	Horizontal	Pass
2	1865.500	41.43	-15.99	74.0	-32.57	Peak	25.00	150	Horizontal	Pass
3**	2409.500	95.81	-12.16	54.0	41.81	AV	226.00	150	Horizontal	N/A
3	2409.500	103.98	-12.16	74.0	29.98	Peak	226.00	150	Horizontal	N/A
4**	4001.000	31.16	-5.23	54.0	-22.84	AV	1.00	150	Horizontal	Pass
4	4001.000	47.47	-5.23	74.0	-26.53	Peak	1.00	150	Horizontal	Pass
5**	6686.000	38.91	0.15	54.0	-15.09	AV	360.00	150	Horizontal	Pass
5	6686.000	54.43	0.15	74.0	-19.57	Peak	360.00	150	Horizontal	Pass
6**	12233.938	39.65	1.55	54.0	-14.35	AV	31.00	150	Horizontal	Pass
6	12233.938	51.09	1.55	74.0	-22.91	Peak	31.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

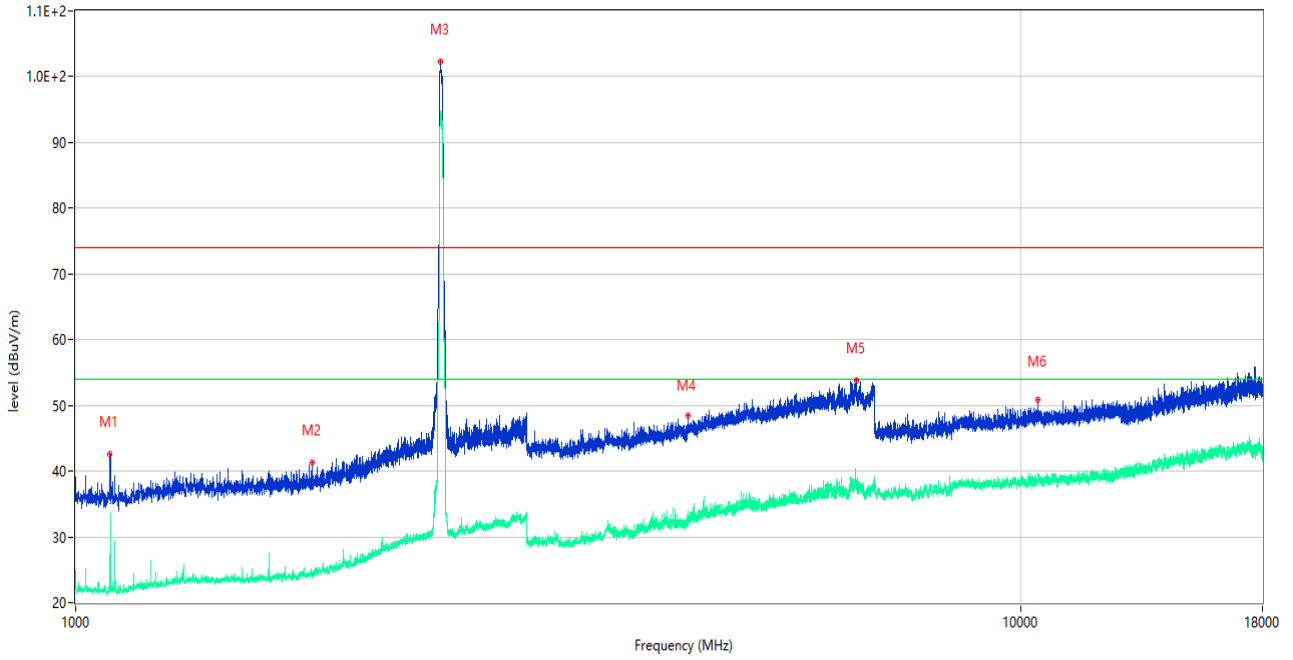

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1087.500	22.33	-18.21	54.0	-31.67	AV	265.00	150	Vertical	Pass
1	1087.500	42.54	-18.21	74.0	-31.46	Peak	265.00	150	Vertical	Pass
2**	1780.000	24.55	-16.93	54.0	-29.45	AV	310.00	150	Vertical	Pass
2	1780.000	41.22	-16.93	74.0	-32.78	Peak	310.00	150	Vertical	Pass
3**	2432.500	94.41	-12.76	54.0	40.41	AV	265.00	150	Vertical	N/A
3	2432.500	102.28	-12.76	74.0	28.28	Peak	265.00	150	Vertical	N/A
4**	4445.000	32.57	-4.20	54.0	-21.43	AV	360.00	150	Vertical	Pass
4	4445.000	48.51	-4.20	74.0	-25.49	Peak	360.00	150	Vertical	Pass
5**	6698.000	37.20	-0.28	54.0	-16.80	AV	138.00	150	Vertical	Pass
5	6698.000	53.84	-0.28	74.0	-20.16	Peak	138.00	150	Vertical	Pass
6**	10418.375	38.96	0.62	54.0	-15.04	AV	125.00	150	Vertical	Pass
6	10418.375	50.95	0.62	74.0	-23.05	Peak	125.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

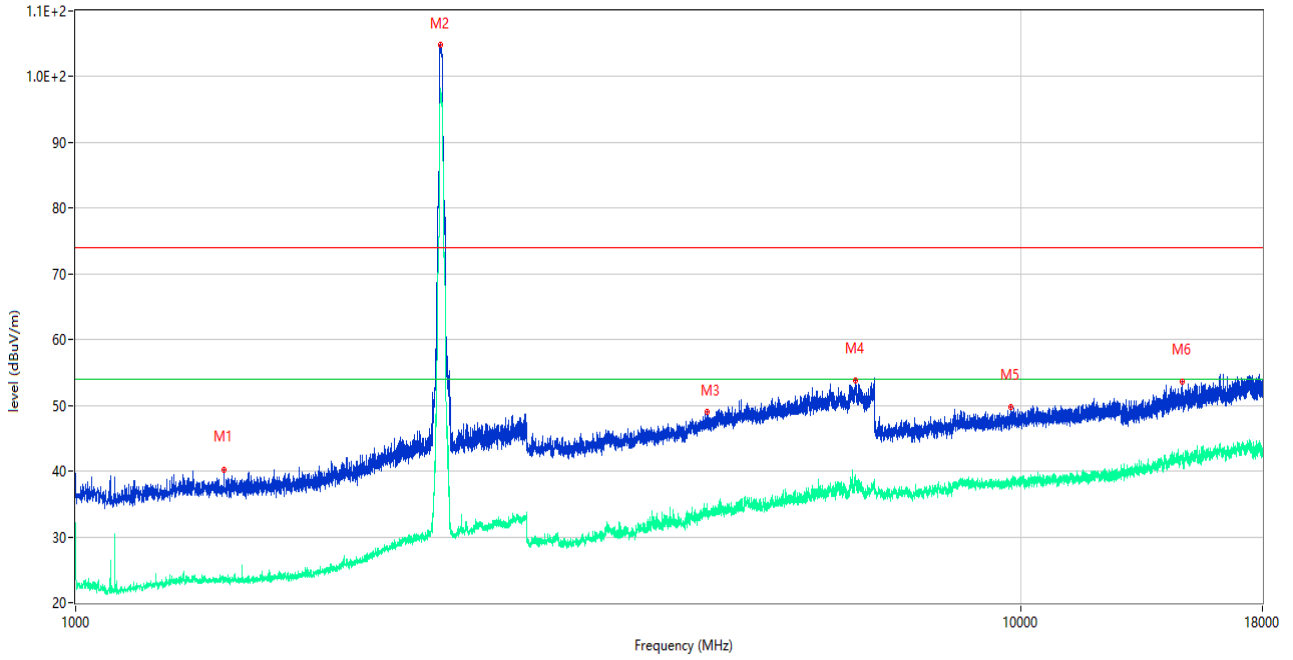


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1435.500	23.13	-17.25	54.0	-30.87	AV	0.00	150	Horizontal	Pass
1	1435.500	40.22	-17.25	74.0	-33.78	Peak	0.00	150	Horizontal	Pass
2**	2429.000	97.69	-12.62	54.0	43.69	AV	258.00	150	Horizontal	N/A
2	2429.000	104.83	-12.62	74.0	30.83	Peak	258.00	150	Horizontal	N/A
3**	4659.000	33.50	-3.69	54.0	-20.50	AV	30.00	150	Horizontal	Pass
3	4659.000	49.07	-3.69	74.0	-24.93	Peak	30.00	150	Horizontal	Pass
4**	6681.000	38.36	0.20	54.0	-15.64	AV	210.00	150	Horizontal	Pass
4	6681.000	53.72	0.20	74.0	-20.28	Peak	210.00	150	Horizontal	Pass
5**	9748.500	37.78	-0.13	54.0	-16.22	AV	360.00	150	Horizontal	Pass
5	9748.500	49.79	-0.13	74.0	-24.21	Peak	360.00	150	Horizontal	Pass
6**	14819.812	41.81	1.59	54.0	-12.19	AV	8.00	150	Horizontal	Pass
6	14819.812	53.60	1.59	74.0	-20.40	Peak	8.00	150	Horizontal	Pass



1 GHz to 18 GHz, ANT V 802.11n20 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

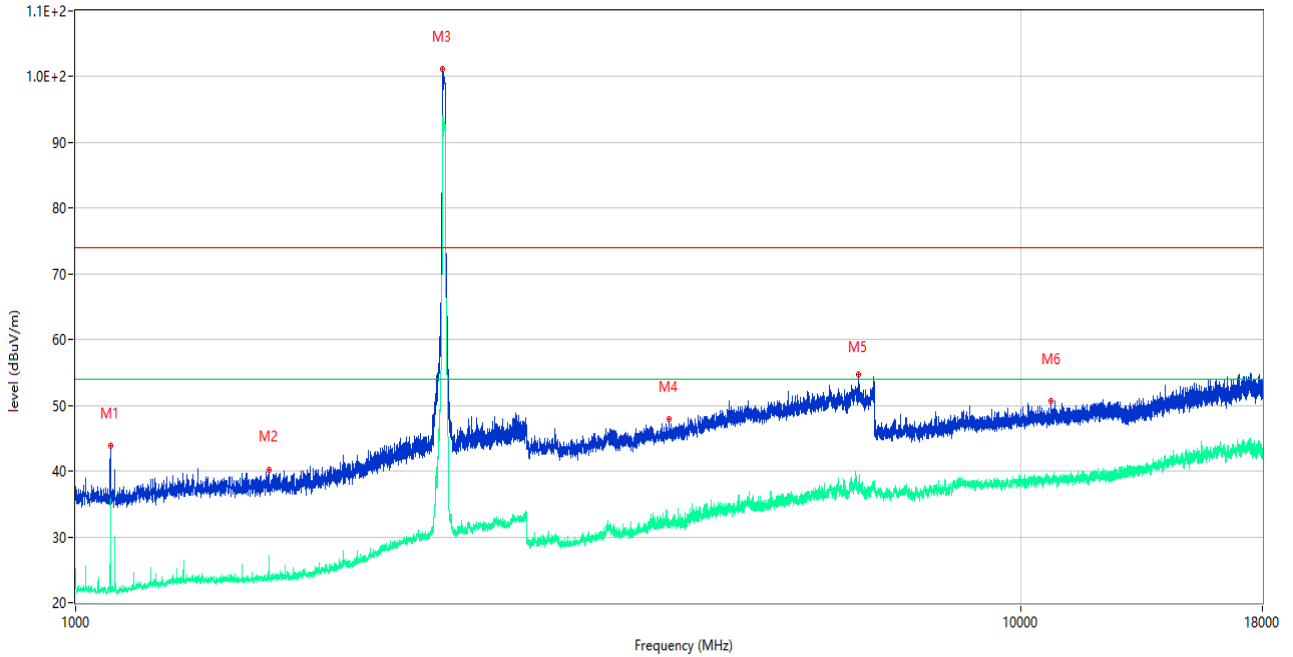

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	29.70	-18.14	54.0	-24.30	AV	289.00	150	Vertical	Pass
1	1088.000	43.86	-18.14	74.0	-30.14	Peak	289.00	150	Vertical	Pass
2**	1600.000	26.05	-17.30	54.0	-27.95	AV	34.00	150	Vertical	Pass
2	1600.000	40.27	-17.30	74.0	-33.73	Peak	34.00	150	Vertical	Pass
3**	2469.000	93.87	-12.59	54.0	39.87	AV	289.00	150	Vertical	N/A
3	2469.000	101.13	-12.59	74.0	27.13	Peak	289.00	150	Vertical	N/A
4**	4245.000	31.49	-4.98	54.0	-22.51	AV	212.00	150	Vertical	Pass
4	4245.000	47.89	-4.98	74.0	-26.11	Peak	212.00	150	Vertical	Pass
5**	6735.000	38.44	0.21	54.0	-15.56	AV	196.00	150	Vertical	Pass
5	6735.000	54.71	0.21	74.0	-19.29	Peak	196.00	150	Vertical	Pass
6**	10749.000	38.65	-0.28	54.0	-15.35	AV	360.00	150	Vertical	Pass
6	10749.000	50.75	-0.28	74.0	-23.25	Peak	360.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

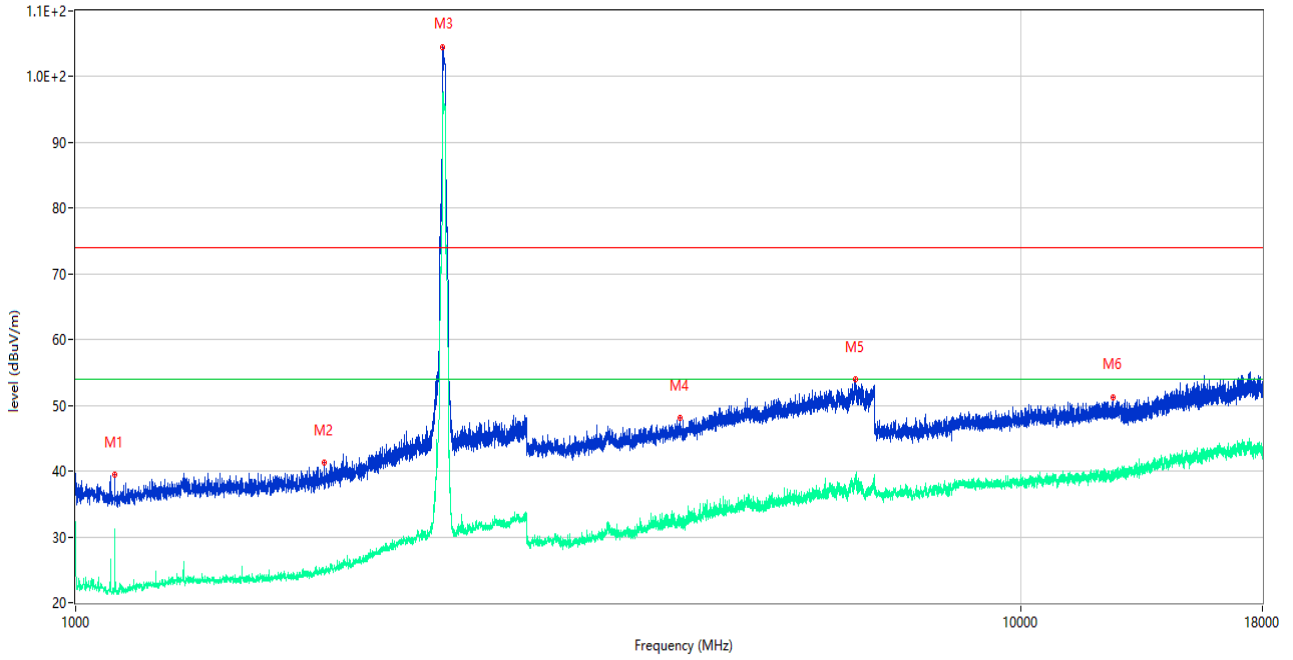

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	25.00	-18.36	54.0	-29.00	AV	89.00	150	Horizontal	Pass
1	1100.000	39.41	-18.36	74.0	-34.59	Peak	89.00	150	Horizontal	Pass
2**	1831.000	24.61	-16.42	54.0	-29.39	AV	73.00	150	Horizontal	Pass
2	1831.000	41.23	-16.42	74.0	-32.77	Peak	73.00	150	Horizontal	Pass
3**	2469.000	96.79	-12.54	54.0	42.79	AV	214.00	150	Horizontal	N/A
3	2469.000	104.58	-12.54	74.0	30.58	Peak	214.00	150	Horizontal	N/A
4**	4353.000	31.99	-3.79	54.0	-22.01	AV	242.00	150	Horizontal	Pass
4	4353.000	48.13	-3.79	74.0	-25.87	Peak	242.00	150	Horizontal	Pass
5**	6680.000	38.37	0.17	54.0	-15.63	AV	98.00	150	Horizontal	Pass
5	6680.000	53.91	0.17	74.0	-20.09	Peak	98.00	150	Horizontal	Pass
6**	12497.000	38.97	1.94	54.0	-15.03	AV	285.00	150	Horizontal	Pass
6	12497.000	51.27	1.94	74.0	-22.73	Peak	285.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

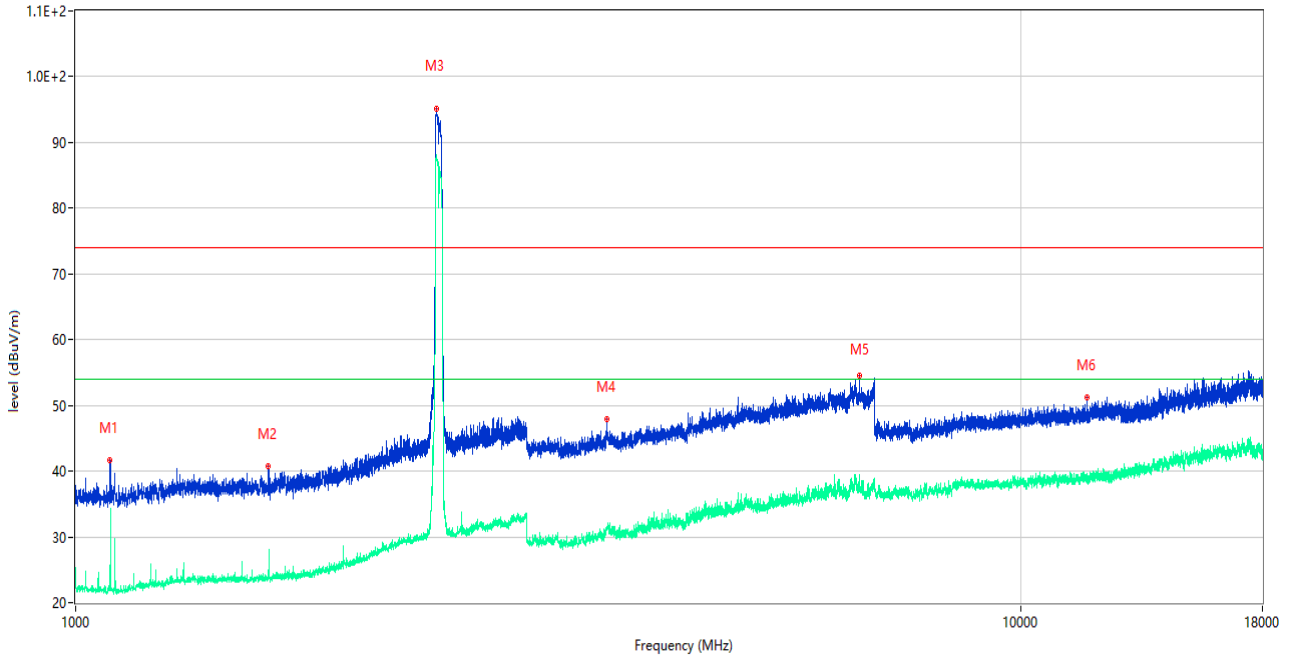

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1087.500	22.36	-18.21	54.0	-31.64	AV	287.00	150	Vertical	Pass
1	1087.500	41.68	-18.21	74.0	-32.32	Peak	287.00	150	Vertical	Pass
2**	1599.500	23.73	-17.34	54.0	-30.27	AV	360.00	150	Vertical	Pass
2	1599.500	40.77	-17.34	74.0	-33.23	Peak	360.00	150	Vertical	Pass
3**	2406.500	87.56	-11.88	54.0	33.56	AV	287.00	150	Vertical	N/A
3	2406.500	95.11	-11.88	74.0	21.11	Peak	287.00	150	Vertical	N/A
4**	3645.000	31.23	-6.25	54.0	-22.77	AV	343.00	150	Vertical	Pass
4	3645.000	47.90	-6.25	74.0	-26.10	Peak	343.00	150	Vertical	Pass
5**	6743.000	37.78	0.45	54.0	-16.22	AV	129.00	150	Vertical	Pass
5	6743.000	54.53	0.45	74.0	-19.47	Peak	129.00	150	Vertical	Pass
6**	11732.250	38.81	1.28	54.0	-15.19	AV	360.00	150	Vertical	Pass
6	11732.250	51.18	1.28	74.0	-22.82	Peak	360.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

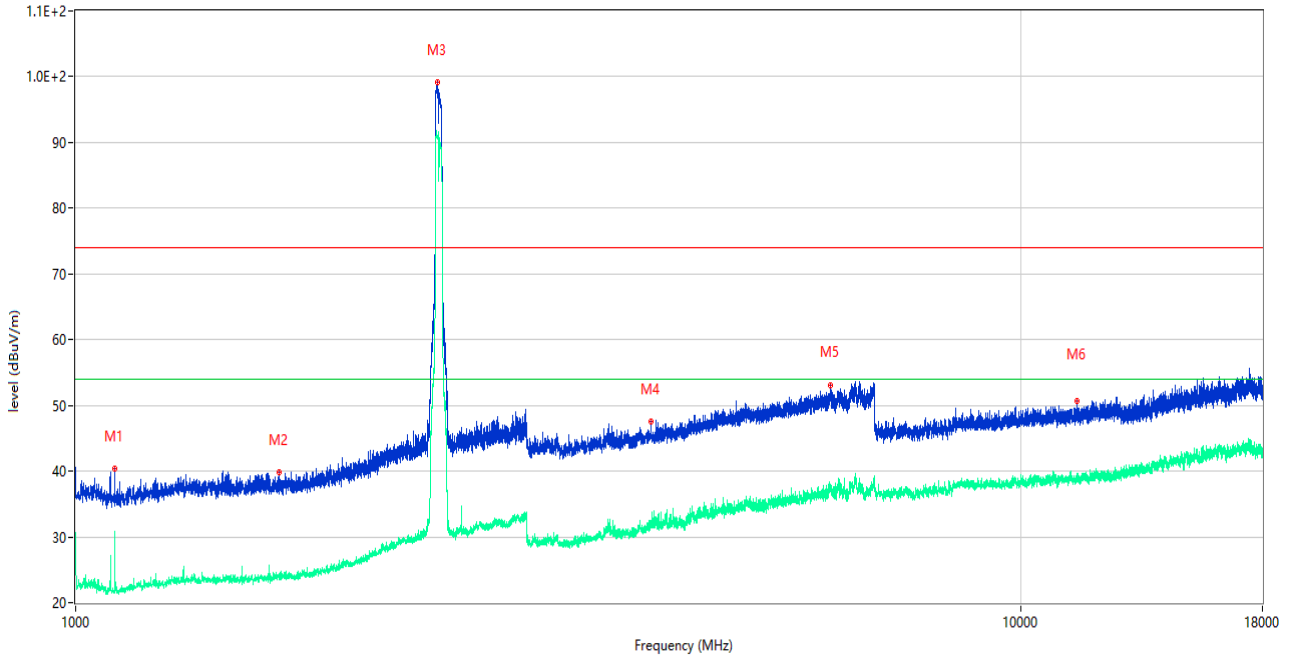

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.50	-18.36	54.0	-29.50	AV	115.00	150	Horizontal	Pass
1	1100.000	40.39	-18.36	74.0	-33.61	Peak	115.00	150	Horizontal	Pass
2**	1639.500	24.06	-17.09	54.0	-29.94	AV	278.00	150	Horizontal	Pass
2	1639.500	39.75	-17.09	74.0	-34.25	Peak	278.00	150	Horizontal	Pass
3**	2415.500	90.70	-12.43	54.0	36.70	AV	247.00	150	Horizontal	N/A
3	2415.500	99.16	-12.43	74.0	25.16	Peak	247.00	150	Horizontal	N/A
4**	4060.000	31.89	-5.06	54.0	-22.11	AV	163.00	150	Horizontal	Pass
4	4060.000	47.54	-5.06	74.0	-26.46	Peak	163.00	150	Horizontal	Pass
5**	6290.000	36.94	0.20	54.0	-17.06	AV	360.00	150	Horizontal	Pass
5	6290.000	53.14	0.20	74.0	-20.86	Peak	360.00	150	Horizontal	Pass
6**	11450.500	39.57	0.30	54.0	-14.43	AV	186.00	150	Horizontal	Pass
6	11450.500	50.71	0.30	74.0	-23.29	Peak	186.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

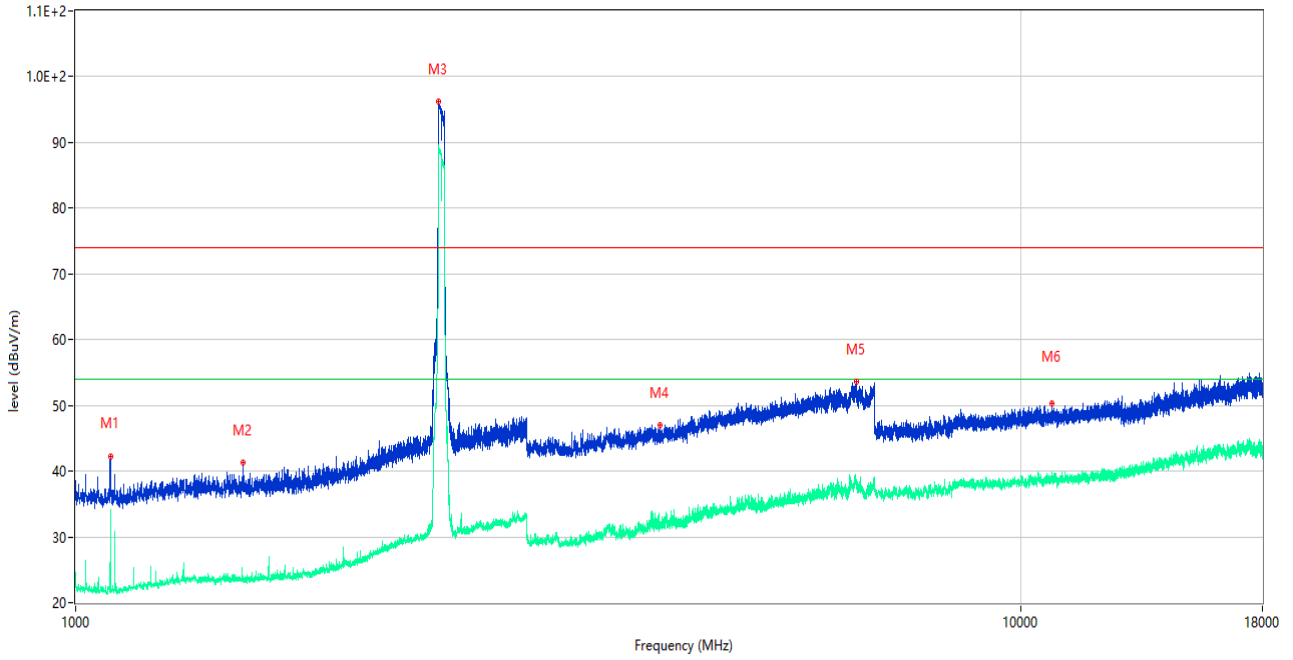

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1088.000	29.77	-18.14	54.0	-24.23	AV	0.00	150	Vertical	Pass
1	1088.000	42.30	-18.14	74.0	-31.70	Peak	0.00	150	Vertical	Pass
2**	1501.500	23.80	-17.24	54.0	-30.20	AV	102.00	150	Vertical	Pass
2	1501.500	41.32	-17.24	74.0	-32.68	Peak	102.00	150	Vertical	Pass
3**	2422.500	89.66	-12.17	54.0	35.66	AV	291.00	150	Vertical	N/A
3	2422.500	96.21	-12.17	74.0	22.21	Peak	291.00	150	Vertical	N/A
4**	4148.000	31.44	-5.13	54.0	-22.56	AV	322.00	150	Vertical	Pass
4	4148.000	46.96	-5.13	74.0	-27.04	Peak	322.00	150	Vertical	Pass
5**	6698.000	37.65	-0.28	54.0	-16.35	AV	322.00	150	Vertical	Pass
5	6698.000	53.58	-0.28	74.0	-20.42	Peak	322.00	150	Vertical	Pass
6**	10769.125	38.44	-0.13	54.0	-15.56	AV	310.00	150	Vertical	Pass
6	10769.125	50.24	-0.13	74.0	-23.76	Peak	310.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

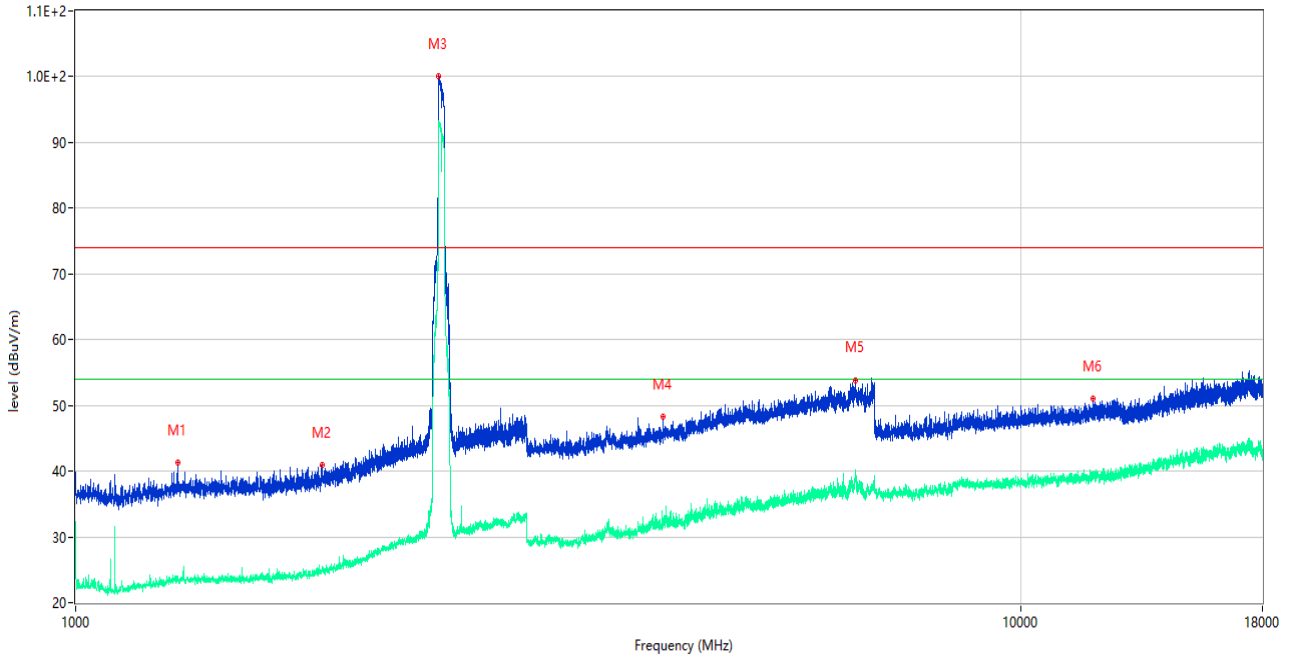

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1281.500	23.52	-17.32	54.0	-30.48	AV	203.00	150	Horizontal	Pass
1	1281.500	41.35	-17.32	74.0	-32.65	Peak	203.00	150	Horizontal	Pass
2**	1821.500	24.78	-16.43	54.0	-29.22	AV	360.00	150	Horizontal	Pass
2	1821.500	40.99	-16.43	74.0	-33.01	Peak	360.00	150	Horizontal	Pass
3**	2422.000	92.73	-12.17	54.0	38.73	AV	219.00	150	Horizontal	N/A
3	2422.000	100.05	-12.17	74.0	26.05	Peak	219.00	150	Horizontal	N/A
4**	4183.000	31.84	-5.05	54.0	-22.16	AV	217.00	150	Horizontal	Pass
4	4183.000	48.24	-5.05	74.0	-25.76	Peak	217.00	150	Horizontal	Pass
5**	6686.000	39.35	0.15	54.0	-14.65	AV	92.00	150	Horizontal	Pass
5	6686.000	53.82	0.15	74.0	-20.18	Peak	92.00	150	Horizontal	Pass
6**	11909.063	39.74	1.92	54.0	-14.26	AV	168.00	150	Horizontal	Pass
6	11909.063	51.01	1.92	74.0	-22.99	Peak	168.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel


RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

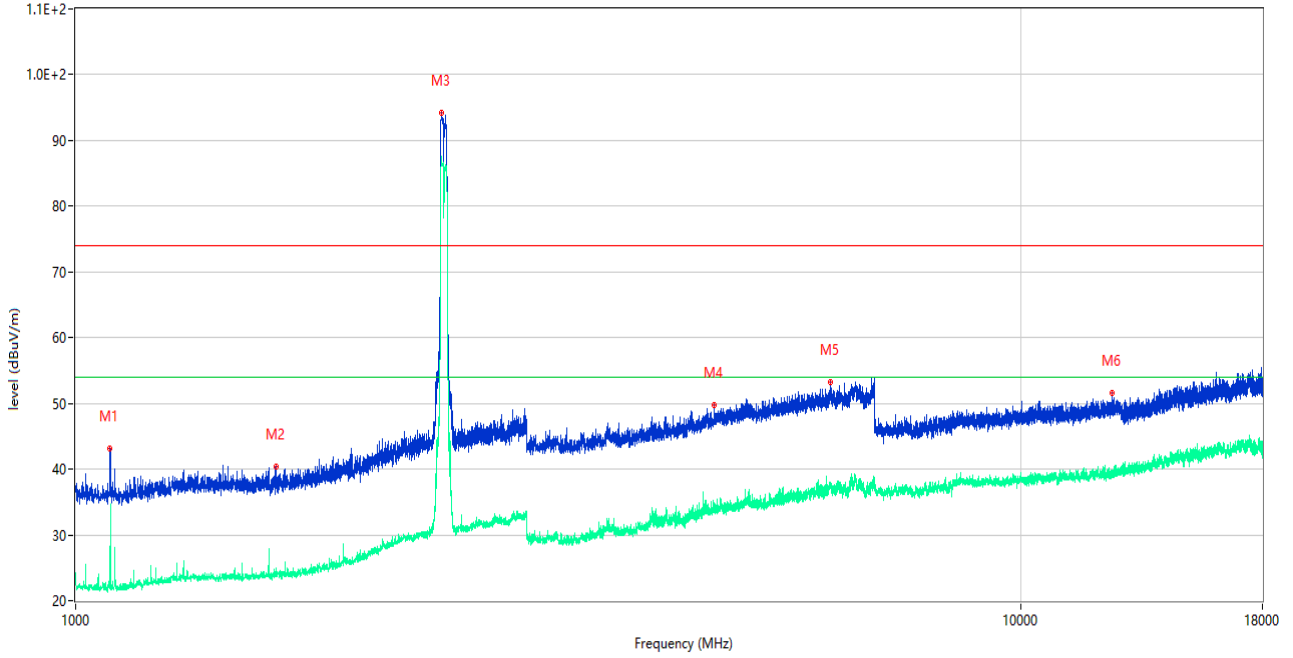

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1087.500	22.50	-18.21	54.0	-31.50	AV	279.00	150	Vertical	Pass
1	1087.500	43.13	-18.21	74.0	-30.87	Peak	279.00	150	Vertical	Pass
2**	1628.000	23.81	-17.31	54.0	-30.19	AV	360.00	150	Vertical	Pass
2	1628.000	40.34	-17.31	74.0	-33.66	Peak	360.00	150	Vertical	Pass
3**	2439.000	87.57	-12.49	54.0	33.57	AV	266.00	150	Vertical	N/A
3	2439.000	94.13	-12.49	74.0	20.13	Peak	266.00	150	Vertical	N/A
4**	4732.000	33.80	-3.70	54.0	-20.20	AV	333.00	150	Vertical	Pass
4	4732.000	49.73	-3.70	74.0	-24.27	Peak	333.00	150	Vertical	Pass
5**	6286.000	37.21	0.37	54.0	-16.79	AV	151.00	150	Vertical	Pass
5	6286.000	53.19	0.37	74.0	-20.81	Peak	151.00	150	Vertical	Pass
6**	12495.563	38.97	1.93	54.0	-15.03	AV	359.00	150	Vertical	Pass
6	12495.563	51.62	1.93	74.0	-22.38	Peak	359.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

RE Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

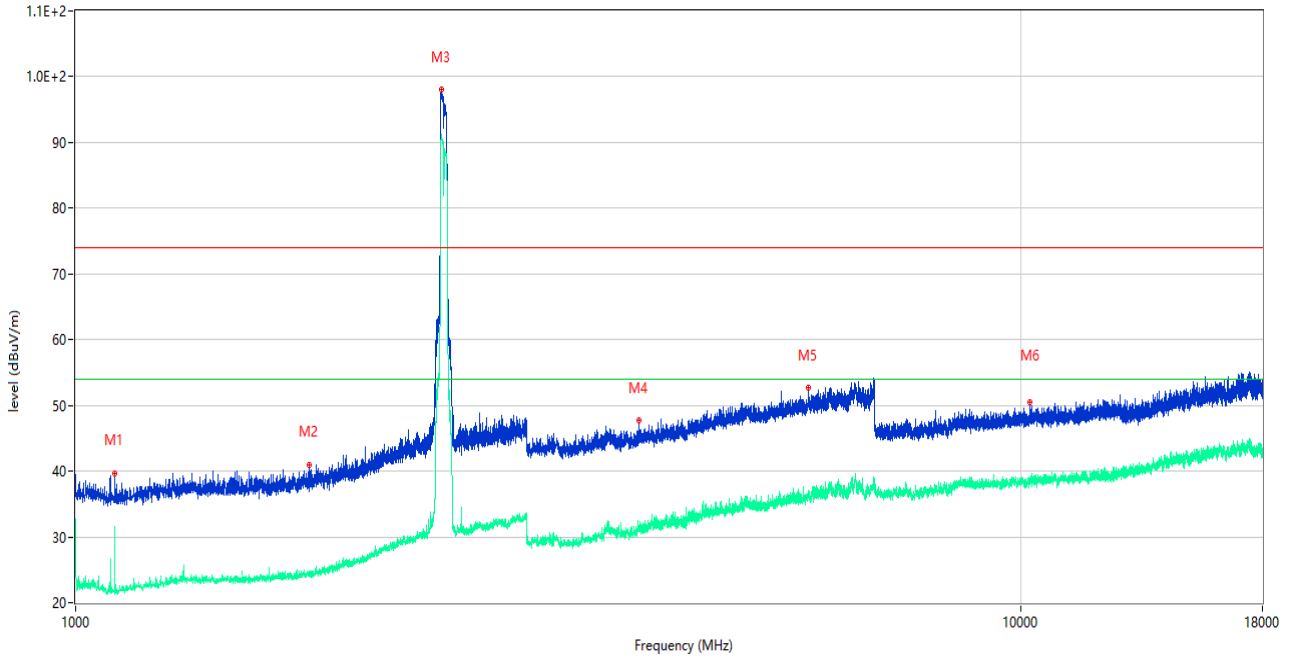

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1100.000	24.59	-18.36	54.0	-29.41	AV	62.00	150	Horizontal	Pass
1	1100.000	39.72	-18.36	74.0	-34.28	Peak	62.00	150	Horizontal	Pass
2**	1764.000	24.39	-16.81	54.0	-29.61	AV	207.00	150	Horizontal	Pass
2	1764.000	40.87	-16.81	74.0	-33.13	Peak	207.00	150	Horizontal	Pass
3**	2436.000	91.08	-12.64	54.0	37.08	AV	236.00	150	Horizontal	N/A
3	2436.000	98.00	-12.64	74.0	24.00	Peak	236.00	150	Horizontal	N/A
4**	3943.000	31.25	-5.38	54.0	-22.75	AV	178.00	150	Horizontal	Pass
4	3943.000	47.69	-5.38	74.0	-26.31	Peak	178.00	150	Horizontal	Pass
5**	5954.000	36.18	-1.11	54.0	-17.82	AV	278.00	150	Horizontal	Pass
5	5954.000	52.66	-1.11	74.0	-21.34	Peak	278.00	150	Horizontal	Pass
6**	10209.937	38.40	0.70	54.0	-15.60	AV	273.00	150	Horizontal	Pass
6	10209.937	50.51	0.70	74.0	-23.49	Peak	273.00	150	Horizontal	Pass



## A.7 Band Edge (Restricted-band band-edge)

### Test Data

Note<sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note<sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note<sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

### ANT0

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	52.833	74	21.167	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	52.897	74	21.103	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass
802.11g	Low	2390	52.646	74	21.354	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	52.796	74	21.204	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass
802.11n20	Low	2390	53.386	74	20.614	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	53.650	74	20.350	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass
802.11n40	Low	2390	58.153	74	15.847	PEAK	Pass
		2390	43.784	54	10.216	AVERAGE	Pass
	HIGH	2483.5	53.875	74	20.125	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass

**ANT1**

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	52.521	74	21.479	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	52.801	74	21.199	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass
802.11g	Low	2390	52.735	74	21.265	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	52.843	74	21.157	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass
802.11n20	Low	2390	52.625	74	21.375	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	53.040	74	20.960	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass
802.11n40	Low	2390	57.355	74	16.645	PEAK	Pass
		2390	45.935	54	8.065	AVERAGE	Pass
	HIGH	2483.5	54.453	74	19.547	PEAK	Pass
		2483.5	44.390	54	9.610	AVERAGE	Pass

**MIMO**


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11n20	Low	2390	52.881	74	21.119	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	53.467	74	20.533	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass
802.11n40	Low	2390	53.014	74	20.986	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
	HIGH	2483.5	55.673	74	18.327	PEAK	Pass
		2483.5	42.607	54	11.393	AVERAGE	Pass

Test plots


ANT0

802.11b Mode:

LOW CHANNEL, PEAK

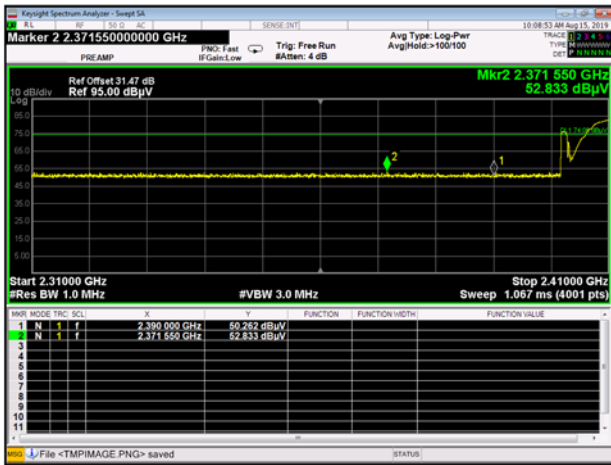


HIGH CHANNEL, PEAK

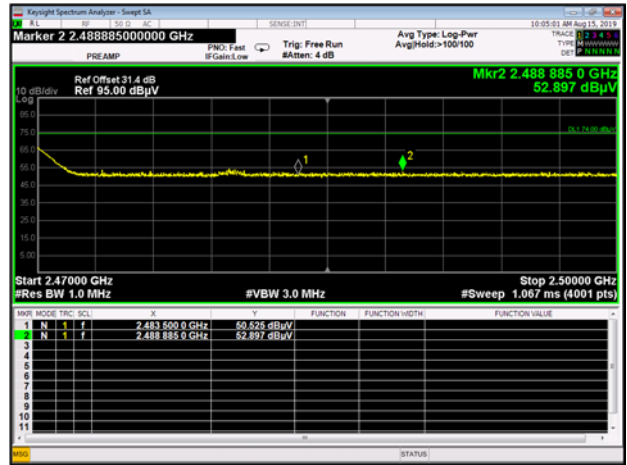


802.11g Mode:

LOW CHANNEL, PEAK

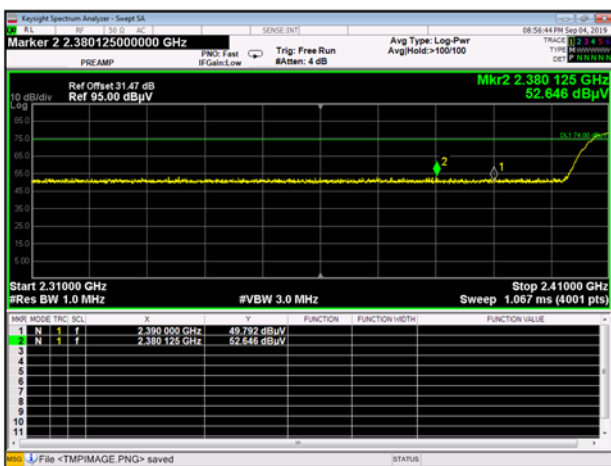


HIGH CHANNEL, PEAK

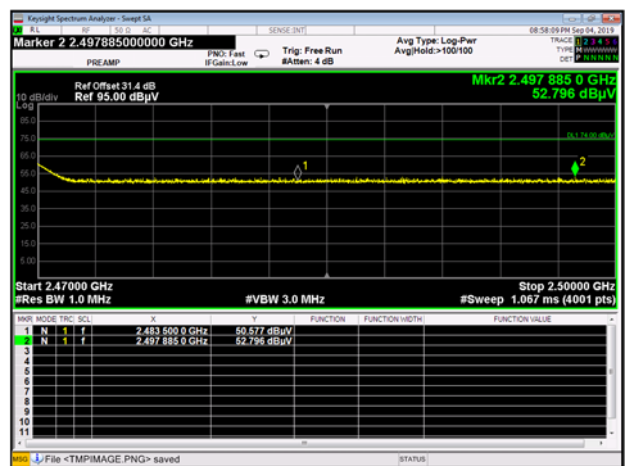

802.11n-20 MHz Mode:

LOW CHANNEL, PEAK

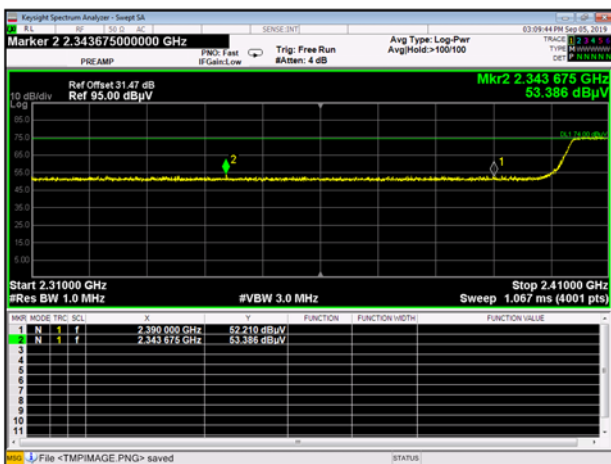


HIGH CHANNEL, PEAK




802.11n-40 MHz Mode:


LOW CHANNEL, PEAK

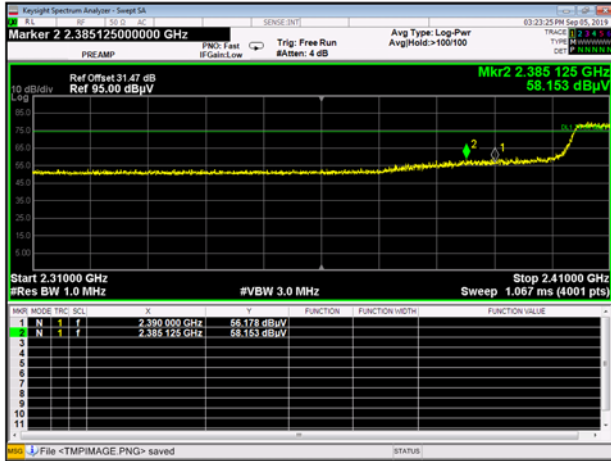

LOW CHANNEL, AV

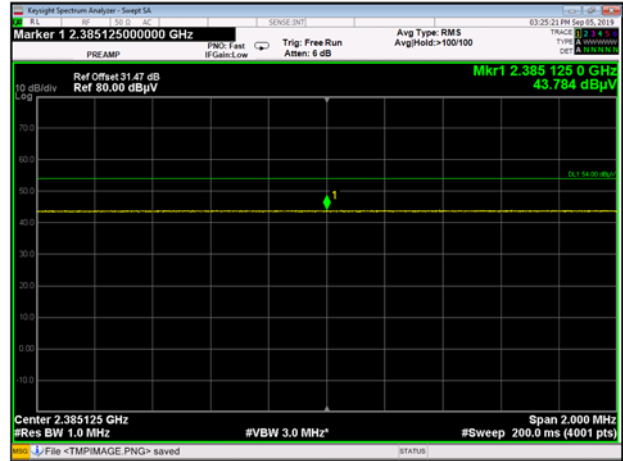


HIGH CHANNEL, PEAK

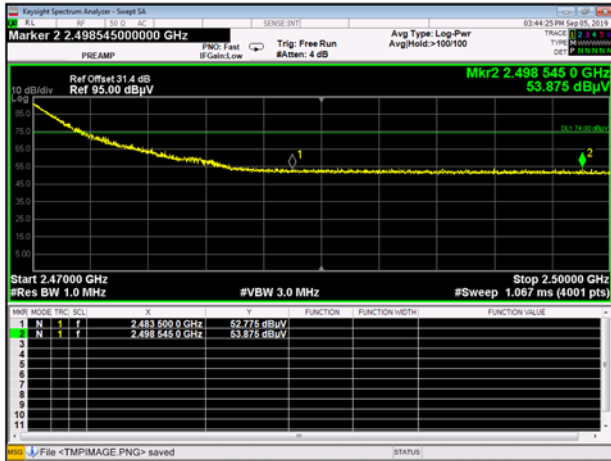


ANT1

802.11b Mode:

LOW CHANNEL, PEAK

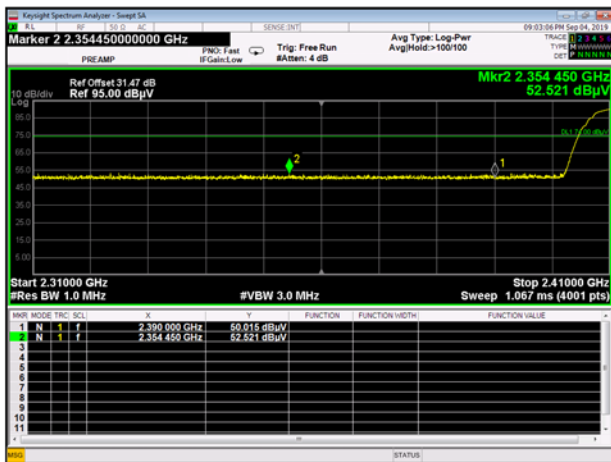


HIGH CHANNEL, PEAK

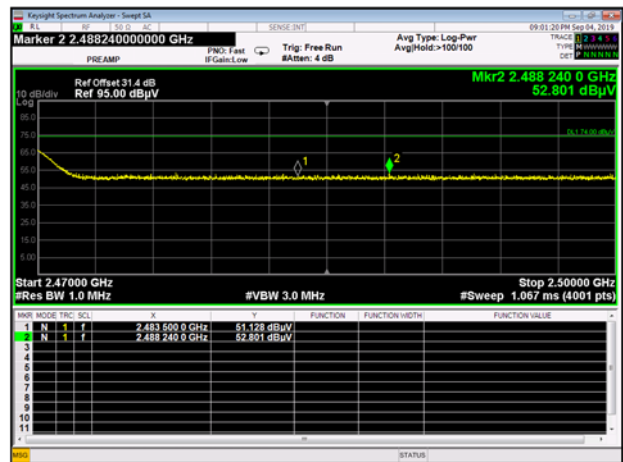

802.11g Mode:

LOW CHANNEL, PEAK

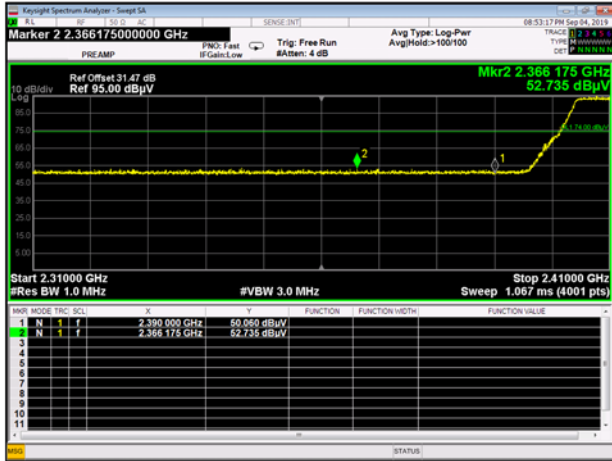


HIGH CHANNEL, PEAK




802.11n-20 MHz Mode:

LOW CHANNEL, PEAK

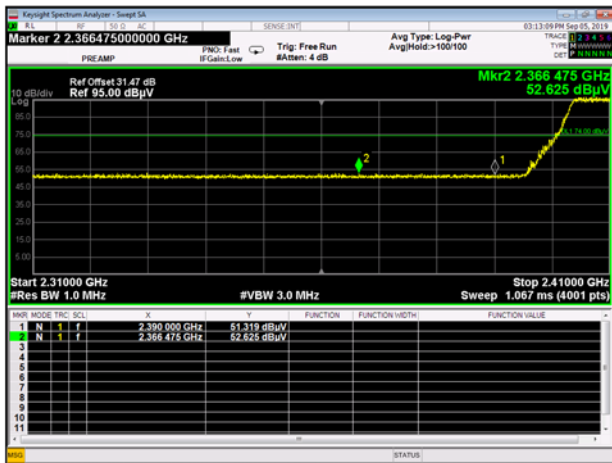


HIGH CHANNEL, PEAK

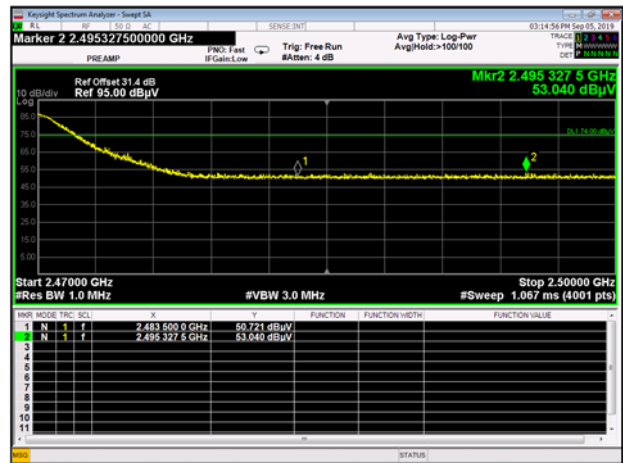


802.11n-40 MHz Mode:


LOW CHANNEL, PEAK

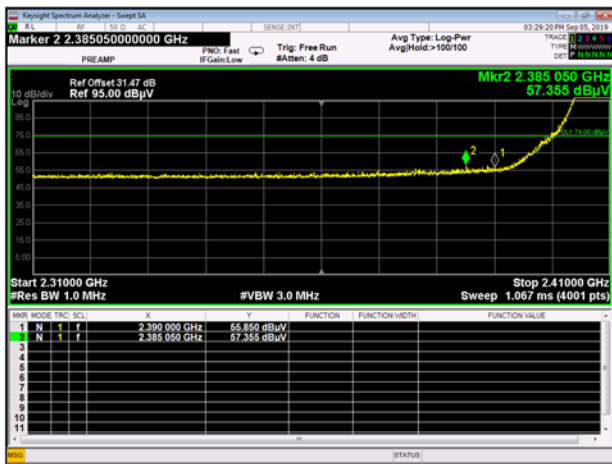


LOW CHANNEL, AV

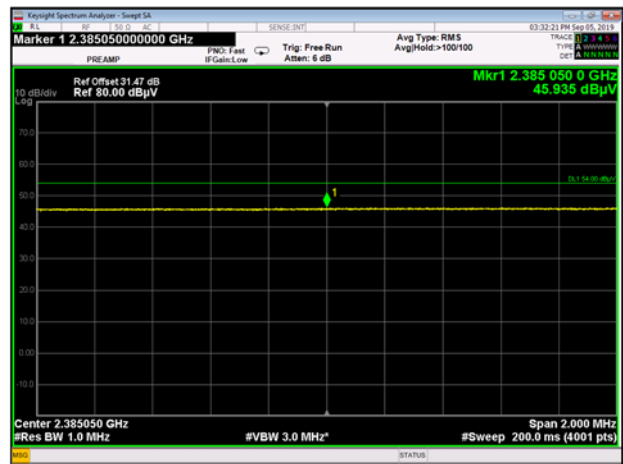

HIGH CHANNEL, PEAK

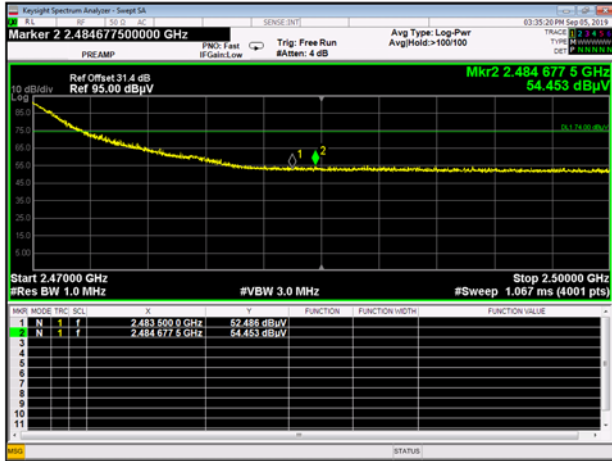


HIGH CHANNEL, AV

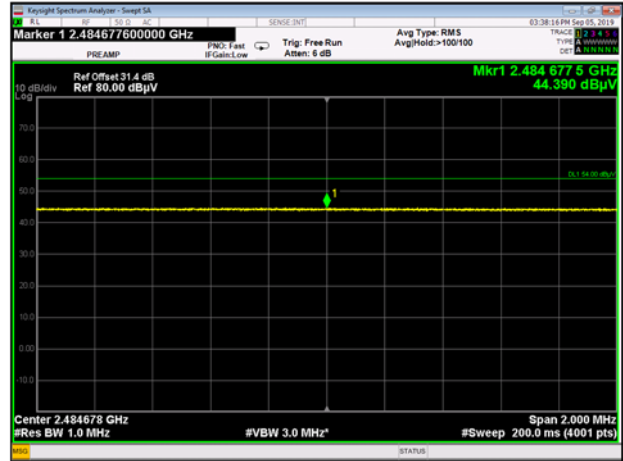


MIMO

802.11n-20 MHz Mode:

LOW CHANNEL, PEAK

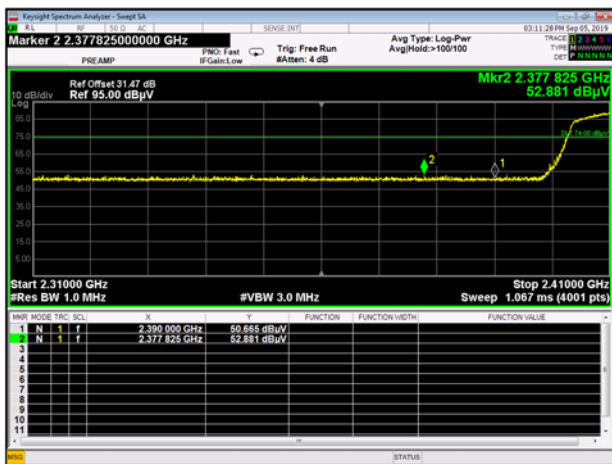


HIGH CHANNEL, PEAK

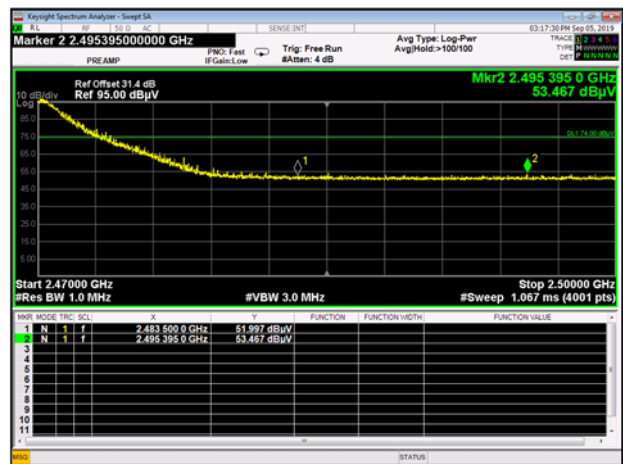

802.11n-40 MHz Mode:


LOW CHANNEL, PEAK

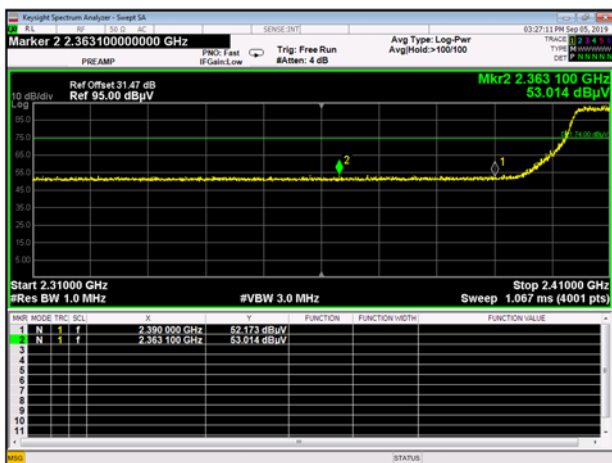

HIGH CHANNEL, PEAK



HIGH CHANNEL, AV

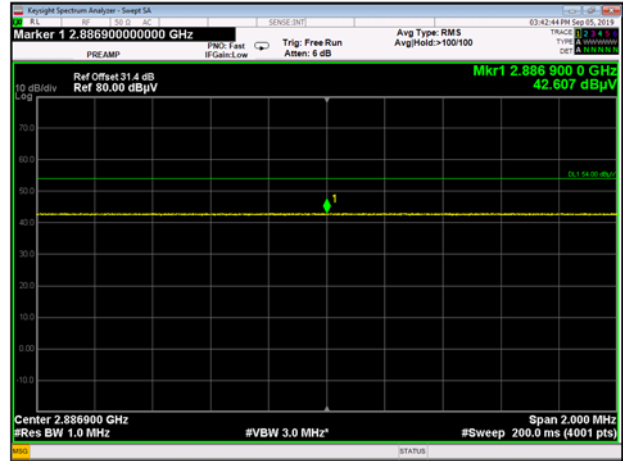

## A.8 Power Spectral Density (PSD)

Note: The Power Spectral Density (PSD) please refer to the Report No. 170524-01.TR04 (FCC ID: PD99260NG) (ISED ID: 1000M-9260NG) (which issued by Intel Mobile Communications France S.A.S – WRF Lab on Jul. 17, 2017), **Section B.2.3 Power Spectral Density & B.3.4 Power Spectral Density.**



## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-EC1980077-AR.pdf".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-EC1980077-AW.pdf".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-EC1980077-AI.pdf".

--END OF REPORT--