

## FCC 47 CFR PART 15 SUBPART E

### TEST REPORT

For

**Xerox TMS**

**Model: IVU-4000**

**Trade Name: xerox**

*Issued to*

**Advantech Co.Ltd.  
No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114,  
Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.  
No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City 24891, Taiwan. (R.O.C.)  
<http://www.ccsrf.com>  
[service@ccsrf.com](mailto:service@ccsrf.com)  
Issued Date: June 1, 2016**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	June 1, 2016	Initial Issue	ALL	Doris Chu

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. TEST METHODOLOGY.....</b>	<b>6</b>
3.1 EUT CONFIGURATION.....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	7
3.5 DESCRIPTION OF TEST MODES.....	8
<b>4. INSTRUMENT CALIBRATION .....</b>	<b>10</b>
4.1 MEASURING INSTRUMENT CALIBRATION.....	10
4.2 MEASUREMENT EQUIPMENT USED.....	10
4.3 MEASUREMENT UNCERTAINTY.....	11
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
5.1 FACILITIES.....	12
5.2 EQUIPMENT.....	12
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	12
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	13
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>14</b>
6.1 SETUP CONFIGURATION OF EUT .....	14
6.2 SUPPORT EQUIPMENT .....	14
<b>7. FCC PART 15 REQUIREMENTS .....</b>	<b>15</b>
7.1 26 DB EMISSION BANDWIDTH .....	15
7.2 MAXIMUM CONDUCTED OUTPUT POWER.....	35
7.3 BAND EDGES MEASUREMENT.....	39
7.4 PEAK POWER SPECTRAL DENSITY.....	91
7.5 RADIATED UNDESIRABLE EMISSION .....	111
7.6 POWERLINE CONDUCTED EMISSIONS.....	167
7.7 FREQUENCY STABILITY.....	168
7.8 DYNAMIC FREQUENCY SELECTION.....	170
<b>APPENDIX I PHOTOGRAPHS OF TEST SETUP.....</b>	<b>188</b>

# 1. TEST RESULT CERTIFICATION

**Applicant:** Advantech Co.Ltd.  
 No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,  
 Taipei 114, Taiwan, R.O.C.

**Manufacturer:** Advantech Co.Ltd.  
 No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,  
 Taipei 114, Taiwan, R.O.C.

**Equipment Under Test:** Xerox TMS

**Model Number:** IVU-4000

**Trade Name:** xerox

**Date of Test:** May 12 ~27, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted


**We hereby certify that:**

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

*Approved by:*

*Tested by:*

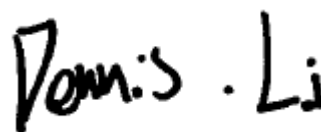Miller Lee  
 Manager  
 Compliance Certification Services Inc.

Dennis Li  
 Engineer  
 Compliance Certification Services Inc.

## 2. EUT DESCRIPTION

<b>Product</b>	Xerox TMS				
<b>Model Number</b>	IVU-4000				
<b>Trade Name</b>	xerox				
<b>Model Discrepancy</b>	N/A				
<b>Received Date</b>	May 15, 2016				
<b>Power supply</b>	Powered from host device.				
<b>Operating Frequency Range &amp; Number of Channels</b>		<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Number of Channels</b>	
	U-NII-1	IEEE 802.11a	5180 ~ 5240	4 Channels	
		IEEE 802.11n HT 20 MHz	5180 ~ 5240	4 Channels	
		IEEE 802.11n HT 40 MHz	5190 ~ 5230	2 Channels	
	U-NII-2A	IEEE 802.11a	5260 ~ 5320	4 Channels	
		IEEE 802.11n HT 20 MHz	5260 ~ 5320	4 Channels	
		IEEE 802.11n HT 40 MHz	5270 ~ 5310	2 Channels	
	U-NII-2C	IEEE 802.11a	5500 ~ 5700	8 Channels	
		IEEE 802.11n HT 20 MHz	5500 ~ 5700	8 Channels	
		IEEE 802.11n HT 40 MHz	5510 ~ 5670	5 Channels	
<b>Transmit Power</b>		<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Output Power (dBm)</b>	<b>Output Power (w)</b>
	U-NII-1	IEEE 802.11a	5180 ~ 5240	13.77	0.0238
		IEEE 802.11n HT 20 MHz	5180 ~ 5240	13.77	0.0238
		IEEE 802.11n HT 40 MHz	5190 ~ 5230	15.88	0.0387
	U-NII-2A	IEEE 802.11a	5260 ~ 5320	13.77	0.0238
		IEEE 802.11n HT 20 MHz	5260 ~ 5320	14.24	0.0265
		IEEE 802.11n HT 40 MHz	5270 ~ 5310	16.65	0.0462
	U-NII-2C	IEEE 802.11a	5500 ~ 5700	13.15	0.0207
		IEEE 802.11n HT 20 MHz	5500 ~ 5700	14.41	0.0276
		IEEE 802.11n HT 40 MHz	5510 ~ 5670	16.68	0.0466
<b>Modulation Technique</b>	OFDM (64QAM, 16QAM, QPSK, BPSK)				
<b>Antenna Specification</b>	Model: MA230.LBC.002 MONOPOLE Antenna / Gain: 2dBi				

**Remark:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407, KDB 644545 D03 v01 and KDB 789033 D02 v01r02 General UNII Test Procedures New Rules v01r02.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

According to the requirements in ANSI C63.10: 2013, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

##### **Radiated Emissions**

The EUT is placed on the turntable, which is 1.5 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### **3.5 DESCRIPTION OF TEST MODES**

The EUT (model: IVU-4000) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

#### **U-NII-1:**

##### **IEEE 802.11a for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6.5Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:**

Channel Low (5190MHz) and Channel High (5230MHz) with 13.5Mbps data rate were chosen for full testing.

#### **U-NII-2A:**

##### **IEEE 802.11a for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 20 MHz for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6.5Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 40 MHz for 5270 ~ 5310MHz:**

Channel Low (5270MHz) and Channel High (5310MHz) with 13.5Mbps data rate were chosen for full testing.



**U-NII-2C:****IEEE 802.11a for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5580MHz) and Channel High (5700MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz for 5510 ~ 5670MHz:**

Channel Low (5510MHz), Channel Mid (5550MHz) and Channel High (5670MHz) with 13.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
DC Power Supplies	GW Instek	SPS-3610	GPE880163	01/19/2016	01/18/2017
Power Meter	Anritsu	ML2495A	1012009	07/08/2015	07/07/2016
Power Sensor	Anritsu	MA2411B	917072	07/08/2015	07/07/2016
Signal Analyzer	R&S	FSV 40	101073	07/20/2015	07/19/2016
Spectrum Analyzer	Agilent	E4446A	US42510268	02/15/2016	02/14/2017
Thermostatic/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/08/2015	10/07/2016
Vector Signal Generator	R&S	SMU 200A	102239	03/10/2016	03/09/2017
AC Power Source	EXTECH	6205	1140845	N.C.R	N.C.R

Wugu 966 Chamber A					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB3	A030105	08/06/2015	08/05/2016
EMI Test Receiver	R&S	ESCI	100064	06/04/2015	06/03/2016
Horn Antenna	EMCO	3117	55165	02/24/2016	02/23/2017
Horn Antenna	EMCO	3116	26370	01/15/2016	01/14/2017
K Type Cable	Huber+Suhner	SUCOFLEX 102	29406/2	01/12/2016	01/11/2017
K Type Cable	Huber+Suhner	SUCOFLEX 102	22470/2	01/12/2016	01/11/2017
Pre-Amplifier	MITEQ	AMF-6F-2604 00-40-8P	985646	01/14/2016	01/13/2017
Pre-Amplifier	EMCI	EMC 012635	980151	06/05/2015	06/04/2016
Pre-Amplifier	EMCI	EM330	N/A	06/05/2015	06/04/2016
Spectrum Analyzer	Agilent	E4446A	US42510252	12/08/2015	12/07/2016
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	EZ-EMC (CCS-3A1RE)				

Conducted Emission Room # B					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
N/A					

### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, horn and/or Loop. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.




Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

**5.4 TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-247, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

*\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

**Remark:**

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

## 7. FCC PART 15 REQUIREMENTS


### 7.1 26 DB EMISSION BANDWIDTH

#### LIMIT

Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### Test Configuration

#### TEST PROCEDURE



1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as  $RBW > 1\%EBW$ ,  $VBW > RBW$ ,  $Span > 26dB$  bandwidth, and Sweep = auto.
4. Mark the peak frequency and  $-26dB$  (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.

#### TEST RESULTS

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5180	27.6990
Mid	5220	38.7260
High	5240	36.9030

**Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5180	28.9440
Mid	5220	40.4630
High	5240	39.5950

**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5190	49.9000
Mid	5230	87.1200



**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5260	35.9480
Mid	5280	37.4240
High	5320	29.0010

**Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5260	37.7420
Mid	5280	37.1640
High	5320	31.2010

**Test mode: IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5270	72.9400
Mid	5310	46.8900

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5500	31.3170
Mid	5580	39.9420
High	5700	32.8220

**Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5500	32.0120
Mid	5580	42.1130
High	5700	32.1850


**Test mode: IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**

Channel	Frequency (MHz)	26db Bandwidth (MHz)
Low	5510	48.6300
Mid	5550	74.9600
High	5670	48.6300


**Test Plot**

**IEEE 802.11a for 5180 ~ 5240MHz**


**CH Low**

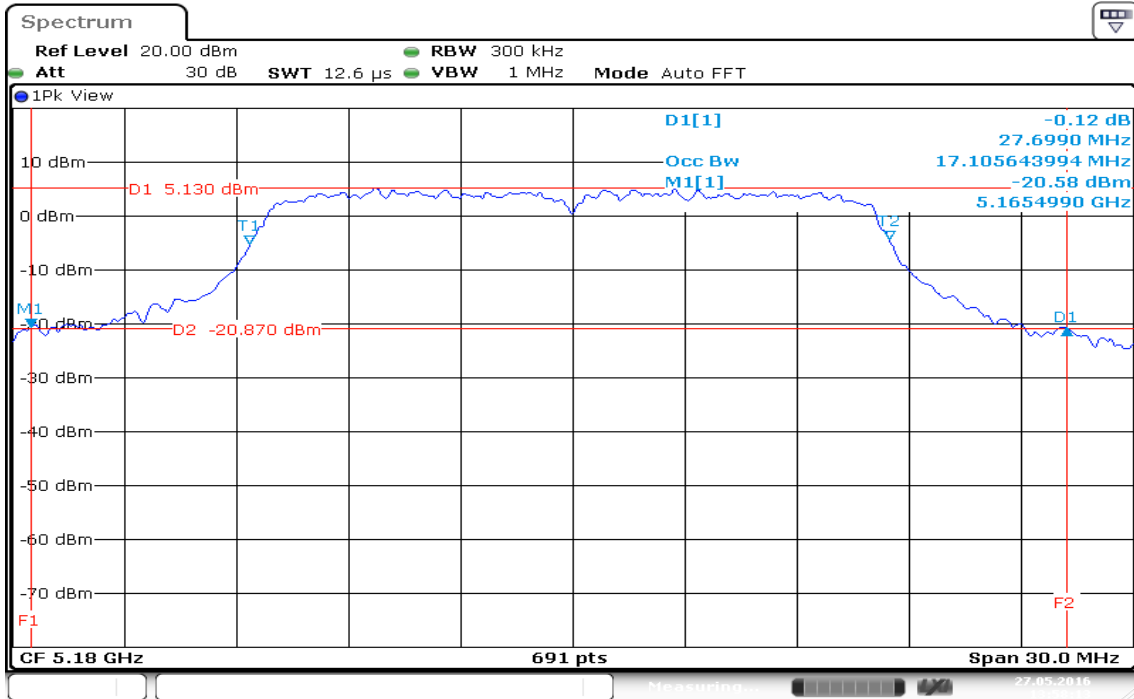

**CH Mid**

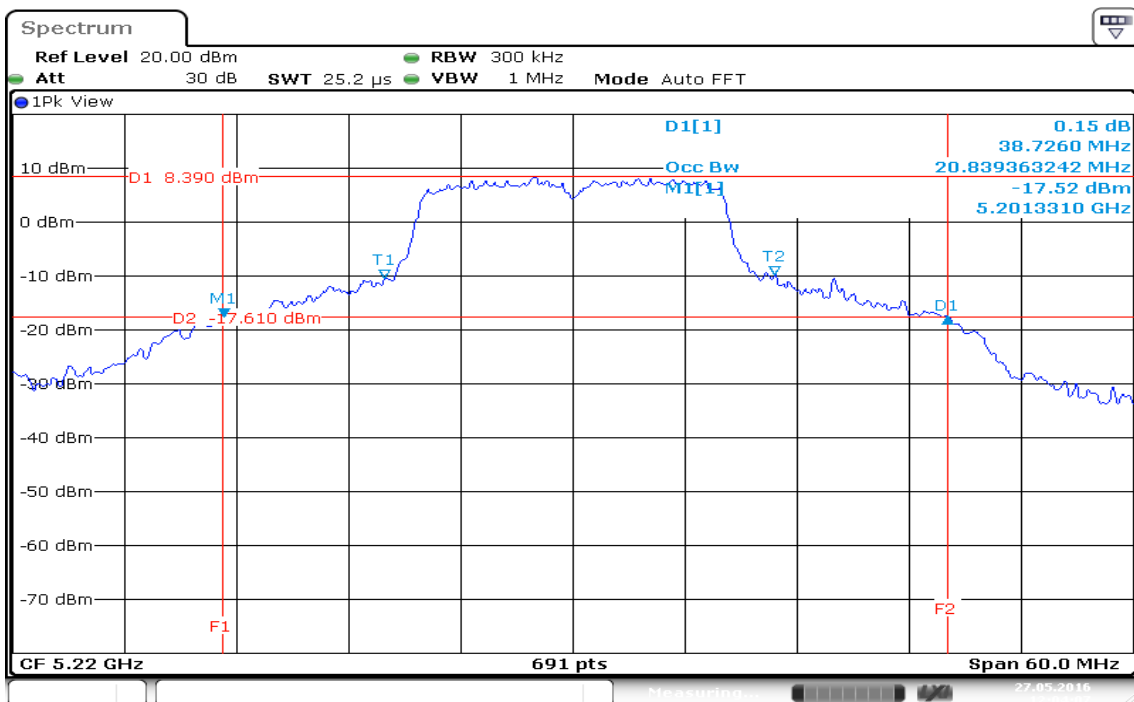


### CH High

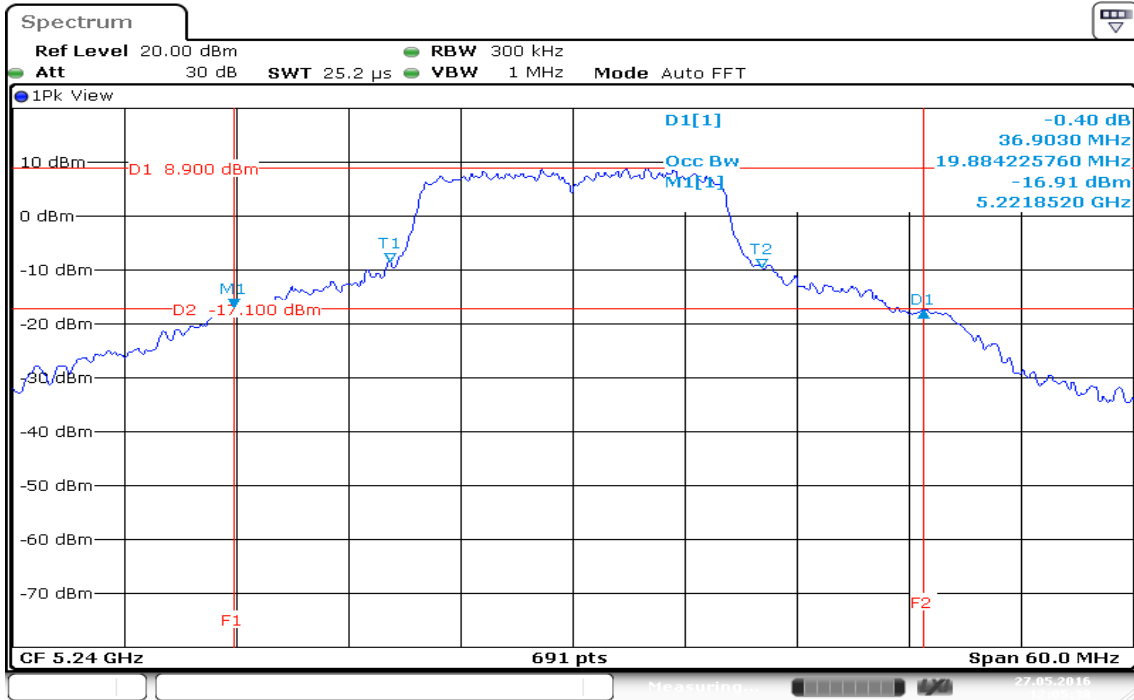

Date: 27.MAY.2016 12:05:38


**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

**CH Low**

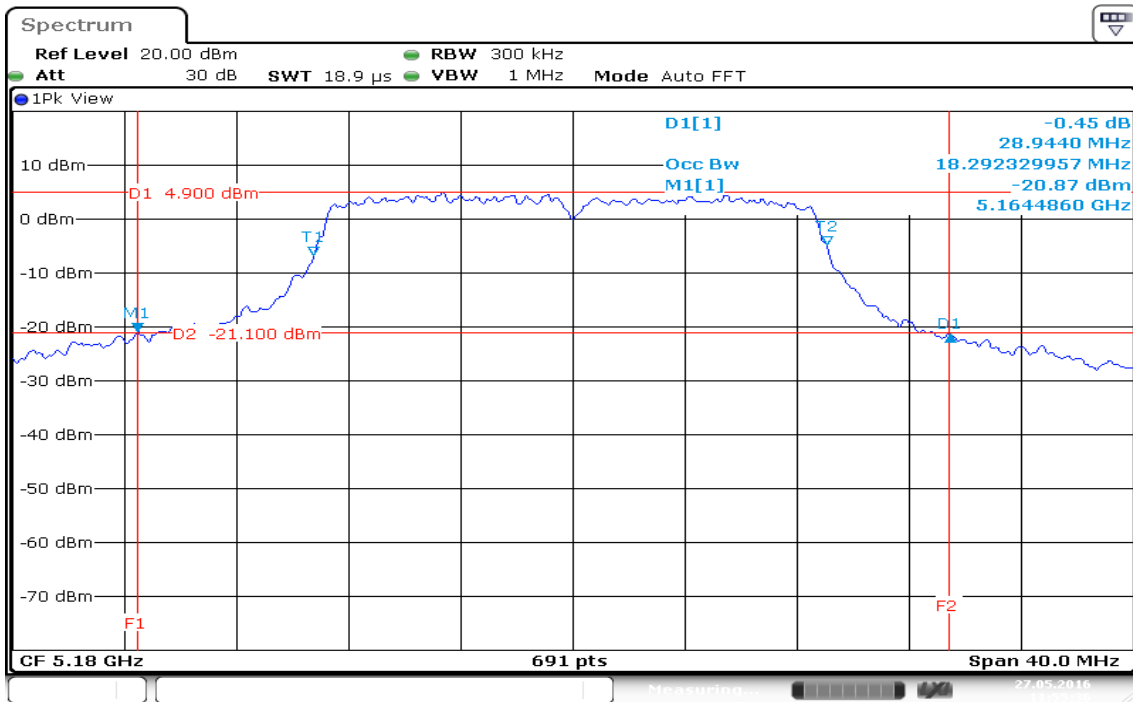


Date: 27.MAY.2016 11:55:36

**CH Mid**

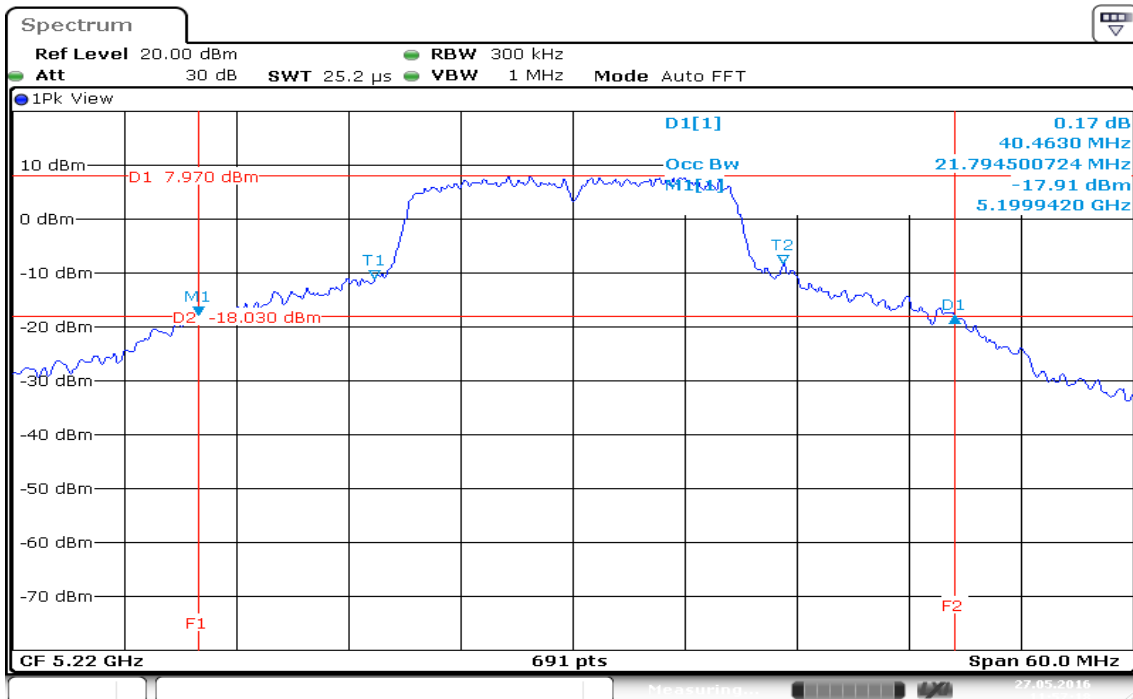

Date: 27.MAY.2016 11:57:18


### CH High

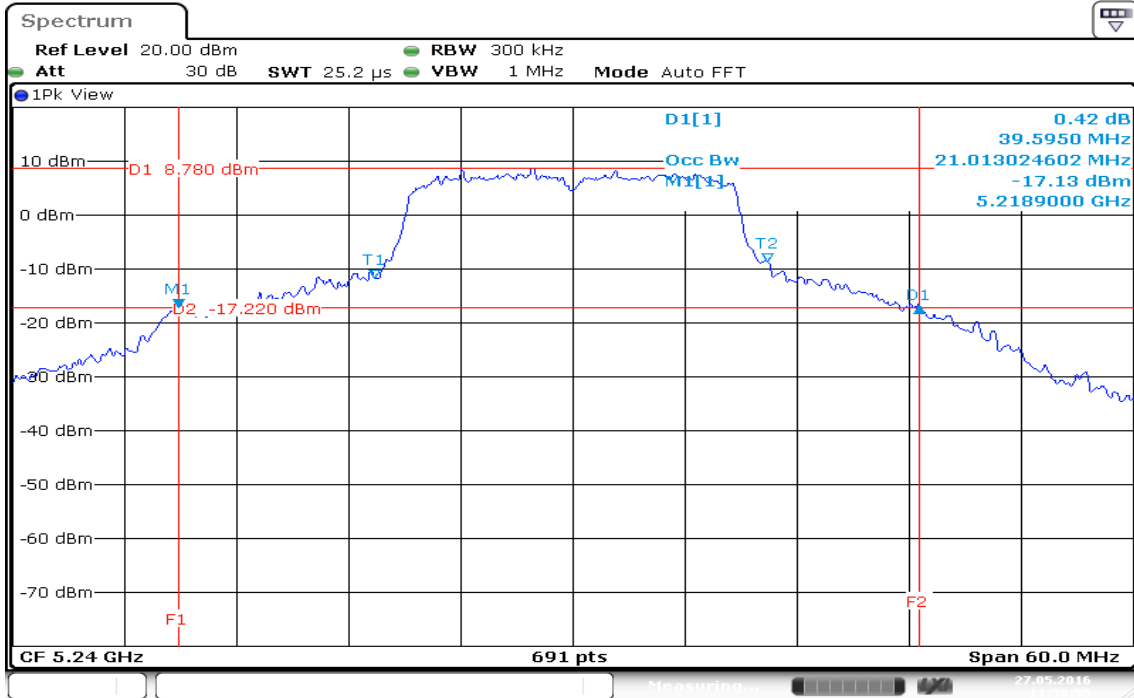


Date: 27.MAY.2016 11:58:55

**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

**CH Low**

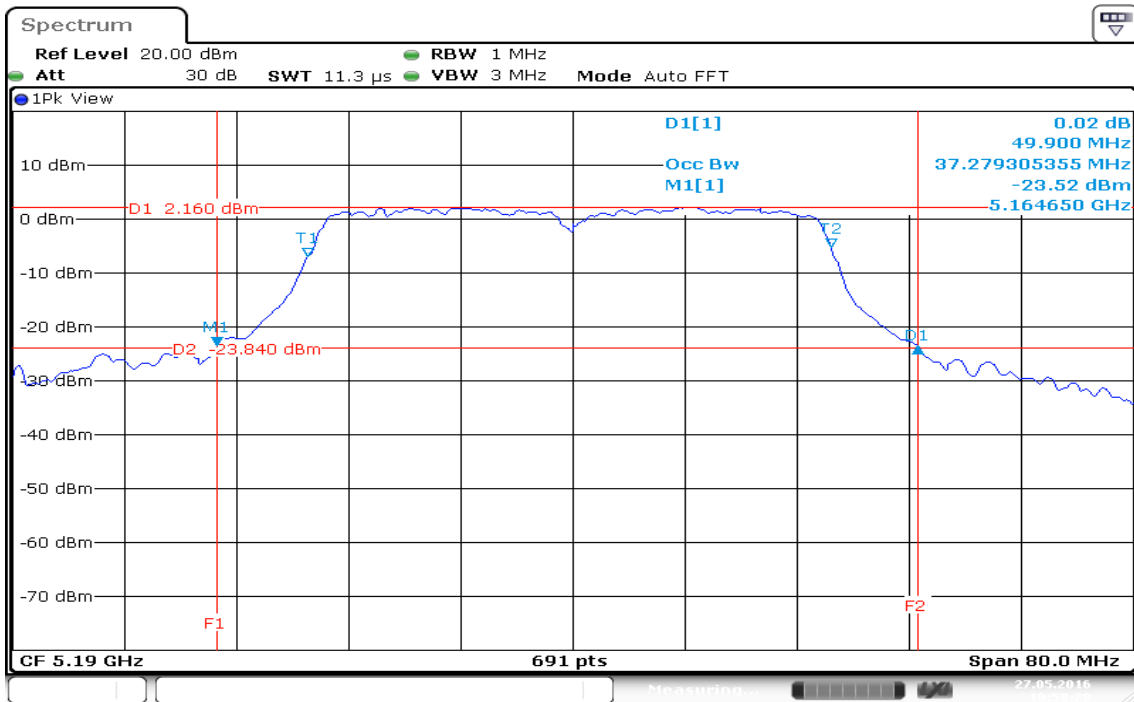


**CH High**

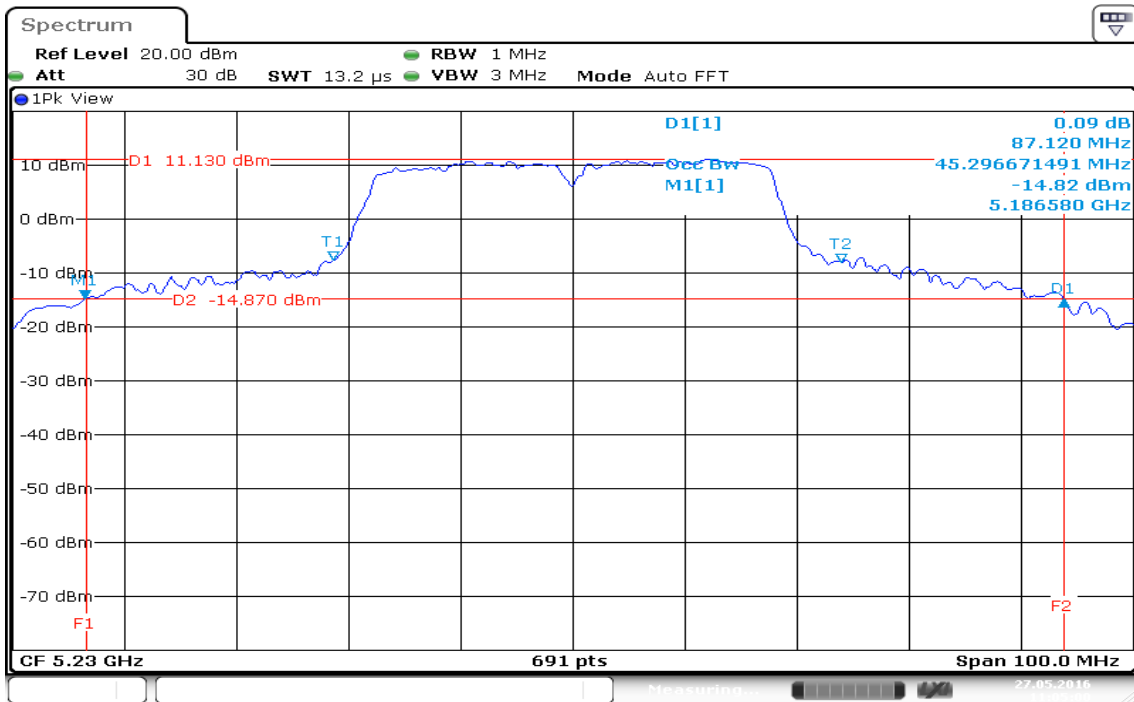


**IEEE 802.11a mode / 5260 ~ 5320MHz**

**CH Low**

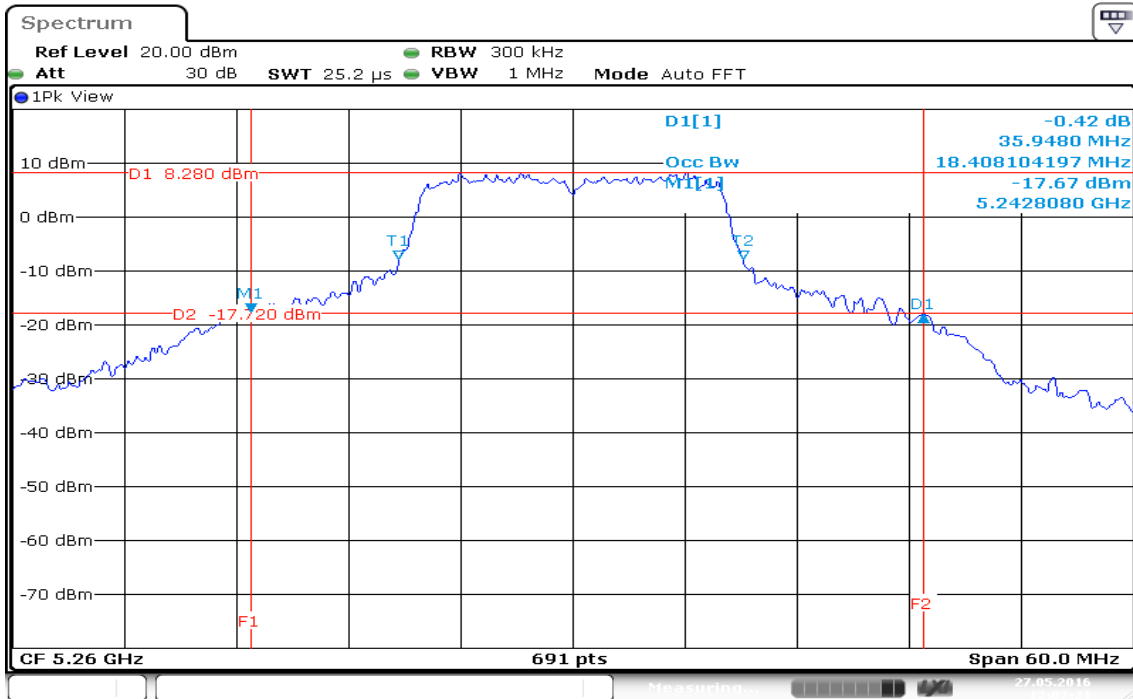

Date: 27.MAY.2016 12:07:21


**CH Mid**

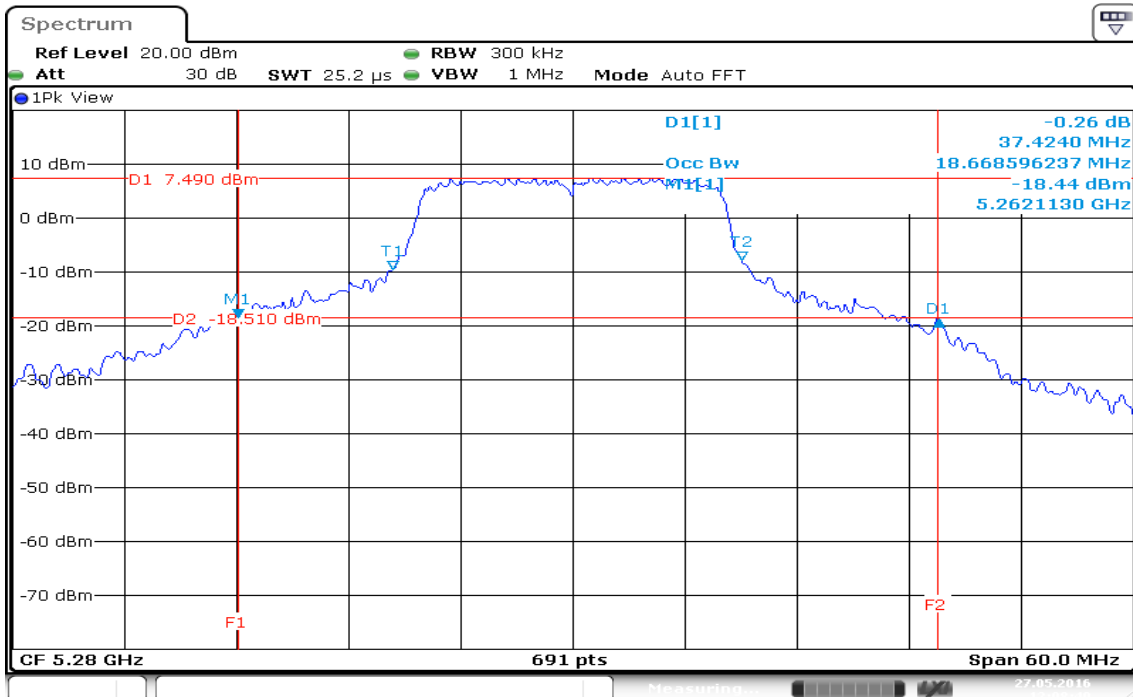

Date: 27.MAY.2016 12:08:40




### CH High

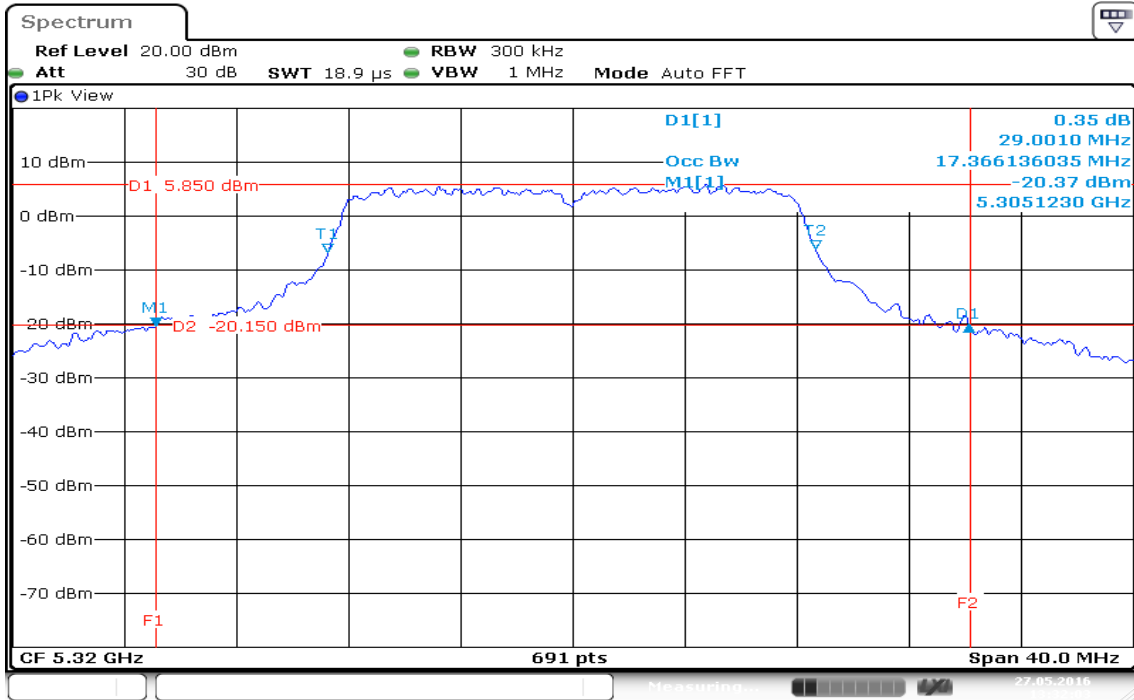

Date: 27.MAY.2016 13:32:03


**IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz**

**CH Low**

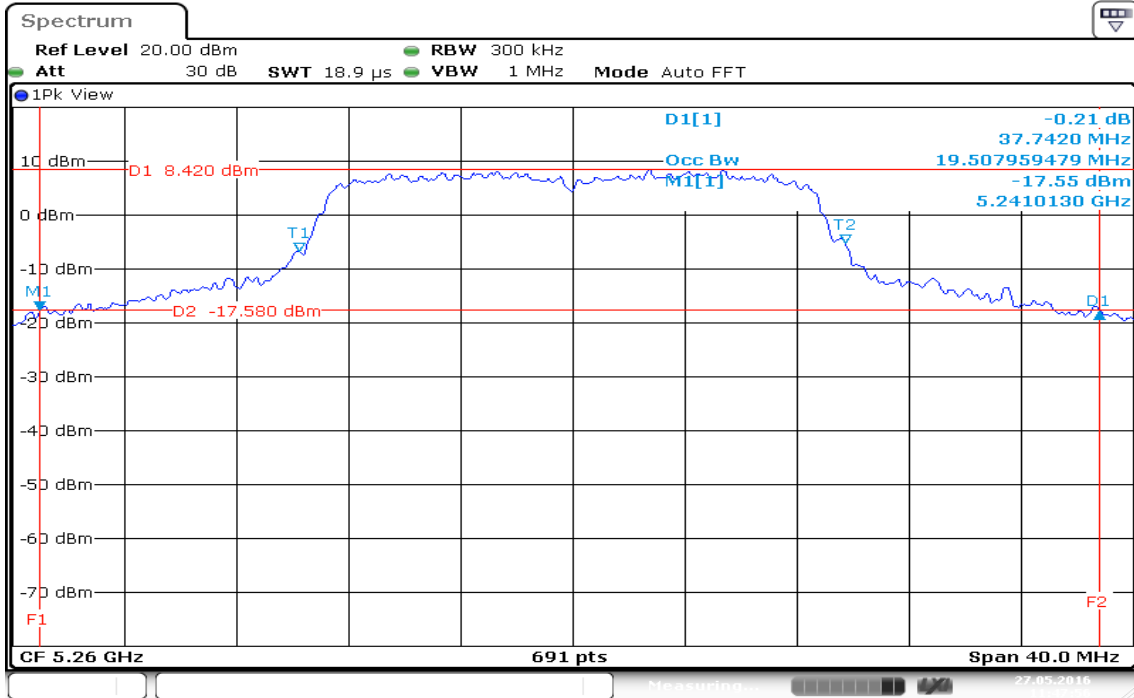


Date: 27.MAY.2016 11:47:56

**CH Mid**

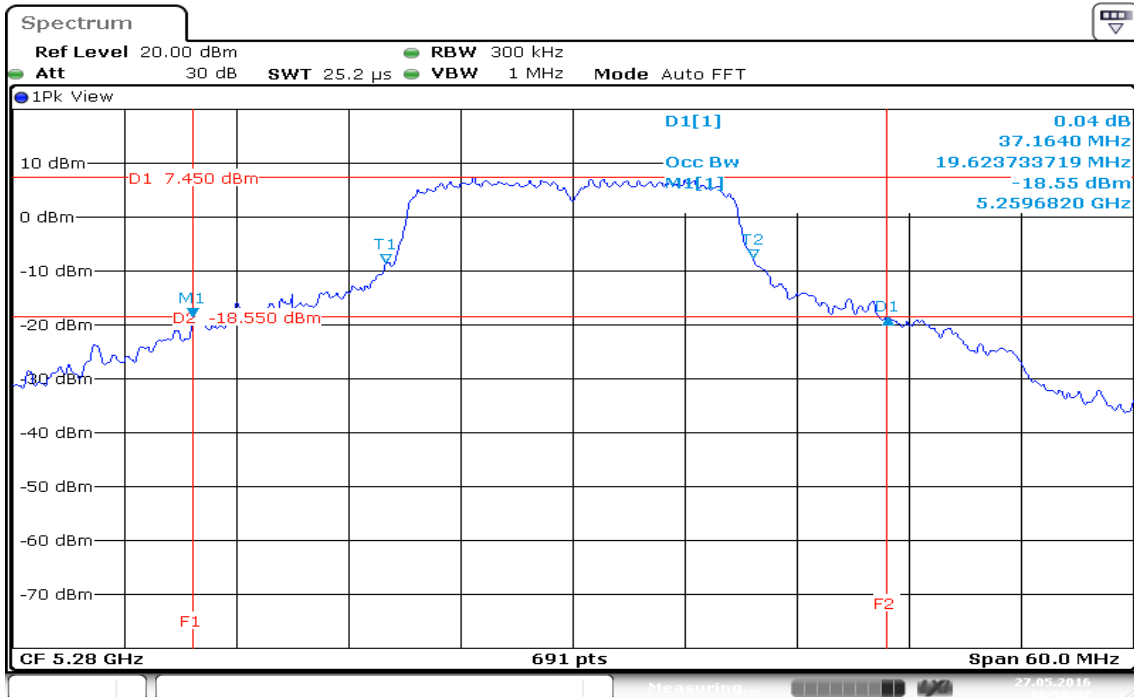

Date: 27.MAY.2016 11:50:27


### CH High

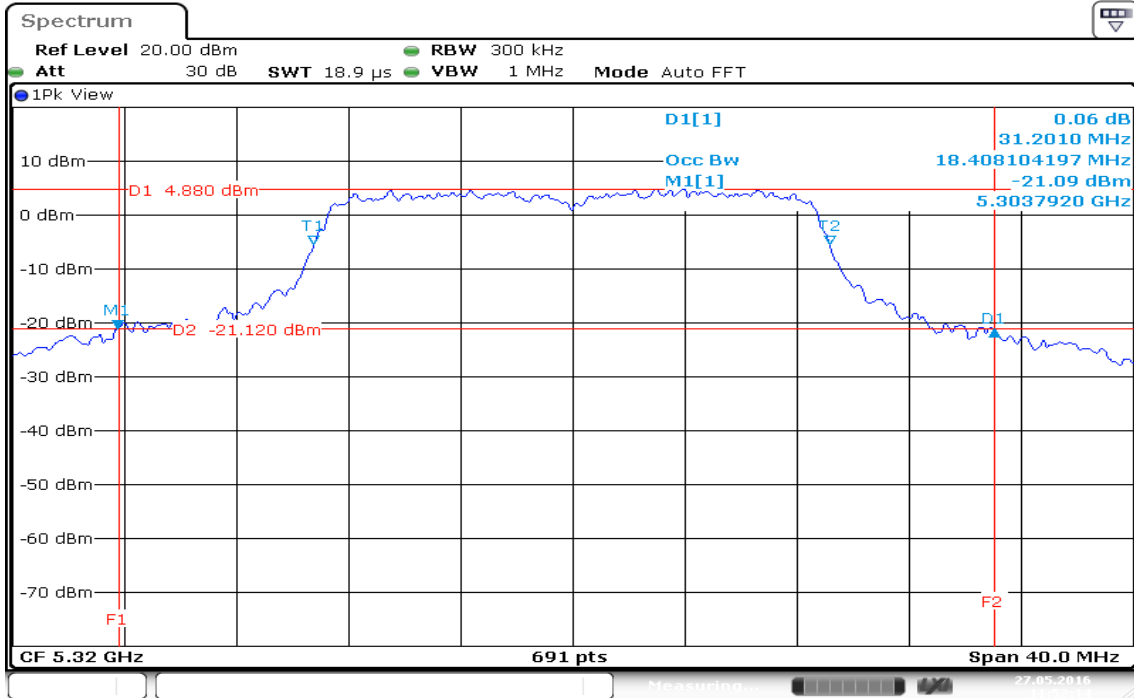

Date: 27.MAY.2016 11:52:13


**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

**CH Low**

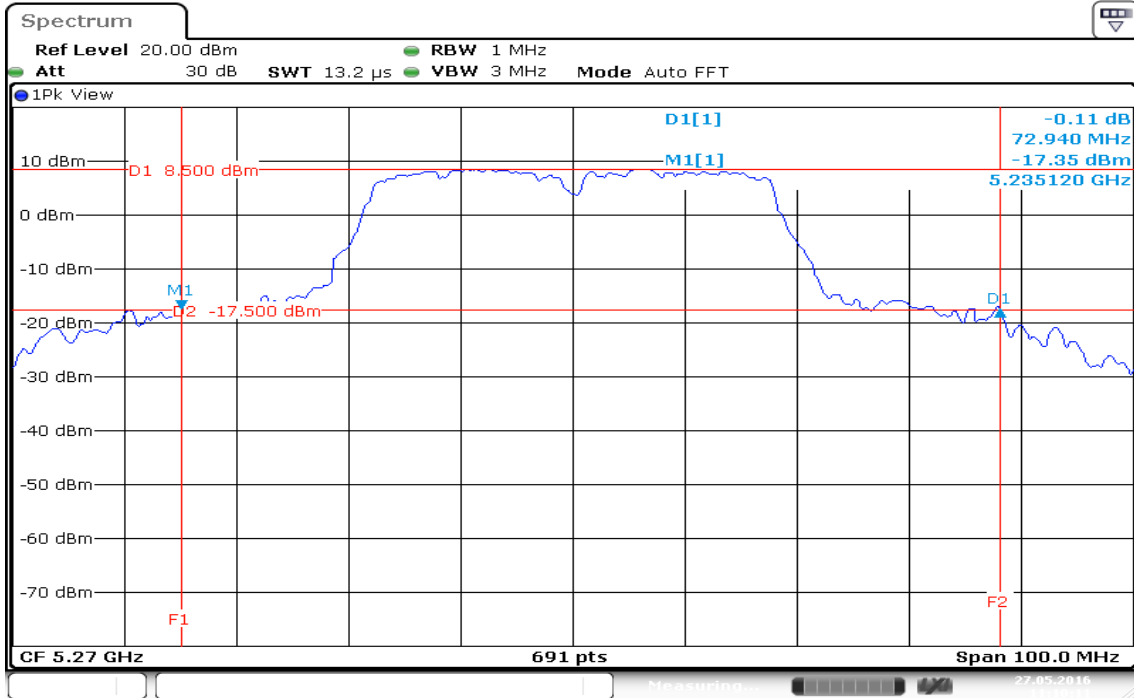

Date: 27.MAY.2016 11:10:11


**CH High**

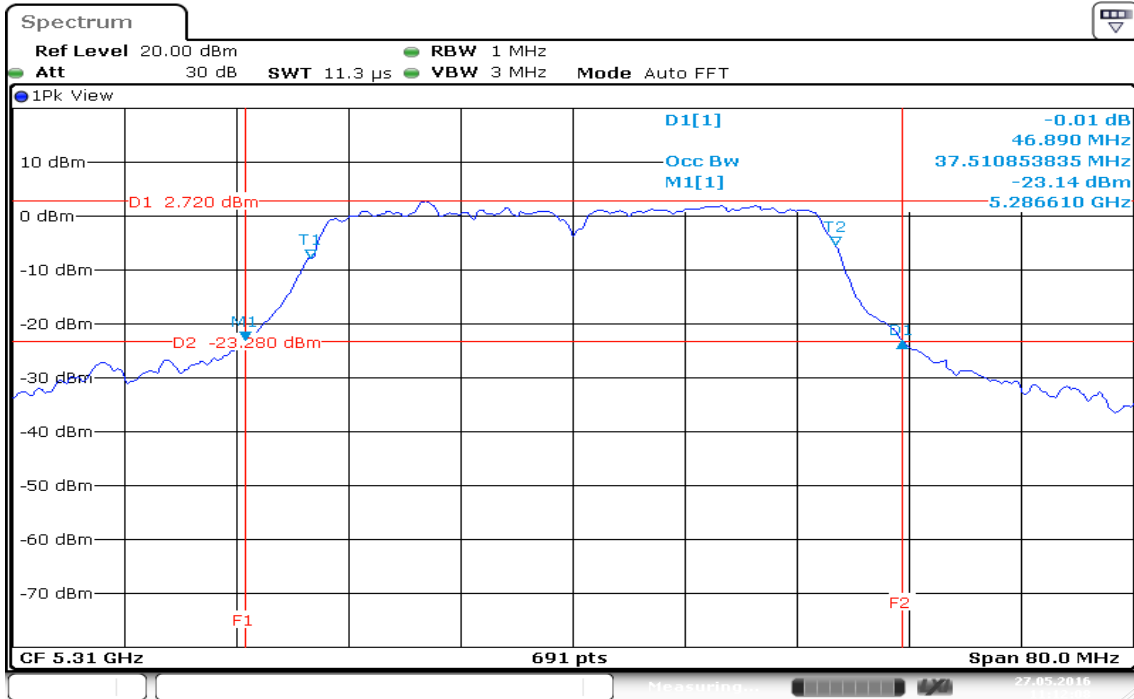


Date: 27.MAY.2016 11:12:08

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**


**CH Low**

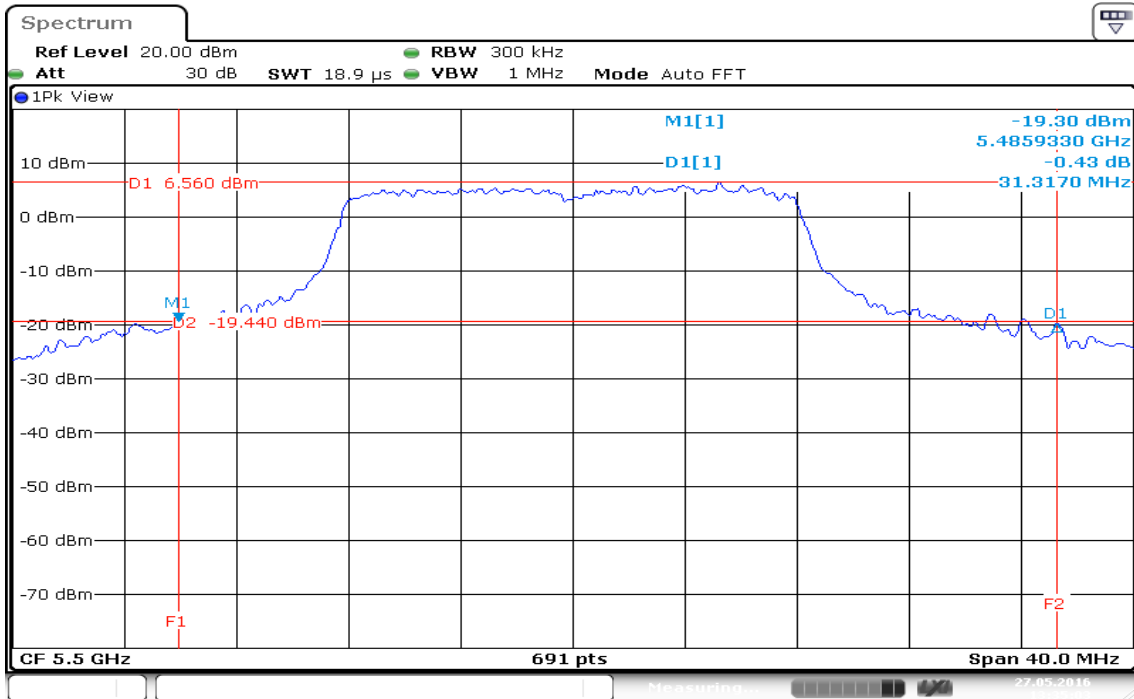

**CH Mid**

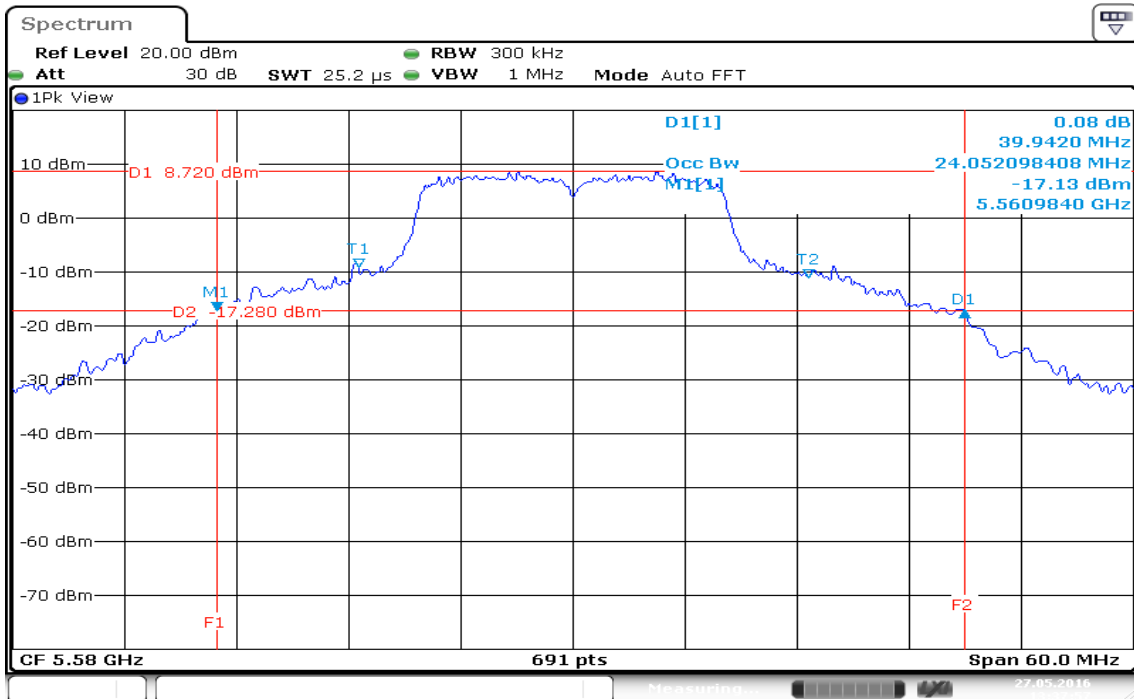


### CH High

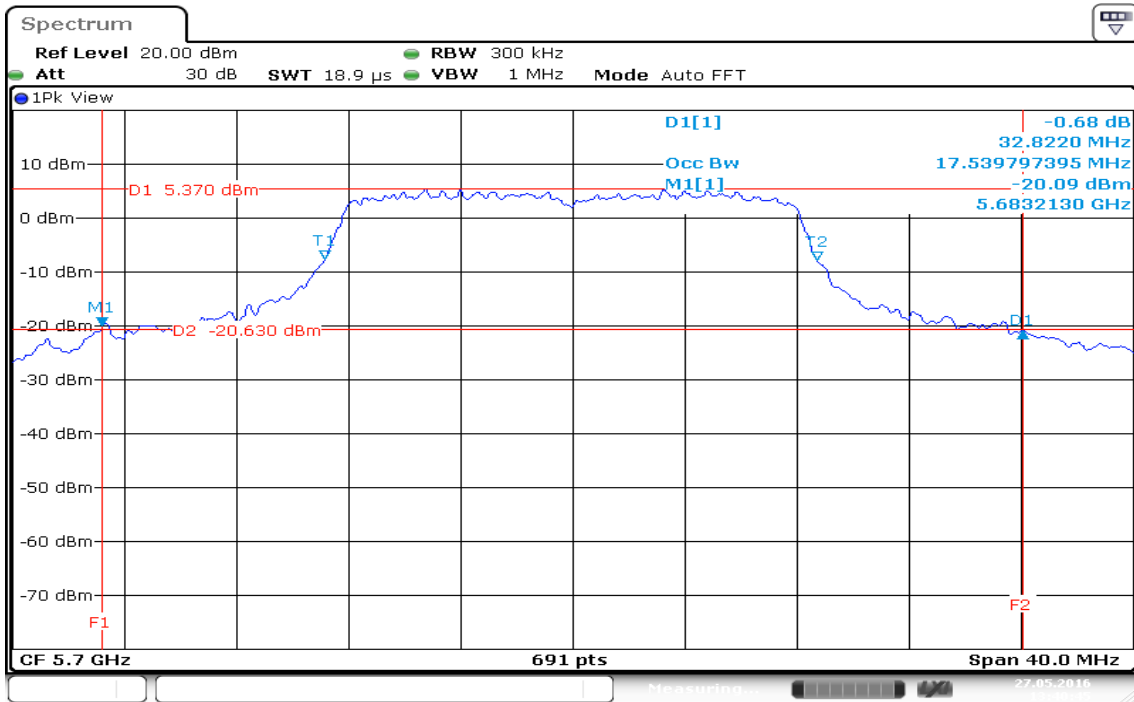


Date: 27.MAY.2016 13:40:45

**IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz**


**CH Low**

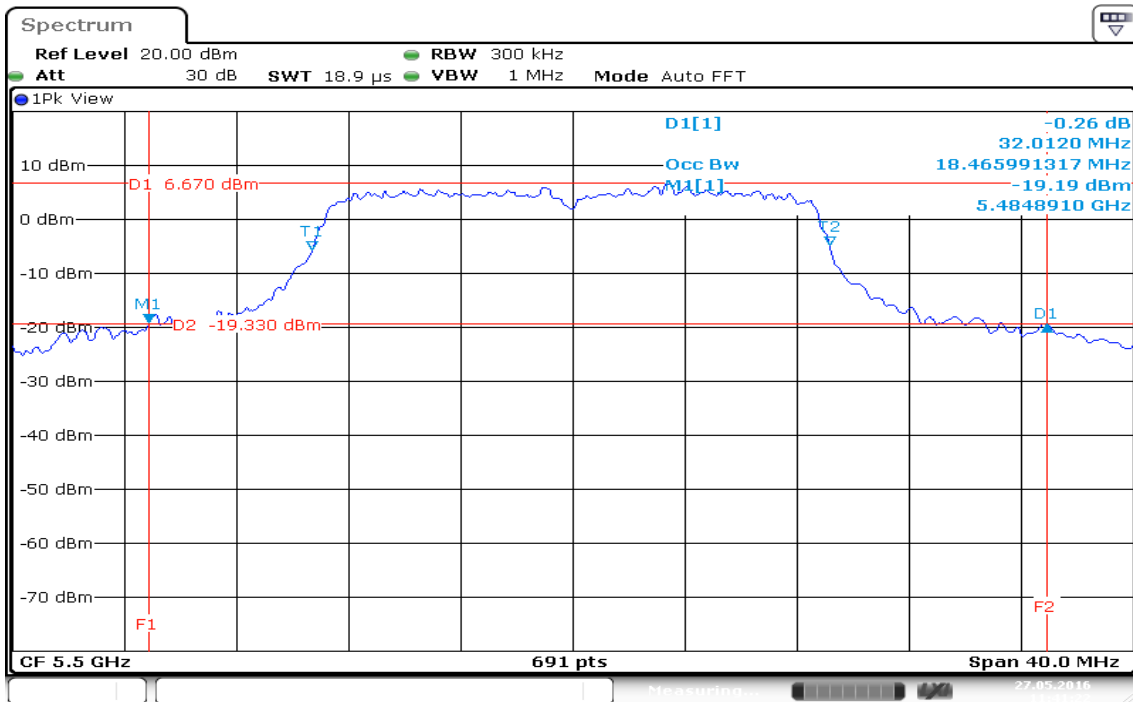

**CH Mid**

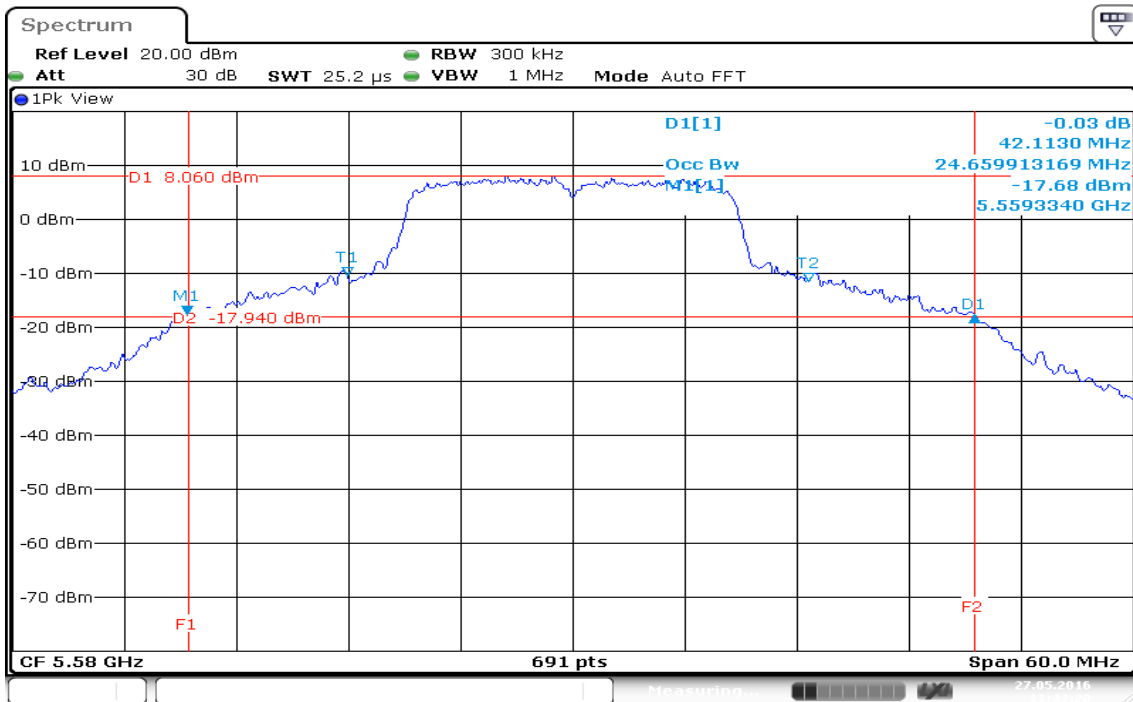

### CH High

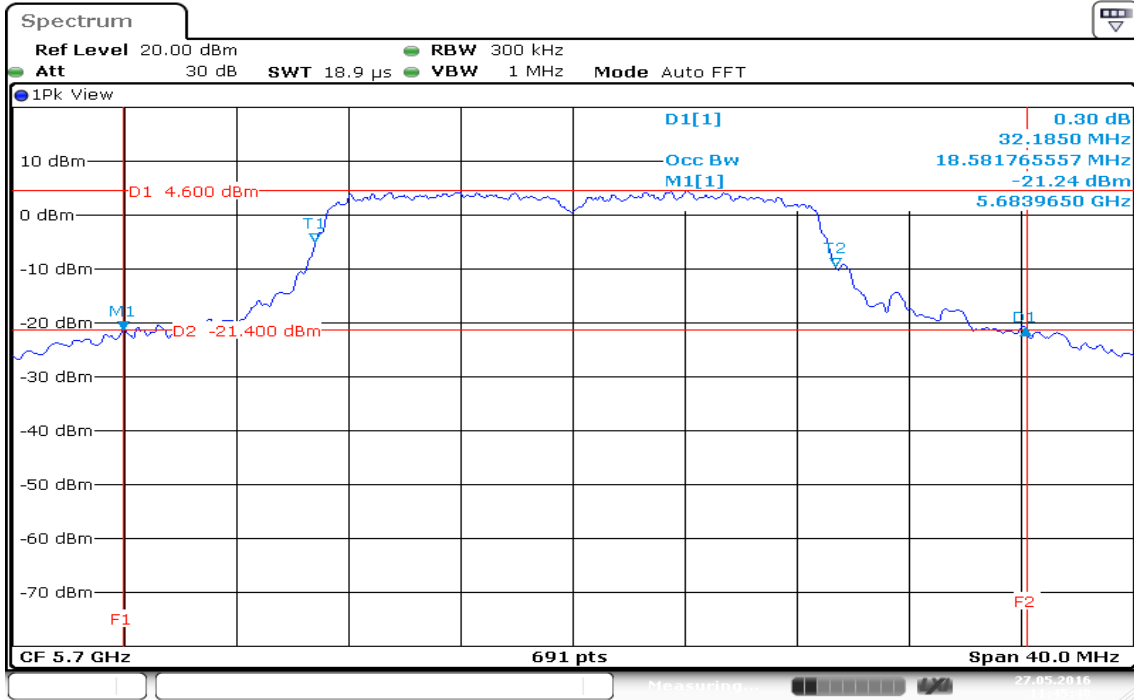


Date: 27.MAY.2016 11:45:48




**IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**


**CH Low**

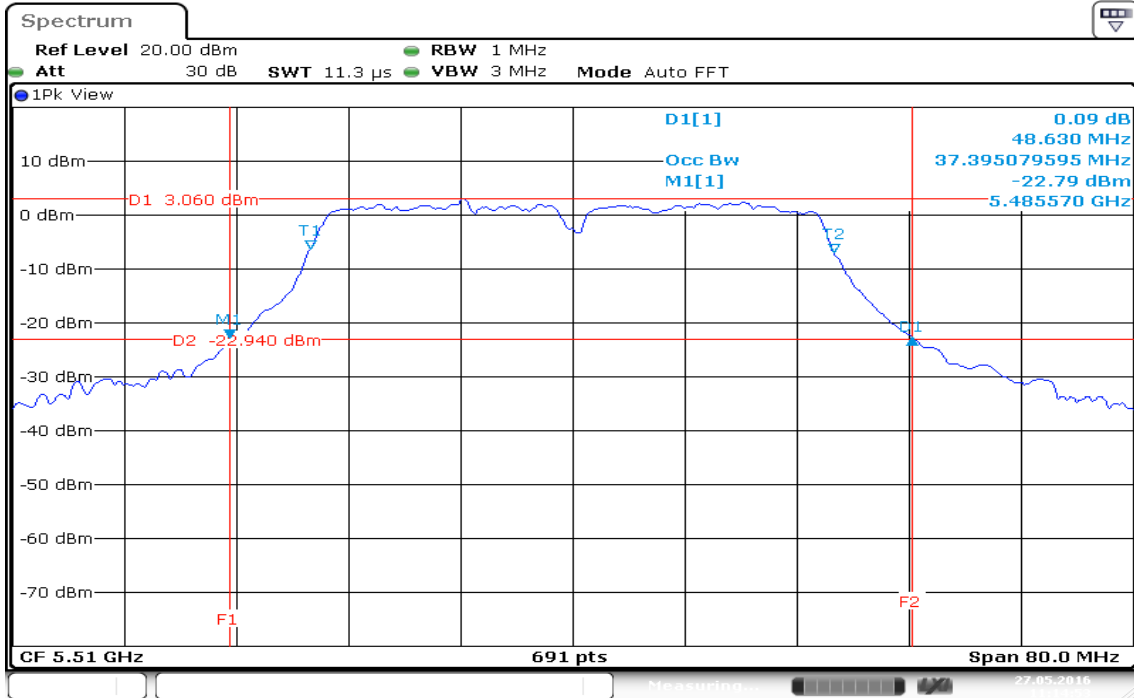

**CH Mid**

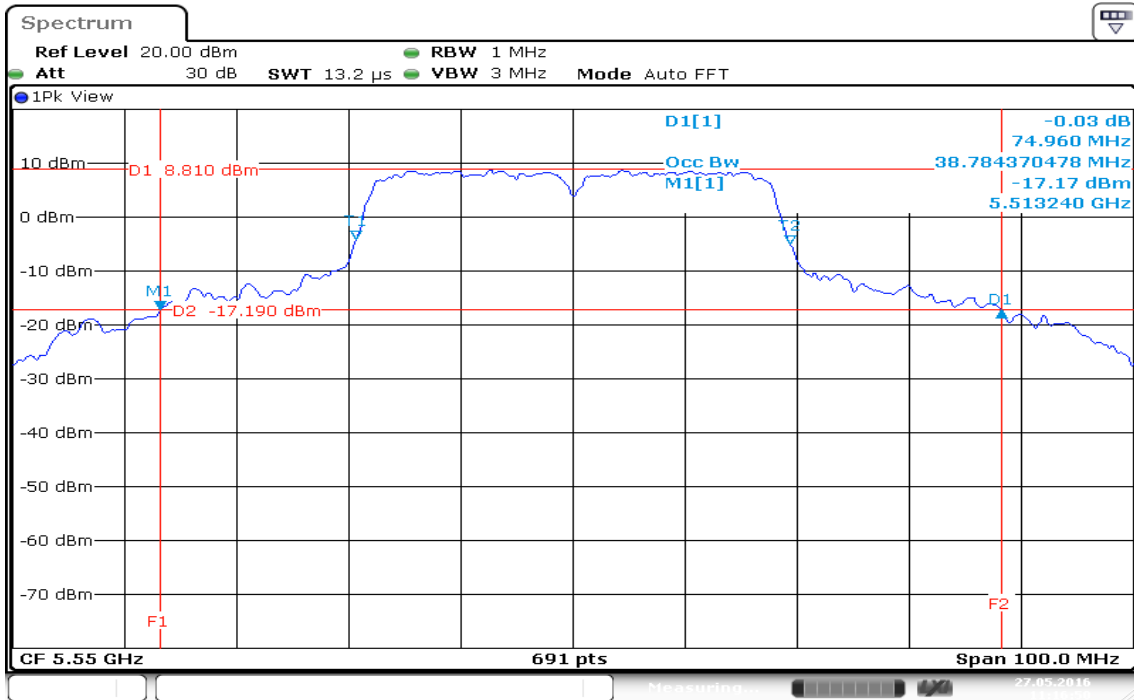

### CH High

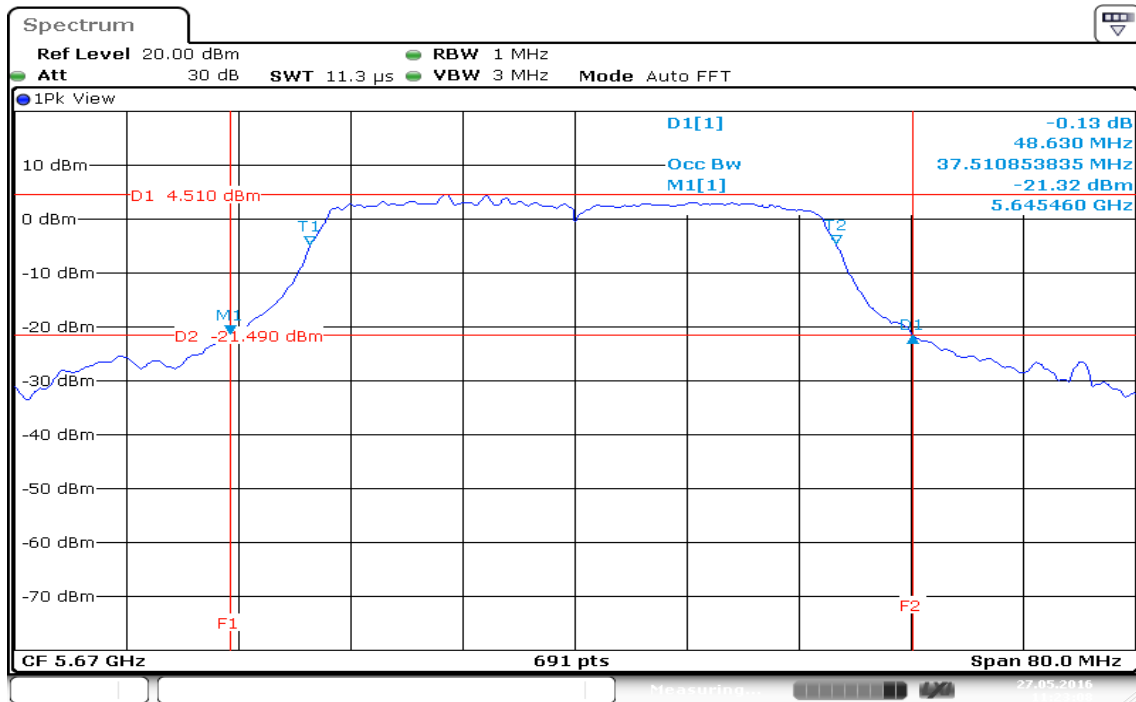

Date: 27.MAY.2016 11:23:08

## 7.2 MAXIMUM CONDUCTED OUTPUT POWER

### LIMIT

According to §15.407(a)

For the band 5.15-5.25 GHz, 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz.


If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi

*In addition, devices with maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W. The peak power shall not exceed the limit as follow:*

### Test Configuration

*The EUT was connected to a spectrum analyzer through a 50Ω RF cable.*

### TEST PROCEDURE



Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run". Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

**TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5180	<b>*13.77</b>	0.0238	24.00
Mid	5220	13.00	0.0200	24.00
High	5240	13.16	0.0207	24.00

**Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5180	<b>*13.77</b>	0.0238	24.00
Mid	5220	13.00	0.0200	24.00
High	5240	13.16	0.0207	24.00

**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5190	10.73	0.0118	24.00
High	5230	<b>*15.88</b>	0.0387	24.00

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5260	13.21	0.0209	24.00
Mid	5280	<b>*13.77</b>	0.0238	24.00
High	5320	12.66	0.0185	24.00

**Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5260	13.16	0.0207	24.00
Mid	5280	<b>*14.24</b>	0.0265	24.00
High	5320	13.59	0.0229	24.00

**Test mode: IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5270	<b>*16.65</b>	0.0462	24.00
High	5310	9.79	0.0095	24.00

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5500	<b>*13.15</b>	0.0207	24.00
Mid	5580	12.67	0.0185	24.00
High	5700	12.73	0.0187	24.00

**Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5720MHz**

Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5500	<b>*14.41</b>	0.0276	24.00
Mid	5580	14.31	0.0270	24.00
High	5700	14.15	0.0260	24.00

**Test mode: IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**


Channel	Frequency (MHz)	Maximum Output Power (dBm)	Maximum Output Power (W)	Limit (dBm)
Low	5510	10.34	0.0108	24.00
Mid	5550	<b>*16.68</b>	0.0466	24.00
High	5670	11.68	0.0147	24.00

## 7.3 BAND EDGES MEASUREMENT

### LIMIT

According to §15.407(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

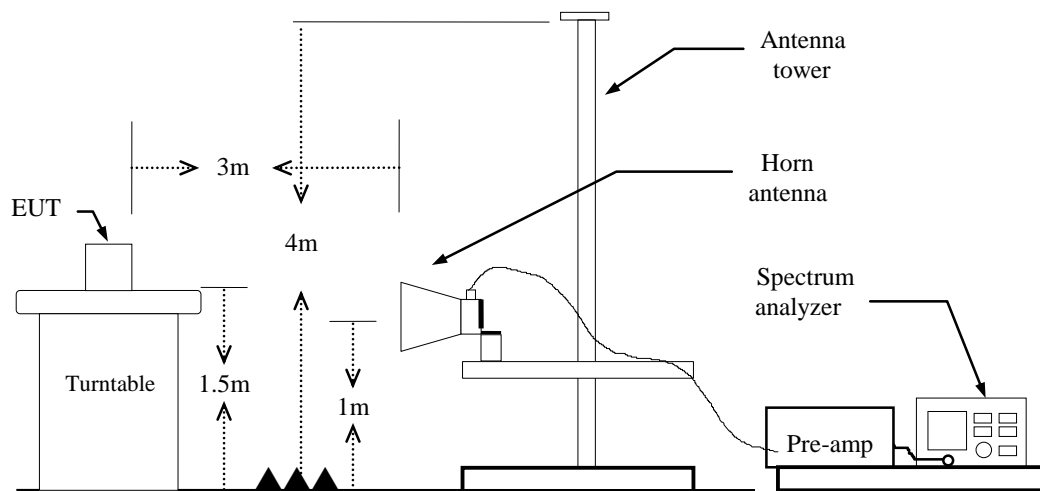

## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz,  
if duty cycle  $\geq 98\%$ , VBW=10Hz.  
if duty cycle  $< 98\%$  VBW=1/T.  
**IEEE 802.11a mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11n HT 20 MHz mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11n HT 40 MHz mode:**  $\geq 98\%$ , VBW=10Hz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

## **TEST RESULTS**


Refer to attach spectrum analyzer data chart.



**U-NII-1**


**IEEE 802.11a Mode / CH Low**

**Detector mode: Peak**

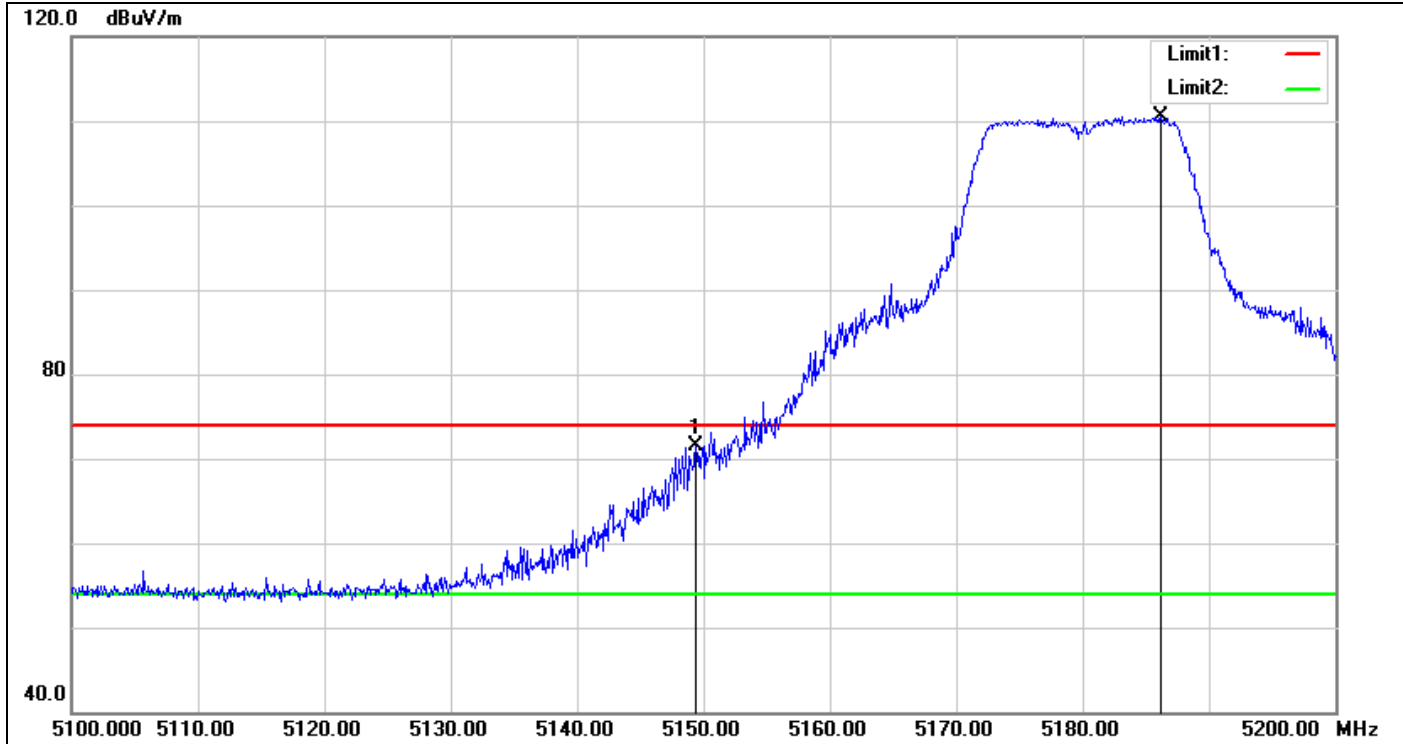

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.400	68.56	3.04	71.60	74.00	-2.40	peak
2	5186.200	106.37	4.09	110.46	-	-	peak


**Detector mode: Average**

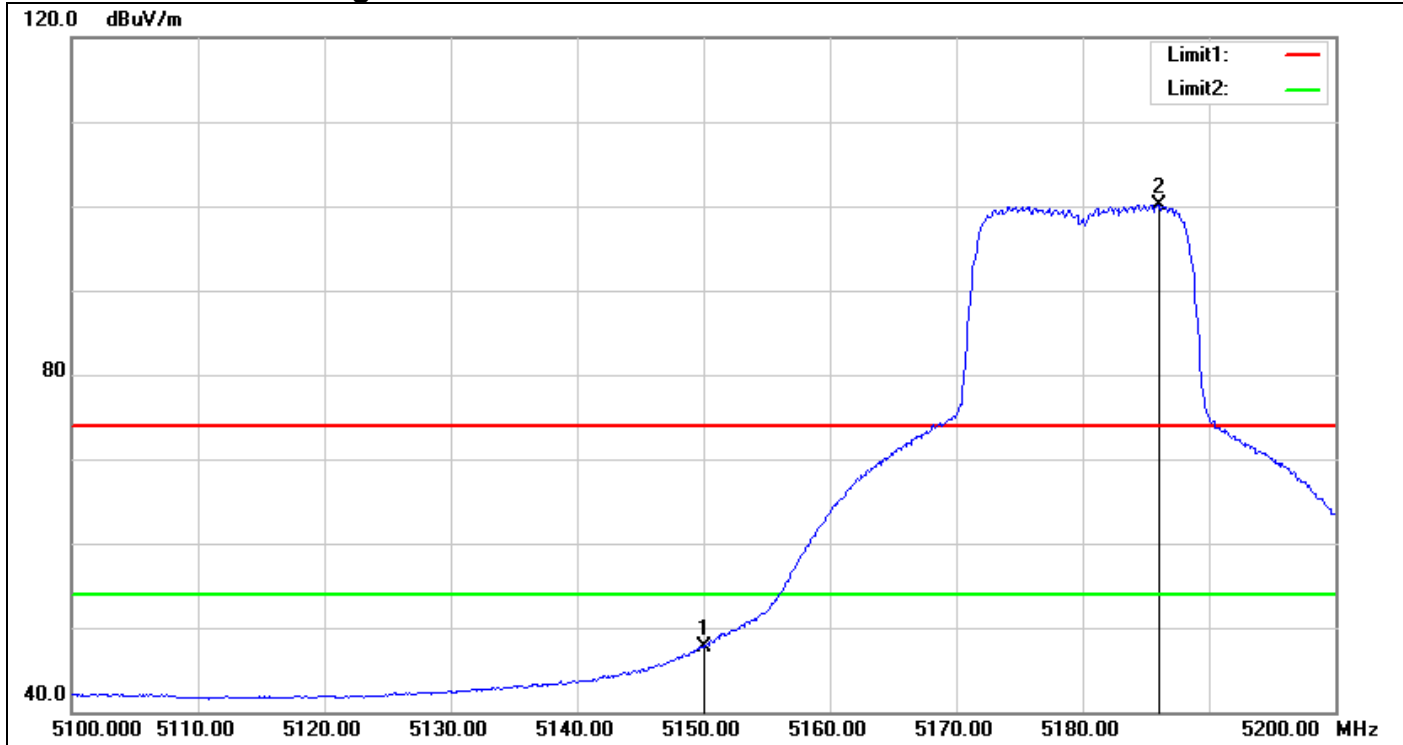

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	44.74	3.04	47.78	54.00	-6.22	AVG
2	5186.000	96.06	4.08	100.14	-	-	AVG


## IEEE 802.11a Mode / CH Mid

Detector mode: Peak

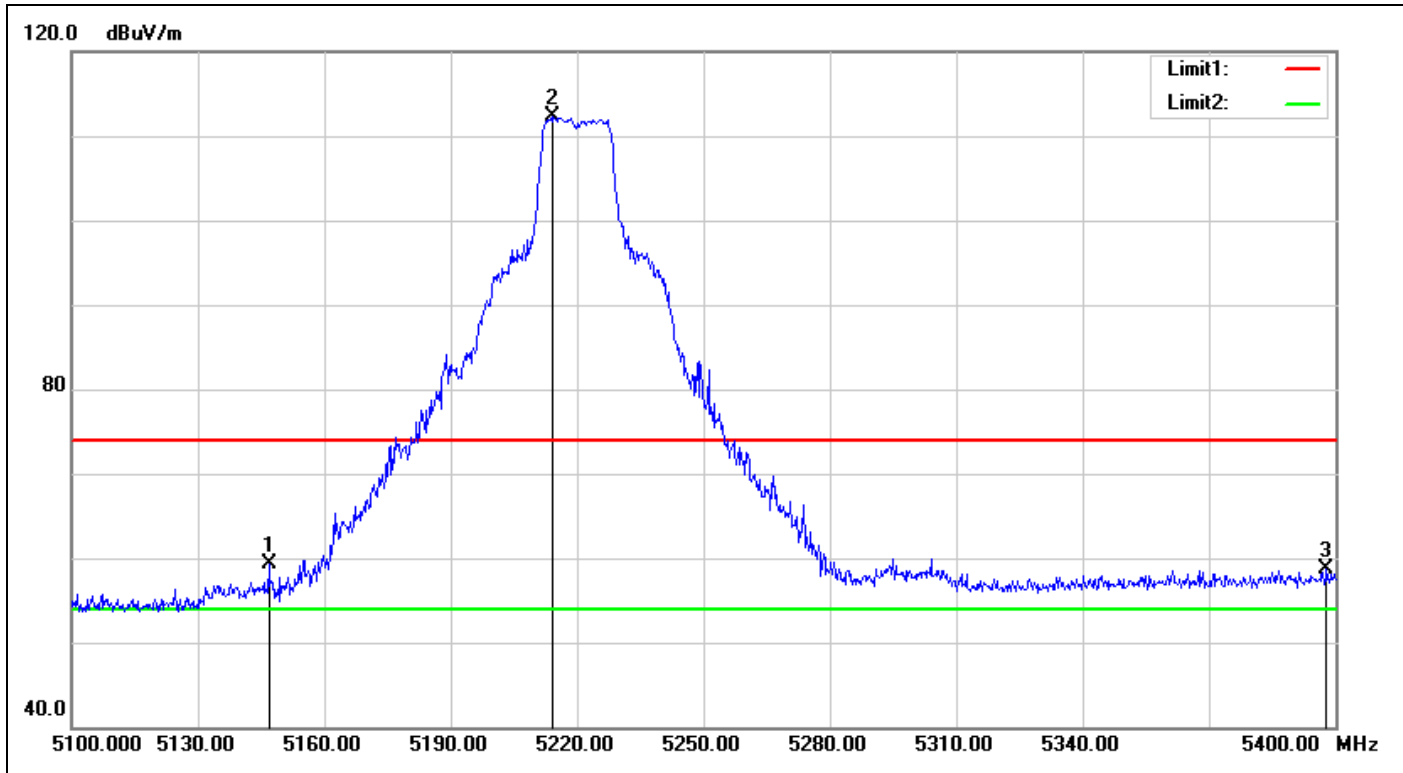

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	56.26	3.02	59.28	74.00	-14.72	peak
2	5214.300	107.72	4.54	112.26	-	-	peak
3	5397.900	52.95	5.70	58.65	74.00	-15.35	peak


**Detector mode: Average**

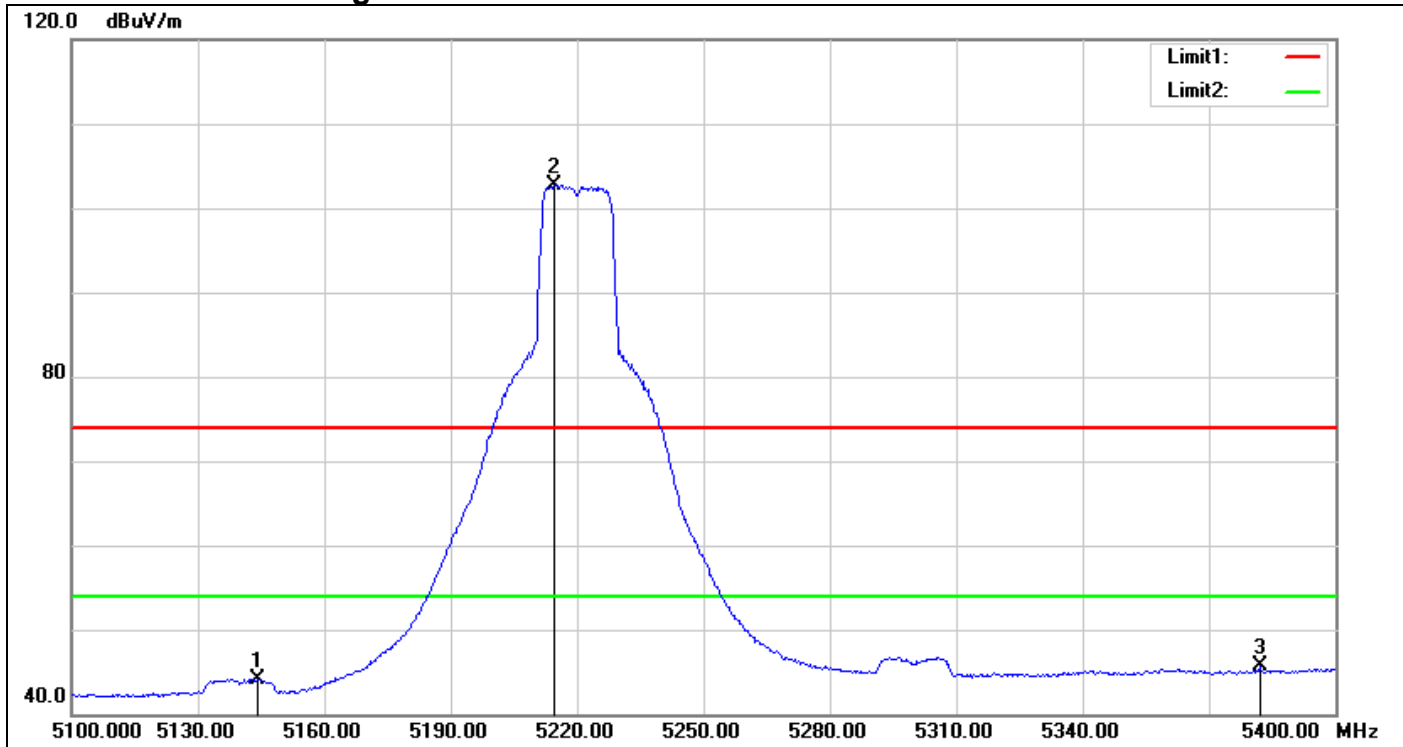

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.100	41.14	3.00	44.14	54.00	-9.86	AVG
2	5214.600	98.25	4.54	102.79	-	-	AVG
3	5382.000	40.03	5.57	45.60	54.00	-8.40	AVG


## IEEE 802.11a Mode / CH High

Detector mode: Peak

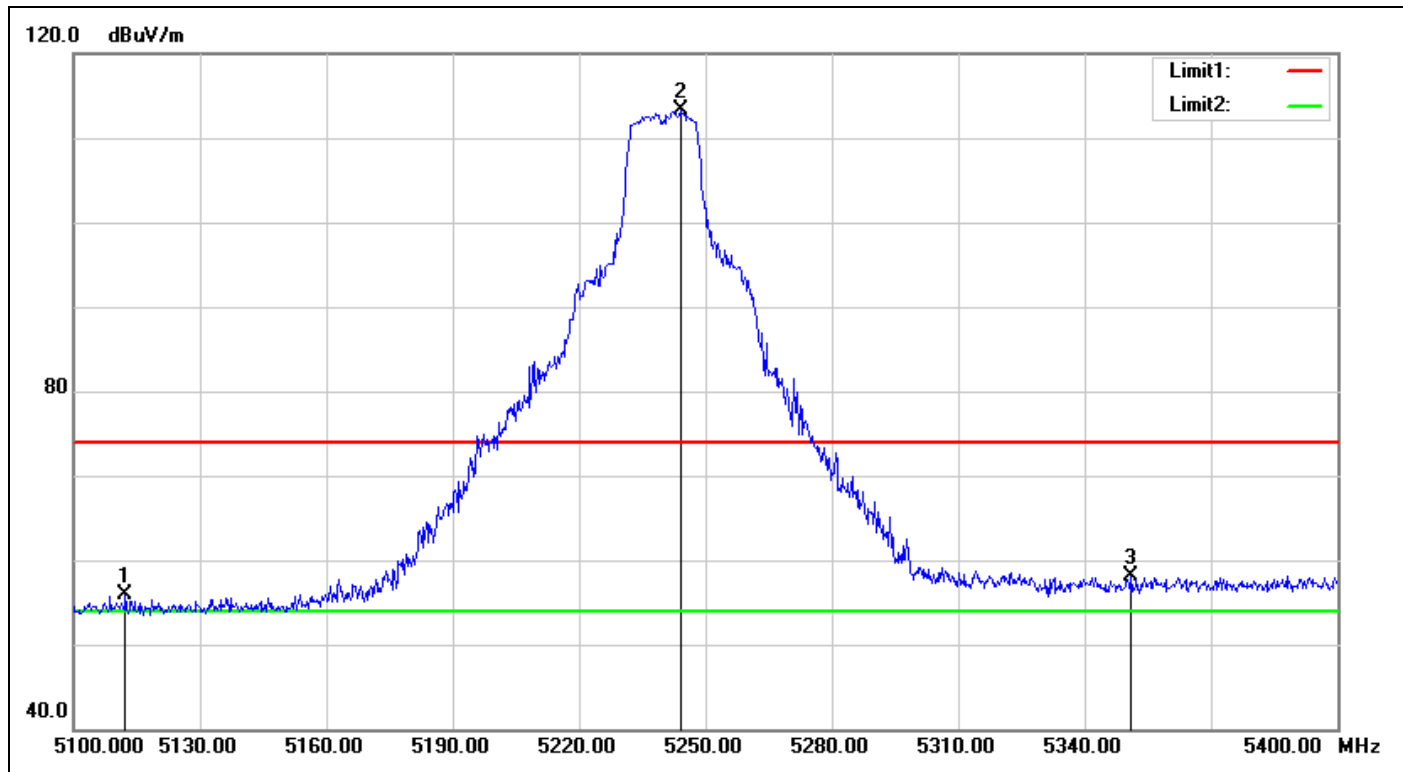

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5112.300	53.14	2.78	55.92	74.00	-18.08	peak
2	5244.000	108.61	4.64	113.25	-	-	peak
3	5351.100	52.80	5.32	58.12	74.00	-15.88	peak


**Detector mode: Average**

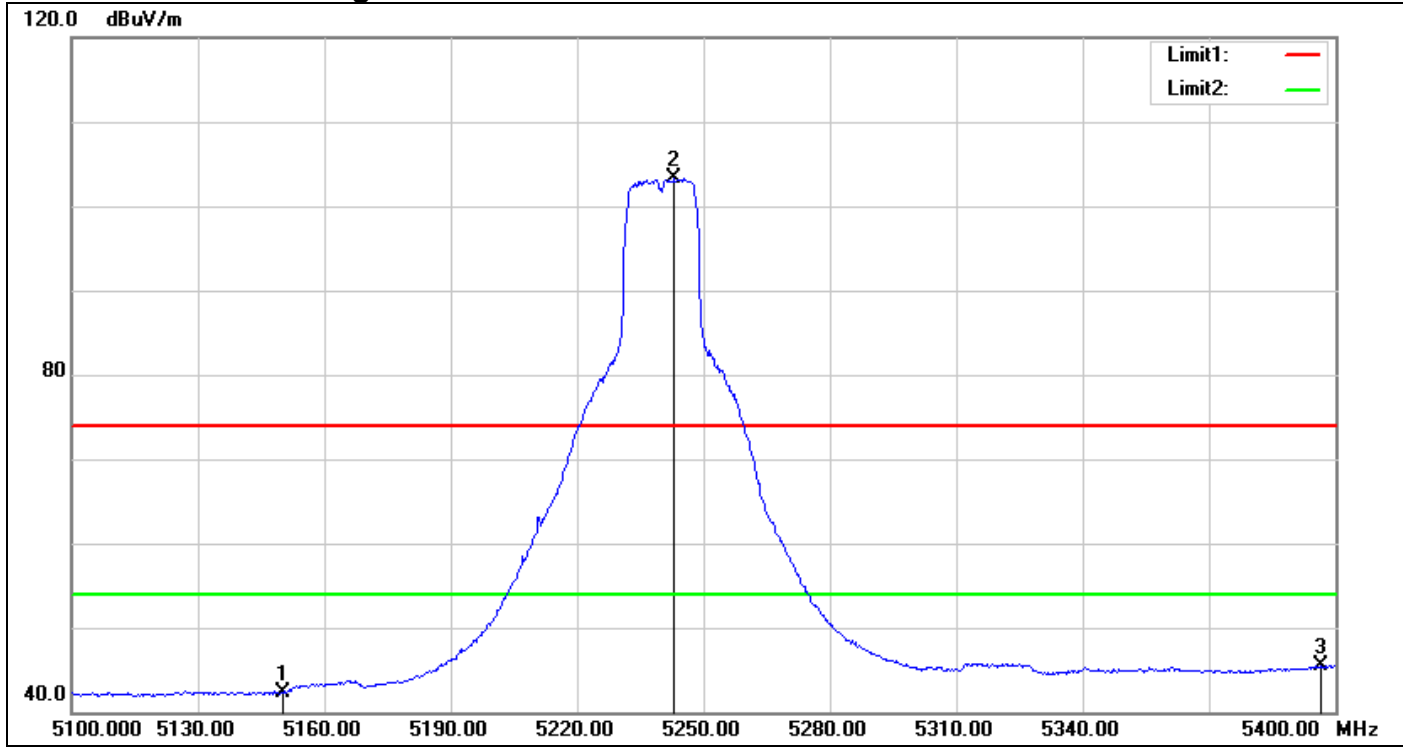

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.28	3.04	42.32	54.00	-11.68	AVG
2	5243.100	98.63	4.64	103.27	-	-	AVG
3	5396.700	39.80	5.69	45.49	54.00	-8.51	AVG


## IEEE 802.11n HT20 MHz Mode / CH Low

Detector mode: Peak

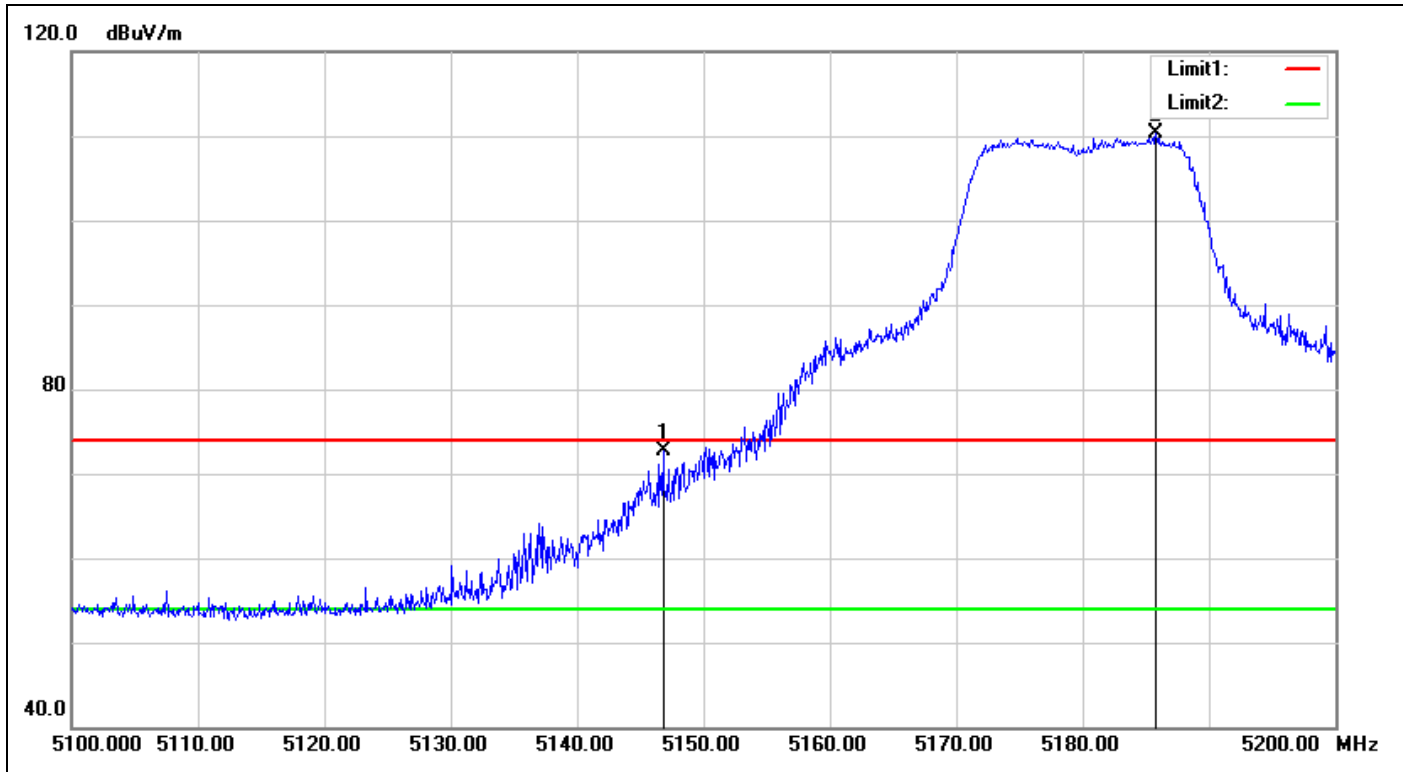

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	69.60	3.02	72.62	74.00	-1.38	peak
2	5185.800	106.30	4.08	110.38	-	-	peak

**Detector mode: Average**

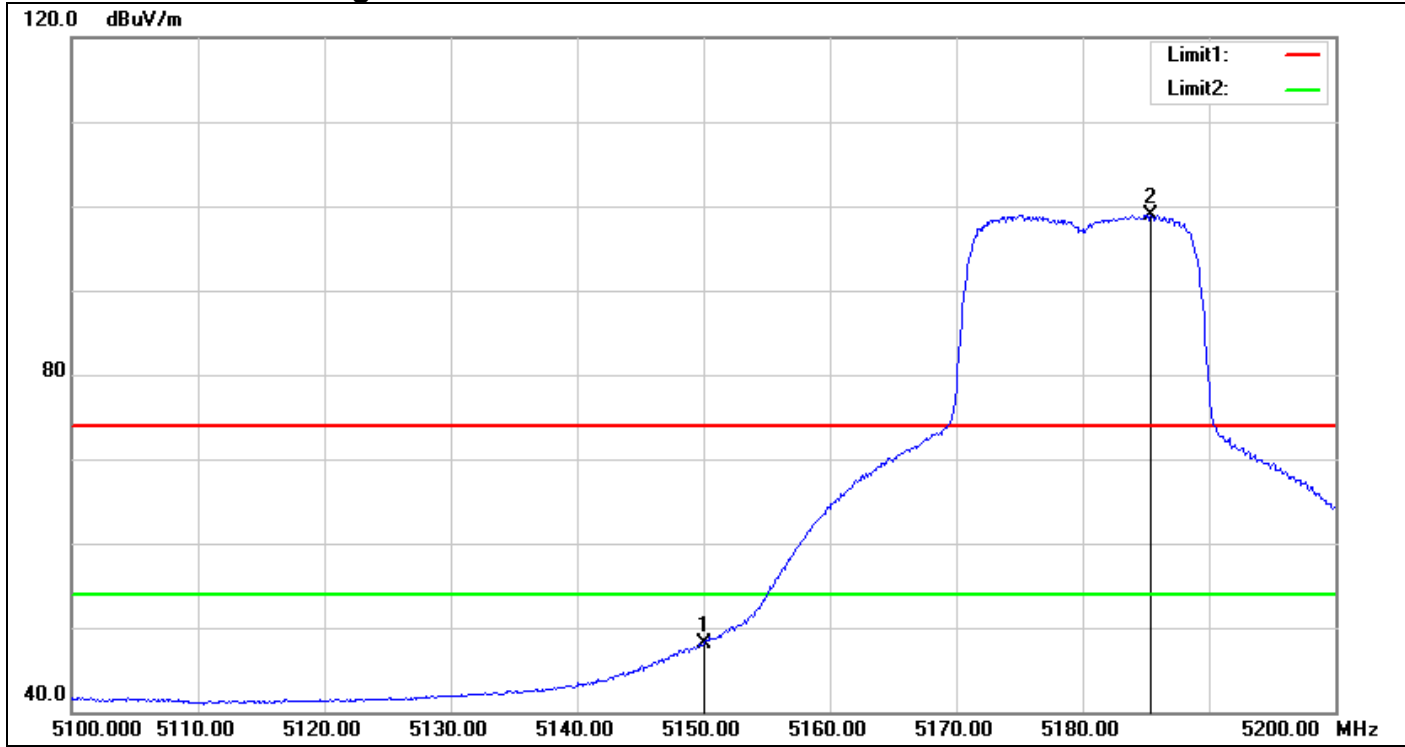


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	45.15	3.04	48.19	54.00	-5.81	AVG
2	5185.400	94.90	4.07	98.97	-	-	AVG




## IEEE 802.11n HT20 MHz Mode / CH Mid

Detector mode: Peak

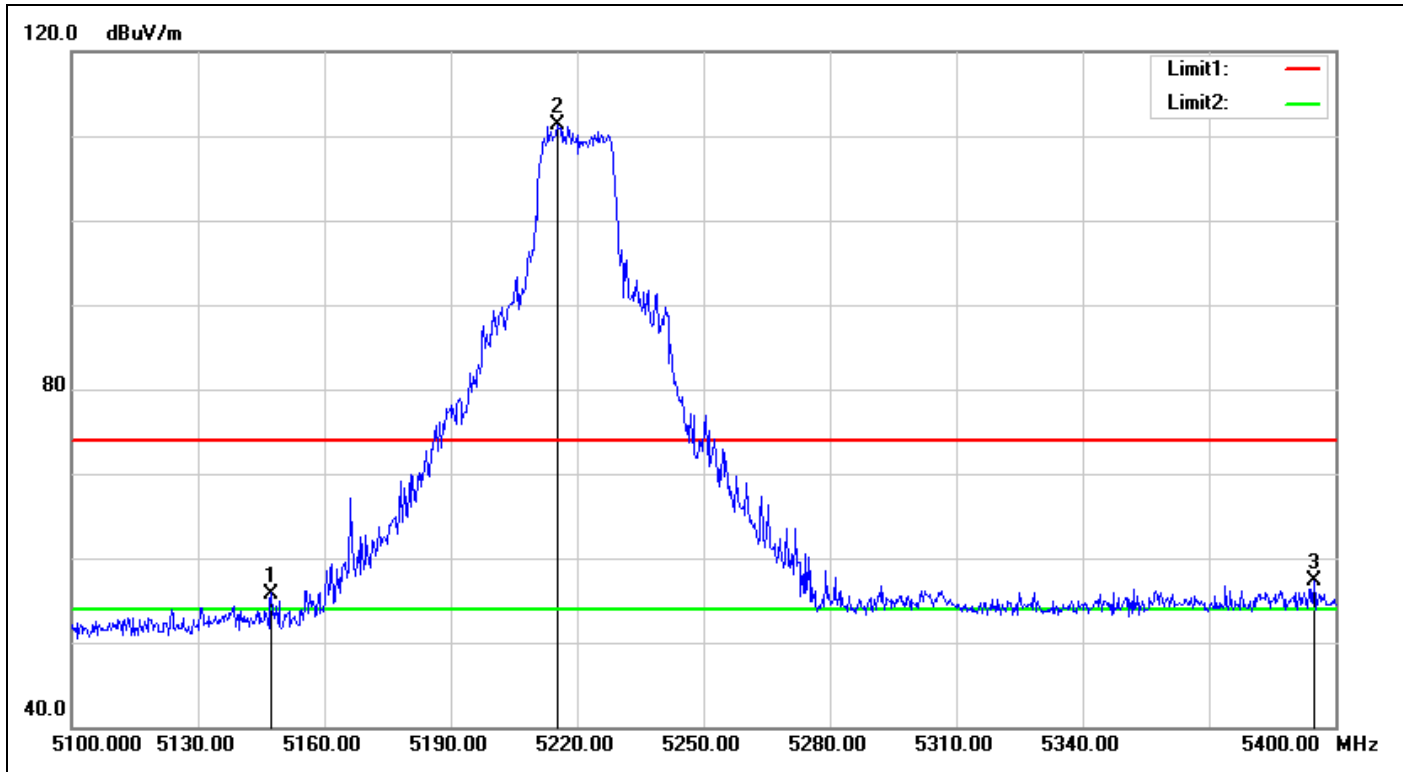

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.400	52.78	3.02	55.80	74.00	-18.20	peak
2	5215.200	106.74	4.54	111.28	-	-	peak
3	5394.900	51.70	5.68	57.38	74.00	-16.62	peak


**Detector mode: Average**

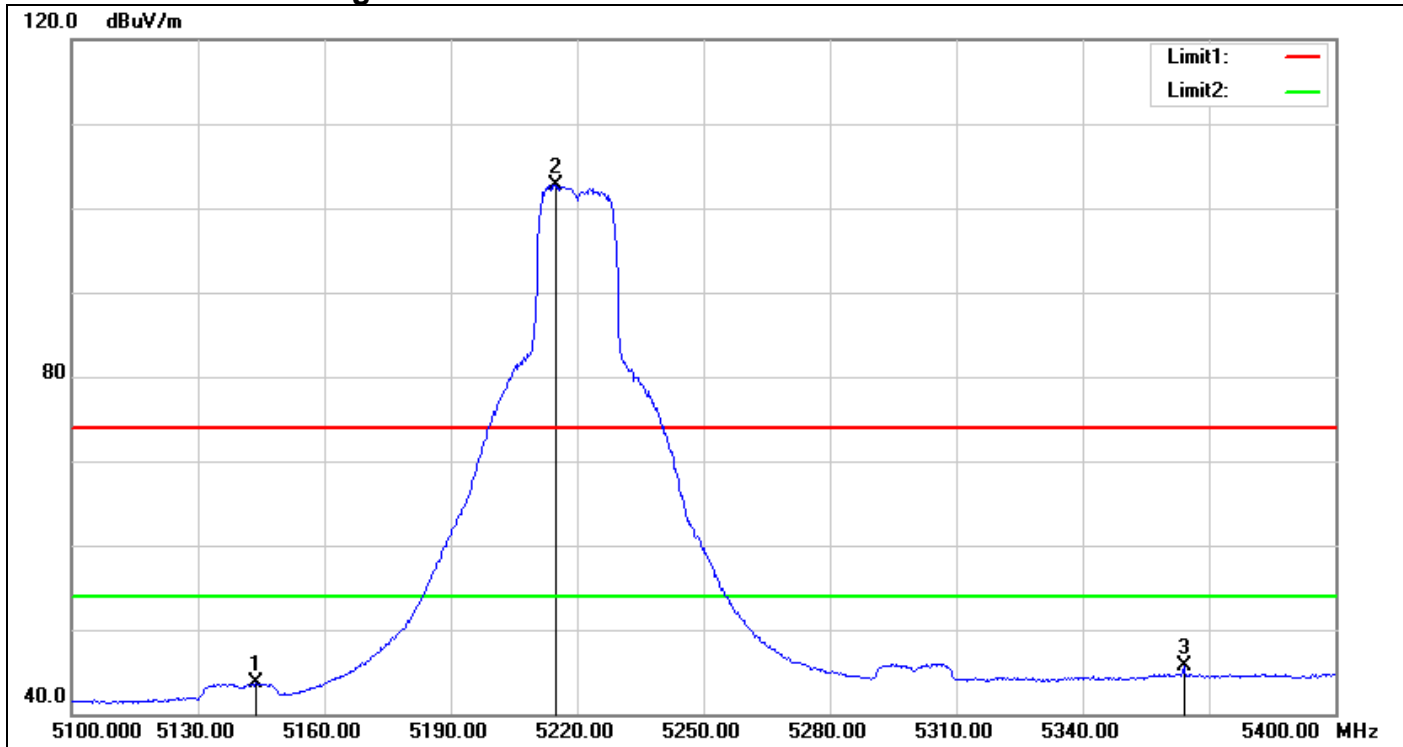

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.800	40.65	3.00	43.65	54.00	-10.35	AVG
2	5214.900	98.16	4.54	102.70	-	-	AVG
3	5364.000	40.19	5.42	45.61	54.00	-8.39	AVG


## IEEE 802.11n HT20 MHz Mode / CH High

Detector mode: Peak

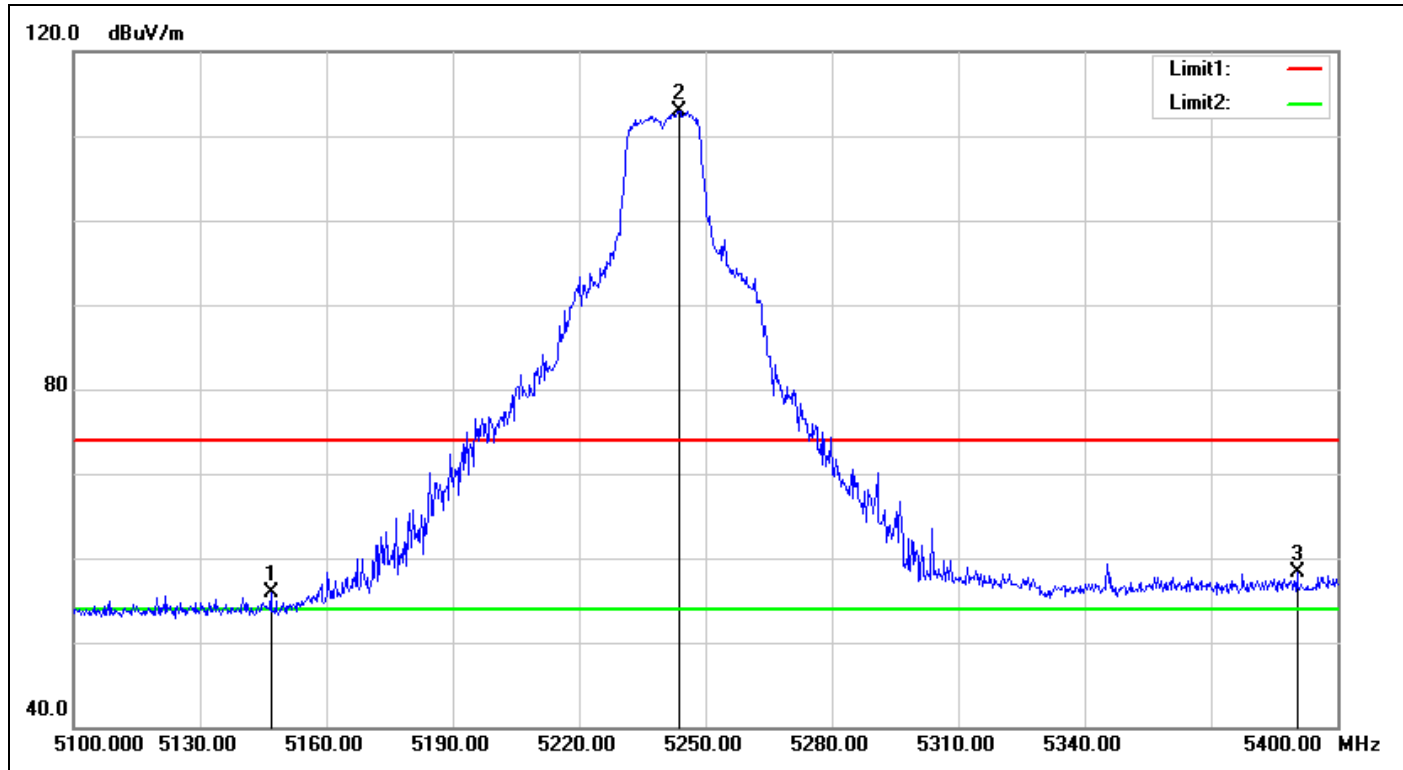

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	52.80	3.02	55.82	74.00	-18.18	peak
2	5243.700	108.34	4.64	112.98	-	-	peak
3	5390.400	52.59	5.64	58.23	74.00	-15.77	peak


**Detector mode: Average**

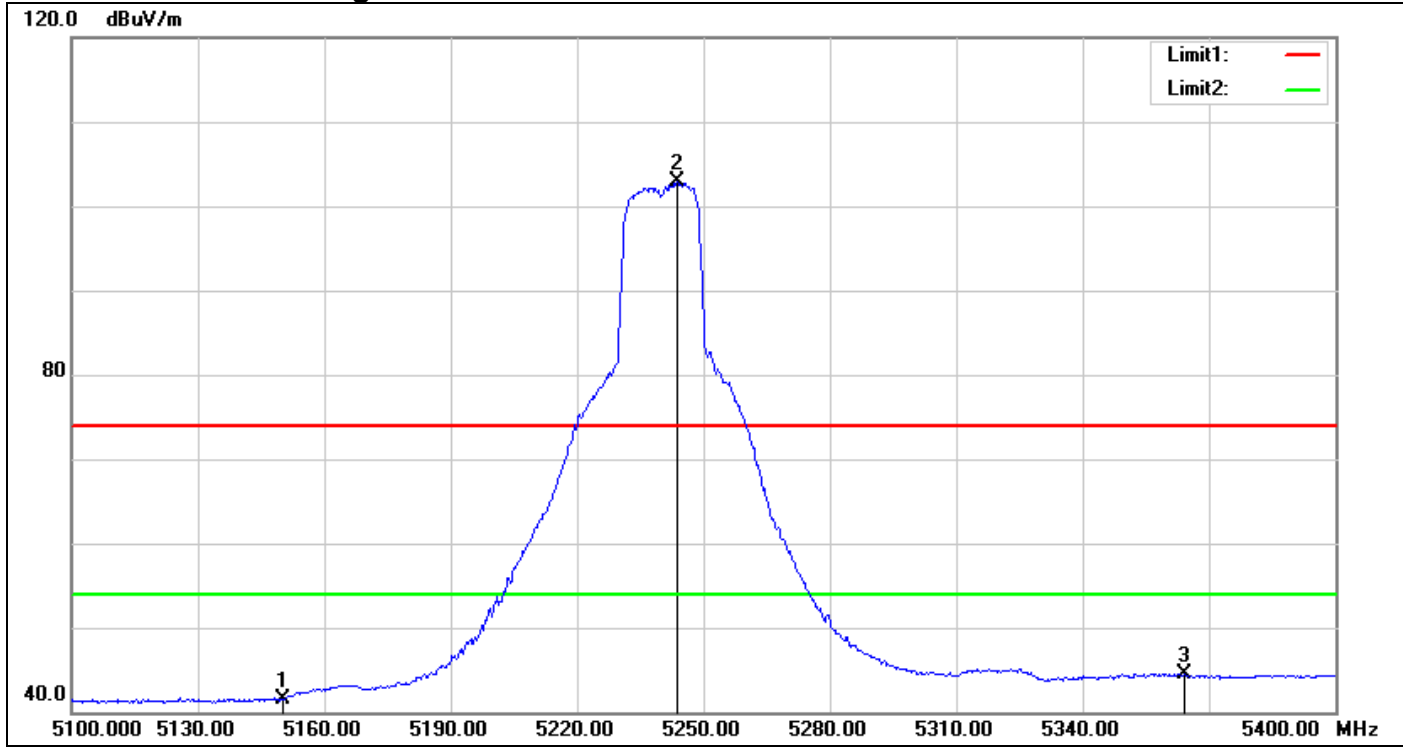

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	38.51	3.04	41.55	54.00	-12.45	AVG
2	5243.700	98.20	4.64	102.84	-	-	AVG
3	5364.300	39.14	5.43	44.57	54.00	-9.43	AVG


## IEEE 802.11n HT40 MHz Mode / CH Low

Detector mode: Peak

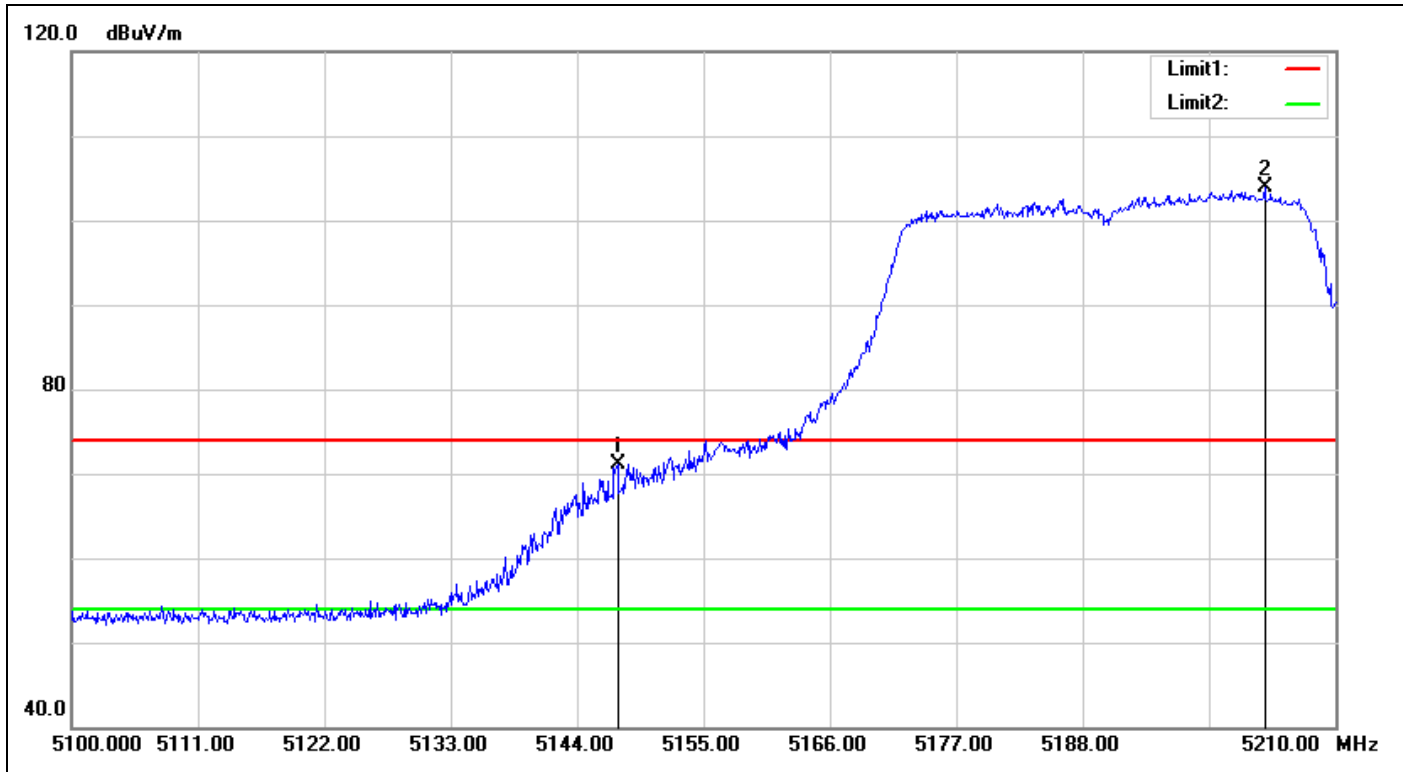

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.520	68.05	3.02	71.07	74.00	-2.93	peak
2	5203.840	99.44	4.50	103.94	-	-	peak


**Detector mode: Average**

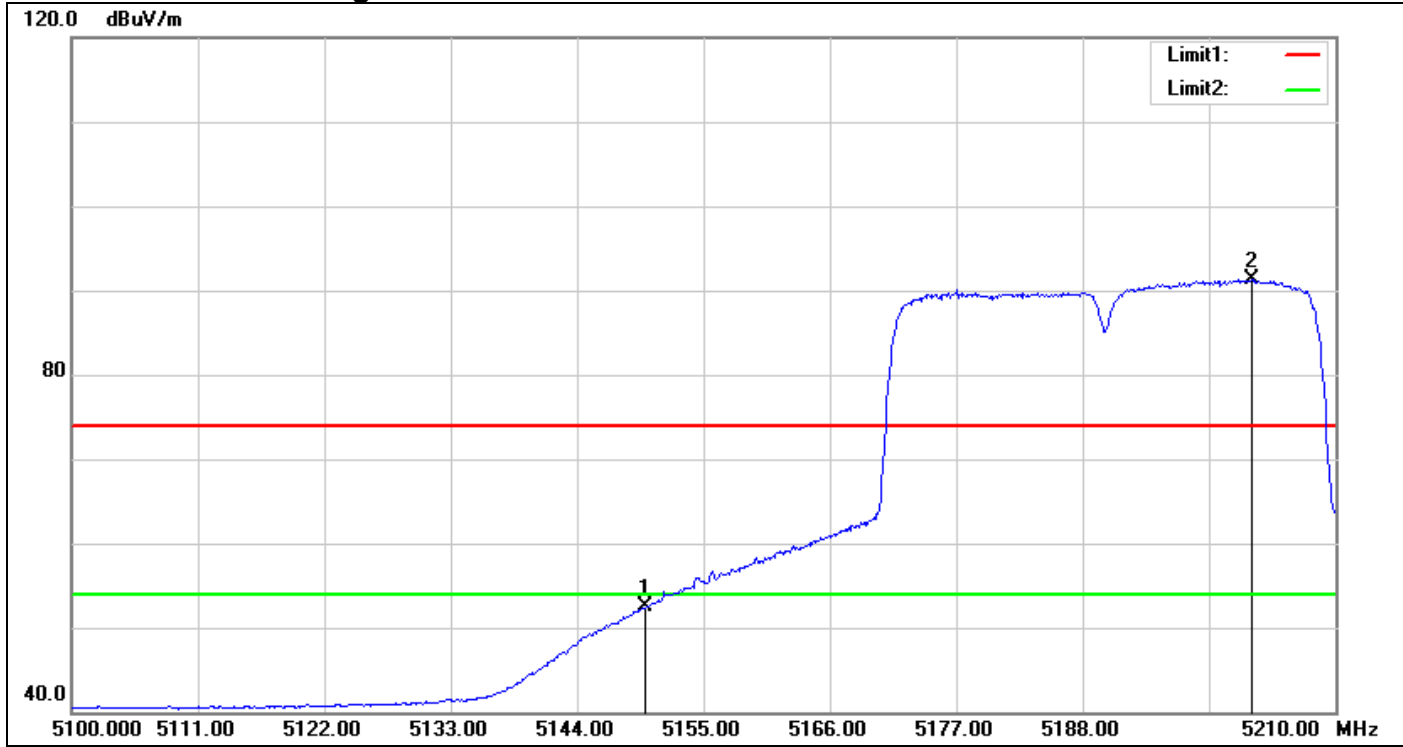

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	49.45	3.04	52.49	54.00	-1.51	AVG
2	5202.740	86.74	4.50	91.24	-	-	AVG


## IEEE 802.11n HT40 MHz Mode / CH High

Detector mode: Peak

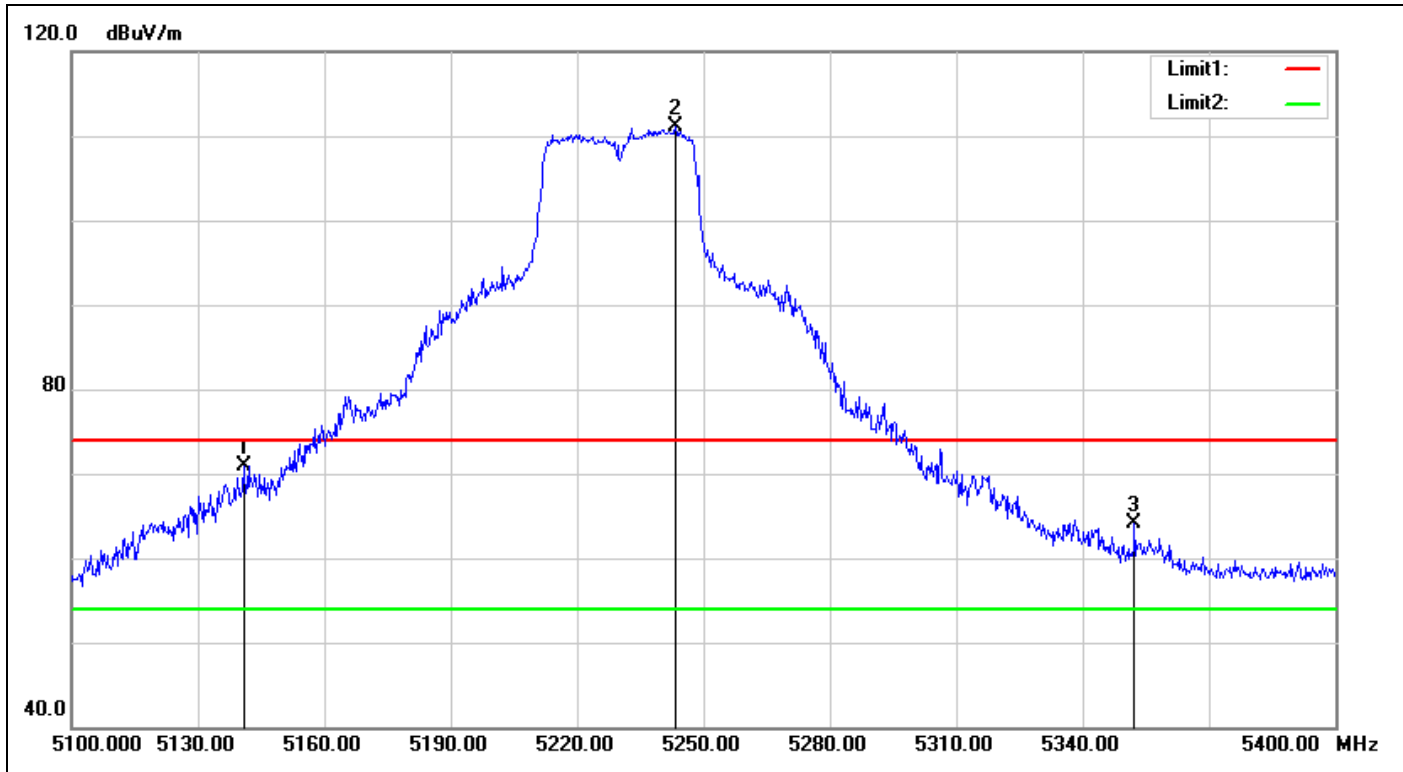

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.800	67.97	2.98	70.95	74.00	-3.05	peak
2	5243.400	106.48	4.64	111.12	-	-	peak
3	5352.300	58.84	5.33	64.17	74.00	-9.83	peak

**Detector mode: Average**

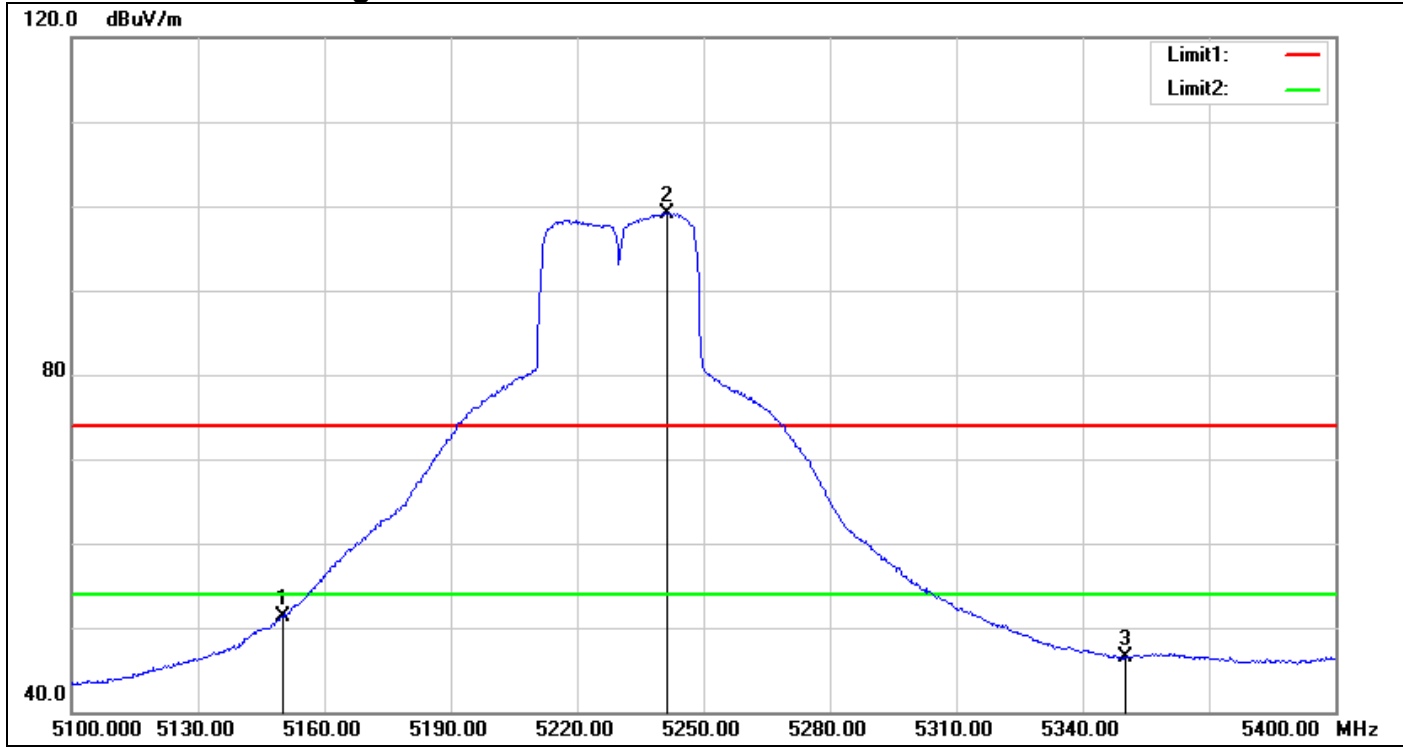


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	48.34	3.04	51.38	54.00	-2.62	AVG
2	5241.300	94.53	4.63	99.16	-	-	AVG
3	5350.000	41.18	5.31	46.49	54.00	-7.51	AVG



**U-NII-2A**


**IEEE 802.11a Mode / CH Low**

**Detector mode: Peak**

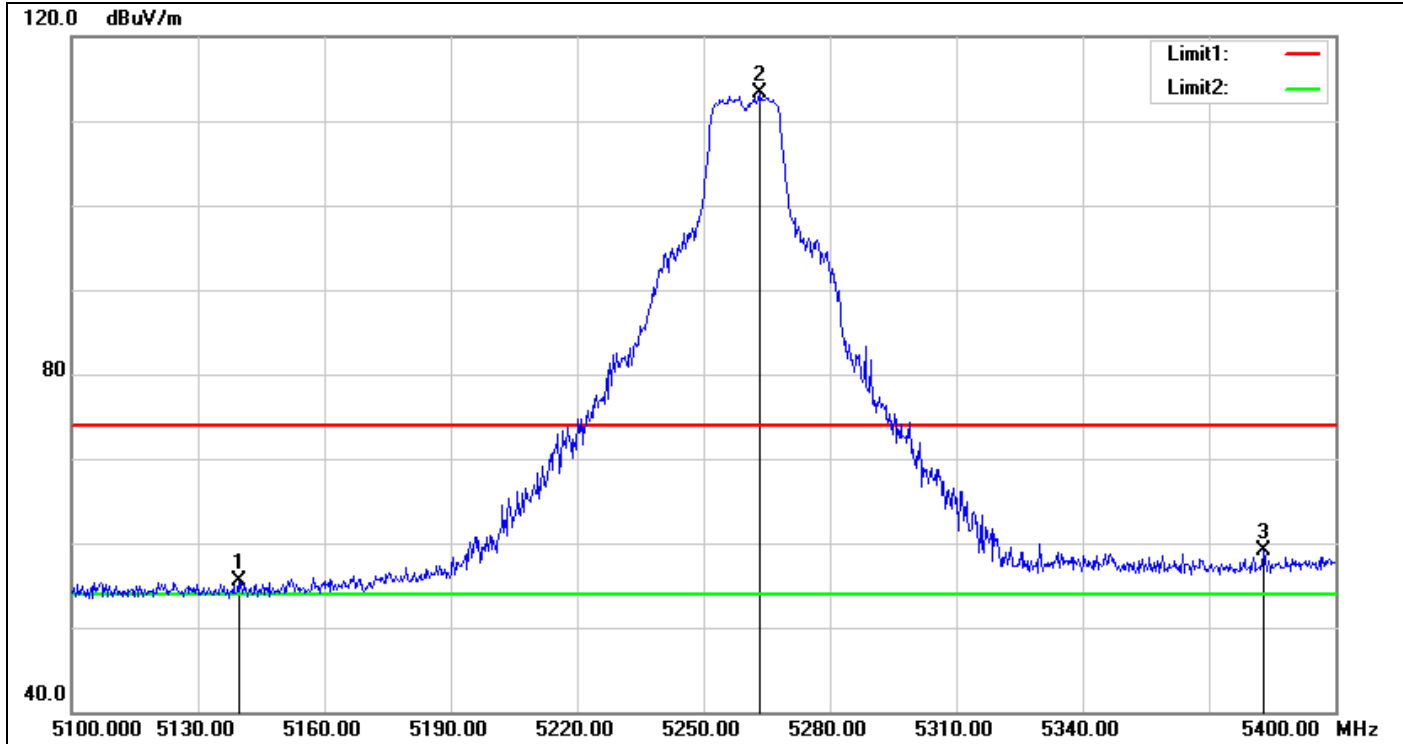

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.600	52.57	2.97	55.54	74.00	-18.46	peak
2	5263.200	108.60	4.70	113.30	-	-	peak
3	5382.900	53.52	5.58	59.10	74.00	-14.90	peak


**Detector mode: Average**

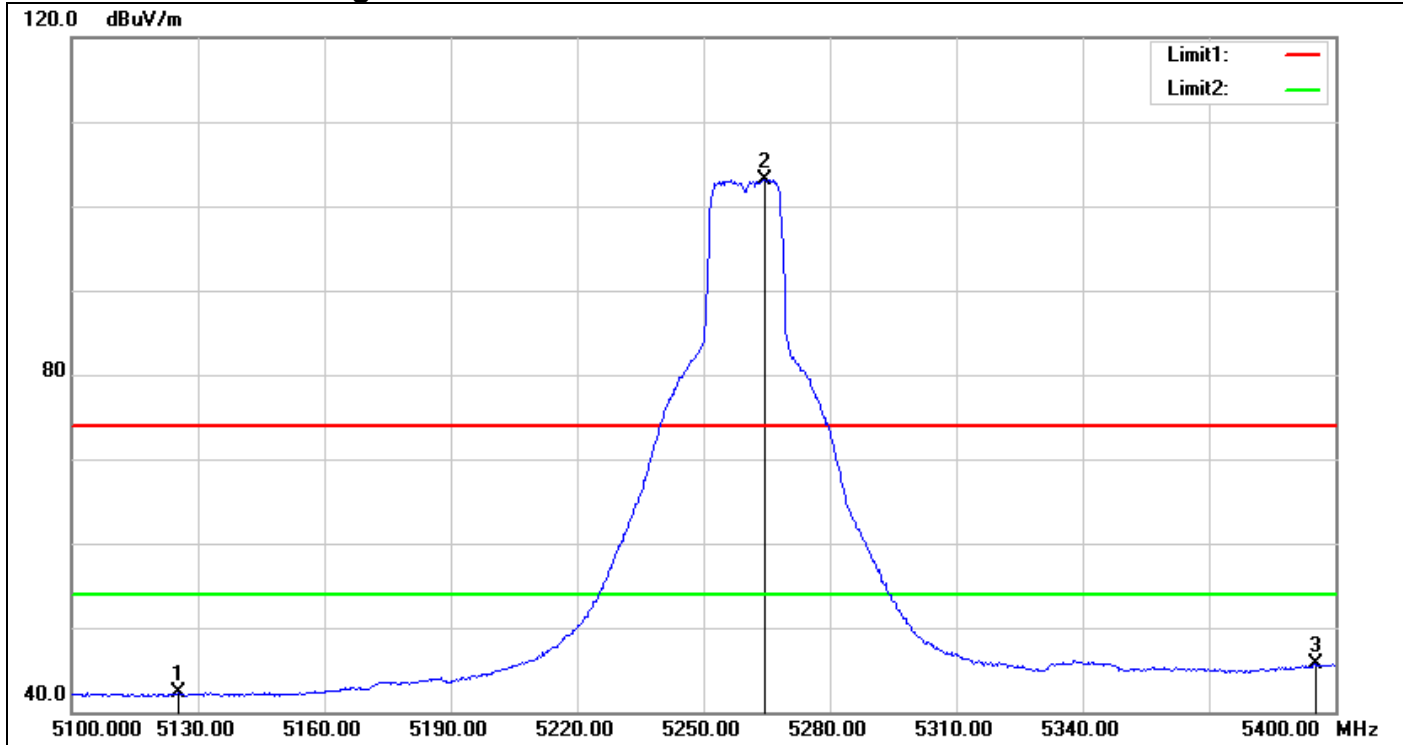

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5125.500	39.51	2.87	42.38	54.00	-11.62	AVG
2	5264.400	98.47	4.71	103.18	-	-	AVG
3	5395.200	39.97	5.68	45.65	54.00	-8.35	AVG


## IEEE 802.11a Mode / CH Mid

Detector mode: Peak

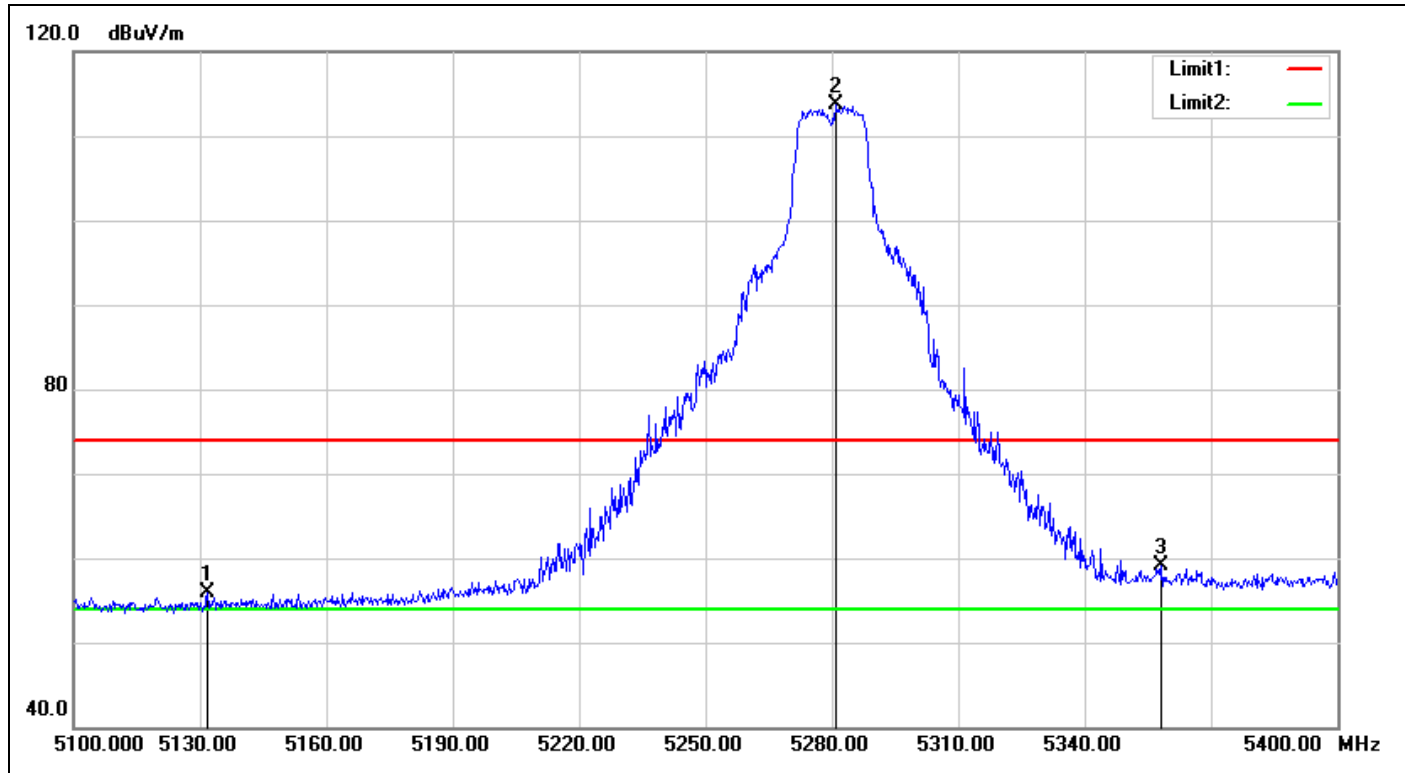

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5131.800	53.01	2.92	55.93	74.00	-18.07	peak
2	5280.900	108.96	4.77	113.73	-	-	peak
3	5358.300	53.81	5.38	59.19	74.00	-14.81	peak


**Detector mode: Average**

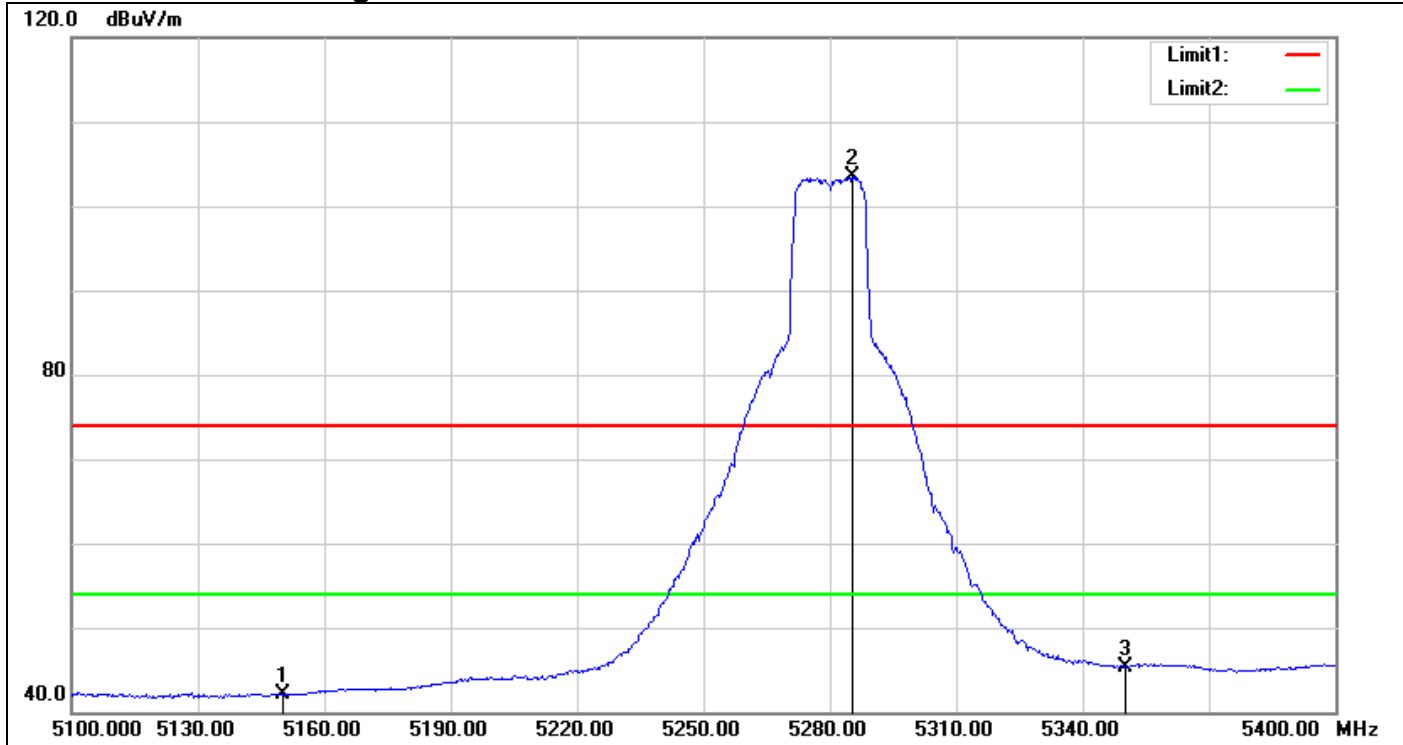

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	39.04	3.04	42.08	54.00	-11.92	AVG
2	5285.400	98.75	4.78	103.53	-	-	AVG
3	5350.000	39.92	5.31	45.23	54.00	-8.77	AVG


## IEEE 802.11a Mode / CH High

Detector mode: Peak

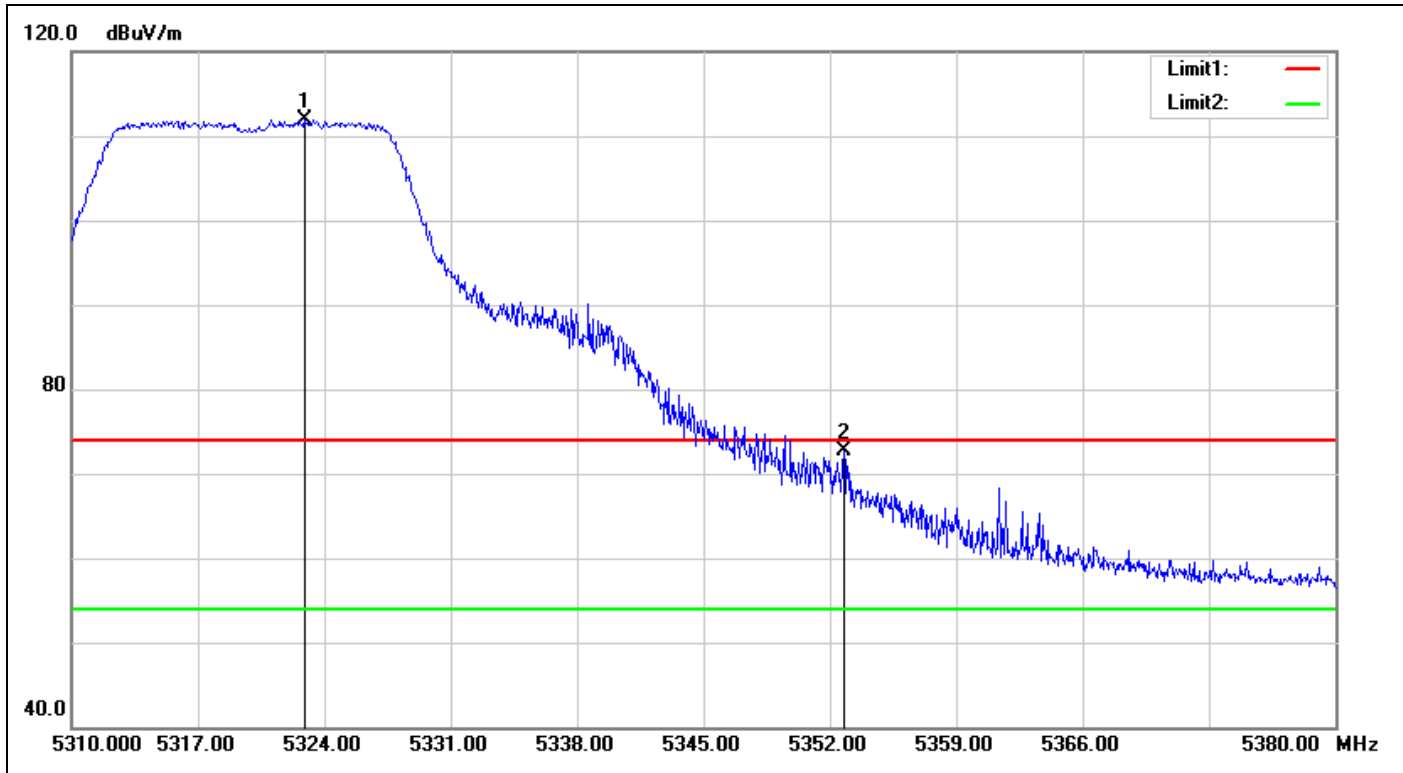

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.880	106.78	5.05	111.83	-	-	peak
2	5352.770	67.33	5.33	72.66	74.00	-1.34	peak


**Detector mode: Average**

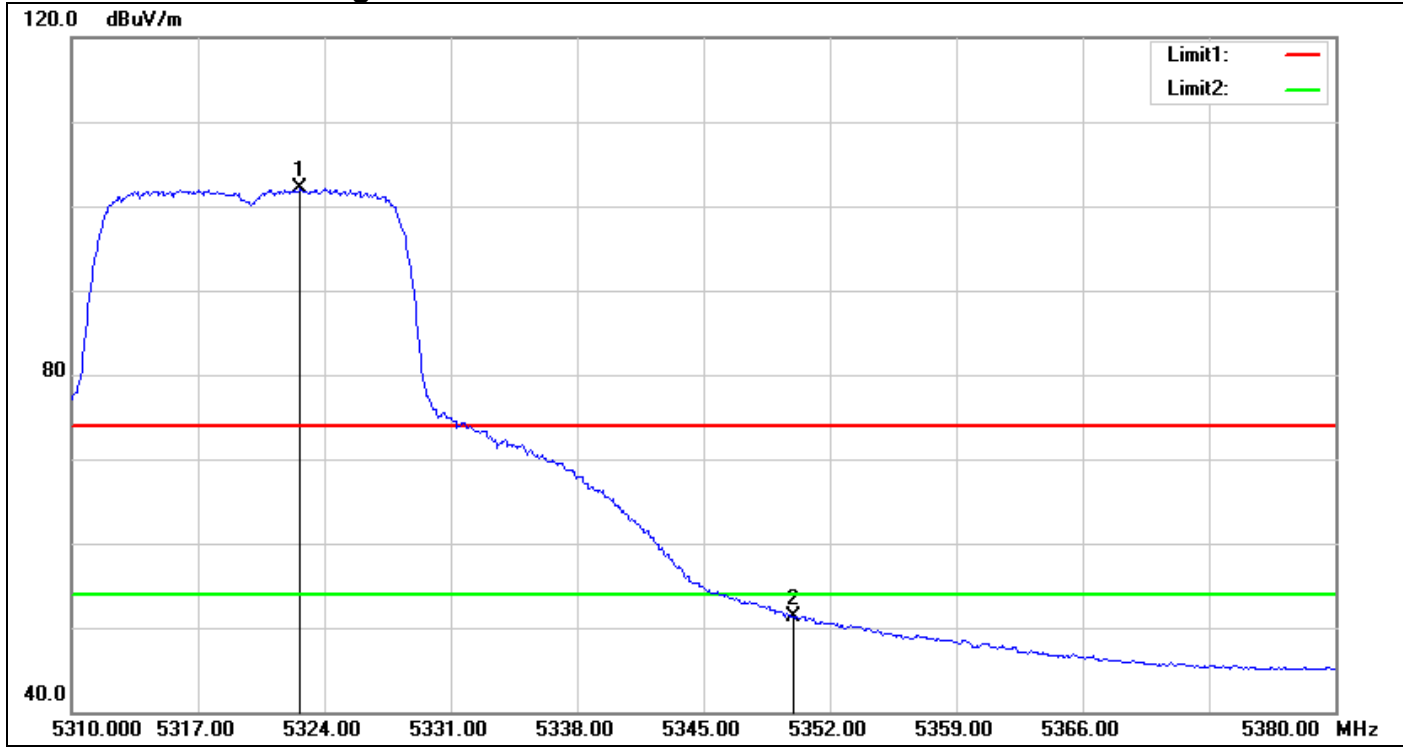

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.670	97.05	5.05	102.10	-	-	AVG
2	5350.000	46.03	5.31	51.34	54.00	-2.66	AVG


## IEEE 802.11n HT 20 MHz Mode / CH Low

Detector mode: Peak

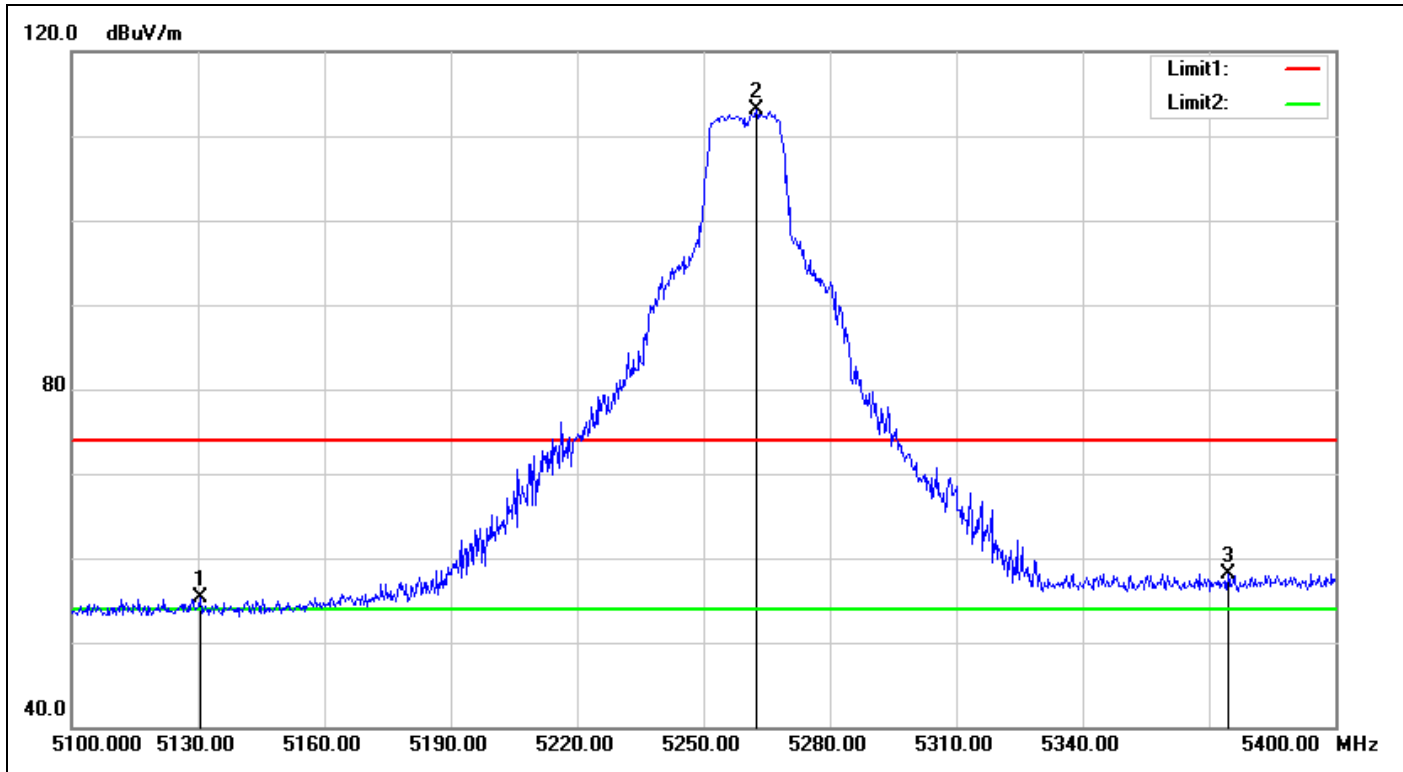

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5130.600	52.39	2.91	55.30	74.00	-18.70	peak
2	5262.600	108.36	4.70	113.06	-	-	peak
3	5374.500	52.64	5.51	58.15	74.00	-15.85	peak

**Detector mode: Average**

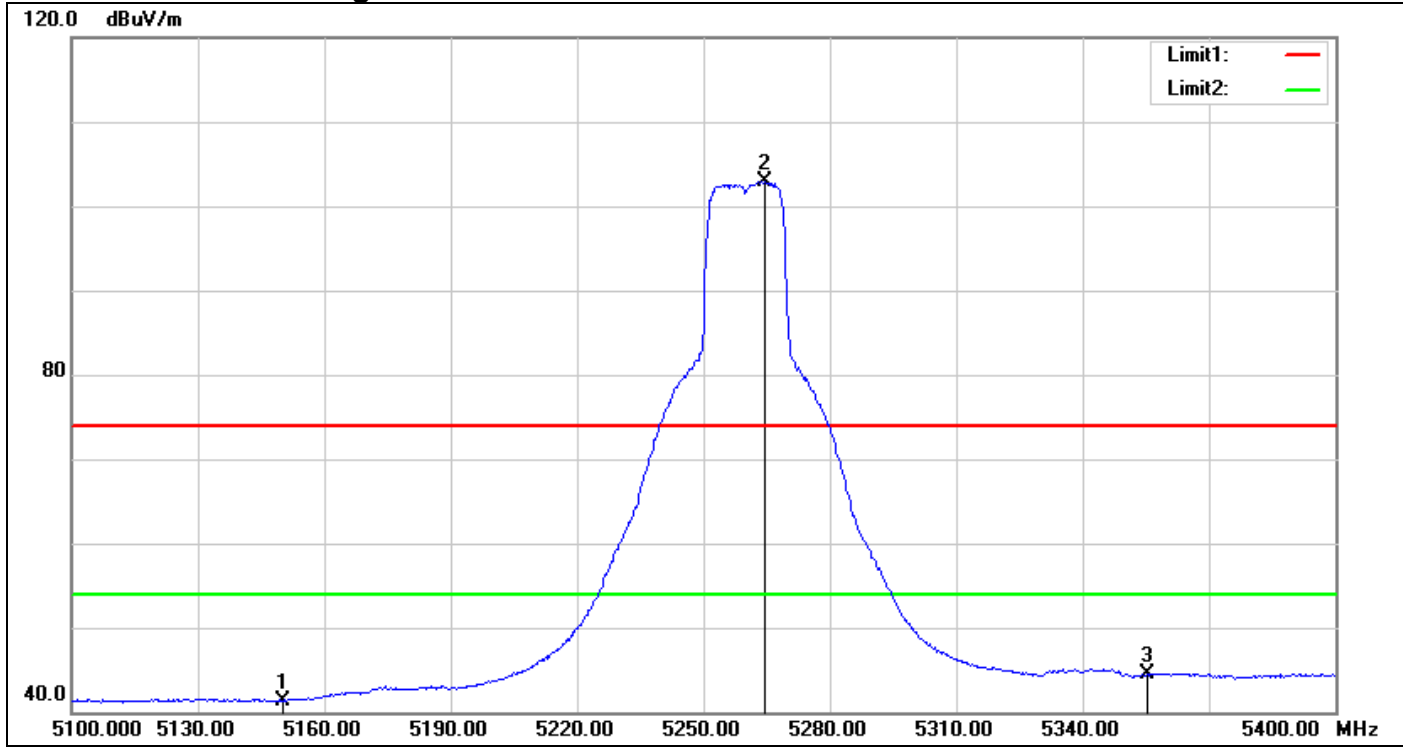


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	38.27	3.04	41.31	54.00	-12.69	AVG
2	5264.700	98.16	4.71	102.87	-	-	AVG
3	5355.300	39.23	5.35	44.58	54.00	-9.42	AVG




## IEEE 802.11n HT 20 MHz Mode / CH Mid

Detector mode: Peak

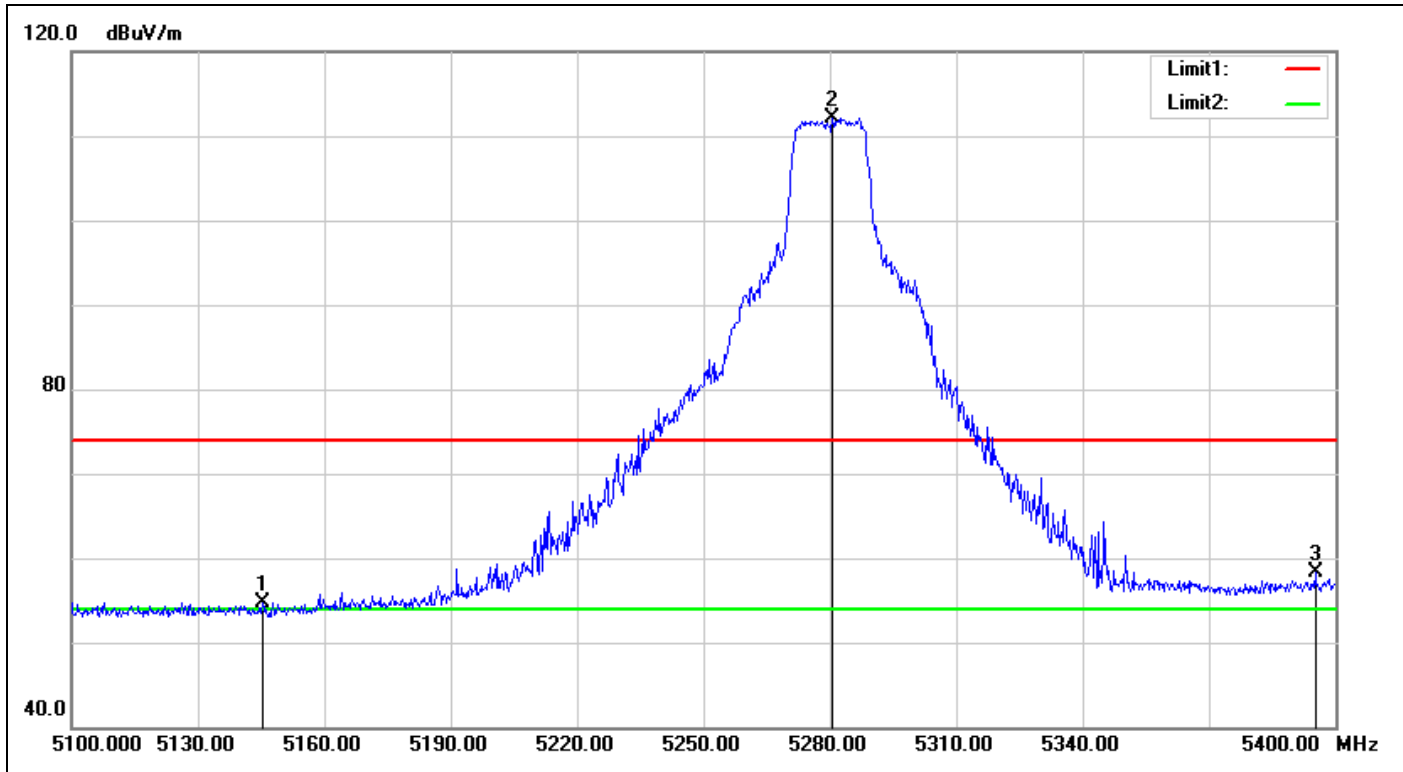

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.300	51.77	3.01	54.78	74.00	-19.22	peak
2	5280.600	107.35	4.76	112.11	-	-	peak
3	5395.200	52.72	5.68	58.40	74.00	-15.60	peak


**Detector mode: Average**

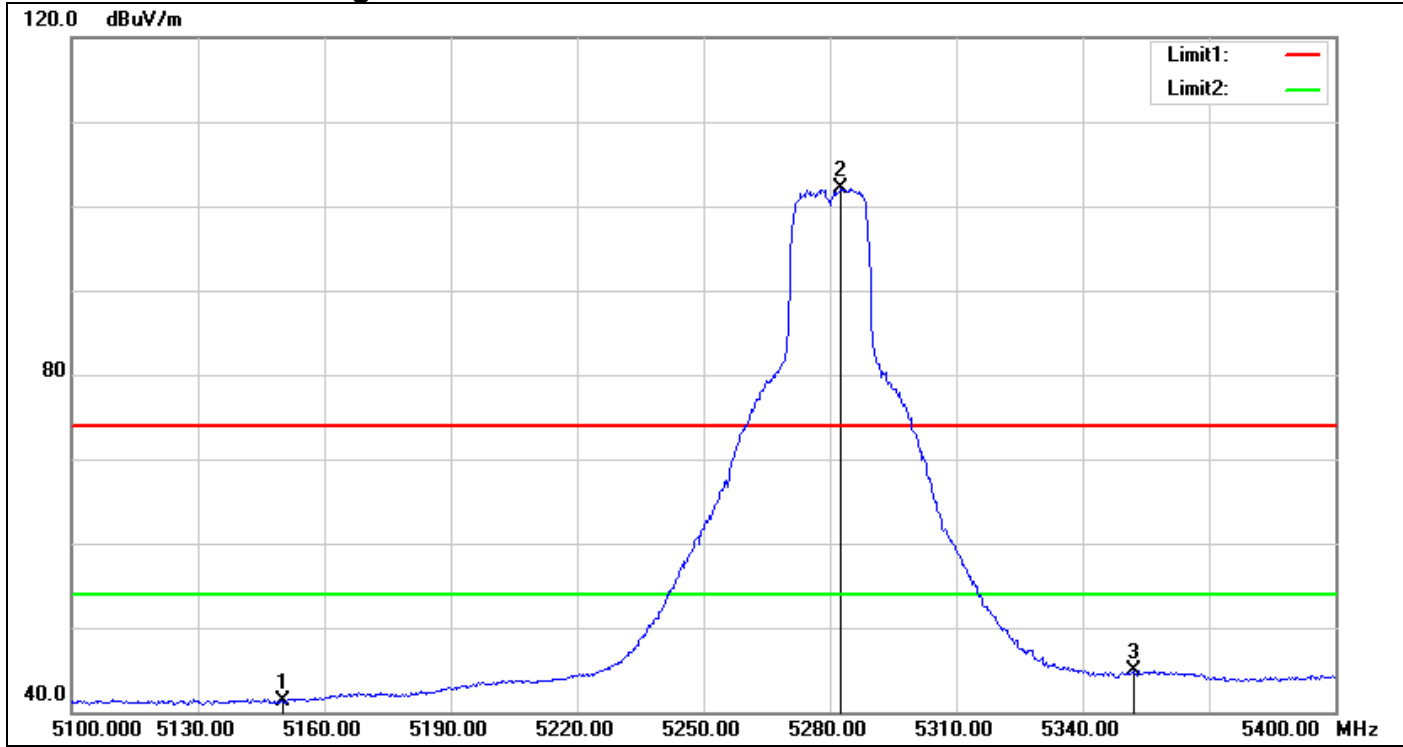

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	38.30	3.04	41.34	54.00	-12.66	AVG
2	5282.700	97.36	4.77	102.13	-	-	AVG
3	5352.300	39.56	5.33	44.89	54.00	-9.11	AVG


## IEEE 802.11n HT 20 MHz Mode / CH High

Detector mode: Peak

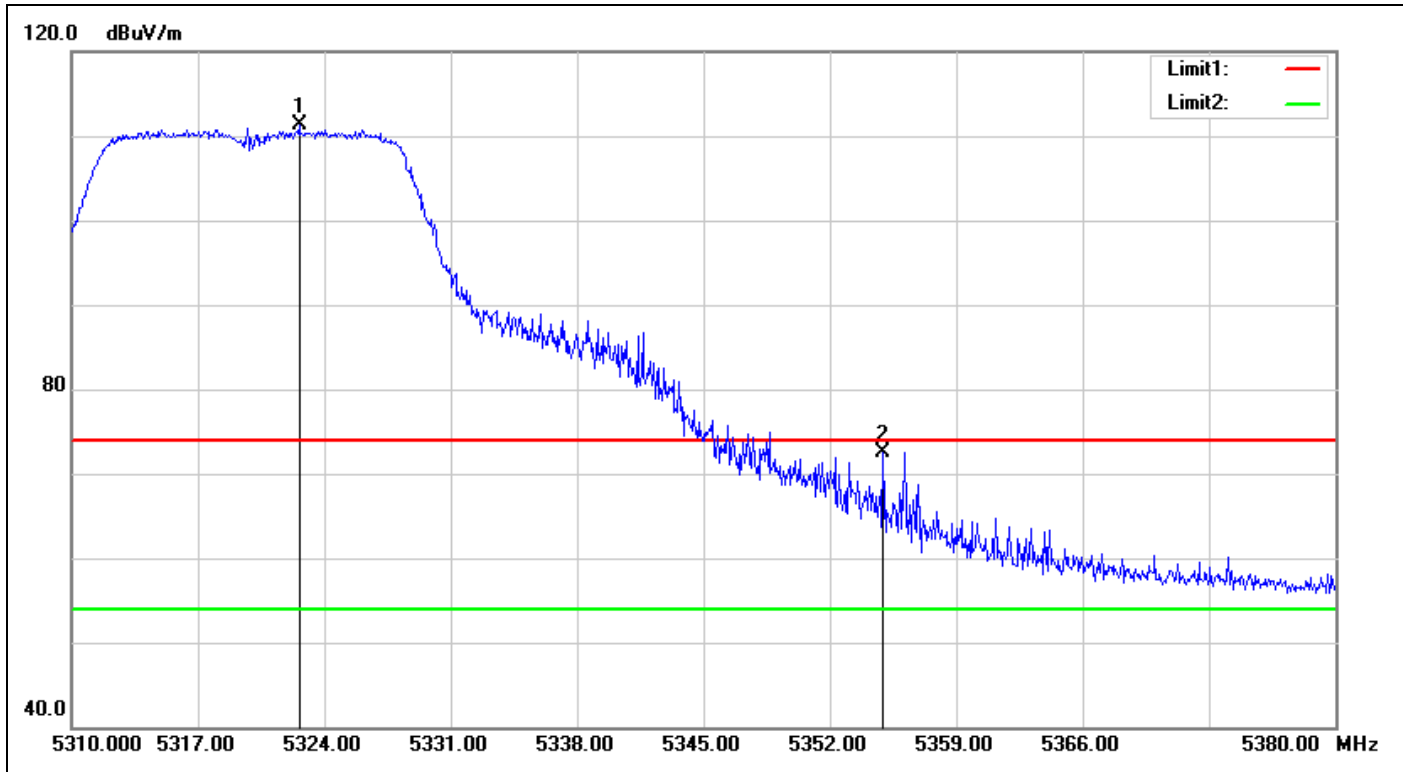

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5322.600	106.18	5.05	111.23	-	-	peak
2	5354.940	67.18	5.35	72.53	74.00	-1.47	peak


**Detector mode: Average**

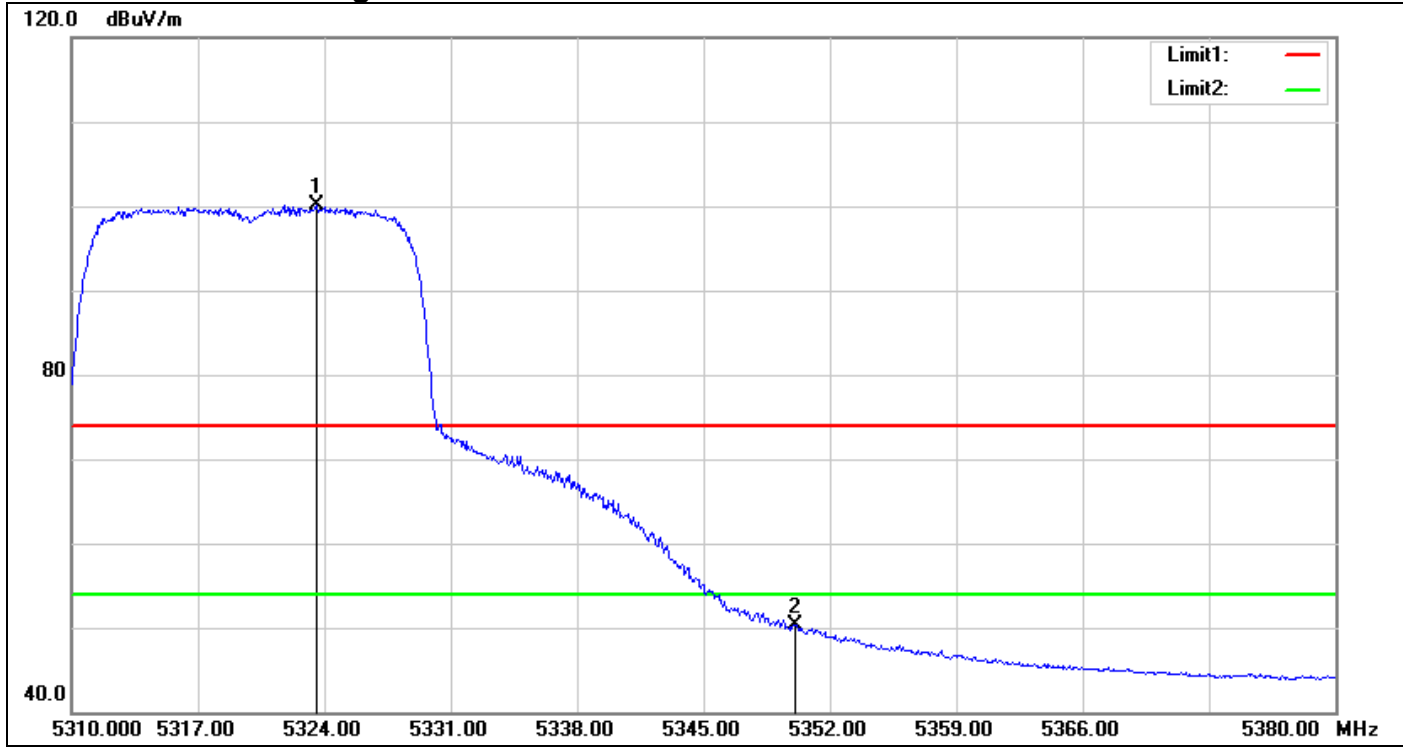

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5323.580	95.05	5.06	100.11	-	-	AVG
2	5350.110	45.01	5.31	50.32	54.00	-3.68	AVG


## IEEE 802.11n HT 40 MHz Mode / CH Low

Detector mode: Peak

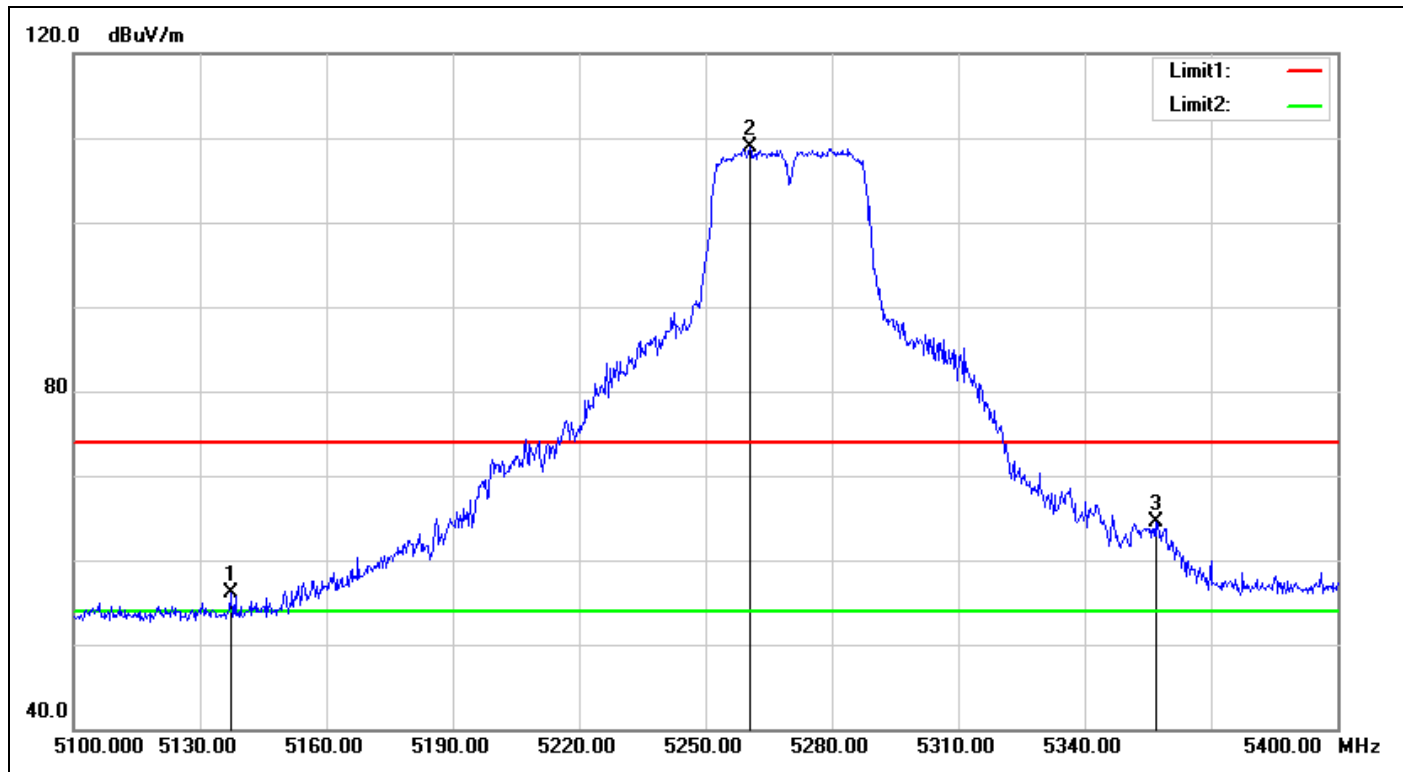

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5137.500	53.13	2.96	56.09	74.00	-17.91	peak
2	5260.500	104.17	4.70	108.87	-	-	peak
3	5356.800	59.04	5.37	64.41	74.00	-9.59	peak


**Detector mode: Average**

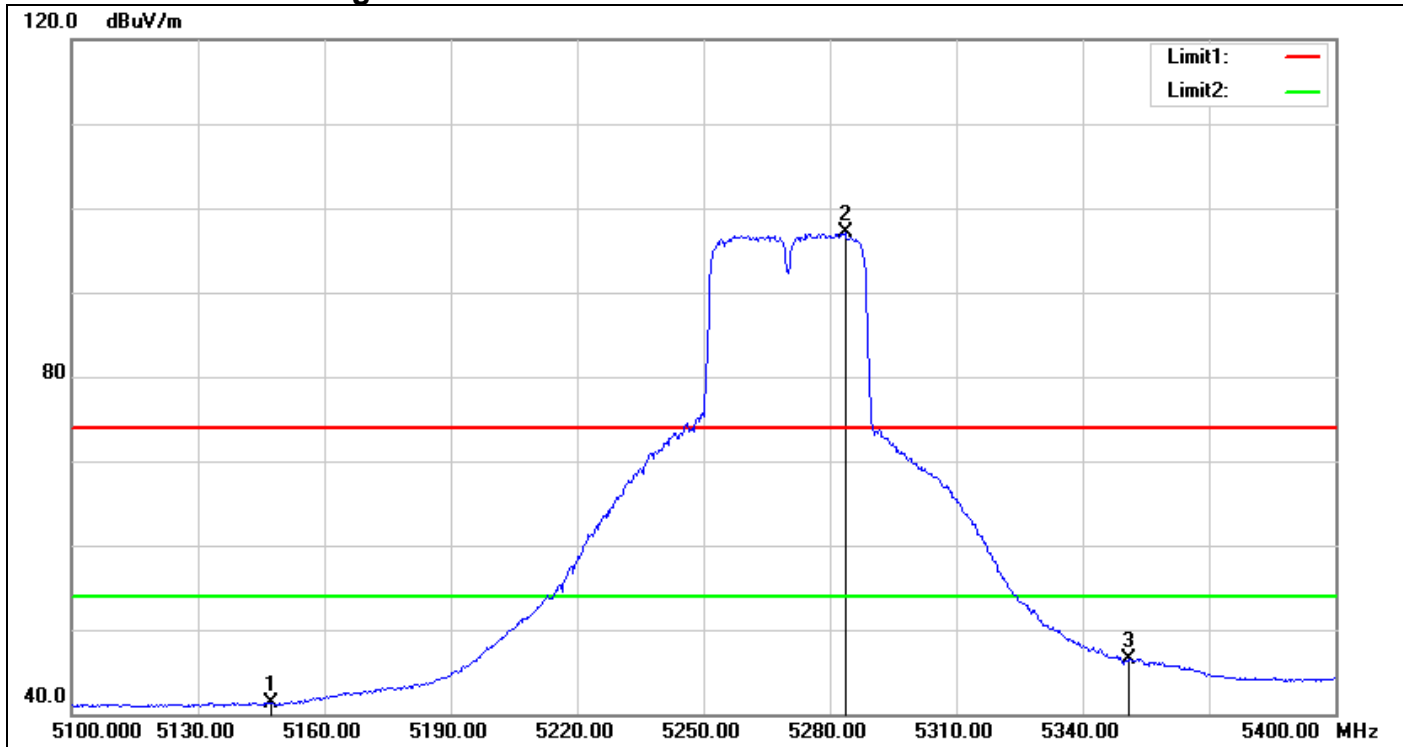

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.400	38.33	3.02	41.35	54.00	-12.65	AVG
2	5283.600	92.27	4.77	97.04	-	-	AVG
3	5351.100	41.17	5.32	46.49	54.00	-7.51	AVG


## IEEE 802.11n HT 40 MHz Mode / CH High

Detector mode: Peak

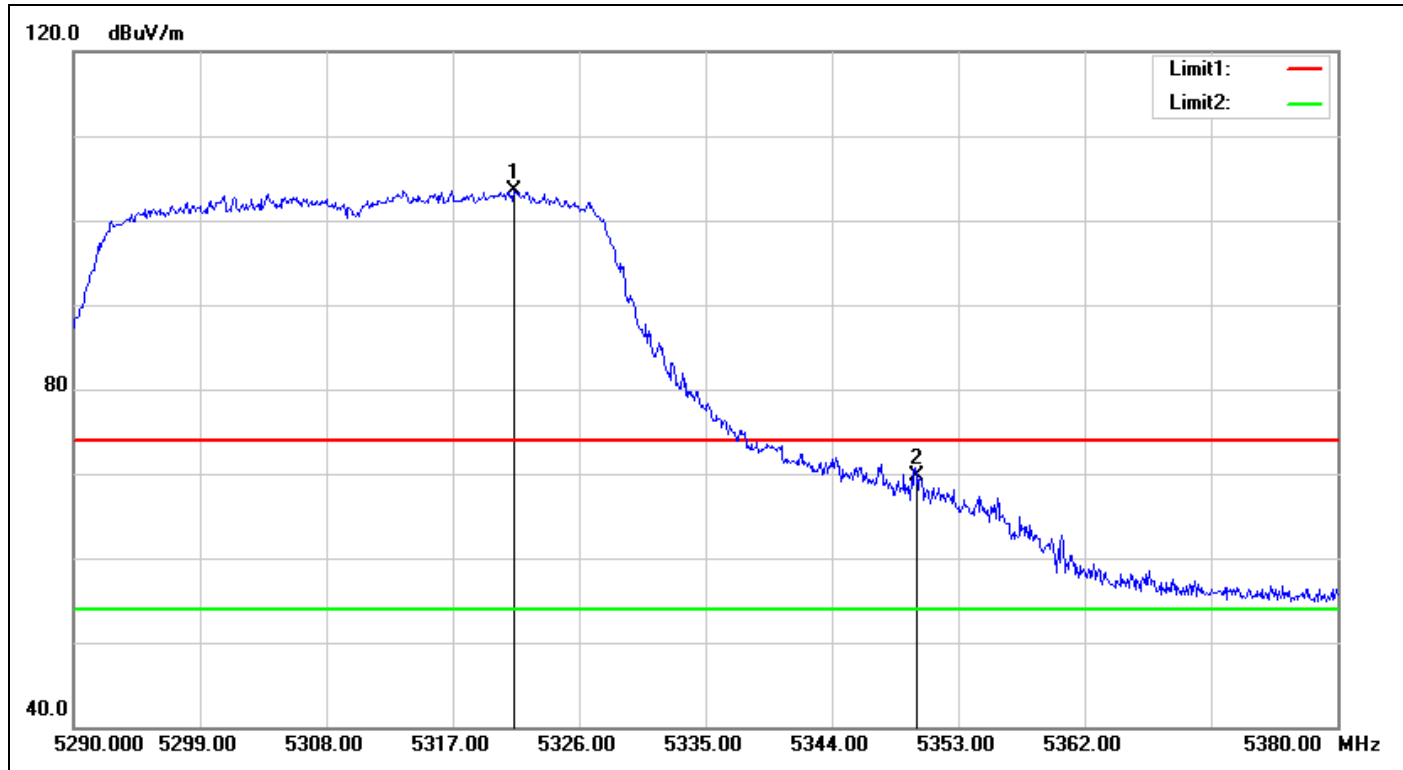

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5321.320	98.52	5.03	103.55	-	-	peak
2	5350.000	64.43	5.31	69.74	74.00	-4.26	peak

**Detector mode: Average**

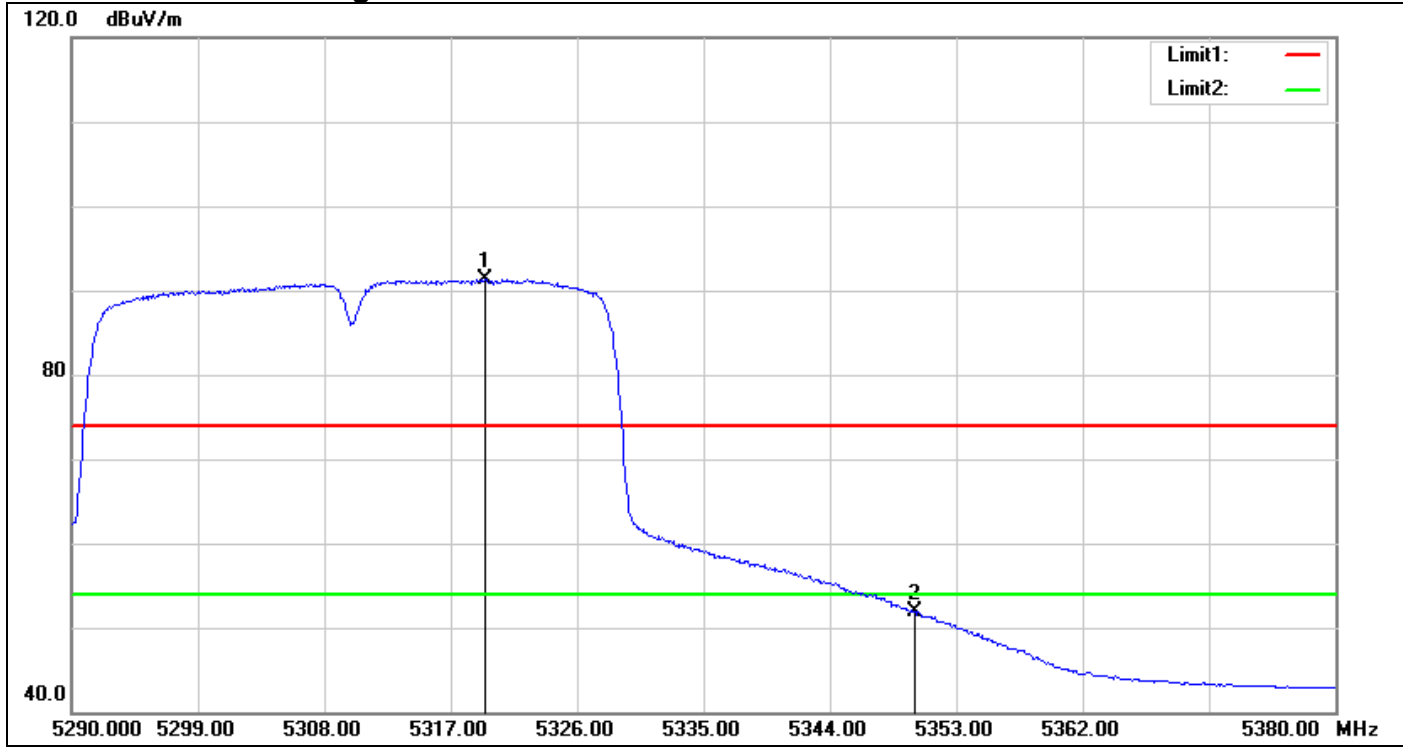


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5319.430	86.27	5.02	91.29	-	-	AVG
2	5350.000	46.65	5.31	51.96	54.00	-2.04	AVG



**U-NII-2C**


**IEEE 802.11a Mode / CH Low**

**Detector mode: Peak**

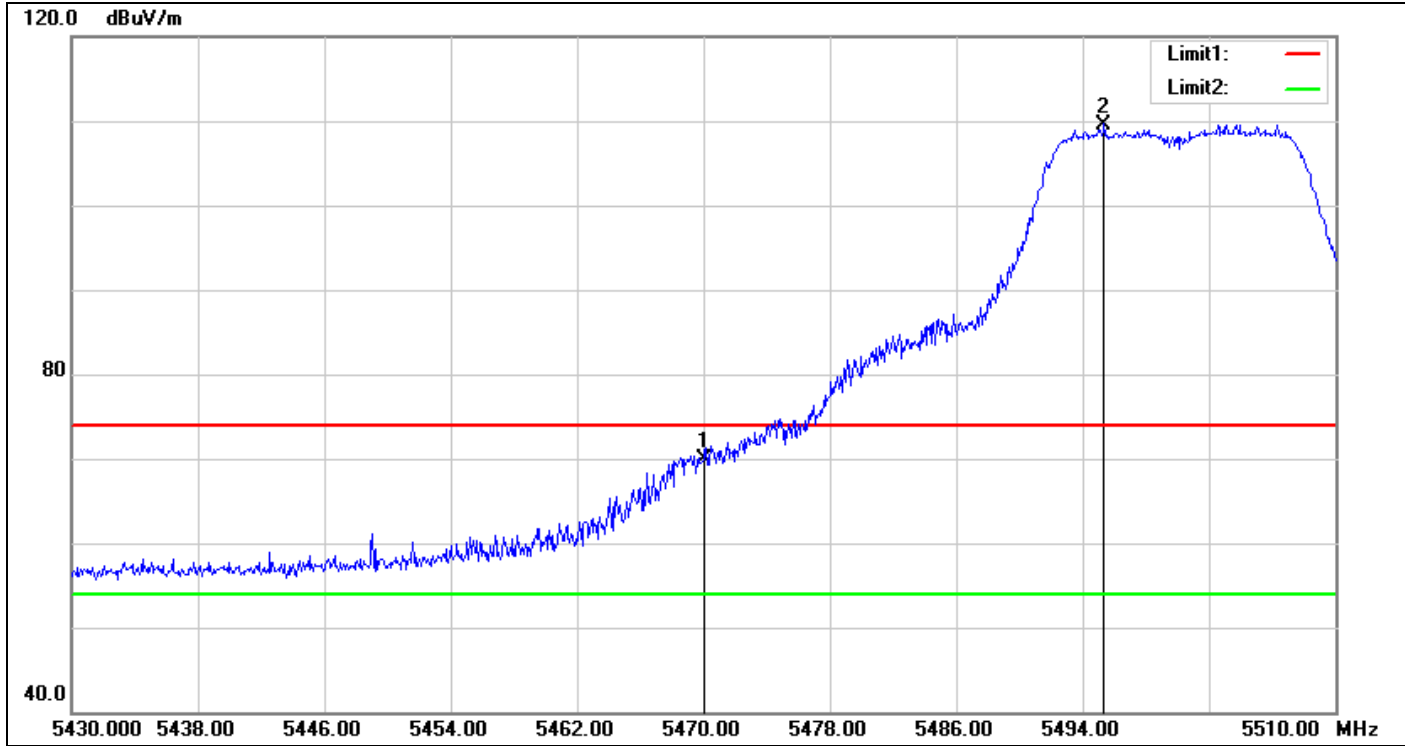

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	64.54	5.39	69.93	74.00	-4.07	peak
2	5495.360	104.33	5.27	109.60	-	-	peak


**Detector mode: Average**

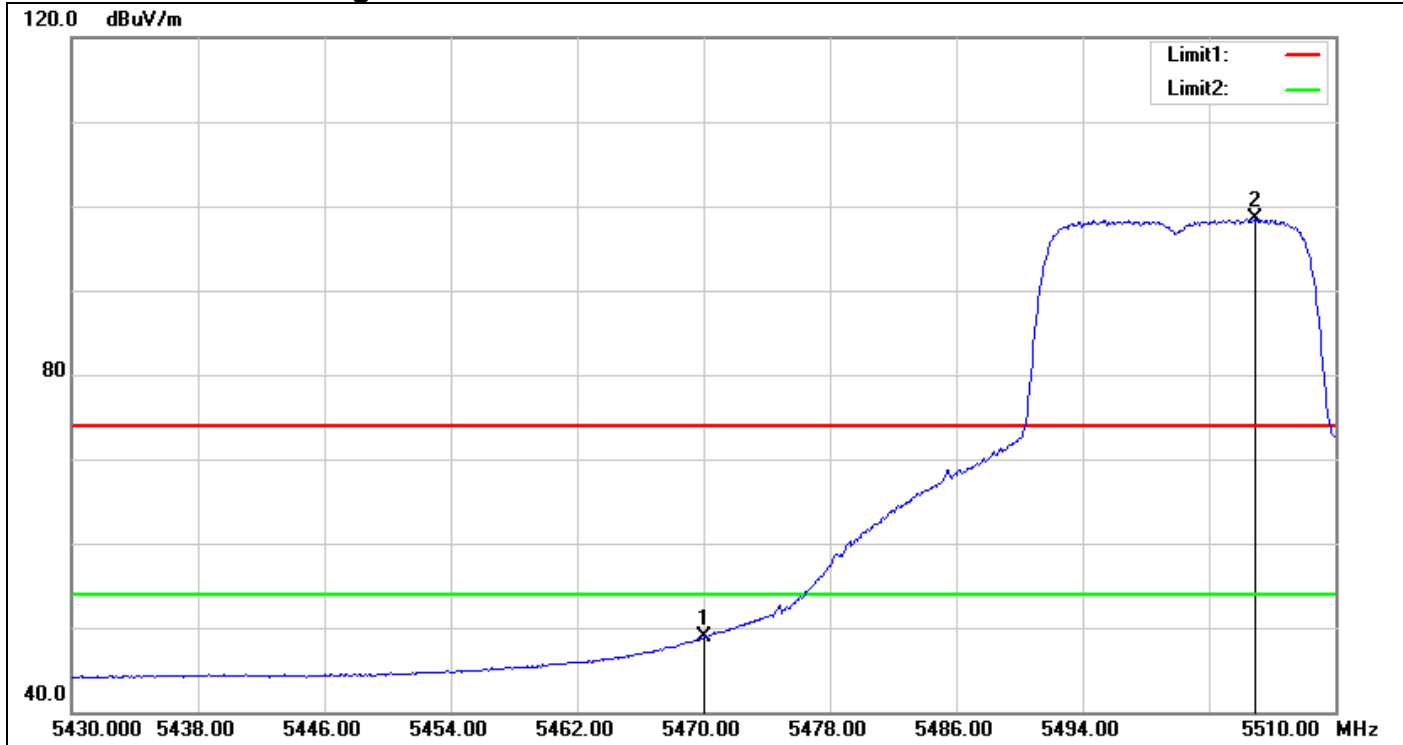

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	43.44	5.39	48.83	54.00	-5.17	AVG
2	5504.880	93.22	5.27	98.49	-	-	AVG


## IEEE 802.11a Mode / CH Mid

Detector mode: Peak

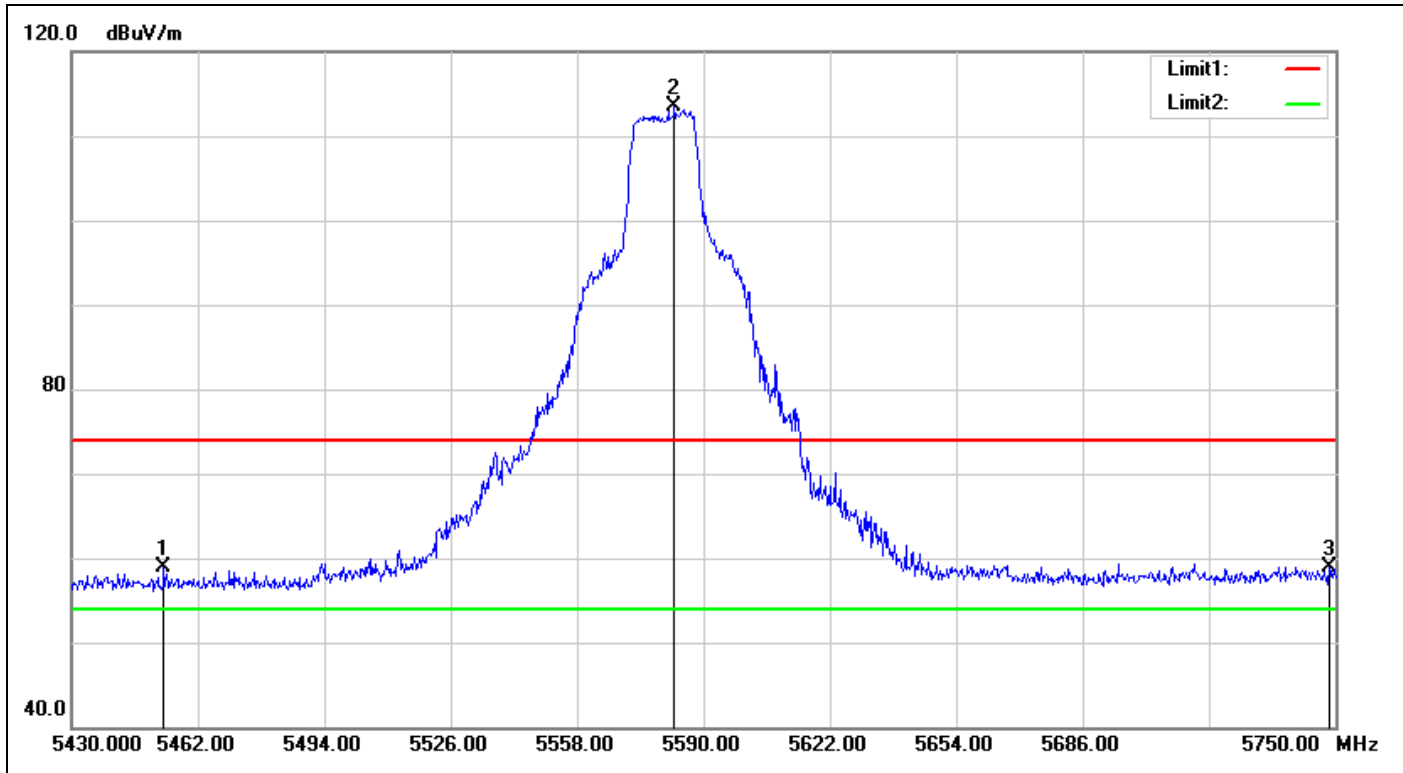

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.360	53.50	5.47	58.97	74.00	-15.03	peak
2	5582.640	107.94	5.60	113.54	-	-	peak
3	5748.400	52.69	6.31	59.00	74.00	-15.00	peak


**Detector mode: Average**

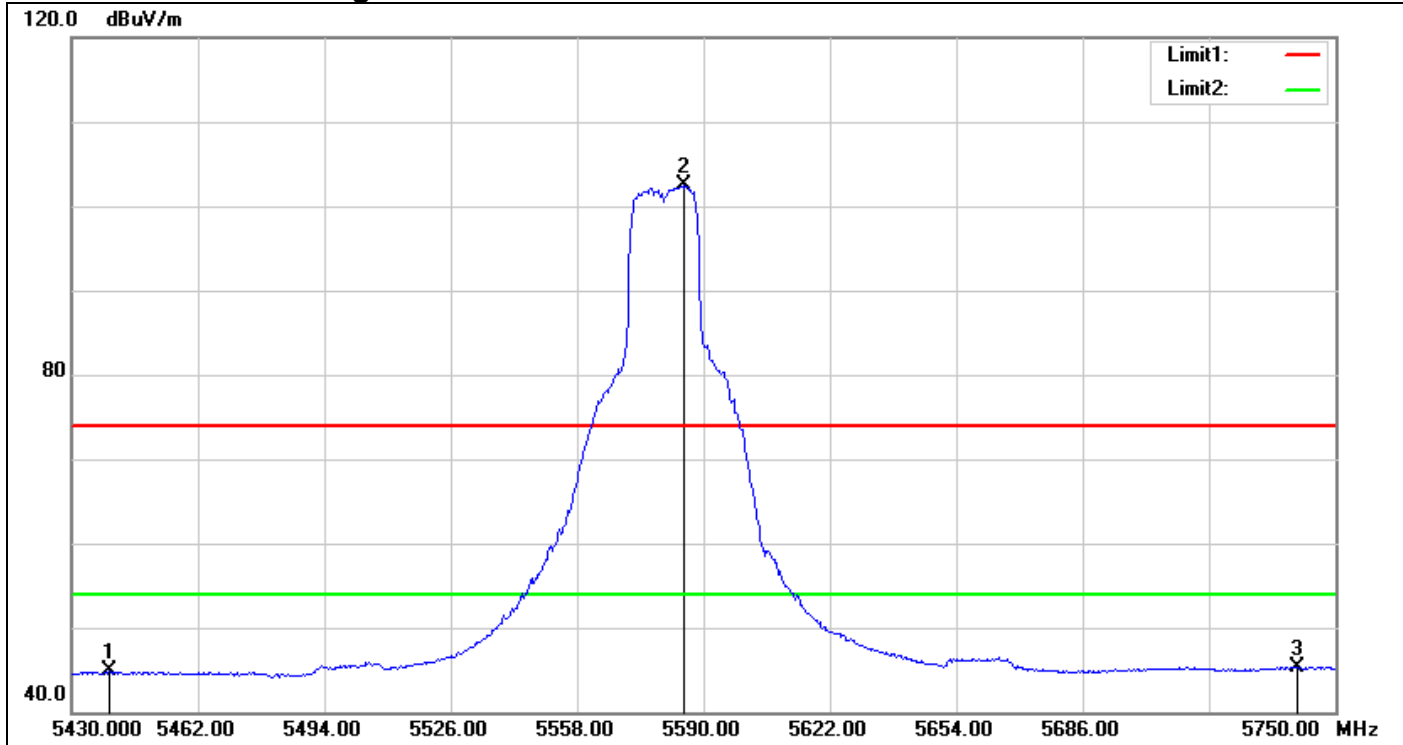

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.600	39.28	5.53	44.81	54.00	-9.19	AVG
2	5585.200	96.80	5.61	102.41	-	-	AVG
3	5740.400	39.06	6.27	45.33	54.00	-8.67	AVG


## IEEE 802.11a Mode / CH High

Detector mode: Peak

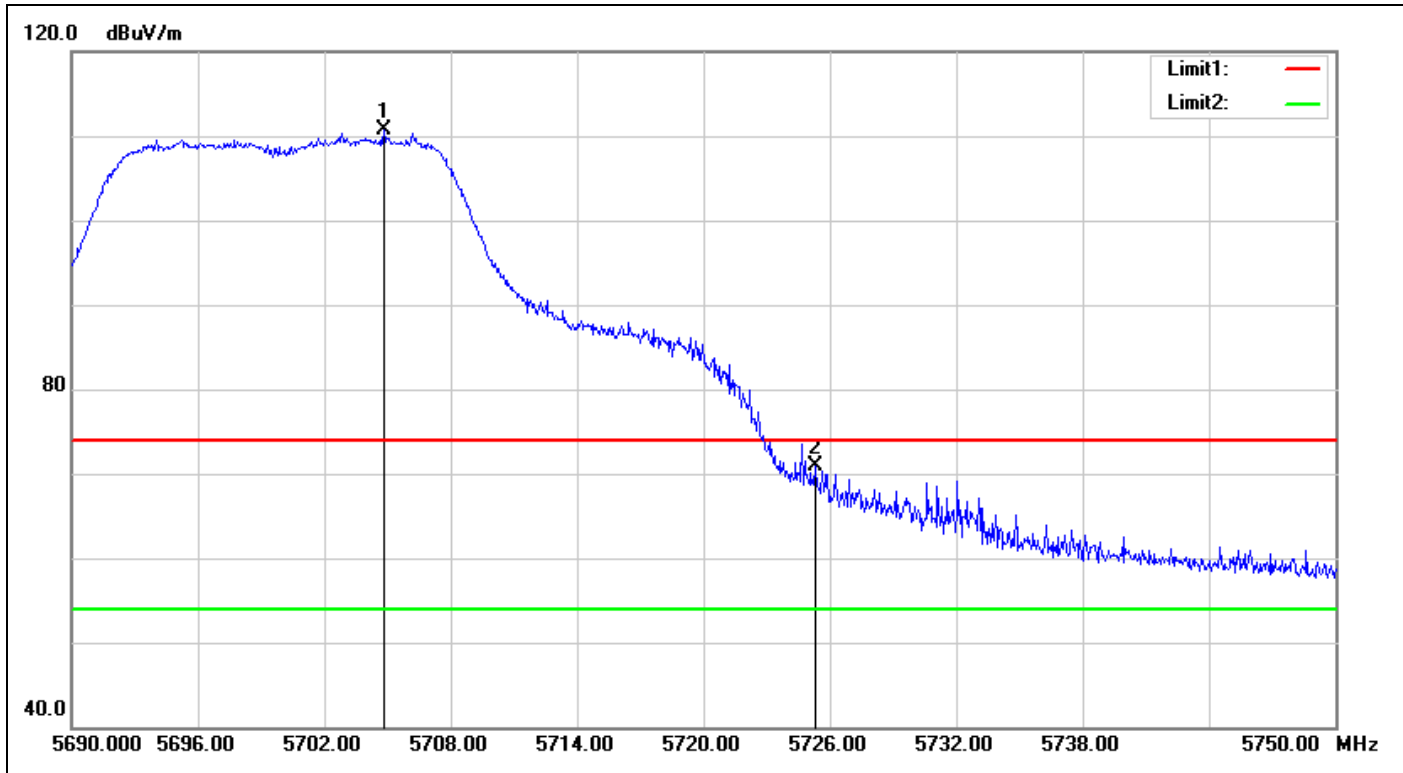

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5704.820	104.67	6.12	110.79	-	-	peak
2	5725.280	64.72	6.21	70.93	74.00	-3.07	peak


**Detector mode: Average**

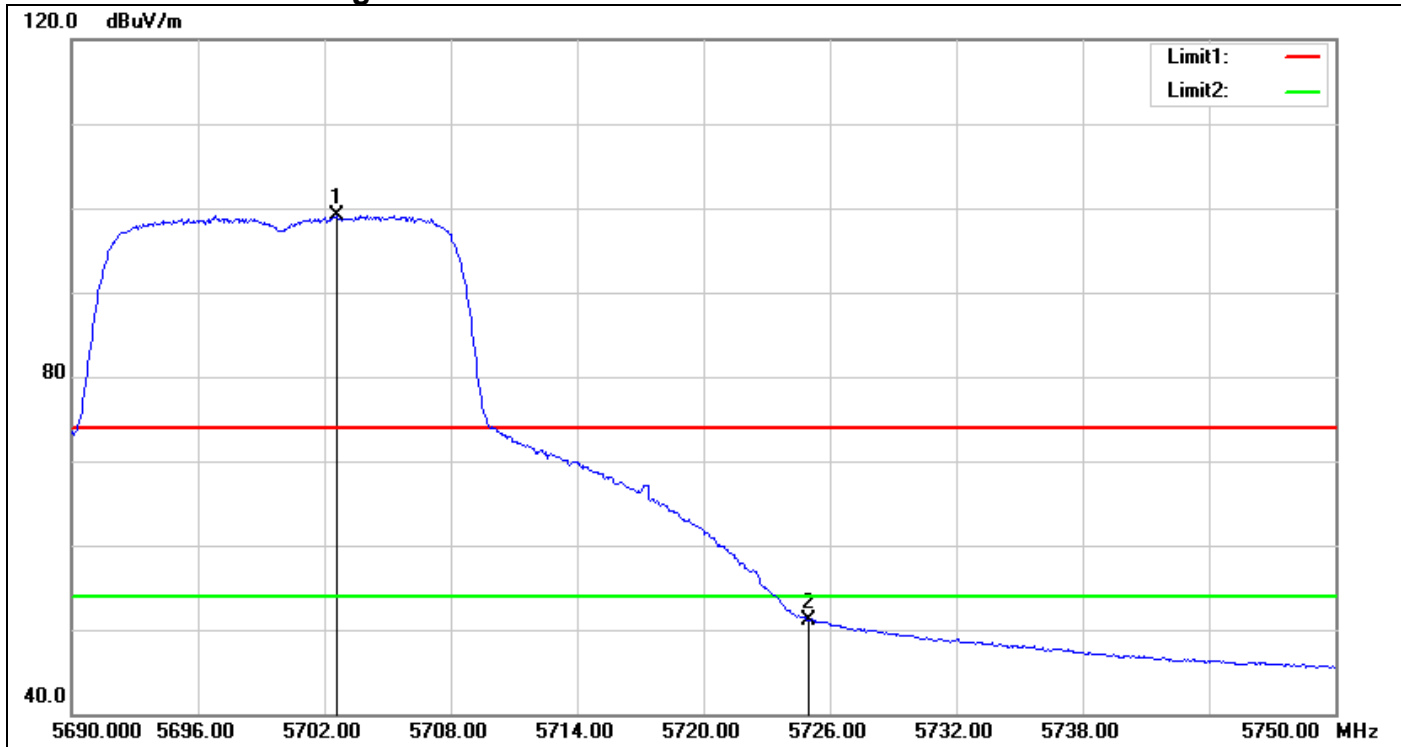

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5702.600	93.01	6.11	99.12	-	-	peak
2	5725.000	44.92	6.21	51.13	74.00	-22.87	peak


## IEEE 802.11n HT 20 MHz Mode / CH Low

Detector mode: Peak

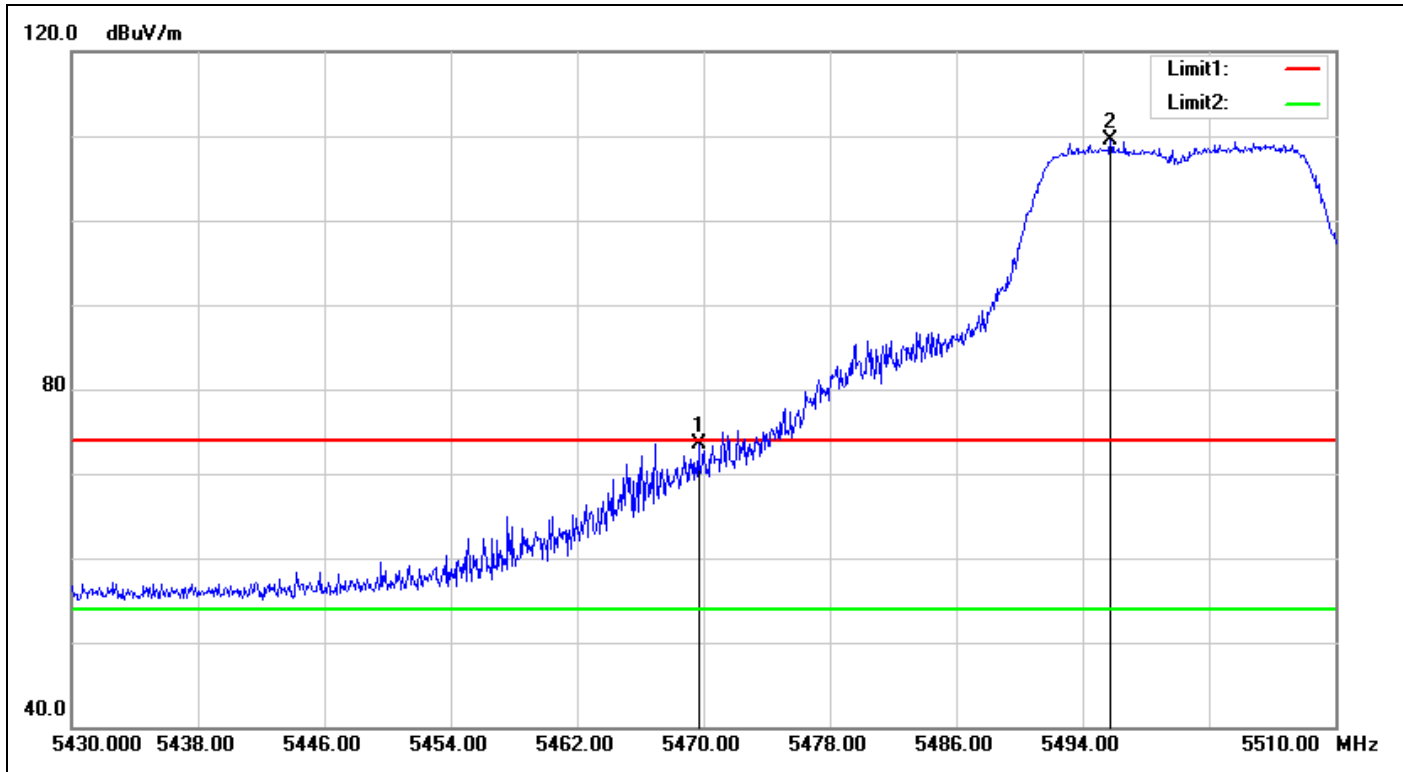

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5469.680	68.16	5.39	73.55	74.00	-0.45	peak
2	5495.760	104.25	5.27	109.52	-	-	peak

**Detector mode: Average**

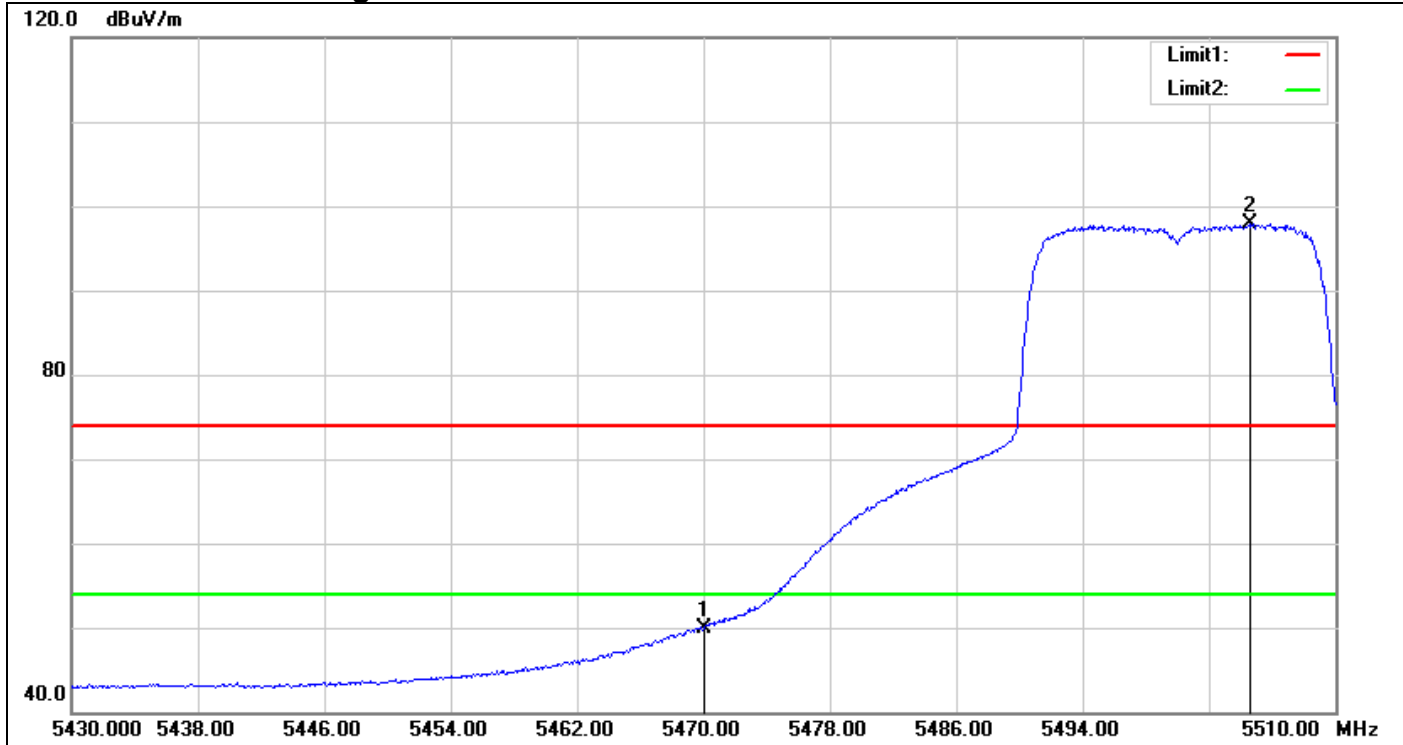


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	44.59	5.39	49.98	54.00	-4.02	AVG
2	5504.640	92.58	5.27	97.85	-	-	AVG




## IEEE 802.11n HT 20 MHz Mode / CH Mid

Detector mode: Peak

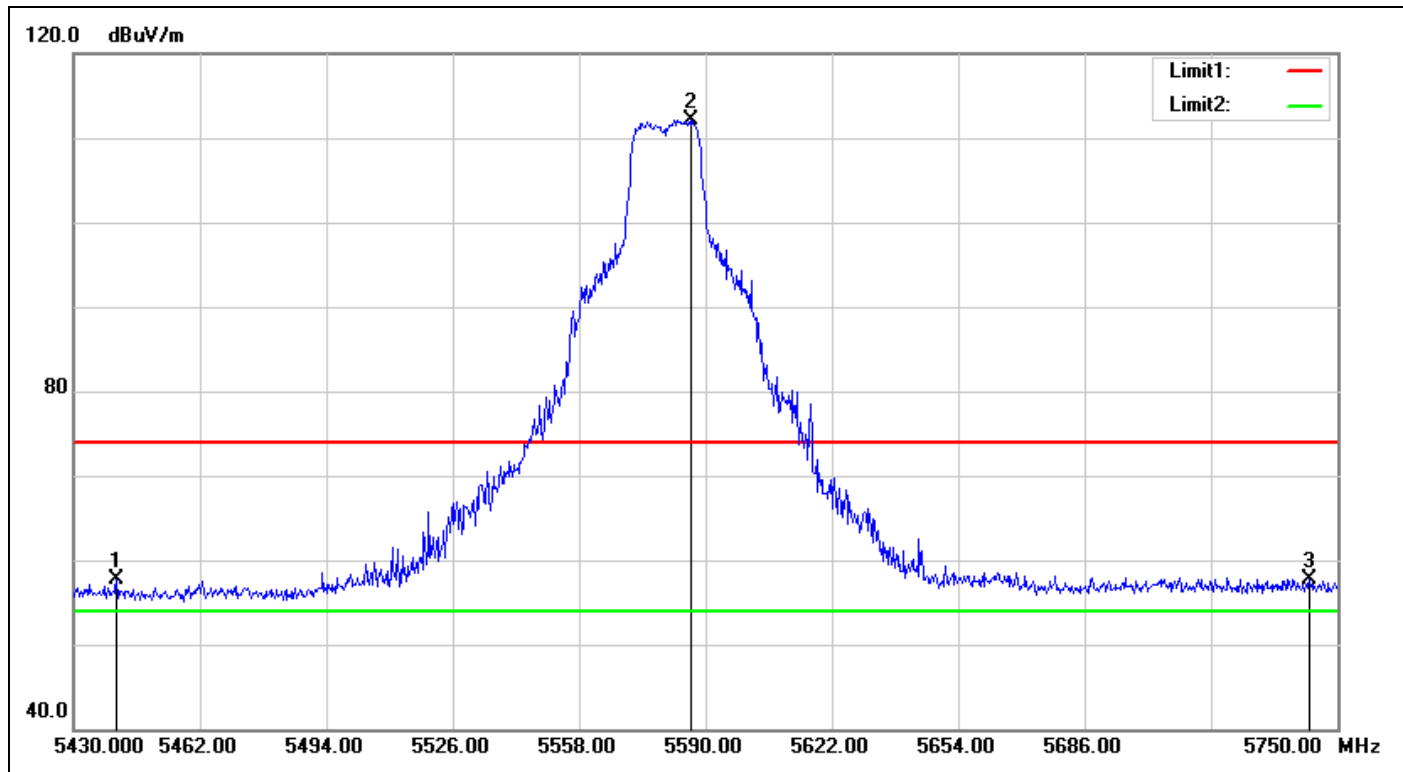

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.880	52.17	5.53	57.70	74.00	-16.30	peak
2	5586.480	106.47	5.62	112.09	-	-	peak
3	5742.960	51.51	6.29	57.80	74.00	-16.20	peak


**Detector mode: Average**

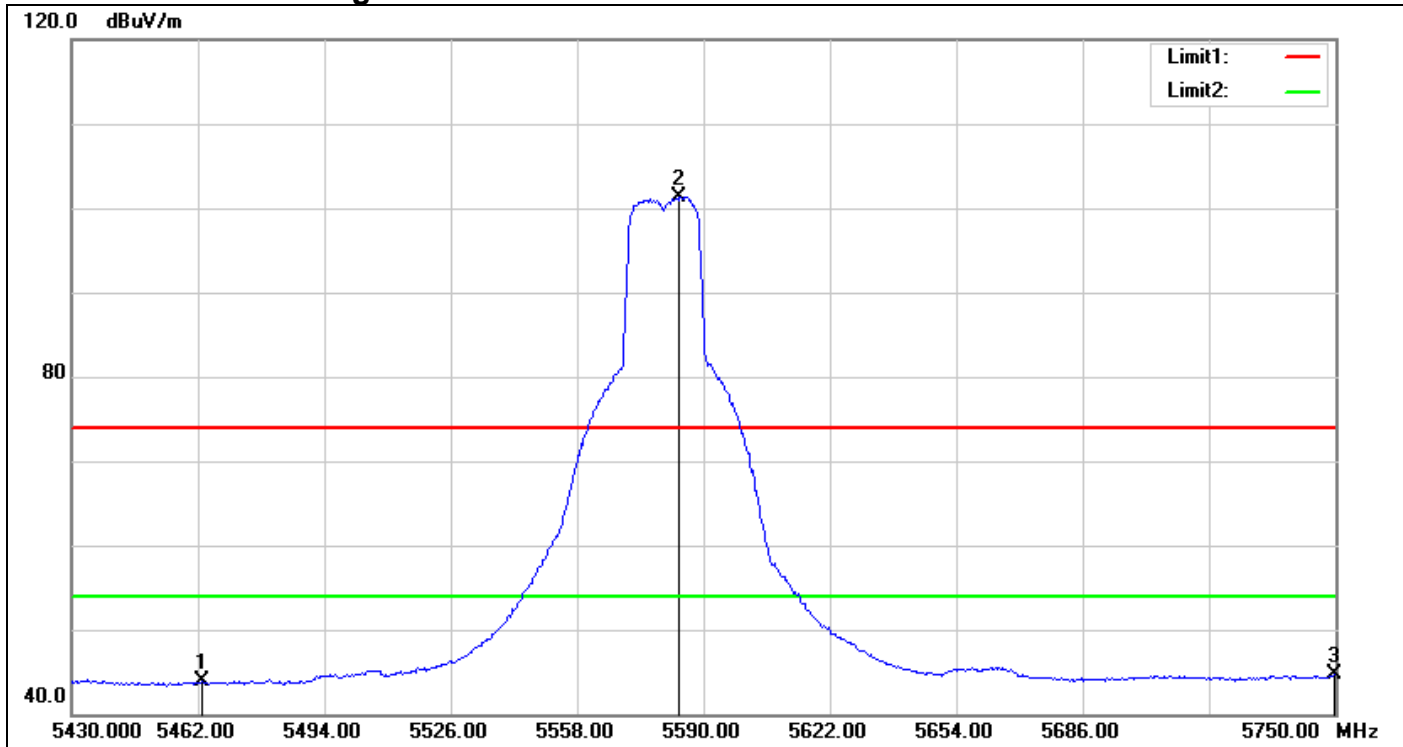

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5462.960	38.41	5.42	43.83	54.00	-10.17	AVG
2	5583.600	95.72	5.61	101.33	-	-	AVG
3	5749.680	38.34	6.31	44.65	54.00	-9.35	AVG


## IEEE 802.11n HT 20 MHz Mode / CH High

Detector mode: Peak

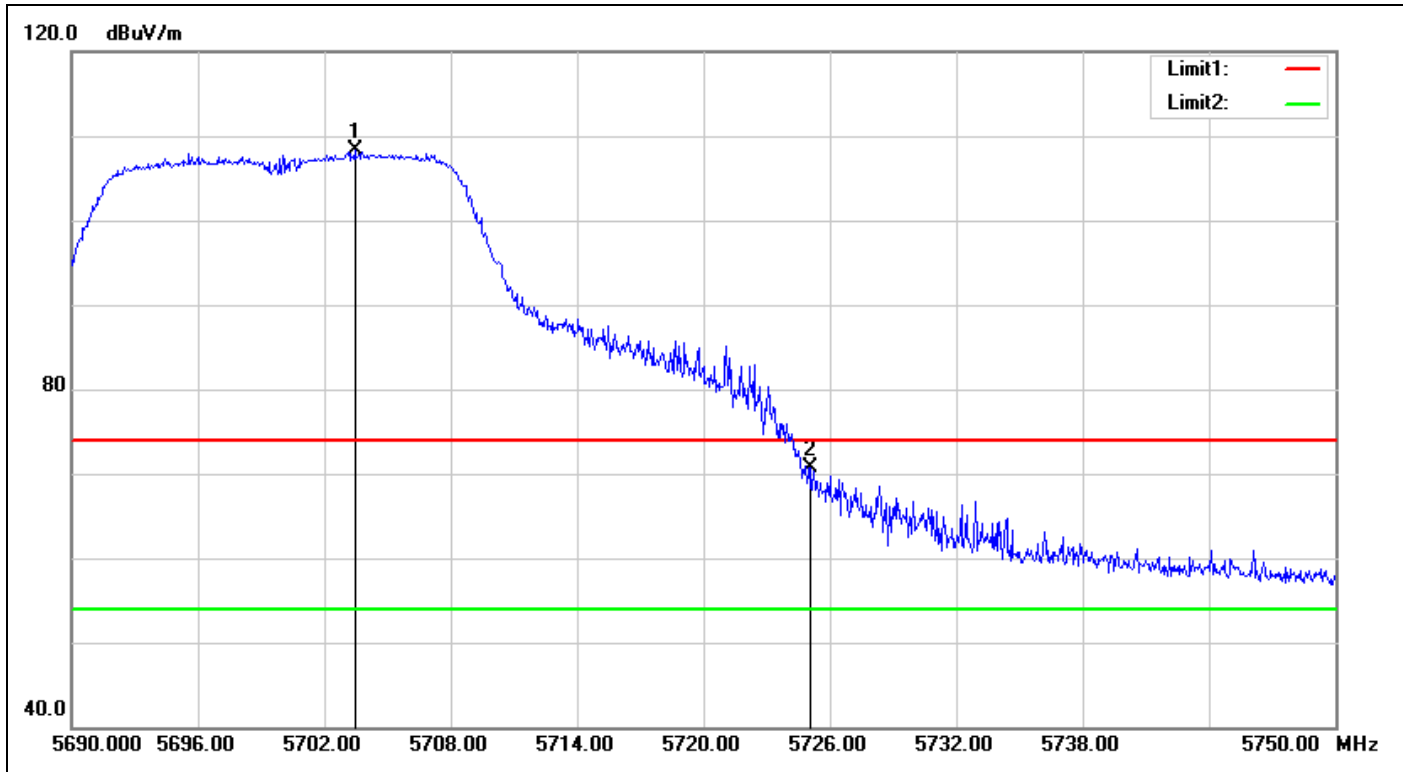

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5703.440	102.16	6.12	108.28	-	-	peak
2	5725.100	64.42	6.21	70.63	74.00	-3.37	peak


**Detector mode: Average**

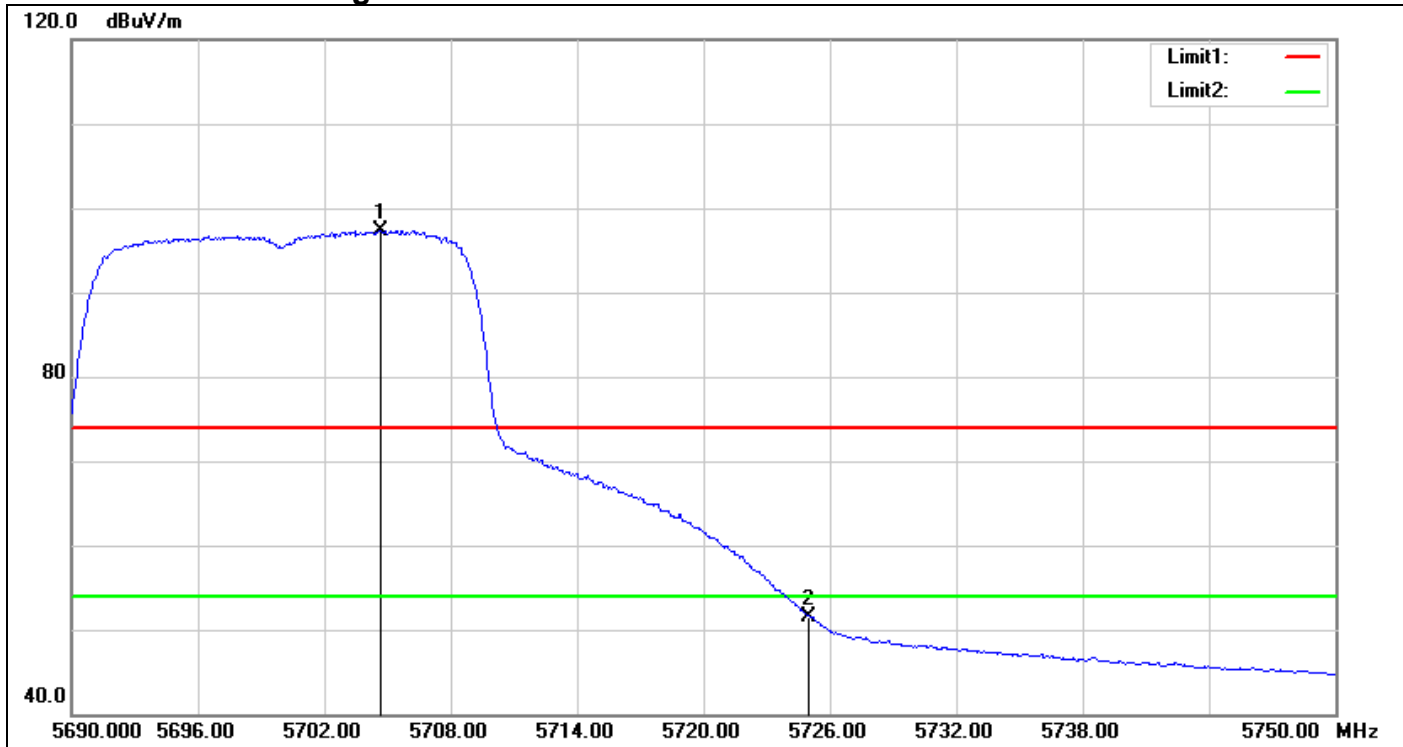

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5704.640	91.17	6.12	97.29	-	-	AVG
2	5725.000	45.30	6.21	51.51	54.00	-2.49	AVG


## IEEE 802.11n HT 40 MHz Mode / CH Low

Detector mode: Peak

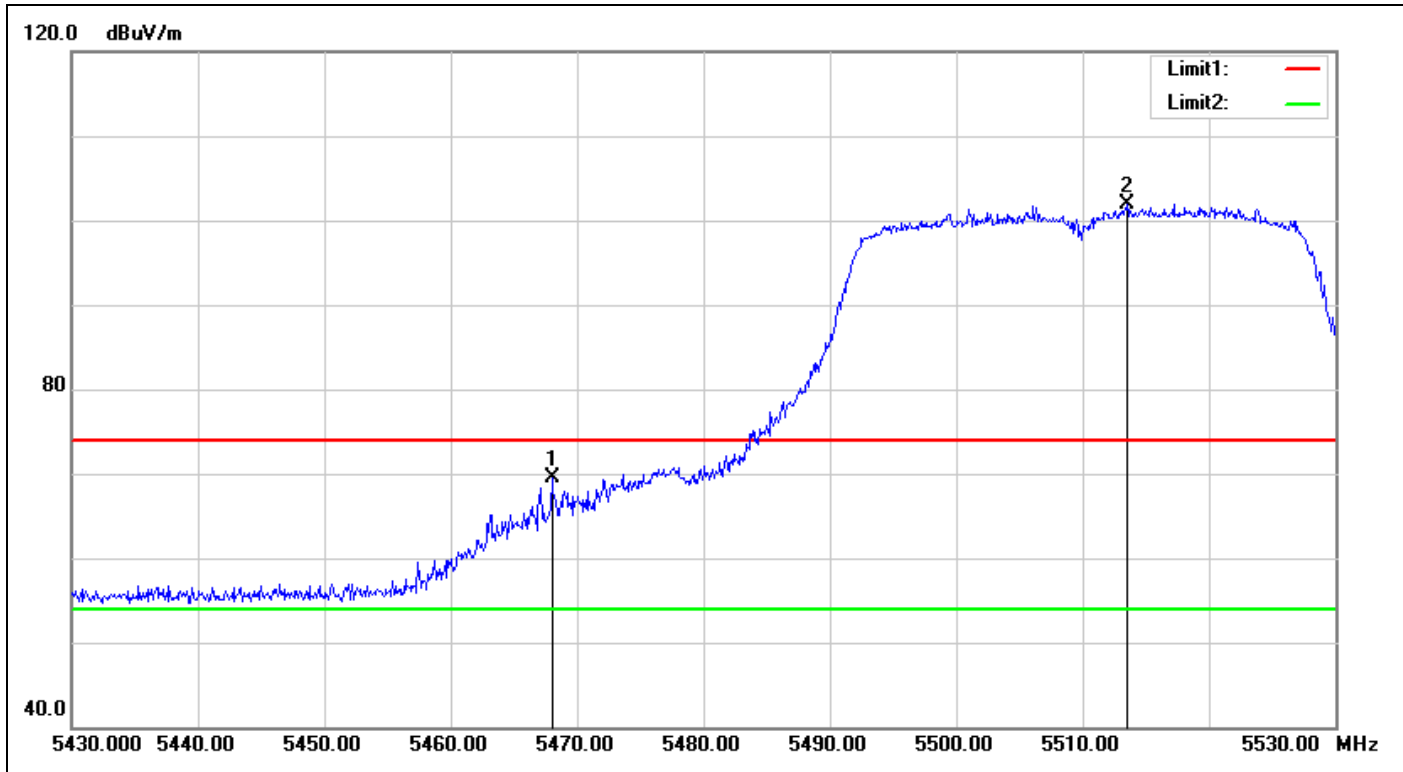

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5468.000	64.03	5.40	69.43	74.00	-4.57	peak
2	5513.500	96.68	5.31	101.99	-	-	peak


**Detector mode: Average**

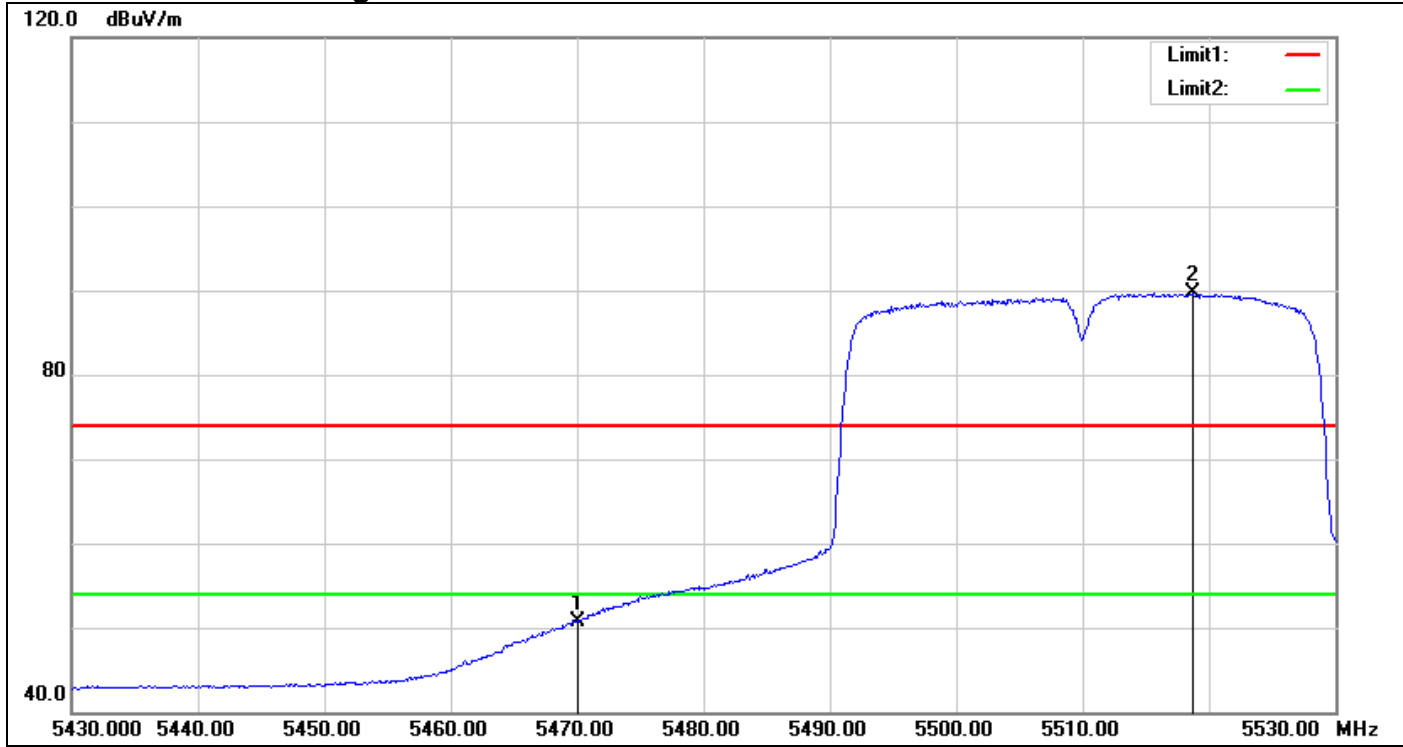

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	45.34	5.39	50.73	54.00	-3.27	AVG
2	5518.700	84.34	5.33	89.67	-	-	AVG


## IEEE 802.11n HT 40 MHz Mode / CH Mid

Detector mode: Peak

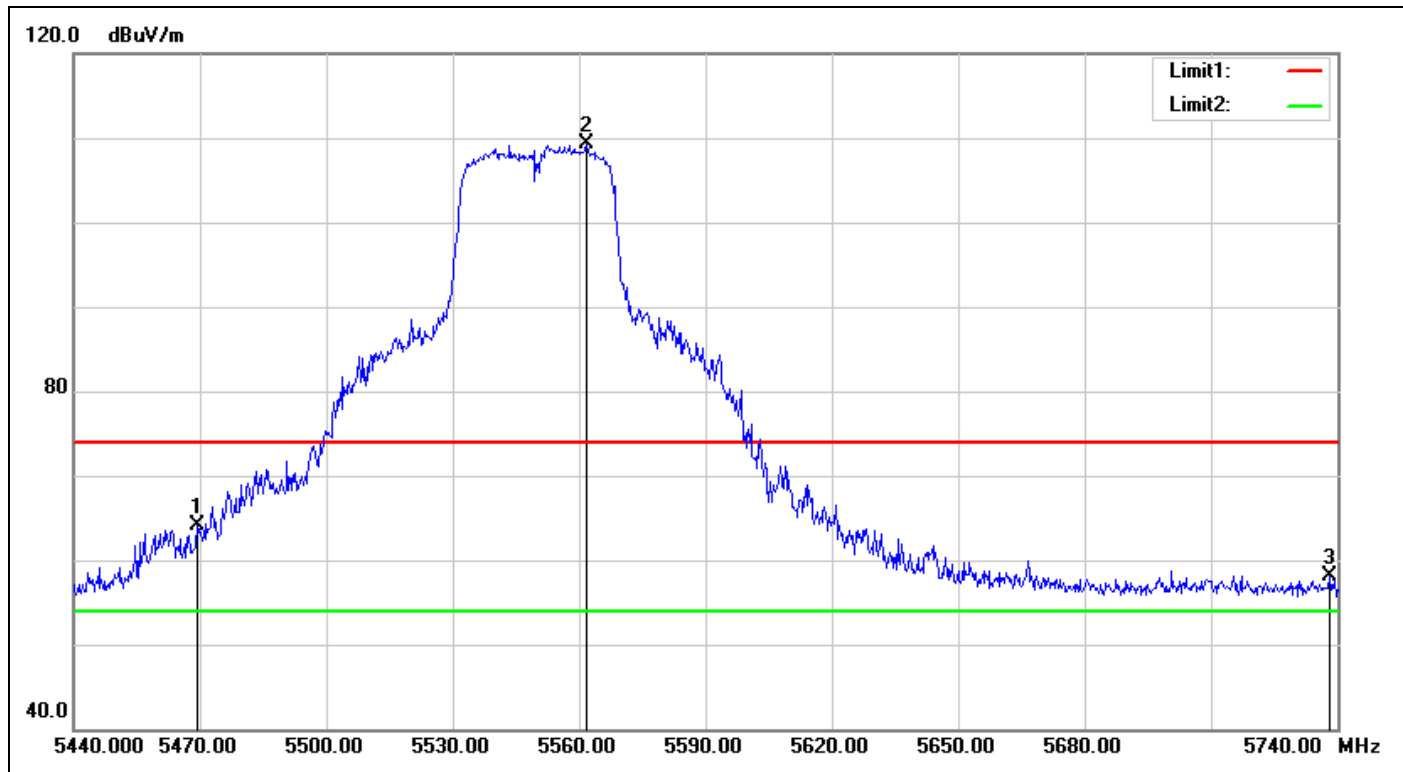

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5469.400	58.63	5.39	64.02	74.00	-9.98	peak
2	5561.800	103.89	5.51	109.40	-	-	peak
3	5738.200	51.76	6.26	58.02	74.00	-15.98	peak

**Detector mode: Average**

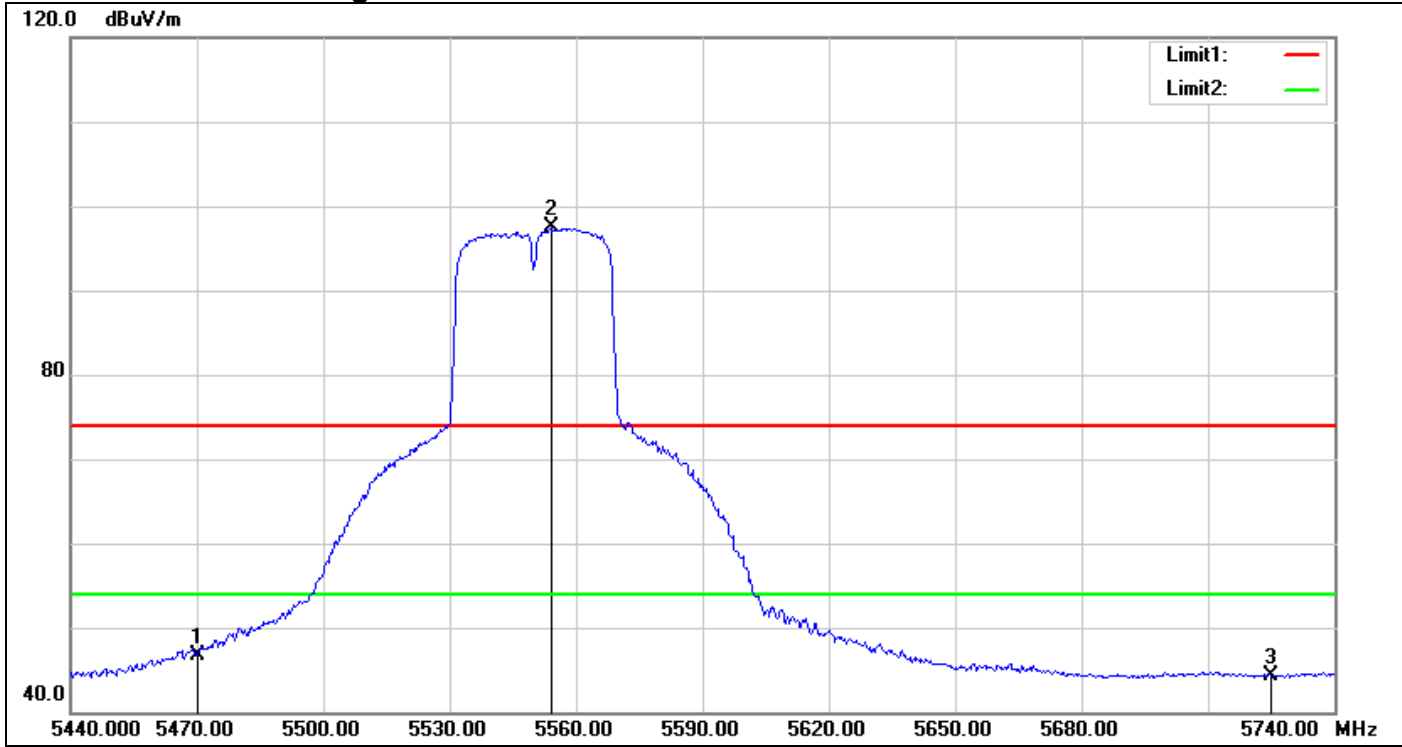


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5470.000	41.29	5.39	46.68	54.00	-7.32	AVG
2	5554.300	92.00	5.48	97.48	-	-	AVG
3	5725.000	37.99	6.21	44.20	54.00	-9.80	AVG




## IEEE 802.11n HT 40 MHz Mode / CH High

Detector mode: Peak

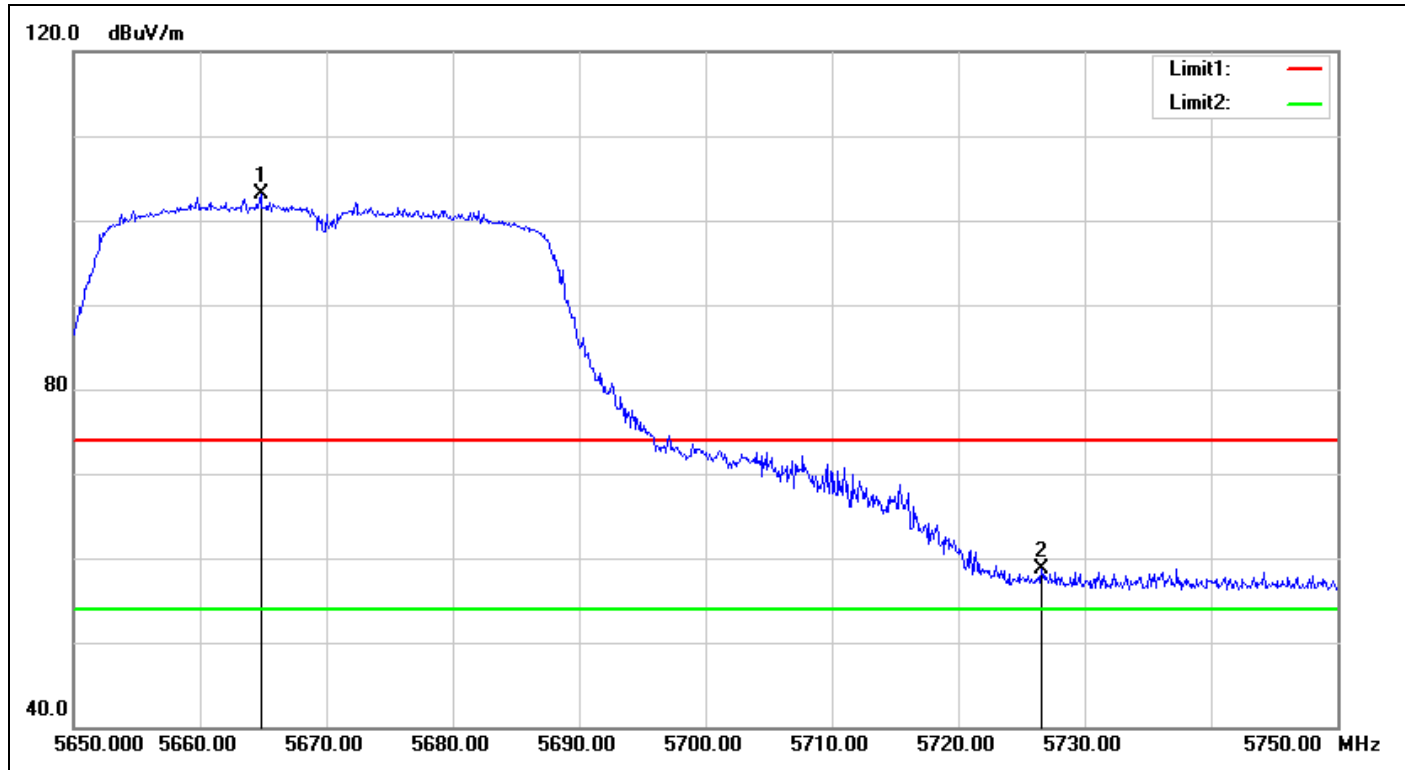

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5664.800	97.17	5.95	103.12	-	-	peak
2	5726.600	52.53	6.22	58.75	74.00	-15.25	peak

**Detector mode: Average**

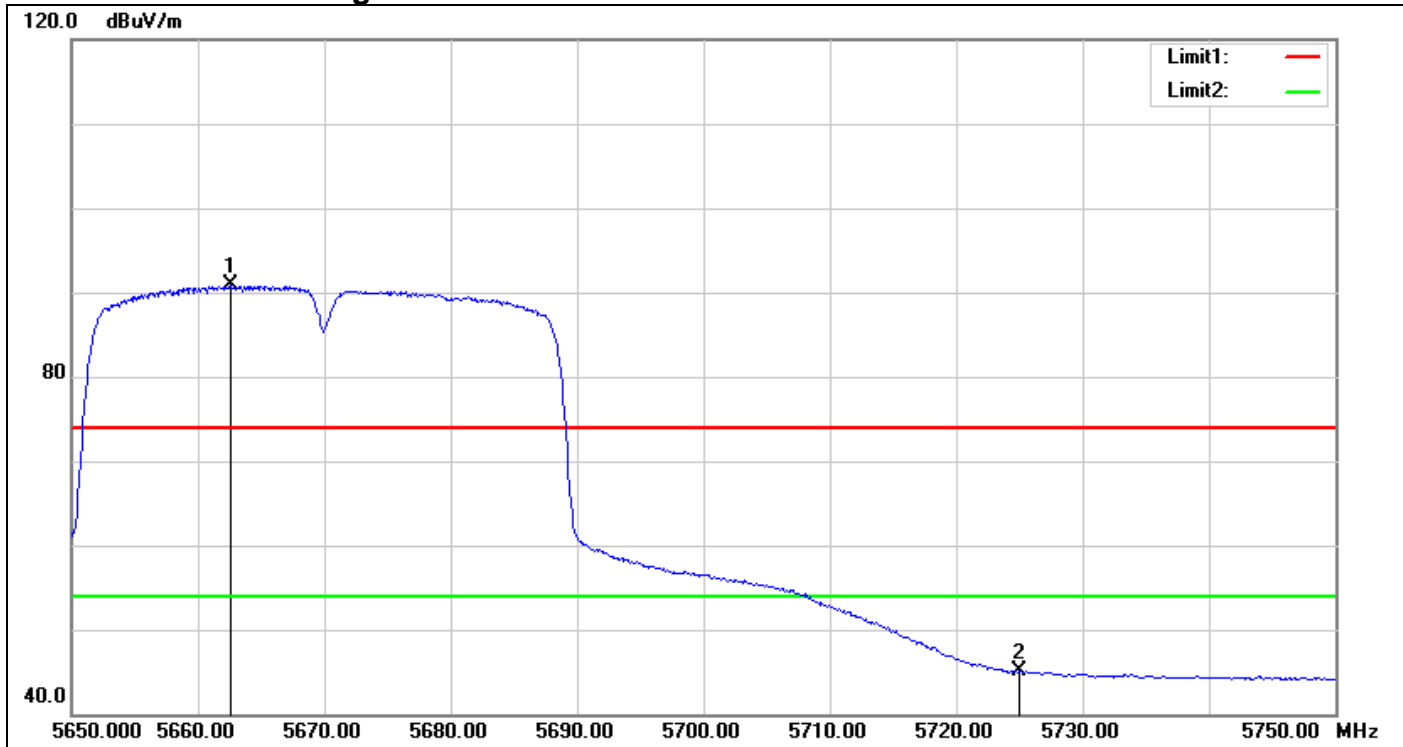

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5662.600	84.90	5.94	90.84	-	-	AVG
2	5725.000	38.89	6.21	45.10	54.00	-8.90	AVG

## **7.4 PEAK POWER SPECTRAL DENSITY**


### **LIMIT**

According to §15.407(a)

- (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 11dBm in any 1MHz band.
- (2) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*

### **Test Configuration**



### **TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = Sweep= AUTO
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed

### **TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5180	10.64	11.00	PASS
Mid	5220	10.77	11.00	PASS
High	5240	10.74	11.00	PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5180	10.77	11.00	PASS
Mid	5220	10.61	11.00	PASS
High	5240	10.16	11.00	PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5190	3.66	11.00	PASS
High	5230	10.57	11.00	PASS

**Test mode: IEEE 802.11a mode/ 5260 ~ 5320MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5260	10.72	11.00	PASS
Mid	5280	10.39	11.00	PASS
High	5320	10.30	11.00	PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5260	10.59	11.00	PASS
Mid	5280	10.28	11.00	PASS
High	5320	10.89	11.00	PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5270	10.49	11.00	PASS
High	5310	3.28	11.00	PASS

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5500	10.87	11.00	PASS
Mid	5580	10.55	11.00	PASS
High	5700	10.19	11.00	PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz**


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5500	10.64	11.00	PASS
Mid	5580	10.38	11.00	PASS
High	5700	10.64	11.00	PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5510	4.87	11.00	PASS
Mid	5550	10.38	11.00	PASS
High	5670	4.75	11.00	PASS

**Test Plot**  
**IEEE 802.11a mode / 5180 ~ 5240MHz**


**CH Low**

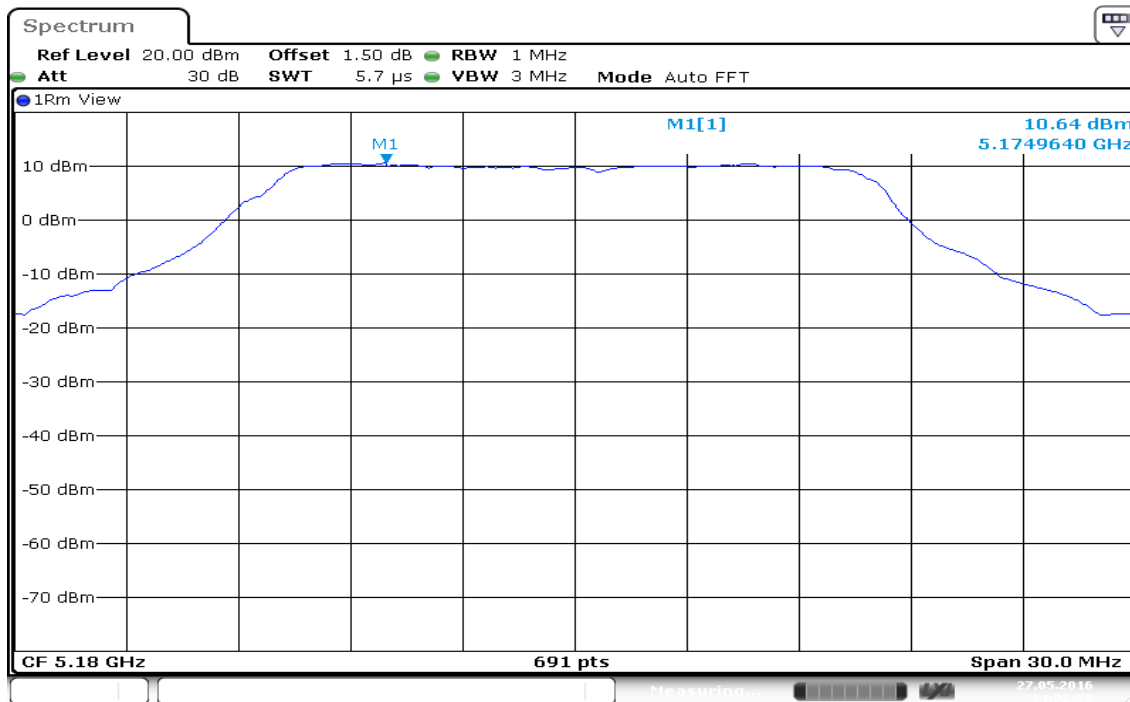

**CH Mid**

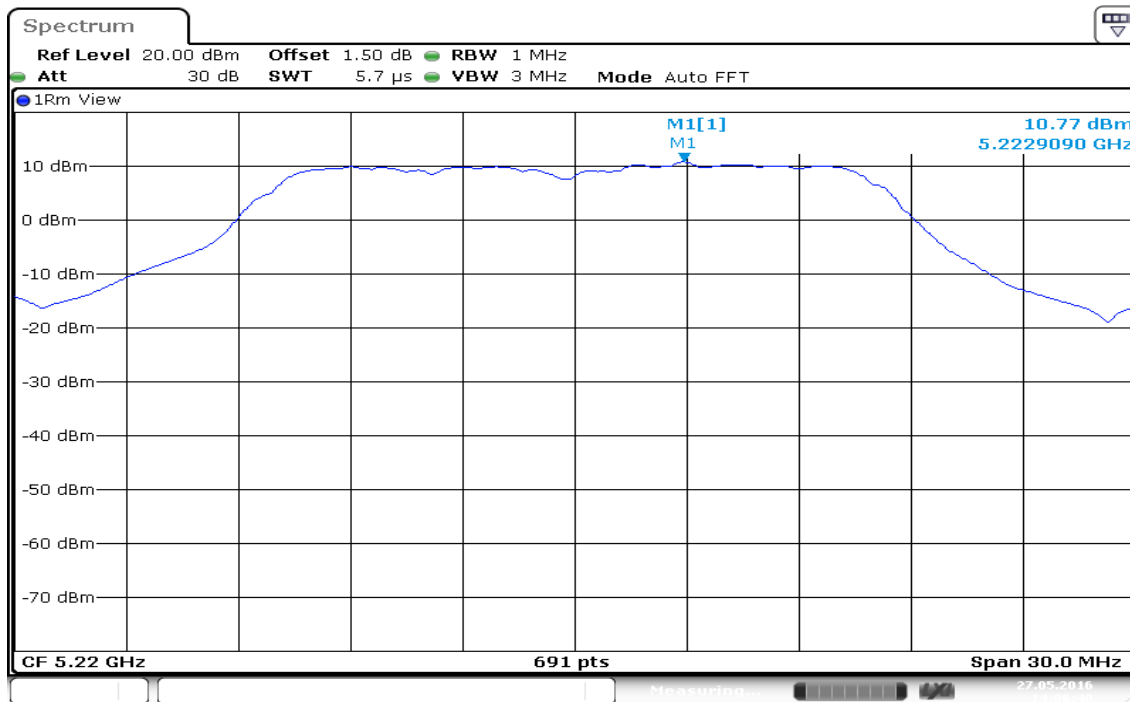

### CH High

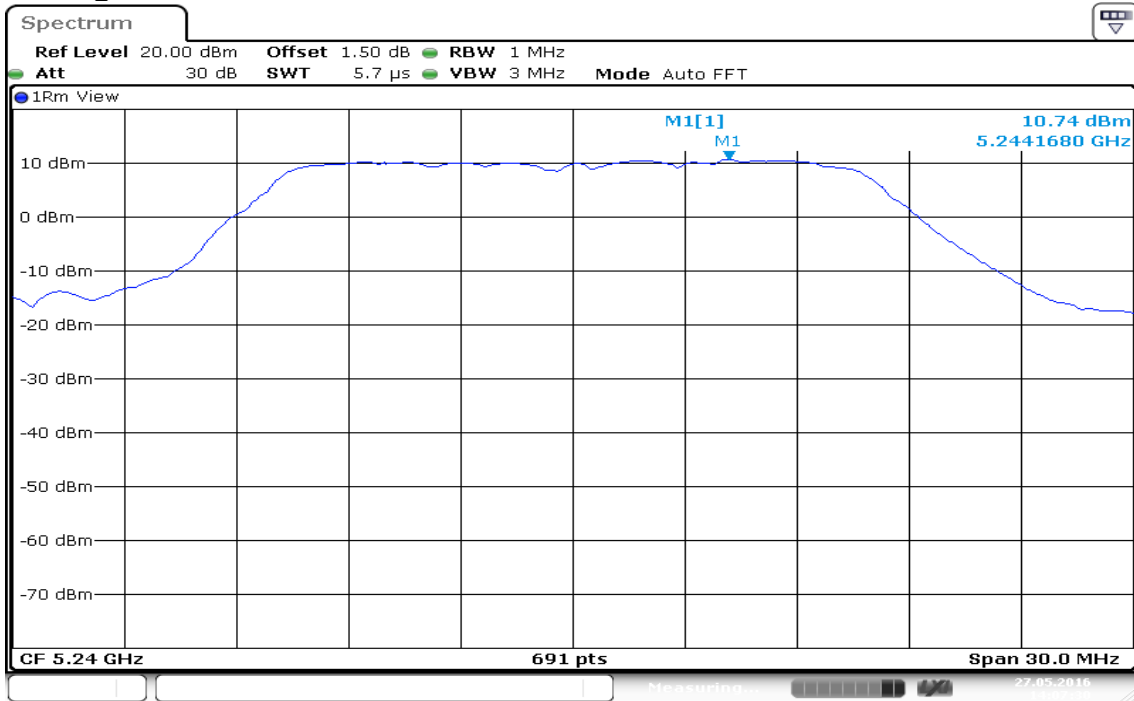


Date: 27.MAY.2016 14:07:30




### IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

#### CH Low

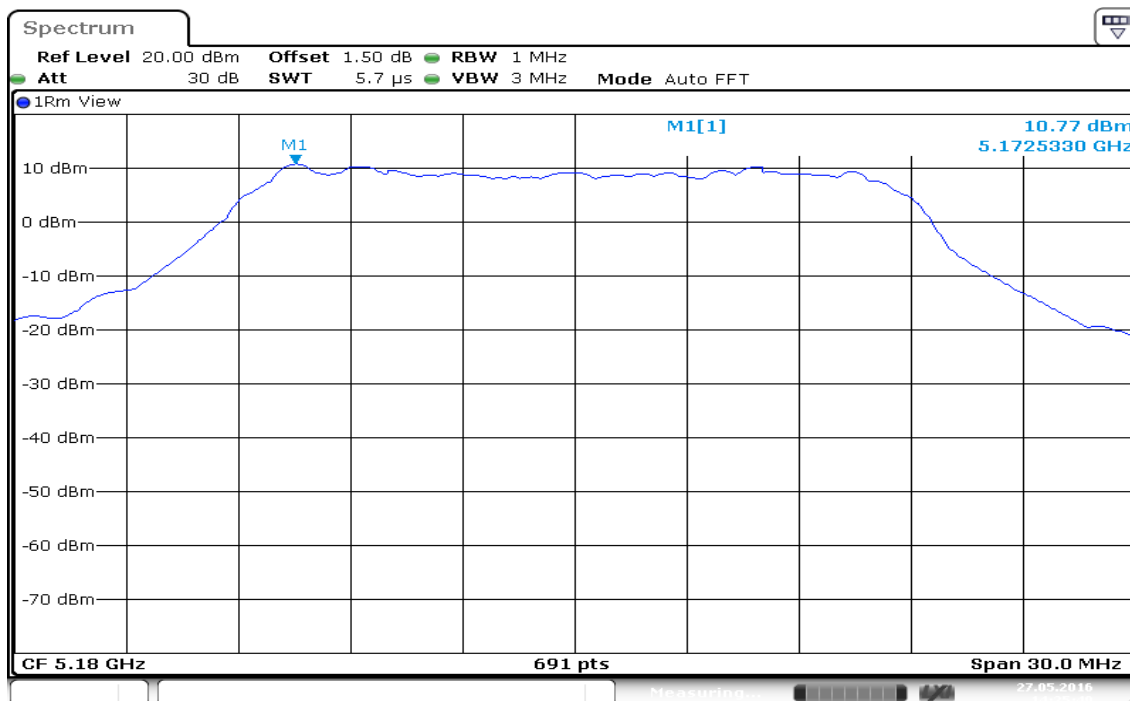


Date: 27.MAY.2016 14:25:49

#### CH Mid

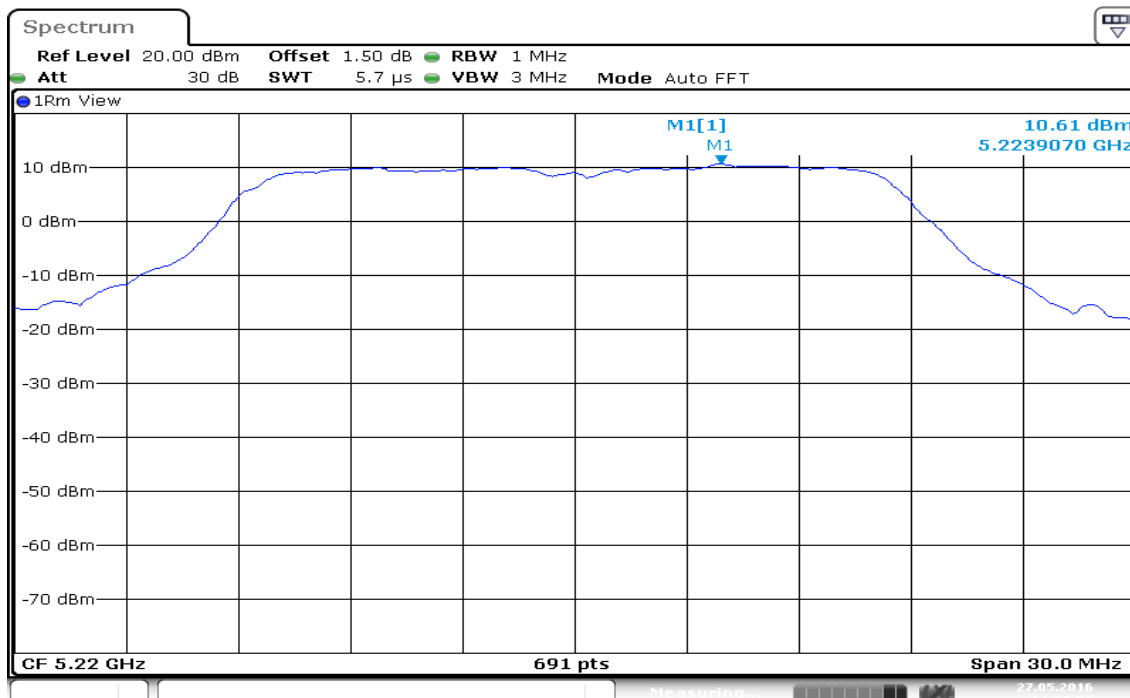

Date: 27.MAY.2016 14:28:50


### CH High

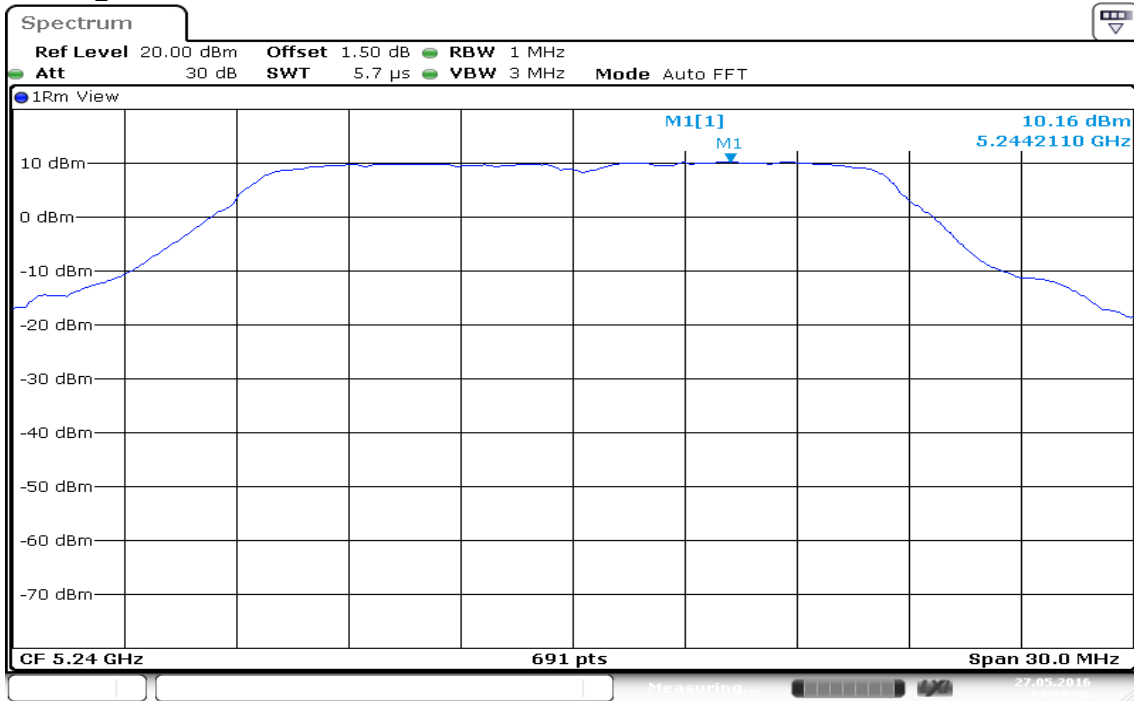

Date: 27.MAY.2016 14:33:56


### IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

#### CH Low

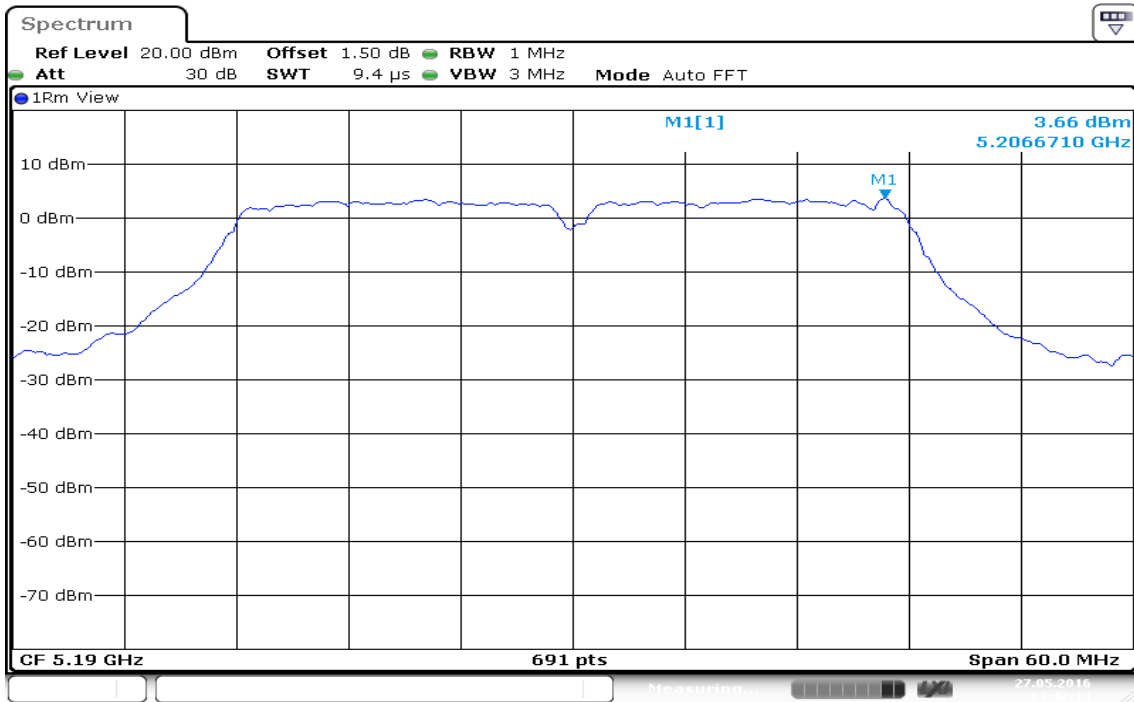

Date: 27.MAY.2016 14:42:14


#### CH High

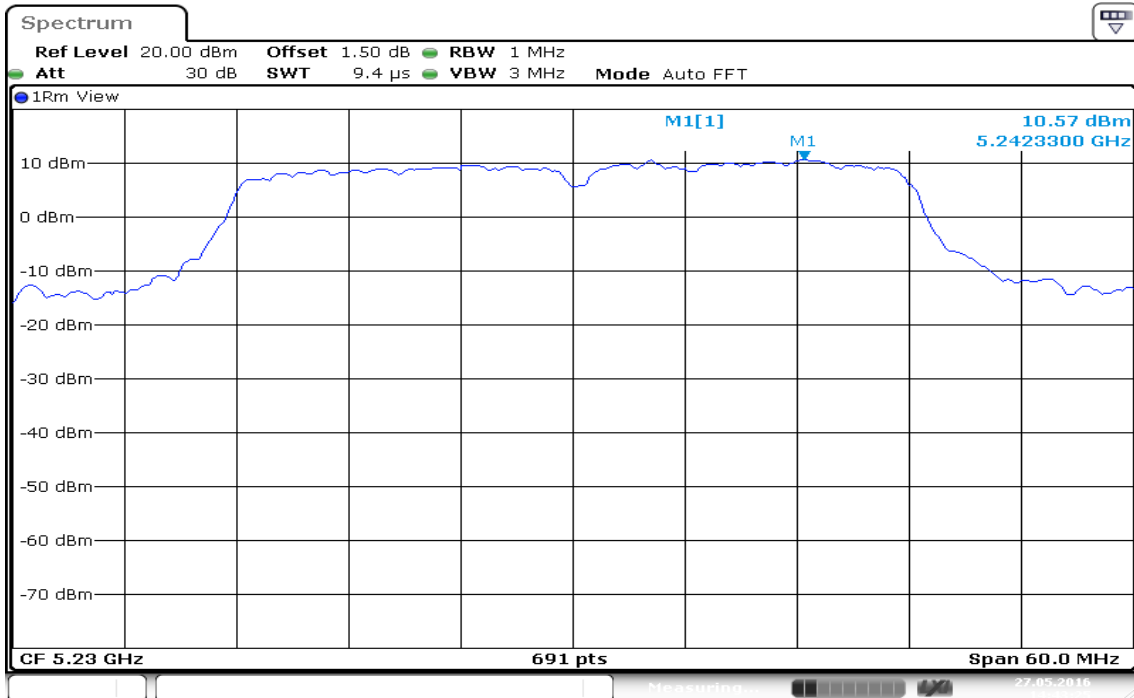

Date: 27.MAY.2016 14:43:25


### IEEE 802.11a mode / 5260 ~ 5320MHz

#### CH Low

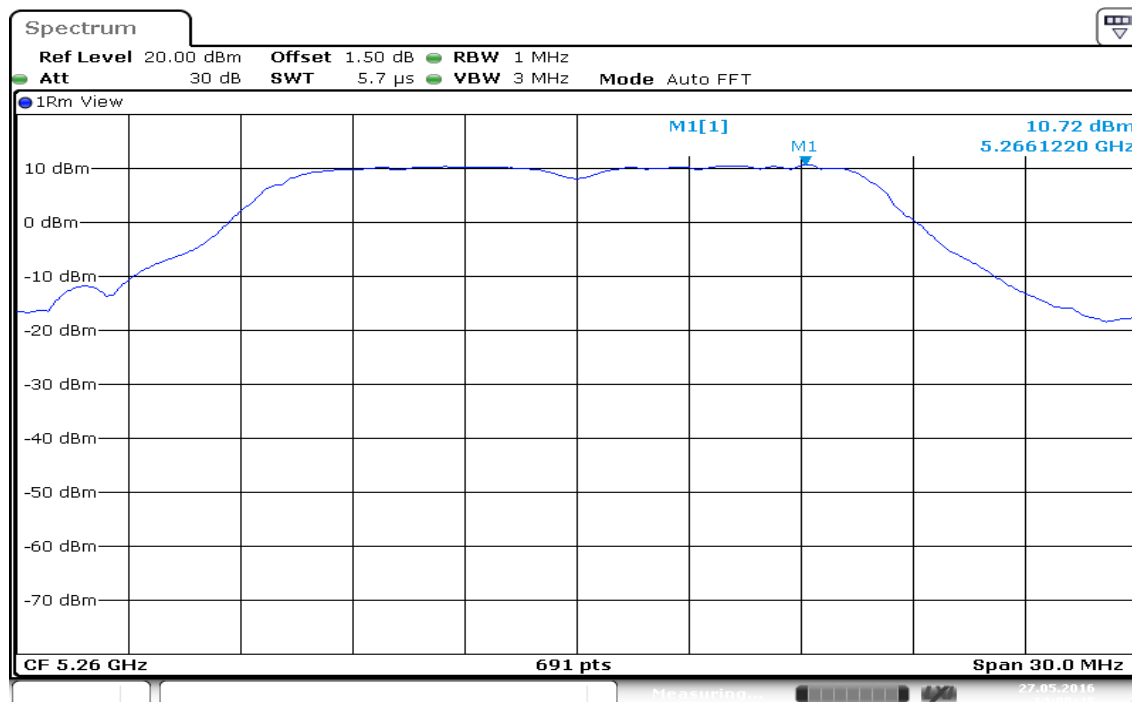


Date: 27.MAY.2016 14:08:48

#### CH Mid

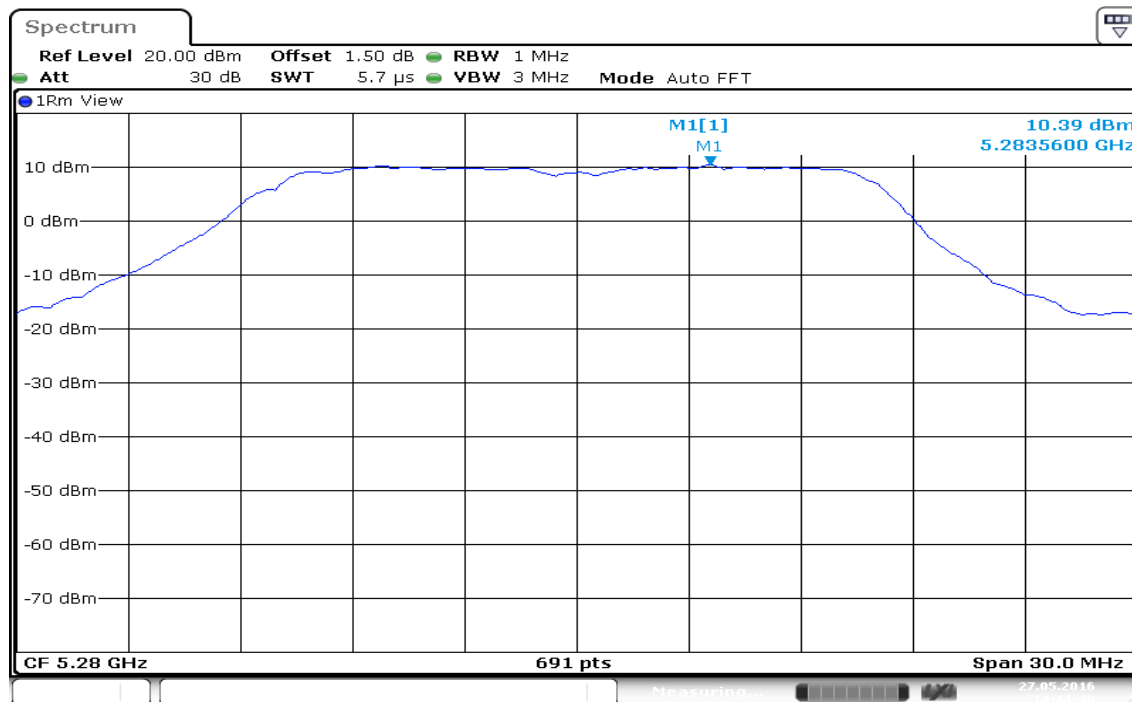

Date: 27.MAY.2016 14:11:40


### CH High

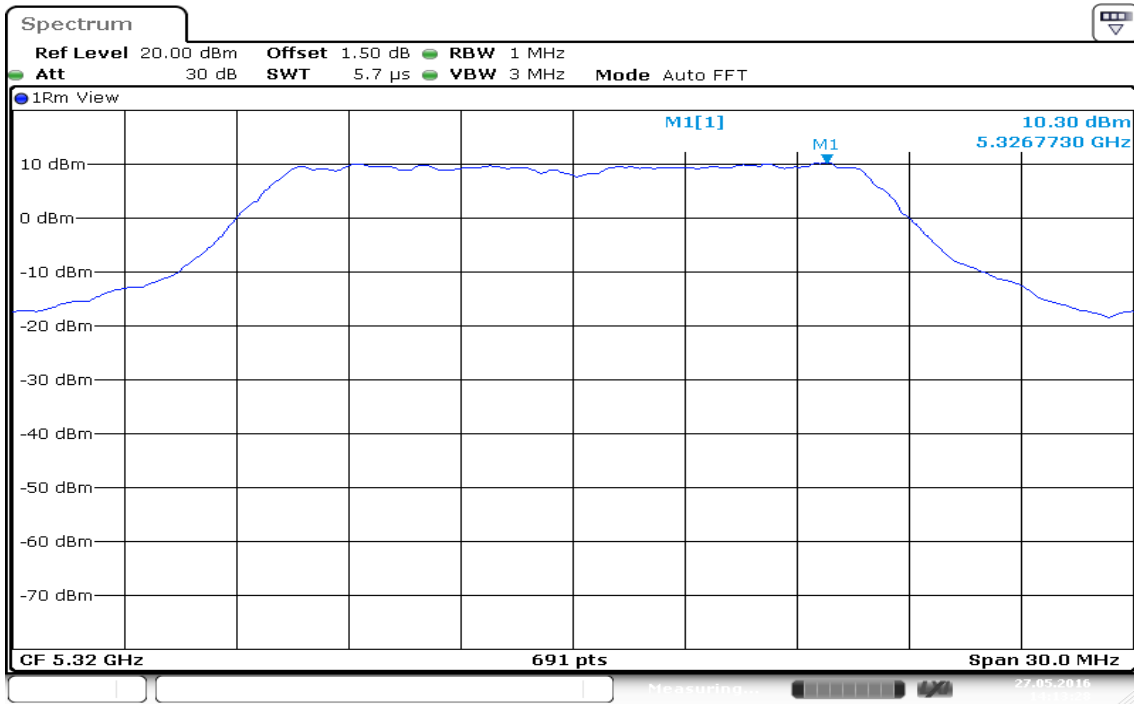

Date: 27.MAY.2016 14:13:27


### IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz

#### CH Low

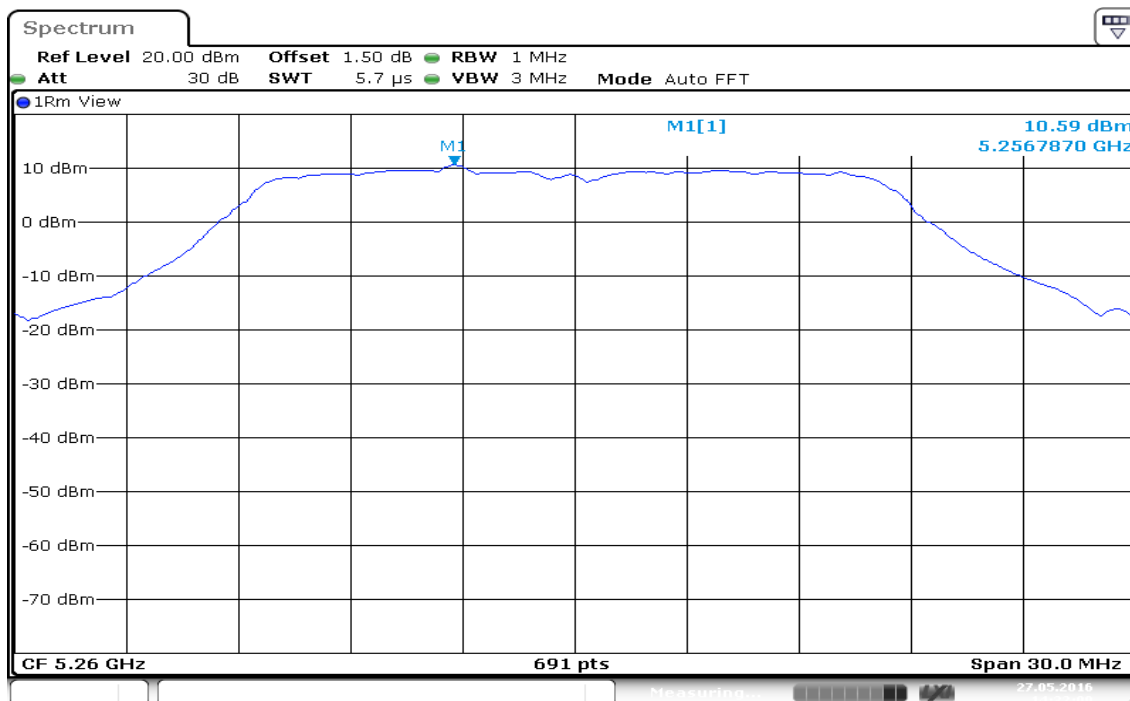


Date: 27.MAY.2016 14:32:08

#### CH Mid

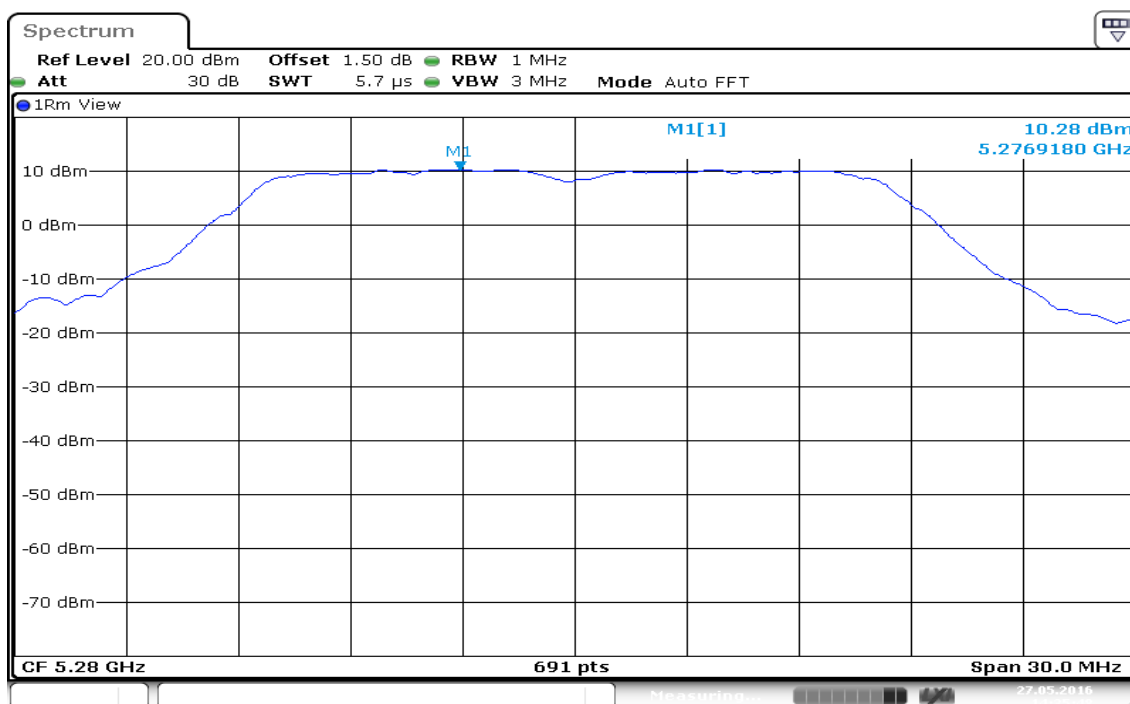

Date: 27.MAY.2016 14:35:48


### CH High

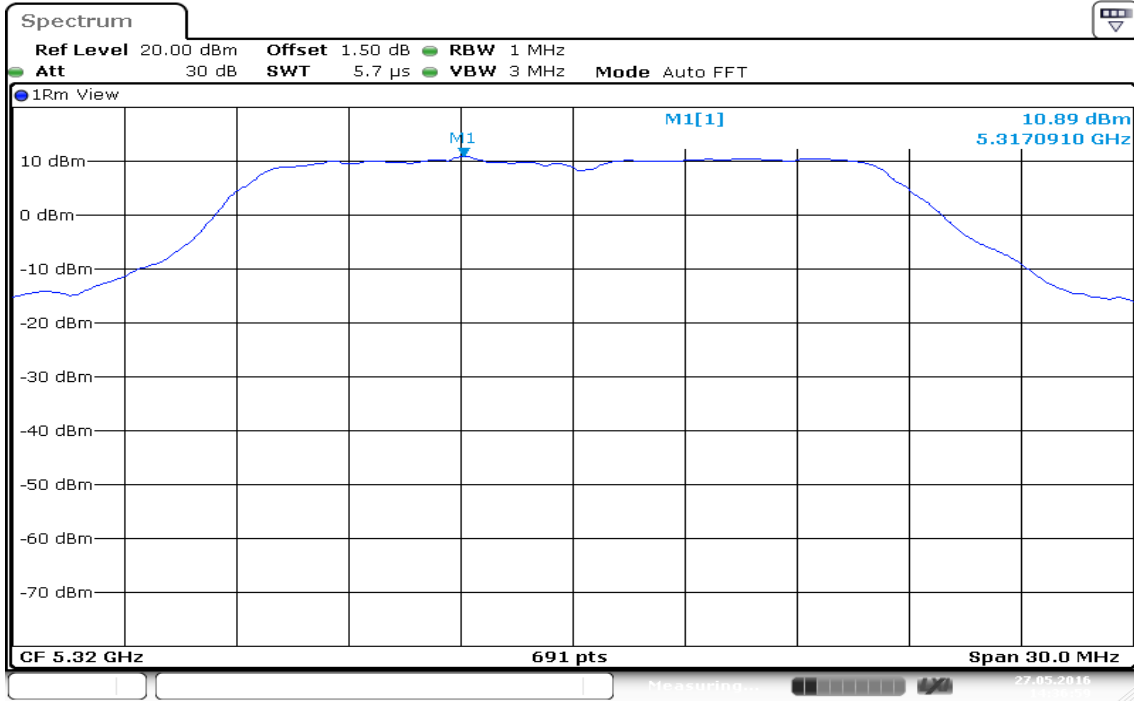


Date: 27.MAY.2016 14:36:59

**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz**

**CH Low**

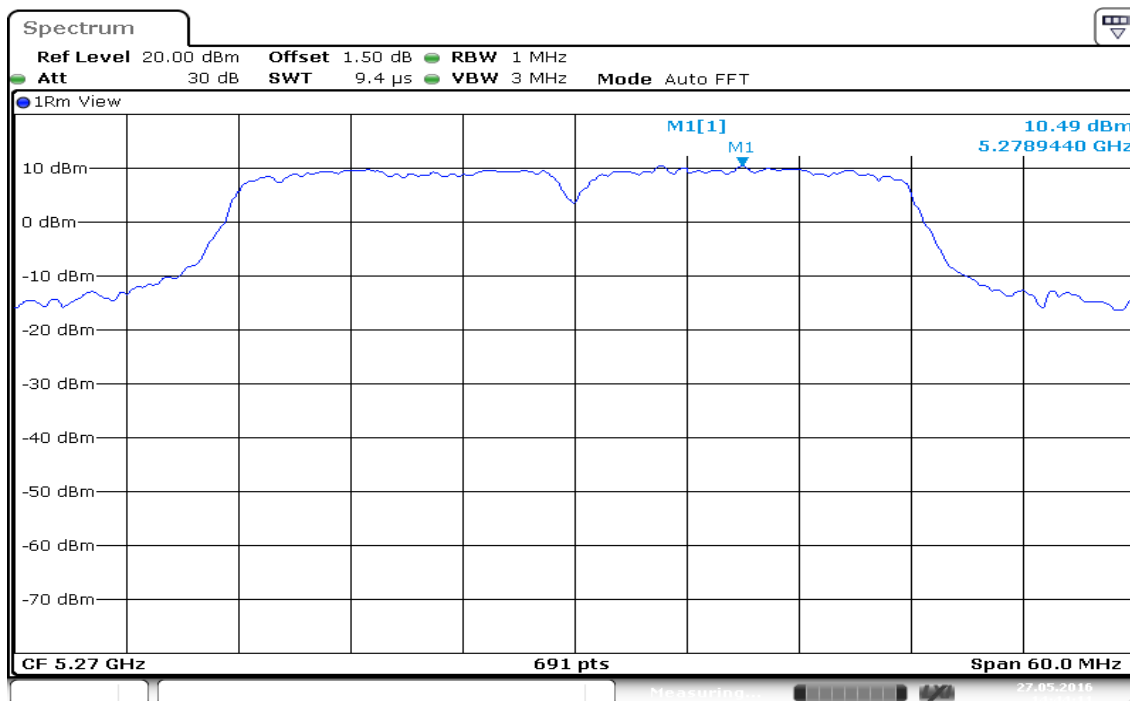


**CH High**

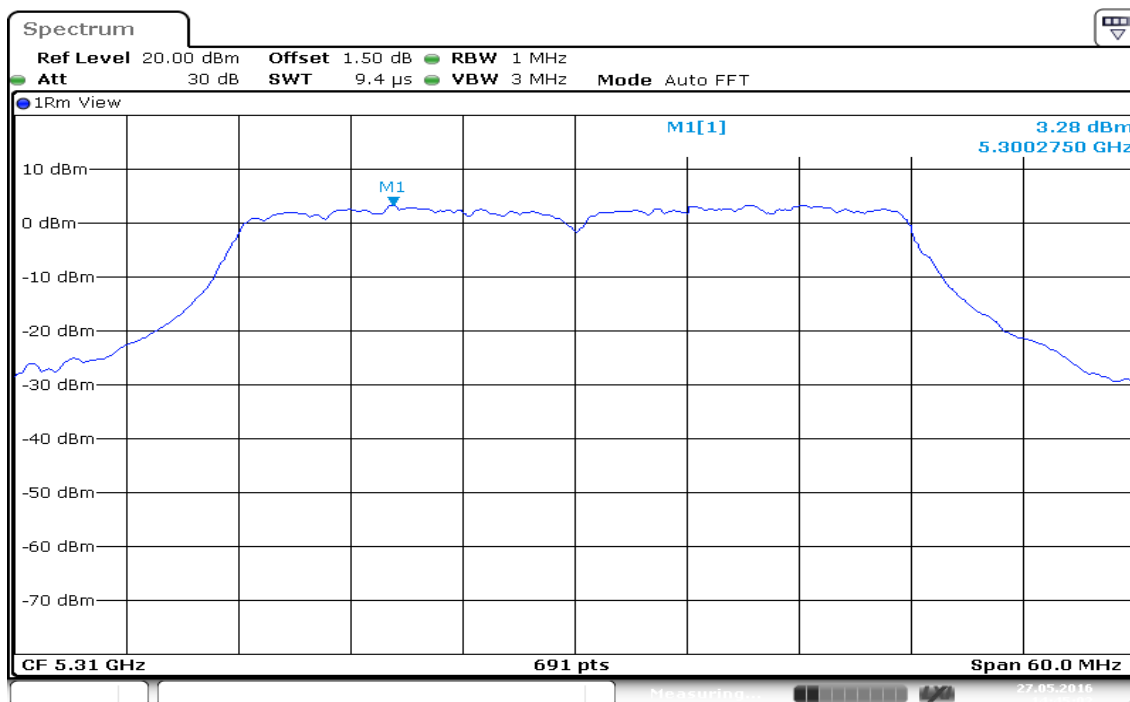




**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

**CH Low**

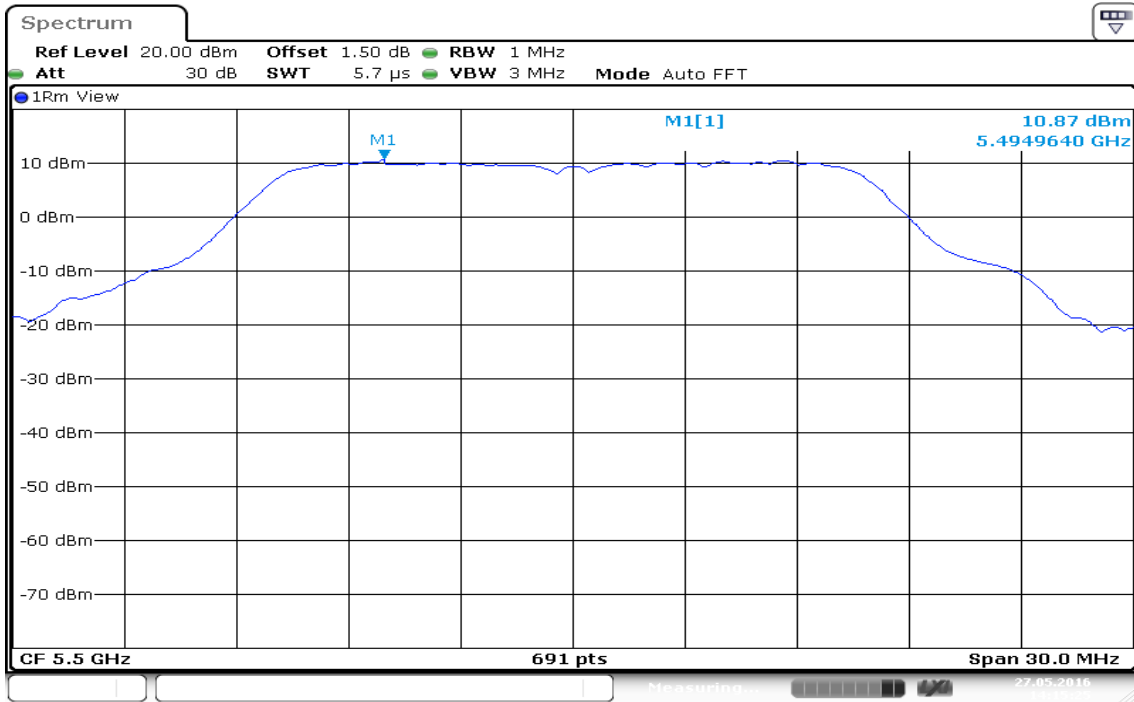


Date: 27.MAY.2016 14:15:25

**CH Mid**

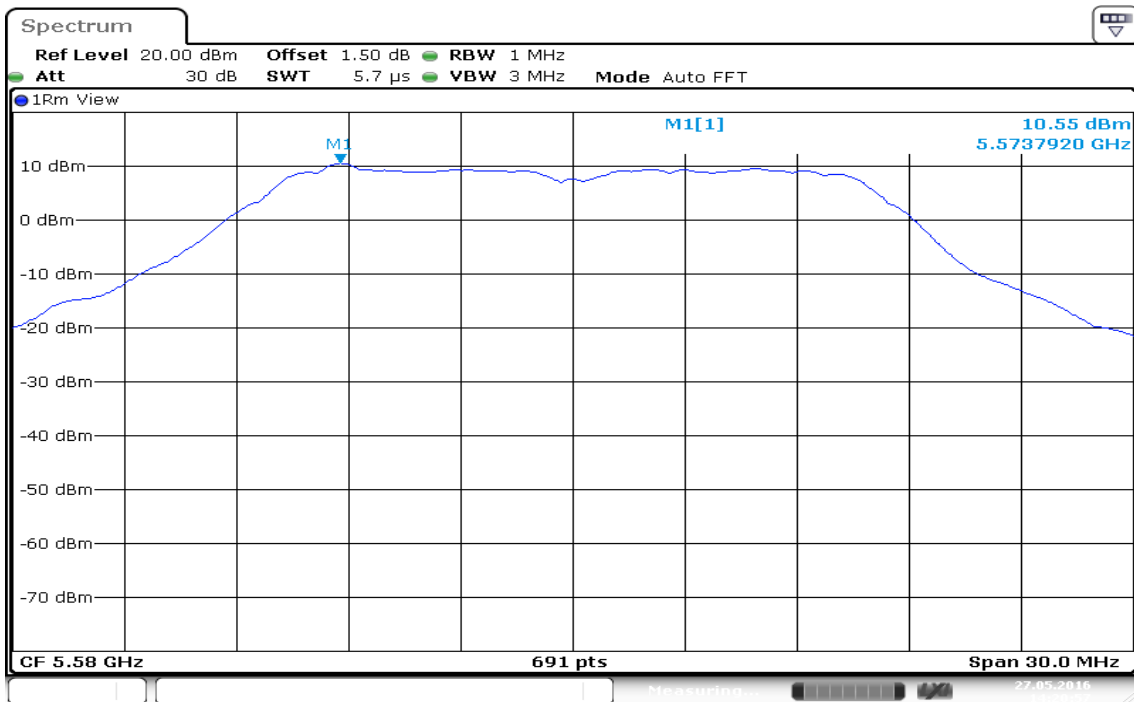

Date: 27.MAY.2016 14:20:57


### CH High

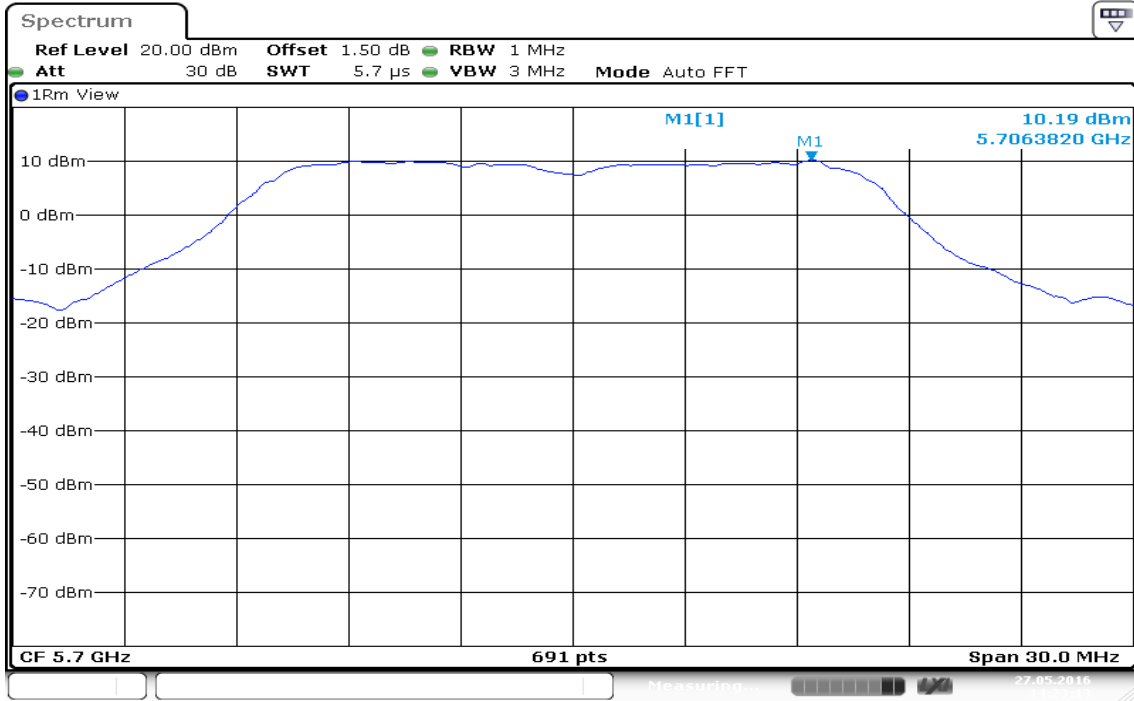


Date: 27.MAY.2016 14:23:12

### IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz


#### CH Low

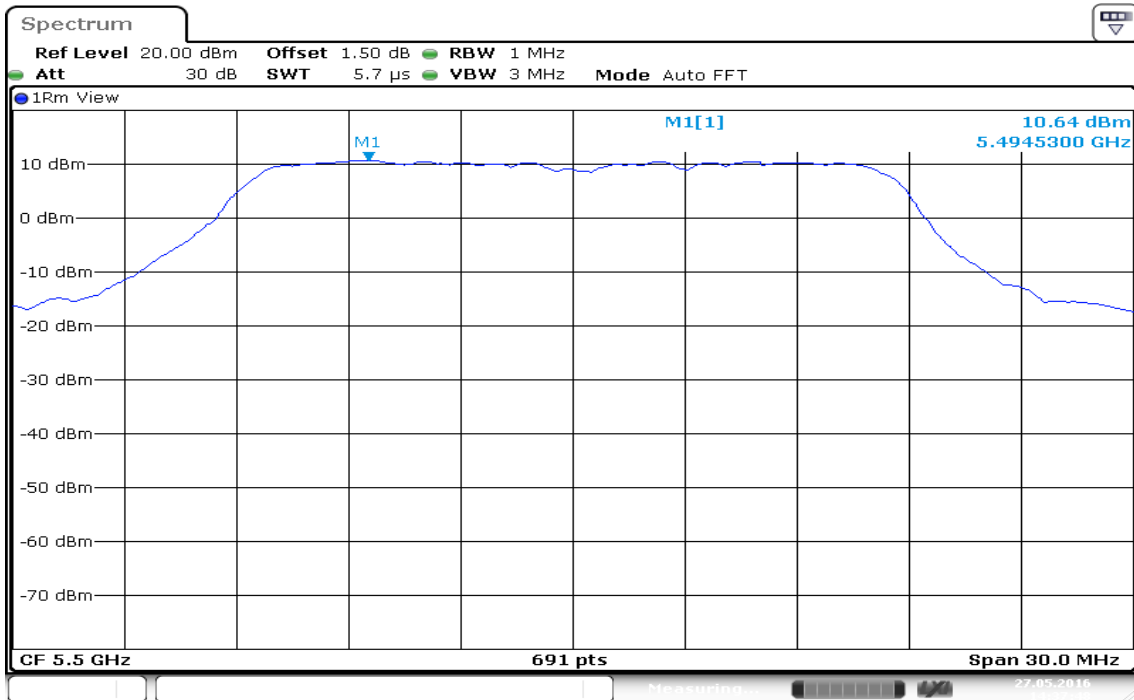

#### CH Mid

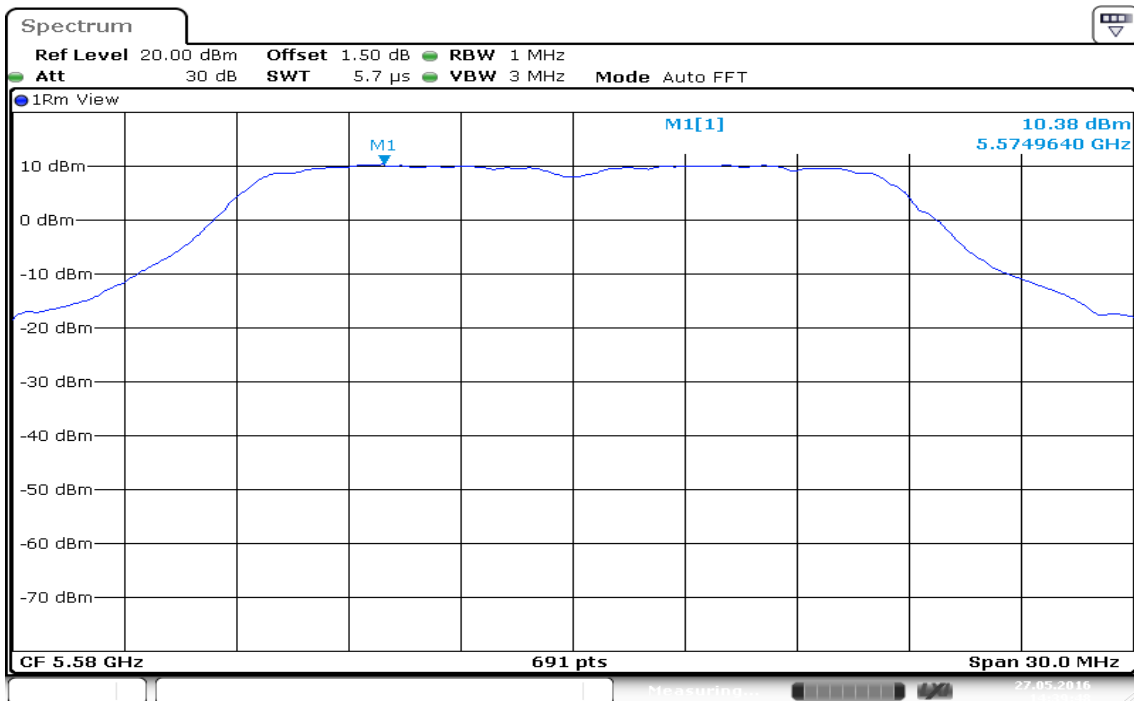


### CH High

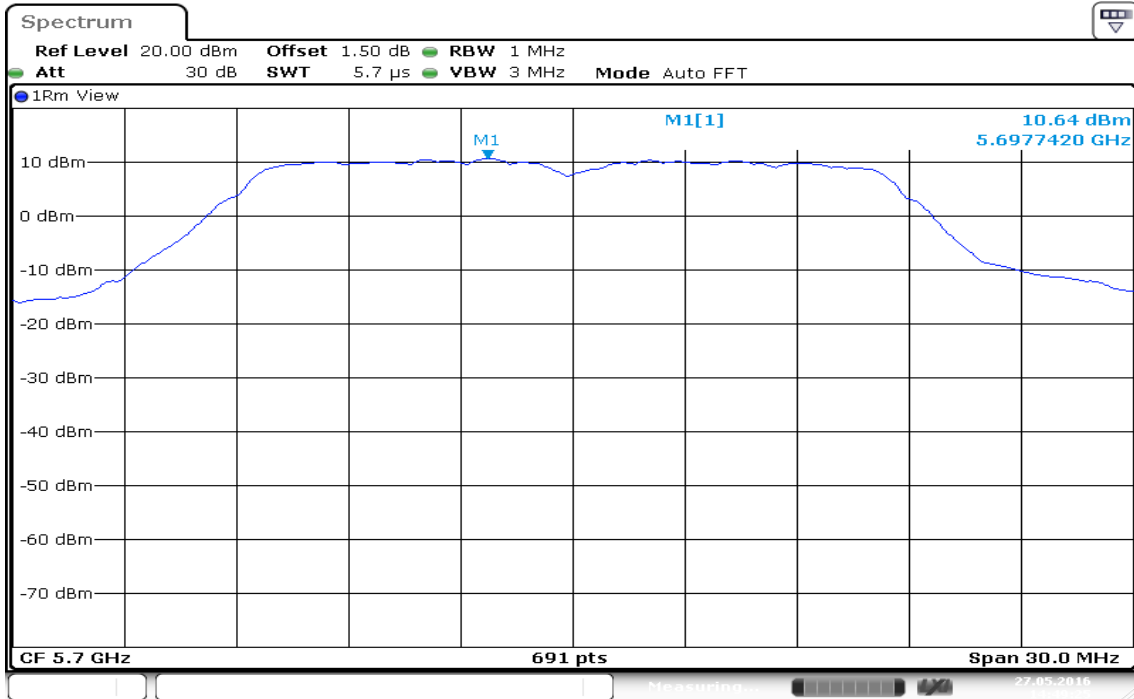


Date: 27.MAY.2016 14:49:24

**IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz**


**CH Low**

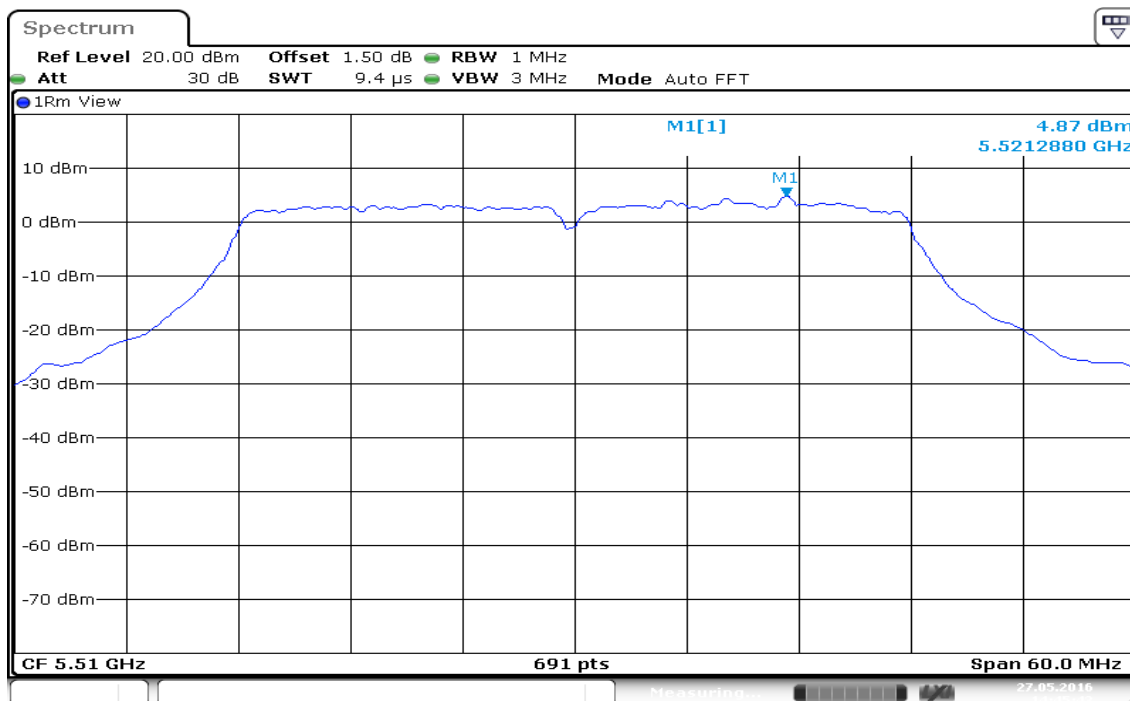

**CH Mid**

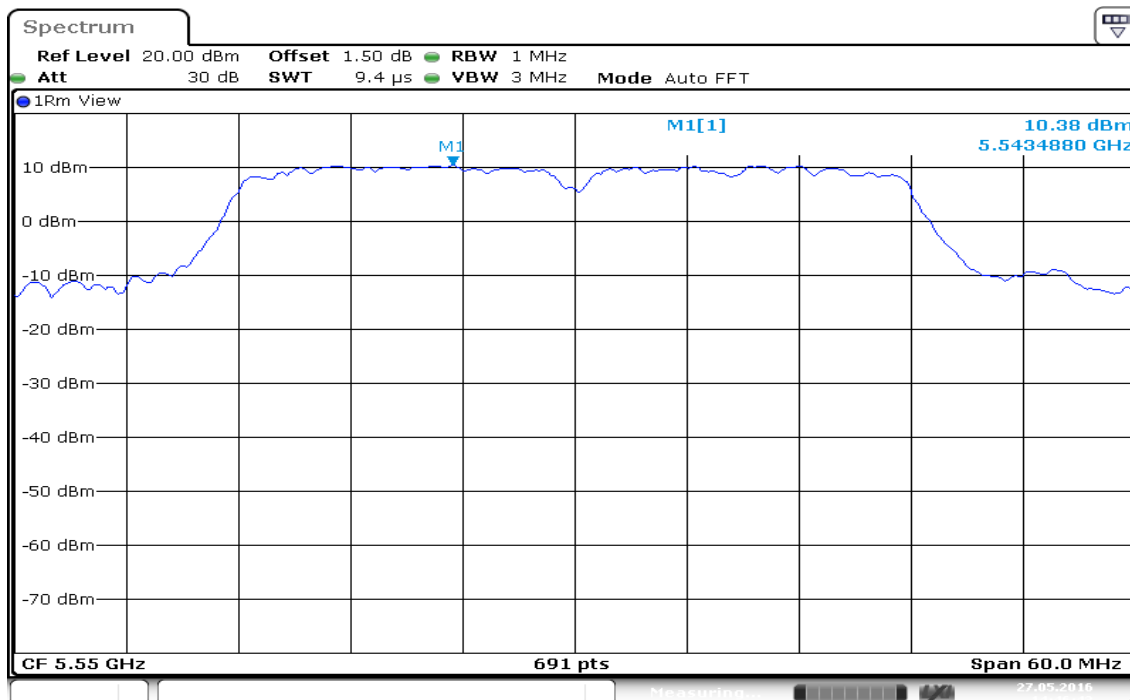

### CH High

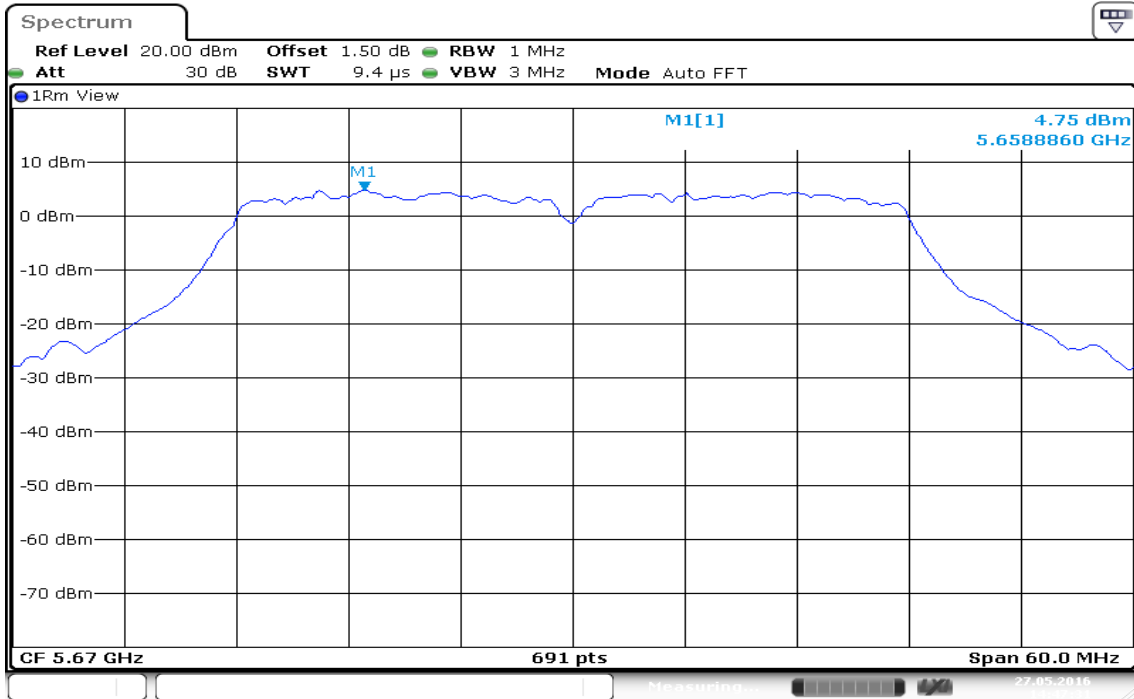

Date: 27.MAY.2016 14:47:31

## 7.5 RADIATED UNDESIRABLE EMISSION

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
0.009 - 0.490	2400/F(kHz) +80	20LOG((2400/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((24000/F(kHz))+40)
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## Test Configuration

### 9kHz ~ 30MHz

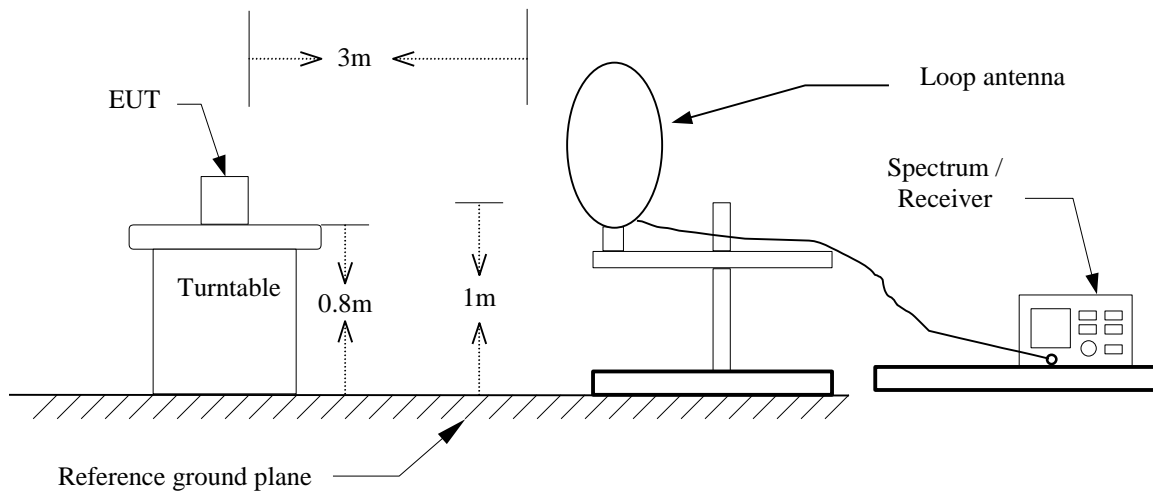


### 30MHz ~ 1GHz

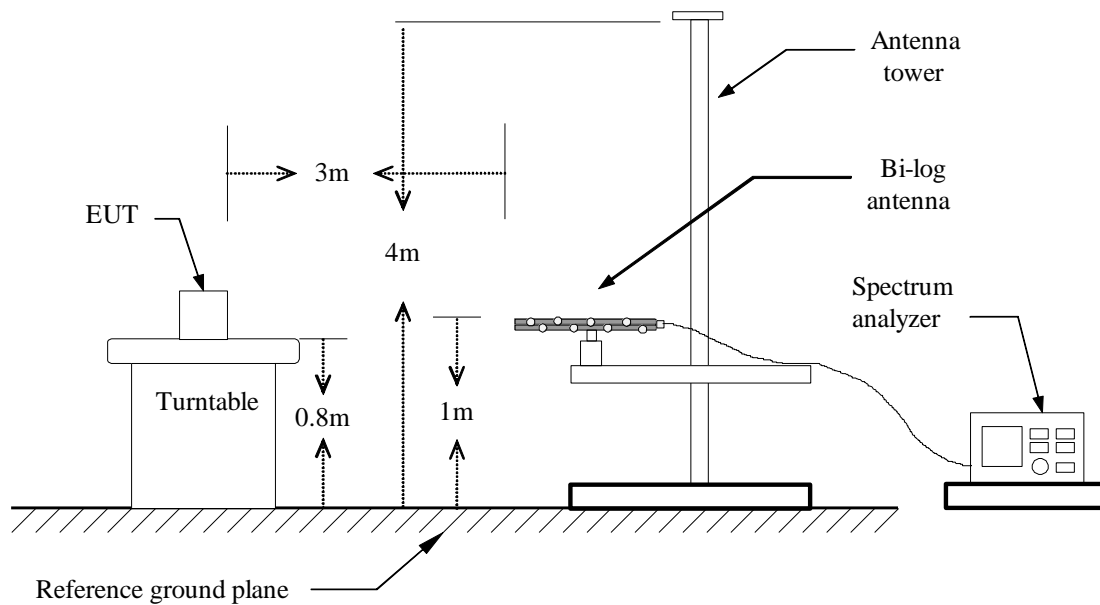



### Above 1 GHz

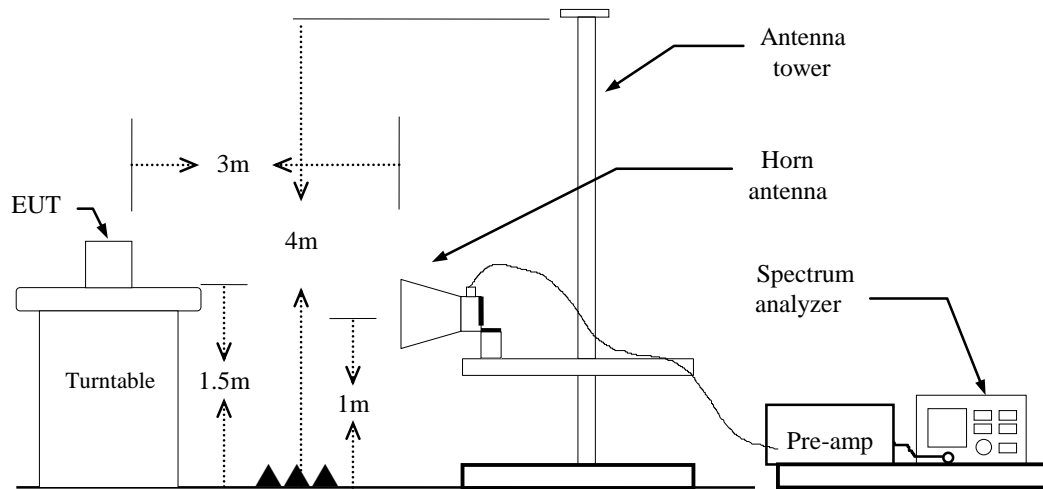

## **TEST PROCEDURE**

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,  
if duty cycle  $\geq 98\%$ , VBW=10Hz.

if duty cycle  $< 98\%$  VBW=1/T.

**IEEE 802.11a mode:**  $\geq 98\%$ , VBW=10Hz

**IEEE 802.11n HT 20 MHz mode:**  $\geq 98\%$ , VBW=10Hz

**IEEE 802.11n HT 40 MHz mode:**  $\geq 98\%$ , VBW=10Hz

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

**Note:** We checked every harmonics frequencies from Fundamental frequencies with reduced VBW, and we mark a point to prove pass or not if we find any emission. For this case, there are no emissions hidden in the noise floor.

**Below 1 GHz**

**Operation Mode:** Normal Link


**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

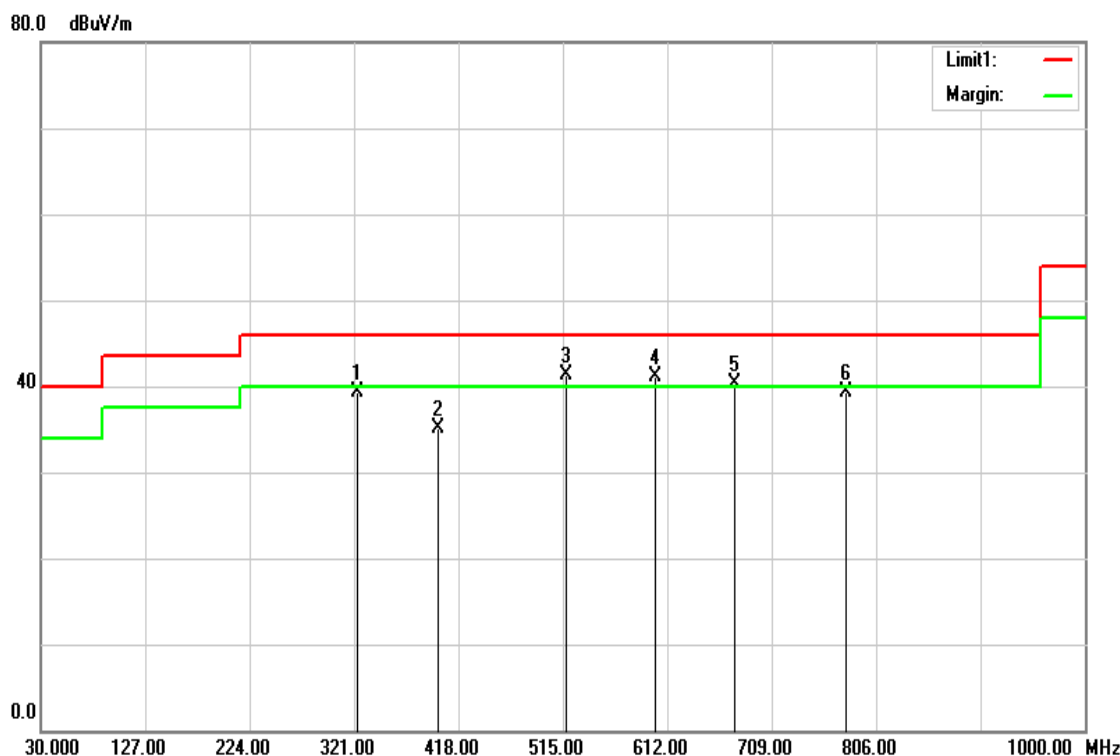


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
323.9100	52.82	-13.59	39.23	46.00	-6.77	peak	V
399.5700	46.79	-11.71	35.08	46.00	-10.92	peak	V
517.9100	50.31	-8.97	41.34	46.00	-4.66	peak	V
600.3600	48.81	-7.75	41.06	46.00	-4.94	peak	V
675.0500	46.67	-6.32	40.35	46.00	-5.65	peak	V
777.8700	43.98	-4.69	39.29	46.00	-6.71	peak	V

**Remark:**

- 1 Measuring frequencies from 30 MHz to the 1GHz.
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3 Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5 Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Operation Mode:** Normal Link  
**Temperature:** 27°C  
**Humidity:** 53% RH

**Test Date:** May 12, 2016  
**Tested by:** Dennis Li  
**Polarity:** Hor.

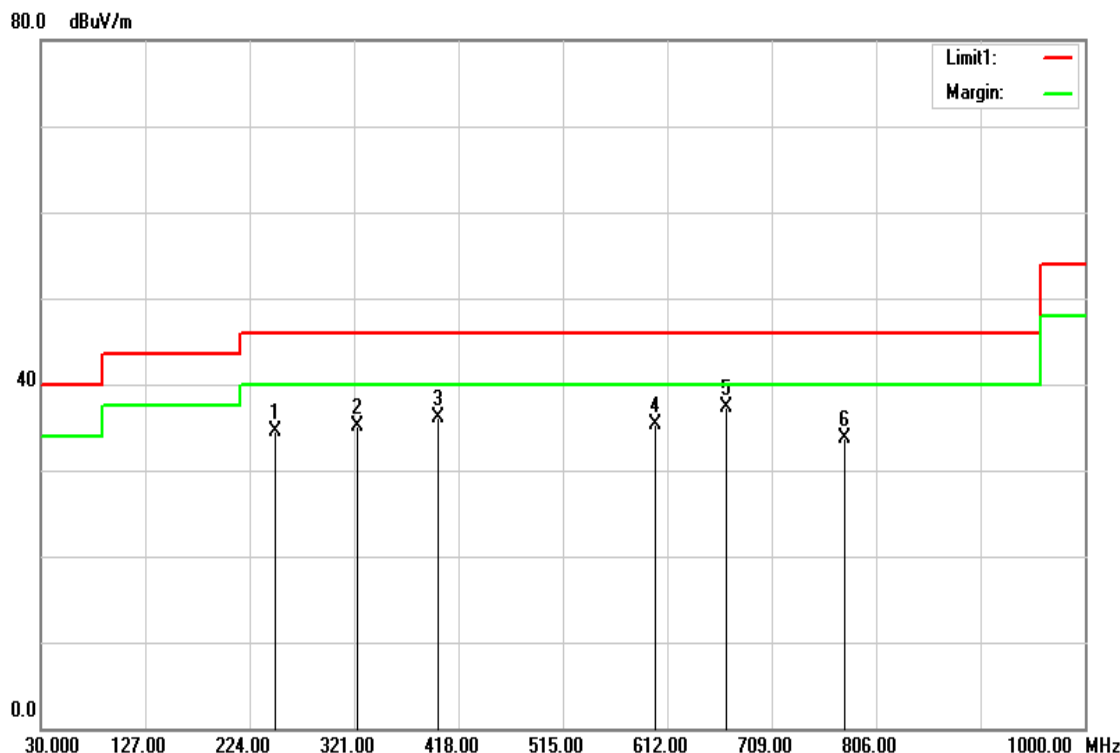


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
248.2500	50.76	-16.32	34.44	46.00	-11.56	peak	H
323.9100	48.61	-13.59	35.02	46.00	-10.98	peak	H
399.5700	47.81	-11.71	36.10	46.00	-9.90	peak	H
600.3600	42.96	-7.75	35.21	46.00	-10.79	peak	H
666.3200	43.71	-6.41	37.30	46.00	-8.70	peak	H
776.9000	38.43	-4.69	33.74	46.00	-12.26	peak	H


**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz**  
**U-NII-1**  
**Tx / IEEE 802.11a mode / CH Low**  
**Polarity: Vertical**

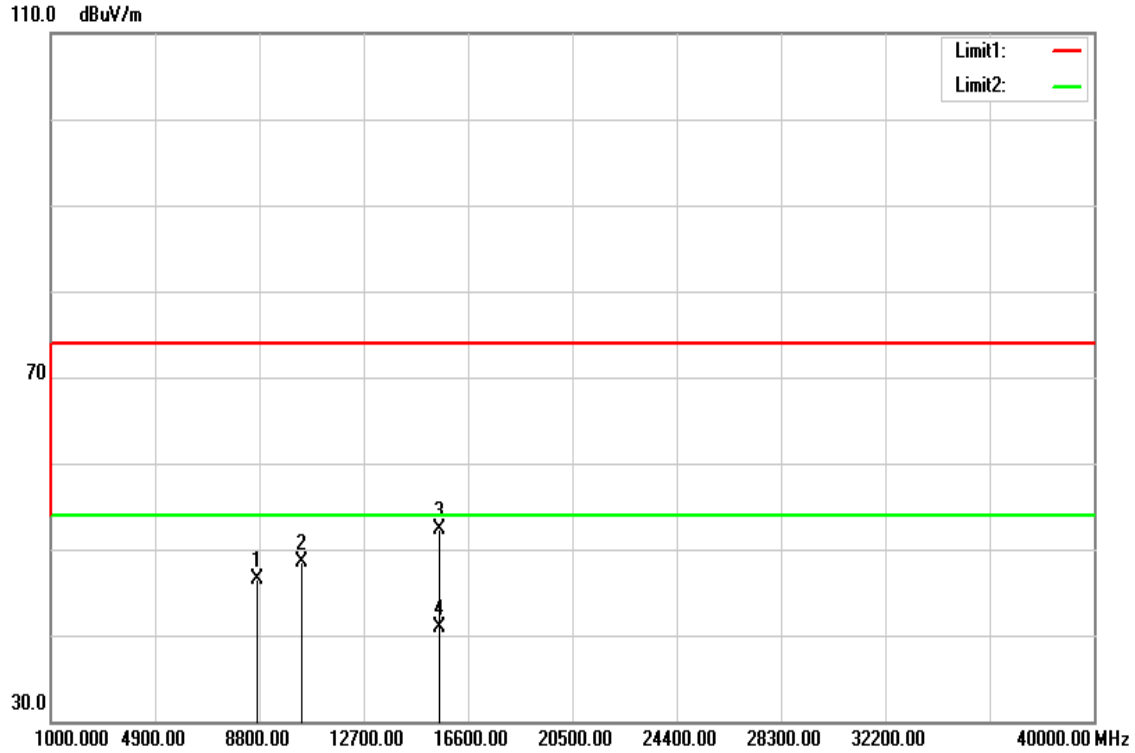

**Polarity: Horizontal**

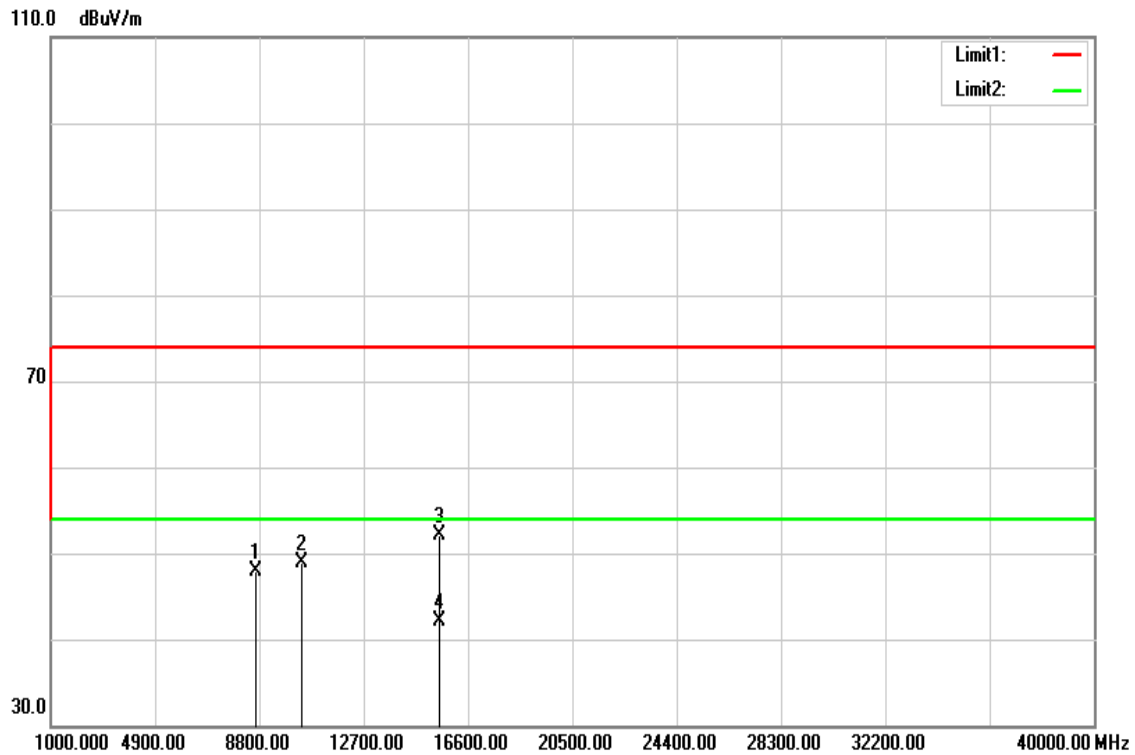

**Operation Mode:** Tx / IEEE 802.11a mode / CH Low

**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8745.000	30.94	15.54	46.48	74.00	-27.52	peak	V
10360.000	30.92	17.58	48.50	74.00	-25.50	peak	V
15540.000	31.62	20.61	52.23	74.00	-21.77	peak	V
15540.000	20.24	20.61	40.85	54.00	-13.15	AVG	V
N/A							
8669.000	32.51	15.40	47.91	74.00	-26.09	peak	H
10360.000	31.37	17.58	48.95	74.00	-25.05	peak	H
15540.000	31.43	20.61	52.04	74.00	-21.96	peak	H
15540.000	21.51	20.61	42.12	54.00	-11.88	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $Margin (dB) = Remark\ result\ (dBuV/m) - Average\ limit\ (dBuV/m)$ .

**Tx / IEEE 802.11a mode / CH Mid**

**Polarity: Vertical**

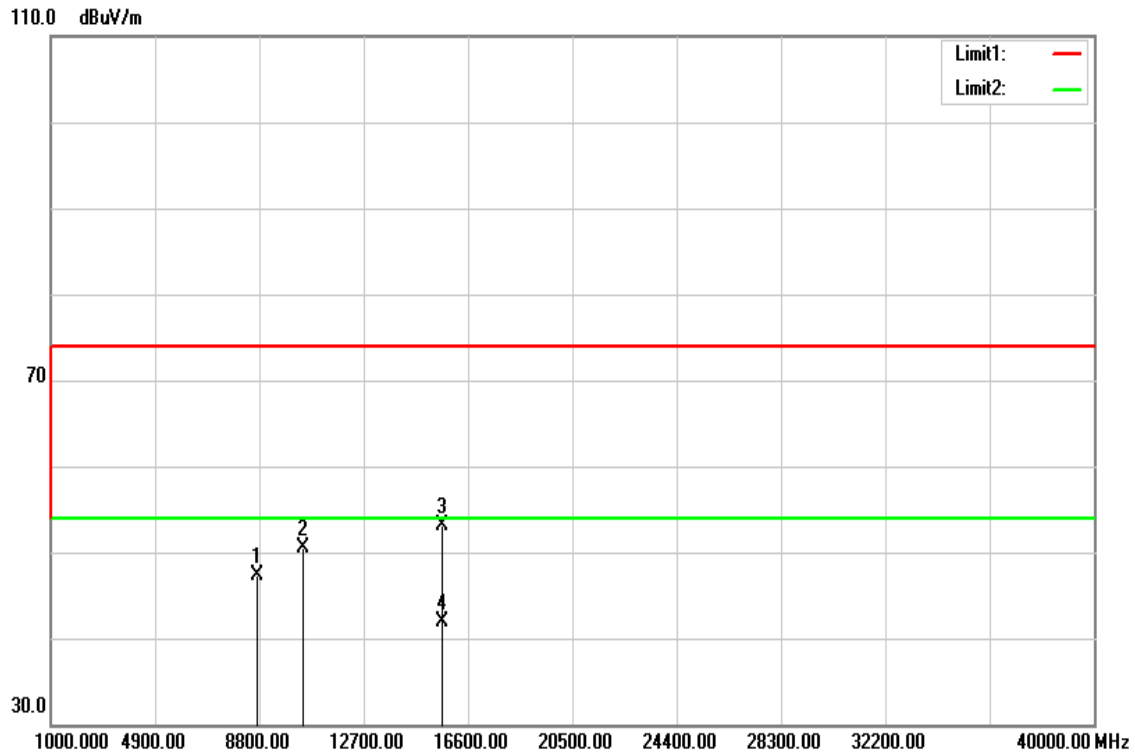

**Polarity: Horizontal**

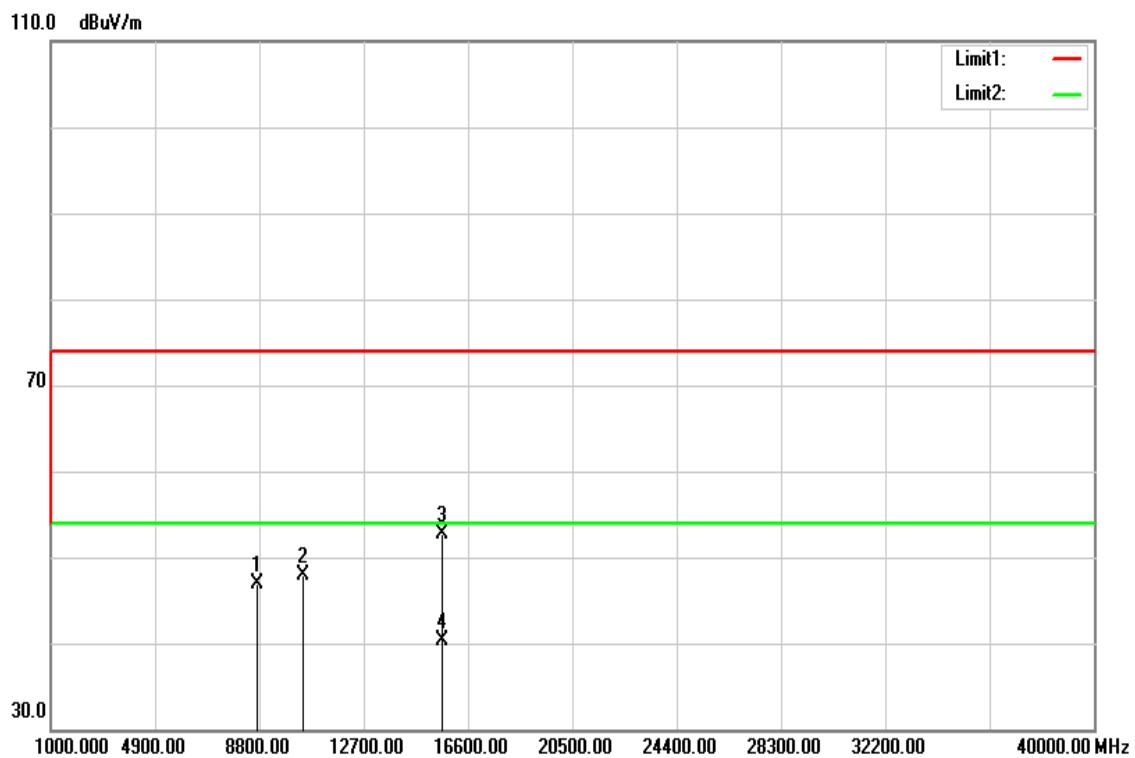

**Operation Mode:** Tx / IEEE 802.11a mode / CH Mid

**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8715.000	31.90	15.48	47.38	74.00	-26.62	peak	V
10440.000	33.03	17.57	50.60	74.00	-23.40	peak	V
15660.000	32.01	21.02	53.03	74.00	-20.97	peak	V
15660.000	20.83	21.02	41.85	54.00	-12.15	AVG	V
N/A							
8742.000	31.35	15.53	46.88	74.00	-27.12	peak	H
10440.000	30.36	17.57	47.93	74.00	-26.07	peak	H
15660.000	31.65	21.02	52.67	74.00	-21.33	peak	H
15660.000	19.23	21.02	40.25	54.00	-13.75	AVG	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).




**Tx / IEEE 802.11a mode / CH High**

**Polarity: Vertical**

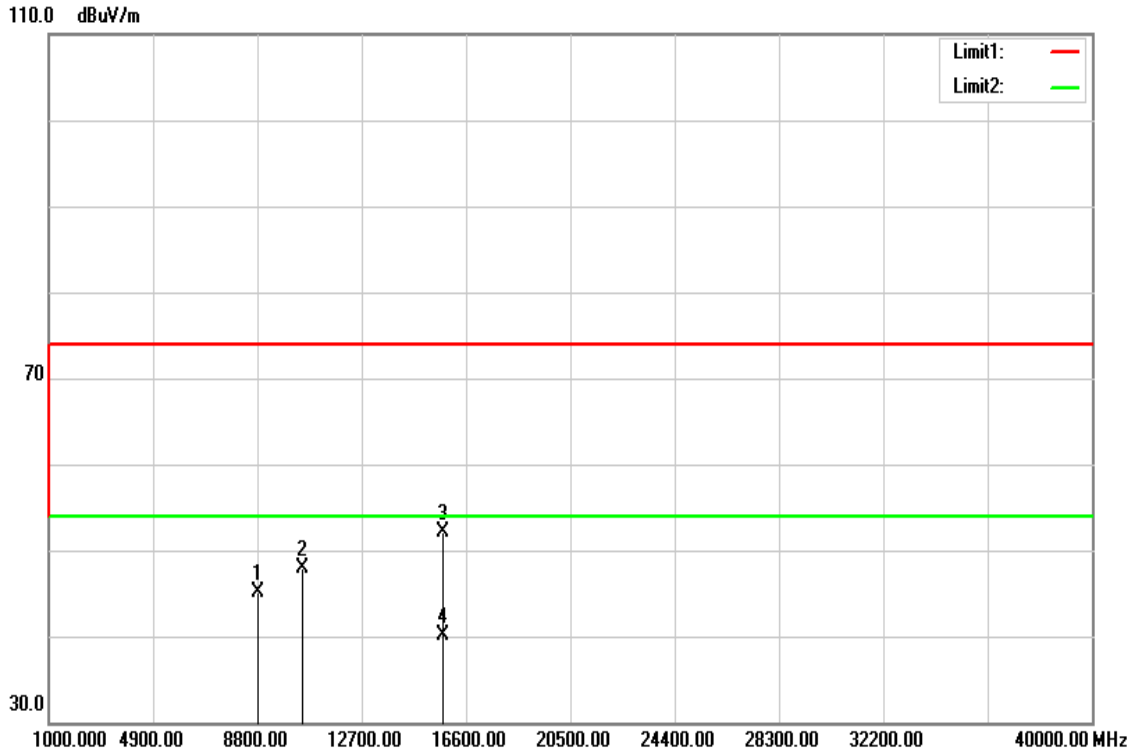

**Polarity: Horizontal**

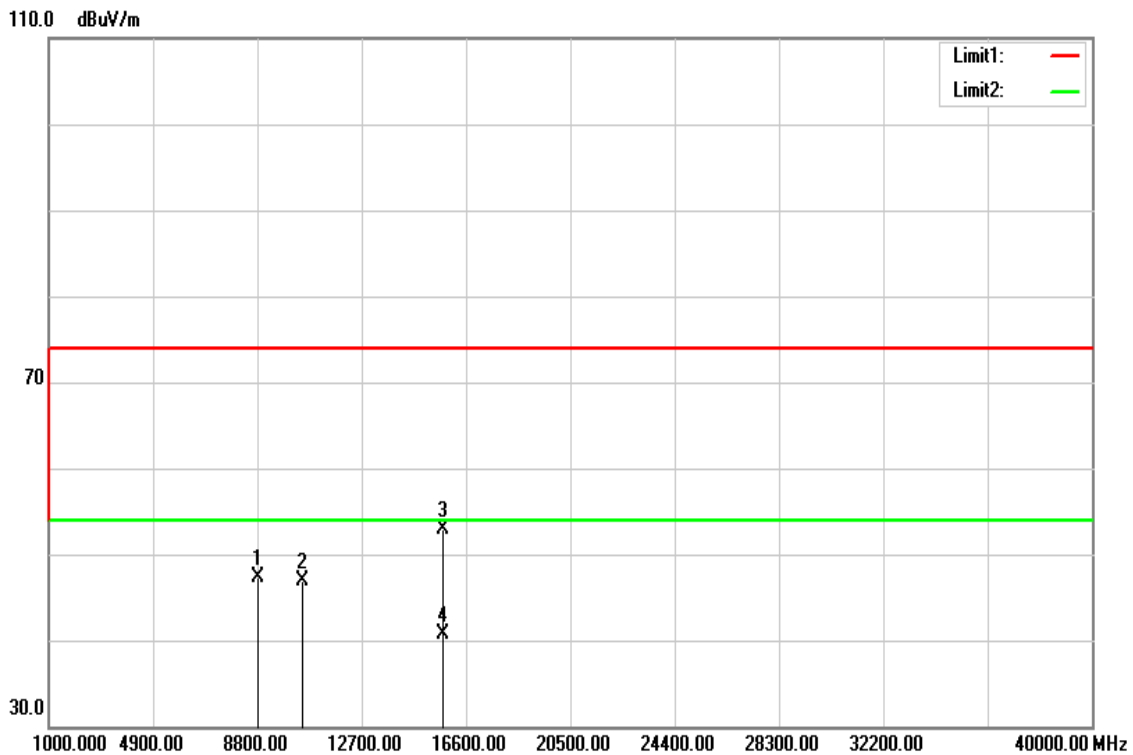

**Operation Mode:** Tx / IEEE 802.11a mode / CH High      **Test Date:** May 12, 2016  
**Temperature:** 27°C      **Tested by:** Dennis Li  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8810.000	29.36	15.66	45.02	74.00	-28.98	peak	V
10480.000	30.34	17.57	47.91	74.00	-26.09	peak	V
15720.000	30.81	21.22	52.03	74.00	-21.97	peak	V
15720.000	18.80	21.22	40.02	54.00	-13.98	AVG	V
N/A							
8813.000	31.66	15.67	47.33	74.00	-26.67	peak	H
10480.000	29.40	17.57	46.97	74.00	-27.03	peak	H
15720.000	31.71	21.22	52.93	74.00	-21.07	peak	H
15720.000	19.53	21.22	40.75	54.00	-13.25	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH Low**

**Polarity: Vertical**

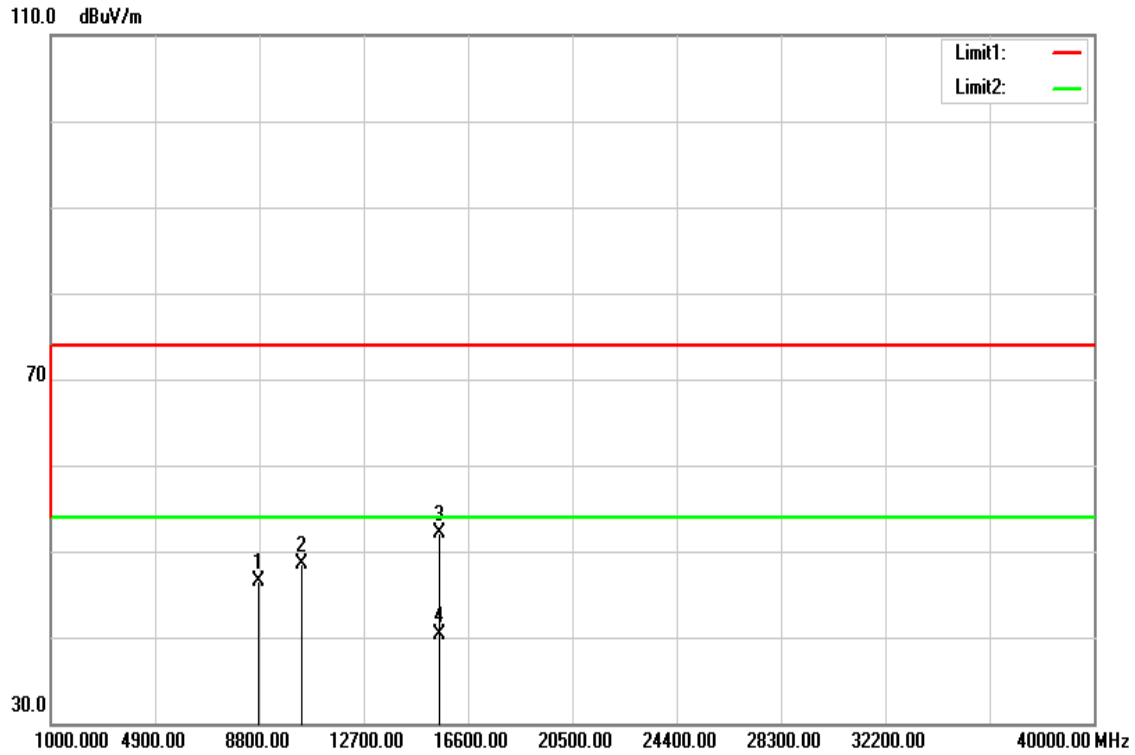

**Polarity: Horizontal**

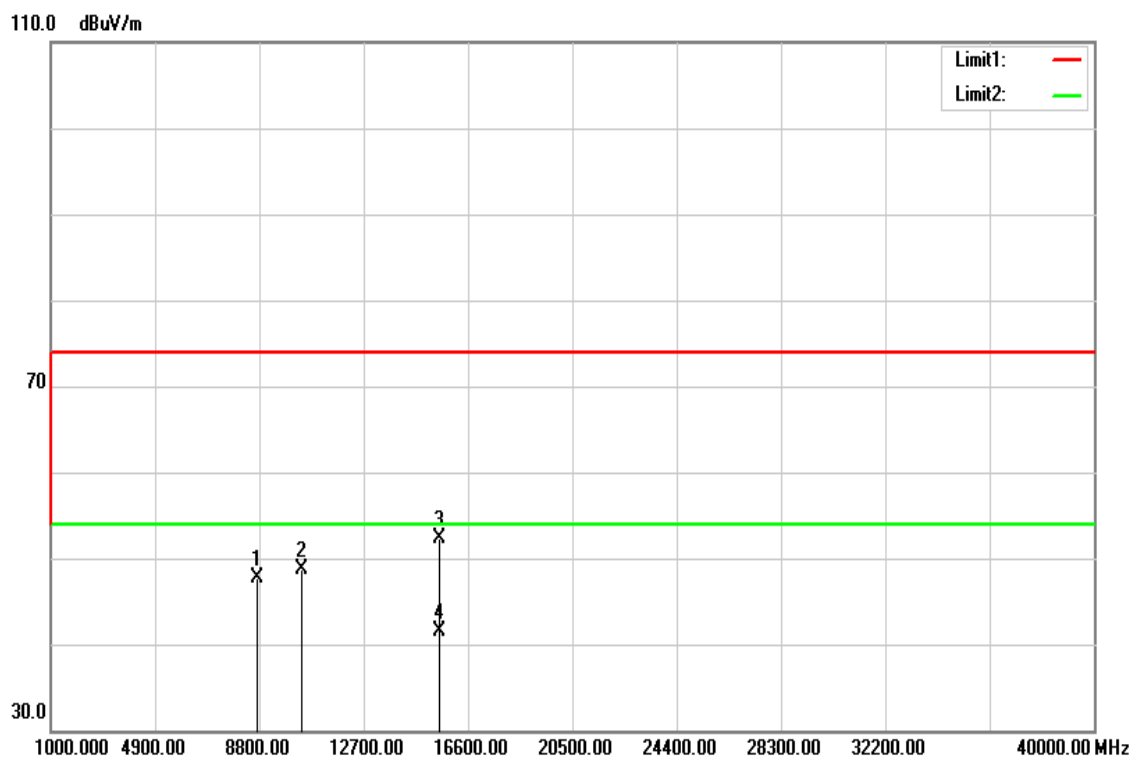

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH Low  
**Temperature:** 27°C  
**Humidity:** 53% RH  
**Test Date:** May 12, 2016  
**Tested by:** Dennis Li  
**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8769.000	30.84	15.59	46.43	74.00	-27.57	peak	V
10360.000	30.90	17.58	48.48	74.00	-25.52	peak	V
15540.000	31.50	20.61	52.11	74.00	-21.89	peak	V
15540.000	19.69	20.61	40.30	54.00	-13.70	AVG	V
N/A							
8699.000	32.31	15.45	47.76	74.00	-26.24	peak	H
10360.000	31.22	17.58	48.80	74.00	-25.20	peak	H
15540.000	31.71	20.61	52.32	74.00	-21.68	peak	H
15540.000	20.95	20.61	41.56	54.00	-12.44	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH Mid**

**Polarity: Vertical**

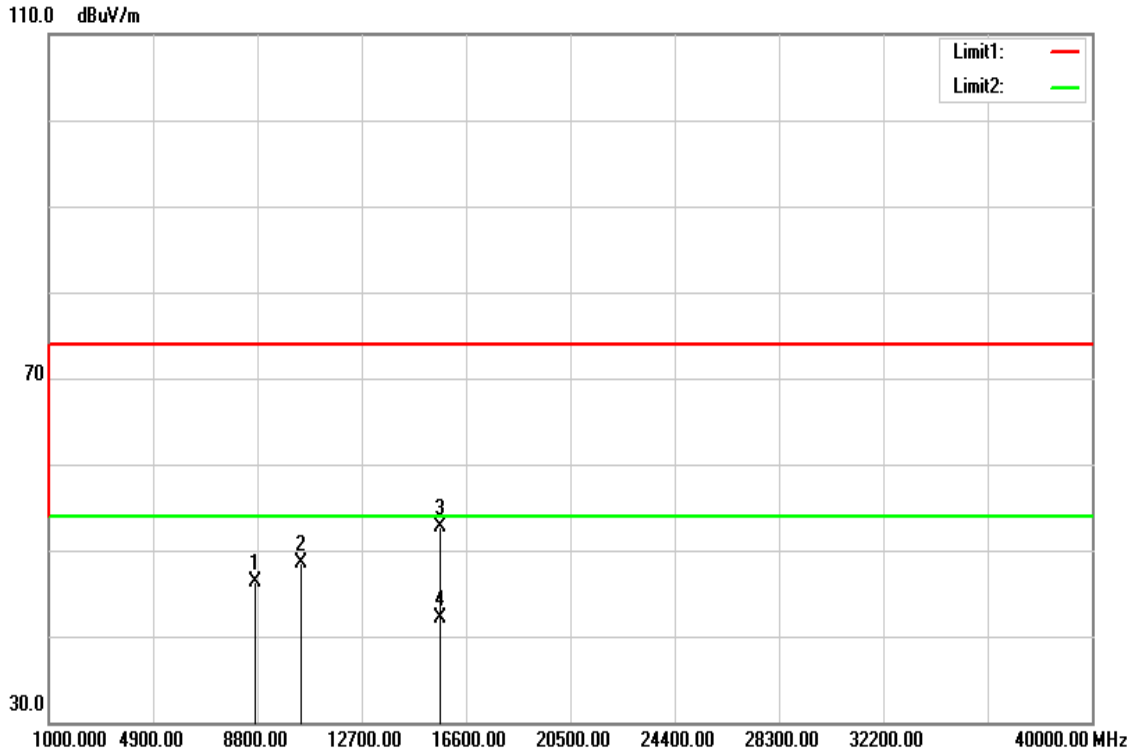

**Polarity: Horizontal**

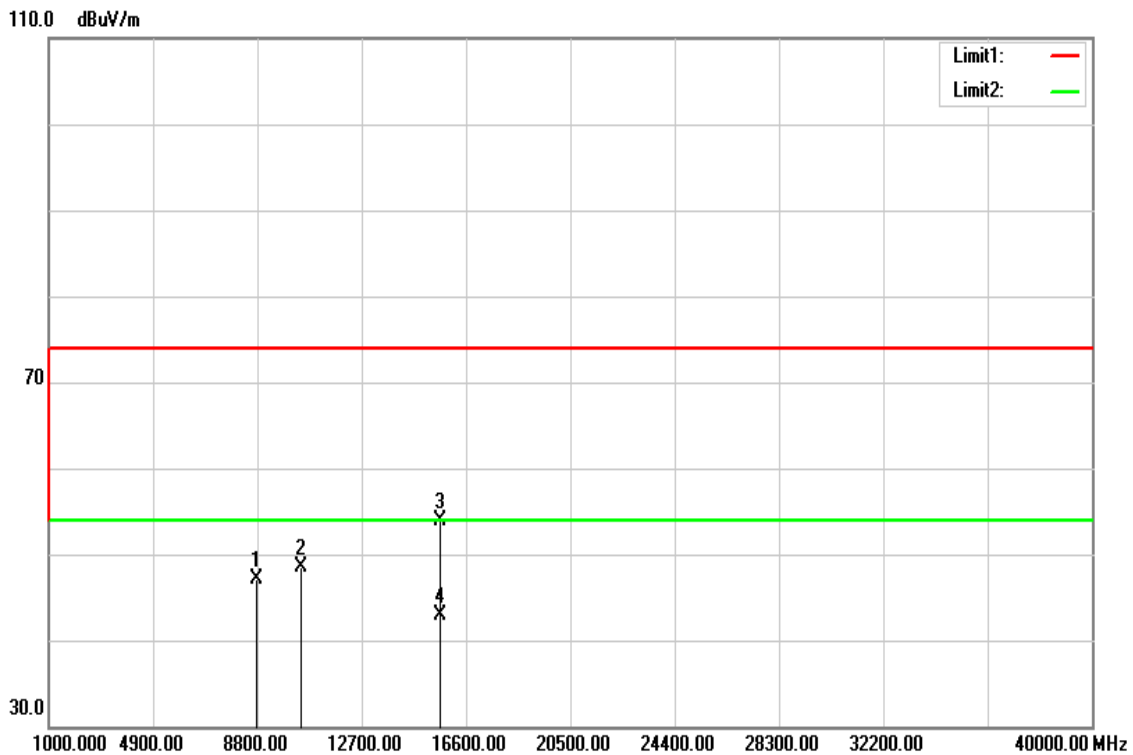

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** May 12, 2016  
**Temperature:** 27°C **Tested by:** Dennis Li  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8745.000	30.70	15.54	46.24	74.00	-27.76	peak	V
10440.000	30.88	17.57	48.45	74.00	-25.55	peak	V
15660.000	31.74	21.02	52.76	74.00	-21.24	peak	V
15660.000	21.14	21.02	42.16	54.00	-11.84	AVG	V
N/A							
8795.000	31.45	15.63	47.08	74.00	-26.92	peak	H
10440.000	30.94	17.57	48.51	74.00	-25.49	peak	H
15660.000	32.97	21.02	53.99	74.00	-20.01	peak	H
15660.000	21.91	21.02	42.93	54.00	-11.07	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH High**

**Polarity: Vertical**

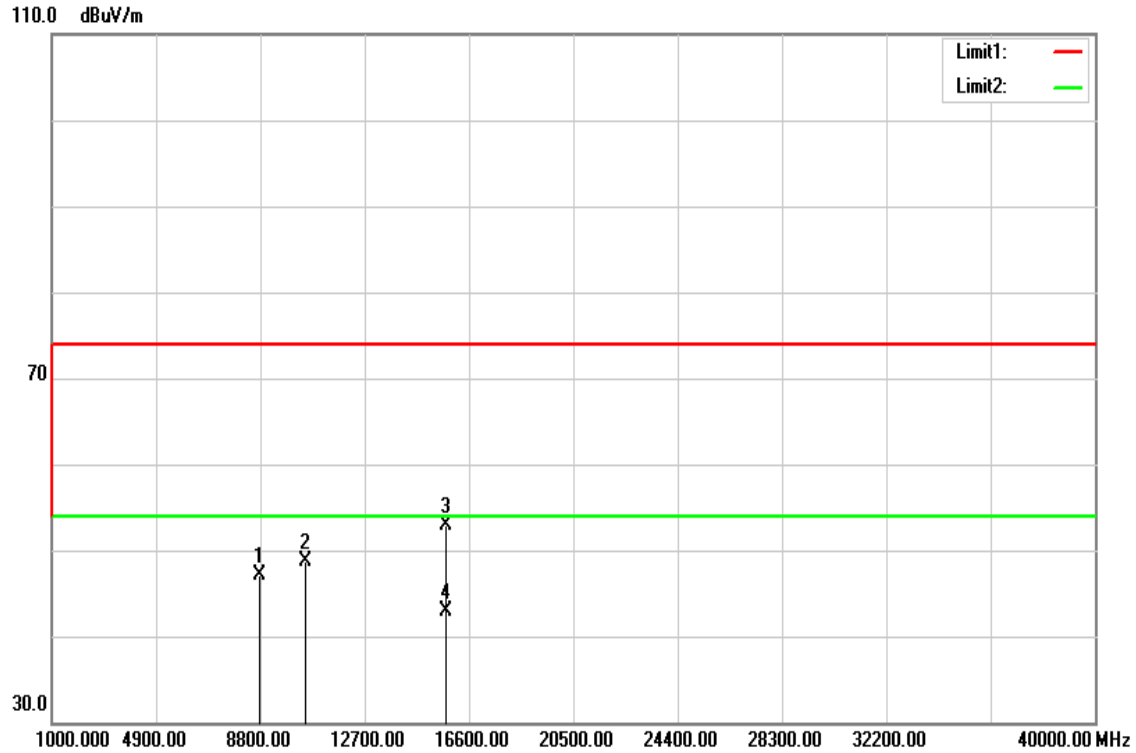

**Polarity: Horizontal**

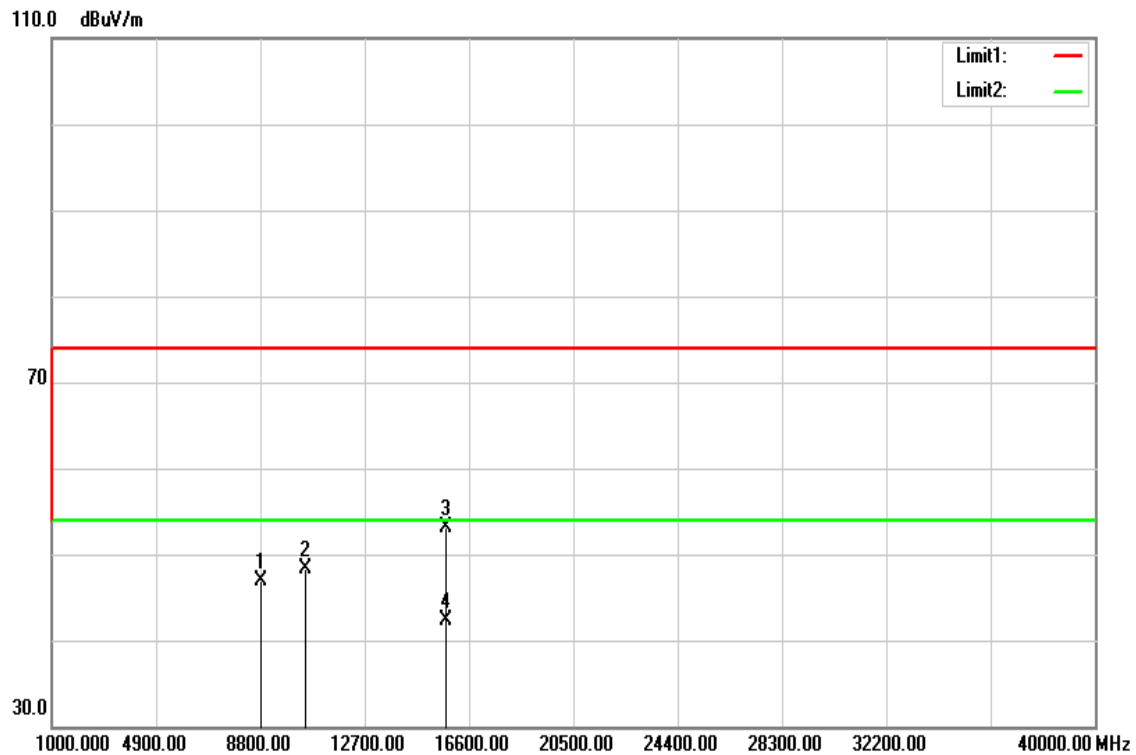

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH High      **Test Date:** May 12, 2016  
**Temperature:** 27°C      **Tested by:** Dennis Li  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8751.000	31.62	15.55	47.17	74.00	-26.83	peak	V
10480.000	31.06	17.57	48.63	74.00	-25.37	peak	V
15720.000	31.62	21.22	52.84	74.00	-21.16	peak	V
15720.000	21.74	21.22	42.96	54.00	-11.04	AVG	V
N/A							
8821.000	31.32	15.68	47.00	74.00	-27.00	peak	H
10480.000	30.73	17.57	48.30	74.00	-25.70	peak	H
15720.000	31.88	21.22	53.10	74.00	-20.90	peak	H
15720.000	21.14	21.22	42.36	54.00	-11.64	AVG	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).




**Tx / IEEE 802.11n HT 40 MHz mode / CH Low**

**Polarity: Vertical**

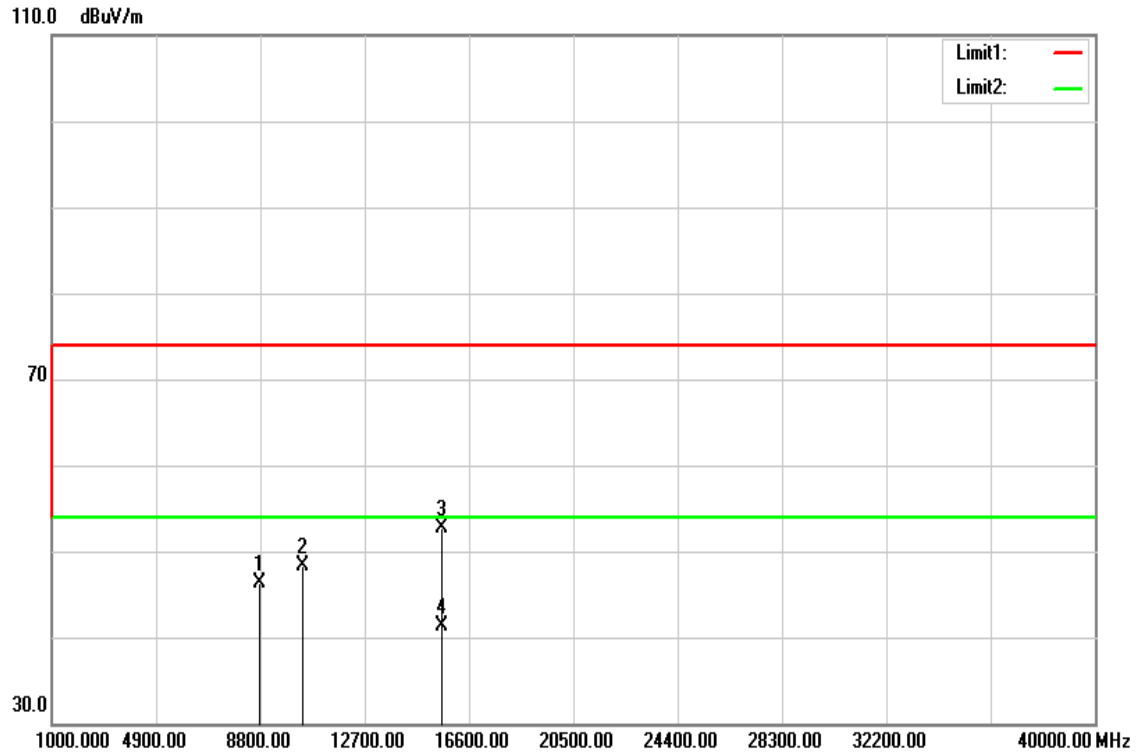

**Polarity: Horizontal**

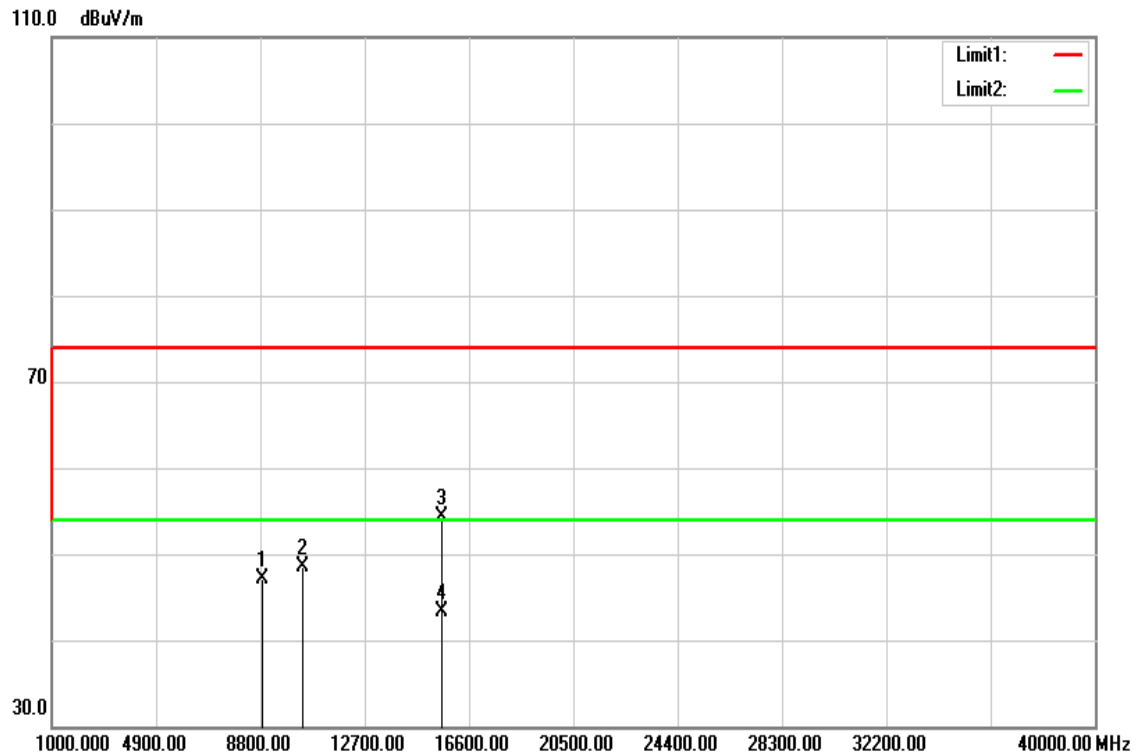

**Operation Mode:** Tx / IEEE 802.11n HT 40 MHz mode / CH Low **Test Date:** May 12, 2016  
**Temperature:** 27°C **Tested by:** Dennis Li  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8756.000	30.65	15.56	46.21	74.00	-27.79	peak	V
10380.000	30.72	17.58	48.30	74.00	-25.70	peak	V
15570.000	32.09	20.71	52.80	74.00	-21.20	peak	V
15570.000	20.51	20.71	41.22	54.00	-12.78	AVG	V
N/A							
8863.000	31.33	15.76	47.09	74.00	-26.91	peak	H
10380.000	30.97	17.58	48.55	74.00	-25.45	peak	H
15570.000	33.66	20.71	54.37	74.00	-19.63	peak	H
15570.000	22.54	20.71	43.25	54.00	-10.75	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 40 MHz mode / CH High**

**Polarity: Vertical**

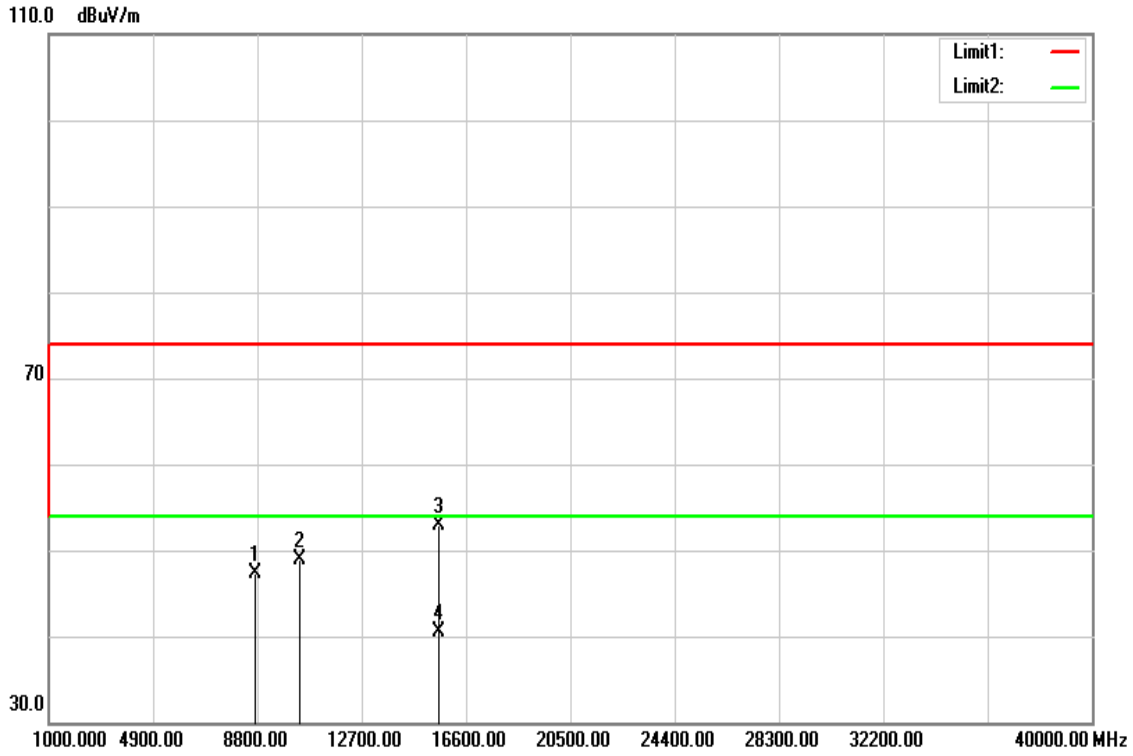

**Polarity: Horizontal**

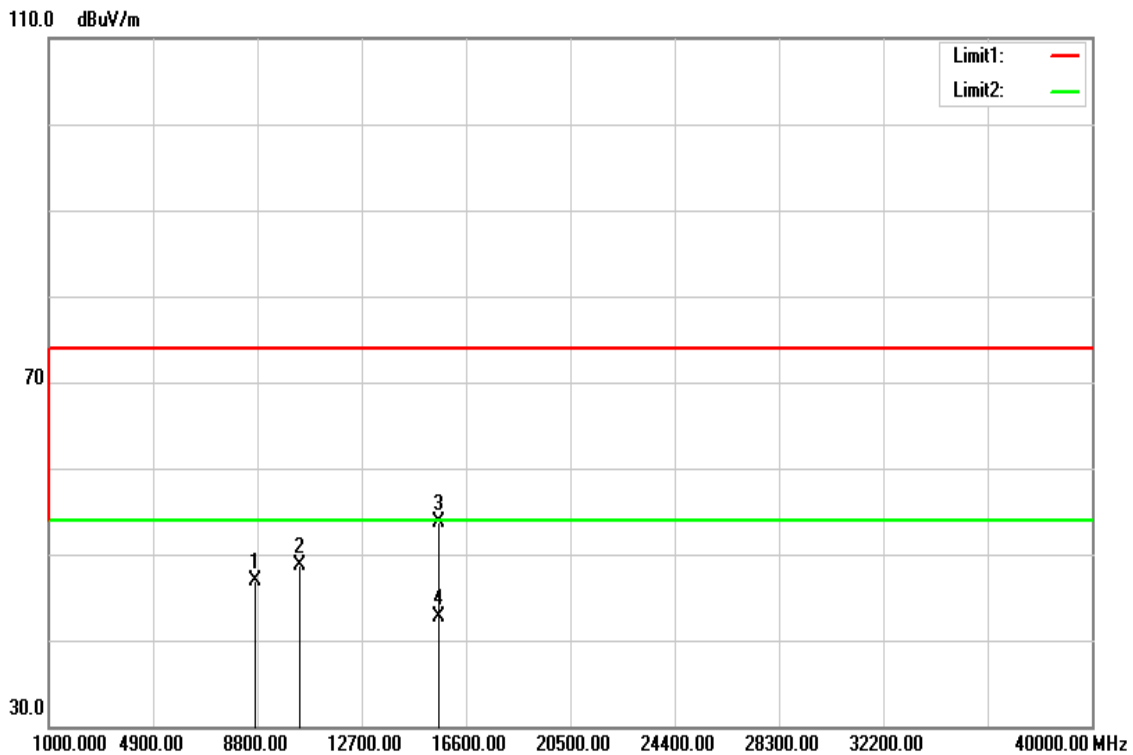

**Operation Mode:** Tx / IEEE 802.11n HT 40 MHz mode / CH High      **Test Date:** May 12, 2016  
**Temperature:** 27°C      **Tested by:** Dennis Li  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8722.000	31.84	15.50	47.34	74.00	-26.66	peak	V
10380.000	31.31	17.58	48.89	74.00	-25.11	peak	V
15570.000	32.21	20.71	52.92	74.00	-21.08	peak	V
15570.000	19.81	20.71	40.52	54.00	-13.48	AVG	V
N/A							
8711.000	31.52	15.48	47.00	74.00	-27.00	peak	H
10380.000	31.11	17.58	48.69	74.00	-25.31	peak	H
15570.000	32.94	20.71	53.65	74.00	-20.35	peak	H
15570.000	21.94	20.71	42.65	54.00	-11.35	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

## U-NII-2A

### Tx / IEEE 802.11a mode / CH Low


**Polarity: Vertical**

110.0 dBuV/m

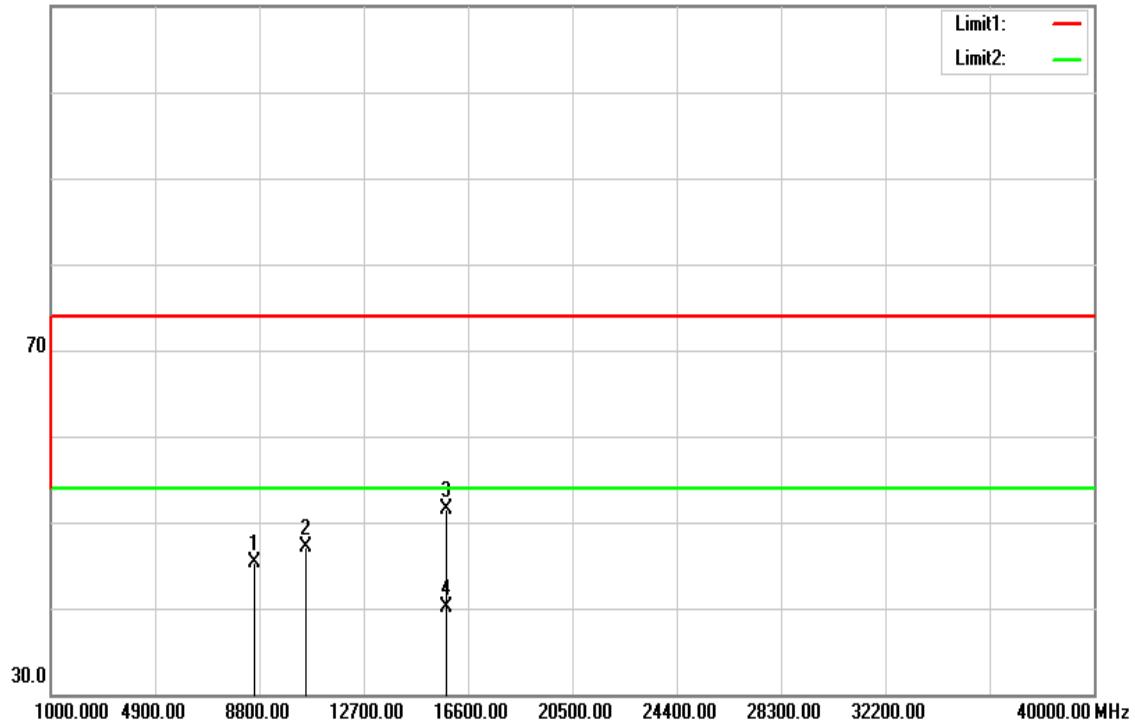

**Polarity: Horizontal**

110.0 dBuV/m

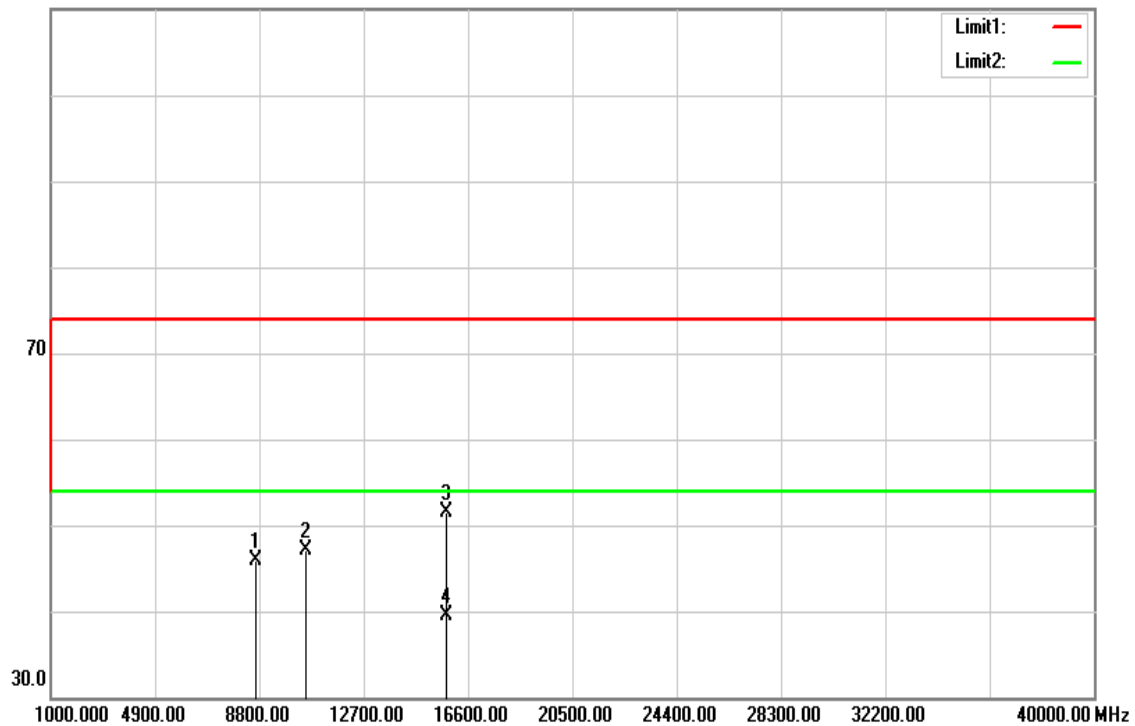

**Operation Mode:** Tx / IEEE 802.11a mode / CH Low

**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8636.000	30.02	15.34	45.36	74.00	-28.64	peak	V
10520.000	29.59	17.59	47.18	74.00	-26.82	peak	V
15780.000	30.15	21.43	51.58	74.00	-22.42	peak	V
15780.000	18.68	21.43	40.11	54.00	-13.89	AVG	V
N/A							
8652.000	30.46	15.37	45.83	74.00	-28.17	peak	H
10520.000	29.59	17.59	47.18	74.00	-26.82	peak	H
15780.000	30.06	21.43	51.49	74.00	-22.51	peak	H
15780.000	18.12	21.43	39.55	54.00	-14.45	AVG	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11a mode / CH Mid**


**Polarity: Vertical**

110.0 dBuV/m

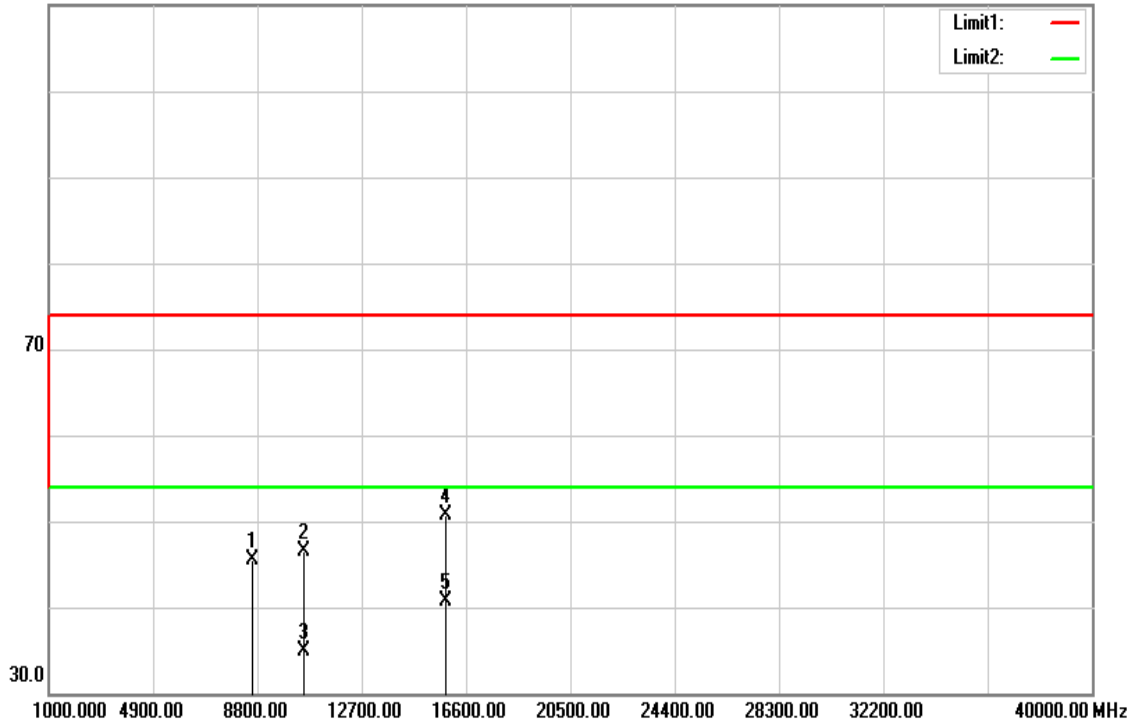

**Polarity: Horizontal**

110.0 dBuV/m

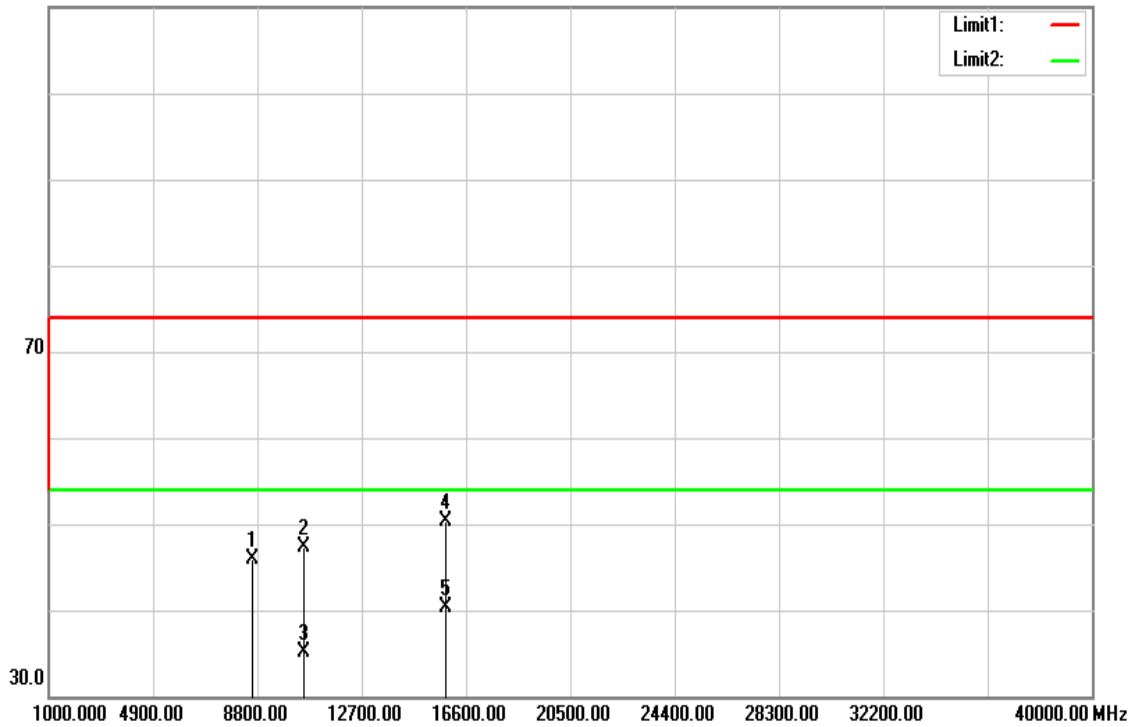

**Operation Mode:** Tx / IEEE 802.11a mode / CH Mid

**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8639.000	30.16	15.34	45.50	74.00	-28.50	peak	V
10560.000	28.91	17.63	46.54	74.00	-27.46	peak	V
10560.000	17.22	17.63	34.85	54.00	-19.15	AVG	V
15840.000	29.14	21.63	50.77	74.00	-23.23	peak	V
15840.000	19.06	21.63	40.69	54.00	-13.31	AVG	V
N/A							
8635.000	30.62	15.33	45.95	74.00	-28.05	peak	H
10560.000	29.67	17.63	47.30	74.00	-26.70	peak	H
10560.000	17.51	17.63	35.14	54.00	-18.86	AVG	H
15840.000	28.57	21.63	50.20	74.00	-23.80	peak	H
15840.000	18.58	21.63	40.21	54.00	-13.79	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Tx / IEEE 802.11a mode / CH High**


**Polarity: Vertical**

110.0 dBuV/m

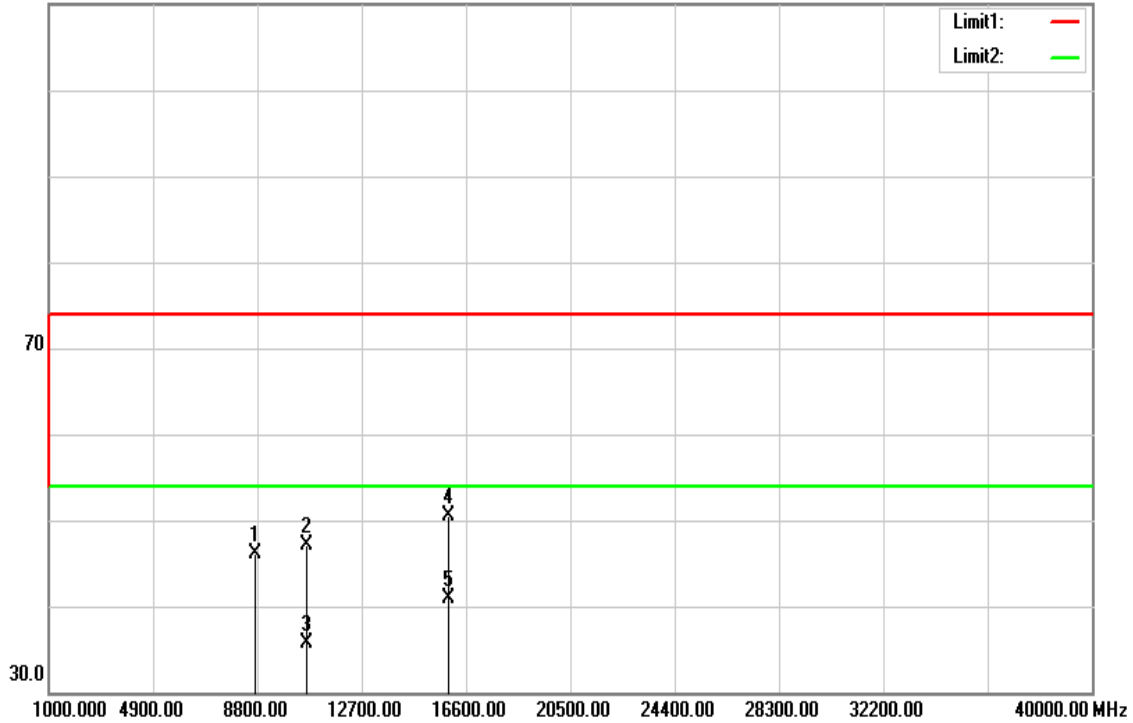

**Polarity: Horizontal**

110.0 dBuV/m

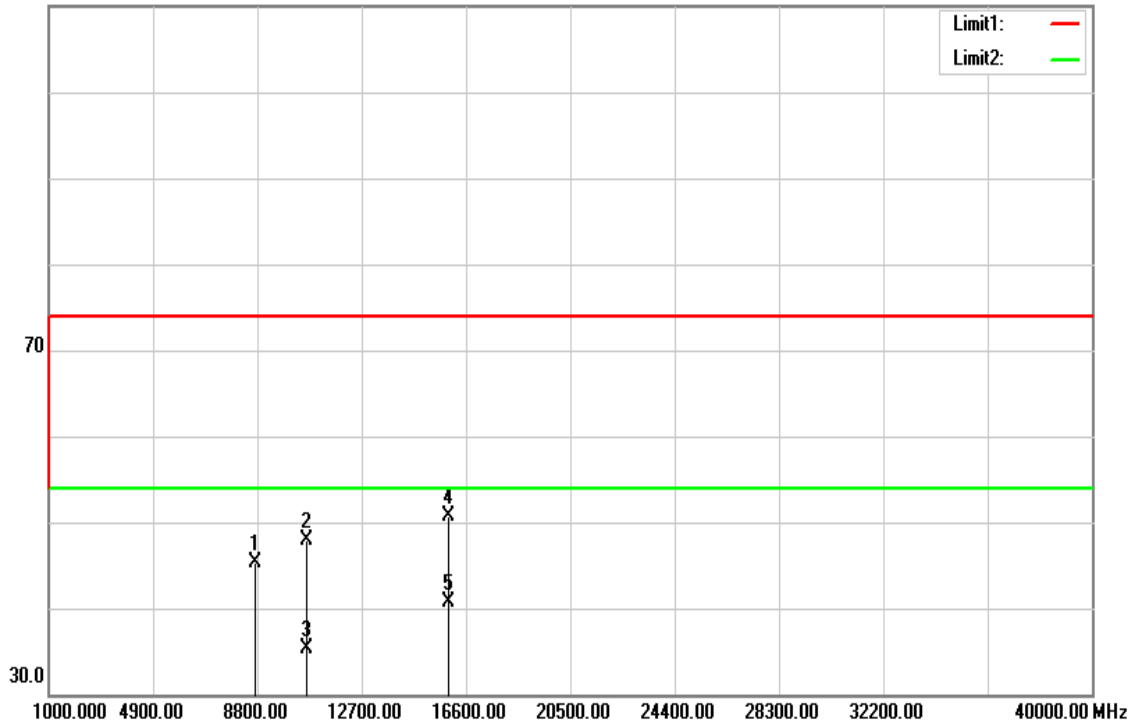

**Operation Mode:** Tx / IEEE 802.11a mode / CH High

**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8738.000	30.59	15.53	46.12	74.00	-27.88	peak	V
10640.000	29.36	17.72	47.08	74.00	-26.92	peak	V
10640.000	17.94	17.72	35.66	54.00	-18.34	AVG	V
15960.000	28.47	22.04	50.51	74.00	-23.49	peak	V
15960.000	18.81	22.04	40.85	54.00	-13.15	AVG	V
N/A							
8746.000	29.85	15.54	45.39	74.00	-28.61	peak	H
10640.000	30.22	17.72	47.94	74.00	-26.06	peak	H
10640.000	17.52	17.72	35.24	54.00	-18.76	AVG	H
15960.000	28.74	22.04	50.78	74.00	-23.22	peak	H
15960.000	18.65	22.04	40.69	54.00	-13.31	AVG	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH Low**


**Polarity: Vertical**

110.0 dBuV/m

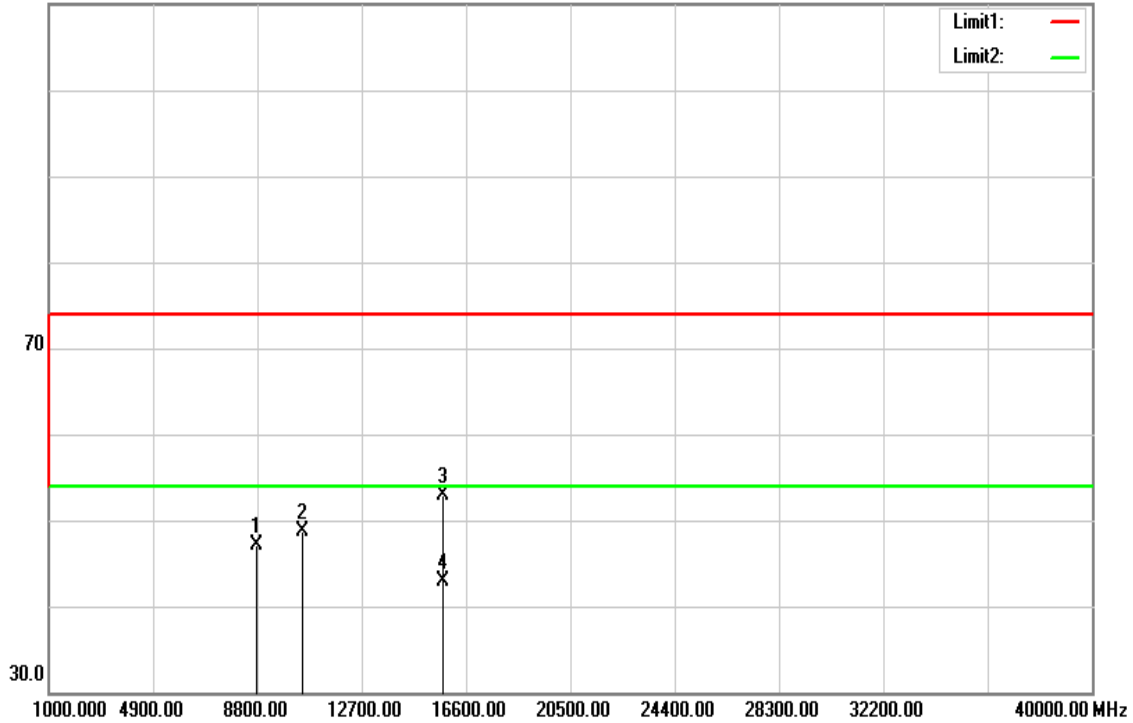

**Polarity: Horizontal**

110.0 dBuV/m

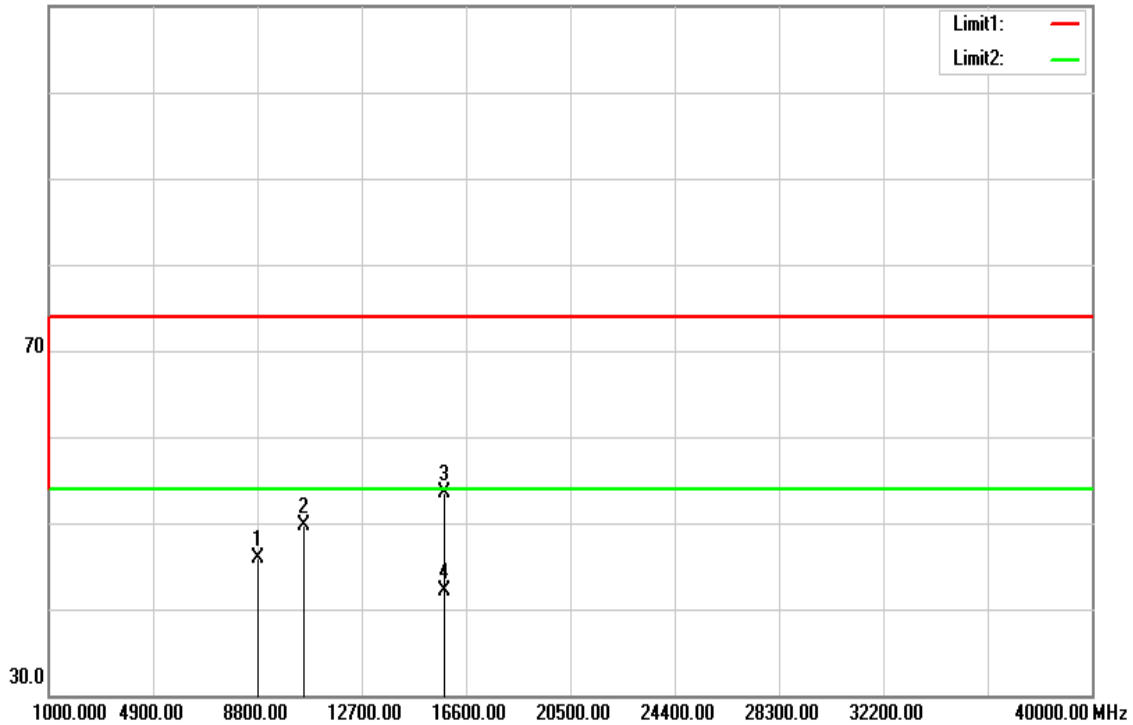

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8751.000	31.62	15.55	47.17	74.00	-26.83	peak	V
10480.000	31.06	17.57	48.63	74.00	-25.37	peak	V
15720.000	31.62	21.22	52.84	74.00	-21.16	peak	V
15720.000	21.74	21.22	42.96	54.00	-11.04	AVG	V
N/A							
8826.000	30.22	15.69	45.91	74.00	-28.09	peak	H
10520.000	32.08	17.59	49.67	74.00	-24.33	peak	H
15780.000	32.08	21.43	53.51	74.00	-20.49	peak	H
15780.000	20.68	21.43	42.11	54.00	-11.89	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH Mid**

**Polarity: Vertical**

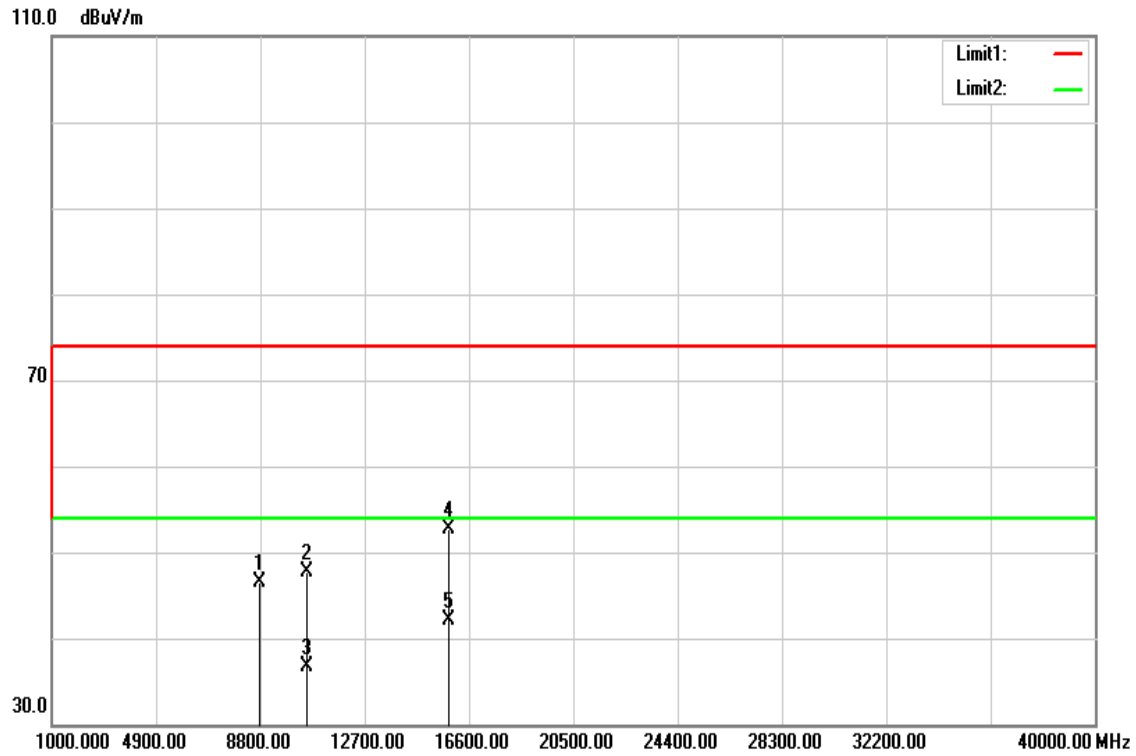

**Polarity: Horizontal**

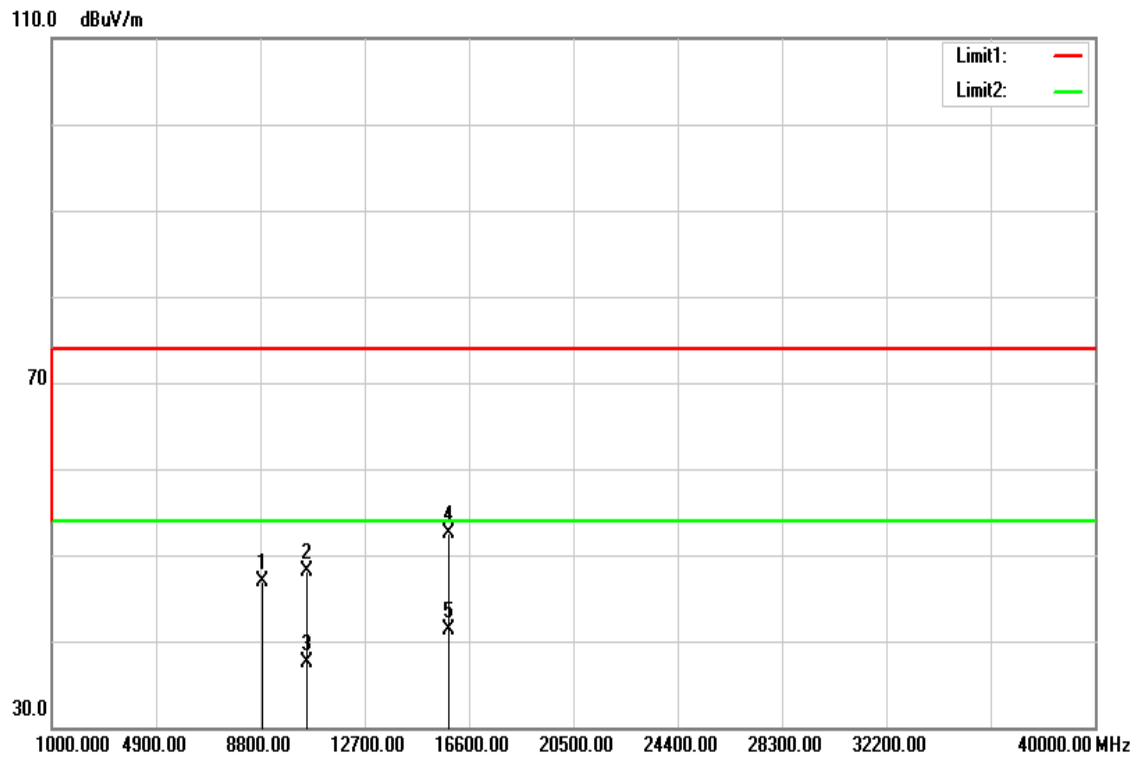

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8755.000	31.04	15.56	46.60	74.00	-27.40	peak	V
10560.000	30.15	17.63	47.78	74.00	-26.22	peak	V
10560.000	19.06	17.63	36.69	54.00	-17.31	AVG	V
15840.000	31.13	21.63	52.76	74.00	-21.24	peak	V
15840.000	20.48	21.63	42.11	54.00	-11.89	AVG	V
N/A							
8859.000	31.10	15.75	46.85	74.00	-27.15	peak	H
10560.000	30.46	17.63	48.09	74.00	-25.91	peak	H
10560.000	19.89	17.63	37.52	54.00	-16.48	AVG	H
15840.000	30.91	21.63	52.54	74.00	-21.46	peak	H
15840.000	19.76	21.63	41.39	54.00	-12.61	AVG	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH High**


**Polarity: Vertical**

110.0 dBuV/m

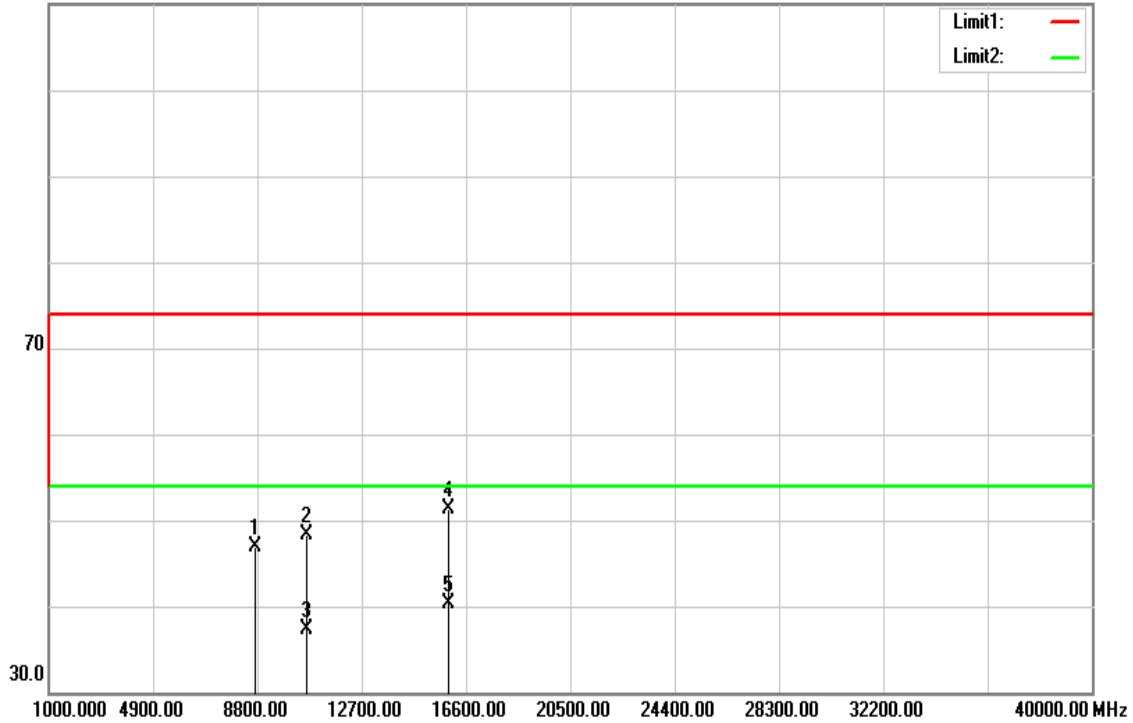

**Polarity: Horizontal**

110.0 dBuV/m

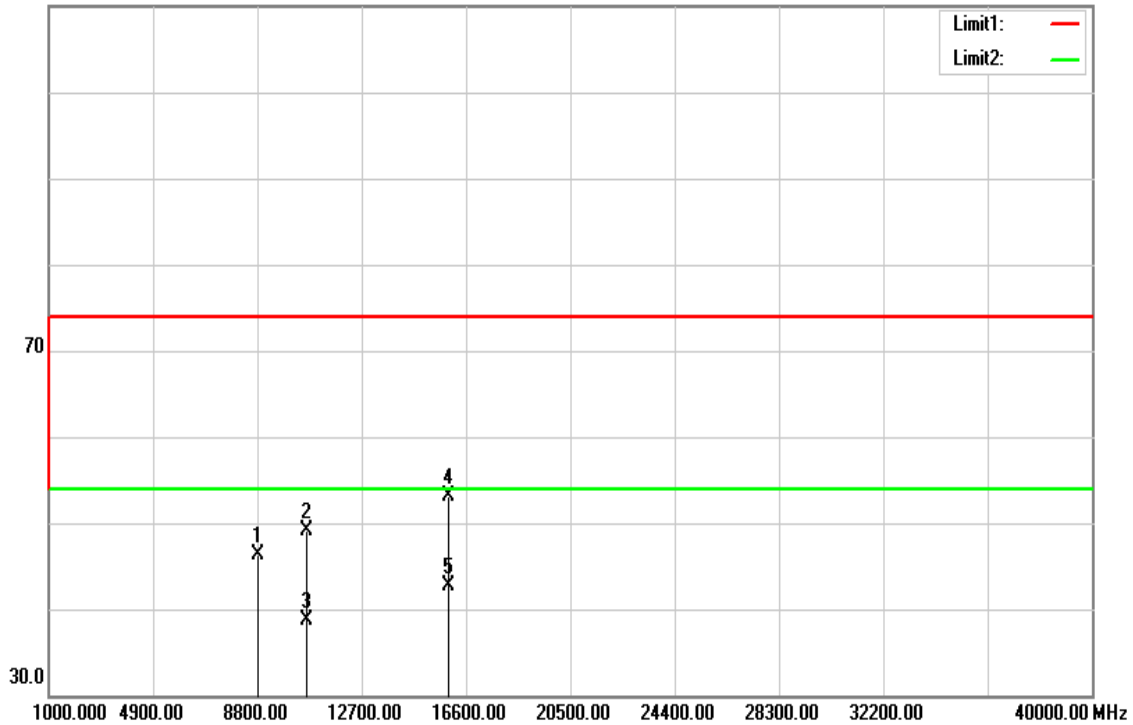

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH High **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8729.000	31.34	15.51	46.85	74.00	-27.15	peak	V
10640.000	30.57	17.72	48.29	74.00	-25.71	peak	V
10640.000	19.54	17.72	37.26	54.00	-16.74	AVG	V
15960.000	29.36	22.04	51.40	74.00	-22.60	peak	V
15960.000	18.21	22.04	40.25	54.00	-13.75	AVG	V
N/A							
8819.000	30.72	15.68	46.40	74.00	-27.60	peak	H
10640.000	31.37	17.72	49.09	74.00	-24.91	peak	H
10640.000	20.97	17.72	38.69	54.00	-15.31	AVG	H
15960.000	31.00	22.04	53.04	74.00	-20.96	peak	H
15960.000	20.61	22.04	42.65	54.00	-11.35	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Tx / IEEE 802.11n HT 40 MHz mode / CH Low**


**Polarity: Vertical**

110.0 dBuV/m

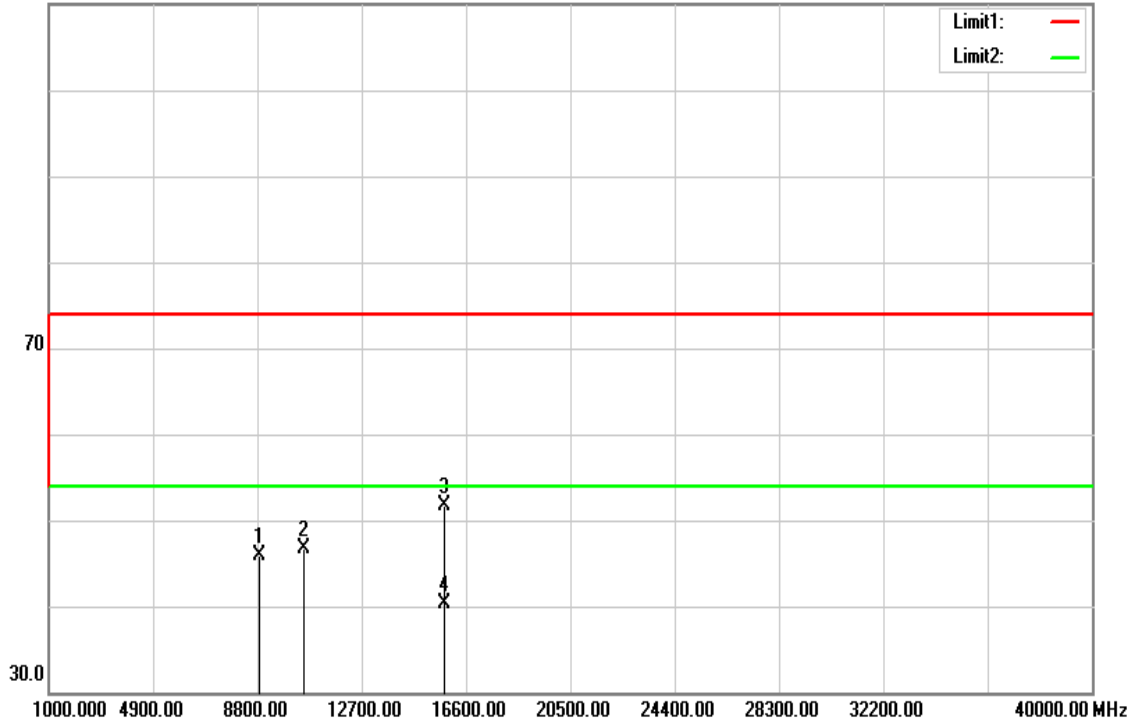

**Polarity: Horizontal**

110.0 dBuV/m

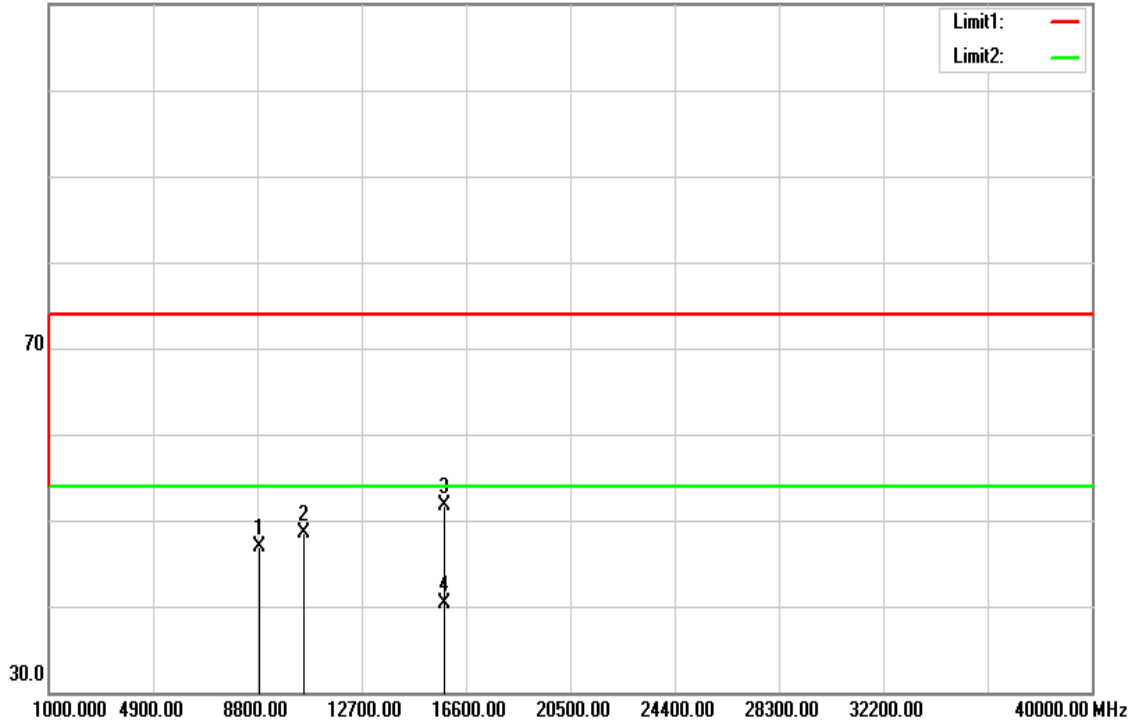

**Operation Mode:** Tx / IEEE 802.11n HT 40 MHz mode / CH Low **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8900.000	30.16	15.83	45.99	74.00	-28.01	peak	V
10540.000	29.19	17.61	46.80	74.00	-27.20	peak	V
15810.000	30.17	21.53	51.70	74.00	-22.30	peak	V
15810.000	18.82	21.53	40.35	54.00	-13.65	AVG	V
N/A							
8856.000	31.13	15.75	46.88	74.00	-27.12	peak	H
10540.000	30.80	17.61	48.41	74.00	-25.59	peak	H
15810.000	30.23	21.53	51.76	74.00	-22.24	peak	H
15810.000	18.83	21.53	40.36	54.00	-13.64	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 40 MHz mode / CH High**

**Polarity: Vertical**

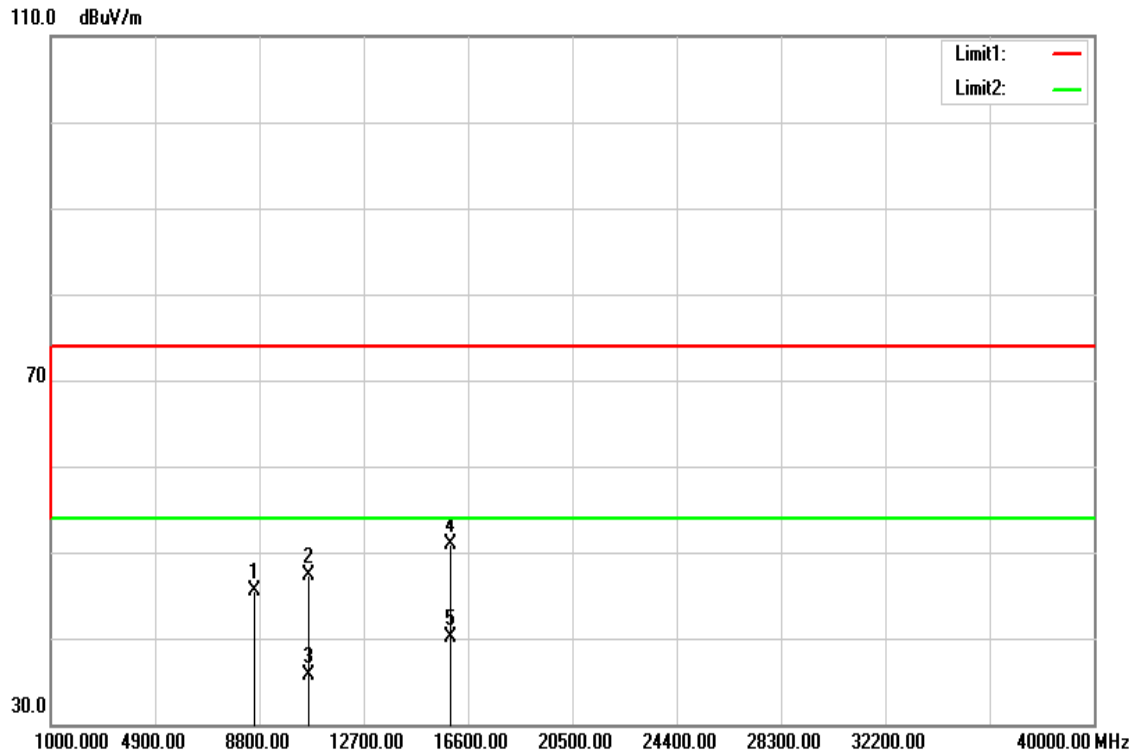

**Polarity: Horizontal**

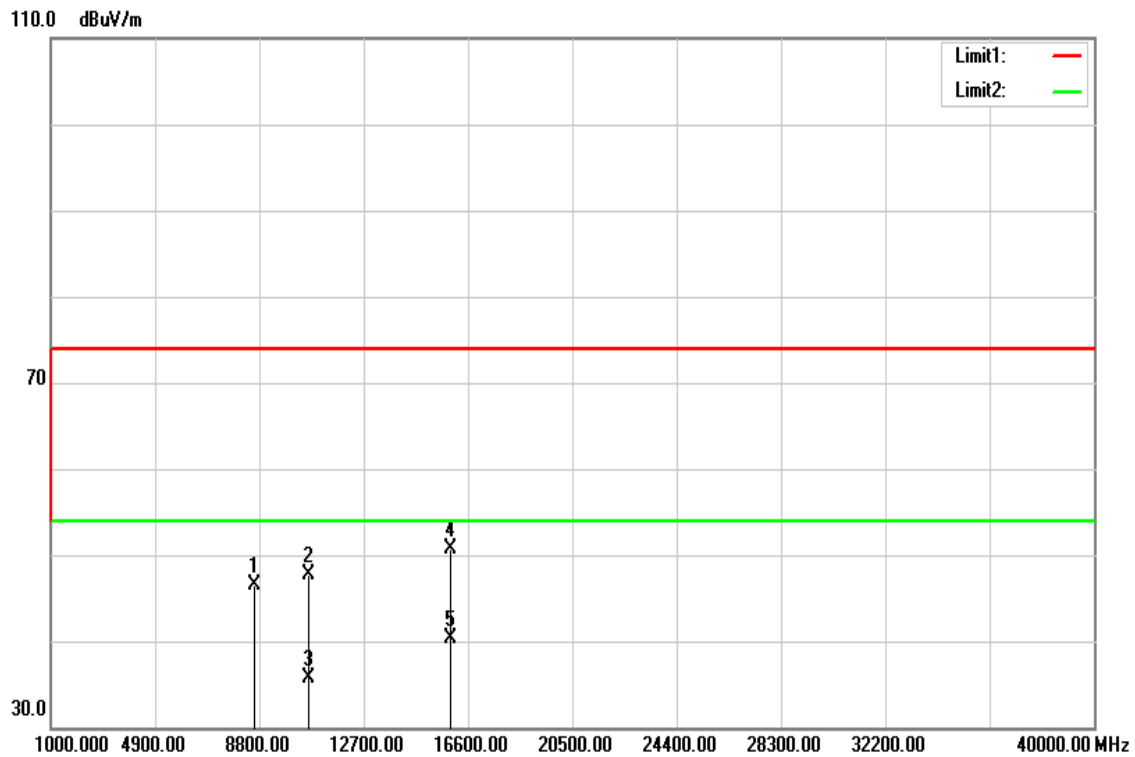

**Operation Mode:** Tx / IEEE 802.11n HT 40 MHz mode / CH High **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8639.000	30.21	15.34	45.55	74.00	-28.45	peak	V
10620.000	29.54	17.70	47.24	74.00	-26.76	peak	V
10620.000	17.99	17.70	35.69	54.00	-18.31	AVG	V
15930.000	28.95	21.94	50.89	74.00	-23.11	peak	V
15930.000	18.21	21.94	40.15	54.00	-13.85	AVG	V
N/A							
8633.000	31.14	15.33	46.47	74.00	-27.53	peak	H
10620.000	29.97	17.70	47.67	74.00	-26.33	peak	H
10620.000	17.99	17.70	35.69	54.00	-18.31	AVG	H
15930.000	28.80	21.94	50.74	74.00	-23.26	peak	H
15930.000	18.41	21.94	40.35	54.00	-13.65	AVG	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**U-NII-2C**

**Tx / IEEE 802.11a mode / CH Low**


**Polarity: Vertical**

110.0 dBuV/m

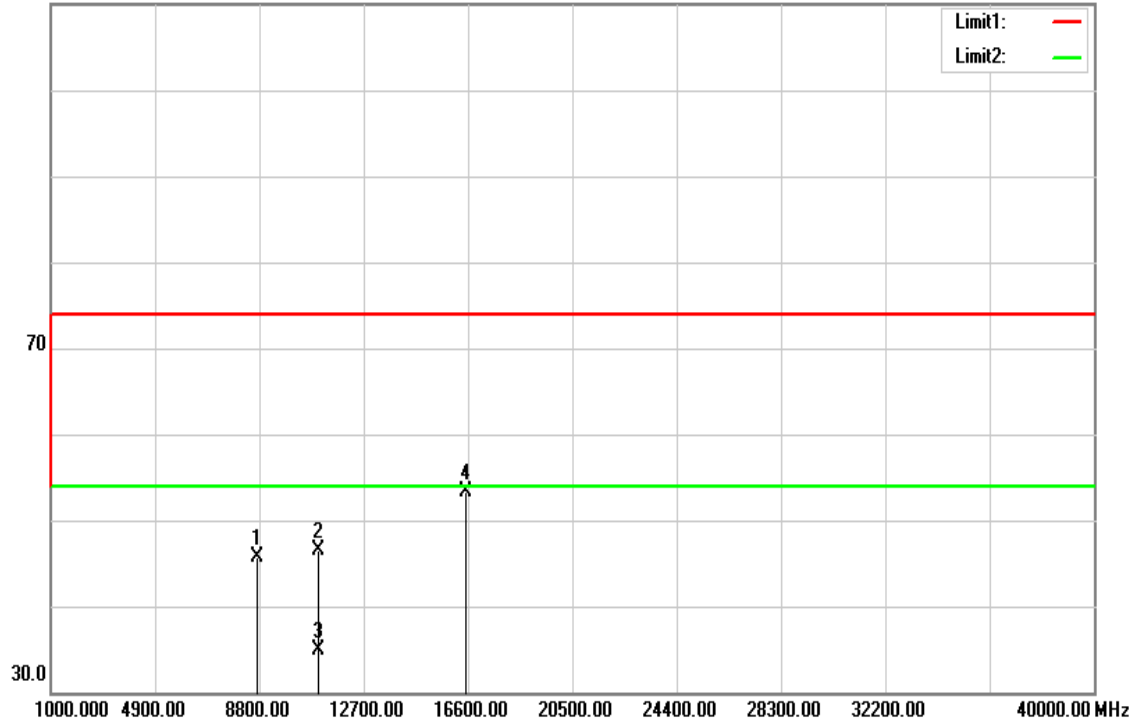

**Polarity: Horizontal**

110.0 dBuV/m

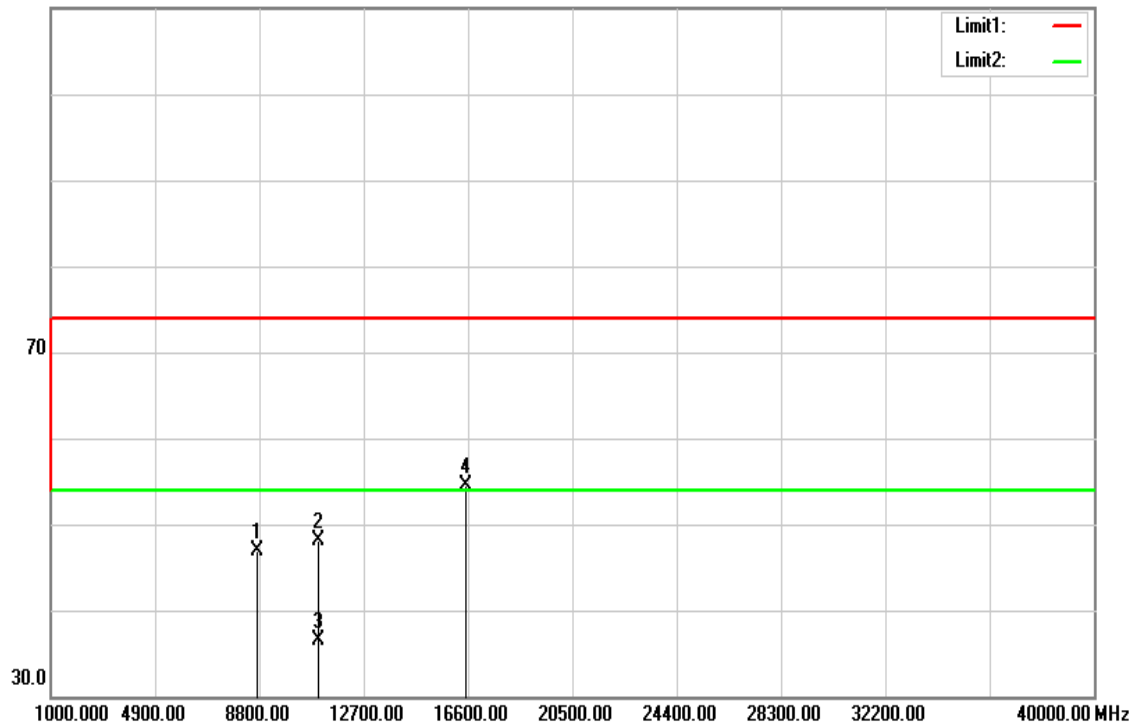

**Operation Mode:** Tx / IEEE 802.11a mode / CH Low

**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8725.000	30.24	15.50	45.74	74.00	-28.26	peak	V
11000.000	28.36	18.10	46.46	74.00	-27.54	peak	V
11000.000	16.75	18.10	34.85	54.00	-19.15	AVG	V
16500.000	29.77	23.57	53.34	74.00	-20.66	peak	V
N/A							
8734.000	31.44	15.52	46.96	74.00	-27.04	peak	H
11000.000	29.96	18.10	48.06	74.00	-25.94	peak	H
11000.000	18.45	18.10	36.55	54.00	-17.45	AVG	H
16500.000	30.89	23.57	54.46	74.00	-19.54	peak	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11a mode / CH Mid**


**Polarity: Vertical**

110.0 dBuV/m

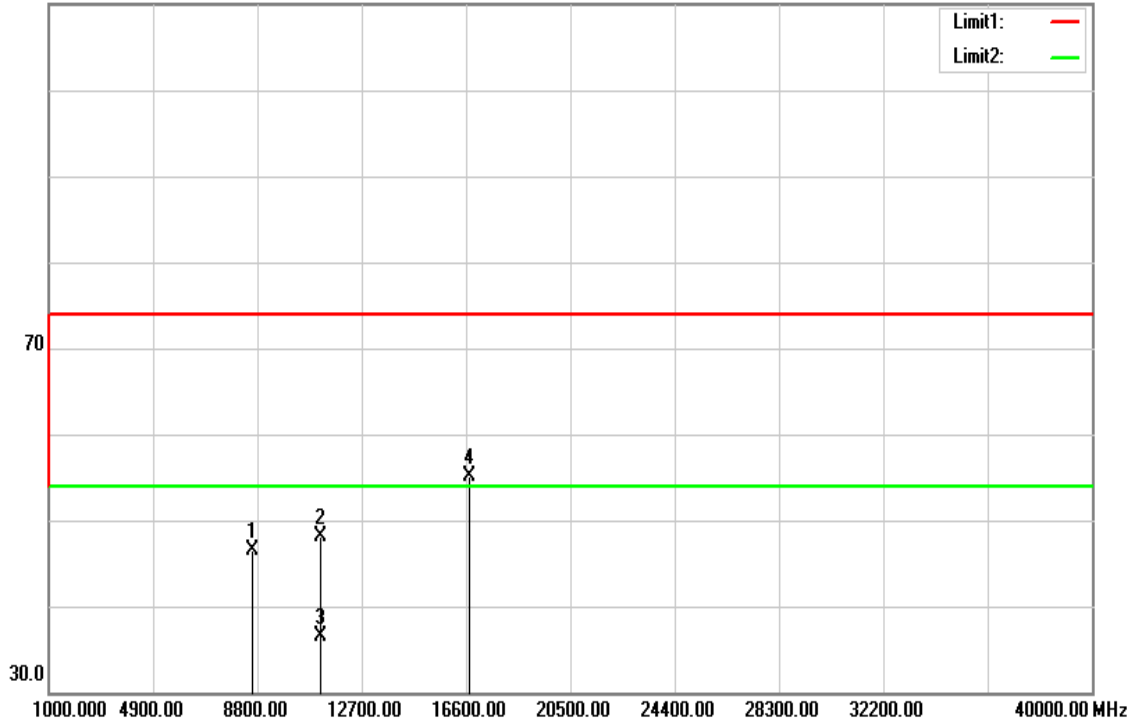

**Polarity: Horizontal**

110.0 dBuV/m

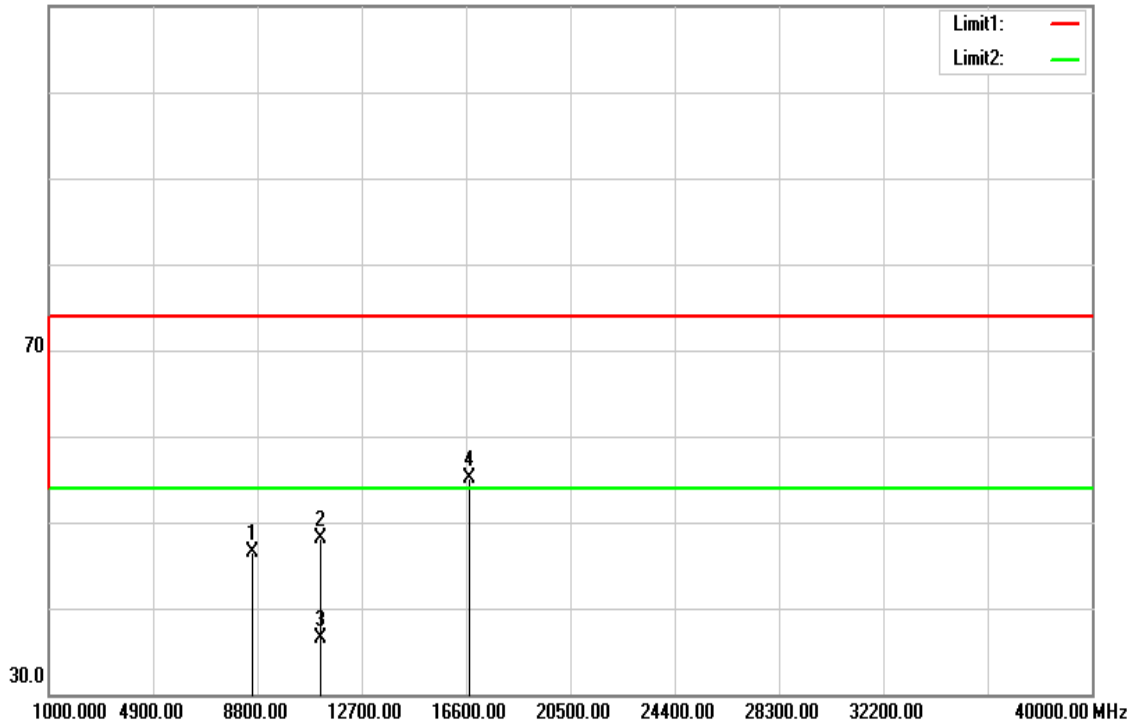

**Operation Mode:** Tx / IEEE 802.11a mode / CH Mid

**Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8611.000	31.28	15.29	46.57	74.00	-27.43	peak	V
11160.000	30.00	18.12	48.12	74.00	-25.88	peak	V
11160.000	18.45	18.12	36.57	54.00	-17.43	AVG	V
16740.000	30.73	24.45	55.18	74.00	-18.82	peak	V
N/A							
8611.000	31.28	15.29	46.57	74.00	-27.43	peak	H
11160.000	30.00	18.12	48.12	74.00	-25.88	peak	H
11160.000	18.45	18.12	36.57	54.00	-17.43	AVG	H
16740.000	30.73	24.45	55.18	74.00	-18.82	peak	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Tx / IEEE 802.11a mode / CH High**


**Polarity: Vertical**

110.0 dBuV/m

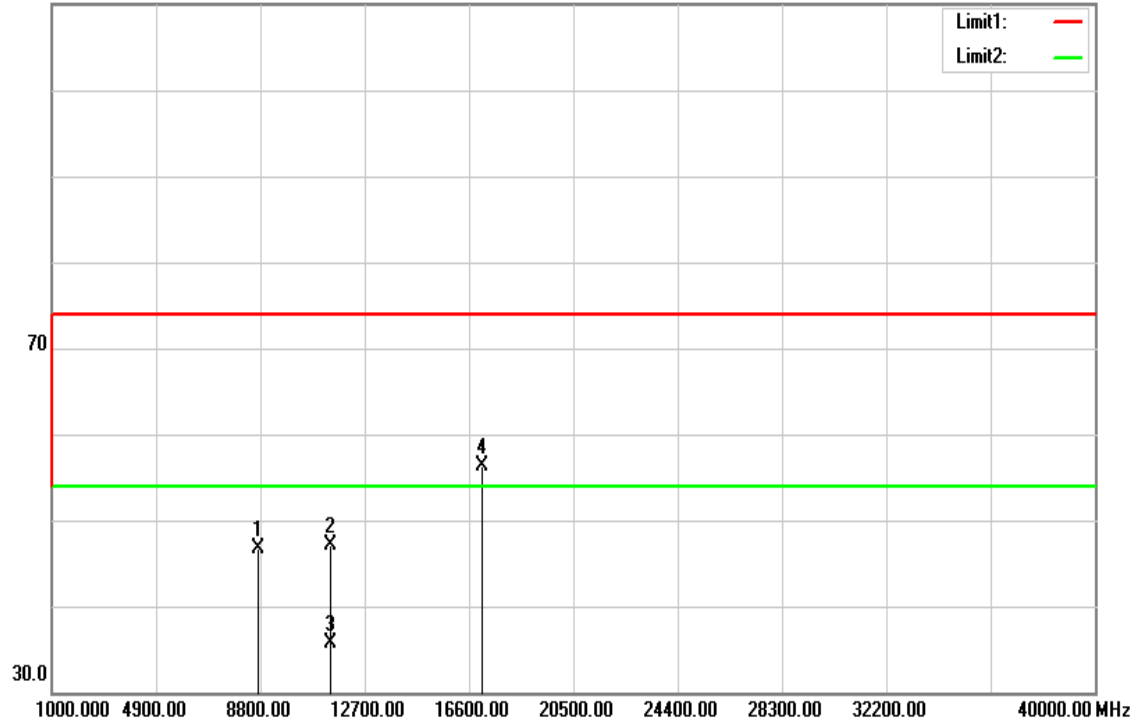

**Polarity: Horizontal**

110.0 dBuV/m

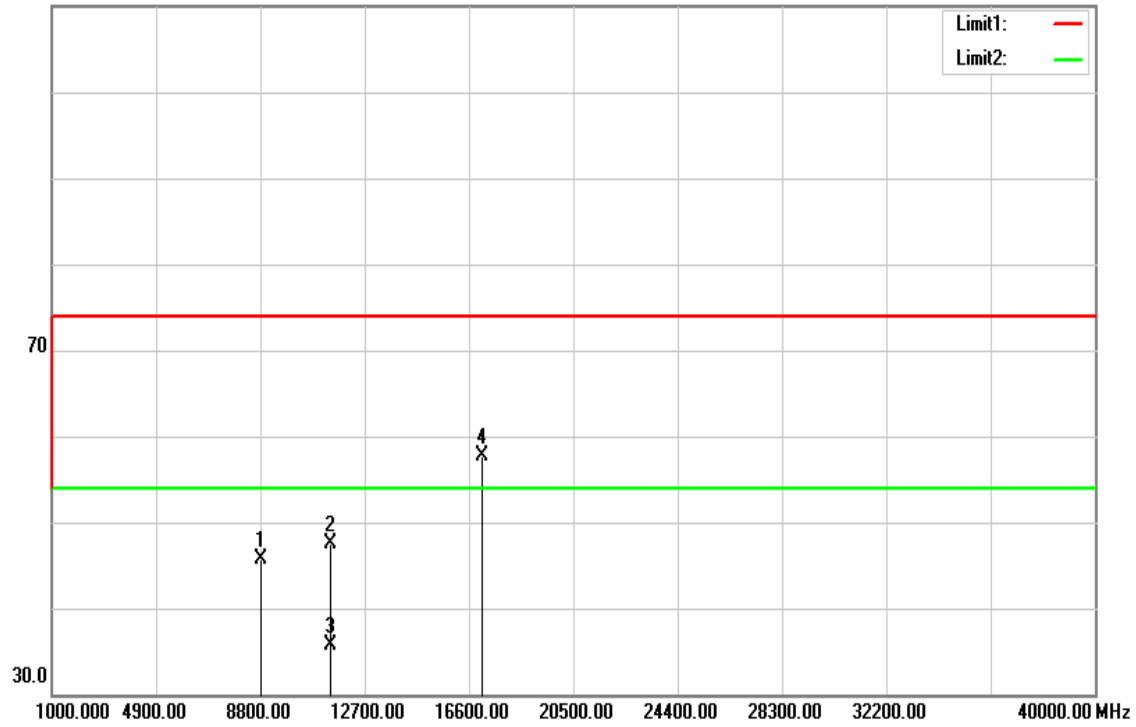

**Operation Mode:** Tx / IEEE 802.11a mode / CH High      **Test Date:** May 12, 2016  
**Temperature:** 27°C      **Tested by:** Dennis Li  
**Humidity:** 53% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8698.000	31.17	15.45	46.62	74.00	-27.38	peak	V
11400.000	28.86	18.15	47.01	74.00	-26.99	peak	V
11400.000	17.54	18.15	35.69	54.00	-18.31	AVG	V
17100.000	30.37	26.01	56.38	74.00	-17.62	peak	V
N/A							
8835.000	29.93	15.71	45.64	74.00	-28.36	peak	H
11400.000	29.42	18.15	47.57	74.00	-26.43	peak	H
11400.000	17.54	18.15	35.69	54.00	-18.31	AVG	H
17100.000	31.77	26.01	57.78	74.00	-16.22	peak	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH Low**


**Polarity: Vertical**

110.0 dBuV/m

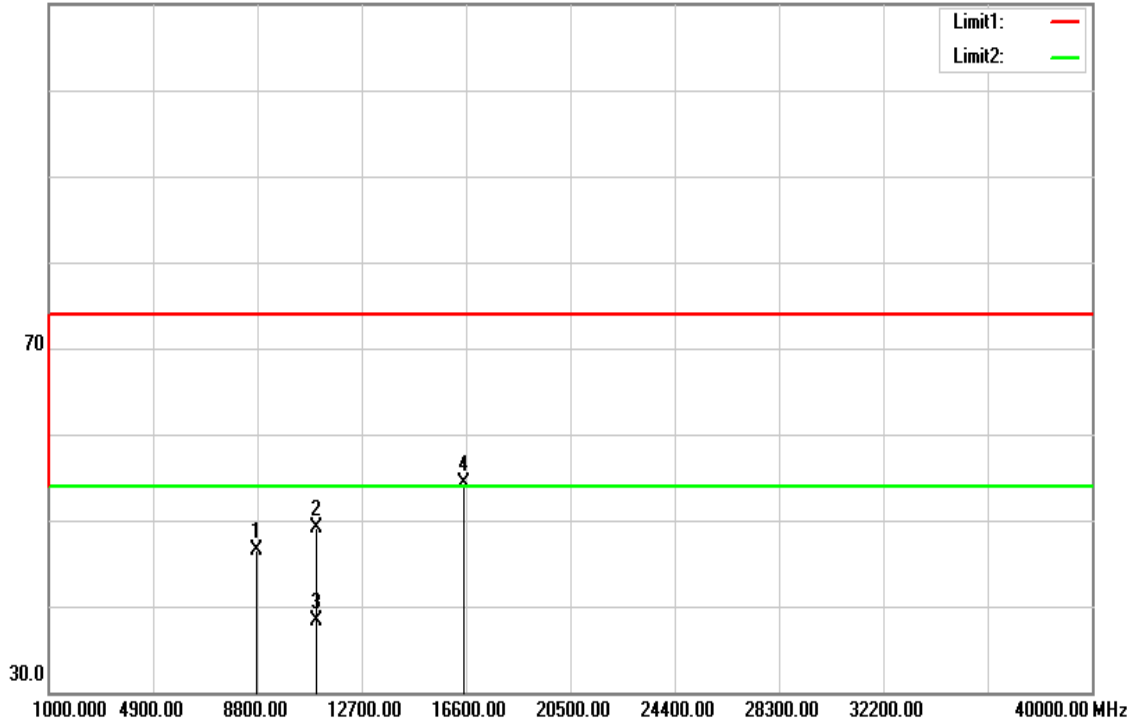

**Polarity: Horizontal**

110.0 dBuV/m

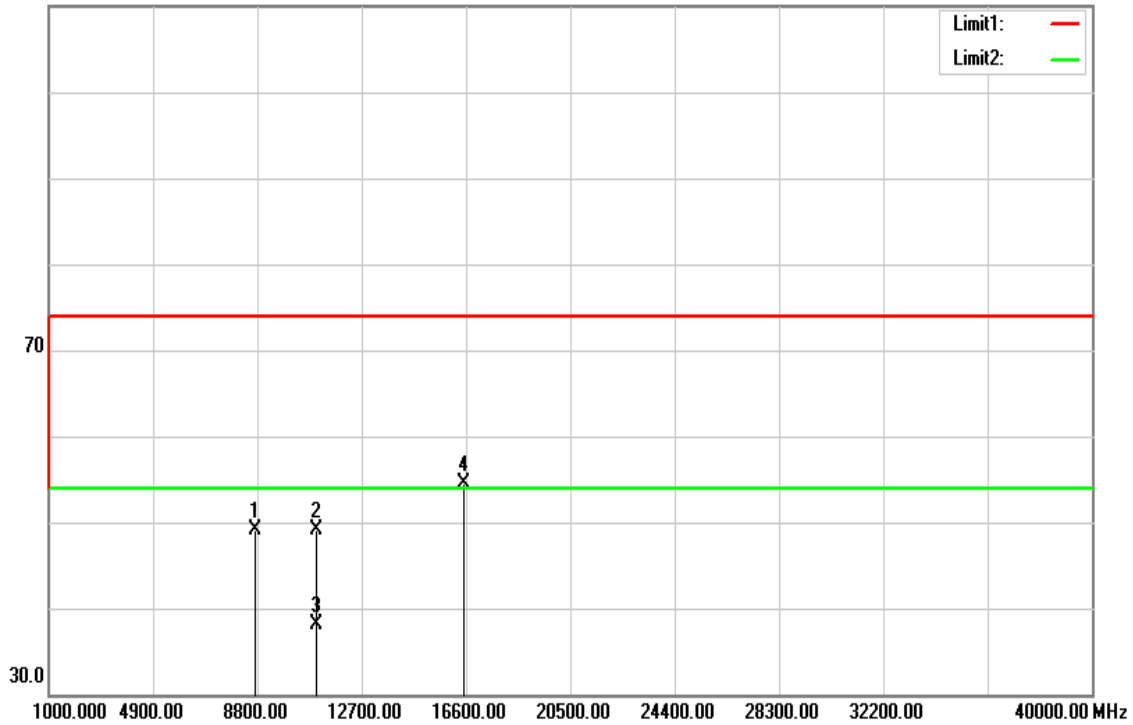

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8749.000	31.05	15.55	46.60	74.00	-27.40	peak	V
11000.000	31.05	18.10	49.15	74.00	-24.85	peak	V
11000.000	20.29	18.10	38.39	54.00	-15.61	AVG	V
16500.000	30.76	23.57	54.33	74.00	-19.67	peak	V
N/A							
8724.000	33.68	15.50	49.18	74.00	-24.82	peak	H
11000.000	30.94	18.10	49.04	74.00	-24.96	peak	H
11000.000	20.09	18.10	38.19	54.00	-15.81	AVG	H
16500.000	30.88	23.57	54.45	74.00	-19.55	peak	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH Mid**


**Polarity: Vertical**

110.0 dBuV/m

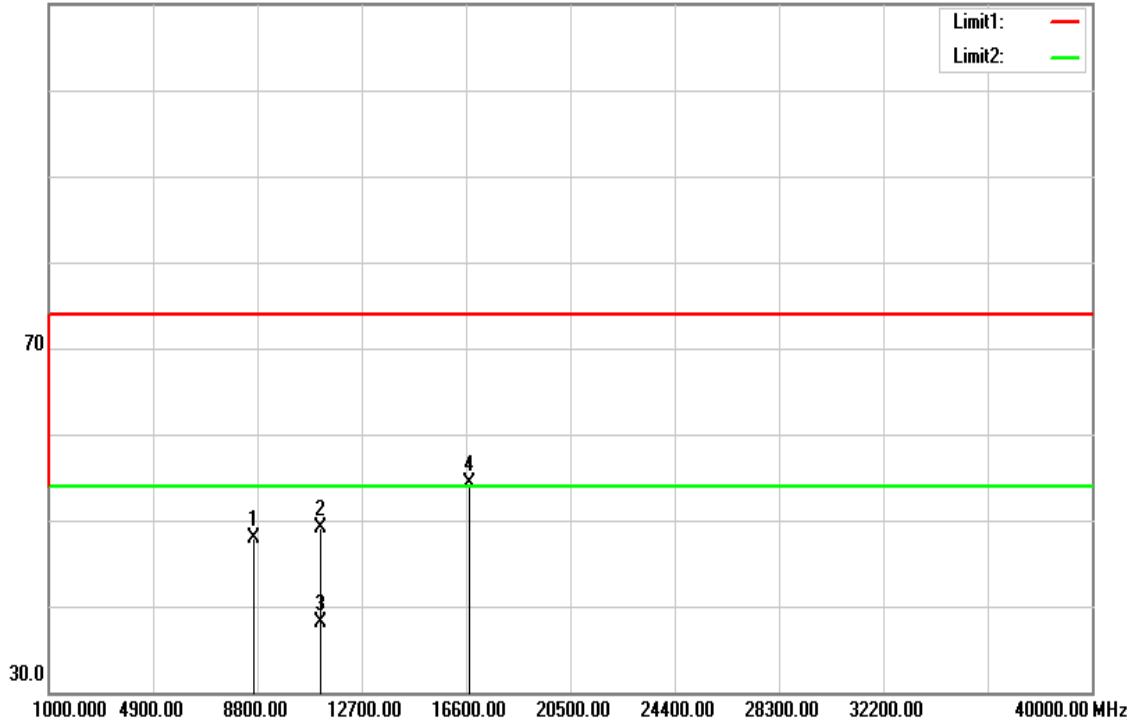

**Polarity: Horizontal**

110.0 dBuV/m

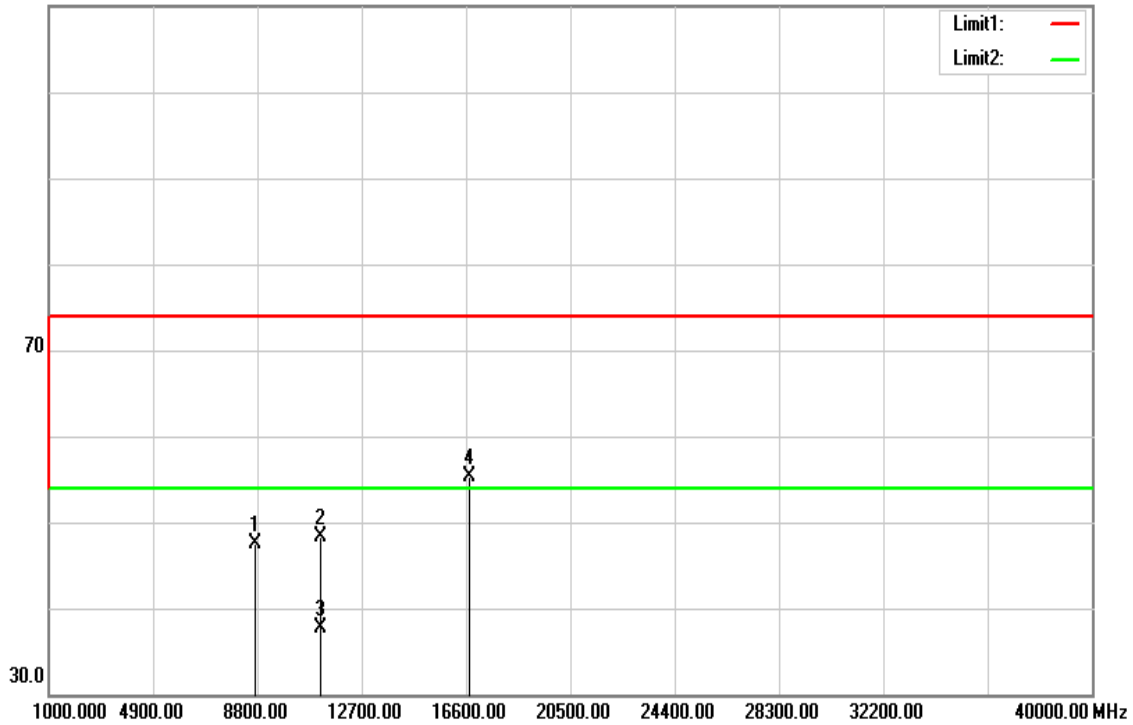

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8655.000	32.45	15.37	47.82	74.00	-26.18	peak	V
11160.000	30.92	18.12	49.04	74.00	-24.96	peak	V
11160.000	19.99	18.12	38.11	54.00	-15.89	AVG	V
16740.000	29.83	24.45	54.28	74.00	-19.72	peak	V
N/A							
8711.000	32.07	15.48	47.55	74.00	-26.45	peak	H
11160.000	30.12	18.12	48.24	74.00	-25.76	peak	H
11160.000	19.57	18.12	37.69	54.00	-16.31	AVG	H
16740.000	30.87	24.45	55.32	74.00	-18.68	peak	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 20 MHz mode / CH High**


**Polarity: Vertical**

110.0 dBuV/m

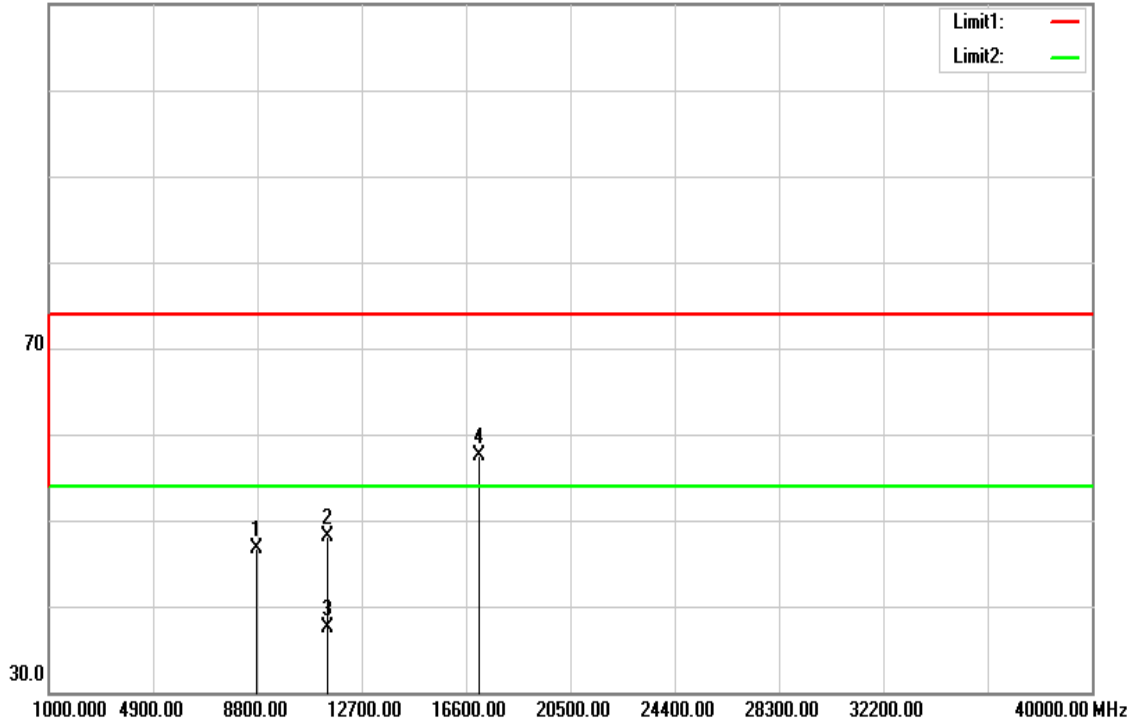

**Polarity: Horizontal**

110.0 dBuV/m

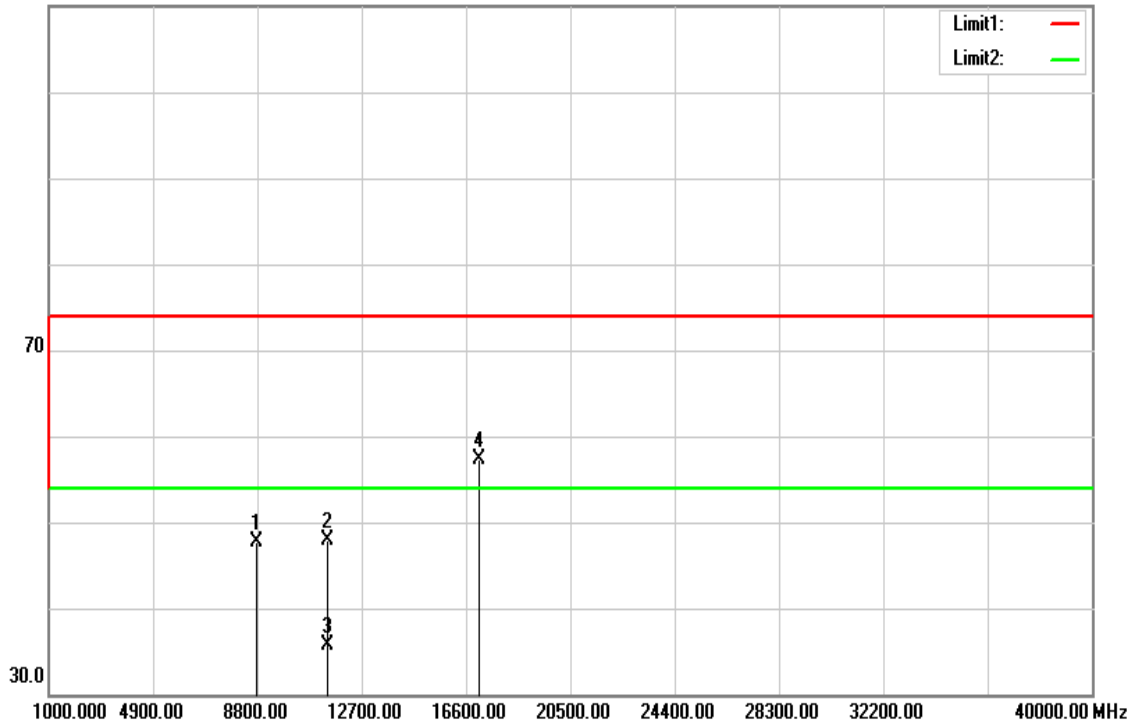

**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz mode / CH High **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8799.000	31.03	15.64	46.67	74.00	-27.33	peak	V
11400.000	29.91	18.15	48.06	74.00	-25.94	peak	V
11400.000	19.40	18.15	37.55	54.00	-16.45	AVG	V
17100.000	31.47	26.01	57.48	74.00	-16.52	peak	V
N/A							
8754.000	32.11	15.56	47.67	74.00	-26.33	peak	H
11400.000	29.80	18.15	47.95	74.00	-26.05	peak	H
11400.000	17.51	18.15	35.66	54.00	-18.34	AVG	H
17100.000	31.30	26.01	57.31	74.00	-16.69	peak	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).




**Tx / IEEE 802.11n HT 40 MHz mode / CH Low**

**Polarity: Vertical**

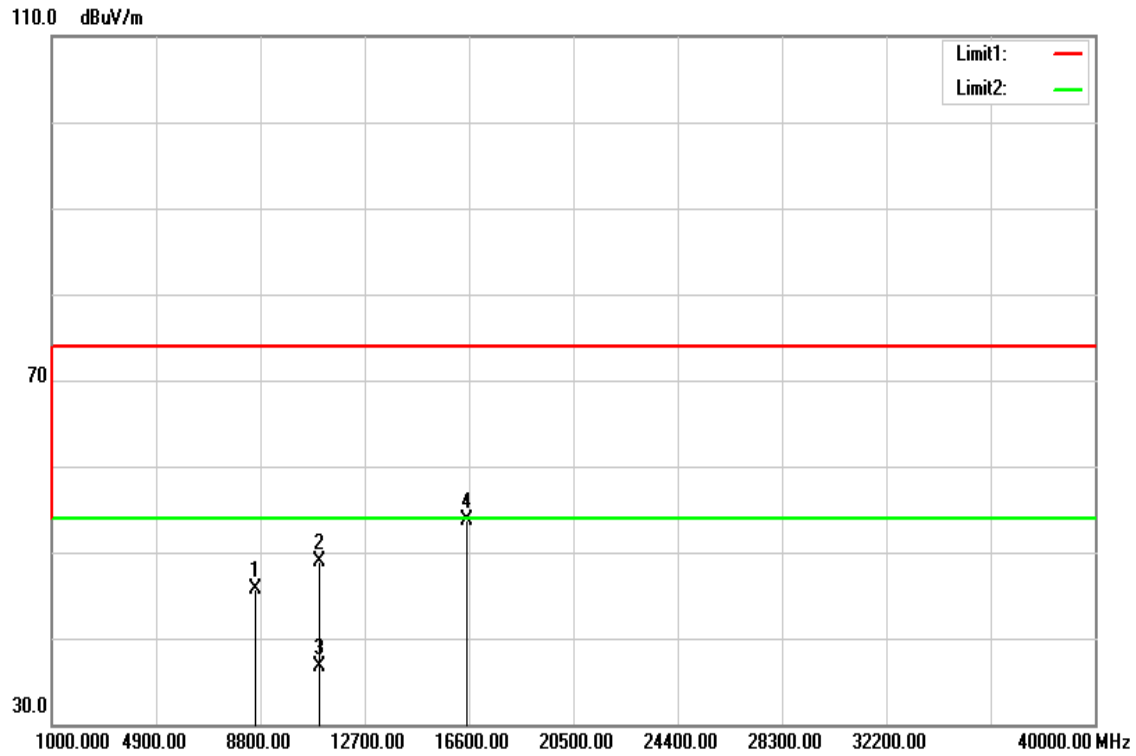

**Polarity: Horizontal**

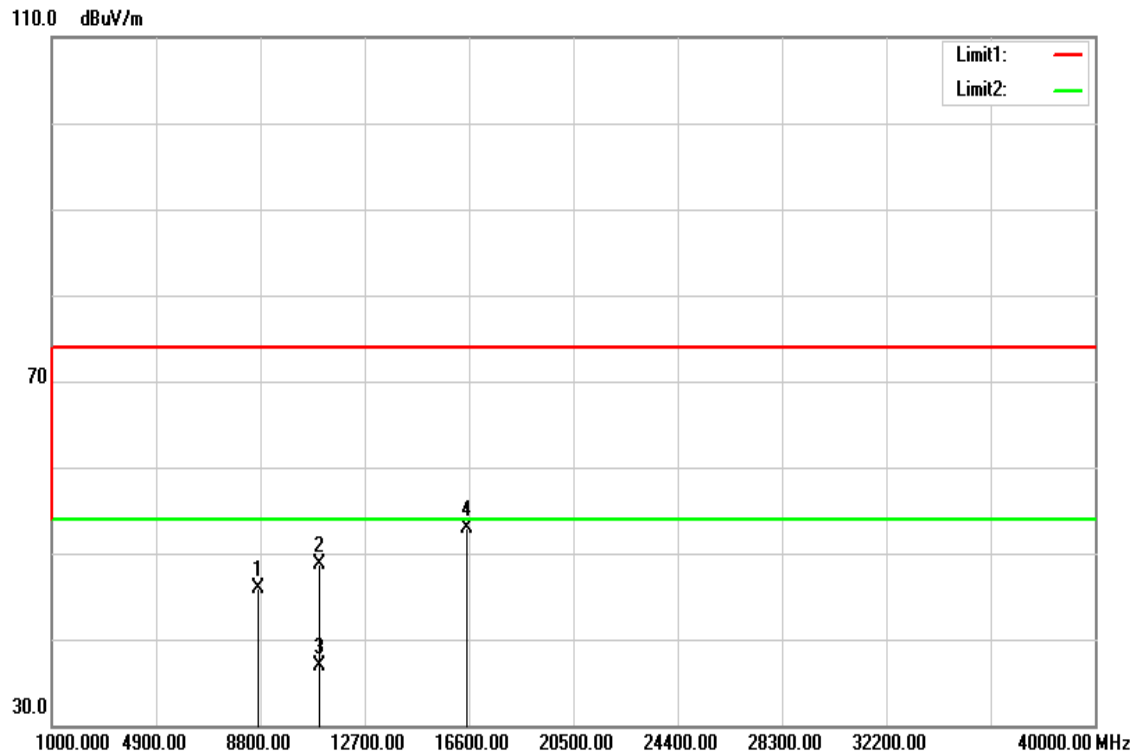

**Operation Mode:** Tx / IEEE 802.11n HT 40 MHz mode / CH Low **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.


Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8612.000	30.41	15.29	45.70	74.00	-28.30	peak	V
11020.000	30.90	18.10	49.00	74.00	-25.00	peak	V
11020.000	18.68	18.10	36.78	54.00	-17.22	AVG	V
16530.000	29.94	23.68	53.62	74.00	-20.38	peak	V
N/A							
8713.000	30.52	15.48	46.00	74.00	-28.00	peak	H
11020.000	30.53	18.10	48.63	74.00	-25.37	peak	H
11020.000	18.89	18.10	36.99	54.00	-17.01	AVG	H
16530.000	29.30	23.68	52.98	74.00	-21.02	peak	H
N/A							

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 40 MHz mode / CH Mid**

**Polarity: Vertical**

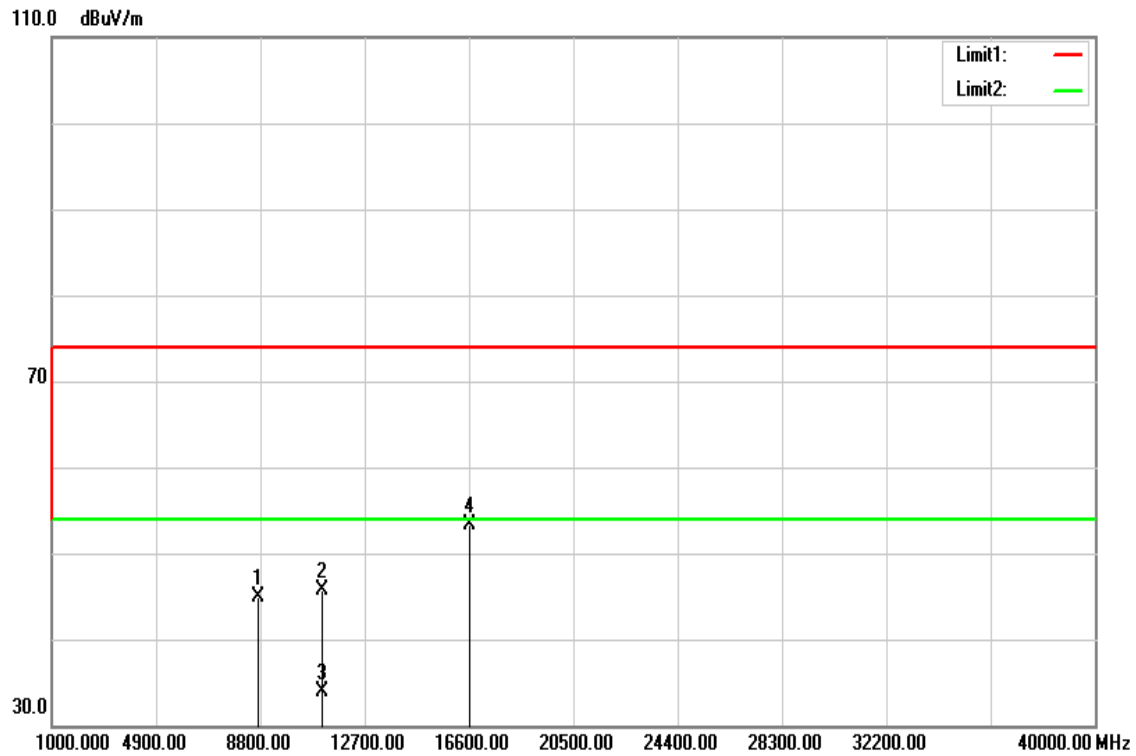

**Polarity: Horizontal**

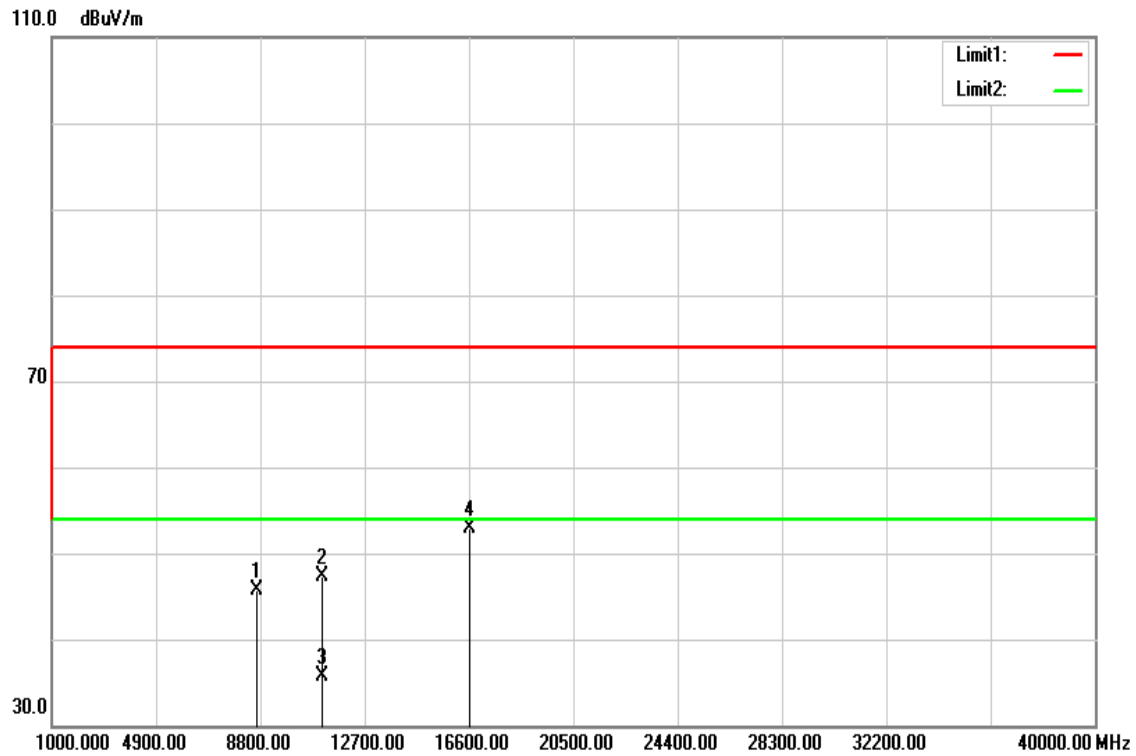

**Operation Mode:** Tx / IEEE 802.11n HT 40 MHz mode / CH Mid **Test Date:** May 12, 2016  
**Temperature:** 27°C **Tested by:** Dennis Li  
**Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8716.000	29.49	15.49	44.98	74.00	-29.02	peak	V
11100.000	27.57	18.11	45.68	74.00	-28.32	peak	V
11100.000	15.73	18.11	33.84	54.00	-20.16	AVG	V
16650.000	29.08	24.12	53.20	74.00	-20.80	peak	V
N/A							
8644.000	30.39	15.35	45.74	74.00	-28.26	peak	H
11100.000	29.24	18.11	47.35	74.00	-26.65	peak	H
11100.000	17.58	18.11	35.69	54.00	-18.31	AVG	H
16650.000	28.72	24.12	52.84	74.00	-21.16	peak	H
N/A							


**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Tx / IEEE 802.11n HT 40 MHz mode / CH High**


**Polarity: Vertical**

110.0 dBuV/m

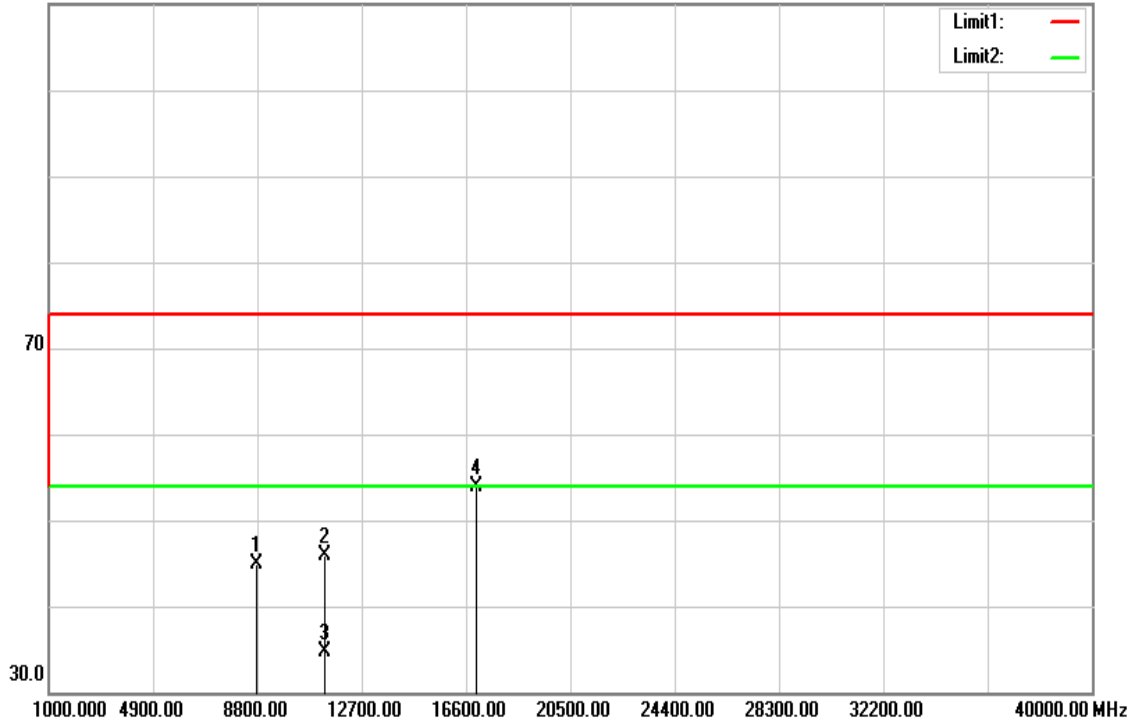

**Polarity: Horizontal**

110.0 dBuV/m

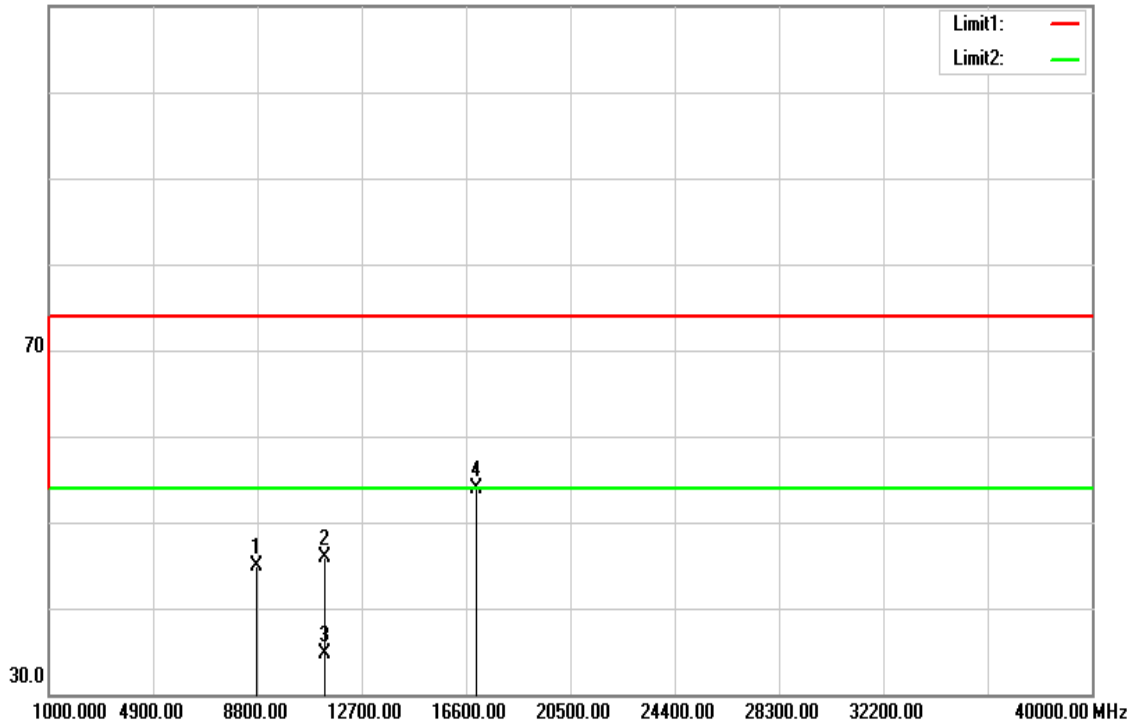

**Operation Mode:** Tx / IEEE 802.11n HT 40 MHz mode / CH High **Test Date:** May 12, 2016

**Temperature:** 27°C

**Tested by:** Dennis Li

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
8759.000	29.37	15.57	44.94	74.00	-29.06	peak	V
11340.000	27.83	18.14	45.97	74.00	-28.03	peak	V
11340.000	16.51	18.14	34.65	54.00	-19.35	AVG	V
17010.000	28.41	25.46	53.87	74.00	-20.13	peak	V
N/A							
8759.000	29.37	15.57	44.94	74.00	-29.06	peak	H
11340.000	27.83	18.14	45.97	74.00	-28.03	peak	H
11340.000	16.51	18.14	34.65	54.00	-19.35	AVG	H
17010.000	28.41	25.46	53.87	74.00	-20.13	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).