

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

| Applicant: | Advantech Co., Ltd No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan, R.O.C. |
|-----------------------|---|
| Product Name: | Motherboard |
| Brand Name: | Advantech |
| Model No.: | RSB-4760 |
| Model Difference: | N/A |
| FCC ID: | M82-RSB-4760 |
| Report Number: | E2/2017/90149 |
| FCC Rule Part: | §15.247, Cat: DSS |
| Issue Date: | Oct. 20, 2017 |
| Date of Test: | Sep. 29, 2017~ Oct. 13, 2017 |
| Date of EUT Received: | Sep. 29, 2017 |

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Prepared By:

Stefanie Yu / Clerk

Approved By:

Jim Chang / Asst. Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Revision History

| Report Number | Revision | Description | Issue Date |
|---------------|----------|------------------------------|---------------|
| E2/2017/90149 | Rev.00 | Initial creation of document | Oct. 20, 2017 |
| | | | |
| | | | |
| | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Table of Contents

| 1 | GENERAL INFORMATION | 3 |
|----|---|---|
| 2 | SYSTEM TEST CONFIGURATION | 3 |
| 3 | UMMARY OF TEST RESULTS | D |
| 4 | DESCRIPTION OF TEST MODES17 | 1 |
| 5 | MEASUREMENT UNCERTAINTY14 | 4 |
| 6 | CONDUCTED EMISSION TEST1 | 5 |
| 7 | PEAK OUTPUT POWER MEASUREMENT19 | 9 |
| 8 | 20dB BANDWIDTH MEASUREMENT27 | 1 |
| 9 | CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT2 | 5 |
| 10 | RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT |) |
| 11 | FREQUENCY SEPARATION | 3 |
| 12 | NUMBER OF HOPPING FREQUENCY6 | 5 |
| 13 | TIME OF OCCUPANCY (DWELL TIME)68 | 3 |
| 14 | ANTENNA REQUIREMENT | ô |



GENERAL INFORMATION 1

1.1 Product description

General:

| Product Name: | Motherboard | | | |
|------------------------|--------------------|--|--|--|
| Brand Name: | Advantech | Advantech | | |
| Model No.: | RSB-4760 | RSB-4760 | | |
| Model Difference: | N/A | | | |
| Product SW/HW version: | N/A/ N/A | | | |
| | 12VDC from Adapter | | | |
| Power Supply: | Adapter: | Model No.: FSP036-RBBN2, Supplier: FSP GROUP INC. | | |

Bluetooth BR+EDR:

| Bluetooth Version: | Bluetooth V4.1 dual mode | | |
|--------------------|--------------------------|--|--|
| Channel number: | 79 channels | | |
| Modulation type: | GFSK + π/4DQPSK + 8DPSK | | |
| Transmit Power: | 12.2 dBm | | |
| Frequency Range: | 2.402GHz – 2.480GHz | | |
| Dwell Time: | <= 0.4s | | |

| Antenna Type | Supplier | Antenna Part No. | Freq. | Peak Antenna Gain (dBi) | Worst Antenna Gain |
|-----------------|----------|---------------------|--------|-------------------------------|--------------------------|
| Dipole type | INVAX | 1750008671-01 | 2.4GHz | 2.89 | |
| External | INVAX | 1750007622-01 | 2.4GHz | 3.50 | V |
| Antenna | INVAX | 1750008717-01 | 2.4GHz | 2.89 | |
| Antenna | Walsin | 1750008772-01 | 2.4GHz | 2.93 | |

Note: Pre-scanned was done on the above 4 antennas, the 1750007622-01 results higher emission at 2.4GHz. Therefore, the completed set of measurement was done on the antenna to be presented on this test report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Report No.: E2/2017/90149 Page 7 of 76



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247 FCC Public Notice DA 00-705 Measurement Guidelines ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Number and Designation number are: 735305 TW 0002

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: E2/2017/90149 Page 9 of 76



2.5 Configuration of Tested System Fig. 2-1 Conducted (Antenna Port) Emission Configuration




Fig 2-3 Conduction (AC Power Line) Radiated Emission




Fig 2-2 Radiated Emission



Table 2-1 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Data Cable | Power Cord |
|------|----------------------------|-----------|----------------|------------|------------|------------|
| 1 | Notebook | Lenovo | L430 | R9-WR6X4 | Shielded | Unshielded |
| 2 | Bluetooth Test Software | N/A | N/A | N/A | N/A | N/A |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



UMMARY OF TEST RESULTS 3

| FCC Rules | Description Of Test | Result |
|-----------------------|--|-----------|
| §15.207(a) | AC Power Line Conducted Emission | Compliant |
| §15.247(b)(1) | Peak Output Power | Compliant |
| §15.247(a)(1) | 20dB & 99% Bandwidth | Compliant |
| §15.247(d) | Conducted Band Edge and Spurious Emission | Compliant |
| §15.247(d) | Radiated Band Edge and Spurious Emission | Compliant |
| §15.247(a)(1) | Frequency Separation | Compliant |
| §15.247(a)(1)(iii) | Number of hopping frequency | Compliant |
| §15.247(a)(1)(iii) | Time of Occupancy | Compliant |
| §15.203 §15.247(b) | Antenna Requirement | Compliant |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

| СН | FREQUENCY | СН | FREQUENCY | СН | FREQUENCY | СН | FREQUENCY |
|----|-----------|----|-----------|----|-----------|----|-----------|
| 0 | 2402 MHz | 20 | 2422 MHz | 40 | 2442 MHz | 70 | 2462 MHz |
| 1 | 2403 MHz | 21 | 2423 MHz | 41 | 2443 MHz | 71 | 2463 MHz |
| 2 | 2404 MHz | 22 | 2424 MHz | 42 | 2444 MHz | 72 | 2464 MHz |
| 3 | 2405 MHz | 23 | 2425 MHz | 43 | 2445 MHz | 73 | 2465 MHz |
| 4 | 2406 MHz | 24 | 2426 MHz | 44 | 2446 MHz | 74 | 2466 MHz |
| 5 | 2407 MHz | 25 | 2427 MHz | 45 | 2447 MHz | 75 | 2467 MHz |
| 6 | 2408 MHz | 26 | 2428 MHz | 46 | 2448 MHz | 76 | 2468 MHz |
| 7 | 2409 MHz | 27 | 2429 MHz | 47 | 2449 MHz | 77 | 2469 MHz |
| 8 | 2410 MHz | 28 | 2430 MHz | 48 | 2450 MHz | 78 | 2470 MHz |
| 9 | 2411 MHz | 29 | 2431 MHz | 49 | 2451 MHz | 79 | 2471 MHz |
| 10 | 2412 MHz | 30 | 2432 MHz | 50 | 2452 MHz | 70 | 2472 MHz |
| 11 | 2413 MHz | 31 | 2433 MHz | 51 | 2453 MHz | 71 | 2473 MHz |
| 12 | 2414 MHz | 32 | 2434 MHz | 52 | 2454 MHz | 72 | 2474 MHz |
| 13 | 2415 MHz | 33 | 2435 MHz | 53 | 2455 MHz | 73 | 2475 MHz |
| 14 | 2416 MHz | 34 | 2436 MHz | 54 | 2456 MHz | 74 | 2476 MHz |
| 15 | 2417 MHz | 35 | 2437 MHz | 55 | 2457 MHz | 75 | 2477 MHz |
| 16 | 2418 MHz | 36 | 2438 MHz | 56 | 2458 MHz | 76 | 2478 MHz |
| 17 | 2419 MHz | 37 | 2439 MHz | 57 | 2459 MHz | 77 | 2479 MHz |
| 18 | 2420 MHz | 38 | 2440 MHz | 58 | 2460 MHz | 78 | 2480 MHz |
| 19 | 2421 MHz | 39 | 2441 MHz | 59 | 2461 MHz | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition. 1
- Test program used to control the EUT for staying in continuous transmitting and receiving 2 mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst 3 case.
- Pre-scanned was done on the four antenna ports and main antenna port results higher 4 emission at 2.4GHz. Therefore the completed set of measurement was done on main antenna port.

Pre-scanned 1750008671-01,1750007622-01, was done on external antenna: 1750008717-01 and antenna 1750008772-01, and antenna 1750007622-01 results higher emission at 2.4GHz. Therefore, the completed set of measurement was done on antenna: 1750007622-01 to be presented on this test report.

RADIATED EMISSION TEST:

| RADIATED EMISSION TEST (BELOW 1 GHz) | | | | | |
|--------------------------------------|----------------------|-------------------|------------------|----------------|--|
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | PACKET TYPE | |
| Bluetooth | 0 to 78 | 0,39,78 | GFSK | DH5 | |
| | RAI | DIATED EMISSIC | ON TEST (ABOVE 1 | GHz) | |
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | PACKET TYPE | |
| Bluetooth | 0 to 78 | 0,39,78 | GFSK | DH5 | |

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



ANTENNA PORT CONDUCTED MEASUREMENT:

| | CONDUCTED TEST | | | | | | |
|----------------------------------|------------------------------------|-------------------|------------------|----------------|--|--|--|
| | Peak Output Power, 20dB Band Width | | | | | | |
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | PACKET TYPE | | | |
| | 0 to 78 | 0,39,78 | GFSK | DH5 | | | |
| Bluetooth | 0 to 78 | 0,39,78 | π/4-DQPSK | DH5 | | | |
| | 0 to 78 | 0,39,78 | 8-DQPK | DH5 | | | |
| | | Bai | nd Edge | | | | |
| Bluetooth | 0 to 78 | 0,78 | GFSK | DH5 | | | |
| | | Frequen | cy Separation | | | | |
| Bluetooth 0 to 78 0,1,2 GFSK DH5 | | | | DH5 | | | |
| | | Number of h | opping frequency | | | | |
| Bluetooth | 0 to 78 | 0 to 78 | GFSK | DH5 | | | |
| | Time of Occupancy (Dwell time) | | | | | | |
| Bluetooth | 0 to 78 | 0,39,78 | GFSK | DH1/DH3/DH5 | | | |
| Bluetooth | 0 to 78 | 39 | π/4-DQPSK | DH1/DH3/DH5 | | | |
| Bluetooth | 0 to 78 | 39 | 8-DPSK | DH1/DH3/DH5 | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





MEASUREMENT UNCERTAINTY 5

| Test Items | Uncertainty |
|--|-----------------------------|
| AC Power Line Conducted Emission | +/- 2.586 dB |
| Peak Output Power | +/- 0.84 dB |
| 20dB Bandwidth | +/- 51.33 Hz |
| 100 KHz Bandwidth Of Frequency Band Edges | +/- 0.84 dB |
| Frequency Separation | +/- 51.33 Hz |
| Number of hopping frequency | +/- 51.33 Hz |
| Time of Occupancy | +/- 51.33 Hz |
| Temperature | +/- 0.65 °C |
| Humidity | +/- 4.6 % |
| DC / AC Power Source | DC= +/- 0.13%, AC= +/- 0.2% |

Radiated Spurious Emission:

| | 9kHz – 30MHz: +/- 2.87 dB | | | | |
|---------------------------|----------------------------|--|--|--|--|
| | 30MHz - 180MHz: +/- 3.37dB | | | | |
| Measurement uncertainty | 180MHz -417MHz: +/- 3.19dB | | | | |
| (Polarization : Vertical) | 0.417GHz-1GHz: +/- 3.19dB | | | | |
| | 1GHz - 18GHz: +/- 4.04dB | | | | |
| | 18GHz - 40GHz: +/- 4.04dB | | | | |

| | 9kHz – 30MHz: +/- 2.87 dB |
|-----------------------------|----------------------------|
| | 30MHz - 167MHz: +/- 4.22dB |
| Measurement uncertainty | 167MHz -500MHz: +/- 3.44dB |
| (Polarization : Horizontal) | 0.5GHz-1GHz: +/- 3.39dB |
| | 1GHz - 18GHz: +/- 4.08dB |
| | 18GHz - 40GHz: +/- 4.08dB |

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

| Frequency range | Limits dB(uV) | | | | |
|-----------------|------------------|----------|--|--|--|
| MHz | Quasi-peak | Average | | | |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 | | | |
| 0.50 to 5 | 56 | 46 | | | |
| 5 to 30 | 60 | 50 | | | |

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used

| | Conducted Emission Test Site | | | | | | | | | |
|------------------------|------------------------------|-----------------------|----------------------|--------------|------------|--|--|--|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. | | | | | |
| EMI Test Re- ceiver | R&S | ESCI 7 | 100950 | 12/12/2016 | 12/11/2017 | | | | | |
| Coaxial Cables | N/A | N30N30-1042-150 cm | N/A | 08/30/2017 | 08/29/2018 | | | | | |
| LISN | Schwarzbeck | NSLK 8127 | 8127-648 | 06/18/2017 | 06/17/2018 | | | | | |
| Test Software | Farad | EZ-EMC | Ver. SGS-03A 2 | N.C.R. | N.C.R. | | | | | |


6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

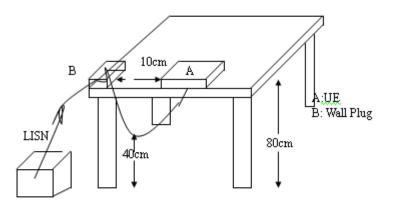

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result


Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




AC POWER LINE CONDUCTED EMISSION TEST DATA

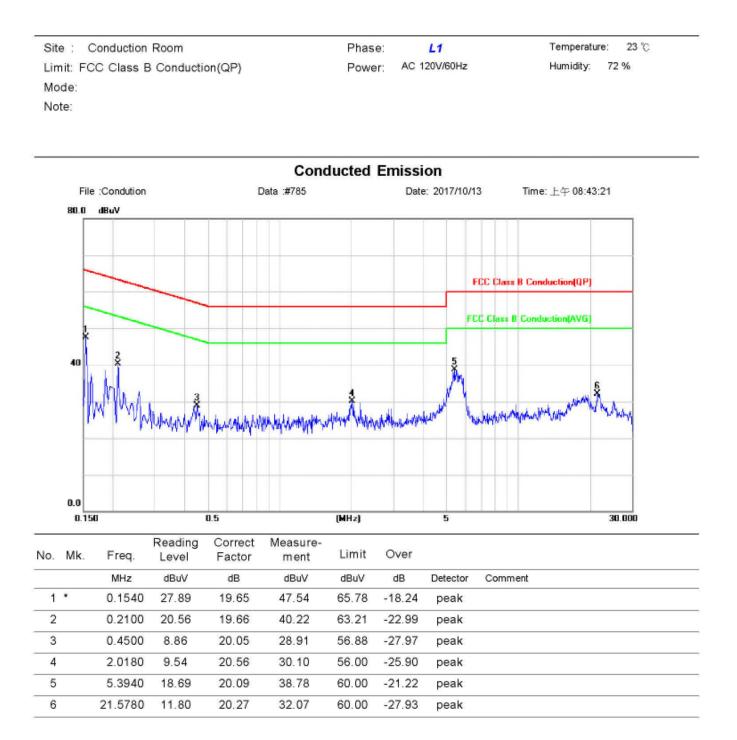


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



| Site : Conduction Room | Phase: N | Temperature: 23 °C |
|-----------------------------------|---------------------|--------------------|
| Limit: FCC Class B Conduction(QP) | Power: AC 120V/60Hz | Humidity: 72 % |
| Mode: | | |
| Note: | | |

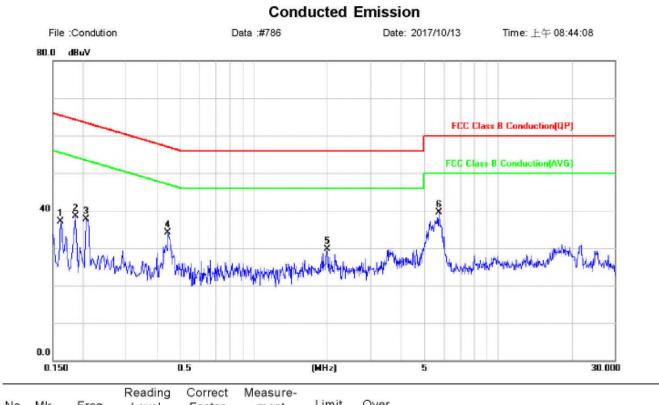

| No. Mk. | Freq. | Level | Factor | ment | Limit | Over | | | |
|---------|--------|-------|--------|-------|-------|--------|----------|---------|--|
| | MHz | dBuV | dB | dBuV | dBuV | dB | Detector | Comment | |
| 1 | 0.1620 | 17.52 | 19.50 | 37.02 | 65.36 | -28.34 | peak | | |
| 2 | 0.1860 | 19.05 | 19.49 | 38.54 | 64.21 | -25.67 | peak | | |
| 3 | 0.2060 | 18.30 | 19.50 | 37.80 | 63.37 | -25.57 | peak | | |
| 4 | 0.4460 | 14.19 | 19.90 | 34.09 | 56.95 | -22.86 | peak | | |
| 5 | 2.0020 | 9.26 | 20.42 | 29.68 | 56.00 | -26.32 | peak | | |
| 6 * | 5.7140 | 19.46 | 19.96 | 39.42 | 60.00 | -20.58 | peak | | |
| | | | | | | | | | |





7 PEAK OUTPUT POWER MEASUREMENT


7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

7.2 Measurement Equipment Used

| Conducted Emission Test Site | | | | | | | | | |
|------------------------------|------------|-----------------|------------|------------|------------|--|--|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | |
| Power Meter | Anritsu | ML2496A | 1326001 | 06/23/2017 | 06/22/2018 | | | | |
| Power Sensor | Anritsu | MA2411B | 1315048 | 06/23/2017 | 06/22/2018 | | | | |
| Power Sensor | Anritsu | MA2411B | 1315049 | 06/23/2017 | 06/22/2018 | | | | |
| Coaxial Cable | WOKEN | 00100A1F1A19 | RF01 | 12/12/2016 | 10/11/2017 | | | | |
| 30cm | WOREN | 5C | KFUI | 12/12/2010 | 12/11/2017 | | | | |
| DC Block | PASTERNACK | PE8210 | RF29 | 12/12/2016 | 12/11/2017 | | | | |
| Splitter | RF-LAMBAD | RFLT2W1G18 G | RF35 | 12/12/2016 | 12/11/2017 | | | | |
| Attenuator | WOKEN | 218FS-10 | RF23 | 12/12/2016 | 12/11/2017 | | | | |
| DC Power Supply | Agilent | E3640A | MY53140006 | 05/02/2017 | 05/01/2018 | | | | |

7.3 Test Set-up:



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.



7.5 Measurement Result

| 1M BR mode (Peak): 1M BR mode (Average): | | | | | | | | | |
|--|--|----------------------------------|-------------------------|---------------|-------|----------------|---|-------------------------|---------------|
| СН | Freq. (MHz) | Peak Output Power (dBm) | Output Power (mW) | Limit (mW) | СН | Freq. (MHz) | Max. Output include tune up tolerance Power (dBm) | Output Power (mW) | Limit (mW) |
| 0 | 2402 | 11.86 | 15.346 | 1000 | 0 | 2402 | 10.07 | 10.162 | 1000 |
| 39 | 2441 | 12.20 | 16.596 | 1000 | 39 | 2441 | 10.37 | 10.889 | 1000 |
| 78 | 2480 | 11.07 | 12.794 | 1000 | 78 | 2480 | 9.23 | 8.375 | 1000 |
| 2M ED | OR mode (| Peak): | | | 2M E | OR mode (A | Average): | | |
| СН | Freq. (MHz) | Peak Output Power (dBm) | Output Power (mW) | Limit (mW) | СН | Freq. (MHz) | Max. Avg.Output include tune up tolerance | Output Power (mW) | Limit (mW) |
| 0 | 2402 | 11.61 | 14.488 | 125 | 0 | 2402 | 7.62 | 5.781 | 125 |
| 39 | 2441 | 11.89 | 15.453 | 125 | 39 | 2441 | 8.06 | 6.397 | 125 |
| 78 | 2480 | 10.82 | 12.078 | 125 | 78 | 2480 | 7.03 | 5.047 | 125 |
| 3M ED | OR mode (| Peak): | | | 3M EI | OR mode (A | Average): | | - |
| сн | Freq. (MHz) | Peak Output Power (dBm) | Output Power (mW) | Limit (mW) | СН | Freq. (MHz) | Max. Avg.Output include tune up tolerance | Output Power (mW) | Limit (mW) |
| 0 | 2402 | 11.52 | 14.191 | 125 | 0 | 2402 | 7.80 | 6.026 | 125 |
| 39 | 2441 | 11.83 | 15.241 | 125 | 39 | 2441 | 8.09 | 6.442 | 125 |
| 78 | 2480 | 10.73 | 11.830 | 125 | 78 | 2480 | 6.90 | 4.898 | 125 |
| | *Note: Max. Output include tune up tolerance Power | | | | | | | | |

measured by using average detector.

NOTE: cable loss as 0.5dB that offsets in the spectrum



8 20DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Measurement Equipment Used

| Conducted Emission Test Site | | | | | | | | | |
|------------------------------|------------|--------------------|------------|------------|------------|--|--|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | |
| Spectrum Analyzer | KEYSIGHT | N9010A | MY51440113 | 06/20/2017 | 06/19/2018 | | | | |
| Coaxial Cable 30cm | WOKEN | 00100A1F1A19 5C | RF01 | 12/12/2016 | 12/11/2017 | | | | |
| DC Block | PASTERNACK | PE8210 | RF29 | 12/12/2016 | 12/11/2017 | | | | |
| Splitter | RF-LAMBAD | RFLT2W1G18 G | RF35 | 12/12/2016 | 12/11/2017 | | | | |
| Attenuator | WOKEN | 218FS-10 | RF23 | 12/12/2016 | 12/11/2017 | | | | |
| DC Power Supply | Agilent | E3640A | MY53140006 | 05/02/2017 | 05/01/2018 | | | | |

8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and –20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed

NOTE:

For the plot of bandwidth measurement, the marker of the 20dB BW is arrow-mark



8.5 Measurement Result

GFSK

π/4-DQPSK

| СН | 20 dB BW (MHz) | 2/3 BW (MHz) | СН | 20 dB BW (MHz) | 2/3 BW (MHz) | СН | 20 dB BW (MHz) | 2/3 BW (MHz) |
|------|----------------------|--------------------|------|----------------------|--------------------|------|----------------------|--------------------|
| Low | 0.923 | 0.62 | Low | 1.254 | 0.84 | Low | 1.256 | 0.84 |
| Mid | 0.923 | 0.62 | Mid | 1.253 | 0.84 | Mid | 1.256 | 0.84 |
| High | 0.923 | 0.62 | High | 1.253 | 0.84 | High | 1.255 | 0.84 |


8-DPSK

20dB Band Width Test Data CH-Low (GFSK mode)


SG



20dB Band Width Test Data CH-Mid (GFSK mode)

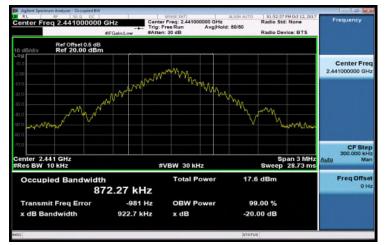

20dB Band Width Test Data CH-High (GFSK mode)

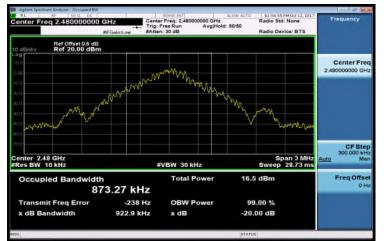

Freq 2.402000000 GHz Center Freq: 2.40 Trig: Free Run #Atten: 30 dB AugHold: 50/50 Ref Offset 0.5 dB Ref 20.00 dBm Center Free

20dB Band Width Test Data CH-Low (π/4-DQPSK mode)



20dB Band Width Test Data CH-Mid (π/4-DQPSK mode)





20dB Band Width Test Data CH-High (π/4-DQPSK mode)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format docunests, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> edocument.htm. Attention is for this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrialPark, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com




20dB Band Width Test Data CH-Low (8-DPSK mode)



20dB Band Width Test Data CH-Mid (8-DPSK mode)



20dB Width Test Data CH-High (8-DPSK mode)

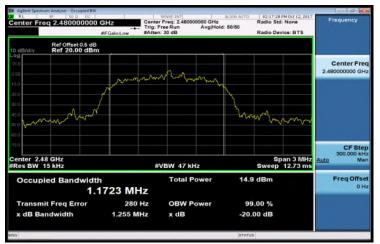

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless the wee stated the test is structure to the point report the law.

SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

| 台灣檢驗科技股份有限公司 | t (886-2) 2299-3279 |
|--------------|---------------------|

f (886-2) 2298-0488

www.tw.sgs.com



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used

| Conducted Emission Test Site | | | | | | | | | |
|------------------------------|------------|--------------------|------------|------------|------------|--|--|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | | |
| Spectrum Analyzer | KEYSIGHT | N9010A | MY51440113 | 06/20/2017 | 06/19/2018 | | | | |
| Coaxial Cable 30cm | WOKEN | 00100A1F1A 195C | RF01 | 12/12/2016 | 12/11/2017 | | | | |
| DC Block | PASTERNACK | PE8210 | RF29 | 12/12/2016 | 12/11/2017 | | | | |
| Splitter | RF-LAMBAD | RFLT2W1G18 G | RF35 | 12/12/2016 | 12/11/2017 | | | | |
| Attenuator | WOKEN | 218FS-10 | RF23 | 12/12/2016 | 12/11/2017 | | | | |
| DC Power Supply | Agilent | E3640A | MY53140006 | 05/02/2017 | 05/01/2018 | | | | |

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



9.4 Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
|-------|------------------------|--|
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

9.5 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

- 1. Cable loss as 5.1dB that offsets in the spectrum
- 2. The occurrence of the spike on the conducted emission is the signal of the fundamental emission.



Band Edges Test Data CH-Low (Hopping mode)

| antine from the | HECOLOGICCE Part for Flore for | *7 Sola Free Face | Ang Type Log Per | | Auto Ture |
|-----------------|---|-------------------|------------------------|-------------------------------------|---------------------------------|
| Bar of | Necisi di 1.50 diline | | Mikra | 2.300 10 CHz -59.37 dBm | ALL THE |
| | | | | MANAN | Cantar Fran 1.36500000 044 |
| | | | | | Brantificer Electroscope des |
| | n | | an same and the second | р Г | Biop Pre- |
| Ben 5W 132 kr | | AN ROOM DOWN | Descript 1 | tep 2.42004 GH2 G0 ms (1001 pts) | CF Biog |
| | 2414 17 000 000 2414 000 000 2414 000 000 | 赫羅 | | | PiregOffice OH |
| | | | | | |
| | | | 10+54 | | |

Band Edges Test Data CH-High



AU 2 101003000 0 Ref 23.00 days Cantarfi 捕車

Band Edges Test Data CH-Low (Non-Hopping mode)

Band Edges Test Data CH-High

| Certiler Frei Scimission | Fill Fair C | Trip Free Far | Ang Type Log Per | 100000000000000000000000000000000000000 | FREATO |
|-------------------------------------|-------------|-------------------|------------------|---|--------------------------------|
| Ref Office St. dl. | POPULAR. | ELECTRONIC STREET | Mitra | 2,483 600 GHz | AutoTure |
| Å | | | | | Cantar Frag 2.487508058 0Hz |
| | | | | | Brarifreg 2.47500000 0412 |
| and the second | • | | | | Biop Freq 2 Secondaria 221 |
| Barl 2.47900 GH2 Bles BW 199 kH2 | 6V84 | N 300 KH2 | Every 1 | 1100 2.50000 GH2 660 ms (1381 pts) | CF Biop 2 Million Web |
| | | <i>注</i> 治部: | | | FreqCRost SH4 |
| | | | 11+34 | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Difference states are states ar prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488


www.tw.sqs.com

Report No.: E2/2017/90149 Page 28 of 76


Conducted Spurious Emission Measurement Result

SG




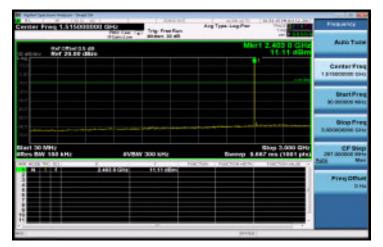



Ch Low 3GHz - 26.5GHz

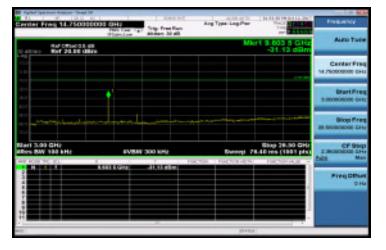

Ch Mid 30MHz - 3GHz

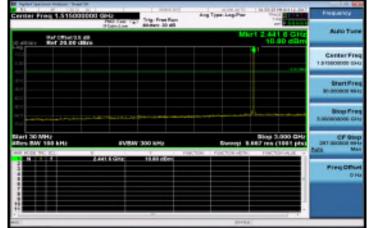



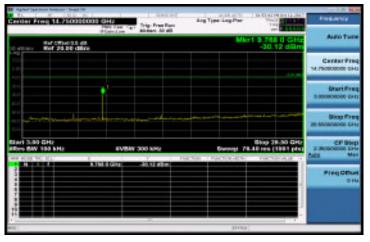

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Difference states are states and states an prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 台灣檢驗科技股份有限公司 www.tw.sgs.com



Ch High 30MHz - 3GHz

| Gentler Frei 151200000 | Pair fair (a) Pair fair (a) Pair fair (a) Pair fair (a) | Ang Type Log Par | A Distriction of the second se | Filegueticy |
|--------------------------------|--|------------------|--|---|
| Ref Official State | | Micr | 1 2.480 3 GHz 10.27 dilim | Augo Ture |
| | | | 1 | CenterFreq 1.515808080 EHu |
| 21 80 81 | | | | Start Freq |
| | | | L | Stop Freq Lincologic Crts |
| Navi 30 MHz Ross BW 100 kHz | | Distance in a | 8kig 3,000 GHz 87 ms (1881 pts) | CF Step 287 access sets bits Mari |
| | 480 3 Ginz: 19,37 e0en | | | Fire Differ |
| 111.00 | | | | |

Ch High 3GHz – 26.5GHz

| Center Frei 11.7500500 | These Press Front France | Arg Type Log Par | Preservey |
|--|------------------------------|--|----------------------|
| Ref Office S.L. dl. Ref 23.00 dline | Without an and an and an and | Mkr1 9,500 0 -30 10 | Auto Ture |
| | | | CantarFing |
| | * | | Brant Prog |
| | | | Biopi France |
| Earl 3.00 GHz Res SW 100 kHz | 4V5W 300 kHz | Eliop 26.50 Exercipe 78.40 rms (188 | PART E-MOREORDER-EH- |
| | 1.585 3 Ging: -30.10 #Bm | | Pireg CRuel OHu |
| 11001 | | | |
| | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Com-pany's sole responsibility is to its Client and this document dees not exonerate parties to a tarsaction form exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be reproduced to the full and the transaction formet is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

| Frequency (MHz) | Field strength (microvolts/meter) | Distance (meters) |
|--------------------|--------------------------------------|----------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.2 Measurement Equipment Used

| 966 Chamber | | | | | | | |
|------------------------|----------------------|--------------------------------|------------------|----------------|------------|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. | | |
| EMI Test Receiver | R&S | ESU 40 | 100363 | 04/18/2017 | 04/17/2018 | | |
| Loop Antenna | ETS-Lindgren | 6502 | 00143303 | 12/23/201 6 | 12/22/2017 | | |
| Broadband An- tenna | TESEQ | CBL 6112D | 35240 | 11/03/2016 | 11/02/2017 | | |
| Horn Antenna | ETS-Lindgren | 3117 | 00143272 | 12/15/2016 | 12/16/2017 | | |
| Horn Antenna | Schwarzbeck | BBHA9170 | 185 | 08/01/2017 | 07/31/2018 | | |
| Pre Amplifier | EMC Instru- ments | EMC330 | 980096 | 12/12/2016 | 12/11/2017 | | |
| Pre Amplifier | EMC Instru- ments | EMC0011830 | 980199 | 12/12/2016 | 12/11/2017 | | |
| Pre Amplifier | R&S | SCU-18 | 10204 | 12/12/2016 | 12/11/2017 | | |
| Pre Amplifier | R&S | SCU-26 | 100780 | 12/12/2016 | 12/11/2017 | | |
| Coaxial Cable | Huber+Suhner | RG 214/U | 966Rx 9K-30M | 12/12/2016 | 12/11/2017 | | |
| Coaxial Cable | Huber+Suhner | RG 214/U SUCOFLEX 104 | 966Rx 30M-3G | 12/12/2016 | 12/11/2017 | | |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 104 | 966Rx 1G-18G | 12/12/2016 | 12/11/2017 | | |
| Coaxial Cable | Huber+Suhner | mini 141-12 SUCOFLEX 104 | 966Rx 18G-40G | 12/12/2016 | 12/11/2017 | | |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 104 | 966Tx 30M-18G | 12/12/2016 | 12/11/2017 | | |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 102 | 966Tx 18G-40G | 12/12/2016 | 12/11/2017 | | |
| Attenuator | WOKEN | 218FS-10 | RF27 | 12/12/2016 | 12/11/2017 | | |
| Site NSA | SGS | 966 Chamber C | SAC-C | 03/02/2017 | 03/01/2018 | | |
| Site VSWR | SGS | 966 Chamber C | SAC-C | 03/02/2017 | 03/01/2018 | | |
| DC Power Supply | HOLA | DP-3003 | D7070035 | 05/04/2017 | 05/03/2018 | | |
| Controller | MF | MF-7802 | N/A | N.C.R. | N.C.R. | | |
| Antenna Master | MF | N/A | N/A | N.C.R. | N.C.R. | | |
| Turn Table | MF | N/A | N/A | N.C.R. | N.C.R. | | |
| Test Software | World-Pallas | Dr. E | V 3.0 Lite | N.C.R. | N.C.R. | | |


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

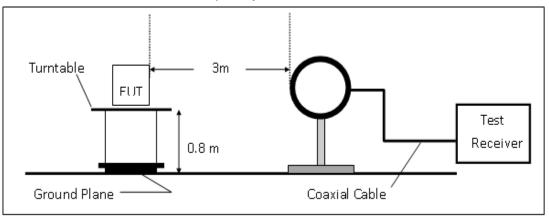

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

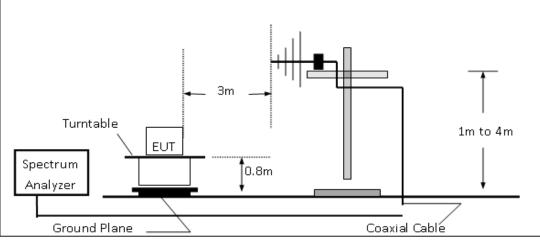

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

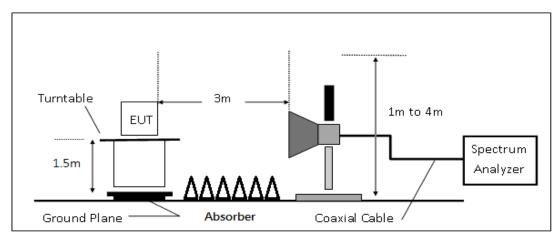

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.4 Measurement Procedure

Radiated Emission

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
 - (1) Span = wide enough to fully capture the emission being measured
 - (2) RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, VBW \ge RBW, Sweep = auto, Detector function = peak, Trace = max hold
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c)

Duty Cycle = On time/100 milliseconds

On time = N1*L1=N2*L2+...+N(n-1)*LN(n-1)+N(n)*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log (duty Cycle)

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

| Where | 5 | CL = Cable Attenuation Factor (Cable Loss) |
|-------|------------------------|---|
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6 Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Chiefs Stateware stated are textus single stateware textus and textus Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Band Edge Measurement Result: (Hopping Mode)


| Fu Ol | peration Mc undamental peration Ba JT Pol. : | Frequency | BT BR H 2412 MH BE CH L E2 | z Te OW Te | st Date : mp. / Humi. : st Engineer : easurement Ar | ntenna Pol. : | 2017/10, 22.7deg Ashton Vertical | /12 _C/57RH | |
|------------------|---|--|--|-----------------------|--|------------------|---|----------------|----|
| 110 | | | | | | | | | |
| 99 | | | | | | | | | |
| 88 | - | | | | | | | | |
| 77 | | | | | | | | RSE PK | |
| 66 | | | | | | | | | |
| | - | | | | | | | | |
| Level [(dBuV/m)] | | | | | | | 1 J | RSE AV | |
| -5 44 | man | and and a second se | word when a start when the second | mohimment | and the second | Marmhanninaharan | www.serment | | |
| 33 | - | | | | | | ¥ | | |
| 22 | | | | | | | | | |
| | | | | | | | | | |
| 11 | - | | | | | | | | |
| 0 2 | 310 | · · · | 2335 | | 360 ncy [MHz] | 2385 | | 241 | 10 |
| | Freq. | Note | Detector Mode | Spectum Reading Le | | Actual FS | Limit @3m | Margin | |
| - | MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | |
| | 2390.00 | E | Peak | 44.90 | 0.92 | 45.83 | 74 | -28.17 | |
| | 2390.00 | E | Average | 32.81 | 0.92 | 33.73 | 54 | -20.27 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




| Operation Mode : | BT BR Hopping | Test Date : | 2017/10/12 |
|-------------------------|---------------|----------------------------|----------------|
| Fundamental Frequency : | 2412 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | BE CH LOW | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Horizontal |
| | | | |

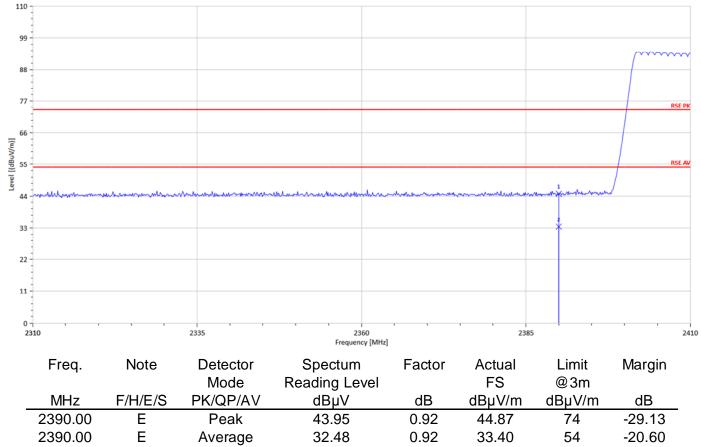




| Operation Mode : | BT BR Hopping | Test Date : | 2017/10/12 |
|-------------------------|---------------|----------------------------|----------------|
| Fundamental Frequency : | 2480 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | BE CH HIGH | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Vertical |
| 110 | | | |

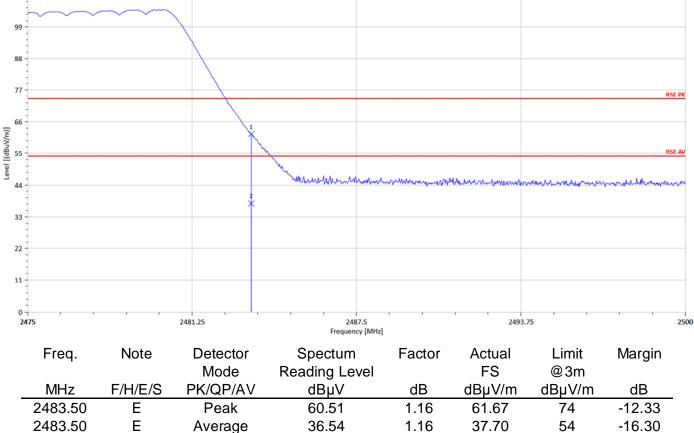




| Operation Mode : | BT BR Hopping | Test Date : | 2017/10/12 |
|-------------------------|---------------|----------------------------|----------------|
| Fundamental Frequency : | 2480 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | BE CH HIGH | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Horizontal |
| 110 - | | | |

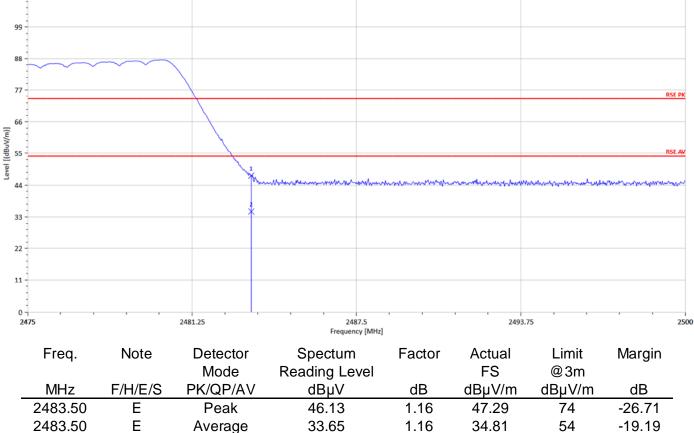




| Operation Mode : | BT EDR Hopping | Test Date : | 2017/10/12 |
|-------------------------|----------------|----------------------------|----------------|
| Fundamental Frequency : | 2412 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | BE CH LOW | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Vertical |
| 110 - | | | |

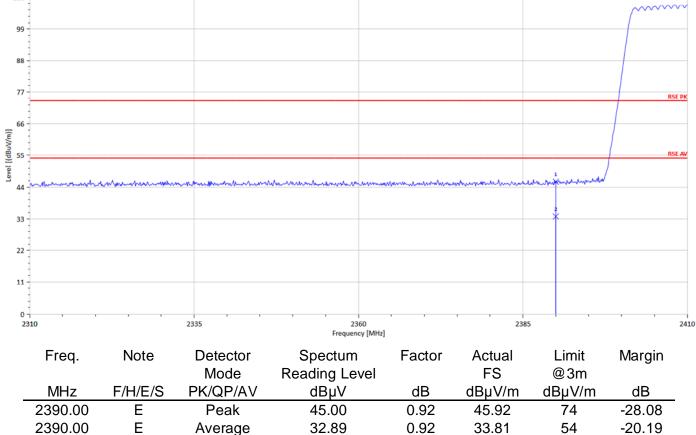




| Operation Mode : | BT EDR Hopping | Test Date : | 2017/10/12 |
|-------------------------|----------------|----------------------------|----------------|
| Fundamental Frequency : | 2412 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | BE CH LOW | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Horizontal |

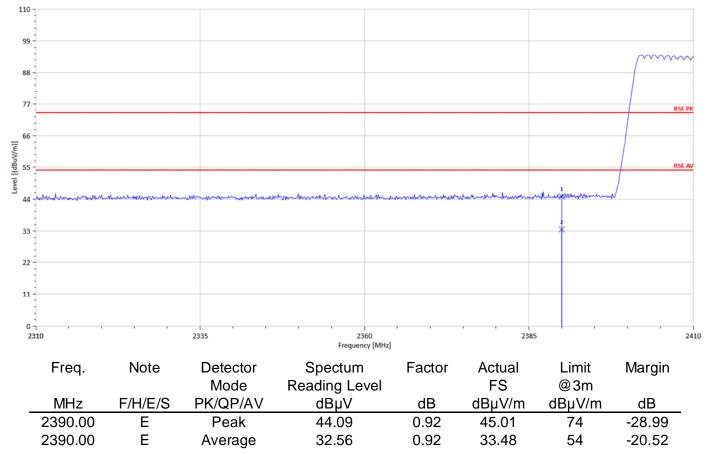




| Operation Mode : | BT EDR Hopping | Test Date : | 2017/10/12 |
|-------------------------|----------------|----------------------------|----------------|
| Fundamental Frequency : | 2480 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | BE CH HIGH | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Vertical |

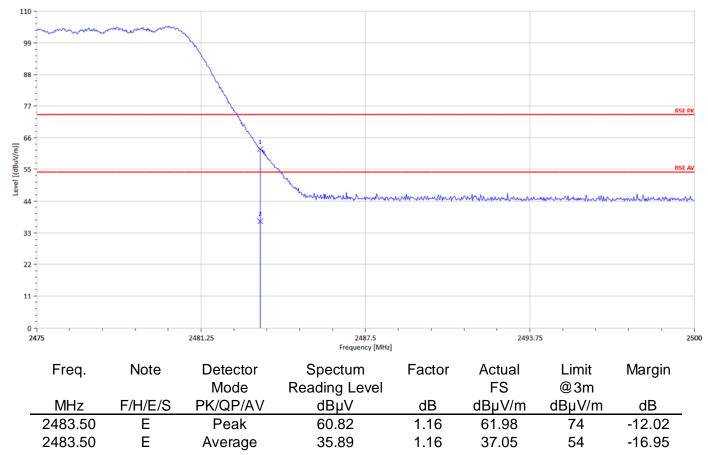




| Operation Mode : | BT EDR Hopping | Test Date : | 2017/10/12 |
|-------------------------|----------------|----------------------------|----------------|
| Fundamental Frequency : | 2480 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | BE CH HIGH | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Horizontal |

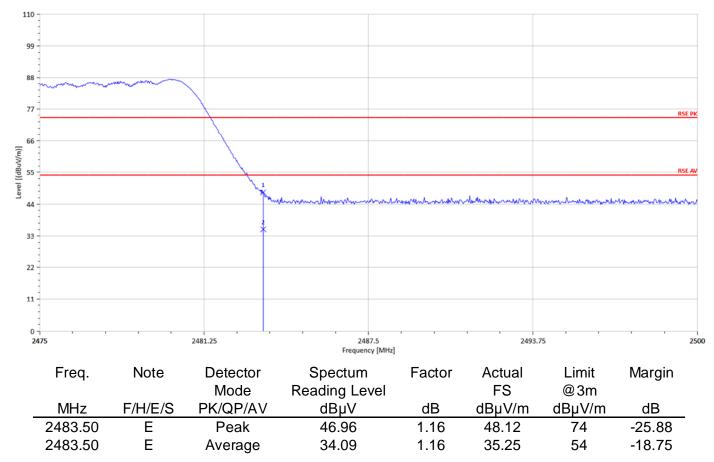





Radiated Emission – Band Edge (Non-Hopping Mode):

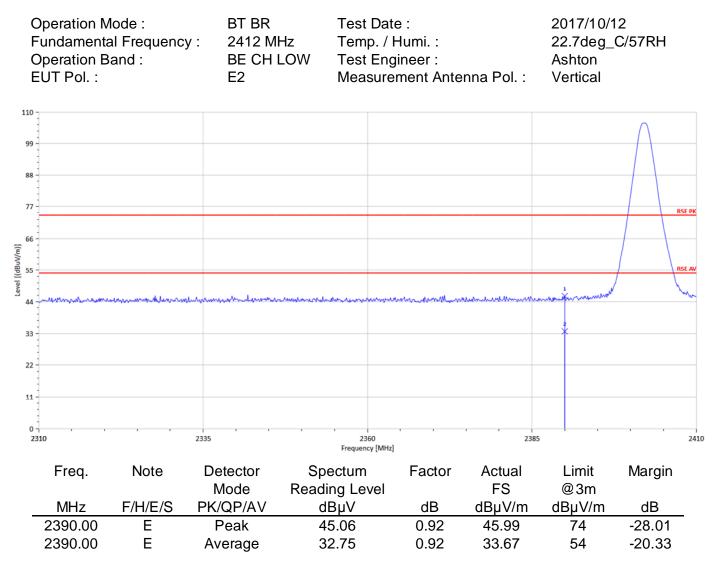

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




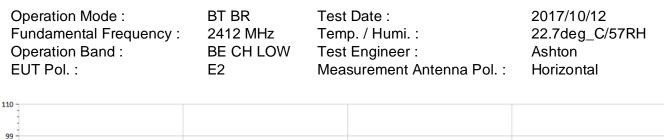


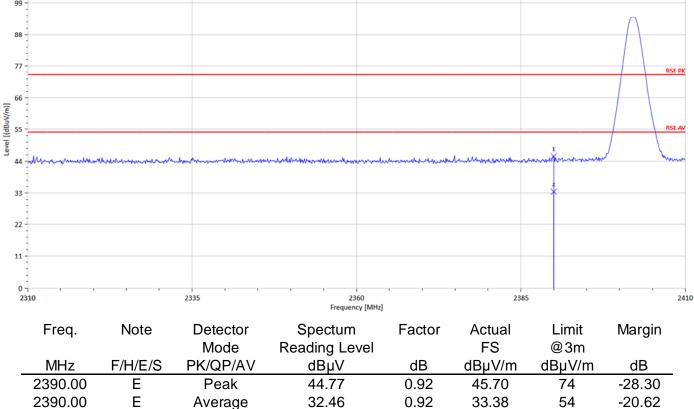




RSE PK

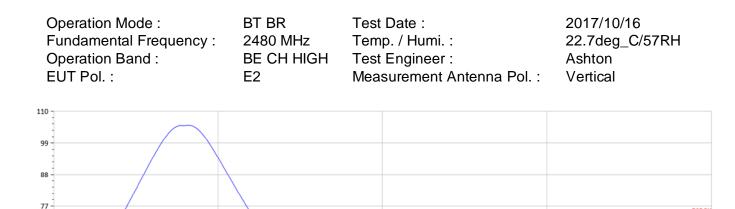


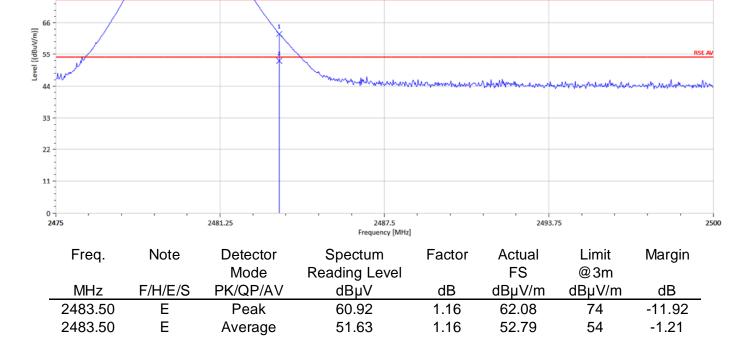

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



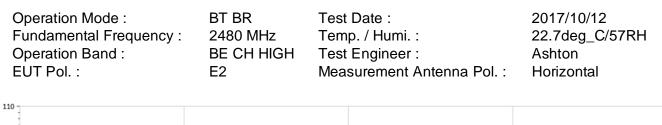

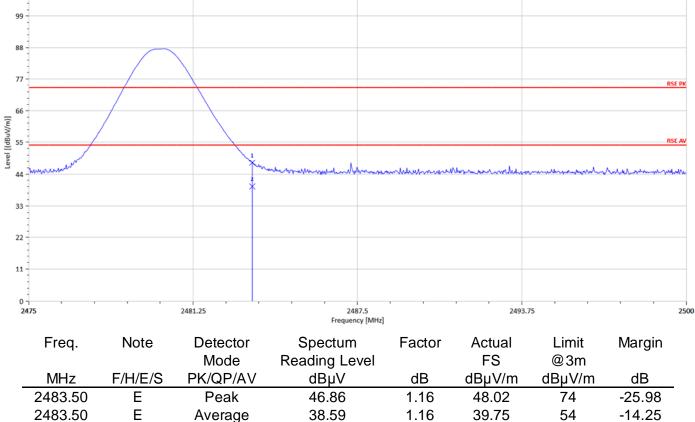




55

44

33

22


RSE A

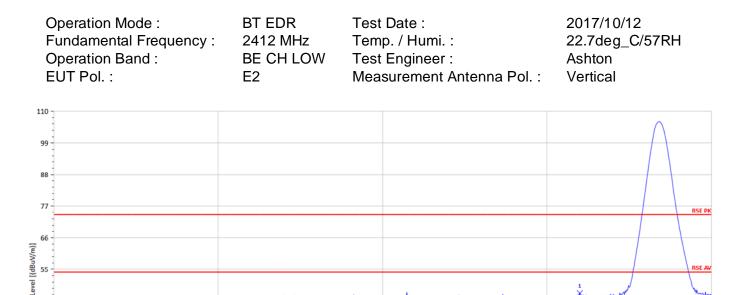


| 11 | | | | | | | | | _ |
|-------------|---------|---------|------------------|--------------------------|--------|--------------|--------------|--------|------|
| 0 - 2310 | D | | 2335 | 2360 Frequency [MHz] | | 2385 | | | 2410 |
| | Freq. | Note | Detector Mode | Spectum Reading Level | Factor | Actual FS | Limit @3m | Margin | |
| | MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | _ |
| | 2390.00 | E | Peak | 45.85 | 0.92 | 46.77 | 74 | -27.23 | _ |
| | 2390.00 | E | Average | 32.81 | 0.92 | 33.73 | 54 | -20.27 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



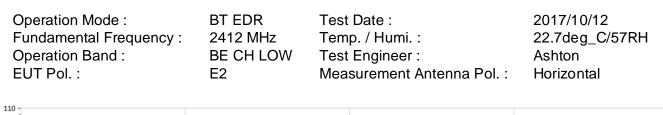

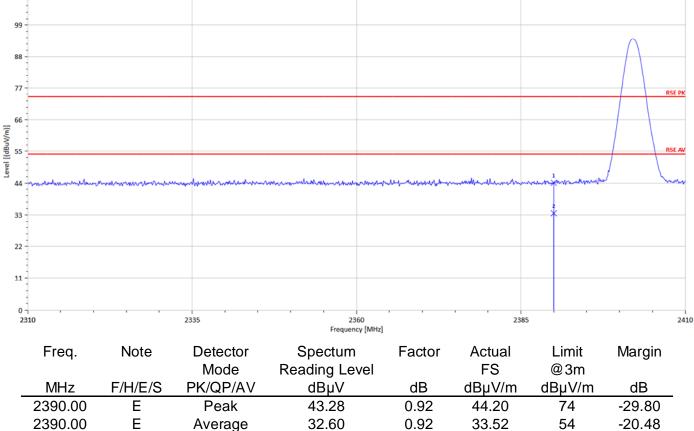



77

66

44

33

22

11

0 -2475

Freq.

MHz

2483.50

2483.50


Level [(dBuV/m)] 55 RSE PK

2500

Margin

dB -10.93

-2.18

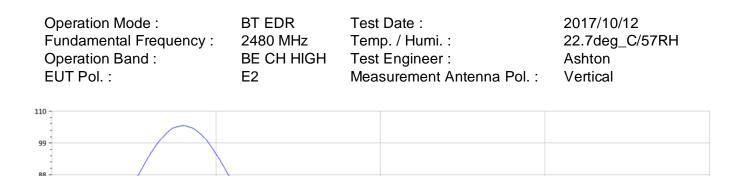

2487.5

Frequency [MHz]

Factor

dB

1.16

1.16


Spectum

Reading Level

dBµV

61.91

50.66



2481.25

Detector

Mode

PK/QP/AV

Peak

Average

Note

F/H/E/S

Е

Е

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

2493.75

Actual

FS

dBµV/m

63.07

51.82

Limit


@3m


dBµV/m

74

54



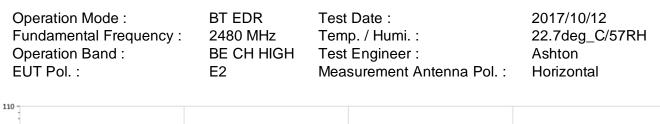

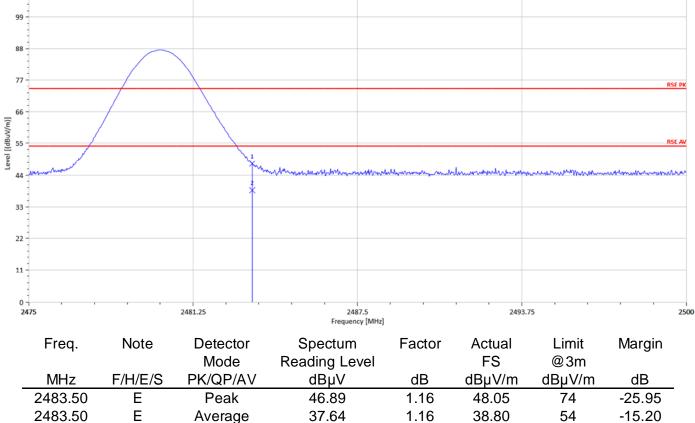



MHz

36.79

191.99

500.45

646.92

773.99

932.10

F/H/E/S

S

S

S

S

S

S

Radiated Spurious Emission Measurement Result:

For Frequency form 30MHz to 1000MHz

| Fu Op | Deration M Indamenta Deration Ba JT Pol. : | al Frequen | | MHz Tem LOW Tes | : Date : np. / Humi. : : Engineer : surement Ant | enna Pol. : | 2017/10/ 22.7deg_ Ashton Vertical | |
|------------------------|---|------------|------------------|-----------------------|---|--------------|--|--------|
| 100 - | | | | | | | | |
| 90 - | | | | | | | | |
| 80 - | | | | | | | | |
| 70 - | | | | | | | | |
| /0 - | | | | | | | | |
| 60 (m) | | | | | | | | RSE QP |
| Level [(dBuV/m)] 05 | | | | | | | | |
| ava | | | | | | | | |
| 30 - | | | | | | | 5 | 6 * |
| 30 | | 2 | | 3 * | | × | Ť | |
| 20 - | | | | | | | | |
| 10 | | | | | | | | |
| 0 - 30 | | | | | , , , | | | |
| 30 | | | 272.5 | | 515 ncy [MHz] | 757 | .5 | 1000 |
| | Freq. | Note | Detector Mode | Spectum Reading Le | | Actual FS | Limit @3m | Margin |

dBµV

46.02

40.52

33.45

31.61

33.00

34.53

| Unless otherwise stated the results shown in this | est report refer only | to the sample(s) tested and such | sample(s) are retained for 90 days only. |
|---|-----------------------|----------------------------------|--|
| | | | |

PK/QP/AV

Peak

Peak

Peak

Peak

Peak

Peak

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

dBµV/m

40

43.5

46

46

46

46

dB

-4.91

-21.11

-20.08

-19.31

-17.71

-13.19

dBµV/m

35.09

22.39

25.92

26.69

28.29

32.81

dB

-10.93

-18.13


-7.53

-4.92

-4.72

-1.72




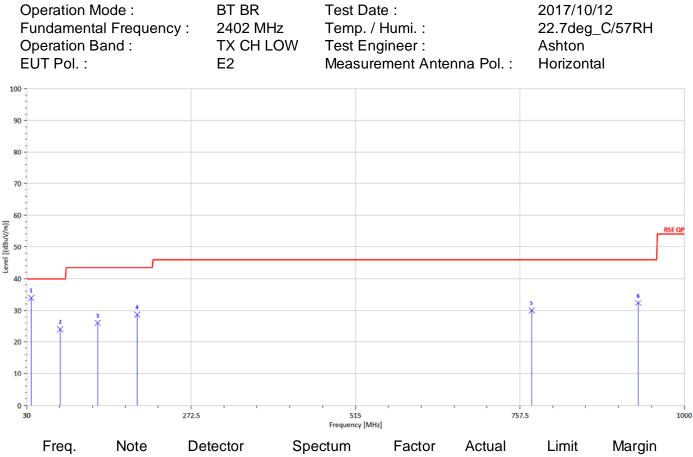

| Freq. | Note | Detector Mode | Spectum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|--------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 36.79 | S | Peak | 44.91 | -10.93 | 33.97 | 40 | -6.03 |
| 79.47 | S | Peak | 45.00 | -21.01 | 23.99 | 40 | -16.01 |
| 134.76 | S | Peak | 41.79 | -15.77 | 26.02 | 43.5 | -17.48 |
| 192.96 | S | Peak | 46.73 | -18.05 | 28.69 | 43.5 | -14.81 |
| 774.96 | S | Peak | 34.70 | -4.75 | 29.95 | 46 | -16.05 |
| 932.10 | S | Peak | 34.09 | -1.72 | 32.37 | 46 | -13.63 |



Report No.: E2/2017/90149 Page 53 of 76

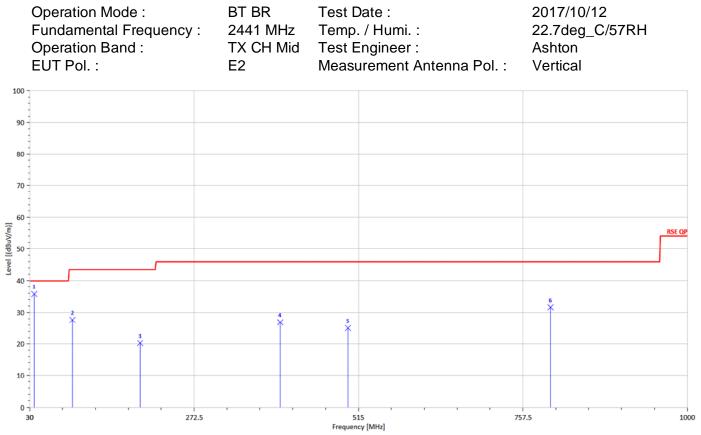


| Freq. | Note | Detector Mode | Spectum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|--------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 36.79 | S | Peak | 46.76 | -10.93 | 35.83 | 40 | -4.17 |
| 93.05 | S | Peak | 46.56 | -18.95 | 27.60 | 43.5 | -15.90 |
| 192.96 | S | Peak | 38.29 | -18.05 | 20.25 | 43.5 | -23.25 |
| 399.57 | S | Peak | 36.61 | -9.73 | 26.87 | 46 | -19.13 |
| 499.48 | S | Peak | 32.68 | -7.66 | 25.02 | 46 | -20.98 |
| 798.24 | S | Peak | 35.47 | -3.91 | 31.56 | 46 | -14.44 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2017/90149 Page 54 of 76

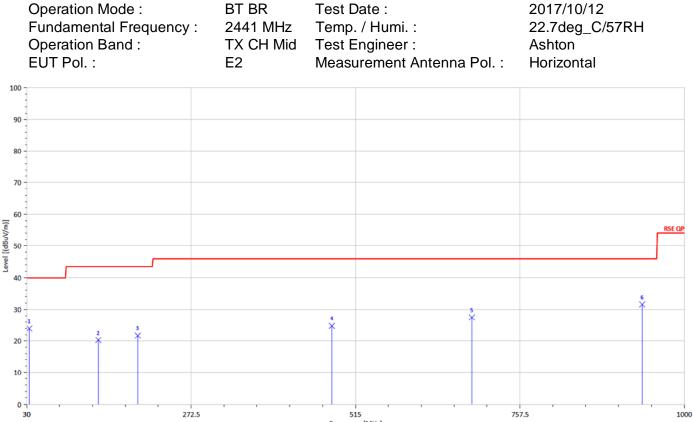


Frequency [MHz]

| Freq. | Note | Detector Mode | Spectum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|--------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 33.88 | S | Peak | 33.21 | -9.27 | 23.93 | 40 | -16.07 |
| 135.73 | S | Peak | 35.97 | -15.73 | 20.24 | 43.5 | -23.26 |
| 193.93 | S | Peak | 39.65 | -17.94 | 21.71 | 43.5 | -21.79 |
| 480.08 | S | Peak | 32.55 | -7.81 | 24.74 | 46 | -21.26 |
| 686.69 | S | Peak | 32.78 | -5.33 | 27.45 | 46 | -18.55 |
| 937.92 | S | Peak | 33.23 | -1.71 | 31.52 | 46 | -14.48 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: E2/2017/90149 Page 55 of 76

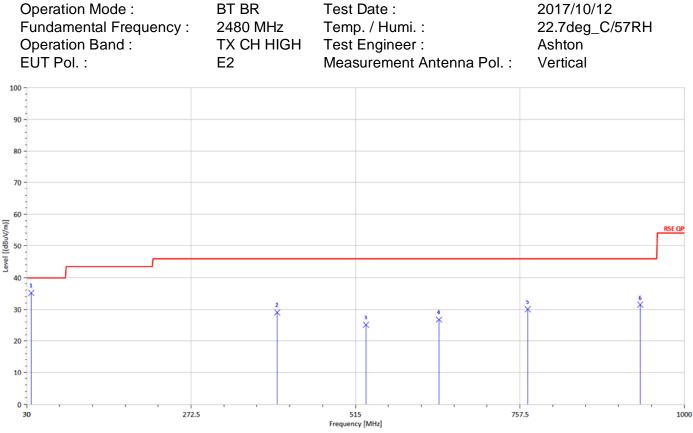

| Freq. | Note | Detector Mode | Spectum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|--------|---------|------------------|--------------------------|--------|--------------|--------------|--------|
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 36.79 | S | Peak | 46.15 | -10.93 | 35.22 | 40 | -4.78 |
| 399.57 | S | Peak | 38.78 | -9.73 | 29.05 | 46 | -16.95 |
| 530.52 | S | Peak | 32.28 | -7.20 | 25.08 | 46 | -20.92 |
| 638.19 | S | Peak | 31.81 | -5.05 | 26.76 | 46 | -19.24 |
| 769.14 | S | Peak | 34.27 | -4.24 | 30.03 | 46 | -15.97 |
| 935.01 | S | Peak | 33.03 | -1.59 | 31.44 | 46 | -14.56 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



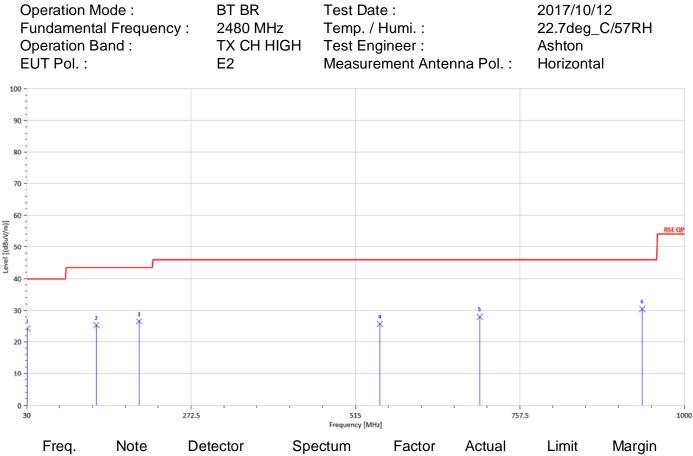

| ⊢req. | Note | Detector | Spectum | Factor | Actual | Limit | Margin | |
|--------|---------|----------|---------------|--------|--------|--------|--------|--|
| | | Mode | Reading Level | | FS | @3m | | |
| MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | |
| 30.97 | S | Peak | 31.99 | -7.70 | 24.28 | 40 | -15.72 | |
| 132.82 | S | Peak | 41.05 | -15.76 | 25.29 | 43.5 | -18.21 | |
| 195.87 | S | Peak | 44.33 | -17.80 | 26.53 | 43.5 | -16.97 | |
| 550.89 | S | Peak | 32.42 | -6.77 | 25.66 | 46 | -20.34 | |
| 698.33 | S | Peak | 33.08 | -5.10 | 27.98 | 46 | -18.02 | |
| 937.92 | S | Peak | 32.11 | -1.71 | 30.40 | 46 | -15.60 | |
| | | | | | | | | |



Radiated Spurious Emission Measurement Result:

For Frequency above 1 GHz

7206.00

9608.00

9608.00

Н

н

н

| | Operation M Fundamenta Operation B EUT Pol. : | al Frequenc | BT BR cy : 2402 M TX CH E2 | Hz Tem LOW Test | Date : p. / Humi. : Engineer : surement Ante | enna Pol. : | 2017/10/1 22.7deg_0 Ashton Vertical | |
|-----------------------|--|-------------|-------------------------------------|-----------------------|---|--------------|--|--------|
| 100 90 | | | | | | | | |
| 80 | | | | | | | | RSE PK |
| 70 | - | | 5 | | | | | |
| 60 [(ɯ/ | - | | × | | | | | RSE AV |
| Level [(dBuV/m)] S | - | | * * | | | | | |
| ອ 40 | | ¥ | * | | | | | |
| 30 | | * | | | | | | |
| 20 | - | | | | | | | |
| 10 | | | | | | | | |
| 0 1 | 000 | | 7375 | 137 Frequen | | 2012 | 5 | 26500 |
| | Freq. | Note | Detector Mode | Spectum Reading Le | Factor vel | Actual FS | Limit @3m | Margin |
| | MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | 4804.00 | Н | Peak | 31.62 | 7.66 | 39.27 | 74 | -34.73 |
| | 4804.00 | Н | Average | 22.57 | 7.66 | 30.23 | 54 | -23.77 |
| | 7206.00 | Н | Peak | 30.35 | 14.95 | 45.29 | 74 | -28.71 |

21.32

43.60

33.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Average

Peak

Average

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

14.95

19.11

19.11

36.27

62.71

52.54

-17.73

-11.29

-1.46

54

74

54



Report No.: E2/2017/90149 Page 58 of 76

| | Operation M Fundamenta Operation B EUT Pol. : | al Frequenc | BT BR 2402 M TX CH E2 | Hz Te LOW Te | est Date emp. / F est Engi easurer | lumi. : neer : | nna Pol. : | 2017/10/1 22.7deg_(Ashton Horizontal | C/57RH | |
|-----------------------|--|-------------|--------------------------------|-------------------|---|-------------------|--------------|--|--------|-------|
| 100 | 1 | | | | | | | | | |
| 90 | ; | | | | | | | | | |
| 80 | , | | | | | | | | | |
| | <u> </u> | | | | | | | | RS | E PK |
| 70 |) | | | | | | | | | _ |
| 60 | <u>, -</u> | | 5 | | | | | | | |
| [(w//n | | | ¥ | | | | | | RS | ie av |
| Level [(dBuV/m)] S |) <u> </u> | | 3 | | | | | | | _ |
| ລັງ 40 | <u>, -</u> | 1 | 1 | | | | | | | |
| | | Î | * | | | | | | | |
| 30 | , | × | | | | | | | | _ |
| 20 | ,= | | | | | | | | | |
| | | | | | | | | | | |
| 10 | 1 | | | | | | | | | |
| 0 | · · · | | | | | | | | | |
| 1 | 1000 | | 7375 | Fre | 13750 quency [MHz] | | 2012 | 5 | | 26500 |
| | Freq. | Note | Detector Mode | Spectu Reading | | Factor | Actual FS | Limit @3m | Margin | |
| | MHz | F/H/E/S | PK/QP/AV | dBµ\ | / | dB | dBµV/m | dBµV/m | dB | |
| | 4804.00 | Н | Peak | 30.90 | | 7.66 | 38.56 | 74 | -35.44 | |
| | 4804.00 | Н | Average | 21.19 | | 7.66 | 28.85 | 54 | -25.15 | |
| | 7206.00 | Н | Peak | 30.06 | | 14.95 | 45.01 | 74 | -28.99 | |
| | 7206.00 | Н | Average | 20.94 | | 14.95 | 35.89 | 54 | -18.11 | |
| | 9608.00 | Н | Peak | 38.64 | 1 - | 19.11 | 57.75 | 74 | -16.25 | |

Average

Н

9608.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unjuncted to the fullow to retent of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

31.65

19.11

50.76

54

-3.24




9764.00

н

Report No.: E2/2017/90149 Page 59 of 76

| Operation Mode : | BT BR | Test Date : | 2017/10/12 |
|-------------------------|-----------|----------------------------|----------------|
| Fundamental Frequency : | 2441 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | TX CH MID | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Vertical |

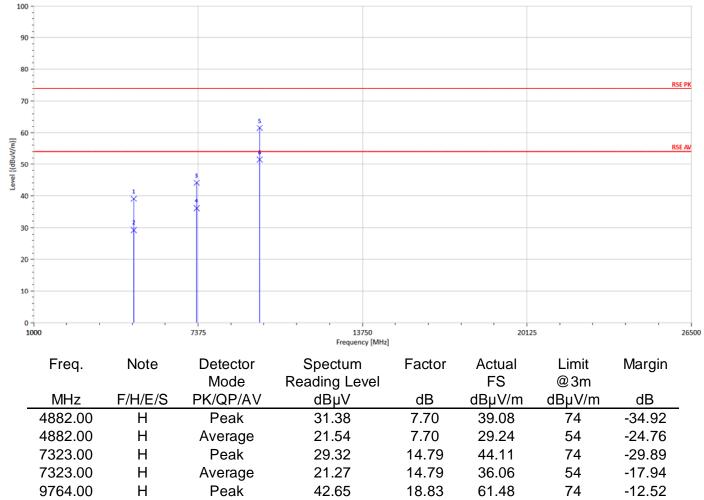

32.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Average

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

18.83

51.52

54

-2.48




9764.00

н

Report No.: E2/2017/90149 Page 60 of 76

| Operation Mode : | BT BR | Test Date : | 2017/10/12 |
|-------------------------|-----------|----------------------------|----------------|
| Fundamental Frequency : | 2441 MHz | Temp. / Humi. : | 22.7deg_C/57RH |
| Operation Band : | TX CH MID | Test Engineer : | Ashton |
| EUT Pol. : | E2 | Measurement Antenna Pol. : | Horizontal |

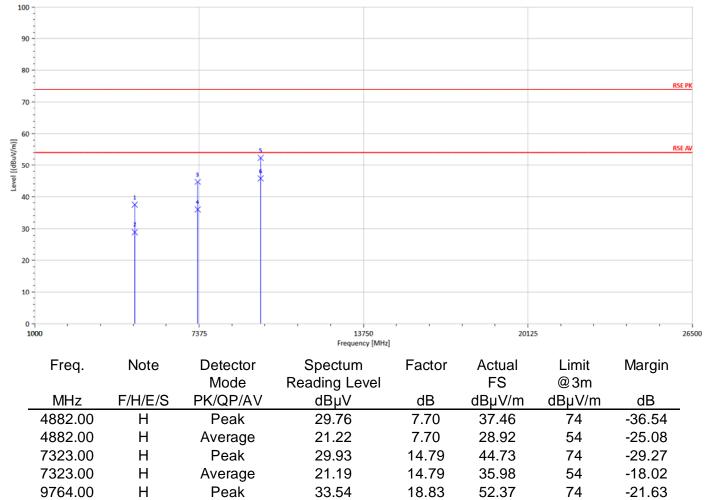

27.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Average

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

18.83

45.86

54

-8.14



9920.00

9920.00

Н

н

Report No.: E2/2017/90149 Page 61 of 76

| F C E | Dperation M Fundamenta Dperation B EUT Pol. : | al Frequenc | BT BR y : 2480 M TX CH E2 | Hz Terr HIGH Test | : Date : ip. / Humi. : : Engineer : surement An | tenna Pol. : | 2017/10/1 22.7deg_(Ashton Vertical | | |
|------------------|--|-------------|------------------------------------|----------------------|--|----------------|--|------------------|-------|
| 100 | | | | | | | | | |
| 90 · | - | | | | | | | | |
| 80 - | • | | | | | | | R | SE PK |
| 70 - | - | | \$ X | | | | | | |
| 60 - | - | | Î | | | | | | |
| [(ɯ//m | - | | | | | | | R | SE AV |
| Level [(dBuV/m)] | | | × × | | | | | | |
| 40 | - | × | × | | | | | | _ |
| 30 - | - | * | | | | | | | _ |
| 20 - | | | | | | | | | |
| 20 | | | | | | | | | |
| 10 - | | | | | | | | | _ |
| 0 · 10 | 200 | | 7375 | | 3750 ncy [MHz] | 201 | 25 | | 26500 |
| | Freq. | Note | Detector | Spectur | | | Limit | Margin | |
| | | Г/Ц/Г/Q | Mode | Reading Le | | FS dBu)//m | @3m | ٩D | |
| - | MHz | F/H/E/S | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | - |
| | 4960.00 4960.00 | H H | Peak | 29.91 21.72 | 7.69 7.69 | 37.60 29.41 | 74 54 | -36.40 -24.59 | |
| | | | Average | | | | 54 | | |
| | 7440.00 | H | Peak | 30.85 | 15.43 | | 74 54 | -27.71 | |
| | 7440.00 | Н | Average | 22.01 | 15.43 | 37.44 | 54 | -16.56 | |

47.40

30.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Peak

Average

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

18.74

18.74

66.14

49.02

74


54

-7.86

-4.98



Report No.: E2/2017/90149 Page 62 of 76

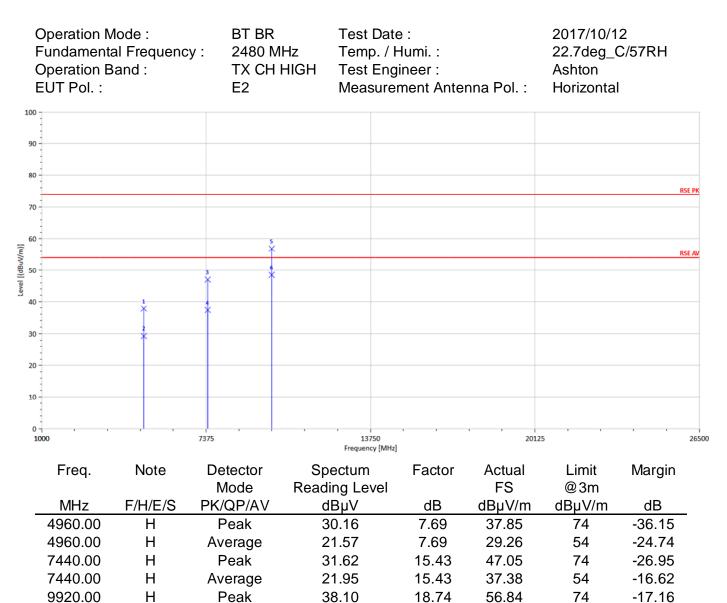

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Average

н

9920.00

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Train documents issued by the company subject to is defined conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

29.79

18.74

48.53

54

-5.47



11 FREQUENCY SEPARATION


11.1 Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 Measurement Equipment Used

| Conducted Emission Test Site | | | | | | | | |
|------------------------------|------------|--------------------|------------|------------|------------|--|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | |
| Spectrum Analyzer | KEYSIGHT | N9010A | MY51440113 | 06/20/2017 | 06/19/2018 | | | |
| Coaxial Cable 30cm | WOKEN | 00100A1F1A19 5C | RF01 | 12/12/2016 | 12/11/2017 | | | |
| DC Block | PASTERNACK | PE8210 | RF29 | 12/12/2016 | 12/11/2017 | | | |
| Splitter | RF-LAMBAD | RFLT2W1G18G | RF35 | 12/12/2016 | 12/11/2017 | | | |
| Attenuator | WOKEN | 218FS-10 | RF23 | 12/12/2016 | 12/11/2017 | | | |
| DC Power Supply | Agilent | E3640A | MY53140006 | 05/02/2017 | 05/01/2018 | | | |

11.3 Test Set-up



11.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

Unless otherwise stated the results shown in this test report feller only to the sample(s) tested and sources in a transition of sources only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



11.5 Measurement Result

| Channel separation (MHz) | Limit | Result |
|-----------------------------|---|--------|
| 1 | >=25 kHz or 2/3 times 20dB bandwidth | PASS |

Frequency Separation Test Data



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 NUMBER OF HOPPING FREQUENCY


12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

| Conducted Emission Test Site | | | | | | | | |
|------------------------------|------------|--------------------|------------|------------|------------|--|--|--|
| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. | | | |
| TYPE | | NUMBER | NUMBER | CAL. | | | | |
| Spectrum Analyzer | KEYSIGHT | N9010A | MY51440113 | 06/20/2017 | 06/19/2018 | | | |
| Coaxial Cable 30cm | WOKEN | 00100A1F1A 195C | RF01 | 12/12/2016 | 12/11/2017 | | | |
| DC Block | PASTERNACK | PE8210 | RF29 | 12/12/2016 | 12/11/2017 | | | |
| Splitter | RF-LAMBAD | RFLT2W1G18 G | RF35 | 12/12/2016 | 12/11/2017 | | | |
| Attenuator | WOKEN | 218FS-10 | RF23 | 12/12/2016 | 12/11/2017 | | | |
| DC Power Supply | Agilent | E3640A | MY53140006 | 05/02/2017 | 05/01/2018 | | | |

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



12.5 Measurement Result


Tabular Data of Total Channel Number

| | Channel Number | Limit |
|-----------------------|----------------|-------|
| 2.4 GHz – 2.441GHz | 40 | |
| 2.441 GHz – 2.4835GHz | 39 | >15 |
| 2.4GHz ~2.4835GHz | (40+39) = 79 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Channel Number

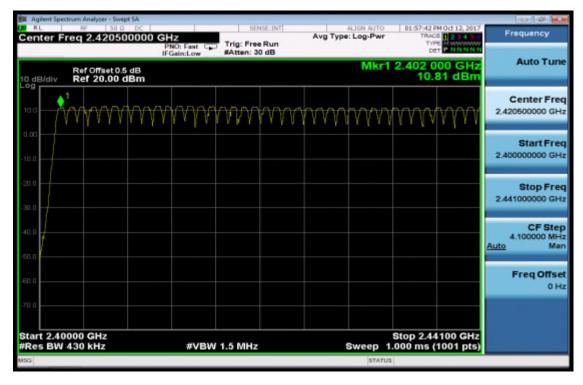

2.4GHz - 2.441GHz

2.441 GHz - 2.4835GHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



TIME OF OCCUPANCY (DWELL TIME) 13


13.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2 Measurement Equipment Used

| Conducted Emission Test Site | | | | | | | | |
|------------------------------|------------|--------------------|------------------|------------|------------|--|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST | CAL DUE. | | | |
| ITPE | | NUNDER | NUMBER | CAL. | | | | |
| Spectrum Analyzer | KEYSIGHT | N9010A | MY51440113 | 06/20/2017 | 06/19/2018 | | | |
| Coaxial Cable 30cm | WOKEN | 00100A1F1A 195C | RF01 | 12/12/2016 | 12/11/2017 | | | |
| DC Block | PASTERNACK | PE8210 | RF29 | 12/12/2016 | 12/11/2017 | | | |
| Splitter | RF-LAMBAD | RFLT2W1G18 G | RF35 | 12/12/2016 | 12/11/2017 | | | |
| Attenuator | WOKEN | 218FS-10 | RF23 | 12/12/2016 | 12/11/2017 | | | |
| DC Power Supply | Agilent | E3640A | MY53140006 | 05/02/2017 | 05/01/2018 | | | |

13.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



13.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.

6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)*(0.4 *20) =53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13.5 Tabular Result of the Measurement

GFSK (1Mbps)

| Channel | PACKET TYPE | Measurement Result | Limit |
|---------|-------------|--------------------|-------|
| Onanner | | (ms) | (ms) |
| | DH1 | 116.80 | 400ms |
| 0 | DH3 | 256.32 | 400ms |
| | DH5 | 302.61 | 400ms |
| | DH1 | 116.80 | 400ms |
| 39 | DH3 | 256.32 | 400ms |
| | DH5 | 302.61 | 400ms |
| | DH1 | 116.80 | 400ms |
| 78 | DH3 | 257.60 | 400ms |
| | DH5 | 302.61 | 400ms |

π/4 DQPSK (2Mbps)

| Channel | PACKET TYPE | Measurement Result (ms) | Limit (ms) |
|---------|-------------|----------------------------|---------------|
| 39 | 2DH1 | 119.68 | 400ms |
| | 2DH3 | 256.32 | 400ms |
| | 2DH5 | 302.61 | 400ms |

8-DPSK (3Mbps)

| Channel | PACKET TYPE | Measurement Result (ms) | Limit (ms) |
|---------|-------------|----------------------------|---------------|
| 39 | 3DH1 | 118.72 | 400ms |
| | 3DH3 | 255.68 | 400ms |
| | 3DH5 | 302.61 | 400ms |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK (1Mbps):

| CH Low | DH1 time slot = DH3 time slot = | | (| | 116.80 (ms) 256.32 (ms) |
|---------|------------------------------------|---------|--------------------------------|--------|----------------------------|
| | DH5 time slot = | | (1600/6/79) * | | 302.61 (ms) |
| CH Mid | DH1 time slot = DH3 time slot = | | (1600/2/79) * (1600/4/79) * | | 116.80 (ms) 256.32 (ms) |
| | DH5 time slot = | 2.837 * | (1600/6/79) * | 31.6 = | 302.61 (ms) |
| CH High | DH1 time slot = DH3 time slot = | 1.610 * | (1600/2/79) * (1600/4/79) * | 31.6 = | 116.80 (ms) 257.60 (ms) |
| | DH5 time slot = | 2.837 * | (1600/6/79) * | 31.6 = | 302.61 (ms) |

$\pi/4$ -DQPSK (2Mbps):

| CH Mid | 2DH1 time slo = | 0.374 * | (1600/2/79) * | 31.6 = | 119.68 (ms) |
|--------|-----------------|---------|---------------|--------|-------------|
| | 2DH3 time slo = | 1.602 * | (1600/4/79) * | 31.6 = | 256.32 (ms) |
| | 2DH5 time slo = | 2.837 * | (1600/6/79) * | 31.6 = | 302.61 (ms) |

8-DPSK (3Mbps):

| CH Mid | 3DH1 time slo = | 0.371 * | * | (1600/2/79) * | 31.6 = | 118.72 (ms) |
|--------|-----------------|---------|---|---------------|--------|-------------|
| | 3DH3 time slo = | 1.598 * | * | (1600/4/79) * | 31.6 = | 255.68 (ms) |
| | 3DH5 time slo = | 2.837 * | k | (1600/6/79) * | 31.6 = | 302.61 (ms) |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



| GFSK (1Mbps) for AFH Mode | | | | | | | |
|-----------------------------|--------------------------------|----------------------------|---------------|--|--|--|--|
| Hopping Channel Number | PACKET TYPE | Measurement Result (ms) | Limit (ms) | | | | |
| 20 | DH5 | 151.31 | 400ms | | | | |
| | π/4 DQPSK (2Mbps) for AFH Mode | | | | | | |
| Hopping Channel Number | PACKET TYPE | Measurement Result (ms) | Limit (ms) | | | | |
| 20 | 2DH5 | 151.31 | 400ms | | | | |
| 8-DPSK (3Mbps) for AFH Mode | | | | | | | |
| Hopping Channel Number | PACKET TYPE | Measurement Result (ms) | Limit (ms) | | | | |
| 20 | 3DH5 | 151.31 | 400ms | | | | |

GFSK (1Mbps):

| DH5 time s = | 2.837 | (ms) | * | (800/6/20 * 8 = | 151.31 | (ms) |
|------------------|-------|------|---|-----------------|--------|------|
| π/4 -DQPSK (2Mbp | | | | | | |
| 2DH5 time = | 2.837 | (ms) | * | (800/6/20 * 8 = | 151.31 | (ms) |
| 8-DPSK (3Mbps): | | | | | | |
| 3DH5 time = | 2.837 | (ms) | * | (800/6/20 * 8 = | 151.31 | (ms) |

13.6 Measurement Result

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2017/90149 Page 73 of 76


CH-Low DH1

CH-Mid DH1

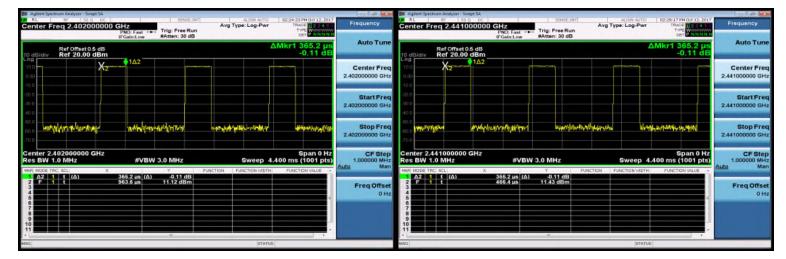


CH-Low DH3

CH-Mid DH3

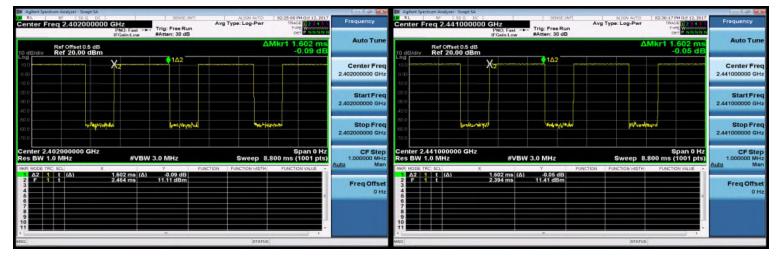

CH-Low DH5

CH-Mid DH5

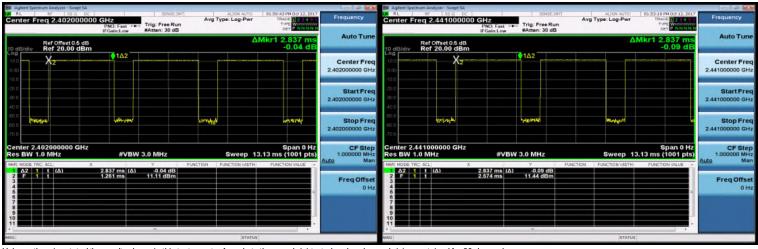

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless the wee stated the test is structure to the point report the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrialPark, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com


Member of SGS Group



Report No.: E2/2017/90149 Page 74 of 76


CH-High DH1

CH-Mid 2DH1

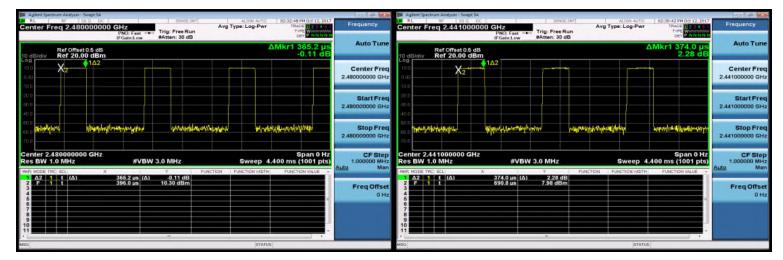


CH-High DH3

CH-Mid 2DH3

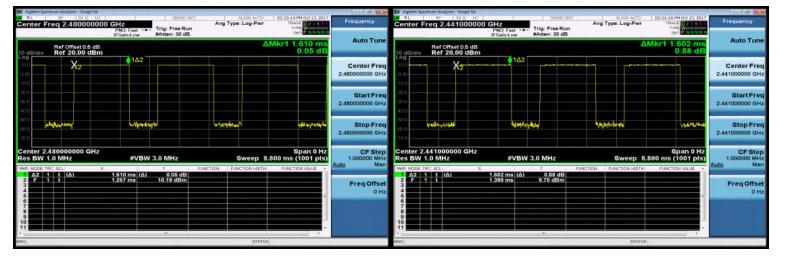

CH-High DH5

CH-Mid 2DH5

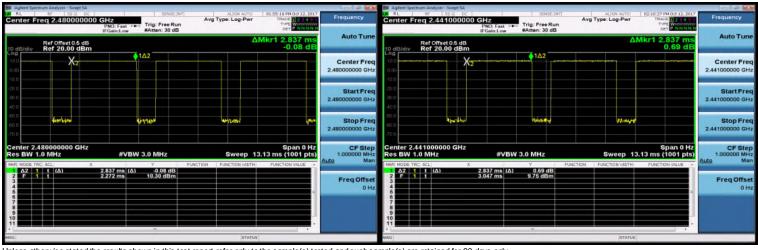

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless the wee stated the test is structure to the point report the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

| 台灣檢驗科技股份有限公司 |
|--------------|
| |

f (886-2) 2298-0488

www.tw.sas.com


Member of SGS Group




CH-Mid 3DH1

| RL J | | (): Fast +++ Trig: Free Ru | Avg Type: Log-Pwr | 12:01:43 PM 0d:12, 2017 TRACE 0 2:14 Trife Trife | Frequency |
|---|------------------------------------|---------------------------------------|-------------------|---|----------------------------------|
| 10 dB/div | Ref Offset 0.5 dB Ref 20.00 dBm | ain:Low #Atten: 30 dE | | Mkr1 370.7 µs 0.15 dB | Auto Tun |
| 19 0 0.00 40 0 | ∮1∆2 | | | | Center Fre 2.441000000 GH |
| 20.0 30.0 40.0 | | | | | Start Fre 2.441000000 Gi |
| 50.0 50.0 <mark>M</mark> 70.0 | hargssportshine shiring | enroldy filled for | ngananganan | ahlasi nyili | Stop Fre 2.441000000 GP |
| Center 2.44 Res BW 1.0 | SCL X | | | Span 0 Hz 467 ms (1001 pts) PUNCTION VALUE | CF Ste 1,000000 Mi Auto Mi |
| 1 A2 1 2 F 1 3 4 5 6 7 7 8 9 | t (Δ) 37 t 13 | 0.7 μs (Δ) 0,15 dB 4,0 μs 9,71 dBm | | | Freq Offs 01 |
| 10 | | ·m· | | · . | |

CH-Mid 3DH3

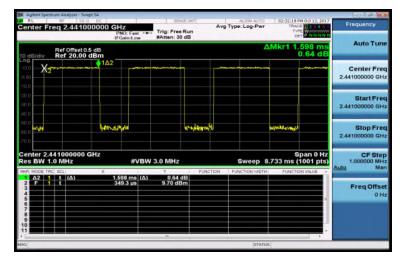

CH-Mid 3DH5

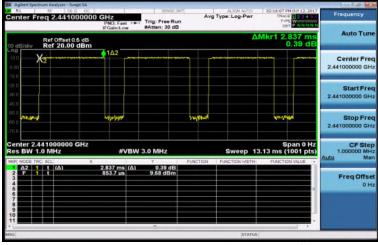

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless the wee stated the test is structure to the point report the law.

SGS Taiwan Ltd. | No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.tw.sgs.com



14 ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2 Antenna Connected Construction

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.