

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

0F
Advantech Co., Ltd
No. 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei
11491, Taiwan, R.O.C.
Motherboard
Advantech
RSB-4760
N/A
M82-RSB-4760
E2/2017/90154
§15.247, Cat: DTS
Oct. 20, 2017
Sep. 29, 2017~ Oct. 12, 2017
Sep. 29, 2017

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Prepared By:

Stefanie Yu / Clerk

Approved By:

Jim Chang / Asst. Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明 · 此報告結果僅對測試之樣品負責 , 同時此樣品僅係留90天。本報告未經本公司書面許可 , 不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms</u> <u>e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Revision History

Report Number	Revision	Description	Issue Date
E2/2017/90154	Rev.00	Initial creation of document	Oct. 20, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	. 12
7	PEAK OUTPUT POWER MEASUREMENT	. 16
8	6dB BANDWIDTH MEASUREMENT	. 19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	. 22
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	. 30
11	PEAK POWER SPECTRAL DENSITY	. 51
12	ANTENNA REQUIREMENT	. 55



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Motherboard				
Brand Name:	Advantech	Advantech			
Model No.:	RSB-4760	RSB-4760			
Model difference:	N/A				
Hardware Version:	N/A				
Software Version:	N/A				
	12VDC from Adapter				
Power Supply:	Adapter:	Model No.: FSP036-RBBN2, Supplier: FSP GROUP INC.			

Bluetooth Low Energy:

Bluetooth Version:	Bluetooth V4.1 LE Single mode
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	2.22 dBm
Frequency Range:	2402 – 2480MHz

Antenna Type	Supplier	Antenna Part No.	Freq.	Peak Antenna Gain (dBi)	Worst Antenna Gain	
Dipole type	INVAX	1750008671-01	2.4GHz	2.89		
External	INVAX	1750007622-01	2.4GHz	3.50	V	
Antenna	INVAX	1750008717-01	2.4GHz	2.89		
Antenna	Walsin	1750008772-01	2.4GHz	2.93		
Note: Pre-scanned was done on the above 4 antennas, the 1750007622-01 results higher emission at						

nned was done on the above 4 antennas, the 1750007622-01 results higher emission at 2.4GHz. Therefore, the completed set of measurement was done on the antenna to be presented on this test report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: E2/2017/90154 Page 5 of 55



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance.

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Number and Designation number are: 735305 / TW 0002

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss 0.5 dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery of falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2017/90154 Page 7 of 55

2.5 Configuration of Tested System Fig. 2-1 Conducted (Antenna Port) Emission Configuration




Fig 2-3 Conduction (AC Power Line) Radiated Emission




Fig 2-2 Radiated Emission



ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Ca- ble	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	L430	R9-WR6X4	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document be client and this document be and subject to a transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approach be proceeded to be used. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	14	2430 MHz	28	2458 MHz
1	2404 MHz	15	2432 MHz	29	2460 MHz
2	2406 MHz	16	2434 MHz	30	2462 MHz
3	2408 MHz	17	2436 MHz	31	2464 MHz
4	2410 MHz	18	2438 MHz	32	2466 MHz
5	2412 MHz	19	2440 MHz	33	2468 MHz
6	2414 MHz	20	2442 MHz	34	2470 MHz
7	2416MHz	21	2444 MHz	35	2472 MHz
8	2418 MHz	22	2446 MHz	36	2474 MHz
9	2420 MHz	23	2448 MHz	37	2476 MHz
10	2422 MHz	24	2450 MHz	38	2478 MHz
11	2424 MHz	25	2452 MHz	39	2480 MHz
12	2426 MHz	26	2454 MHz		
13	2428 MHz	27	2456 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Pre-scanned was done on the four antenna ports and main antenna port results higher emission at 2.4GHz. Therefore the completed set of measurement was done on main antenna port.

Pre-scanned was done external antenna: 1750008671-01,1750007622-01, on 1750008717-01 and antenna 1750008772-01, and antenna 1750007622-01 results higher emission at 2.4GHz. Therefore, the completed set of measurement was done on antenna: 1750007622-01 to be presented on this test report.

RADIATED EMISSION TEST:

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	
RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth LE	0 to 39	0,19,39	GFSK	1	
	RADI	ATED EMISSIC	N TEST (ABOVE 1	GHz)	
Bluetooth LE	0 to 39	0,19,39	GFSK	1	
Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and					


lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)		
Bluetooth LE	0 to 39	0,19,39	GFSK	1		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Train documents issued by the company subject to is defined conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

Measurement uncertainty	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.						

6.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2016	12/11/2017		
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	08/30/2017	08/29/2018		
LISN	Schwarzbeck	NSLK 8127	8127-648	06/18/2017	06/17/2018		
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.		


6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

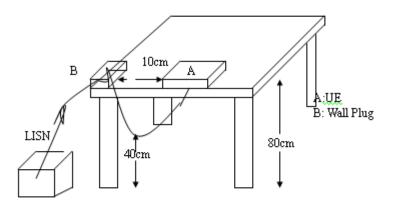

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed


6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




AC POWER LINE CONDUCTED EMISSION TEST DATA

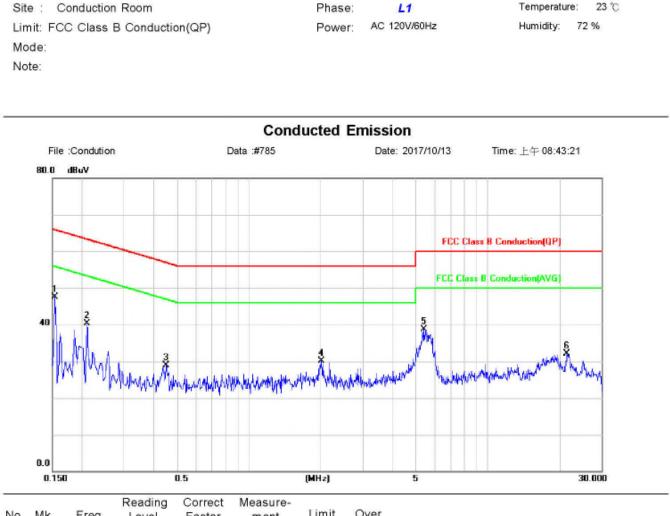


No.	Mk.	Freq.	Level	Factor	ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	•	0.1540	27.89	19.65	47.54	65.78	-18.24	peak	
2		0.2100	20.56	19.66	40.22	63.21	-22.99	peak	
3		0.4500	8.86	20.05	28.91	56.88	-27.97	peak	
4		2.0180	9.54	20.56	30.10	56.00	-25.90	peak	
5		5.3940	18.69	20.09	38.78	60.00	-21.22	peak	
6		21.5780	11.80	20.27	32.07	60.00	-27.93	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





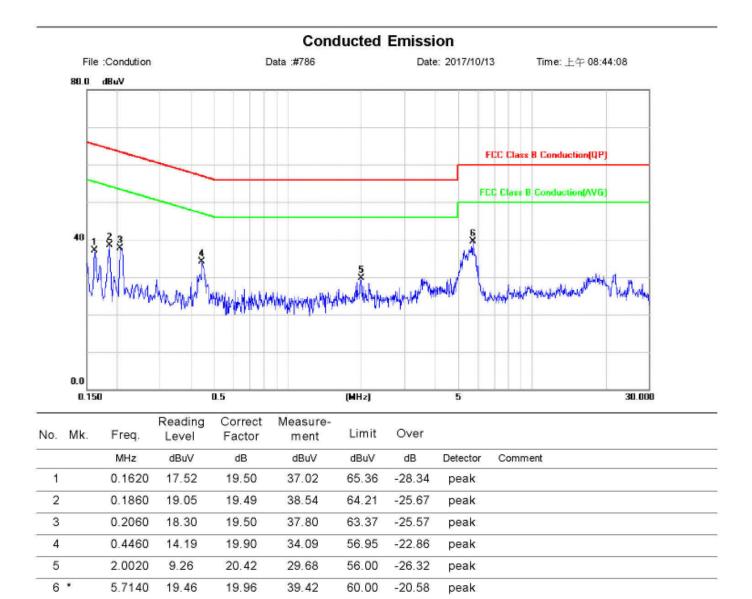

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



PEAK OUTPUT POWER MEASUREMENT 7

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Power Meter	Anritsu	ML2496A	1326001	06/23/2017	06/22/2018		
Power Sensor	Anritsu	MA2411B	1315048	06/23/2017	06/22/2018		
Power Sensor	Anritsu	MA2411B	1315049	06/23/2017	06/22/2018		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	RF01	12/12/2016	12/11/2017		
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017		
DC Power Supply	Agilent	E3640A	MY53140006	05/02/2017	05/01/2018		

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



7.4 Measurement Procedure:

- 1.Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Power Meter.

5.Repeat above procedures until all test default channel measured was complete.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Duty Factor:

	Duty Cycle (%)	Duty Factor (dB)
BLE	62.66	2.03



Duty Cycle Factor:10*log(1/(62.66/100))=2.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com	
	(000 L) LL00 0L10	1 (000 2) 2200 0 100		



BLE mode:

7.5 **Measurement Result:**

сн	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
0	2402	1.94	1 Watt = 30 dBm
20	2442	2.22	1 Watt = 30 dBm
39	2480	1.31	1 Watt = 30 dBm
BLE mo	ode:		
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
0	2402	-0.31	1 Watt = 30 dBm
20	2442	-0.08	1 Watt = 30 dBm
39	2480	-0.98	1 Watt = 30 dBm

*Note: Measured by power meter, cable loss as 0.5 dB that offsets on the power meter in Peak *Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter *Note: Max. Output include tune up tolerance Power is average power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8 6DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY51440113	06/20/2017	06/19/2018		
Coaxial Cable 30cm	WOKEN	00100A1F1A195 C	RF01	12/12/2016	12/11/2017		
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017		
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017		
DC Power Supply	Agilent	E3640A	MY53140006	05/02/2017	05/01/2018		

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

8.5 Measurement Result:

BLE mode			
Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	0.681	> 0.5	PASS
2442	0.682	> 0.5	PASS
2480	0.684	> 0.5	PASS

Note: Refer to next page for plots.

6dB Band Width Test Data CH-Low

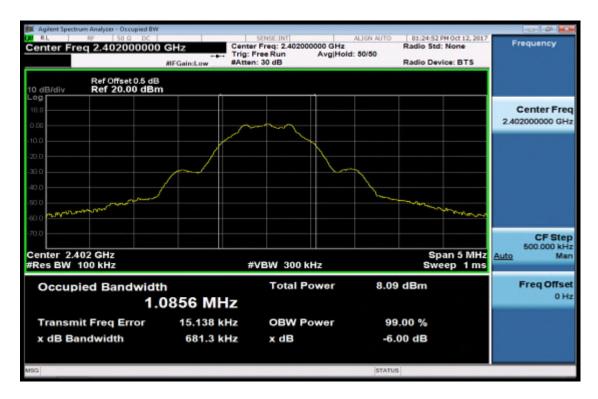


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6dB Band Width Test Data CH-Mid



6dB Band Width Test Data CH-High

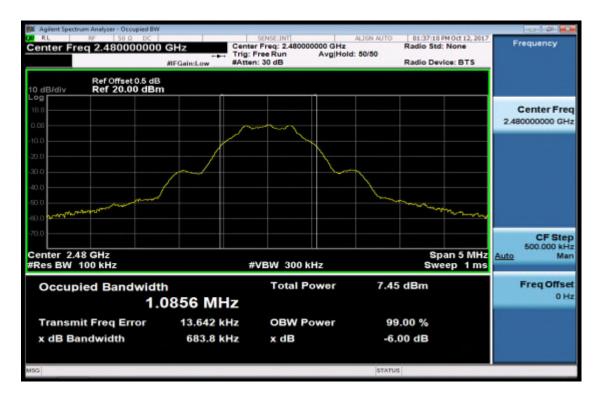

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9

9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY51440113	06/20/2017	06/19/2018		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	RF01	12/12/2016	12/11/2017		
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017		
DC Power Supply	Agilent	E3640A	MY53140006	05/02/2017	05/01/2018		

9.2 Measurement Equipment Used:

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



9.4 Measurement Procedure

Band Edge Limit Calculation:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.



Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

Frequency (MHz)	RF Power Density (dBm)	Bandedge Limit = PSD - 20dB (dBm)				
2402	1.34	-18.66				
2480	0.71	-19.29				

Band Edgo Limit

NOTE: cable loss as dB that offsets in the spectrum NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Power Spectral Density for Bandedge Limit (CH-Low)




Power Spectral Density for Bandedge Limit (CH-High)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



BT4.1 mode **Band Edges Test Data CH-Low**

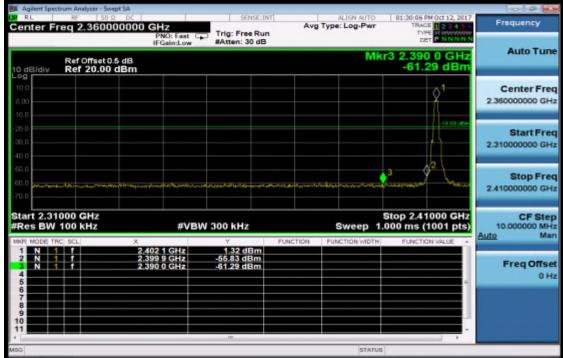

Band Edges Test Data CH-High

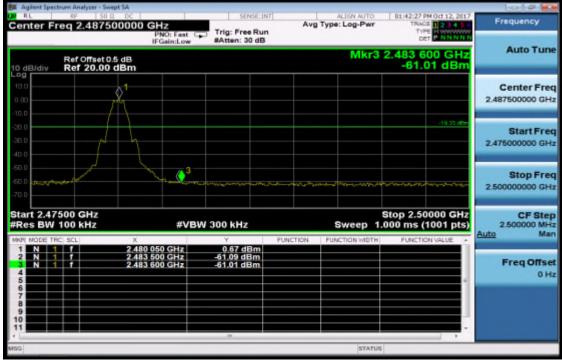


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Conducted Spurious Emission Measurement Result CH-Low 30MHz - 3GHz

	trum Analyzer - Swept !						
Center Fr	eq 1.515000		Trig: Free Run		Type: Log-Pwr	01:30:23 PM Oct 12, 20 TRACE 2 2 3 4 THE DET P N N M	Frequency
10 dB/div	Ref Offset 0.5 o Ref 20.00 de	IFGain:Low	#Atten: 30 dB		Mk	r1 2.403 0 GH 1.44 dBn	Auto Tuni
10.0 0.00						1	Center Fre 1.515000000 GH
-20,0 -30 D -40.0						-10.56.69	Start Free 30.000000 MH
-50.0 -60.0 -70.0	هر انجو راد میروند. مراجع انجو را میروند میروند ا	an yan da gina an ingi kan an a	998) mangan kepahangan sebut kengan sebut kengan sebut kengan sebut kengan sebut kengan sebut kengan sebut keng		aykyata kana jeninden d	linis interferencia en compañía en co	Stop Fre 3.000000000 GH
Start 30 M Res BW	100 kHz		W 300 kHz			Stop 3.000 GH .667 ms (1001 pts	
MKR MODE TR 1 N 1 2 3 4 5 6		× 2,403 0 GHz	Υ 1,44 dBm	FUNCTION	FUNCTION WDTH	FUNCTION VALUE	Freq Offse 0 H
7 8 9 10 11							
5G					STATUS	5	

CH-Low 3GHz – 26.5GHz

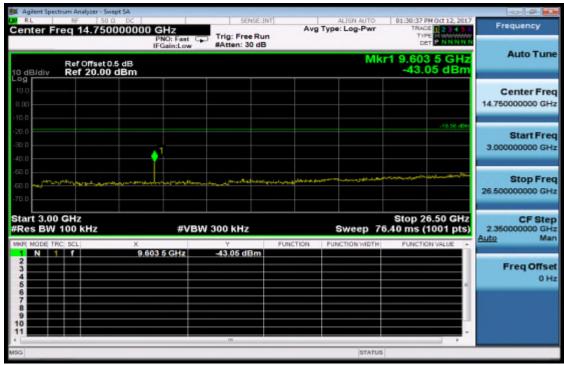

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





CH-Mid 30MHz - 3GHz

Ref Offset 0.5 dB MKH 22.441 6 CH2 10 dB/div 1.59 dBm 10 dB/div 1.51500000 GH 10 dB/div 1.51500000 GH 20 dB/div 1.50 dB/div 20 dB/div	Agilent Spectrum Analyzer - Swept SA				
Ref Offset 0.5 dB Mkr1 2.441 6 GHz 0 dB/div Ref 20.00 dBm 10 dB/div Ref 20.00 dBm 10 dB/div Ref 20.00 dBm 10 dB/div 1.59 dBm 10 dB/div 1.51500000 GH 10 dB/div 1.51500000 GH 20 dB/div 1.51500000 GH	11.6 TE 210 St. 475	PNO: Fast Trig: Free R	Avg Type: Log-Pwr Run	TRACE 123456 TYPE PLANADOWN	Frequency
100 1	10 dB/div Ref 20.00 dBm	IFGain:Low #Atten: 30		r1 2.441 6 GHz 1.59 dBm	Auto Tune
200 2041 dP 30 D 30 D 40 D 30 D 40 D 50 D 50 D 50 D	10.0			¢1	Center Freq 1.515000000 GHz
E0 0 Stop Free 70 0 Stop Free Start 30 MHz Stop 3.000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.667 ms (1001 pts) 1 N 1 N 1 N 2 3 4 Sweep 9.667 ms (1001 pts)	-20.0 -30.0			-19.41.694	Start Freq 30.000000 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 9.667 ms (1001 pts) 297.000000 MH MMR MODE TRC: SCL X Y FUNCTION FUNCTION WDTH FUNCTION VALUE Auto Main 1 N 1 f 2,441 6 GHz 1,59 dBm Function WDTH FUNCTION VALUE Freq Offset 3 4 0 H 0 H 0	-50,0	an di kali da kang di ngangan dalam kani na kani ngandara.	an a	Julianaa, America Patricipa que a sura	Stop Freq 3.000000000 GHz
1 N 1 f 2,441 6 GHz 1,59 dBm 2 5 5 5 5 6 GHz 0 Freq Offse 3 6 6 6 6 6 7 5 6 6 6 7 5 6 6 7 5 6 6 7 5 6 6 7 5 6 6 7 5 6 7 5 6 7 5 6 7 5 6 7 5 7 5	Start 30 MHz #Res BW 100 kHz	#VBW 300 kHz		.667 ms (1001 pts)	CF Step 297.000000 MHz Auto Man
	N 1 f 2, 2 3 3 3 3 4 5 6 6 7 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 1 1 1 1 2, 12, 12 1			FUNCTION VALUE	Freq Offset 0 Hz
	usc		STATUS	E .	

CH-Mid 3GHz – 26.5GHz

Agilent Spectrum Analyzer - Swept SA				-		
Center Freq 14.75000000	PNO: Fast	Trig: Free Run #Atten: 30 dB	Avg	ALIGN AUTO Type: Log-Pwr	01:36:06 PM Oct 12, 2017 TRACE 2 3 4 5 TYPE DET P NUMBER	Frequency
Ref Offset 0.5 dB	IP-Gain:Low	exten: 30 GB		Mk	r1 9.768 0 GHz -43.88 dBm	Auto Tune
100 0.00						Center Fred 14.750000000 GH:
-20.0	↓1				-10.41 (69)	Start Free 3.000000000 GH
-50.0 -50.0	***	Antophe Jog Participation of Anto	محيور والجمع ويوريهم		lantan Sedi ng Katilan Lain ni kang Katilan Juwa	Stop Free 26.500000000 GH
Start 3.00 GHz #Res BW 100 kHz	#VBW	300 kHz	FUNCTION	Sweep 70	Stop 26.50 GHz 5.40 ms (1001 pts)	CF Step 2.350000000 GH Auto Mar
2 3 4 5	.768 0 GHz	-43,88 dBm				Freq Offse 0 Ha
6 7 8 9 10						
esc .		m		STATUS		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CH-High 30MHz - 3GHz

Ref Offset 0.5 dB MKT 2.480 3 GHZ 10 dB/div Ref 20.00 dBm 0.77 dBm 10 d1/div 0.77 dBm 0.77 dBm 10 d2/div 0.1 1 0.1 1 0 d2/div 0.1 1 0.1 1 0 d2/div 0.77 dBm 0.77 dBm 0 d2/div 0.1 1 0.1 1	Agilent Spectrum Analyzer - Swe					-		
IFGaintLow #Atten: 30 dB Dermannen Auto Tur 10 dB/div Ref Offset 0.5 dB 0.77 dBm 0.77 dBm 0.77 dBm 10 d0/div Ref 20.00 dBm 0.1 0.1 0.5100000 GF 0.5100000 GF 200 .31920 GF .31920 GF .31920 GF .31920 GF .31920 GF .200 .31920 GF .31920		00000 GHz	Trig: Free Run			TRACE	123456	Frequency
100 100 100 100 100 100 100 100	10 dEJdiv Ref 20.00	IFGain:Low	#Atten: 30 dB		Mk	r1 2.480 0.7	3 GHz	Auto Tune
-20.0	0.00					• ¹		Center Freq 1.515000000 GHz
500	-20,0 -30.0						-19 20 dise	Start Freq 30.000000 MHz
	-50,0	a a na ang da ang d	a ha an	ak kan yang berdapat dikana	ويعهدونه والمحموم والمحمو والمحمو	J	and the second second	Stop Free 3.000000000 GHa
#Res BW 100 kHz #VBW 300 kHz Sweep 9.667 ms (1001 pts) 297.000000 Mi	Start 30 MHz #Res BW 100 kHz	#VB\	N 300 kHz			.667 ms (1	001 pts)	CF Step 297.000000 MHz Auto Man
Image Mode TRC: ScL X Y PUNCTION PUNCTION WIDTH PUNCTION VALUE 1 N 1 f 2,480 3 GHz 0,77 dBm 2 3	1 N 1 7 2 3 3 4 5 5 6 7 8 9 9			FUNCTION	PUNCTION WIDTH	FUNCTIO	N VALUE	Freq Offset 0 Hz
ASG STATUS	MISG				STATUS	F		

CH- High 3GHz – 26.5GHz

Agilent Spectrum Analyzer - Swept SA						a 4 🛃
Center Freq 14.7500000		SENSE IN		Type: Log-Pwr	81:42:57 PM Oct 12, 261 TRACE 2 3 4 3	Frequency
	PNO: Fast	#Atten: 30 dB			DET P NINNN	
10 dB/div Ref Offset 0.5 dB				Mk	r1 9.909 0 GHz -43.61 dBm	
10.0						Center Free 14.750000000 GH:
-20.0 -30.0	1				-19.2) ide	Start Free 3.000000000 GH
40.0 50.0 50.0	, Para and a second second second	مى خلى يەرىمىرىن مەرىپى _{قۇرىم} ىز مە		ىرى يەرىپىيەر تەرىپىيەر تەرىپىيە مەرىپىيە بىلىرىلىرى مەرىپىيەر يېرىپىيەر تەرىپىيەر تەرىپىيەر بىلىرىلىرى يەرىپىلىرى	فالتوالية ويتوسوون ومحمور ويوتشا ومروا	Stop Free 26.50000000 GH
Start 3.00 GHz #Res BW 100 kHz	#VBW	300 kHz		Sweep 7	Stop 26.50 GHz 5.40 ms (1001 pts	CF Ster 2.350000000 GH Auto Ma
	9.909 0 GHz	-43.61 dBm	FUNCTION	FUNCTION WDTH	FUNCTION VALUE +	- Internet
2 3 4 5						Freq Offse 0 H
6 7 8 9						
10		m			,	
usg				STATUS		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對测試之樣品負責,同時比樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




10.2 **Measurement Equipment Used**

966 Chamber					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
EMI Test Receiver	R&S	ESU 40	100363	04/18/2017	04/17/2018
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/201 6	12/22/2017
Broadband Antenna	TESEQ	CBL 6112D	35240	11/03/2016	11/02/2017
Horn Antenna	ETS-Lindgren	3117	00143272	12/15/2016	12/16/2017
Horn Antenna	Schwarzbeck	BBHA9170	185	08/01/2017	07/31/2018
Pre Amplifier	EMC Instru- ments	EMC330	980096	12/12/2016	12/11/2017
Pre Amplifier	EMC Instru- ments	EMC0011830	980199	12/12/2016	12/11/2017
Pre Amplifier	R&S	SCU-18	10204	12/12/2016	12/11/2017
Pre Amplifier	R&S	SCU-26	100780	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2016	12/11/2017
Attenuator	WOKEN	218FS-10	RF27	12/12/2016	12/11/2017
Site NSA	SGS	966 Chamber C	SAC-C	03/02/2017	03/01/2018
Site VSWR	SGS	966 Chamber C	SAC-C	03/02/2017	03/01/2018
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2017	05/03/2018
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

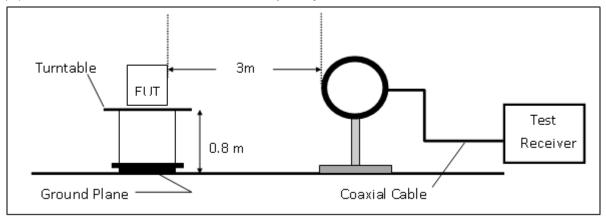

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

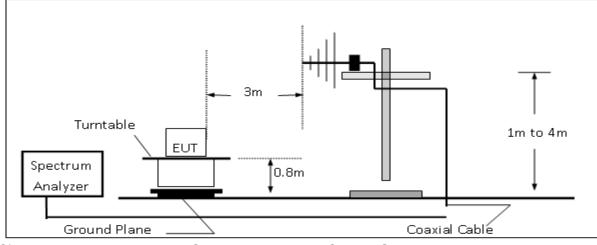

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

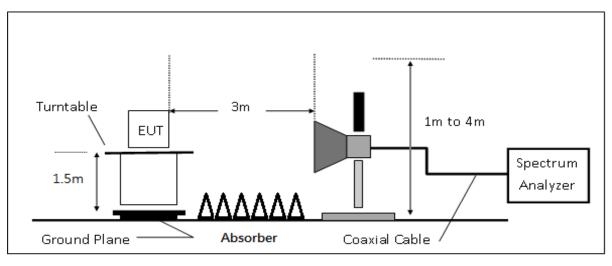

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	8	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note :

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz 10.6

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs Stateware stated are textus single stateware textus and textus Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Radiated Band Edge Measurement Result

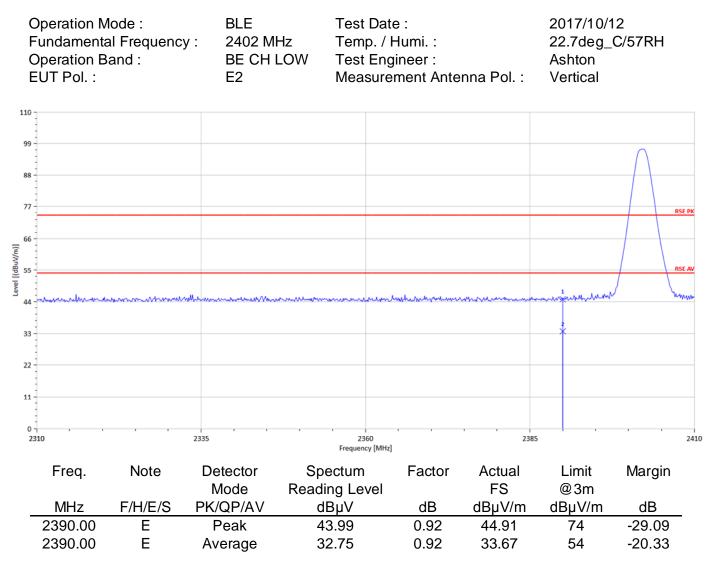


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




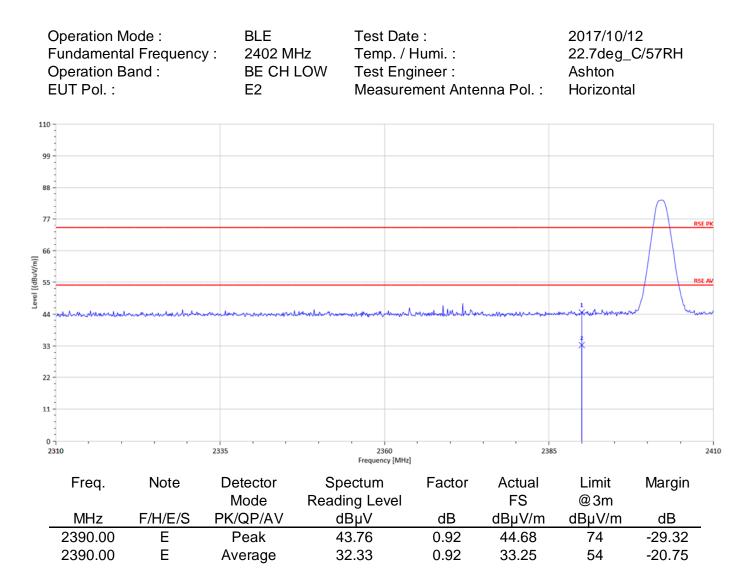


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




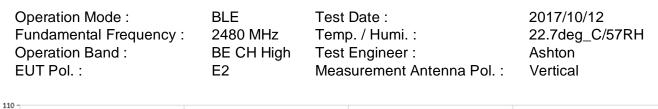

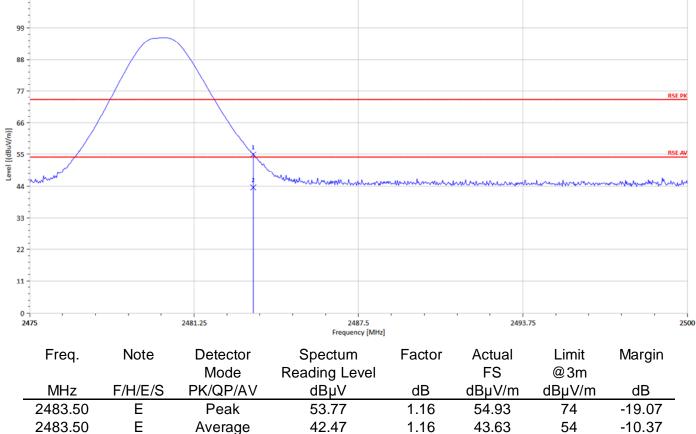






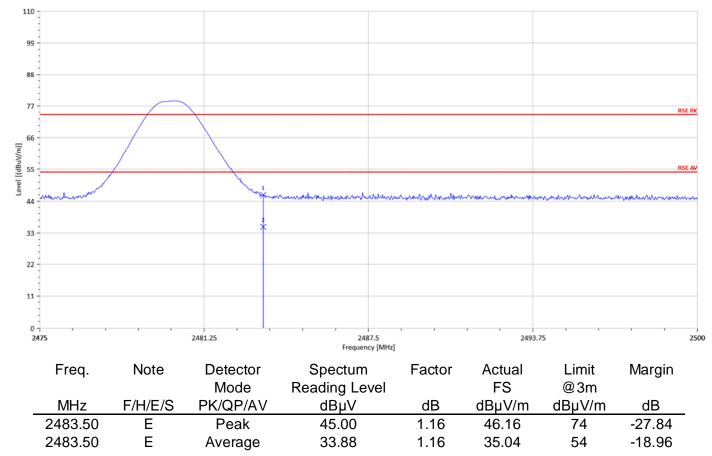




Radiated Spurious Emission Measurement Result For Frequency form 30MHz to 1000MHz

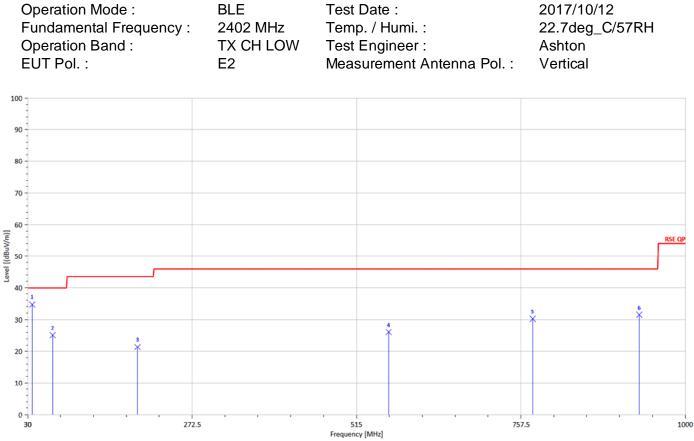


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	45.65	-10.93	34.72	40	-5.28
66.86	S	Peak	47.31	-22.18	25.13	40	-14.87
191.99	S	Peak	39.51	-18.13	21.39	43.5	-22.11
562.53	S	Peak	32.40	-6.30	26.10	46	-19.90
774.96	S	Peak	34.97	-4.75	30.22	46	-15.78
932.10	S	Peak	33.19	-1.72	31.46	46	-14.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



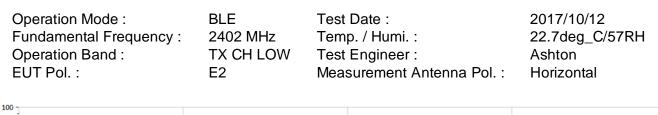


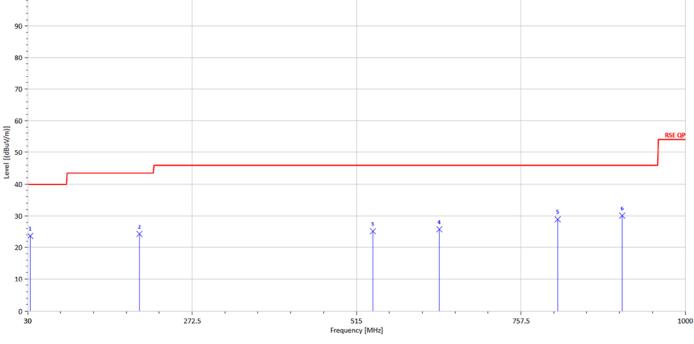

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
33.88	S	Peak	32.92	-9.27	23.65	40	-16.35	
194.90	S	Peak	42.11	-17.85	24.26	43.5	-19.24	
539.25	S	Peak	32.47	-7.38	25.09	46	-20.91	
637.22	S	Peak	30.78	-5.08	25.70	46	-20.30	
811.82	S	Peak	31.90	-3.00	28.91	46	-17.09	
906.88	S	Peak	31.88	-1.82	30.06	46	-15.94	




Operation Mode :	BLE	Test Date :	2017/10/12
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	TX CH MID	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

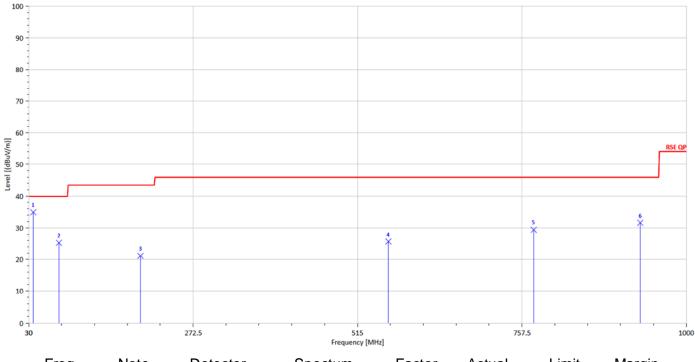

Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
36.79	S	Peak	45.90	-10.93	34.97	40	-5.03	
74.62	S	Peak	46.65	-21.43	25.22	40	-14.78	
194.90	S	Peak	38.97	-17.85	21.12	43.5	-22.38	
560.59	S	Peak	32.28	-6.64	25.64	46	-20.36	
774.96	S	Peak	34.13	-4.75	29.38	46	-16.62	
932.10	S	Peak	33.30	-1.72	31.57	46	-14.43	





Operation Mode :		Test Date :	2017/10/12
Fundamental Frequency :		Temp. / Humi. :	22.7deg_C/57RH
Operation Band :		Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

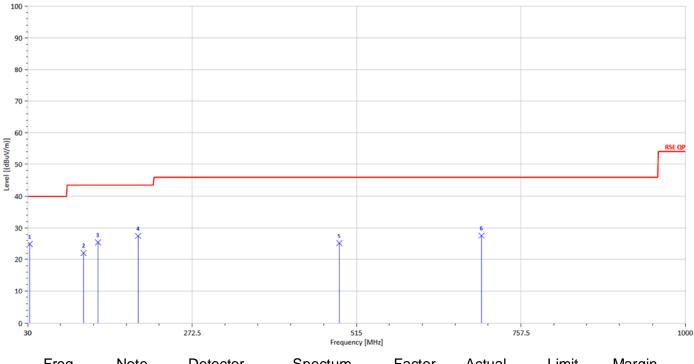

⊢req.	Note	Detector	Spectum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
32.91	S	Peak	33.59	-8.75	24.85	40	-15.15	
112.45	S	Peak	38.40	-16.33	22.07	43.5	-21.43	
133.79	S	Peak	41.17	-15.82	25.36	43.5	-18.14	
192.96	S	Peak	45.48	-18.05	27.44	43.5	-16.06	
489.78	S	Peak	32.78	-7.65	25.13	46	-20.87	
699.30	S	Peak	32.64	-5.09	27.55	46	-18.45	



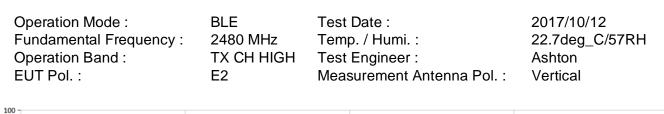


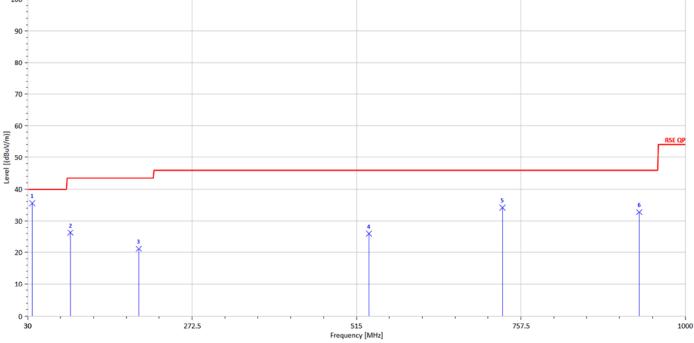

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	36.79	S	Peak	46.53	-10.93	35.60	40	-4.40
	93.05	S	Peak	45.19	-18.95	26.23	43.5	-17.27
	193.93	S	Peak	39.11	-17.94	21.16	43.5	-22.34
	533.43	S	Peak	32.99	-7.09	25.90	46	-20.10
	730.34	S	Peak	38.90	-4.67	34.23	46	-11.77
	932.10	S	Peak	34.50	-1.72	32.77	46	-13.23





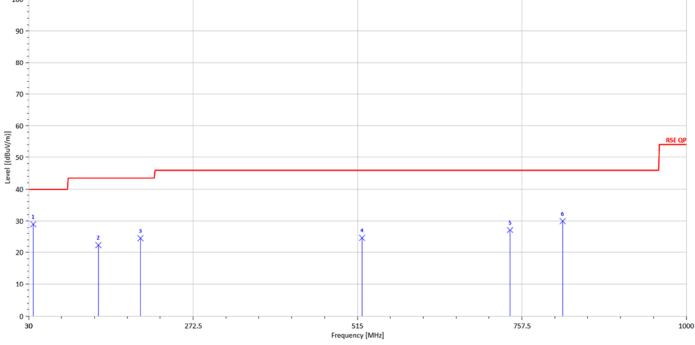

	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	36.79	S	Peak	39.90	-10.93	28.97	40	-11.03
	132.82	S	Peak	38.12	-15.76	22.36	43.5	-21.14
	194.90	S	Peak	42.32	-17.85	24.47	43.5	-19.03
	521.79	S	Peak	31.85	-7.26	24.59	46	-21.41
	740.04	S	Peak	31.18	-4.09	27.09	46	-18.91
	817.64	S	Peak	33.00	-3.10	29.90	46	-16.10



Radiated Spurious Emission Measurement Result For Frequency above 1GHz

F	Dperation Mode : Fundamental Frequency : Dperation Band : EUT Pol. :	BLE 2402 MHz Tx CH LOW E2	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :	2017/10/12 22.7deg_C/57RH Ashton Vertical
100 -				
90 -	-			
80 -	-			
				RSE PK
70 -				
60 -	-	5		RSE A
50 -	-	Ť.		ISE A
	. ¥	*		
40 -	Ť ¥			
30 -				
20 -				
10	-			
10 -				
0 - 10	2000 7375	. I	13750 20 Frequency [MHz]	0125 26

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Peak	30.46	7.66	38.12	74	-35.88
4804.00	Н	Average	21.27	7.66	28.93	54	-25.07
7206.00	Н	Peak	29.28	14.95	44.23	74	-29.77
7206.00	Н	Average	21.58	14.95	36.53	54	-17.47
9608.00	Н	Peak	34.70	19.11	53.81	74	-20.19
9608.00	Н	Average	27.79	19.11	46.90	54	-7.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




9608.00

9608.00

н

н

Operation Mode :	BLE	Test Date :	2017/10/12
Fundamental Frequency :	2402 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH LOW	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

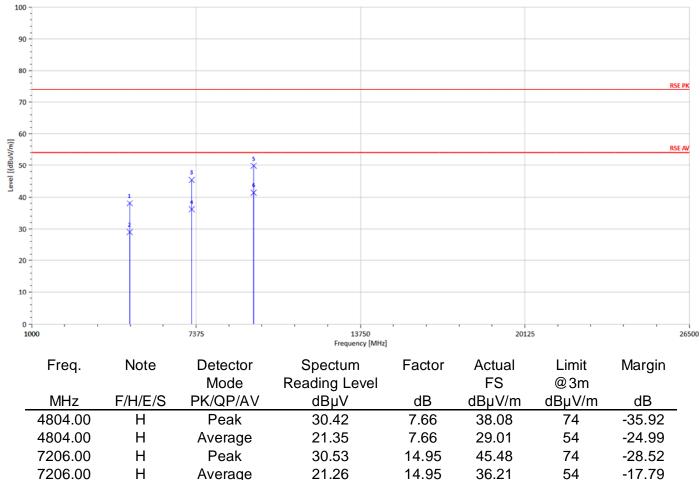

30.72

22.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Peak

Average

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

19.11

19.11

49.83

41.45

-24.17


-12.55

74

54




Operation Mode :	BLE	Test Date :	2017/10/12
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH MID	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

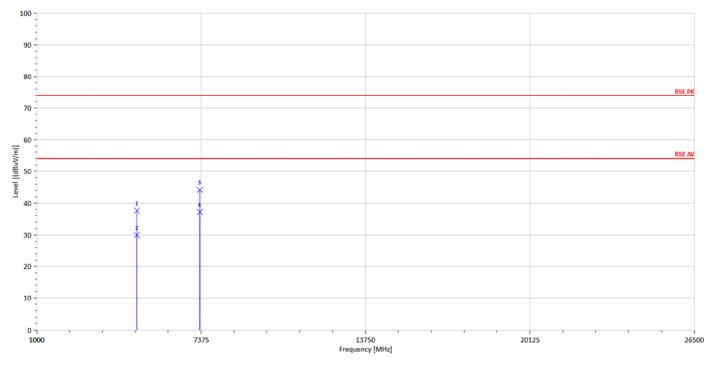

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4884.00	Н	Peak	30.00	7.62	37.62	74	-36.38
4884.00	Н	Average	22.31	7.62	29.93	54	-24.07
7326.00	Н	Peak	29.42	14.80	44.22	74	-29.78
7326.00	Н	Average	22.43	14.80	37.23	54	-16.77




Operation Mode :	BLE	Test Date :	2017/10/12
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH MID	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

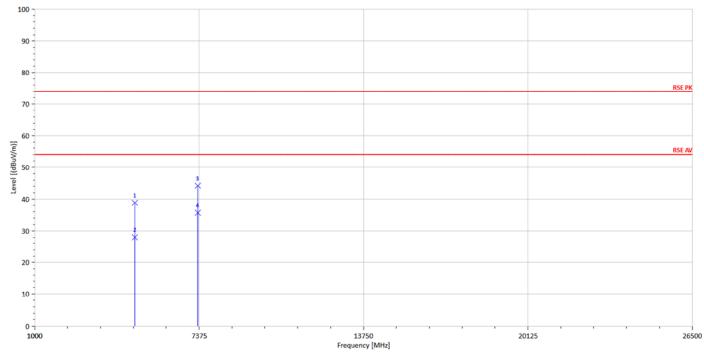

I	Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
48	384.00	Н	Peak	31.28	7.62	38.90	74	-35.10
48	384.00	Н	Average	20.35	7.62	27.97	54	-26.03
73	326.00	Н	Peak	29.52	14.80	44.32	74	-29.68
73	326.00	Н	Average	20.94	14.80	35.74	54	-18.26



Operation Mode :	BLE	Test Date :	2017/10/12
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH HIGH	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical
100			

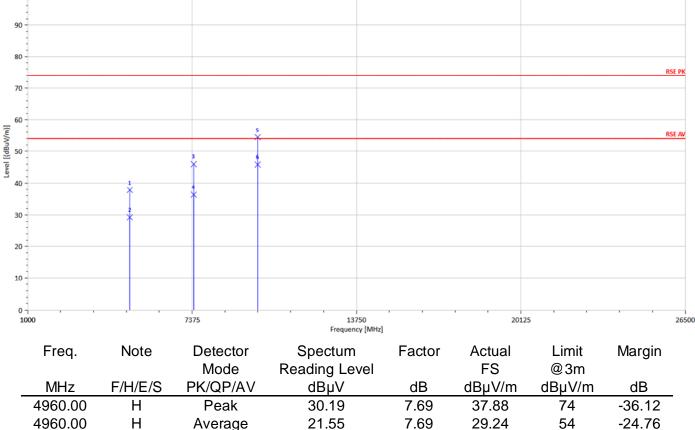

30.61

20.96

35.70

27.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Peak

Average

Peak

Average

Н

н

н

н

7440.00

7440.00

9920.00

9920.00

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-Train documents issued by the company subject to is defined conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

15.43

15.43

18.74

18.74

46.04

36.39

54.44

45.93

74

54

74

54

-27.96

-17.61

-19.56

-8.07



7440.00

9920.00


9920.00

н

н

н

Operation Mode :BLEFundamental Frequency :2480 MHzOperation Band :Tx CH HIGHEUT Pol. :E2	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :	2017/10/12 22.7deg_C/57RH Ashton Horizontal
--	---	--

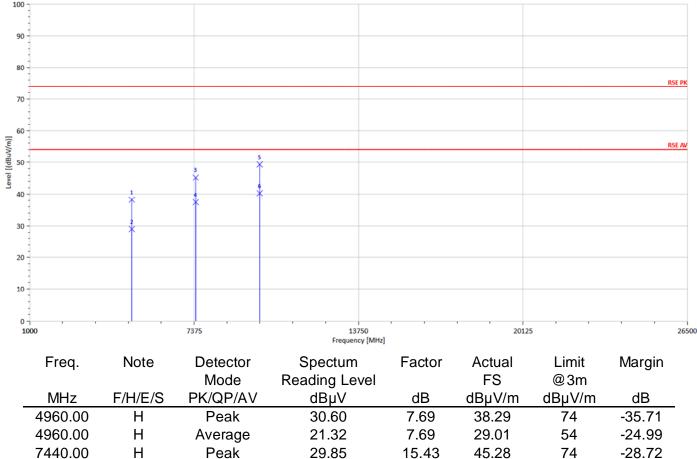

22.05

30.58

21.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Average

Peak

Average

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

15.43

18.74

18.74

37.48

49.31

40.32

54

74

54

-16.52

-24.69

-13.68



11 PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 **Measurement Equipment Used:**

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Spectrum Analyzer	KEYSIGHT	N9010A	MY51440113	06/20/2017	06/19/2018		
Coaxial Cable 30cm	WOKEN	00100A1F1A 195C	RF01	12/12/2016	12/11/2017		
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017		
Splitter	RF-LAMBAD	RFLT2W1G18 G	RF35	12/12/2016	12/11/2017		
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017		
DC Power Supply	Agilent	E3640A	MY53140006	05/02/2017	05/01/2018		

11.3 Test Set-up:



11.4 Measurement Procedure:


- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit:

Set the RBW = 100kHz & VBW = 300 kHz.

- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless to herwise stated the textus single(s) textual and textual to be the state and state textual to be days only. 防非方式 就明 : 此報告結果僅針測試之樣品負責、同時此樣品僅保留的人気。本報告未經公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




11.5 **Measurement Result:**

BLE mode								
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result					
2402	-13.37	8	PASS					
2442	-12.94	8	PASS					
2480	-13.95	8	PASS					

NOTE: cable loss as 0.5dB that offsets in the spectrum


BLE mode Power Spectral Density Test Plot (CH-Low)

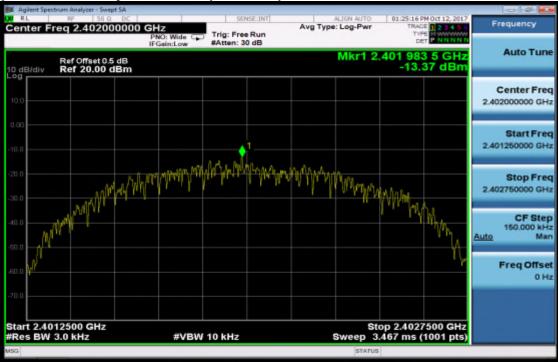


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Power Spectral Density Test Plot (CH-Mid)

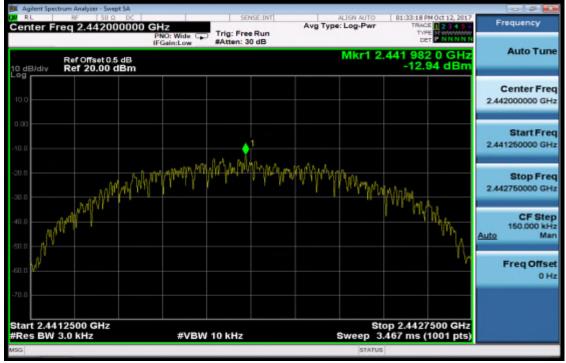

Power Spectral Density Test Plot (CH-High)

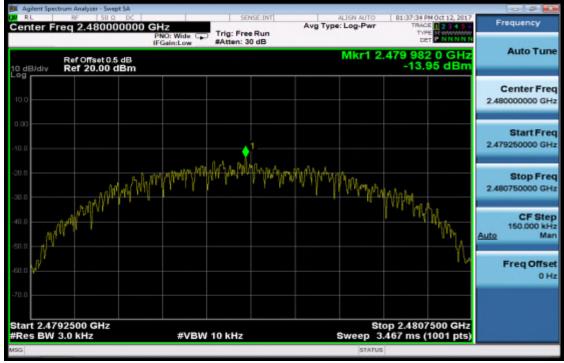

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 ANTENNA REQUIREMENT

Standard Applicable: 12.1

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 **Antenna Connected Construction:**

An embedded-in antenna design is used.

The antenna is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.