



# FCC Radio Test Report

## FCC ID: M82-SCN100

**Report No.** : BTL-FCCP-4-2212T004  
**Equipment** : Computer  
**Model Name** : SCN-100-9, SCN-100-9xxxxxxxxxxxxxxxx (where "x" may be any alphanumeric character, "-" or blank for marketing purpose and no impact safety related critical components and constructions)  
**Brand Name** :  
 (1) ADVANTECH or   
 (2)   
**Applicant** : Advantech Co., Ltd.  
**Address** : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan.  
**Radio Function** : RLAN 5 GHz (U-NII 1, U-NII 2a, U-NII 2c, U-NII 3)  
**FCC Rule Part(s)** : FCC CFR Title 47, Part 15, Subpart E (15.407)  
**Measurement Procedure(s)** : ANSI C63.10-2013  
**Date of Receipt** : 2022/12/9  
**Date of Test** : 2023/1/30 ~ 2023/10/17  
**Date of Receipt** : 2023/11/7

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

**Prepared by** :   
 Jerry Chuang, Supervisor

**Approved by** :   
 Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl\_qa@newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

**CONTENTS**

1	SUMMARY OF TEST RESULTS	6
1.1	TEST FACILITY	7
1.2	MEASUREMENT UNCERTAINTY	7
1.3	TEST ENVIRONMENT CONDITIONS	7
1.4	DUTY CYCLE	8
2	GENERAL INFORMATION	10
2.1	DESCRIPTION OF EUT	10
2.2	TEST MODES	14
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.4	SUPPORT UNITS	17
3	AC POWER LINE CONDUCTED EMISSIONS TEST	18
3.1	LIMIT	18
3.2	TEST PROCEDURE	18
3.3	DEVIATION FROM TEST STANDARD	18
3.4	TEST SETUP	19
3.5	TEST RESULT	19
4	RADIATED EMISSIONS TEST	20
4.1	LIMIT	20
4.2	TEST PROCEDURE	21
4.3	DEVIATION FROM TEST STANDARD	21
4.4	TEST SETUP	22
4.5	EUT OPERATING CONDITIONS	23
4.6	TEST RESULT – BELOW 30 MHZ	23
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	23
4.8	TEST RESULT – ABOVE 1 GHZ	23
5	BANDWIDTH TEST	24
5.1	LIMIT	24
5.2	TEST PROCEDURE	24
5.3	DEVIATION FROM TEST STANDARD	24
5.4	TEST SETUP	24
5.5	EUT OPERATING CONDITIONS	24
5.6	TEST RESULT	24
6	OUTPUT POWER TEST	25
6.1	LIMIT	25
6.2	TEST PROCEDURE	25
6.3	DEVIATION FROM TEST STANDARD	25
6.4	TEST SETUP	25
6.5	EUT OPERATING CONDITIONS	25
6.6	TEST RESULT	25
7	POWER SPECTRAL DENSITY	26
7.1	LIMIT	26
7.2	TEST PROCEDURE	26
7.3	DEVIATION FROM TEST STANDARD	26
7.4	TEST SETUP	26
7.5	EUT OPERATING CONDITIONS	26
7.6	TEST RESULT	26
8	LIST OF MEASURING EQUIPMENTS	27

9	EUT TEST PHOTO	29
10	EUT PHOTOS	29
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	30
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	35
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	38
APPENDIX D	BANDWIDTH	241
APPENDIX E	OUTPUT POWER	322
APPENDIX F	POWER SPECTRAL DENSITY	330

**REVISION HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2212T004	R00	Original Report.	2023/9/4	Invalid
BTL-FCCP-4-2212T004	R01	Added conducted test items.	2023/11/7	Valid

## 1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a)	Bandwidth	APPENDIX D	Pass	-----
15.407(a)	Output Power	APPENDIX E	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX F	Pass	-----
15.407(c)	Antenna Requirement	-----	Pass	-----
15.203	Automatically Discontinue Transmission	-----	Pass	<b>NOTE (3)</b>

**NOTE:**

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

### 1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan  
(FCC DN: TW0659)

C05       CB08       CB11       SR10       SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan  
(FCC DN: TW0659)

C06       CB21       CB22

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k = 2$ , providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{cispr}}$  requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB21	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Occupied Bandwidth	0.5332
Output Power	0.3669
Power Spectral Density	0.6590
Conducted Spurious emissions	0.5416
Conducted Band edges	0.5335
Frequency Stability	0.5333

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.





### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	16 °C, 63 %	AC 120V	Jay Tien
Radiated emissions below 1 GHz	Refer to data	AC 120V	Mark Wang
Radiated emissions above 1 GHz	Refer to data	AC 120V	Mark Wang
Bandwidth	21.1 °C, 59 %	AC 120V	Jerry Chuang
Output Power	21.1 °C, 59 %	AC 120V	Jay Tien
Power Spectral Density	21.1 °C, 59 %	AC 120V	Jerry Chuang







## 1.4 DUTY CYCLE

If duty cycle is  $\geq 98\%$ , duty factor is not required.  
 If duty cycle is  $< 98\%$ , duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	2.090	1	2.090	2.150	97.21%	0.12
IEEE 802.11n (HT20)	4.030	1	4.030	4.090	98.53%	0.06
IEEE 802.11n (HT40)	3.970	1	3.970	4.060	97.78%	0.10
IEEE 802.11ac (VHT80)	3.950	1	3.950	4.060	97.29%	0.12
IEEE 802.11ac (VHT160)	3.970	1	3.970	4.030	98.51%	0.07
IEEE 802.11ax (HE20)	4.010	1	4.010	4.080	98.28%	0.08
IEEE 802.11ax (HE40)	3.950	1	3.950	4.050	97.53%	0.11
IEEE 802.11ax (HE80)	3.950	1	3.950	4.040	97.77%	0.10
IEEE 802.11ax (HE160)	3.970	1	3.970	4.050	98.02%	0.09

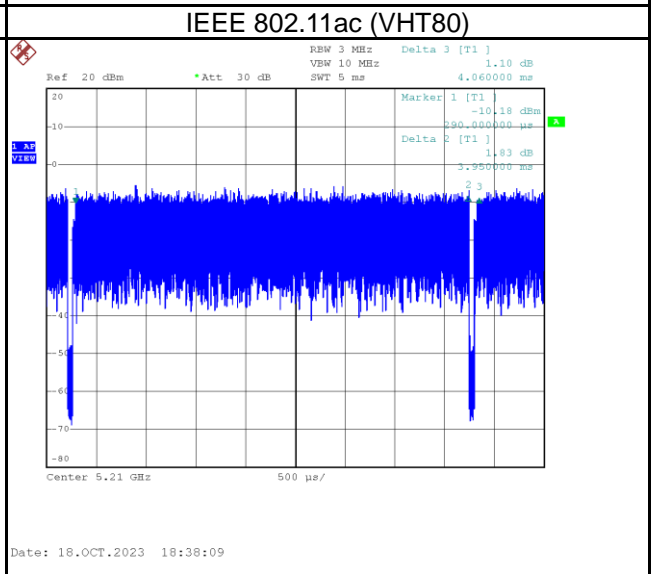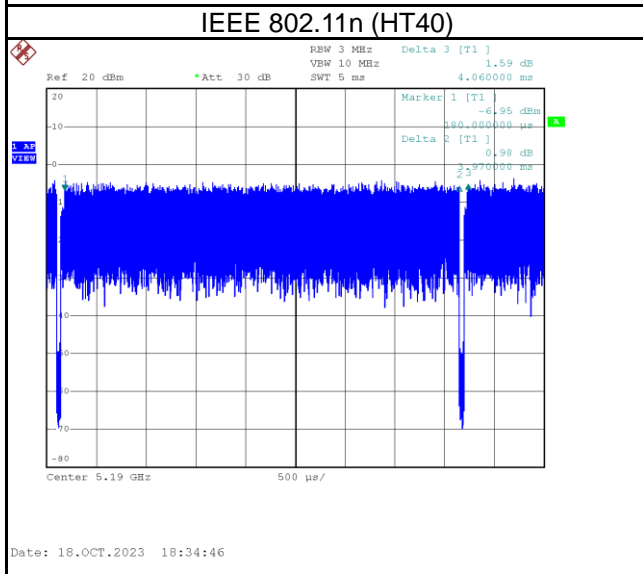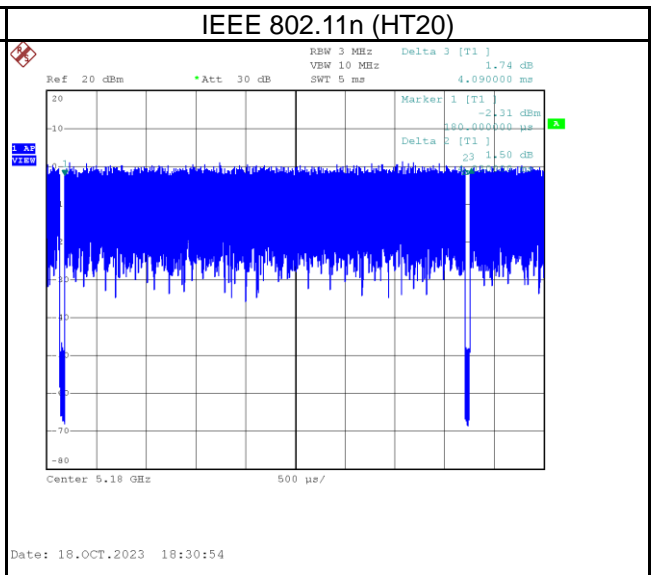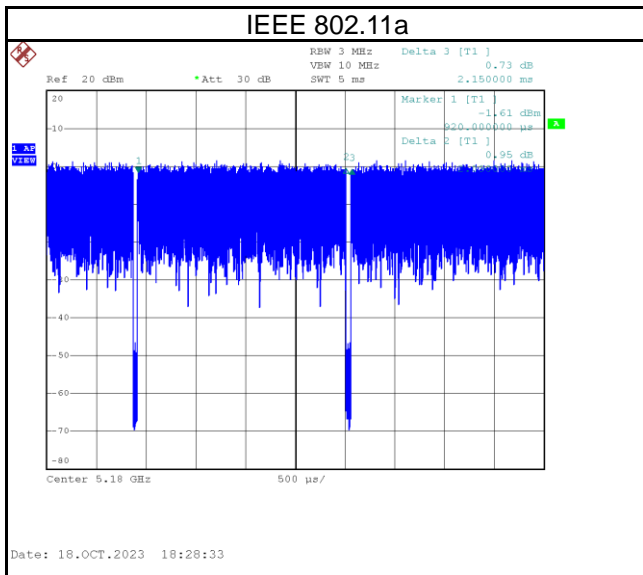



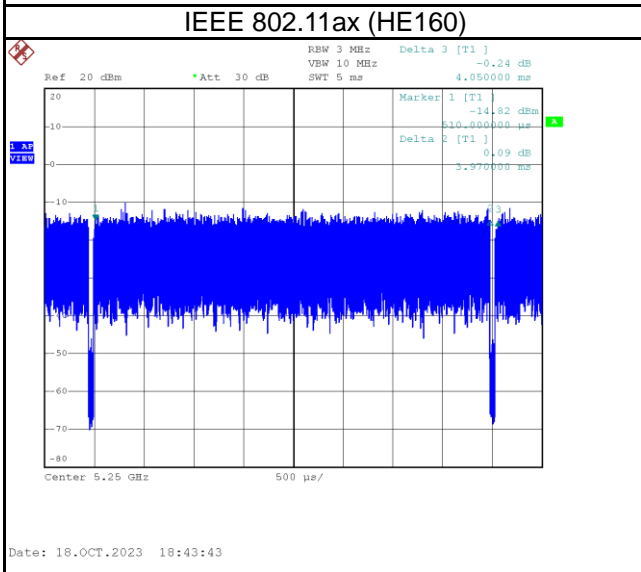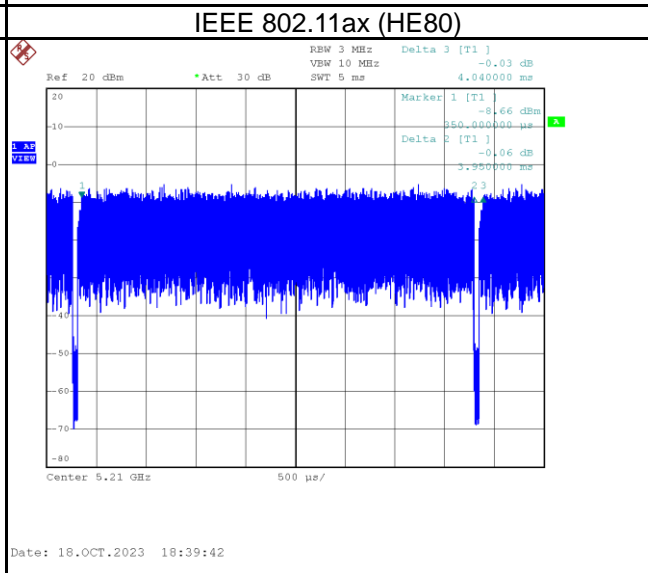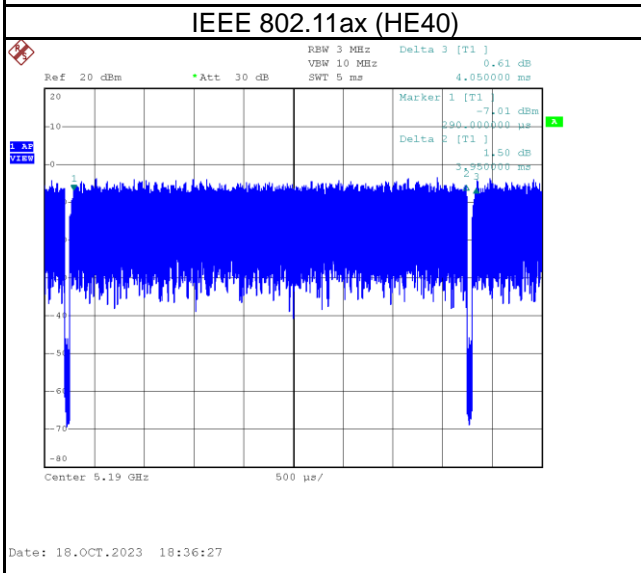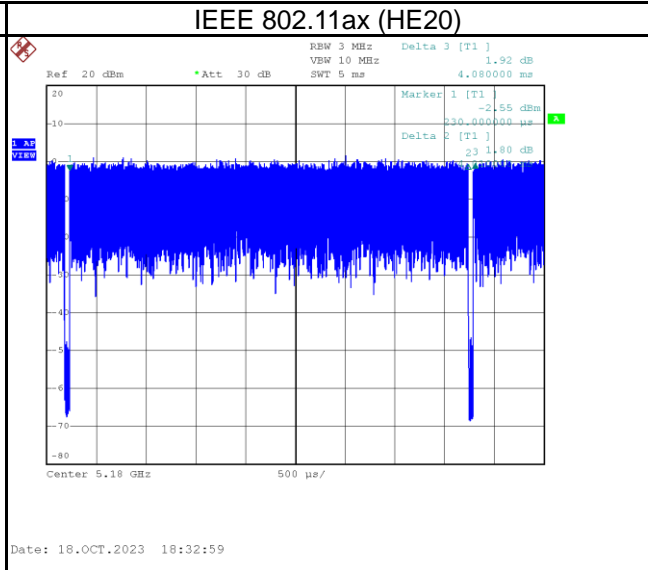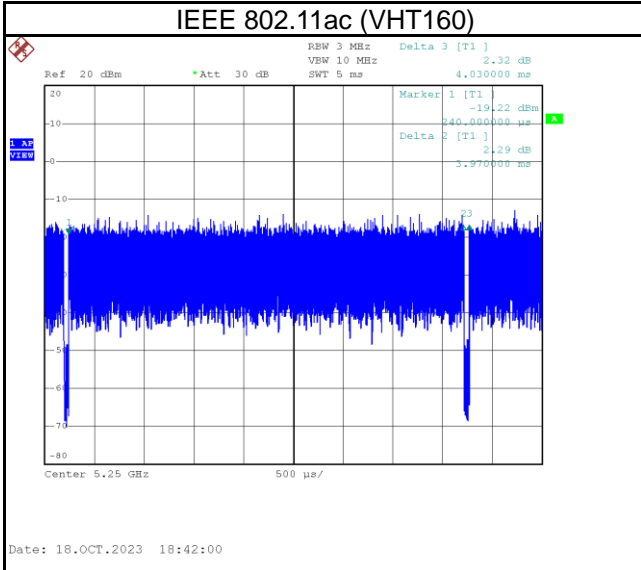



## 2 GENERAL INFORMATION

### 2.1 DESCRIPTION OF EUT

Equipment	Computer
Model Name	SCN-100-9, SCN-100-9xxxxxxxxxxxxxxxx (where "x" may be any alphanumeric character, "-" or blank for marketing purpose and no impact safety related critical components and constructions)
Brand Name	(1) ADVANTECH or  (2) 
Model Difference	Different model distribute to different area.
Power Source	DC voltage supplied from AC/DC Adapter.
Power Rating	EUT: 12-32Vdc, 10-3.75A For Adapter: I/P: 100-240V~2.3A, 50-60Hz O/P: 24.0V=7.5A 180.0W
Products Covered	1 * Adapter: FSP / FSP180-AAAN3
WIFI+BT Module	Intel® Wi-Fi 6E AX210 / AX210NGW
Operation Band	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Maximum Output Power for Antenna 1 UNII-1	IEEE 802.11a: 15.73 dBm (0.0374 W) IEEE 802.11n (HT20): 15.96 dBm (0.0394 W) IEEE 802.11n (HT40): 17.57 dBm (0.0571 W) IEEE 802.11ac (VHT80): 15.10 dBm (0.0324 W) IEEE 802.11ac (VHT160): 15.70 dBm (0.0372 W) IEEE 802.11ax (HE20): 15.97 dBm (0.0395 W) IEEE 802.11ax (HE40): 17.61 dBm (0.0577 W) IEEE 802.11ax (HE80): 14.54 dBm (0.0284 W) IEEE 802.11ax (HE160): 15.44 dBm (0.0350 W)
Maximum Output Power for Antenna 1 UNII-2A	IEEE 802.11a: 21.39 dBm (0.1377 W) IEEE 802.11n (HT20): 21.47 dBm (0.1403 W) IEEE 802.11n (HT40): 21.39 dBm (0.1377 W) IEEE 802.11ac (VHT80): 15.70 dBm (0.0372 W) IEEE 802.11ax (HE20): 21.65 dBm (0.1462 W) IEEE 802.11ax (HE40): 21.61 dBm (0.1449 W) IEEE 802.11ax (HE80): 15.67 dBm (0.0369 W)
Maximum Output Power for Antenna 1 UNII-2C	IEEE 802.11a: 21.40 dBm (0.1380 W) IEEE 802.11n (HT20): 21.17 dBm (0.1309 W) IEEE 802.11n (HT40): 21.21 dBm (0.1321 W) IEEE 802.11ac (VHT80): 21.07 dBm (0.1279 W) IEEE 802.11ac (VHT160): 16.28 dBm (0.0425 W) IEEE 802.11ax (HE20): 20.96 dBm (0.1247 W) IEEE 802.11ax (HE40): 21.23 dBm (0.1327 W) IEEE 802.11ax (HE80): 20.35 dBm (0.1084 W) IEEE 802.11ax (HE160): 16.49 dBm (0.0446 W)
Maximum Output Power for Antenna 1 UNII-3	IEEE 802.11a: 21.17 dBm (0.1309 W) IEEE 802.11n (HT20): 21.18 dBm (0.1312 W) IEEE 802.11n (HT40): 21.23 dBm (0.1327 W) IEEE 802.11ac (VHT80): 19.92 dBm (0.0982 W) IEEE 802.11ax (HE20): 21.21 dBm (0.1321 W) IEEE 802.11ax (HE40): 20.91 dBm (0.1233 W) IEEE 802.11ax (HE80): 19.92 dBm (0.0982 W)

Maximum Output Power for Antenna 1 Straddle Channel	IEEE 802.11n (HT20): 19.99 dBm (0.0998 W) IEEE 802.11n (HT40): 21.00 dBm (0.1259 W) IEEE 802.11ac (VHT80): 21.01 dBm (0.1262 W) IEEE 802.11ax (HE20): 19.80 dBm (0.0955 W) IEEE 802.11ax (HE40): 20.92 dBm (0.1236 W) IEEE 802.11ax (HE80): 20.29 dBm (0.1069 W)
Maximum Output Power for Antenna 2 UNII-1	IEEE 802.11a: 15.73 dBm (0.0374 W) IEEE 802.11n (HT20): 15.94 dBm (0.0393 W) IEEE 802.11n (HT40): 16.22 dBm (0.0419 W) IEEE 802.11ac (VHT80): 13.55 dBm (0.0226 W) IEEE 802.11ac (VHT160): 15.40 dBm (0.0347 W) IEEE 802.11ax (HE20): 15.97 dBm (0.0395 W) IEEE 802.11ax (HE40): 16.23 dBm (0.0420 W) IEEE 802.11ax (HE80): 13.31 dBm (0.0214 W) IEEE 802.11ax (HE160): 15.19 dBm (0.0330 W)
Maximum Output Power for Antenna 2 UNII-2A	IEEE 802.11a: 21.16 dBm (0.1306 W) IEEE 802.11n (HT20): 20.95 dBm (0.1245 W) IEEE 802.11n (HT40): 20.23 dBm (0.1054 W) IEEE 802.11ac (VHT80): 15.36 dBm (0.0344 W) IEEE 802.11ax (HE20): 21.45 dBm (0.1396 W) IEEE 802.11ax (HE40): 21.05 dBm (0.1274 W) IEEE 802.11ax (HE80): 14.86 dBm (0.0306 W)
Maximum Output Power for Antenna 2 UNII-2C	IEEE 802.11a: 21.16 dBm (0.1306 W) IEEE 802.11n (HT20): 20.89 dBm (0.1227 W) IEEE 802.11n (HT40): 20.84 dBm (0.1213 W) IEEE 802.11ac (VHT80): 20.16 dBm (0.1038 W) IEEE 802.11ac (VHT160): 13.98 dBm (0.0250 W) IEEE 802.11ax (HE20): 20.93 dBm (0.1239 W) IEEE 802.11ax (HE40): 20.84 dBm (0.1213 W) IEEE 802.11ax (HE80): 19.61 dBm (0.0914 W) IEEE 802.11ax (HE160): 14.98 dBm (0.0315 W)
Maximum Output Power for Antenna 2 UNII-3	IEEE 802.11a: 20.92 dBm (0.1236 W) IEEE 802.11n (HT20): 20.92 dBm (0.1236 W) IEEE 802.11n (HT40): 20.96 dBm (0.1247 W) IEEE 802.11ac (VHT80): 19.87 dBm (0.0971 W) IEEE 802.11ax (HE20): 20.95 dBm (0.1245 W) IEEE 802.11ax (HE40): 20.88 dBm (0.1225 W) IEEE 802.11ax (HE80): 19.95 dBm (0.0989 W)
Maximum Output Power for Antenna 2 Straddle Channel	IEEE 802.11n (HT20): 19.76 dBm (0.0946 W) IEEE 802.11n (HT40): 20.56 dBm (0.1138 W) IEEE 802.11ac (VHT80): 21.01 dBm (0.1262 W) IEEE 802.11ax (HE20): 19.87 dBm (0.0971 W) IEEE 802.11ax (HE40): 20.46 dBm (0.1112 W) IEEE 802.11ax (HE80): 20.66 dBm (0.1164 W)
Test Software Version	DRTU V03227.22.190.0
Test Model	SCN-100-9
Sample Status	Engineering Sample
EUT Modification(s)	N/A

**NOTE:**

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

**(2) Channel List:**

UNII-1					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				



UNII-2A					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

UNII-3					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

802.11ac (VHT160) 802.11ax (HE160)	
Channel	Frequency (MHz)
50	5250
114	5570

## (3) Table for Filed Antenna:

Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
1		PC165.54.0076A	PCB	I-PEX MFH4L	2400-2500	5.34
					5150-5725	4.95
					5725-5850	5.33
2		PC166.54.0061A	PCB	I-PEX MFH4L	2400-2500	4.14
					5150-5725	6.76
					5725-5850	6.52

## NOTE:

- (a) The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitters and receivers (1T1R).
- (b) For Antenna 1:  
The Directional Gain = maximum antenna gain is 5.33 dBi < 6 dBi.  
Thus, the limits of Power Spectral Density and Output Power should not be reduced.
- (c) For Antenna 2:  
The Directional Gain = maximum antenna gain is 6.76 dBi > 6 dBi.  
To UNII-1,  
the reduced power spectral density limits =  $17 - (6.76 - 6) = 10.24$   
the reduced output power limits =  $24 - (6.76 - 6) = 23.24$   
To UNII-2A and UNII-2C,  
the reduced power spectral density limits =  $11 - (6.76 - 6) = 10.24$ .  
the reduced output power limits =  $24 - (6.76 - 6) = 23.24$   
To UNII-3,  
the reduced power spectral density limits and output power limits =  $30 - (6.76 - 6) = 29.24$ .

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

## (5) Operating Mode and Antenna Configuration

Operating Mode \ TX Mode	1 TX
IEEE 802.11b	V (Antenna 1 or Antenna 2)
IEEE 802.11g	V (Antenna 1 or Antenna 2)
IEEE 802.11n (HT20)	V (Antenna 1 or Antenna 2)
IEEE 802.11n (HT40)	V (Antenna 1 or Antenna 2)
IEEE 802.11ac (VHT80)	V (Antenna 1 or Antenna 2)
IEEE 802.11ac (VHT160)	V (Antenna 1 or Antenna 2)
IEEE 802.11ax (HE20)	V (Antenna 1 or Antenna 2)
IEEE 802.11ax (HE40)	V (Antenna 1 or Antenna 2)
IEEE 802.11ax (HE80)	V (Antenna 1 or Antenna 2)
IEEE 802.11ax (HE160)	V (Antenna 1 or Antenna 2)

**2.2 TEST MODES**

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11ac (VHT80)	58	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/48 52/64 100/140 149/165	Bandedge
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46 54/62 102/134 151/159	
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42 58 106/122 155	
	IEEE 802.11ac (VHT160) IEEE 802.11ax (HE160)	50 114	
	IEEE 802.11a	36/40/48 52/56/64 100/120/140 149/157/165	Harmonic
	IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/40/48 52/56/64 100/120/140/144 149/157/165	
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46 54/62 102/118/134/142 151/159	
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42 58 106/122/138 155	
	IEEE 802.11ac (VHT160) IEEE 802.11ax (HE160)	50 114	
	IEEE 802.11a	36/40/48 52/56/64 100/120/140 149/157/165	
Bandwidth & Power Spectral Density & Output Power	IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/40/48 52/56/64 100/120/140/144 149/157/165	-
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46 54/62 102/118/134/142 151/159	
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42 58 106/122/138 155	
	IEEE 802.11ac (VHT160) IEEE 802.11ax (HE160)	50 114	
	IEEE 802.11a	36/40/48 52/56/64 100/120/140 149/157/165	


**NOTE:**

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (3) For IEEE 802.11ax modes, refer to TCB Workshop presentations on October 3, 2018, after evaluated, all testing are performed under fully loaded conditions (Full RU). In the test data, only the partially loaded conditions data are marked with tones.


### 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

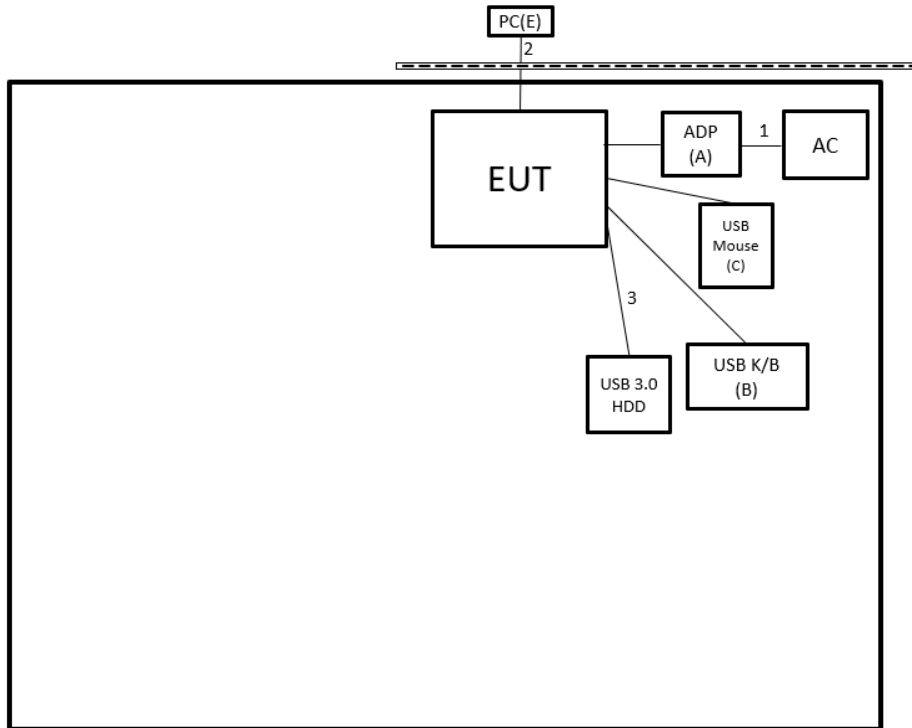

Radiated Emissions Test

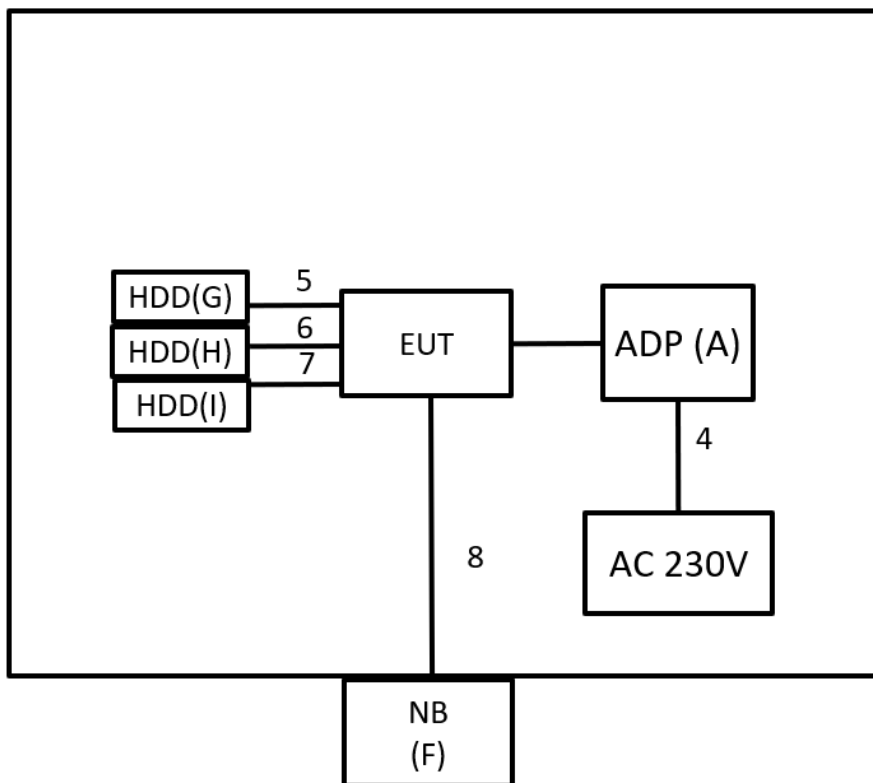



**2.4 SUPPORT UNITS**

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	FSP GROUP	FSP180-AAAN3	N/A	Supplied by test requester.
B	USB K/B	DELL	KB216t	CN-0W33XP-L0 300-797-05TY-A 03	Furnished by test lab.
C	USB Mouse	DELL	MOCZUL	CN-049TWY-PR C00-79E-01HA	Furnished by test lab.
D	USB 3.0 HDD	WD	WDBC3C0010BS L-0B	WX81A88ALJU C	Furnished by test lab.
E	PC	DELL	OptiPlex 790 MT	64NJVBX	Furnished by test lab.
F	NB	HP	TPN-C125	N/A	Furnished by test lab.
G	USB 2.5" HDD	AKITIO	Neutrino U3.1	SK21D1621D00 3F	Furnished by test lab.
H	USB 2.5" HDD	AKITIO	Neutrino U3.1	SK21D1621D00 3F	Furnished by test lab.
I	USB 3.0 HDD	WD	WDBC3C0010BS L-0B	WX81A88ALJU C	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1.8m	Power Cable	Furnished by test lab.
2	N/A	N/A	6m	RJ-45 Cable	Furnished by test lab.
3	N/A	N/A	1.5m	USB to TypeC Cable	Furnished by test lab.
4	N/A	N/A	1m	Power Cable	Furnished by test lab.
5	N/A	N/A	0.6m	TypeC to TypeC Cable	Furnished by test lab.
6	N/A	N/A	1m	TypeC to TypeC Cable	Furnished by test lab.
7	N/A	N/A	0.3m	TypeC to TypeC Cable	Furnished by test lab.
8	N/A	N/A	12m	RJ45 Cable	Furnished by test lab.

### 3 AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

**NOTE:**

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)  
 Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level (dB $\mu$ V)		Correct Factor (dB)		Measurement Value (dB $\mu$ V)
38.22	+	3.45	=	41.67

Measurement Value (dB $\mu$ V)		Limit Value (dB $\mu$ V)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).  
 All other support equipment were powered from an additional LISN(s).  
 The LISN provides 50 Ohm/50 $\mu$ H of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.  
 The end of the cable will be terminated, using the correct terminating impedance.  
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


**NOTE:**

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.  
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4 TEST SETUP

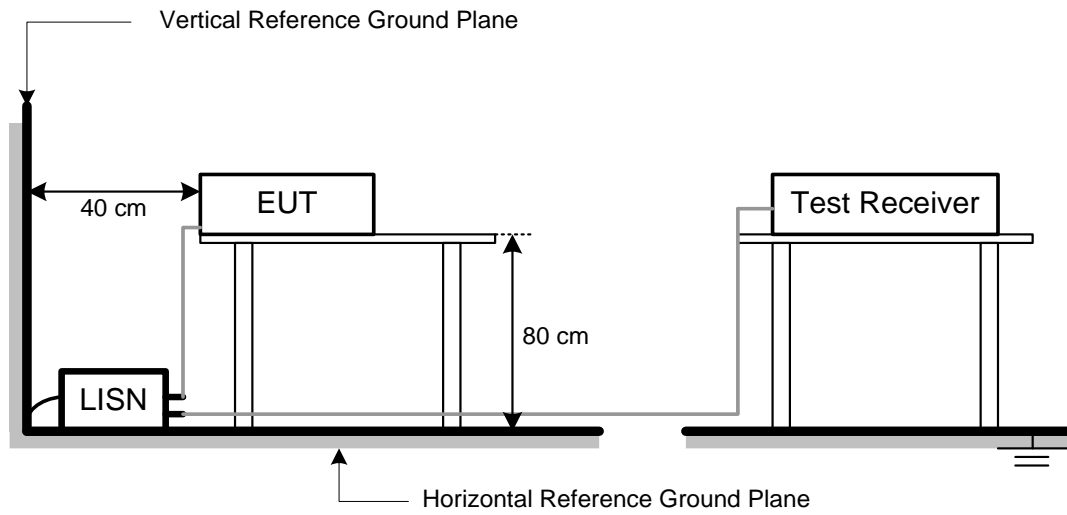

### 3.5 TEST RESULT

Please refer to the APPENDIX A.

## 4 RADIATED EMISSIONS TEST

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBµV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

#### NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB)		Measurement Value (dBuV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBuV/m)		Limit Value (dBuV/m)		Margin Level (dB)
21.22	-	68.3	=	-47.08

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

#### 4.3 DEVIATION FROM TEST STANDARD


No deviation.


## 4.4 TEST SETUP

9 kHz to 30 MHz

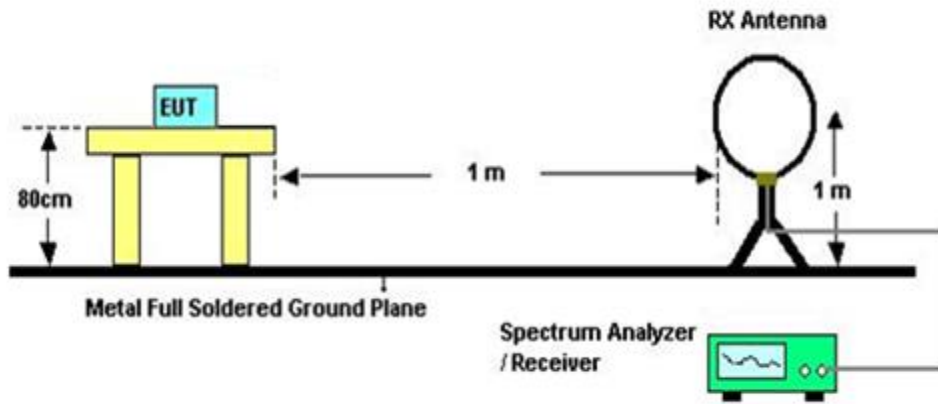

30 MHz to 1 GHz

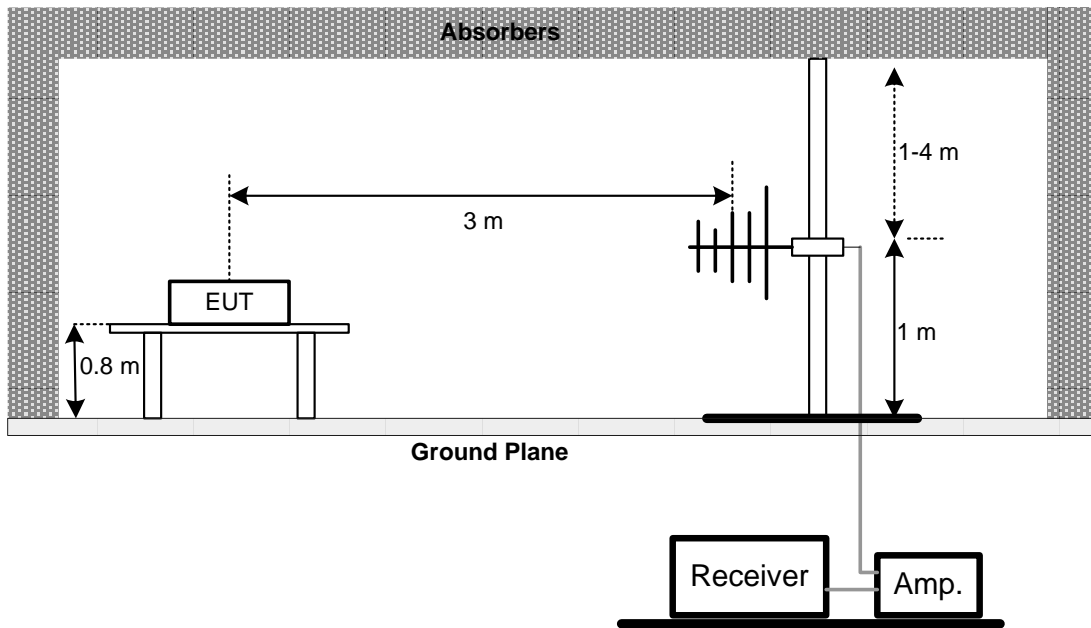

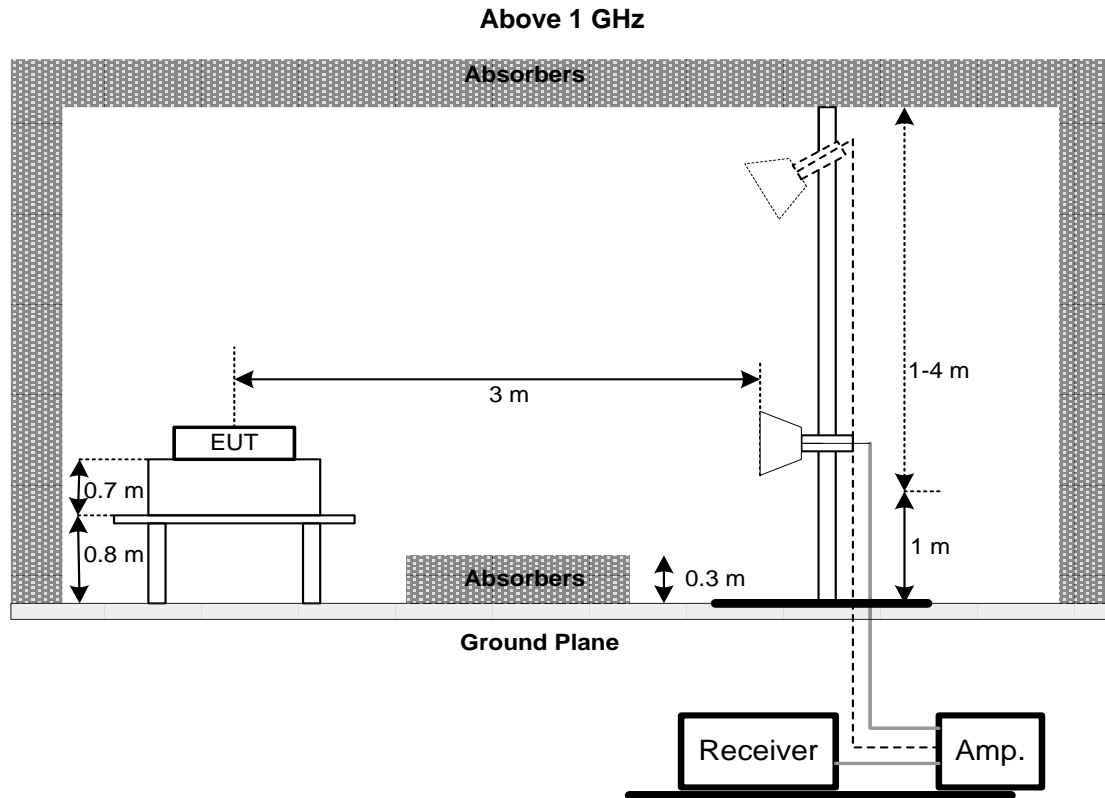

#### 4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

**NOTE:**

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

#### 4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

#### 4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

**NOTE:**

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

## 5 BANDWIDTH TEST

### 5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

### 5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.3 DEVIATION FROM TEST STANDARD

No deviation.

### 5.4 TEST SETUP



### 5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 5.6 TEST RESULT

Please refer to the APPENDIX D.



## 6 OUTPUT POWER TEST

### 6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		1 Watt (30dBm)	5470-5725
			5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


### 6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
  - a)Method PM (Measurement using an RF average power meter):
    - (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied  
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.  
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.  
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
    - (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
    - (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
    - (iv) Adjust the measurement in dBm by adding 10 log (1/x) where x is the duty cycle (e.g., 10 log (1/0.25) if the duty cycle is 25%).

### 6.3 DEVIATION FROM TEST STANDARD

No deviation.

### 6.4 TEST SETUP

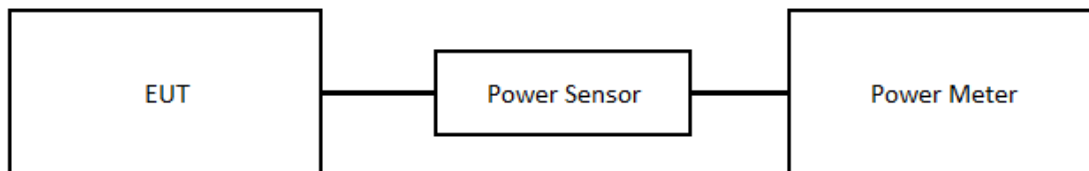

### 6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULT

Please refer to the APPENDIX E.

## 7 POWER SPECTRAL DENSITY

### 7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	Other than Mobile and portable: 17 dBm/MHz	5150-5250
		Mobile and portable: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		30 dBm/500 kHz	5470-5725
			5725-5850

### 7.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

### 7.3 DEVIATION FROM TEST STANDARD

No deviation.

### 7.4 TEST SETUP

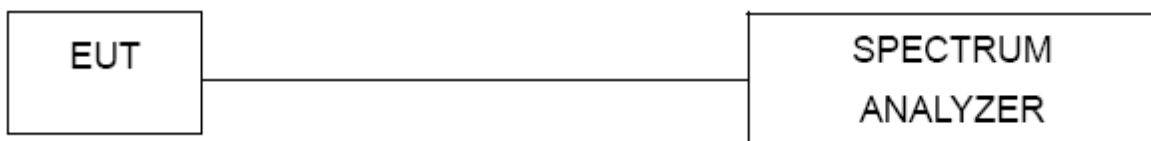

### 7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULT

Please refer to the APPENDIX F.

## 8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101521	2022/9/28	2023/9/27
2	Test Cable	EMCI	EMCCFD300-BM-BMR-5000	220331	2022/3/31	2023/3/30
3	EMI Test Receiver	R&S	ESR 7	101433	2022/11/16	2023/11/15
4	Measurement Software	EZ	EZ_EMCI (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2022/9/19	2023/9/18
2	Preamplifier	EMCI	EMC118A45SE	980819	2023/3/7	2024/3/6
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2022/9/28	2023/9/27
4	Preamplifier	EMCI	EMC001340	980579	2022/9/30	2023/9/29
5	Test Cable	EMCI	EMC104-SM-SM-1000	220319	2023/3/14	2024/3/13
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2023/3/14	2024/3/13
7	Test Cable	EMCI	EMC104-SM-SM-7000	220324	2023/3/14	2024/3/13
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2023/2/24	2024/2/23
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2022/9/19	2023/9/18
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2022/5/18	2023/5/17
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2022/5/18	2023/5/17
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2022/5/20	2023/5/19
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2022/5/20	2023/5/19
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2023/3/14	2024/3/13
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2023/3/14	2024/3/13
16	Measurement Software	EZ	EZ_EMCI (Version NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2023/3/27	2024/3/25

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Keysight	8990B	MY51000517	2023/3/15	2024/3/13
2	Power Sensor	Keysight	N1923A	MY58310005	2023/3/15	2024/3/13

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 40	100129	2023/3/27	2024/3/25

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.  
All calibration period of equipment list is one year.

**9 EUT TEST PHOTO**


Please refer to document Appendix No.: TP-2212T004-FCCP-1 (APPENDIX-TEST PHOTOS).

**10 EUT PHOTOS**

Please refer to document Appendix No.: EP-2212T004-1 (APPENDIX-EUT PHOTOS).

## **APPENDIX A AC POWER LINE CONDUCTED EMISSIONS**

Test Mode	Normal	Tested Date	2023/2/1
Test Frequency	-	Phase	Line

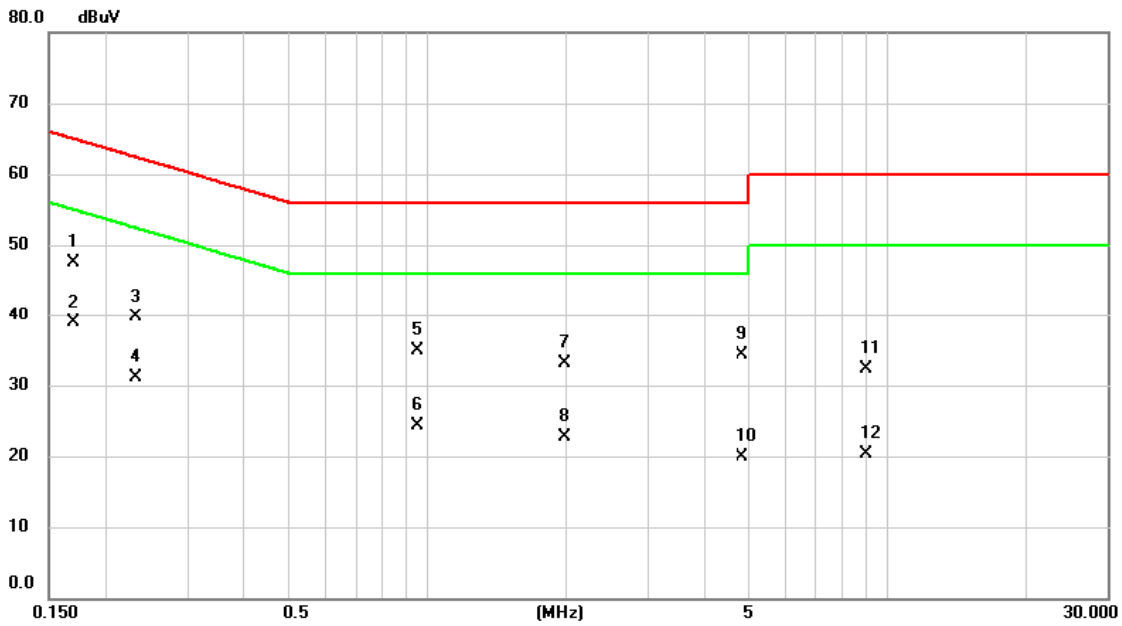


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1702	37.89	9.64	47.53	64.95	-17.42	QP	
2	*	0.1702	29.20	9.64	38.84	54.95	-16.11	AVG	
3		0.2310	30.14	9.63	39.77	62.41	-22.64	QP	
4		0.2310	21.55	9.63	31.18	52.41	-21.23	AVG	
5		0.9487	25.17	9.67	34.84	56.00	-21.16	QP	
6		0.9487	14.73	9.67	24.40	46.00	-21.60	AVG	
7		1.9792	23.43	9.70	33.13	56.00	-22.87	QP	
8		1.9792	12.97	9.70	22.67	46.00	-23.33	AVG	
9		4.8457	24.63	9.77	34.40	56.00	-21.60	QP	
10		4.8457	10.20	9.77	19.97	46.00	-26.03	AVG	
11		9.0105	22.51	9.86	32.37	60.00	-27.63	QP	
12		9.0105	10.51	9.86	20.37	50.00	-29.63	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2023/2/1
Test Frequency	-	Phase	Neutral

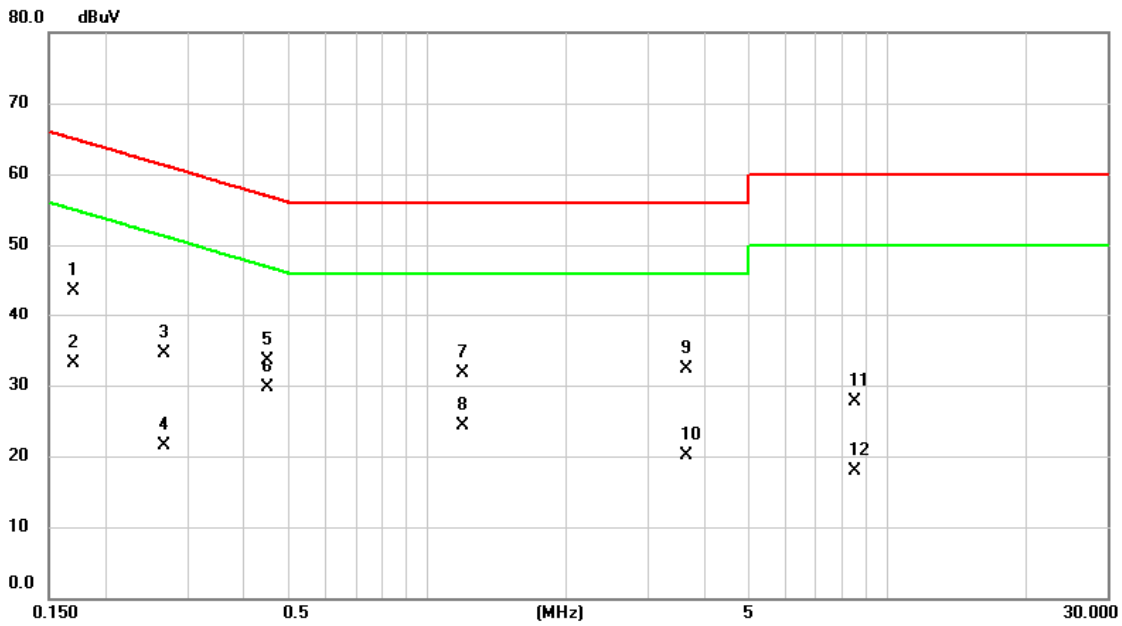

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	33.80	9.65	43.45	64.95	-21.50	QP	
2		0.1703	23.41	9.65	33.06	54.95	-21.89	AVG	
3		0.2670	24.86	9.64	34.50	61.21	-26.71	QP	
4		0.2670	11.81	9.64	21.45	51.21	-29.76	AVG	
5		0.4515	23.86	9.64	33.50	56.85	-23.35	QP	
6	*	0.4515	20.06	9.64	29.70	46.85	-17.15	AVG	
7		1.1940	22.11	9.68	31.79	56.00	-24.21	QP	
8		1.1940	14.65	9.68	24.33	46.00	-21.67	AVG	
9		3.6533	22.52	9.76	32.28	56.00	-23.72	QP	
10		3.6533	10.35	9.76	20.11	46.00	-25.89	AVG	
11		8.4908	17.92	9.87	27.79	60.00	-32.21	QP	
12		8.4908	8.09	9.87	17.96	50.00	-32.04	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode	Idle	Tested Date	2023/2/1
Test Frequency	-	Phase	Line

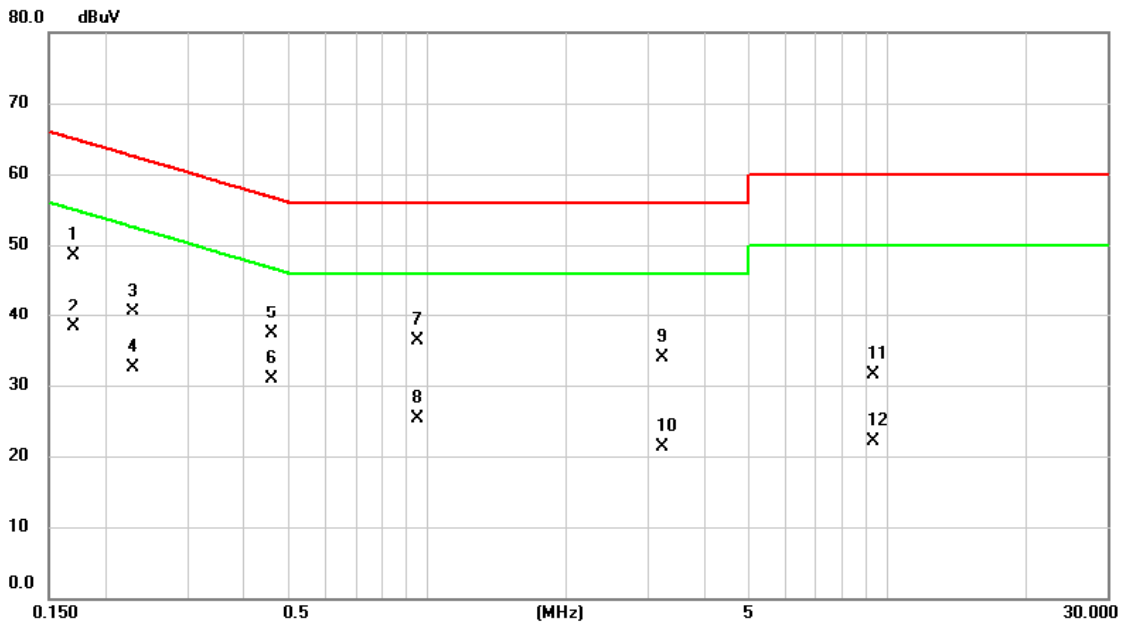


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1703	38.92	9.64	48.56	64.95	-16.39	QP	
2		0.1703	28.65	9.64	38.29	54.95	-16.66	AVG	
3		0.2288	30.92	9.63	40.55	62.49	-21.94	QP	
4		0.2288	22.79	9.63	32.42	52.49	-20.07	AVG	
5		0.4582	27.67	9.63	37.30	56.73	-19.43	QP	
6	*	0.4582	21.32	9.63	30.95	46.73	-15.78	AVG	
7		0.9532	26.69	9.67	36.36	56.00	-19.64	QP	
8		0.9532	15.56	9.67	25.23	46.00	-20.77	AVG	
9		3.2348	24.26	9.74	34.00	56.00	-22.00	QP	
10		3.2348	11.59	9.74	21.33	46.00	-24.67	AVG	
11		9.3255	21.64	9.86	31.50	60.00	-28.50	QP	
12		9.3255	12.15	9.86	22.01	50.00	-27.99	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2023/2/1
Test Frequency	-	Phase	Neutral

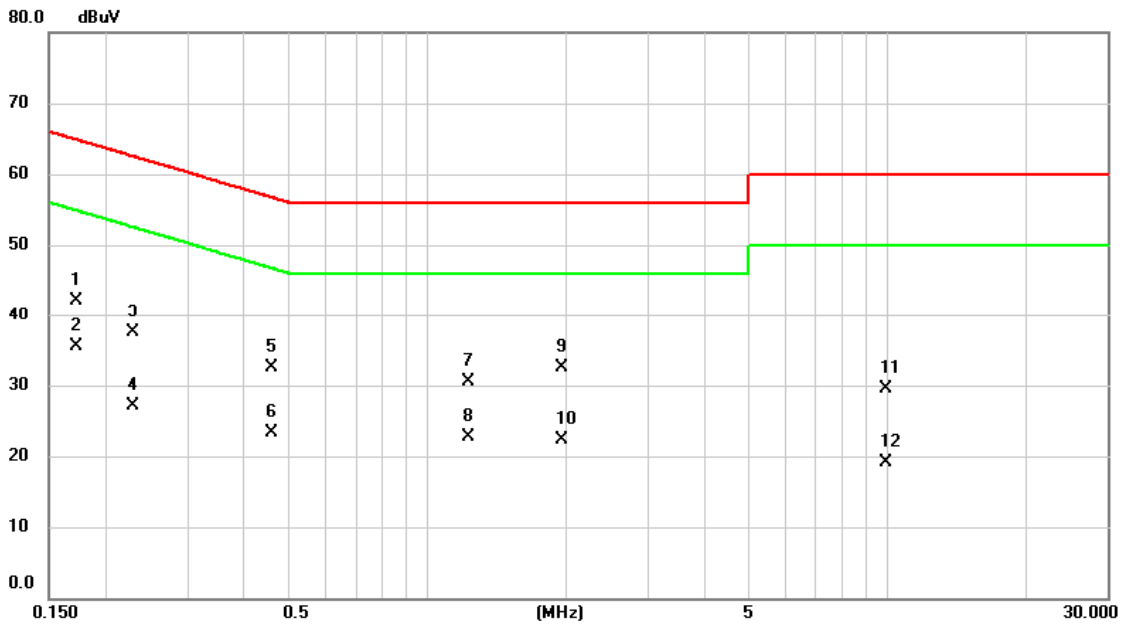

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1725	32.52	9.65	42.17	64.84	-22.67	QP	
2	*	0.1725	25.89	9.65	35.54	54.84	-19.30	AVG	
3		0.2287	27.82	9.64	37.46	62.50	-25.04	QP	
4		0.2287	17.43	9.64	27.07	52.50	-25.43	AVG	
5		0.4604	22.93	9.64	32.57	56.69	-24.12	QP	
6		0.4604	13.62	9.64	23.26	46.69	-23.43	AVG	
7		1.2255	20.92	9.68	30.60	56.00	-25.40	QP	
8		1.2255	13.02	9.68	22.70	46.00	-23.30	AVG	
9		1.9590	22.82	9.71	32.53	56.00	-23.47	QP	
10		1.9590	12.65	9.71	22.36	46.00	-23.64	AVG	
11		9.8970	19.64	9.91	29.55	60.00	-30.45	QP	
12		9.8970	9.12	9.91	19.03	50.00	-30.97	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX B    RADIATED EMISSIONS - 30 MHZ TO 1 GHZ**

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/17
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	64%

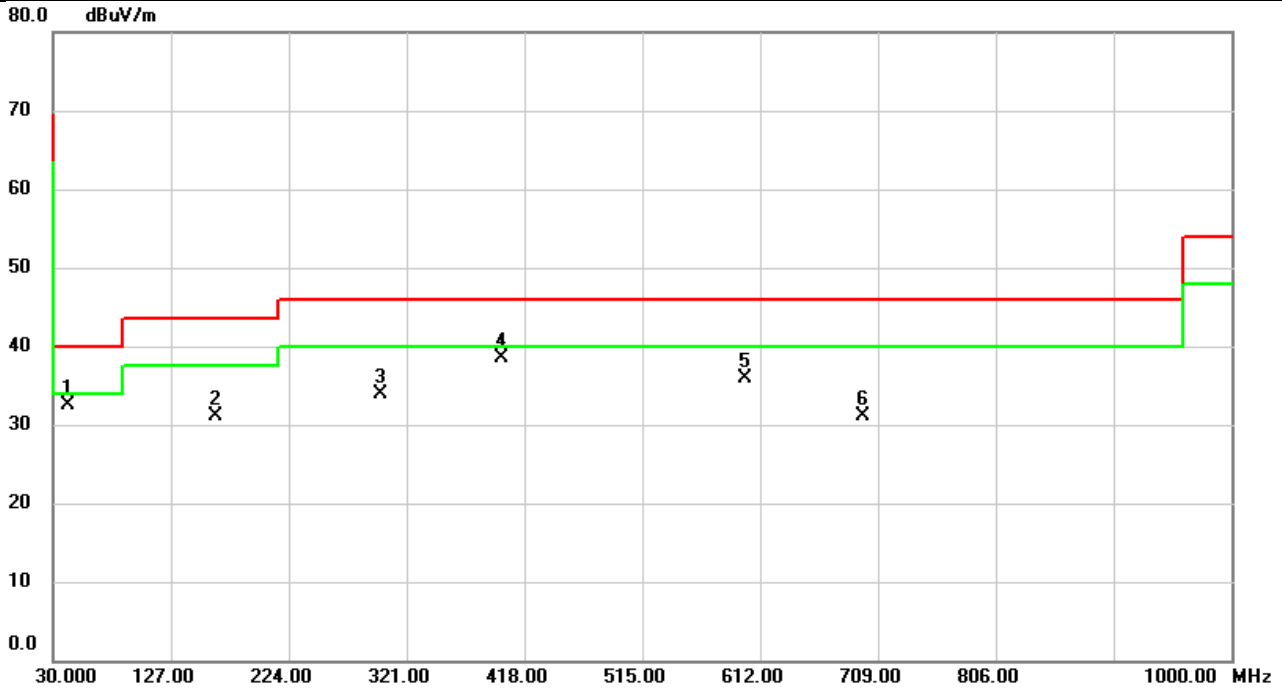


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		42.6100	44.67	-12.18	32.49	40.00	-7.51	peak	
2		164.3773	43.35	-12.22	31.13	43.50	-12.37	peak	
3		300.0157	45.24	-11.32	33.92	46.00	-12.08	peak	
4	*	399.8610	47.26	-8.70	38.56	46.00	-7.44	peak	
5		599.5840	39.73	-3.88	35.85	46.00	-10.15	peak	
6		697.1337	33.94	-2.84	31.10	46.00	-14.90	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/17
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	64%

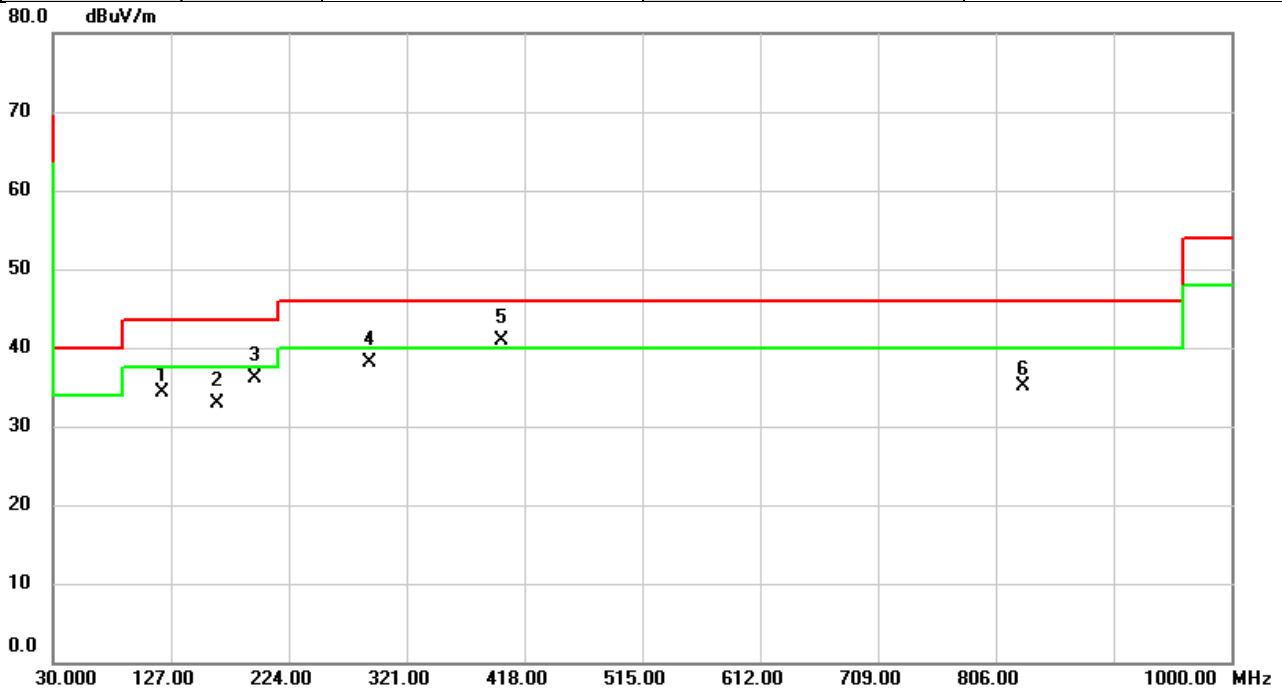


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		120.1453	48.92	-14.53	34.39	43.50	-9.11	peak	
2		165.1210	45.11	-12.27	32.84	43.50	-10.66	QP	
3		196.5813	51.10	-15.04	36.06	43.50	-7.44	QP	
4		291.0593	49.53	-11.47	38.06	46.00	-7.94	QP	
5	*	399.8933	49.53	-8.70	40.83	46.00	-5.17	QP	
6		828.5040	35.53	-0.48	35.05	46.00	-10.95	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ**

Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

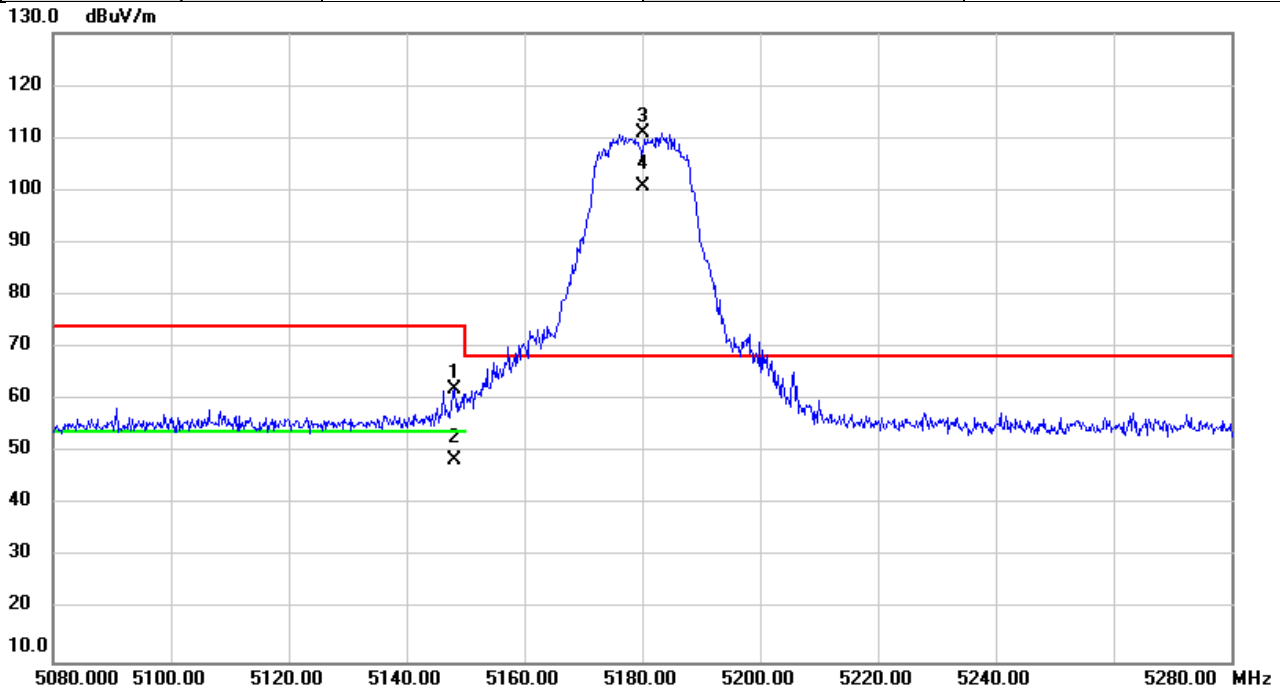


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5148.000	60.49	1.46	61.95	74.00	-12.05	peak	
2		5148.000	47.07	1.46	48.53	54.00	-5.47	AVG	
3	*	5180.000	109.41	1.47	110.88	68.20	42.68	peak	NoLimit
4	X	5180.000	99.40	1.47	100.87	68.20	32.67	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

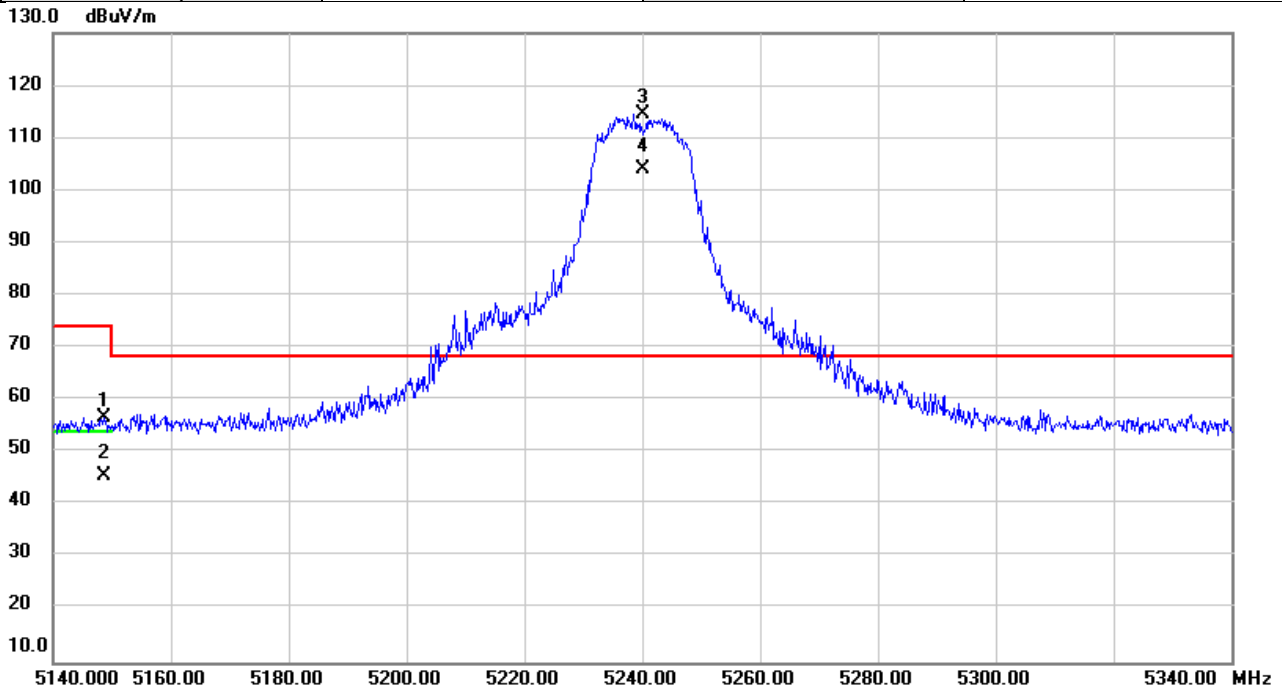


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5148.587	55.26	1.46	56.72	74.00	-17.28	peak	
2		5148.587	44.21	1.46	45.67	54.00	-8.33	AVG	
3	*	5240.000	113.14	1.49	114.63	68.20	46.43	peak	NoLimit
4	X	5240.000	102.71	1.49	104.20	68.20	36.00	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

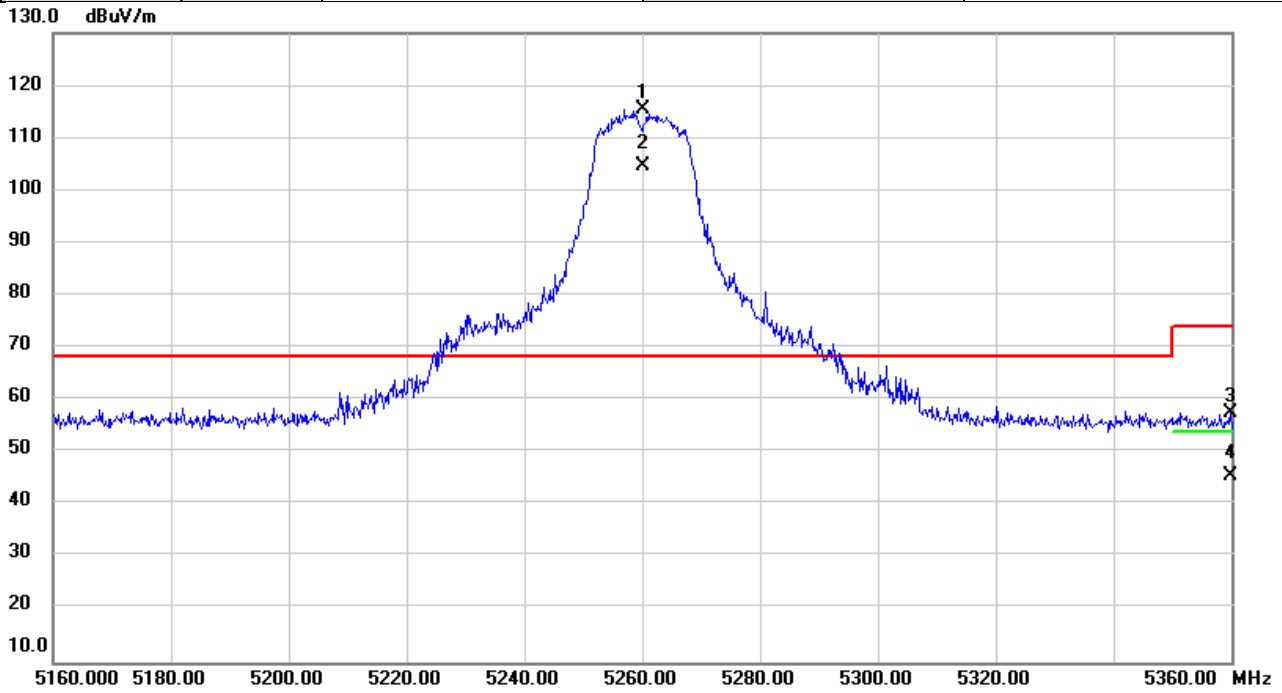


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	113.88	1.50	115.38	68.20	47.18	peak	NoLimit
2	X	5260.000	103.28	1.50	104.78	68.20	36.58	AVG	NoLimit
3		5359.840	56.01	1.52	57.53	74.00	-16.47	peak	
4		5359.840	44.08	1.52	45.60	54.00	-8.40	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

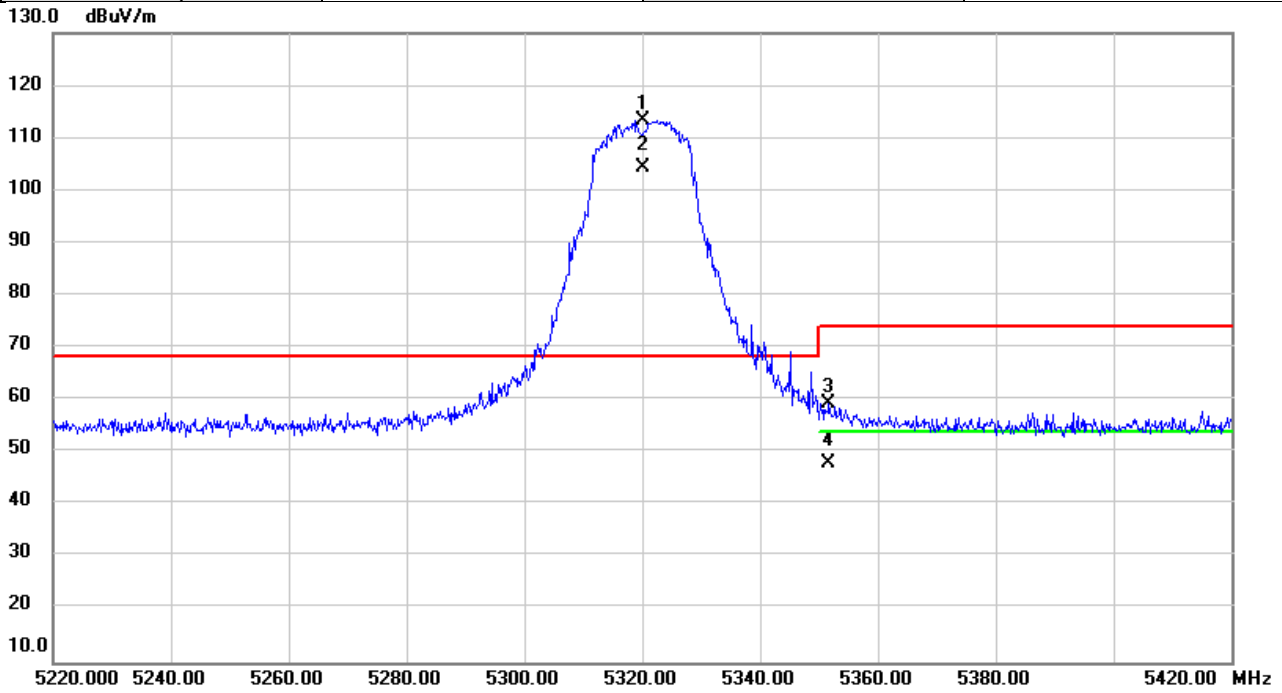


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5320.000	111.96	1.52	113.48	68.20	45.28	peak	NoLimit
2	X	5320.000	102.71	1.52	104.23	68.20	36.03	AVG	NoLimit
3		5351.667	57.91	1.53	59.44	74.00	-14.56	peak	
4		5351.667	46.46	1.53	47.99	54.00	-6.01	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

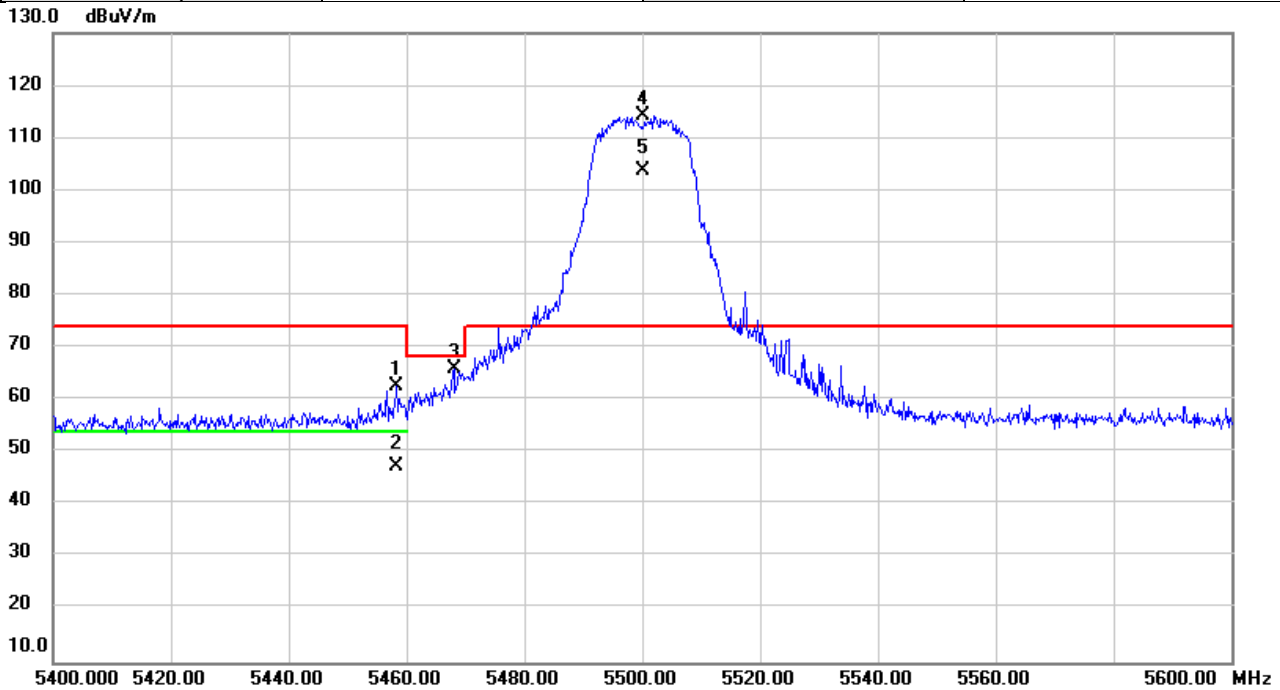


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5458.213	61.17	1.55	62.72	74.00	-11.28	peak	
2		5458.213	45.75	1.55	47.30	54.00	-6.70	AVG	
3		5468.007	64.37	1.56	65.93	68.20	-2.27	peak	
4	*	5500.000	112.54	1.57	114.11	74.00	40.11	peak	NoLimit
5	X	5500.000	102.22	1.57	103.79	74.00	29.79	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

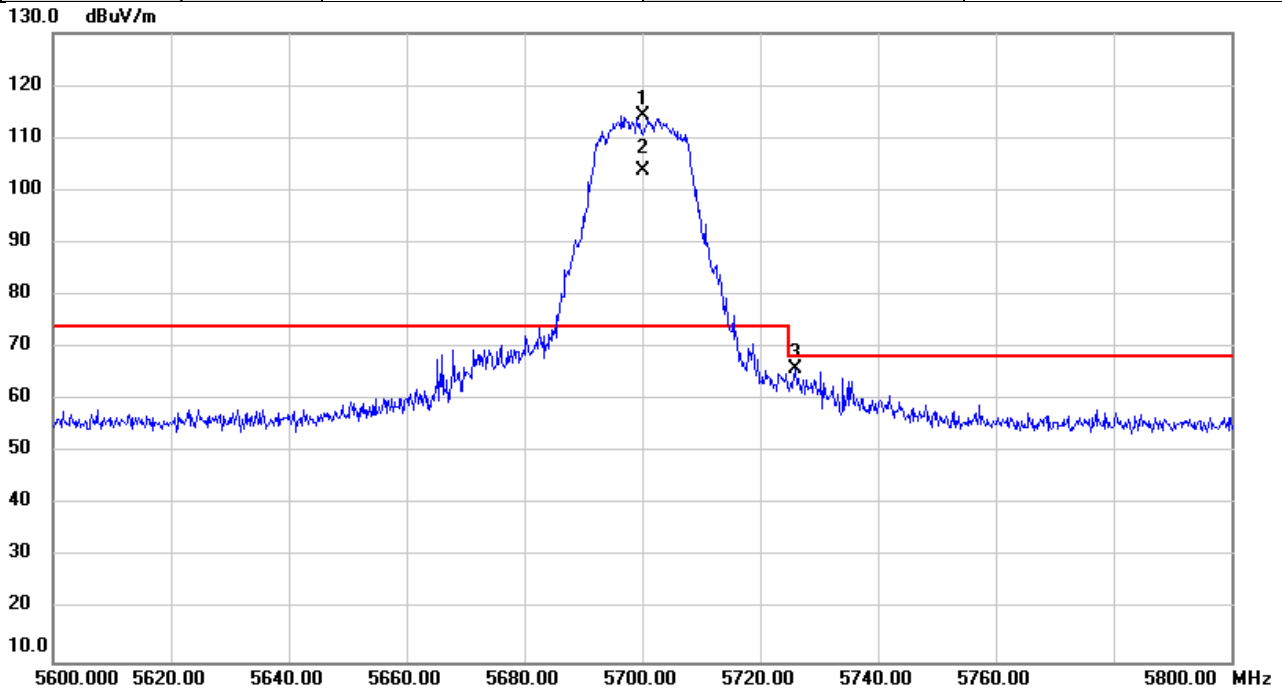


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5700.000	112.37	1.90	114.27	74.00	40.27	peak	NoLimit
2	X	5700.000	101.94	1.90	103.84	74.00	29.84	AVG	NoLimit
3		5726.000	63.89	1.94	65.83	68.20	-2.37	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

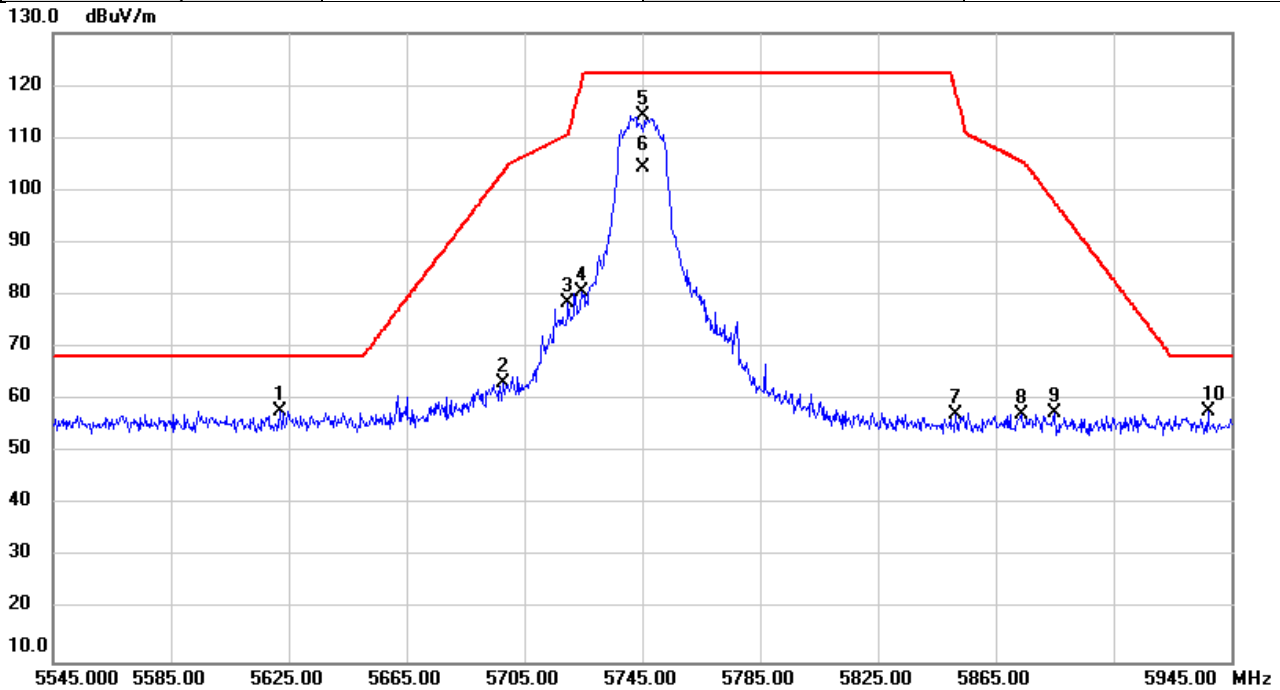


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5622.107	56.13	1.77	57.90	68.20	-10.30	peak	
2		5697.573	61.40	1.90	63.30	103.41	-40.11	peak	
3		5719.893	76.72	1.93	78.65	110.77	-32.12	peak	
4		5724.467	78.62	1.93	80.55	120.99	-40.44	peak	
5	*	5745.000	112.21	1.97	114.18	122.20	-8.02	peak	NoLimit
6		5745.000	102.35	1.97	104.32	122.20	-17.88	AVG	NoLimit
7		5851.640	55.23	2.14	57.37	118.46	-61.09	peak	
8		5874.013	55.11	2.18	57.29	105.48	-48.19	peak	
9		5884.987	55.29	2.20	57.49	97.78	-40.29	peak	
10		5937.227	55.65	2.28	57.93	68.20	-10.27	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/21
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

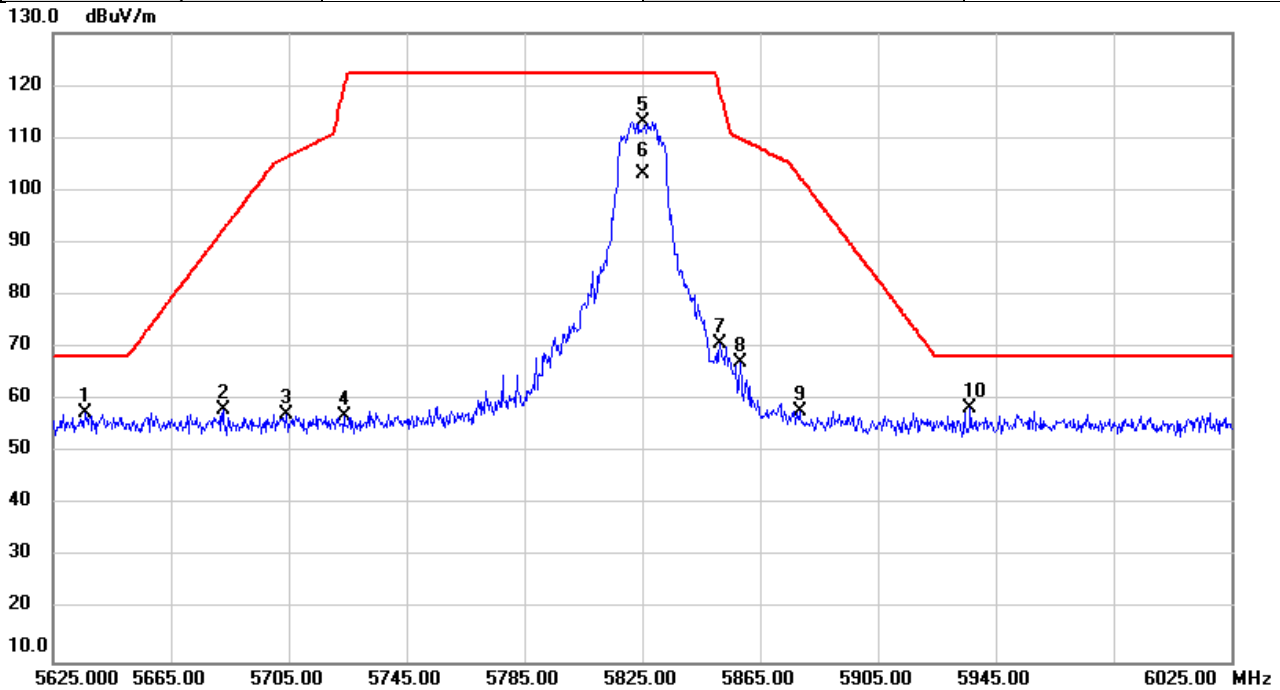


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5635.893	55.82	1.79	57.61	68.20	-10.59	peak	
2		5682.813	56.22	1.87	58.09	92.52	-34.43	peak	
3		5704.360	55.41	1.91	57.32	106.42	-49.10	peak	
4		5723.933	54.97	1.93	56.90	119.77	-62.87	peak	
5	*	5825.000	111.06	2.11	113.17	122.20	-9.03	peak	NoLimit
6		5825.000	100.99	2.11	103.10	122.20	-19.10	AVG	NoLimit
7		5851.640	68.69	2.14	70.83	118.46	-47.63	peak	
8		5858.320	65.06	2.15	67.21	109.87	-42.66	peak	
9		5878.507	55.59	2.19	57.78	102.59	-44.81	peak	
10		5936.253	56.03	2.28	58.31	68.20	-9.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

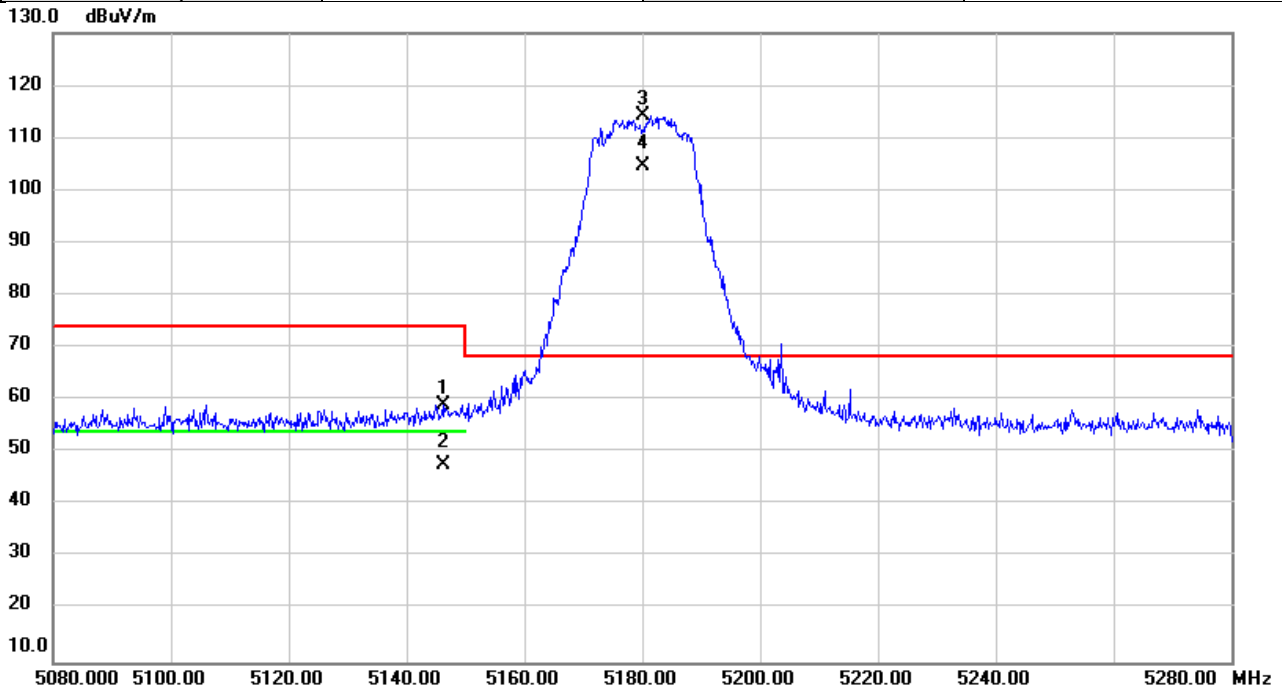


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5146.140	57.70	1.46	59.16	74.00	-14.84	peak	
2		5146.140	46.27	1.46	47.73	54.00	-6.27	AVG	
3	*	5180.000	112.82	1.47	114.29	68.20	46.09	peak	NoLimit
4	X	5180.000	103.30	1.47	104.77	68.20	36.57	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

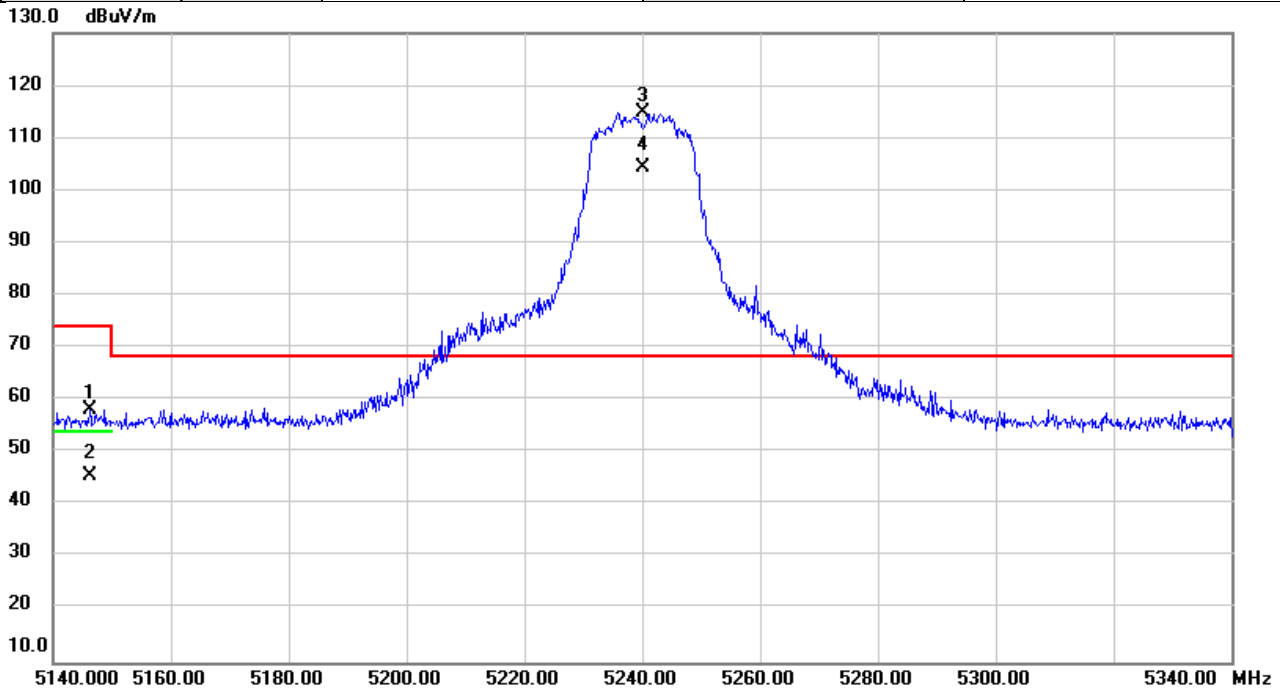


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5146.213	56.75	1.46	58.21	74.00	-15.79	peak	
2		5146.213	44.06	1.46	45.52	54.00	-8.48	AVG	
3	*	5240.000	113.24	1.49	114.73	68.20	46.53	peak	NoLimit
4	X	5240.000	102.96	1.49	104.45	68.20	36.25	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

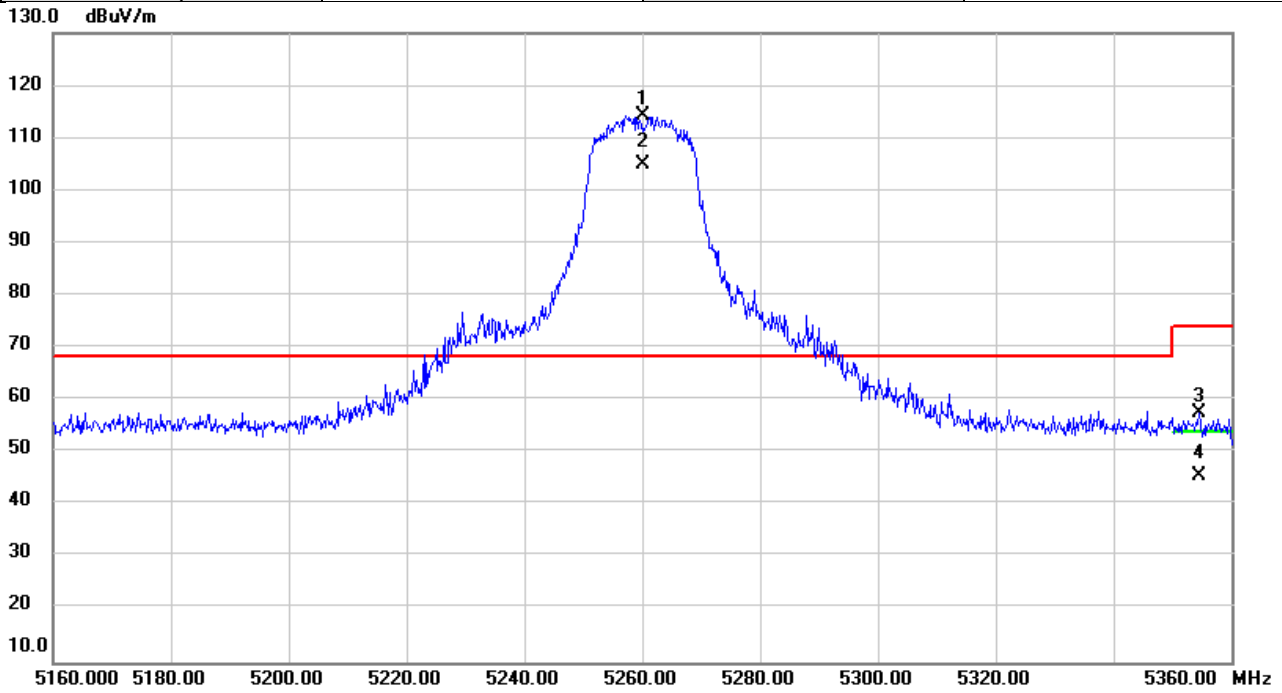


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5260.000	112.62	1.50	114.12	68.20	45.92	peak	NoLimit
2	X	5260.000	103.31	1.50	104.81	68.20	36.61	AVG	NoLimit
3		5354.427	56.07	1.53	57.60	74.00	-16.40	peak	
4		5354.427	43.95	1.53	45.48	54.00	-8.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

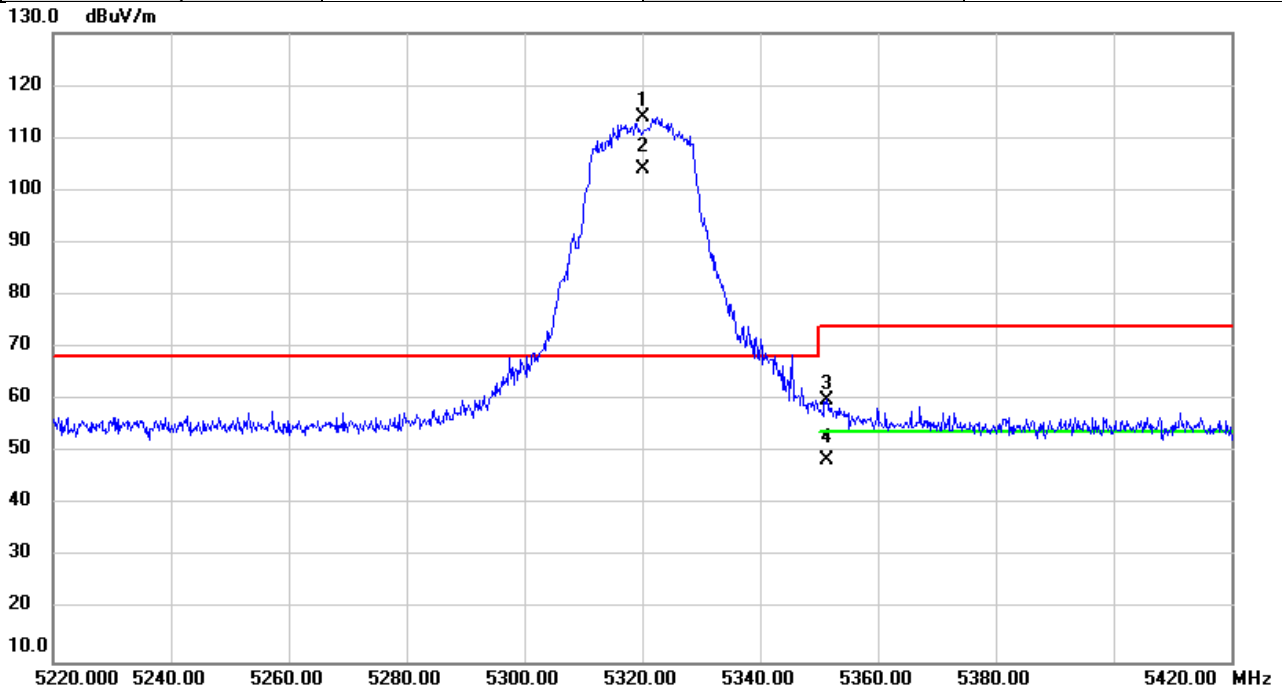


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5320.000	112.41	1.52	113.93	68.20	45.73	peak	NoLimit
2	X	5320.000	102.54	1.52	104.06	68.20	35.86	AVG	NoLimit
3		5351.207	58.57	1.53	60.10	74.00	-13.90	peak	
4		5351.207	46.98	1.53	48.51	54.00	-5.49	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

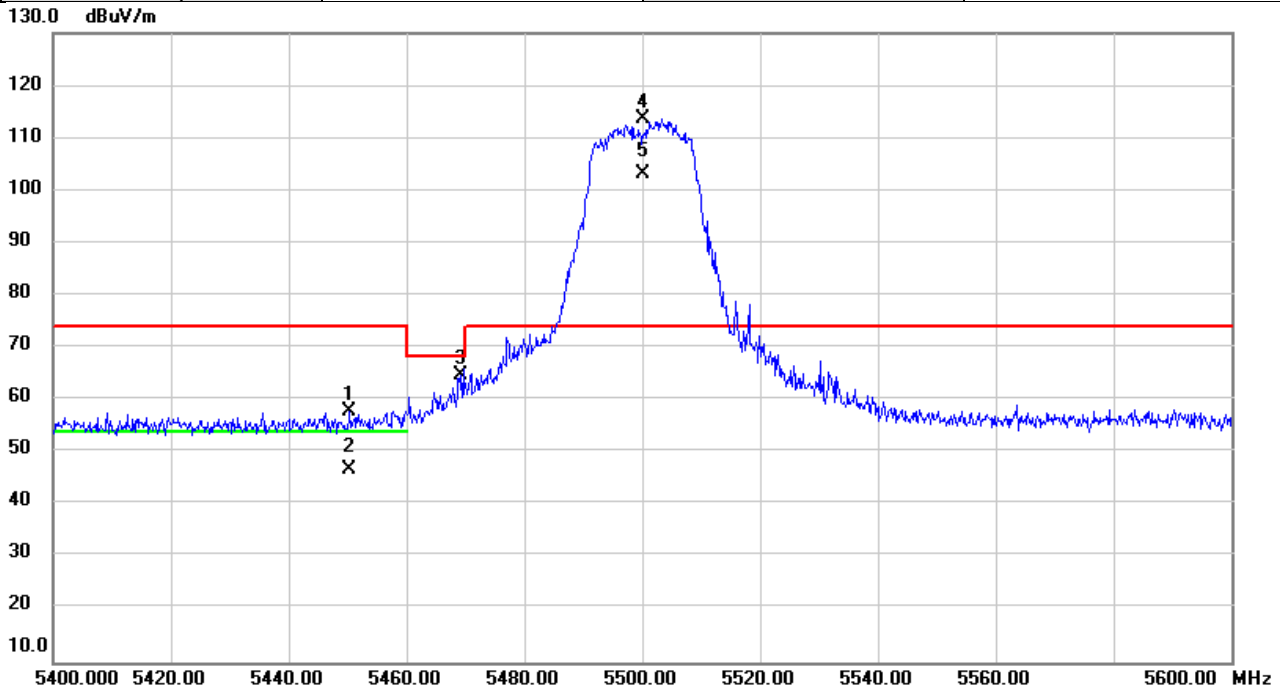


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5450.360	56.41	1.56	57.97	74.00	-16.03	peak	
2		5450.360	45.04	1.56	46.60	54.00	-7.40	AVG	
3		5469.167	63.33	1.56	64.89	68.20	-3.31	peak	
4	*	5500.000	112.19	1.57	113.76	74.00	39.76	peak	NoLimit
5	X	5500.000	101.66	1.57	103.23	74.00	29.23	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

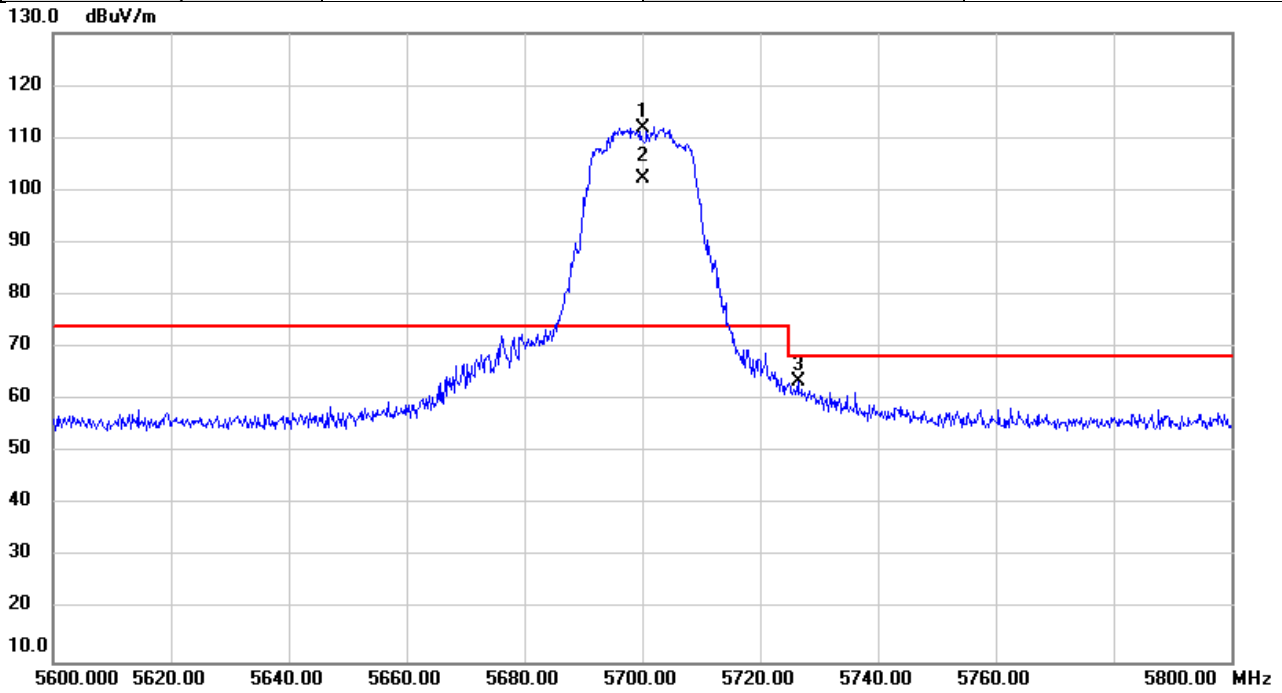


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5700.000	110.10	1.90	112.00	74.00	38.00	peak	NoLimit
2	X	5700.000	100.24	1.90	102.14	74.00	28.14	AVG	NoLimit
3		5726.560	61.66	1.94	63.60	68.20	-4.60	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

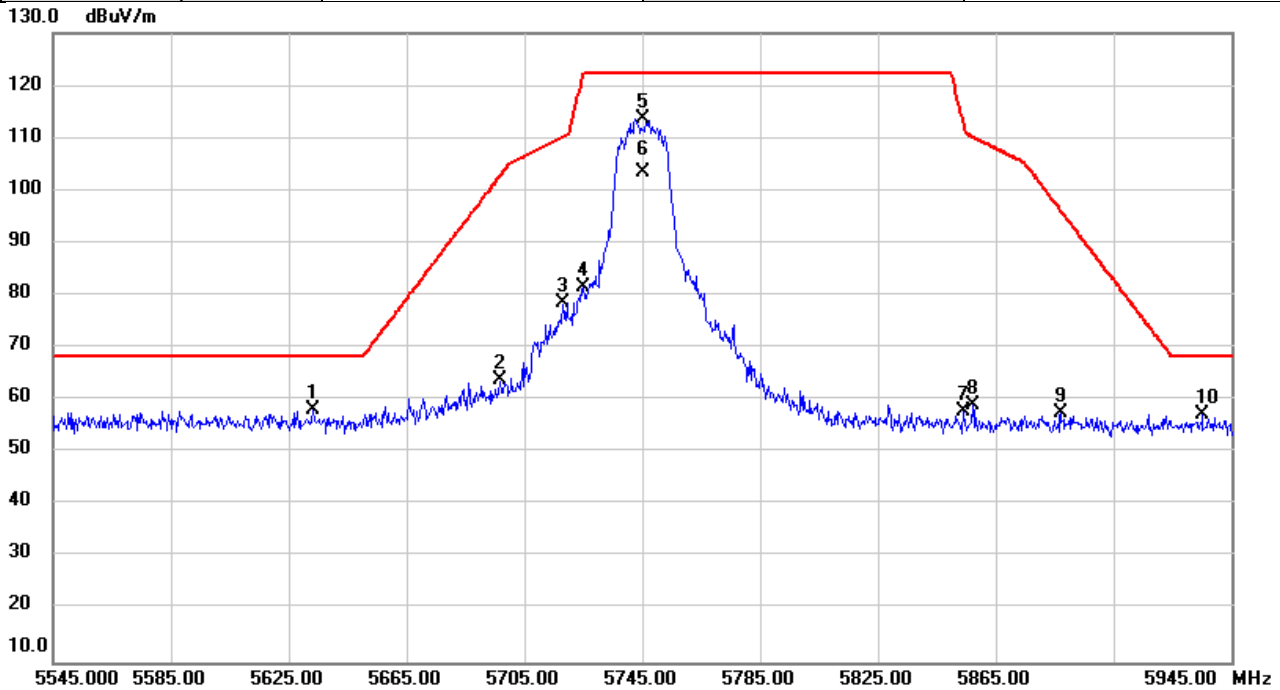


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5633.280	56.33	1.79	58.12	68.20	-10.08	peak	
2		5696.907	61.80	1.90	63.70	102.92	-39.22	peak	
3		5718.067	76.46	1.94	78.40	110.26	-31.86	peak	
4		5725.053	79.49	1.94	81.43	122.20	-40.77	peak	
5	*	5745.000	111.56	1.97	113.53	122.20	-8.67	peak	NoLimit
6		5745.000	101.58	1.97	103.55	122.20	-18.65	AVG	NoLimit
7		5854.040	55.83	2.15	57.98	112.99	-55.01	peak	
8		5857.240	57.04	2.15	59.19	110.17	-50.98	peak	
9		5887.333	55.36	2.20	57.56	96.04	-38.48	peak	
10		5935.213	54.88	2.28	57.16	68.20	-11.04	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/21
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

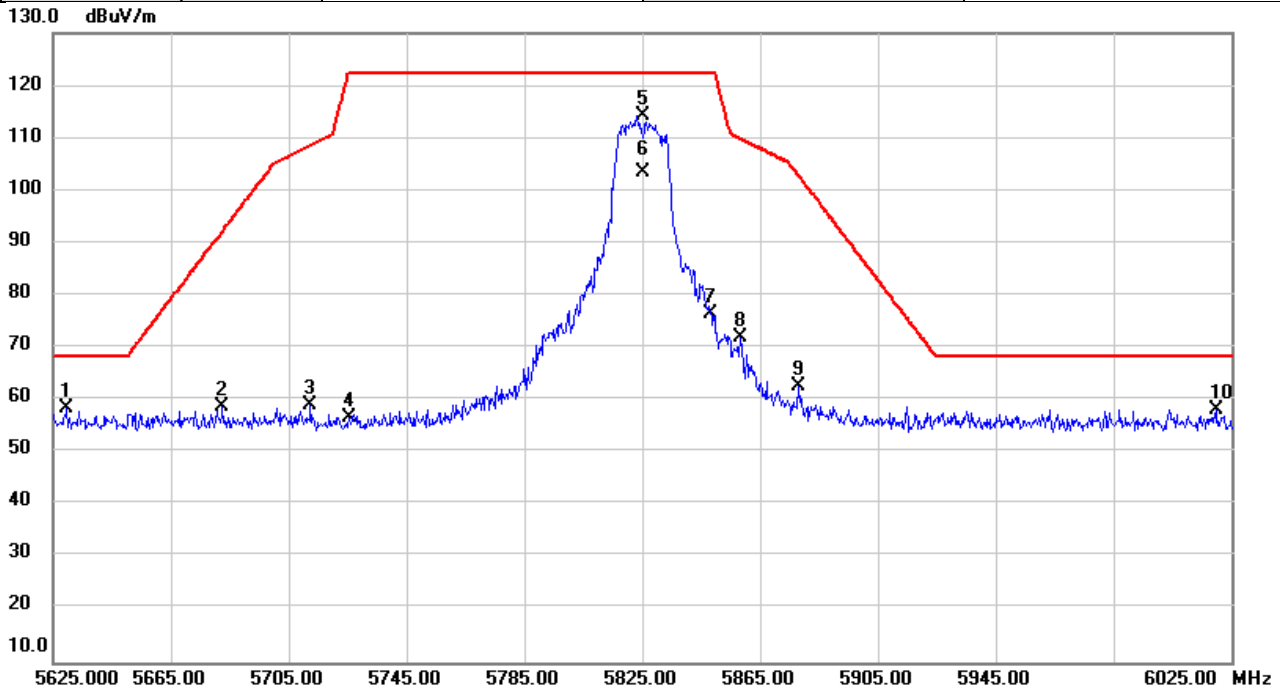


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5629.413	56.73	1.78	58.51	68.20	-9.69	peak	
2		5682.227	56.91	1.87	58.78	92.09	-33.31	peak	
3		5712.440	56.99	1.92	58.91	108.69	-49.78	peak	
4		5725.680	54.86	1.94	56.80	122.20	-65.40	peak	
5	*	5825.000	112.04	2.11	114.15	122.20	-8.05	peak	NoLimit
6		5825.000	101.41	2.11	103.52	122.20	-18.68	AVG	NoLimit
7		5847.960	74.23	2.14	76.37	122.20	-45.83	peak	
8		5858.320	69.83	2.15	71.98	109.87	-37.89	peak	
9		5878.240	60.61	2.19	62.80	102.79	-39.99	peak	
10		6019.733	55.74	2.50	58.24	68.20	-9.96	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5190MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

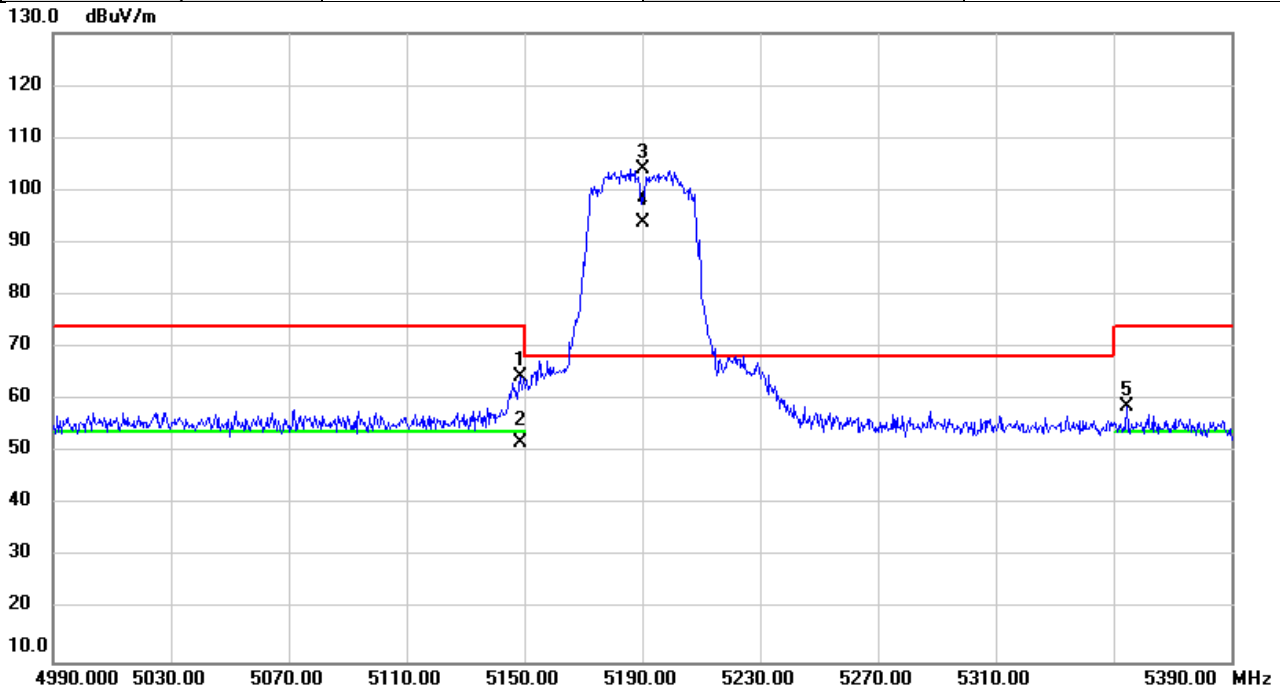


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5148.587	62.94	1.46	64.40	74.00	-9.60	peak	
2		5148.587	50.47	1.46	51.93	54.00	-2.07	AVG	
3	*	5190.000	102.72	1.48	104.20	68.20	36.00	peak	NoLimit
4	X	5190.000	92.41	1.48	93.89	68.20	25.69	AVG	NoLimit
5		5354.560	57.24	1.53	58.77	74.00	-15.23	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

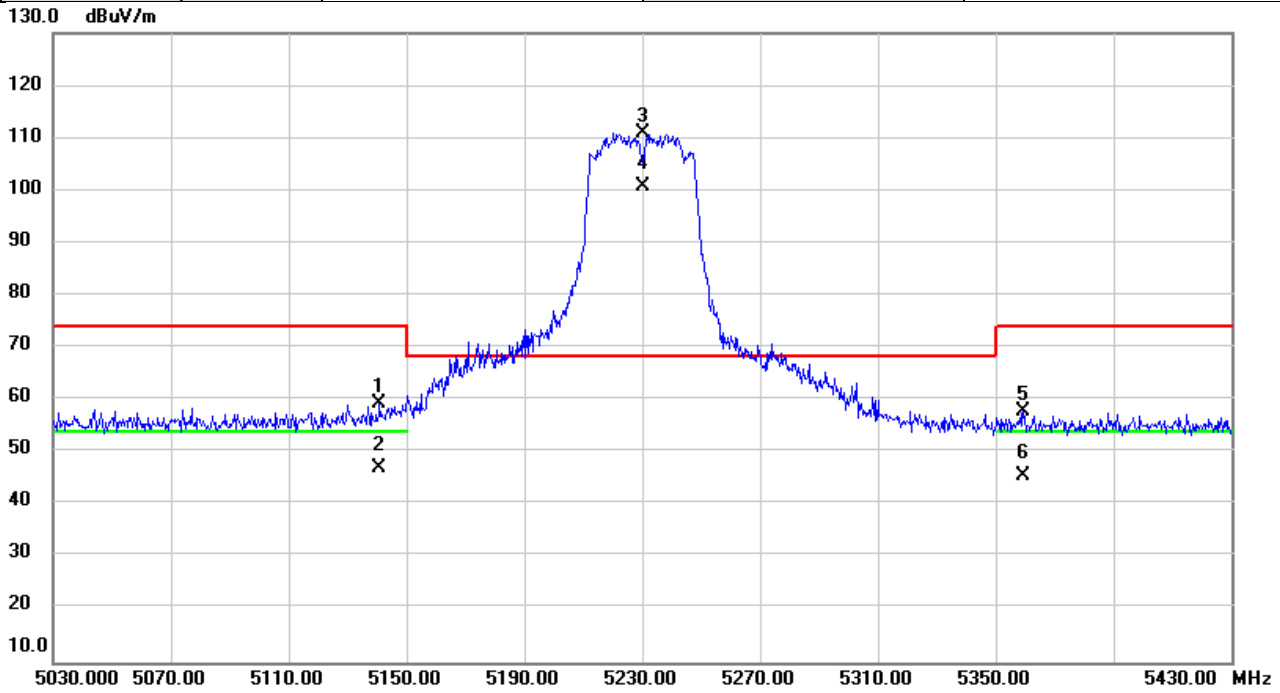


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5140.880	57.80	1.46	59.26	74.00	-14.74	peak	
2		5140.880	45.68	1.46	47.14	54.00	-6.86	AVG	
3	*	5230.000	109.46	1.49	110.95	68.20	42.75	peak	NoLimit
4	X	5230.000	99.24	1.49	100.73	68.20	32.53	AVG	NoLimit
5		5359.320	56.39	1.53	57.92	74.00	-16.08	peak	
6		5359.320	44.10	1.53	45.63	54.00	-8.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5270MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

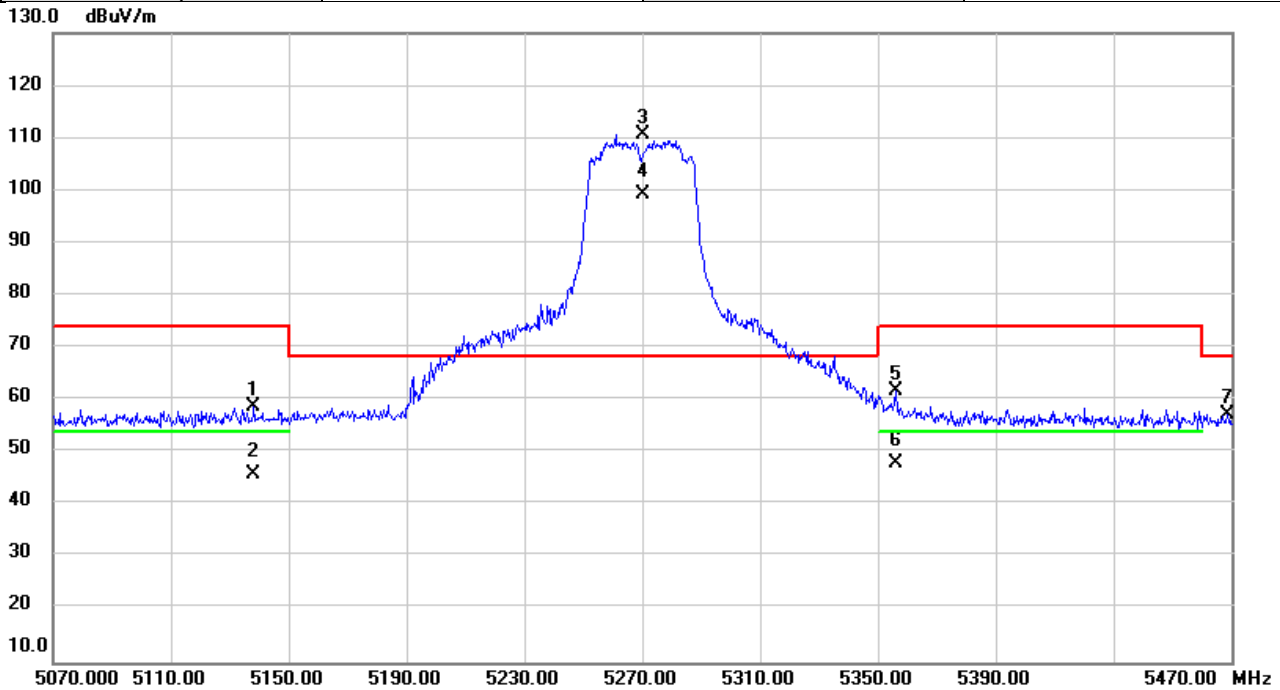


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5138.040	57.26	1.47	58.73	74.00	-15.27	peak	
2		5138.040	44.45	1.47	45.92	54.00	-8.08	AVG	
3	*	5270.000	109.11	1.50	110.61	68.20	42.41	peak	NoLimit
4	X	5270.000	97.83	1.50	99.33	68.20	31.13	AVG	NoLimit
5		5356.067	60.22	1.53	61.75	74.00	-12.25	peak	
6		5356.067	46.43	1.53	47.96	54.00	-6.04	AVG	
7		5468.440	55.62	1.56	57.18	68.20	-11.02	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

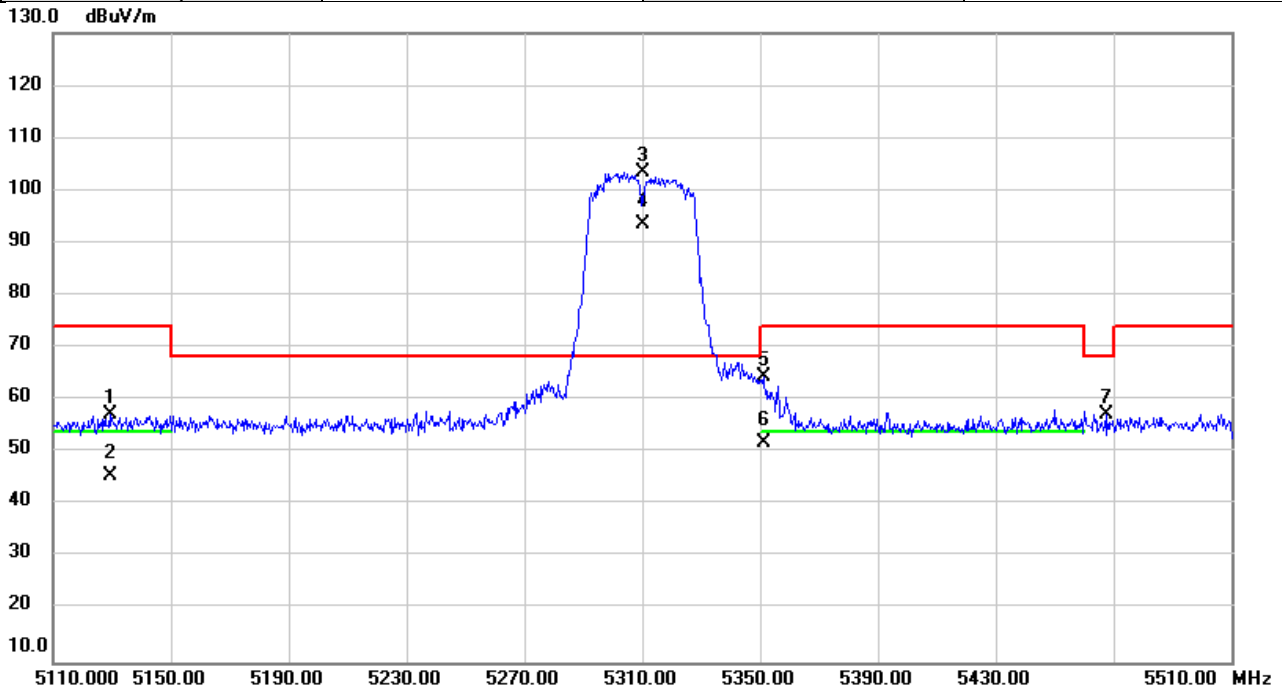


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5129.720	55.77	1.46	57.23	74.00	-16.77	peak	
2		5129.720	44.13	1.46	45.59	54.00	-8.41	AVG	
3	*	5310.000	101.86	1.51	103.37	68.20	35.17	peak	NoLimit
4	X	5310.000	92.10	1.51	93.61	68.20	25.41	AVG	NoLimit
5		5351.147	63.00	1.53	64.53	74.00	-9.47	peak	
6		5351.147	50.22	1.53	51.75	54.00	-2.25	AVG	
7		5467.453	55.72	1.56	57.28	68.20	-10.92	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

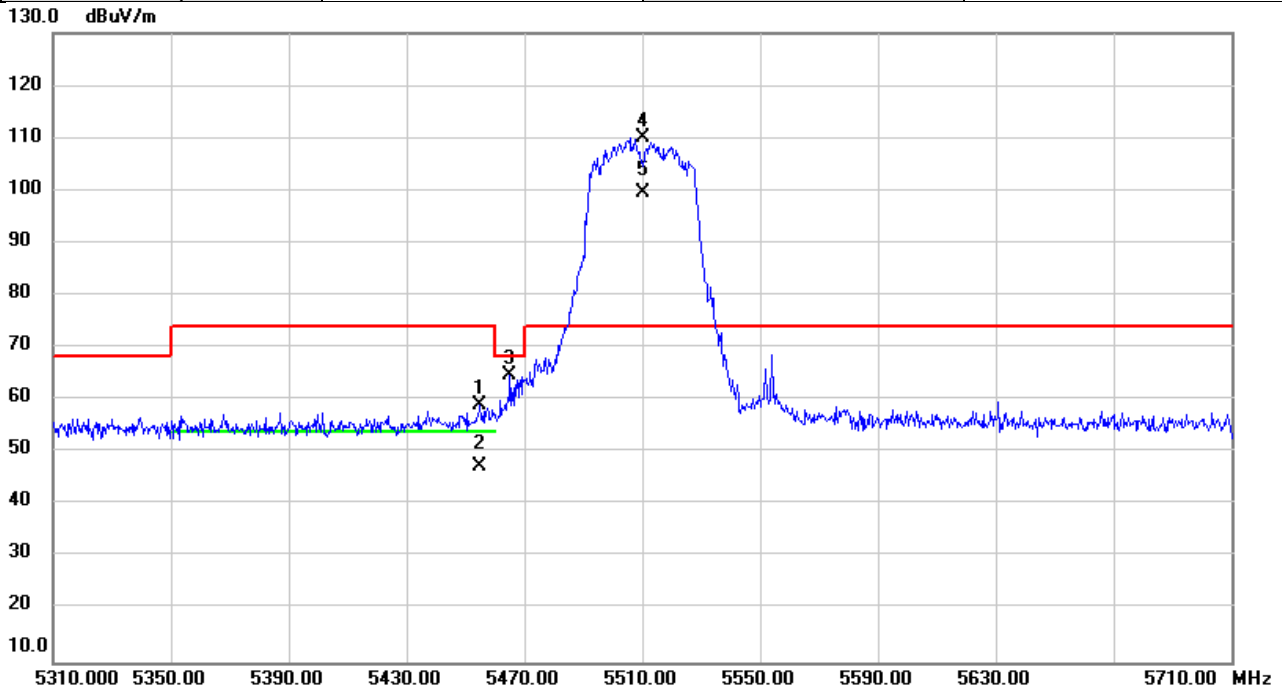


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5454.987	57.57	1.55	59.12	74.00	-14.88	peak	
2		5454.987	45.79	1.55	47.34	54.00	-6.66	AVG	
3		5464.853	63.33	1.56	64.89	68.20	-3.31	peak	
4	*	5510.000	108.34	1.58	109.92	74.00	35.92	peak	NoLimit
5	X	5510.000	98.08	1.58	99.66	74.00	25.66	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

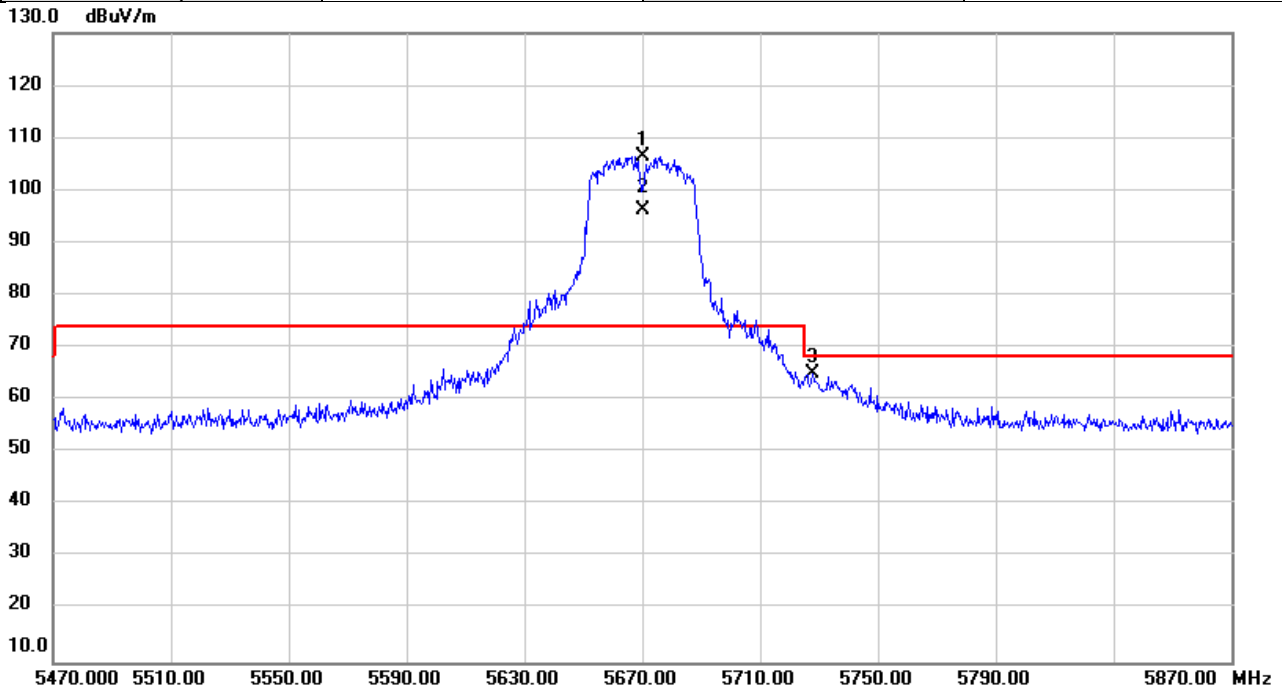


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5670.000	104.65	1.85	106.50	74.00	32.50	peak	NoLimit
2	X	5670.000	94.52	1.85	96.37	74.00	22.37	AVG	NoLimit
3		5727.840	63.10	1.94	65.04	68.20	-3.16	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

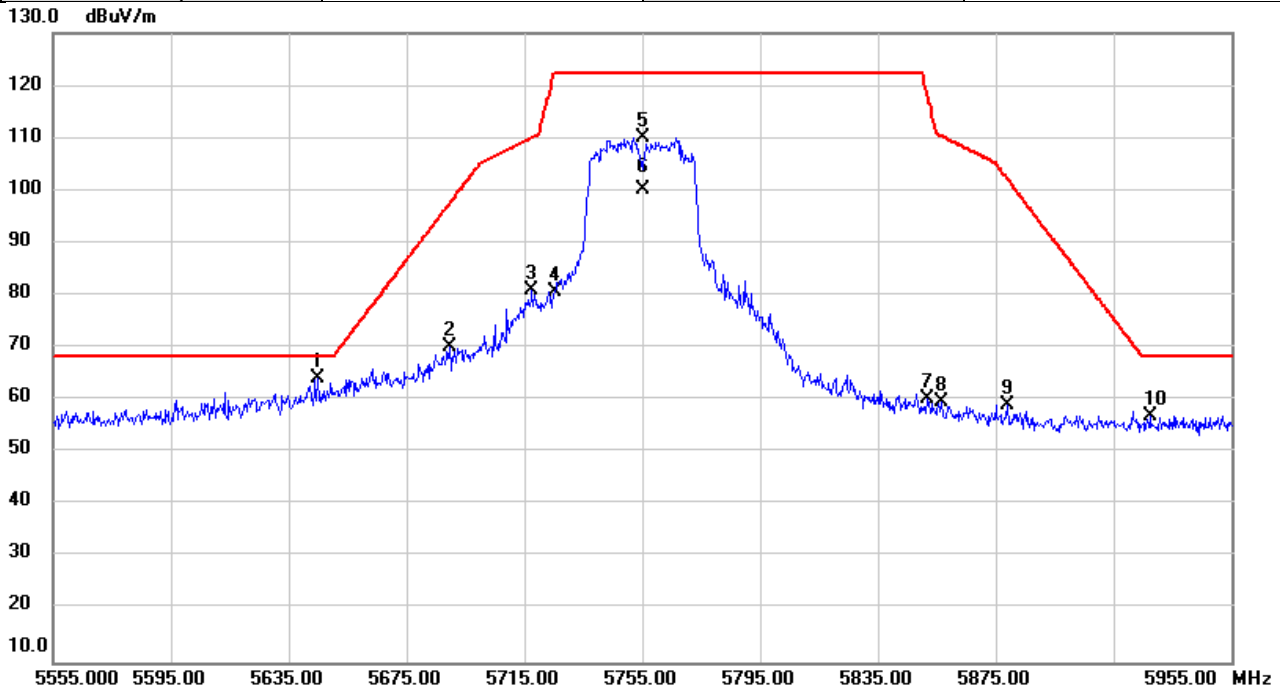


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5644.693	62.21	1.81	64.02	68.20	-4.18	peak	
2		5689.453	68.19	1.89	70.08	97.42	-27.34	peak	
3		5717.507	79.08	1.93	81.01	110.10	-29.09	peak	
4		5725.373	78.83	1.94	80.77	122.20	-41.43	peak	
5		5755.000	107.96	1.99	109.95	122.20	-12.25	peak	NoLimit
6		5755.000	98.09	1.99	100.08	122.20	-22.12	AVG	NoLimit
7		5851.800	58.06	2.14	60.20	118.09	-57.89	peak	
8		5856.733	57.52	2.15	59.67	110.31	-50.64	peak	
9		5878.907	56.76	2.19	58.95	102.30	-43.35	peak	
10		5927.307	54.82	2.27	57.09	68.20	-11.11	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/22
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

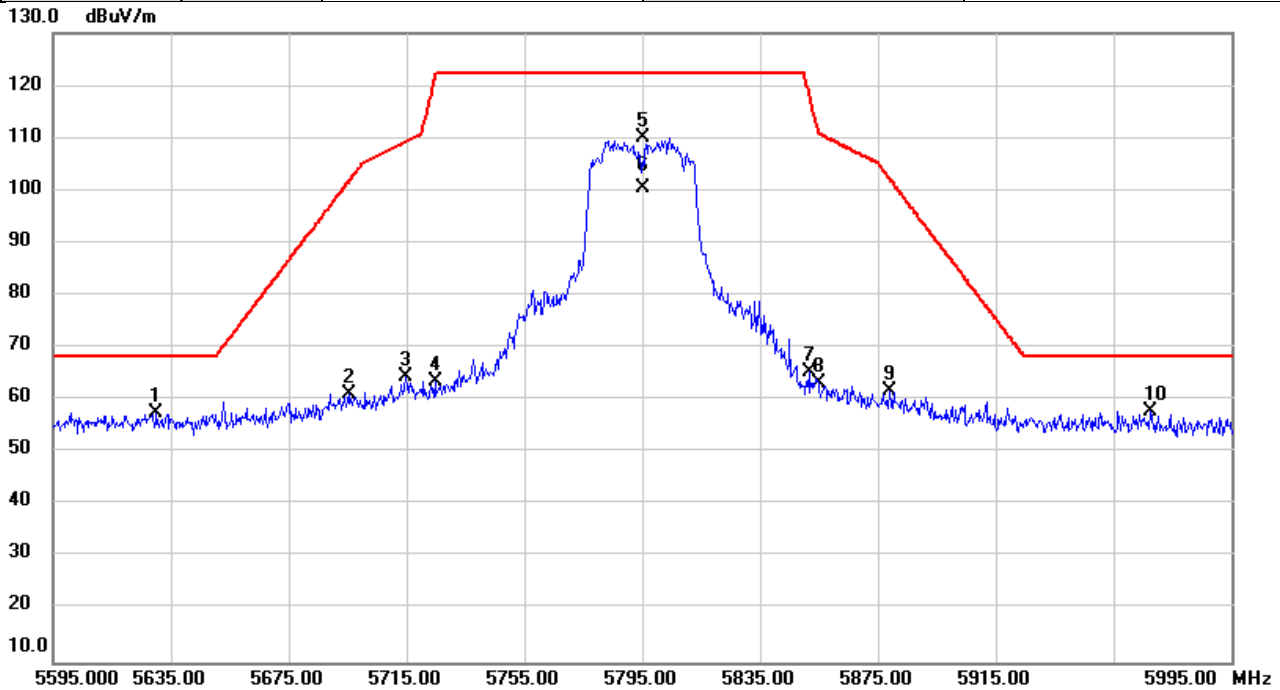


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5630.147	55.77	1.78	57.55	68.20	-10.65	peak	
2		5695.293	59.37	1.89	61.26	101.73	-40.47	peak	
3		5714.907	62.49	1.93	64.42	109.38	-44.96	peak	
4		5724.720	61.76	1.93	63.69	121.56	-57.87	peak	
5		5795.000	107.98	2.05	110.03	122.20	-12.17	peak	NoLimit
6		5795.000	98.37	2.05	100.42	122.20	-21.78	AVG	NoLimit
7		5851.547	63.32	2.14	65.46	118.67	-53.21	peak	
8		5854.840	61.02	2.15	63.17	111.16	-47.99	peak	
9		5878.867	59.59	2.19	61.78	102.33	-40.55	peak	
10	*	5967.760	55.59	2.34	57.93	68.20	-10.27	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/22
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

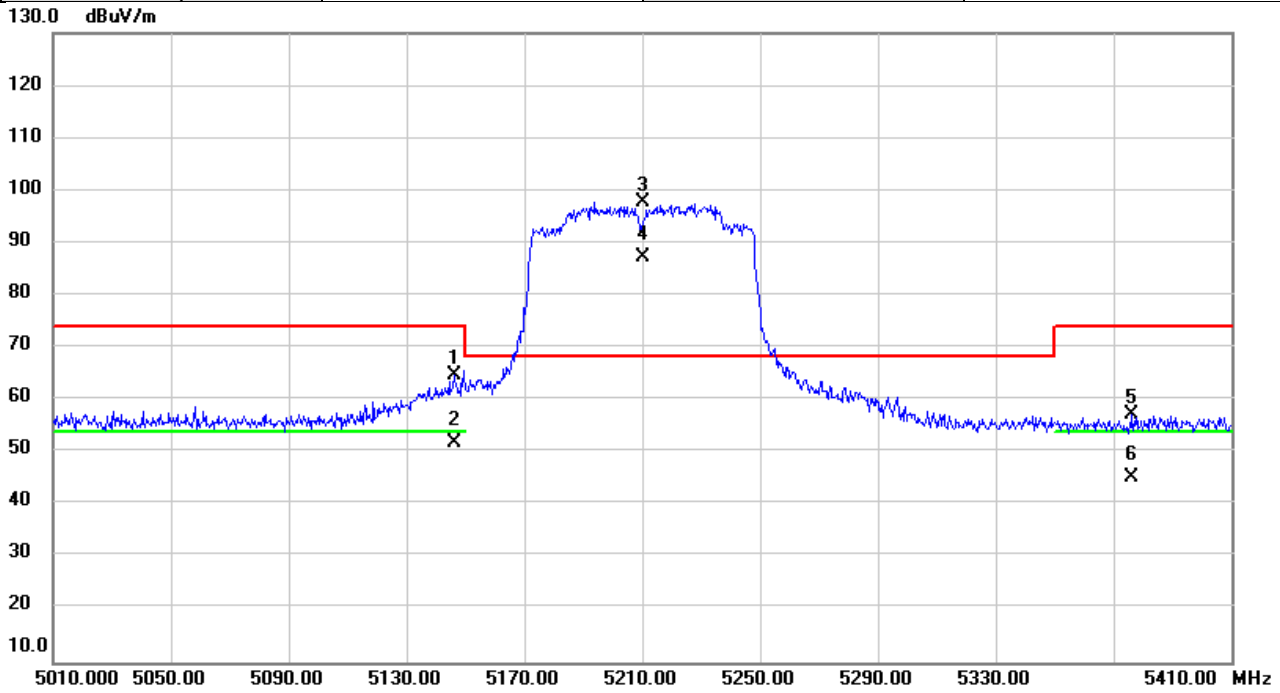


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5146.347	63.36	1.46	64.82	74.00	-9.18	peak	
2		5146.347	50.38	1.46	51.84	54.00	-2.16	AVG	
3	*	5210.000	96.17	1.48	97.65	68.20	29.45	peak	NoLimit
4	X	5210.000	85.68	1.48	87.16	68.20	18.96	AVG	NoLimit
5		5376.147	55.87	1.53	57.40	74.00	-16.60	peak	
6		5376.147	43.77	1.53	45.30	54.00	-8.70	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/22
Test Frequency	5290MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

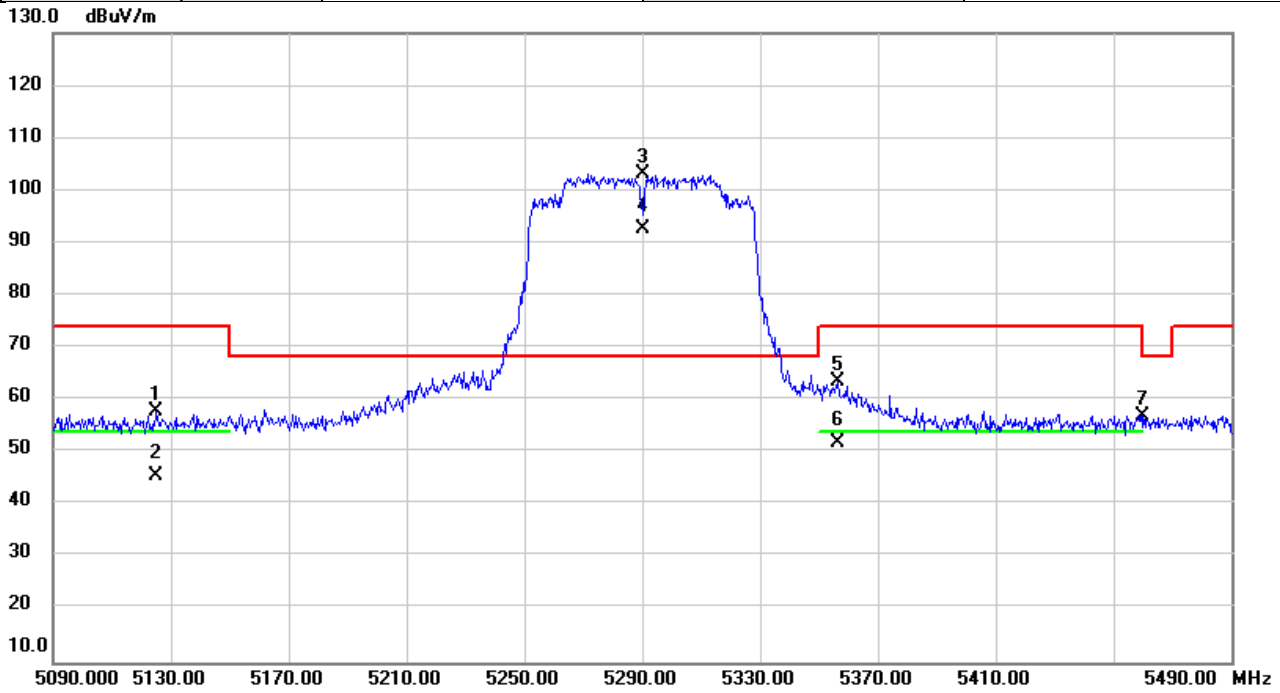


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5125.200	56.52	1.46	57.98	74.00	-16.02	peak	
2		5125.200	44.14	1.46	45.60	54.00	-8.40	AVG	
3	*	5290.000	101.50	1.51	103.01	68.20	34.81	peak	NoLimit
4	X	5290.000	91.25	1.51	92.76	68.20	24.56	AVG	NoLimit
5		5356.387	61.93	1.53	63.46	74.00	-10.54	peak	
6		5356.387	50.45	1.53	51.98	54.00	-2.02	AVG	
7		5460.107	55.32	1.56	56.88	68.20	-11.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/22
Test Frequency	5530MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

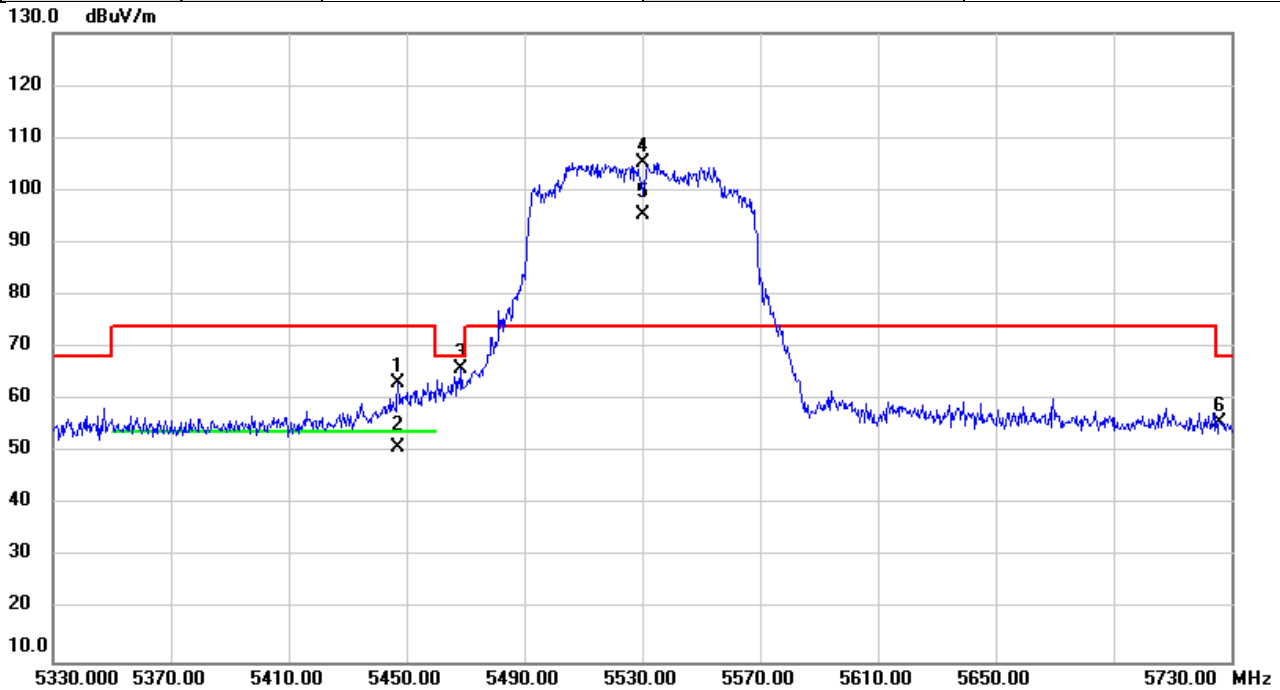


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5446.880	61.71	1.56	63.27	74.00	-10.73	peak	
2		5446.880	49.44	1.56	51.00	54.00	-3.00	AVG	
3		5468.507	64.38	1.56	65.94	68.20	-2.26	peak	
4	*	5530.000	103.64	1.62	105.26	74.00	31.26	peak	NoLimit
5	X	5530.000	93.69	1.62	95.31	74.00	21.31	AVG	NoLimit
6		5726.053	53.69	1.94	55.63	68.20	-12.57	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/22
Test Frequency	5610MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

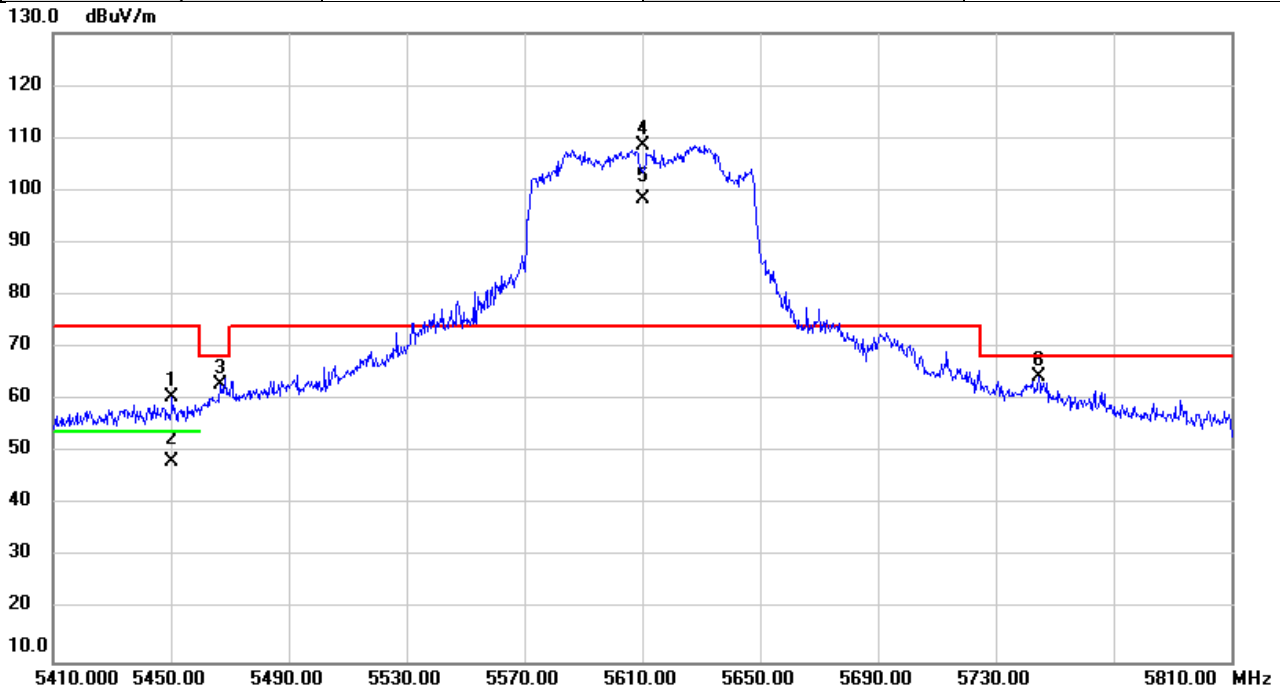


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5450.493	59.01	1.56	60.57	74.00	-13.43	peak	
2		5450.493	46.70	1.56	48.26	54.00	-5.74	AVG	
3		5466.640	61.50	1.56	63.06	68.20	-5.14	peak	
4	*	5610.000	106.94	1.74	108.68	74.00	34.68	peak	NoLimit
5	X	5610.000	96.61	1.74	98.35	74.00	24.35	AVG	NoLimit
6		5744.453	62.47	1.97	64.44	68.20	-3.76	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/22
Test Frequency	5775MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

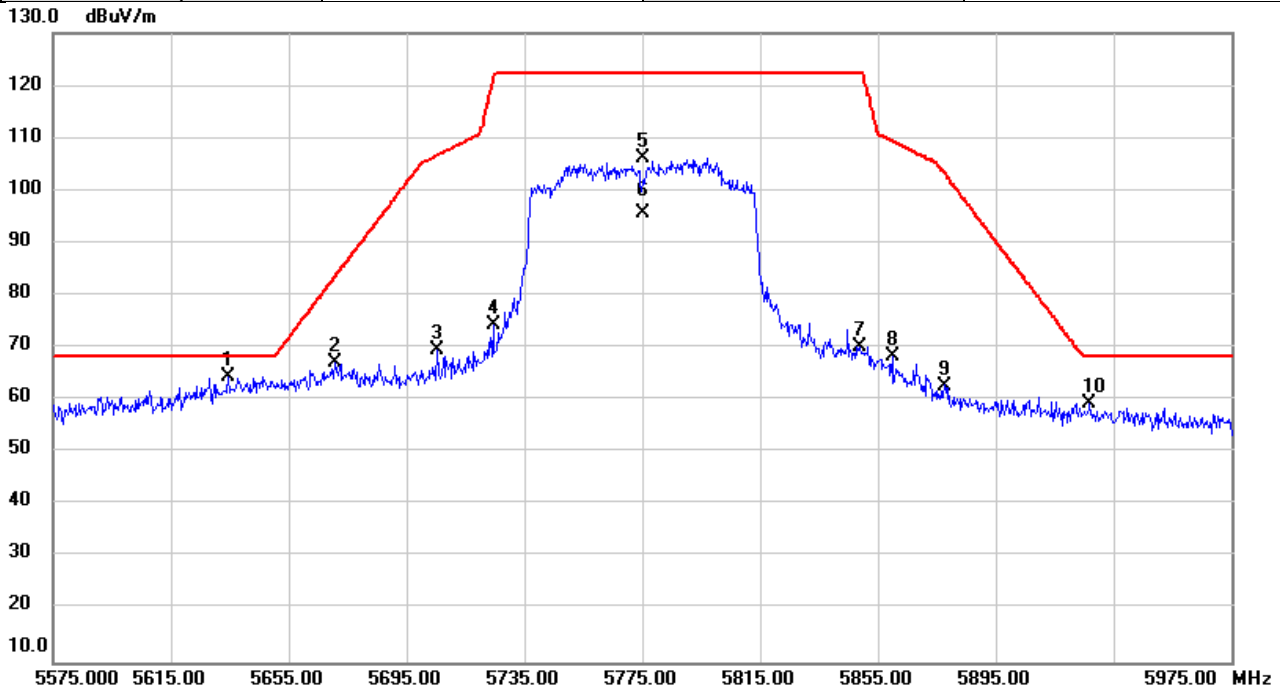


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5634.333	62.78	1.79	64.57	68.20	-3.63	peak	
2		5670.733	65.26	1.85	67.11	83.58	-16.47	peak	
3		5705.600	67.71	1.91	69.62	106.77	-37.15	peak	
4		5724.373	72.48	1.93	74.41	120.77	-46.36	peak	
5		5775.000	104.13	2.03	106.16	122.20	-16.04	peak	NoLimit
6		5775.000	93.60	2.03	95.63	122.20	-26.57	AVG	NoLimit
7		5849.133	68.03	2.14	70.17	122.20	-52.03	peak	
8		5860.067	66.33	2.15	68.48	109.38	-40.90	peak	
9		5877.480	60.61	2.19	62.80	103.36	-40.56	peak	
10		5926.760	56.97	2.27	59.24	68.20	-8.96	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/3/22
Test Frequency	5250MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

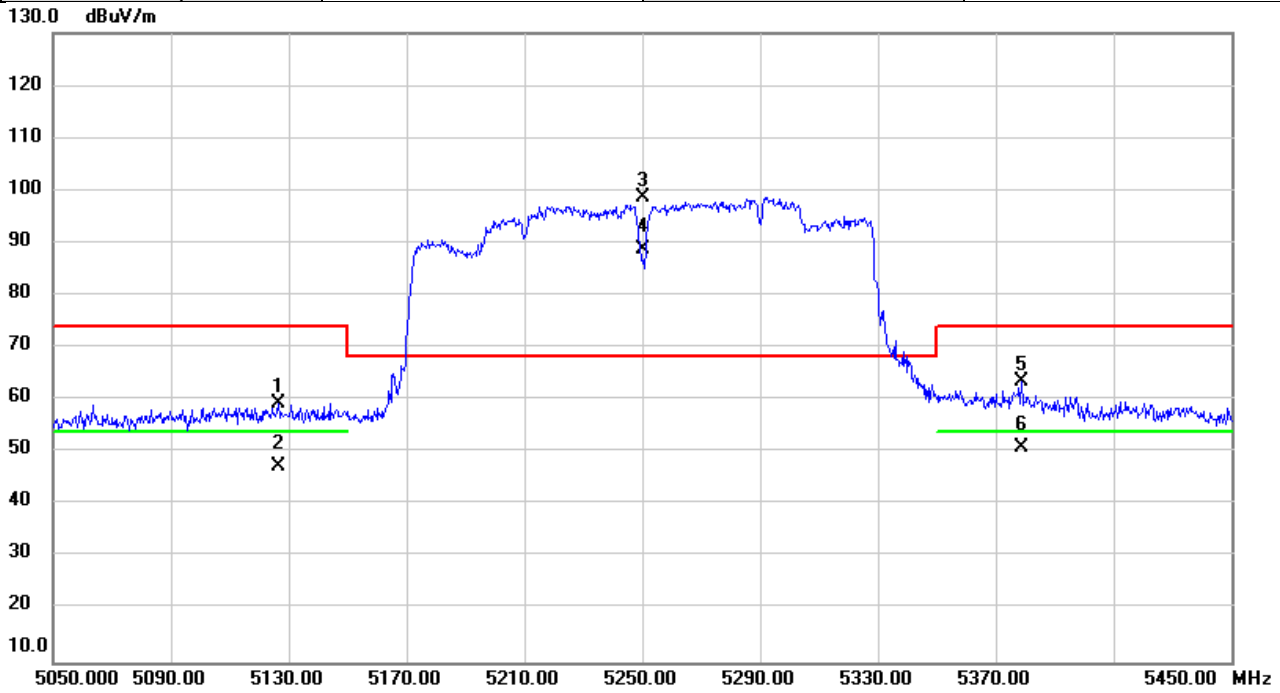


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5126.720	58.03	1.46	59.49	74.00	-14.51	peak	
2		5126.720	45.77	1.46	47.23	54.00	-6.77	AVG	
3	*	5250.000	97.21	1.49	98.70	68.20	30.50	peak	NoLimit
4	X	5250.000	87.35	1.49	88.84	68.20	20.64	AVG	NoLimit
5		5378.880	61.96	1.53	63.49	74.00	-10.51	peak	
6		5378.880	49.31	1.53	50.84	54.00	-3.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/3/22
Test Frequency	5570MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

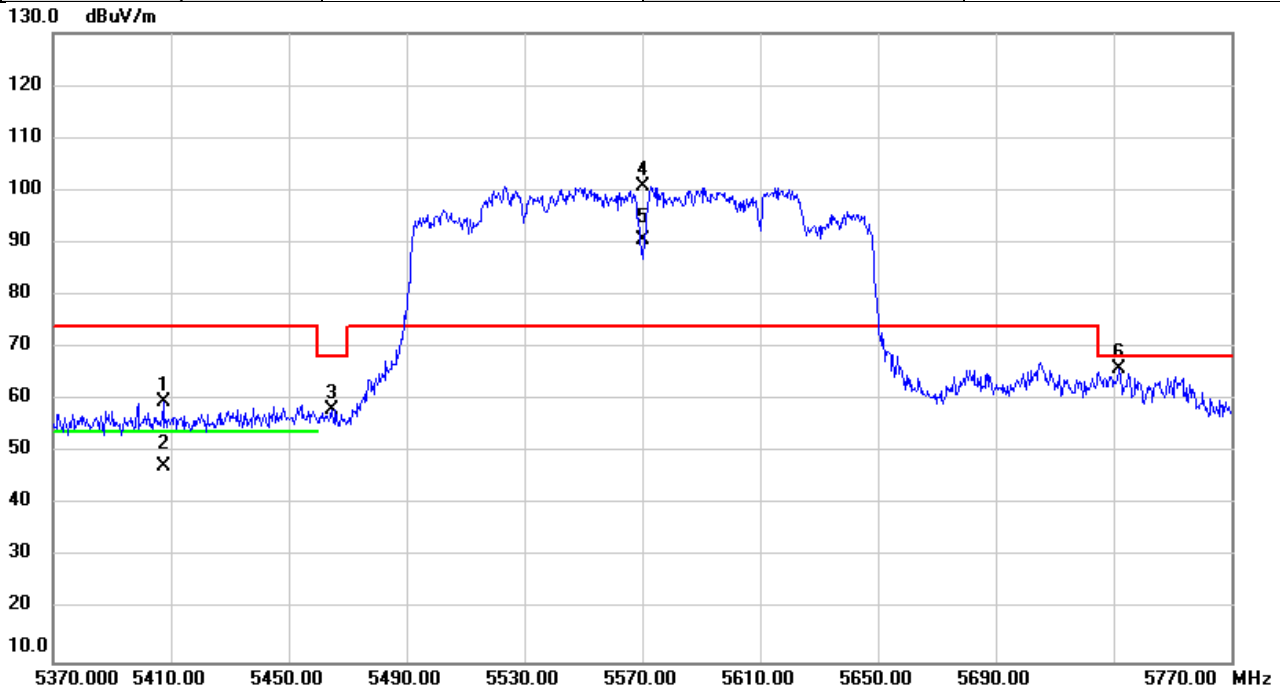


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5407.400	58.00	1.54	59.54	74.00	-14.46	peak	
2		5407.400	45.92	1.54	47.46	54.00	-6.54	AVG	
3		5464.733	56.66	1.56	58.22	68.20	-9.98	peak	
4	*	5570.000	99.08	1.69	100.77	74.00	26.77	peak	NoLimit
5	X	5570.000	88.97	1.69	90.66	74.00	16.66	AVG	NoLimit
6		5731.960	63.95	1.94	65.89	68.20	-2.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

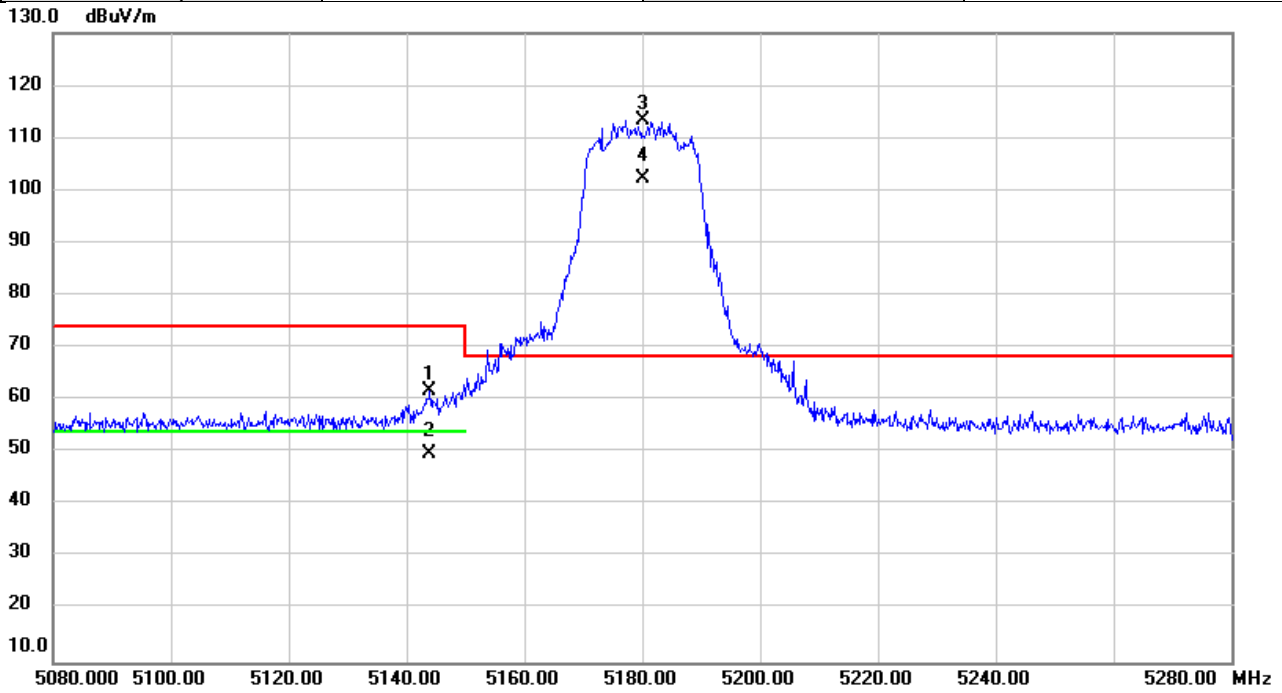


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5143.813	60.43	1.46	61.89	74.00	-12.11	peak	
2		5143.813	48.29	1.46	49.75	54.00	-4.25	AVG	
3	*	5180.000	111.83	1.47	113.30	68.20	45.10	peak	NoLimit
4	X	5180.000	100.81	1.47	102.28	68.20	34.08	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

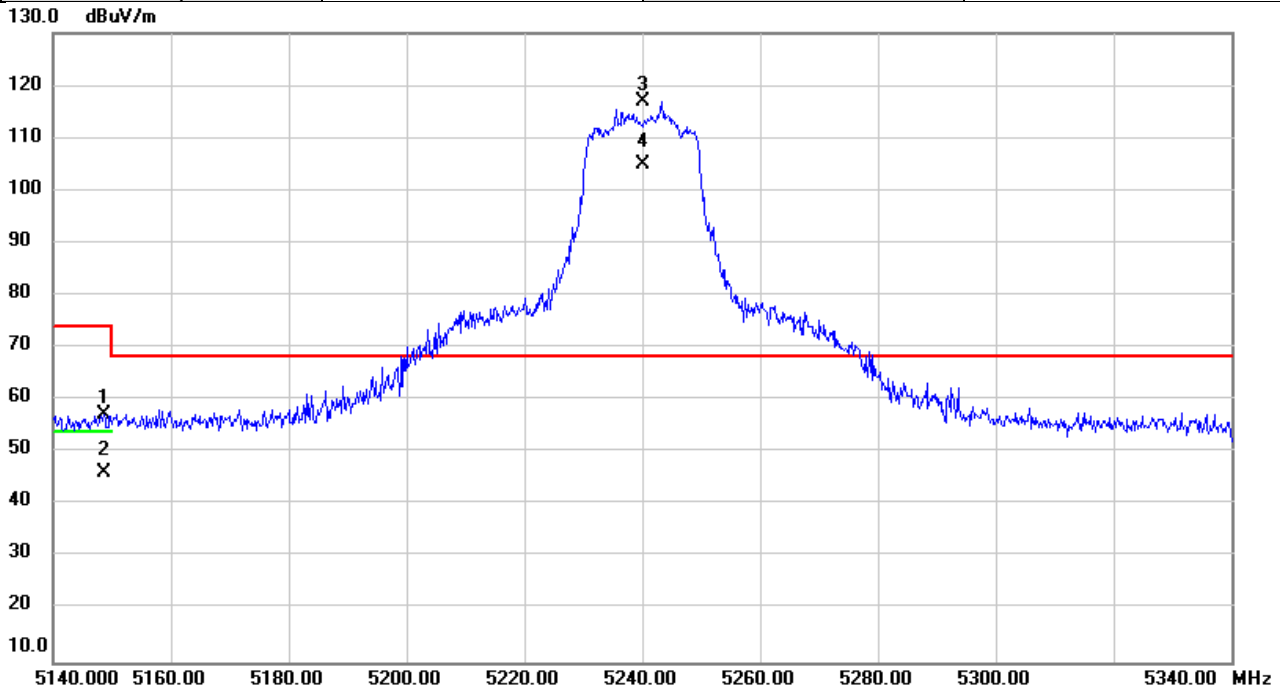


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5148.640	55.79	1.46	57.25	74.00	-16.75	peak	
2		5148.640	44.60	1.46	46.06	54.00	-7.94	AVG	
3	*	5240.000	115.35	1.49	116.84	68.20	48.64	peak	NoLimit
4	X	5240.000	103.47	1.49	104.96	68.20	36.76	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

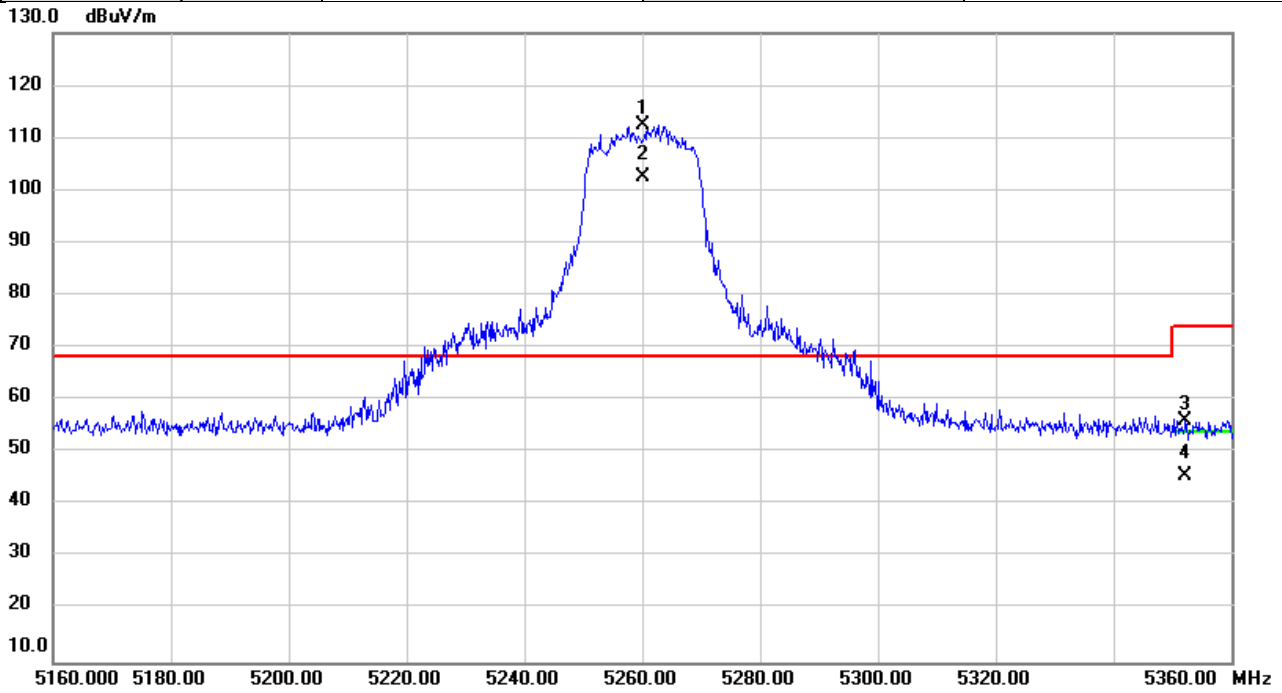


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5260.000	110.83	1.50	112.33	68.20	44.13	peak	NoLimit
2	X	5260.000	100.91	1.50	102.41	68.20	34.21	AVG	NoLimit
3		5352.213	54.65	1.53	56.18	74.00	-17.82	peak	
4		5352.213	43.89	1.53	45.42	54.00	-8.58	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

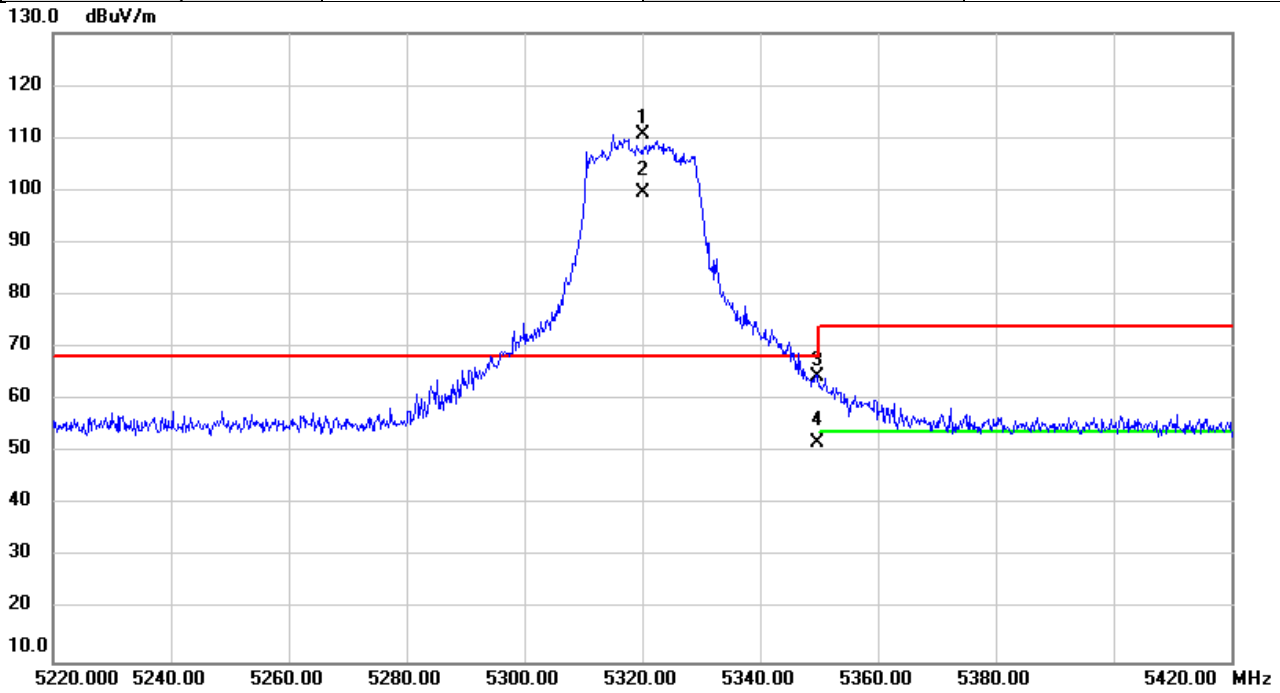


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5320.000	109.23	1.52	110.75	68.20	42.55	peak	NoLimit
2	X	5320.000	98.17	1.52	99.69	68.20	31.49	AVG	NoLimit
3		5349.800	62.94	1.53	64.47	68.20	-3.73	peak	
4		5349.800	50.36	1.53	51.89	68.20	-16.31	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5500MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

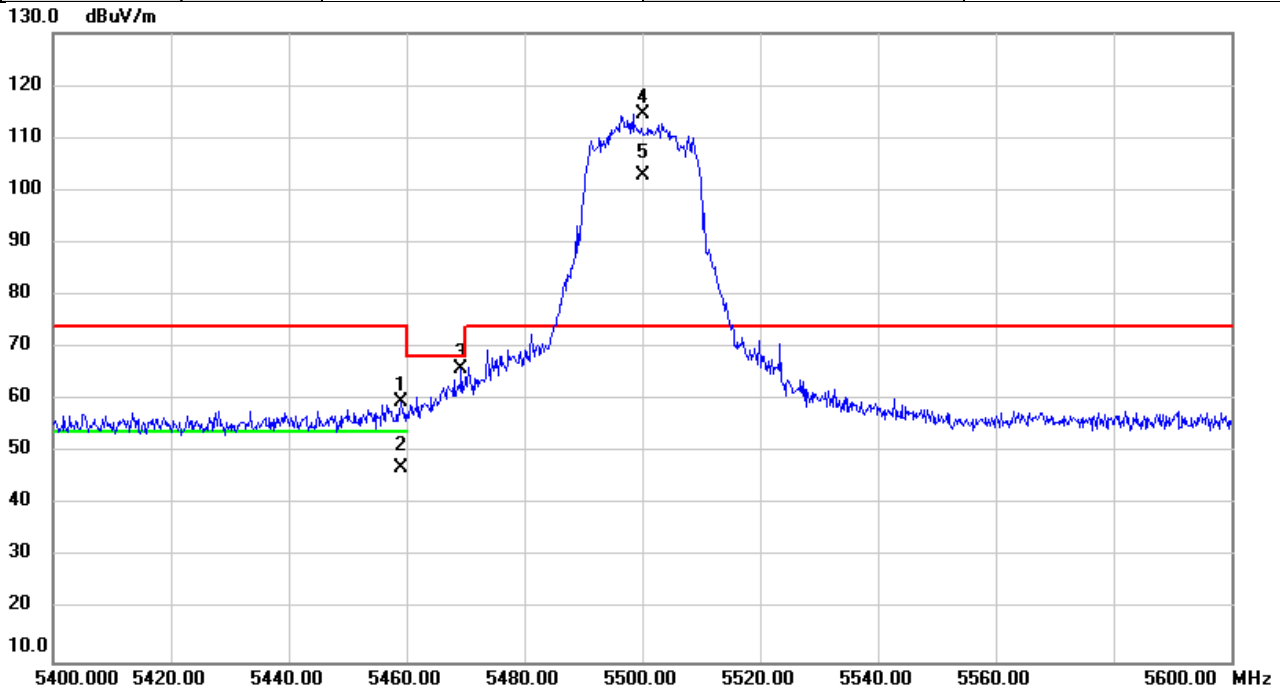


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5459.127	58.08	1.55	59.63	74.00	-14.37	peak	
2		5459.127	45.53	1.55	47.08	54.00	-6.92	AVG	
3		5469.300	64.44	1.56	66.00	68.20	-2.20	peak	
4	*	5500.000	113.04	1.57	114.61	74.00	40.61	peak	NoLimit
5	X	5500.000	101.23	1.57	102.80	74.00	28.80	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5700MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

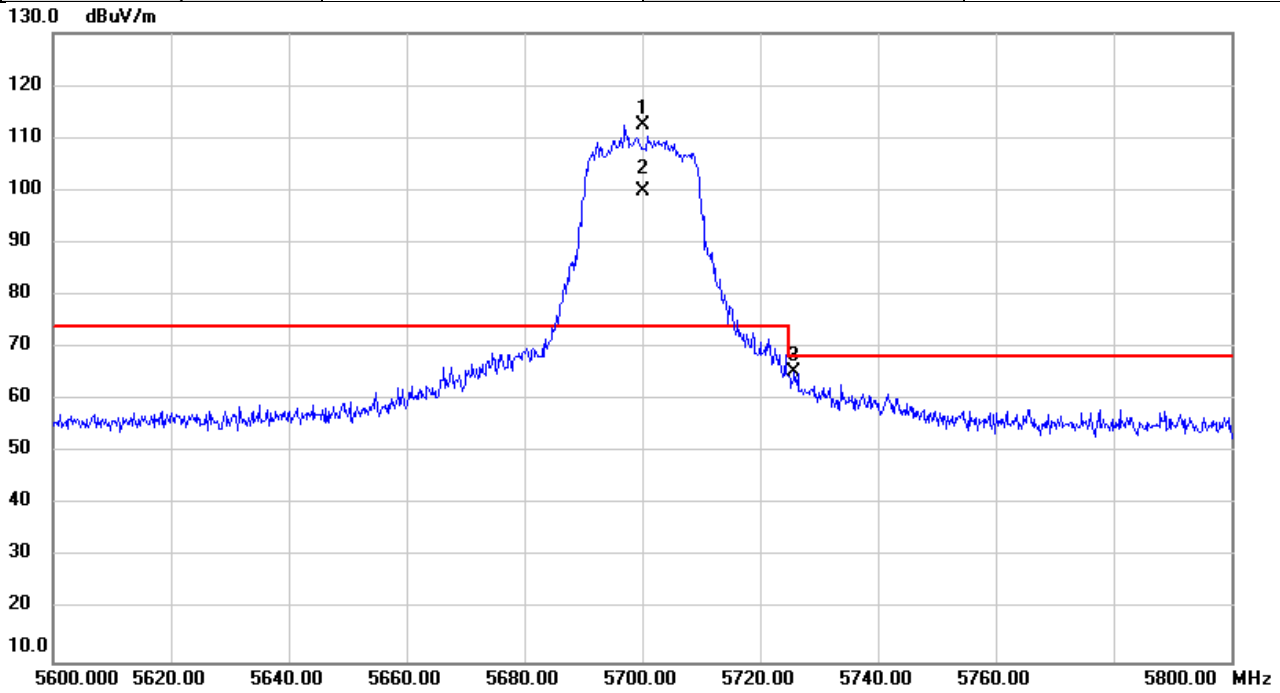


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.000	110.63	1.90	112.53	74.00	38.53	peak	NoLimit
2	X	5700.000	98.01	1.90	99.91	74.00	25.91	AVG	NoLimit
3		5725.820	63.37	1.94	65.31	68.20	-2.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5745MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

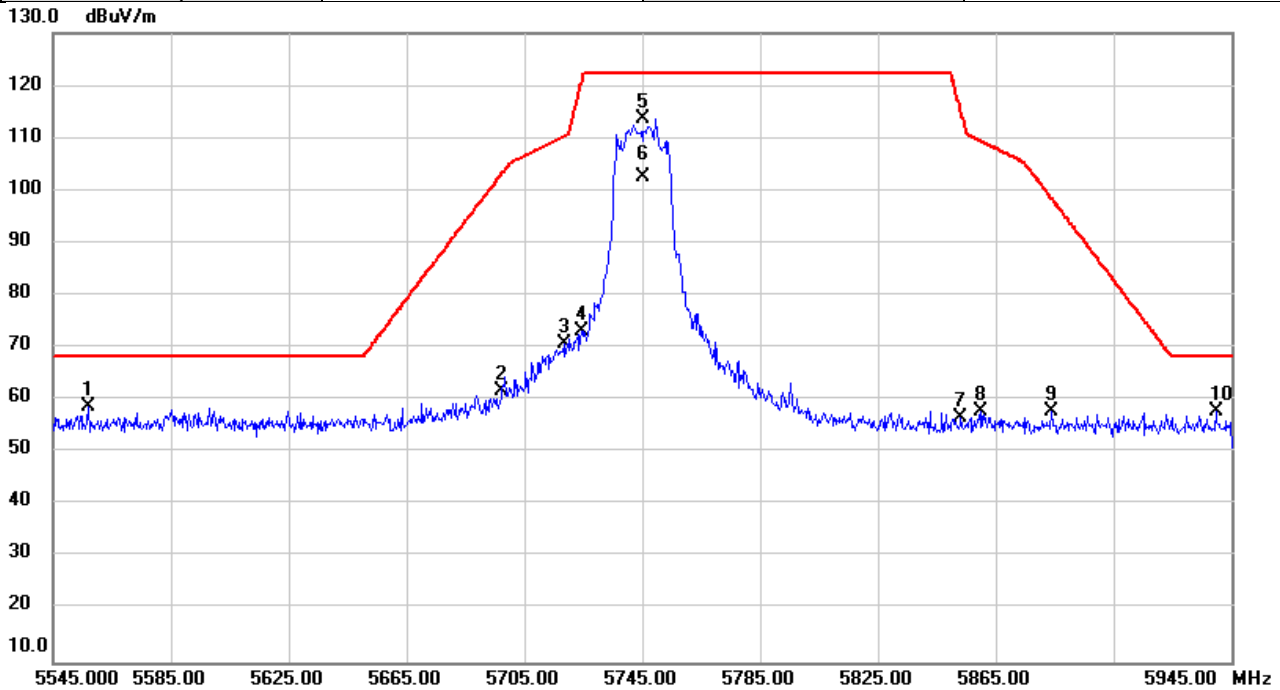


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5557.080	56.95	1.66	58.61	68.20	-9.59	peak	
2		5697.440	60.00	1.90	61.90	103.31	-41.41	peak	
3		5718.387	68.82	1.94	70.76	110.35	-39.59	peak	
4		5724.240	71.24	1.93	73.17	120.47	-47.30	peak	
5	*	5745.000	111.57	1.97	113.54	122.20	-8.66	peak	NoLimit
6		5745.000	100.55	1.97	102.52	122.20	-19.68	AVG	NoLimit
7		5853.053	54.45	2.14	56.59	115.24	-58.65	peak	
8		5859.720	55.56	2.15	57.71	109.48	-51.77	peak	
9		5884.107	55.50	2.20	57.70	98.44	-40.74	peak	
10		5939.693	55.54	2.30	57.84	68.20	-10.36	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/22
Test Frequency	5825MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

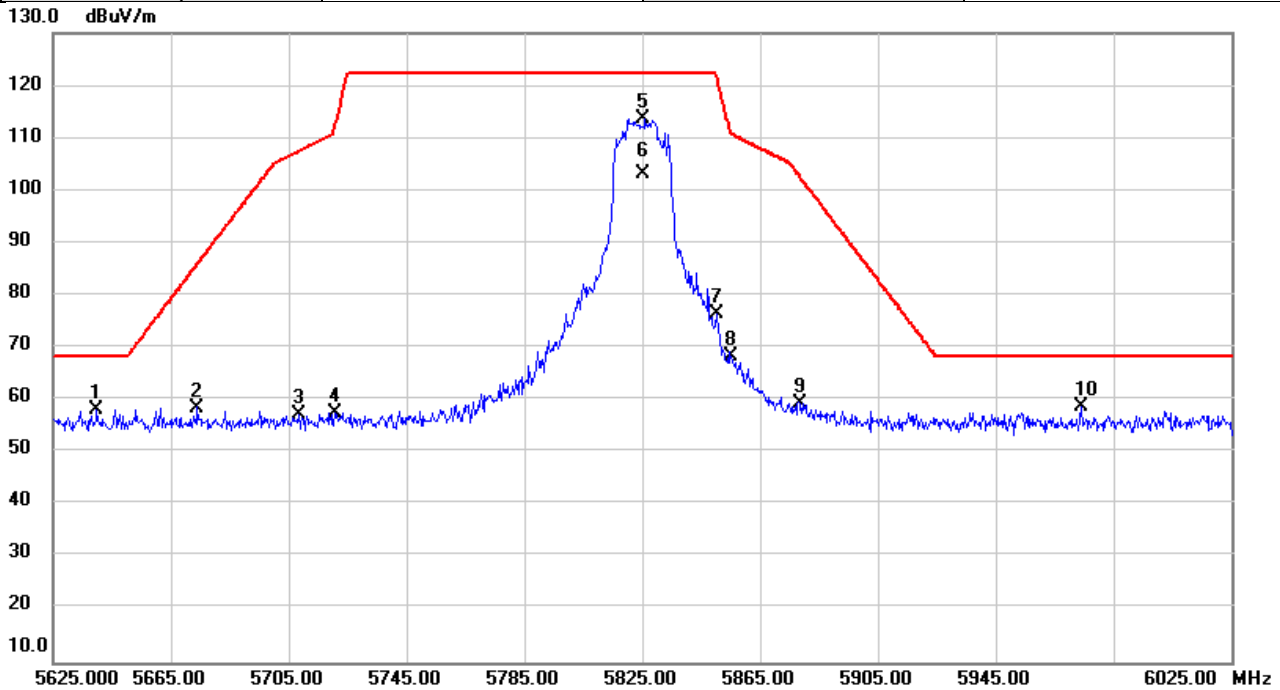


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5639.933	56.47	1.81	58.28	68.20	-9.92	peak	
2		5673.933	56.75	1.85	58.60	85.95	-27.35	peak	
3		5708.240	55.42	1.91	57.33	107.51	-50.18	peak	
4		5720.827	55.65	1.93	57.58	112.69	-55.11	peak	
5	*	5825.000	111.56	2.11	113.67	122.20	-8.53	peak	NoLimit
6		5825.000	101.06	2.11	103.17	122.20	-19.03	AVG	NoLimit
7		5850.160	74.43	2.14	76.57	121.84	-45.27	peak	
8		5855.227	66.12	2.15	68.27	110.74	-42.47	peak	
9		5878.360	57.22	2.19	59.41	102.70	-43.29	peak	
10		5973.867	56.40	2.34	58.74	68.20	-9.46	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5190MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

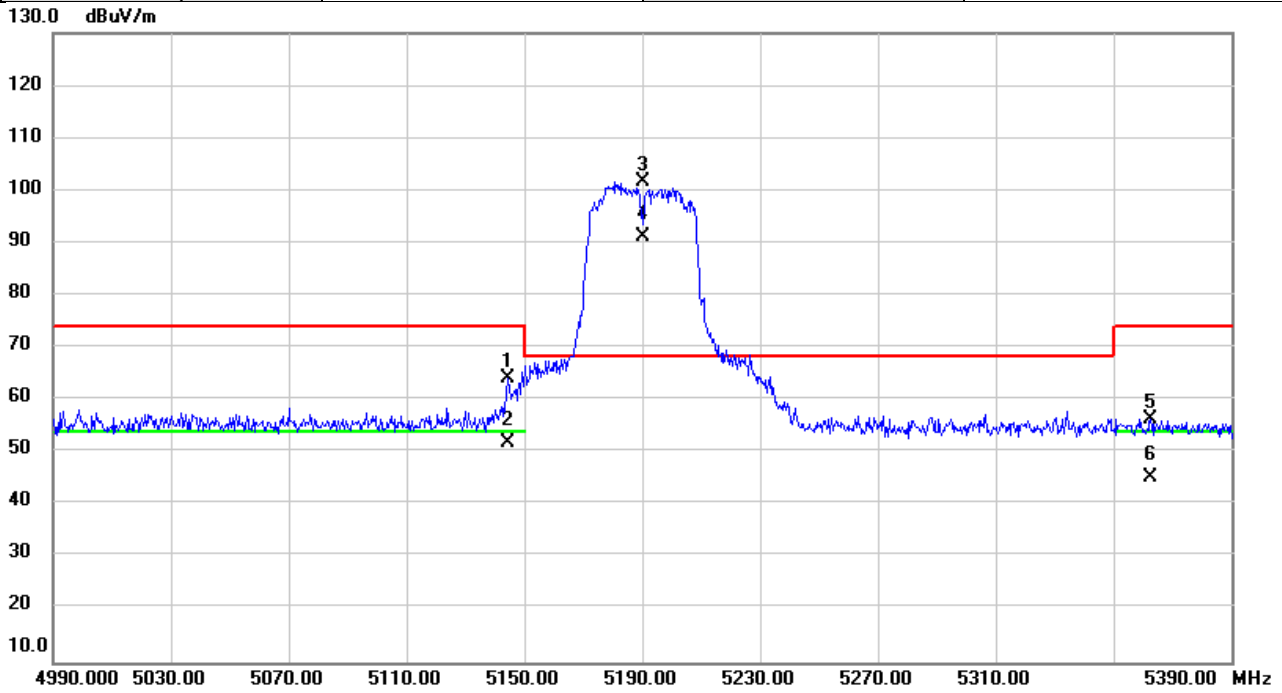


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5144.307	62.73	1.46	64.19	74.00	-9.81	peak	
2		5144.307	50.27	1.46	51.73	54.00	-2.27	AVG	
3	*	5190.000	100.10	1.48	101.58	68.20	33.38	peak	NoLimit
4	X	5190.000	89.62	1.48	91.10	68.20	22.90	AVG	NoLimit
5		5362.733	54.87	1.52	56.39	74.00	-17.61	peak	
6		5362.733	43.79	1.52	45.31	54.00	-8.69	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

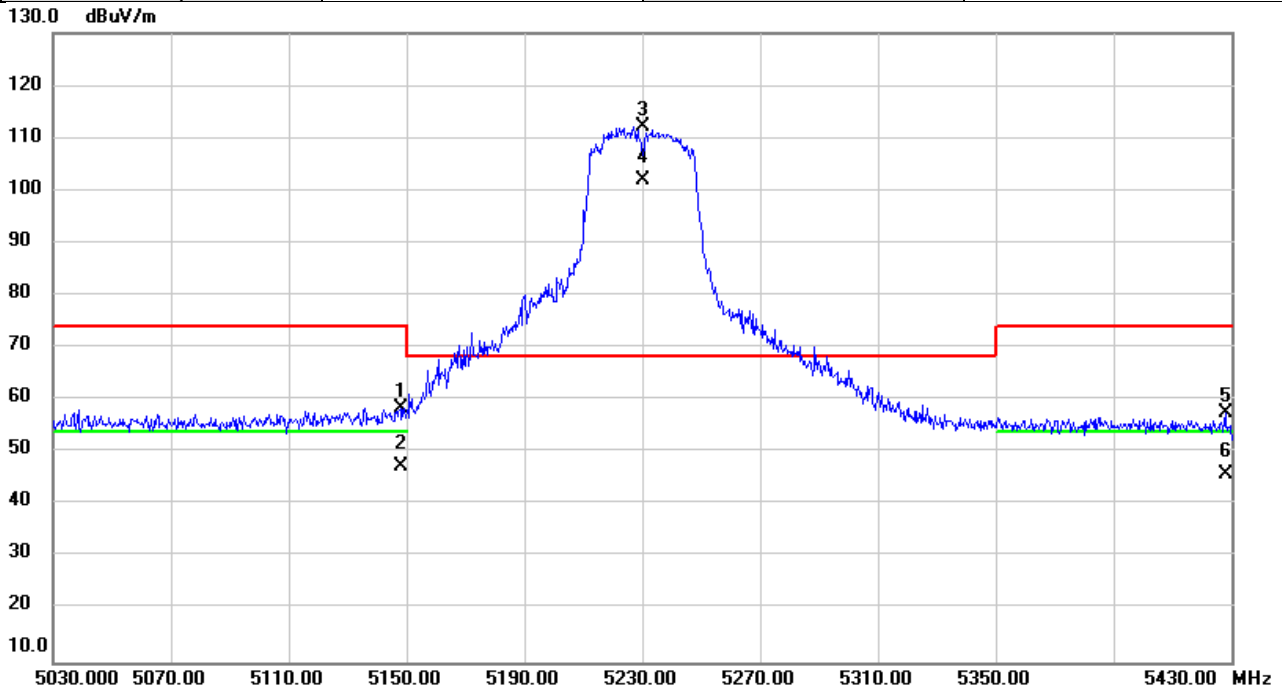


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5147.907	57.11	1.46	58.57	74.00	-15.43	peak	
2		5147.907	45.81	1.46	47.27	54.00	-6.73	AVG	
3	*	5230.000	110.67	1.49	112.16	68.20	43.96	peak	NoLimit
4	X	5230.000	100.56	1.49	102.05	68.20	33.85	AVG	NoLimit
5		5427.920	56.10	1.55	57.65	74.00	-16.35	peak	
6		5427.920	44.16	1.55	45.71	54.00	-8.29	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5270MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

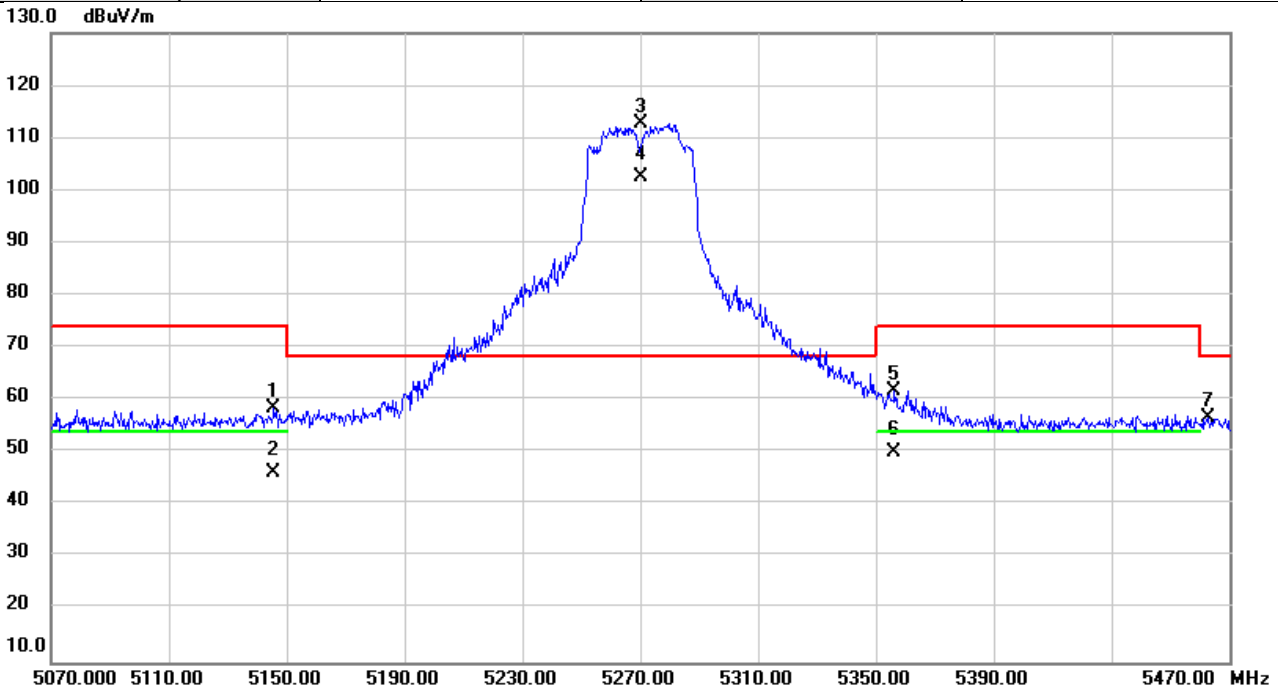


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5145.680	56.90	1.46	58.36	74.00	-15.64	peak	
2		5145.680	44.66	1.46	46.12	54.00	-7.88	AVG	
3	*	5270.000	111.17	1.50	112.67	68.20	44.47	peak	NoLimit
4	X	5270.000	101.07	1.50	102.57	68.20	34.37	AVG	NoLimit
5		5356.147	60.34	1.53	61.87	74.00	-12.13	peak	
6		5356.147	48.61	1.53	50.14	54.00	-3.86	AVG	
7		5462.880	55.08	1.56	56.64	68.20	-11.56	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5310MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

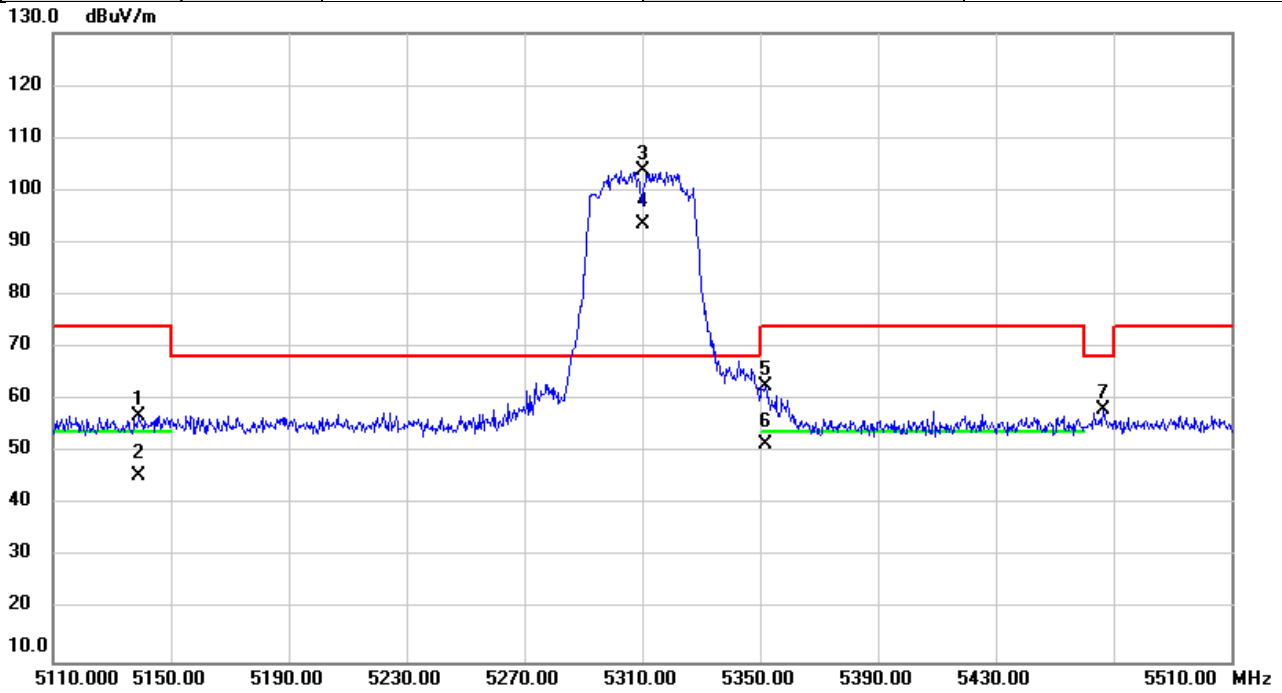


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5139.187	55.47	1.47	56.94	74.00	-17.06	peak	
2		5139.187	44.05	1.47	45.52	54.00	-8.48	AVG	
3	*	5310.000	102.14	1.51	103.65	68.20	35.45	peak	NoLimit
4	X	5310.000	92.03	1.51	93.54	68.20	25.34	AVG	NoLimit
5		5351.707	61.07	1.53	62.60	74.00	-11.40	peak	
6		5351.707	50.06	1.53	51.59	54.00	-2.41	AVG	
7		5466.573	56.68	1.56	58.24	68.20	-9.96	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5510MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

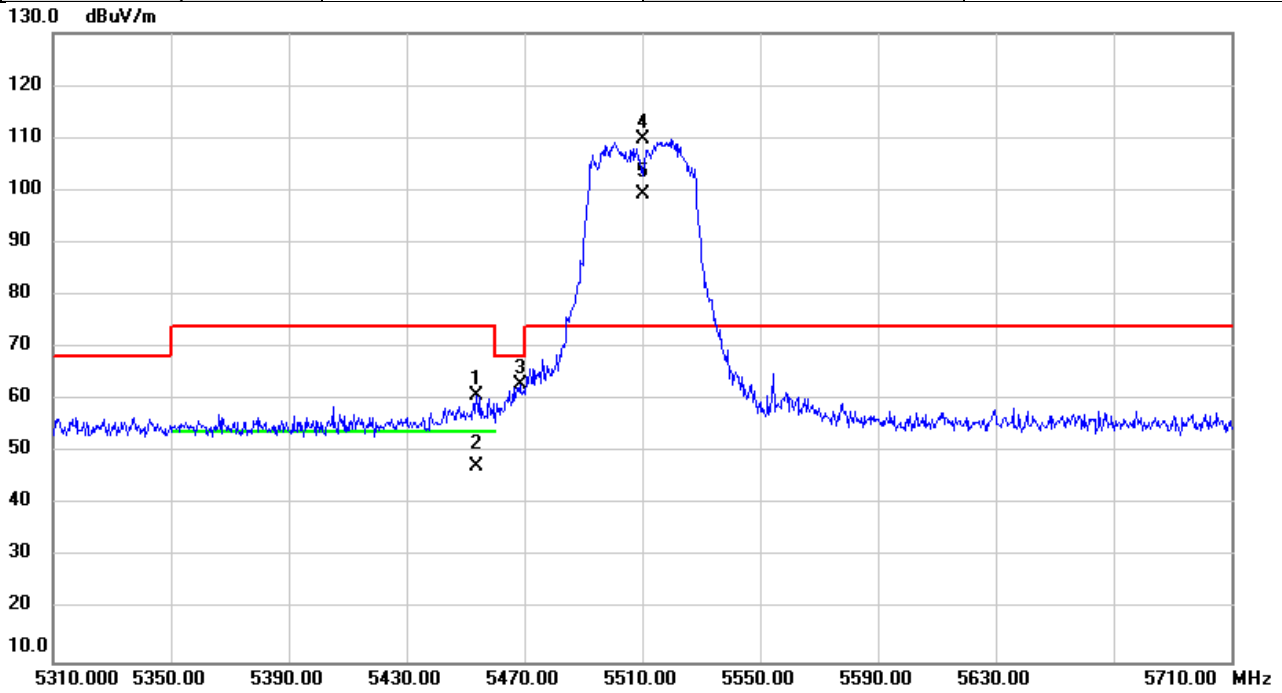


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5453.880	59.26	1.55	60.81	74.00	-13.19	peak	
2		5453.880	45.92	1.55	47.47	54.00	-6.53	AVG	
3		5468.747	61.52	1.56	63.08	68.20	-5.12	peak	
4	*	5510.000	108.17	1.58	109.75	74.00	35.75	peak	NoLimit
5	X	5510.000	97.59	1.58	99.17	74.00	25.17	AVG	NoLimit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

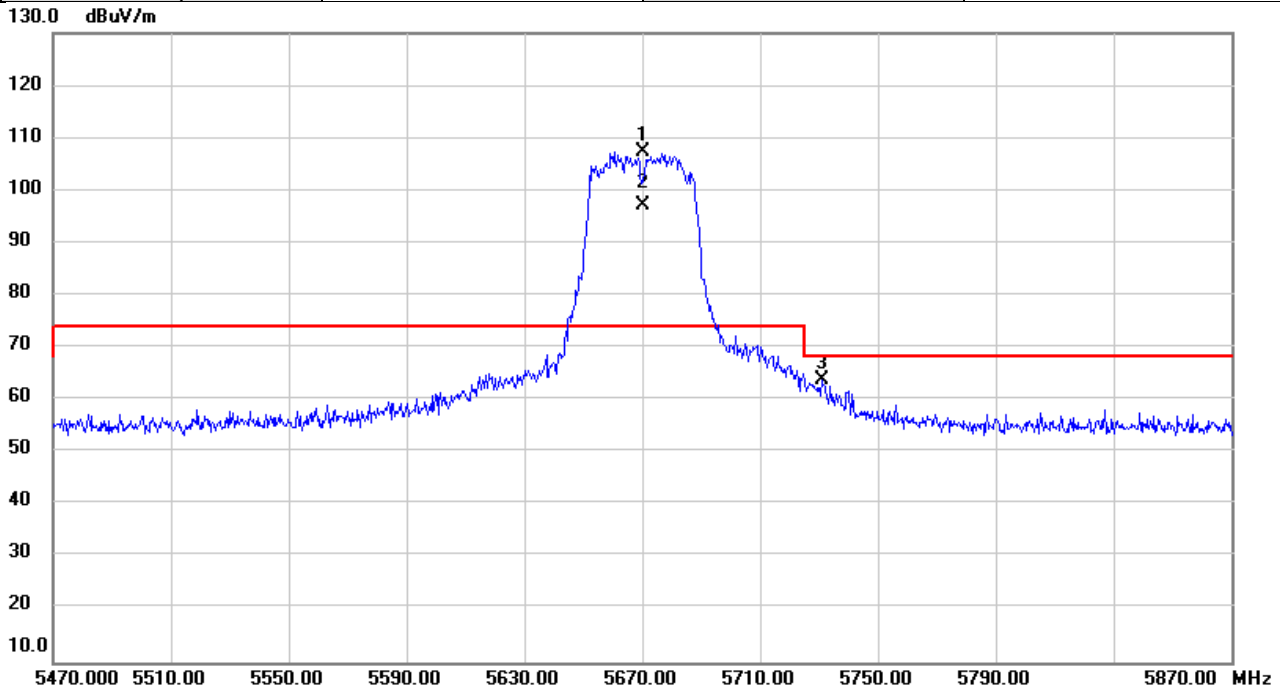


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5670.000	105.60	1.85	107.45	74.00	33.45	peak	NoLimit
2	X	5670.000	95.34	1.85	97.19	74.00	23.19	AVG	NoLimit
3		5731.160	62.01	1.94	63.95	68.20	-4.25	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5755MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

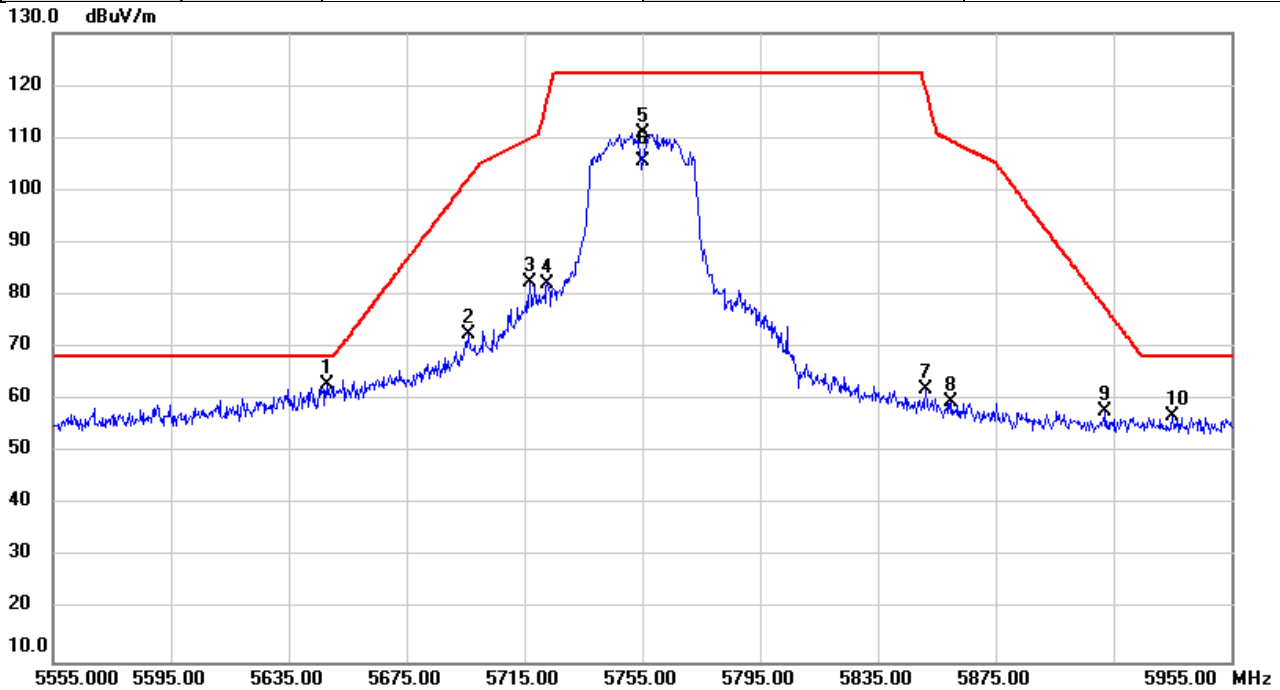


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5648.253	61.03	1.82	62.85	68.20	-5.35	peak	
2		5696.173	70.61	1.89	72.50	102.38	-29.88	peak	
3		5716.907	80.47	1.93	82.40	109.94	-27.54	peak	
4		5722.907	80.37	1.93	82.30	117.43	-35.13	peak	
5		5755.000	108.93	1.99	110.92	122.20	-11.28	peak	NoLimit
6		5755.000	103.65	1.99	105.64	122.20	-16.56	AVG	NoLimit
7		5851.293	59.90	2.14	62.04	119.25	-57.21	peak	
8		5860.027	57.52	2.15	59.67	109.39	-49.72	peak	
9		5912.293	55.49	2.24	57.73	77.57	-19.84	peak	
10		5934.760	54.53	2.28	56.81	68.20	-11.39	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/22
Test Frequency	5795MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

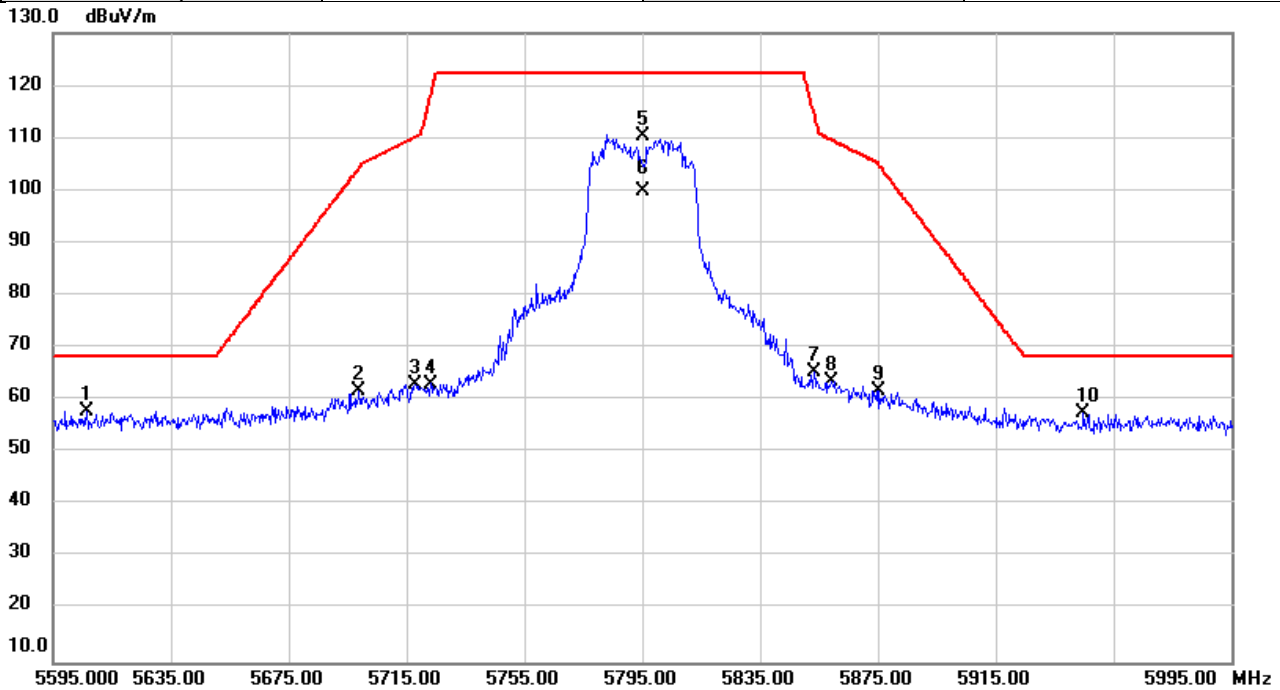


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5606.307	56.11	1.74	57.85	68.20	-10.35	peak	
2		5698.627	59.88	1.90	61.78	104.19	-42.41	peak	
3		5718.133	61.09	1.94	63.03	110.28	-47.25	peak	
4		5723.267	61.17	1.93	63.10	118.25	-55.15	peak	
5		5795.000	108.45	2.05	110.50	122.20	-11.70	peak	NoLimit
6		5795.000	97.88	2.05	99.93	122.20	-22.27	AVG	NoLimit
7		5853.173	63.24	2.14	65.38	114.96	-49.58	peak	
8		5859.040	61.45	2.15	63.60	109.67	-46.07	peak	
9		5875.453	59.51	2.19	61.70	104.86	-43.16	peak	
10		5944.827	55.27	2.30	57.57	68.20	-10.63	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/22
Test Frequency	5210MHz	Polarization	Horizontal
Temp	23°C	Hum.	61%

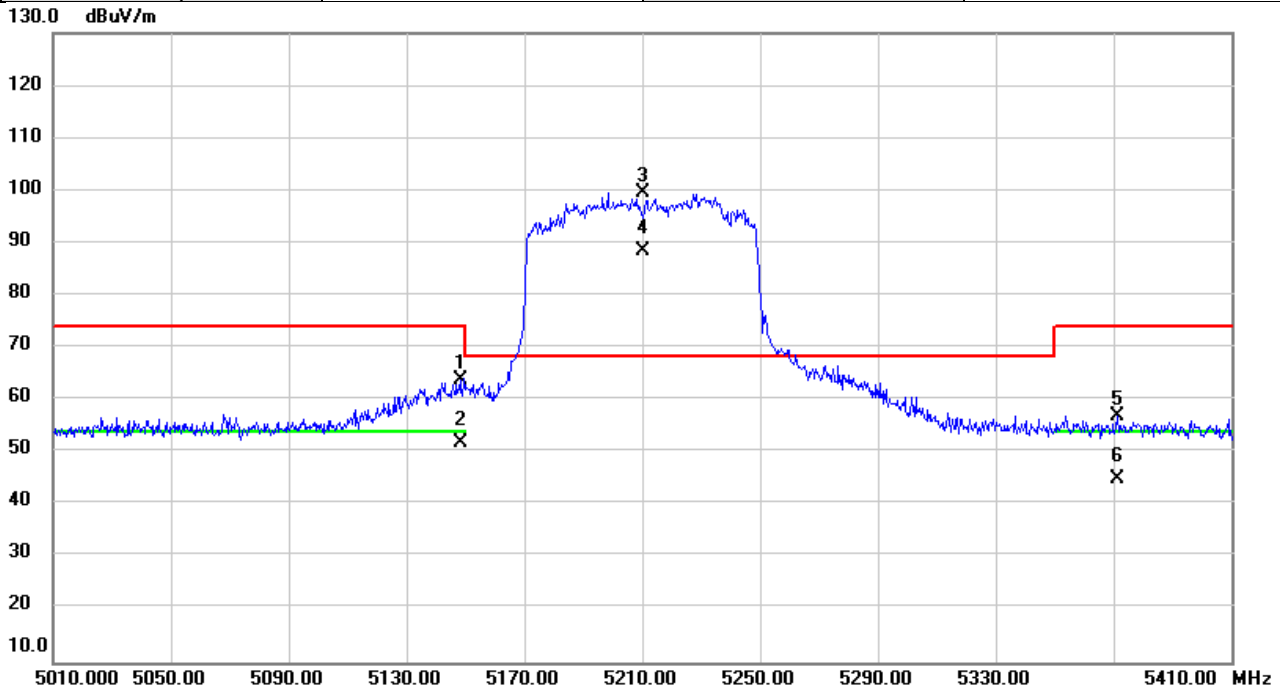


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5148.147	62.30	1.46	63.76	74.00	-10.24	peak	
2		5148.147	50.43	1.46	51.89	54.00	-2.11	AVG	
3	*	5210.000	98.03	1.48	99.51	68.20	31.31	peak	NoLimit
4	X	5210.000	87.09	1.48	88.57	68.20	20.37	AVG	NoLimit
5		5371.200	55.38	1.53	56.91	74.00	-17.09	peak	
6		5371.200	43.54	1.53	45.07	54.00	-8.93	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/22
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

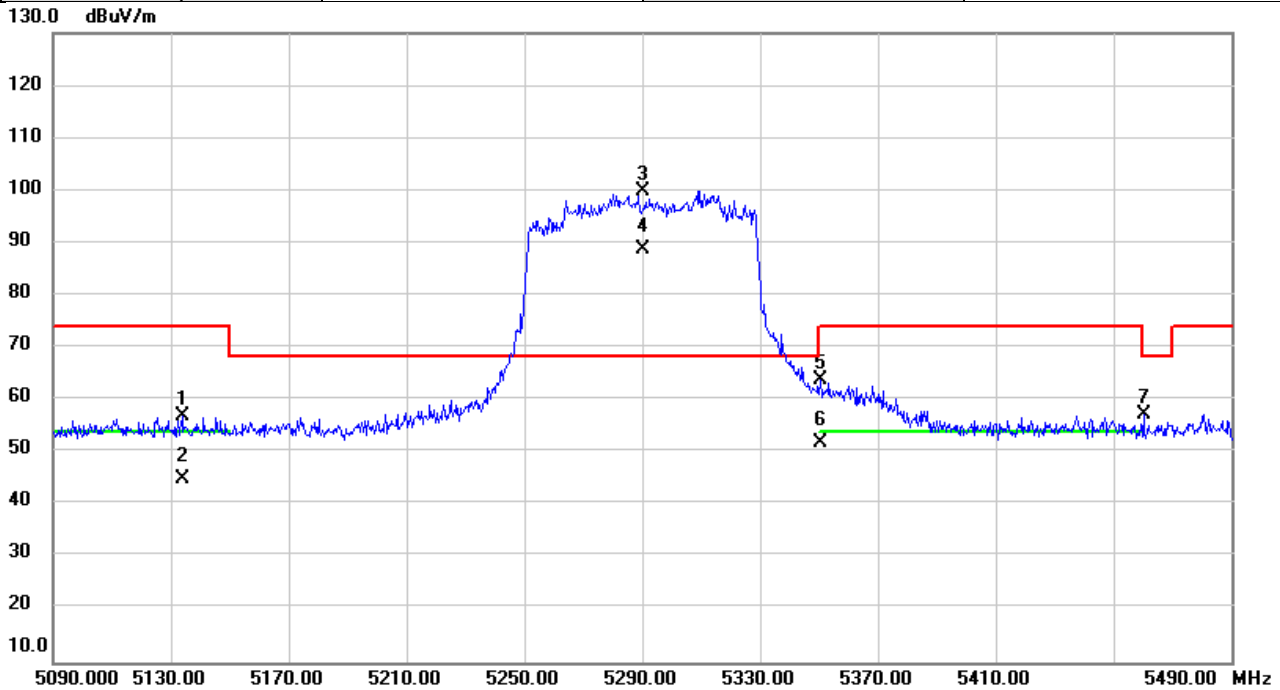


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5133.760	55.60	1.46	57.06	74.00	-16.94	peak	
2		5133.760	43.38	1.46	44.84	54.00	-9.16	AVG	
3	*	5290.000	98.46	1.51	99.97	68.20	31.77	peak	NoLimit
4	X	5290.000	87.17	1.51	88.68	68.20	20.48	AVG	NoLimit
5		5350.560	62.27	1.53	63.80	74.00	-10.20	peak	
6		5350.560	50.33	1.53	51.86	54.00	-2.14	AVG	
7		5460.213	55.61	1.56	57.17	68.20	-11.03	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/22
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

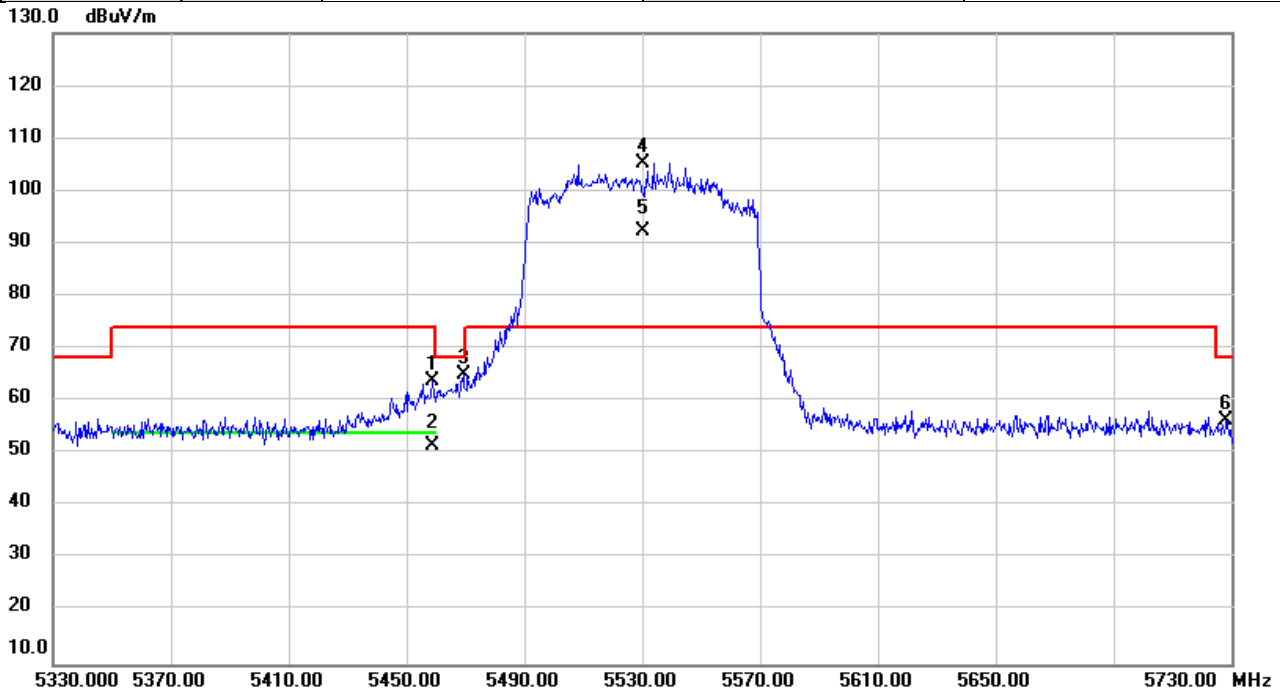


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5458.867	62.18	1.55	63.73	74.00	-10.27	peak	
2		5458.867	50.12	1.55	51.67	54.00	-2.33	AVG	
3		5469.387	63.58	1.56	65.14	68.20	-3.06	peak	
4	*	5530.000	103.68	1.62	105.30	74.00	31.30	peak	NoLimit
5	X	5530.000	90.64	1.62	92.26	74.00	18.26	AVG	NoLimit
6		5728.360	54.35	1.94	56.29	68.20	-11.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/22
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

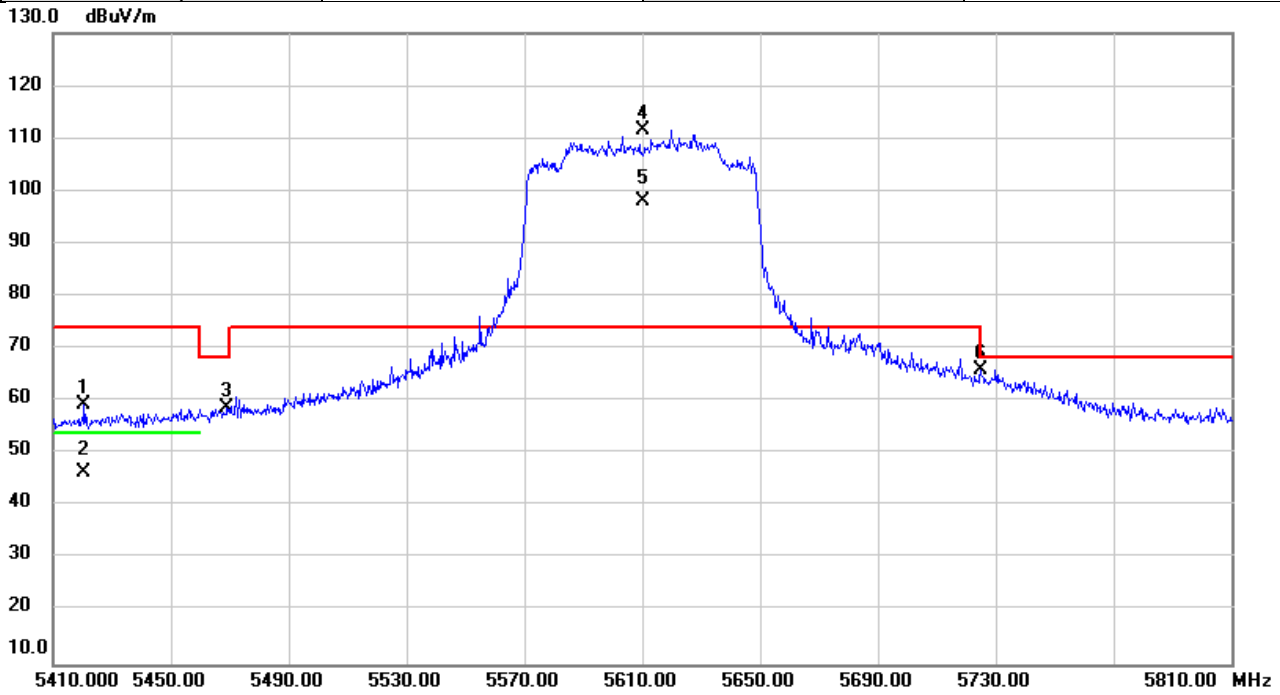


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5420.547	57.67	1.55	59.22	74.00	-14.78	peak	
2		5420.547	44.89	1.55	46.44	54.00	-7.56	AVG	
3		5469.187	57.14	1.56	58.70	68.20	-9.50	peak	
4	*	5610.000	109.95	1.74	111.69	74.00	37.69	peak	NoLimit
5	X	5610.000	96.35	1.74	98.09	74.00	24.09	AVG	NoLimit
6		5725.173	64.10	1.94	66.04	68.20	-2.16	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/22
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

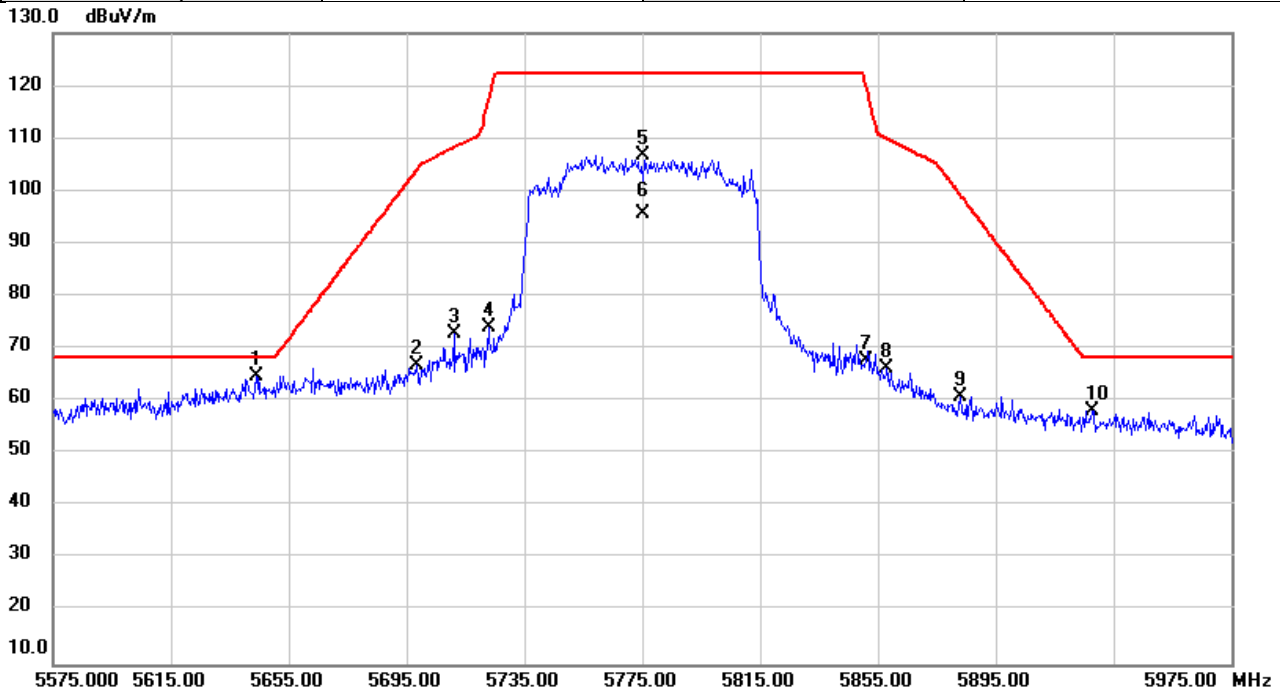


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5643.933	62.88	1.81	64.69	68.20	-3.51	peak	
2		5698.333	64.84	1.90	66.74	103.97	-37.23	peak	
3		5711.053	71.06	1.92	72.98	108.30	-35.32	peak	
4		5722.947	72.09	1.93	74.02	117.52	-43.50	peak	
5		5775.000	104.75	2.03	106.78	122.20	-15.42	peak	NoLimit
6		5775.000	93.56	2.03	95.59	122.20	-26.61	AVG	NoLimit
7		5850.973	65.75	2.14	67.89	119.98	-52.09	peak	
8		5857.947	64.20	2.15	66.35	109.97	-43.62	peak	
9		5883.000	58.79	2.20	60.99	99.26	-38.27	peak	
10		5927.773	55.81	2.27	58.08	68.20	-10.12	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/3/22
Test Frequency	5250MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

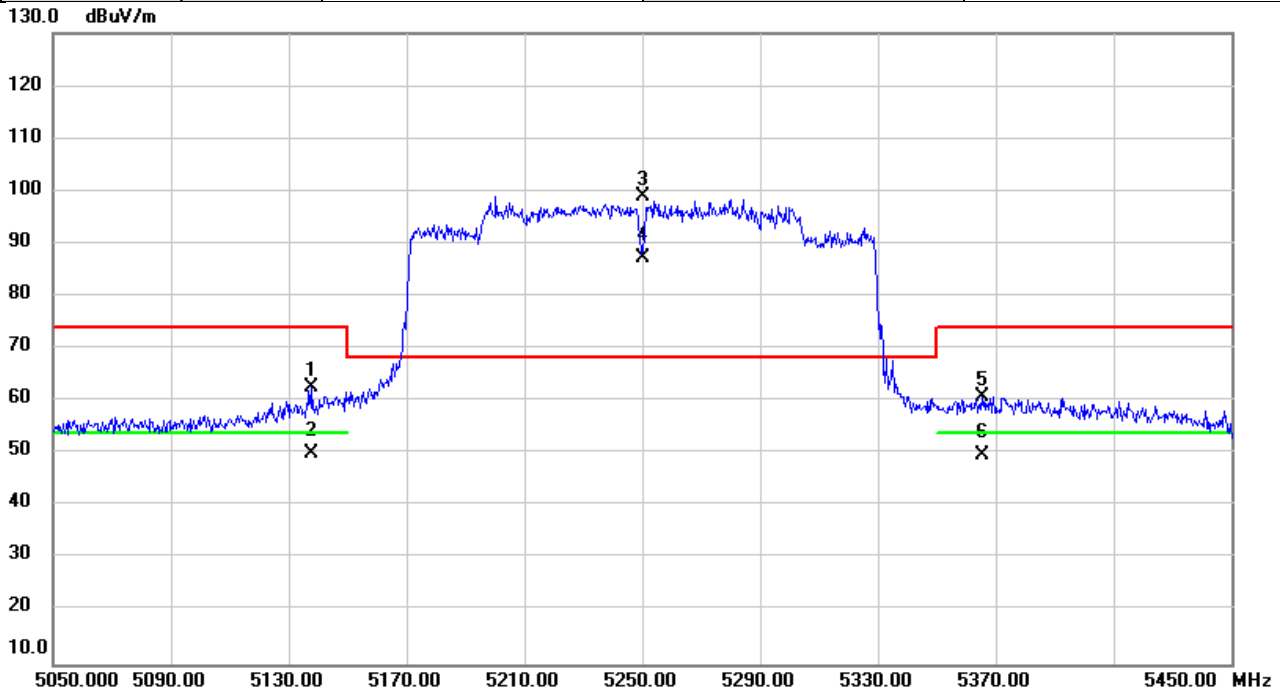


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5137.907	61.18	1.47	62.65	74.00	-11.35	peak	
2		5137.907	48.68	1.47	50.15	54.00	-3.85	AVG	
3	*	5250.000	97.53	1.49	99.02	68.20	30.82	peak	NoLimit
4	X	5250.000	85.75	1.49	87.24	68.20	19.04	AVG	NoLimit
5		5365.627	59.34	1.53	60.87	74.00	-13.13	peak	
6		5365.627	48.35	1.53	49.88	54.00	-4.12	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/3/22
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

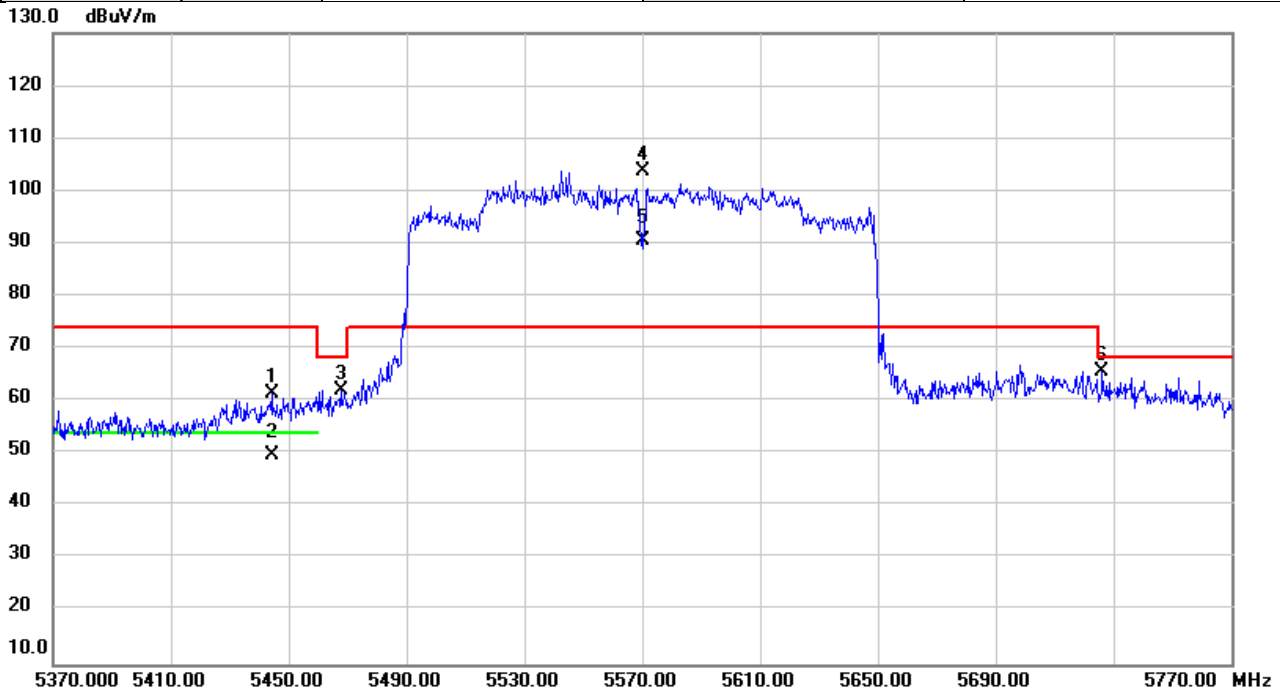


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5444.200	59.87	1.56	61.43	74.00	-12.57	peak	
2		5444.200	48.30	1.56	49.86	54.00	-4.14	AVG	
3		5467.773	60.48	1.56	62.04	68.20	-6.16	peak	
4	*	5570.000	102.20	1.69	103.89	74.00	29.89	peak	NoLimit
5	X	5570.000	88.75	1.69	90.44	74.00	16.44	AVG	NoLimit
6		5726.080	63.81	1.94	65.75	68.20	-2.45	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5180MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

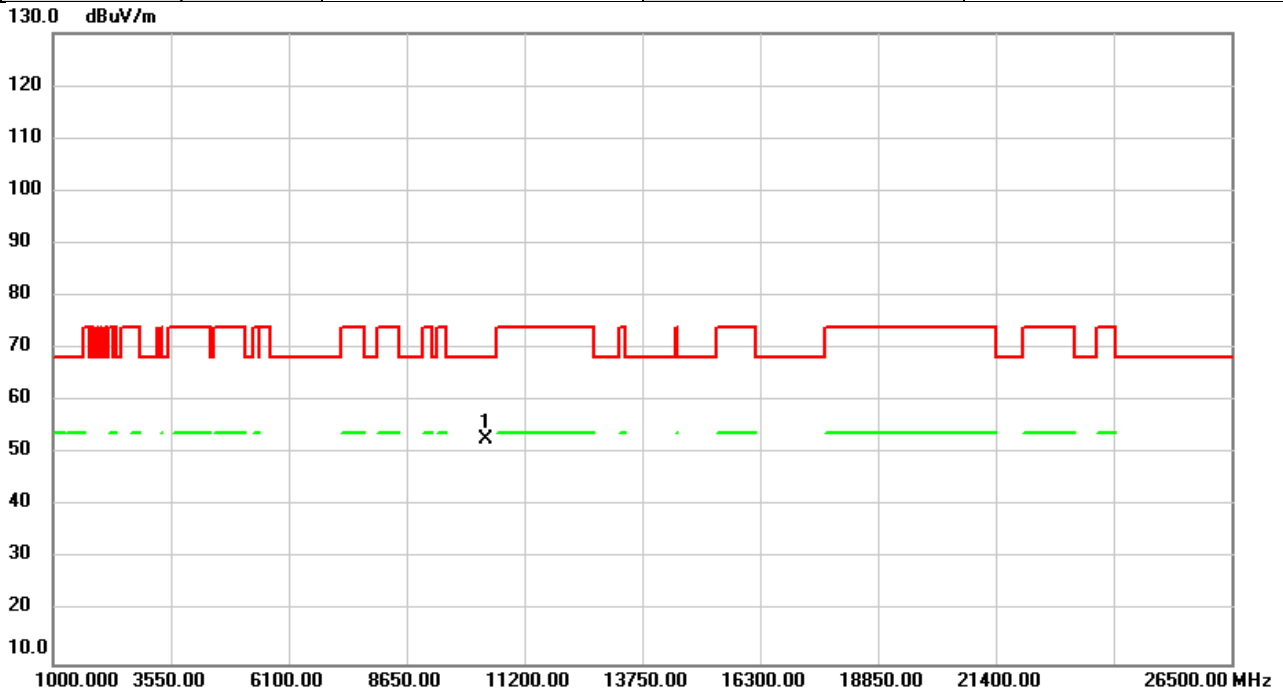


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	47.12	5.71	52.83	68.20	-15.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5180MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

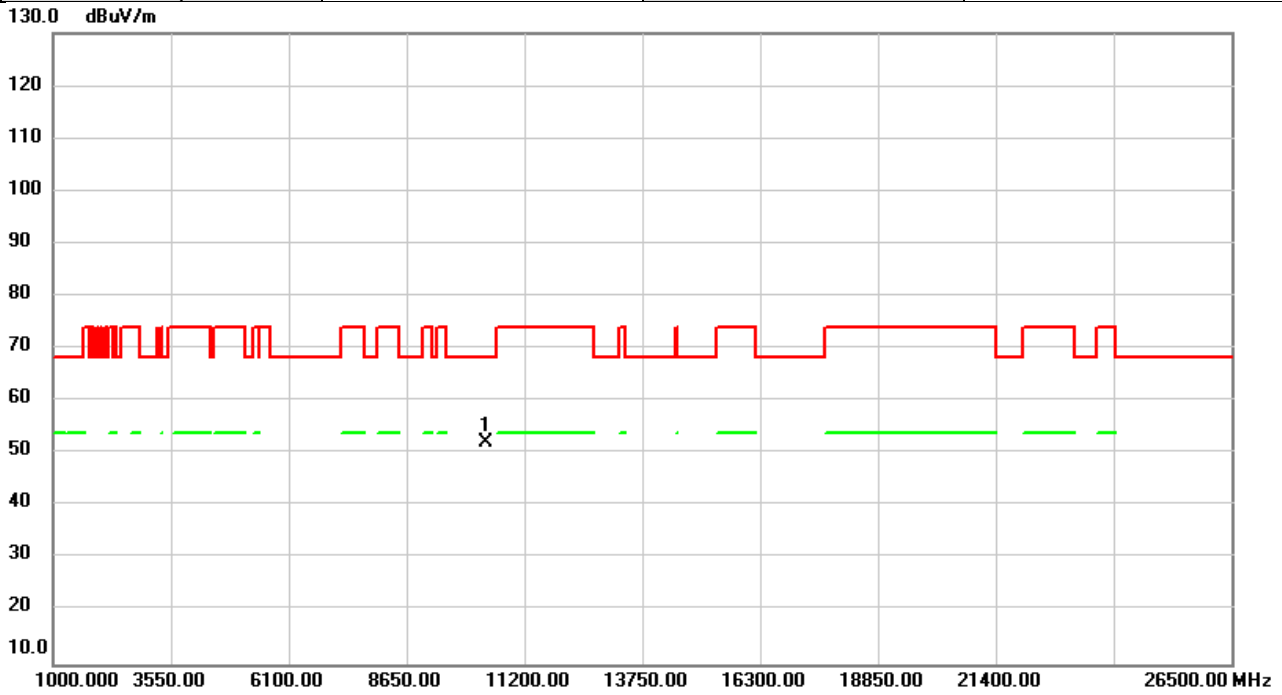


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	46.32	5.71	52.03	68.20	-16.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5200MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

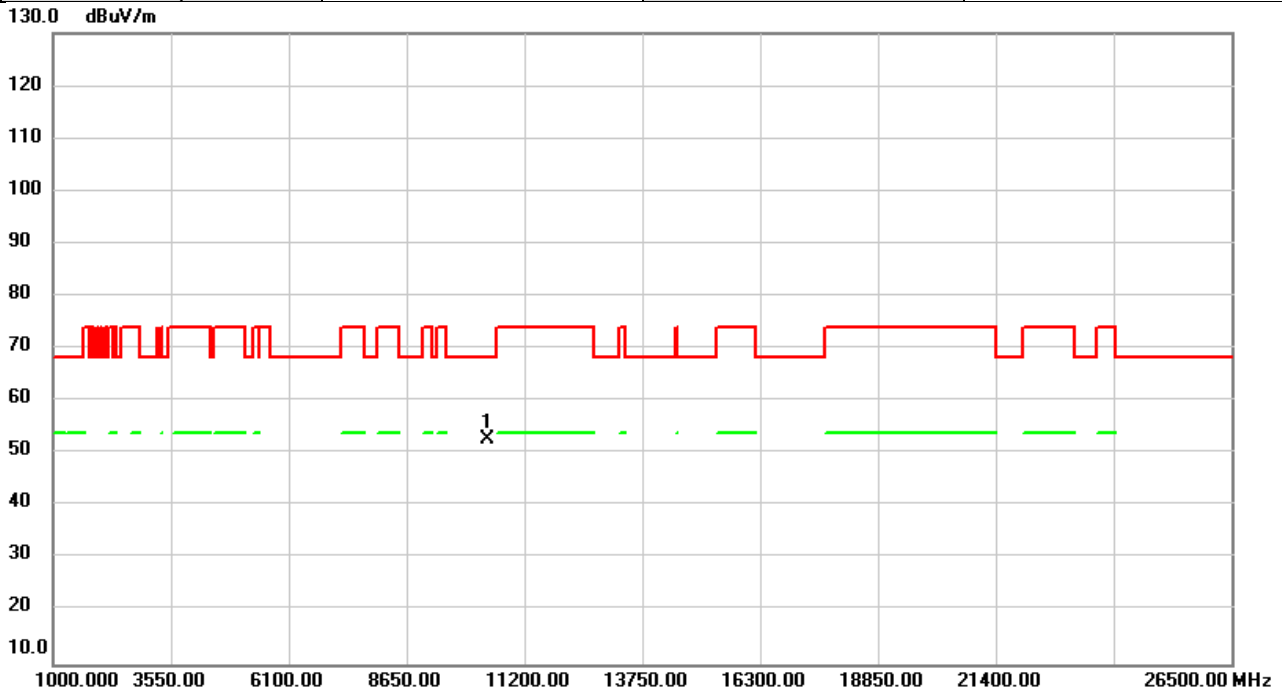


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	47.28	5.61	52.89	68.20	-15.31	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5200MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

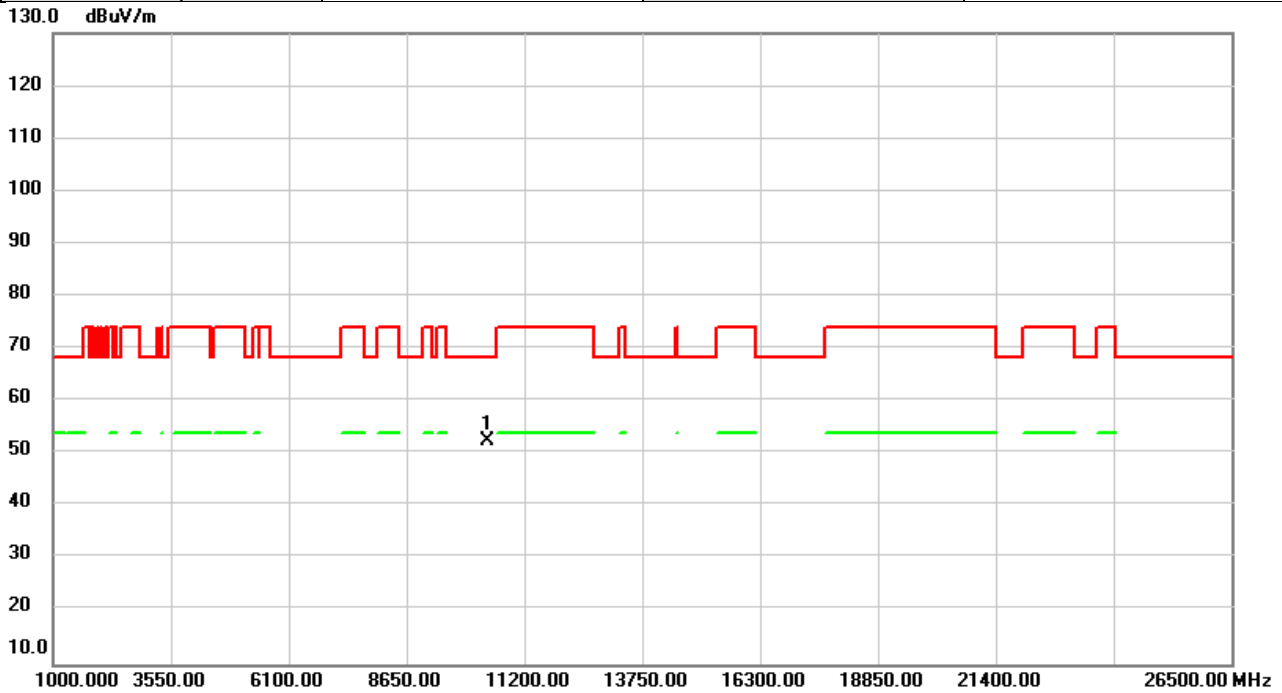


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	46.96	5.61	52.57	68.20	-15.63	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5240MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

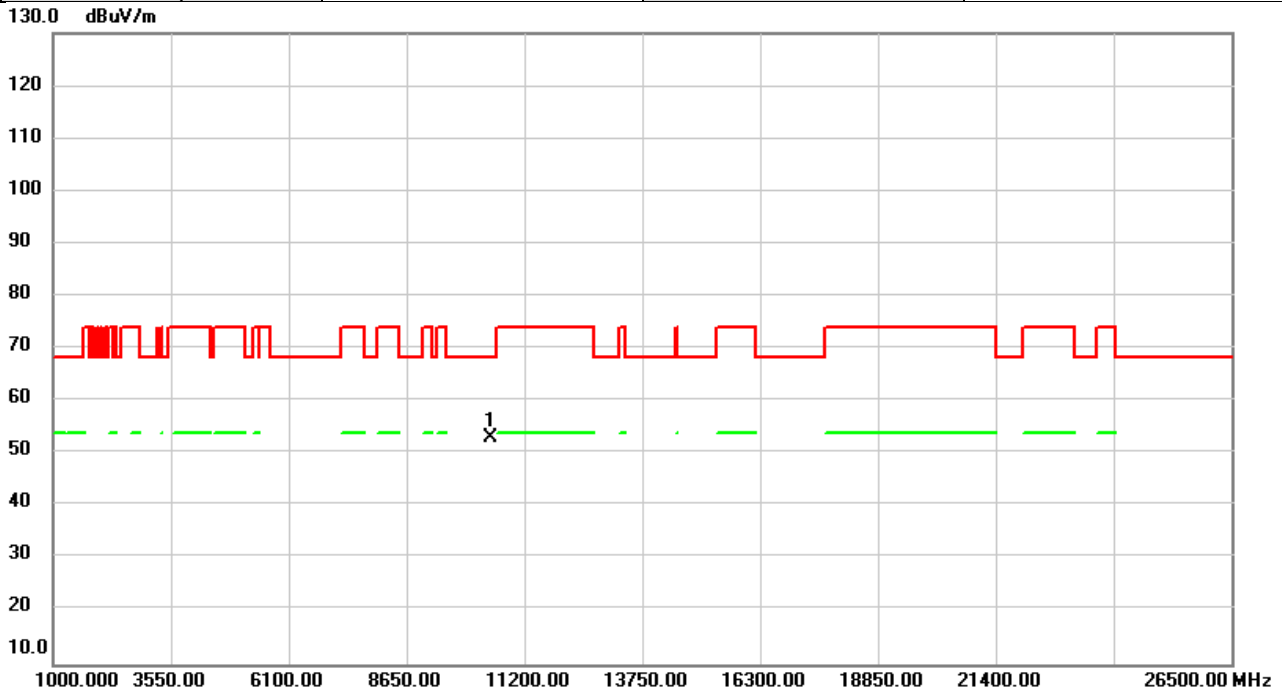


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	47.68	5.39	53.07	68.20	-15.13	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5240MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

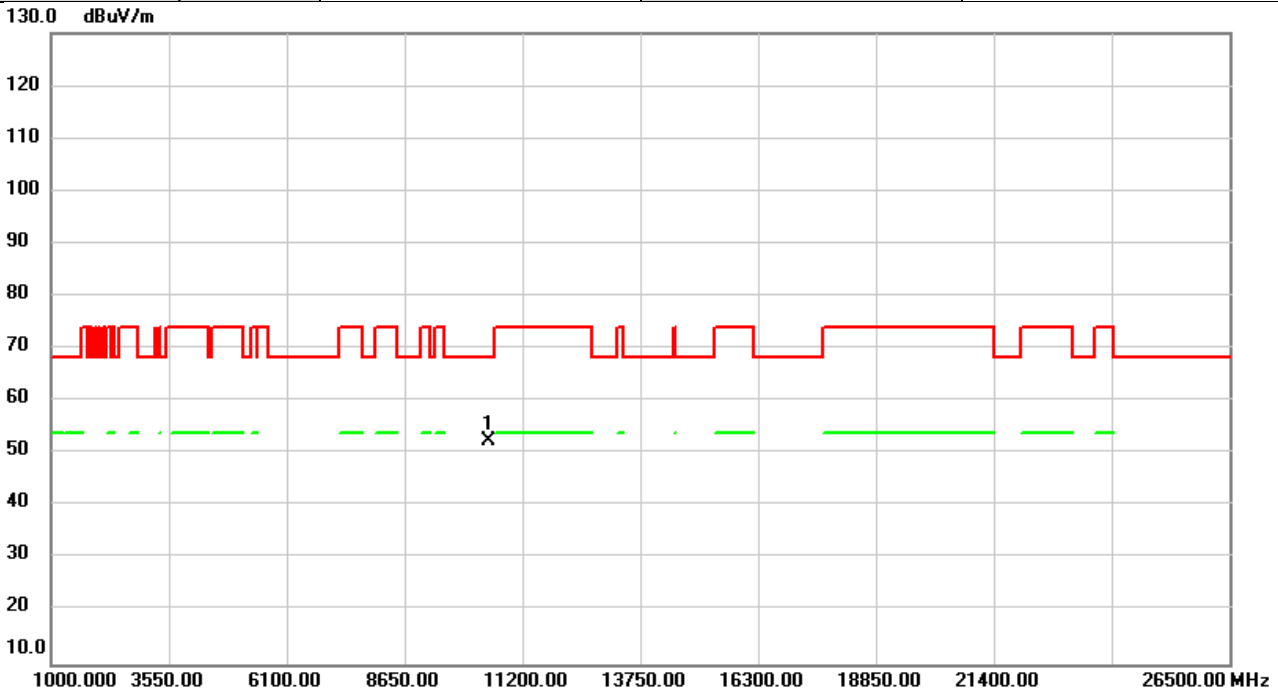


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	47.20	5.39	52.59	68.20	-15.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5260MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

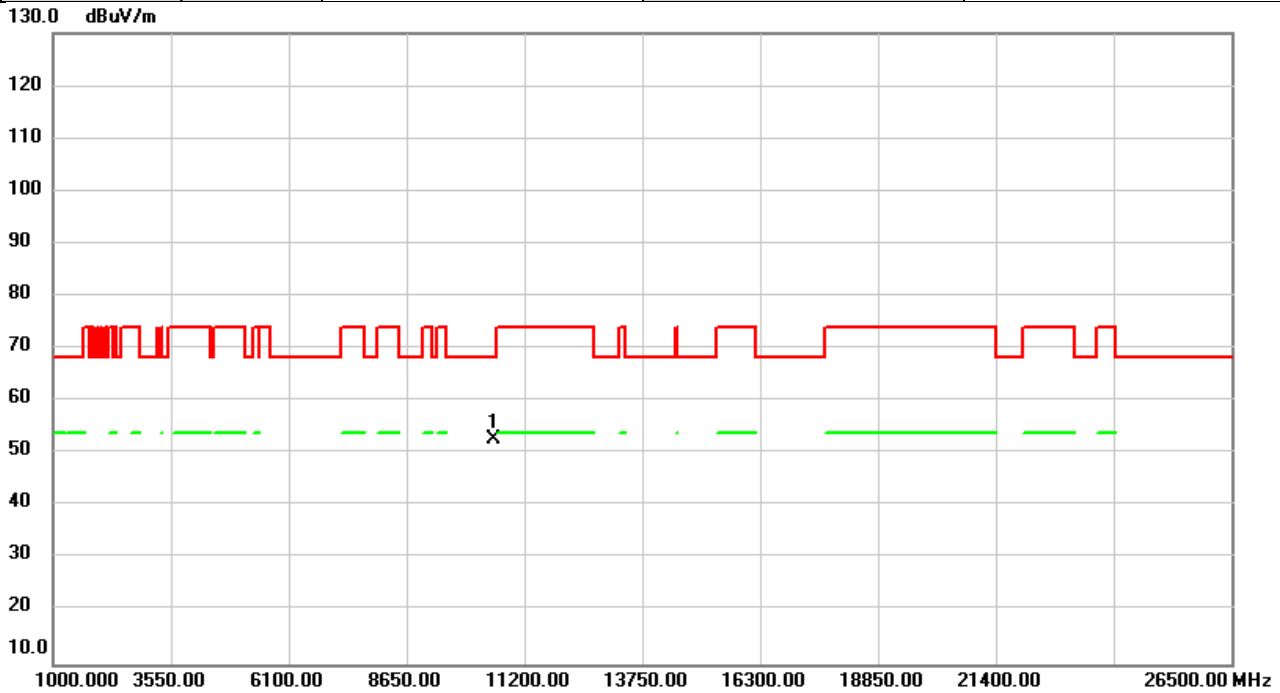


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	47.28	5.38	52.66	68.20	-15.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5260MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

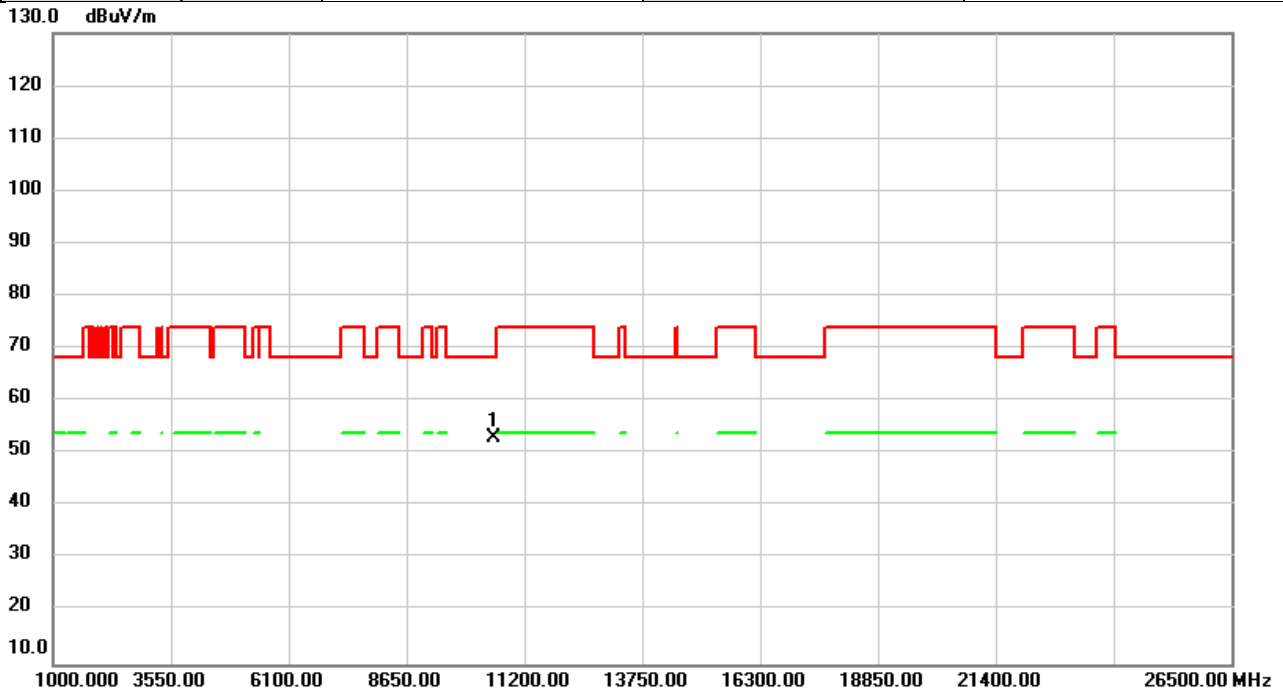


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	47.78	5.38	53.16	68.20	-15.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5280MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

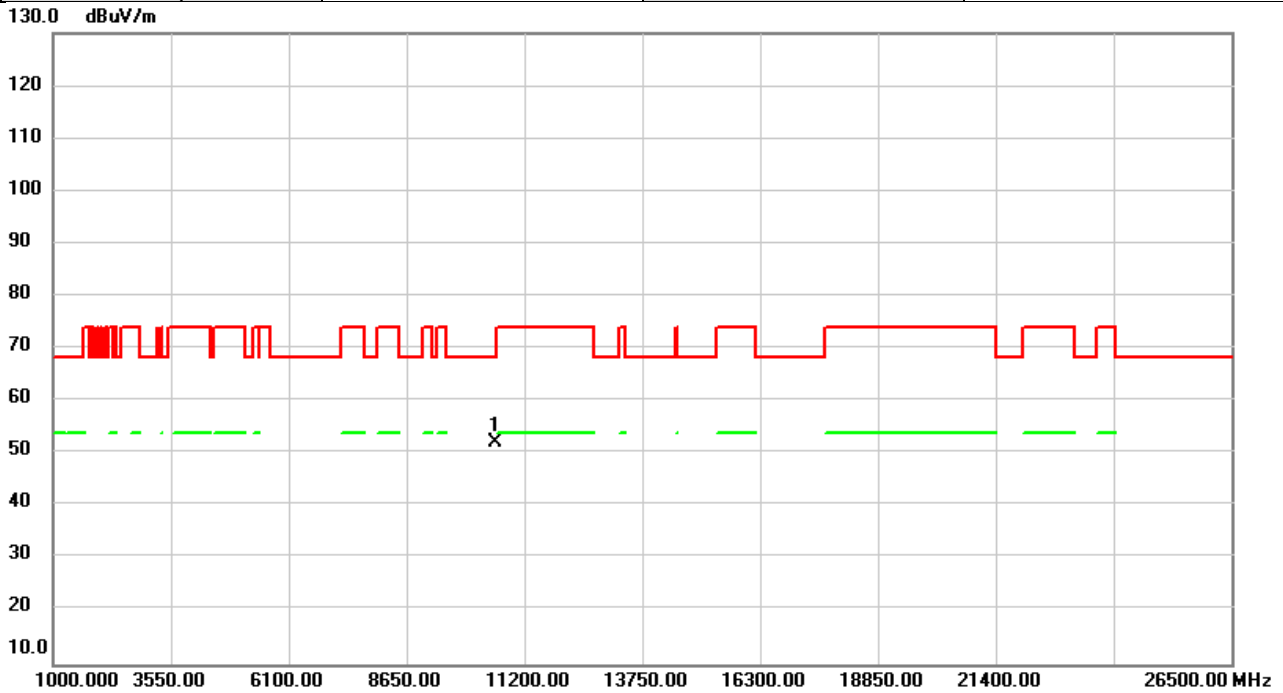


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10560.00	46.65	5.48	52.13	68.20	-16.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5280MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

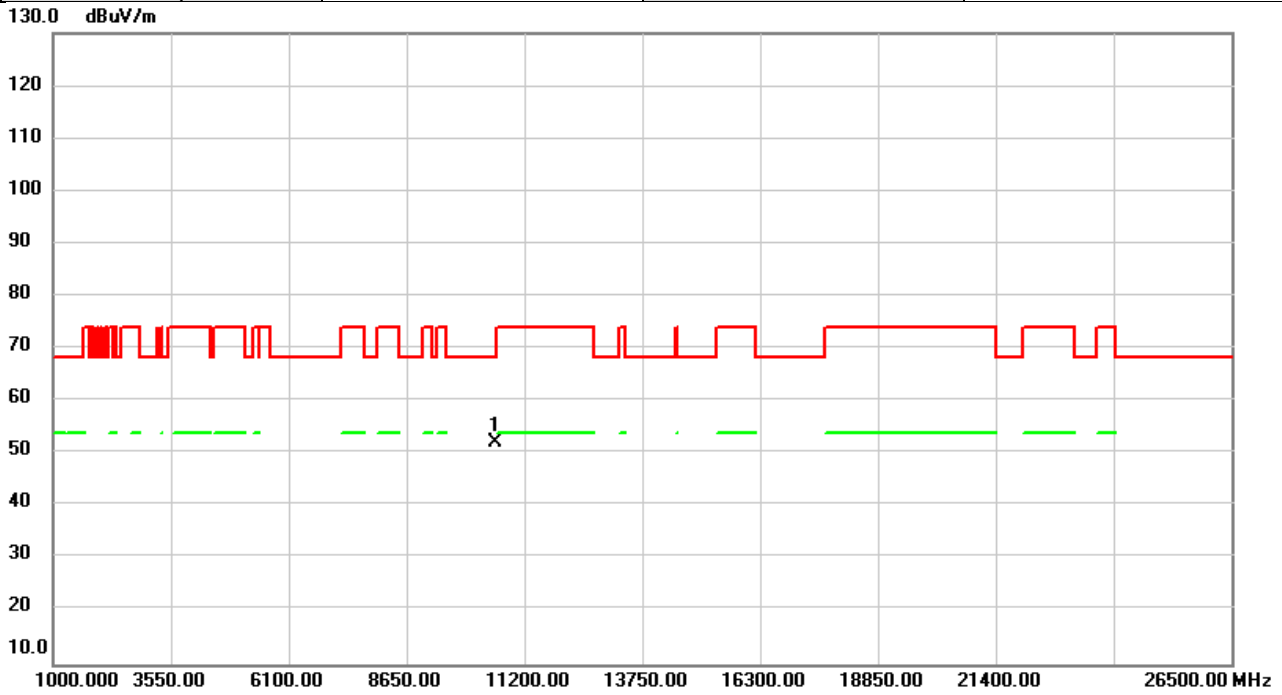


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10560.00	46.79	5.48	52.27	68.20	-15.93	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5320MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

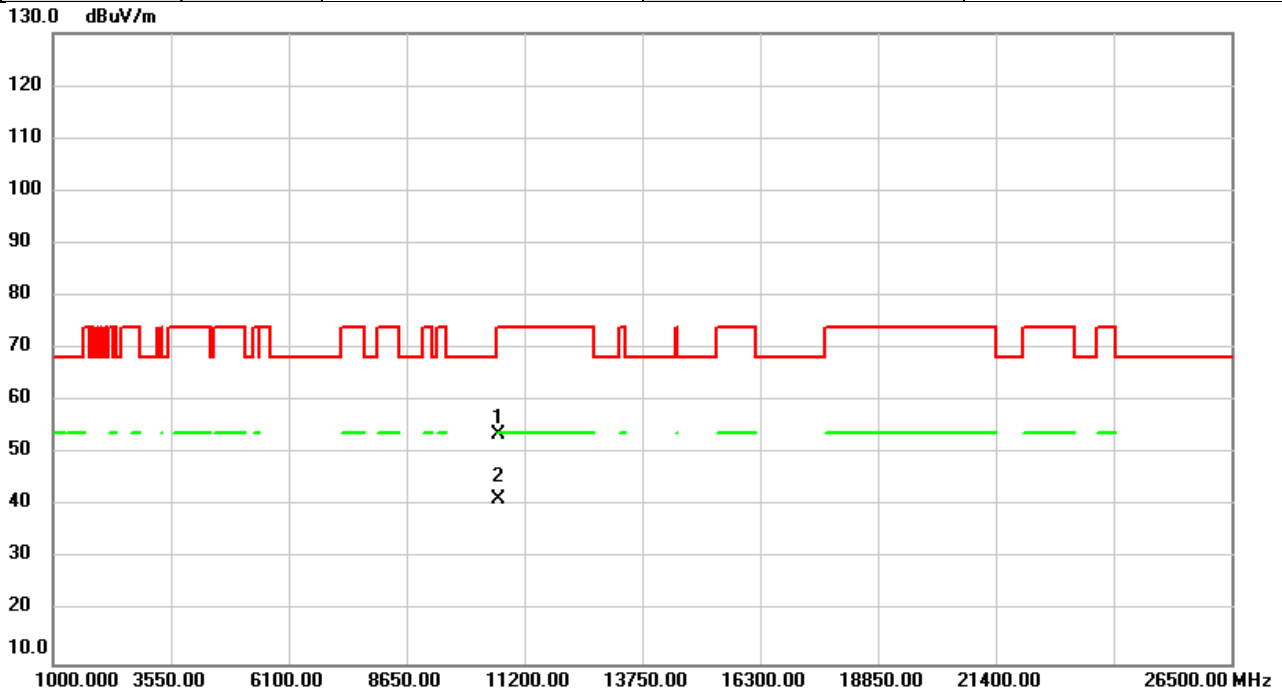


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	47.94	5.67	53.61	74.00	-20.39	peak	
2	*	10640.00	35.63	5.67	41.30	54.00	-12.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5320MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

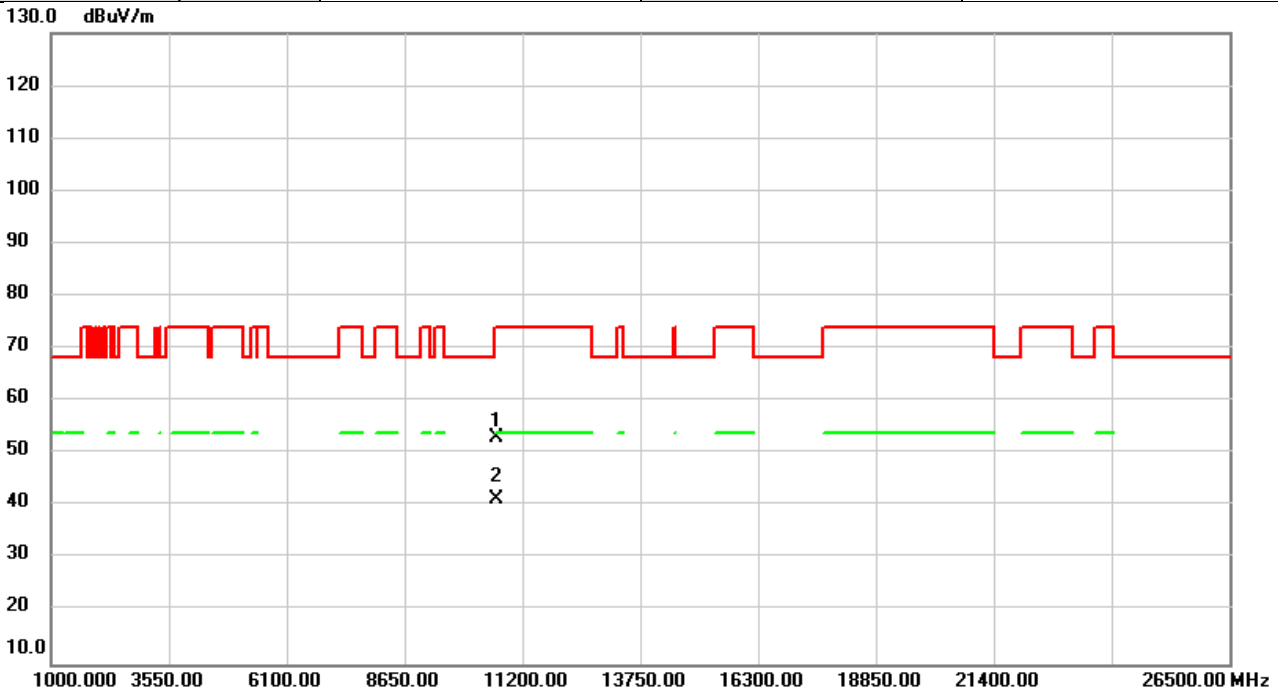


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	47.31	5.67	52.98	74.00	-21.02	peak	
2	*	10640.00	35.58	5.67	41.25	54.00	-12.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5500MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

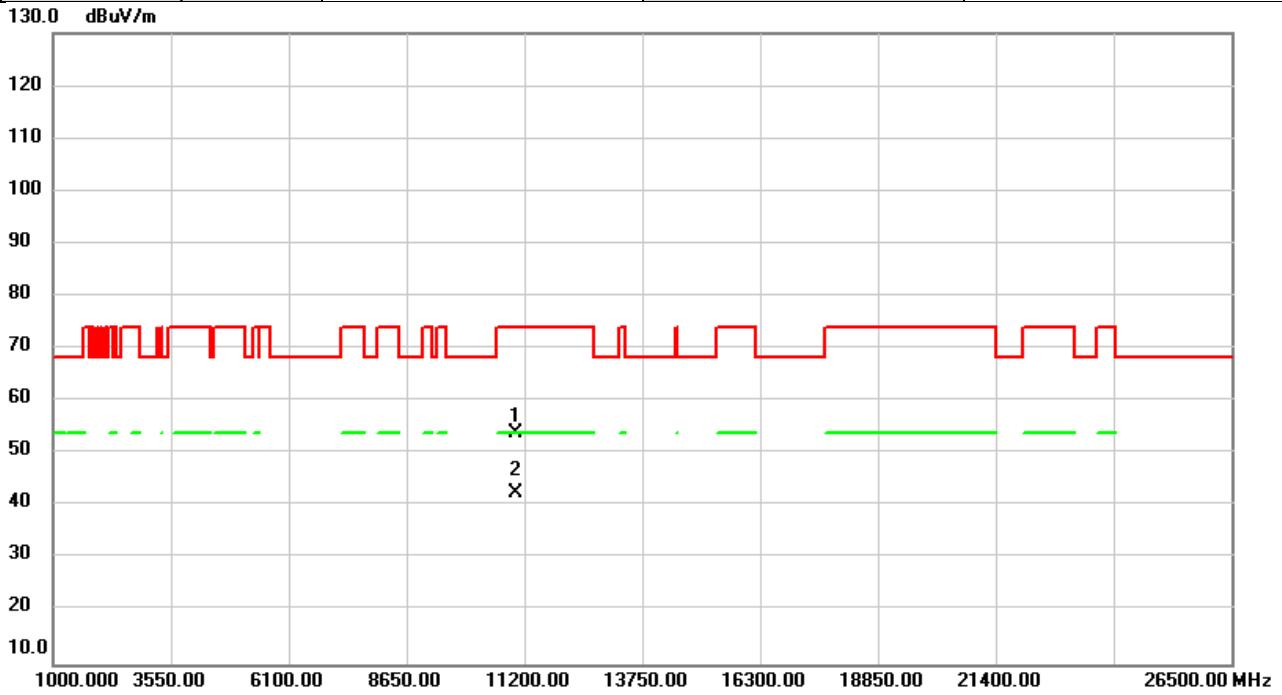


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	47.51	6.54	54.05	74.00	-19.95	peak	
2	*	11000.00	35.88	6.54	42.42	54.00	-11.58	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5500MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

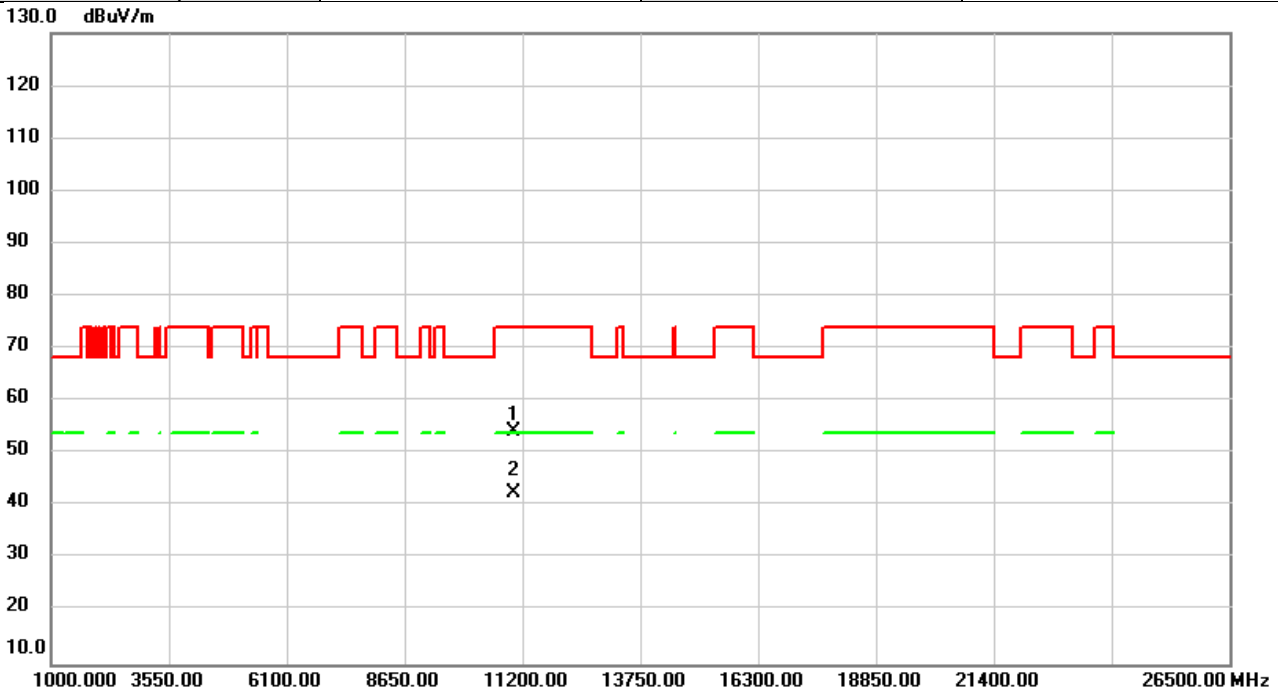


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	47.72	6.54	54.26	74.00	-19.74	peak	
2	*	11000.00	35.90	6.54	42.44	54.00	-11.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5600MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

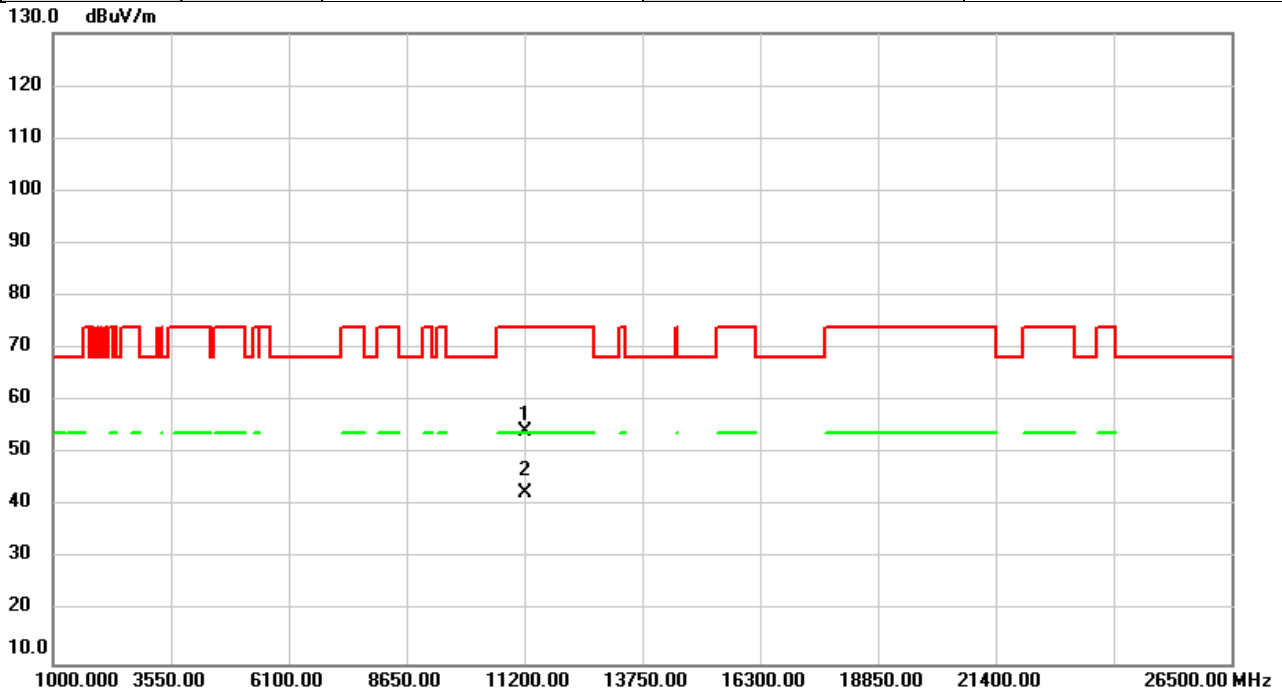


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11200.00	47.69	6.59	54.28	74.00	-19.72	peak	
2	*	11200.00	35.97	6.59	42.56	54.00	-11.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5600MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

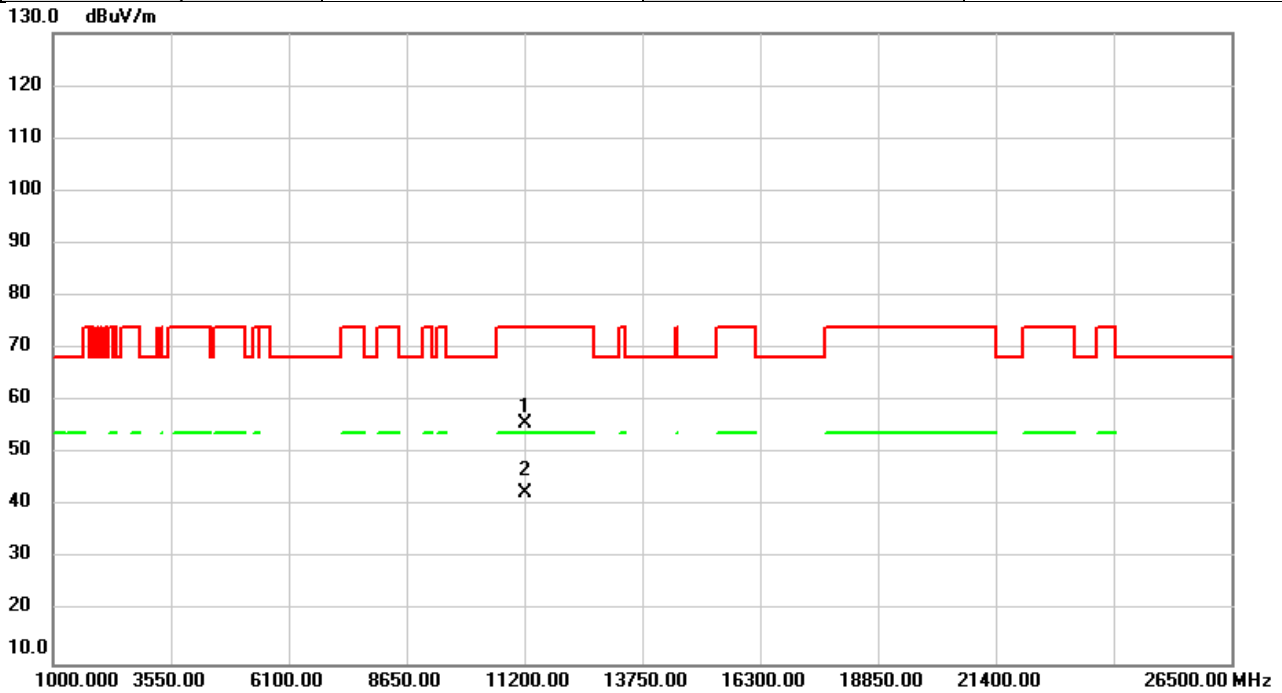


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11200.00	49.29	6.59	55.88	74.00	-18.12	peak	
2	*	11200.00	35.97	6.59	42.56	54.00	-11.44	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5700MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

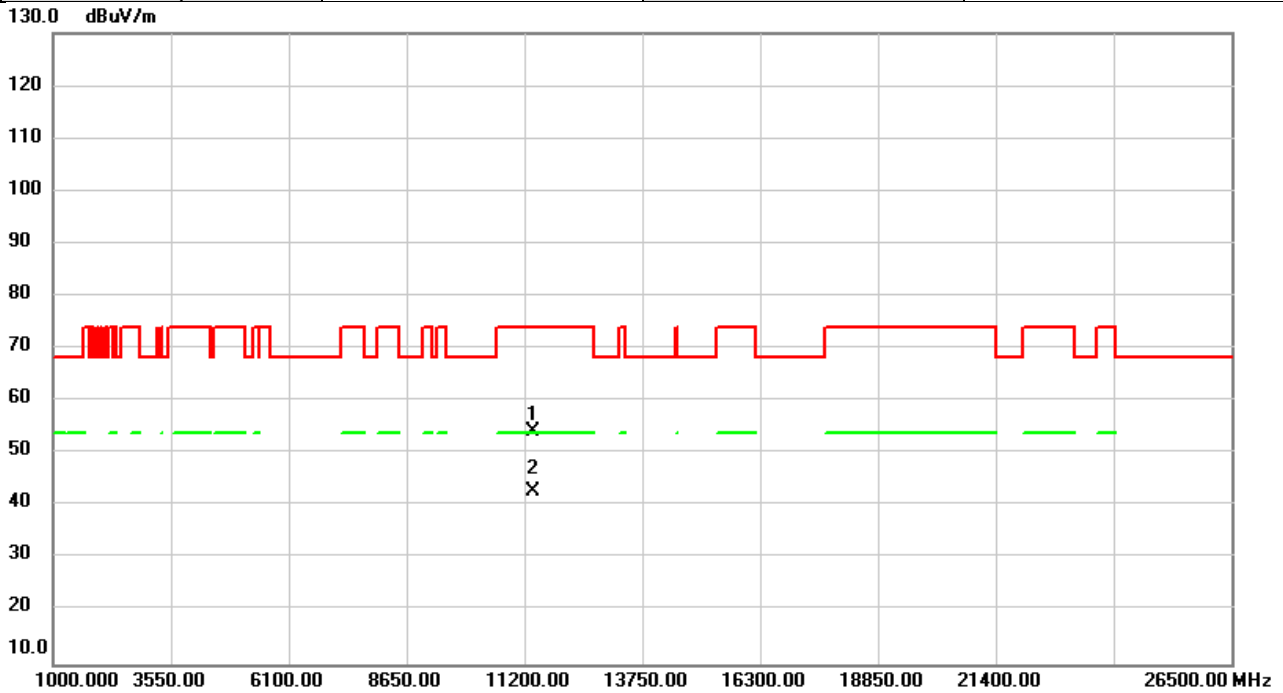


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	47.76	6.64	54.40	74.00	-19.60	peak	
2	*	11400.00	36.08	6.64	42.72	54.00	-11.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5700MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

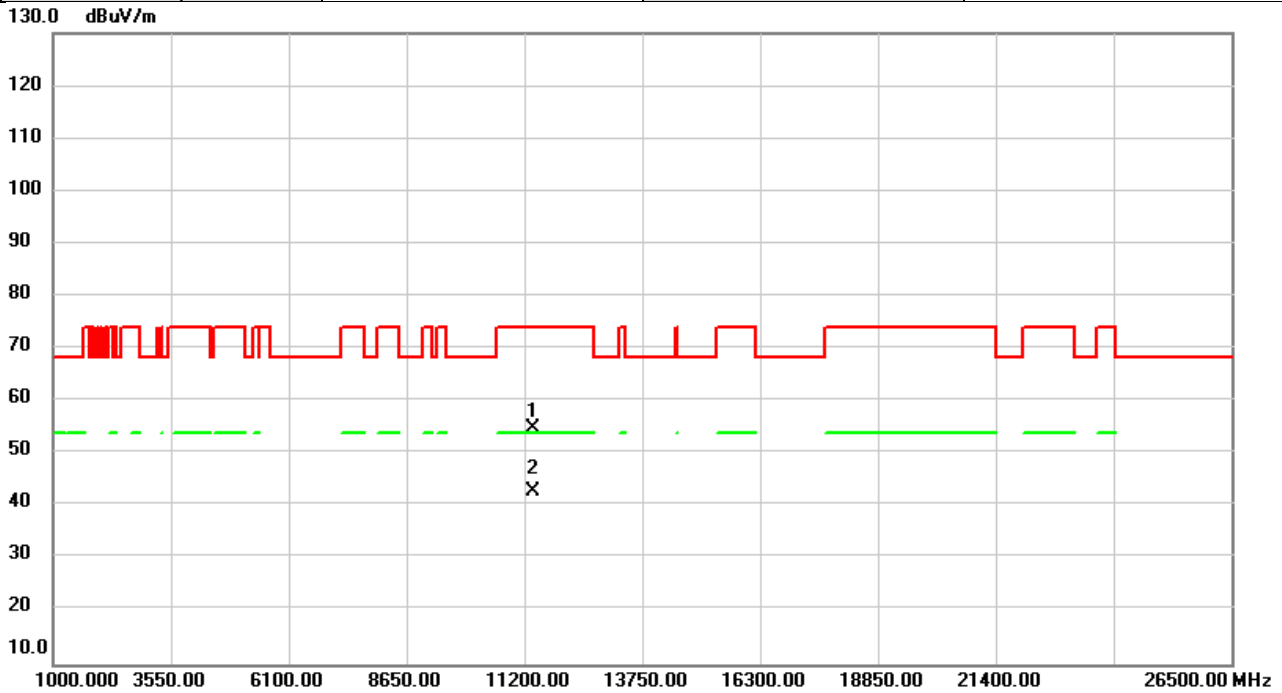


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	48.20	6.64	54.84	74.00	-19.16	peak	
2	*	11400.00	36.10	6.64	42.74	54.00	-11.26	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5745MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

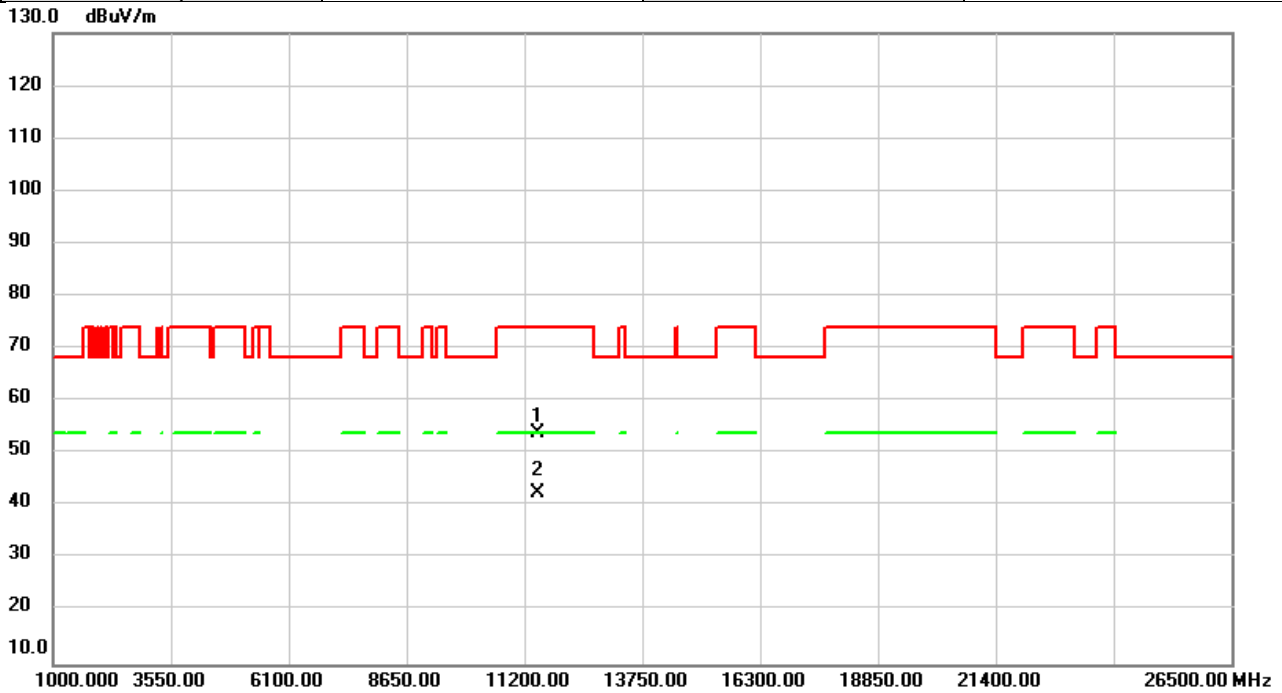


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	47.35	6.66	54.01	74.00	-19.99	peak	
2	*	11490.00	35.94	6.66	42.60	54.00	-11.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5745MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

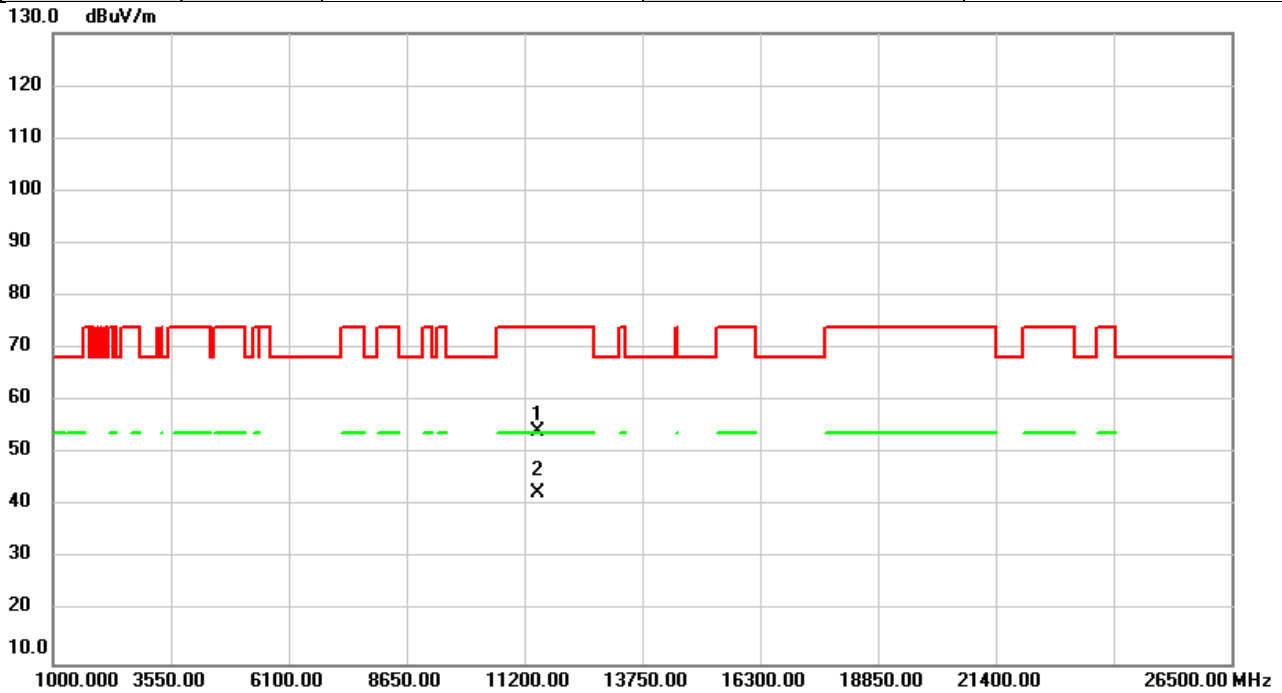


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	47.46	6.66	54.12	74.00	-19.88	peak	
2	*	11490.00	35.87	6.66	42.53	54.00	-11.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5785MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

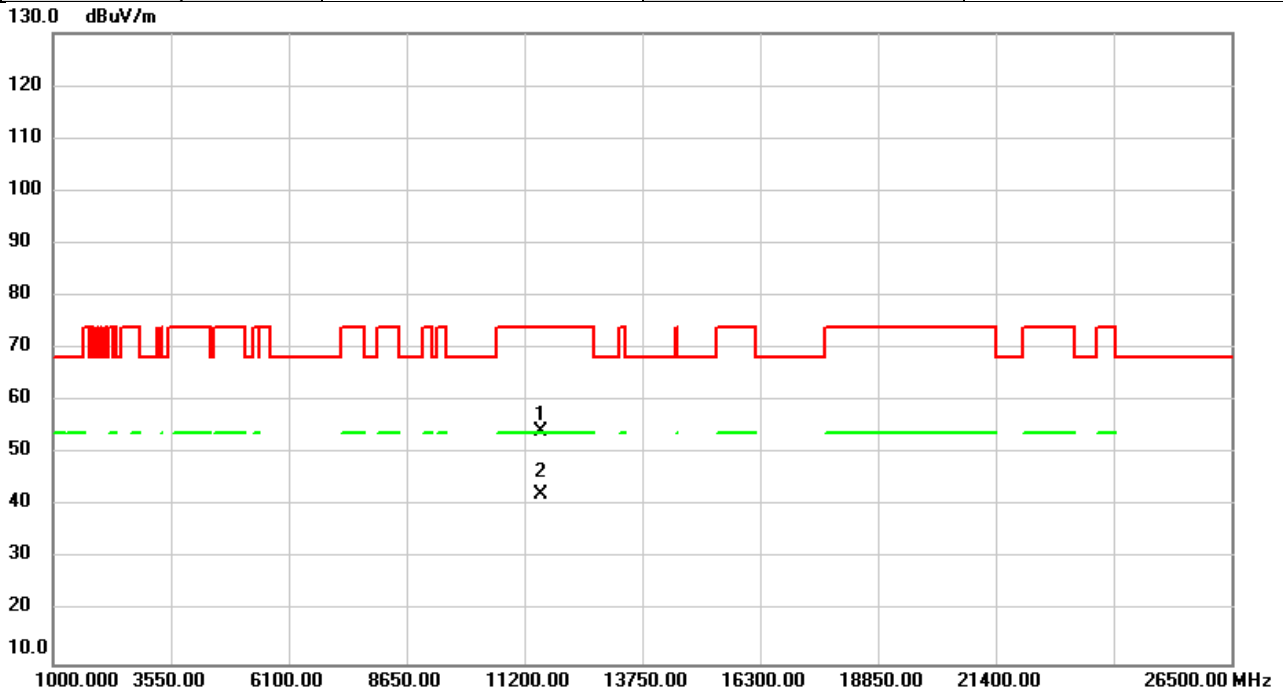


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	47.75	6.65	54.40	74.00	-19.60	peak	
2	*	11570.00	35.70	6.65	42.35	54.00	-11.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5785MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

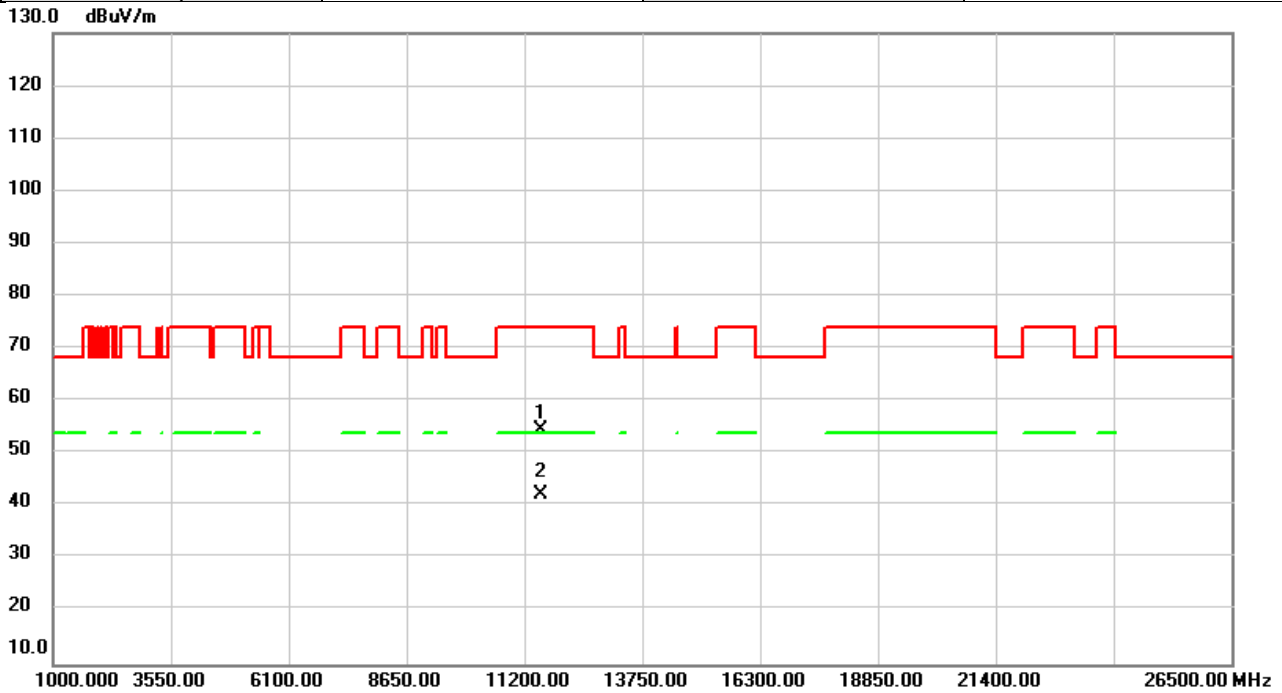


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	48.04	6.65	54.69	74.00	-19.31	peak	
2	*	11570.00	35.70	6.65	42.35	54.00	-11.65	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5825MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

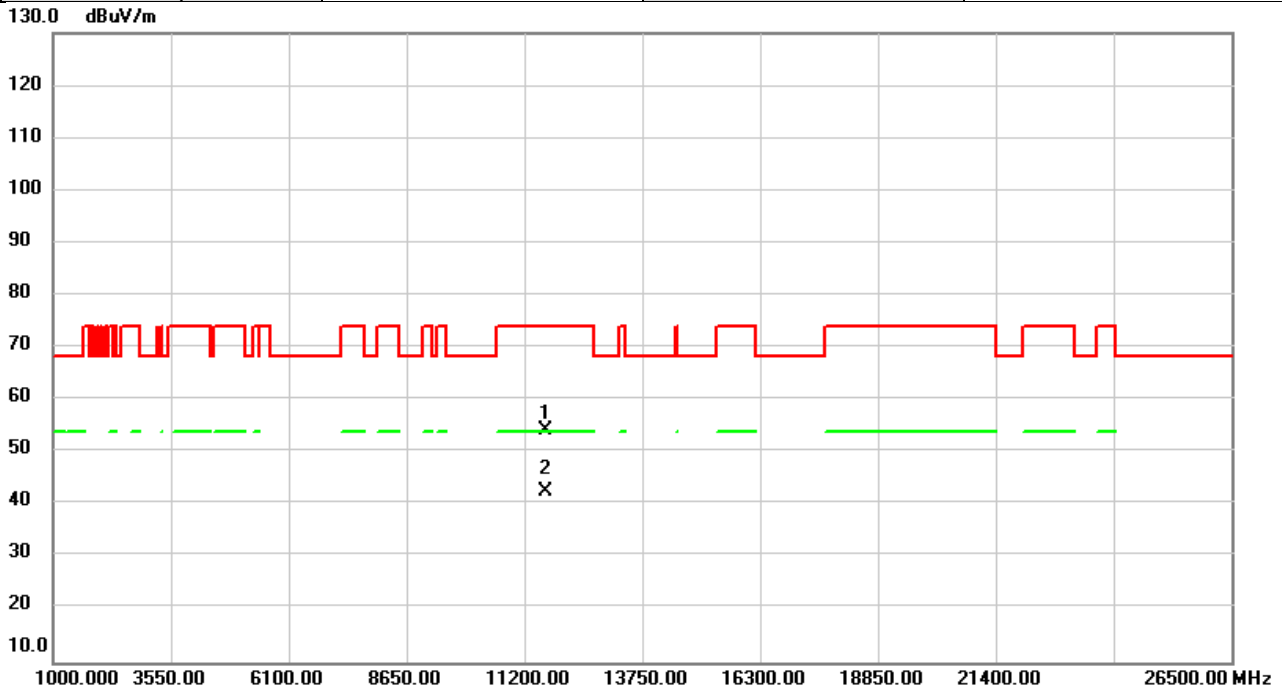


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	47.70	6.63	54.33	74.00	-19.67	peak	
2	*	11650.00	35.94	6.63	42.57	54.00	-11.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2023/3/23
Test Frequency	5825MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

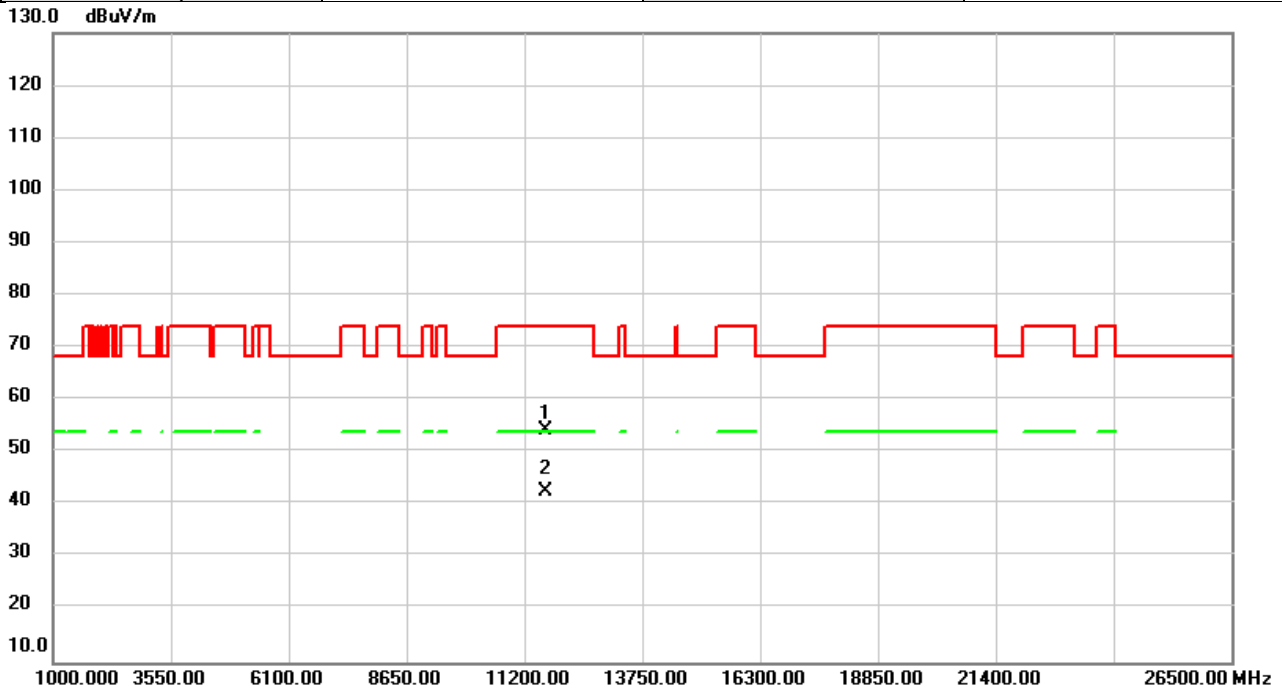


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	47.50	6.63	54.13	74.00	-19.87	peak	
2	*	11650.00	36.01	6.63	42.64	54.00	-11.36	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5180MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

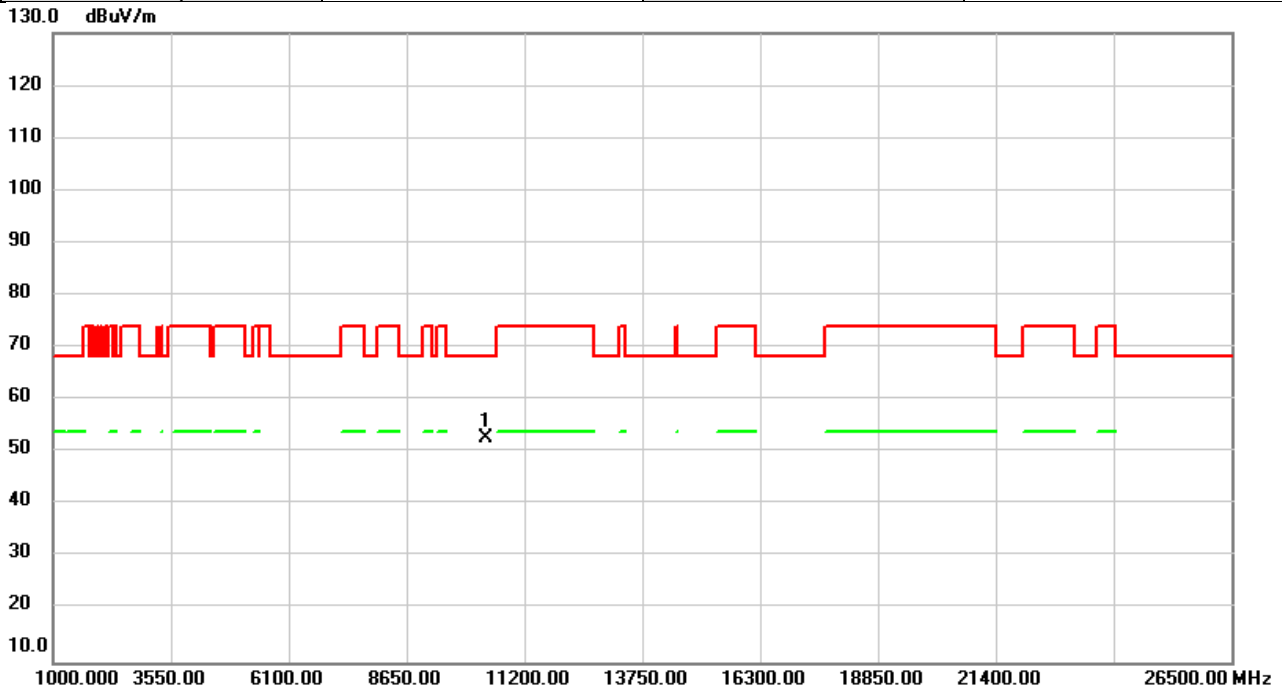


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	47.13	5.71	52.84	68.20	-15.36	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5180MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

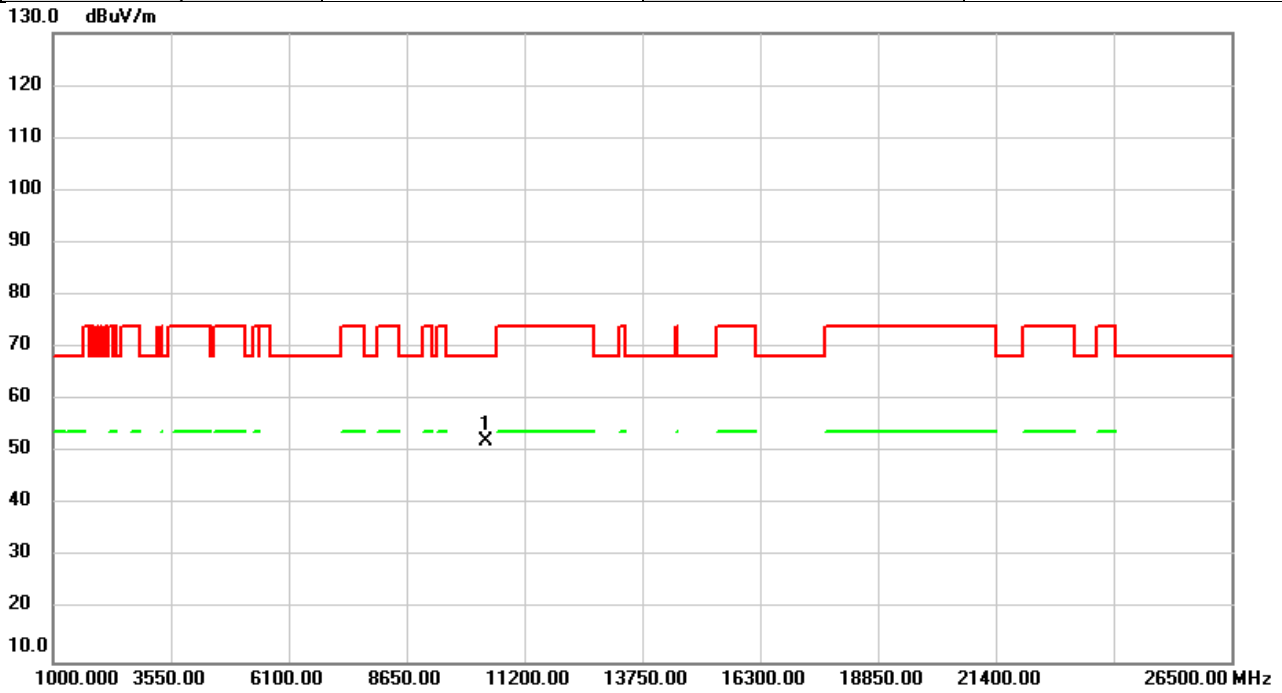


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	46.57	5.71	52.28	68.20	-15.92	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5200MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

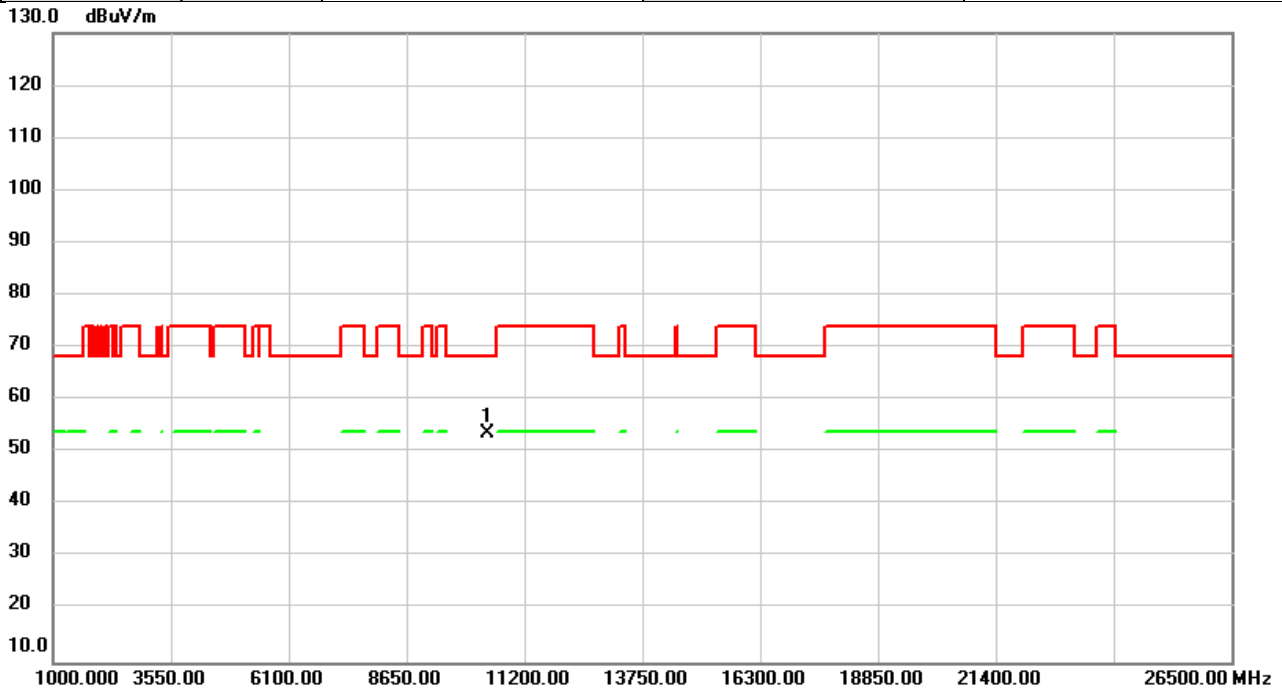


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	47.98	5.61	53.59	68.20	-14.61	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5200MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

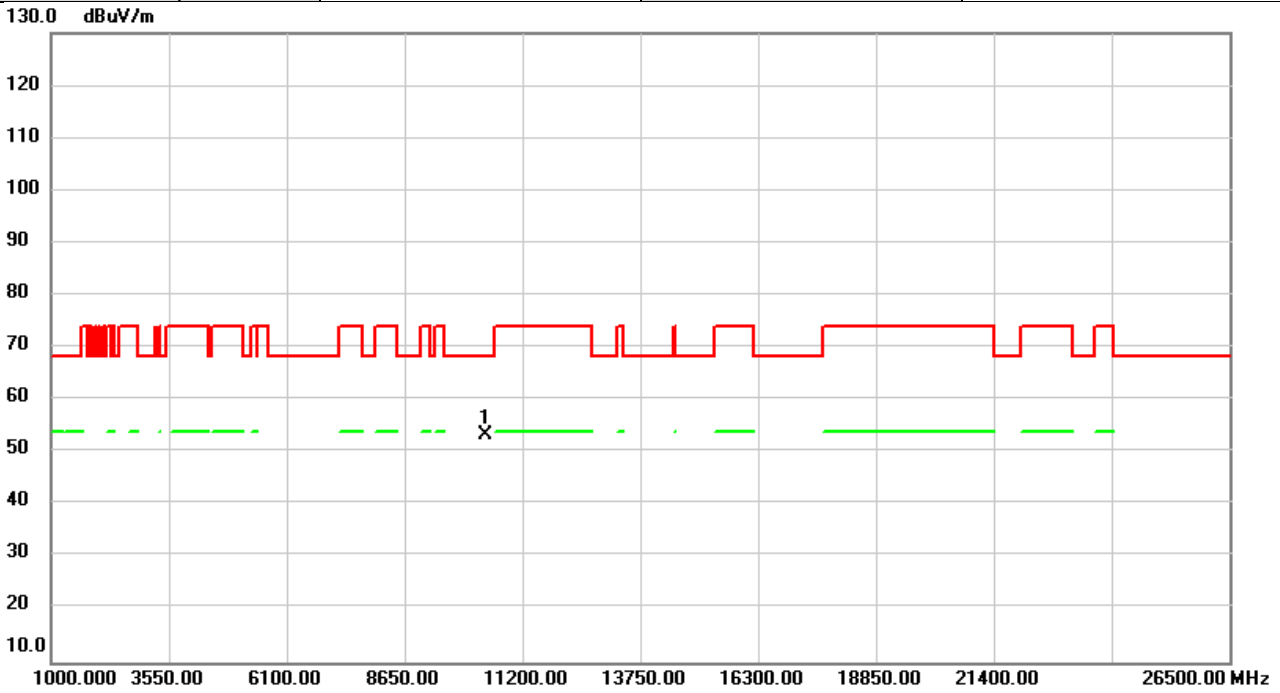


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	47.86	5.61	53.47	68.20	-14.73	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5240MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

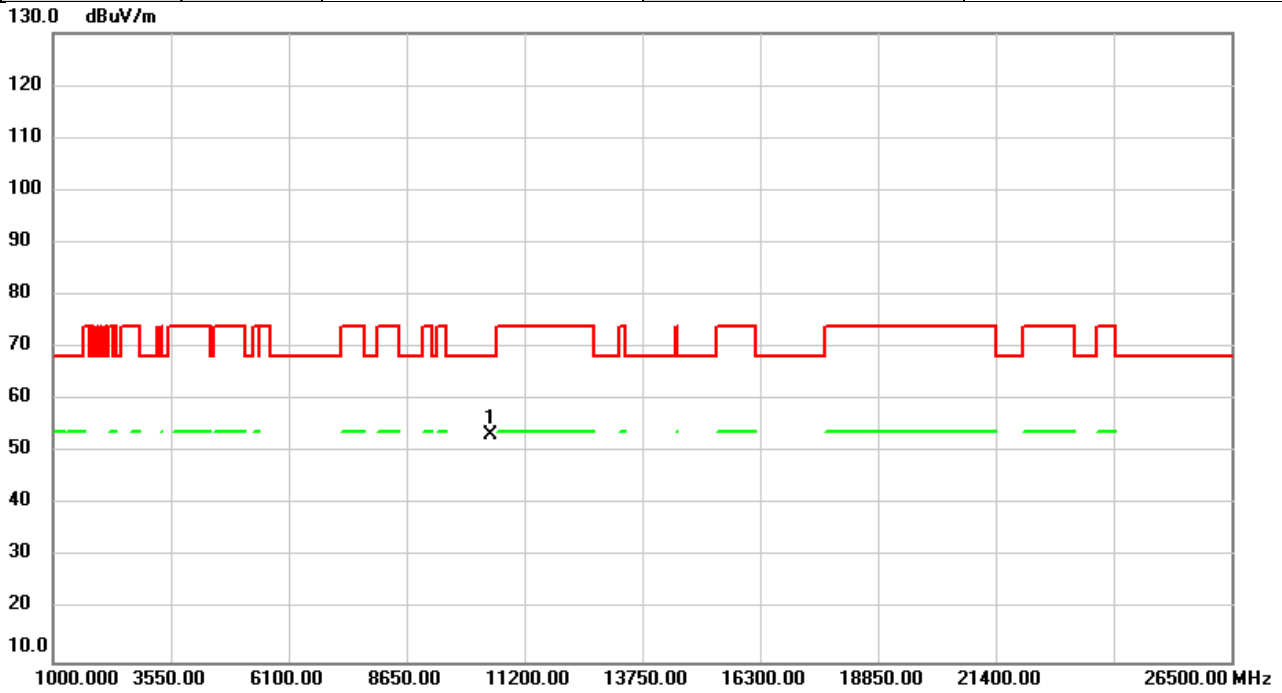


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	47.88	5.39	53.27	68.20	-14.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5240MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

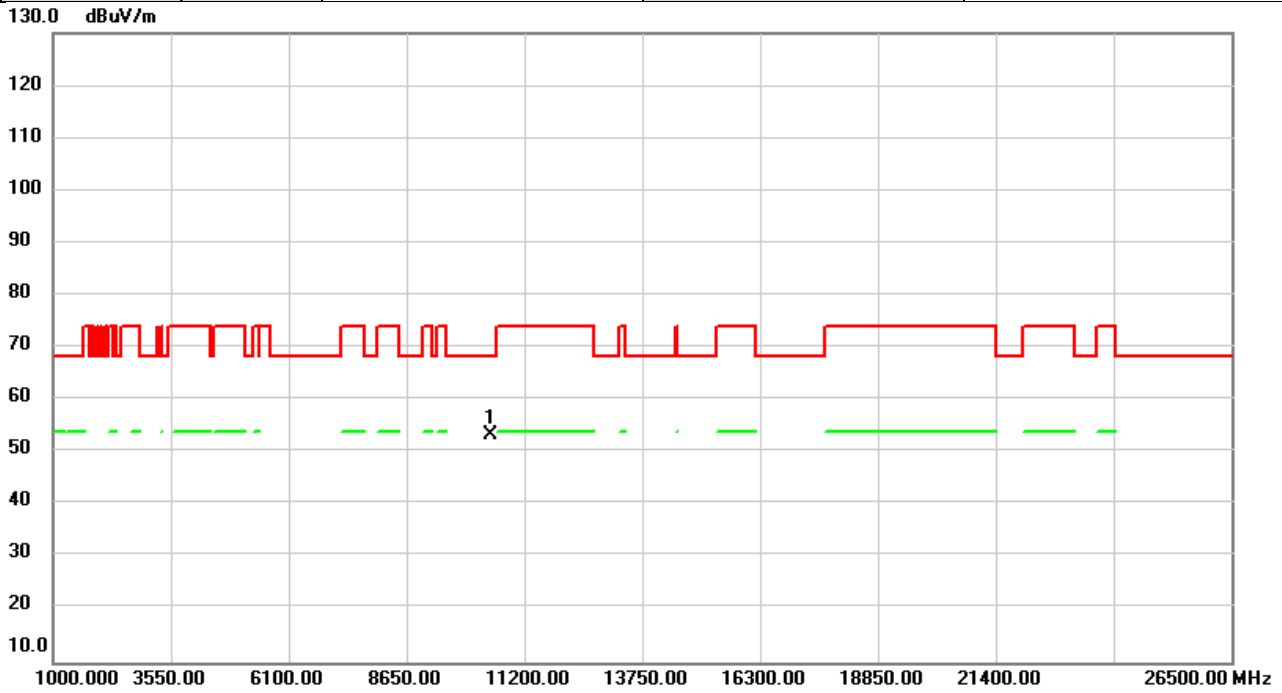


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	48.08	5.39	53.47	68.20	-14.73	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5260MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

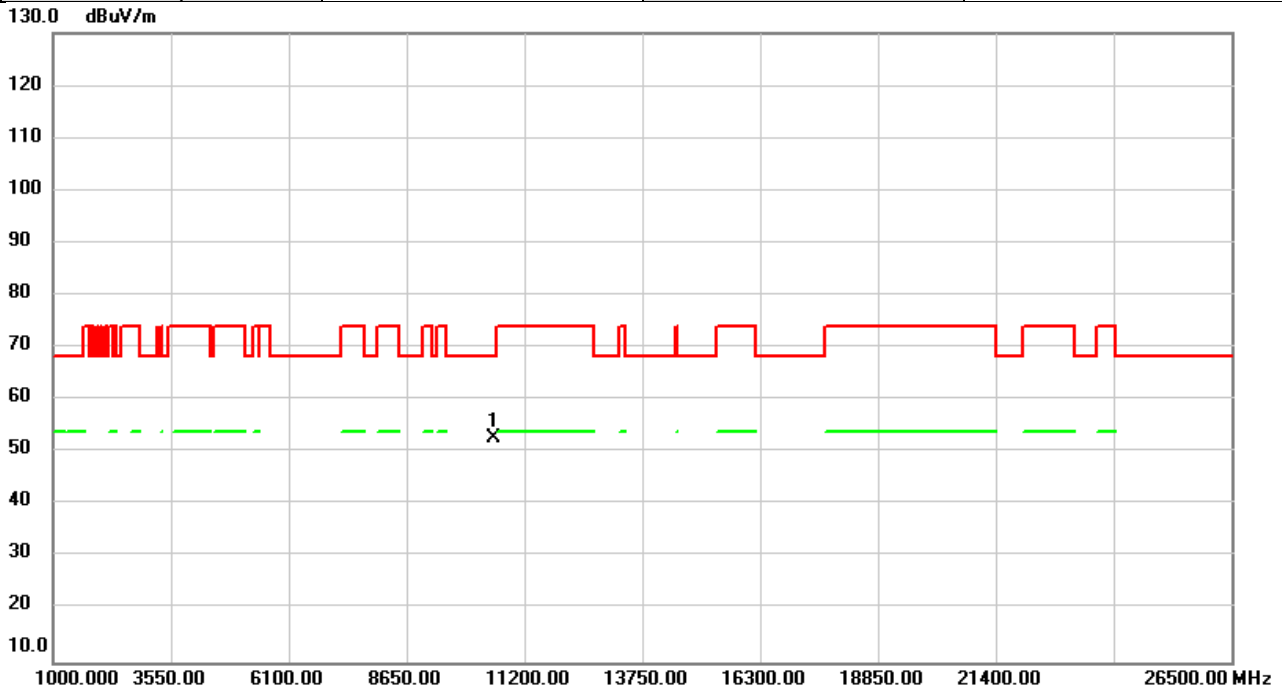


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	47.50	5.38	52.88	68.20	-15.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5260MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

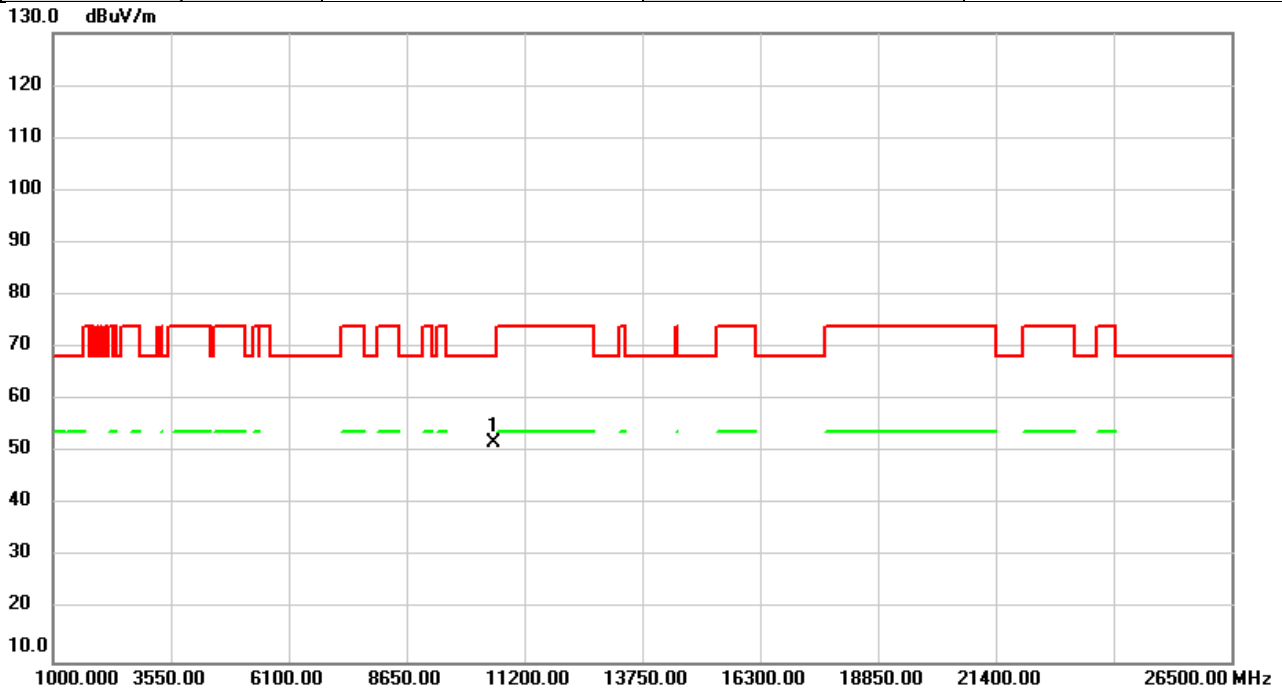


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	46.50	5.38	51.88	68.20	-16.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5280MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

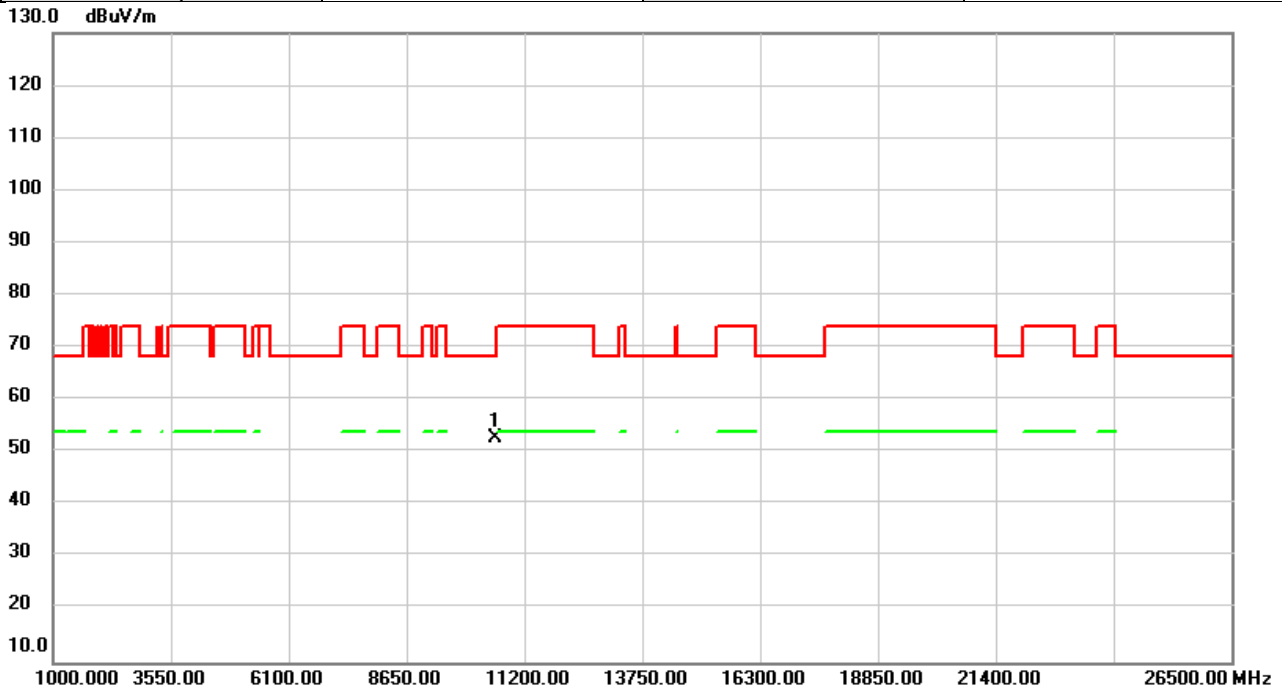


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10560.00	47.25	5.48	52.73	68.20	-15.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5280MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

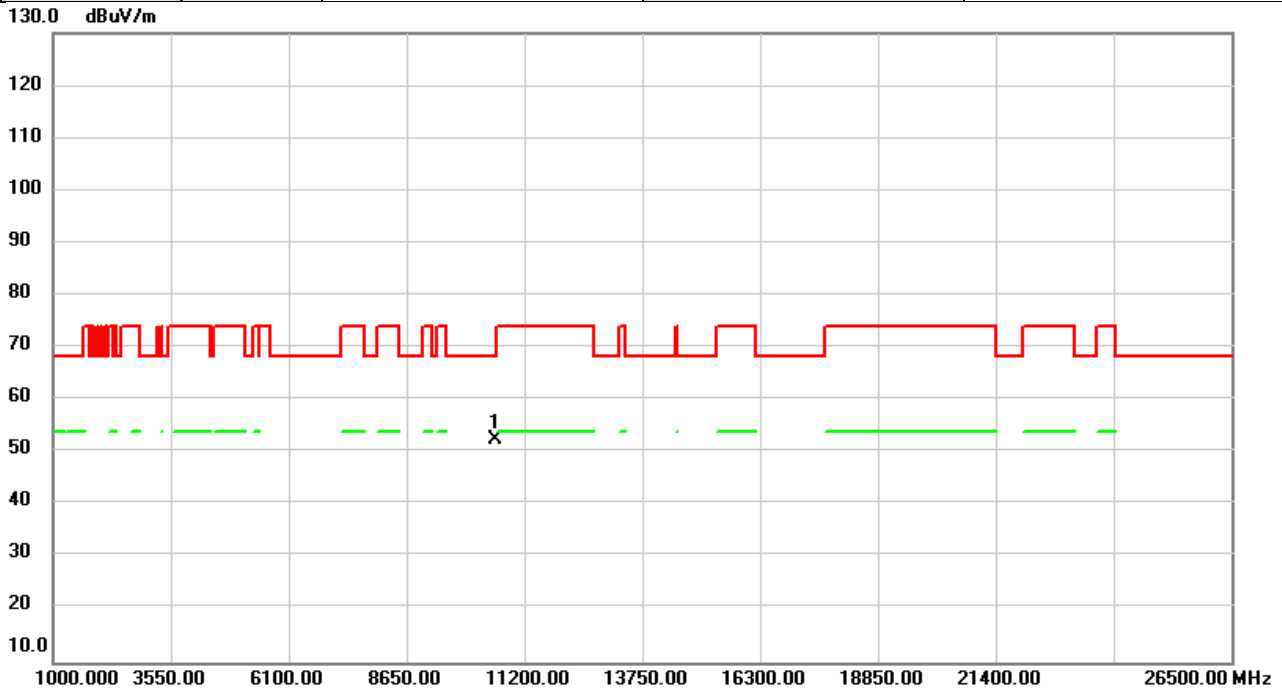


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10560.00	47.01	5.48	52.49	68.20	-15.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5320MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

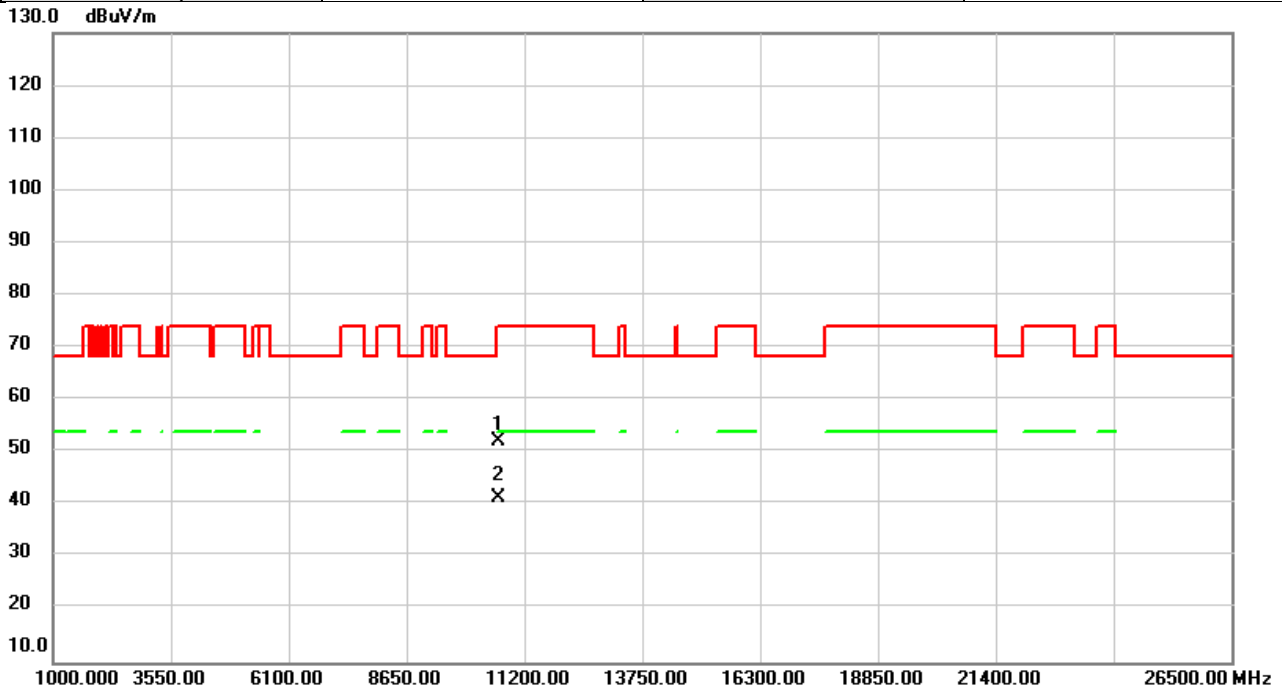


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	46.56	5.67	52.23	74.00	-21.77	peak	
2	*	10640.00	35.66	5.67	41.33	54.00	-12.67	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5320MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

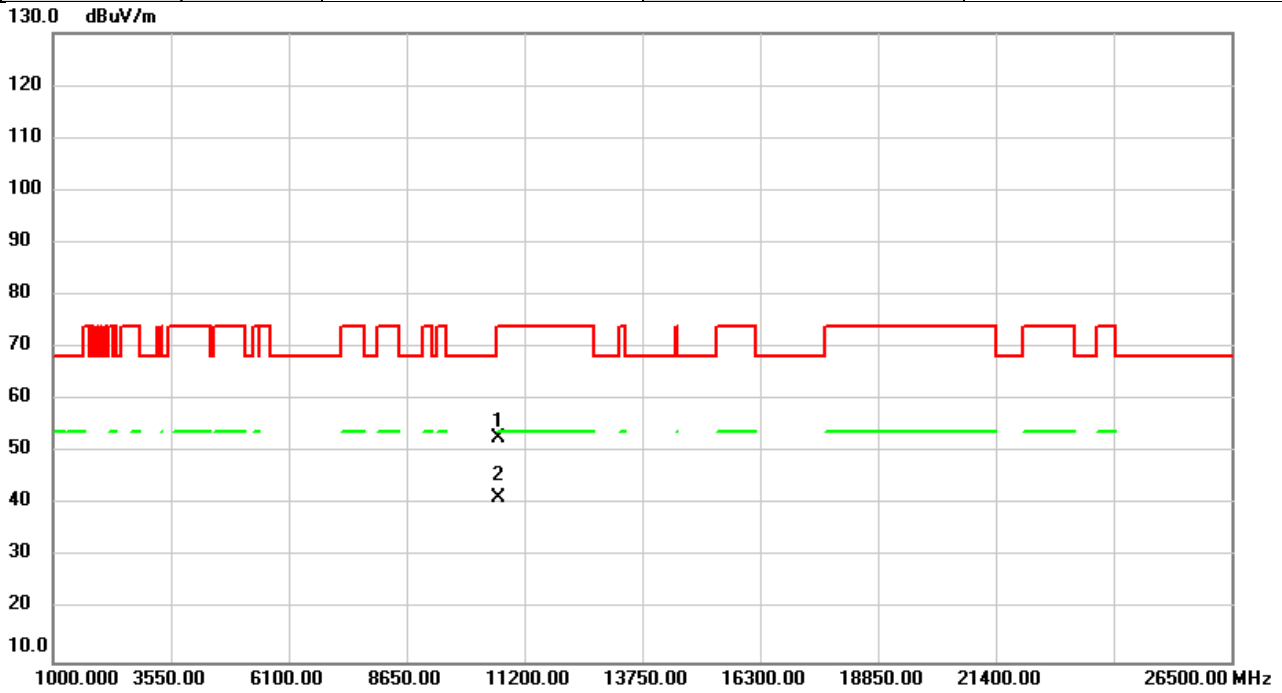


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	46.99	5.67	52.66	74.00	-21.34	peak	
2	*	10640.00	35.61	5.67	41.28	54.00	-12.72	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5500MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

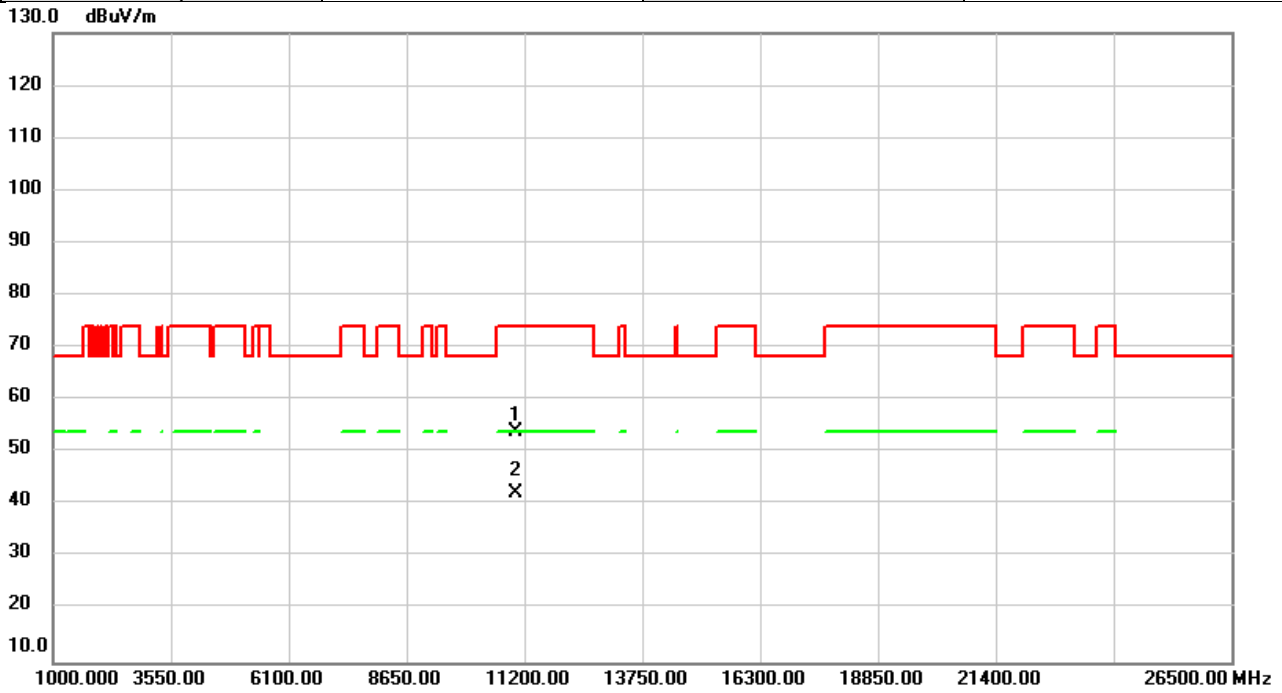


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	47.37	6.54	53.91	74.00	-20.09	peak	
2	*	11000.00	35.86	6.54	42.40	54.00	-11.60	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5500MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

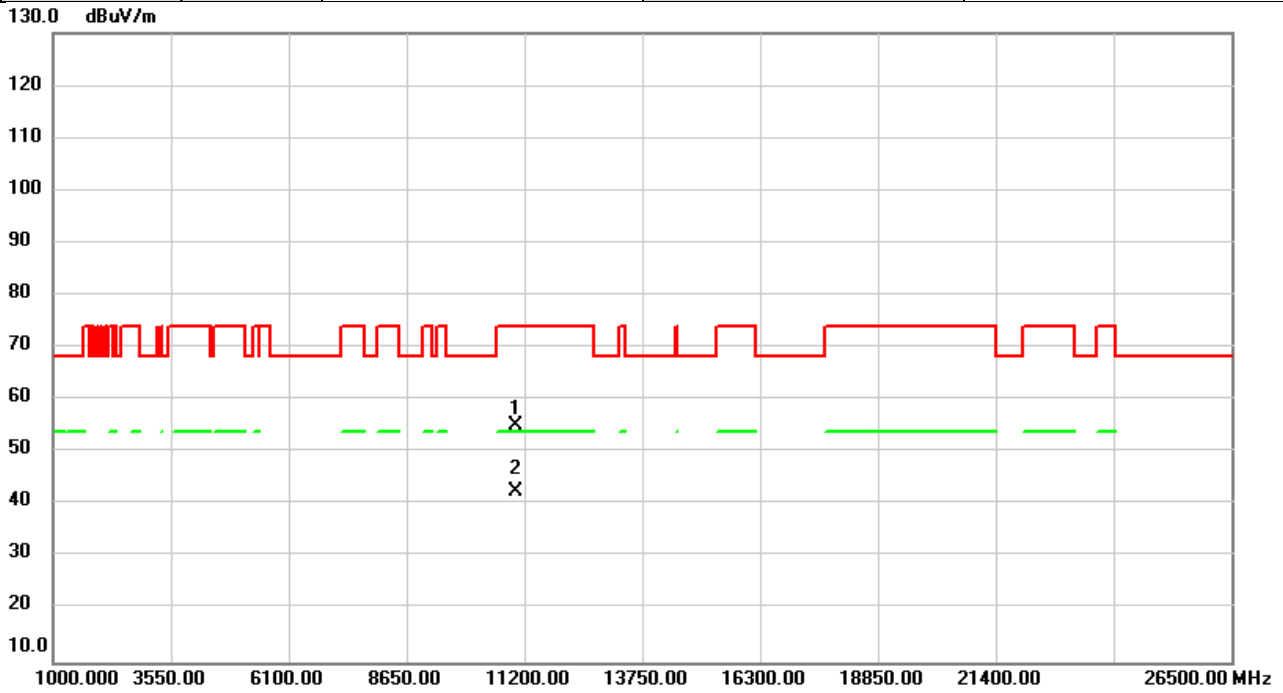


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	48.70	6.54	55.24	74.00	-18.76	peak	
2	*	11000.00	36.00	6.54	42.54	54.00	-11.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5600MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

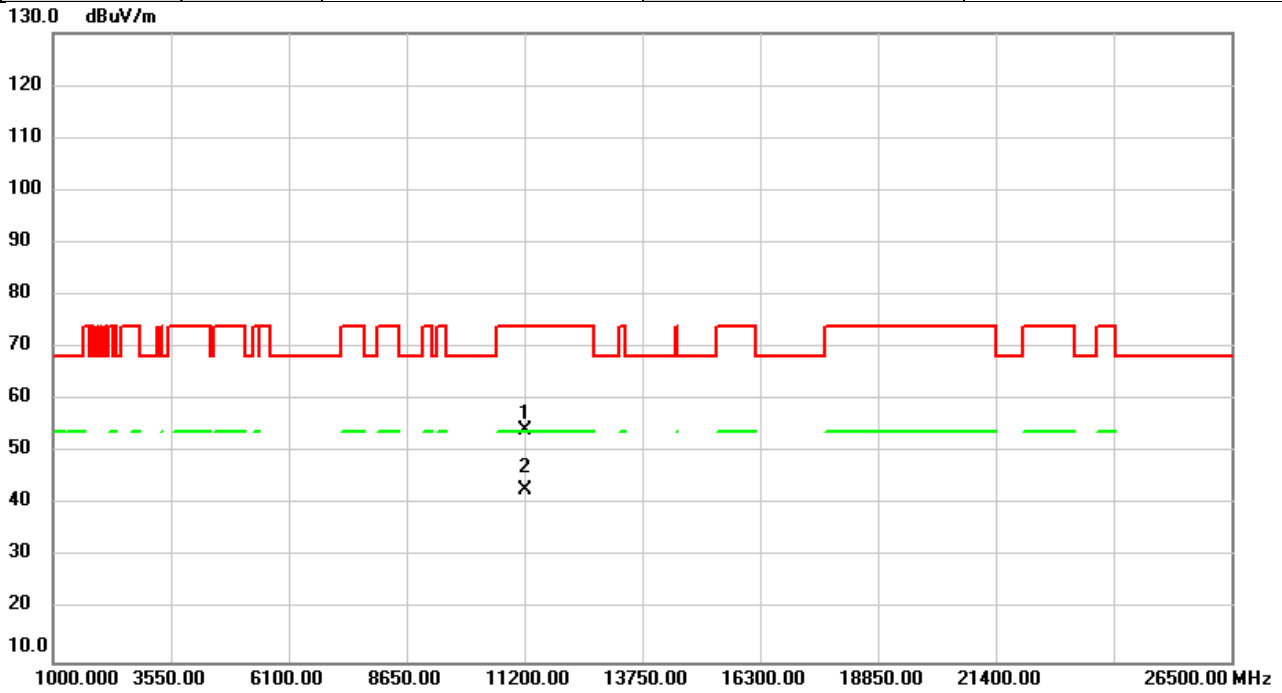


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11200.00	47.59	6.59	54.18	74.00	-19.82	peak	
2	*	11200.00	36.14	6.59	42.73	54.00	-11.27	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5600MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

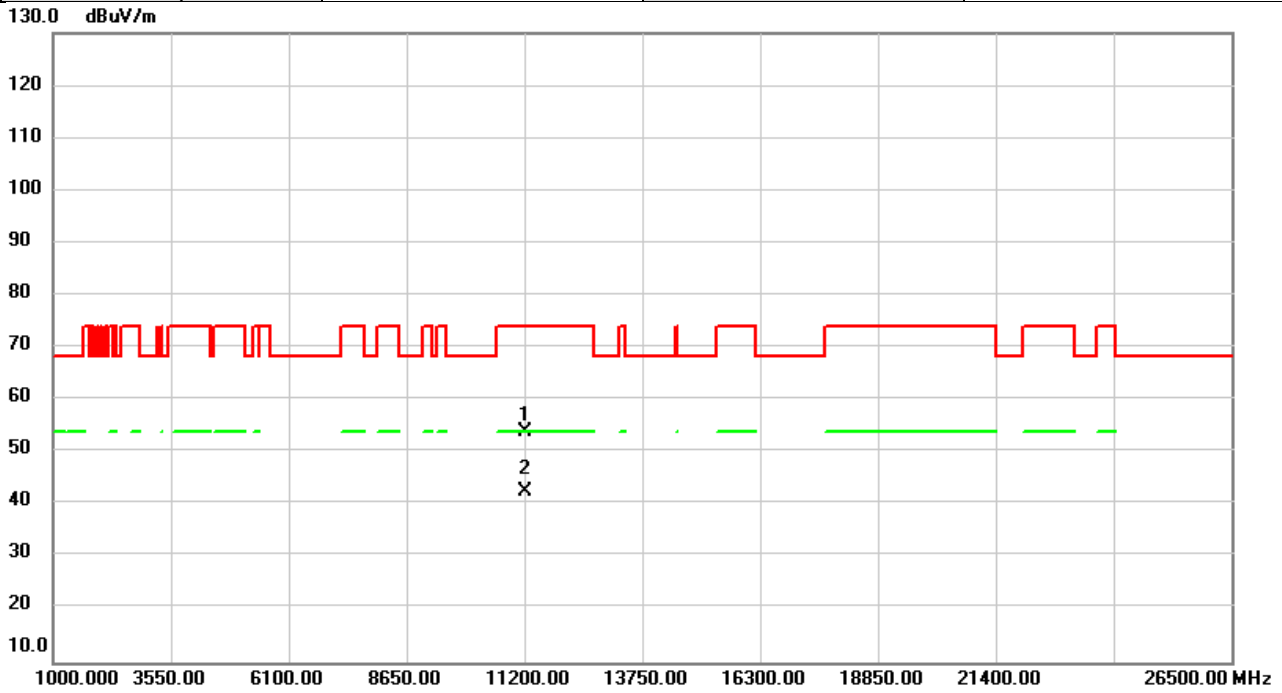


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11200.00	47.44	6.59	54.03	74.00	-19.97	peak	
2	*	11200.00	36.08	6.59	42.67	54.00	-11.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5700MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

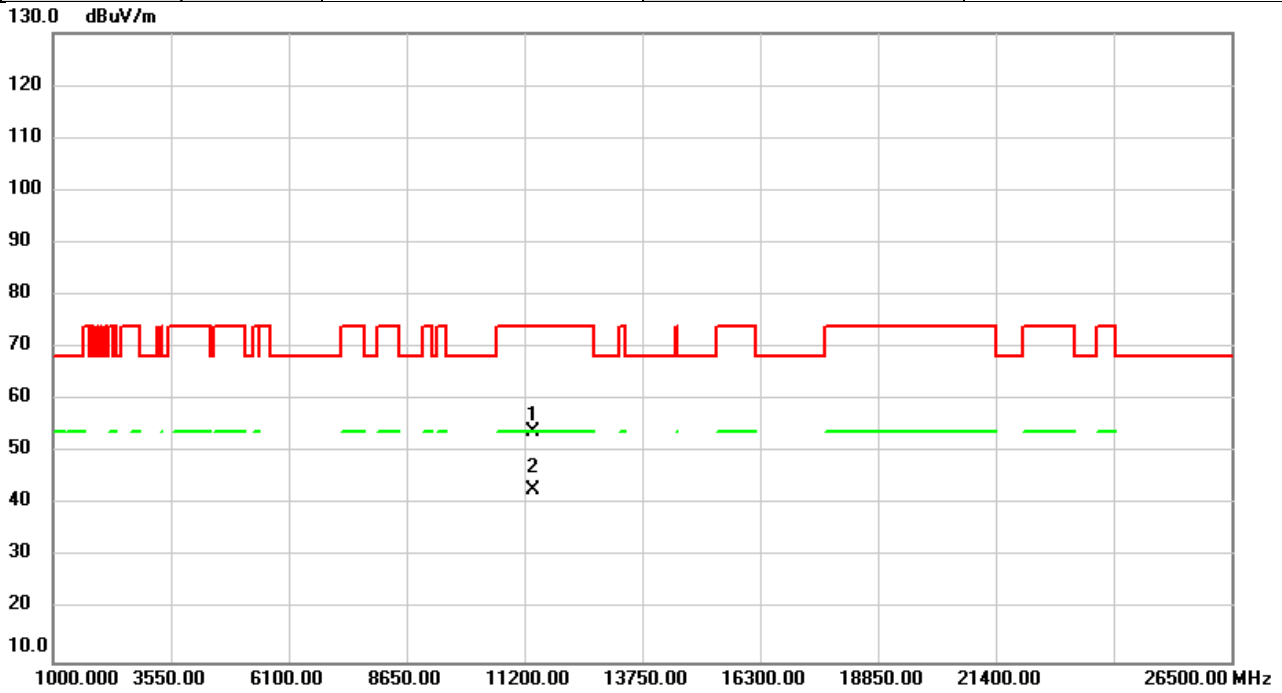


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	47.38	6.64	54.02	74.00	-19.98	peak	
2	*	11400.00	36.18	6.64	42.82	54.00	-11.18	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5700MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

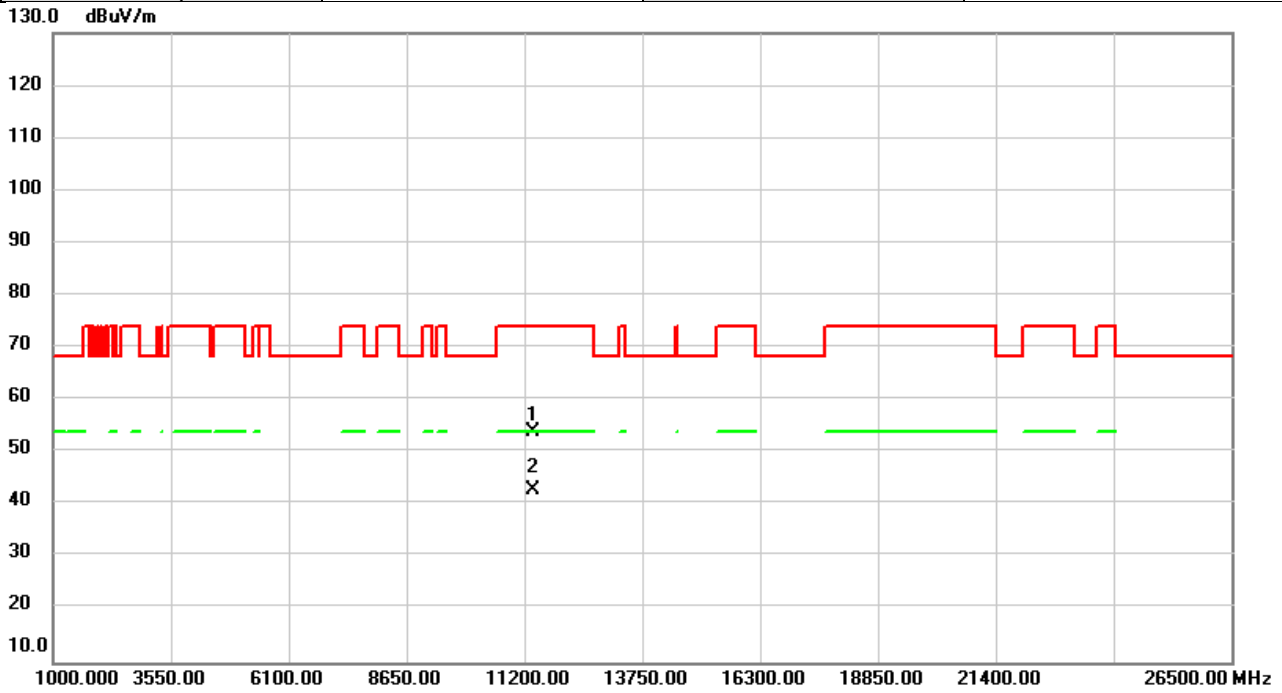


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	47.37	6.64	54.01	74.00	-19.99	peak	
2	*	11400.00	36.22	6.64	42.86	54.00	-11.14	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5720MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

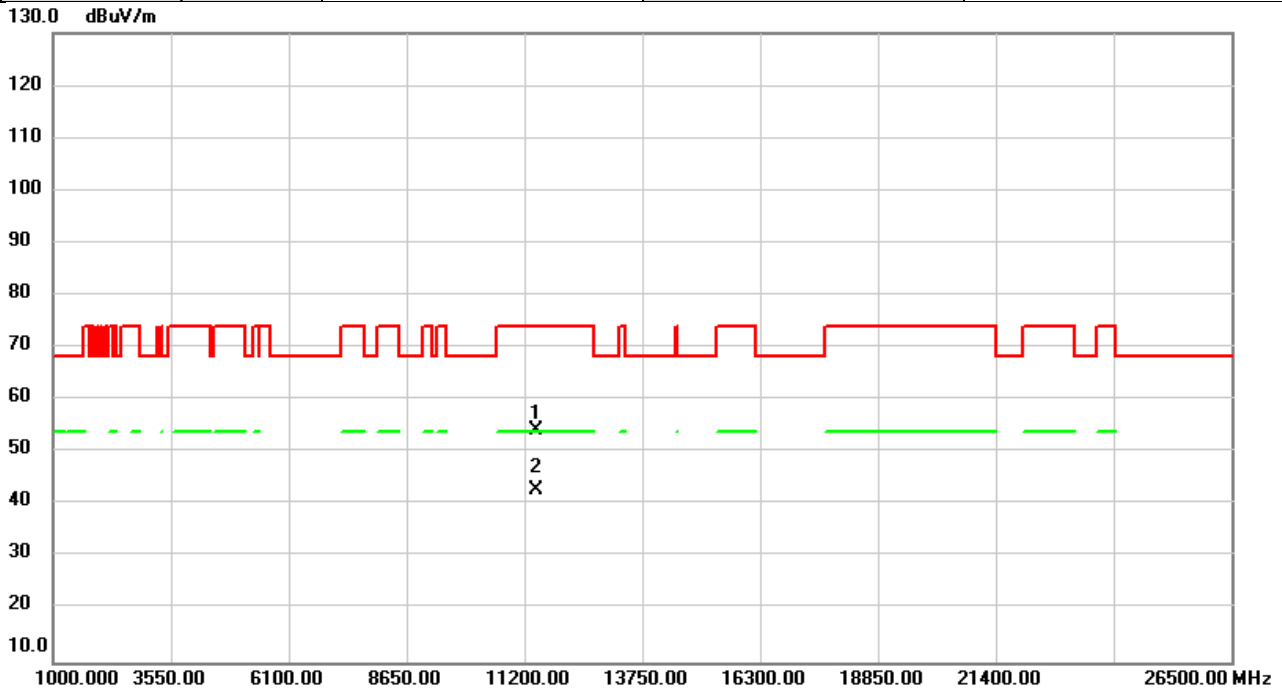


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11440.00	47.46	6.65	54.11	74.00	-19.89	peak	
2	*	11440.00	36.25	6.65	42.90	54.00	-11.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5720MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

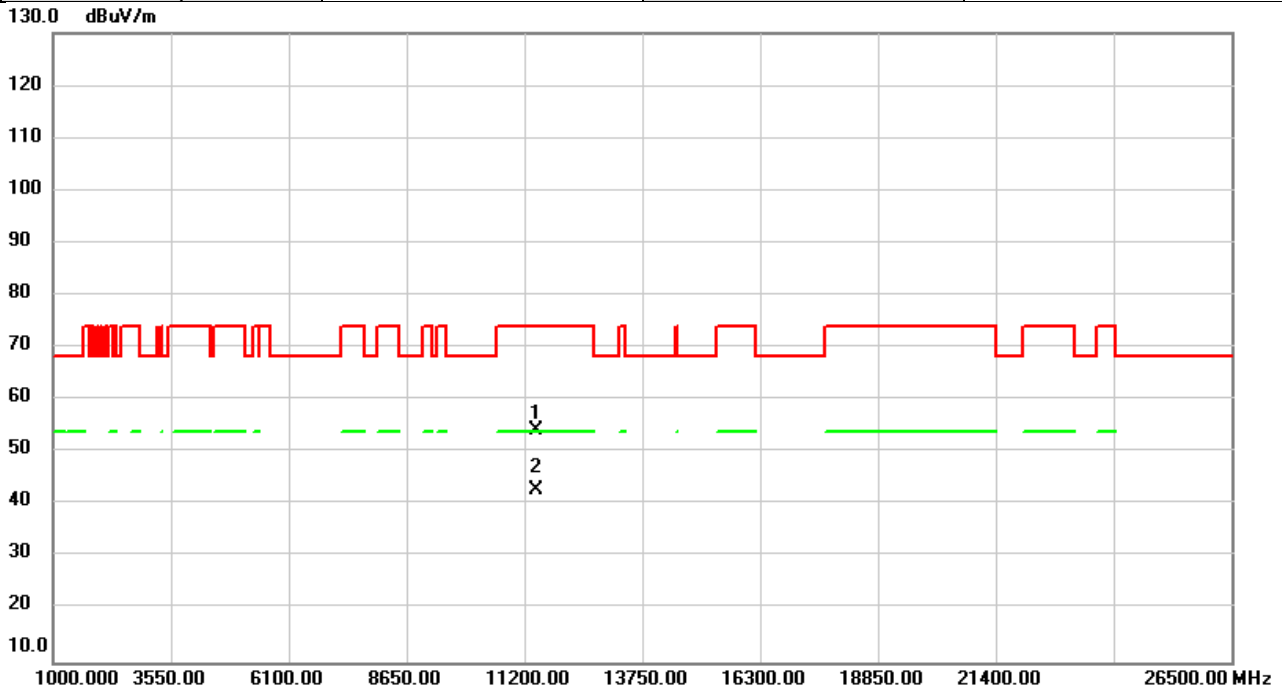


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11440.00	47.70	6.65	54.35	74.00	-19.65	peak	
2	*	11440.00	36.21	6.65	42.86	54.00	-11.14	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5745MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

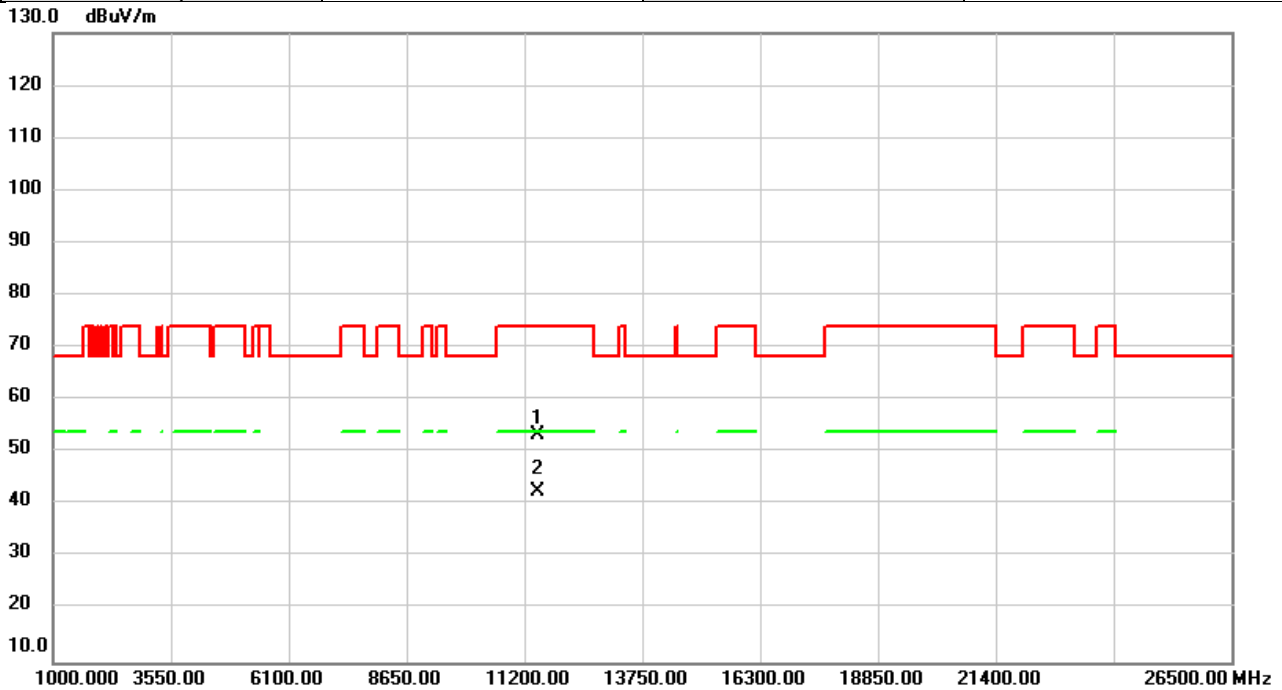


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	46.74	6.66	53.40	74.00	-20.60	peak	
2	*	11490.00	36.03	6.66	42.69	54.00	-11.31	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5745MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

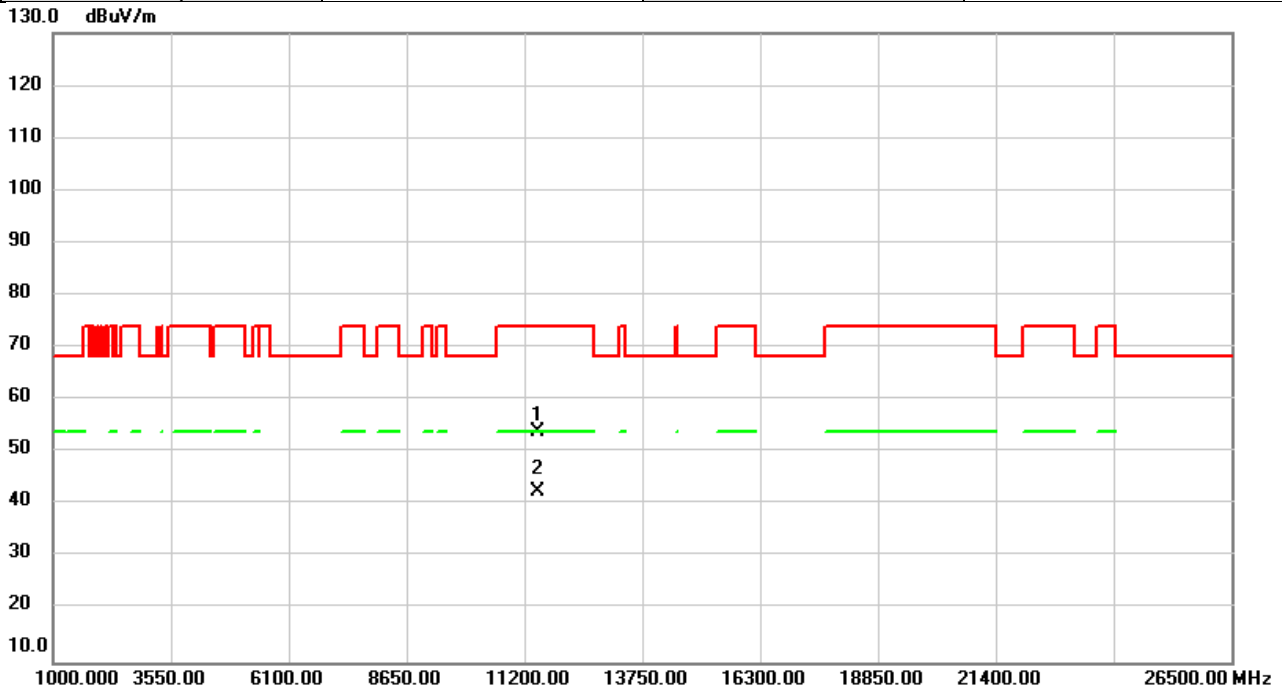


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	47.27	6.66	53.93	74.00	-20.07	peak	
2	*	11490.00	35.93	6.66	42.59	54.00	-11.41	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5785MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

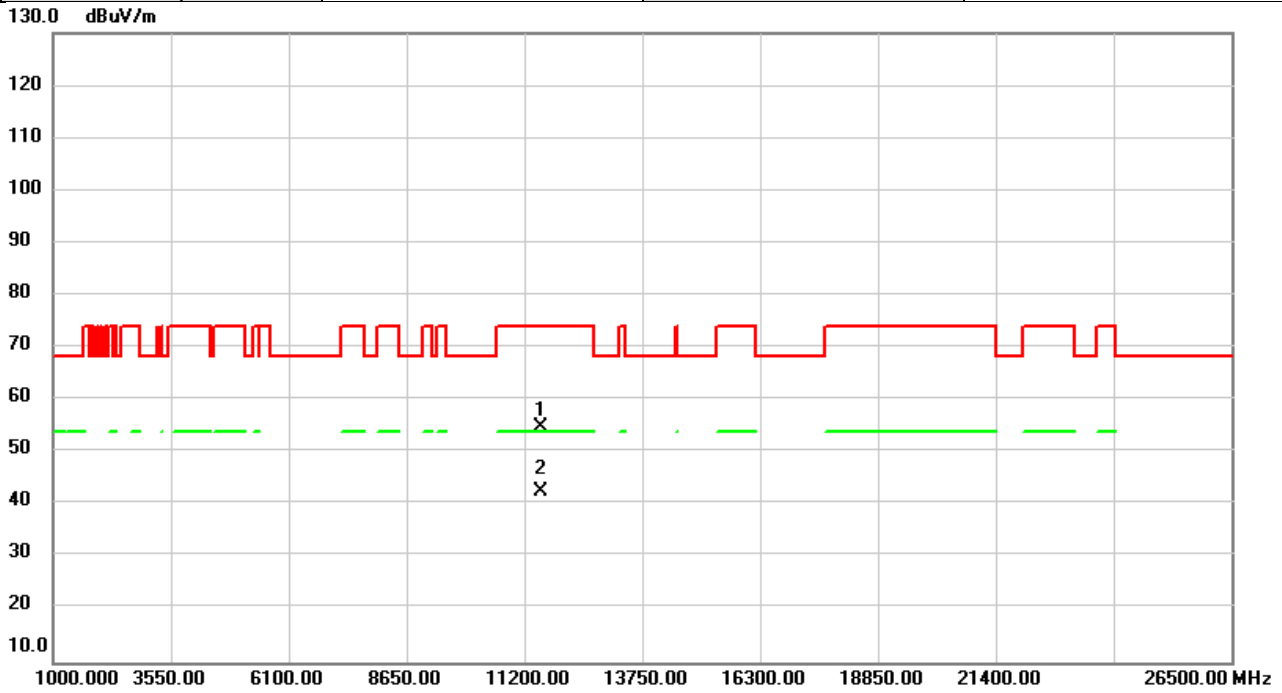


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	48.19	6.65	54.84	74.00	-19.16	peak	
2	*	11570.00	35.89	6.65	42.54	54.00	-11.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5785MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

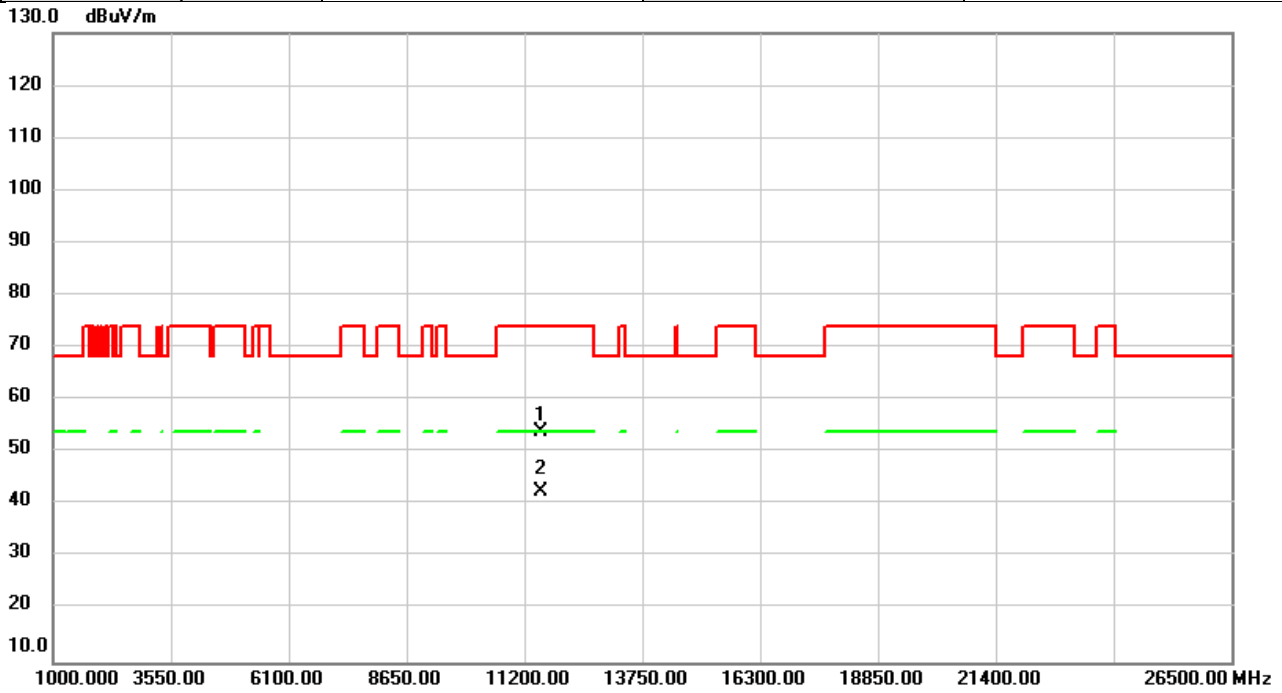


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	47.23	6.65	53.88	74.00	-20.12	peak	
2	*	11570.00	35.85	6.65	42.50	54.00	-11.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5825MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

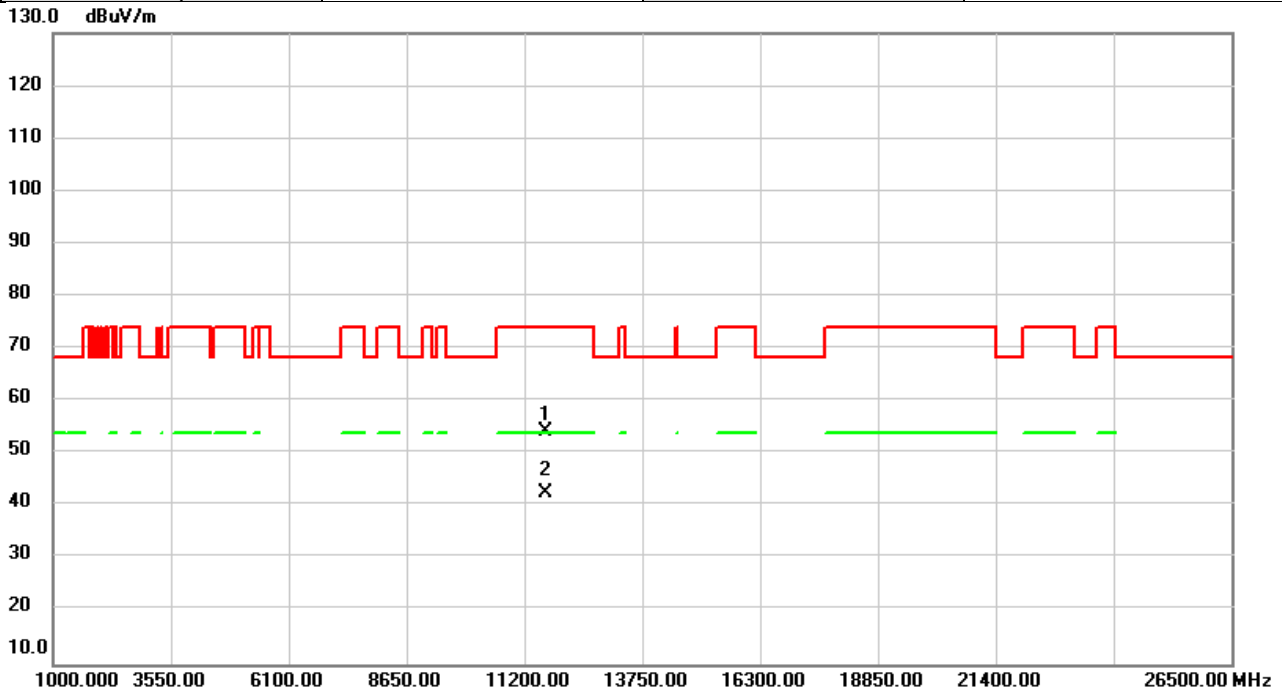


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	47.62	6.63	54.25	74.00	-19.75	peak	
2	*	11650.00	35.96	6.63	42.59	54.00	-11.41	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2023/3/23
Test Frequency	5825MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

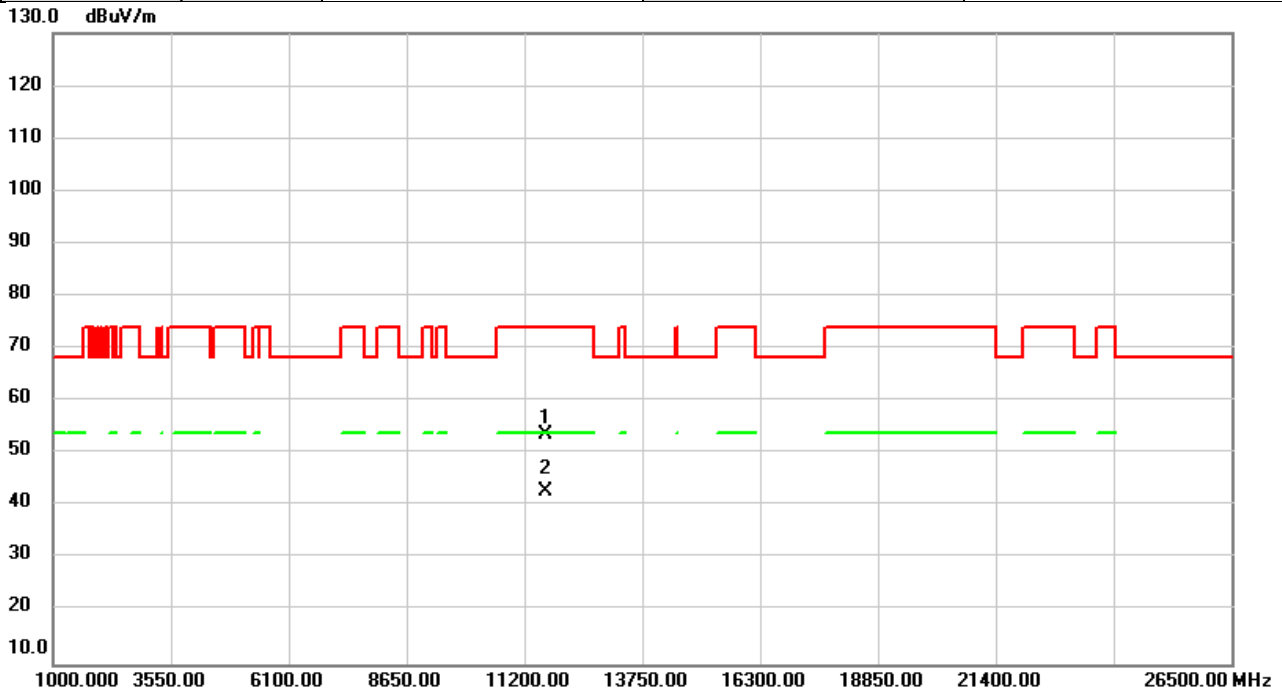


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	47.13	6.63	53.76	74.00	-20.24	peak	
2	*	11650.00	36.17	6.63	42.80	54.00	-11.20	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5190MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

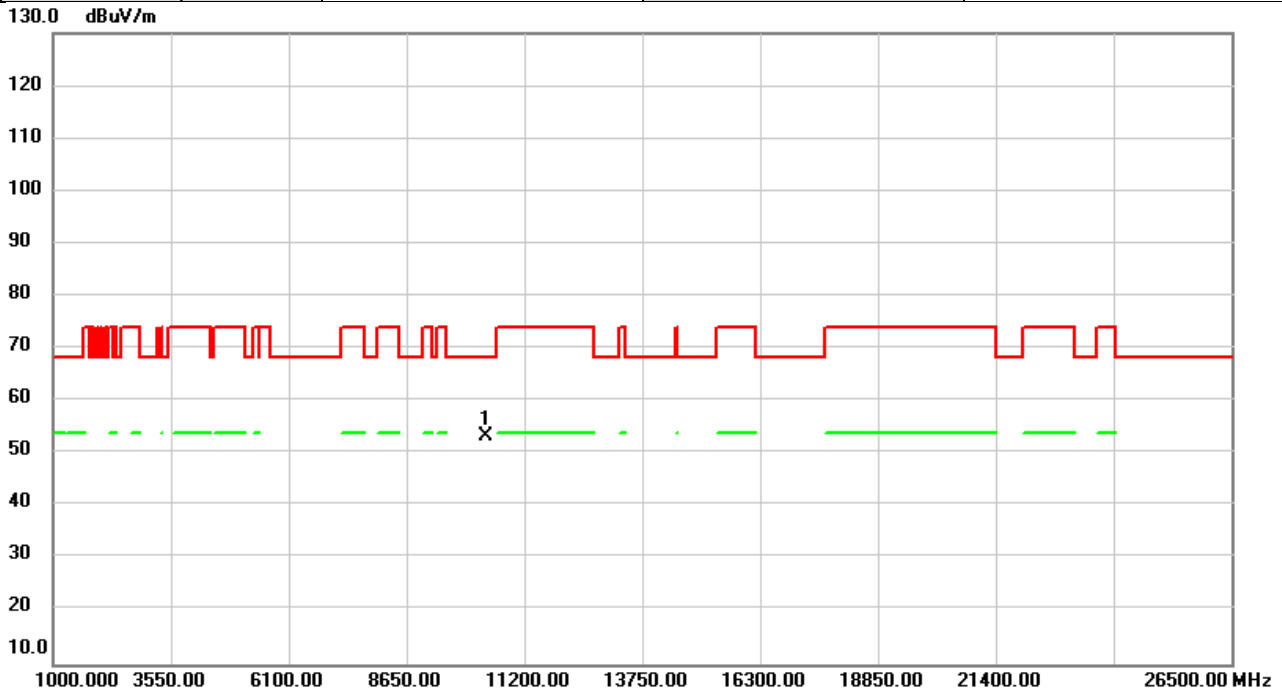


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	47.79	5.67	53.46	68.20	-14.74	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5190MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

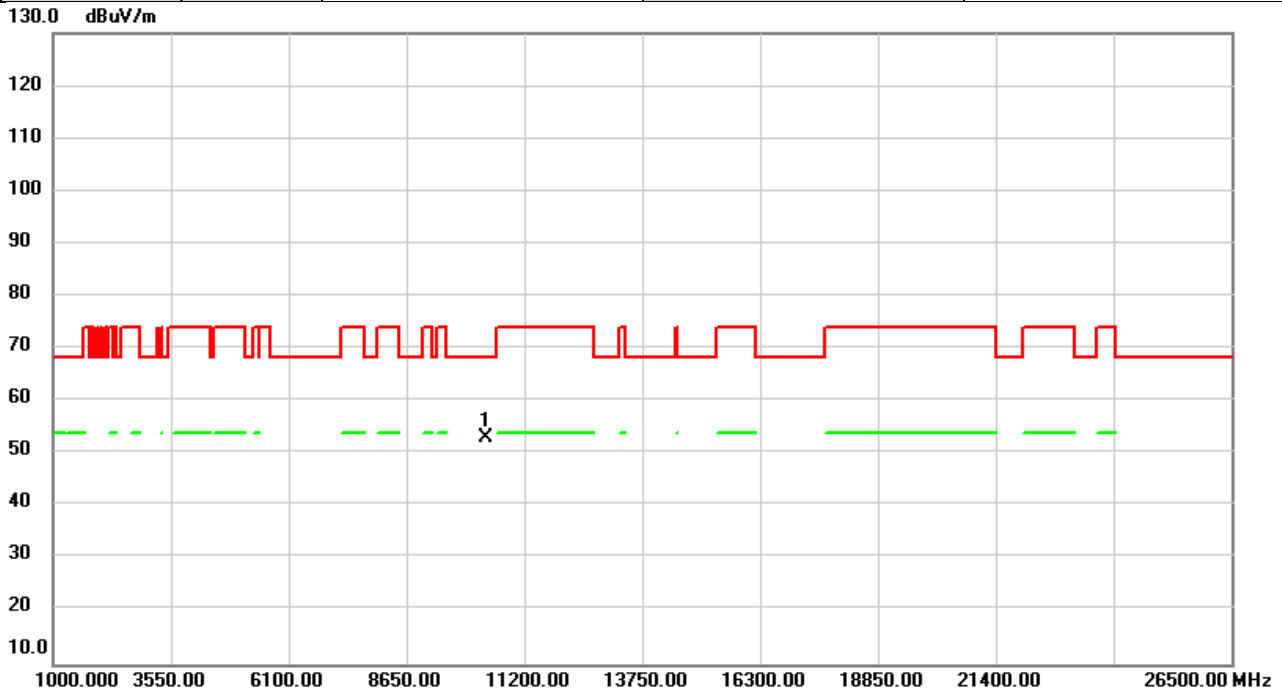


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	47.28	5.67	52.95	68.20	-15.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5230MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

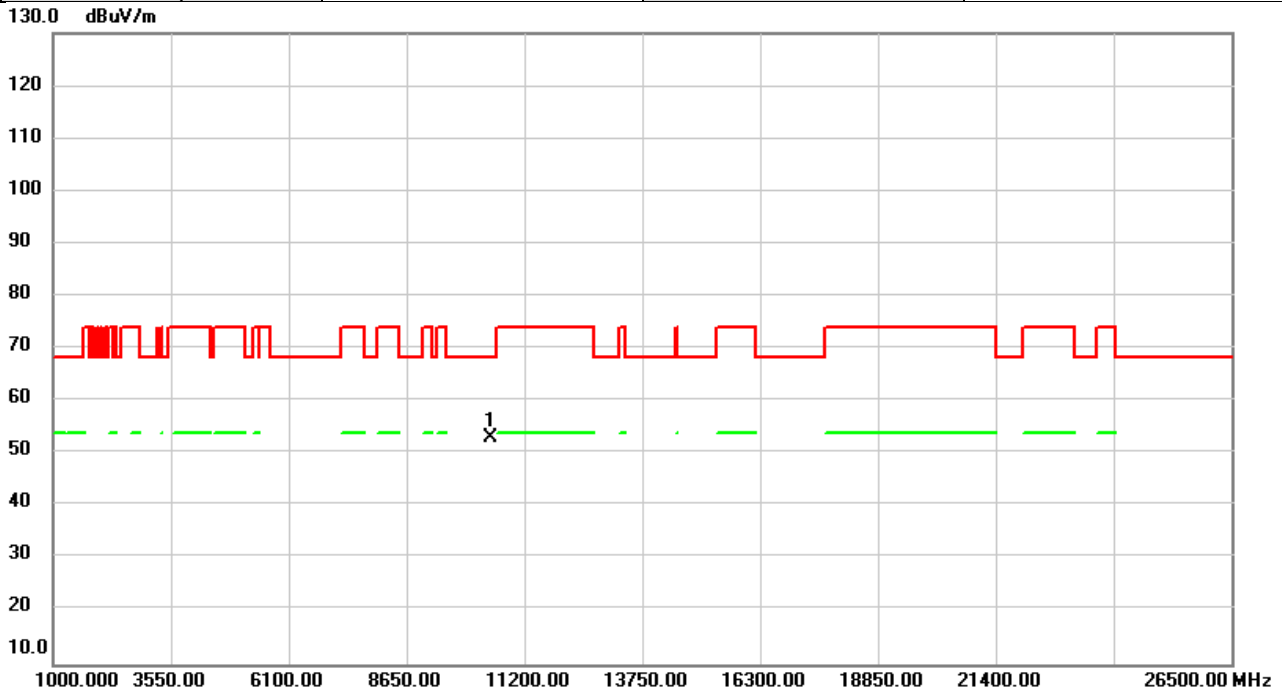


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	47.53	5.45	52.98	68.20	-15.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5230MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

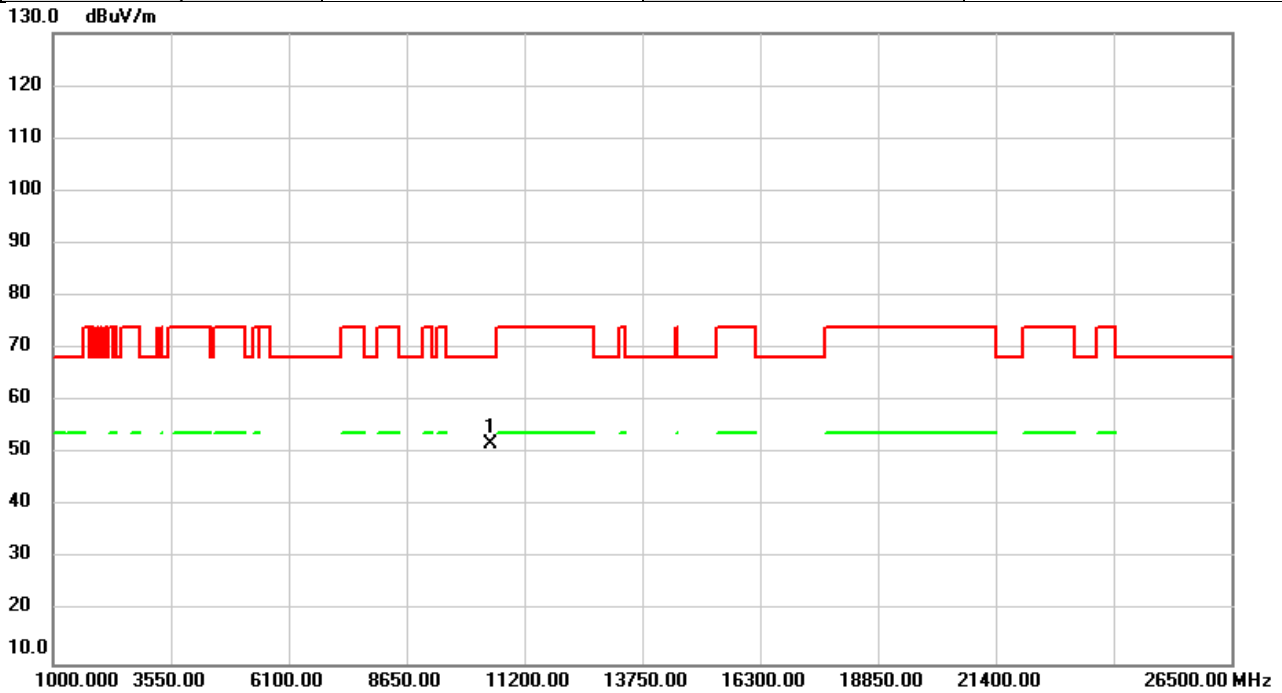


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	46.43	5.45	51.88	68.20	-16.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5270MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

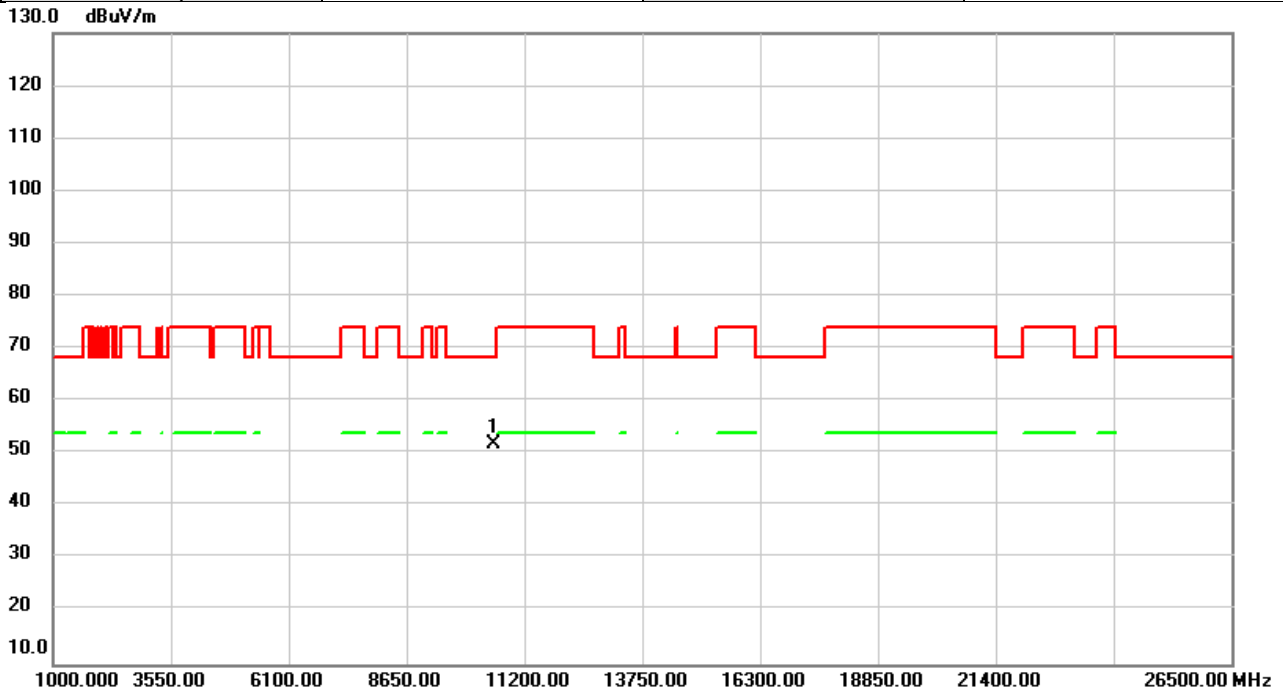


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	46.46	5.44	51.90	68.20	-16.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5270MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

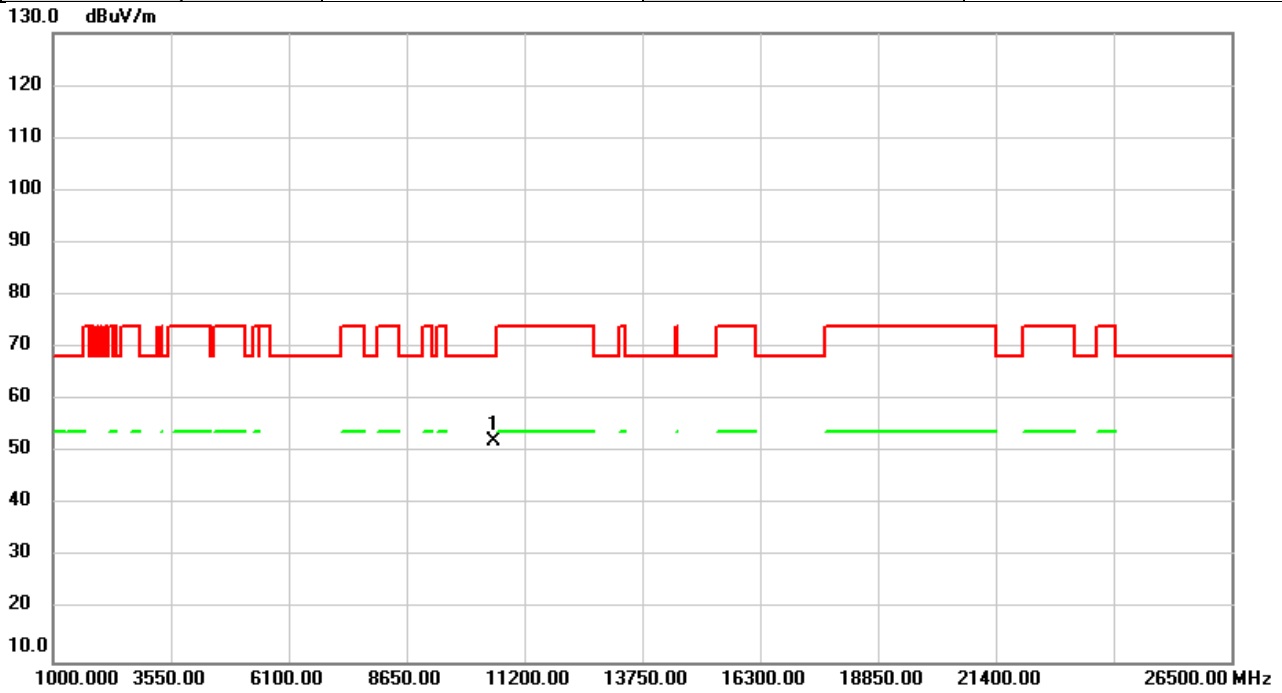


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	46.85	5.44	52.29	68.20	-15.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5310MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

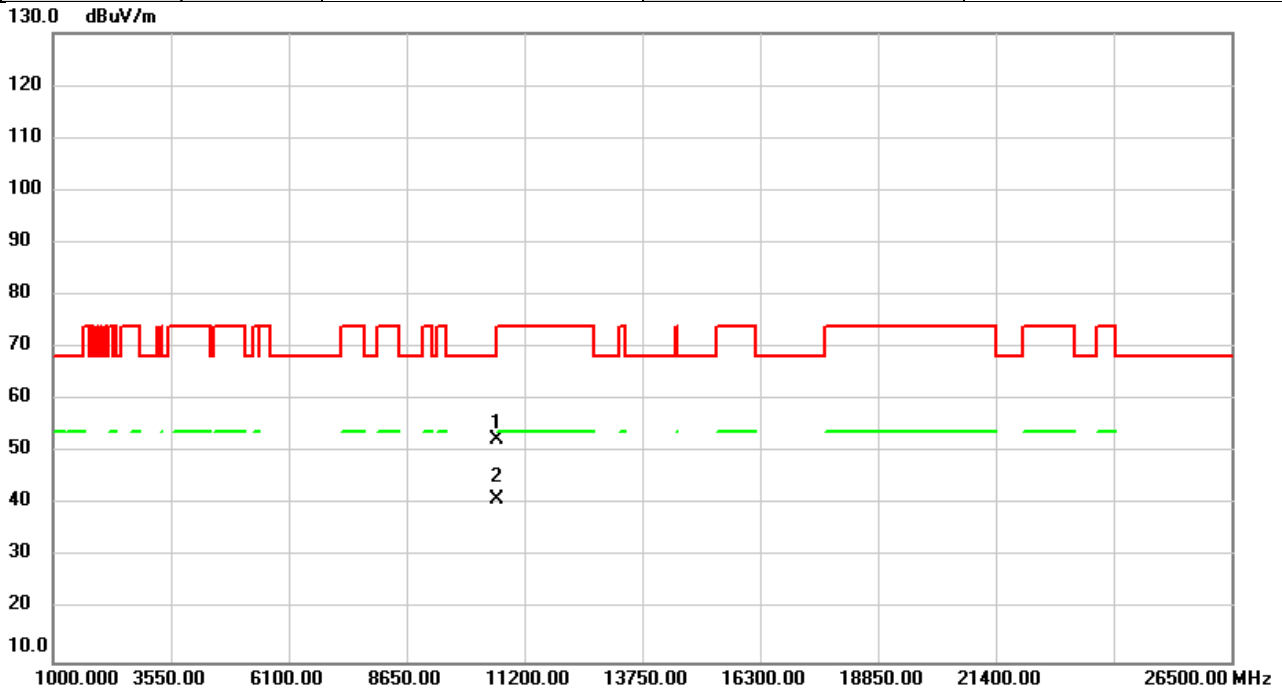


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	46.73	5.63	52.36	74.00	-21.64	peak	
2	*	10620.00	35.39	5.63	41.02	54.00	-12.98	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5310MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

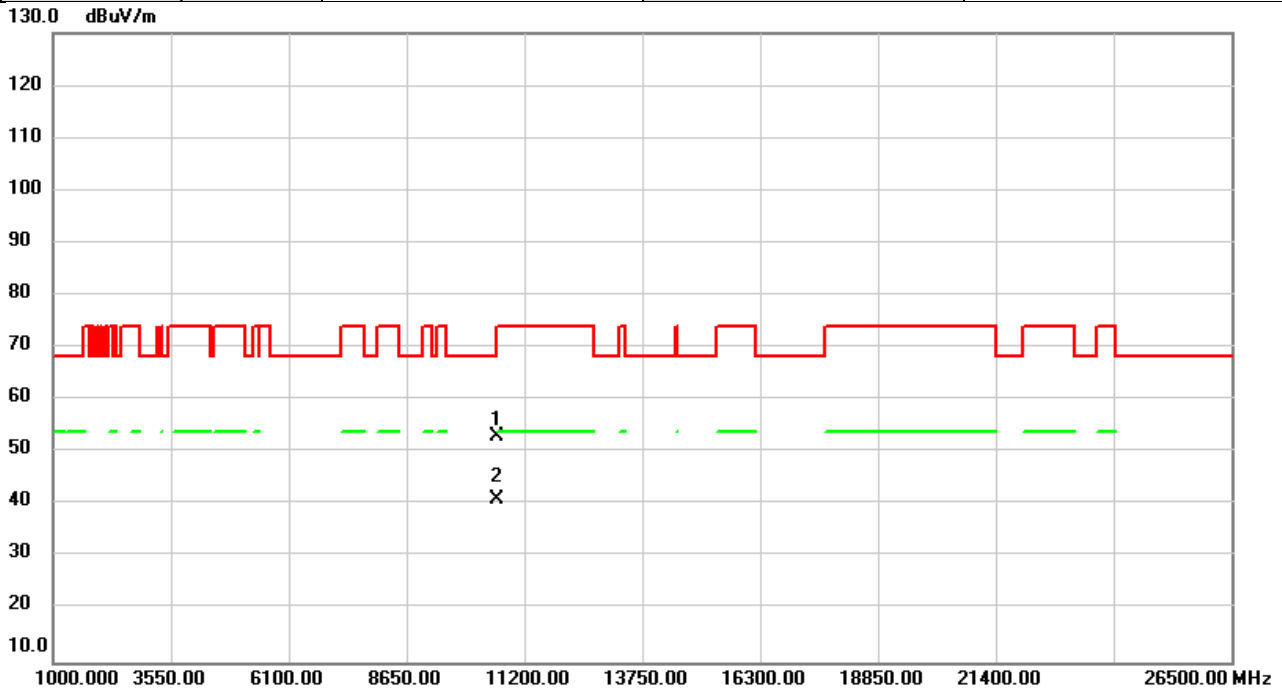


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	47.31	5.63	52.94	74.00	-21.06	peak	
2	*	10620.00	35.40	5.63	41.03	54.00	-12.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5510MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

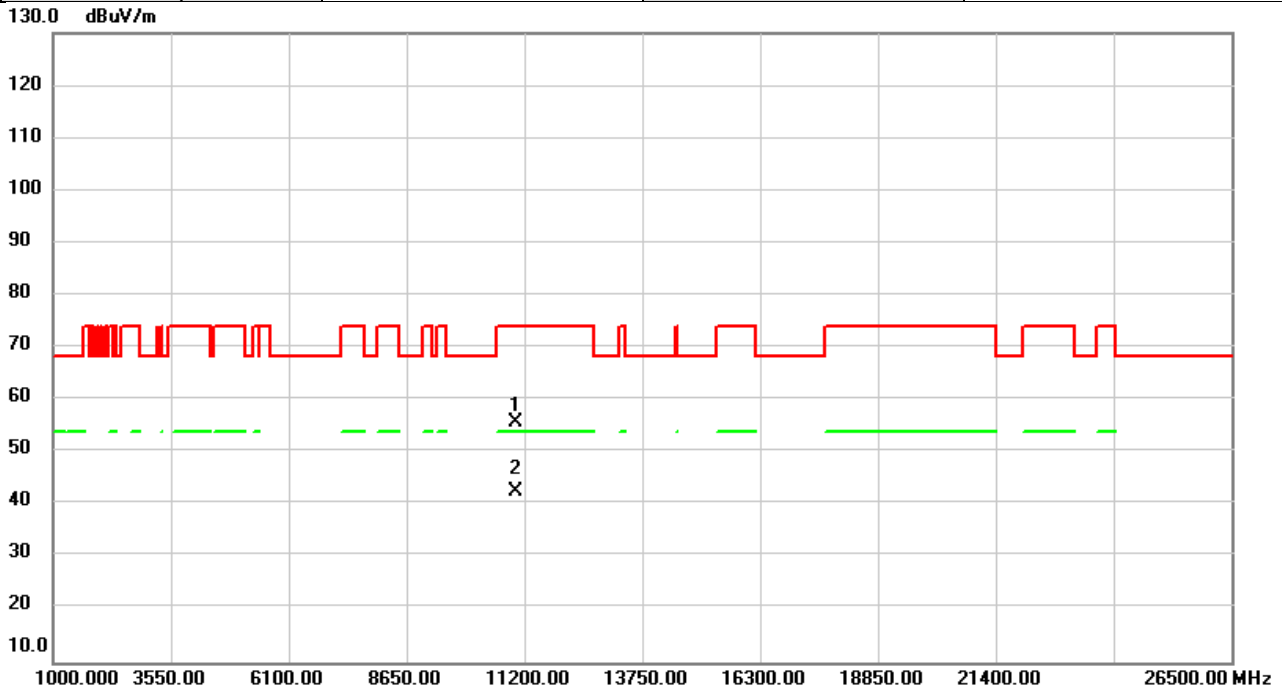


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	49.19	6.54	55.73	74.00	-18.27	peak	
2	*	11020.00	35.95	6.54	42.49	54.00	-11.51	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5510MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

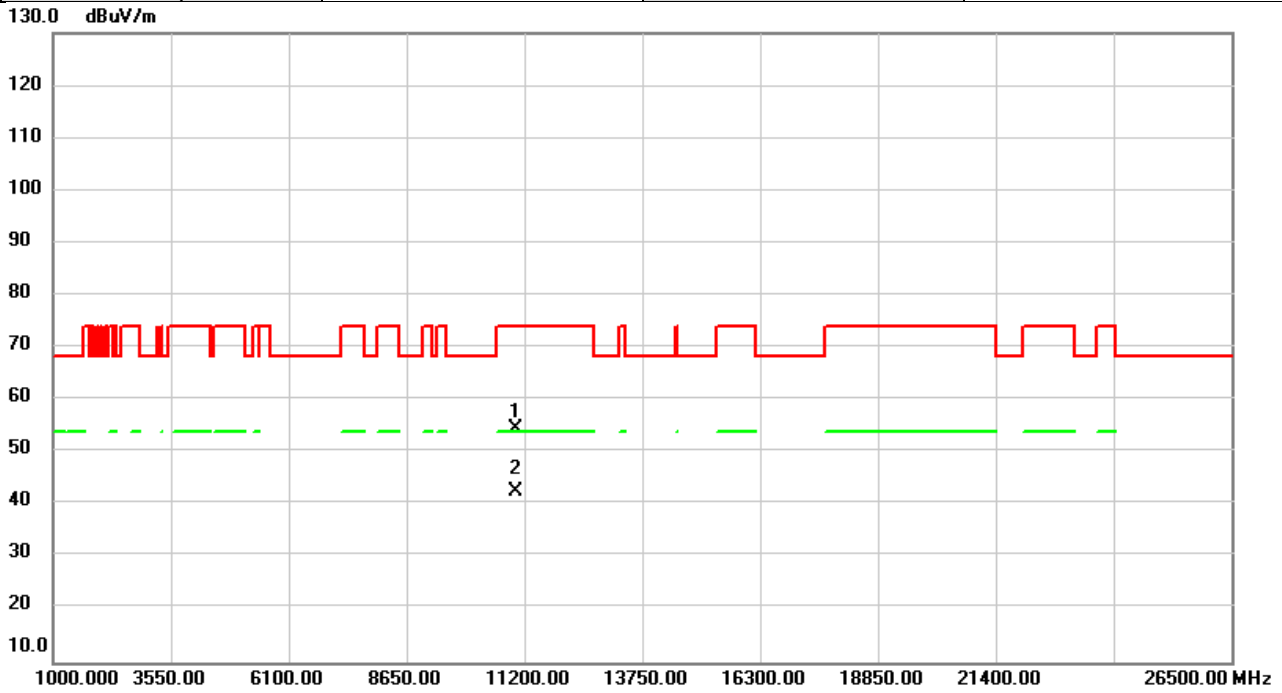


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	47.97	6.54	54.51	74.00	-19.49	peak	
2	*	11020.00	35.93	6.54	42.47	54.00	-11.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5590MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

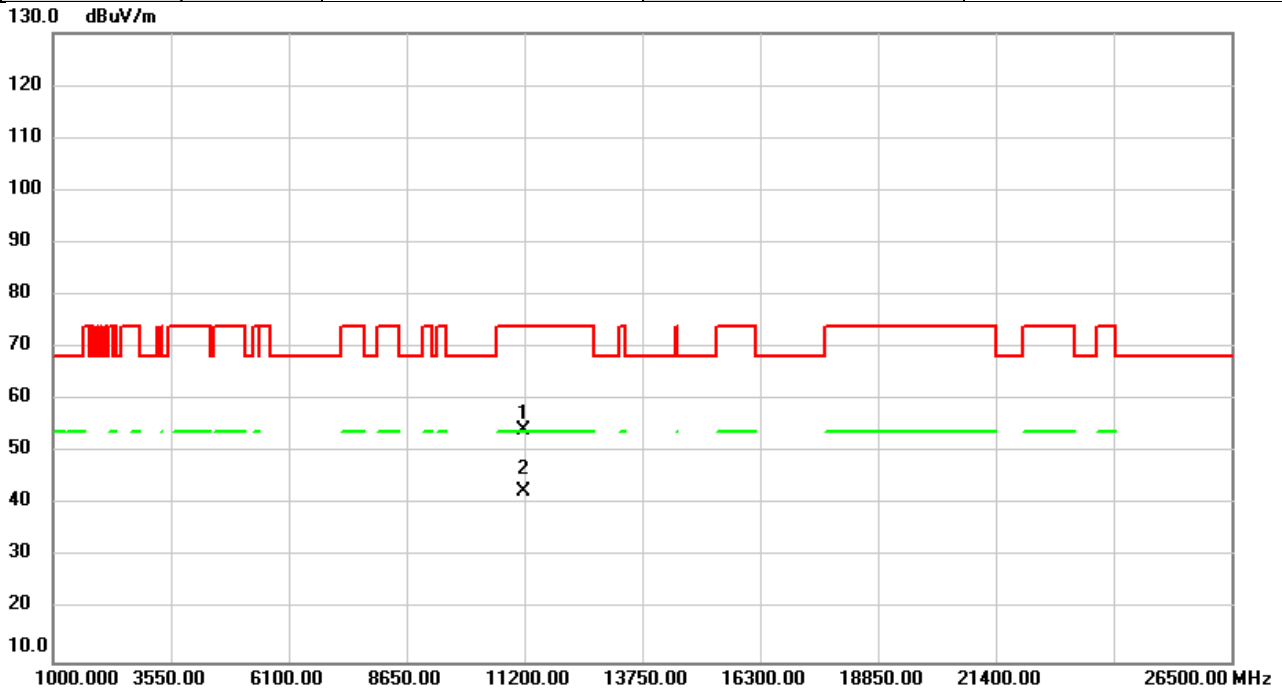


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11180.00	47.62	6.59	54.21	74.00	-19.79	peak	
2	*	11180.00	35.94	6.59	42.53	54.00	-11.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5590MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

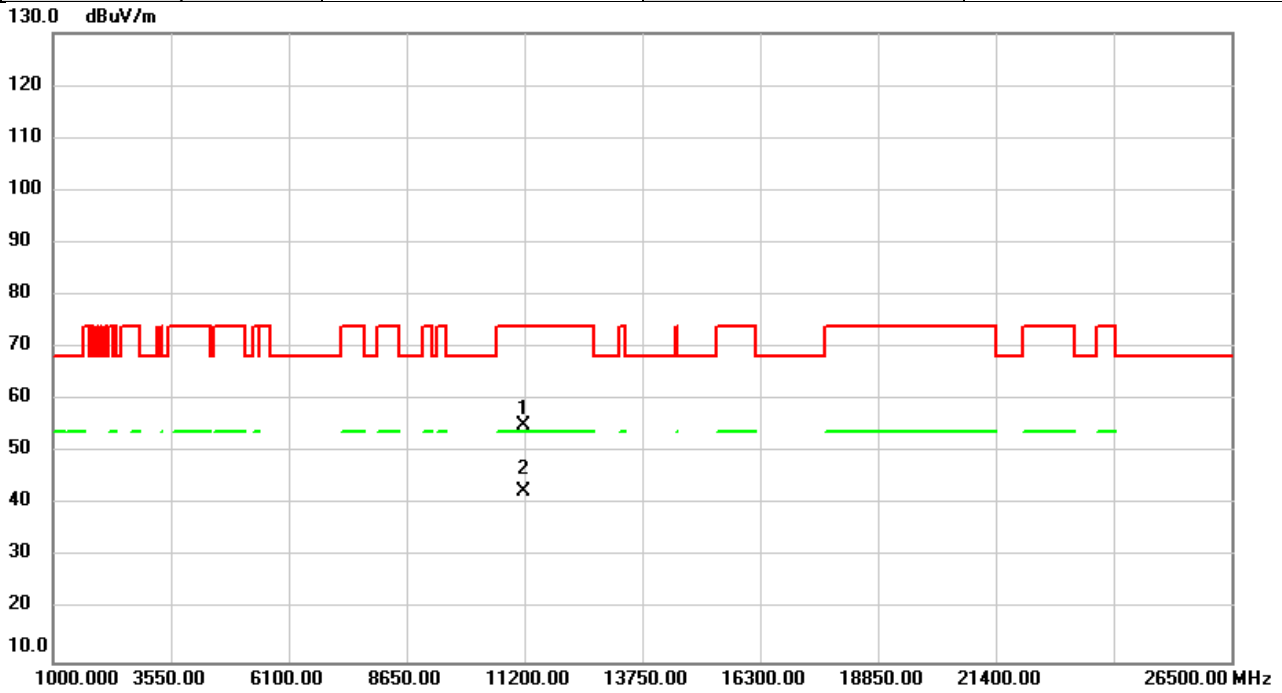


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11180.00	48.71	6.59	55.30	74.00	-18.70	peak	
2	*	11180.00	35.99	6.59	42.58	54.00	-11.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5670MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

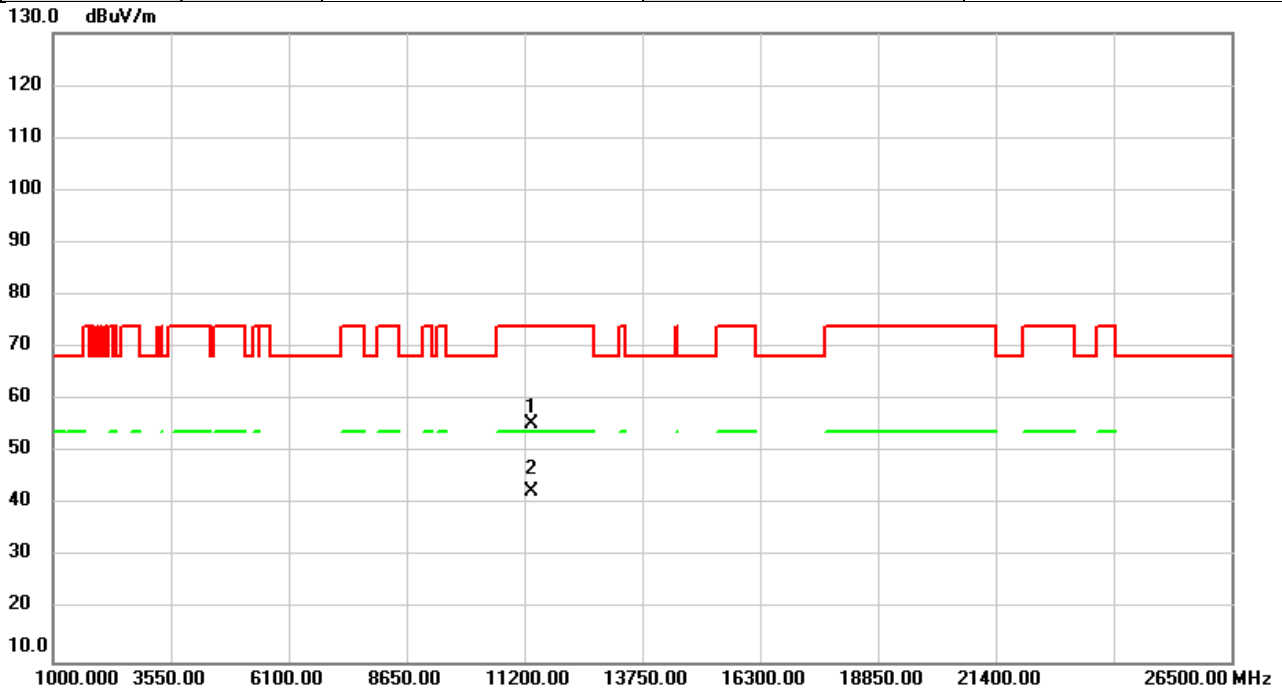


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	48.71	6.62	55.33	74.00	-18.67	peak	
2	*	11340.00	35.98	6.62	42.60	54.00	-11.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5670MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

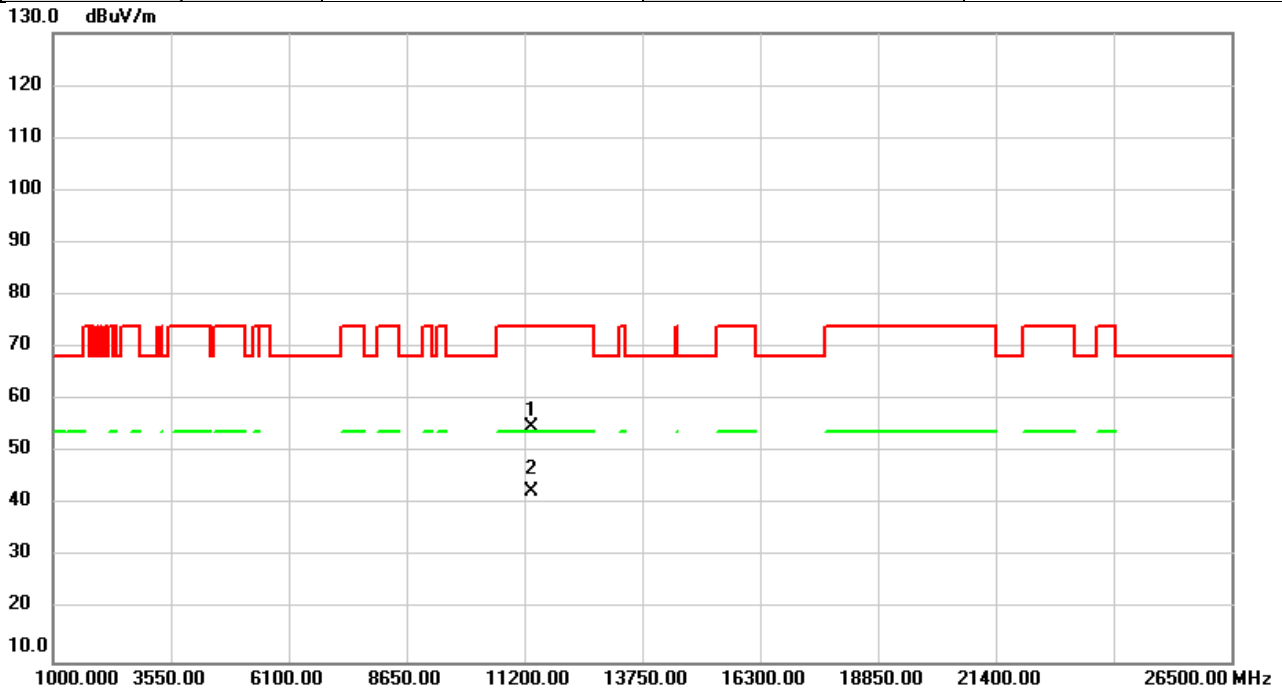


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	48.31	6.62	54.93	74.00	-19.07	peak	
2	*	11340.00	35.93	6.62	42.55	54.00	-11.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5710MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

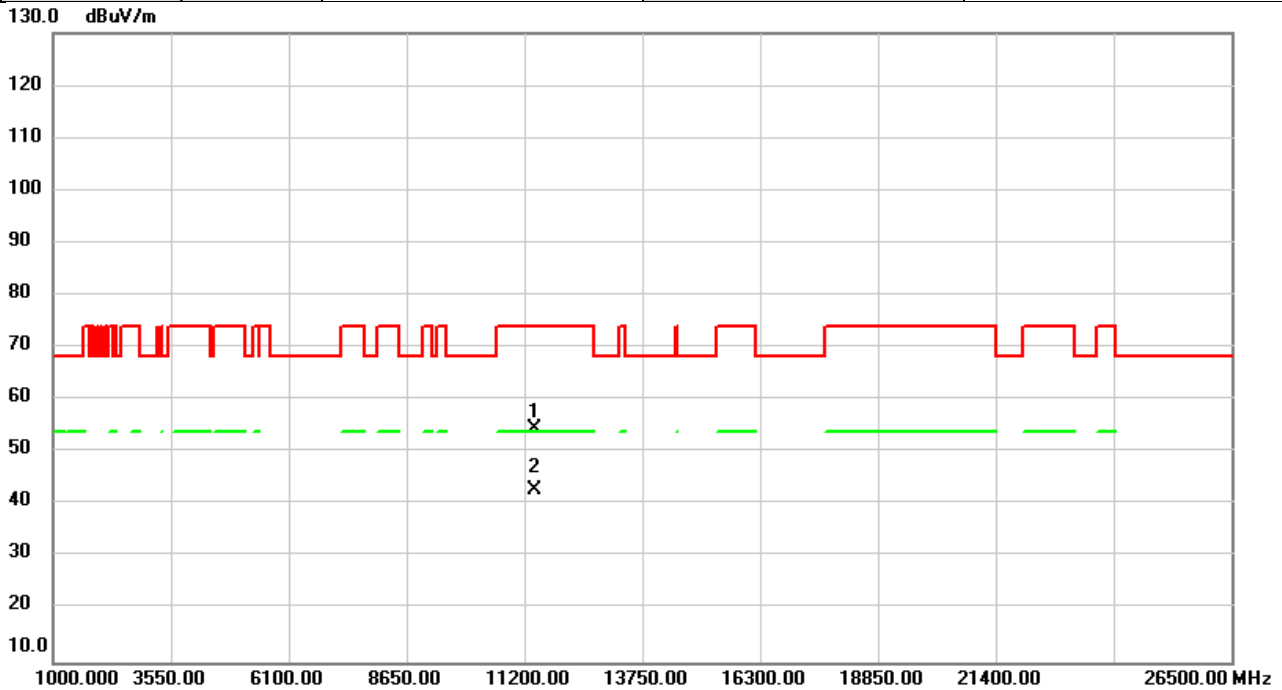


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	48.00	6.65	54.65	74.00	-19.35	peak	
2	*	11420.00	36.08	6.65	42.73	54.00	-11.27	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5710MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

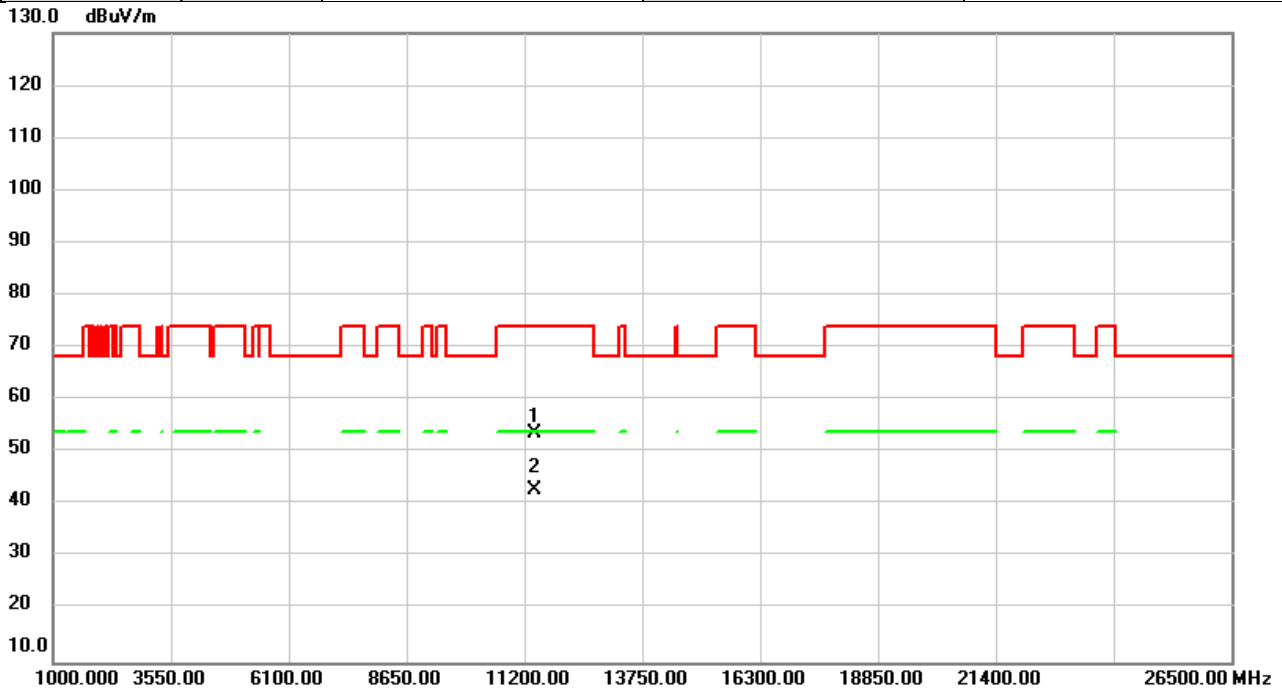


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11420.00	47.02	6.65	53.67	74.00	-20.33	peak	
2	*	11420.00	36.14	6.65	42.79	54.00	-11.21	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5755MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

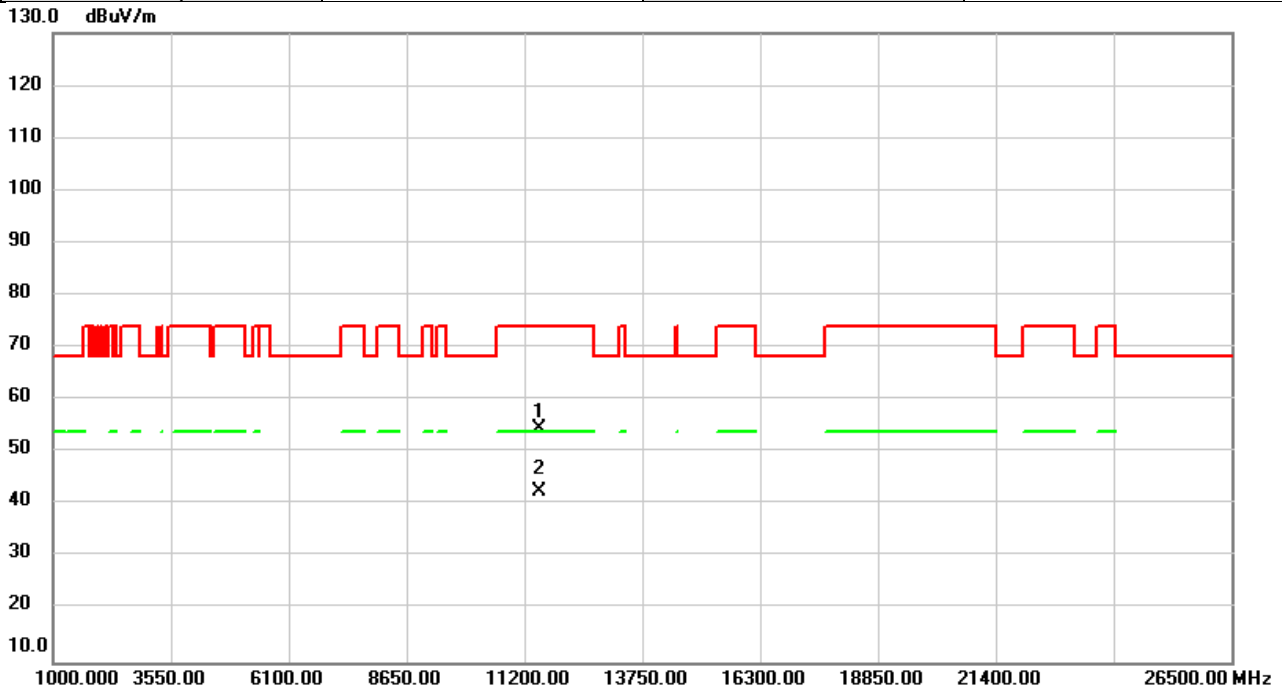


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	47.91	6.67	54.58	74.00	-19.42	peak	
2	*	11510.00	35.87	6.67	42.54	54.00	-11.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5755MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

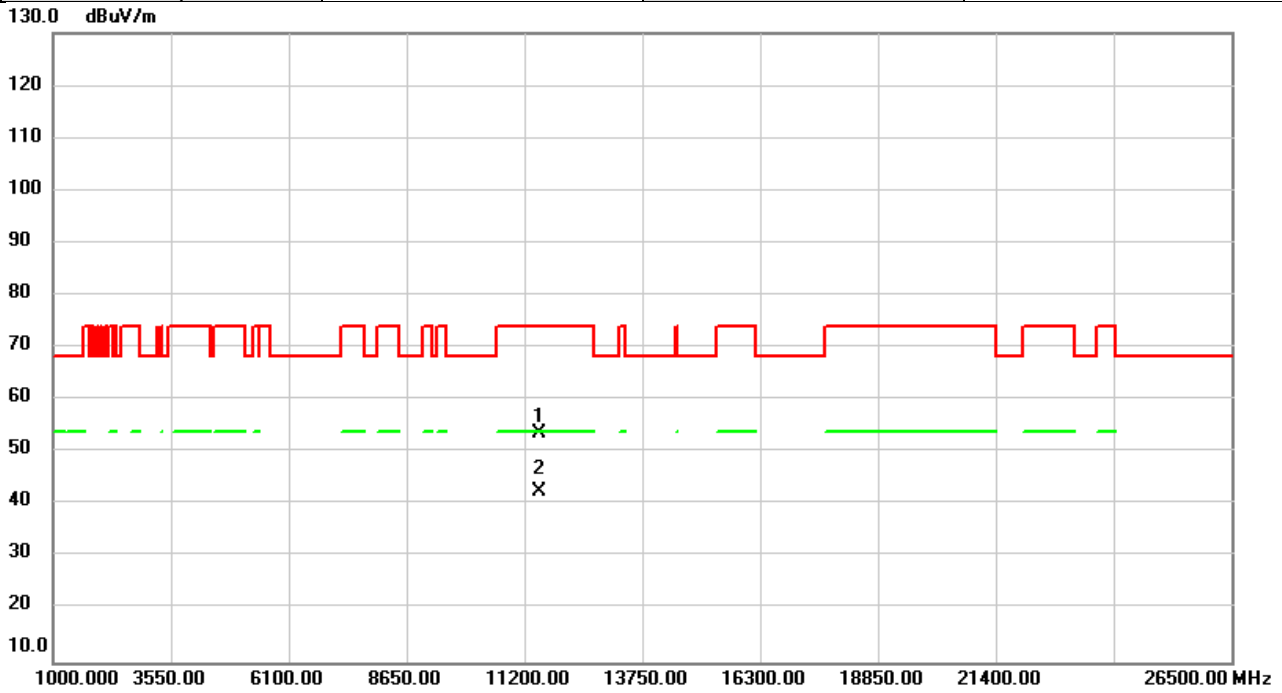


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	47.06	6.67	53.73	74.00	-20.27	peak	
2	*	11510.00	35.92	6.67	42.59	54.00	-11.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5795MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

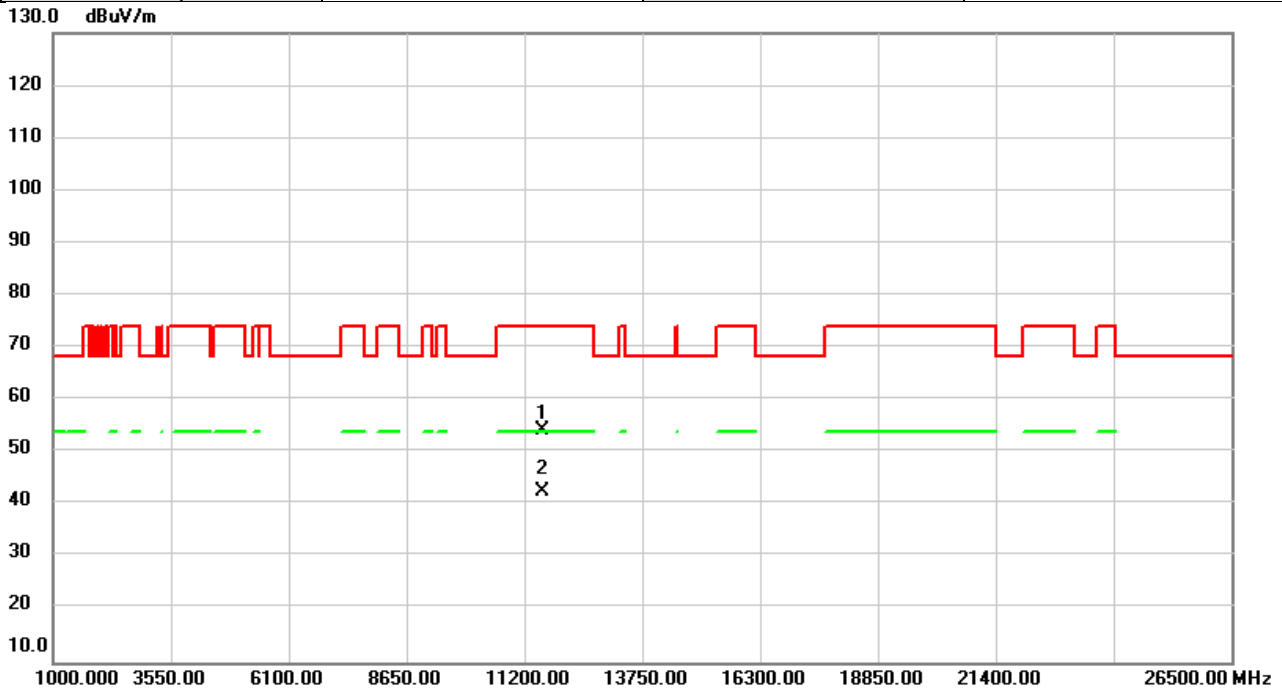


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	47.67	6.64	54.31	74.00	-19.69	peak	
2	*	11590.00	35.84	6.64	42.48	54.00	-11.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2023/3/23
Test Frequency	5795MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

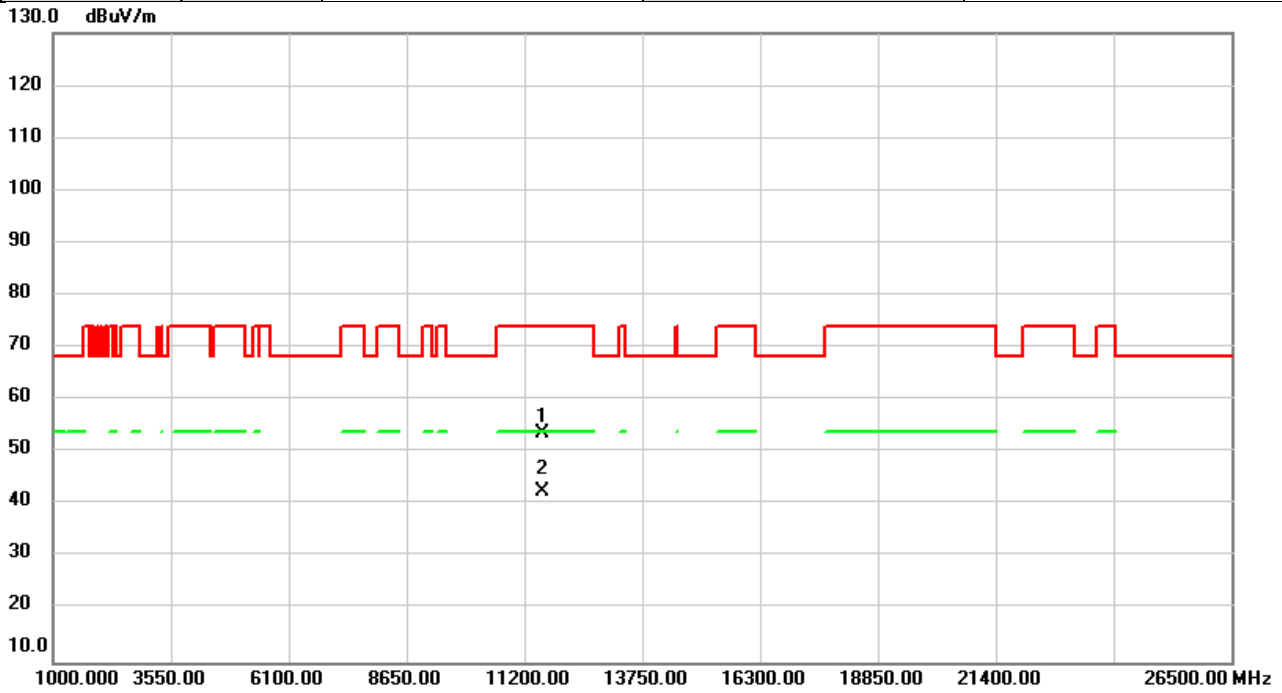


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	47.03	6.64	53.67	74.00	-20.33	peak	
2	*	11590.00	35.82	6.64	42.46	54.00	-11.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5210MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

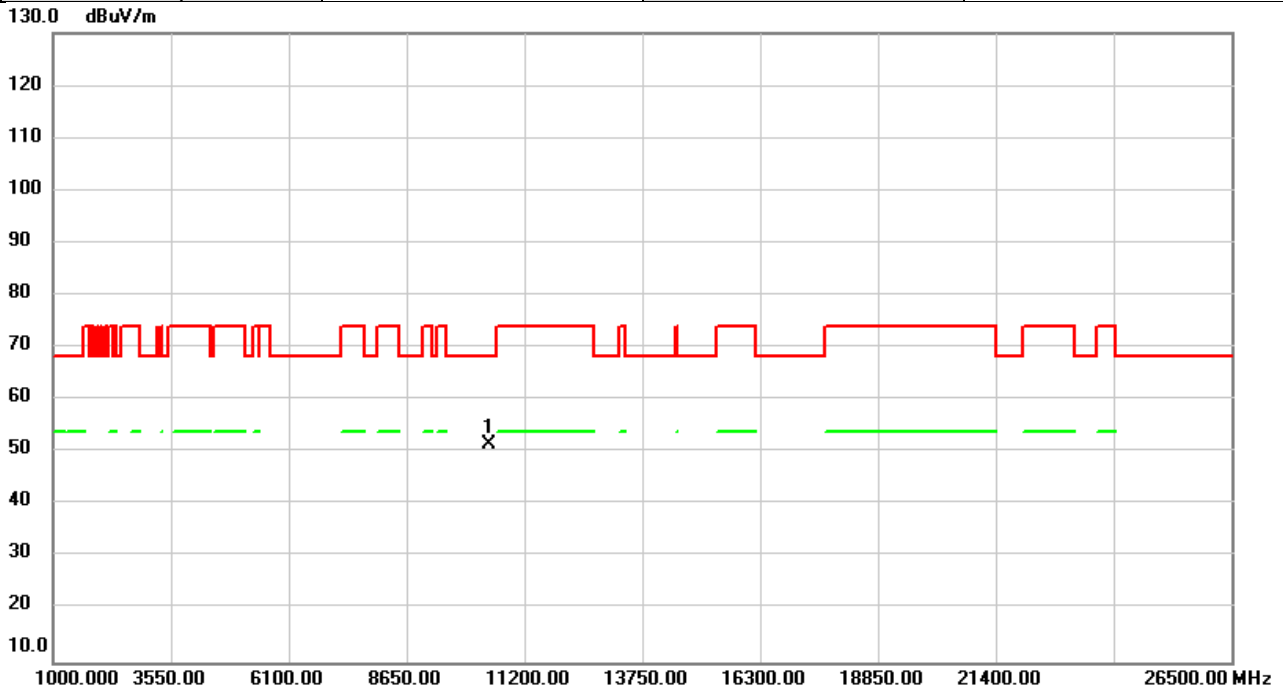


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	45.98	5.55	51.53	68.20	-16.67	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5210MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

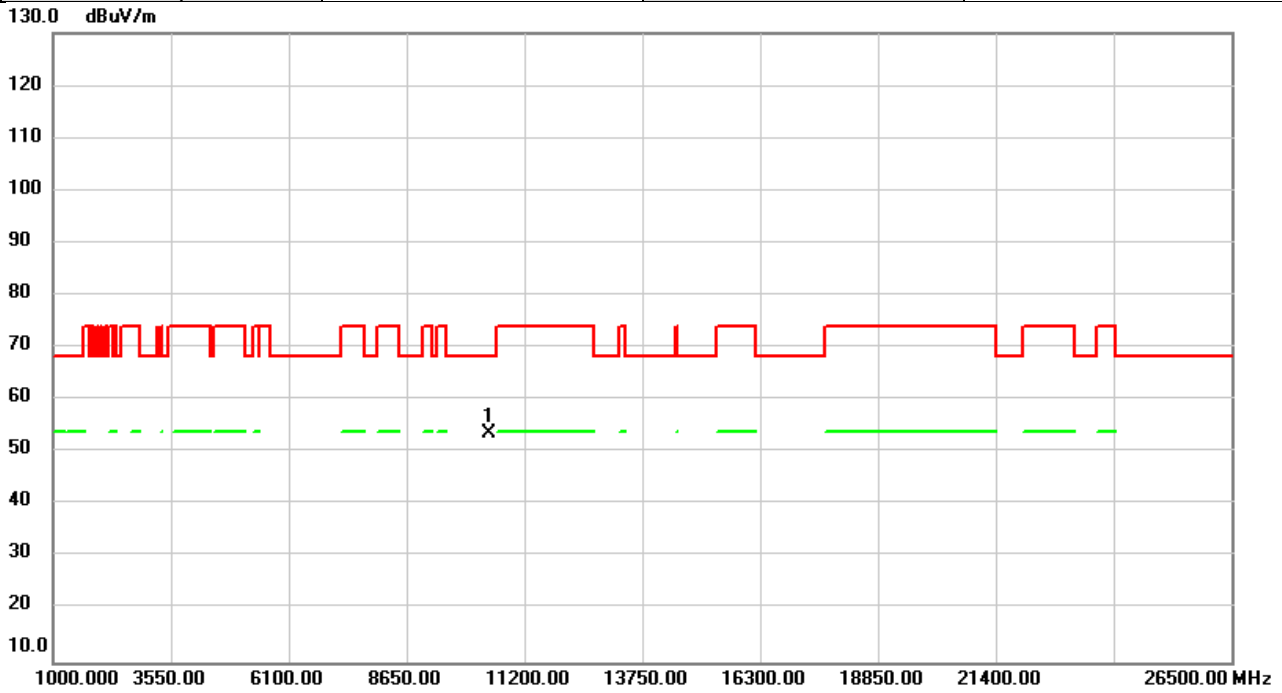


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	48.24	5.55	53.79	68.20	-14.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5290MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

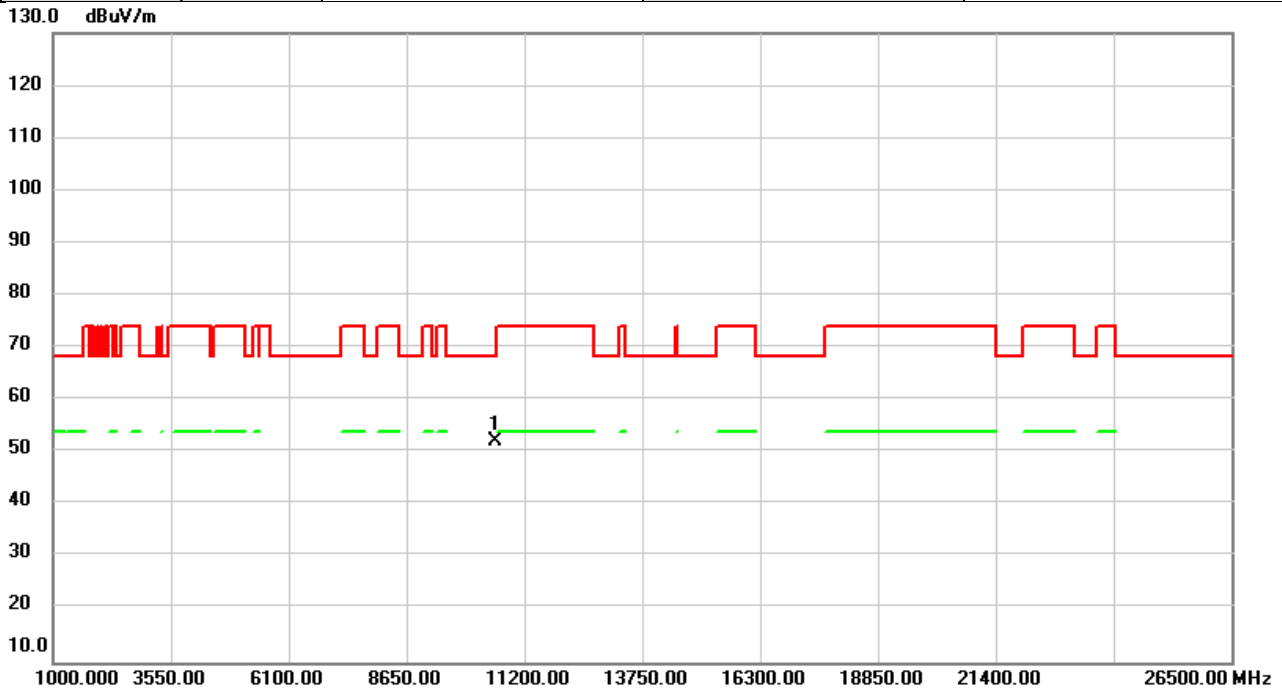


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	46.57	5.53	52.10	68.20	-16.10	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5290MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

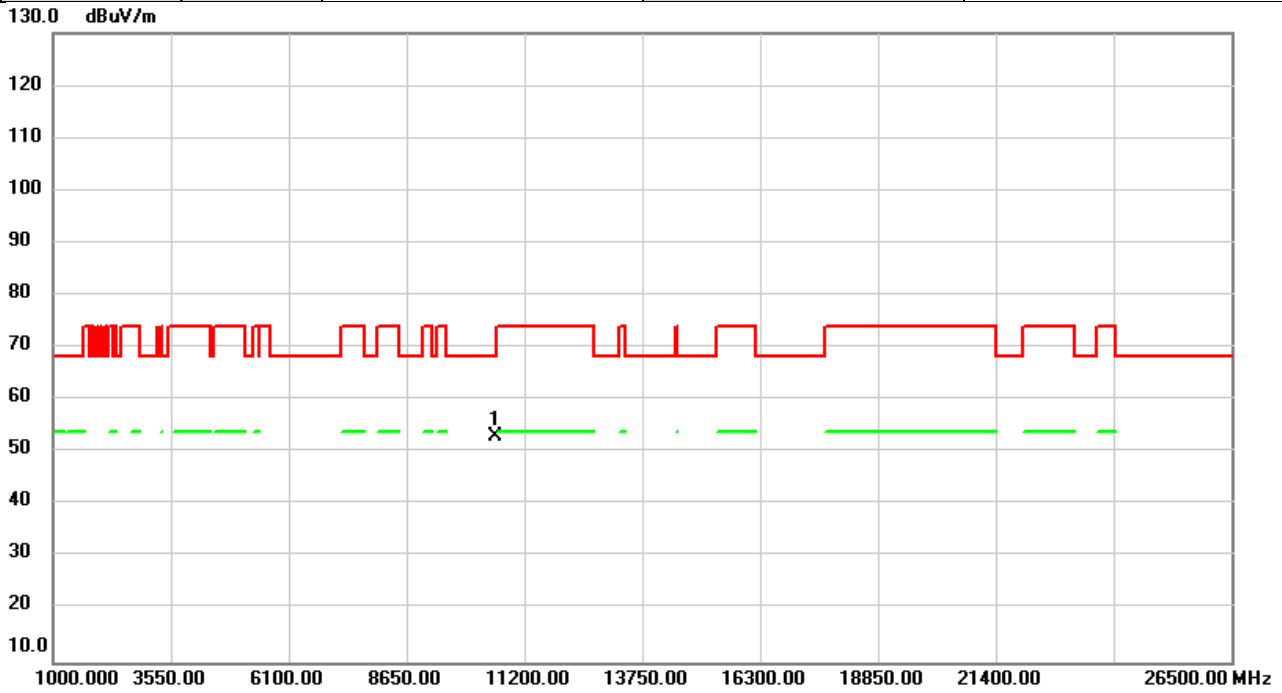


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	47.55	5.53	53.08	68.20	-15.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5530MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

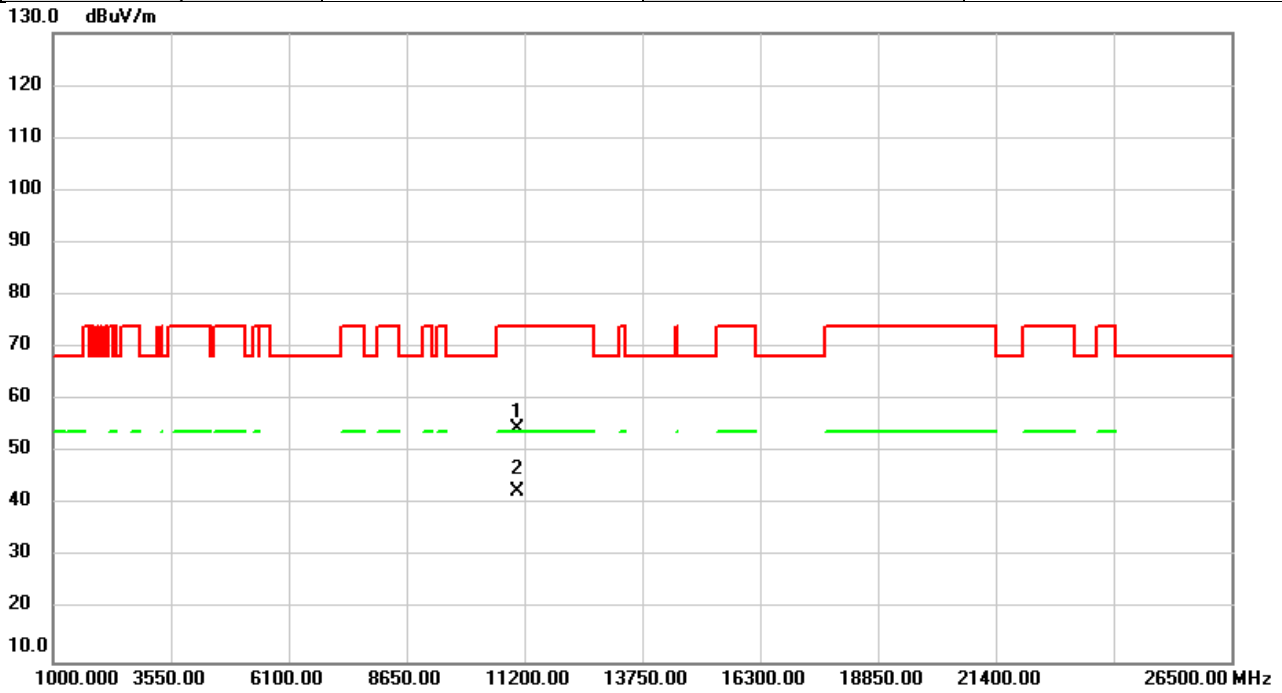


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	48.11	6.56	54.67	74.00	-19.33	peak	
2	*	11060.00	36.02	6.56	42.58	54.00	-11.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5530MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

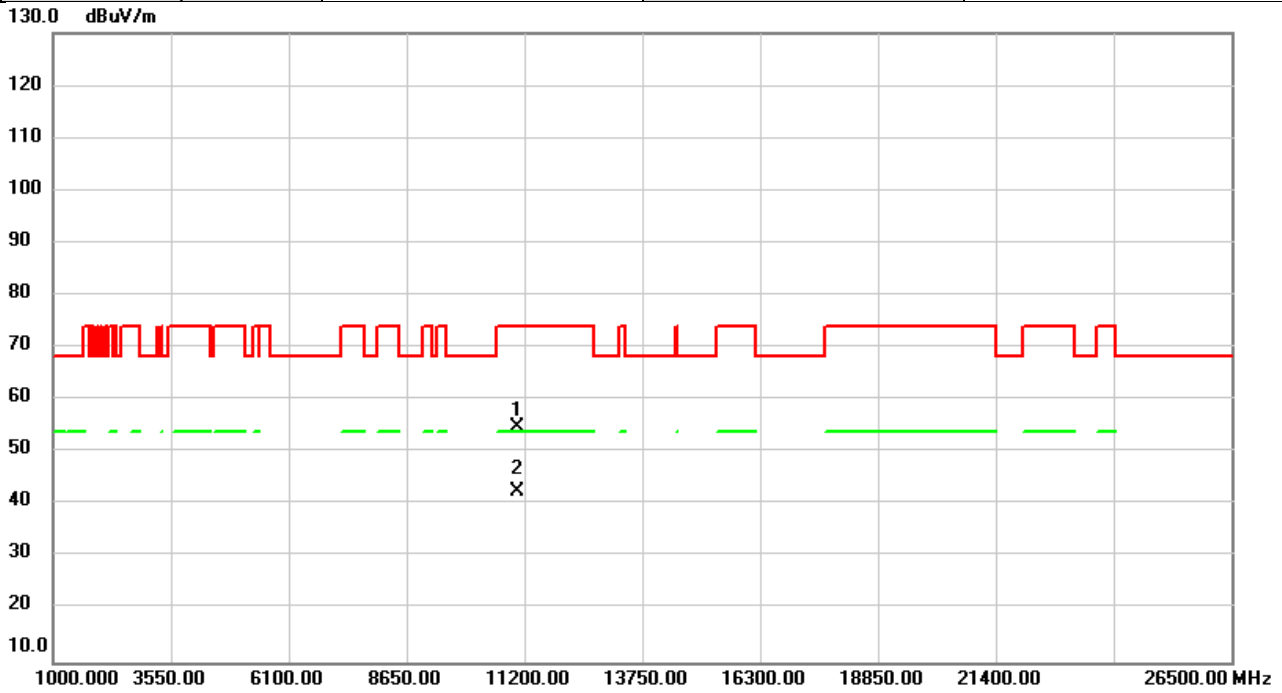


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	48.21	6.56	54.77	74.00	-19.23	peak	
2	*	11060.00	35.94	6.56	42.50	54.00	-11.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5610MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

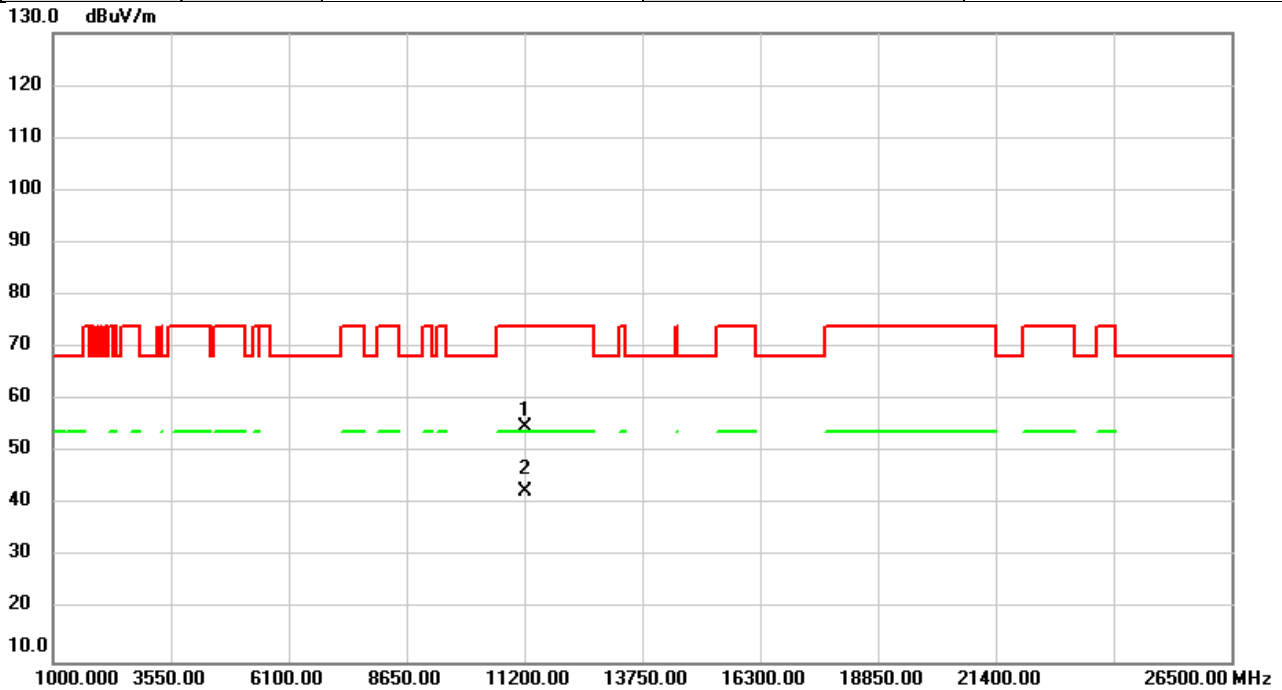


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	48.20	6.59	54.79	74.00	-19.21	peak	
2	*	11220.00	35.92	6.59	42.51	54.00	-11.49	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5610MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

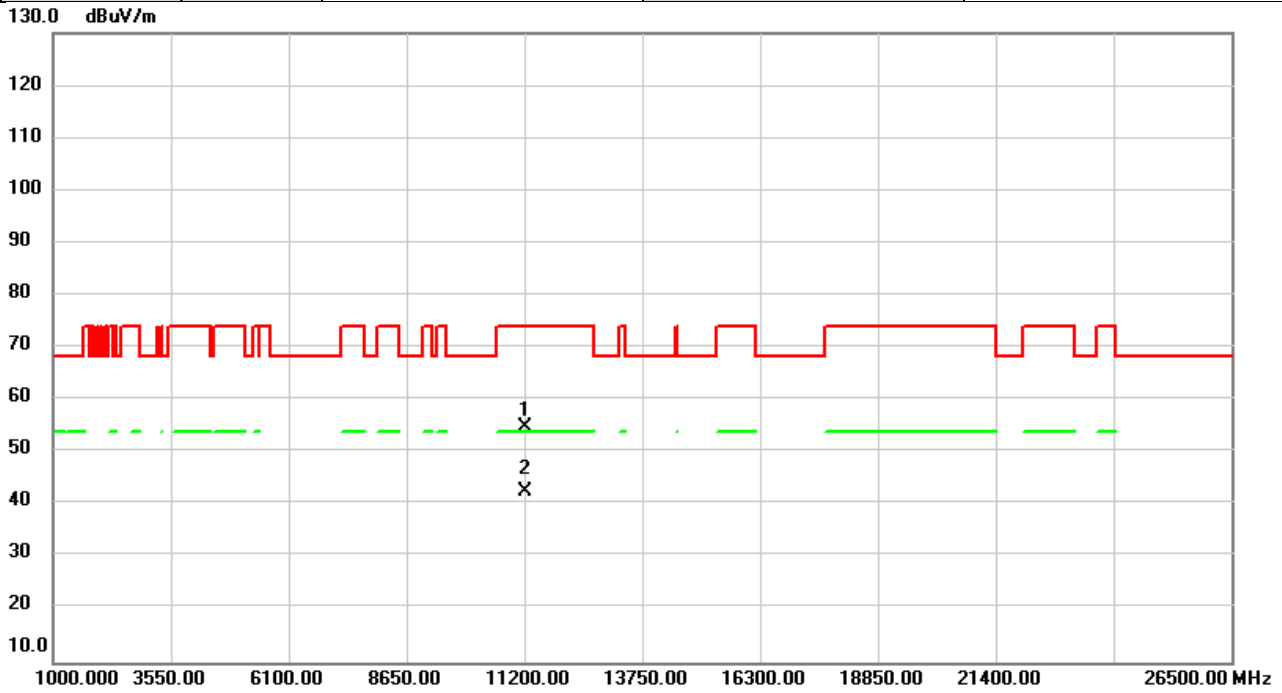


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	48.20	6.59	54.79	74.00	-19.21	peak	
2	*	11220.00	35.90	6.59	42.49	54.00	-11.51	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5690MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

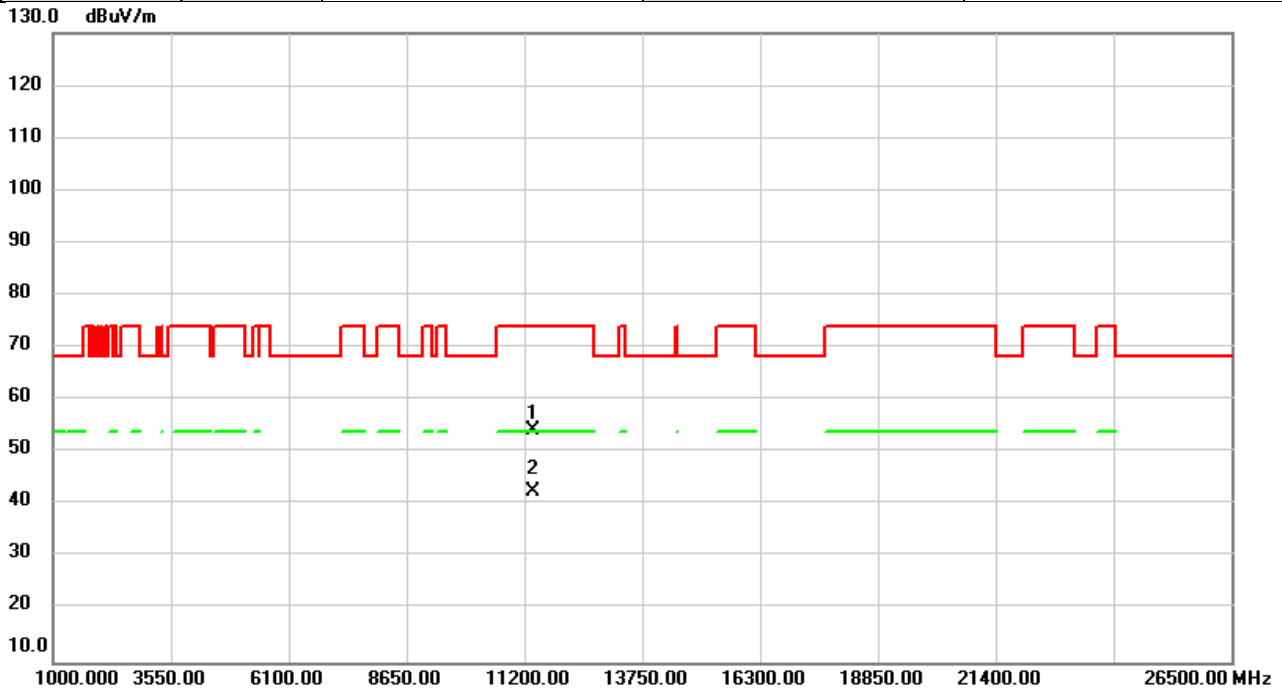


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11380.00	47.60	6.64	54.24	74.00	-19.76	peak	
2	*	11380.00	35.99	6.64	42.63	54.00	-11.37	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5690MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

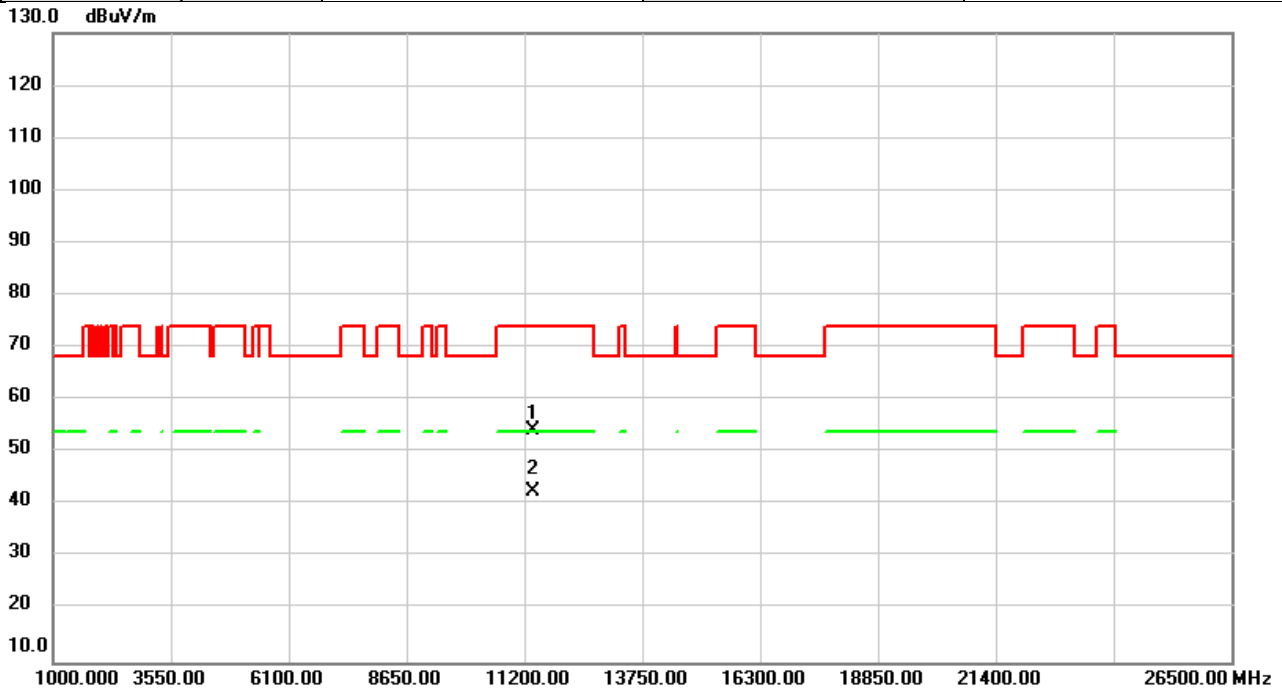


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11380.00	47.70	6.64	54.34	74.00	-19.66	peak	
2	*	11380.00	36.04	6.64	42.68	54.00	-11.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5775MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

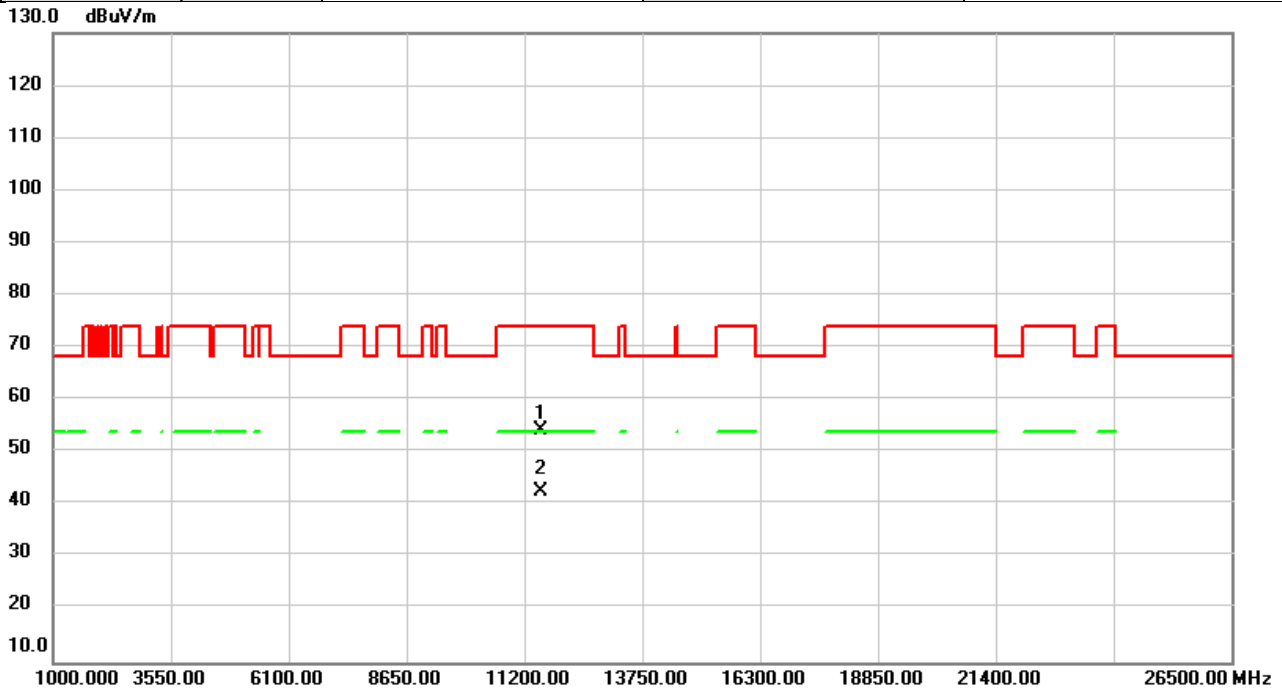


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	47.53	6.65	54.18	74.00	-19.82	peak	
2	*	11550.00	35.94	6.65	42.59	54.00	-11.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2023/3/23
Test Frequency	5775MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

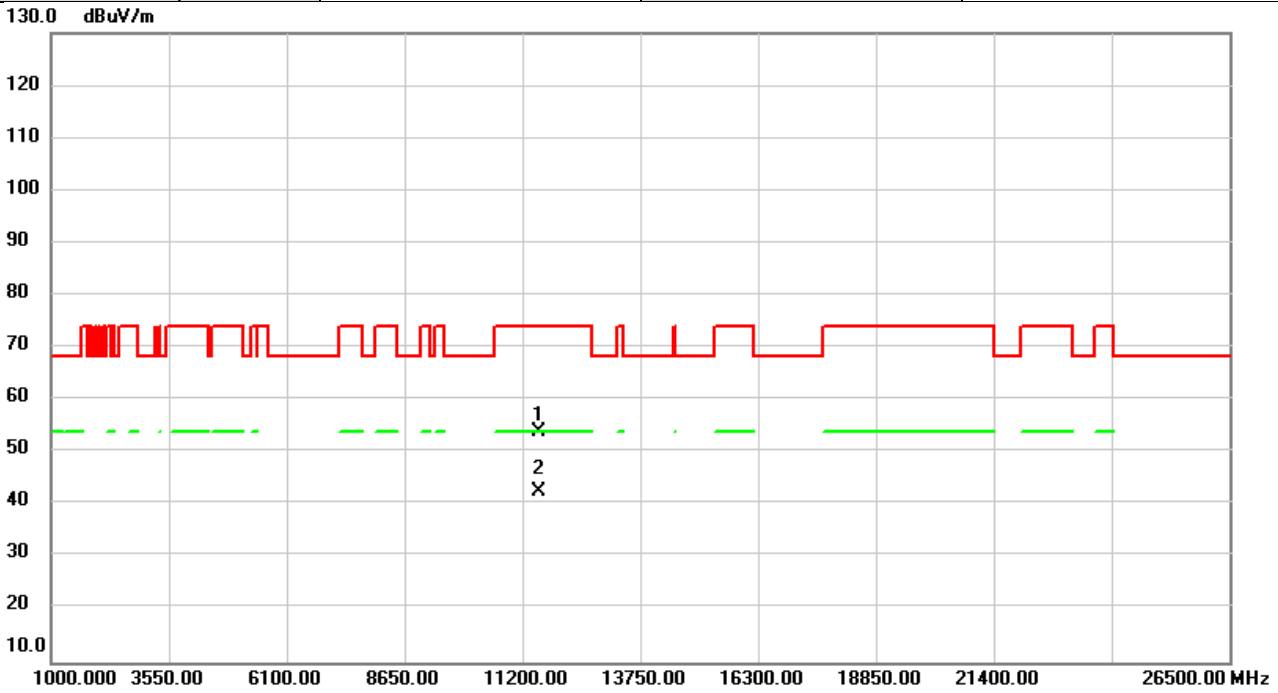


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	47.26	6.65	53.91	74.00	-20.09	peak	
2	*	11550.00	35.89	6.65	42.54	54.00	-11.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/3/23
Test Frequency	5250MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

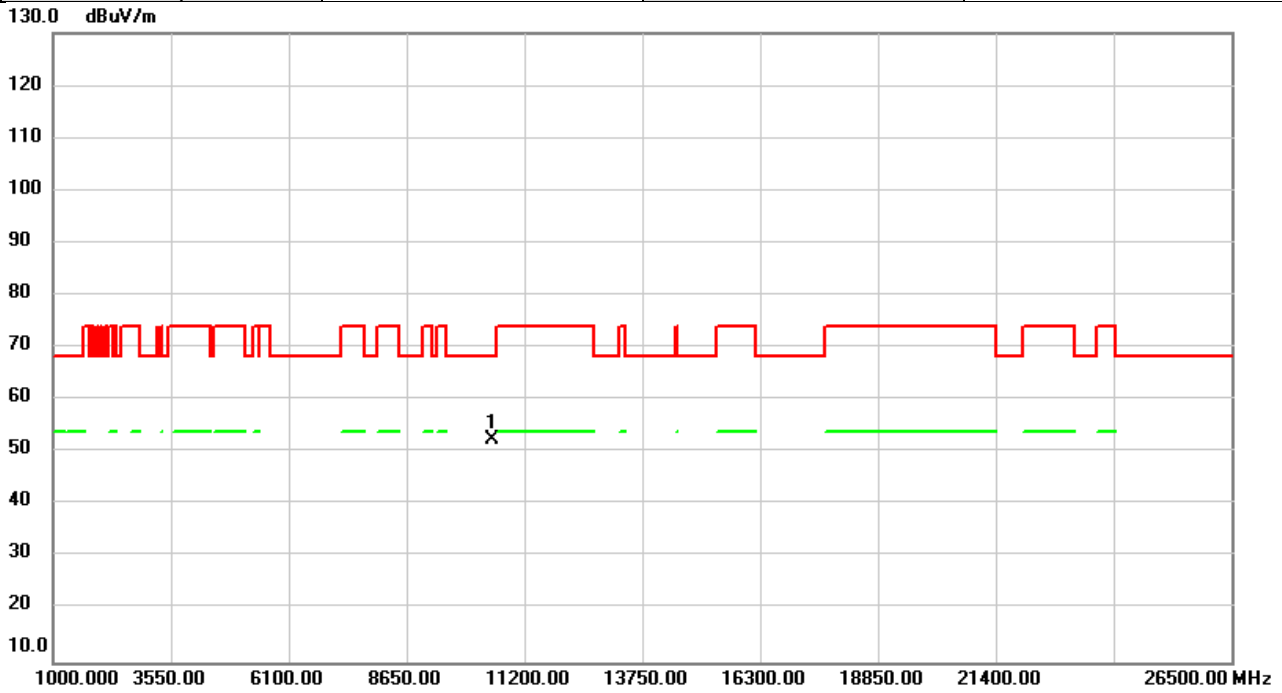


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	47.05	5.34	52.39	68.20	-15.81	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/3/23
Test Frequency	5250MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

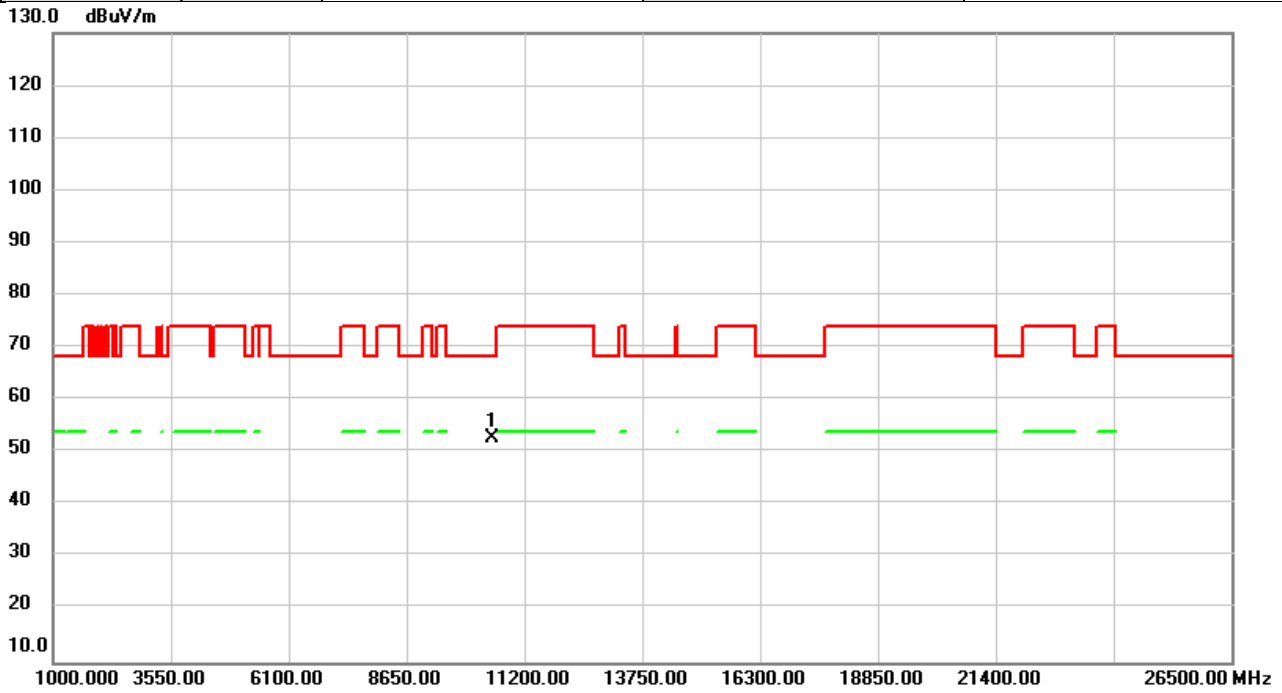


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	47.45	5.34	52.79	68.20	-15.41	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/3/23
Test Frequency	5570MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

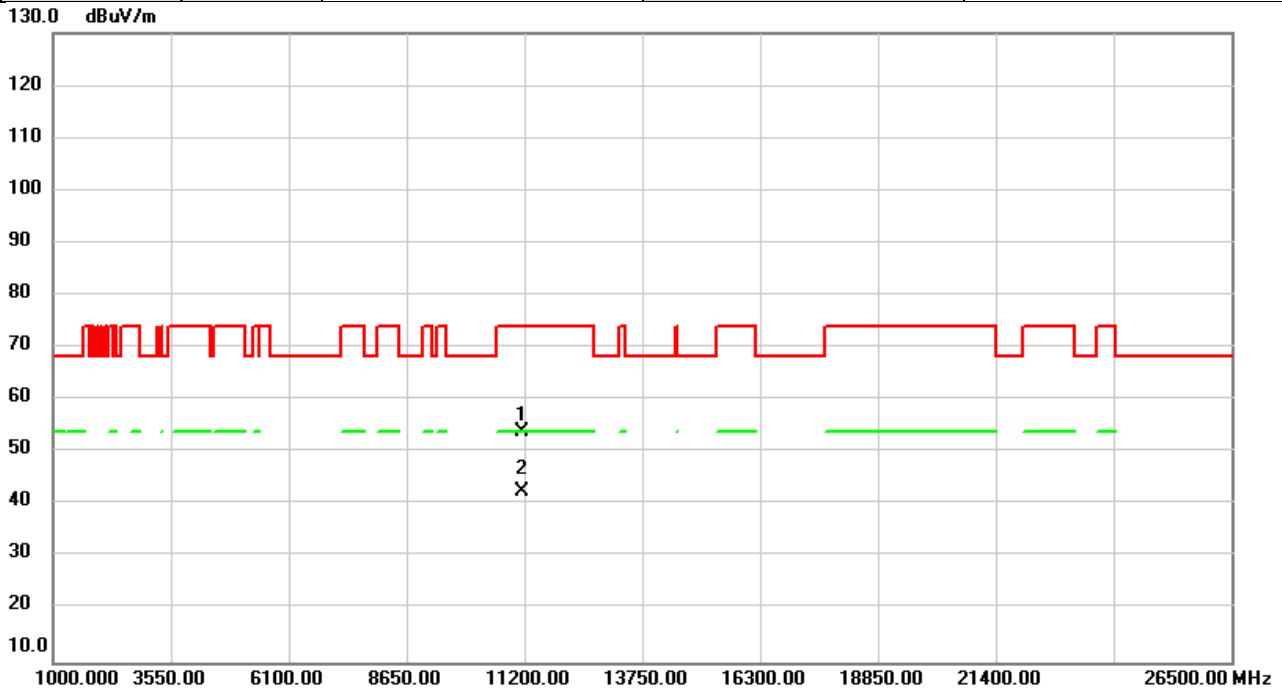


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	47.48	6.57	54.05	74.00	-19.95	peak	
2	*	11140.00	36.08	6.57	42.65	54.00	-11.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2023/3/23
Test Frequency	5570MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

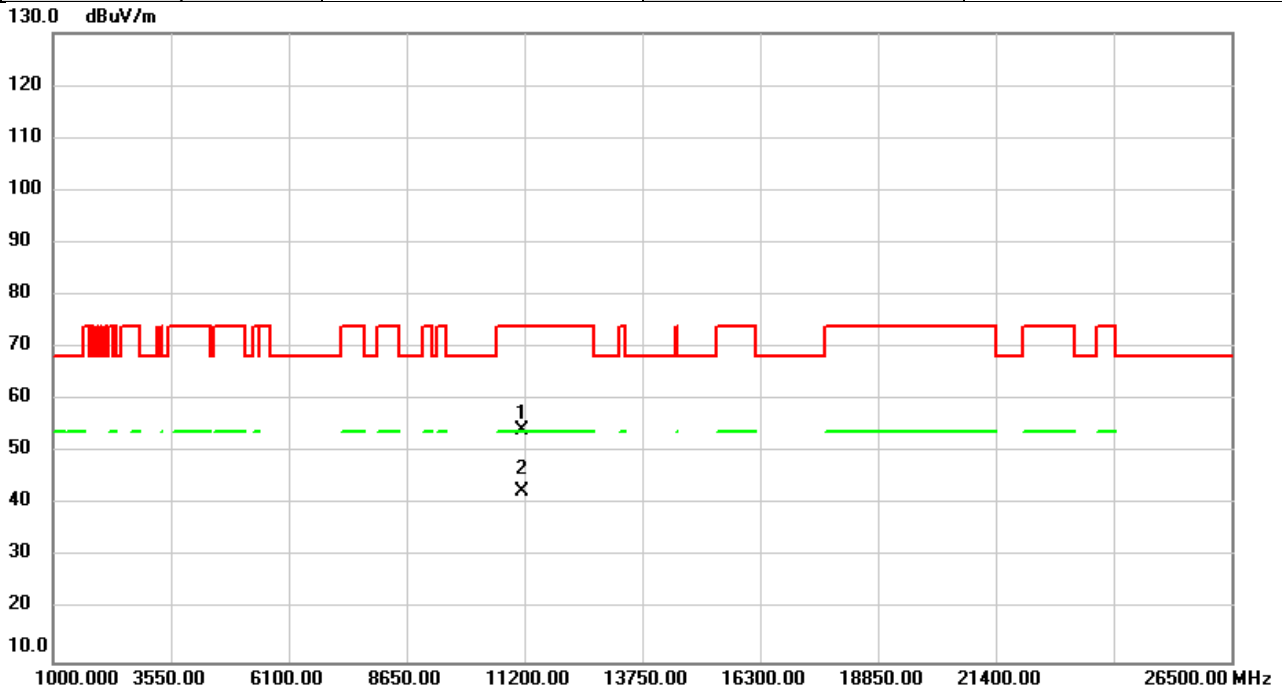


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	47.78	6.57	54.35	74.00	-19.65	peak	
2	*	11140.00	36.00	6.57	42.57	54.00	-11.43	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5180MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

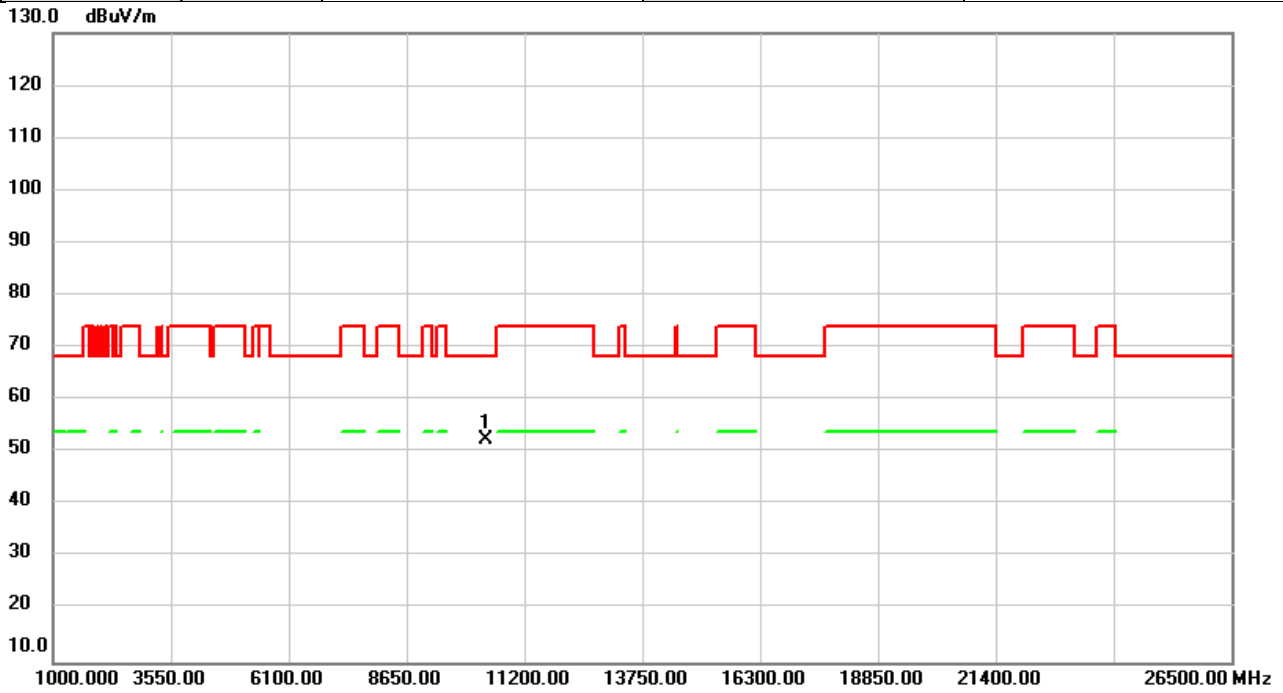


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	46.69	5.71	52.40	68.20	-15.80	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5180MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

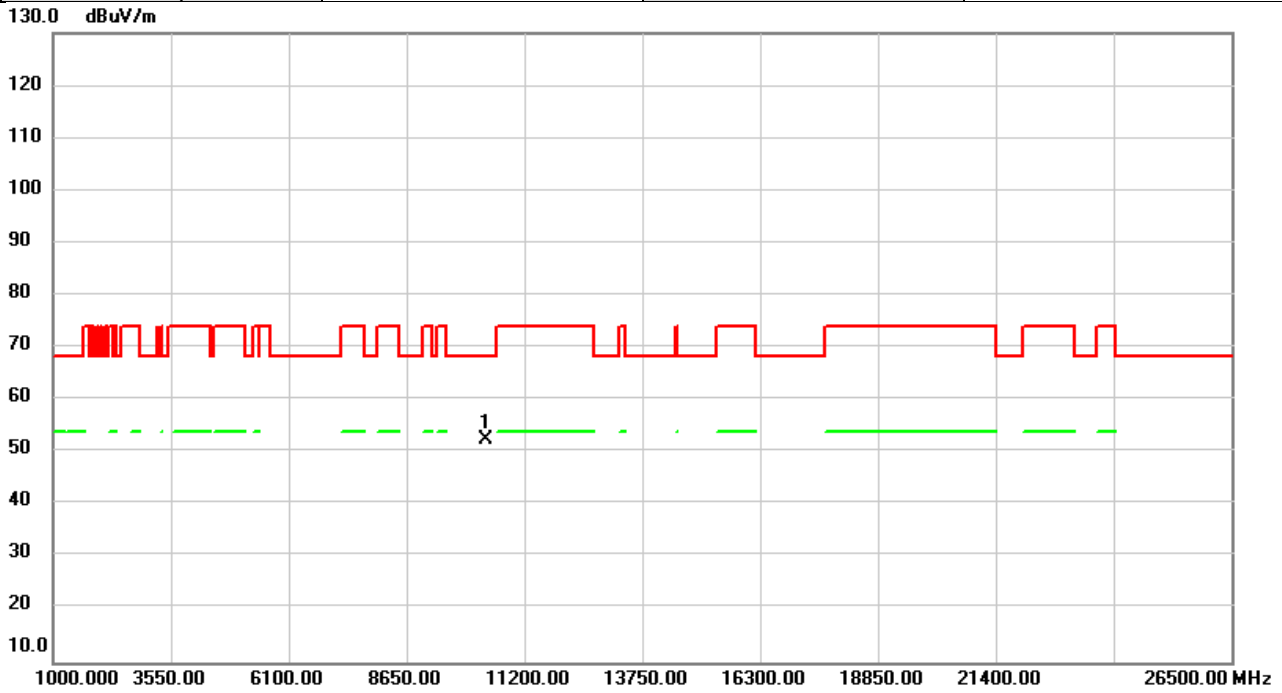


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	46.87	5.71	52.58	68.20	-15.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5200MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

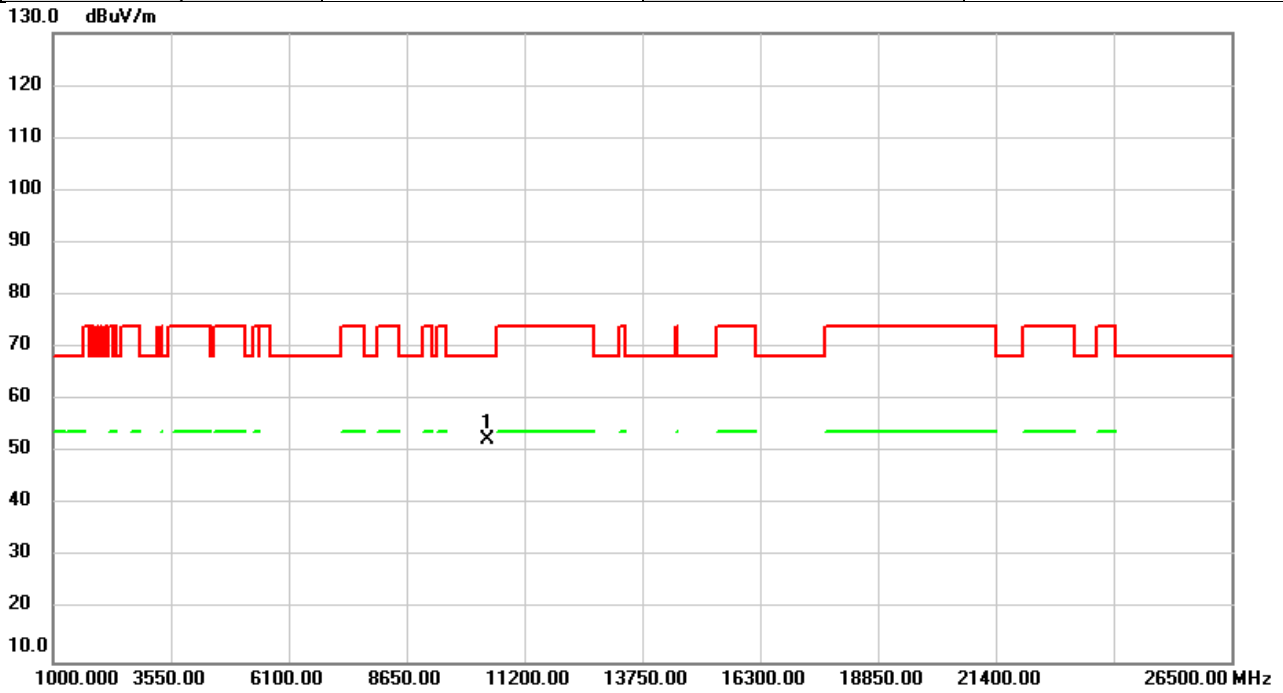


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	46.94	5.61	52.55	68.20	-15.65	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5200MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

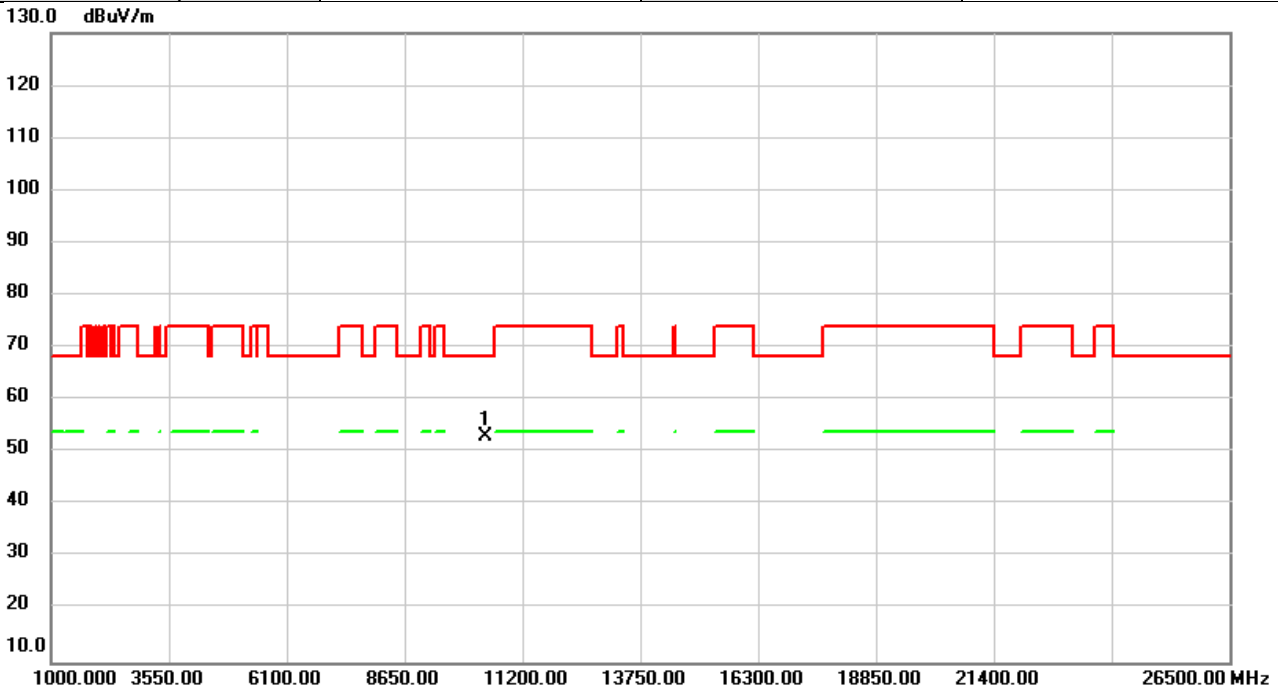


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	47.38	5.61	52.99	68.20	-15.21	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5240MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

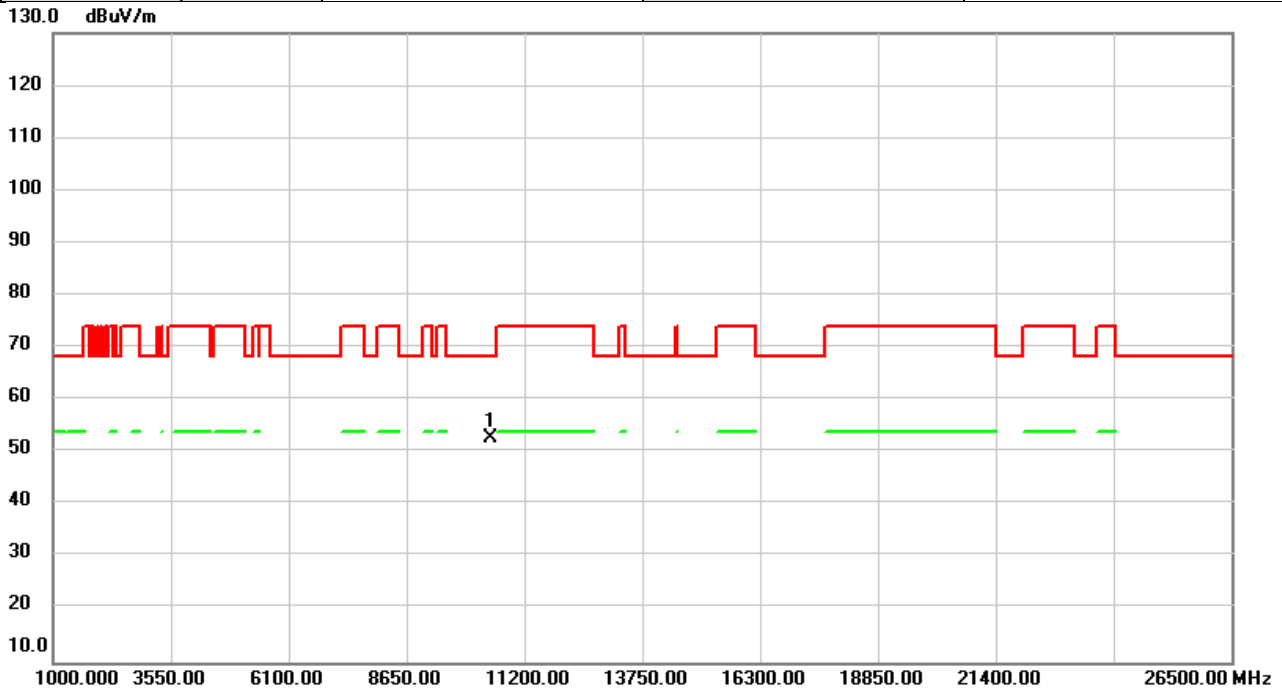


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	47.42	5.39	52.81	68.20	-15.39	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5240MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

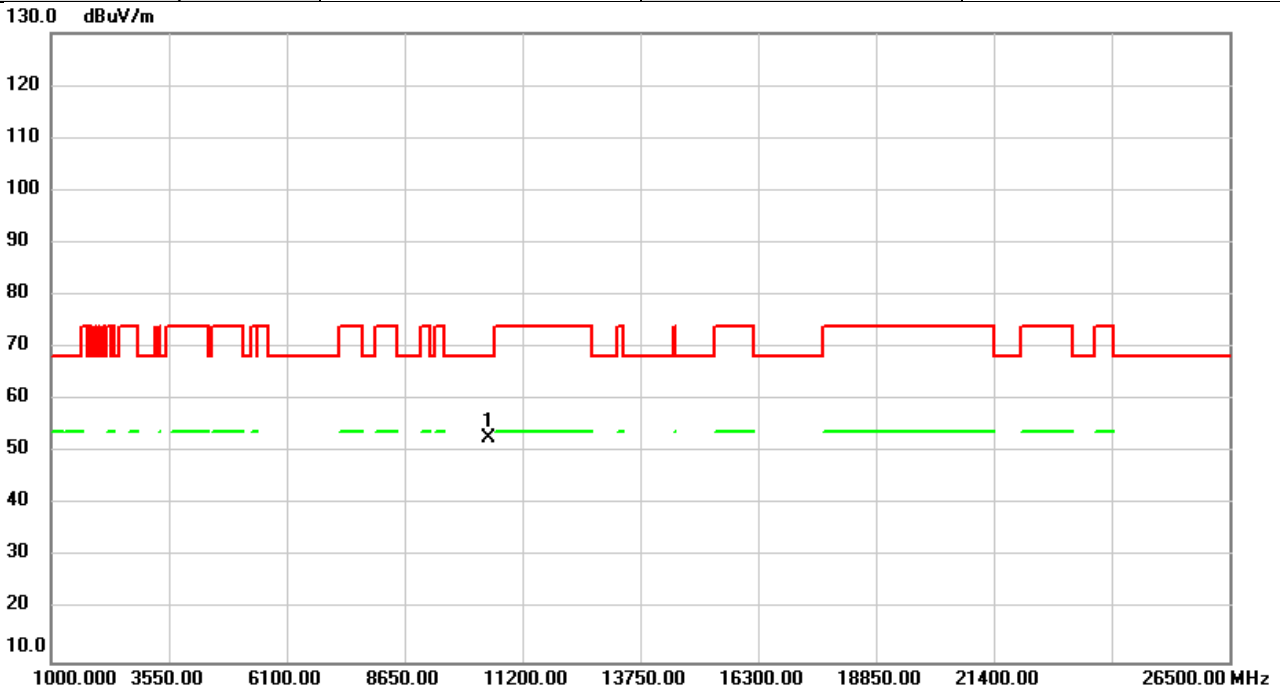


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	47.33	5.39	52.72	68.20	-15.48	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5260MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

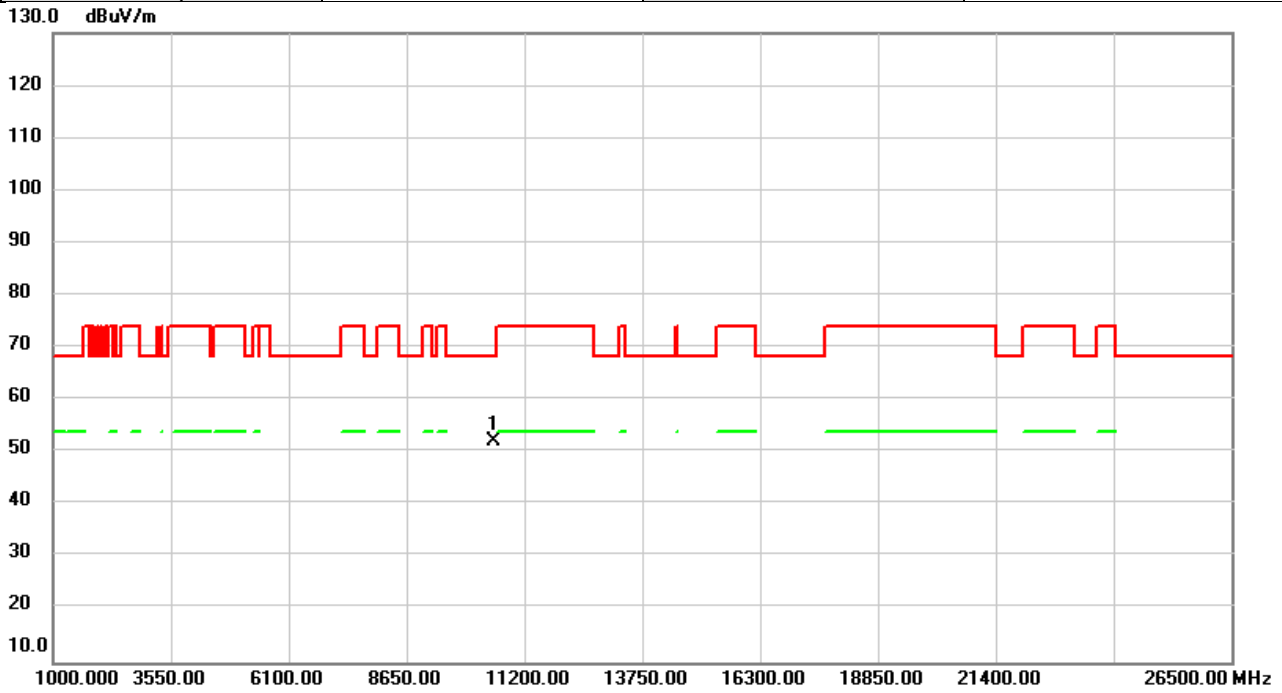


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	46.81	5.38	52.19	68.20	-16.01	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5260MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

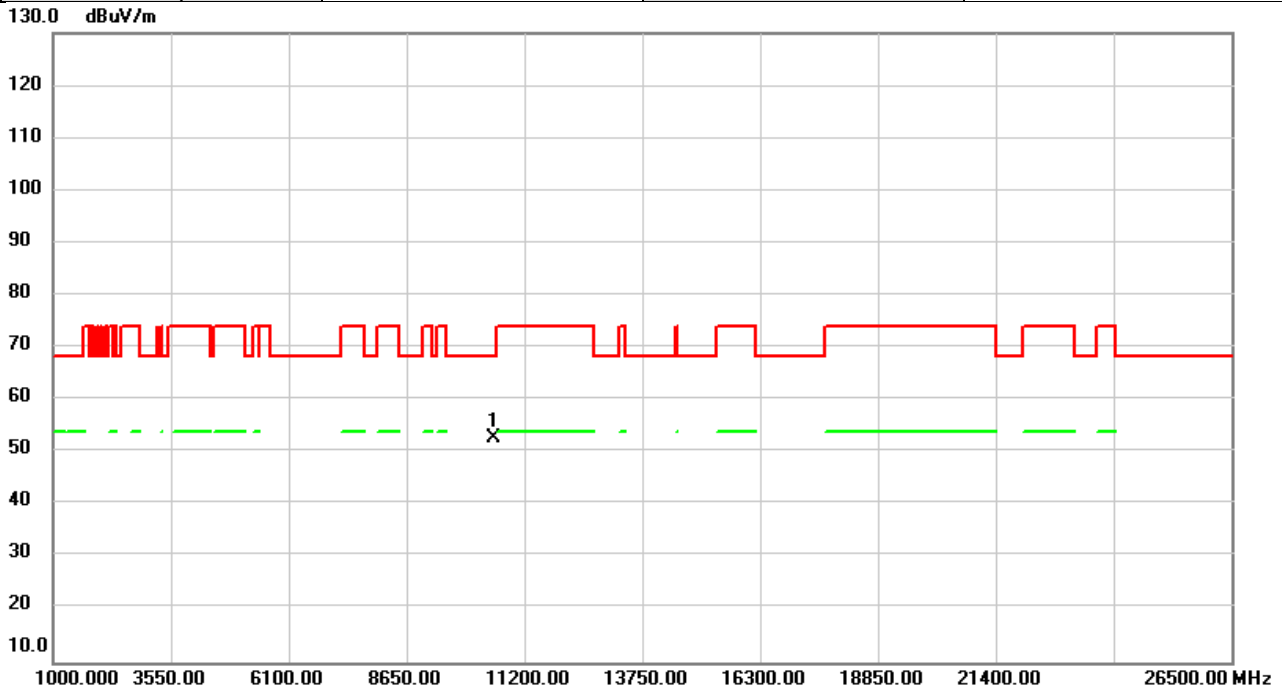


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	47.40	5.38	52.78	68.20	-15.42	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5280MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

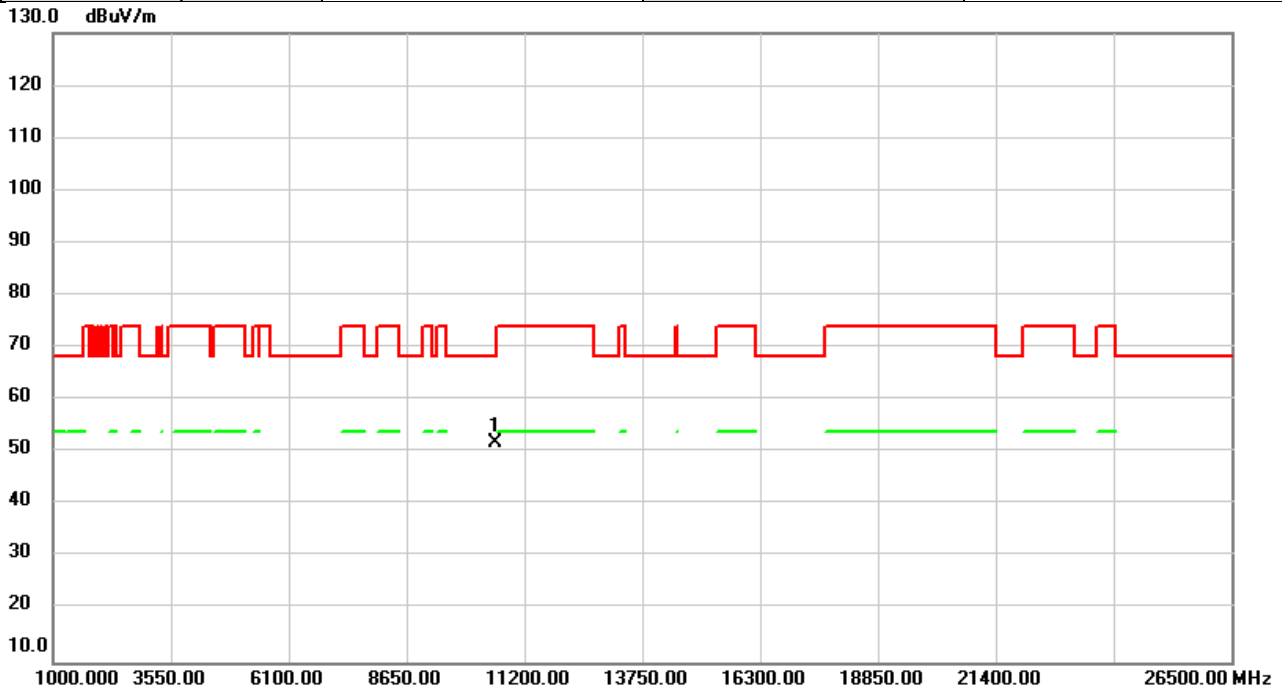


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10560.00	46.41	5.48	51.89	68.20	-16.31	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5280MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

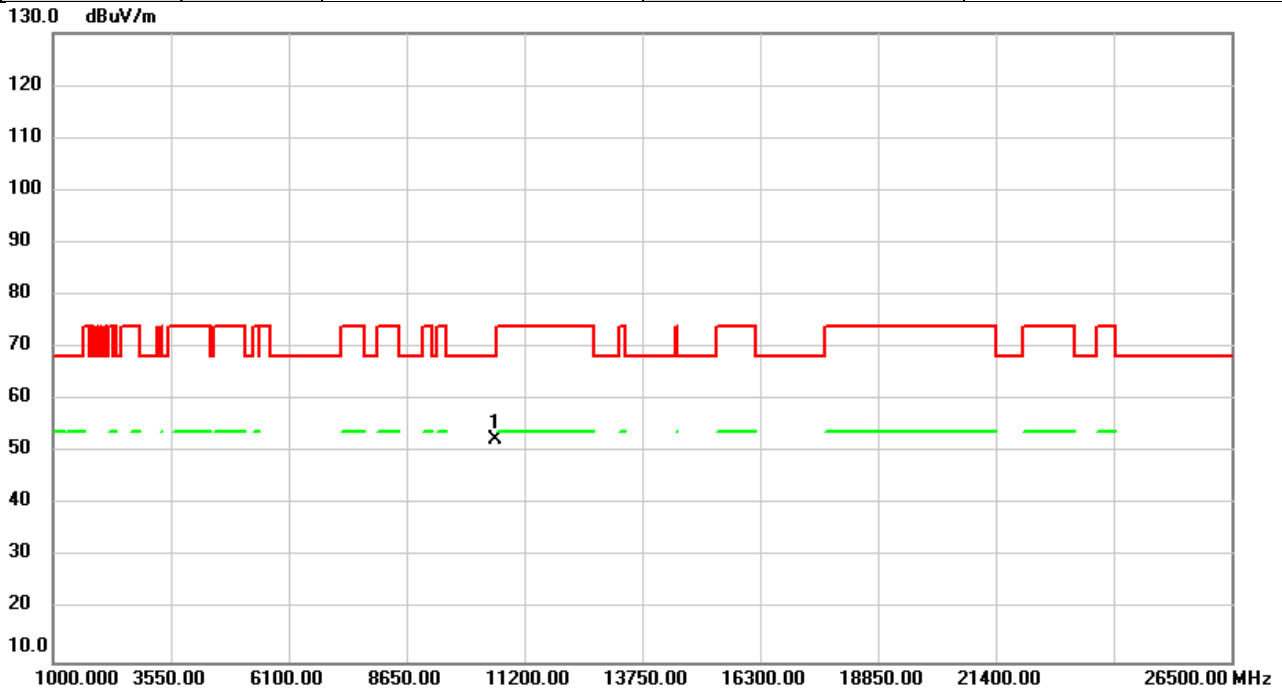


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10560.00	46.86	5.48	52.34	68.20	-15.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5320MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

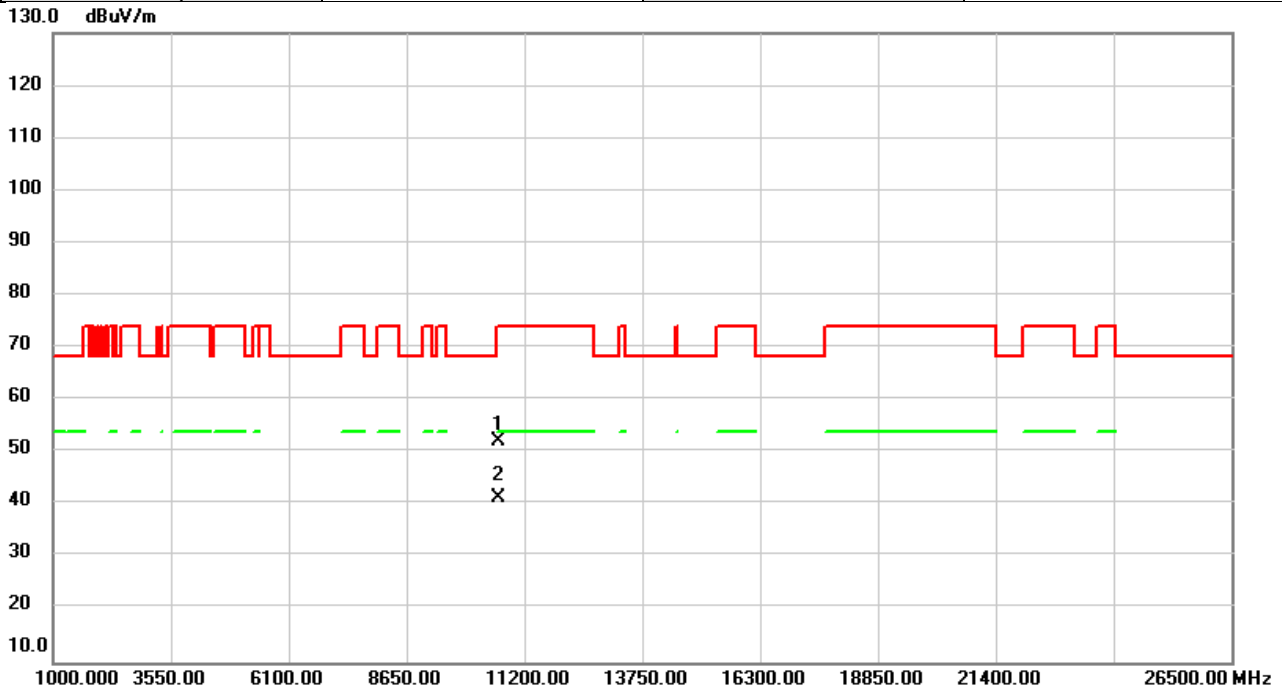


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	46.43	5.67	52.10	74.00	-21.90	peak	
2	*	10640.00	35.62	5.67	41.29	54.00	-12.71	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5320MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

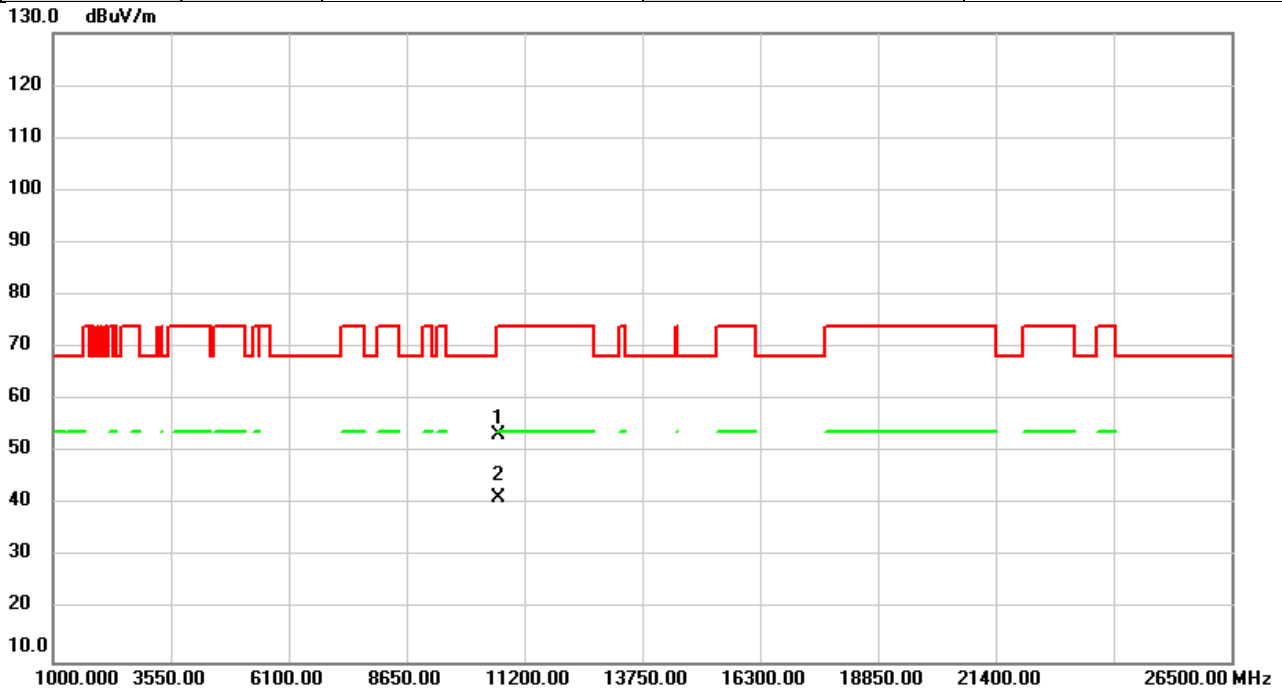


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10640.00	47.63	5.67	53.30	74.00	-20.70	peak	
2	*	10640.00	35.61	5.67	41.28	54.00	-12.72	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5500MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

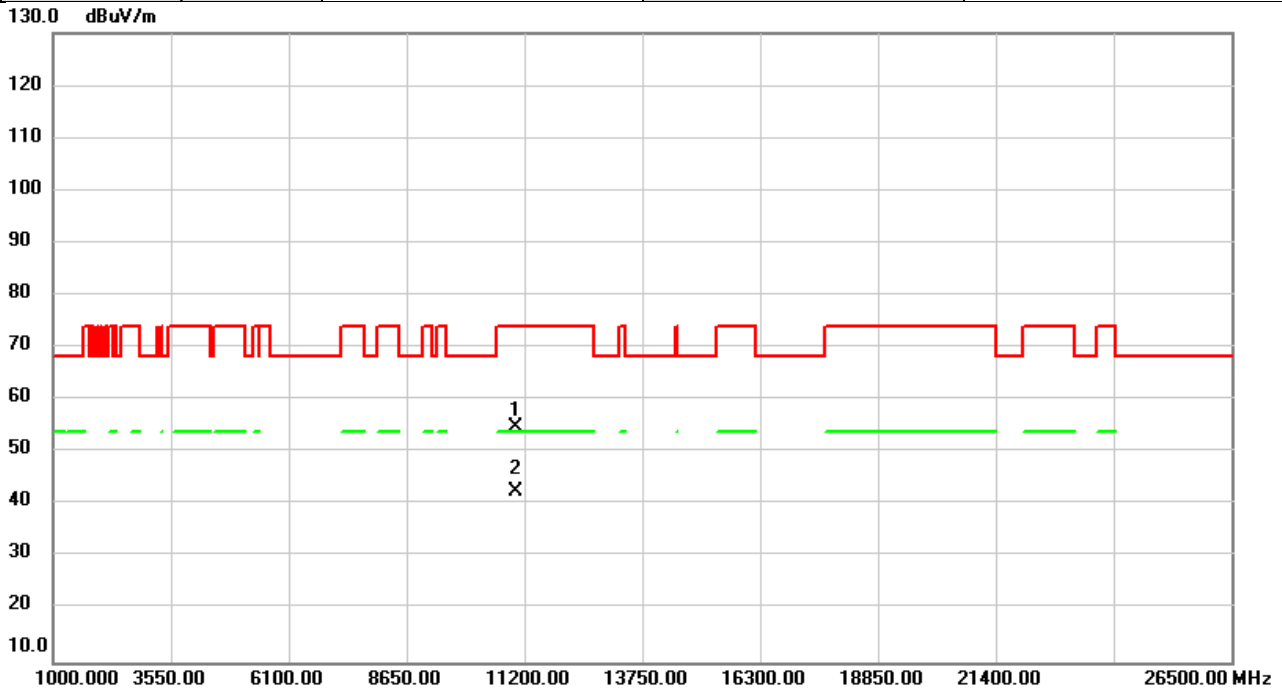


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	48.43	6.54	54.97	74.00	-19.03	peak	
2	*	11000.00	35.92	6.54	42.46	54.00	-11.54	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5500MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

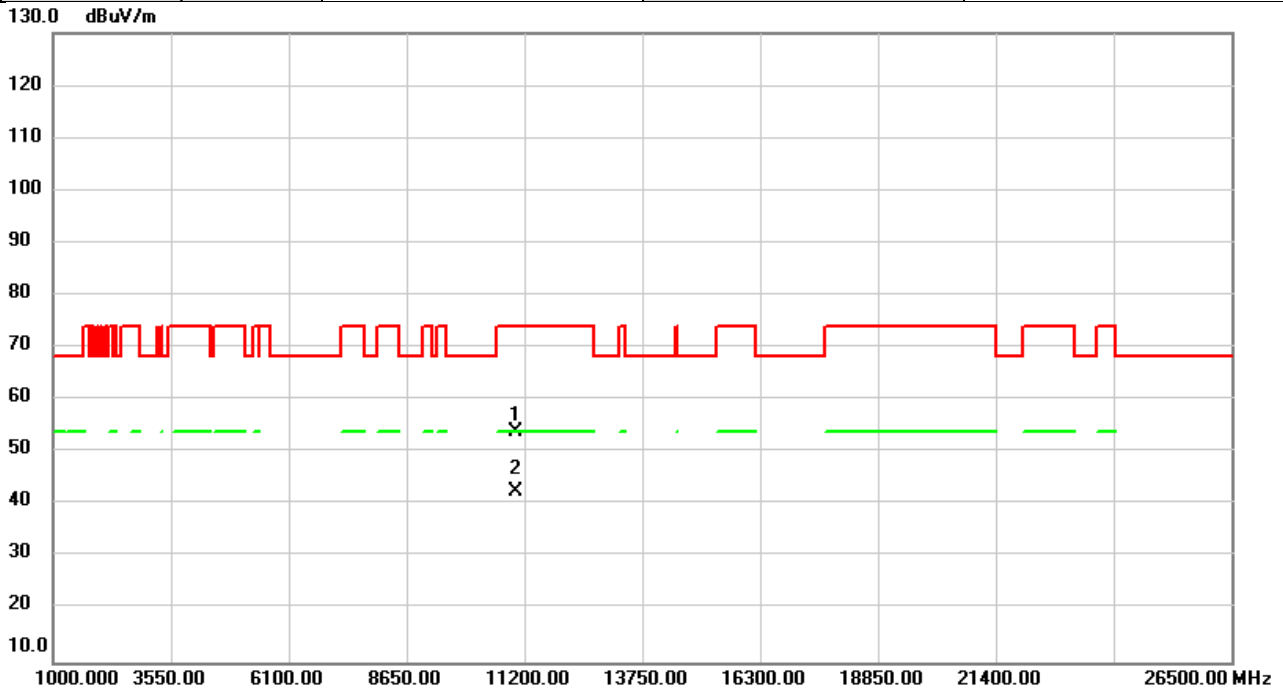


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	47.55	6.54	54.09	74.00	-19.91	peak	
2	*	11000.00	35.88	6.54	42.42	54.00	-11.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5600MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

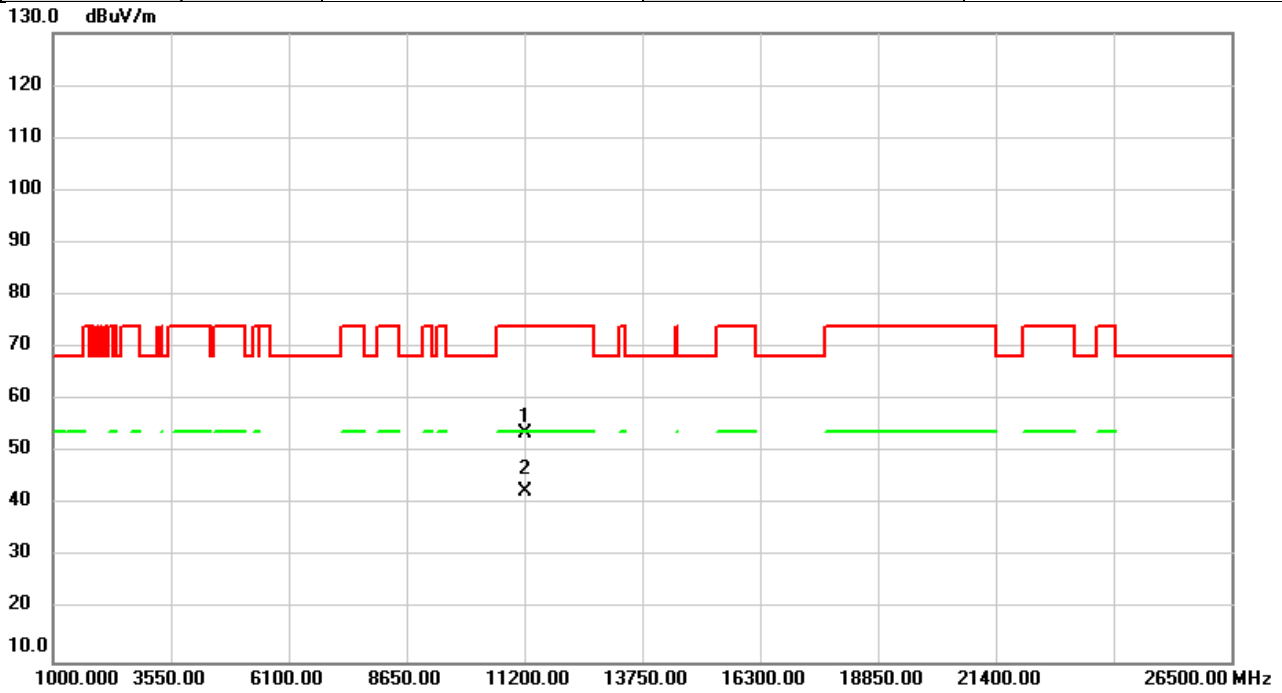


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11200.00	47.11	6.59	53.70	74.00	-20.30	peak	
2	*	11200.00	36.05	6.59	42.64	54.00	-11.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5600MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

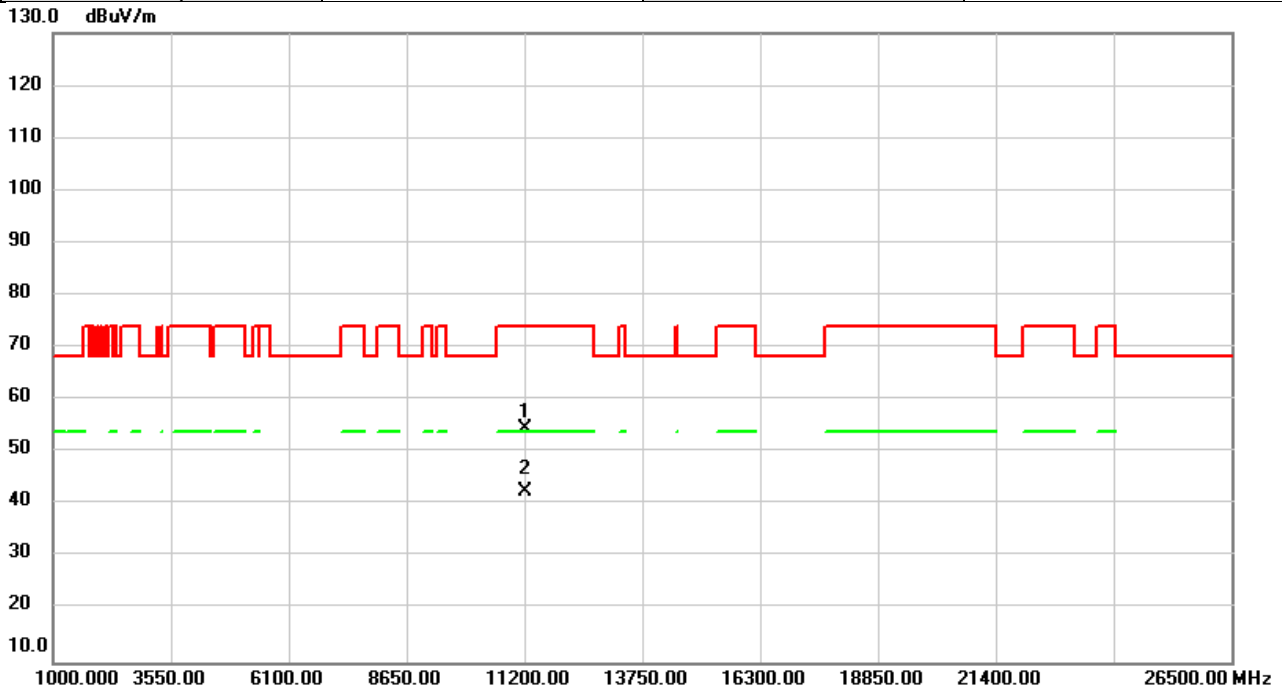


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11200.00	47.98	6.59	54.57	74.00	-19.43	peak	
2	*	11200.00	36.02	6.59	42.61	54.00	-11.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5700MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

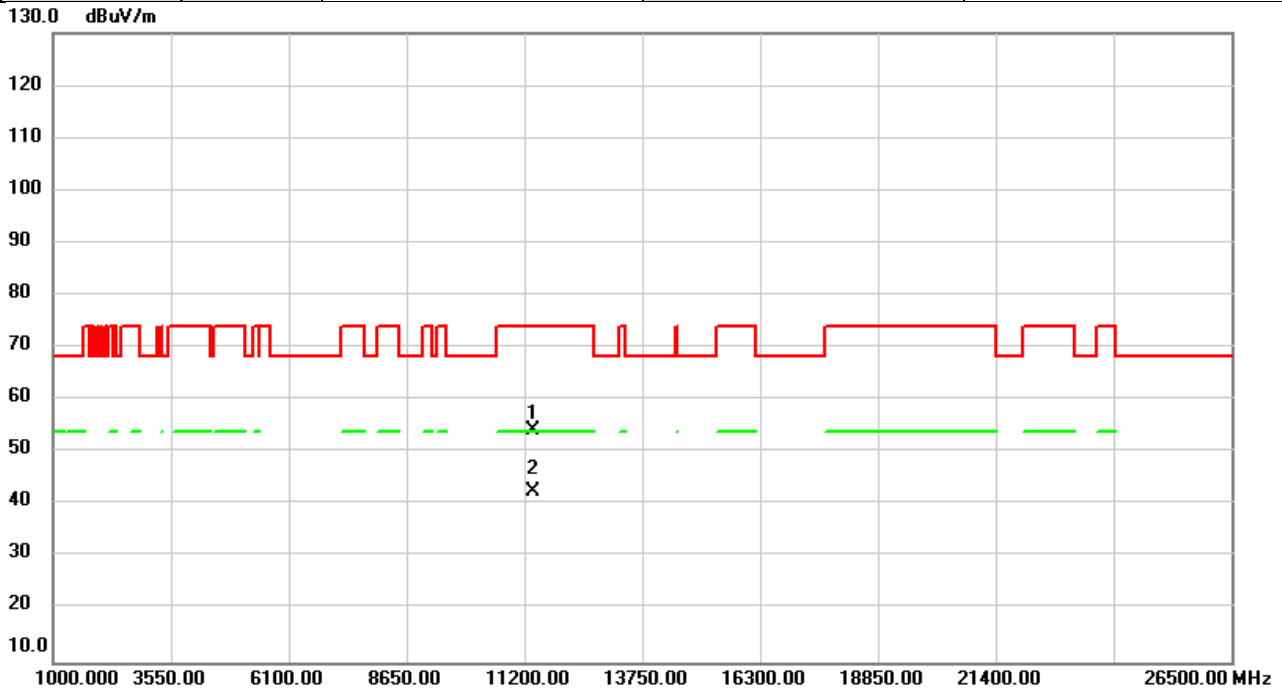


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	47.64	6.64	54.28	74.00	-19.72	peak	
2	*	11400.00	35.86	6.64	42.50	54.00	-11.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5700MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

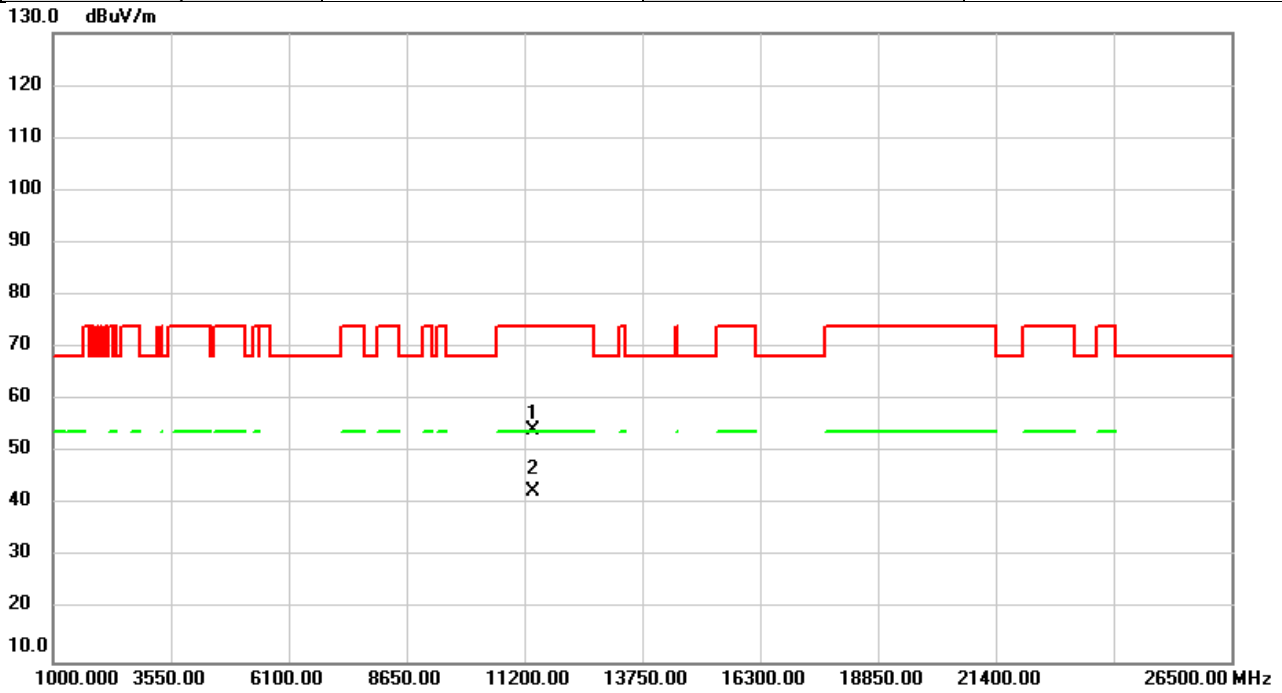


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	47.50	6.64	54.14	74.00	-19.86	peak	
2	*	11400.00	35.91	6.64	42.55	54.00	-11.45	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5720MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

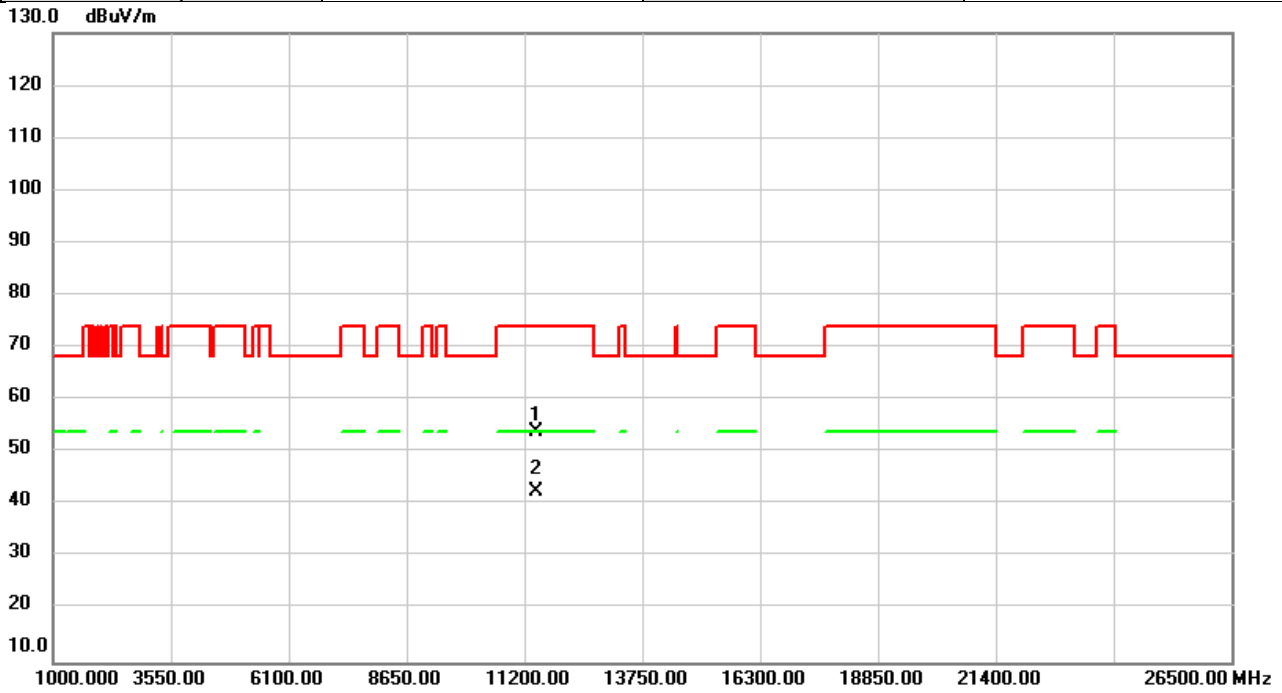


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11440.00	47.32	6.65	53.97	74.00	-20.03	peak	
2	*	11440.00	35.80	6.65	42.45	54.00	-11.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5720MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

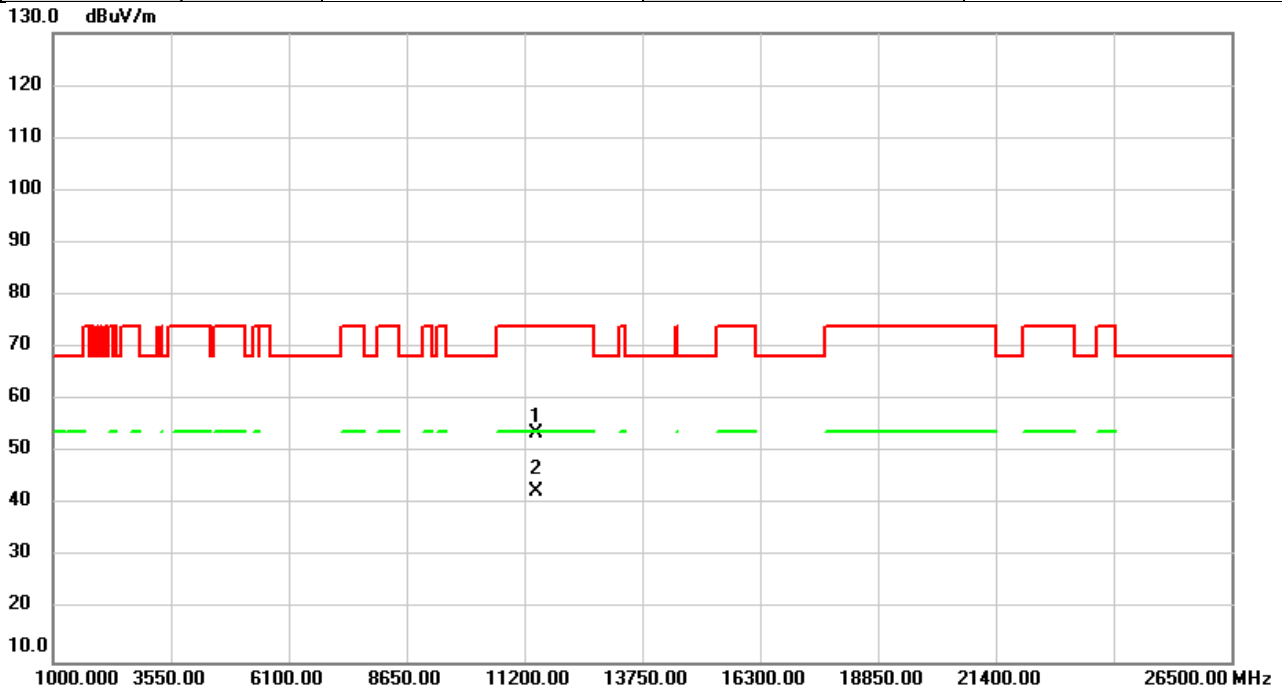


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11440.00	46.89	6.65	53.54	74.00	-20.46	peak	
2	*	11440.00	35.76	6.65	42.41	54.00	-11.59	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5745MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

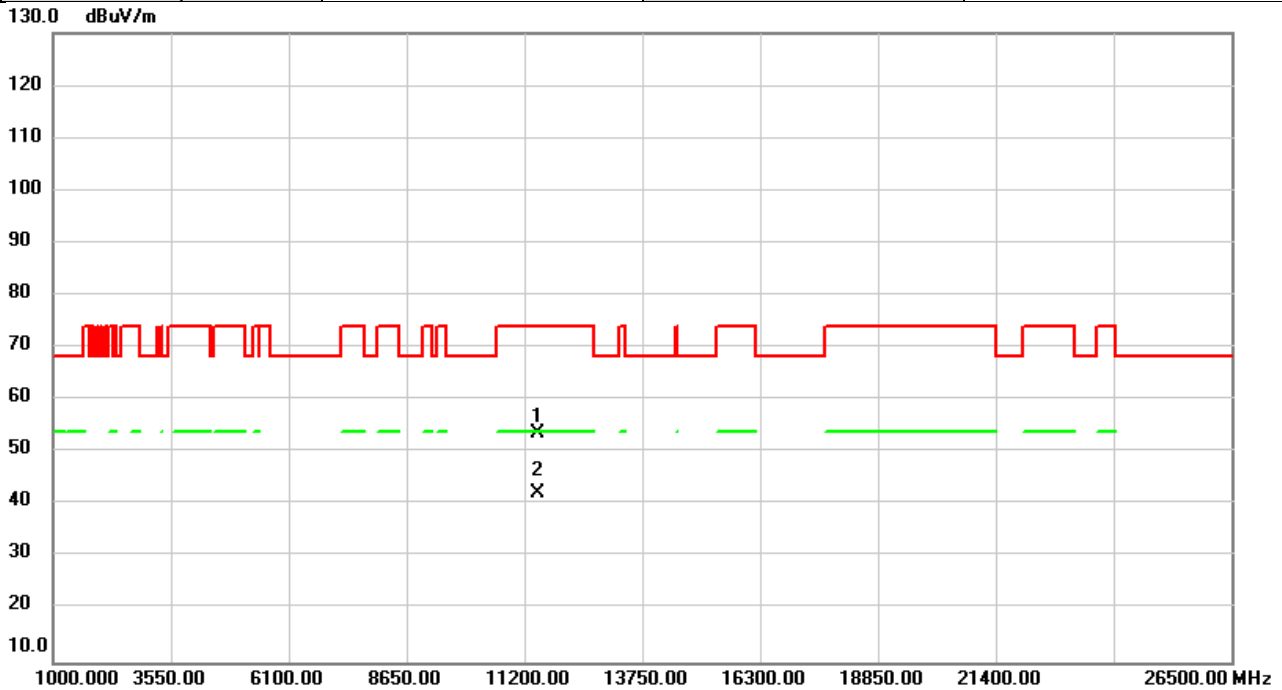


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	47.12	6.66	53.78	74.00	-20.22	peak	
2	*	11490.00	35.62	6.66	42.28	54.00	-11.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5745MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

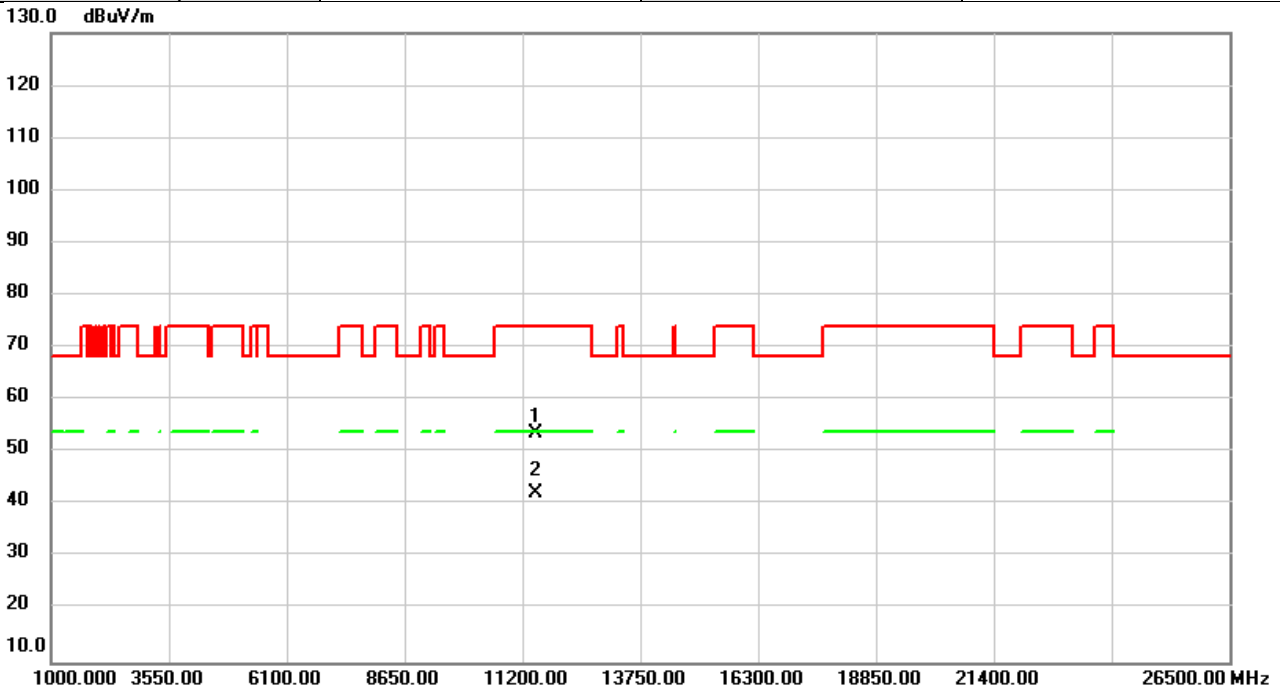


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	46.99	6.66	53.65	74.00	-20.35	peak	
2	*	11490.00	35.53	6.66	42.19	54.00	-11.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5785MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

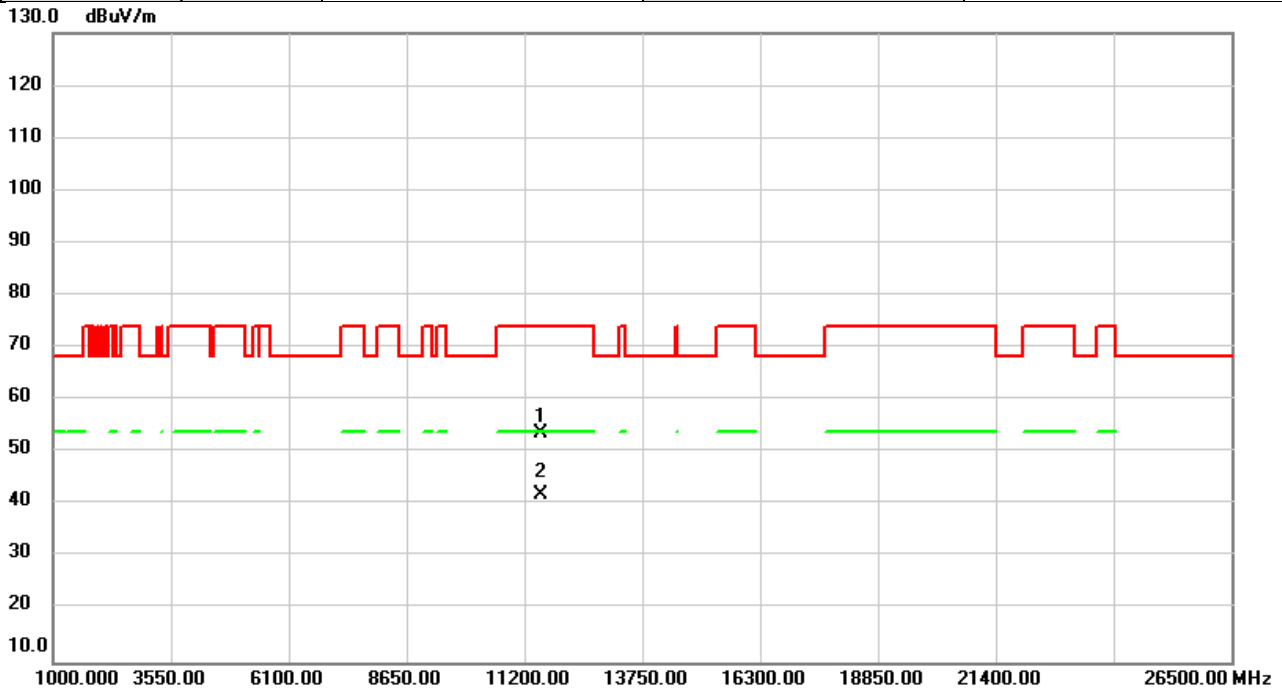


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	46.97	6.65	53.62	74.00	-20.38	peak	
2	*	11570.00	35.32	6.65	41.97	54.00	-12.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5785MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

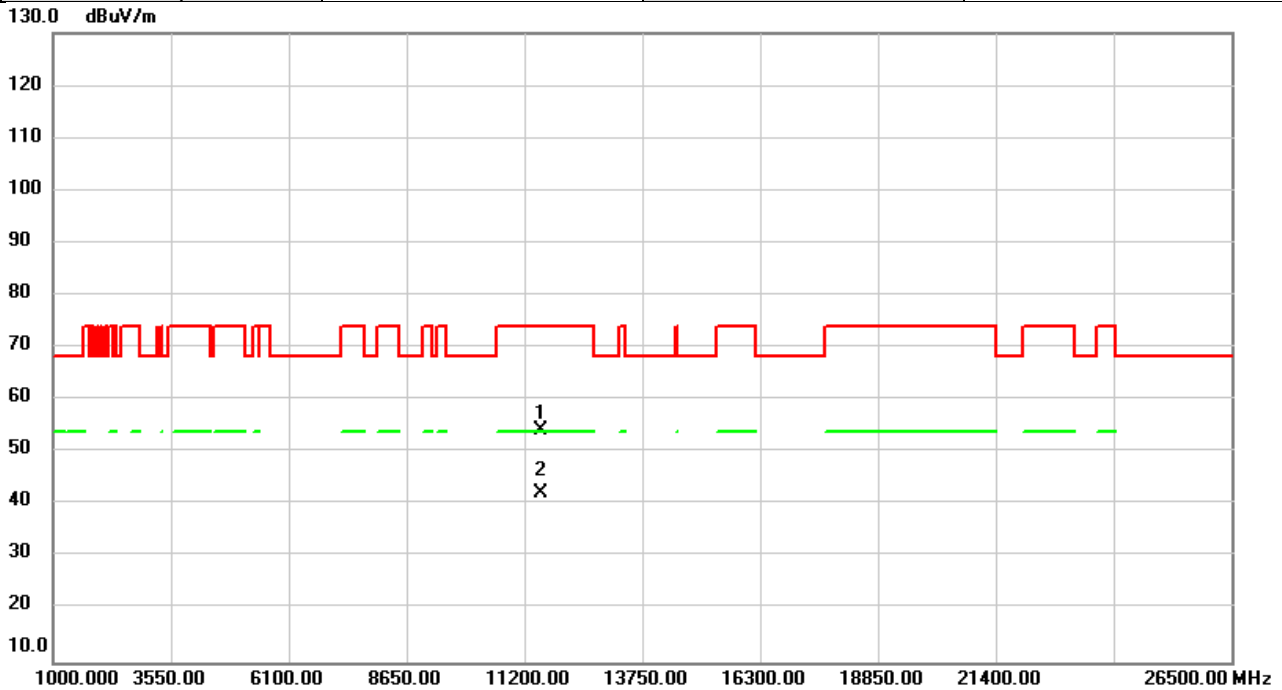


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.00	47.72	6.65	54.37	74.00	-19.63	peak	
2	*	11570.00	35.46	6.65	42.11	54.00	-11.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5825MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

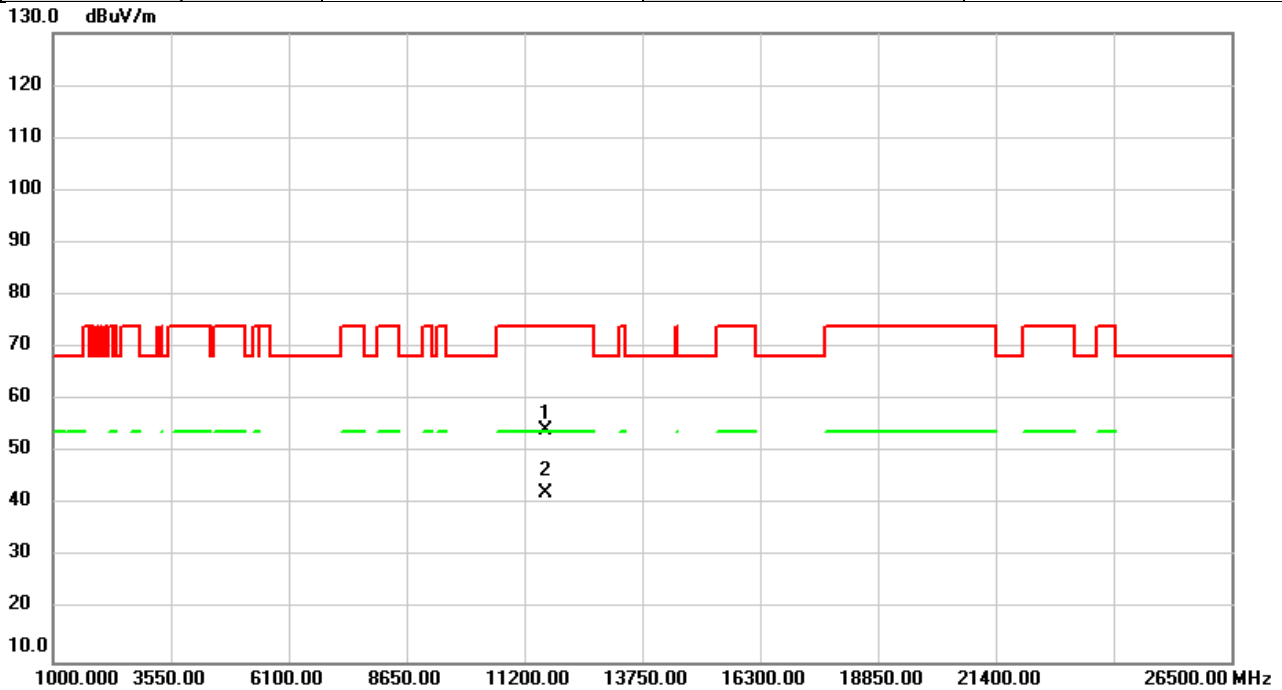


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	47.59	6.63	54.22	74.00	-19.78	peak	
2	*	11650.00	35.60	6.63	42.23	54.00	-11.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/3/23
Test Frequency	5825MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

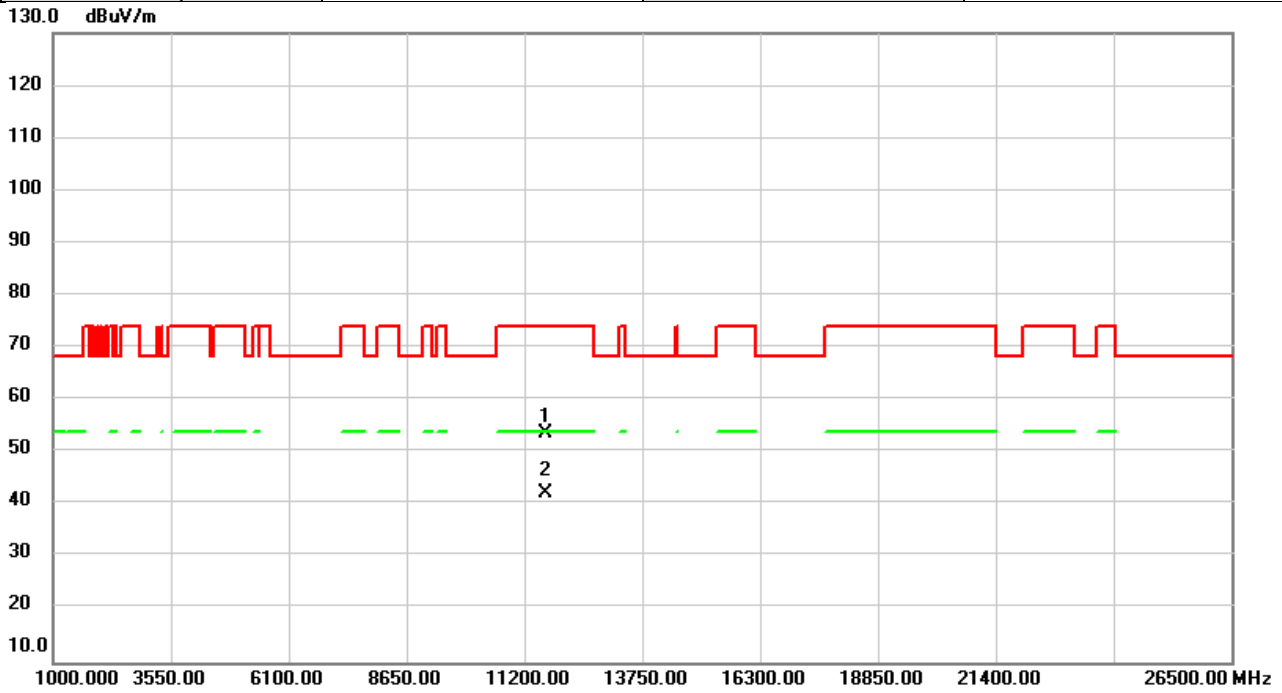


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	47.08	6.63	53.71	74.00	-20.29	peak	
2	*	11650.00	35.59	6.63	42.22	54.00	-11.78	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5190MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

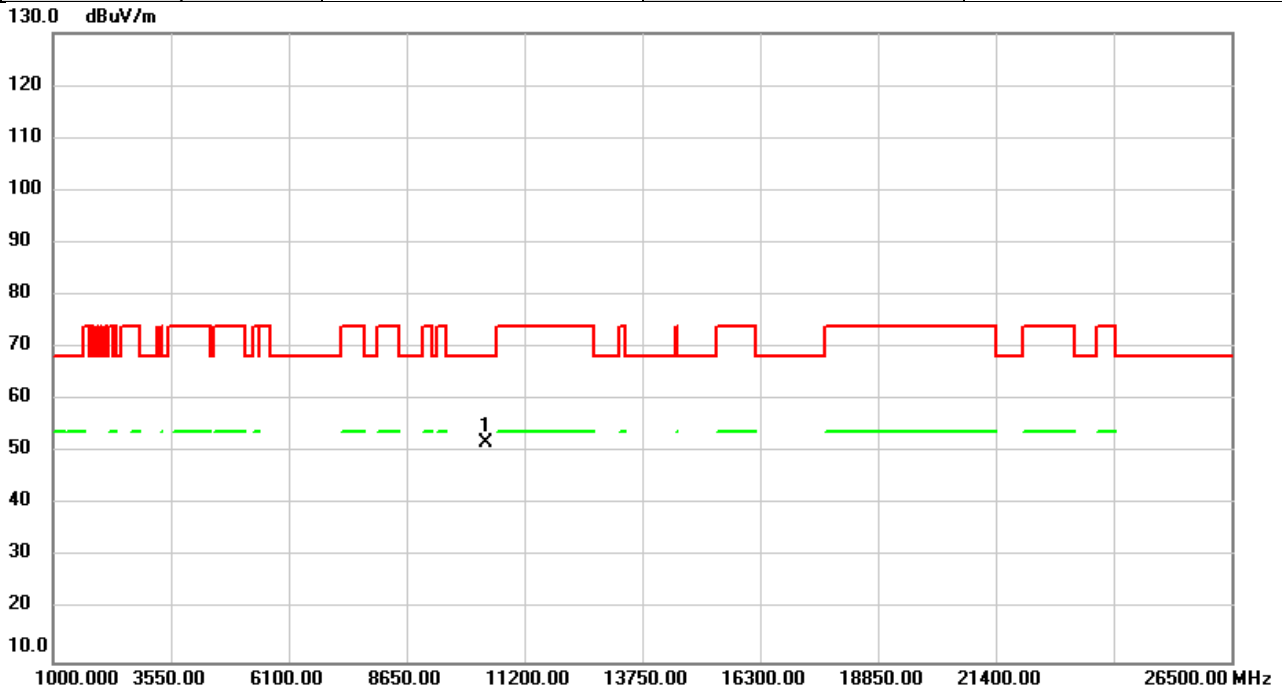


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	46.25	5.67	51.92	68.20	-16.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5190MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

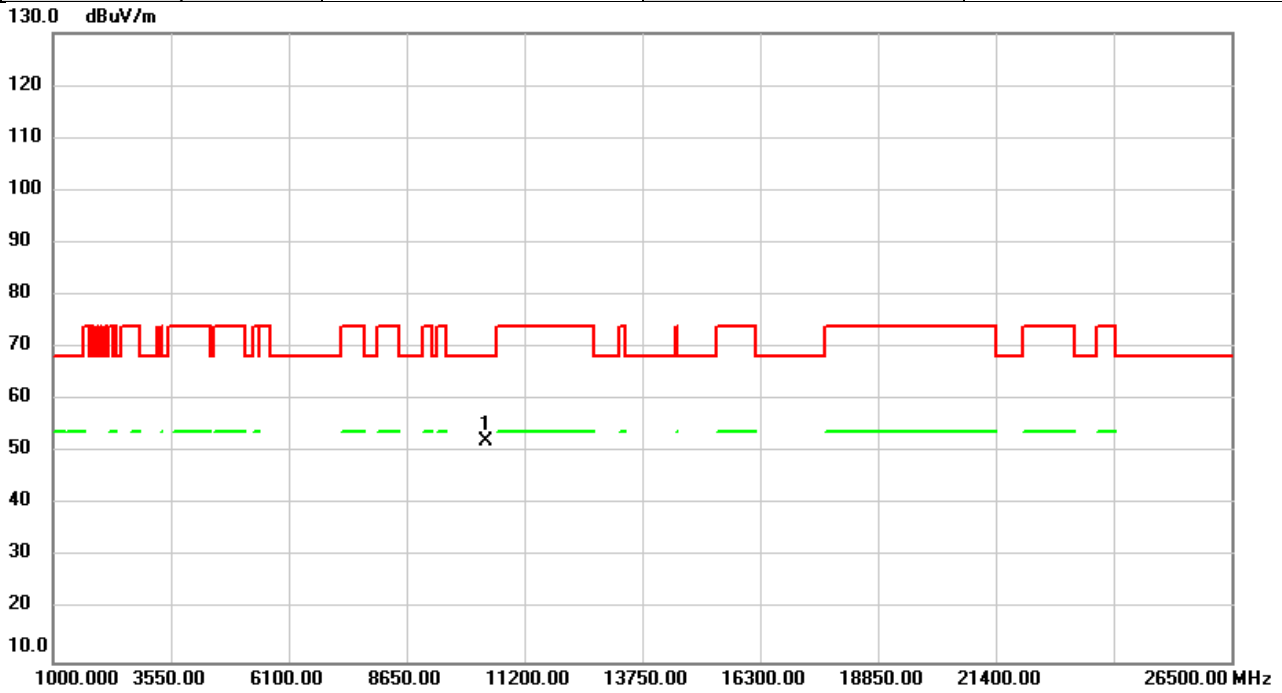


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	46.58	5.67	52.25	68.20	-15.95	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5230MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

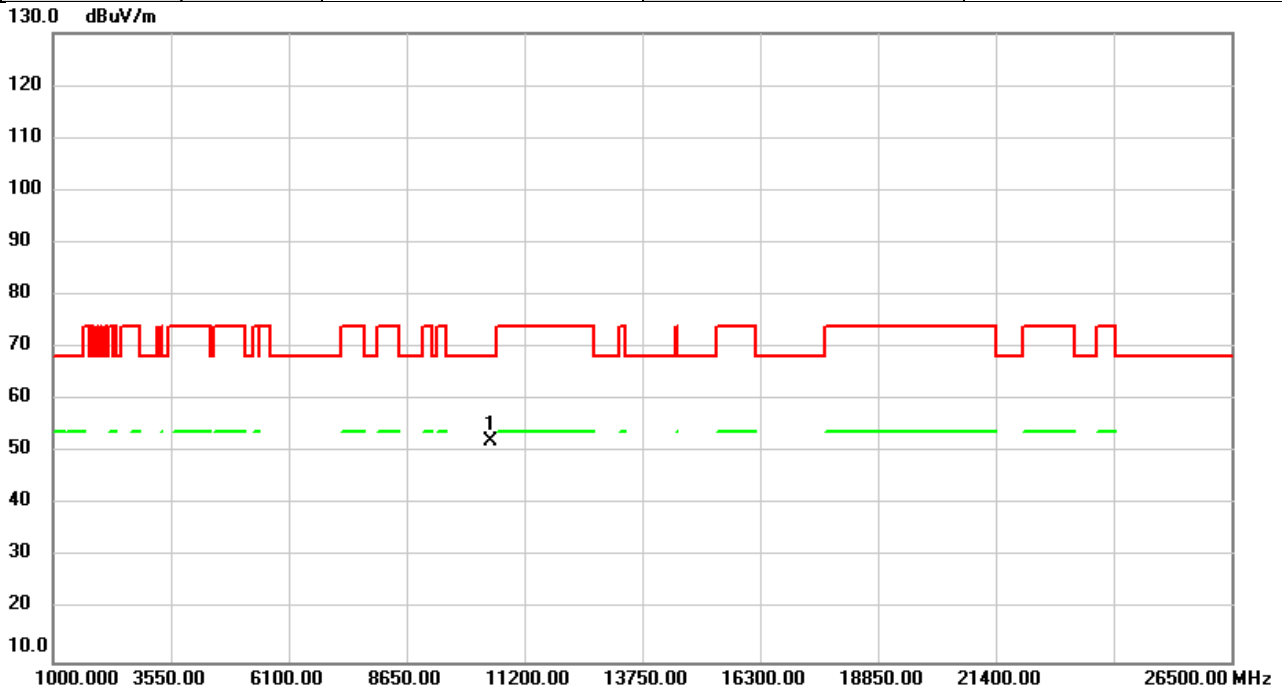


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	46.67	5.45	52.12	68.20	-16.08	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5230MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

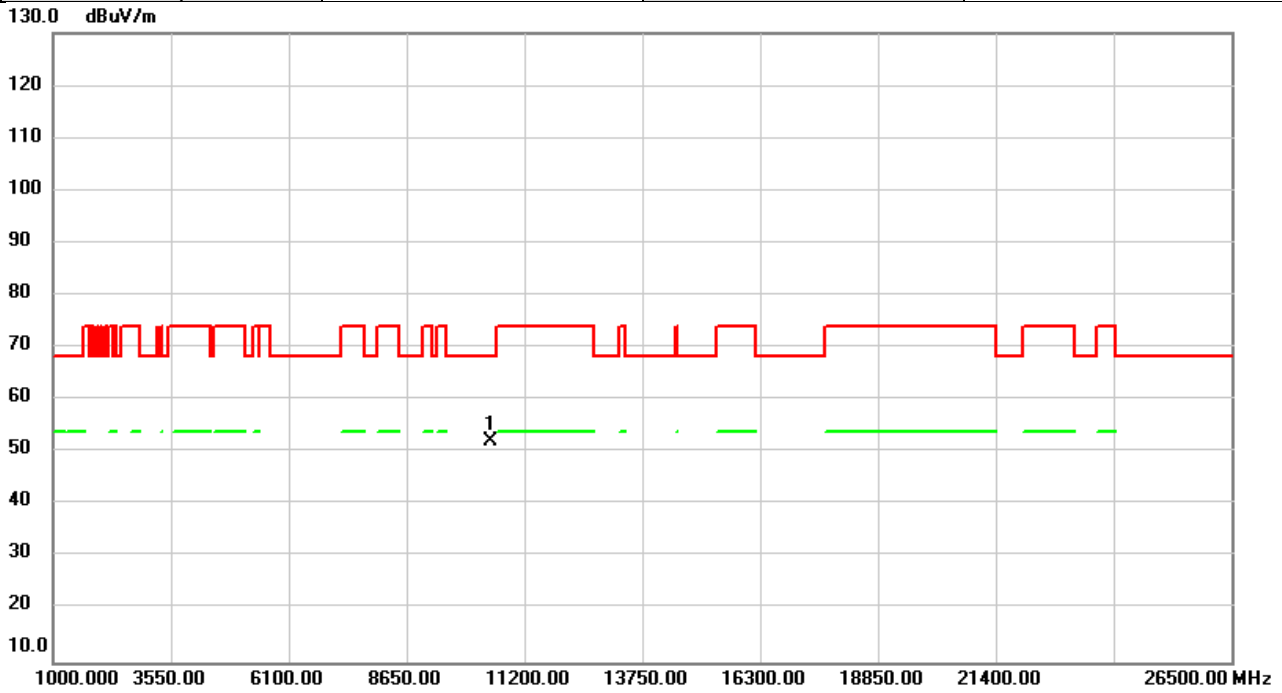


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	46.77	5.45	52.22	68.20	-15.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5270MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

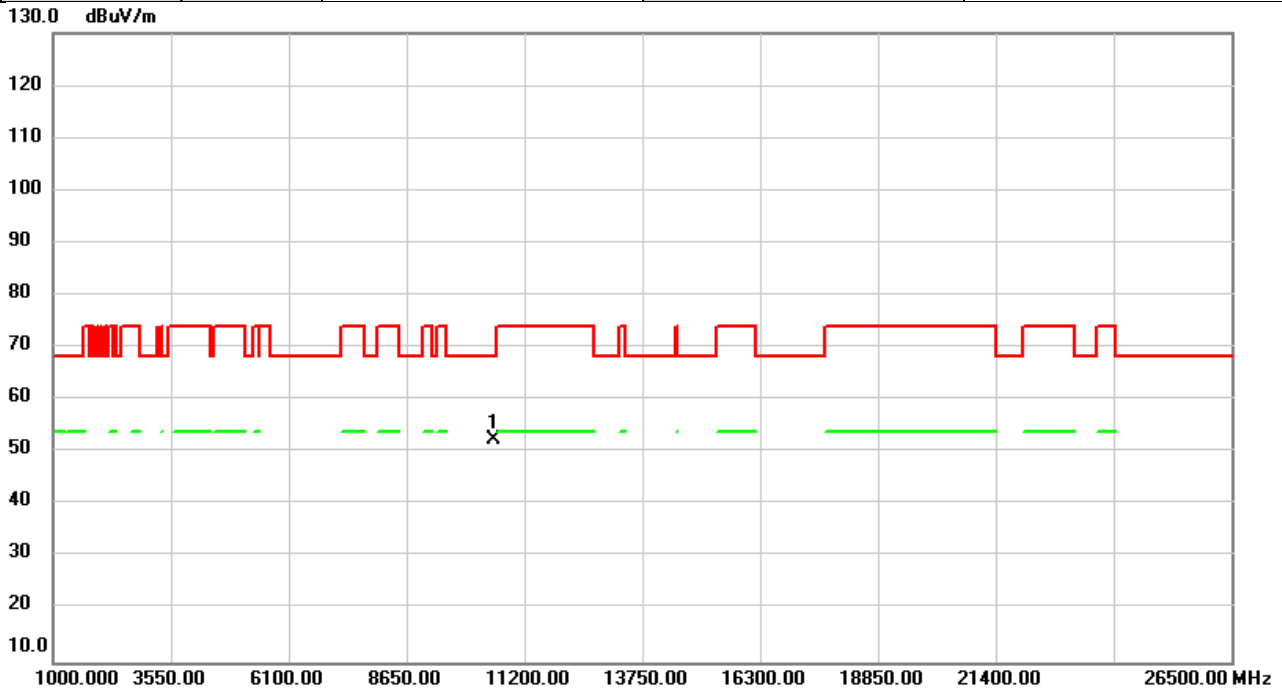


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	47.00	5.44	52.44	68.20	-15.76	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5270MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

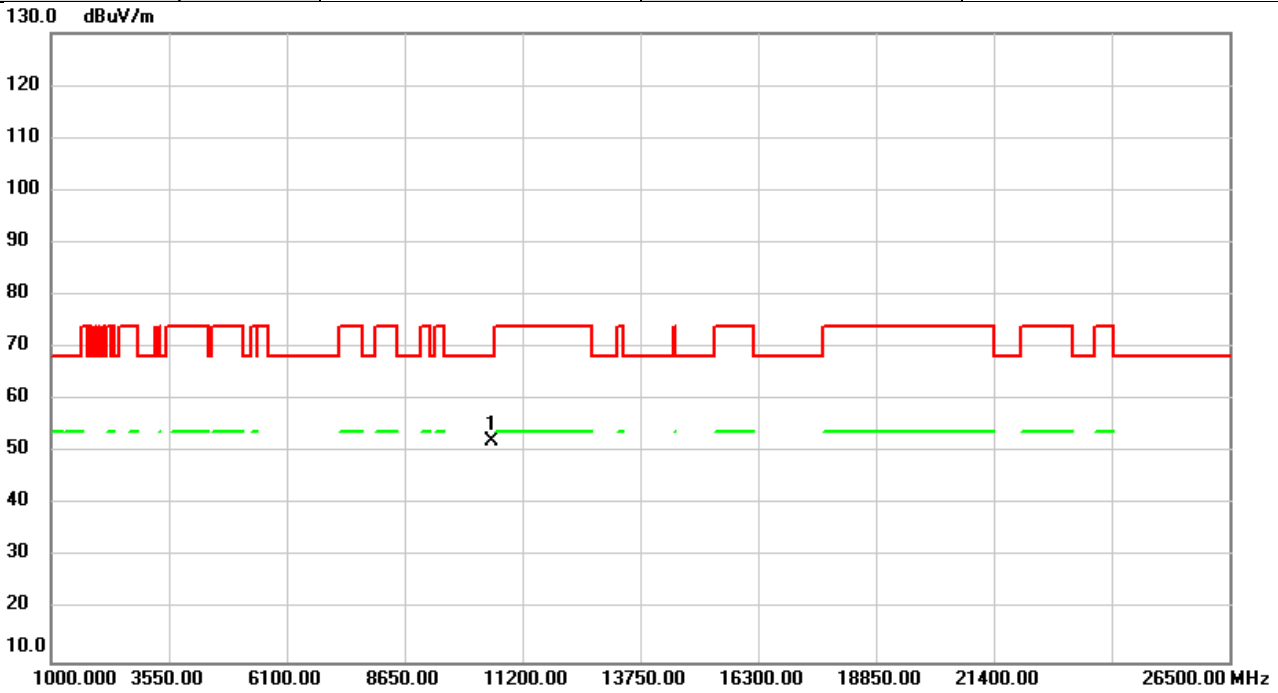


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	46.78	5.44	52.22	68.20	-15.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5310MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

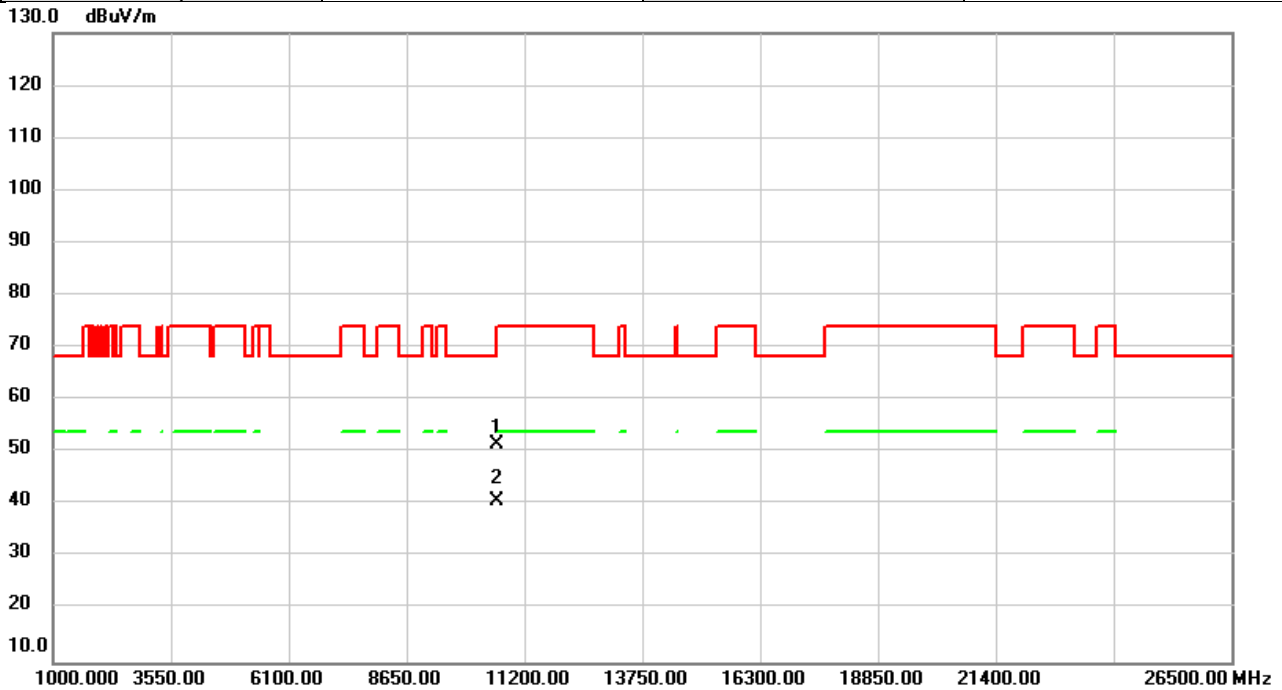


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	45.88	5.63	51.51	74.00	-22.49	peak	
2	*	10620.00	35.07	5.63	40.70	54.00	-13.30	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5310MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

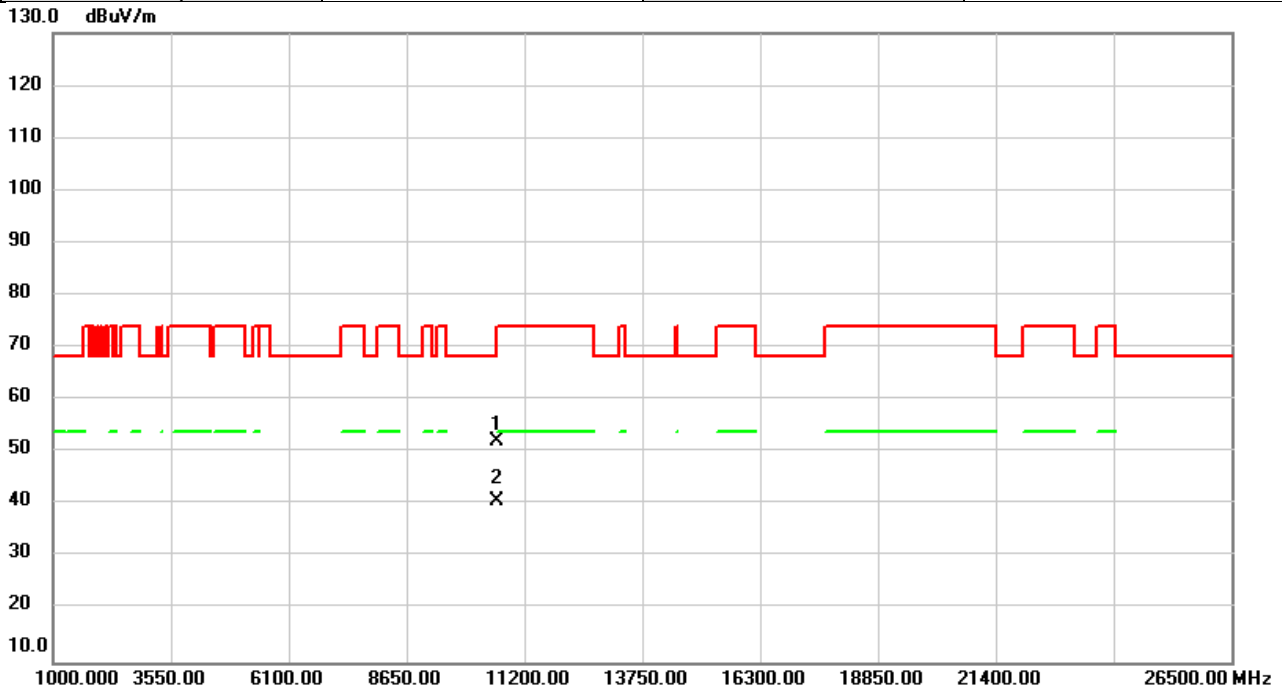


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	46.61	5.63	52.24	74.00	-21.76	peak	
2	*	10620.00	35.06	5.63	40.69	54.00	-13.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5510MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

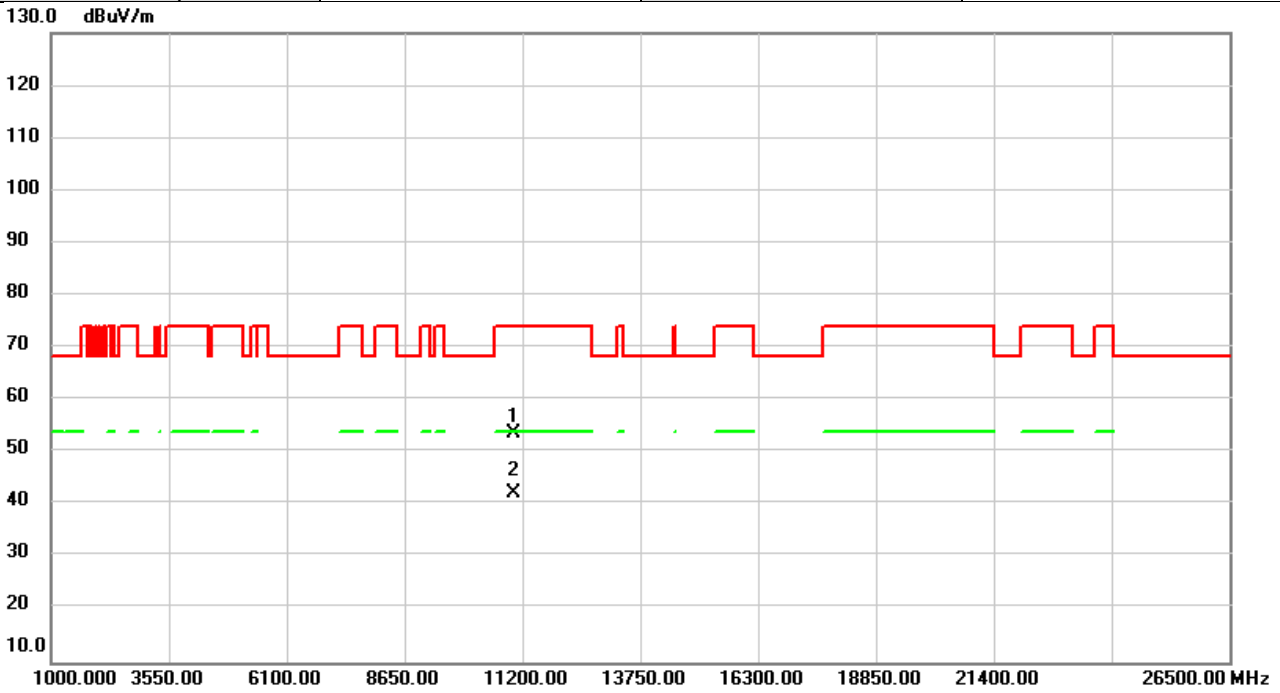


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	47.08	6.54	53.62	74.00	-20.38	peak	
2	*	11020.00	35.59	6.54	42.13	54.00	-11.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5510MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

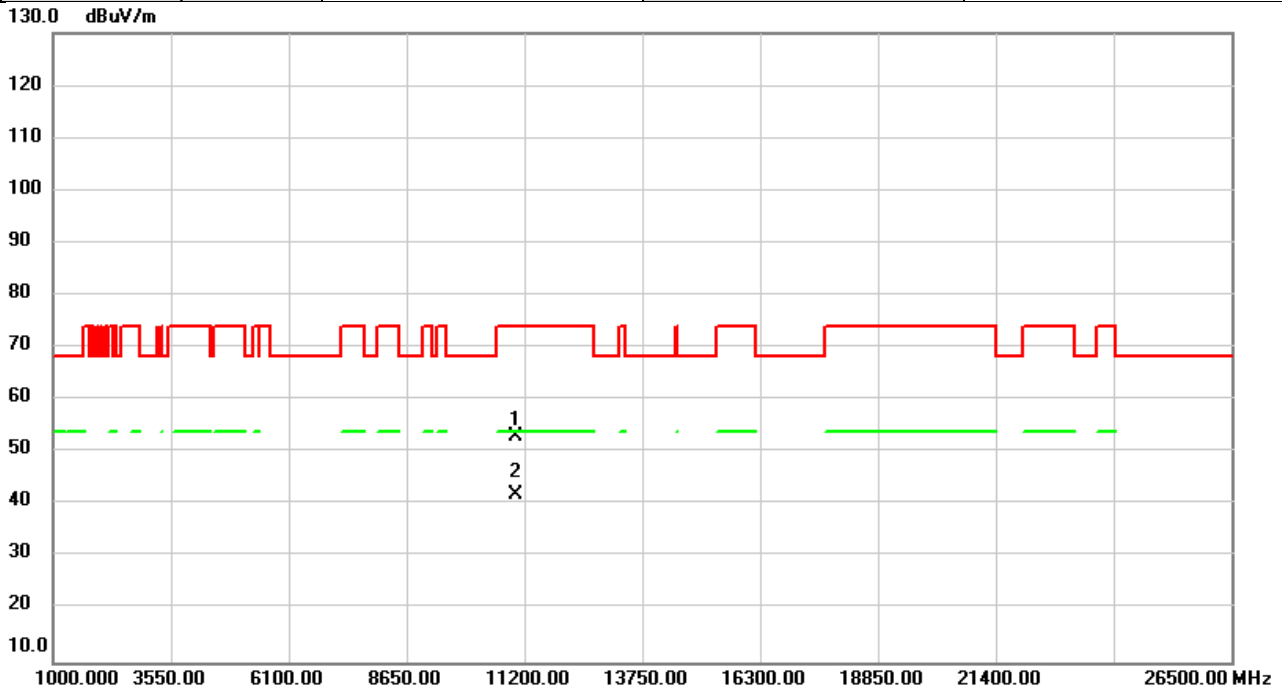


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	46.65	6.54	53.19	74.00	-20.81	peak	
2	*	11020.00	35.55	6.54	42.09	54.00	-11.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5590MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

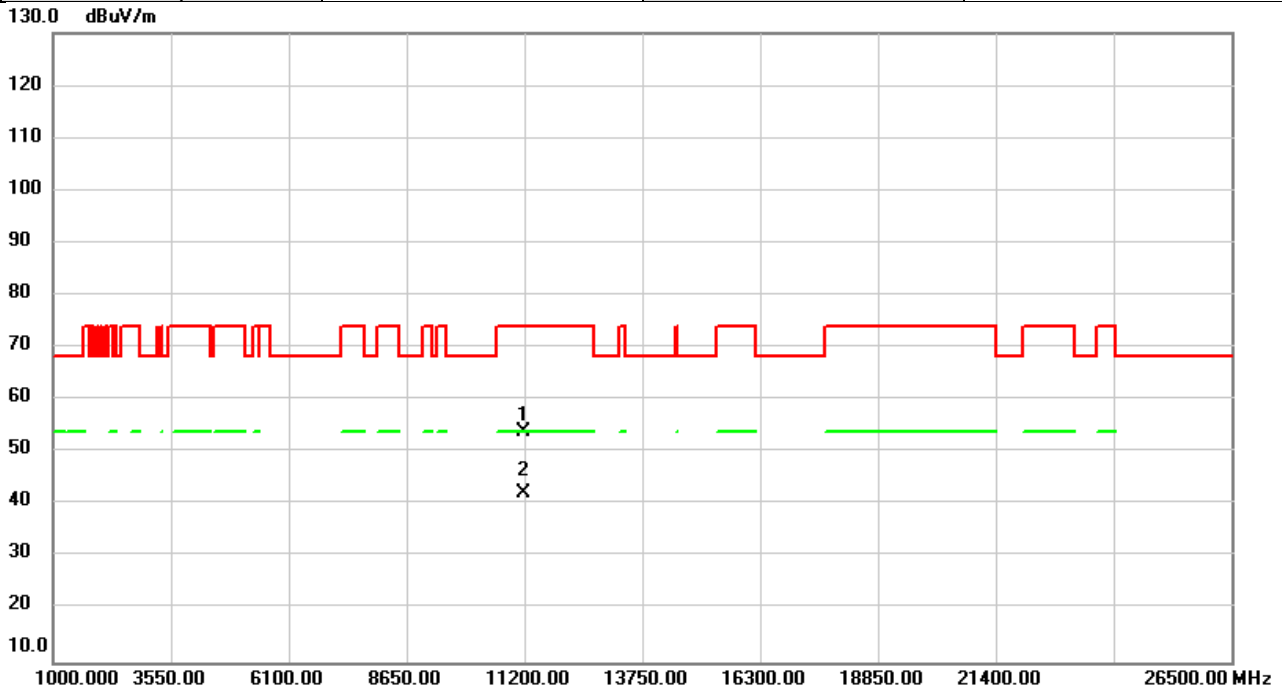


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11180.00	47.48	6.59	54.07	74.00	-19.93	peak	
2	*	11180.00	35.61	6.59	42.20	54.00	-11.80	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5590MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

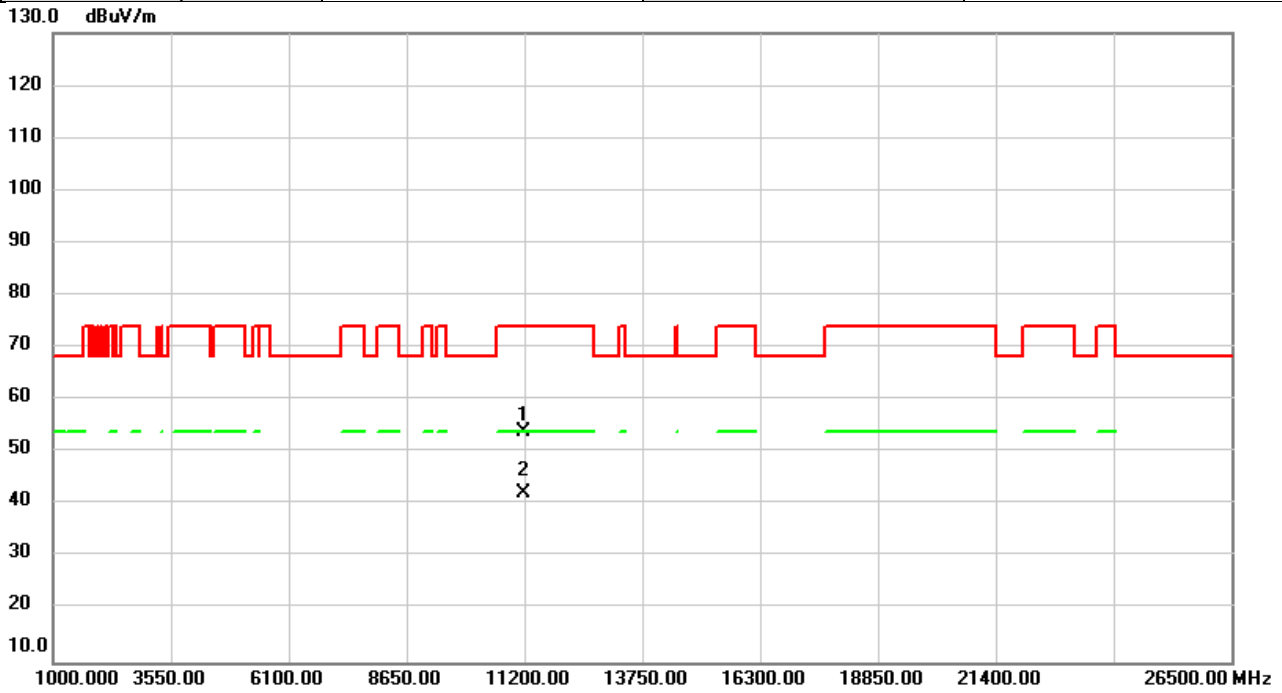


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11180.00	47.36	6.59	53.95	74.00	-20.05	peak	
2	*	11180.00	35.73	6.59	42.32	54.00	-11.68	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5670MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

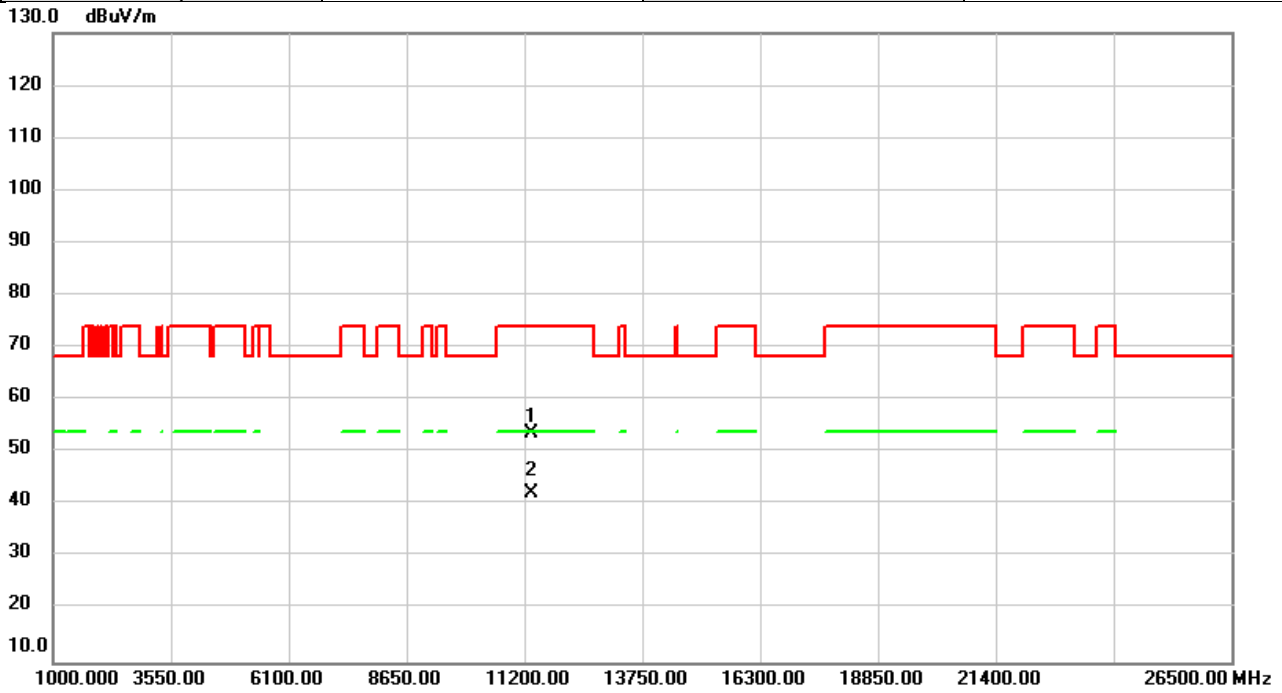


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	47.17	6.62	53.79	74.00	-20.21	peak	
2	*	11340.00	35.71	6.62	42.33	54.00	-11.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5670MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

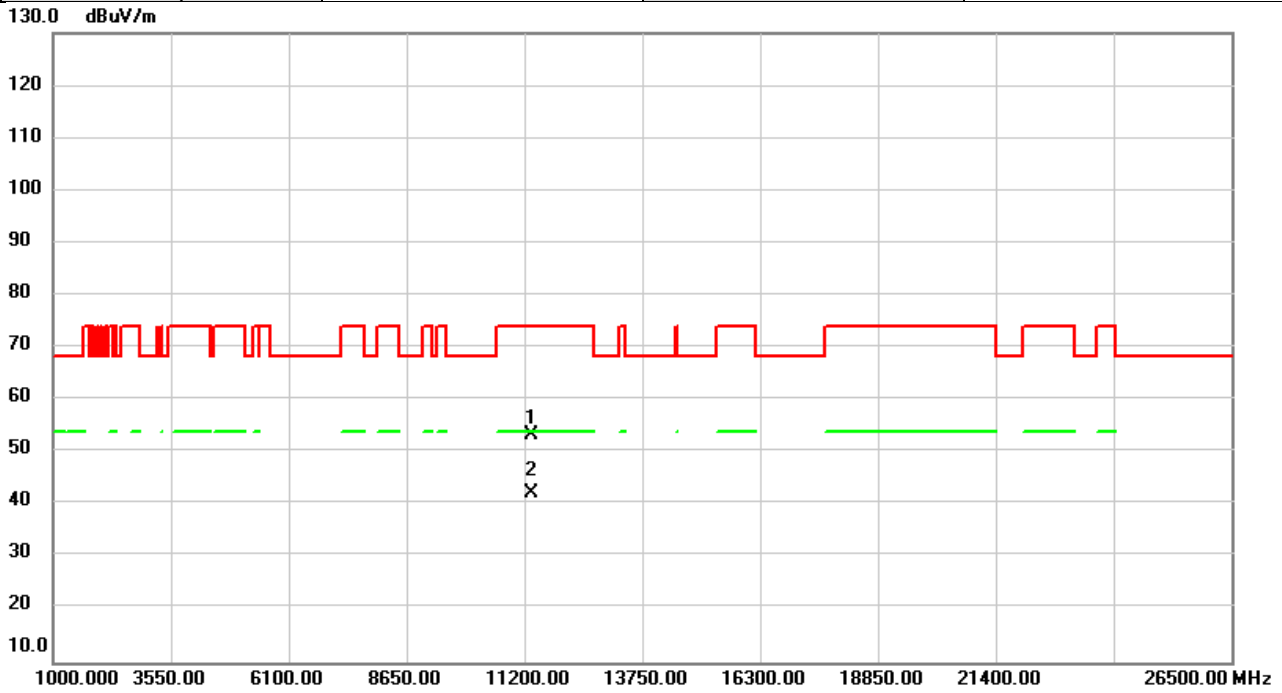


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	46.69	6.62	53.31	74.00	-20.69	peak	
2	*	11340.00	35.71	6.62	42.33	54.00	-11.67	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5710MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

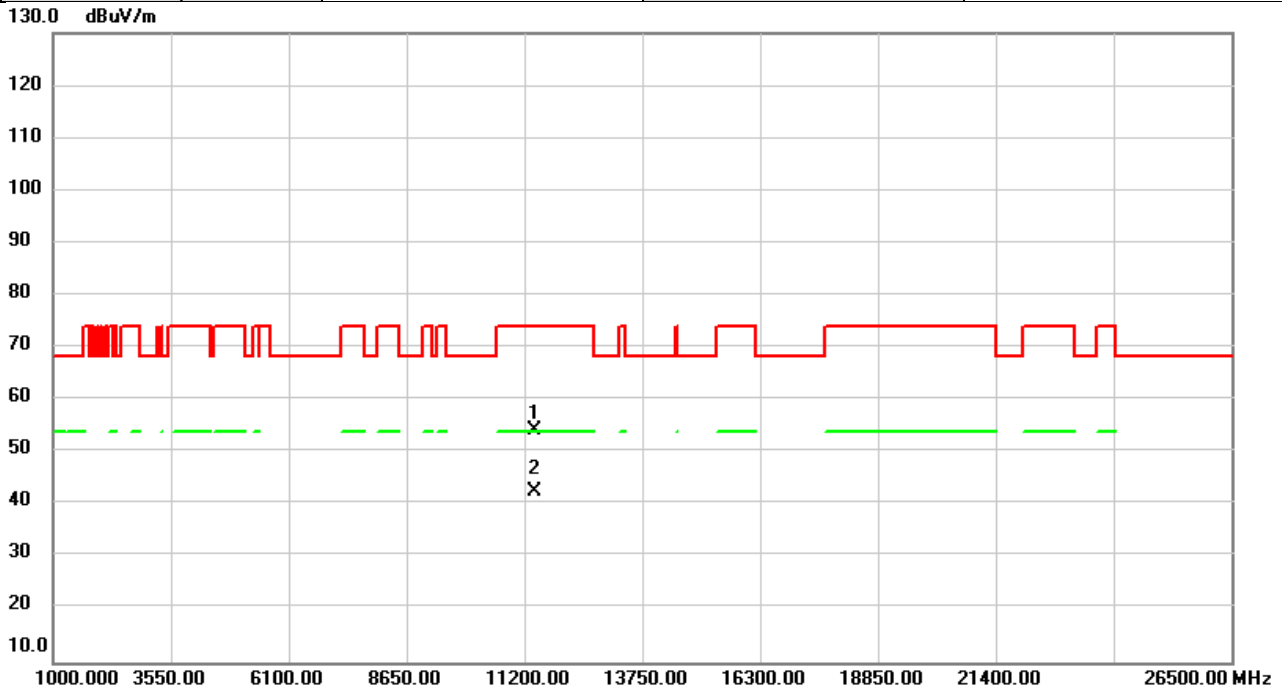


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11420.00	47.61	6.65	54.26	74.00	-19.74	peak	
2	*	11420.00	35.81	6.65	42.46	54.00	-11.54	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5710MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

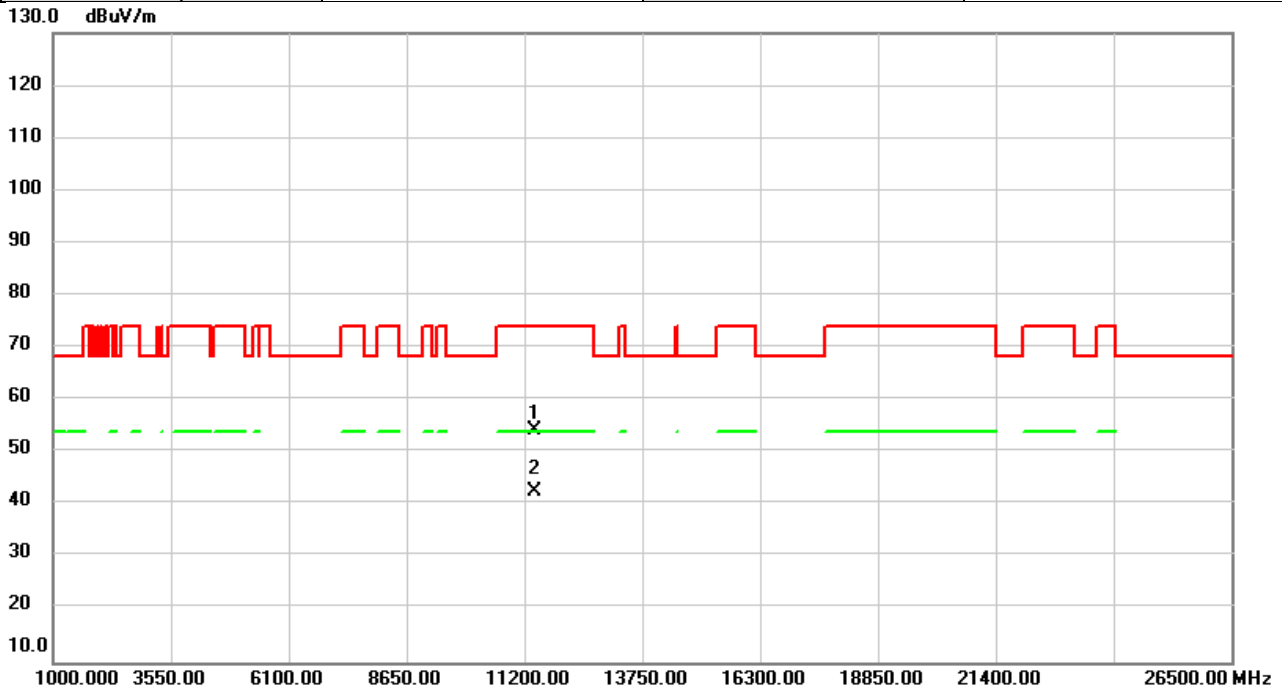


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11420.00	47.53	6.65	54.18	74.00	-19.82	peak	
2	*	11420.00	35.85	6.65	42.50	54.00	-11.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5755MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

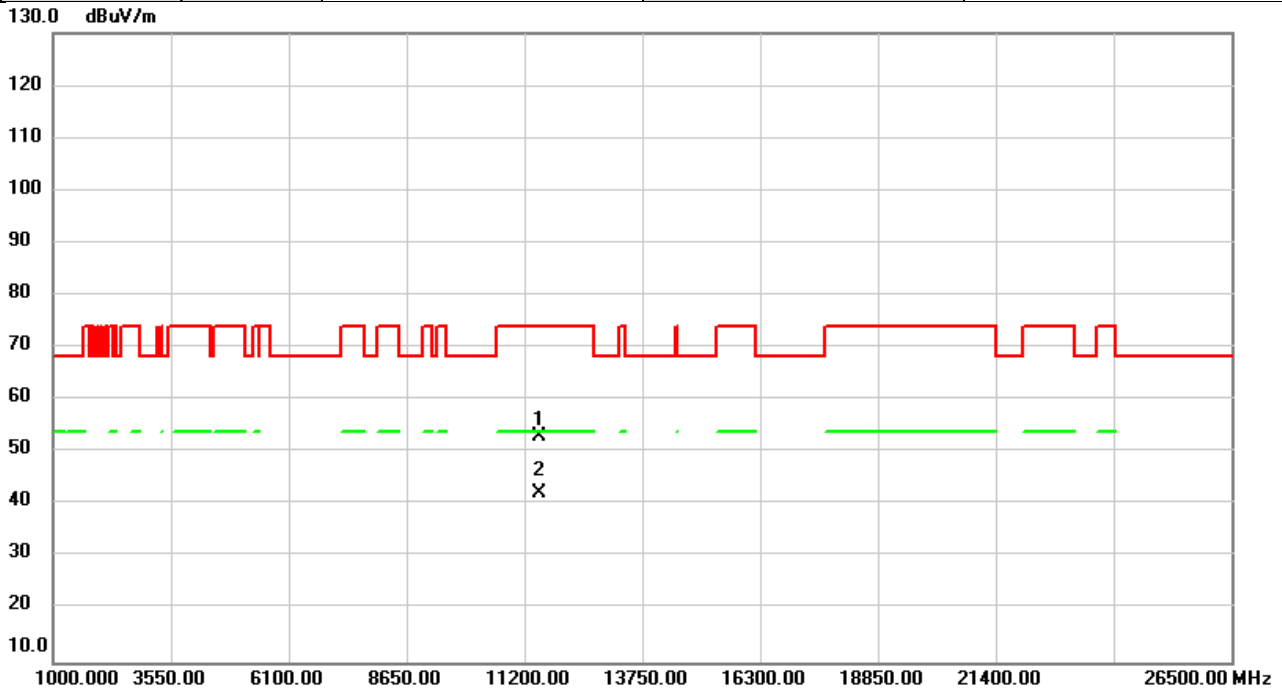


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	46.45	6.67	53.12	74.00	-20.88	peak	
2	*	11510.00	35.58	6.67	42.25	54.00	-11.75	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5755MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

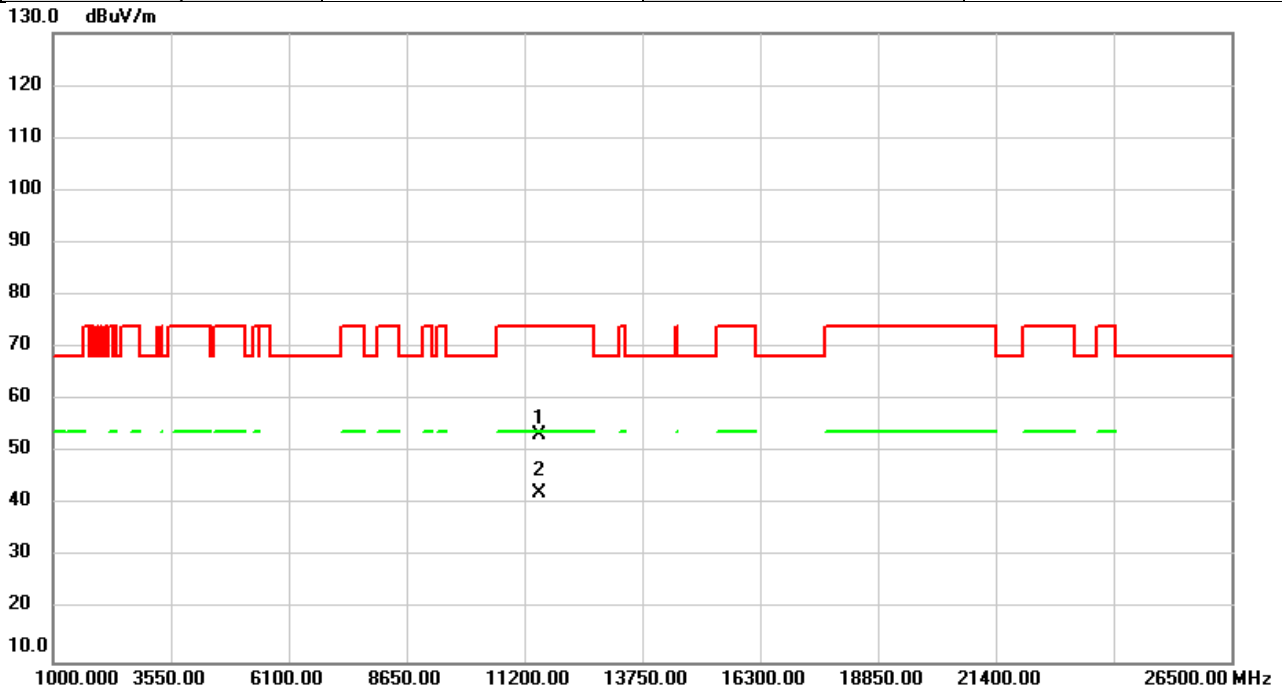


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	46.60	6.67	53.27	74.00	-20.73	peak	
2	*	11510.00	35.66	6.67	42.33	54.00	-11.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5795MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

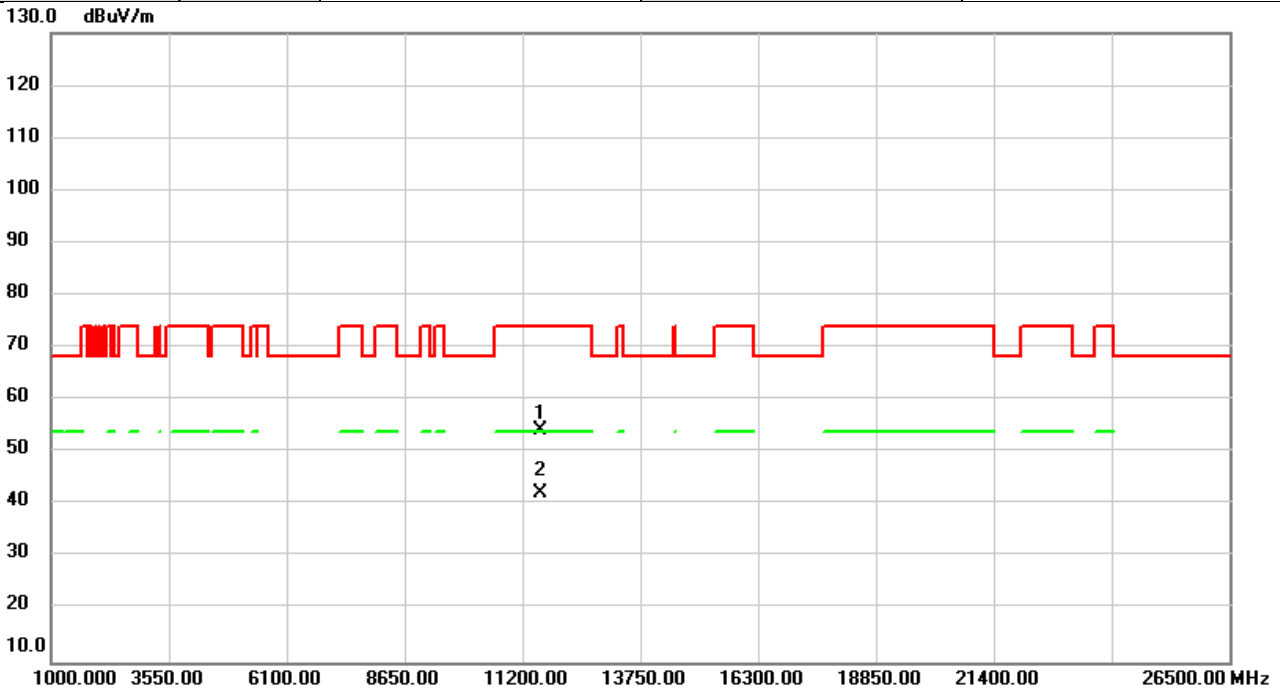


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	47.74	6.64	54.38	74.00	-19.62	peak	
2	*	11590.00	35.50	6.64	42.14	54.00	-11.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/3/23
Test Frequency	5795MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

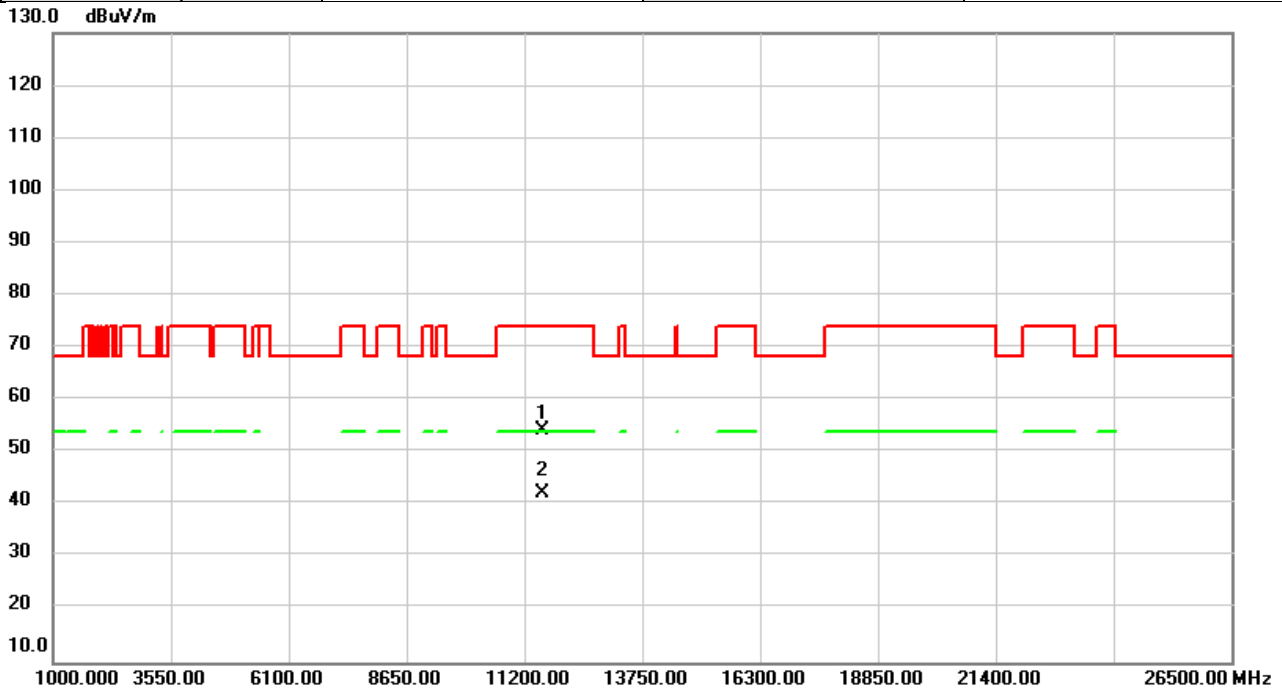


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	47.66	6.64	54.30	74.00	-19.70	peak	
2	*	11590.00	35.51	6.64	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5210MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

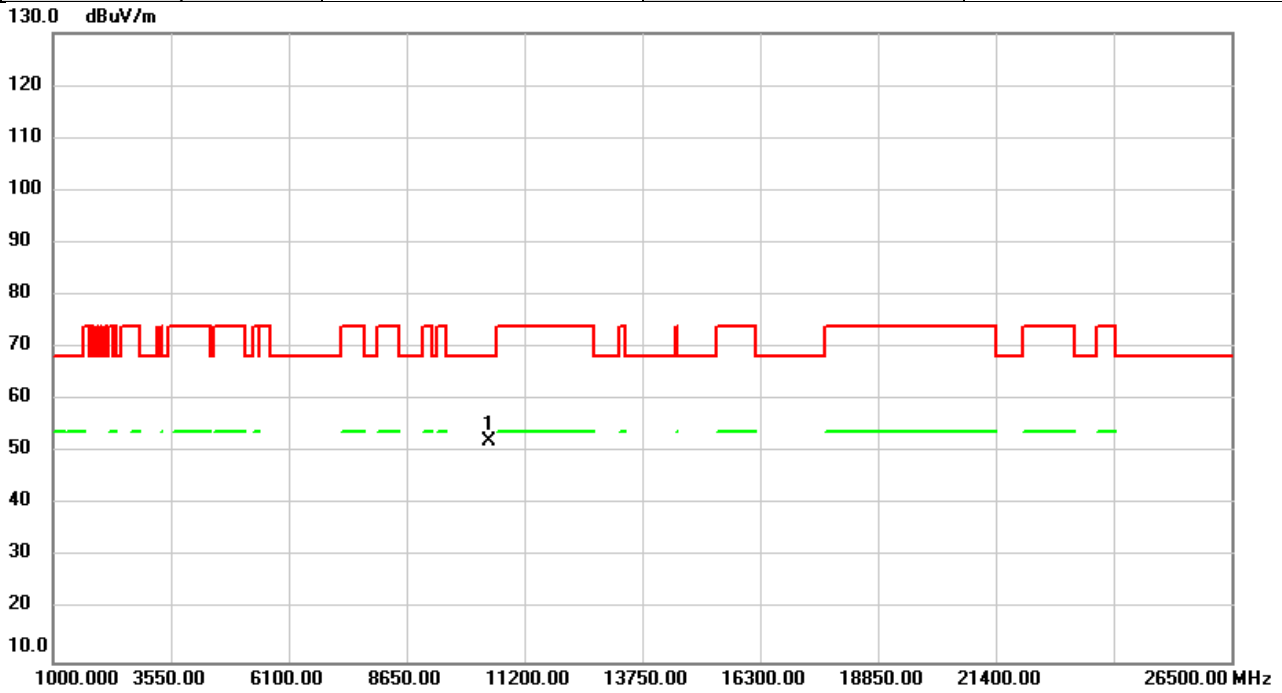


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	46.57	5.55	52.12	68.20	-16.08	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5210MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

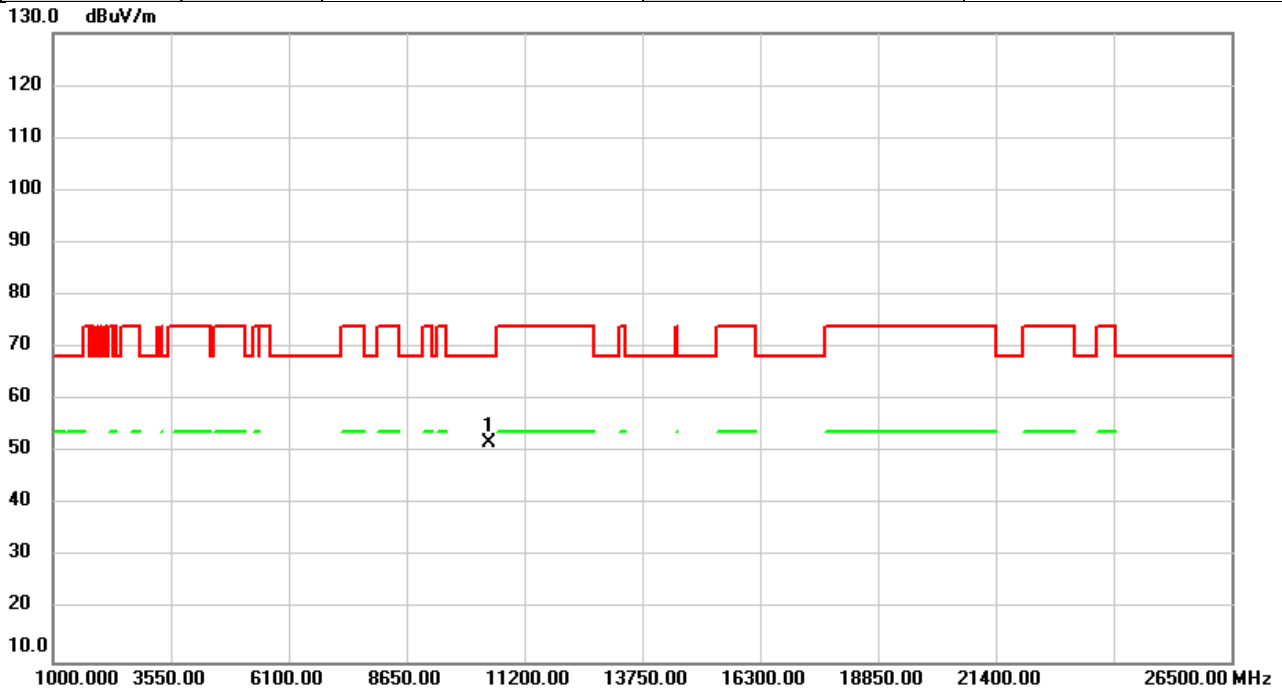


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	46.35	5.55	51.90	68.20	-16.30	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5290MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

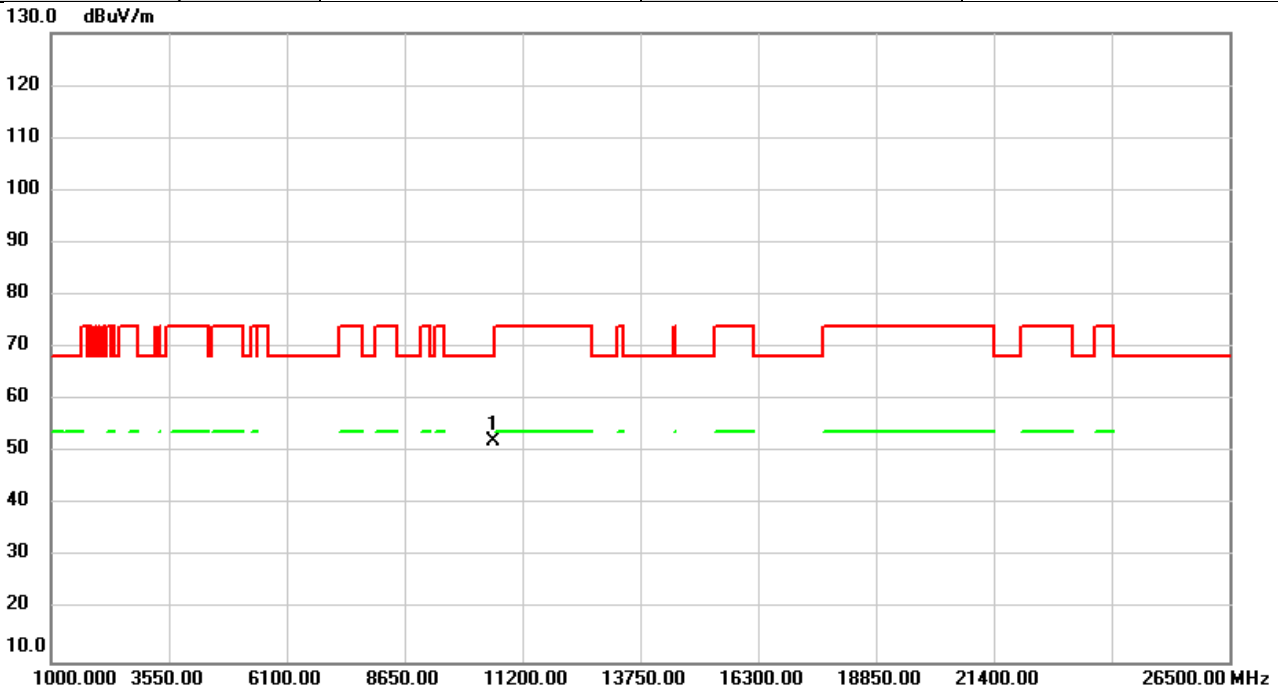


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	46.58	5.53	52.11	68.20	-16.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5290MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

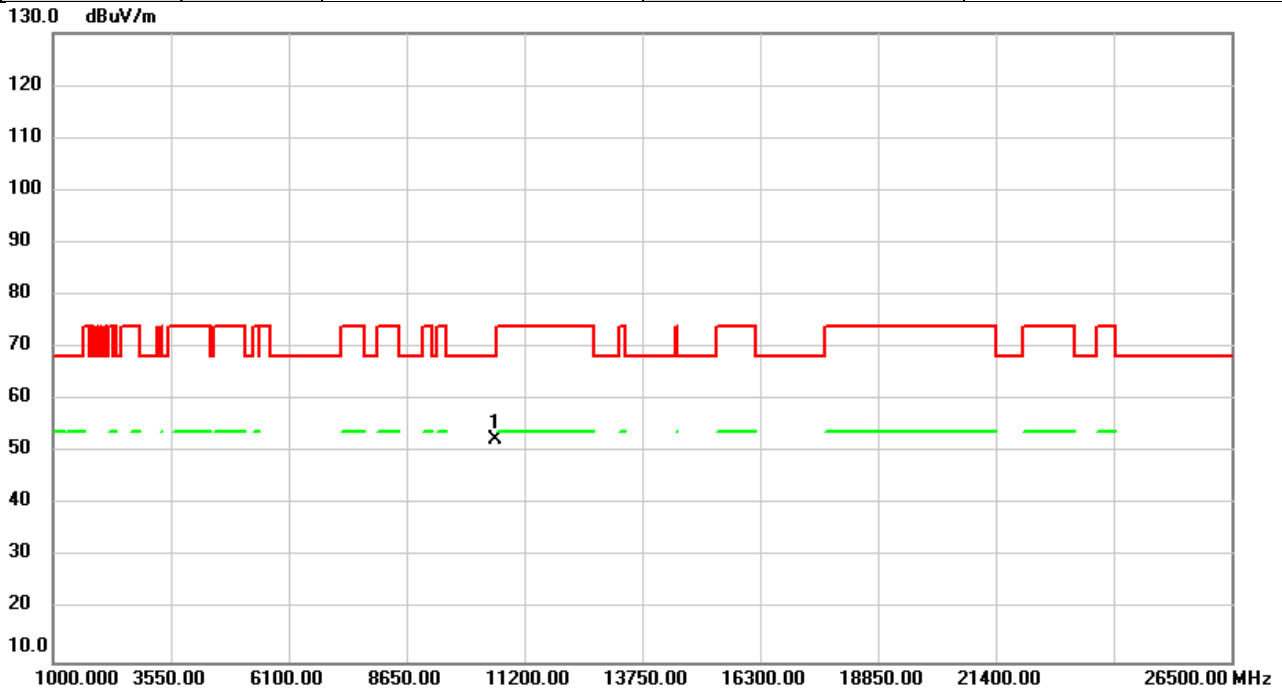


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	47.05	5.53	52.58	68.20	-15.62	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5530MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

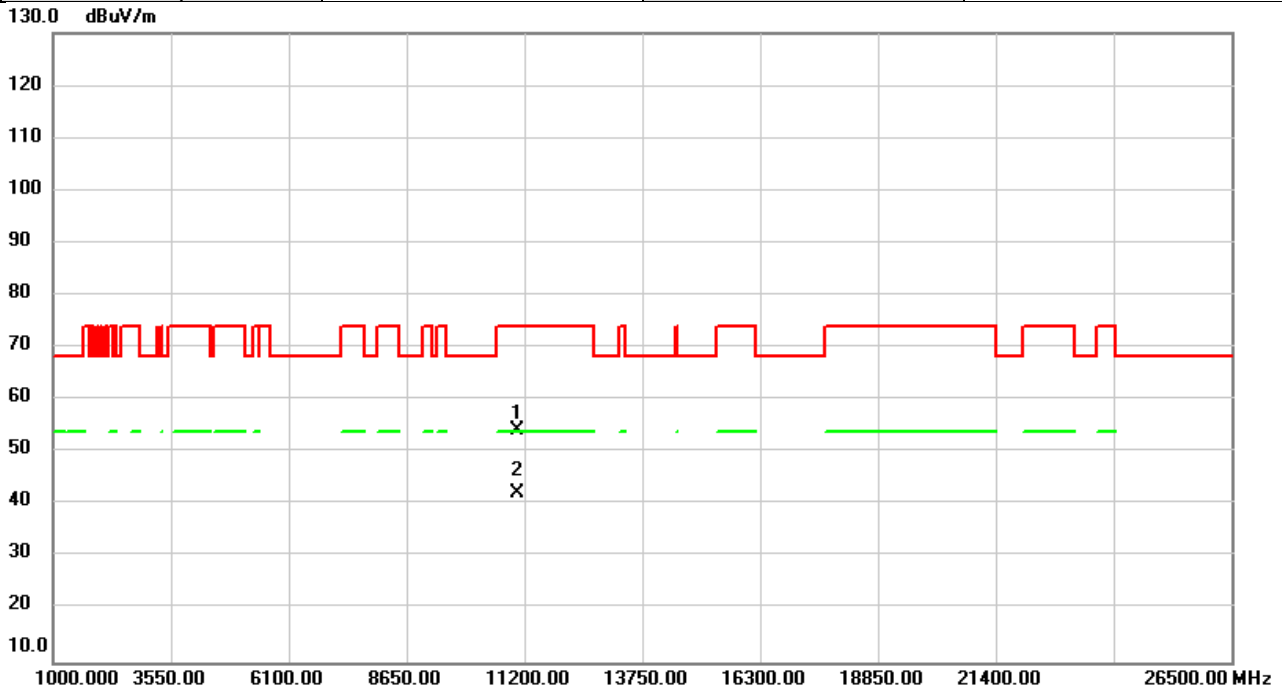


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	47.73	6.56	54.29	74.00	-19.71	peak	
2	*	11060.00	35.70	6.56	42.26	54.00	-11.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5530MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

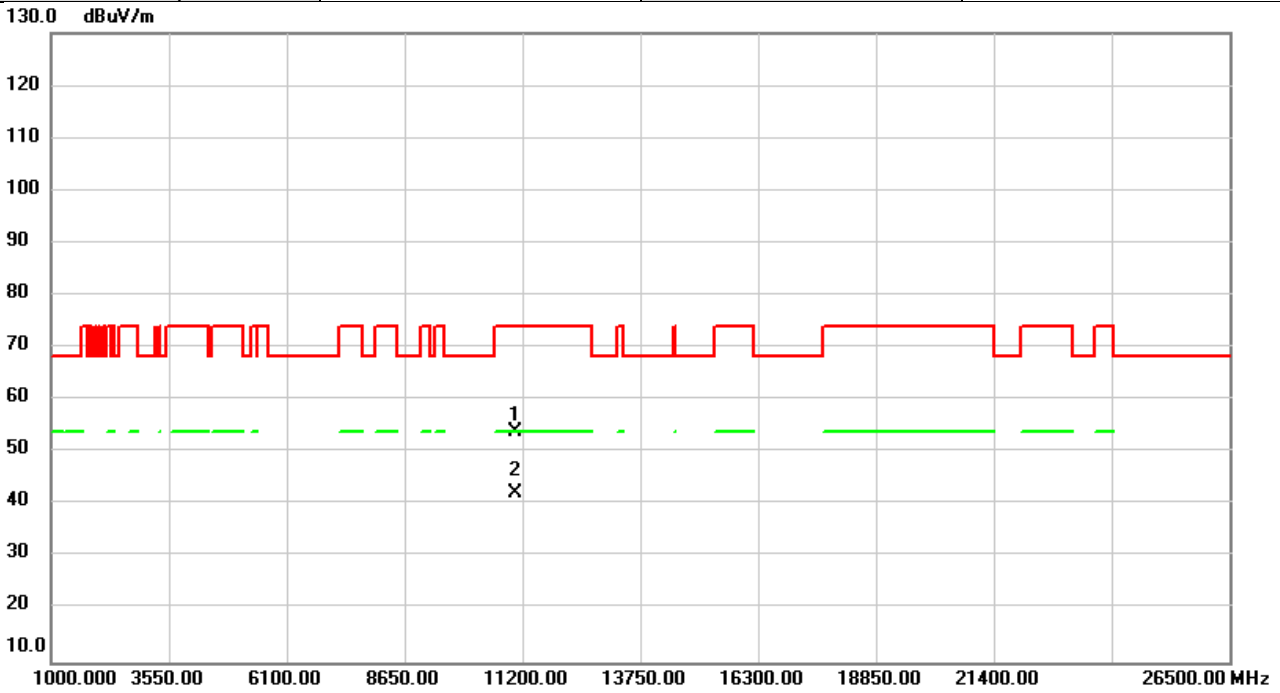


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	47.28	6.56	53.84	74.00	-20.16	peak	
2	*	11060.00	35.68	6.56	42.24	54.00	-11.76	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5610MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

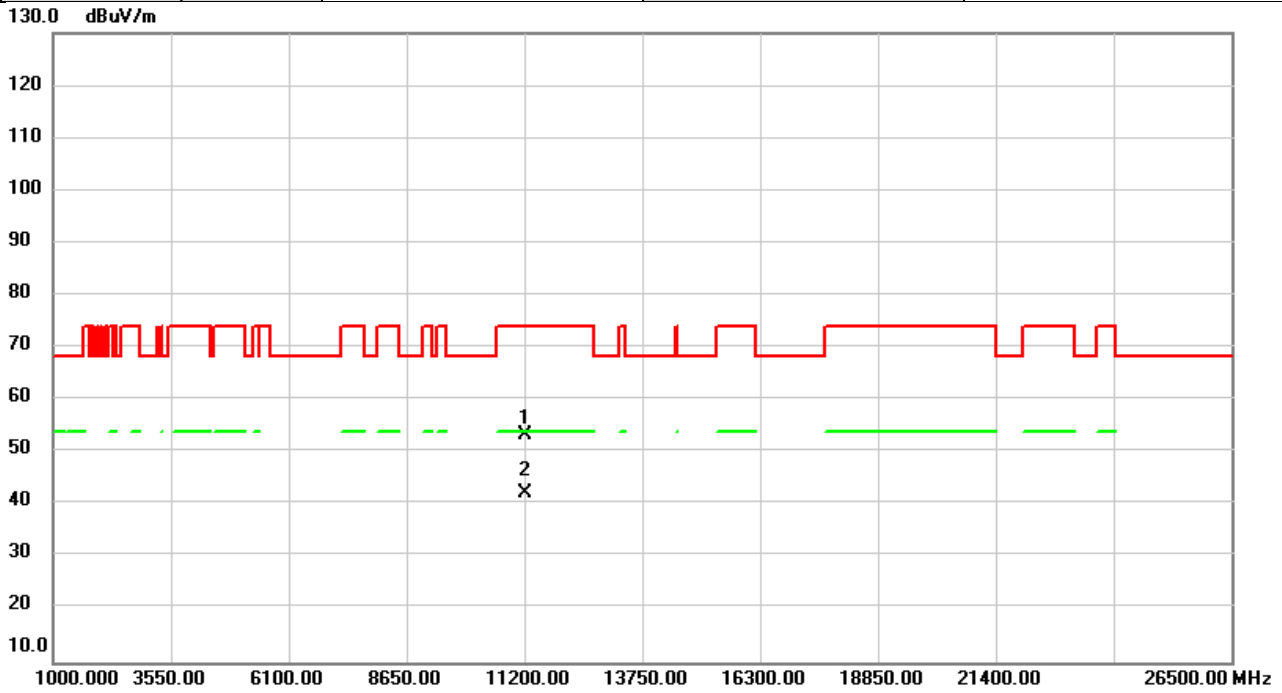


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	46.80	6.59	53.39	74.00	-20.61	peak	
2	*	11220.00	35.71	6.59	42.30	54.00	-11.70	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5610MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

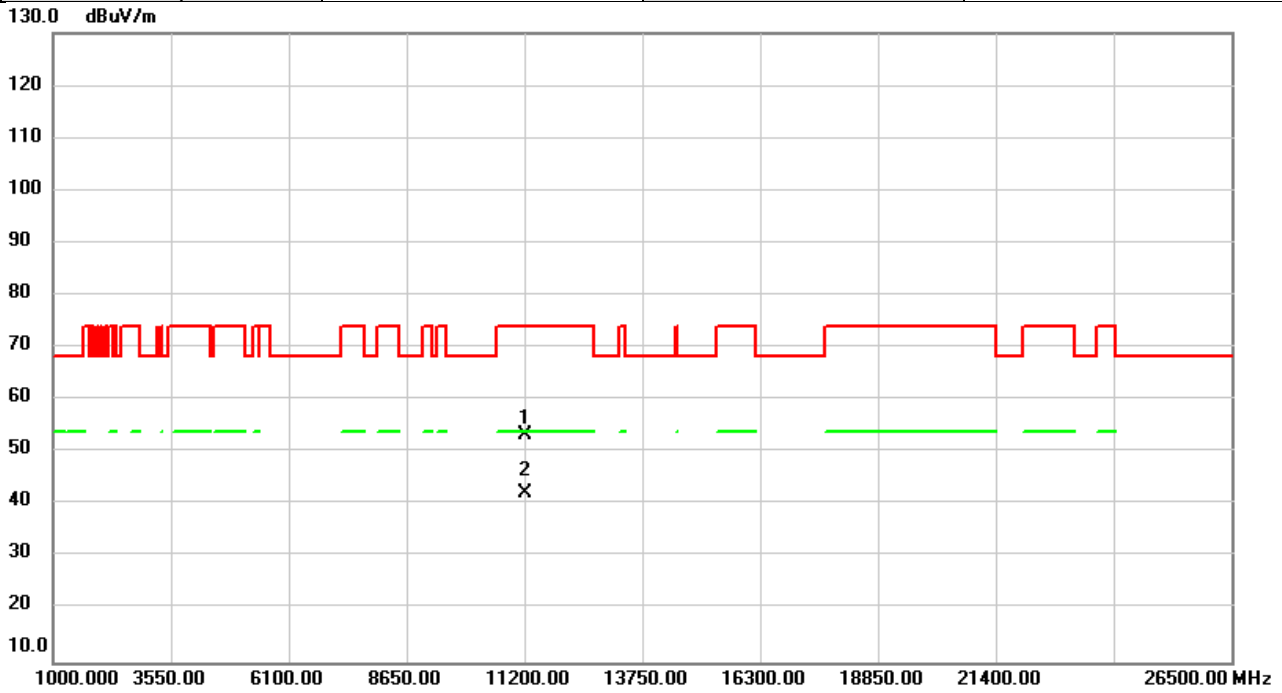


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	46.79	6.59	53.38	74.00	-20.62	peak	
2	*	11220.00	35.63	6.59	42.22	54.00	-11.78	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5690MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

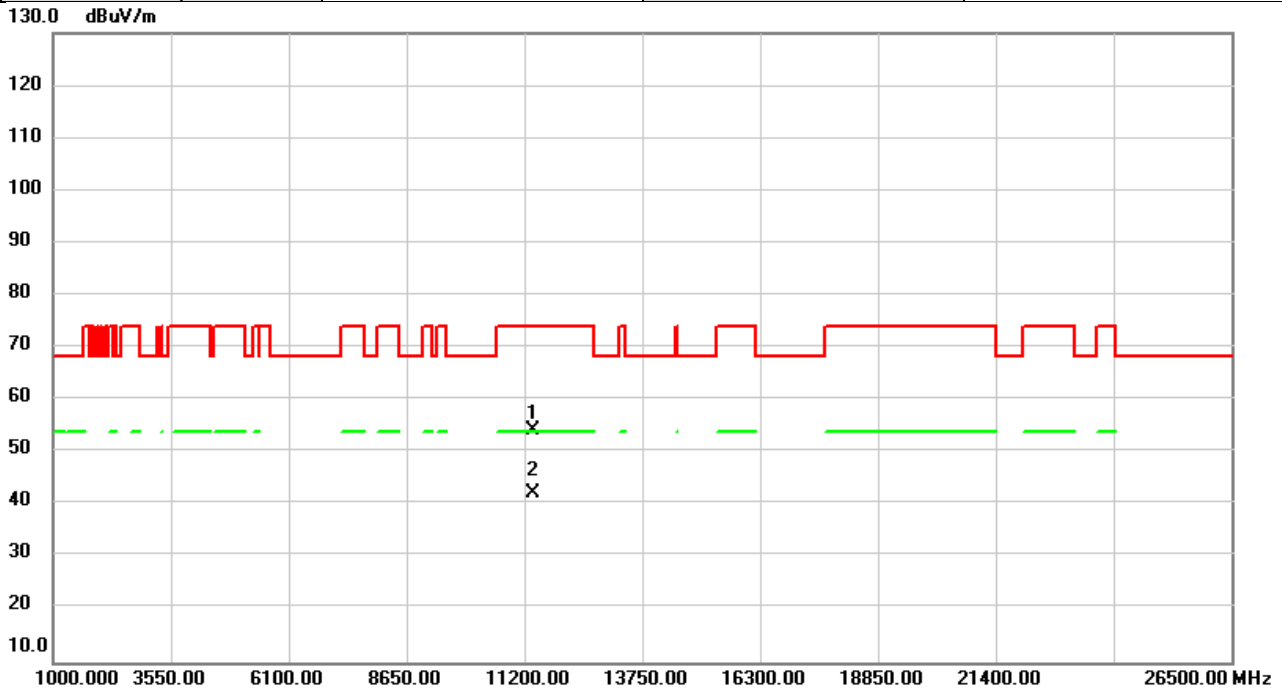


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	47.64	6.64	54.28	74.00	-19.72	peak	
2	*	11380.00	35.72	6.64	42.36	54.00	-11.64	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5690MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

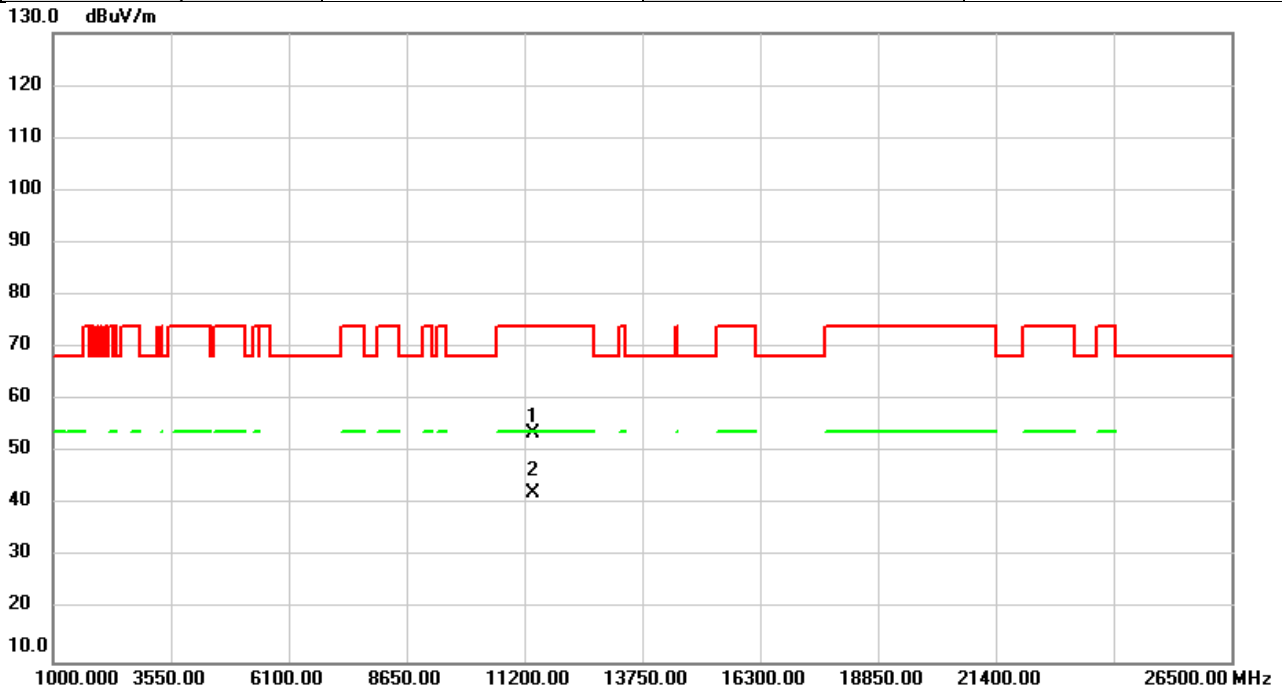


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11380.00	46.98	6.64	53.62	74.00	-20.38	peak	
2	*	11380.00	35.74	6.64	42.38	54.00	-11.62	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5775MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

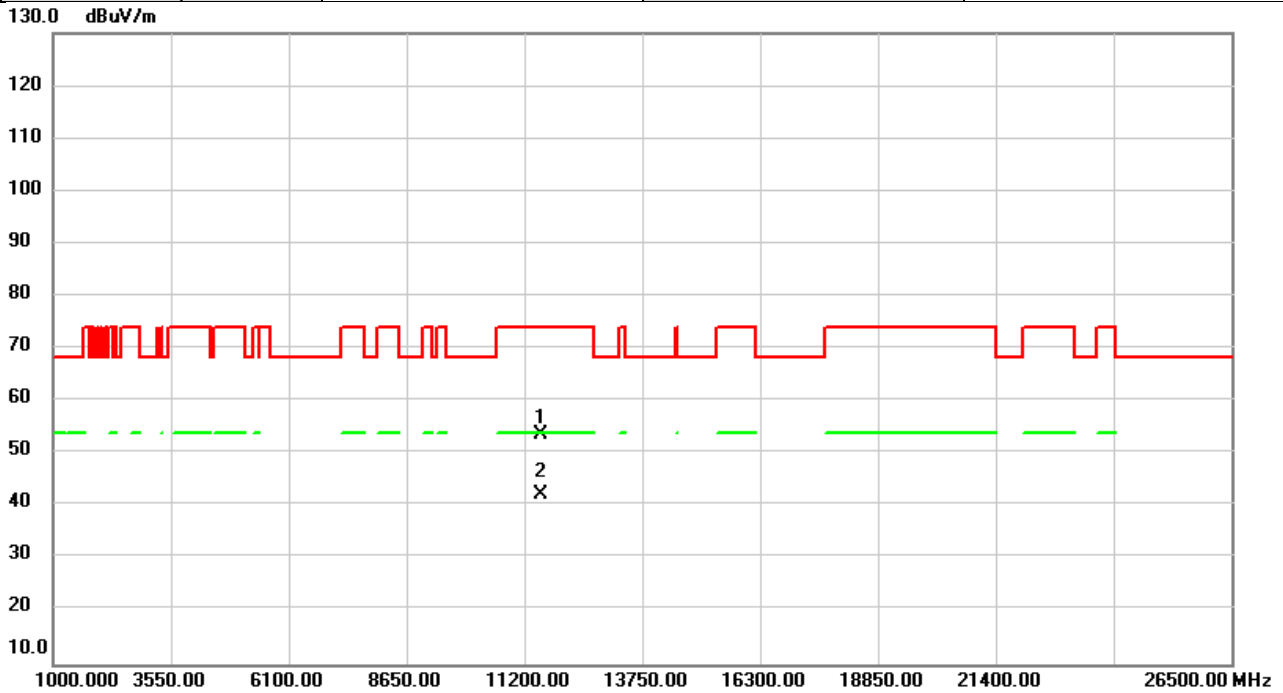


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11550.00	47.01	6.65	53.66	74.00	-20.34	peak	
2	*	11550.00	35.51	6.65	42.16	54.00	-11.84	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/3/23
Test Frequency	5775MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

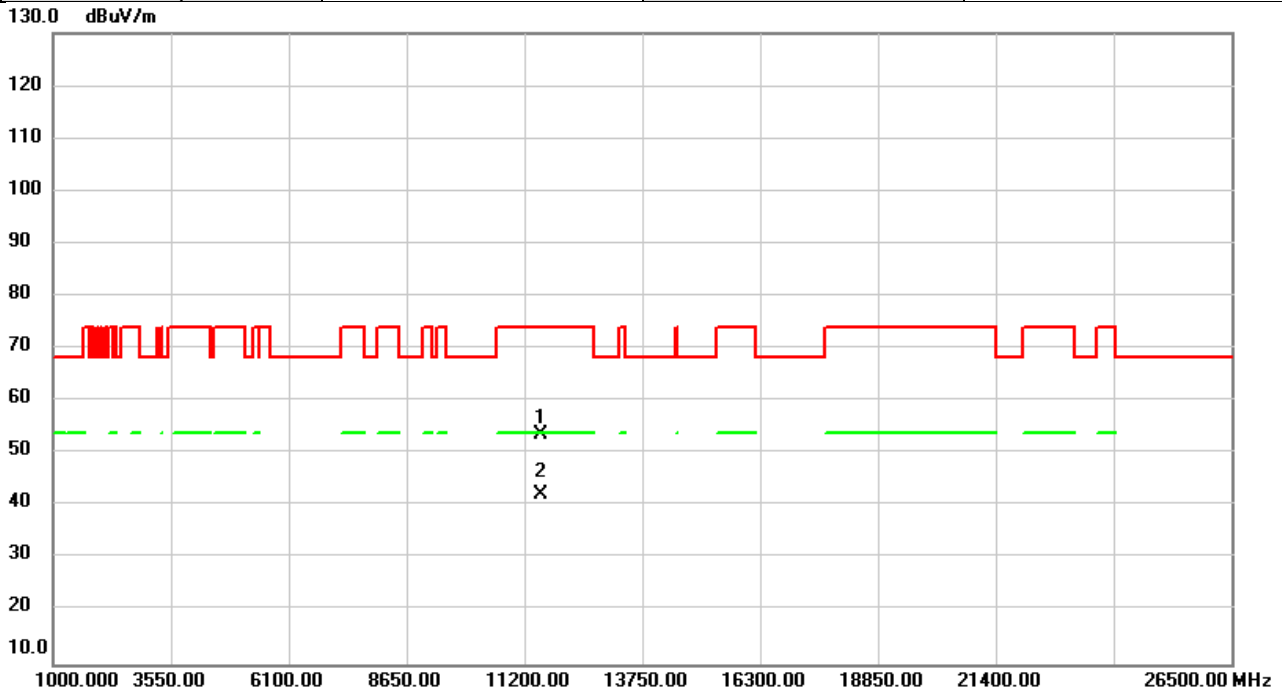


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	46.95	6.65	53.60	74.00	-20.40	peak	
2	*	11550.00	35.54	6.65	42.19	54.00	-11.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/3/23
Test Frequency	5250MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

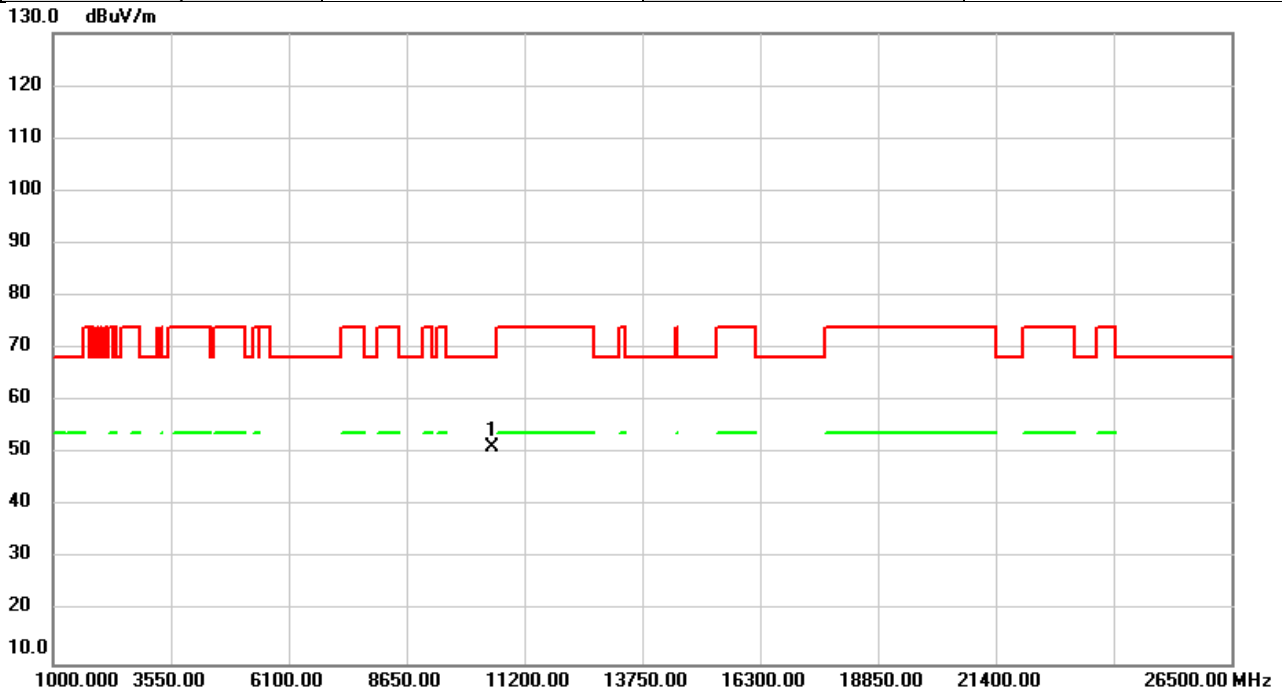


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	45.88	5.34	51.22	68.20	-16.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/3/23
Test Frequency	5250MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

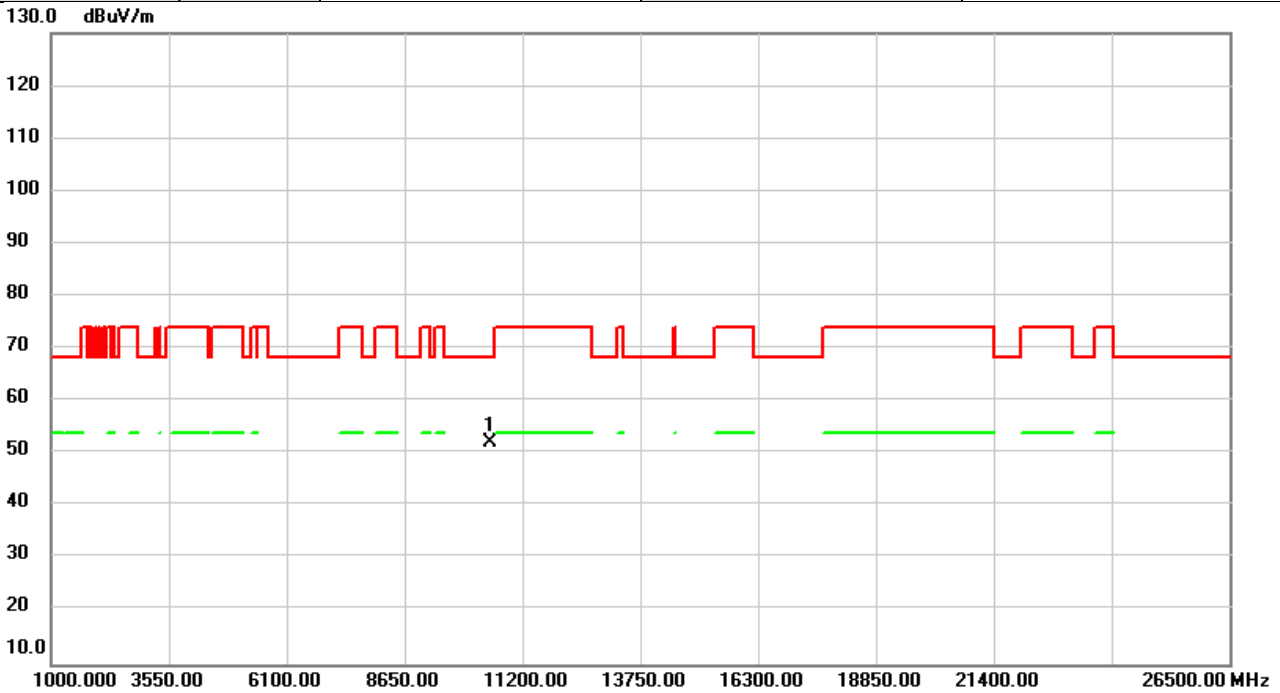


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	46.77	5.34	52.11	68.20	-16.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/3/23
Test Frequency	5570MHz	Polarization	Vertical
Temp	26°C	Hum.	62%

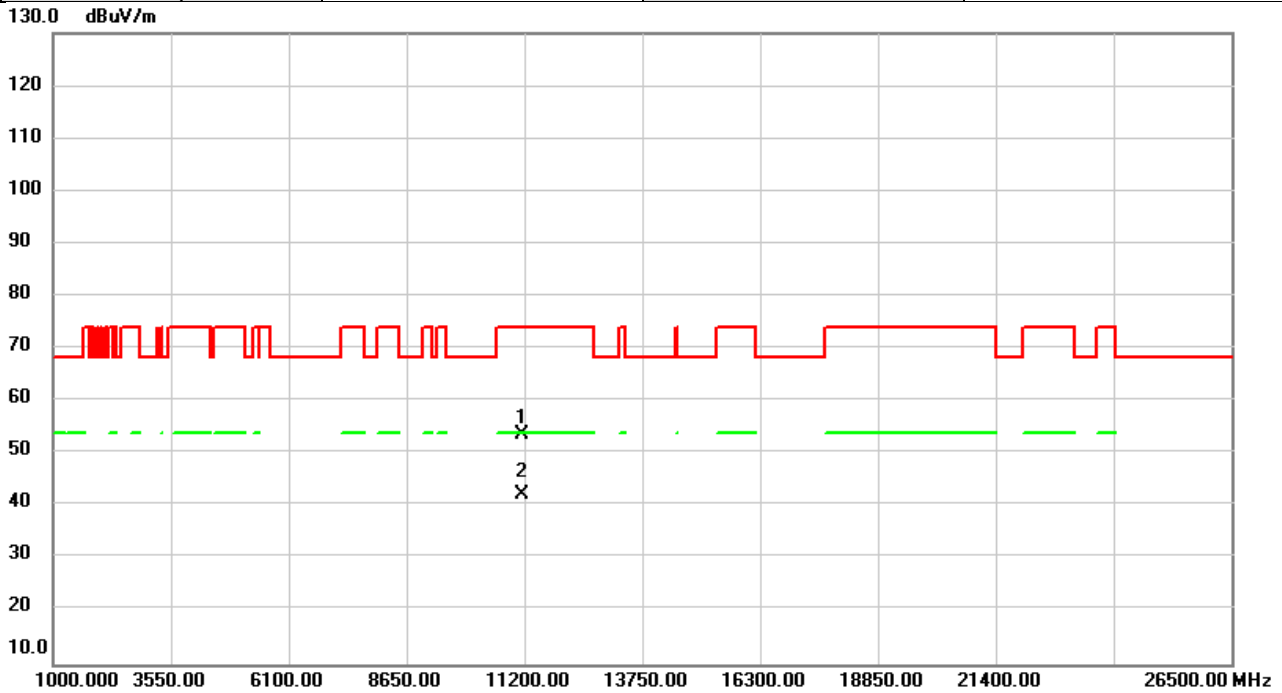


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	46.95	6.57	53.52	74.00	-20.48	peak	
2	*	11140.00	35.66	6.57	42.23	54.00	-11.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/3/23
Test Frequency	5570MHz	Polarization	Horizontal
Temp	26°C	Hum.	62%

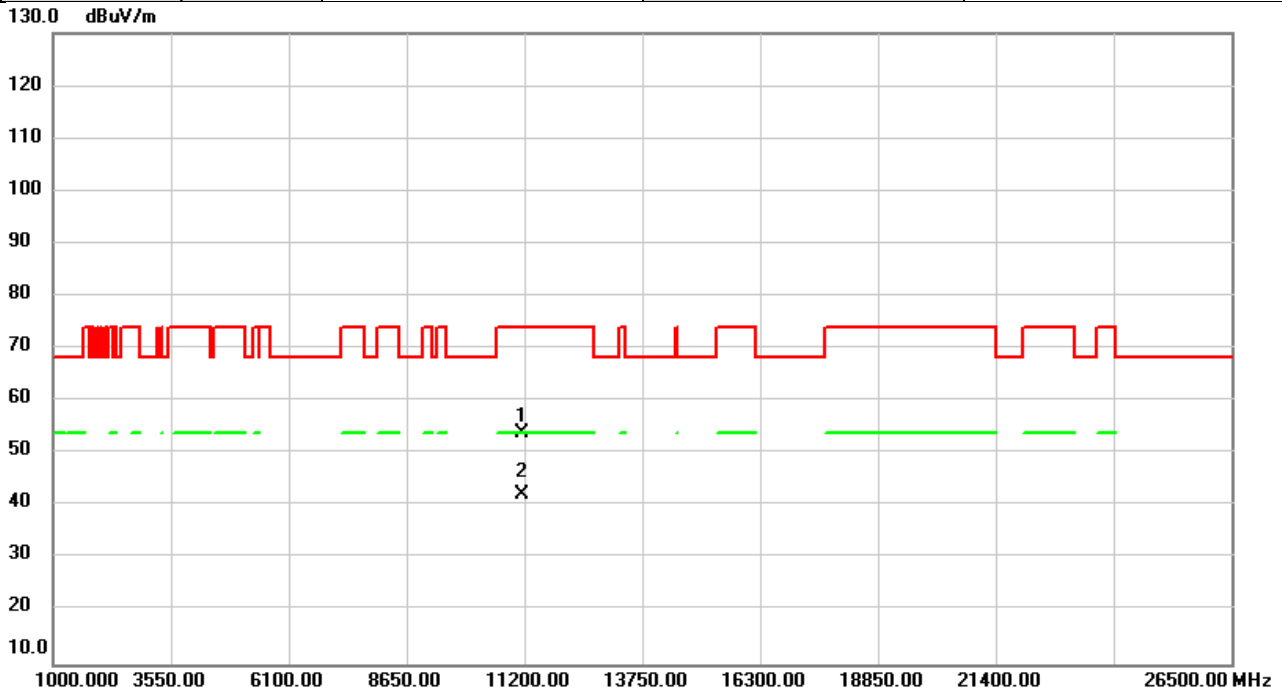

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11140.00	47.28	6.57	53.85	74.00	-20.15	peak	
2	*	11140.00	35.73	6.57	42.30	54.00	-11.70	AVG	

**REMARKS:**



- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.




## APPENDIX D BANDWIDTH

Test Mode	IEEE 802.11a_Antenna 1
-----------	------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	24.25	17.20	No limit
5200	24.19	17.00	No limit
5240	24.00	17.10	No limit

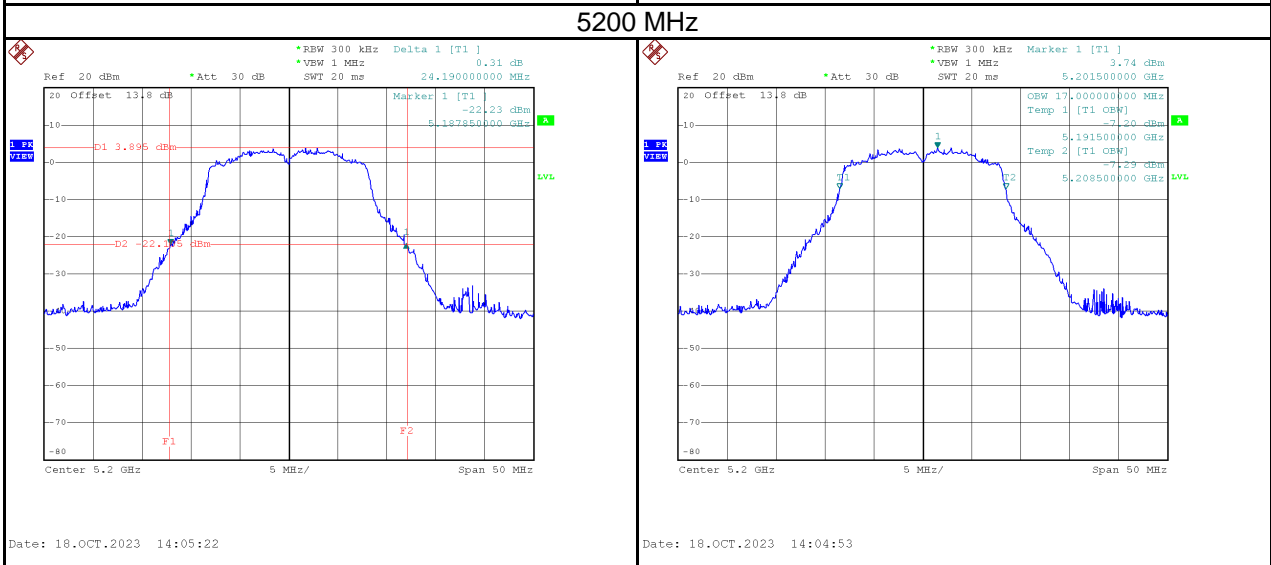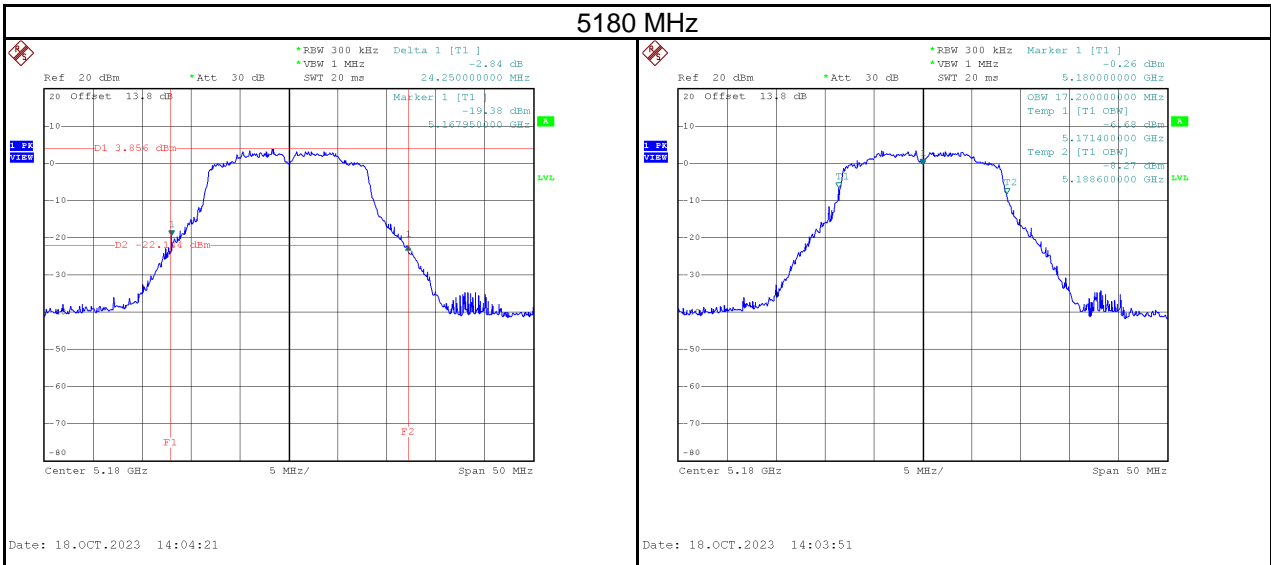

## 5240 MHz

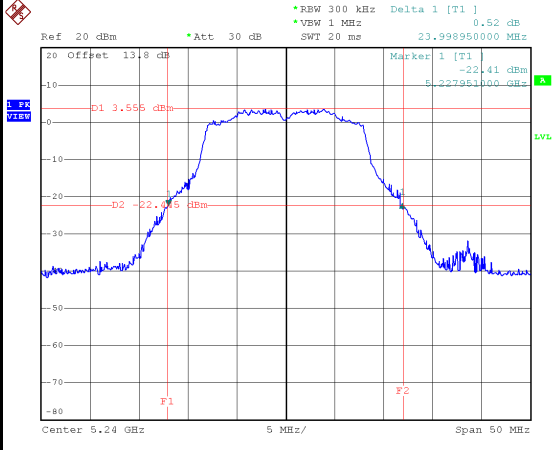



Date: 18.OCT.2023 14:06:28

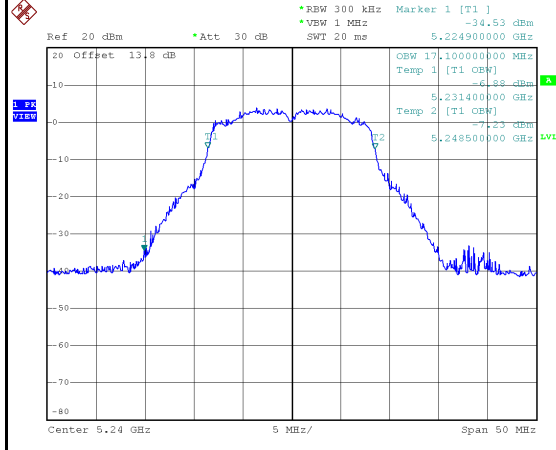



Date: 18.OCT.2023 14:05:57

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	24.50	17.20	No limit
5300	26.90	17.40	No limit
5320	24.60	17.00	No limit


### 5260 MHz

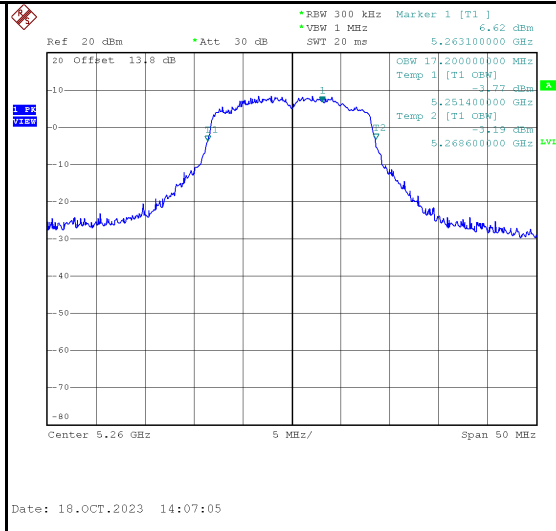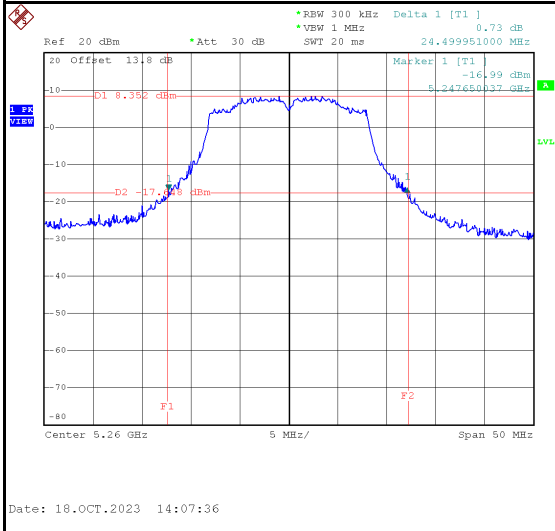


### 5300 MHz

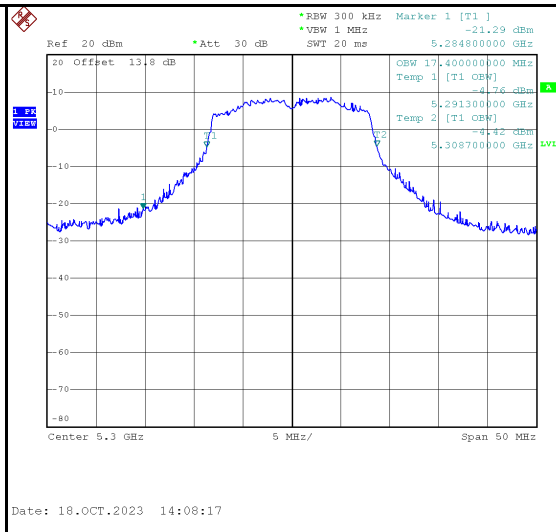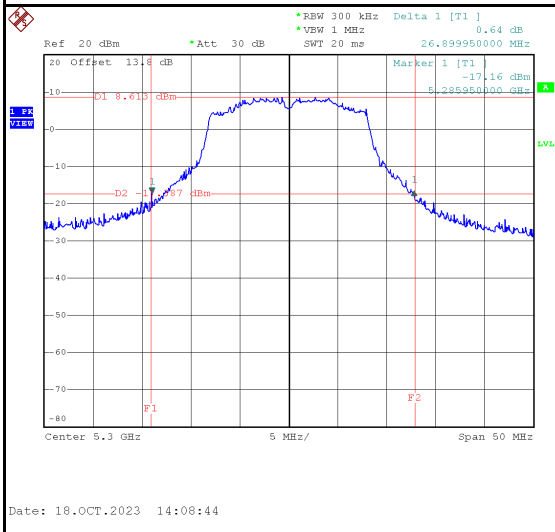

## 5320 MHz

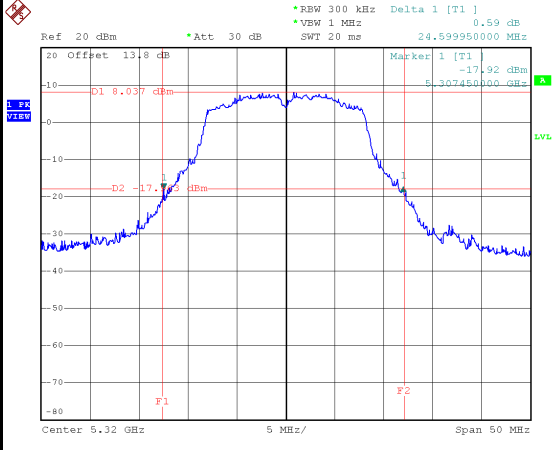



Date: 18.OCT.2023 14:09:52

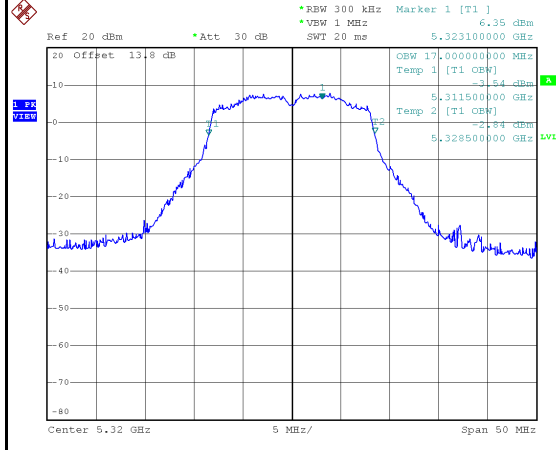



Date: 18.OCT.2023 14:09:23

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	24.41	17.40	No limit
5580	30.29	19.00	No limit
5700	27.25	18.10	No limit


### 5500 MHz

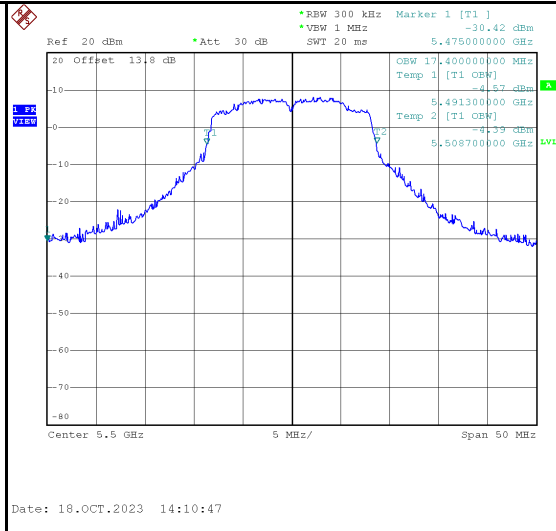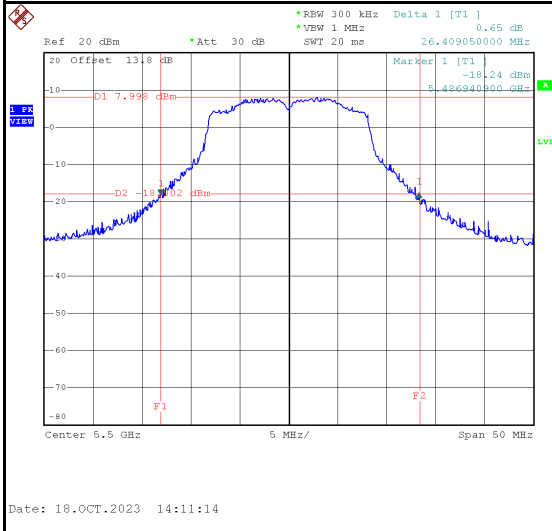


### 5580 MHz

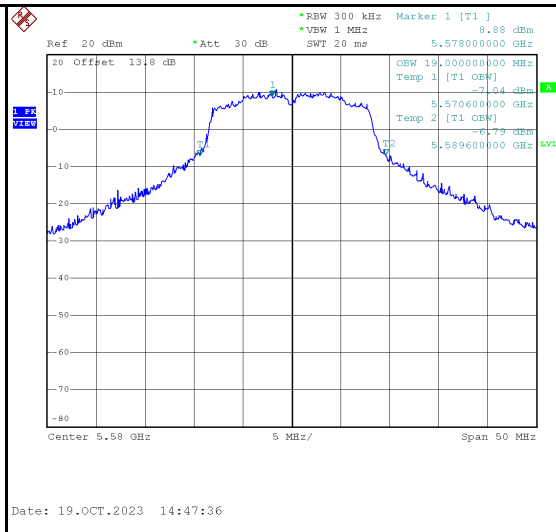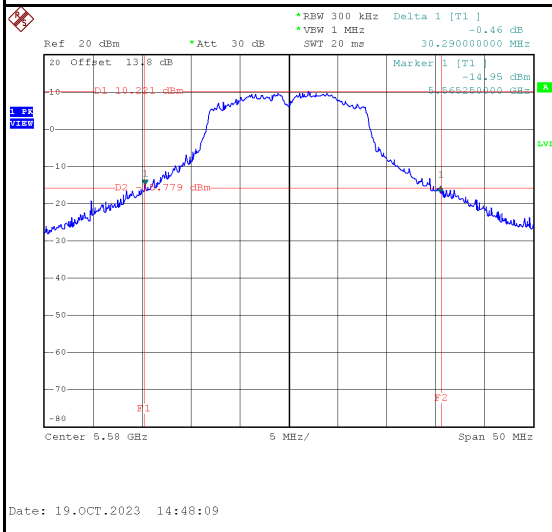

## 5700 MHz

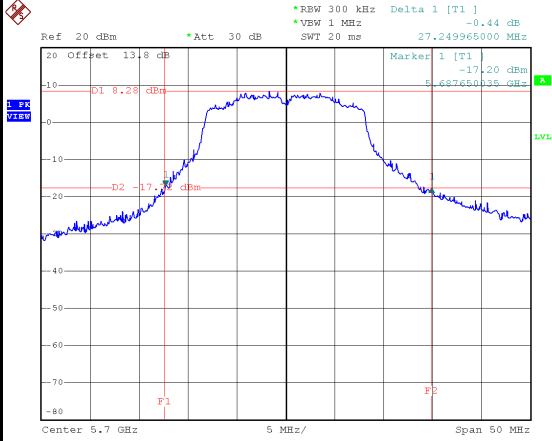


Date: 18.OCT.2023 14:14:41

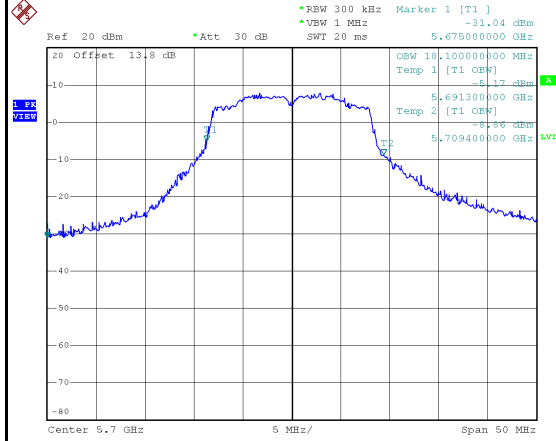


Date: 18.OCT.2023 14:14:15

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	15.10	17.80	500	Pass
5785	15.30	18.00	500	Pass
5825	15.19	17.60	500	Pass

### 5745 MHz

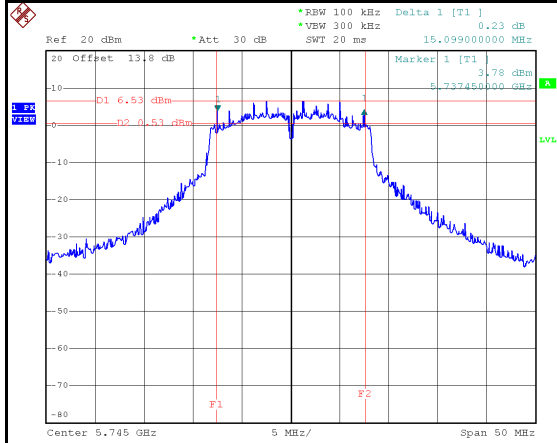


Date: 18.OCT.2023 14:16:00

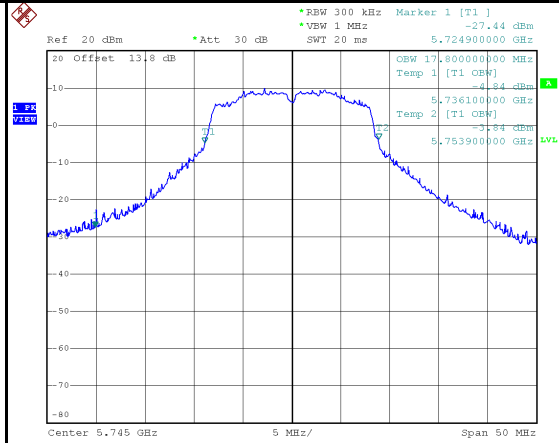


Date: 18.OCT.2023 14:15:21

### 5785 MHz

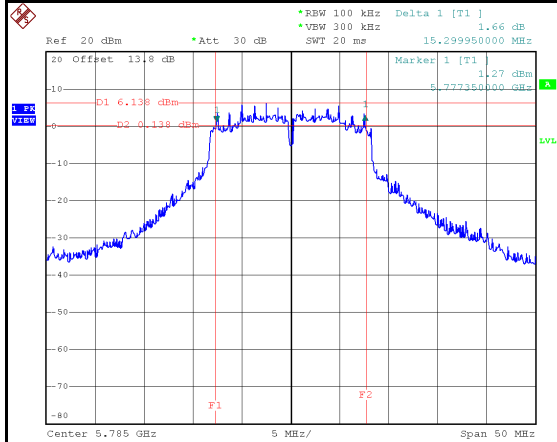


Date: 18.OCT.2023 14:26:59

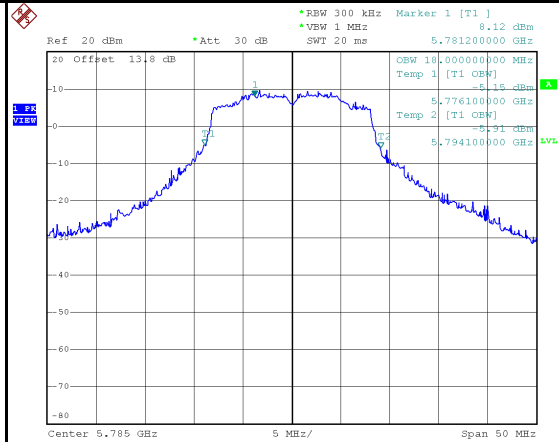


Date: 18.OCT.2023 14:26:19



## 5825 MHz

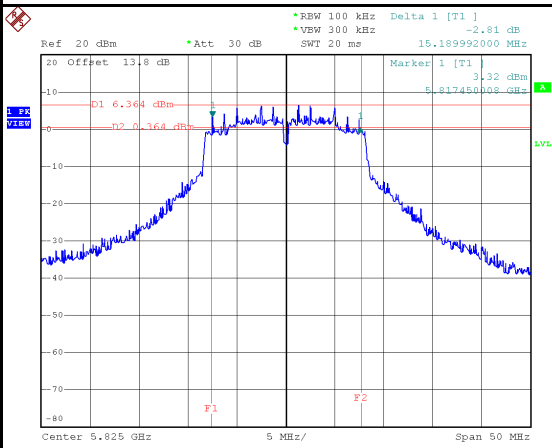



Date: 18.OCT.2023 14:29:06

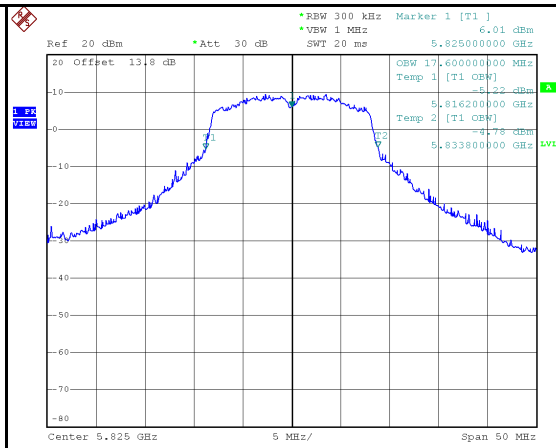


Date: 18.OCT.2023 14:28:28

Test Mode	IEEE 802.11n (HT20)_Antenna 1
-----------	-------------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	24.49	18.10	No limit
5200	25.10	18.10	No limit
5240	24.90	18.10	No limit

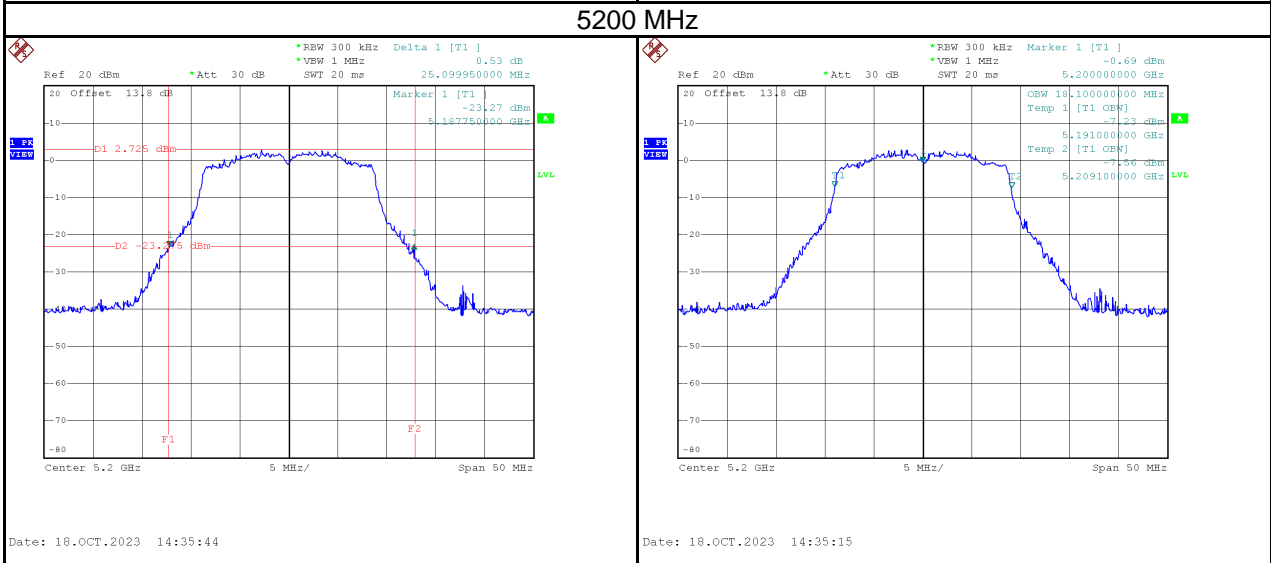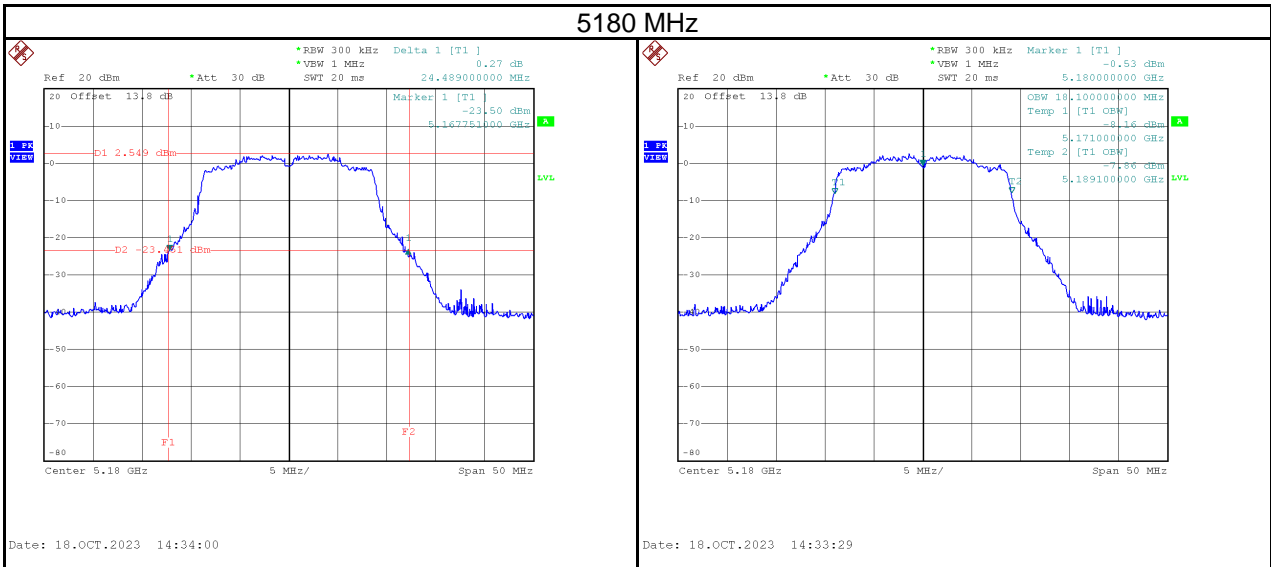

## 5240 MHz

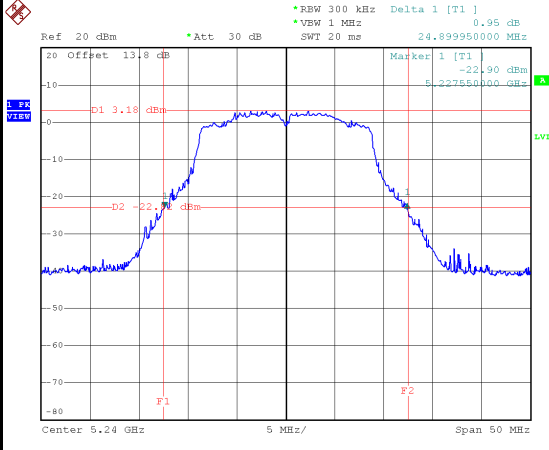



Date: 18.OCT.2023 14:37:31

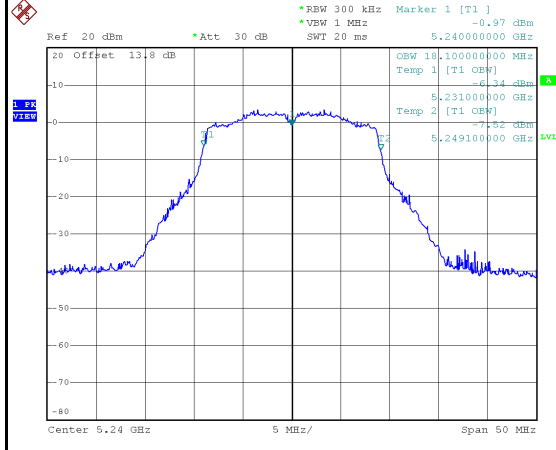



Date: 18.OCT.2023 14:37:02

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	26.85	18.30	No limit
5300	30.61	19.20	No limit
5320	24.19	18.10	No limit


### 5260 MHz

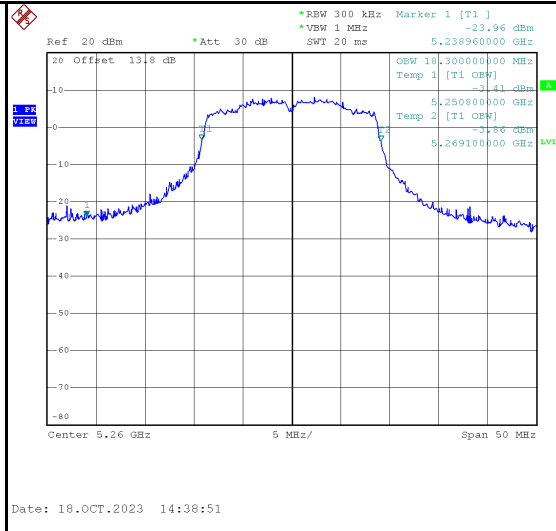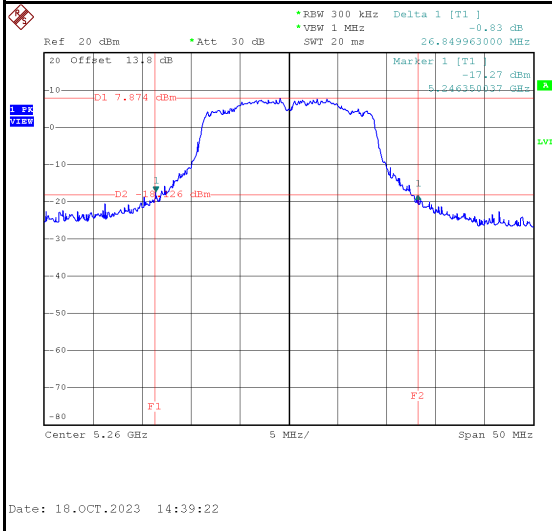


### 5300 MHz

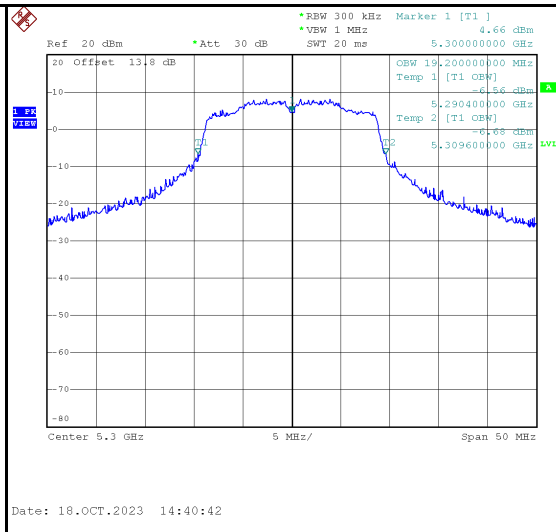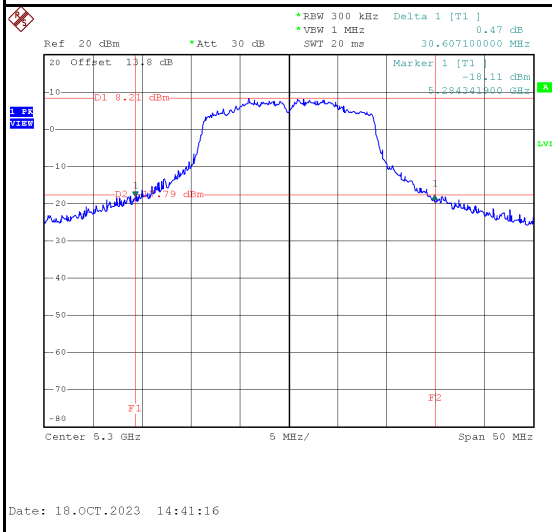

## 5320 MHz

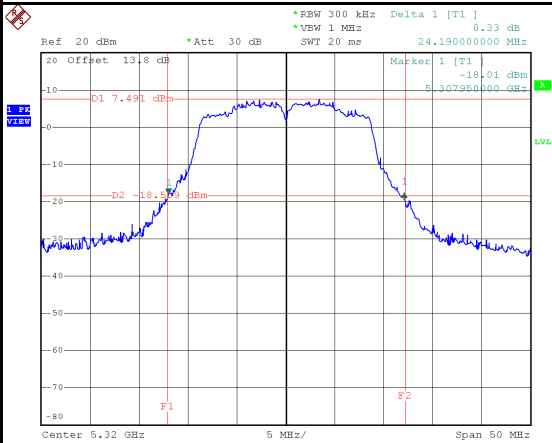



Date: 18.OCT.2023 14:43:56

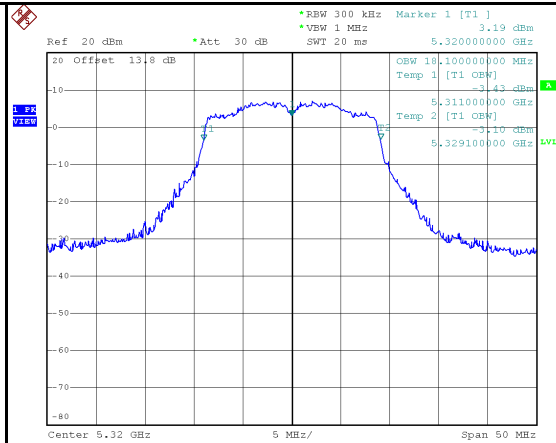

Date: 18.OCT.2023 14:43:25

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	26.75	18.30	No limit
5580	27.89	20.00	No limit
5700	30.29	19.20	No limit



### 5500 MHz

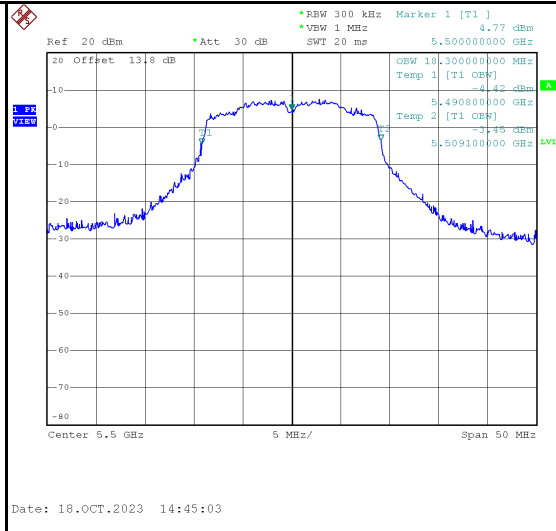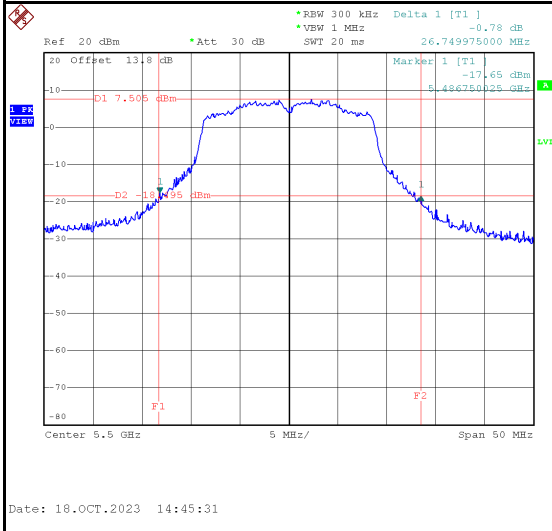

Date: 18.OCT.2023 14:45:31

Date: 18.OCT.2023 14:45:03


### 5580 MHz

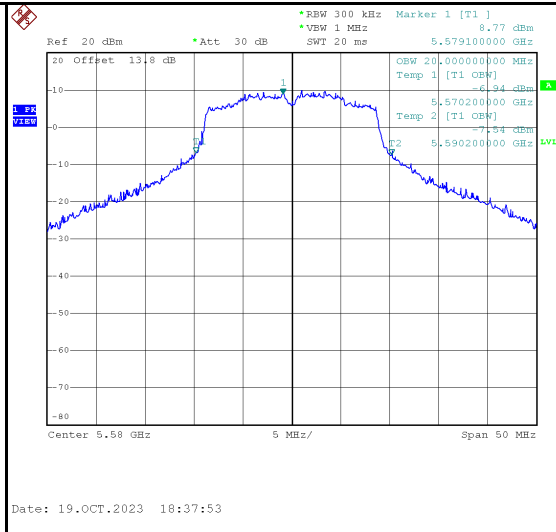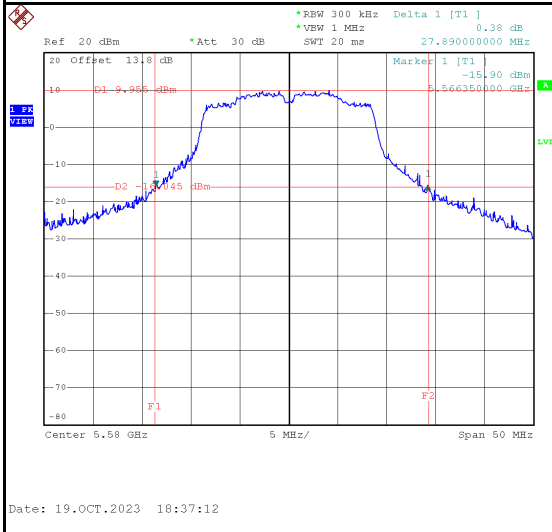


Date: 19.OCT.2023 18:37:12

Date: 19.OCT.2023 18:37:53

## 5700 MHz

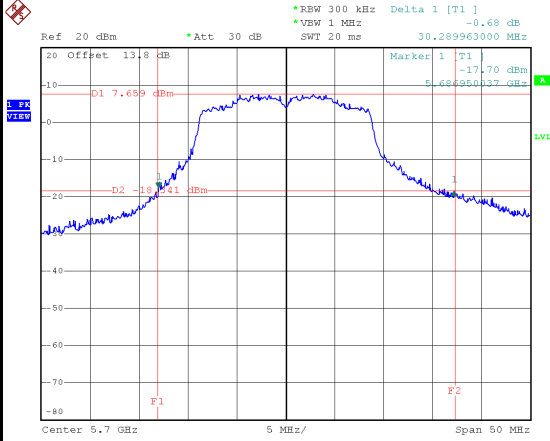


Date: 18.OCT.2023 14:52:39

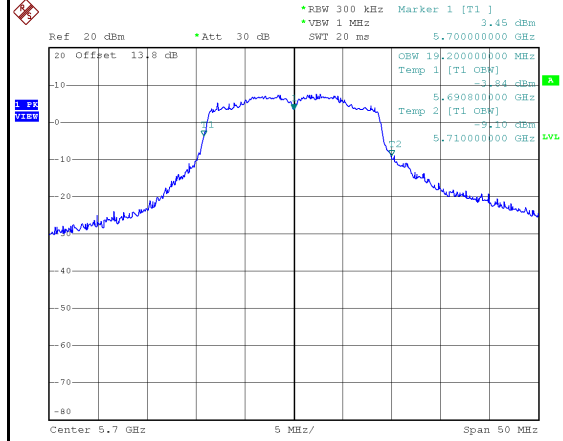


Date: 18.OCT.2023 14:52:12

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	16.15	19.20	500	Pass
5785	15.19	18.90	500	Pass
5825	15.20	18.50	500	Pass

### 5745 MHz

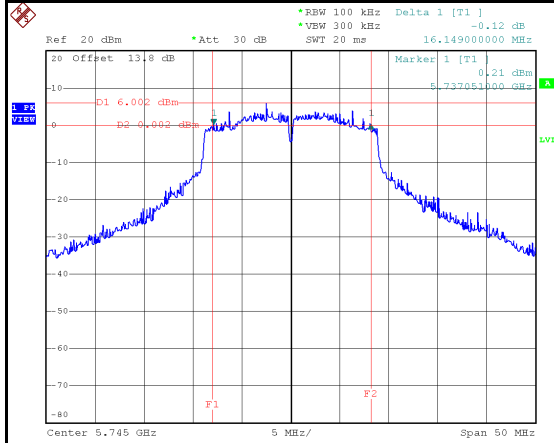


Date: 18.OCT.2023 14:55:33

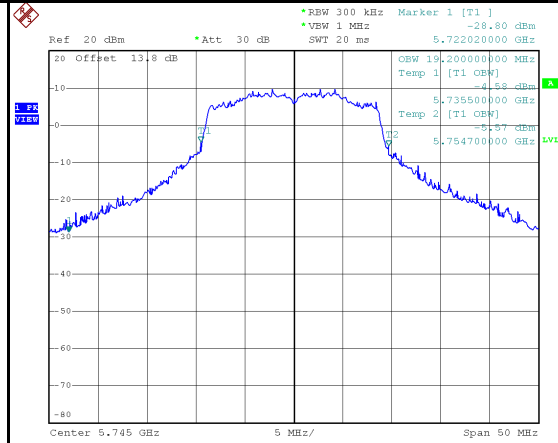


Date: 18.OCT.2023 14:54:55

### 5785 MHz

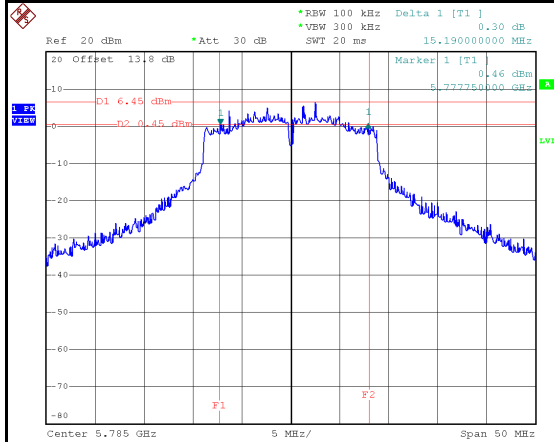


Date: 18.OCT.2023 15:00:12

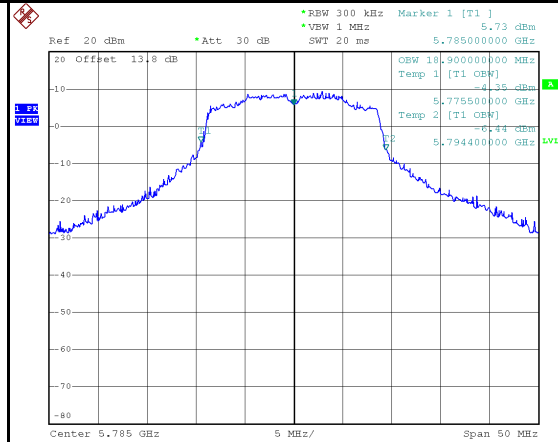


Date: 18.OCT.2023 14:59:32



## 5825 MHz

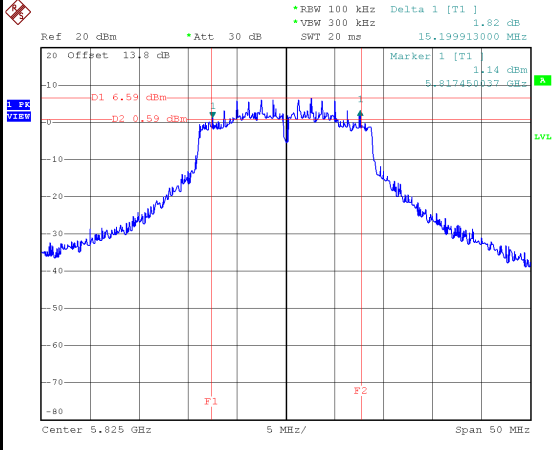

Date: 18.OCT.2023 15:03:40

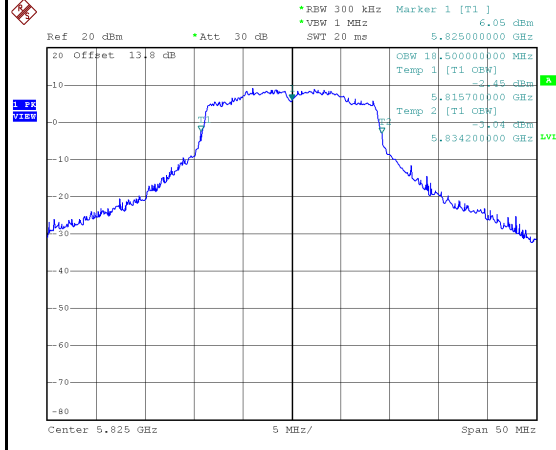


Date: 18.OCT.2023 15:03:00


Test Mode	IEEE 802.11n (HT40)_Antenna 1
-----------	-------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	42.99	36.60	No limit
5230	43.50	36.40	No limit

### 5190 MHz

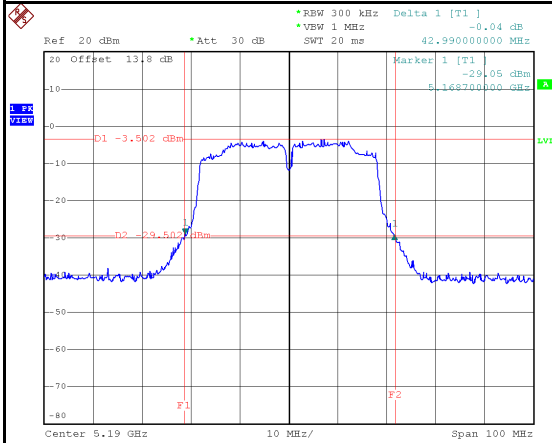


Date: 18.OCT.2023 15:44:36

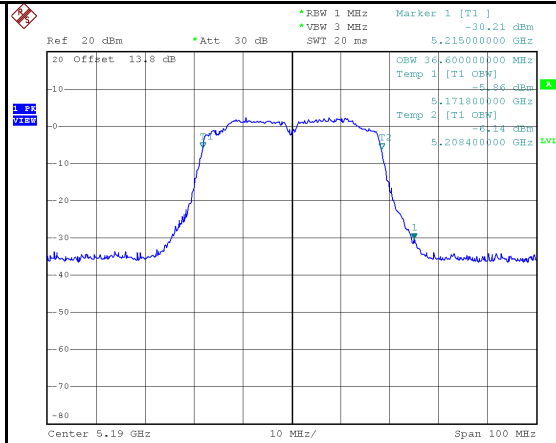


Date: 18.OCT.2023 15:44:01

### 5230 MHz

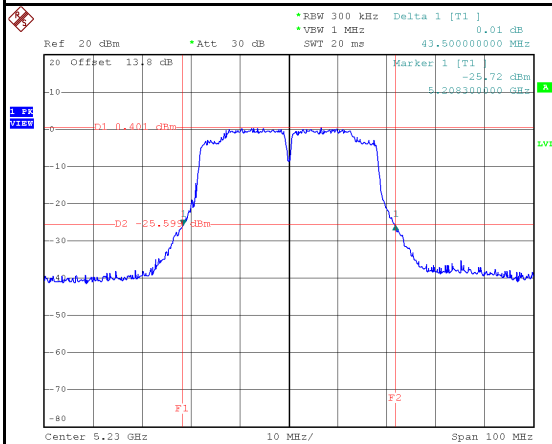



Date: 18.OCT.2023 15:45:47

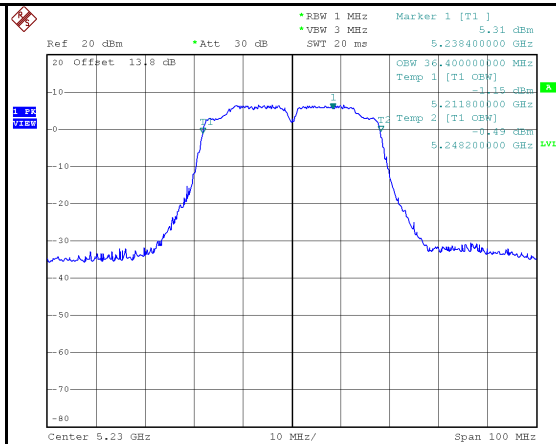



Date: 18.OCT.2023 15:45:15

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	42.90	36.60	No limit
5310	43.20	36.60	No limit

### 5270 MHz

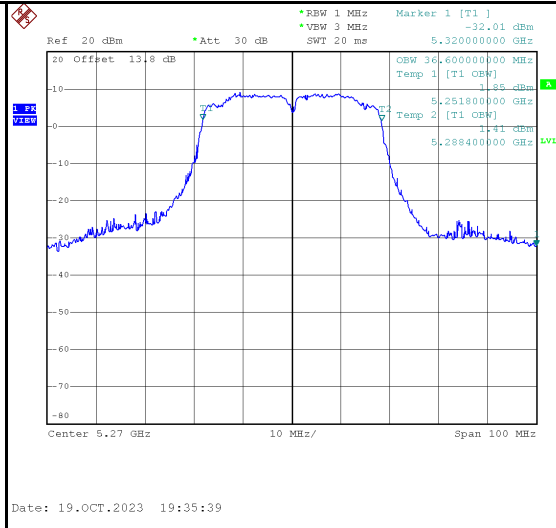
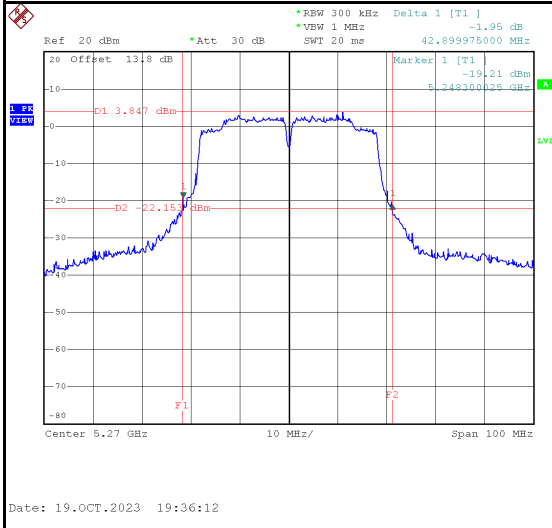


### 5310 MHz

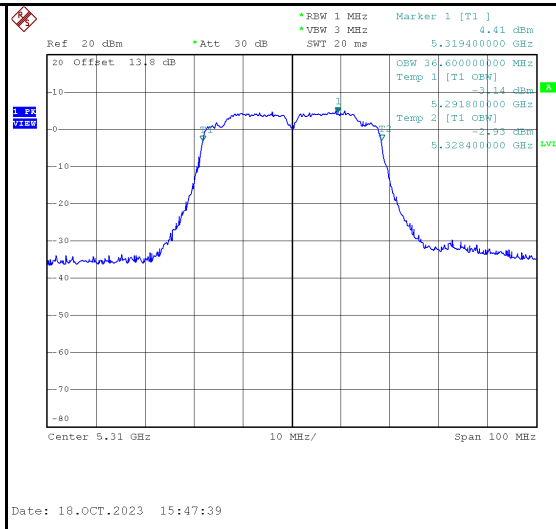
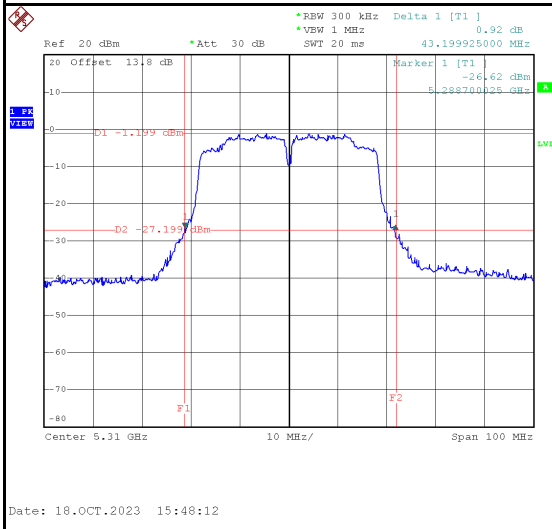


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	43.00	36.60	No limit
5670	45.00	37.00	No limit

### 5510 MHz

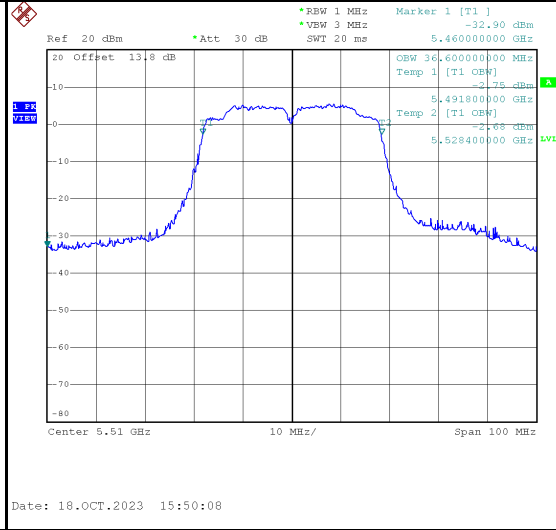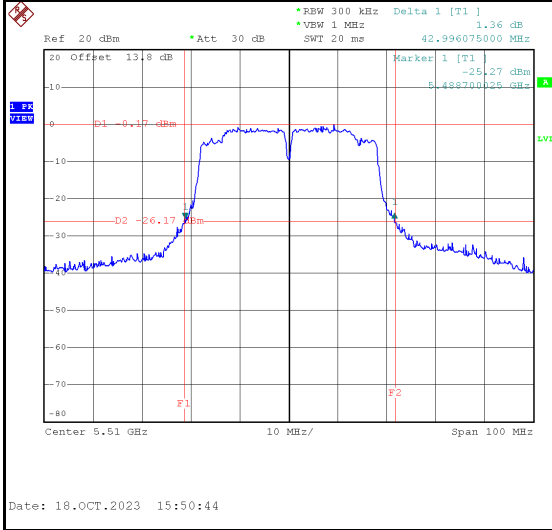


### 5670 MHz

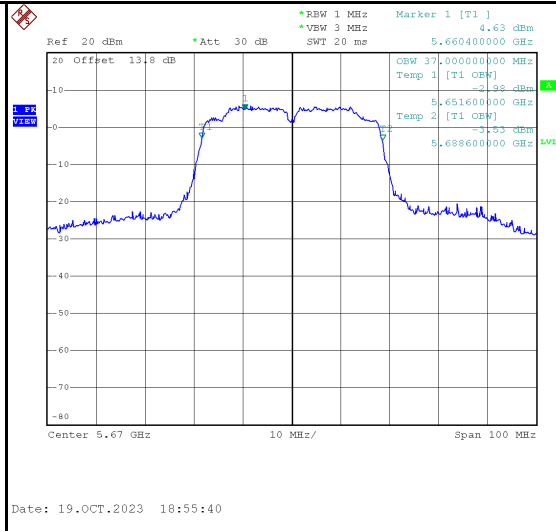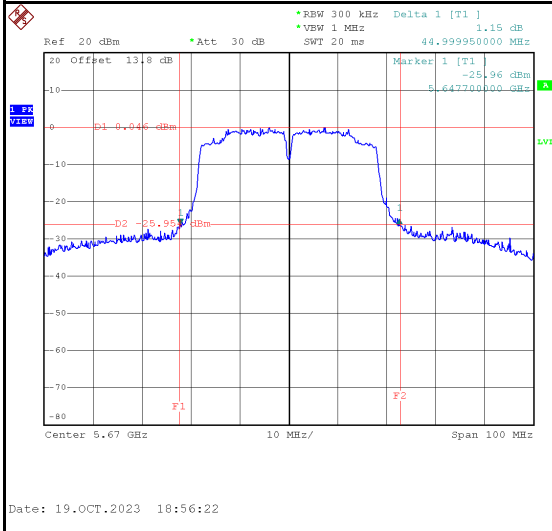


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	32.00	40.60	500	Pass
5795	35.00	40.60	500	Pass

### 5755 MHz

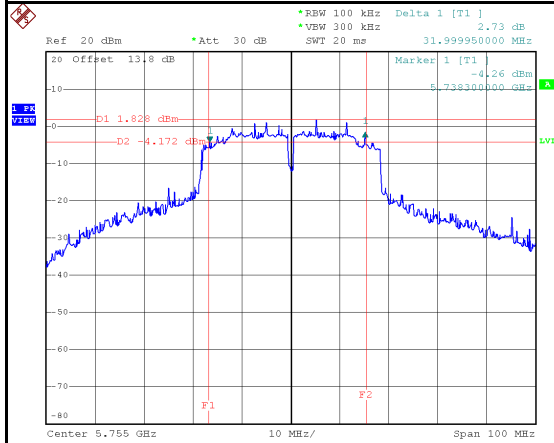


Date: 19.OCT.2023 19:32:05

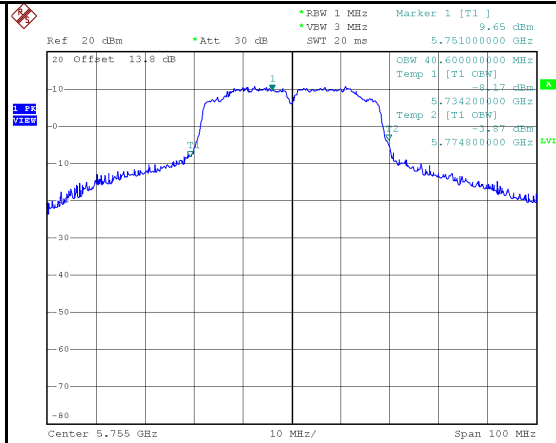


Date: 19.OCT.2023 19:31:16

### 5795 MHz

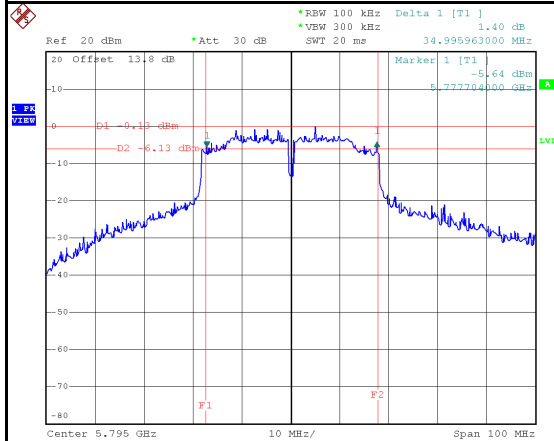


Date: 18.OCT.2023 15:55:36

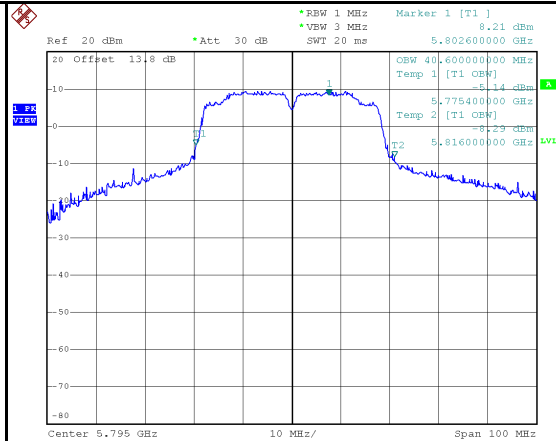


Date: 18.OCT.2023 15:54:56

Test Mode	IEEE 802.11ac (VHT80)_Antenna 1
-----------	---------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	85.60	75.60	No limit


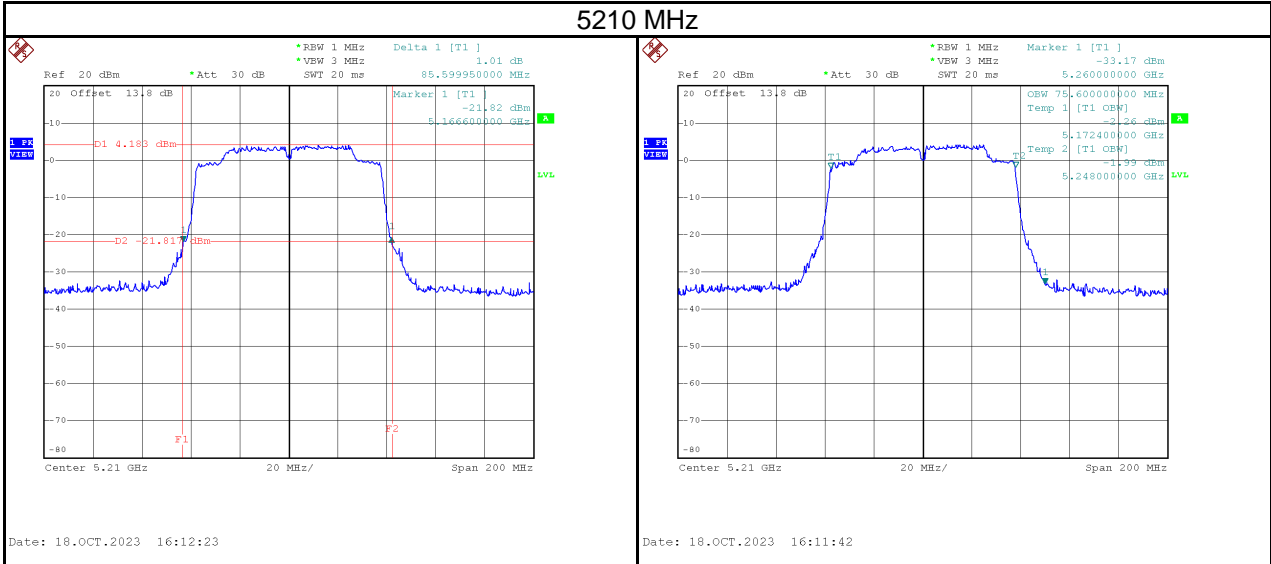


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	83.21	75.20	No limit


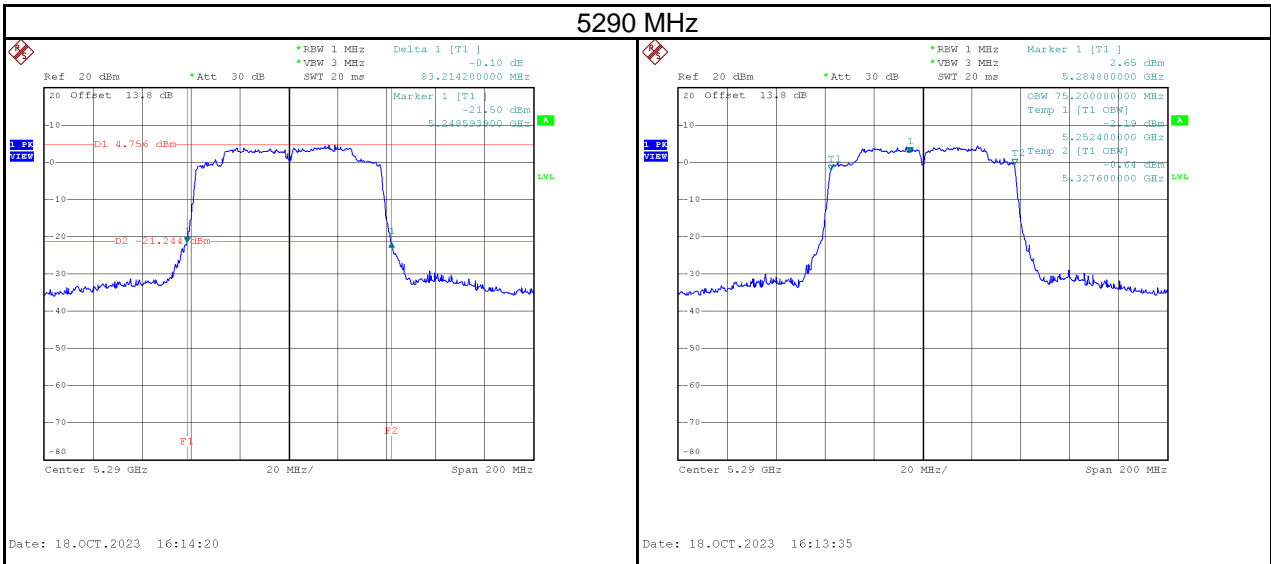


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	91.19	75.60	No limit
5610	93.19	75.60	No limit


### 5530 MHz

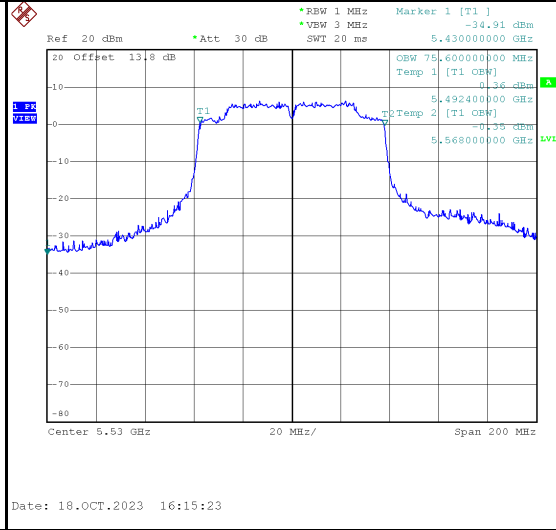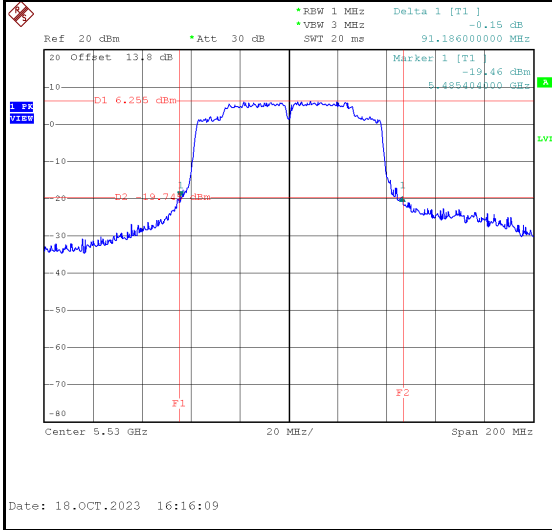

### 5610 MHz

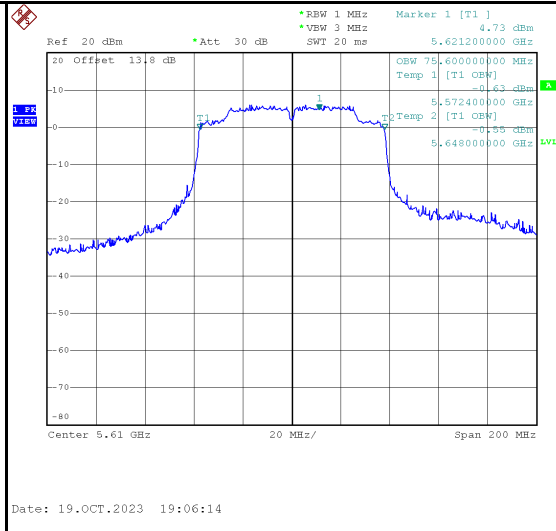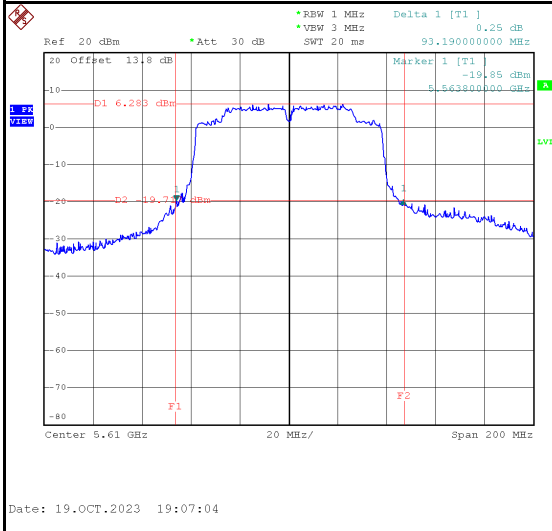


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	73.00	76.00	500	Pass

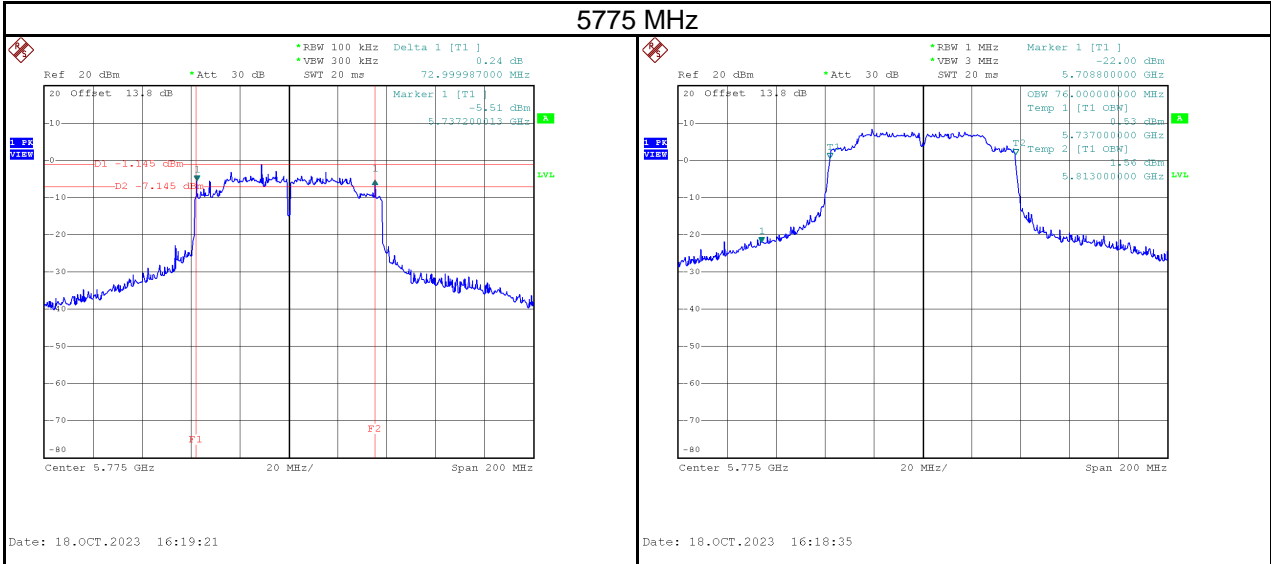




Test Mode	IEEE 802.11ac (VHT160)_Antenna 1
-----------	----------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5250	165.60	154.40	No limit


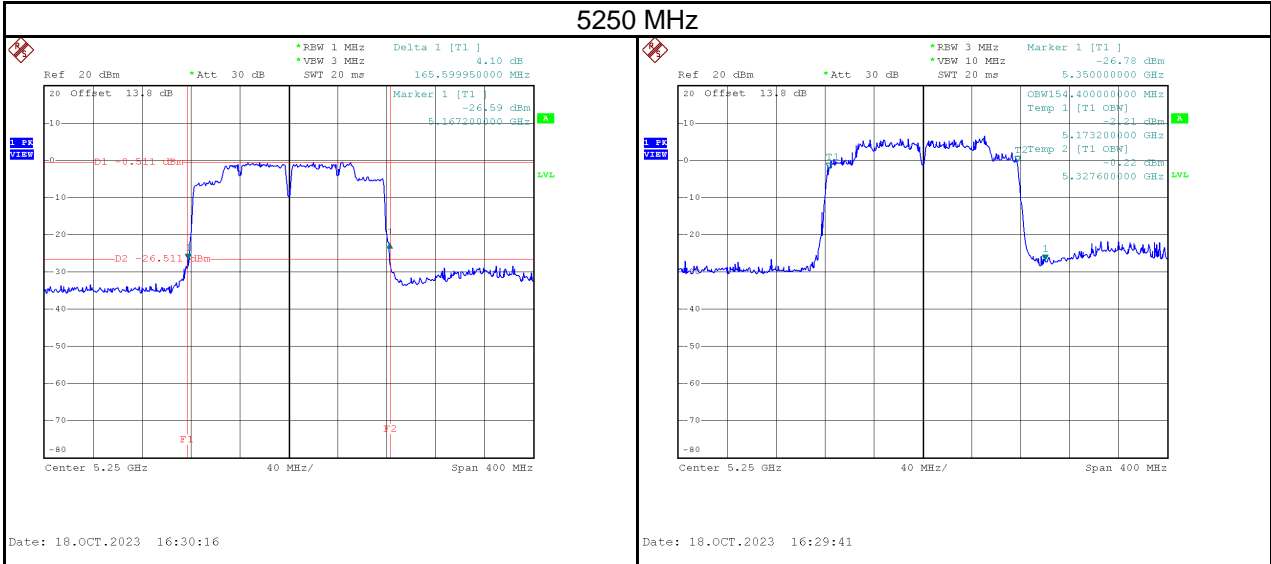


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5570	163.60	154.40	No limit

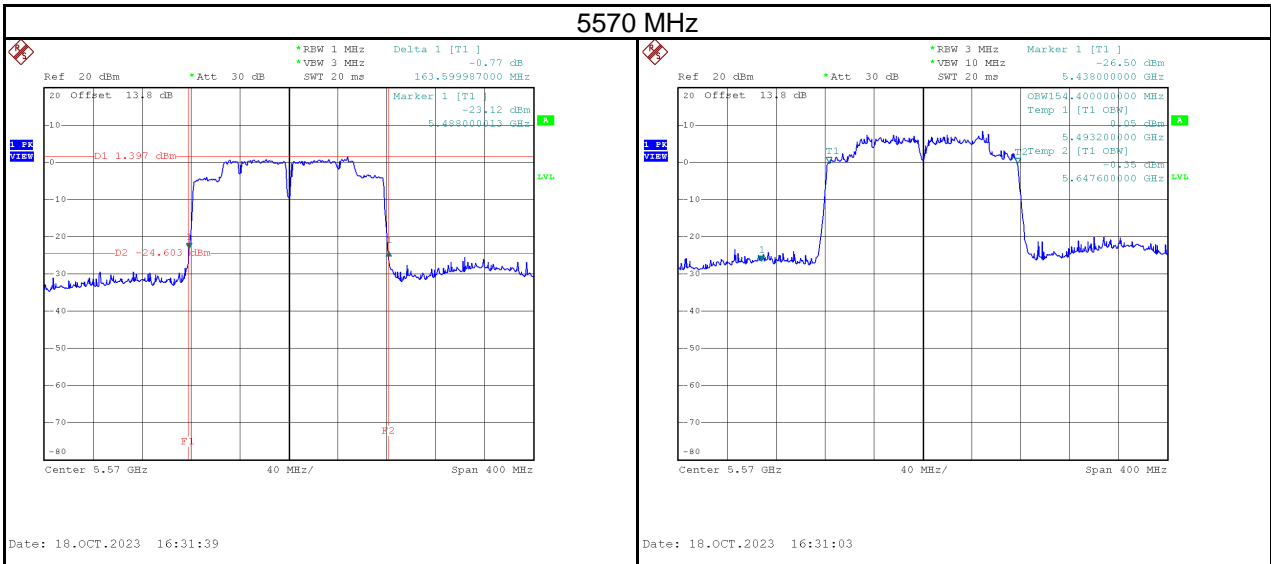


Test Mode	IEEE 802.11ax (HE20)_Antenna 1
-----------	--------------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	24.45	19.00	No limit
5200	23.89	19.10	No limit
5240	24.45	19.10	No limit

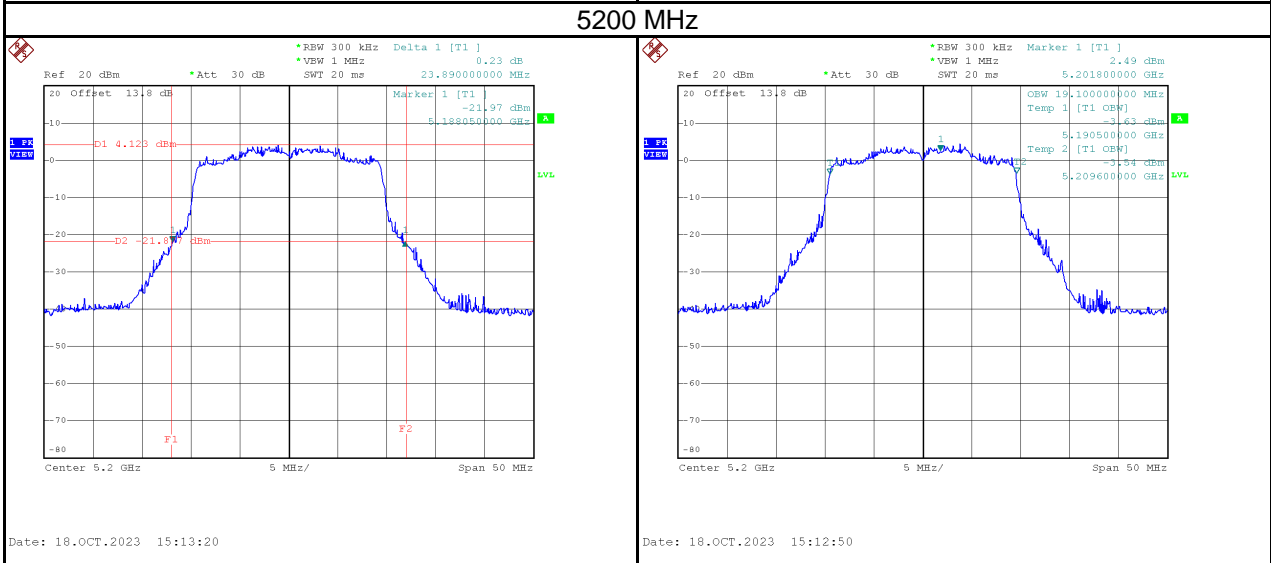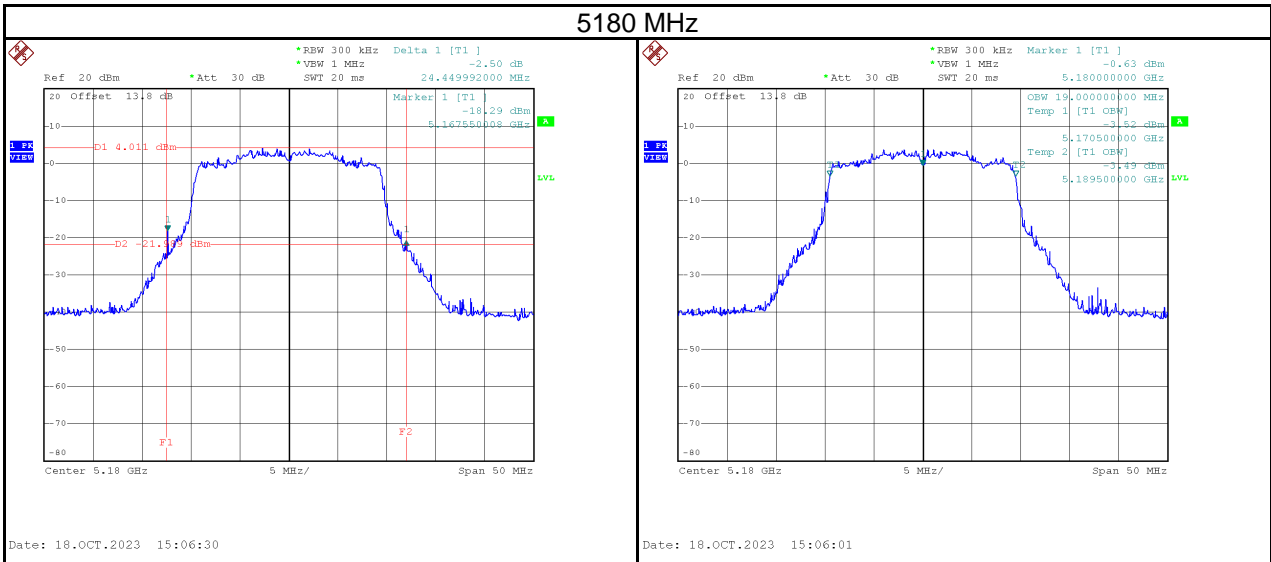

## 5240 MHz

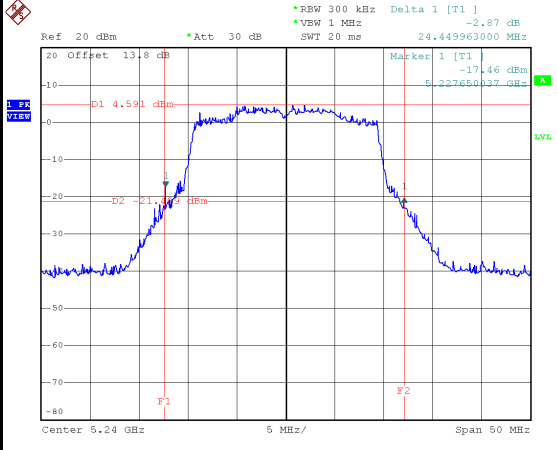



Date: 18.OCT.2023 15:15:16

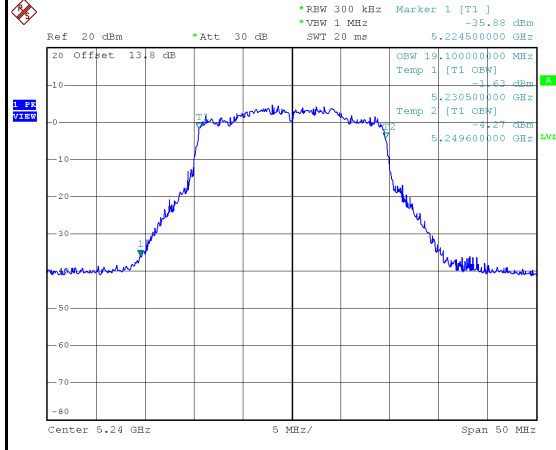



Date: 18.OCT.2023 15:14:44

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	25.31	19.20	No limit
5300	26.75	19.20	No limit
5320	24.55	19.10	No limit


### 5260 MHz

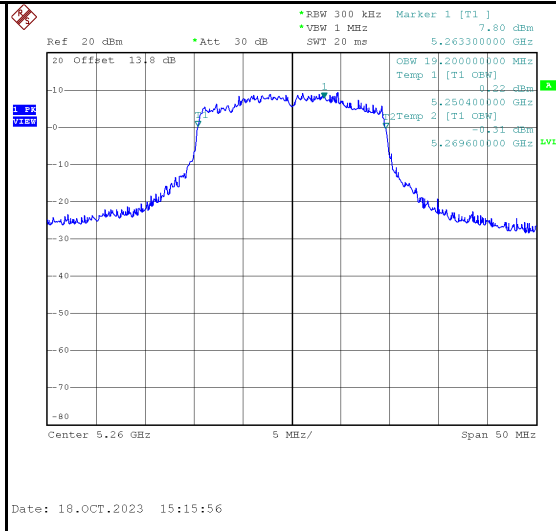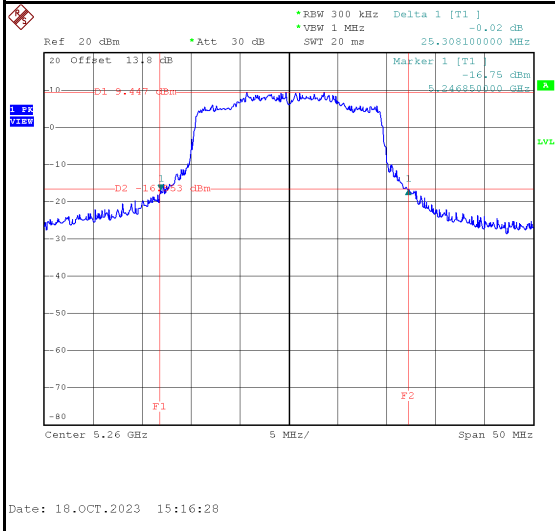


### 5300 MHz

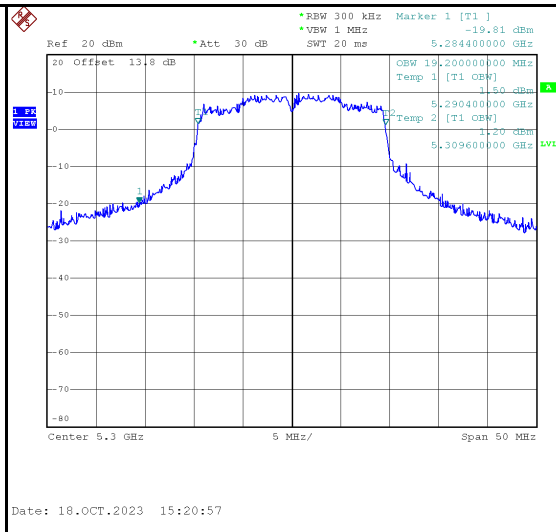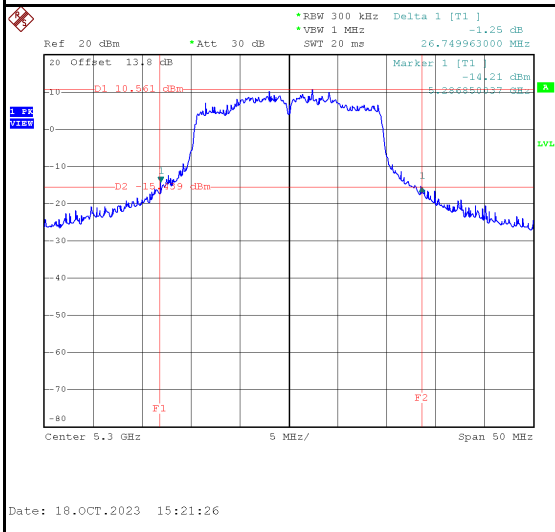

## 5320 MHz

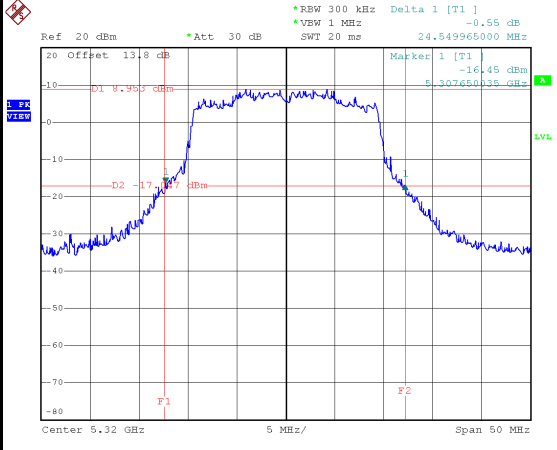



Date: 18.OCT.2023 15:22:36

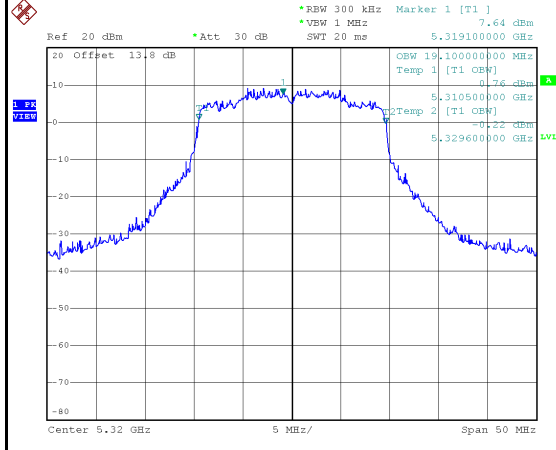



Date: 18.OCT.2023 15:22:07

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	26.39	19.20	No limit
5580	23.40	19.10	No limit
5700	29.70	19.80	No limit


### 5500 MHz

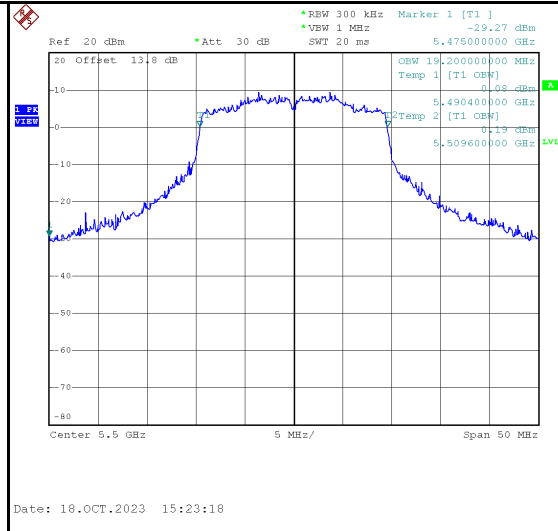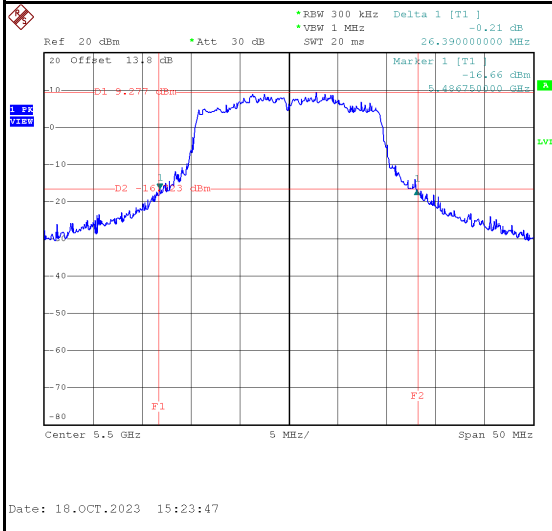


### 5580 MHz

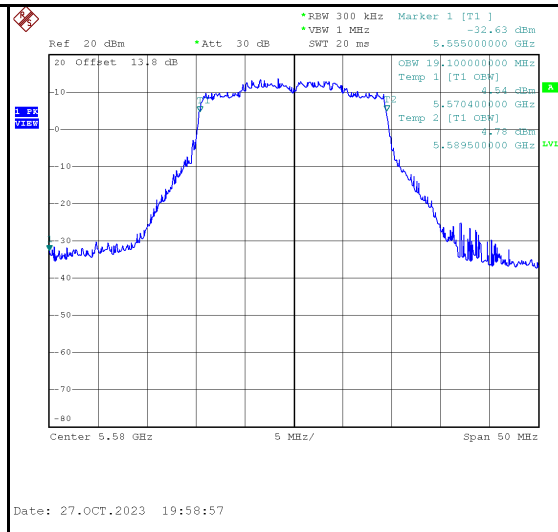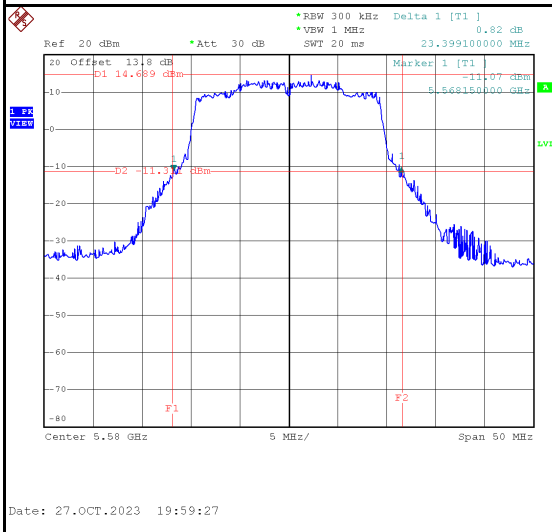

## 5700 MHz

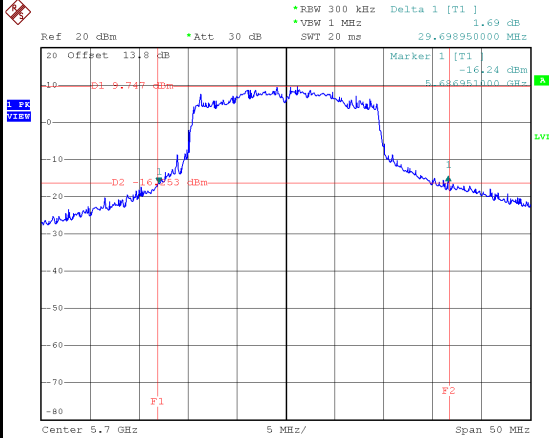



Date: 18.OCT.2023 15:25:57

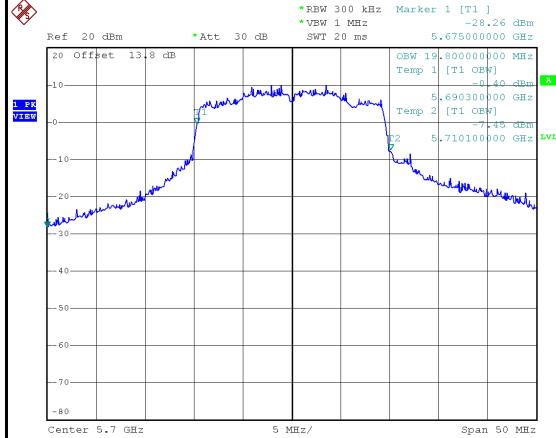



Date: 18.OCT.2023 15:25:29

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	16.75	19.30	500	Pass
5785	15.20	19.40	500	Pass
5825	15.09	19.20	500	Pass

### 5745 MHz

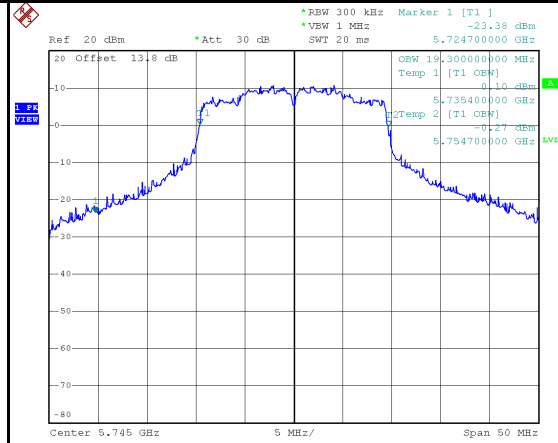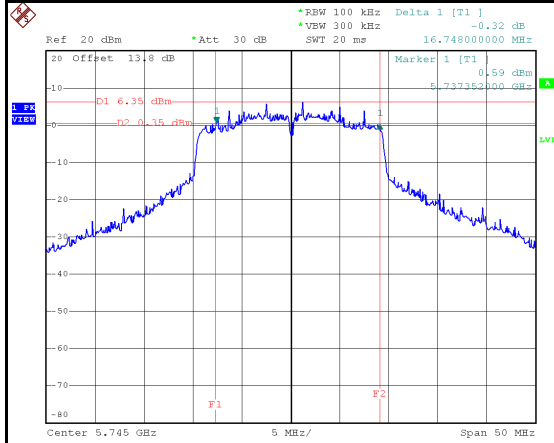


### 5785 MHz

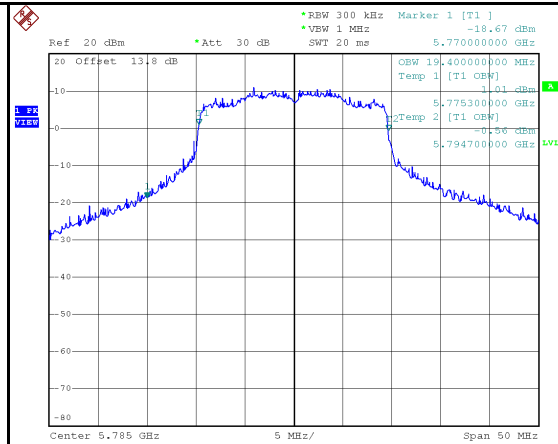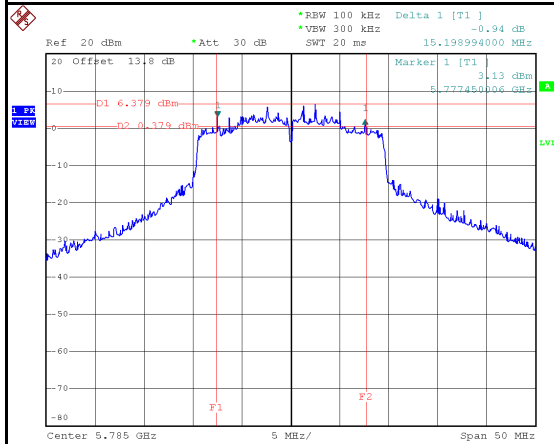




## 5825 MHz

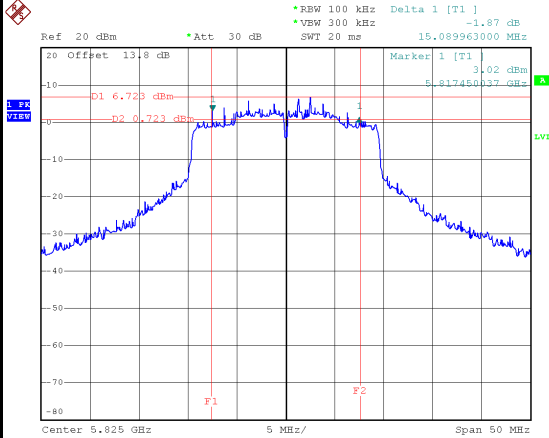



Date: 18.OCT.2023 15:40:22

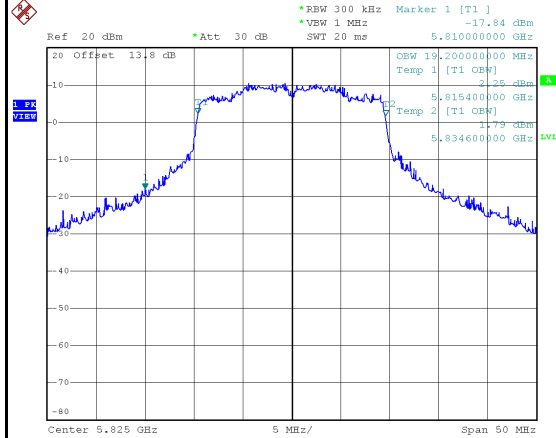

Date: 18.OCT.2023 15:39:40



Test Mode	IEEE 802.11ax (HE40)_Antenna 1
-----------	--------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5190	42.99	38.00	No limit
5230	42.50	38.00	No limit

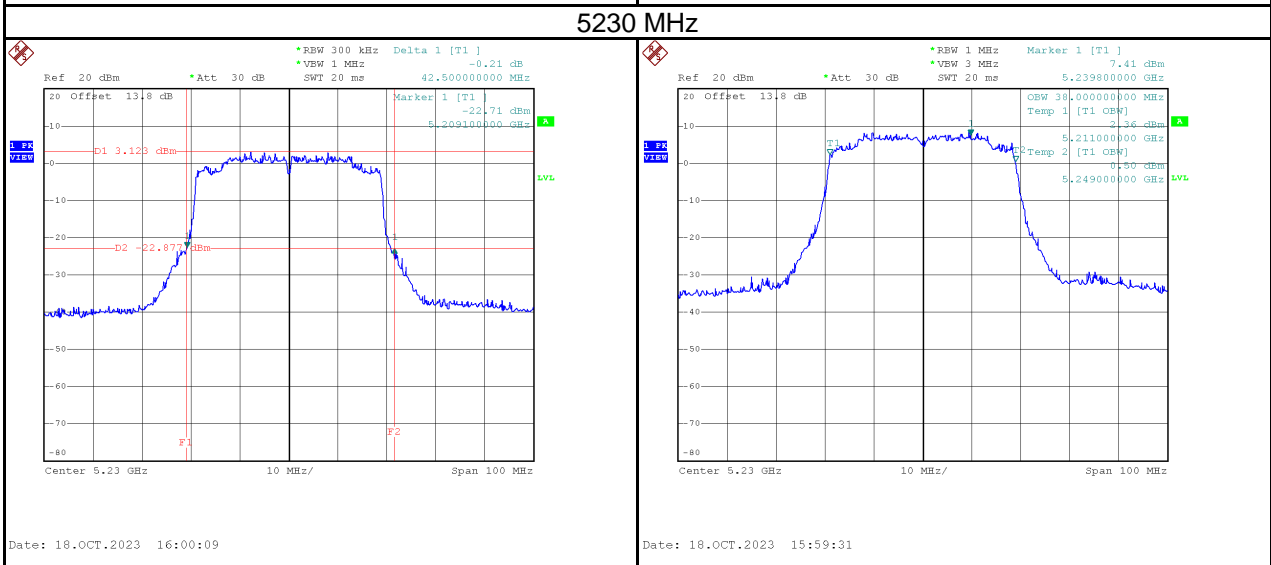
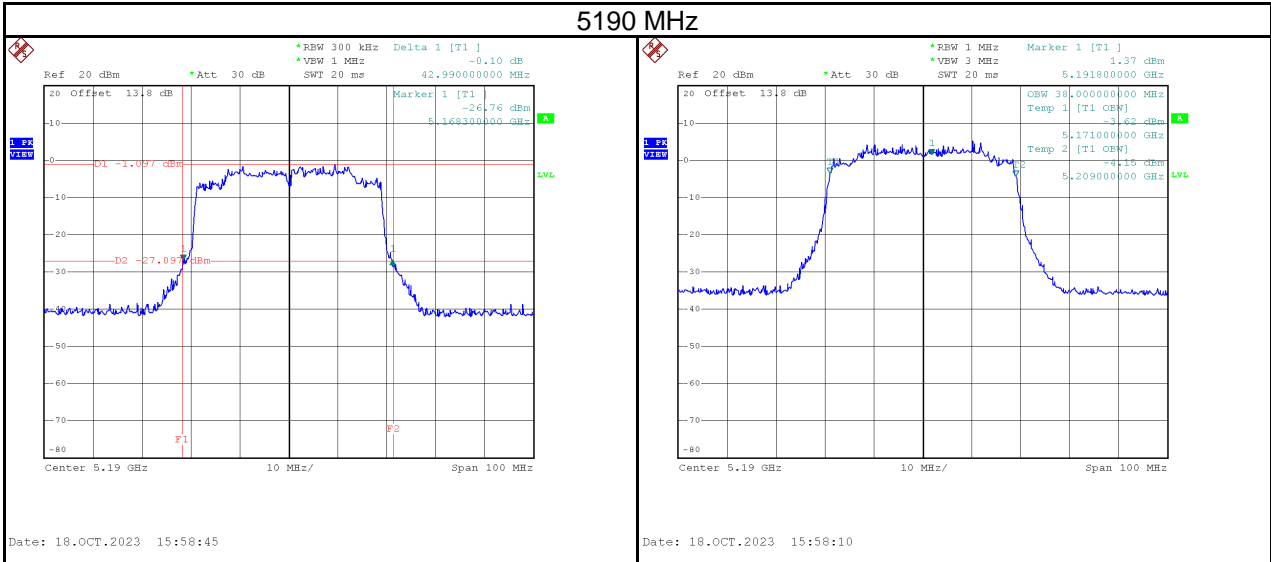


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5270	42.99	38.00	No limit
5310	42.50	37.80	No limit

### 5270 MHz

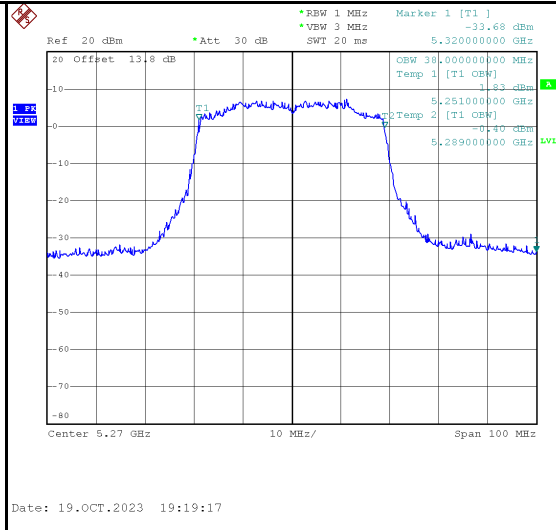
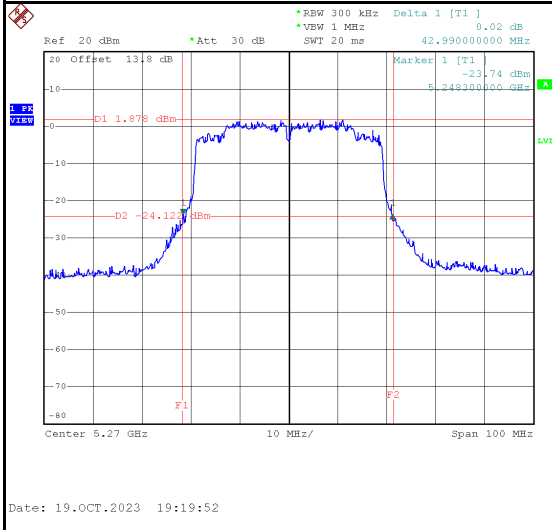


### 5310 MHz

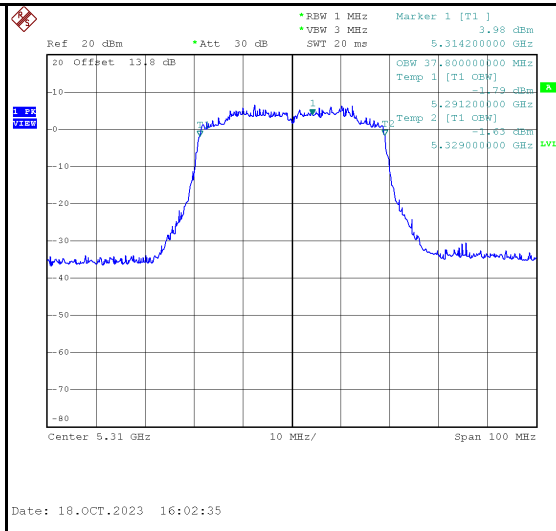
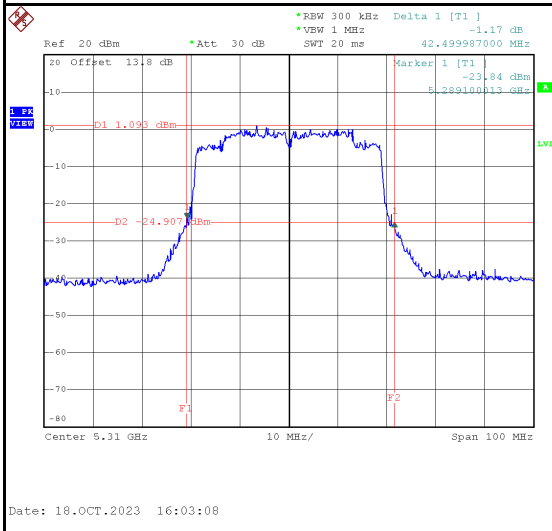


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5510	43.00	37.80	No limit
5670	48.79	38.20	No limit

### 5510 MHz

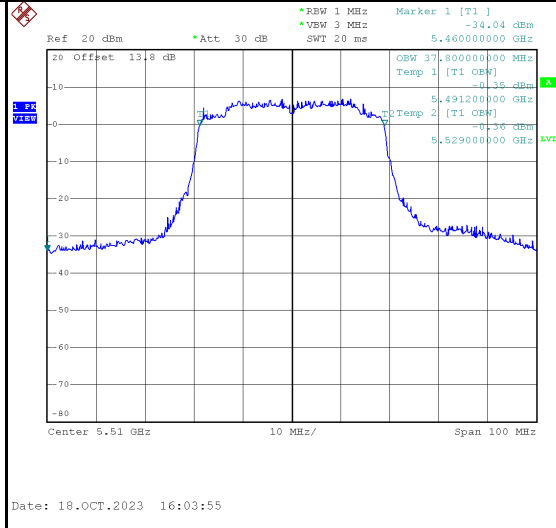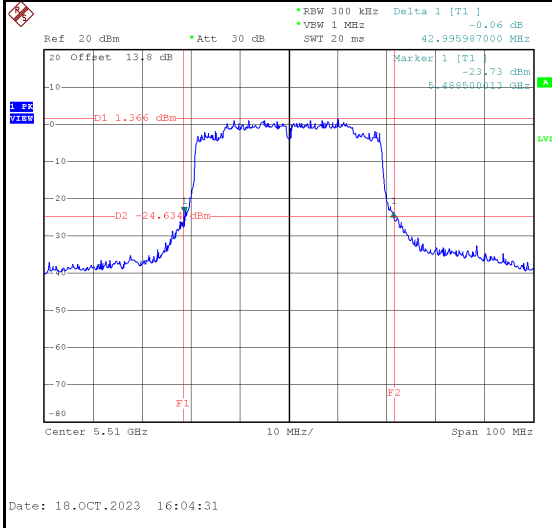


### 5670 MHz

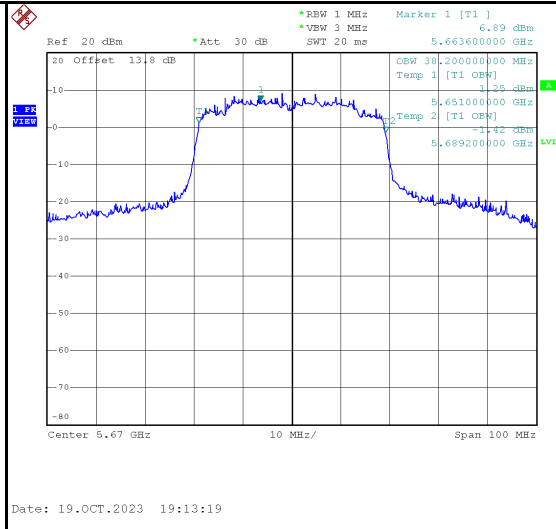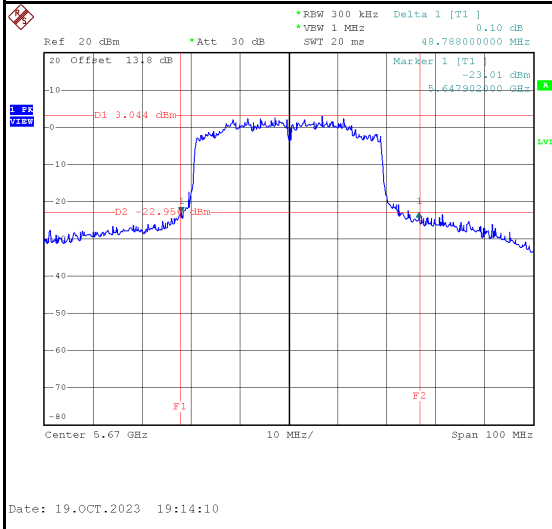


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	35.60	38.20	500	Pass
5795	35.60	39.20	500	Pass

### 5755 MHz

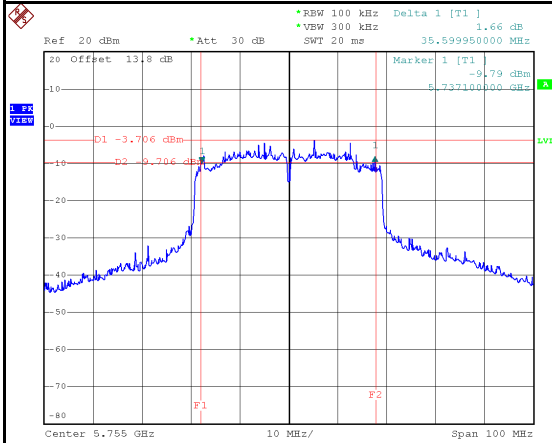


Date: 18.OCT.2023 16:07:53

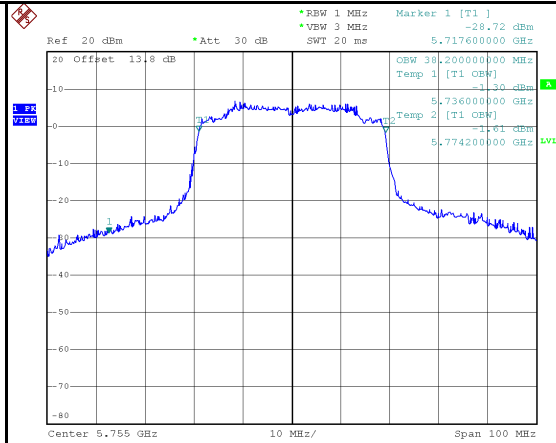


Date: 18.OCT.2023 16:07:16

### 5795 MHz

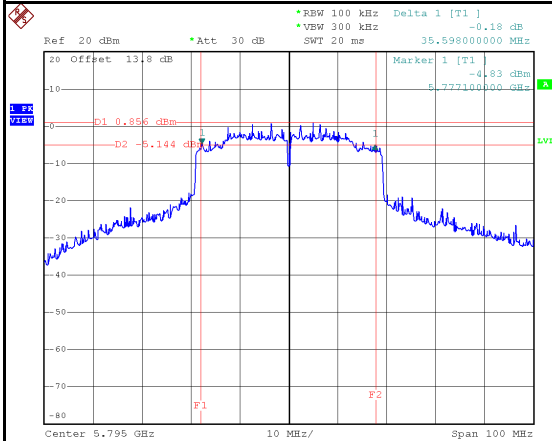


Date: 19.OCT.2023 19:26:37

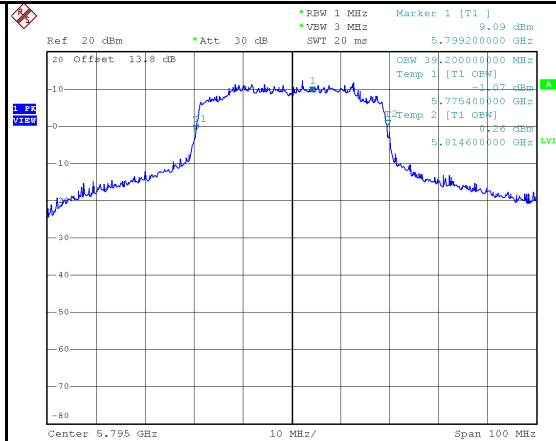


Date: 19.OCT.2023 19:25:56

Test Mode	IEEE 802.11ax (HE80)_Antenna 1
-----------	--------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	84.20	76.80	No limit


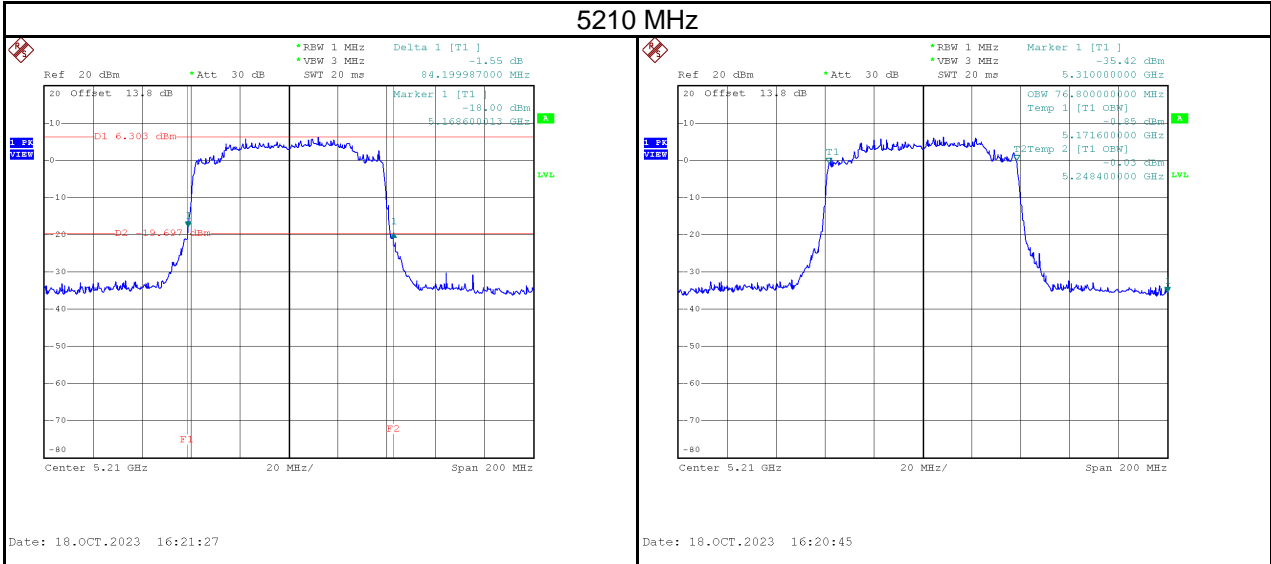


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	83.40	77.20	No limit


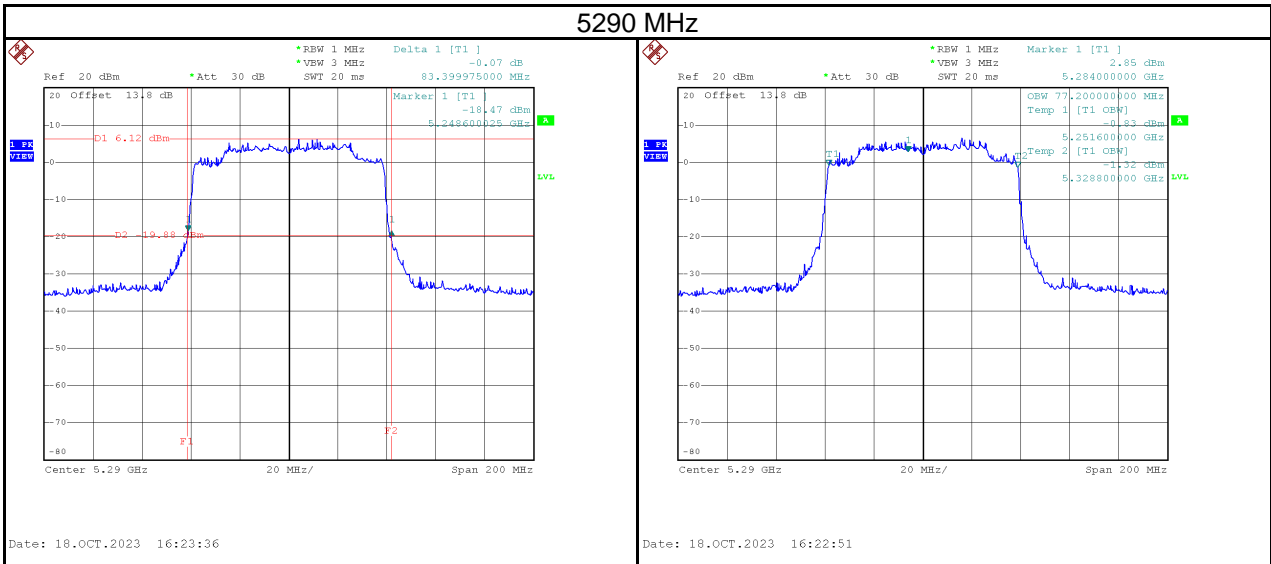


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	86.20	77.20	No limit
5610	86.00	77.20	No limit


### 5530 MHz

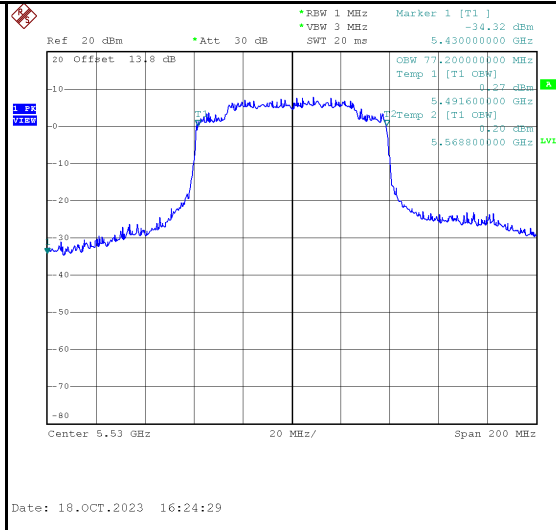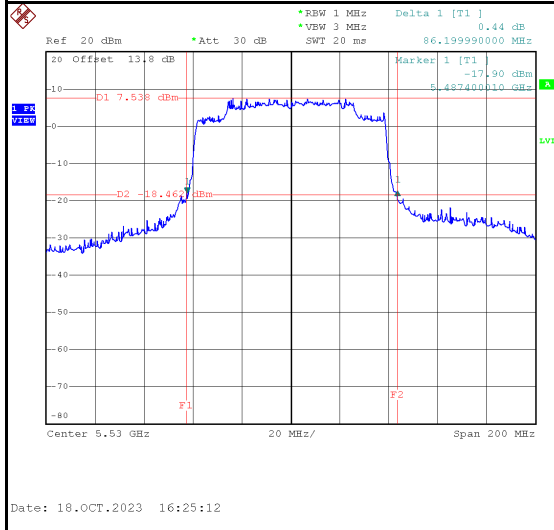

### 5610 MHz

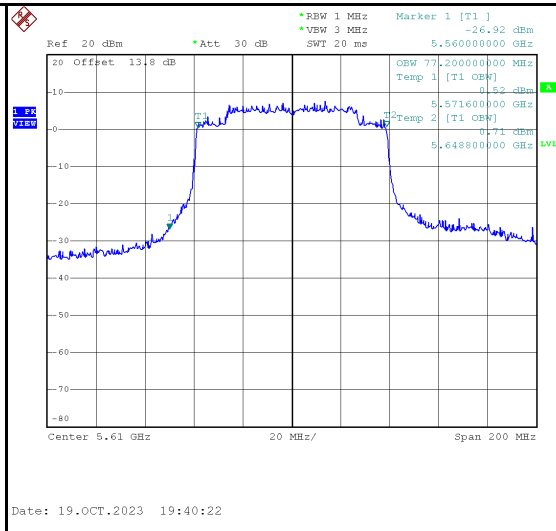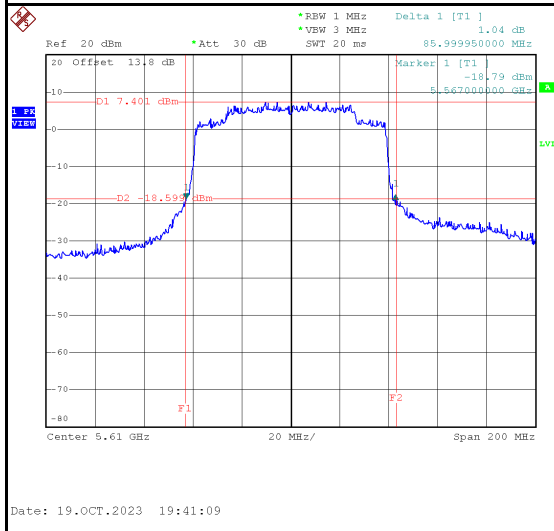


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	53.40	77.20	500	Pass

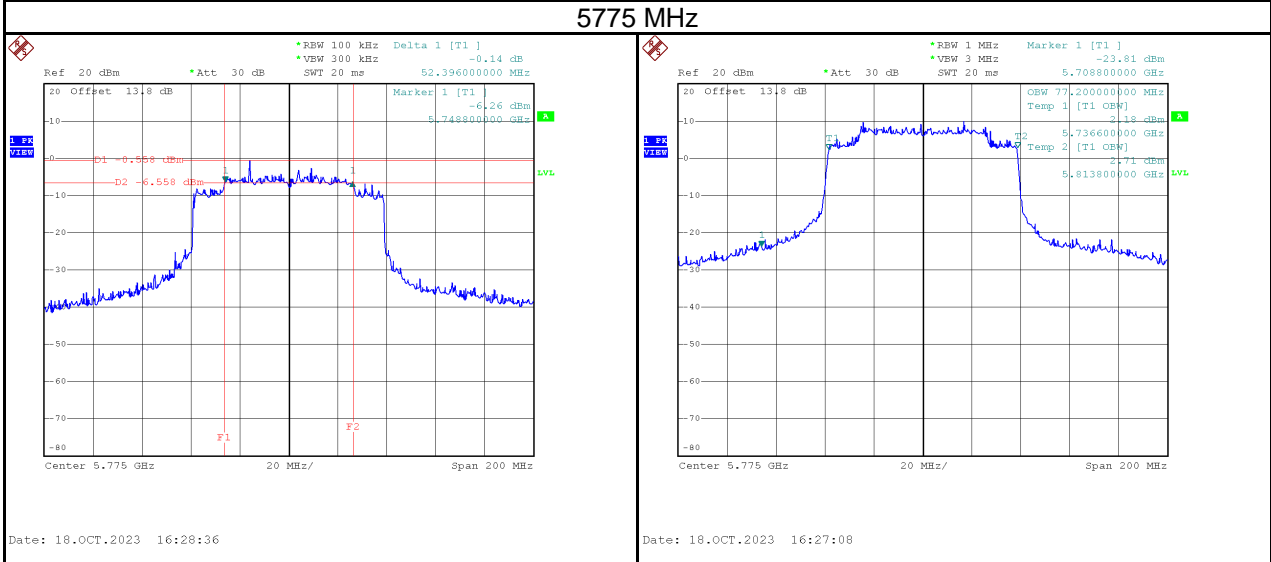




Test Mode	IEEE 802.11ax (HE160)_Antenna 1
-----------	---------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5250	164.40	156.00	No limit


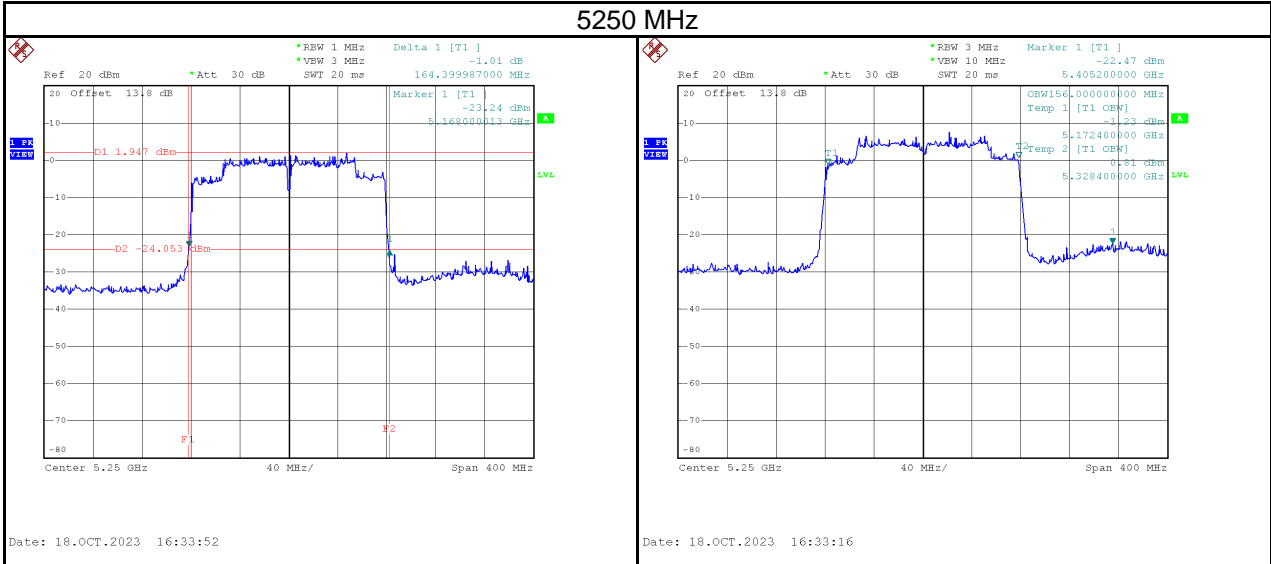


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5570	162.80	156.00	No limit

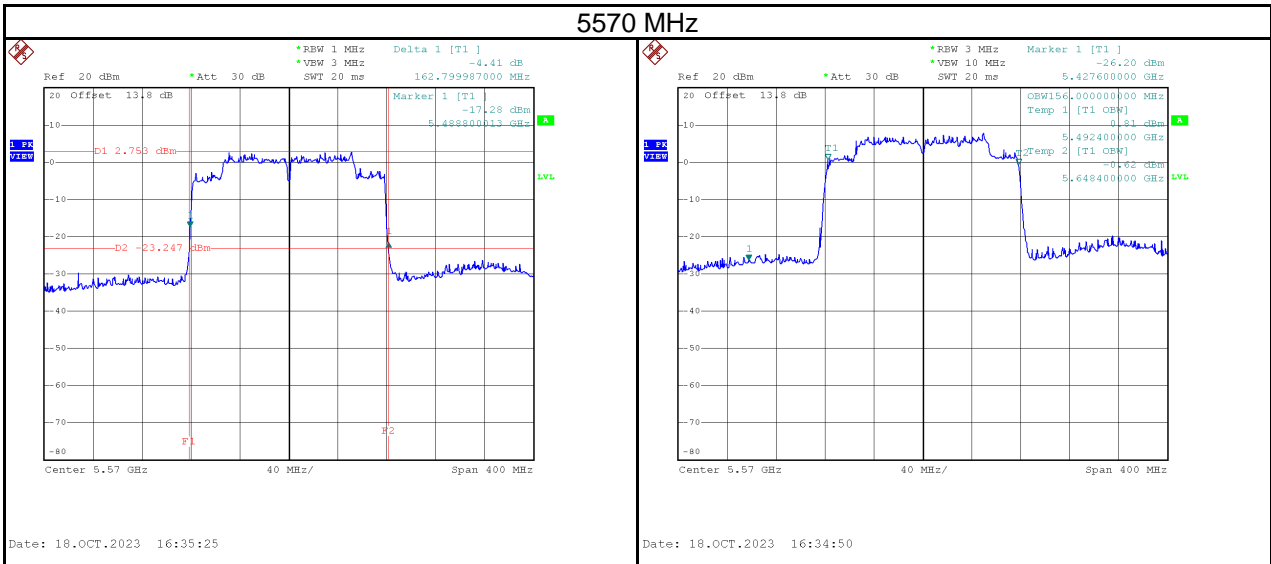


Test Mode	IEEE 802.11a_Antenna 2
-----------	------------------------


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	24.59	17.10	No limit
5200	24.40	17.10	No limit
5240	24.35	17.10	No limit

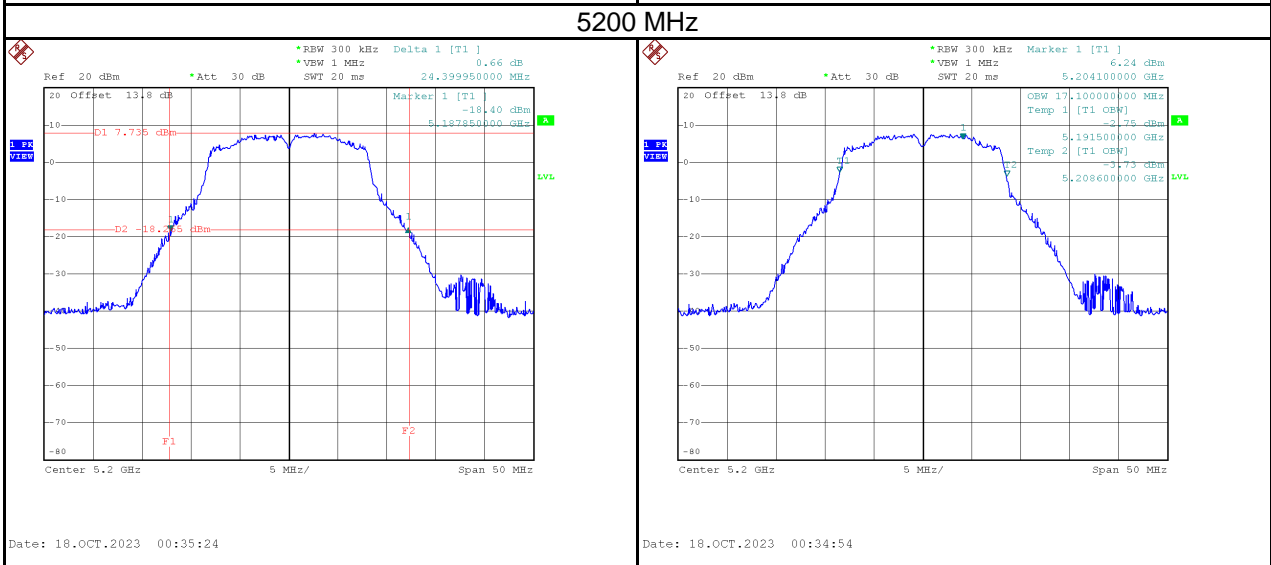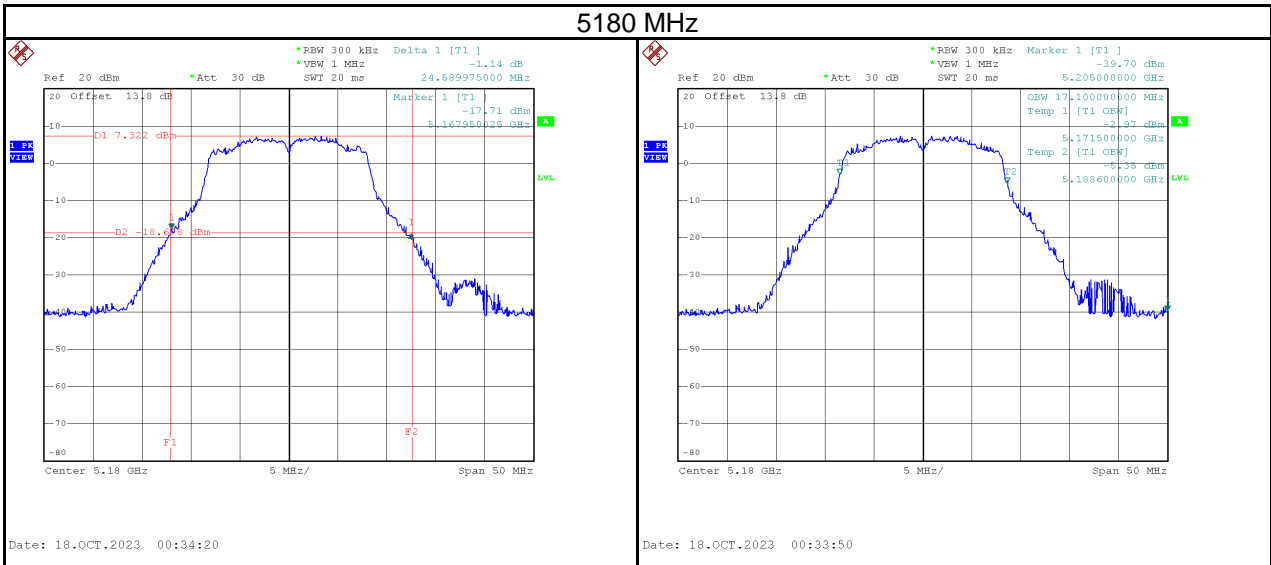

## 5240 MHz

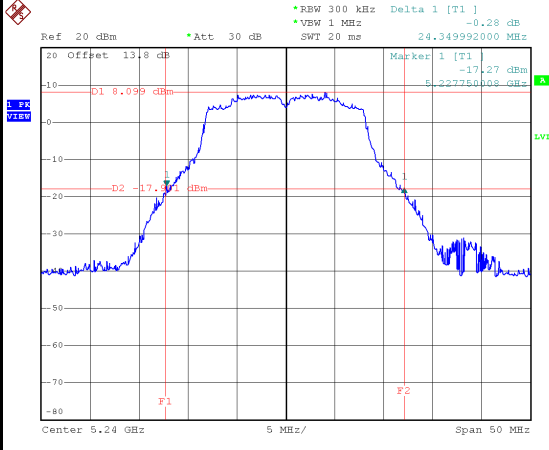



Date: 18.OCT.2023 00:36:23

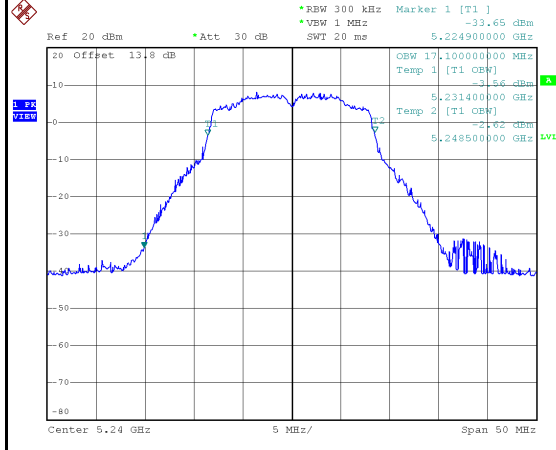



Date: 18.OCT.2023 00:35:54

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	24.00	17.00	No limit
5300	23.70	17.00	No limit
5320	24.40	17.10	No limit


### 5260 MHz

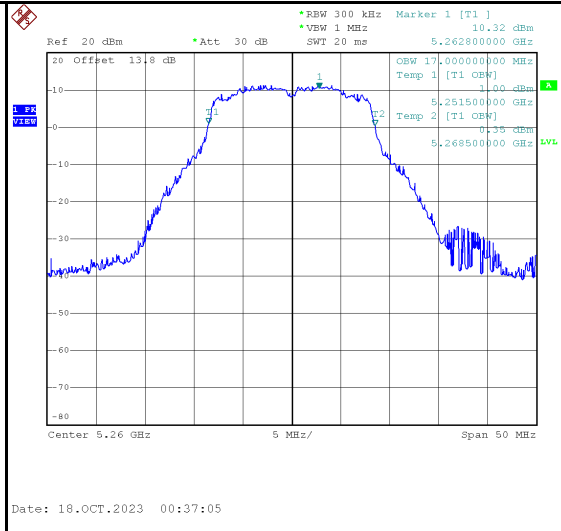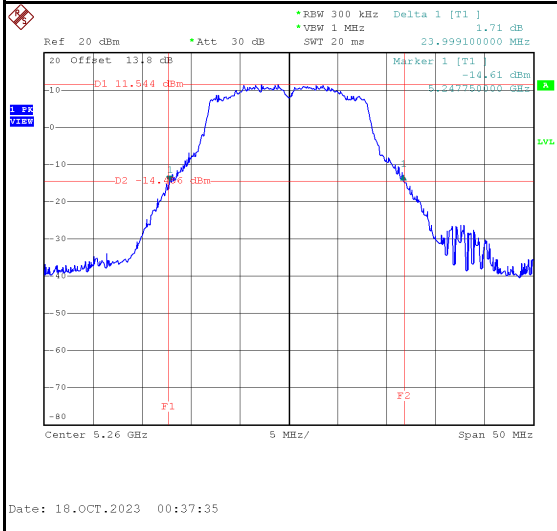


### 5300 MHz

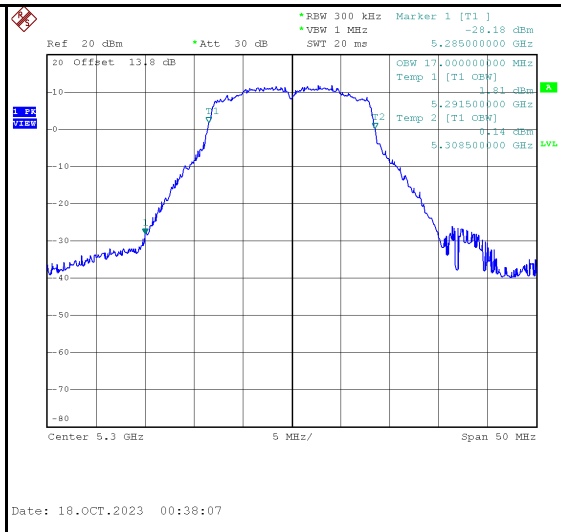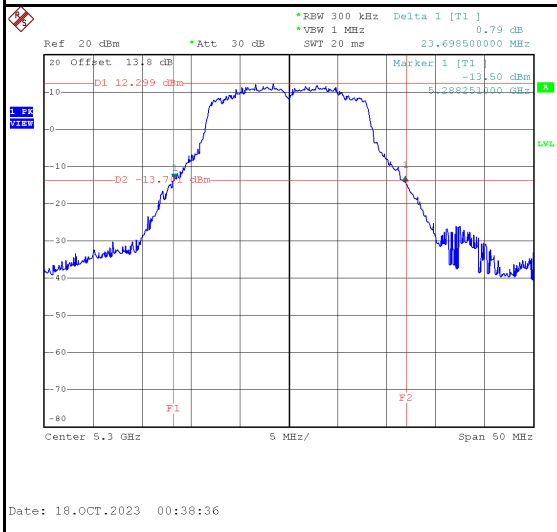

## 5320 MHz

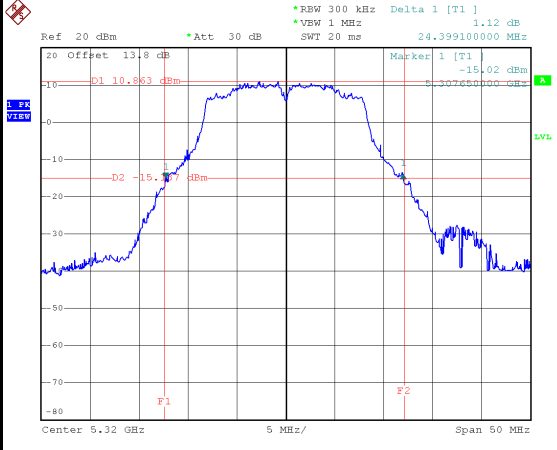

Date: 18.OCT.2023 00:39:43

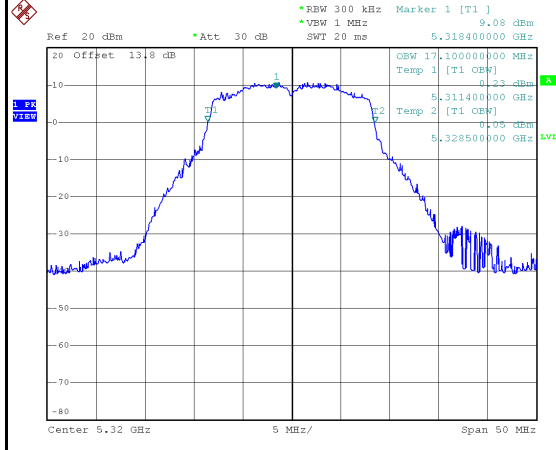

Date: 18.OCT.2023 00:39:13