


Report No.: T170908D07-RP4


Band Edge Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

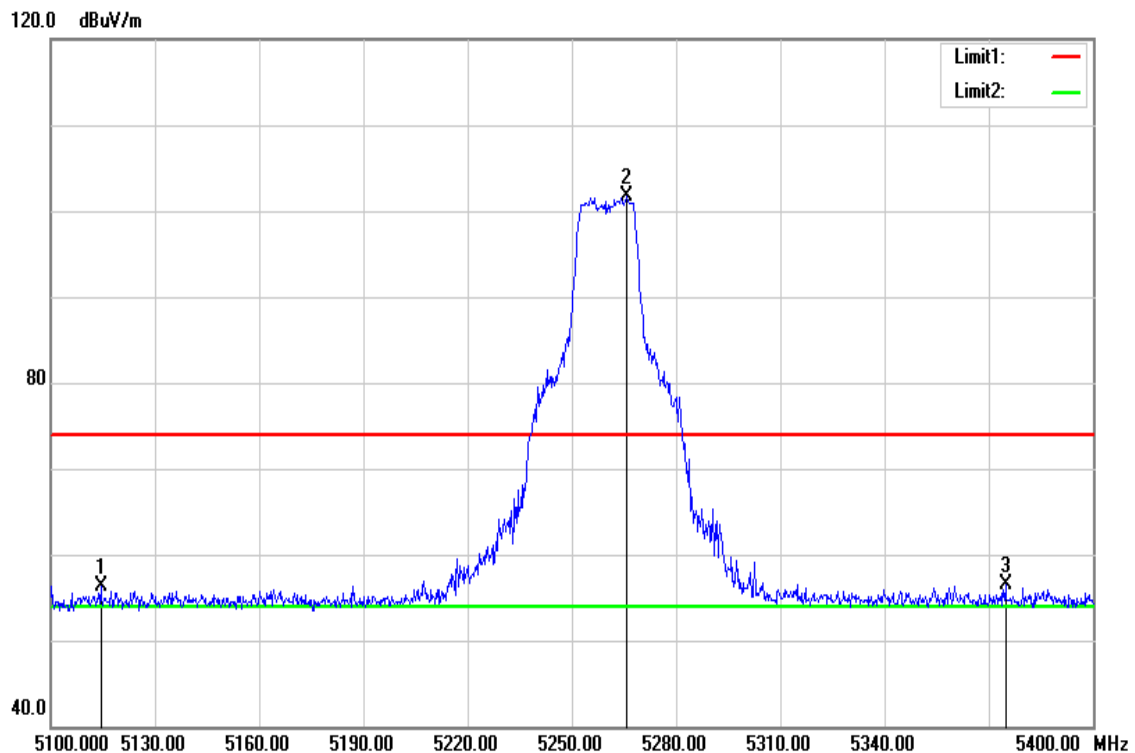


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5114.400	51.38	4.97	56.35	74.00	-17.65	peak
5265.900	96.30	5.35	101.65	-	-	peak
5374.800	50.90	5.61	56.51	74.00	-17.49	peak

Test Mode	IEEE 802.11a / 5260MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

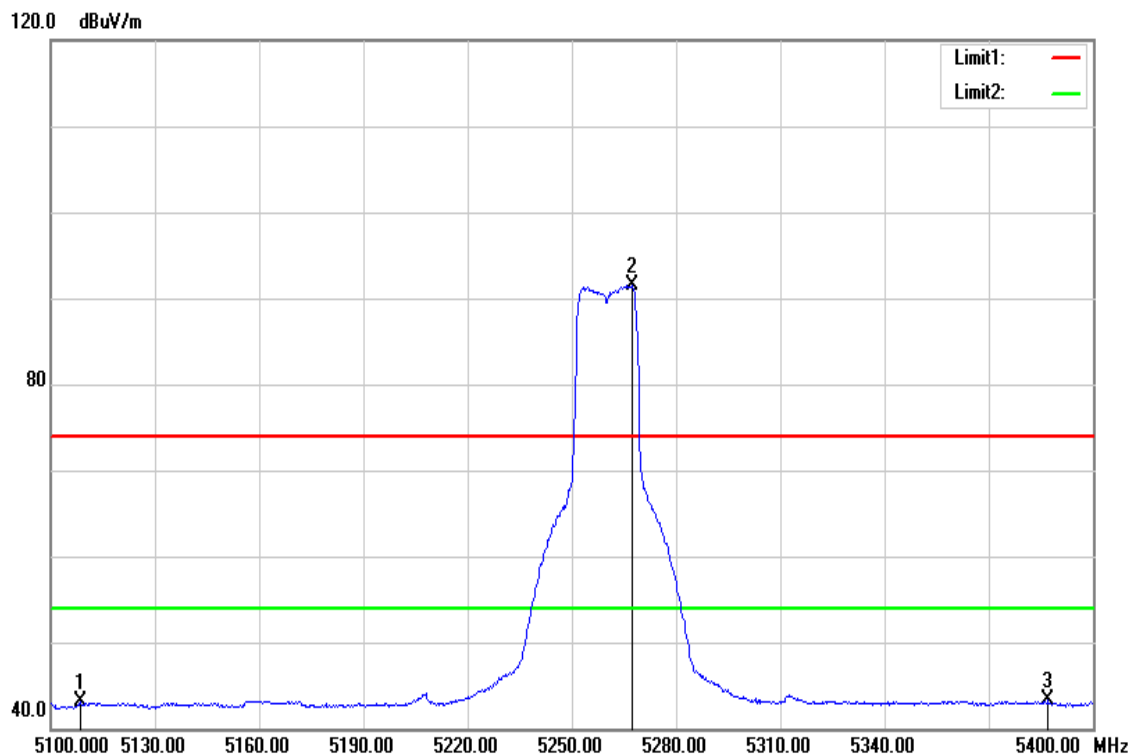

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5108.400	38.16	4.97	43.13	54.00	-10.87	AVG
5267.400	86.10	5.36	91.46	-	-	AVG
5387.100	37.59	5.65	43.24	54.00	-10.76	AVG


Test Mode	IEEE 802.11a / 5320MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

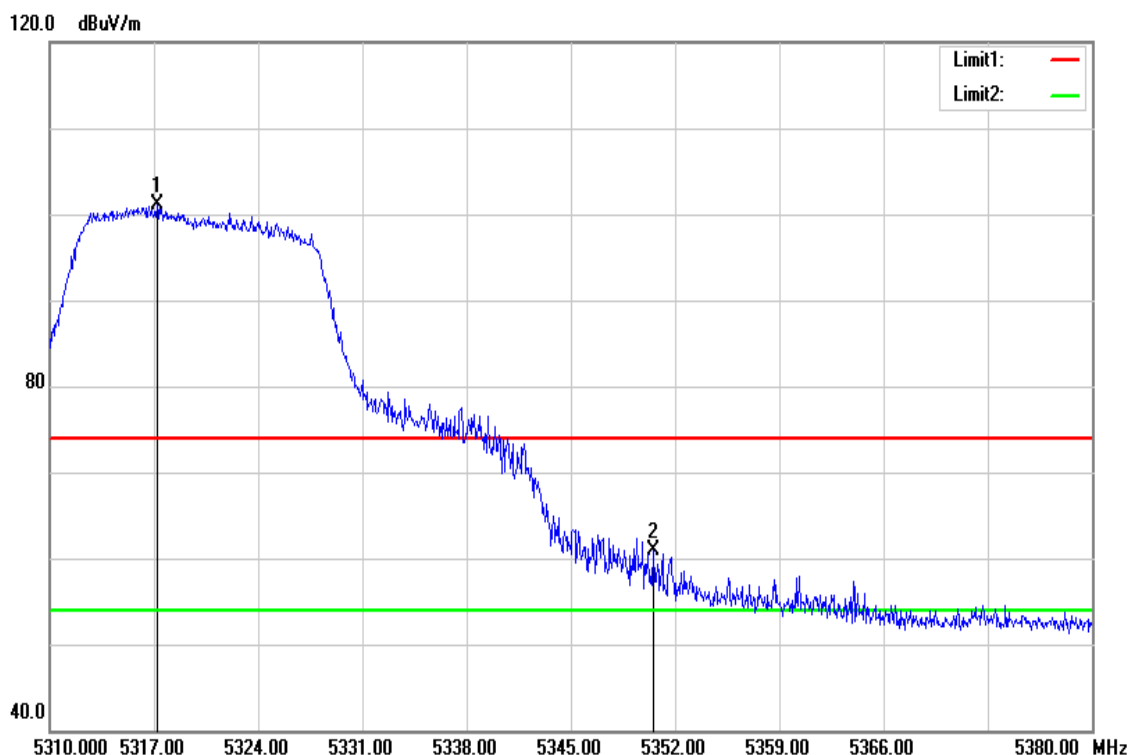

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5317.210	95.67	5.48	101.15	-	-	peak
5350.530	55.36	5.56	60.92	74.00	-13.08	peak


Report No.: T170908D07-RP4

Test Mode	IEEE 802.11a / 5320MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

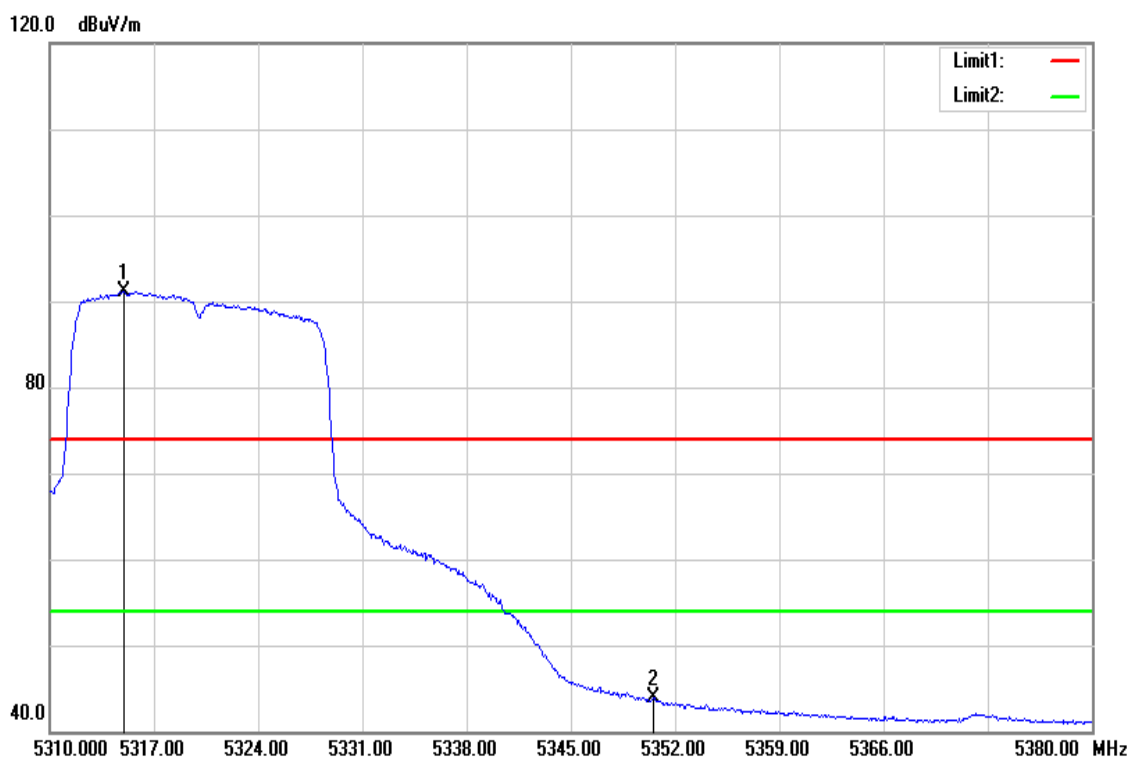

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5314.970	85.69	5.47	91.16	-	-	AVG
5350.530	38.42	5.56	43.98	54.00	-10.02	AVG

Test Mode	IEEE 802.11n 20 MHz / 5260MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

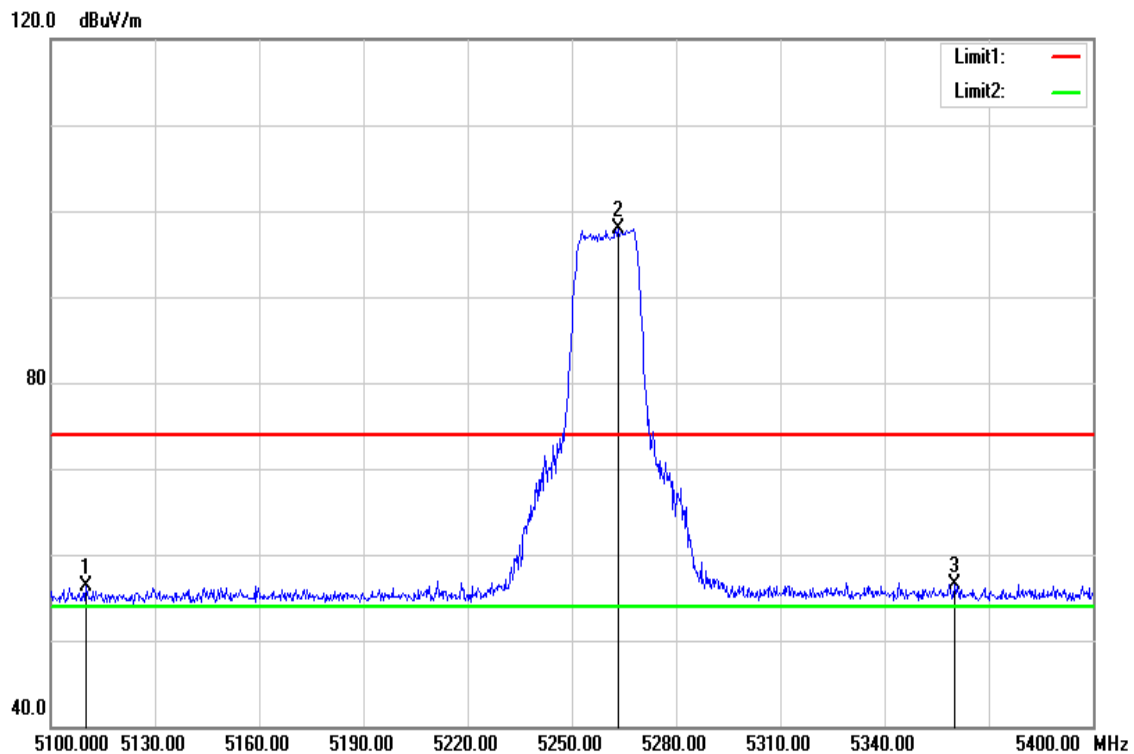

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5110.200	51.30	4.97	56.27	74.00	-17.73	peak
5263.200	92.63	5.34	97.97	-	-	peak
5360.100	50.87	5.59	56.46	74.00	-17.54	peak




Report No.: T170908D07-RP4

Page: 86 / 202

Rev.: 01


Test Mode	IEEE 802.11n 20 MHz / 5260MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

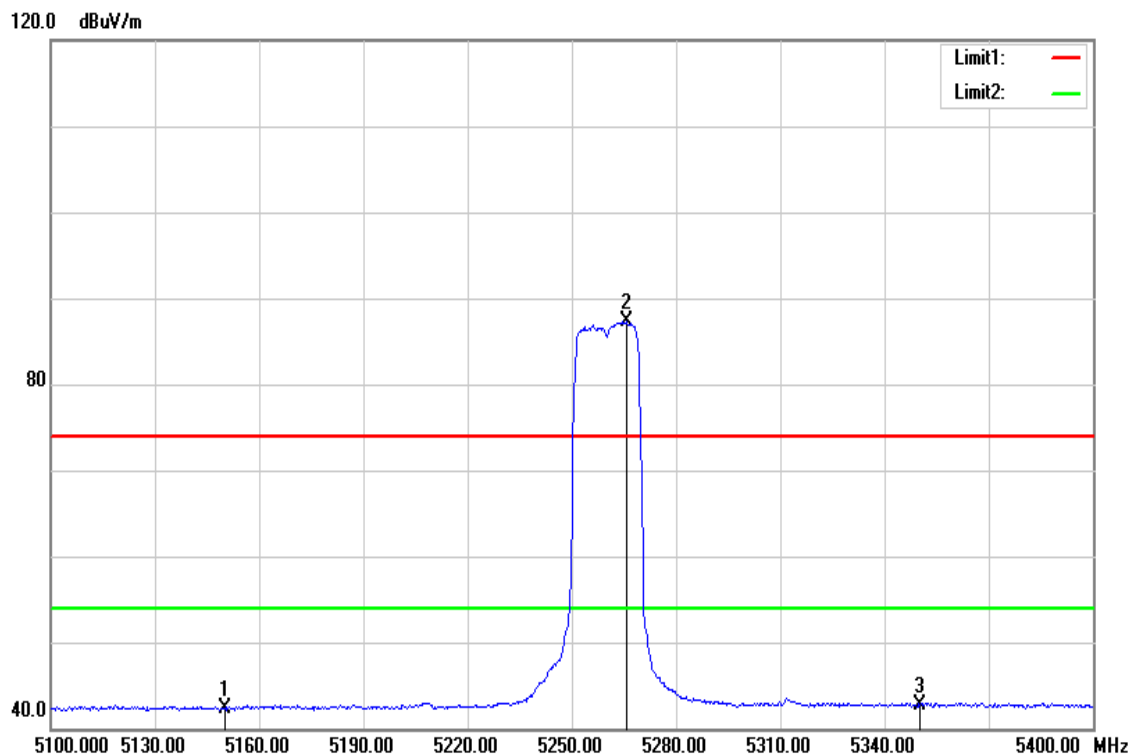

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5150.000	37.16	5.06	42.22	54.00	-11.78	AVG
5265.600	81.95	5.35	87.30	-	-	AVG
5350.000	37.21	5.56	42.77	54.00	-11.23	AVG


Report No.: T170908D07-RP4

Test Mode	IEEE 802.11n 20 MHz / 5320MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

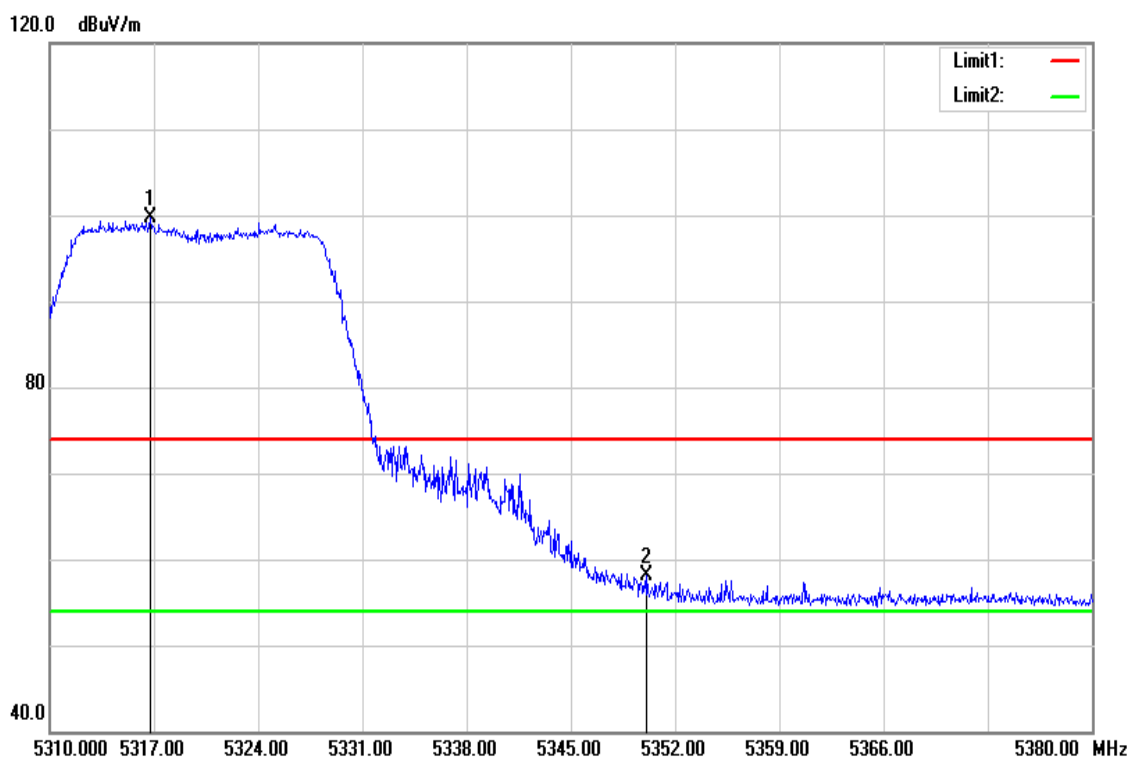


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5316.720	94.27	5.48	99.75	-	-	peak
5350.110	52.45	5.56	58.01	74.00	-15.99	peak

Test Mode	IEEE 802.11n 20 MHz / 5320MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

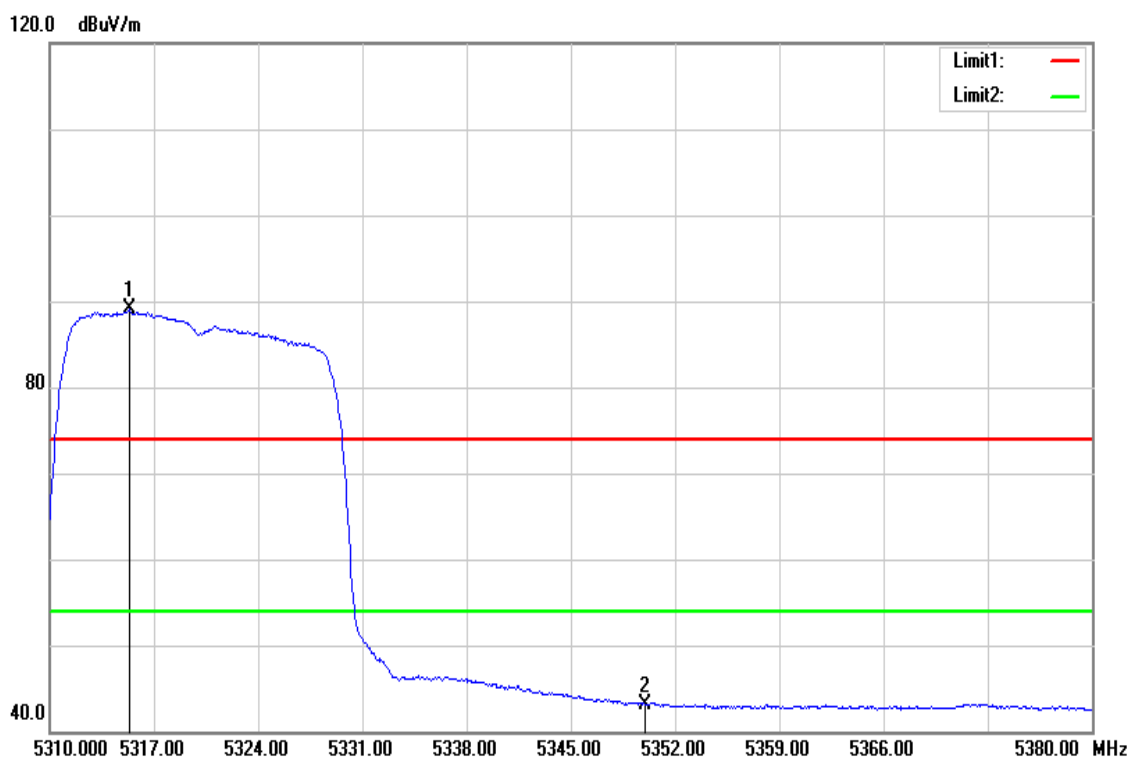

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5315.390	83.56	5.48	89.04	-	-	AVG
5350.000	37.57	5.56	43.13	54.00	-10.87	AVG

Test Mode	IEEE 802.11n 40 MHz / 5270MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

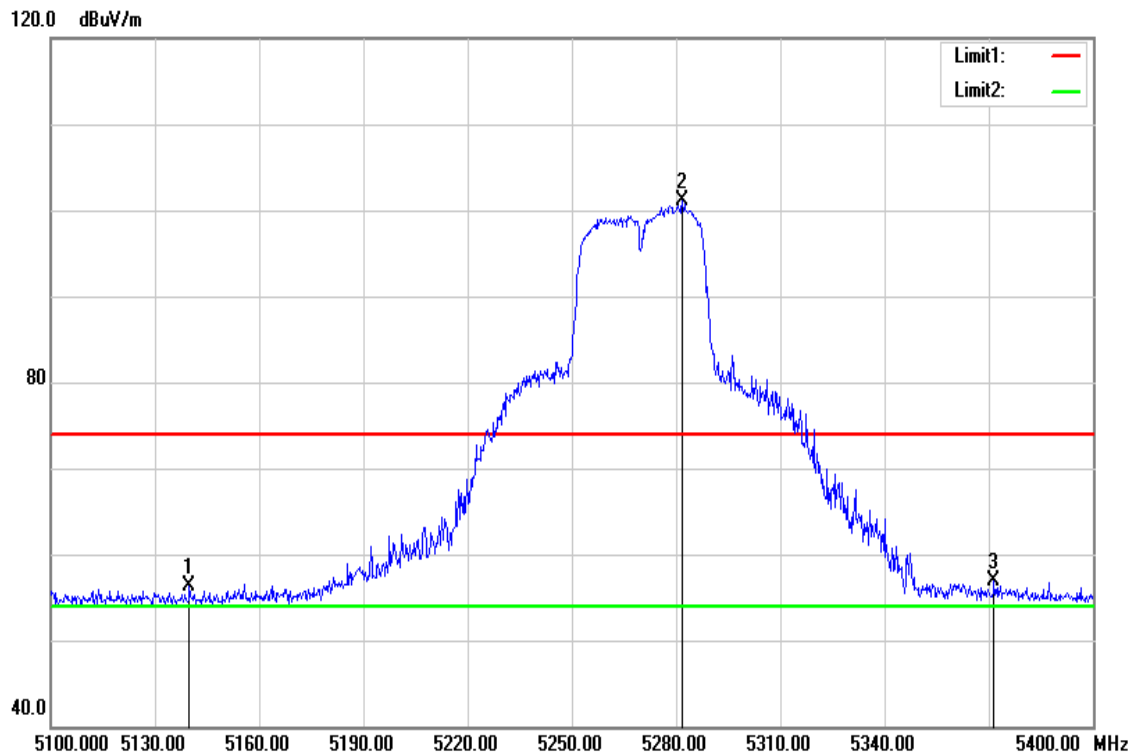

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5139.900	51.19	5.03	56.22	74.00	-17.78	peak
5281.800	95.80	5.39	101.19	-	-	peak
5371.500	51.30	5.61	56.91	74.00	-17.09	peak




Report No.: T170908D07-RP4

Page: 90 / 202

Rev.: 01


Test Mode	IEEE 802.11n 40 MHz / 5270MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

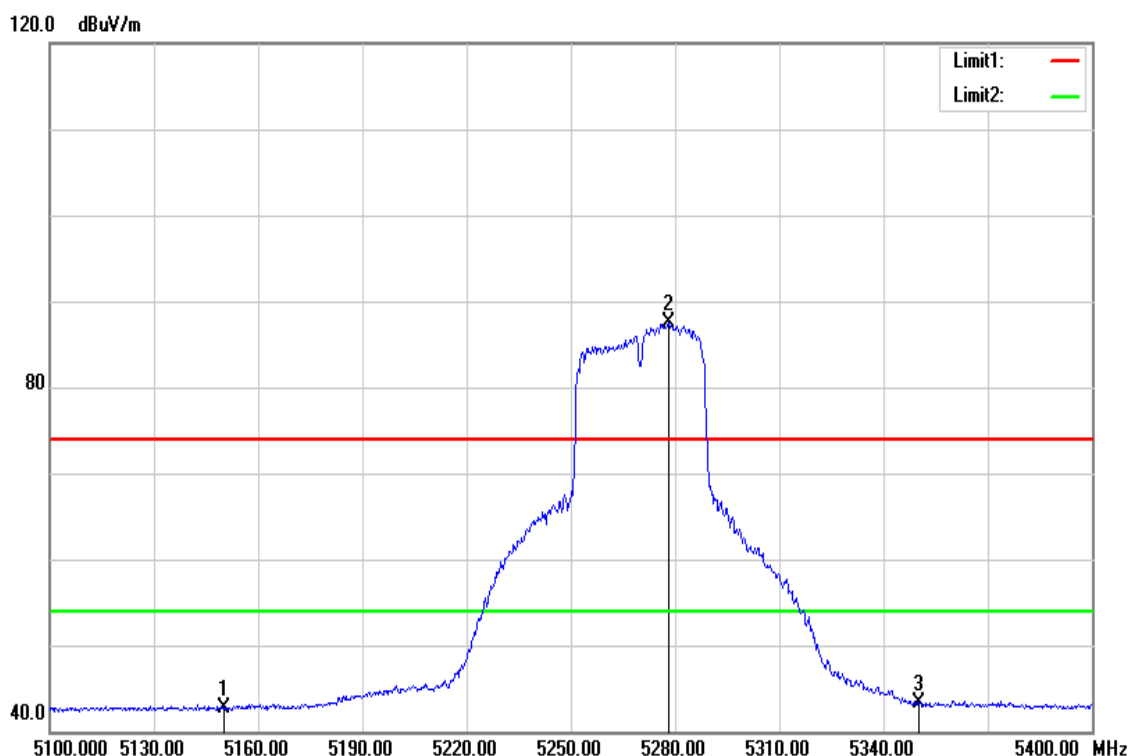

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5150.000	37.65	5.06	42.71	54.00	-11.29	AVG
5278.200	82.08	5.38	87.46	-	-	AVG
5350.000	37.78	5.56	43.34	54.00	-10.66	AVG

Report No.: T170908D07-RP4

Test Mode	IEEE 802.11n 40 MHz / 5310MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

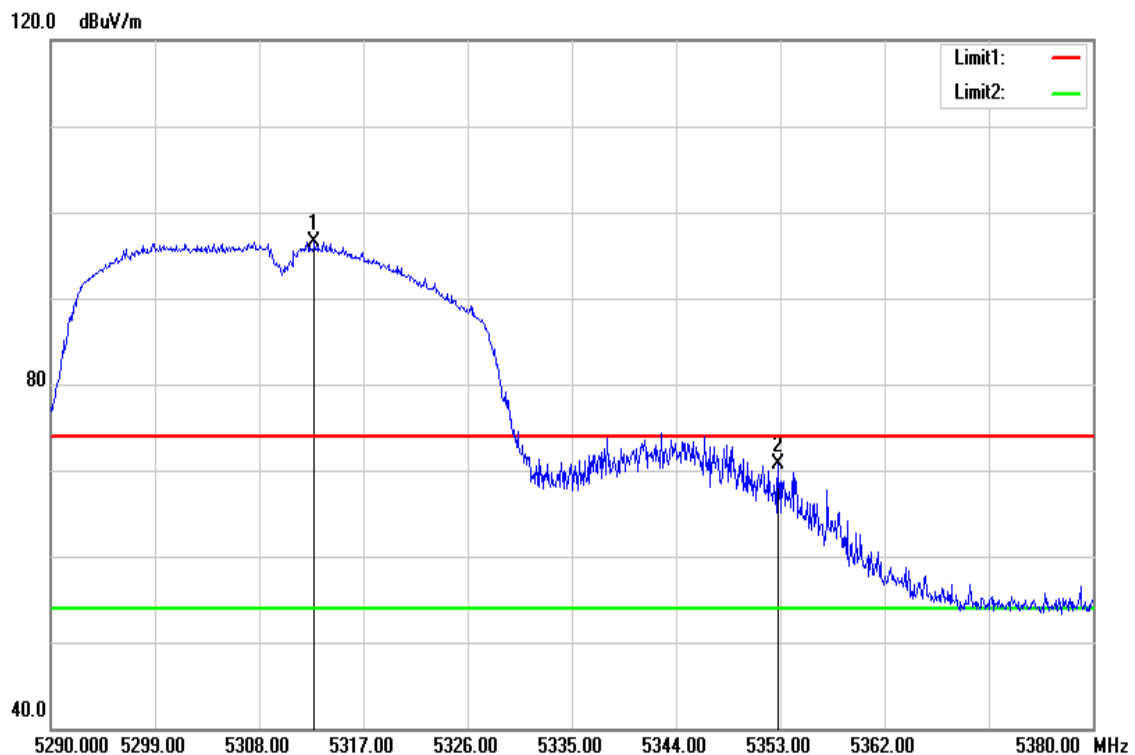

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5312.770	91.12	5.47	96.59	-	-	peak
5352.820	65.17	5.56	70.73	74.00	-3.27	peak




Report No.: T170908D07-RP4

Page: 92 / 202

Rev.: 01

Test Mode	IEEE 802.11n 40 MHz / 5310MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

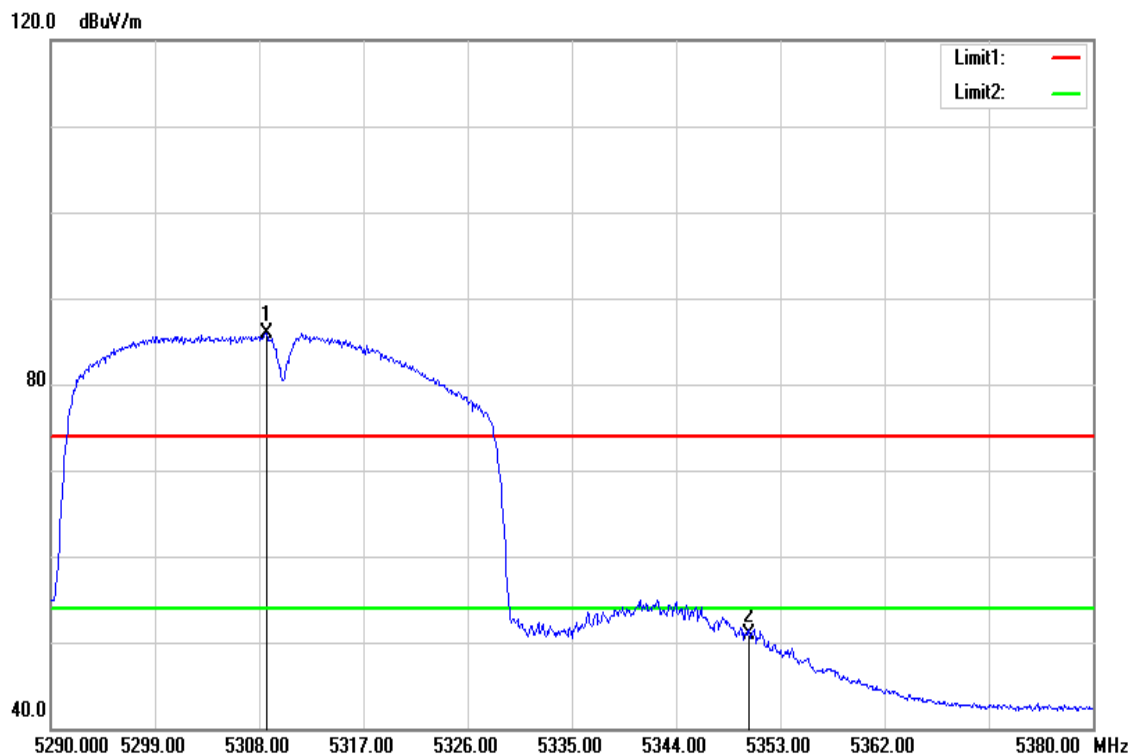


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5308.630	80.49	5.46	85.95	-	-	AVG
5350.300	45.41	5.56	50.97	54.00	-3.03	AVG



Report No.: T170908D07-RP4


Band Edge Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5500MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

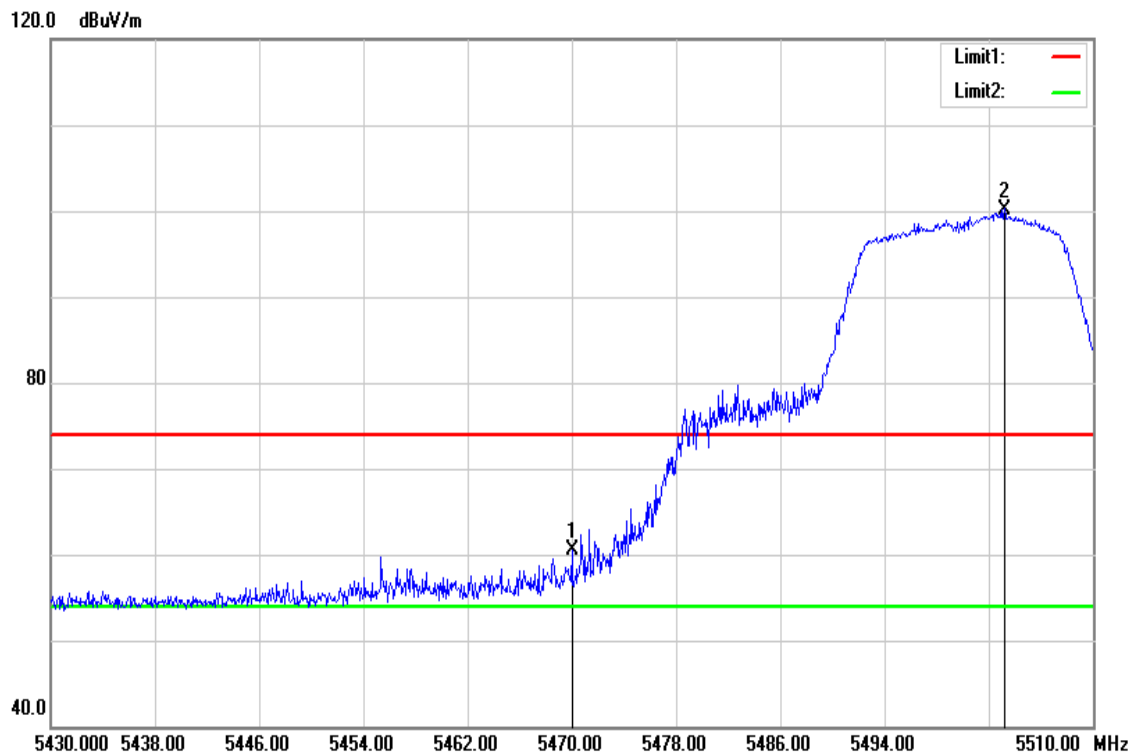

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5470.000	54.69	5.85	60.54	74.00	-13.46	peak
5503.200	94.26	5.94	100.20	-	-	peak


Test Mode	IEEE 802.11a / 5500MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

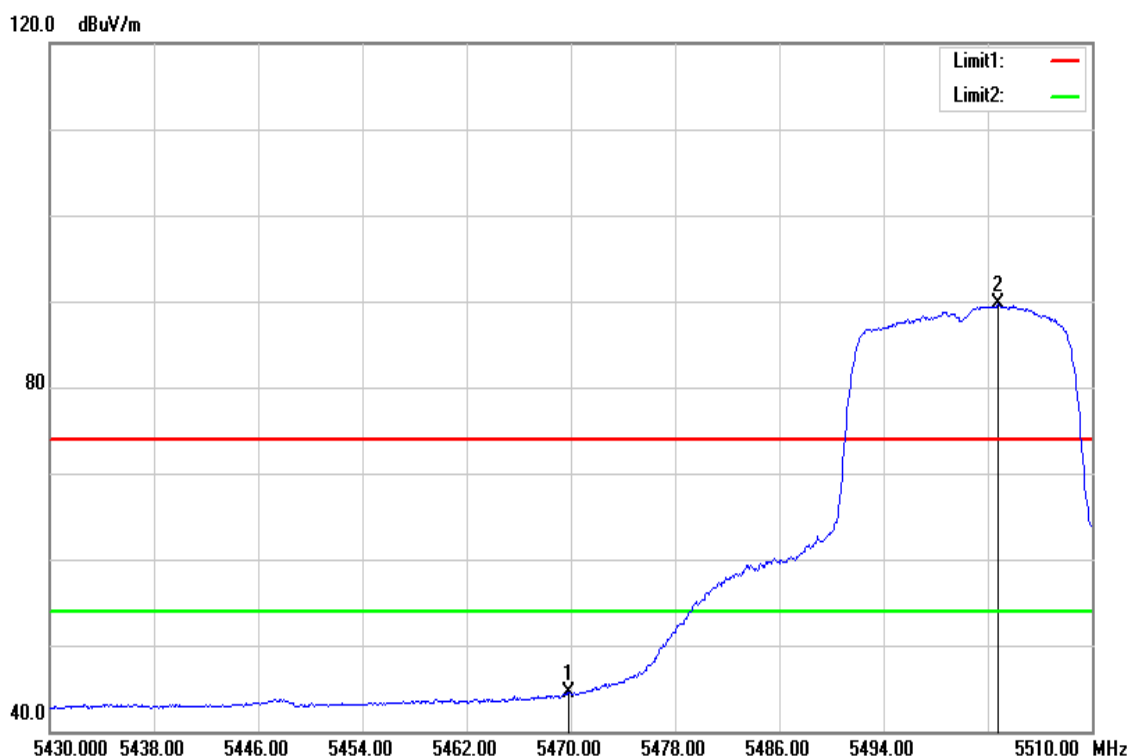

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5469.840	38.63	5.85	44.48	54.00	-9.52	AVG
5502.800	83.67	5.94	89.61	-	-	AVG


Report No.: T170908D07-RP4

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

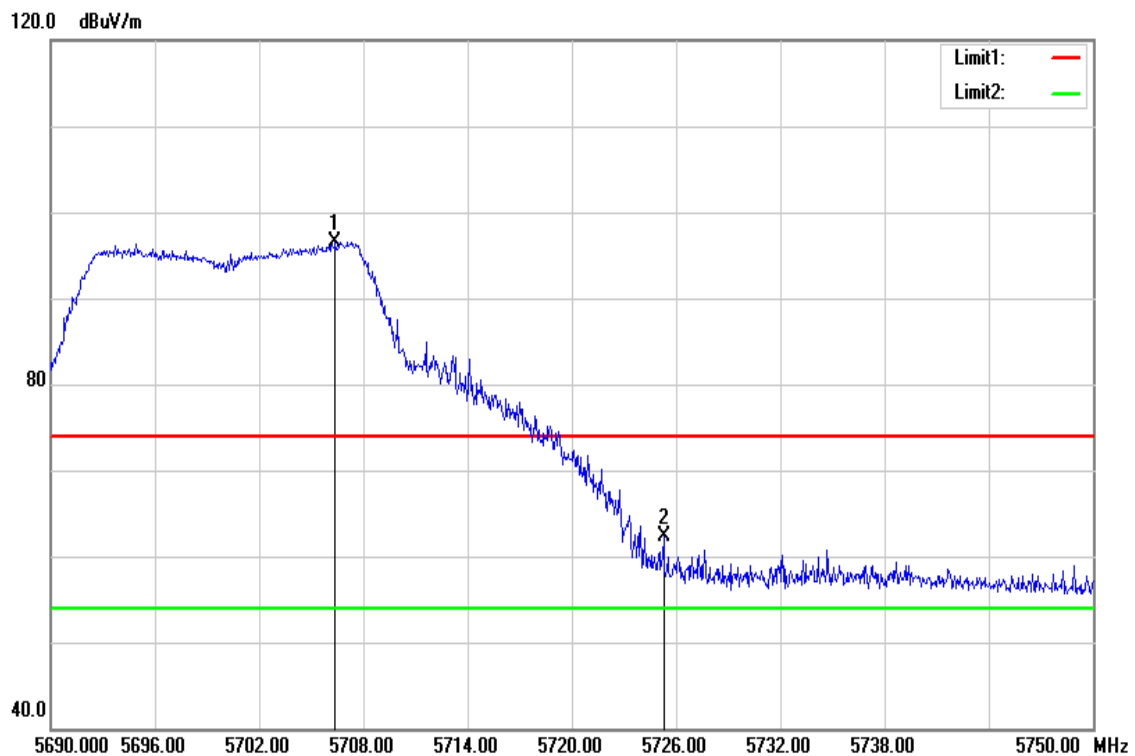


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5706.380	90.10	6.47	96.57	-	-	peak
5725.280	55.73	6.52	62.25	74.00	-11.75	peak

Test Mode	IEEE 802.11a / 5700 MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

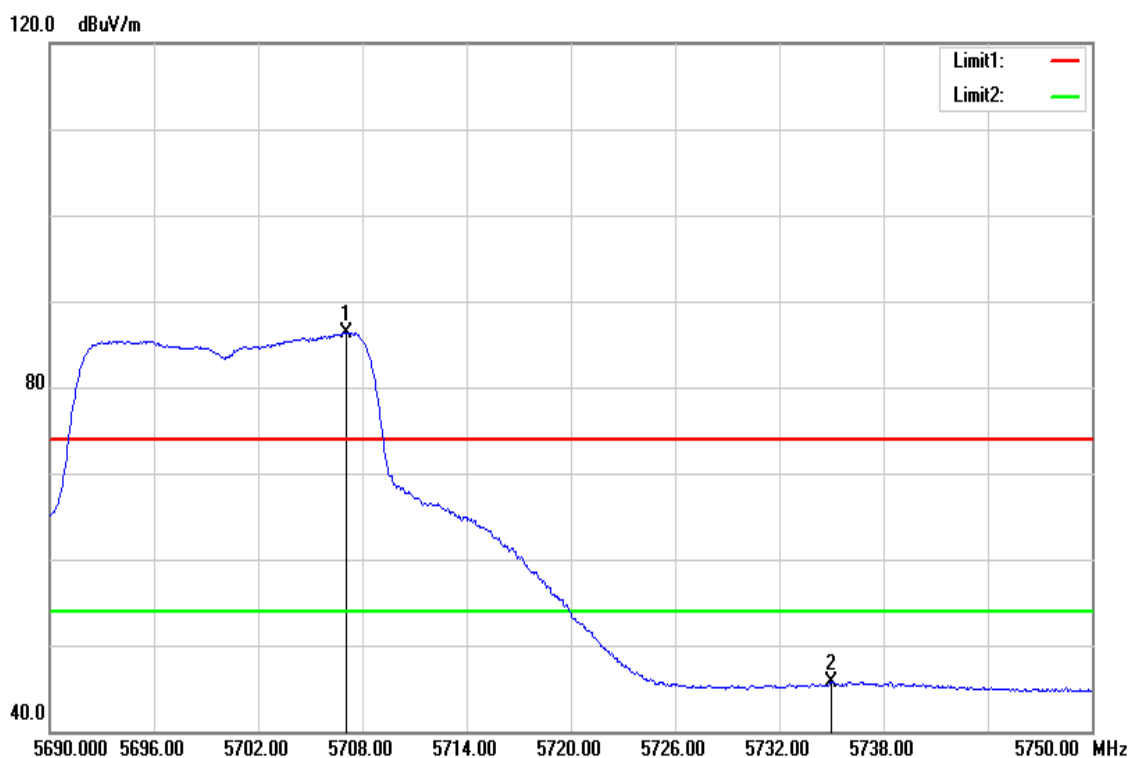


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5707.040	79.82	6.47	86.29	-	-	AVG
5735.000	39.22	6.54	45.76	54.00	-8.24	AVG

Test Mode	IEEE 802.11n 20 MHz / 5500MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

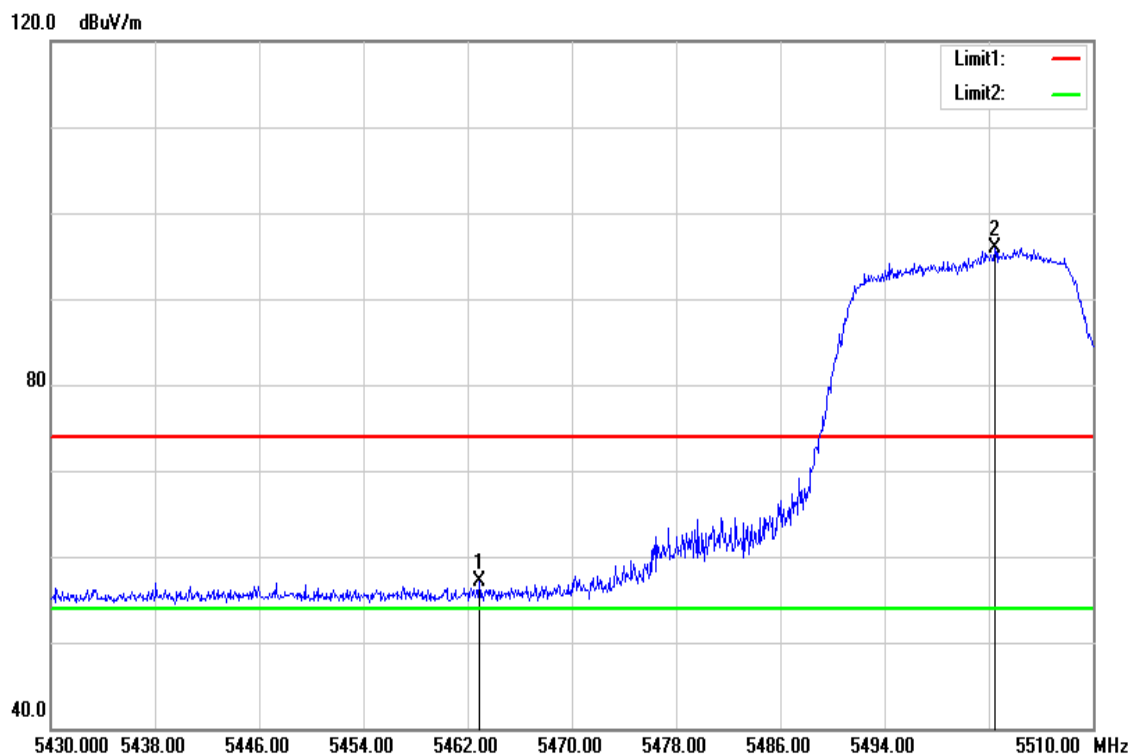

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5462.880	51.23	5.84	57.07	74.00	-16.93	peak
5502.480	90.04	5.93	95.97	-	-	peak


Test Mode	IEEE 802.11n 20 MHz / 5500MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

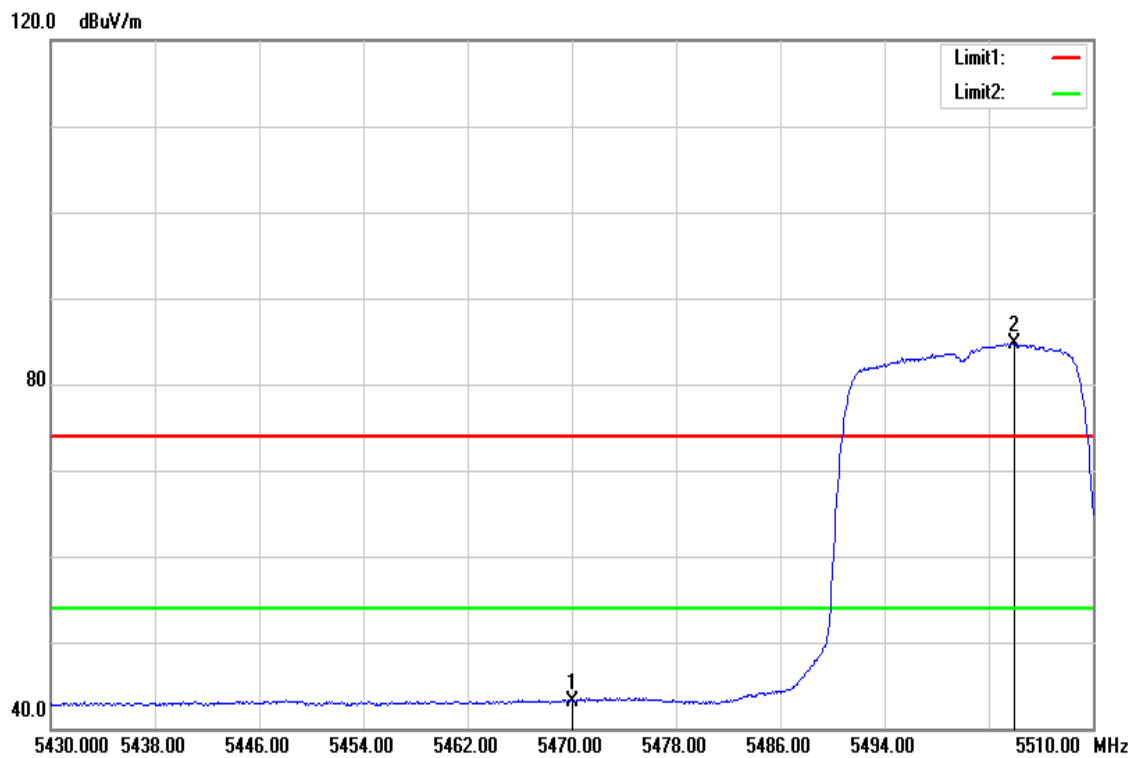

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5470.000	37.33	5.85	43.18	54.00	-10.82	AVG
5504.000	78.81	5.94	84.75	-	-	AVG

Report No.: T170908D07-RP4


Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

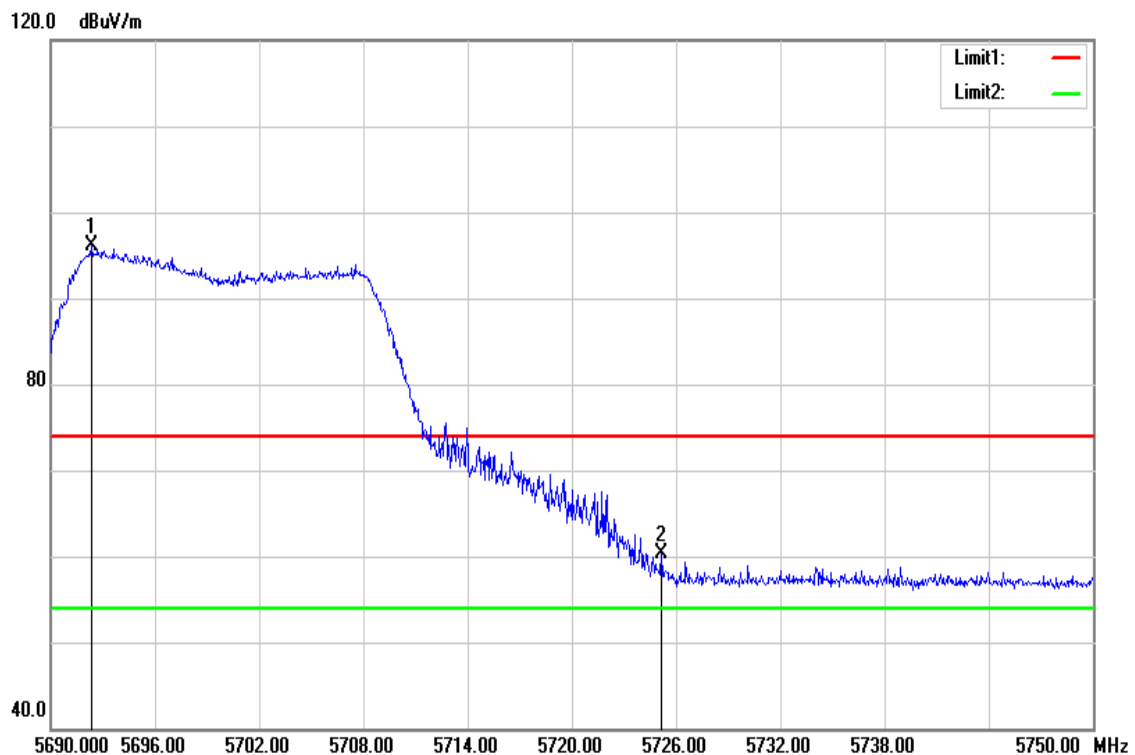

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5692.340	89.65	6.43	96.08	-	-	peak
5725.160	53.87	6.52	60.39	74.00	-13.61	peak

Report No.: T170908D07-RP4


Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

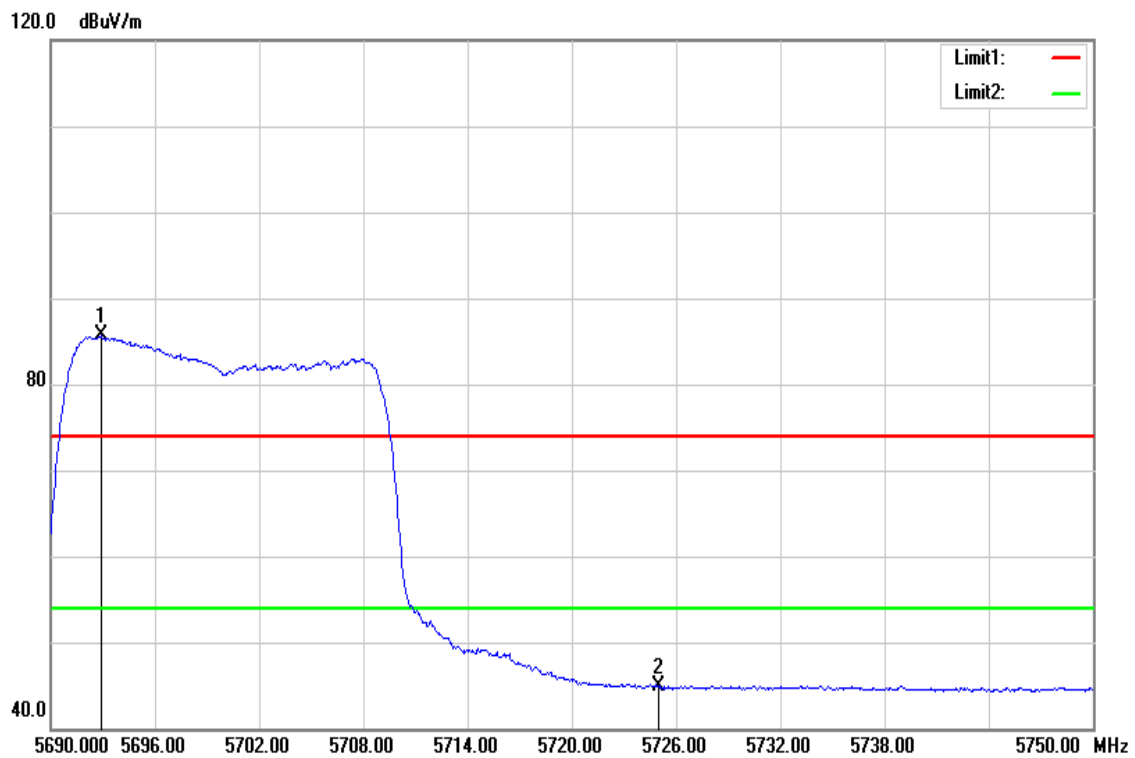

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5692.880	79.17	6.44	85.61	-	-	AVG
5725.000	38.36	6.52	44.88	54.00	-9.12	AVG


Report No.: T170908D07-RP4

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

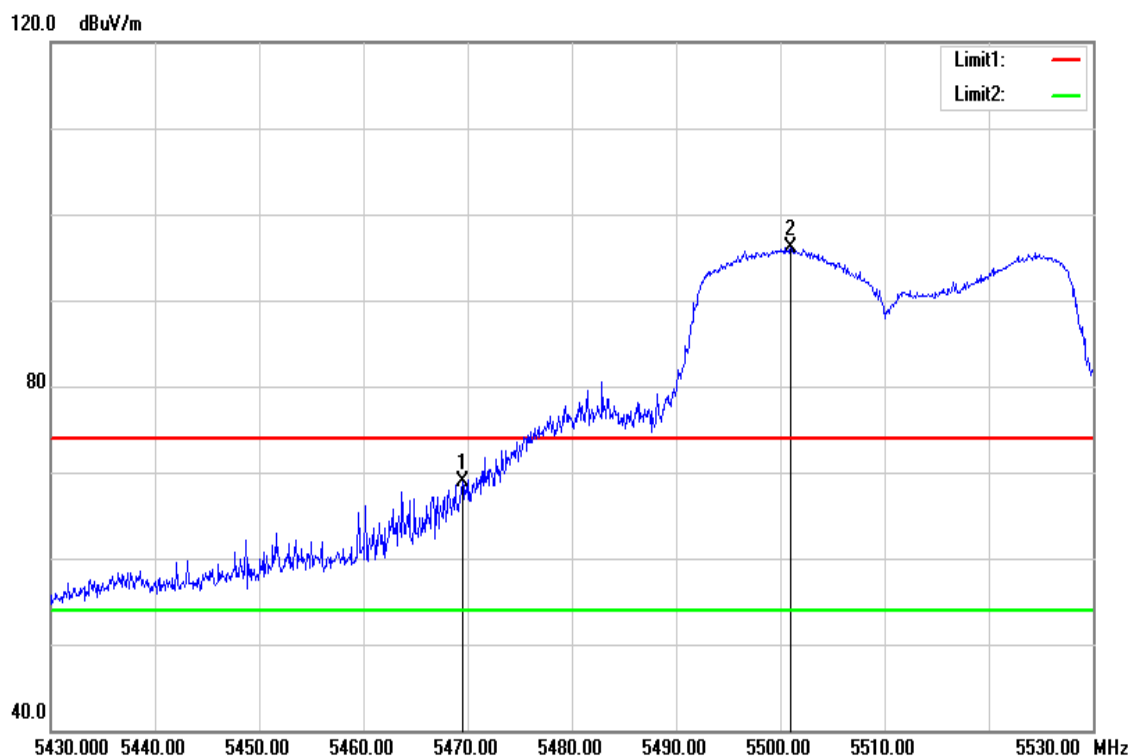


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5469.500	63.09	5.85	68.94	74.00	-5.06	peak
5501.000	90.20	5.93	96.13	-	-	peak

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

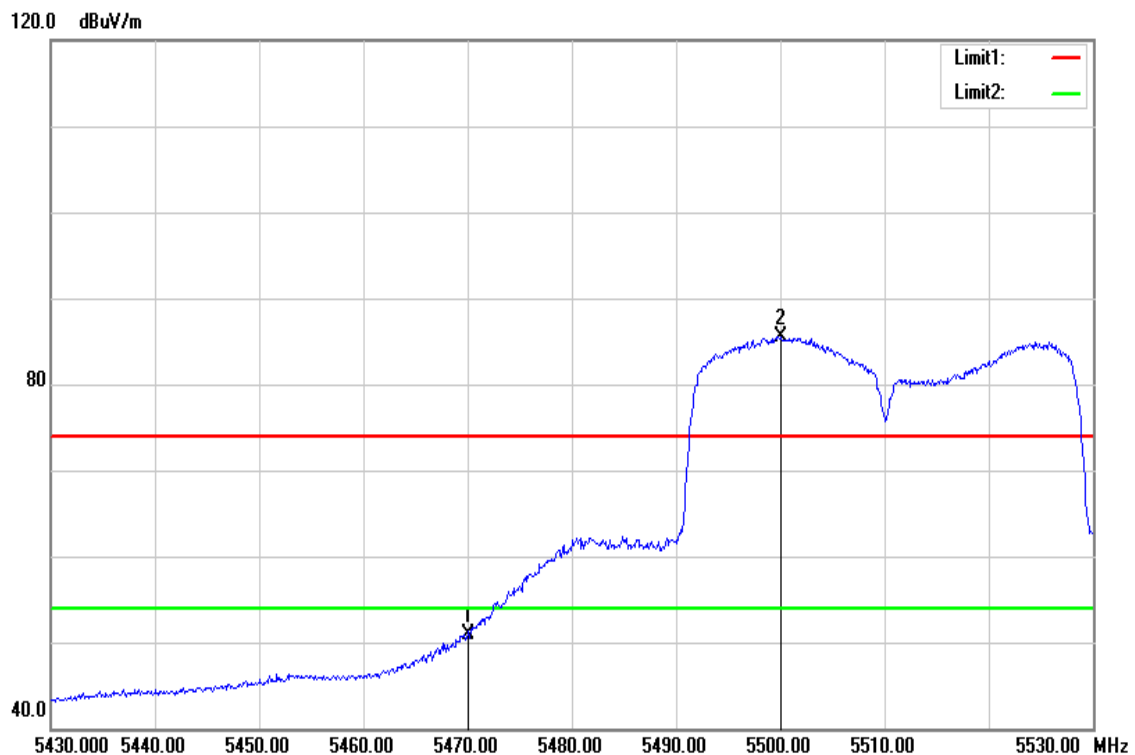

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5470.000	44.97	5.85	50.82	54.00	-3.18	AVG
5500.000	79.63	5.93	85.56	-	-	AVG


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

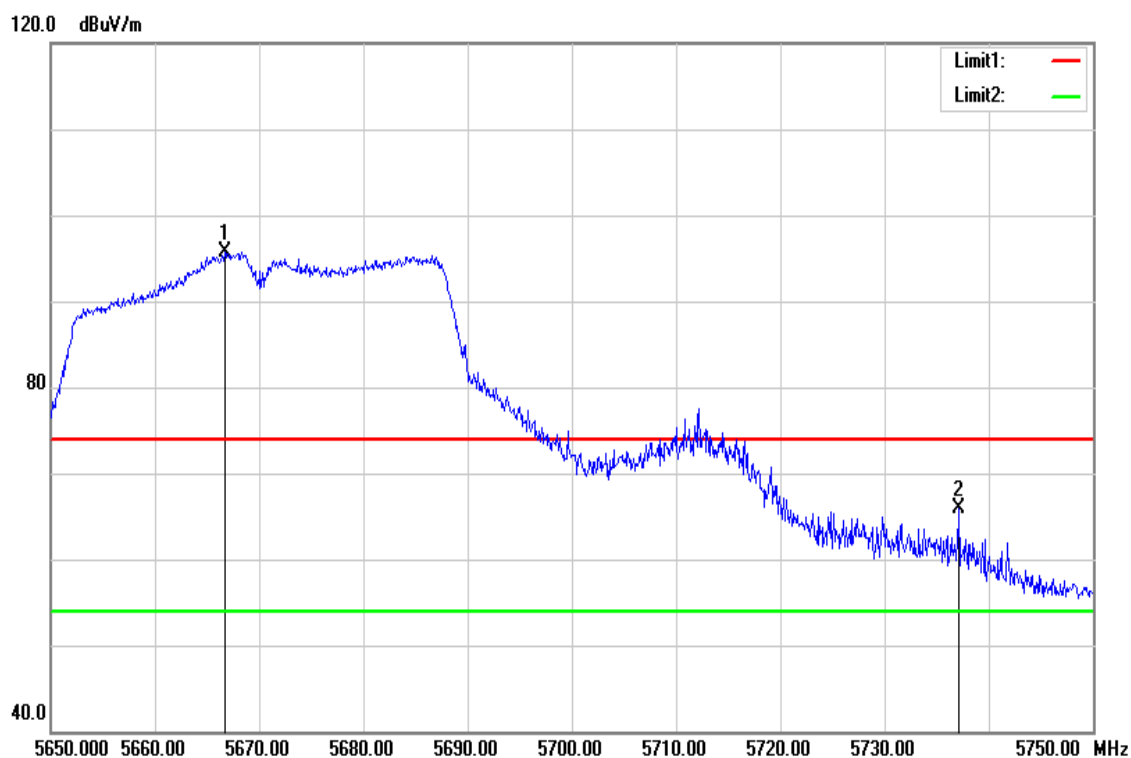

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5666.700	89.42	6.36	95.78	-	-	peak
5737.100	59.38	6.54	65.92	74.00	-8.08	peak

Report No.: T170908D07-RP4

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temperature	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

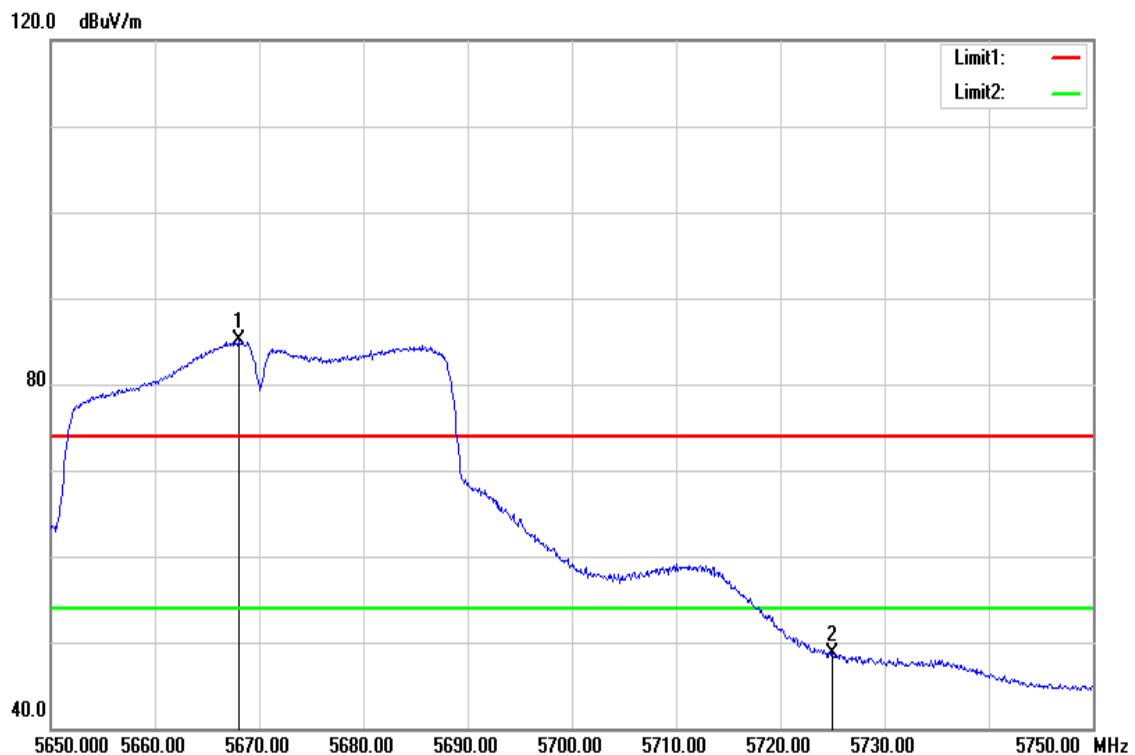


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5668.000	78.70	6.37	85.07	-	-	AVG
5725.000	42.10	6.52	48.62	54.00	-5.38	AVG

Report No.: T170908D07-RP4


Band Edge Test Data for UNII-3

Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

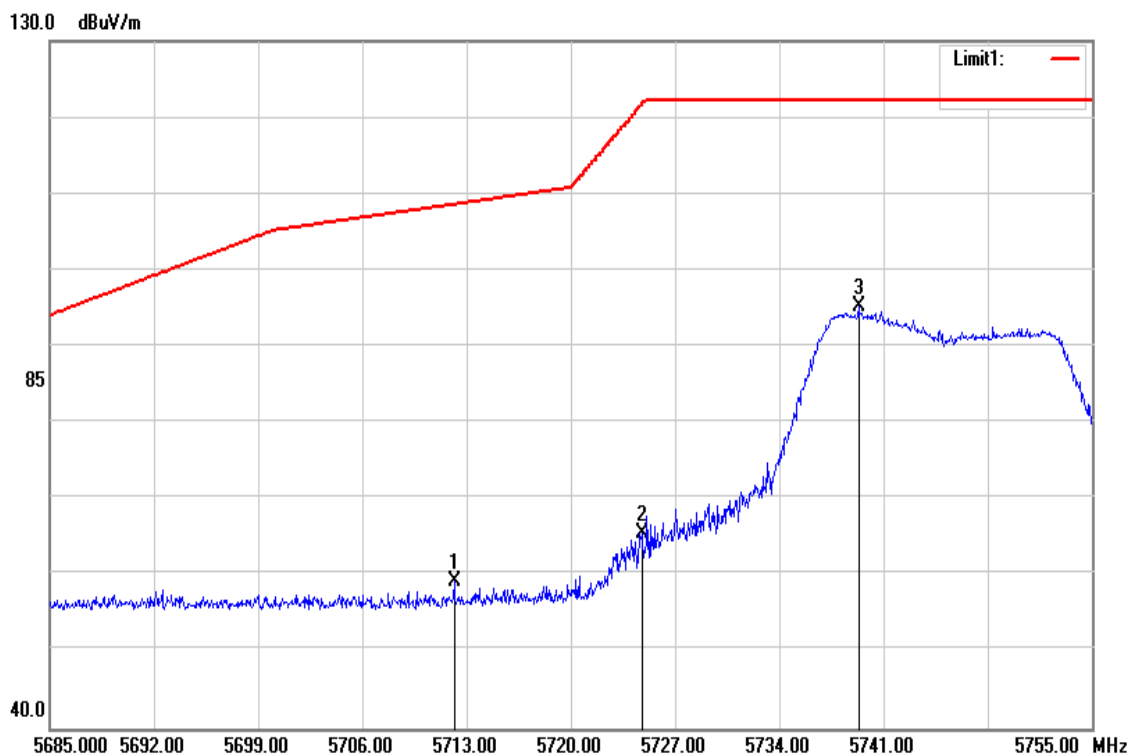

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5712.160	52.75	6.48	59.23	108.60	-49.37	peak
5724.760	59.11	6.52	65.63	121.65	-56.02	peak
5739.320	88.75	6.56	95.31	-	-	peak


Test Mode	IEEE 802.11a / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

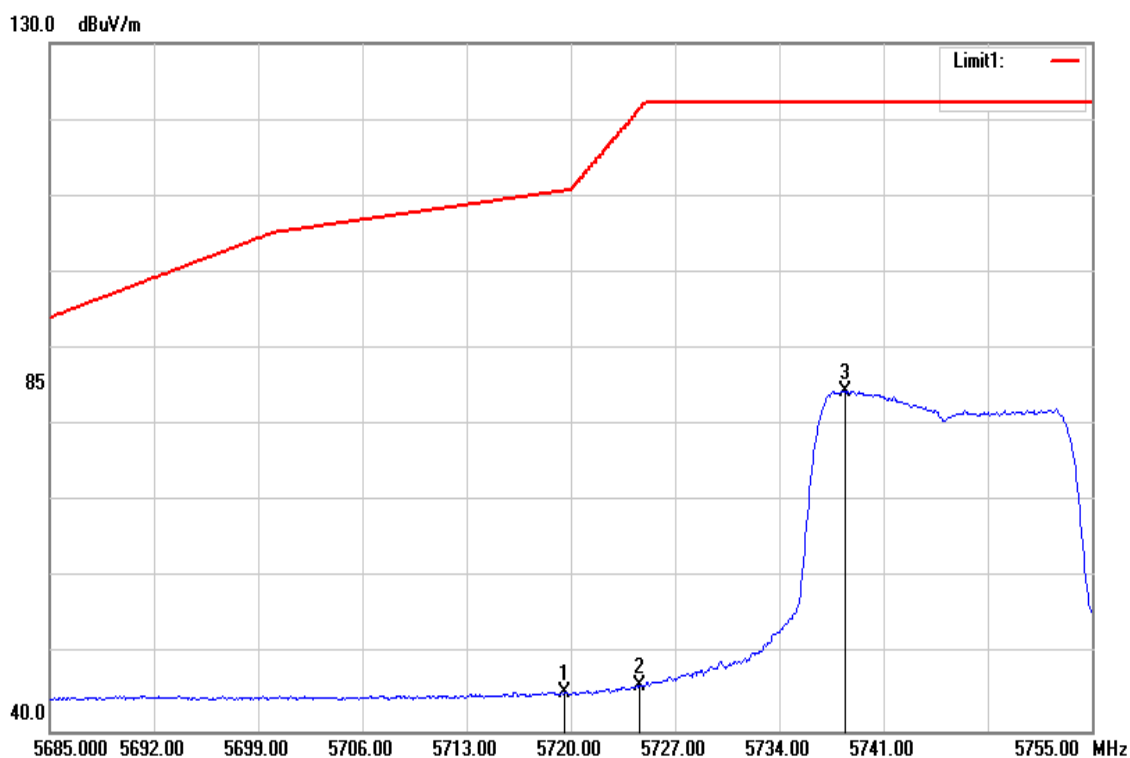

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5719.580	38.59	6.50	45.09	110.68	-65.59	AVG
5724.620	39.52	6.52	46.04	121.33	-75.29	AVG
5738.410	77.98	6.56	84.54	-	-	AVG


Report No.: T170908D07-RP4

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

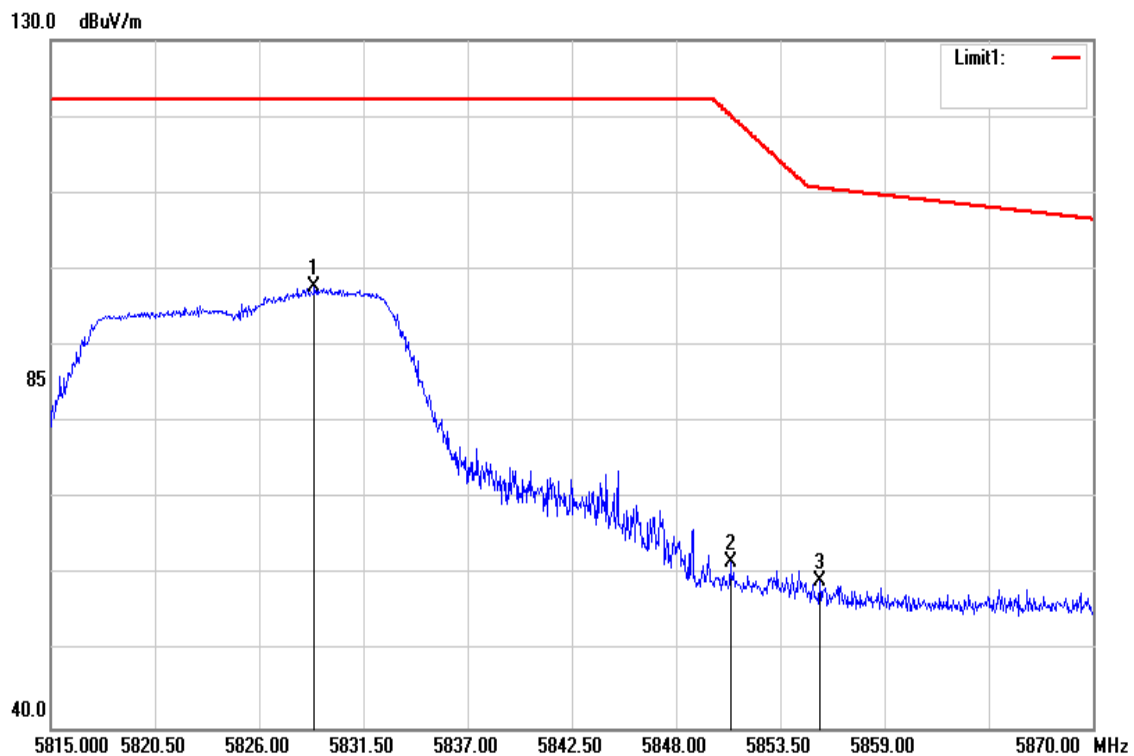


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5828.915	90.84	6.79	97.63	-	-	peak
5850.860	54.93	6.85	61.78	120.24	-58.46	peak
5855.590	52.34	6.86	59.20	110.63	-51.43	peak

Test Mode	IEEE 802.11a / 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

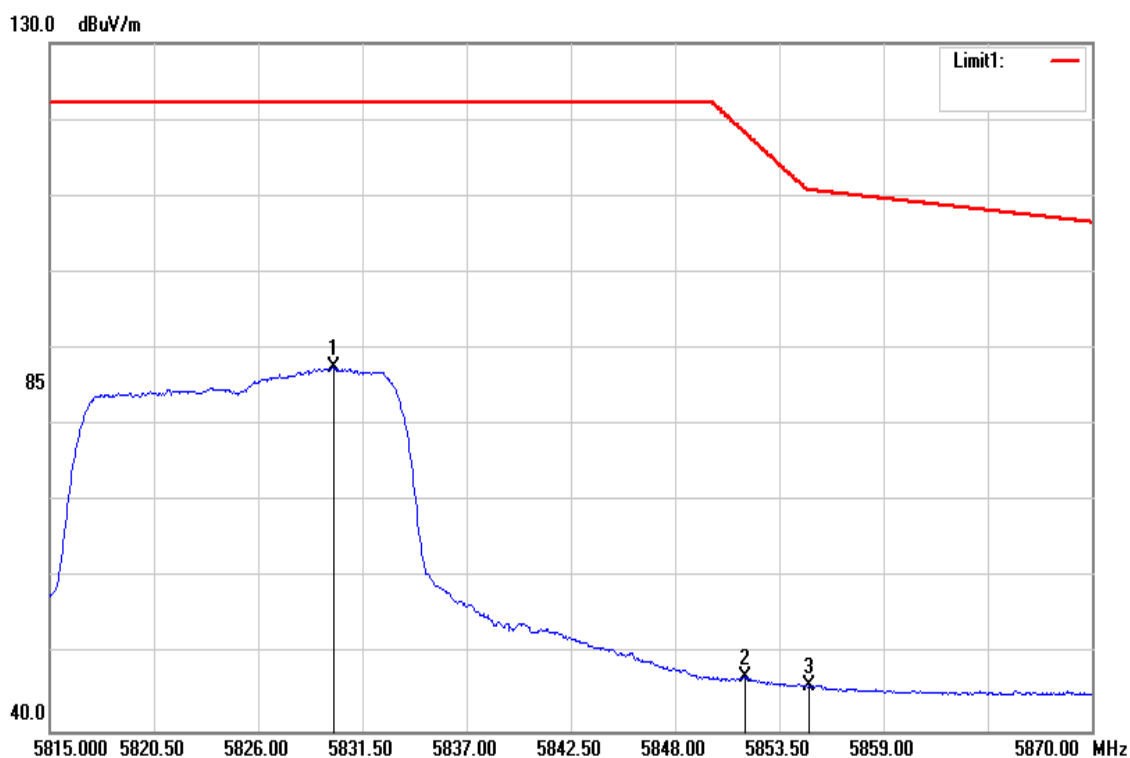


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5829.960	80.82	6.80	87.62	-	-	AVG
5851.685	40.22	6.85	47.07	118.36	-71.29	AVG
5855.095	39.16	6.86	46.02	110.77	-64.75	AVG

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

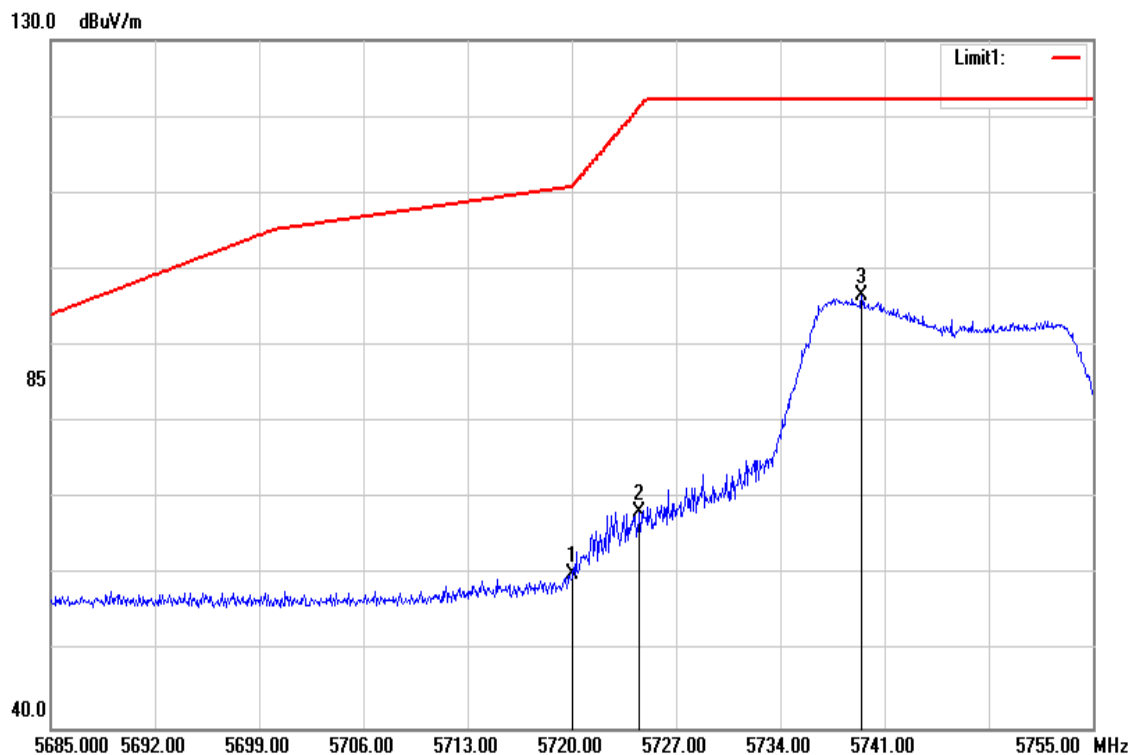


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5720.070	53.64	6.50	60.14	110.96	-50.82	peak
5724.550	61.74	6.52	68.26	121.17	-52.91	peak
5739.460	89.96	6.56	96.52	-	-	peak

Test Mode	IEEE 802.11n 20 MHz / 5745 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

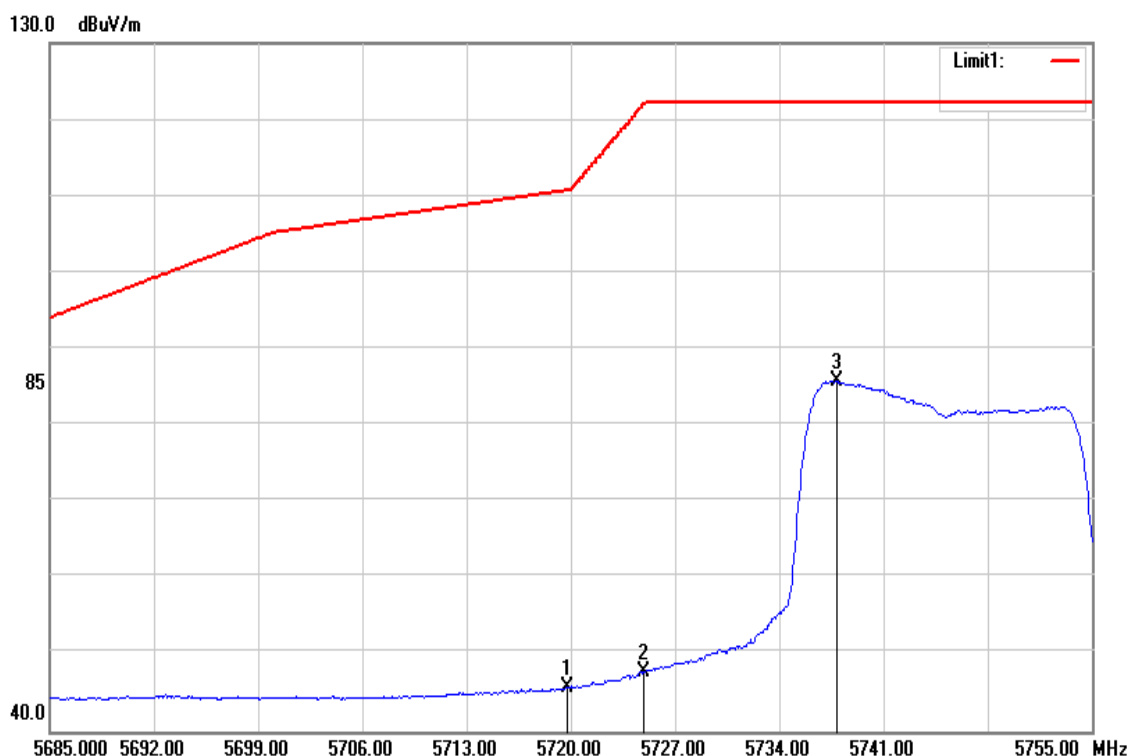


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5719.790	39.28	6.50	45.78	110.74	-64.96	AVG
5724.900	41.29	6.52	47.81	121.97	-74.16	AVG
5737.850	79.25	6.56	85.81	-	-	AVG

Test Mode	IEEE 802.11n 20 MHz / 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

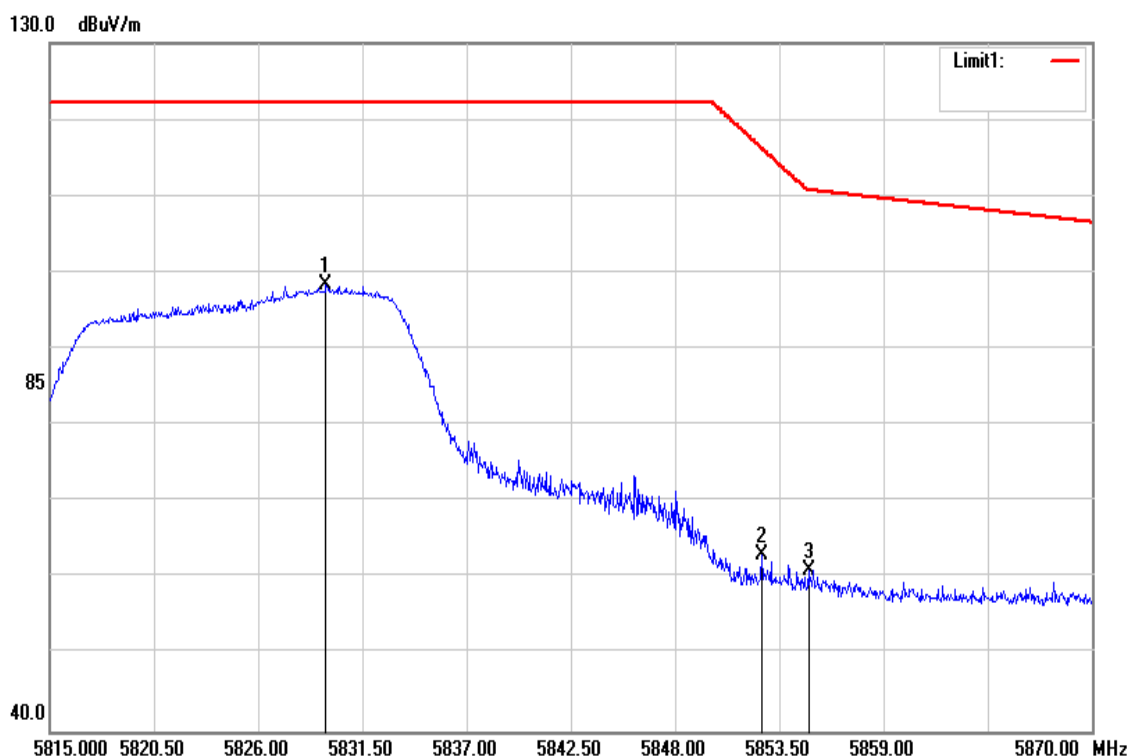


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5829.575	91.50	6.80	98.30	-	-	peak
5852.565	56.15	6.86	63.01	116.35	-53.34	peak
5855.040	54.28	6.86	61.14	110.79	-49.65	peak

Test Mode	IEEE 802.11n 20 MHz / 5825 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

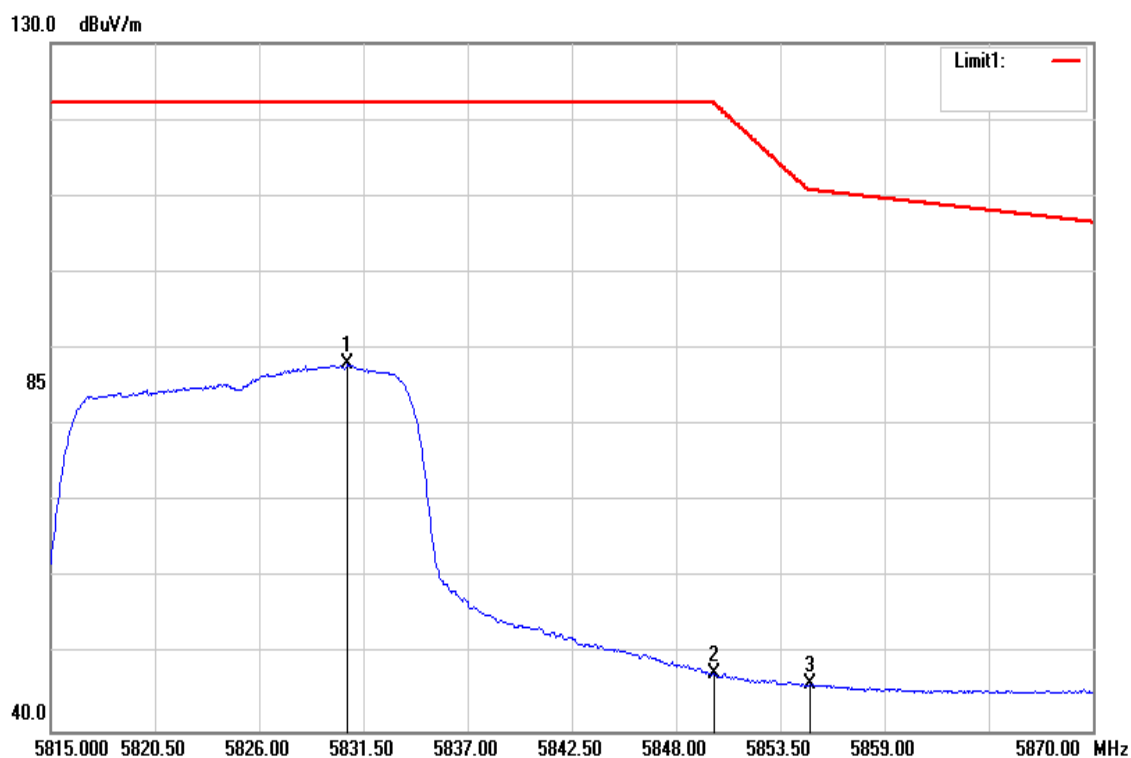


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5830.675	81.16	6.80	87.96	-	-	AVG
5850.035	40.70	6.85	47.55	122.12	-74.57	AVG
5855.095	39.31	6.86	46.17	110.77	-64.60	AVG

Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

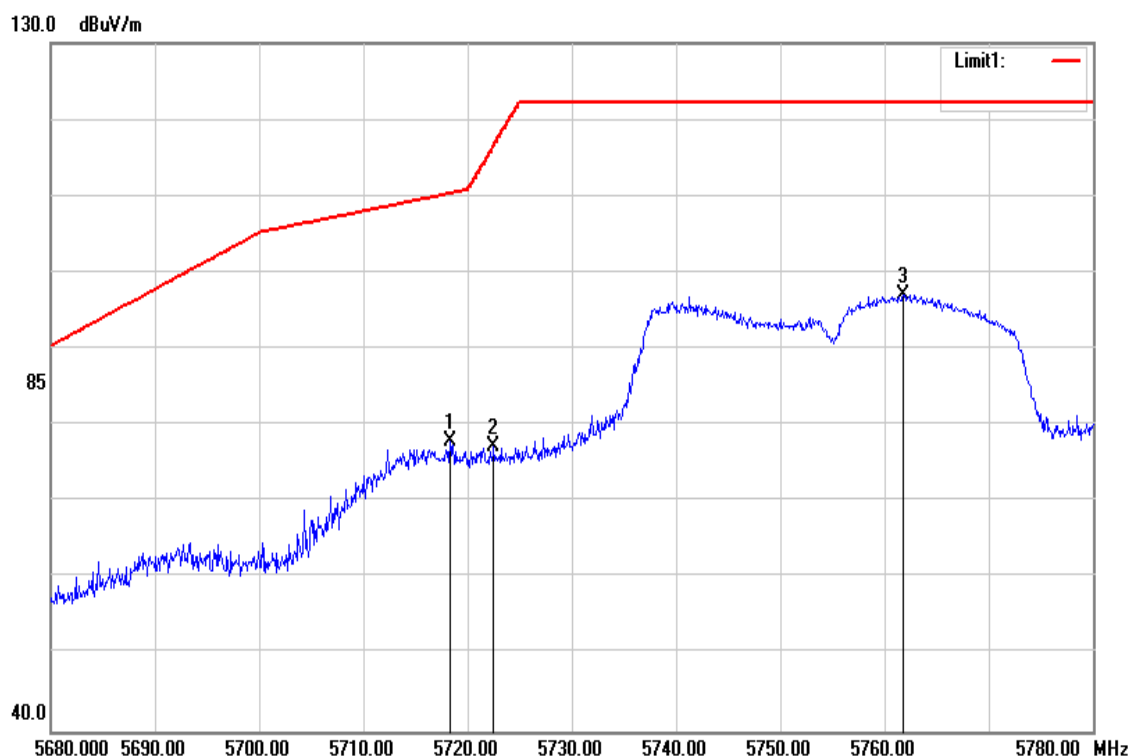

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5718.300	71.44	6.50	77.94	110.32	-32.38	peak
5722.500	70.77	6.51	77.28	116.50	-39.22	peak
5761.800	90.48	6.61	97.09	-	-	peak


Test Mode	IEEE 802.11n 40 MHz/ 5755 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

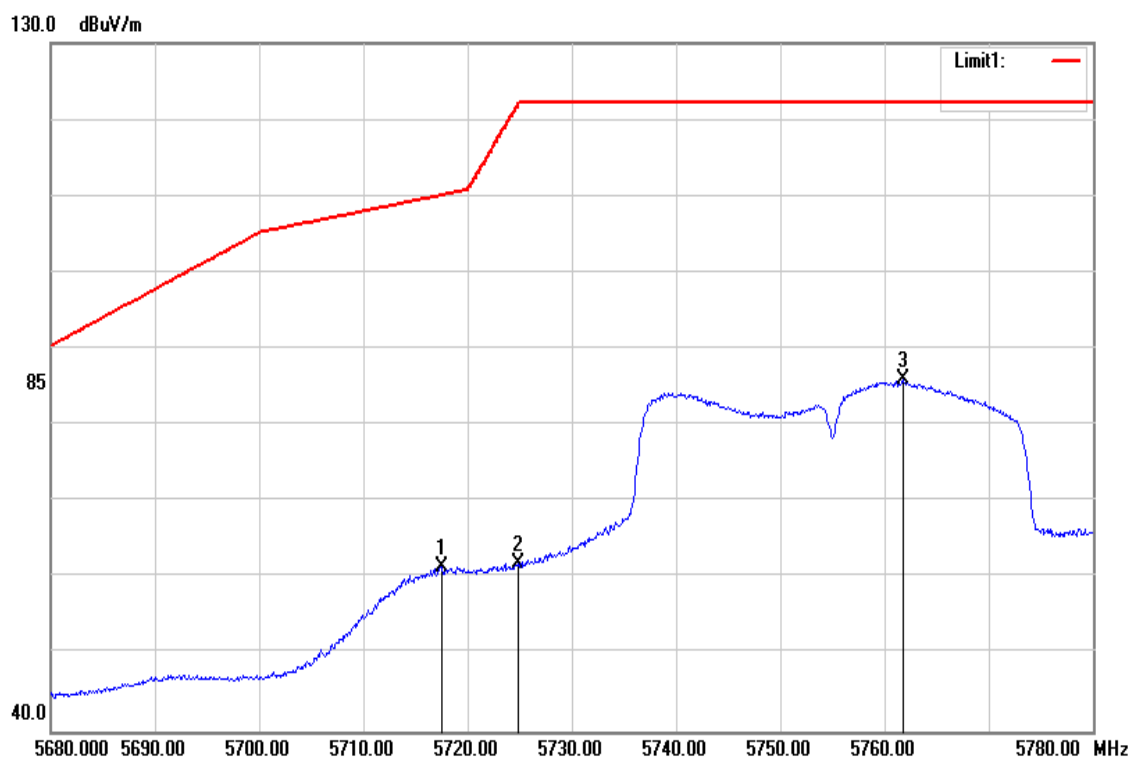

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5717.500	55.02	6.50	61.52	110.10	-48.58	AVG
5724.900	55.45	6.52	61.97	121.97	-60.00	AVG
5761.800	79.34	6.61	85.95	-	-	AVG


Report No.: T170908D07-RP4

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	DC 12V

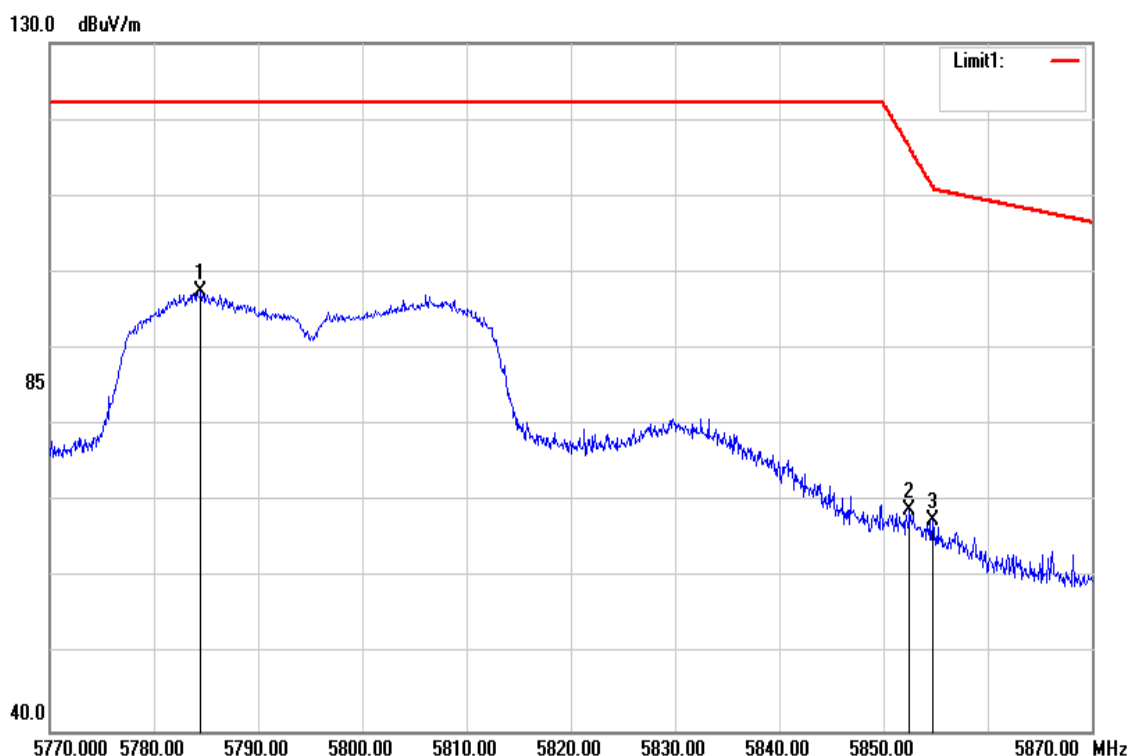

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5784.500	90.80	6.67	97.47	-	-	peak
5852.500	62.14	6.85	68.99	116.50	-47.51	peak
5854.700	60.60	6.86	67.46	111.48	-44.02	peak

Test Mode	IEEE 802.11n 40 MHz/ 5795 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	December 21, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	DC 12V

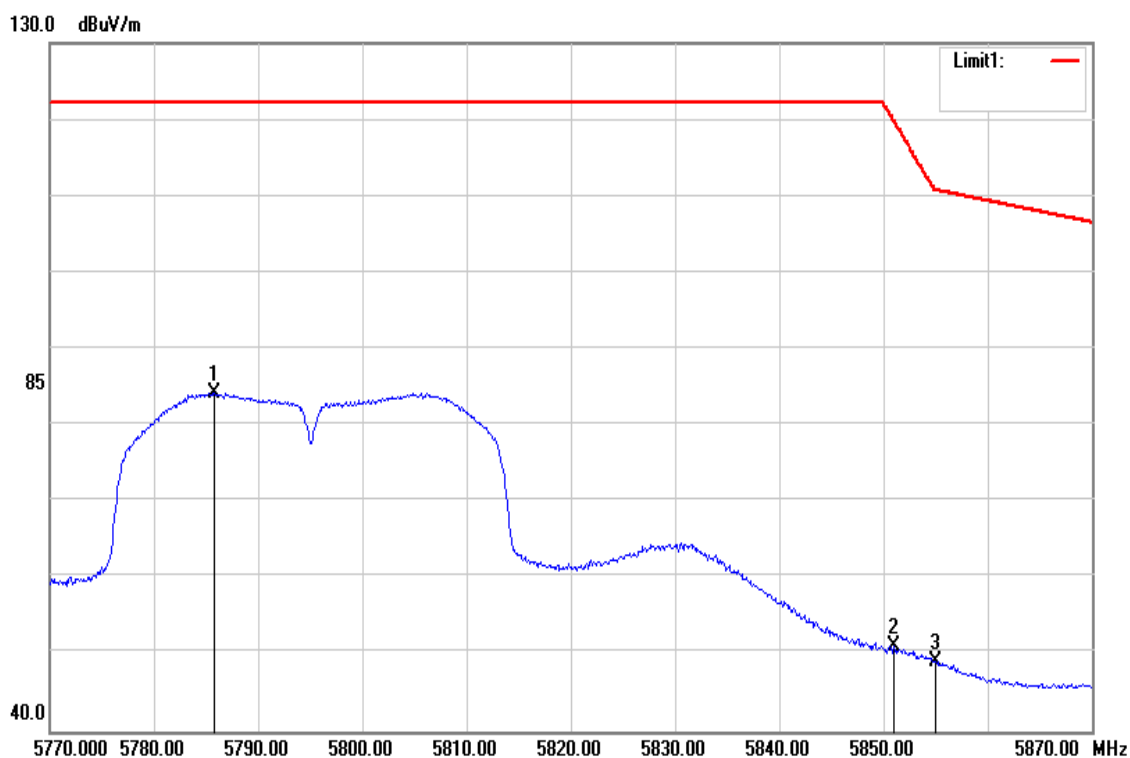


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
5785.800	77.64	6.67	84.31	-	-	AVG
5851.000	44.37	6.85	51.22	119.92	-68.70	AVG
5855.000	42.35	6.86	49.21	110.80	-61.59	AVG

Report No.: T170908D07-RP4

Below 1G Test Data

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak	Test Voltage	DC 12V

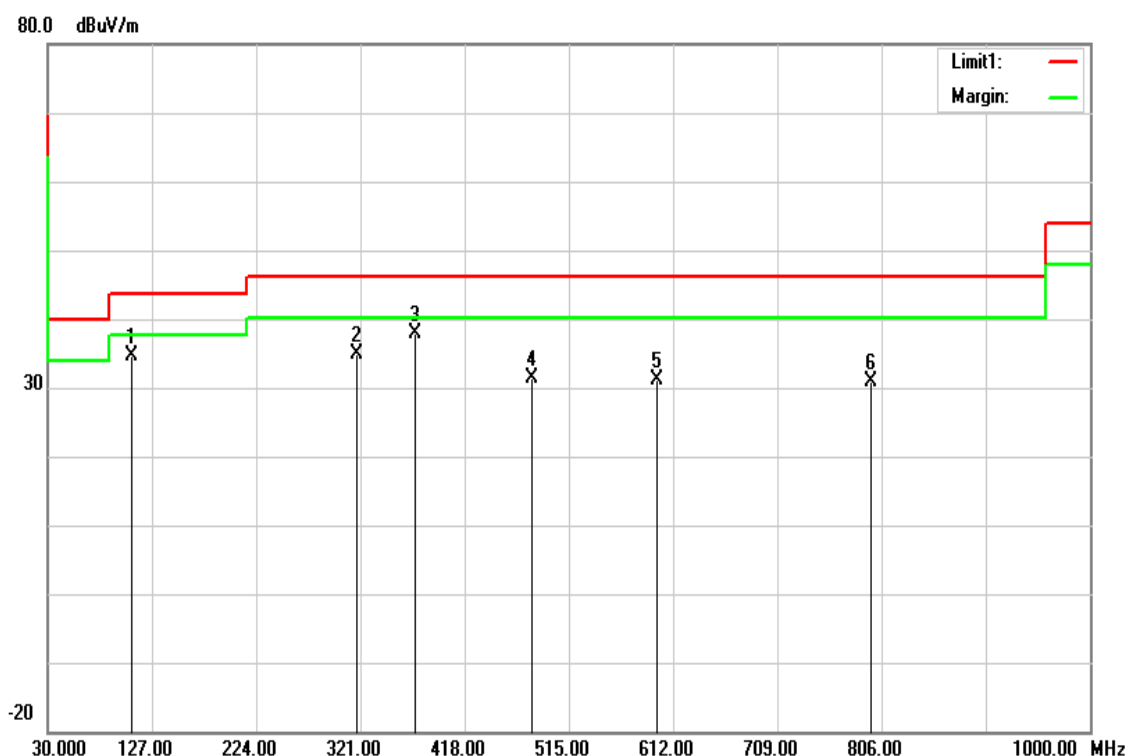


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
108.5700	51.78	-17.04	34.74	43.52	-8.78	peak
317.1200	48.69	-13.70	34.99	46.02	-11.03	peak
372.4100	50.13	-12.27	37.86	46.02	-8.16	peak
480.0800	40.25	-8.94	31.31	46.02	-14.71	peak
597.4500	38.01	-6.96	31.05	46.02	-14.97	peak
796.3000	34.38	-3.44	30.94	46.02	-15.08	peak

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: T170908D07-RP4

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Quasi-peak	Test Voltage	DC 12V

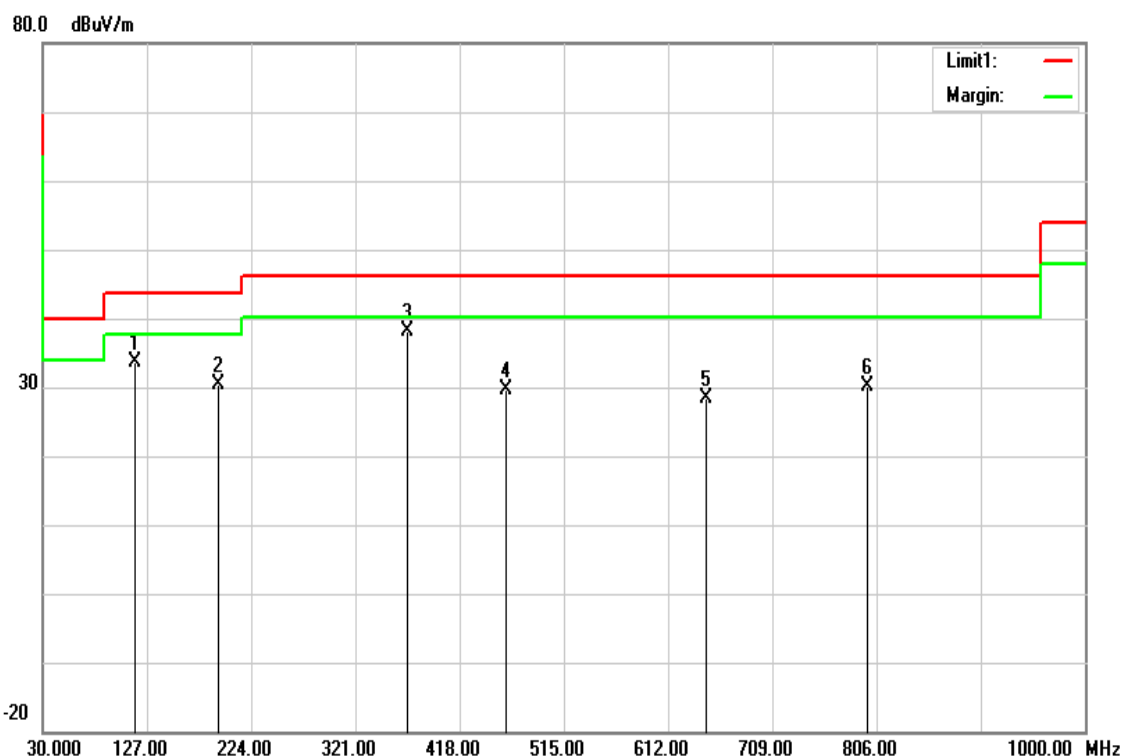


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
116.3300	49.21	-15.65	33.56	43.52	-9.96	peak
192.9600	46.30	-15.95	30.35	43.52	-13.17	peak
369.5000	50.58	-12.36	38.22	46.02	-7.80	QP
461.6500	38.89	-9.34	29.55	46.02	-16.47	peak
647.8900	34.06	-5.61	28.45	46.02	-17.57	peak
797.2700	33.54	-3.43	30.11	46.02	-15.91	peak

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: T170908D07-RP4

Above 1G Test Data for UNII-1

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

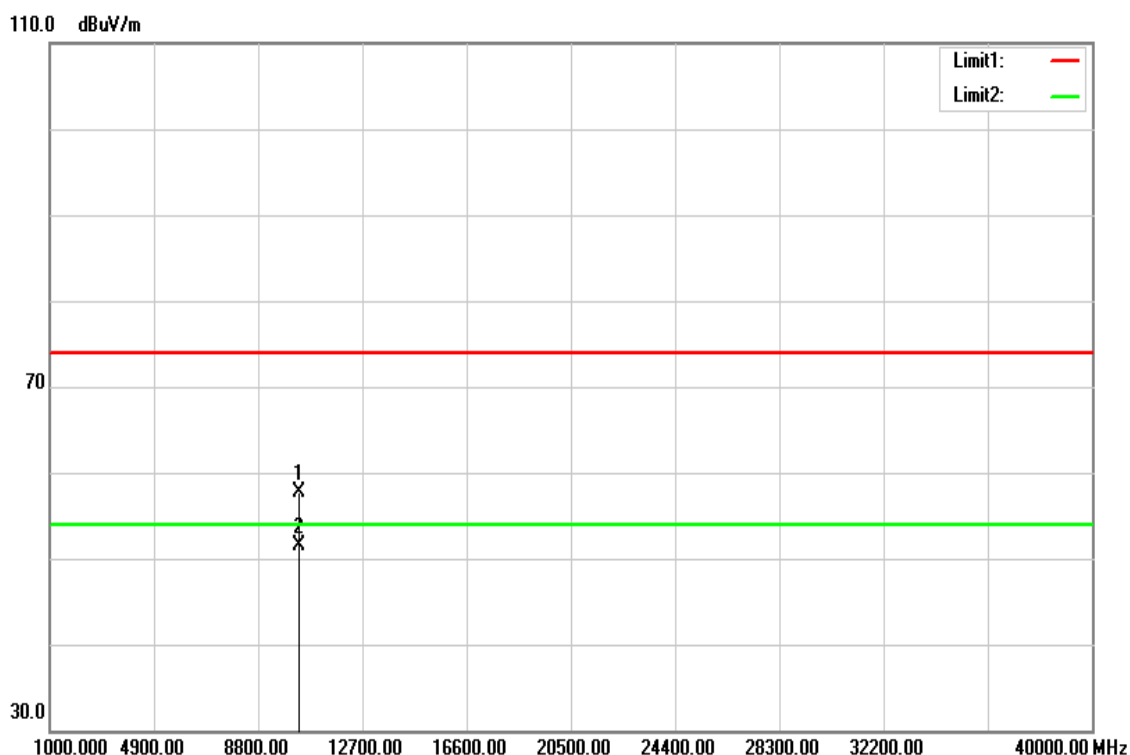


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10350.00	43.27	14.41	57.68	74.00	-16.32	peak
10350.00	37.09	14.41	51.50	54.00	-2.50	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T170908D07-RP4

Test Mode	IEEE 802.11a / 5180MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

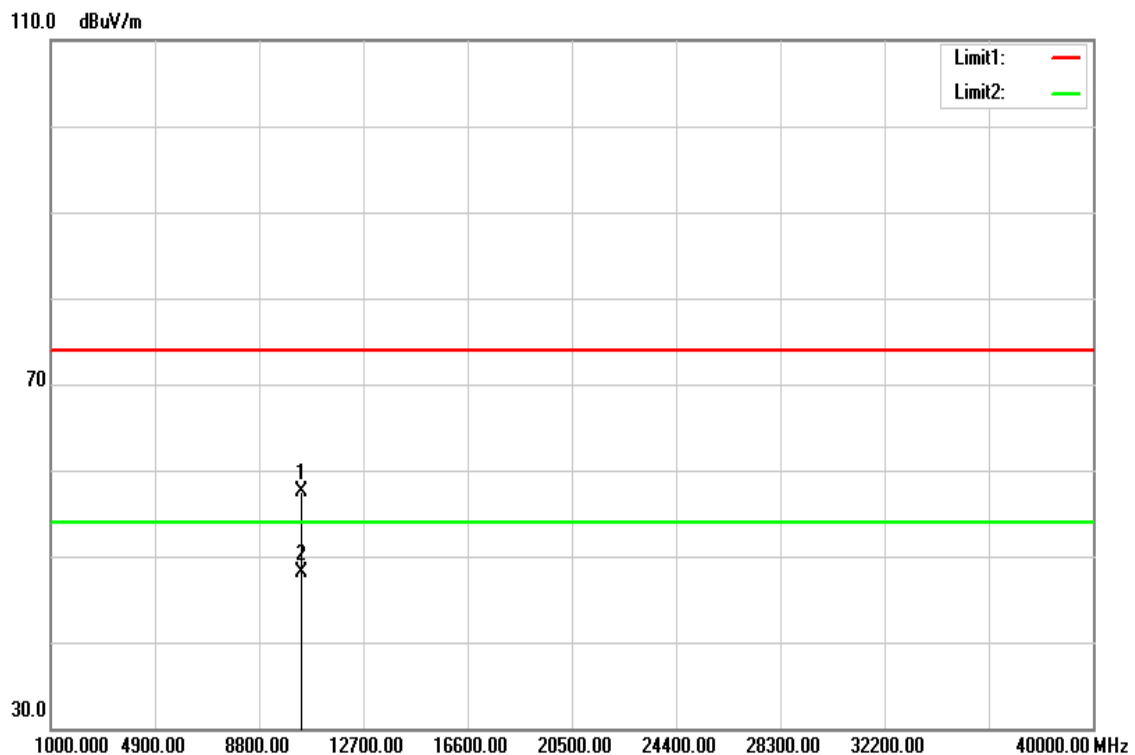


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10360.000	43.10	14.45	57.55	74.00	-16.45	peak
10360.000	33.74	14.45	48.19	54.00	-5.81	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Horizontal	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

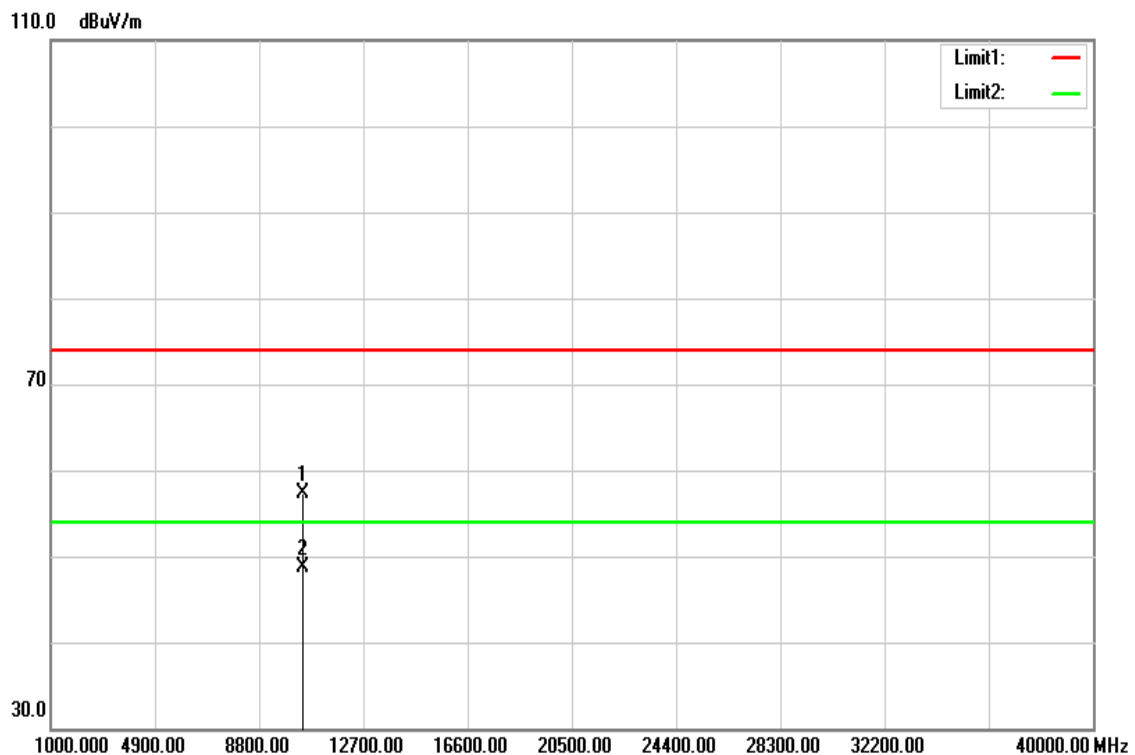


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10440.000	42.68	14.71	57.39	74.00	-16.61	peak
10440.000	34.03	14.71	48.74	54.00	-5.26	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5220 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

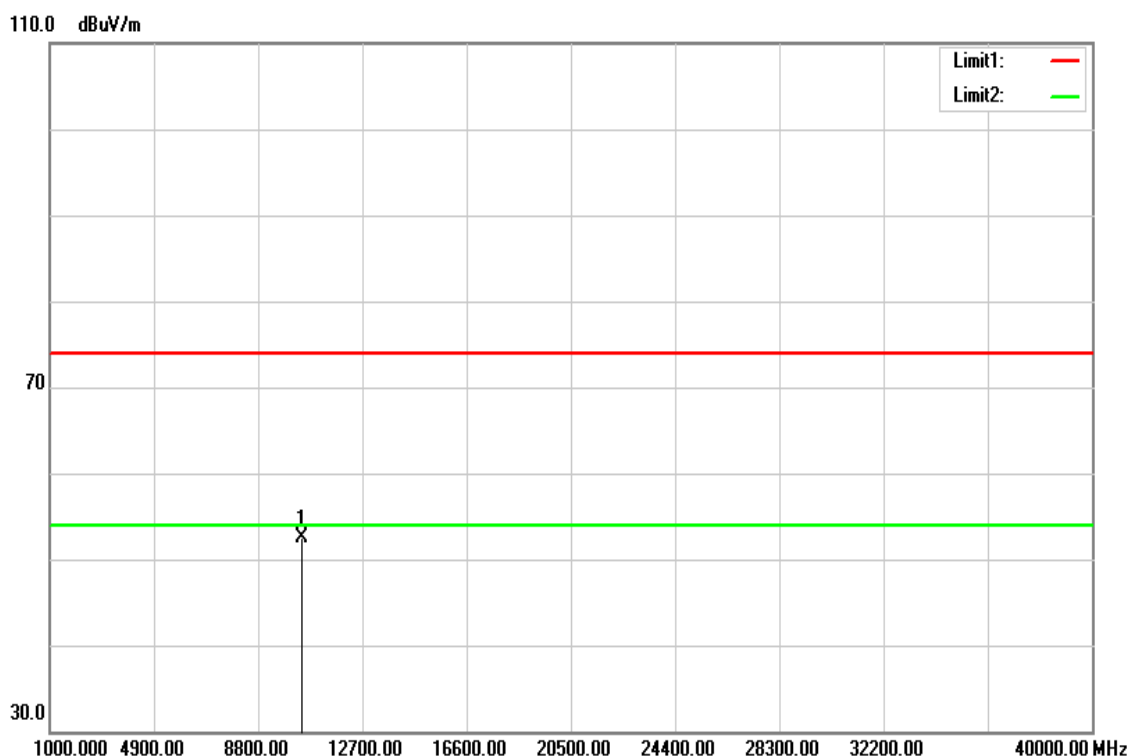


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10440.000	37.76	14.71	52.47	74.00	-21.53	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

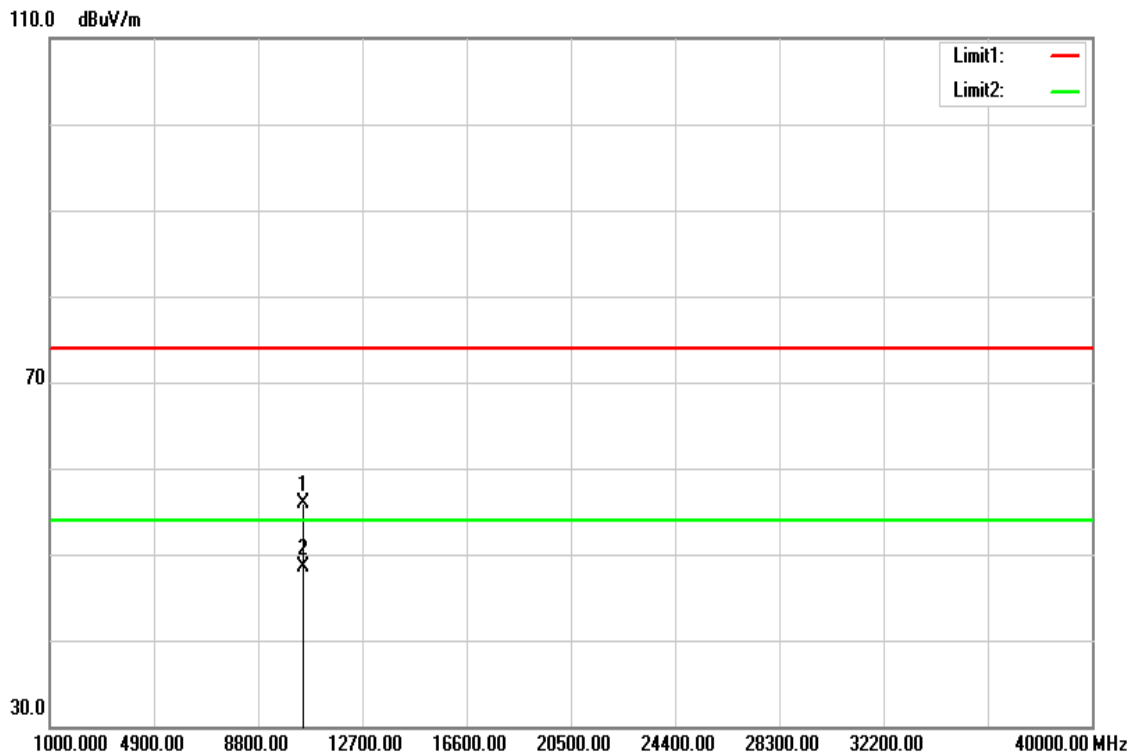


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10480.000	41.02	14.84	55.86	74.00	-18.14	peak
10480.000	33.70	14.84	48.54	54.00	-5.46	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5240MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

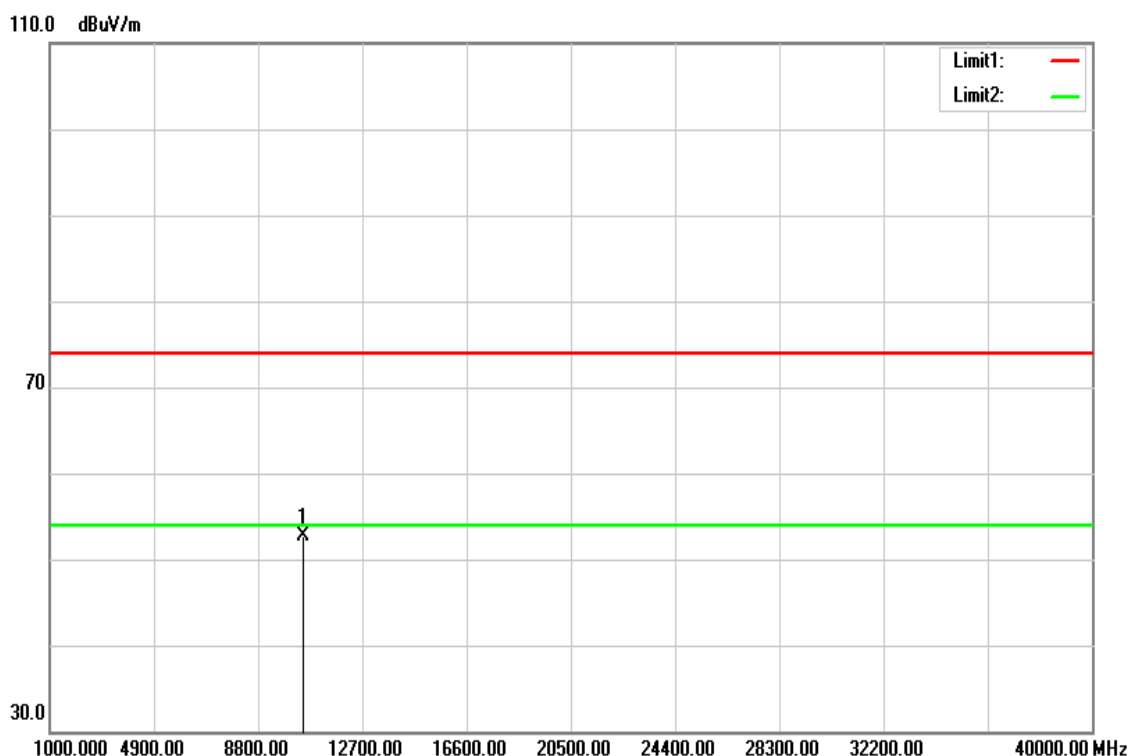

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10490.000	37.77	14.88	52.65	74.00	-21.35	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5180MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V



Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10360.000	40.40	14.45	54.85	74.00	-19.15	peak
10360.000	35.42	14.45	49.87	54.00	-4.13	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n 20 MHz/ 5180MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V




Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10350.000	38.58	14.41	52.99	74.00	-21.01	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5220MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

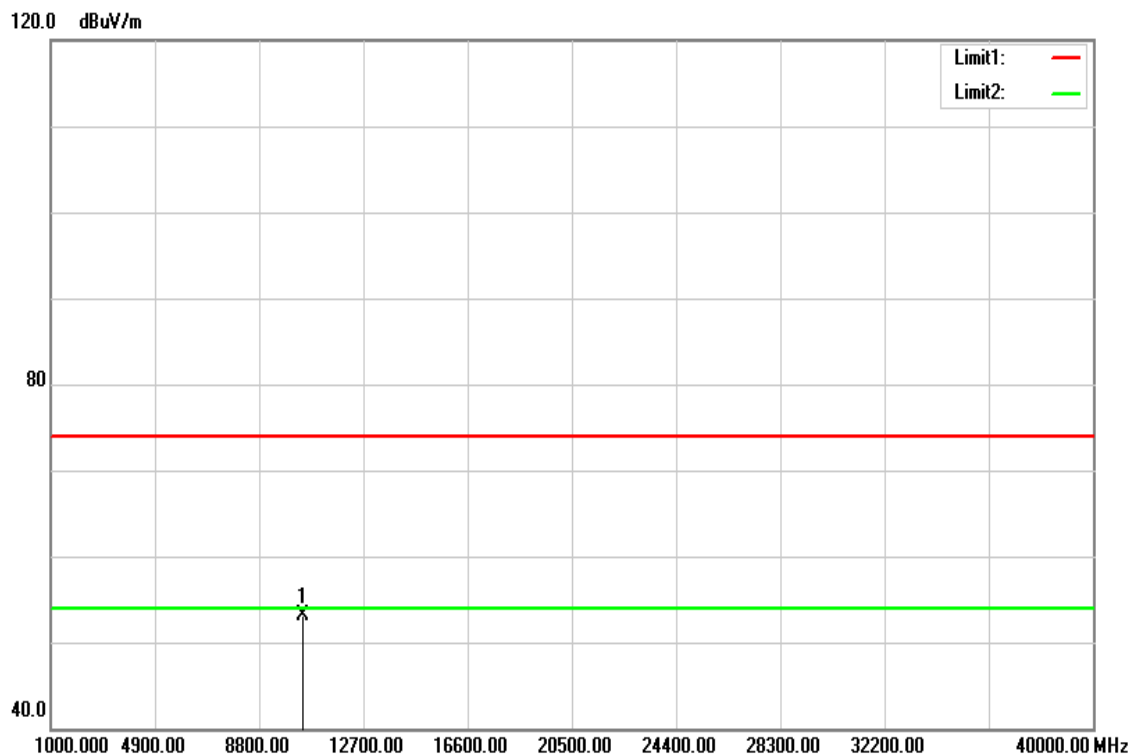


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10440.000	38.32	14.71	53.03	74.00	-20.97	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5220MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

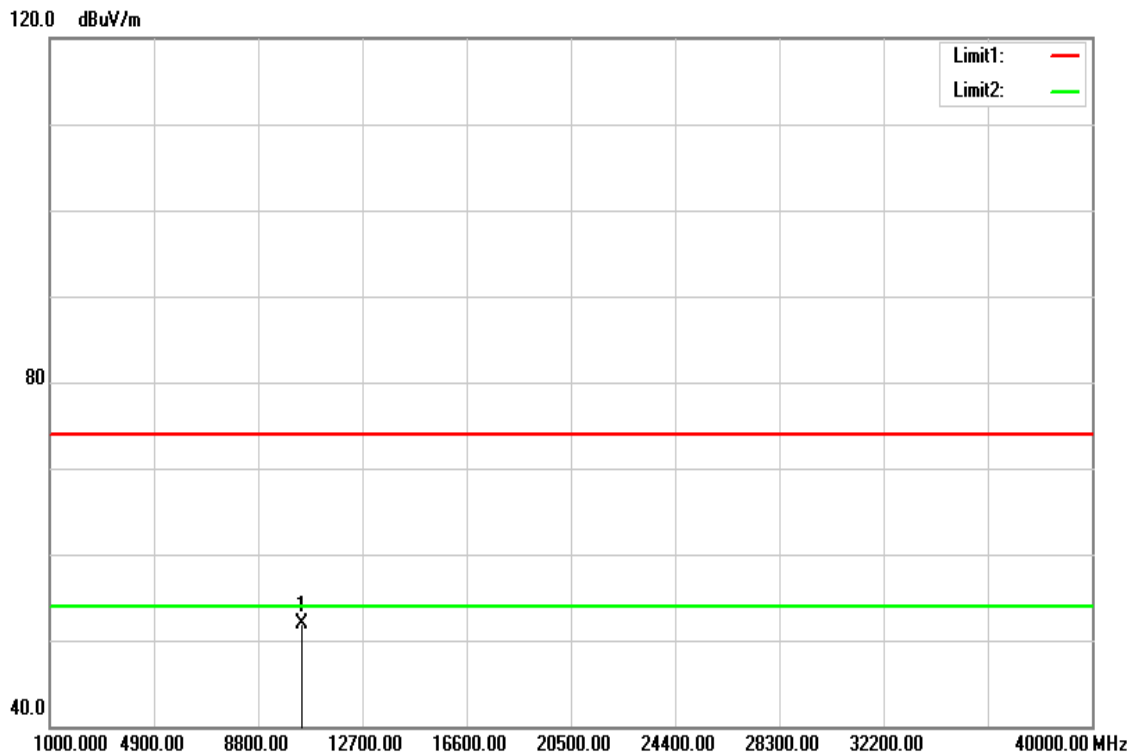


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10440.000	37.16	14.71	51.87	74.00	-22.13	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

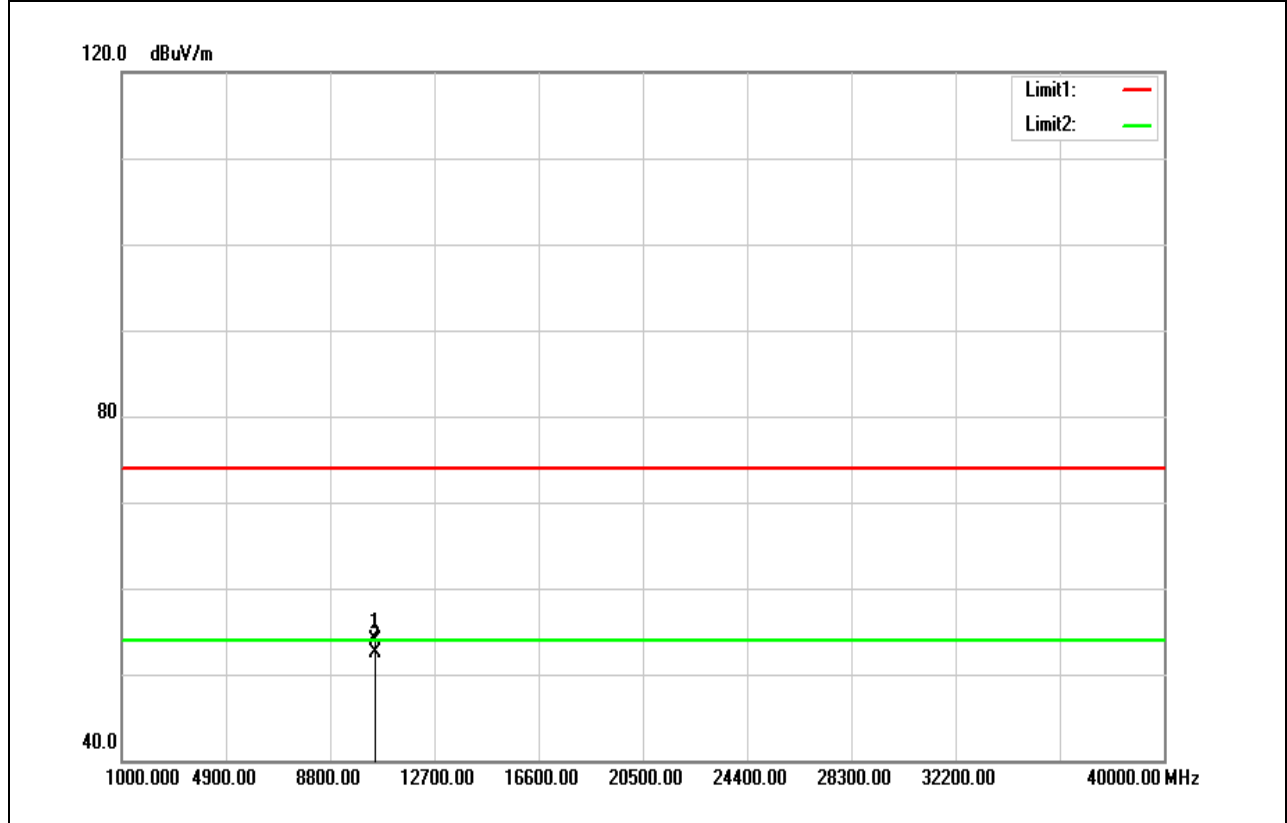

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10480.000	39.16	14.84	54.00	74.00	-20.00	peak
10480.000	37.60	14.84	52.44	54.00	-1.56	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n 20 MHz / 5240MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V




Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10480.000	36.89	14.84	51.73	74.00	-22.27	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5190MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

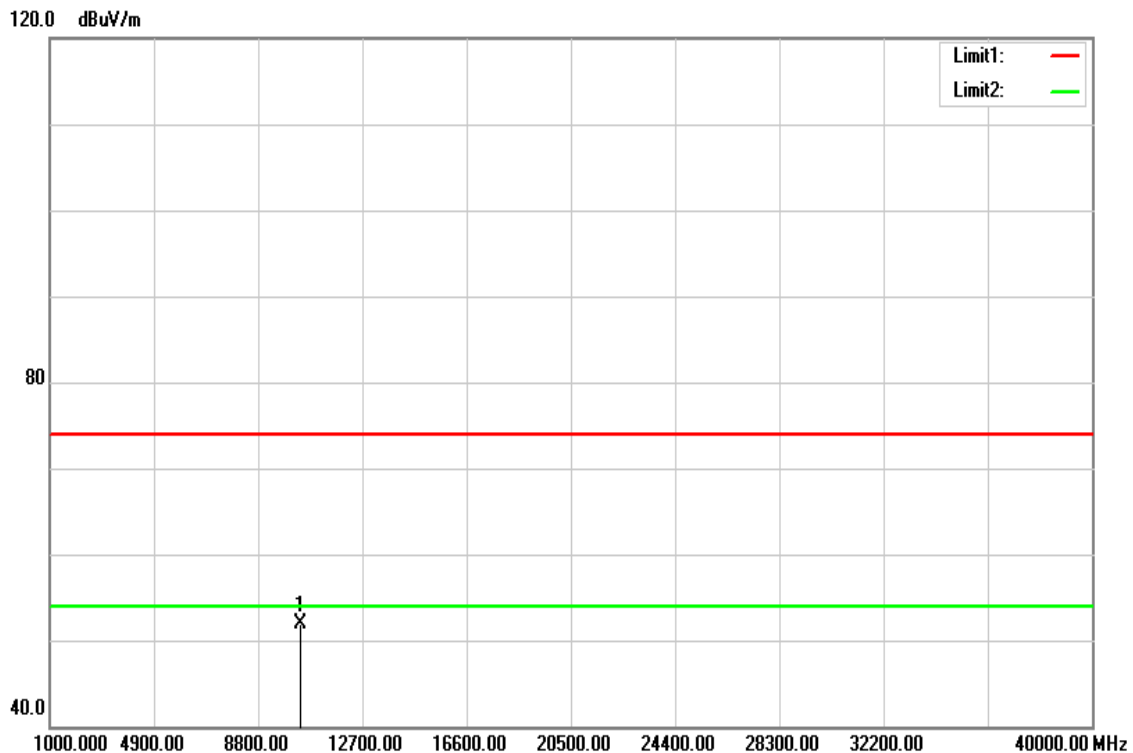

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10380.000	37.41	14.50	51.91	74.00	-22.09	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5190MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V



Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10380.000	36.80	14.50	51.30	74.00	-22.70	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V



Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10460.000	37.76	14.79	52.55	74.00	-21.45	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5230MHZ	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V



Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10460.000	35.54	14.79	50.33	74.00	-23.67	peak
N/A						


Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T170908D07-RP4

Above 1G Test Data for UNII-2a

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

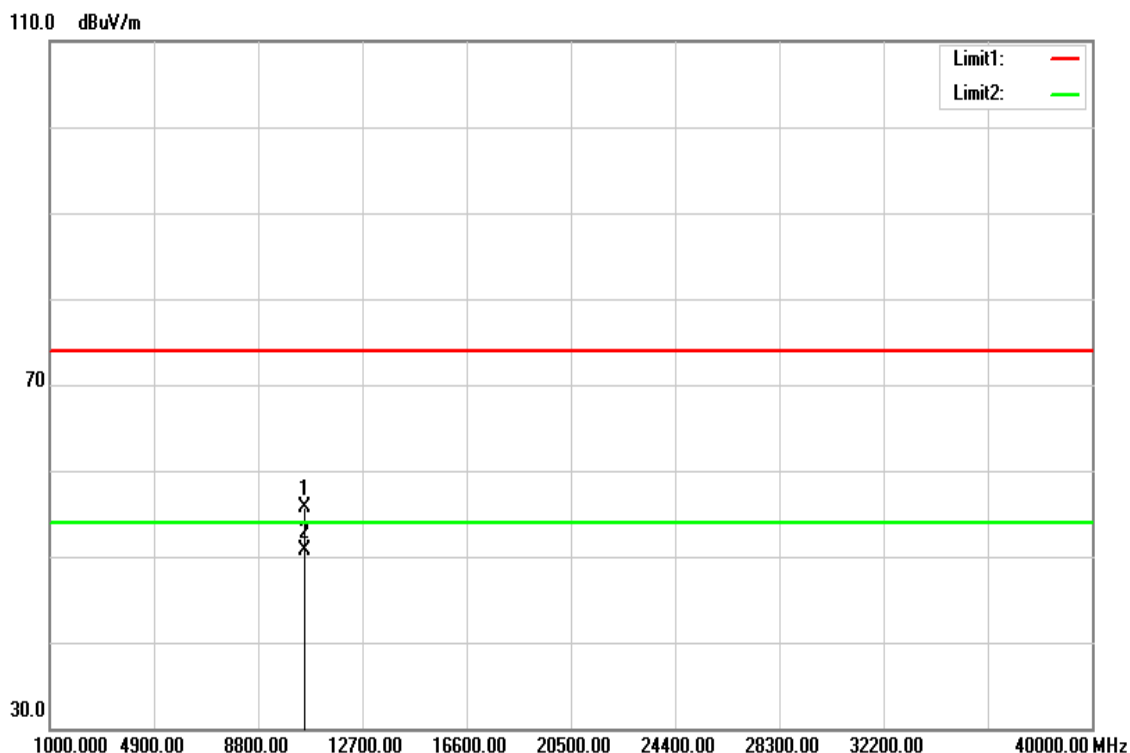


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10520.000	40.66	14.97	55.63	74.00	-18.37	peak
10520.000	35.72	14.97	50.69	54.00	-3.31	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

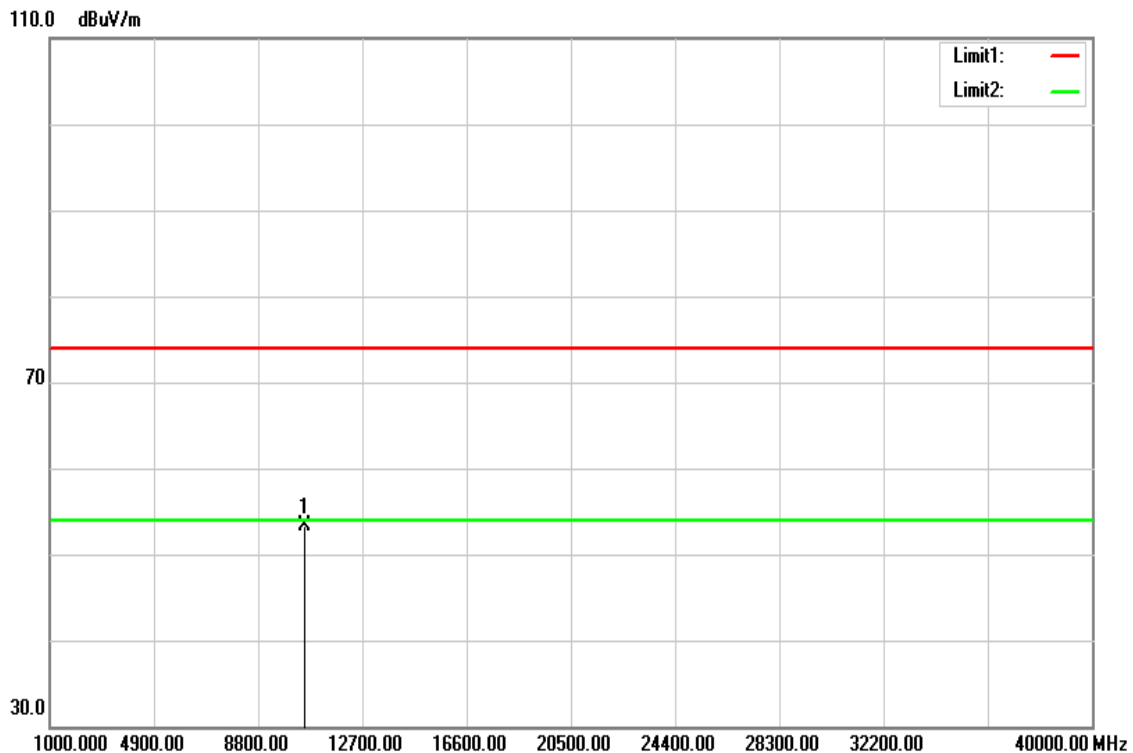


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10520.000	38.32	14.97	53.29	74.00	-20.71	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

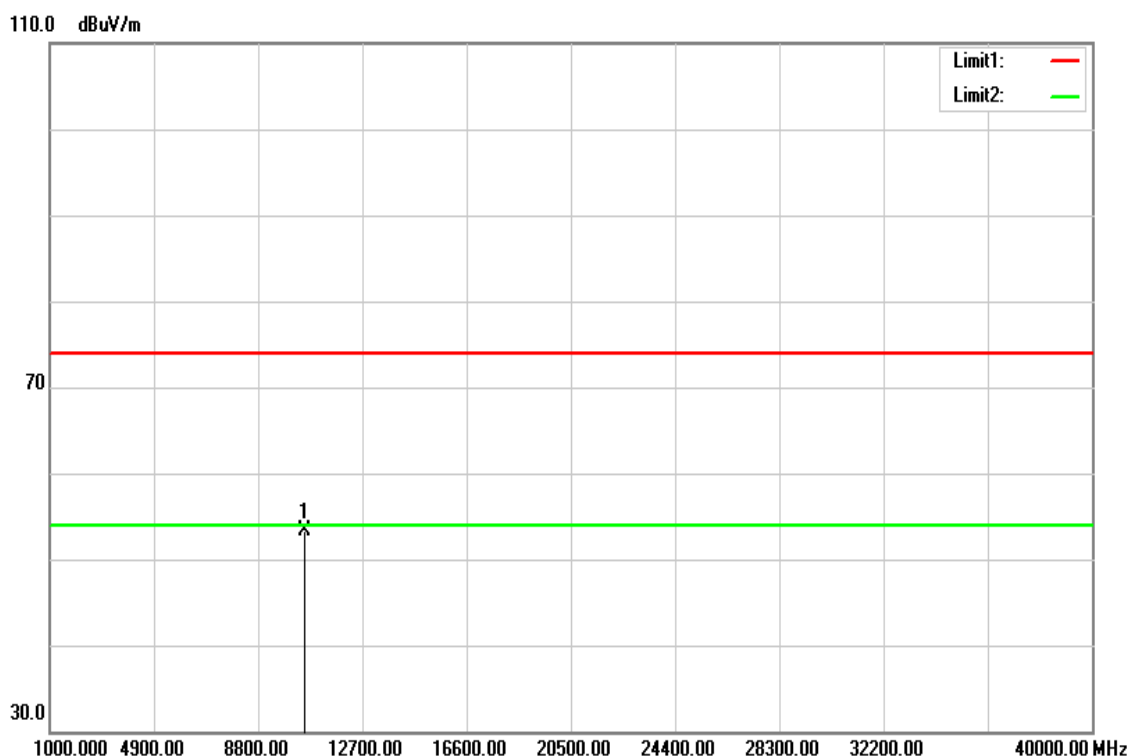


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10560.000	38.24	15.06	53.30	74.00	-20.70	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

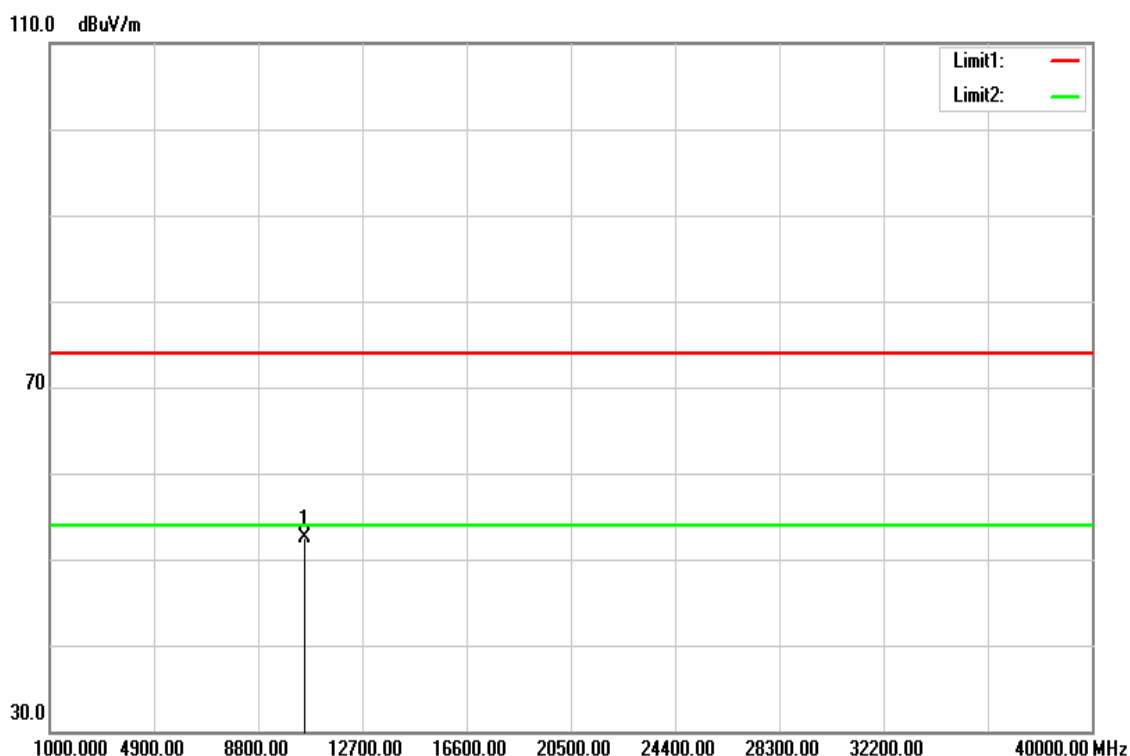


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10560.000	37.42	15.06	52.48	74.00	-21.52	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

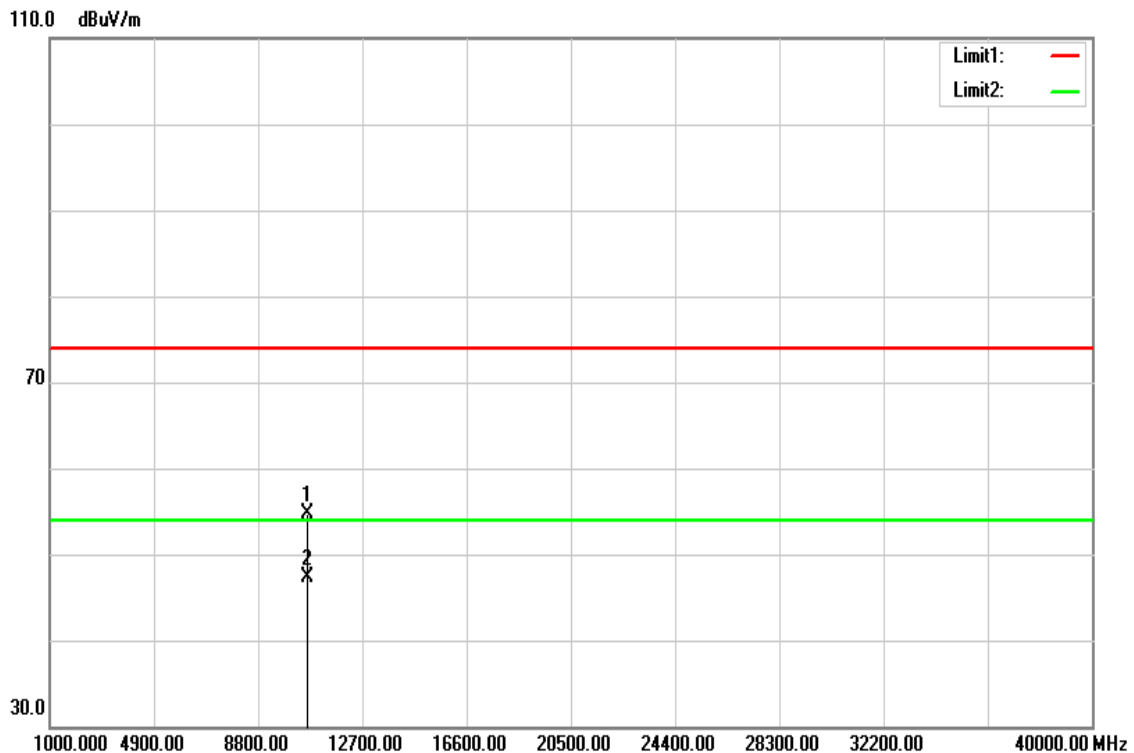


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10640.000	39.40	15.23	54.63	74.00	-19.37	peak
10640.000	31.98	15.23	47.21	54.00	-6.79	AVG
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

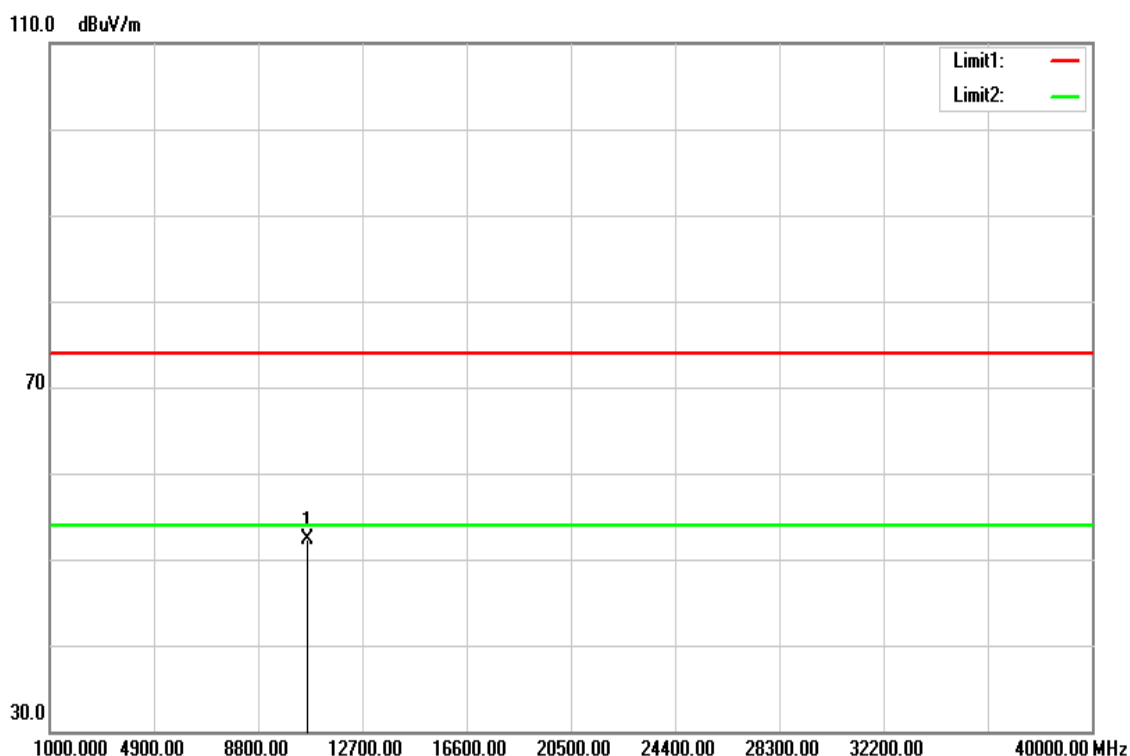

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10640.000	37.03	15.23	52.26	74.00	-21.74	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V



Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10520.000	36.70	14.97	51.67	74.00	-22.33	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V




Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10520.000	36.37	14.97	51.34	74.00	-22.66	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

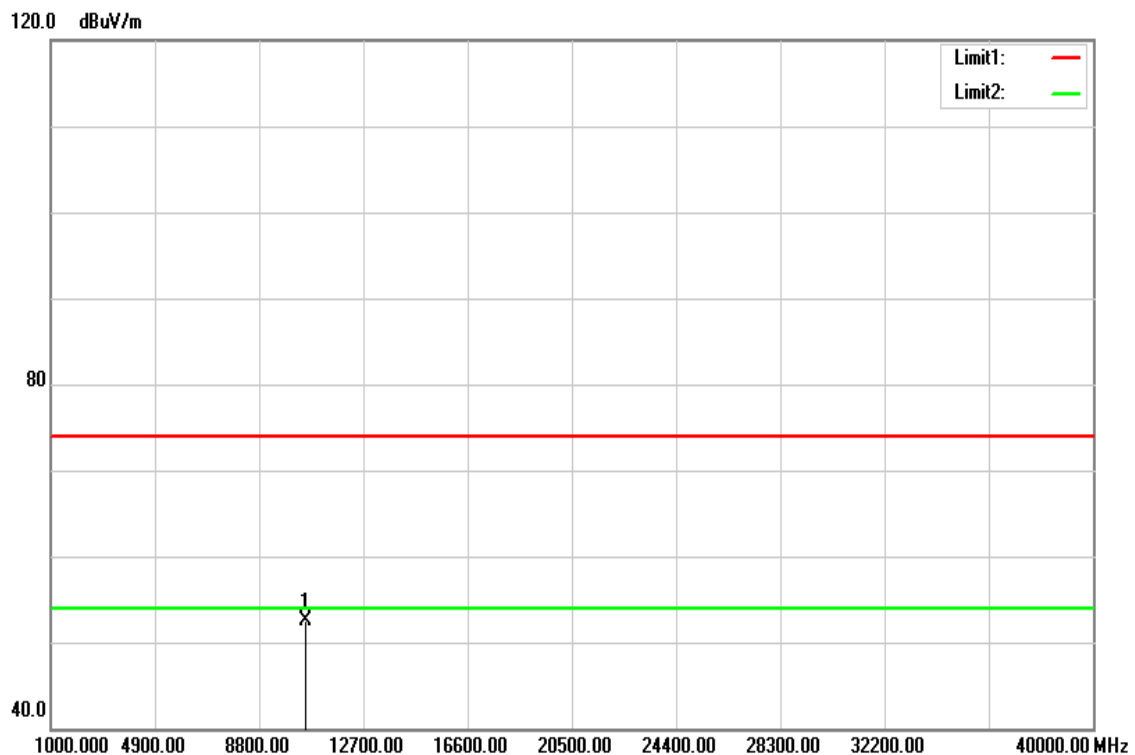

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10560.000	37.48	15.06	52.54	74.00	-21.46	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V



Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10560.000	36.00	15.06	51.06	74.00	-22.94	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Report No.: T170908D07-RP4

Page: 145 / 202

Rev.: 01

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

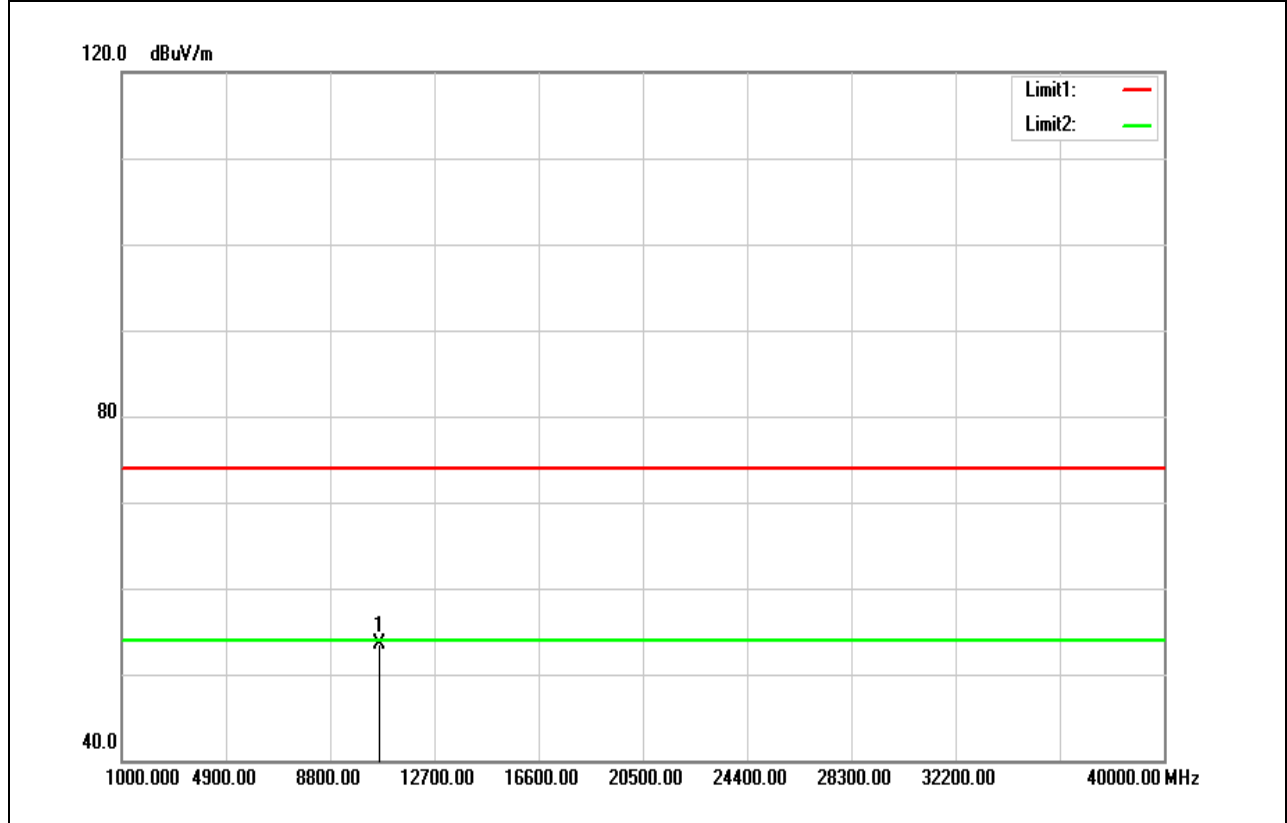


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10640.000	38.23	15.23	53.46	74.00	-20.54	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

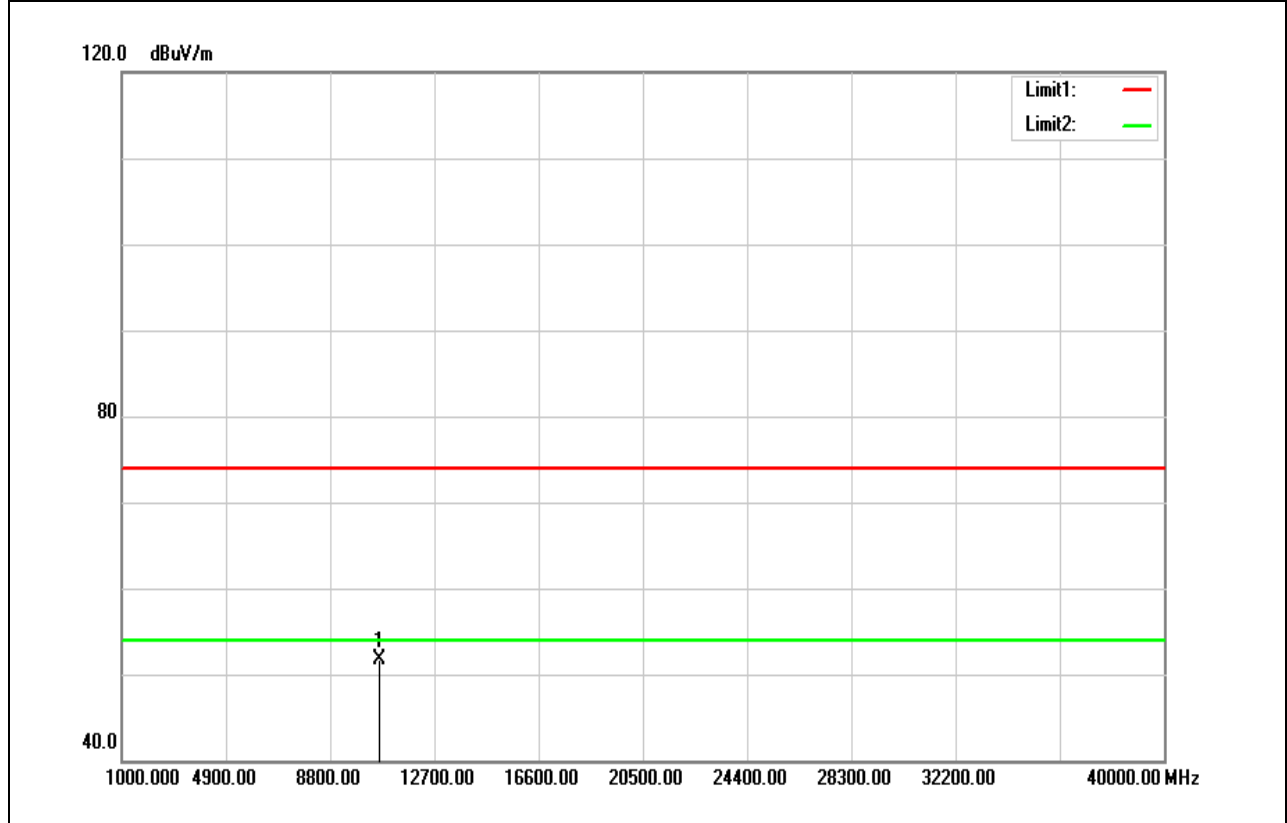

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10640.000	36.37	15.23	51.60	74.00	-22.40	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V




Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10540.000	36.90	15.01	51.91	74.00	-22.09	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

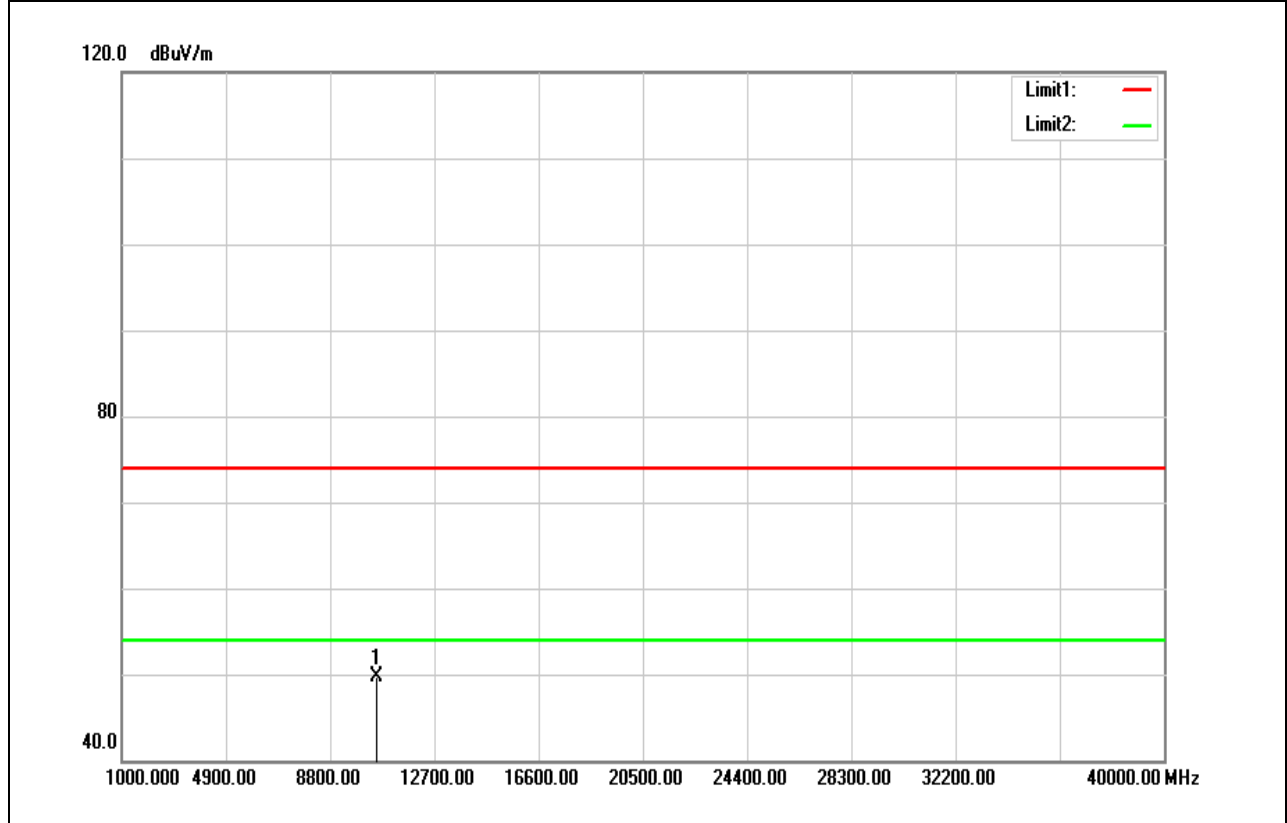


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10540.000	34.69	15.01	49.70	74.00	-24.30	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	January 8, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average	Test Voltage	DC 12V

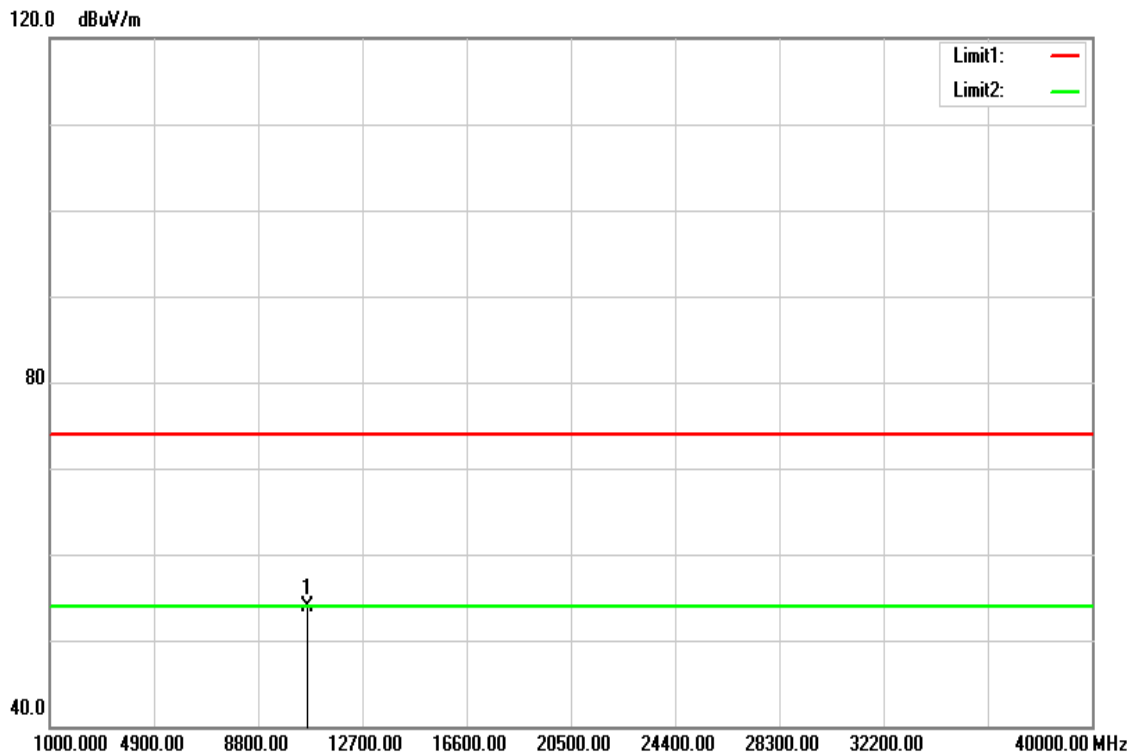

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10620.000	38.74	15.20	53.94	74.00	-20.06	peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz,the EUT peak value was under average limit, therefore the Average value compliance with the average limit