

FCC Test Report (Part 22)

Report No.: RF151229C25-4

FCC ID: M82-TREK733L

Test Model: TREK-733L

Received Date: Apr. 14, 2016

Test Date: Jun. 15 ~ Aug. 08, 2016

Issued Date: Aug. 10, 2016

Applicant: ADVANTECH CO., LTD

Address: No.1, Alley 20, Lane 26, Rueiguang Rd, Neihu District, Taipei, Taiwan 114

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Configuration of System Under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail.....	10
3.4 EUT Operating Conditions.....	12
3.5 General Description of Applied Standards.....	12
4 Test Types and Results	13
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement.....	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results.....	15
4.2 Frequency Stability Measurement.....	20
4.2.1 Limits of Frequency Stability Measurement.....	20
4.2.2 Test Procedure.....	20
4.2.3 Test Setup.....	20
4.2.4 Test Results.....	21
4.3 Occupied Bandwidth Measurement.....	22
4.3.1 Test Procedure.....	22
4.3.2 Test Setup.....	22
4.3.3 Test Result.....	23
4.4 Band Edge Measurement.....	25
4.4.1 Limits of Band Edge Measurement.....	25
4.4.2 Test Setup.....	25
4.4.3 Test Procedures.....	25
4.4.4 Test Results.....	26
4.5 Peak To Average Ratio.....	30
4.5.1 Limits of Peak To Average Ratio Measurement.....	30
4.5.2 Test Setup.....	30
4.5.3 Test Procedures.....	30
4.5.4 Test Results.....	31
4.6 Conducted Spurious Emissions.....	33
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	33
4.6.2 Test Setup.....	33
4.6.3 Test Procedure.....	33
4.6.4 Test Results.....	34
4.7 Radiated Emission Measurement.....	46
4.7.1 Limits of Radiated Emission Measurement.....	46
4.7.2 Test Procedure.....	46
4.7.3 Deviation from Test Standard.....	46
4.7.4 Test Setup.....	47
4.7.5 Test Results.....	48
5 Pictures of Test Arrangements	60
Appendix – Information on the Testing Laboratories	61

Release Control Record

Issue No.	Description	Date Issued
RF151229C25-4	Original release.	Aug. 10, 2016

1 Certificate of Conformity

Product: Computer

Brand: Advantech

Test Model: TREK-733L

Sample Status: Engineering sample

Applicant: ADVANTECH CO., LTD

Test Date: Jun. 15 ~ Aug. 08, 2016

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : *Suntee Liu* , **Date:** Aug. 10, 2016
Suntee Liu / Specialist

Approved by : *Bruce Chen* , **Date:** Aug. 10, 2016
Bruce Chen / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective radiated power	PASS	Meet the requirement of limit.
---	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	PASS	Meet the requirement of limit.
2.1049	Occupied Bandwidth	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -15.9dB at 1673.00MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Apr. 18, 2016	Apr. 17, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Sep. 02, 2015	Sep. 01, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Jan. 07, 2016	Jan. 06, 2017
HORN Antenna SCHWARZBECK	9120D	209	Jan. 20, 2016	Jan. 19, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Jan. 18, 2016	Jan. 17, 2017
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2015	Oct. 17, 2016
Preamplifier Agilent	8449B	3008A01964	Aug. 22, 2015	Aug. 21, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (214378)	Aug. 22, 2015	Aug. 21, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 106	Cable-CH3-03 (309224+12738)	Aug. 22, 2015	Aug. 21, 2016
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2016	Jun. 07, 2017
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jun. 09, 2016	Jun. 08, 2017
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

3 General Information

3.1 General Description of EUT

Product	Computer	
Brand	Advantech	
Test Model	TREK-733L	
Sample Status	Engineering sample	
Nominal Voltage	12 or 24Vdc (Car power system) 3.6Vdc (Battery)	
Modulation Type	QPSK, 16QAM	
Operating Frequency	LTE Band 5 (Channel Bandwidth 1.4MHz)	824.7MHz ~ 848.30MHz
	LTE Band 5 (Channel Bandwidth 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth 10MHz)	829MHz ~ 844MHz
Max. ERP Power	LTE Band 5 (Channel Bandwidth 1.4MHz)	204.174mW (23.1dBm)
	LTE Band 5 (Channel Bandwidth 3MHz)	138.038mW (21.4dBm)
	LTE Band 5 (Channel Bandwidth 5MHz)	169.824mW (22.3dBm)
	LTE Band 5 (Channel Bandwidth 10MHz)	165.959mW (22.2dBm)
Antenna Type	Refer to Note	
Antenna Connector	Refer to Note	
Accessory Device	Stand, GPS + LTE antenna, LTE antenna, Core (For power cable), Battery	
Data Cable Supplied	2.1m Display cable with 1 core 5m Coaxial cable without core (For GPS + LTE antenna) 5.1m Coaxial cable without core (For LTE antenna) 0.27m power cable with one external ferrite core	

Note:

1. The EUT provides 1 completed transmitter (Fixed on chain 0) and 2 receivers.
2. The EUT uses following antennas.


Antenna	Brand	Frequency Range (MHz)	Antenna Gain (dBi)	Antenna Type	Antenna Connector
WWAN (Main) – Chain 0	JEM	1850-1910	0.9	Dipole	SMA
		1710-1755	-0.5		
		824-849	0.5		
		777-787	0.2		
		704-716	0.2		
		1920-1980	-0.4		
WWAN (Aux) – Chain 1	JEM	1850-1910	1.2	Dipole	SMA
		1710-1755	1.8		
		824-849	-0.1		
		777-787	1		
		704-716	1		
		1920-1980	0.7		
WiFi & BT	JEM	2400-2483.5	2.87	PCB	i-pex(MHF)

3. The EUT was operated with following battery:

Battery	
Brand:	Formosan
Model:	GP01NCR18650PF
Rating:	3.6Vdc, 2270mA

4. WLAN 2.4GHz, WWAN 2/3G and LTE 4G technologies can transmit at same time.
5. Spurious emission of the simultaneous operation (WLAN 2.4GHz, WWAN 2/3G and LTE 4G) has been evaluated and no non-compliance was found.

3.2 Configuration of System Under Test

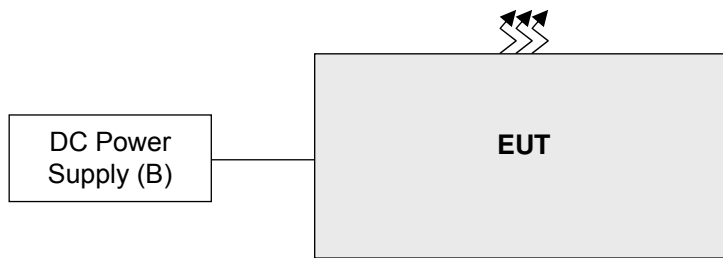

Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Universal Radio Communication Tester	R&S	CMU200	123112	NA	-
B.	DC Power Supply	Topward	6603D	700637	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

LTE Band 5

Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	1 RB / 5 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	1 RB / 14 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	1 RB / 24 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 49 RB Offset
Frequency Stability	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 5 RB Offset
Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK / 16QAM	1 RB / 5 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK / 16QAM	1 RB / 14 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK / 16QAM	1 RB / 24 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK / 16QAM	1 RB / 49 RB Offset
Band Edge	20407 to 20643	20407, 20643	1.4MHz	QPSK	1 RB / 0 RB Offset 1 RB / 5 RB Offset 6 RB / 0 RB Offset
	20415 to 20635	20415, 20635	3MHz	QPSK	1 RB / 0 RB Offset 1 RB / 14 RB Offset 15 RB / 0 RB Offset
	20425 to 20625	20425, 20625	5MHz	QPSK	1 RB / 0 RB Offset 1 RB / 24 RB Offset 25 RB / 0 RB Offset
	20450 to 20600	20450, 20600	10MHz	QPSK	1 RB / 0 RB Offset 1 RB / 49 RB Offset 50 RB / 0 RB Offset
Peak to Average Ratio	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK / 16QAM	1 RB / 5 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK / 16QAM	1 RB / 14 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK / 16QAM	1 RB / 24 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK / 16QAM	1 RB / 49 RB Offset
Conducted Emission	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	1 RB / 5 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	1 RB / 14 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	1 RB / 24 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 49 RB Offset
Radiated Emission Below 1GHz	20407 to 20643	20407	1.4MHz	QPSK	1 RB / 5 RB Offset
	20415 to 20635	20415	3MHz	QPSK	1 RB / 14 RB Offset
	20425 to 20625	20425	5MHz	QPSK	1 RB / 24 RB Offset
	20450 to 20600	20450	10MHz	QPSK	1 RB / 49 RB Offset
Radiated Emission Above 1GHz	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	1 RB / 5 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	1 RB / 14 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	1 RB / 24 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 49 RB Offset

Note:

1. For radiated emission below 1GHz, the low, mid and high channels were pre-tested in chamber. The low channel was the worst case and chosen for final test.
2. The conducted output power for QPSK and 16QAM, measured value of QPSK is higher than 16QAM mode. Therefore, only Occupied bandwidth and Peak to average ratio items had been tested under QPSK and 16QAM modes, the other test items were performed under QPSK mode only.

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
ERP	25deg. C, 69%RH	120Vac, 60Hz	Tank Wu
Frequency Stability	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Occupied Bandwidth	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Band Edge	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Peak To Average Ratio	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Conducted Emission	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Radiated Emission	20deg. C, 69%RH	120Vac, 60Hz	Bayu Chen Tank Wu

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-C 2004

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).

The test report has been issued separately.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$.

Conducted Power Measurement:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 Test Setup

EIRP / ERP Measurement:

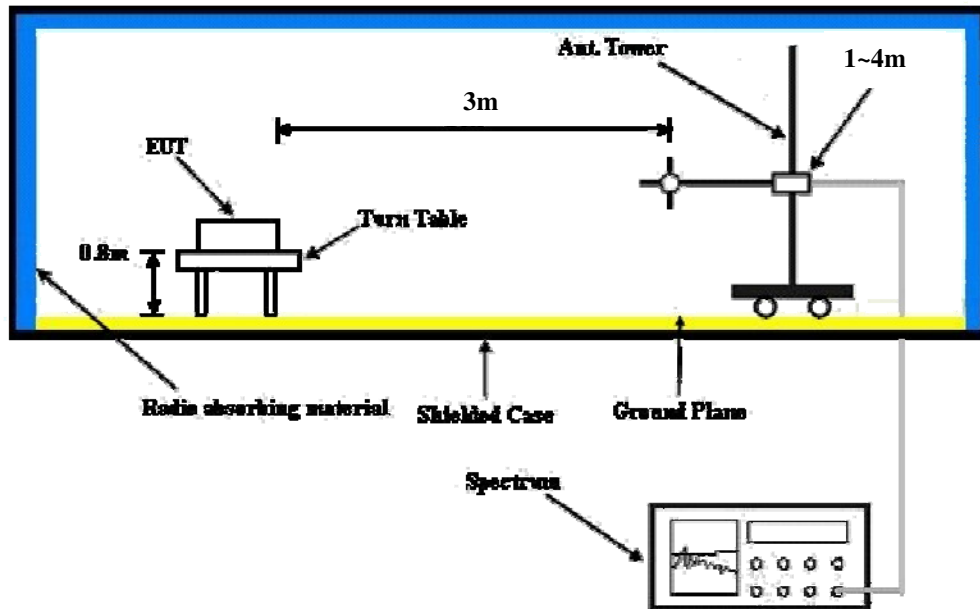

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 20407	CH 20525	CH 20643	CH 20407	CH 20525	CH 20643
			824.7 MHz	836.5 MHz	848.3 MHz	824.7 MHz	836.5 MHz	848.3 MHz
5 / 1.4MHz	1	0	22.46	22.43	22.69	21.55	21.29	21.71
	1	2	22.51	22.48	22.82	21.60	21.34	21.84
	1	5	22.59	22.50	22.85	21.68	21.36	21.87
	3	0	22.50	22.47	22.73	21.59	21.33	21.75
	3	1	22.53	22.49	22.75	21.62	21.35	21.77
	3	3	22.57	22.50	22.84	21.66	21.36	21.86
	6	0	21.84	21.75	21.96	20.93	20.61	20.98

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 20415	CH 20525	CH 20635	CH 20415	CH 20525	CH 20635
			825.5 MHz	836.5 MHz	847.5 MHz	825.5 MHz	836.5 MHz	847.5 MHz
5 / 3MHz	1	0	22.74	22.69	22.83	21.65	21.62	21.73
	1	7	22.78	22.72	22.88	21.74	21.81	21.78
	1	14	22.83	22.75	22.94	21.79	21.71	21.84
	8	0	21.82	21.75	21.91	20.78	20.84	20.81
	8	3	21.52	21.46	21.57	20.48	20.55	20.45
	8	7	21.65	21.53	21.75	20.61	20.62	20.65
	15	0	21.56	21.46	21.62	20.45	20.57	20.52

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 20425	CH 20525	CH 20625	CH 20425	CH 20525	CH 20625
			826.5 MHz	836.5 MHz	846.5 MHz	826.5 MHz	836.5 MHz	846.5 MHz
5 / 5MHz	1	0	22.62	22.54	22.71	21.51	21.57	21.65
	1	12	22.70	22.62	22.87	21.59	21.51	21.81
	1	24	22.78	22.69	22.91	21.67	21.62	21.85
	12	0	21.62	21.56	21.75	20.51	20.59	20.69
	12	6	21.69	21.58	21.85	20.58	20.61	20.76
	12	13	21.86	21.78	22.03	20.73	20.81	20.97
	25	0	21.53	21.47	21.61	20.42	20.41	20.55

Band / BW	RB Size	RB Offset	QPSK			16QAM		
			CH 20450	CH 20525	CH 20600	CH 20450	CH 20525	CH 20600
			829.0 MHz	836.5 MHz	844.0 MHz	829.0 MHz	836.5 MHz	844.0 MHz
5 / 10MHz	1	0	22.73	22.68	22.88	21.59	21.69	21.83
	1	24	22.79	22.72	22.96	21.65	21.57	21.91
	1	49	22.84	22.79	23.11	21.70	21.71	22.06
	25	0	21.63	21.58	21.71	20.49	20.59	20.66
	25	12	21.56	21.46	21.67	20.45	20.41	20.61
	25	25	21.54	21.42	21.66	20.40	20.43	20.67
	50	0	21.42	21.38	21.53	20.32	20.30	20.48

ERP Power (dBm)

LTE Band 5, Channel Bandwidth: 1.4MHz

MODE		TX channel 20407					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.70	-10.4	17.2	3.9	21.1	38.5	-17.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.70	-10.4	17.9	3.9	21.8	38.5	-16.7

MODE		TX channel 20525					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-11.9	15.6	3.8	19.4	38.5	-19.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-8.8	19.3	3.8	23.1	38.5	-15.4

MODE		TX channel 20643					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.30	-12.3	15.4	3.4	18.8	38.5	-19.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.30	-9.3	18.8	3.4	22.2	38.5	-16.3

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 5, Channel Bandwidth: 3MHz

MODE		TX channel 20415					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	825.50	-10.7	16.9	3.9	20.8	38.5	-17.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	825.50	-11.2	17.1	3.9	21.0	38.5	-17.5

MODE		TX channel 20525					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-10.9	16.6	3.8	20.4	38.5	-18.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-10.9	17.2	3.8	21.0	38.5	-17.5

MODE		TX channel 20635					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	847.50	-10.7	16.9	3.4	20.3	38.5	-18.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	847.50	-10.2	18.0	3.4	21.4	38.5	-17.1

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 5, Channel Bandwidth: 5MHz

MODE		TX channel 20425					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	826.50	-9.8	17.8	3.9	21.7	38.5	-16.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	826.50	-9.9	18.4	3.9	22.3	38.5	-16.2

MODE		TX channel 20525					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-10.8	16.7	3.8	20.5	38.5	-18.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-10.2	17.8	3.8	21.6	38.5	-16.9

MODE		TX channel 20625					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	846.50	-10.1	17.5	3.4	20.9	38.5	-17.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	846.50	-9.8	18.4	3.4	21.8	38.5	-16.7

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

LTE Band 5, Channel Bandwidth: 10MHz

MODE		TX channel 20450					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	829.00	-11.8	15.9	3.9	19.8	38.5	-18.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	829.00	-10.6	17.6	3.9	21.5	38.5	-17.0

MODE		TX channel 20525					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-10.2	17.2	3.8	21.0	38.5	-17.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.50	-10.0	18.1	3.8	21.9	38.5	-16.6

MODE		TX channel 20600					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	844.00	-10.1	17.4	3.7	21.1	38.5	-17.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	844.00	-9.9	18.5	3.7	22.2	38.5	-16.3

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

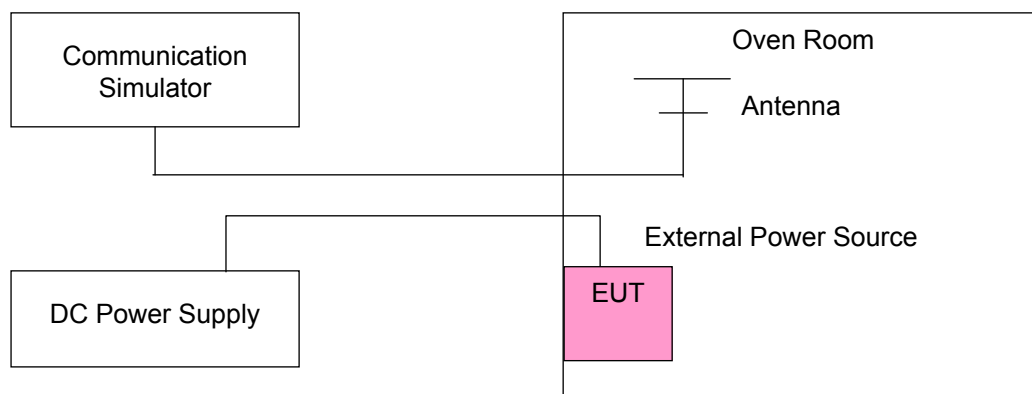

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)	Limit (ppm)
	LTE Band 5	
26.4	-0.015	2.5
24	-0.012	2.5
21.6	-0.014	2.5

NOTE: The applicant defined the normal working voltage is from 21.6Vdc to 26.4Vdc.

Frequency Error vs. Temperature.


TEMP. (°C)	Frequency Error (ppm)	Limit (ppm)
	LTE Band 5	
70	-0.023	2.5
60	-0.022	2.5
50	-0.018	2.5
40	-0.017	2.5
30	-0.015	2.5
20	-0.012	2.5
10	-0.018	2.5
0	-0.018	2.5
-10	-0.022	2.5
-20	-0.027	2.5

4.3 Occupied Bandwidth Measurement

4.3.1 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 Test Setup

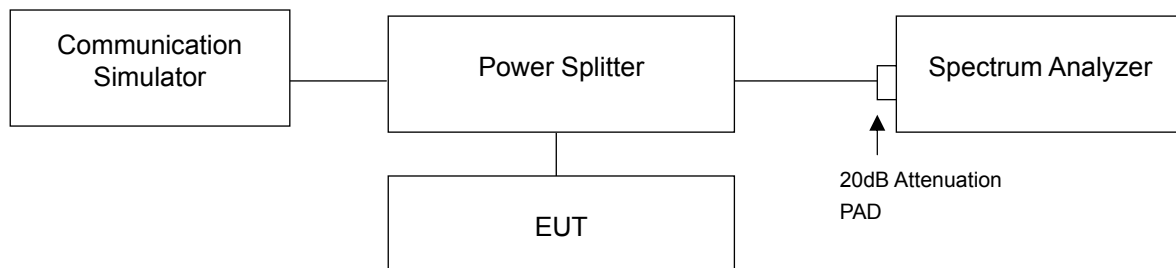

4.3.3 Test Result

LTE Band 5, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
20407	824.7	1.09	1.09
20525	836.5	1.08	1.08
20643	848.3	1.09	1.09


LTE Band 5, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
20415	825.5	2.69	2.69
20525	836.5	2.70	2.69
20635	847.5	2.70	2.68

LTE Band 5, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
20425	826.5	4.47	4.47
20525	836.5	4.47	4.45
20625	846.5	4.47	4.45


LTE Band 5, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
		QPSK	16QAM
20450	829.0	8.93	8.97
20525	836.5	8.90	8.93
20600	844.0	8.93	8.93

Spectrum Plot Of Worst Value


1.4MHz / QPSK

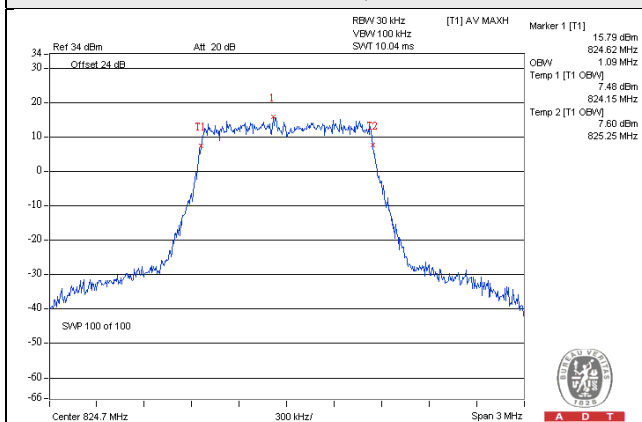


3MHz / QPSK

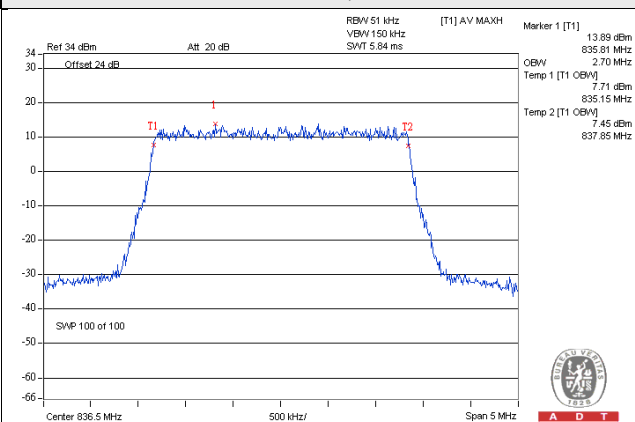

5MHz / QPSK

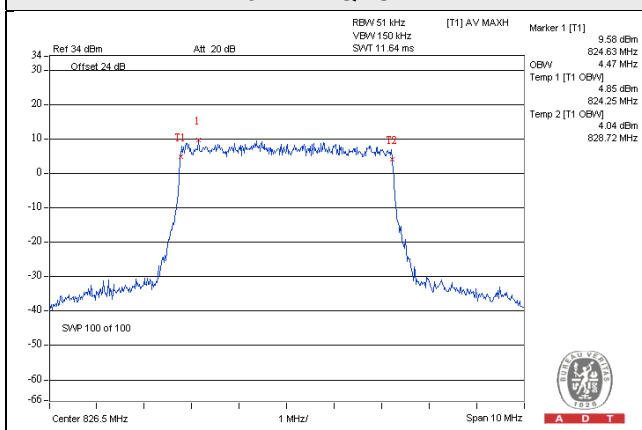

10MHz / 16QAM

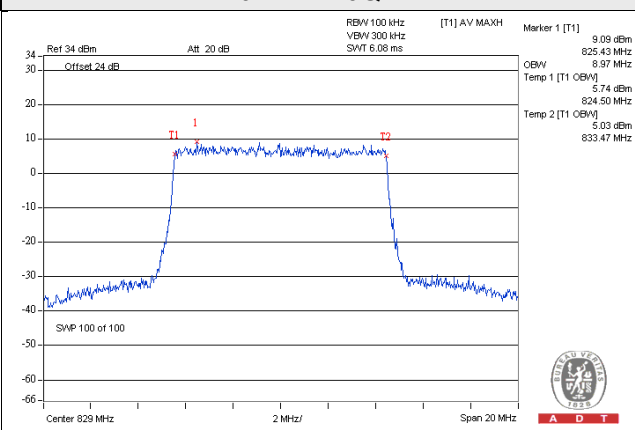


4.4 Band Edge Measurement

4.4.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 Test Setup

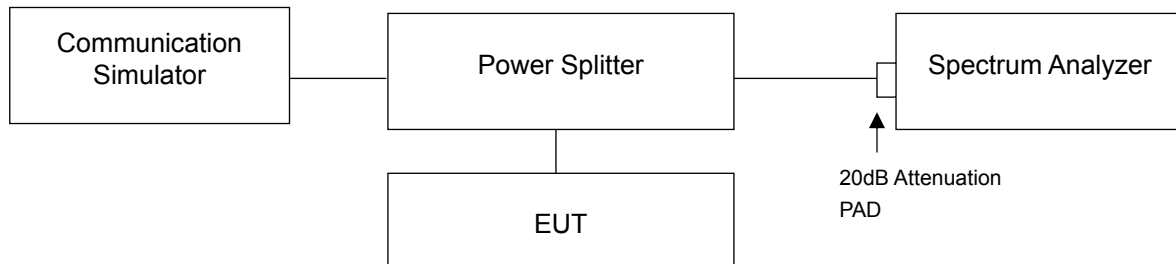


4.4.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Channel Bandwidth 1.4MHz and 3MHz).
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 51kHz and VB of the spectrum is 150kHz (LTE Channel Bandwidth 5MHz).
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Channel Bandwidth 10MHz).
- Record the max trace plot into the test report.

4.4.4 Test Results

LTE Band 5, Channel Bandwidth 1.4MHz

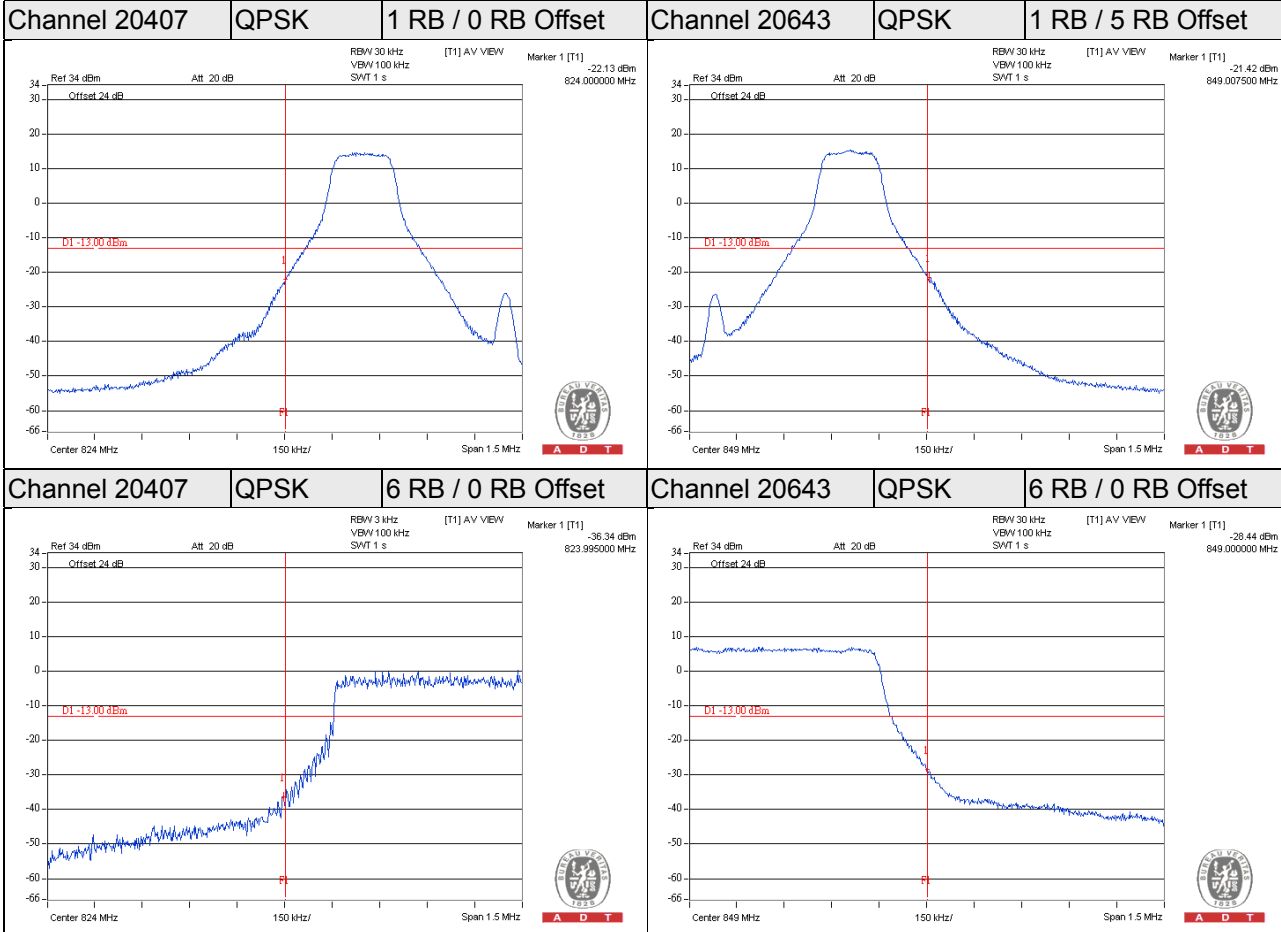

LTE Band 5, Channel Bandwidth 3MHz

Channel 20415



QPSK

1 RB / 0 RB Offset

Channel 20635

QPSK

1 RB / 14 RB Offset

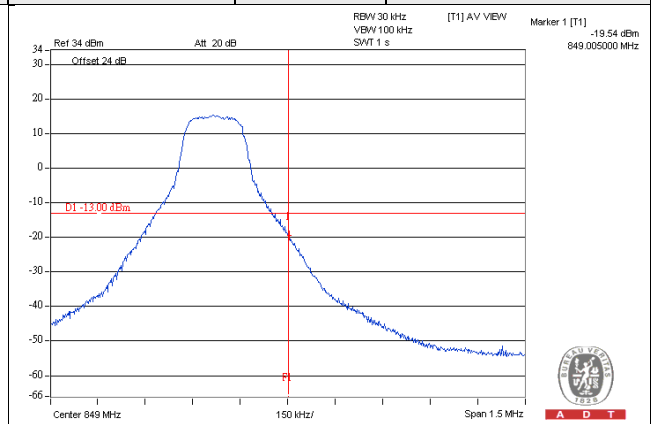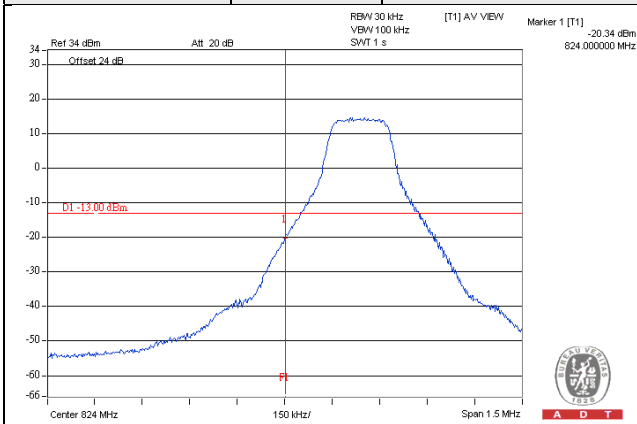

Channel 20415



QPSK

15 RB / 0 RB Offset

Channel 20635

QPSK

15 RB / 0 RB Offset

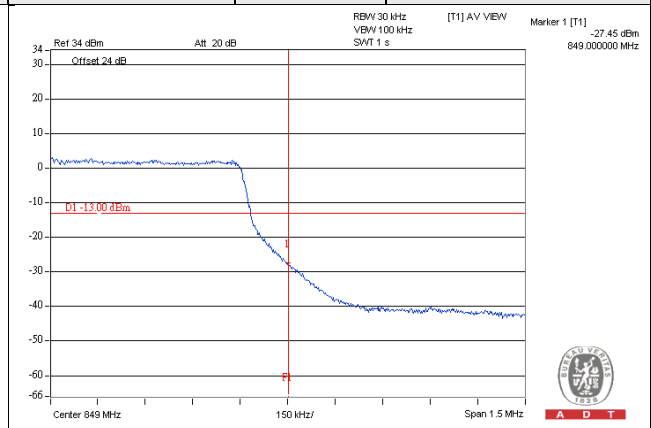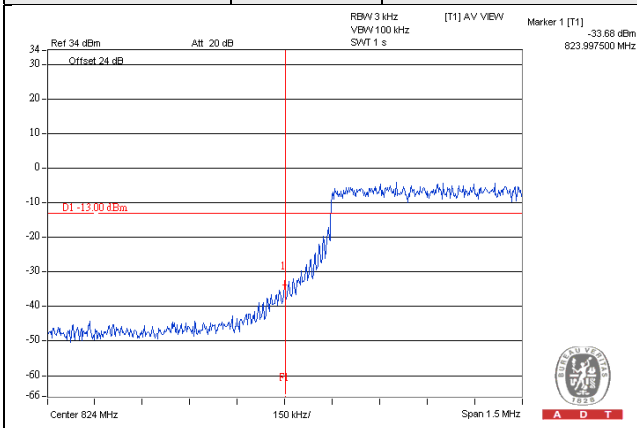

LTE Band 5, Channel Bandwidth 5MHz

Channel 20425



QPSK

1 RB / 0 RB Offset

Channel 20625

QPSK

1 RB / 24 RB Offset

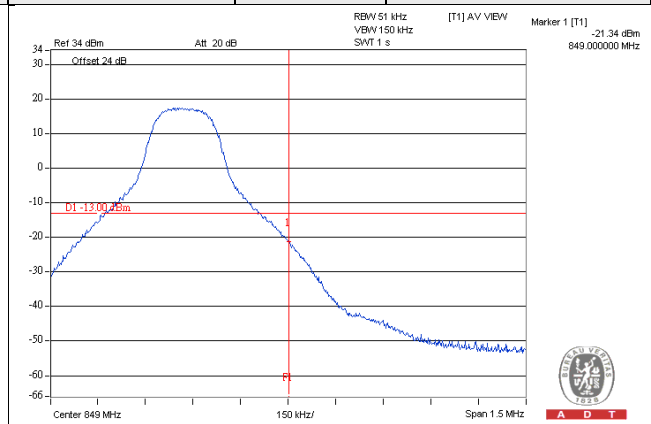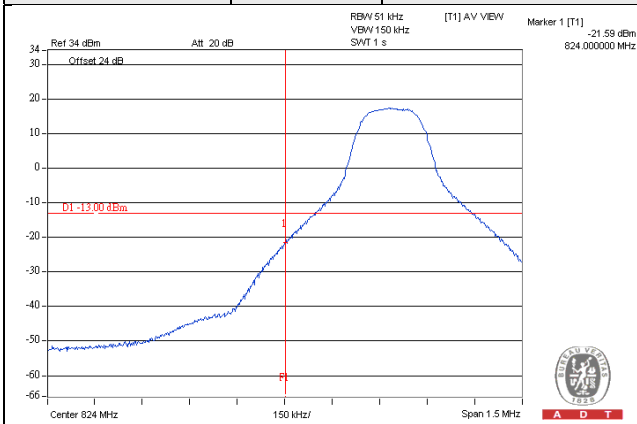

Channel 20425



QPSK

25 RB / 0 RB Offset

Channel 20625

QPSK

25 RB / 0 RB Offset

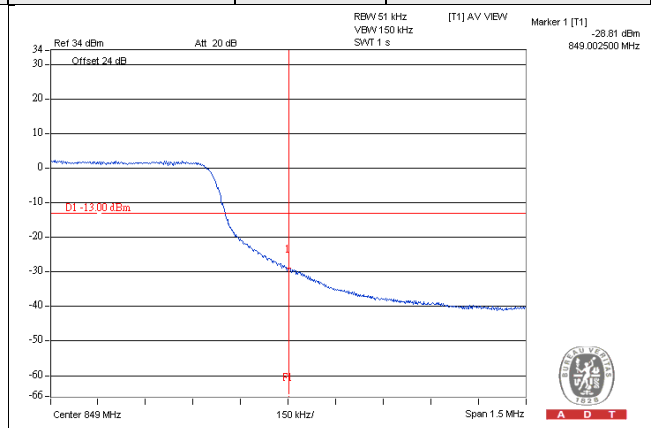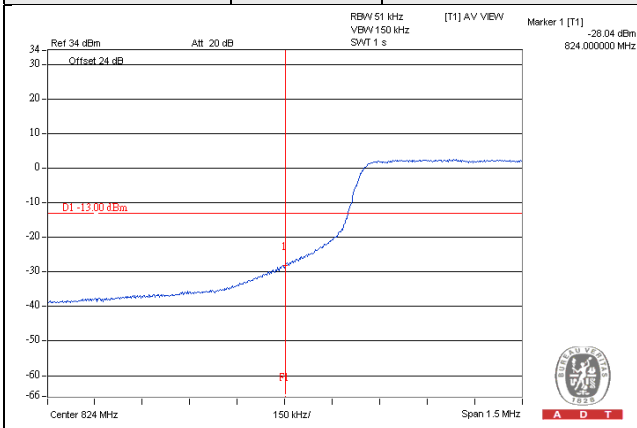

LTE Band 5, Channel Bandwidth 10MHz

Channel 20450



QPSK

1 RB / 0 RB Offset

Channel 20600

QPSK

1 RB / 49 RB Offset

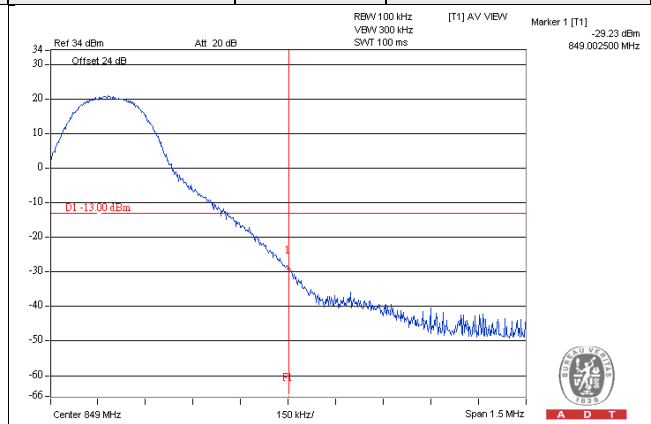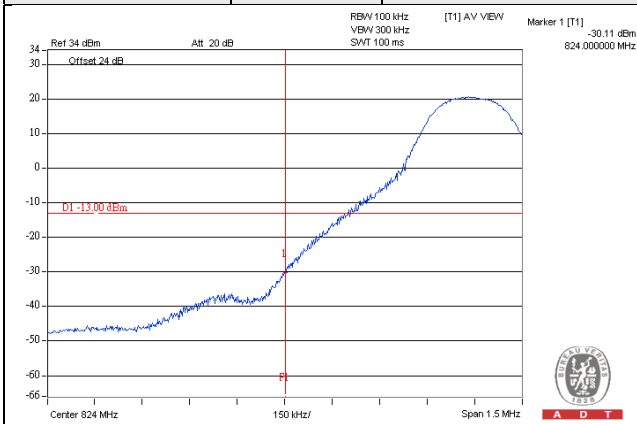

Channel 20450



QPSK

50 RB / 0 RB Offset

Channel 20600

QPSK

50 RB / 0 RB Offset

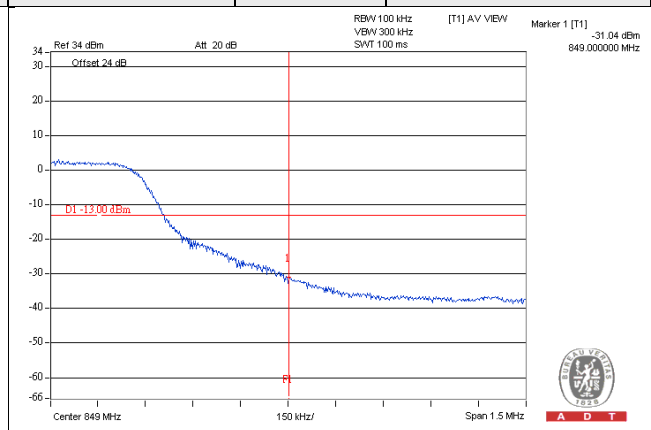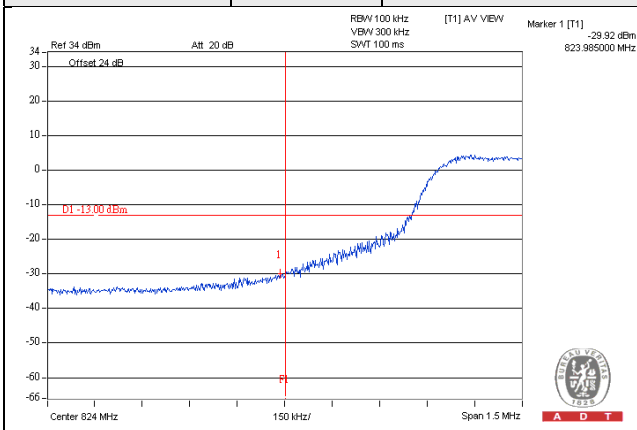


4.5 Peak To Average Ratio

4.5.1 Limits of Peak To Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 Test Setup

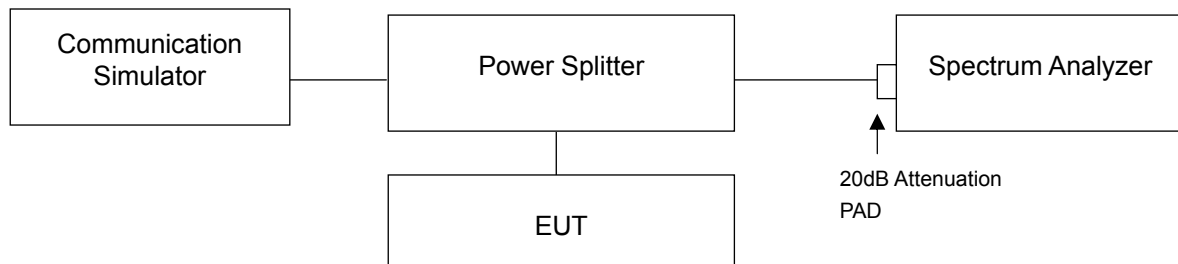

4.5.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results



LTE Band 5, Channel Bandwidth 1.4MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
20407	824.7	5.53	5.93
20525	836.5	6.10	5.94
20643	848.3	5.58	5.50

LTE Band 5, Channel Bandwidth 3MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
20415	825.5	6.03	5.95
20525	836.5	5.83	5.95
20635	847.5	5.71	5.77

LTE Band 5, Channel Bandwidth 5MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
20425	826.5	5.86	5.78
20525	836.5	5.88	5.76
20625	846.5	5.70	5.63

LTE Band 5, Channel Bandwidth 10MHz			
Channel	Frequency (MHz)	Peak To Average Ratio (dB)	
		QPSK	16QAM
20450	829.0	5.69	5.71
20525	836.5	5.61	5.61
20600	844.0	5.60	5.64

Spectrum Plot Of Worst Value

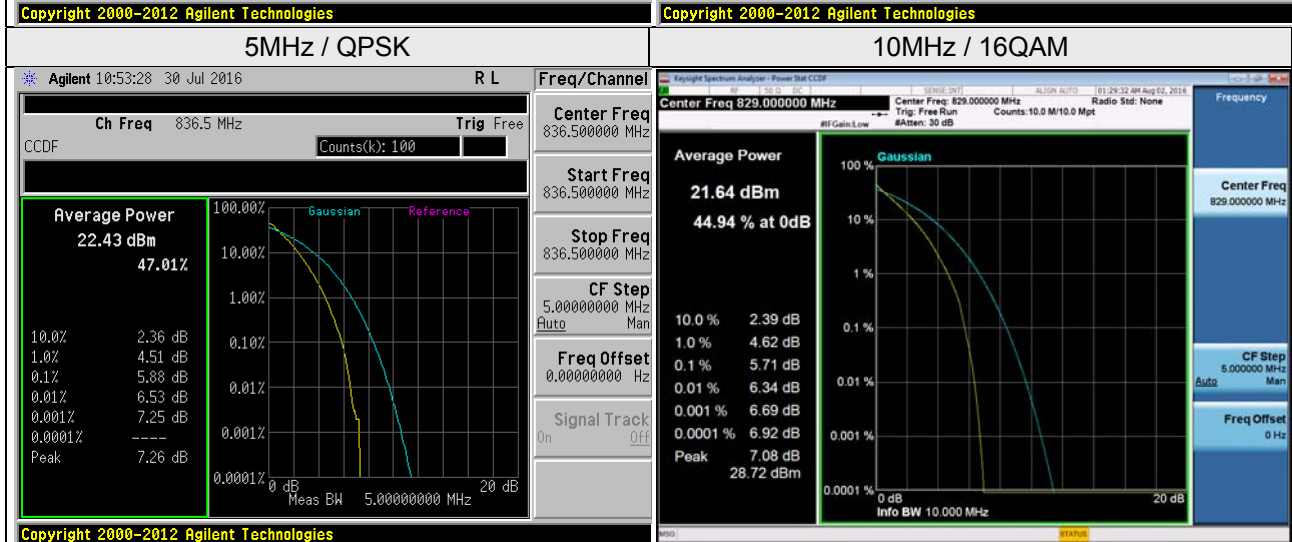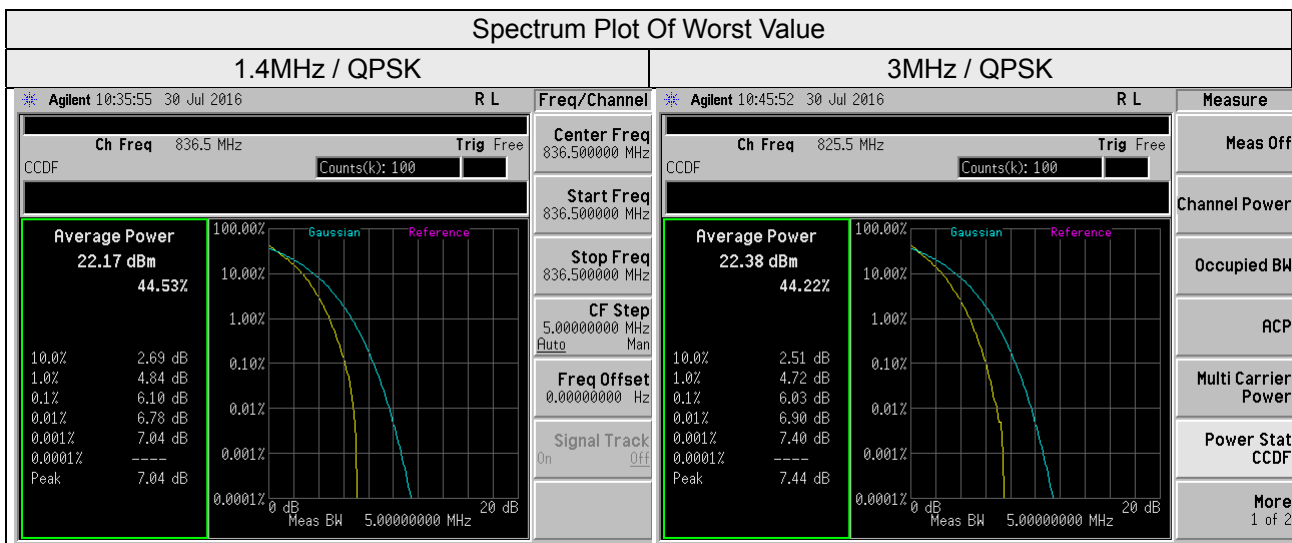


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 Test Setup

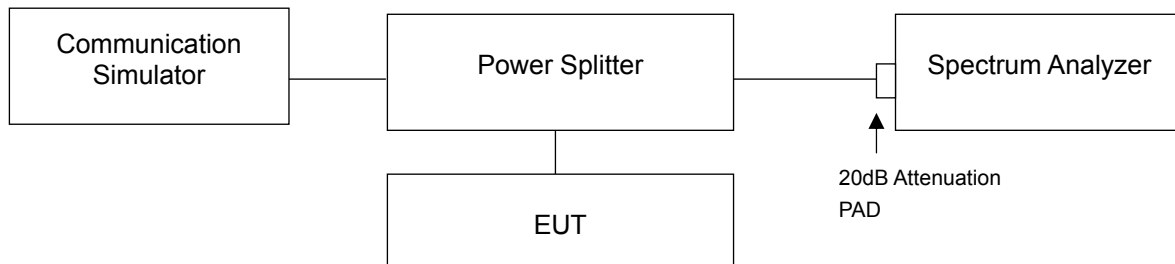

4.6.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 9GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.6.4 Test Results


LTE Band 5, Channel Bandwidth 1.4MHz

Channel 20407


Frequency Range : 9kHz~1GHz

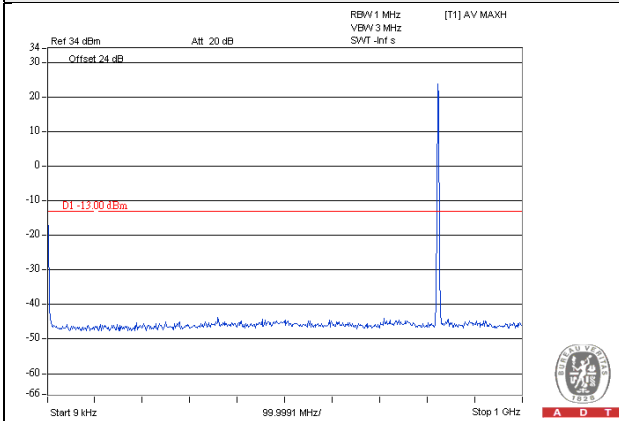


Frequency Range : 1GHz~4GHz

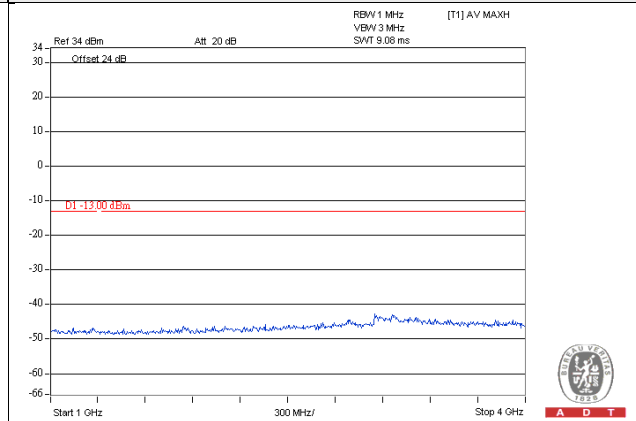

Frequency Range : 4GHz~7GHz

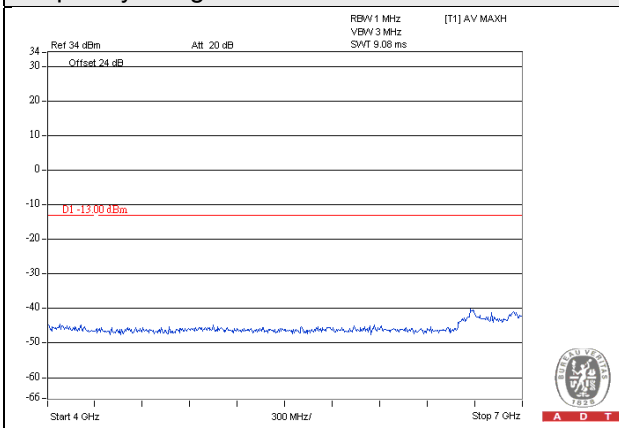


Frequency Range : 7GHz~9GHz

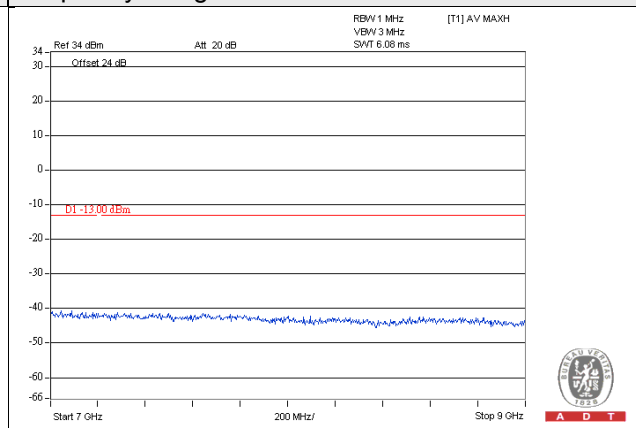


LTE Band 5, Channel Bandwidth 1.4MHz

Channel 20525


Frequency Range : 9kHz~1GHz

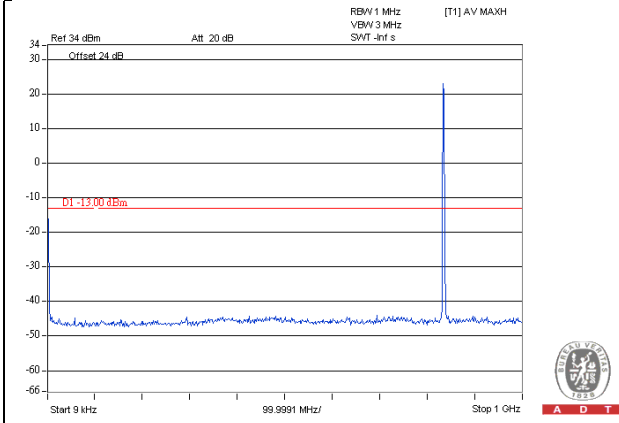


Frequency Range : 1GHz~4GHz

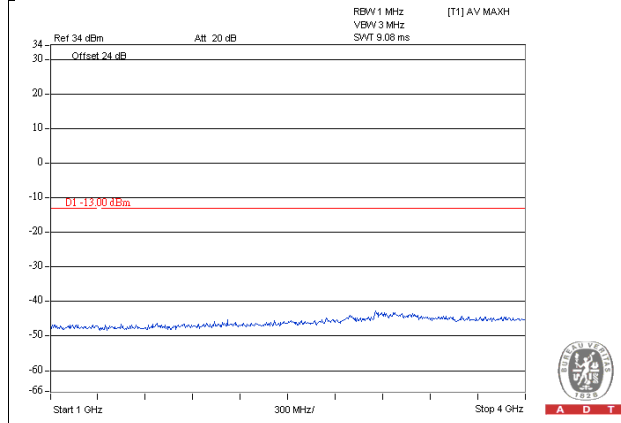

Frequency Range : 4GHz~7GHz

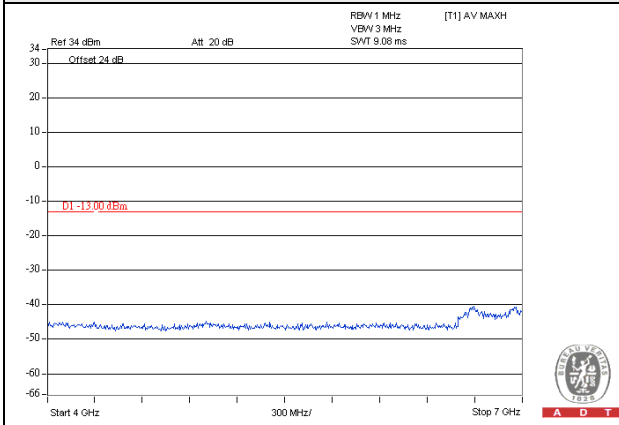


Frequency Range : 7GHz~9GHz

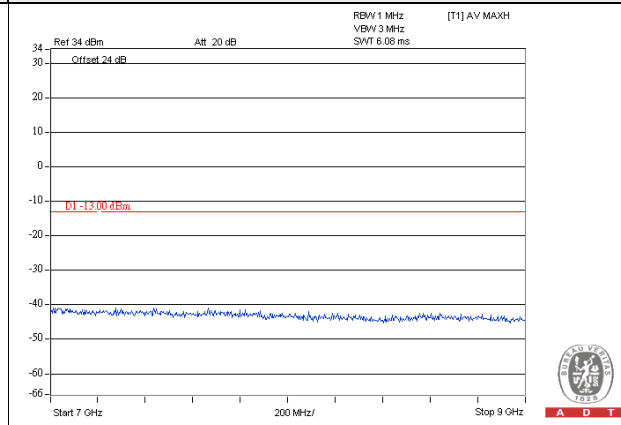


LTE Band 5, Channel Bandwidth 1.4MHz

Channel 20643


Frequency Range : 9kHz~1GHz

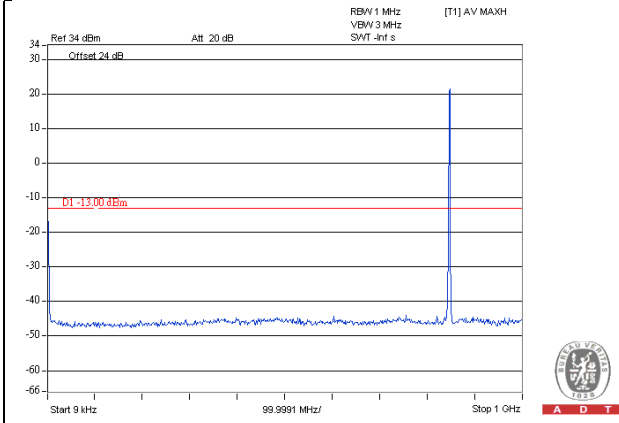


Frequency Range : 1GHz~4GHz

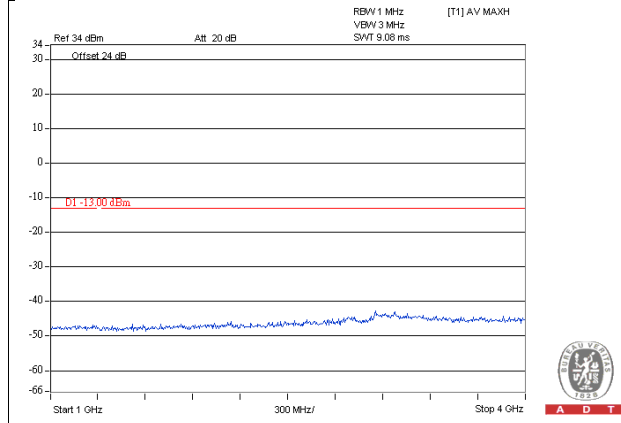

Frequency Range : 4GHz~7GHz

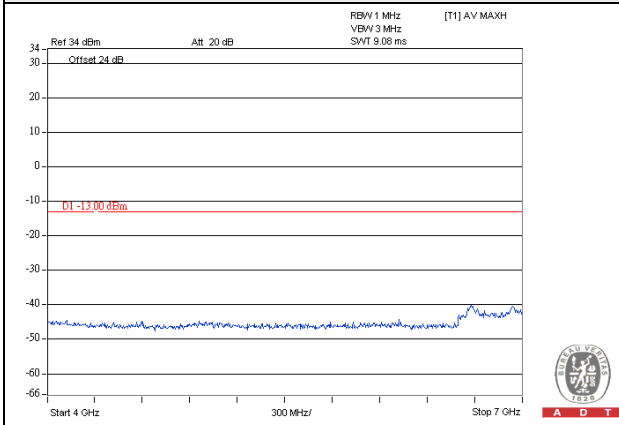


Frequency Range : 7GHz~9GHz

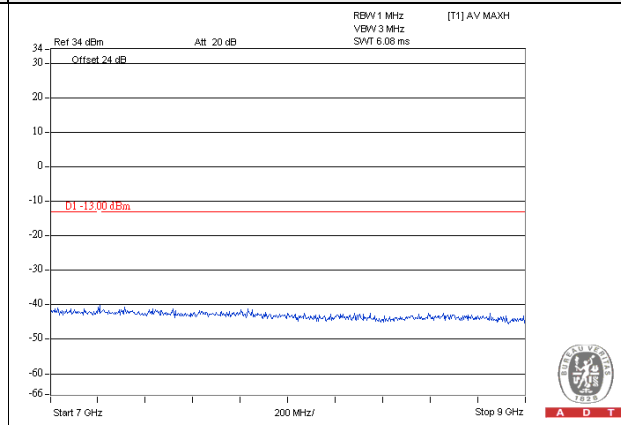


LTE Band 5, Channel Bandwidth 3MHz

Channel 20415


Frequency Range : 9kHz~1GHz

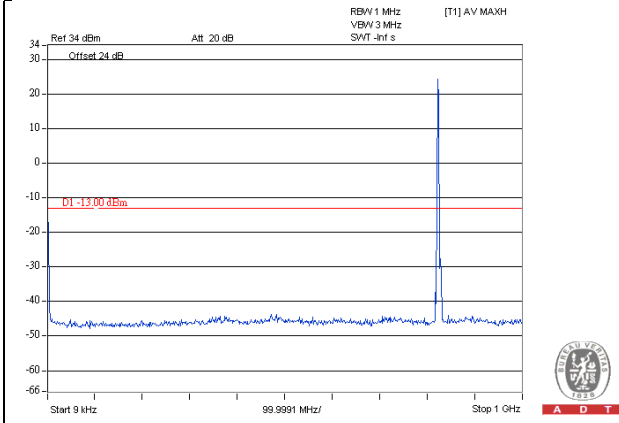


Frequency Range : 1GHz~4GHz

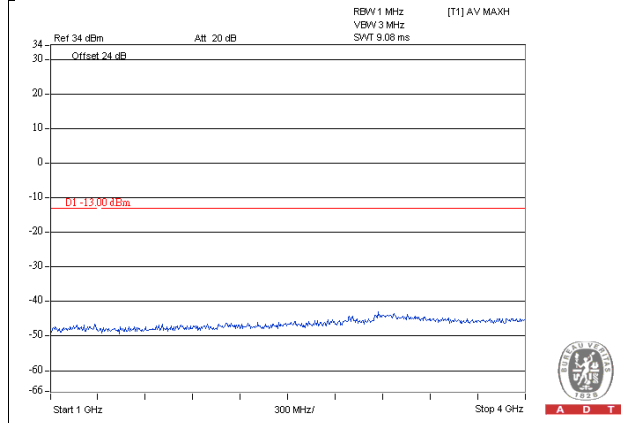

Frequency Range : 4GHz~7GHz

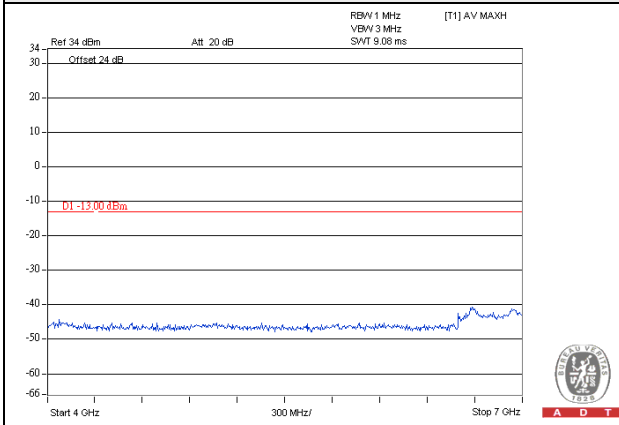


Frequency Range : 7GHz~9GHz

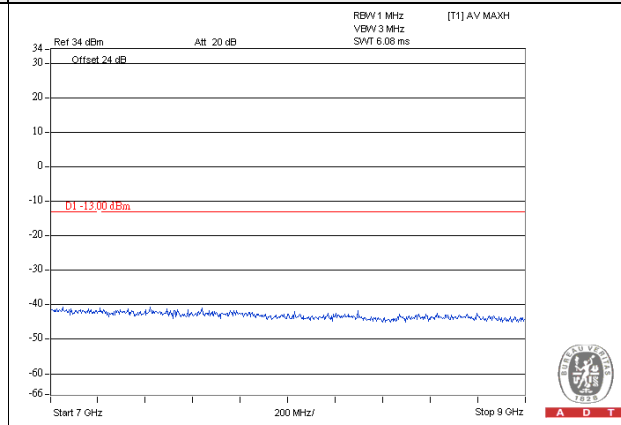


LTE Band 5, Channel Bandwidth 3MHz

Channel 20525


Frequency Range : 9kHz~1GHz

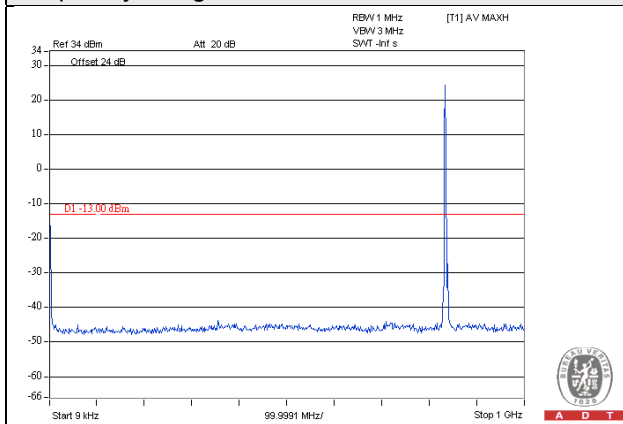


Frequency Range : 1GHz~4GHz

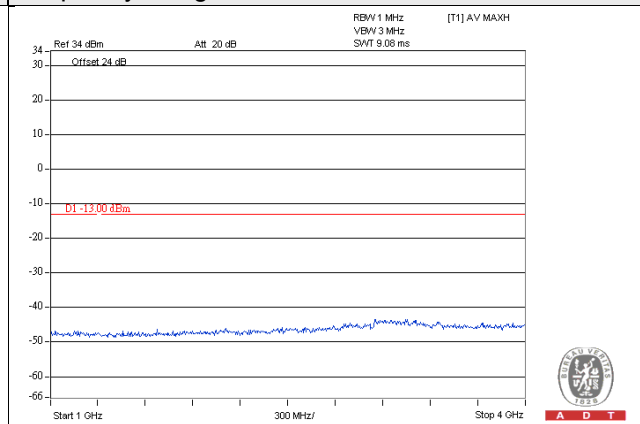

Frequency Range : 4GHz~7GHz

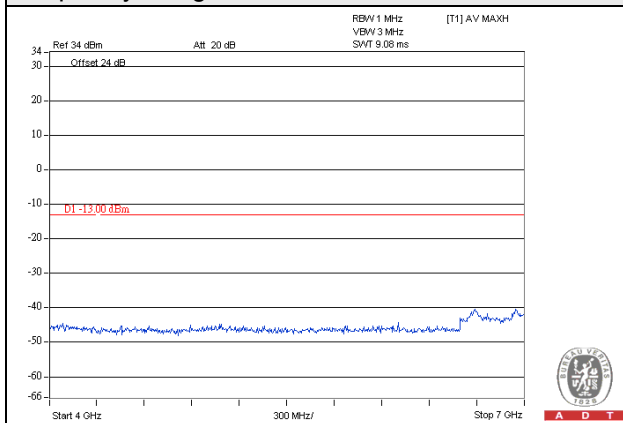


Frequency Range : 7GHz~9GHz

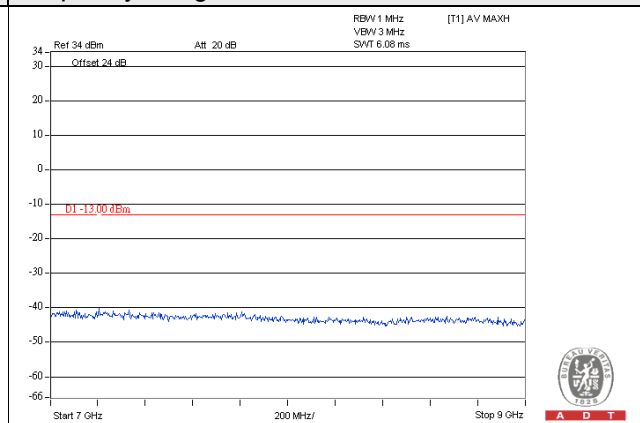


LTE Band 5, Channel Bandwidth 3MHz

Channel 20635


Frequency Range : 9kHz~1GHz

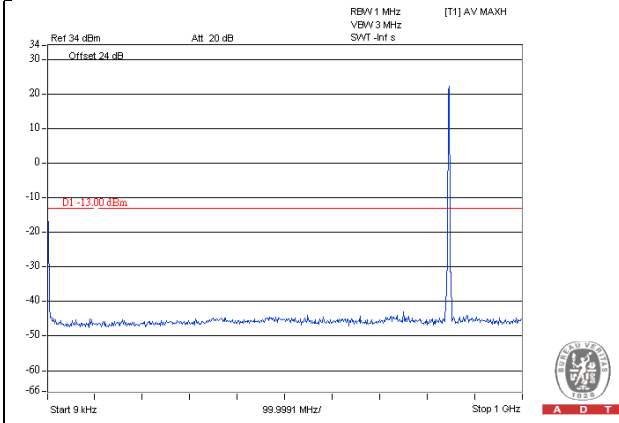


Frequency Range : 1GHz~4GHz

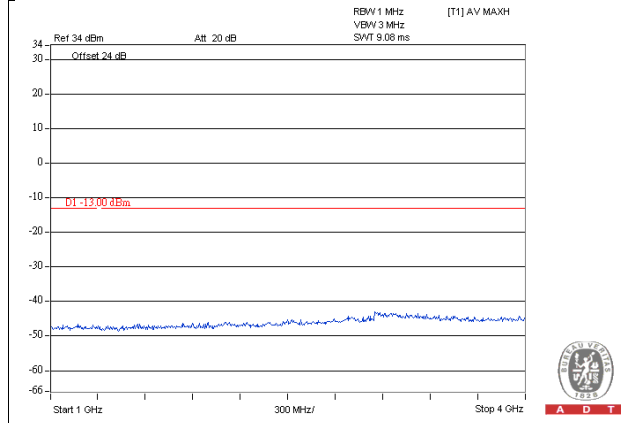

Frequency Range : 4GHz~7GHz

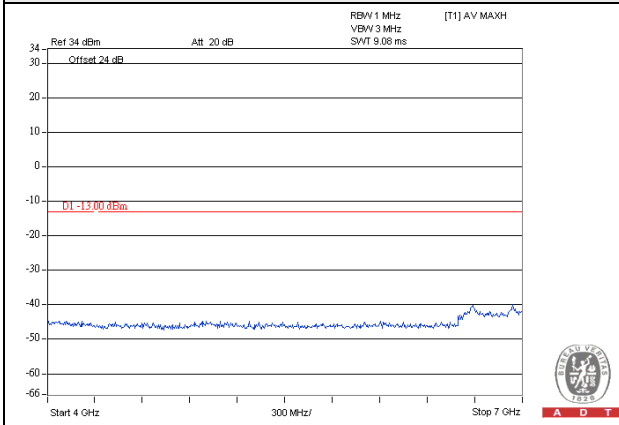


Frequency Range : 7GHz~9GHz

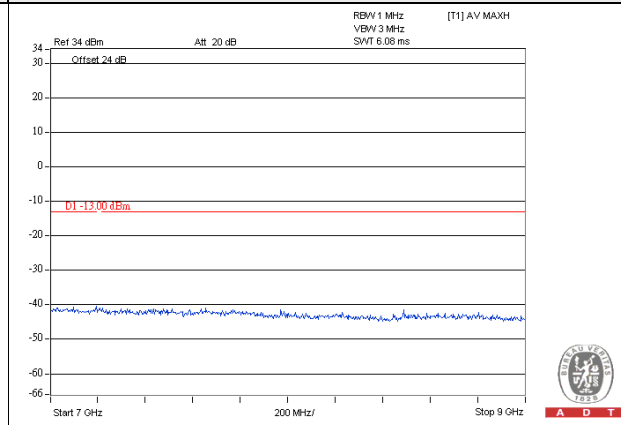


LTE Band 5, Channel Bandwidth 5MHz

Channel 20425


Frequency Range : 9kHz~1GHz

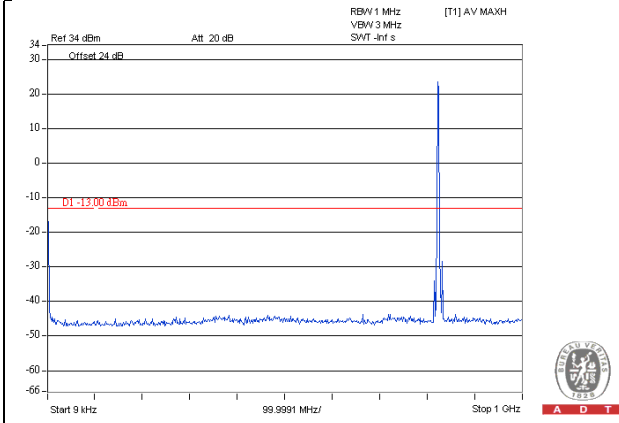


Frequency Range : 1GHz~4GHz

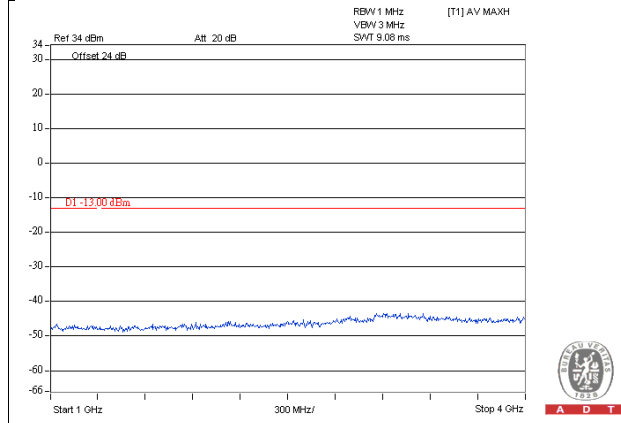

Frequency Range : 4GHz~7GHz

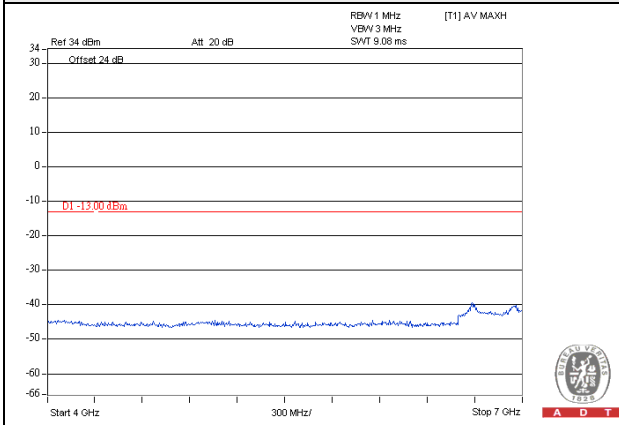


Frequency Range : 7GHz~9GHz

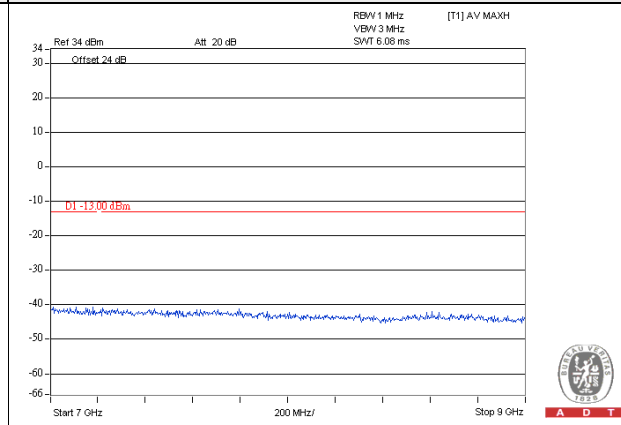


LTE Band 5, Channel Bandwidth 5MHz

Channel 20525


Frequency Range : 9kHz~1GHz

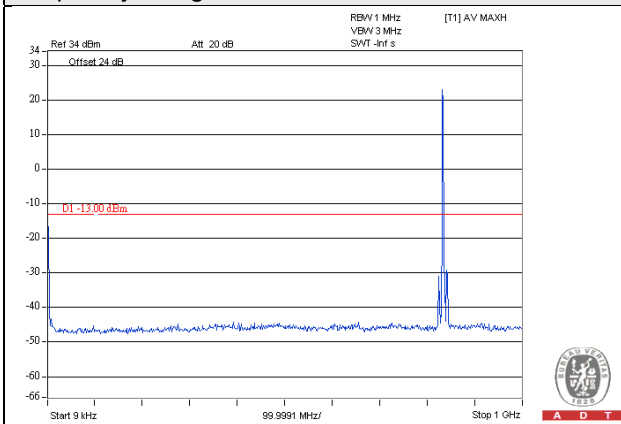


Frequency Range : 1GHz~4GHz

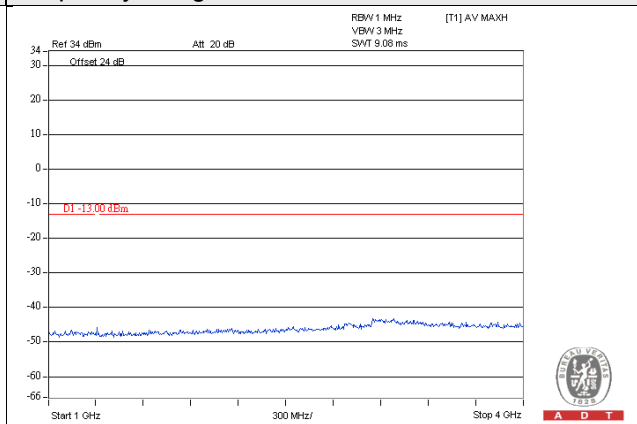

Frequency Range : 4GHz~7GHz

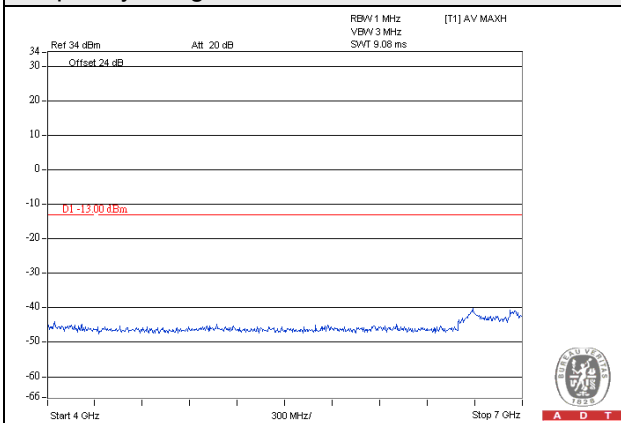


Frequency Range : 7GHz~9GHz

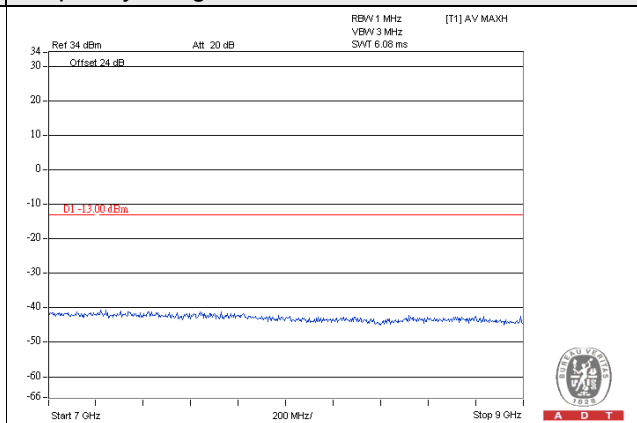


LTE Band 5, Channel Bandwidth 5MHz

Channel 20625


Frequency Range : 9kHz~1GHz

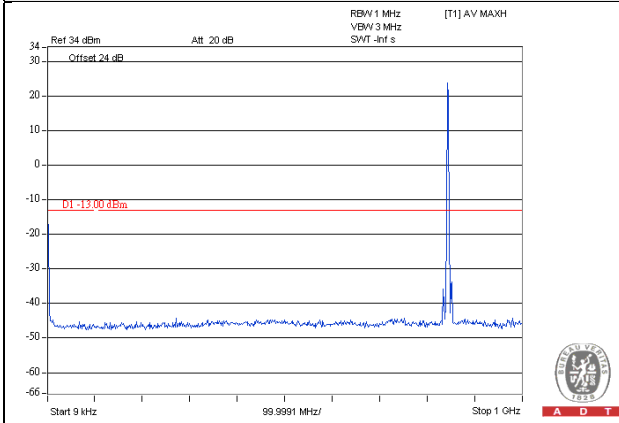


Frequency Range : 1GHz~4GHz

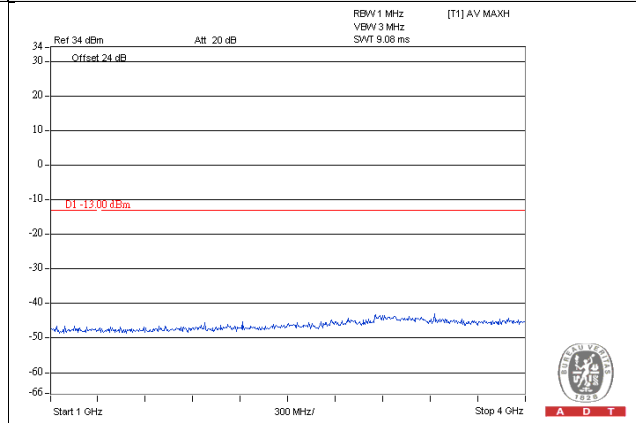

Frequency Range : 4GHz~7GHz

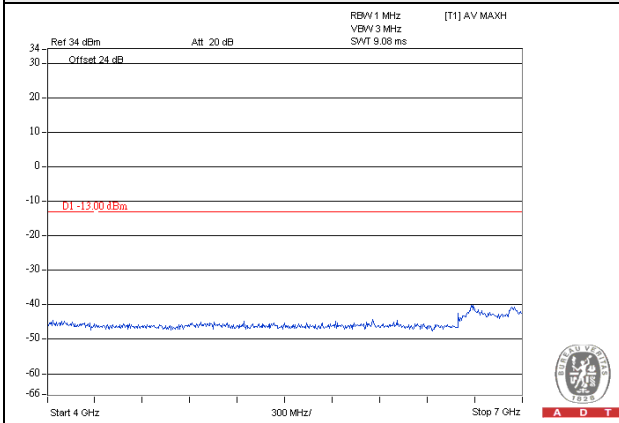


Frequency Range : 7GHz~9GHz

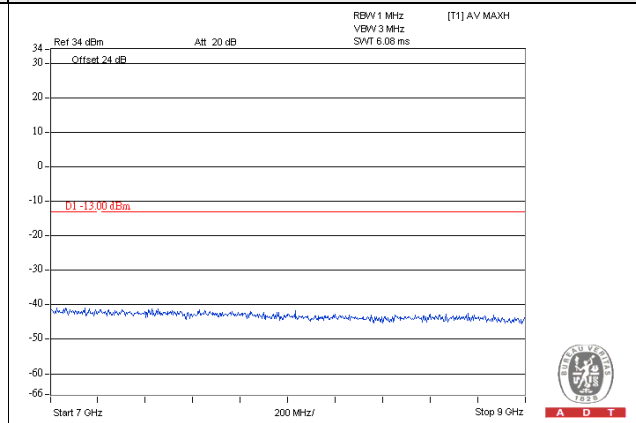


LTE Band 5, Channel Bandwidth 10MHz

Channel 20450


Frequency Range : 9kHz~1GHz

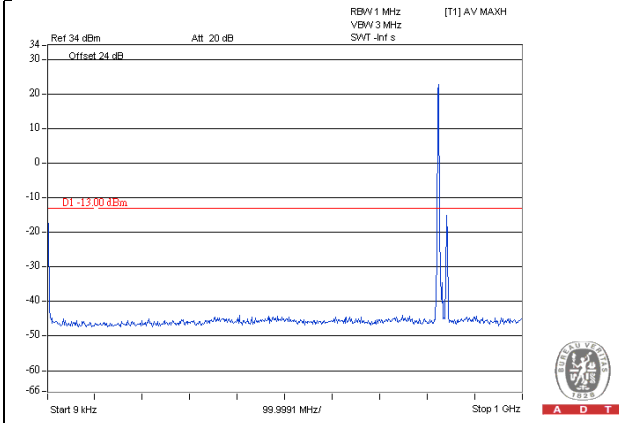


Frequency Range : 1GHz~4GHz

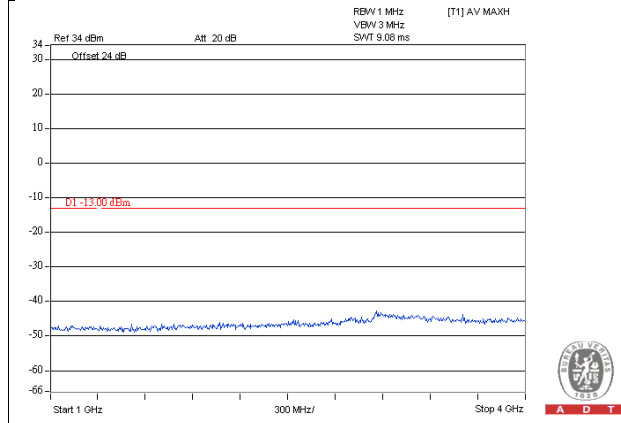

Frequency Range : 4GHz~7GHz

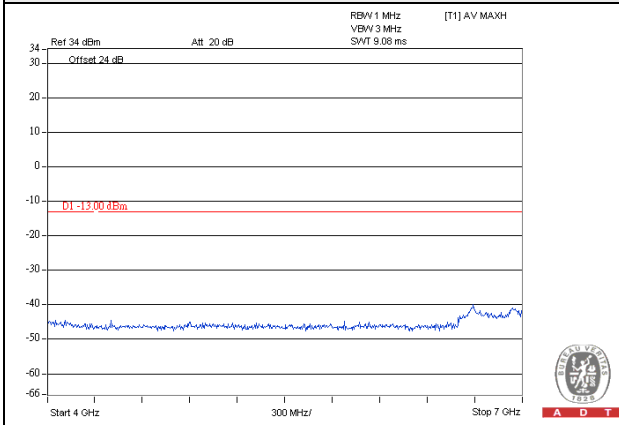


Frequency Range : 7GHz~9GHz

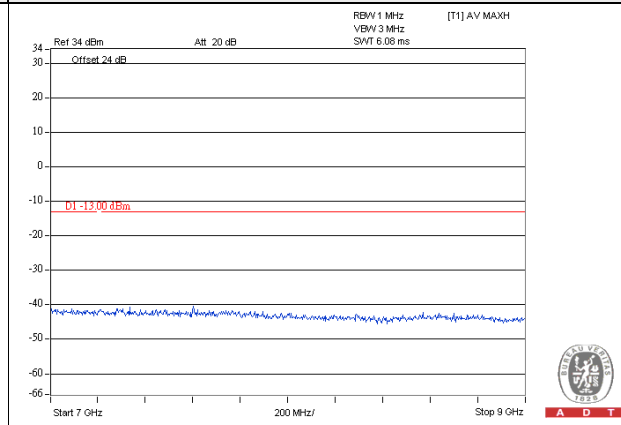


LTE Band 5, Channel Bandwidth 10MHz

Channel 20525


Frequency Range : 9kHz~1GHz

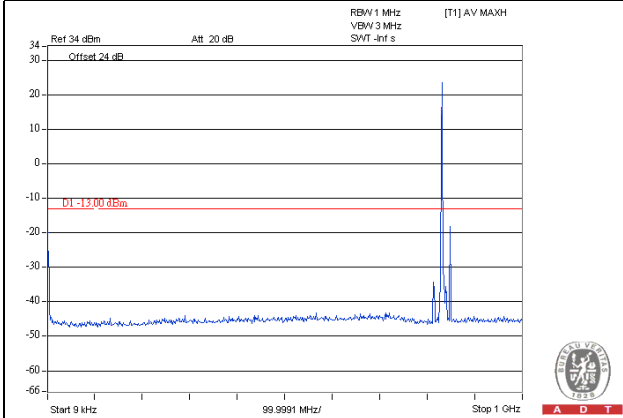


Frequency Range : 1GHz~4GHz

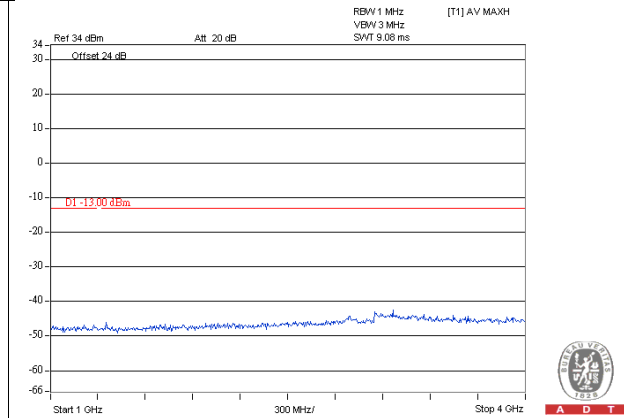

Frequency Range : 4GHz~7GHz

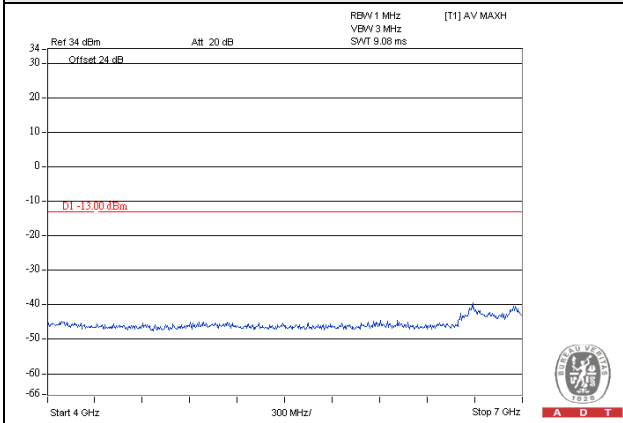


Frequency Range : 7GHz~9GHz

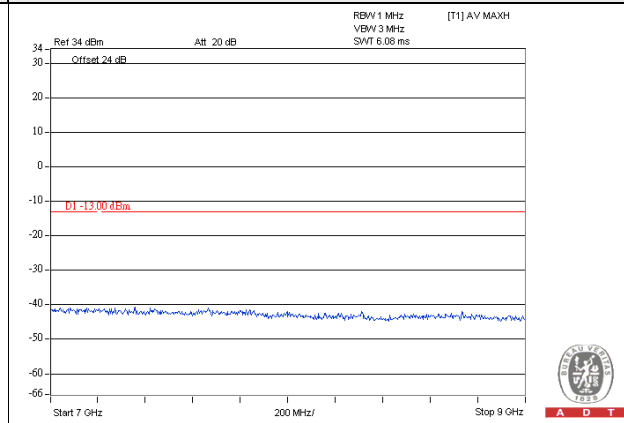


LTE Band 5, Channel Bandwidth 10MHz

Channel 20600


Frequency Range : 9kHz~1GHz

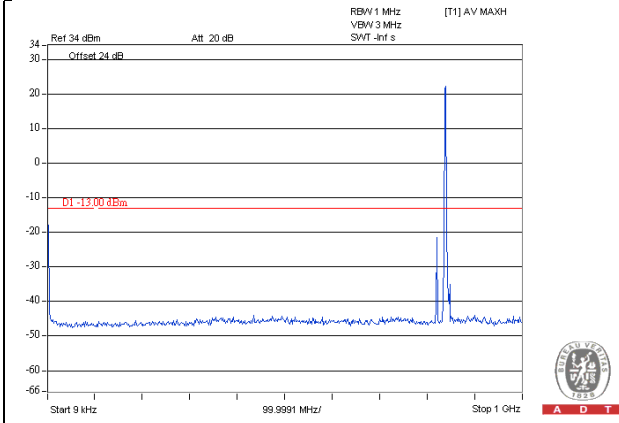


Frequency Range : 1GHz~4GHz

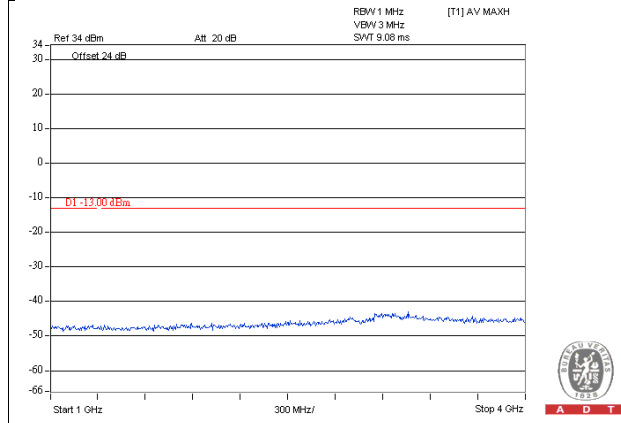

Frequency Range : 4GHz~7GHz

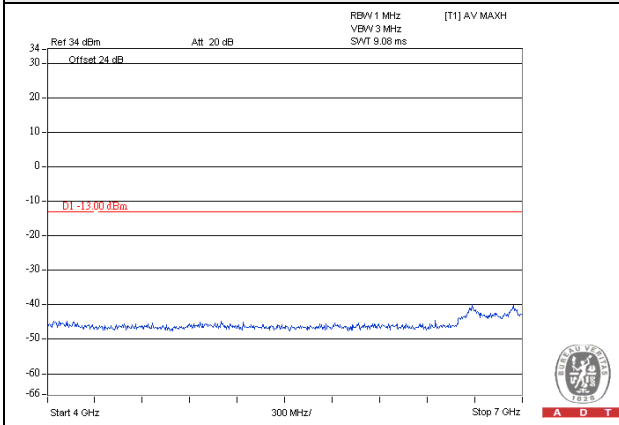

Frequency Range : 7GHz~9GHz

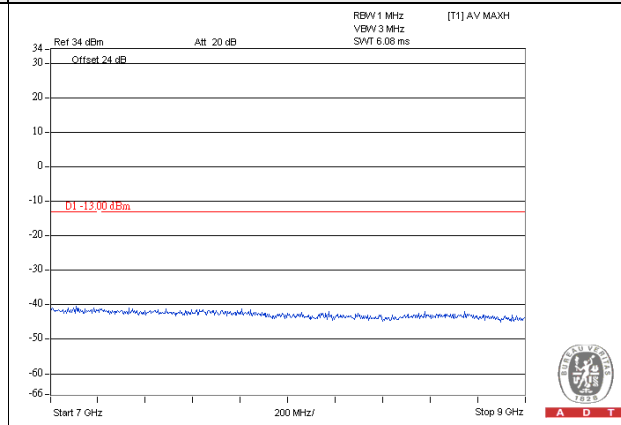

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.7.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

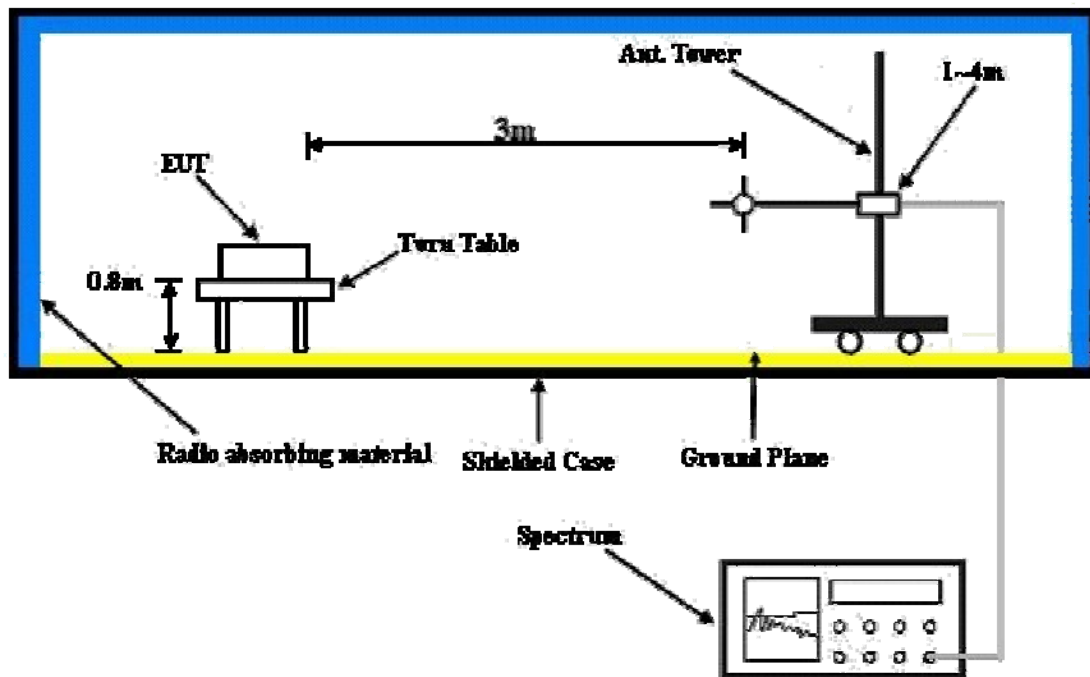

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

Below 1GHz

LTE Band 5, Channel Bandwidth: 1.4MHz

Mode	TX channel 20407	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-48.4	-28.8	-18.3	-47.1	-13.0	-34.1
2	97.90	-47.9	-57.4	-1.4	-58.8	-13.0	-45.8
3	251.16	-60.6	-67.6	-1.4	-69.0	-13.0	-56.0
4	295.78	-60.7	-63.9	-1.8	-65.7	-13.0	-52.7
5	363.68	-58.4	-66.9	3.9	-63.0	-13.0	-50.0
6	935.98	-62.0	-59.7	3.7	-56.0	-13.0	-43.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-35.3	-28.0	-19.4	-47.4	-13.0	-34.4
2	97.90	-43.8	-52.6	-1.4	-54.0	-13.0	-41.0
3	251.16	-57.6	-58.4	-1.4	-59.8	-13.0	-46.8
4	297.72	-56.2	-57.0	-1.7	-58.7	-13.0	-45.7
5	363.68	-54.8	-61.2	3.9	-57.3	-13.0	-44.3
6	961.20	-63.3	-60.0	3.7	-56.3	-13.0	-43.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5, Channel Bandwidth: 3MHz

Mode	TX channel 20415	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-42.6	-23.1	-18.3	-41.4	-13.0	-28.4
2	97.90	-47.8	-57.2	-1.4	-58.6	-13.0	-45.6
3	295.78	-59.5	-62.7	-1.8	-64.5	-13.0	-51.5
4	363.68	-58.6	-67.1	3.9	-63.2	-13.0	-50.2
5	722.58	-62.0	-64.3	3.6	-60.7	-13.0	-47.7
6	838.98	-61.8	-60.9	3.7	-57.2	-13.0	-44.2

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-34.1	-28.5	-18.3	-46.8	-13.0	-33.8
2	97.90	-45.0	-53.8	-1.4	-55.2	-13.0	-42.2
3	194.90	-55.9	-56.5	-2.6	-59.1	-13.0	-46.1
4	295.78	-55.6	-55.9	-1.8	-57.7	-13.0	-44.7
5	363.68	-54.4	-60.8	3.9	-56.9	-13.0	-43.9
6	802.12	-59.9	-59.3	4.0	-55.3	-13.0	-42.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5, Channel Bandwidth: 5MHz

Mode	TX channel 20425	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-47.6	-28.1	-18.3	-46.4	-13.0	-33.4
2	97.90	-46.6	-56.1	-1.4	-57.5	-13.0	-44.5
3	301.60	-58.4	-68.6	3.6	-65.0	-13.0	-52.0
4	363.68	-57.1	-65.7	3.9	-61.8	-13.0	-48.8
5	495.60	-61.4	-67.5	3.8	-63.7	-13.0	-50.7
6	996.12	-62.8	-59.3	3.3	-56.0	-13.0	-43.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-39.2	-34.9	-17.1	-52.0	-13.0	-39.0
2	97.90	-44.4	-53.2	-1.4	-54.6	-13.0	-41.6
3	204.60	-53.6	-55.6	-2.0	-57.6	-13.0	-44.6
4	295.78	-55.1	-55.5	-1.8	-57.3	-13.0	-44.3
5	363.68	-57.0	-63.4	3.9	-59.5	-13.0	-46.5
6	924.34	-61.6	-58.8	3.6	-55.2	-13.0	-42.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5, Channel Bandwidth: 10MHz

Mode	TX channel 20450	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bayu Chen		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-43.1	-21.8	-19.4	-41.2	-13.0	-28.2
2	99.84	-47.7	-56.7	-1.5	-58.2	-13.0	-45.2
3	301.60	-57.1	-67.3	3.6	-63.7	-13.0	-50.7
4	363.68	-57.1	-65.7	3.9	-61.8	-13.0	-48.8
5	495.60	-61.6	-67.8	3.8	-64.0	-13.0	-51.0
6	988.36	-62.4	-59.2	3.4	-55.8	-13.0	-42.8

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-31.9	-26.2	-18.3	-44.5	-13.0	-31.5
2	97.90	-45.0	-53.8	-1.4	-55.2	-13.0	-42.2
3	251.16	-58.6	-59.3	-1.4	-60.7	-13.0	-47.7
4	297.72	-55.5	-56.3	-1.7	-58.0	-13.0	-45.0
5	363.68	-57.0	-63.4	3.9	-59.5	-13.0	-46.5
6	802.12	-60.2	-59.6	4.0	-55.6	-13.0	-42.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Above 1GHz

LTE Band 5, Channel Bandwidth: 1.4MHz

Mode	TX channel 20407	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1649.40	-40.2	-32.5	0.9	-31.6	-13.0	-18.6
2	2474.10	-45.5	-39.2	0.1	-39.1	-13.0	-26.1
3	3298.80	-53.6	-48.3	1.0	-47.3	-13.0	-34.3
4	4123.50	-56.0	-49.6	1.1	-48.5	-13.0	-35.5

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1649.40	-40.4	-33.1	0.9	-32.2	-13.0	-19.2
2	2474.10	-48.8	-44.7	0.1	-44.6	-13.0	-31.6
3	3298.80	-49.5	-43.6	1.0	-42.6	-13.0	-29.6
4	4123.50	-57.9	-50.6	1.1	-49.5	-13.0	-36.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-42.8	-35.2	0.8	-34.4	-13.0	-21.4
2	2509.50	-42.2	-35.9	0.2	-35.7	-13.0	-22.7
3	3346.00	-51.2	-45.4	1.2	-44.2	-13.0	-31.2
4	4182.50	-52.9	-46.5	1.0	-45.5	-13.0	-32.5

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-37.0	-29.7	0.8	-28.9	-13.0	-15.9
2	2509.50	-46.0	-42.1	0.2	-41.9	-13.0	-28.9
3	3346.00	-49.0	-43.2	1.2	-42.0	-13.0	-29.0
4	4182.50	-53.5	-46.0	1.0	-45.0	-13.0	-32.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20643	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1696.60	-42.0	-34.5	0.7	-33.8	-13.0	-20.8
2	2544.90	-39.0	-32.9	0.2	-32.7	-13.0	-19.7
3	3393.20	-49.0	-42.4	1.2	-41.2	-13.0	-28.2
4	4241.50	-47.1	-40.6	1.0	-39.6	-13.0	-26.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1696.60	-42.2	-34.9	0.7	-34.2	-13.0	-21.2
2	2544.90	-43.1	-39.1	0.2	-38.9	-13.0	-25.9
3	3393.20	-47.0	-40.8	1.2	-39.6	-13.0	-26.6
4	4241.50	-52.3	-44.9	1.0	-43.9	-13.0	-30.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5, Channel Bandwidth: 3MHz

Mode	TX channel 20415	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1651.00	-44.1	-36.4	0.9	-35.5	-13.0	-22.5
2	2476.50	-46.2	-39.8	0.1	-39.7	-13.0	-26.7
3	3302.00	-55.0	-49.6	1.0	-48.6	-13.0	-35.6
4	4127.50	-55.5	-49.1	1.1	-48.0	-13.0	-35.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1651.00	-42.0	-34.8	0.9	-33.9	-13.0	-20.9
2	2476.50	-48.9	-44.9	0.1	-44.8	-13.0	-31.8
3	3302.00	-50.4	-44.5	1.0	-43.5	-13.0	-30.5
4	4127.50	-57.3	-50.0	1.1	-48.9	-13.0	-35.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-44.8	-37.1	0.8	-36.3	-13.0	-23.3
2	2509.50	-42.8	-36.5	0.2	-36.3	-13.0	-23.3
3	3346.00	-46.8	-41.0	1.2	-39.8	-13.0	-26.8
4	4182.50	-53.9	-47.5	1.0	-46.5	-13.0	-33.5

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-42.1	-34.8	0.8	-34.0	-13.0	-21.0
2	2509.50	-47.4	-43.4	0.2	-43.2	-13.0	-30.2
3	3346.00	-47.6	-41.8	1.2	-40.6	-13.0	-27.6
4	4182.50	-54.4	-46.9	1.0	-45.9	-13.0	-32.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20635	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1695.00	-43.0	-35.4	0.7	-34.7	-13.0	-21.7
2	2542.50	-40.8	-34.6	0.2	-34.4	-13.0	-21.4
3	3390.00	-50.5	-44.1	1.2	-42.9	-13.0	-29.9
4	4237.50	-49.8	-43.2	1.0	-42.2	-13.0	-29.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1695.00	-40.9	-33.6	0.7	-32.9	-13.0	-19.9
2	2542.50	-42.4	-38.3	0.2	-38.1	-13.0	-25.1
3	3390.00	-46.5	-40.3	1.2	-39.1	-13.0	-26.1
4	4237.50	-52.2	-44.8	1.0	-43.8	-13.0	-30.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5, Channel Bandwidth: 5MHz

Mode	TX channel 20425	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1653.00	-43.2	-35.5	0.9	-34.6	-13.0	-21.6
2	2479.00	-50.5	-44.2	0.1	-44.1	-13.0	-31.1
3	3306.00	-54.3	-48.9	1.0	-47.9	-13.0	-34.9
4	4132.50	-52.4	-46.0	1.1	-44.9	-13.0	-31.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1653.00	-41.9	-34.7	0.9	-33.8	-13.0	-20.8
2	2479.50	-53.2	-49.2	0.1	-49.1	-13.0	-36.1
3	3306.00	-50.0	-44.1	1.0	-43.1	-13.0	-30.1
4	4132.50	-55.5	-48.1	1.1	-47.0	-13.0	-34.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-42.8	-35.2	0.8	-34.4	-13.0	-21.4
2	2059.50	-43.5	-38.2	-0.3	-38.5	-13.0	-25.5
3	3346.00	-51.4	-45.6	1.2	-44.4	-13.0	-31.4
4	4182.50	-50.8	-44.4	1.0	-43.4	-13.0	-30.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-40.9	-33.5	0.8	-32.7	-13.0	-19.7
2	2059.50	-46.8	-42.9	-0.3	-43.2	-13.0	-30.2
3	3346.00	-47.1	-41.3	1.2	-40.1	-13.0	-27.1
4	4182.50	-53.9	-46.4	1.0	-45.4	-13.0	-32.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20625	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1693.00	-43.1	-35.6	0.7	-34.9	-13.0	-21.9
2	2539.50	-45.4	-39.2	0.2	-39.0	-13.0	-26.0
3	3386.50	-53.8	-47.3	1.2	-46.1	-13.0	-33.1
4	4232.50	-49.4	-42.9	1.0	-41.9	-13.0	-28.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1693.00	-41.3	-34.0	0.7	-33.3	-13.0	-20.3
2	2539.50	-47.2	-43.2	0.2	-43.0	-13.0	-30.0
3	3386.00	-49.2	-43.2	1.2	-42.0	-13.0	-29.0
4	4232.50	-52.5	-45.0	1.0	-44.0	-13.0	-31.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

LTE Band 5, Channel Bandwidth: 10MHz

Mode	TX channel 20450	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1658.00	-42.4	-34.8	0.9	-33.9	-13.0	-20.9
2	2487.00	-42.9	-36.6	0.2	-36.4	-13.0	-23.4
3	3316.00	-52.1	-46.7	1.1	-45.6	-13.0	-32.6
4	4145.00	-49.8	-43.4	1.1	-42.3	-13.0	-29.3

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1658.00	-40.2	-33.0	0.9	-32.1	-13.0	-19.1
2	2487.00	-45.4	-41.4	0.2	-41.2	-13.0	-28.2
3	3316.00	-48.0	-42.2	1.1	-41.1	-13.0	-28.1
4	4145.00	-52.8	-45.4	1.1	-44.3	-13.0	-31.3

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20525	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-43.8	-36.1	0.8	-35.3	-13.0	-22.3
2	2059.00	-40.7	-35.3	-0.3	-35.6	-13.0	-22.6
3	3346.00	-55.6	-49.8	1.2	-48.6	-13.0	-35.6
4	4182.50	-49.4	-43.0	1.0	-42.0	-13.0	-29.0

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.00	-41.9	-34.6	0.8	-33.8	-13.0	-20.8
2	2059.50	-42.9	-39.1	-0.3	-39.4	-13.0	-26.4
3	3346.00	-50.9	-45.1	1.2	-43.9	-13.0	-30.9
4	4182.50	-51.2	-43.7	1.0	-42.7	-13.0	-29.7

Remarks:

- Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
- Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 20600	Frequency Range	Above 1000MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1688.00	-43.9	-36.2	0.7	-35.5	-13.0	-22.5
2	2532.00	-44.9	-38.7	0.2	-38.5	-13.0	-25.5
3	3376.00	-52.7	-46.4	1.2	-45.2	-13.0	-32.2
4	4220.00	-50.2	-43.8	1.0	-42.8	-13.0	-29.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1688.00	-41.4	-34.1	0.7	-33.4	-13.0	-20.4
2	2532.00	-44.9	-40.8	0.2	-40.6	-13.0	-27.6
3	3376.00	-48.5	-42.5	1.2	-41.3	-13.0	-28.3
4	4220.00	-53.0	-45.5	1.0	-44.5	-13.0	-31.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---